



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA BAND PHONE WITH BT, WLAN, AND NFC

MODEL NUMBER: LG-P880g, LGP880g, P880g, LG-P880G, LGP880G, P880G

FCC ID: ZNFP880G

REPORT NUMBER: 12U14550-3, Revision A

ISSUE DATE: SEPTEMBER 19, 2012

Prepared for

LG ELECTRONICS MOBILECOMM U.S.A., INC.

1000 SYLVAN AVENUE

ENGLEWOOD CLIFFS, NEW JERSEY 07632

Prepared by

UL CCS

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	08/16/12	Initial Issue	T. LEE
A	09/19/12	Corrected Antenna Gains	T. LEE

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MODEL DIFFERENT	7
5.3. MAXIMUM OUTPUT POWER	7
5.4. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.5. SOFTWARE AND FIRMWARE	7
5.6. WORST-CASE CONFIGURATION AND MODE	8
5.7. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. ANTENNA PORT TEST RESULTS	12
7.1. 802.11b MODE IN THE 2.4 GHz BAND	12
7.1.1. 6 dB BANDWIDTH	12
7.1.2. 99% BANDWIDTH	16
7.1.3. OUTPUT POWER	20
7.1.4. AVERAGE POWER	24
7.1.5. POWER SPECTRAL DENSITY	25
7.1.6. CONDUCTED SPURIOUS EMISSIONS	29
7.2. 802.11g MODE IN THE 2.4 GHz BAND	33
7.2.1. 6 dB BANDWIDTH	33
7.2.2. 99% BANDWIDTH	36
7.2.3. OUTPUT POWER	38
7.2.4. AVERAGE POWER	41
7.2.5. POWER SPECTRAL DENSITY	42
7.2.6. CONDUCTED SPURIOUS EMISSIONS	45
7.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	49
7.3.1. 6 dB BANDWIDTH	49
7.3.2. 99% BANDWIDTH	52
7.3.3. OUTPUT POWER	55
7.3.4. AVERAGE POWER	58
7.3.5. POWER SPECTRAL DENSITY	59
7.3.6. CONDUCTED SPURIOUS EMISSIONS	62

7.4. 802.11a MODE IN THE 5.8 GHz BAND..... 66
7.4.1. 6 dB BANDWIDTH 66
7.4.2. 99% BANDWIDTH 70
7.4.3. OUTPUT POWER 74
7.4.1. AVERAGE POWER 78
7.4.2. POWER SPECTRAL DENSITY 79
7.4.3. CONDUCTED SPURIOUS EMISSIONS..... 83
7.5. 802.11n HT20 MODE IN THE 5.8 GHz BAND 87
7.5.1. 6 dB BANDWIDTH 87
7.5.2. 99% BANDWIDTH 90
7.5.3. OUTPUT POWER 93
7.5.4. AVERAGE POWER 97
7.5.5. POWER SPECTRAL DENSITY 98
7.5.6. CONDUCTED SPURIOUS EMISSIONS..... 101
8. RADIATED TEST RESULTS 105
8.1. LIMITS AND PROCEDURE 105
8.2. TRANSMITTER ABOVE 1 GHz 106
8.2.1. TX ABOVE 1 GHz FOR 802.11b 1TX MODE IN THE 2.4 GHz BAND 106
8.2.2. TX ABOVE 1 GHz FOR 802.11g 1TX MODE IN THE 2.4 GHz BAND 115
8.2.3. TX ABOVE 1 GHz FOR 802.11n HT20 1TX MODE IN THE 2.4 GHz BAND..... 124
8.2.4. TRANSMITTER ABOVE 1 GHz FOR 802.11a MODE IN THE 5.8 GHz BAND.. 133
8.2.5. TRANSMITTER ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 5.8 GHz
BAND 134
8.3. WORST-CASE BELOW 1 GHz 135
9. AC POWER LINE CONDUCTED EMISSIONS 139
10. SETUP PHOTOS 143

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
1000 SYLVAN AVE.
ENGLEWOOD CLIFFS, NJ
UNITED STATES 07632

EUT DESCRIPTION: CELL PHONE WITH GSM/CDMA/WCDMA/LTE+BT
LE+802.11ABGN (HT20) W/ WIRELESS BACK COVER

MODEL: LG-P880g, LGP880g, P880g, LG-P880G, LGP880G, P880G

SERIAL NUMBER: 207KPLC217104 for Conducted, 207KPED217106 for Emissions

DATE TESTED: August 10- 14, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



TIM LEE
STAFF ENGINEER
UL CCS

Tested By:



THANH NGUYEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Tri-Band Phone that also supports BLUETOOTH, WLAN and NFC operating at 13.56MHz.

The EUT is manufactured by LG Electronics.

5.2. MODEL DIFFERENT

Model P880G is identical to Models LG-P880G and LGP880G except for Model designation.

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	16.34	43.05
2412 - 2462	802.11g	20.40	109.65
2412 - 2462	802.11n HT20	19.50	89.13
5745 - 5825	802.11a	19.50	89.13
5745 - 5825	802.11n HT20	16.63	46.03

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an PIFA antenna, with a maximum gain of -2.19 dBi in the 2.4GHz band and -0.56 dBi in the 5.8 GHz band.

5.5. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was Kernel, Version 2.6.39.4

The test utility software used during testing was LG-P880g-V09a July 3, 2012.

The driver installed was Android Version 2.6.39.4

5.6. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z, it was determined that Y(Upward) orientation was worst-case orientation with earphone; therefore, all final radiated testing was performed with the EUT in Y orientation and earphone.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11a mode: 6 Mbps
802.11n HT20mode: MCS0

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-01WD	DA260003271	DoC
Earphone	LG	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2 m	NA
2	Audio	1	Mini-Jack	Un-Shielded	1.5 m	NA

TEST SETUP

The EUT is setup to transmit continuously.

SETUP DIAGRAM FOR TESTS

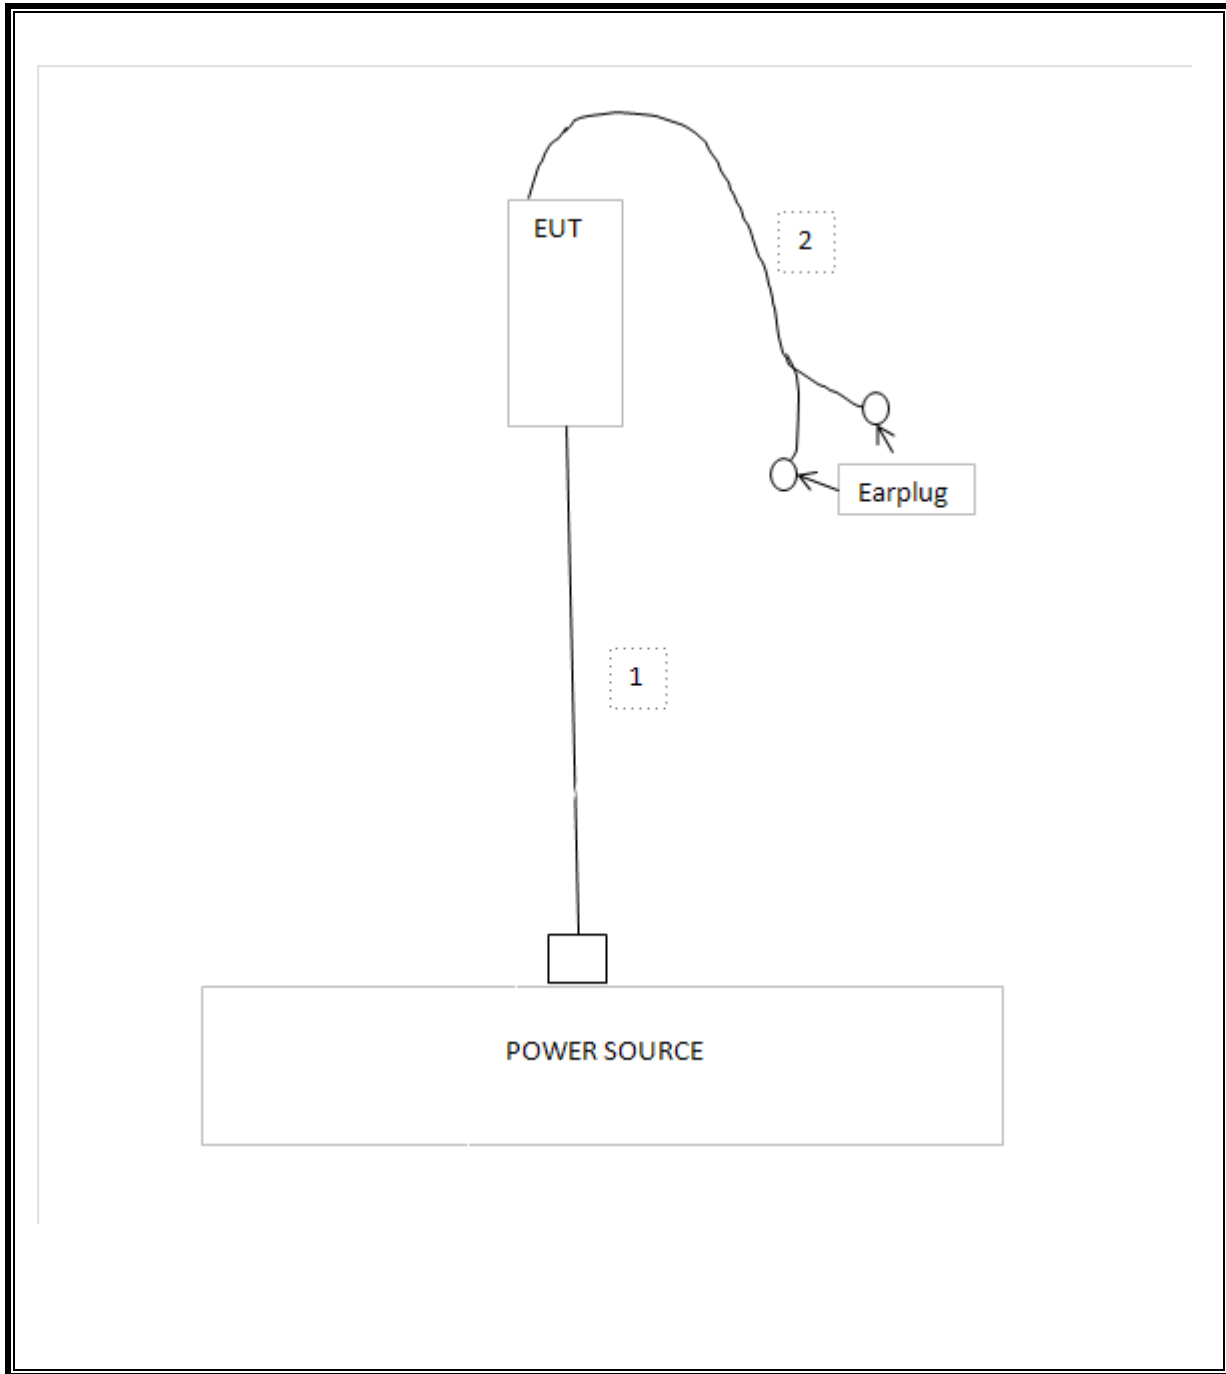

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	01/00/00	10/13/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	11/11/11	11/11/12
1-18GHz Horn Ant	EMCO	3115	C00783	04/15/12	04/15/13
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	09/27/11	09/27/12
Antenna, Horn, 26.5 GHz	ARA	SWH-28	C01015	10/06/11	10/06/12
PSA	Agilent / HP	E4446A	C01012	09/02/11	12/02/12
Power Meter	HP	437B	T226	07/25/12	07/25/13
Power Sensor	HP	HP8481A	T269	07/26/12	07/26/13
LISN, 30 MHz	FCC	LISN-50/250-25-	N02625	11/15/11	11/15/12
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BN	N02481	11/16/11	11/16/12
EMI Test Receiver	R&S	ESHS 20	N02396	08/06/12	08/06/13

7. ANTENNA PORT TEST RESULTS

7.1. 802.11b MODE IN THE 2.4 GHz BAND

7.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.04	0.5
Middle	2437	8.06	0.5
High	2462	9.08	0.5

6 dB BANDWIDTH

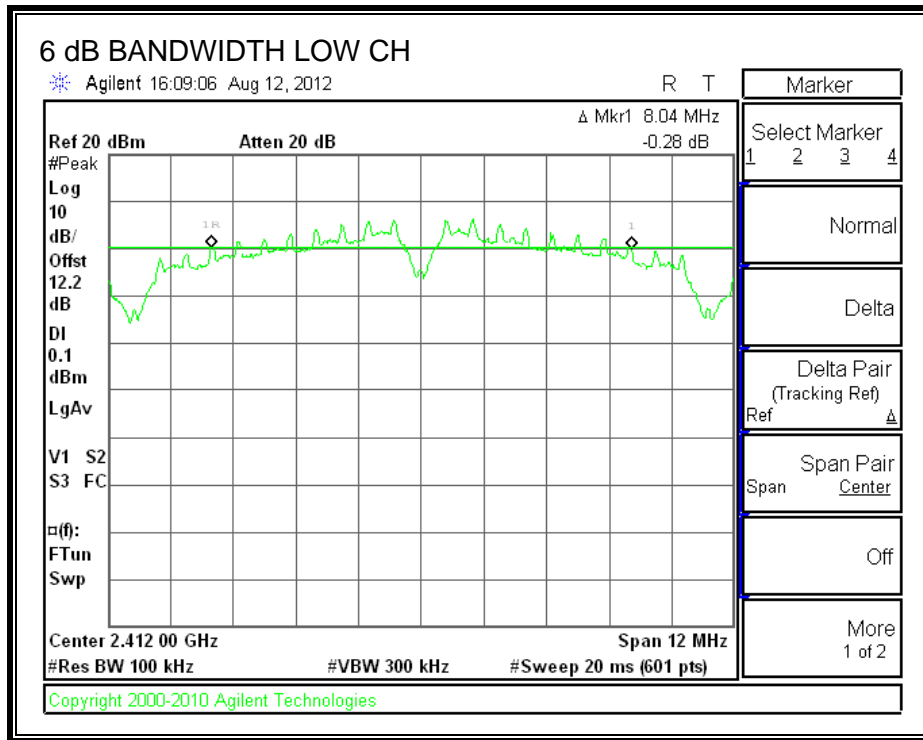

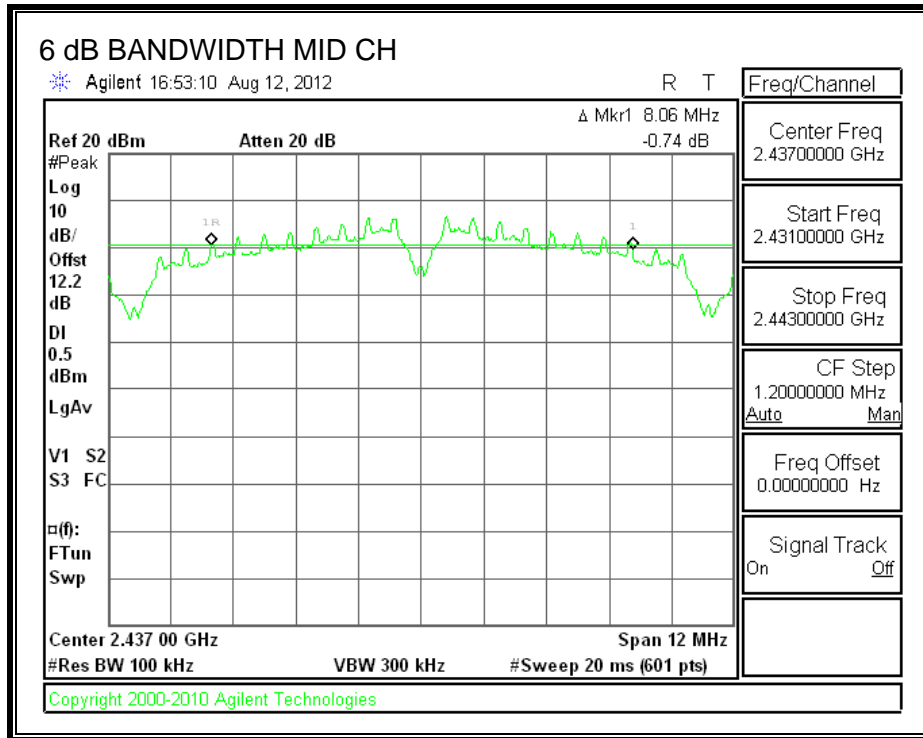

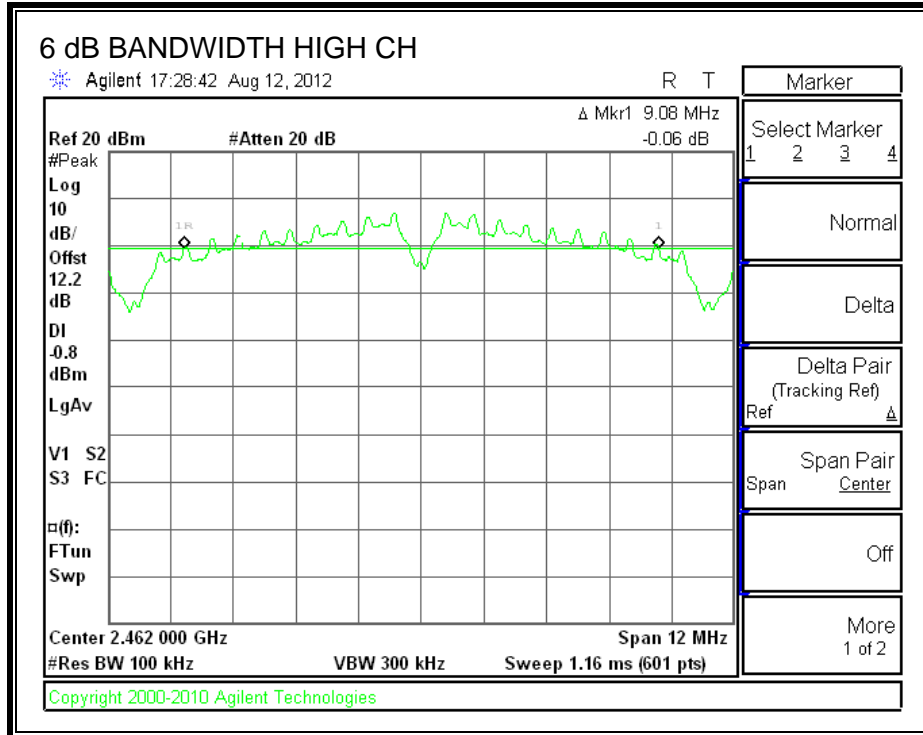

7.1.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.1738
Middle	2437	12.1519
High	2462	12.2287

99% BANDWIDTH

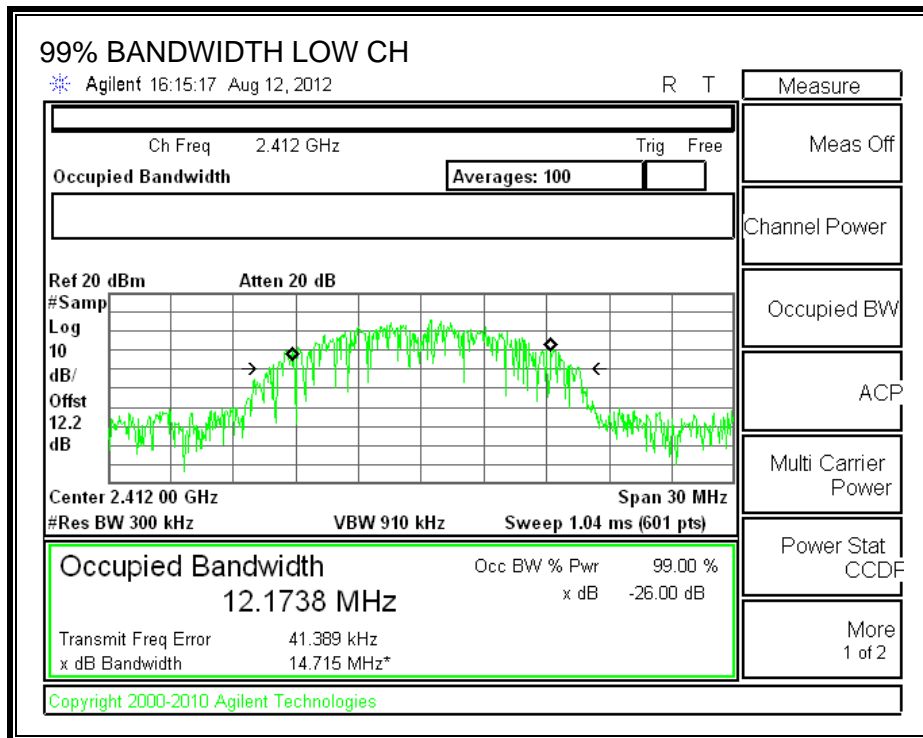

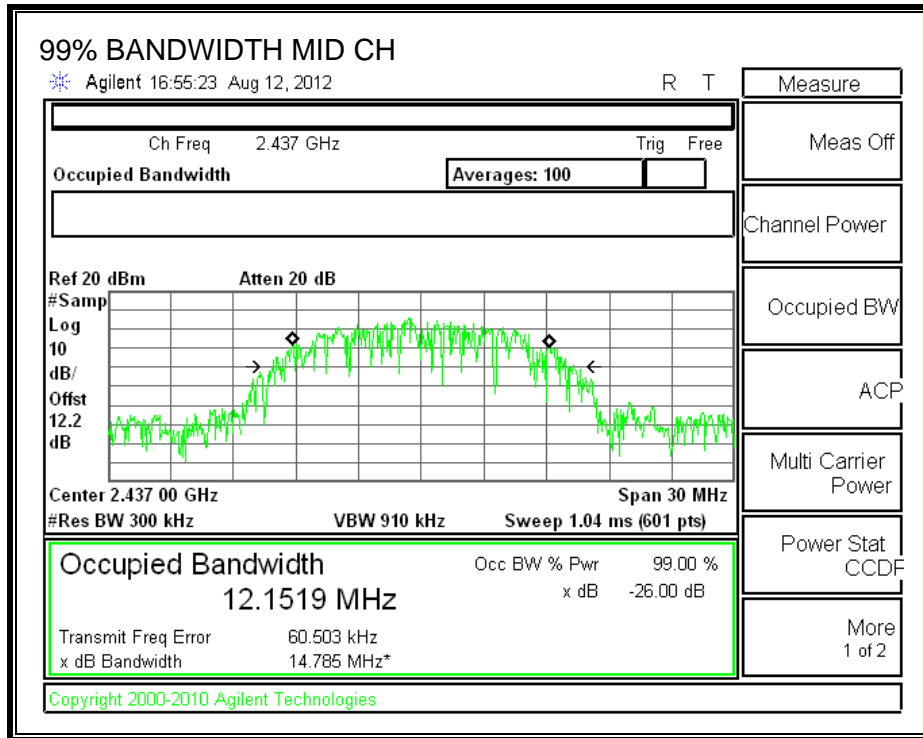

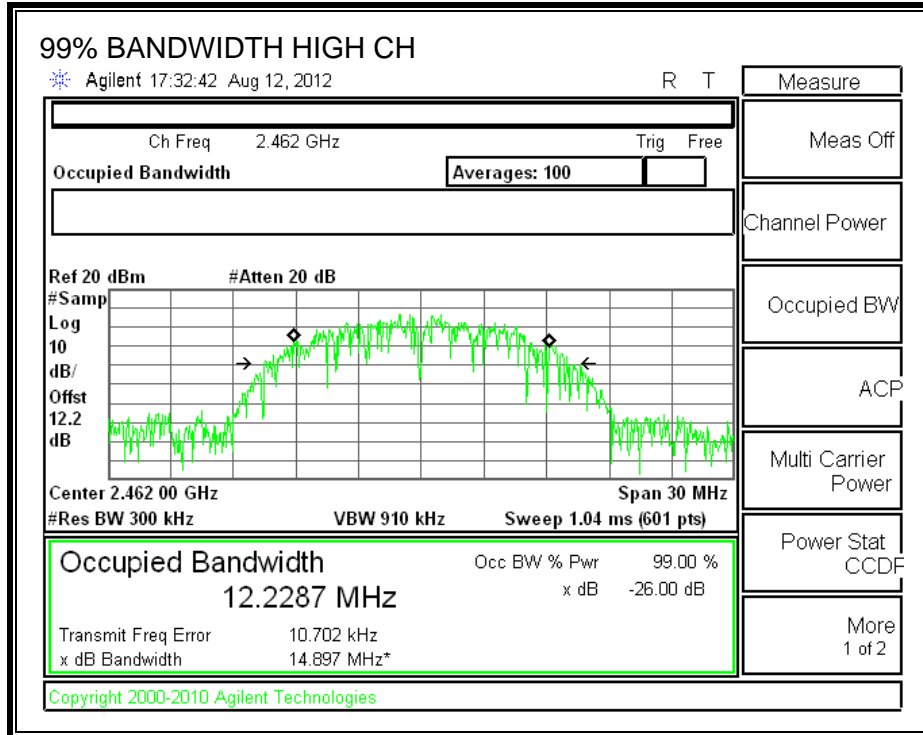

7.1.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2412	15.67	30	-14.330
Middle	2437	16.09	30	-13.910
High	2462	16.34	30	-13.660

OUTPUT POWER

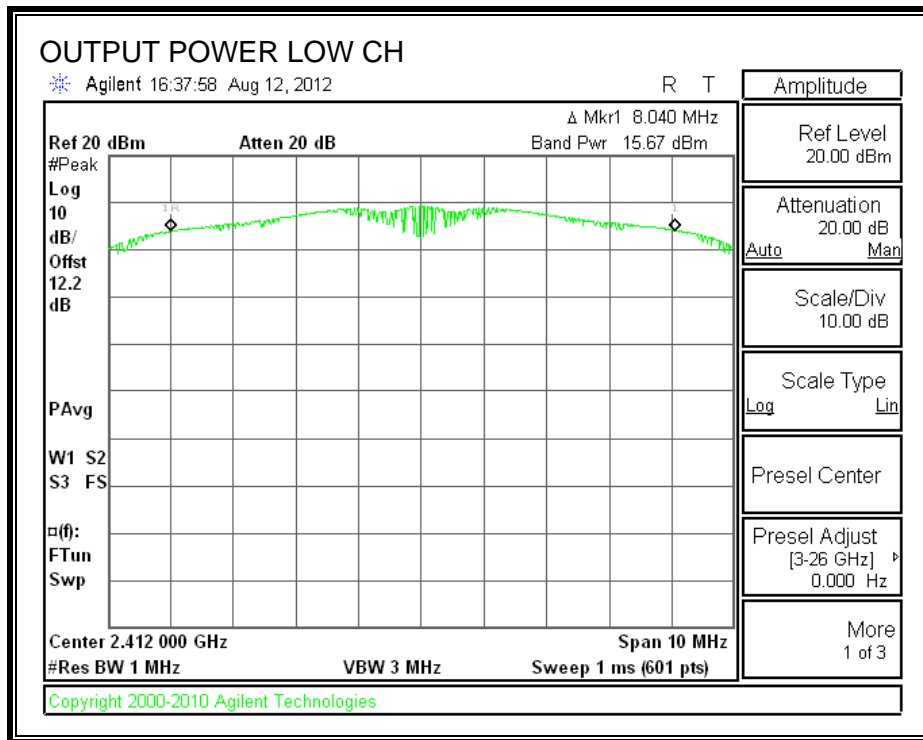

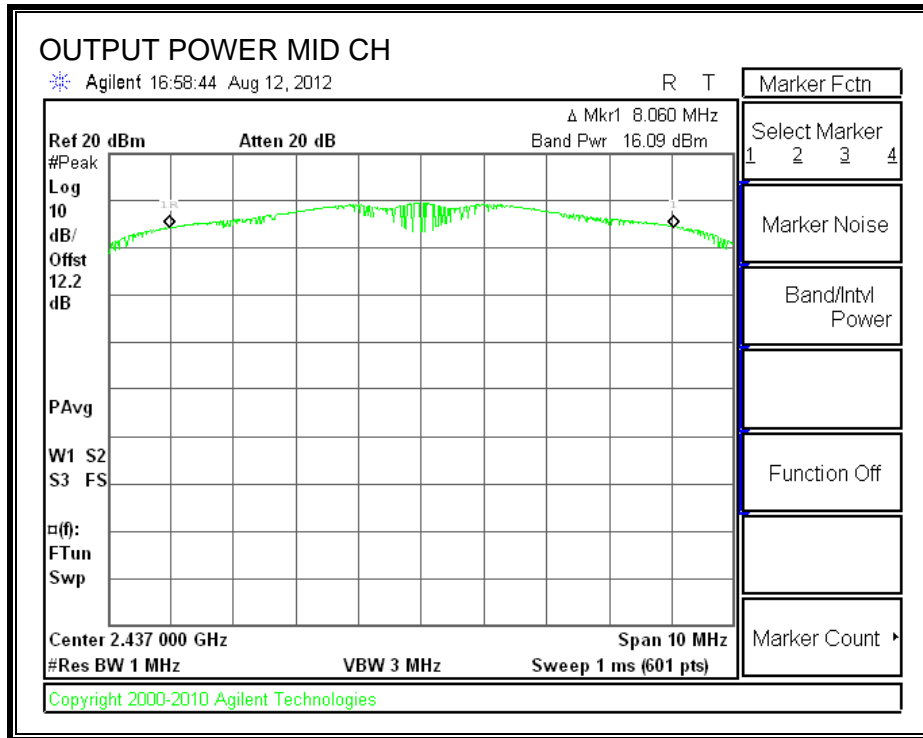

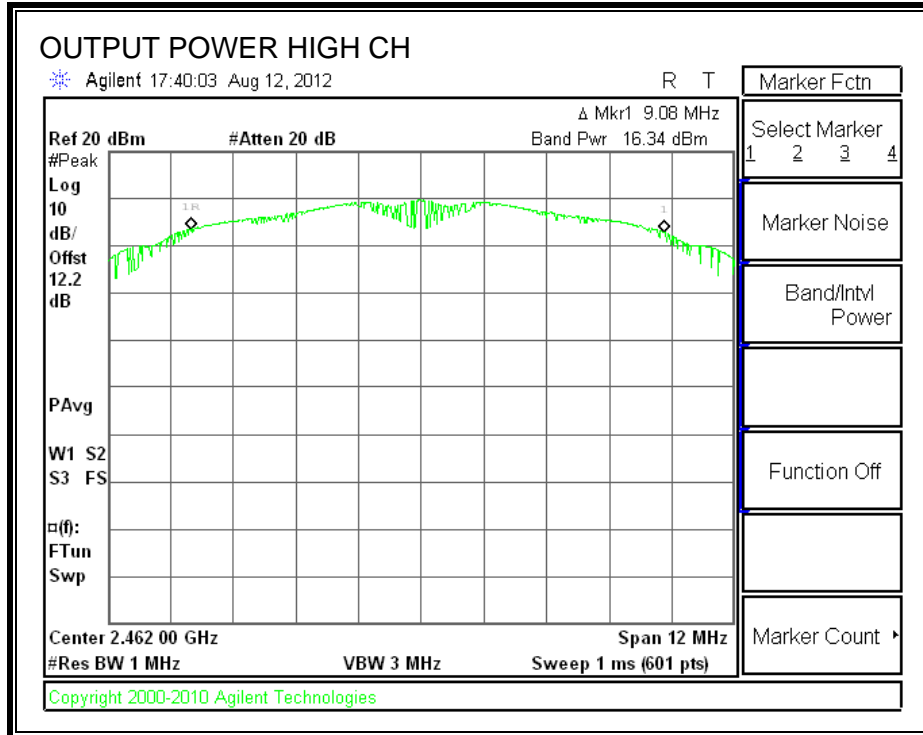

7.1.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and .7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	AV power (dBm)
Low	2412	12.24
Middle	2437	12.43
High	2462	12.69

7.1.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".


RESULTS

Channel	Frequency (MHz)	PSD(reading (dBm))	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	6.16	-9.04	8	-17.04
Middle	2437	6.54	-8.66	8	-16.66
High	2462	6.34	-8.86	8	-16.86

POWER SPECTRAL DENSITY

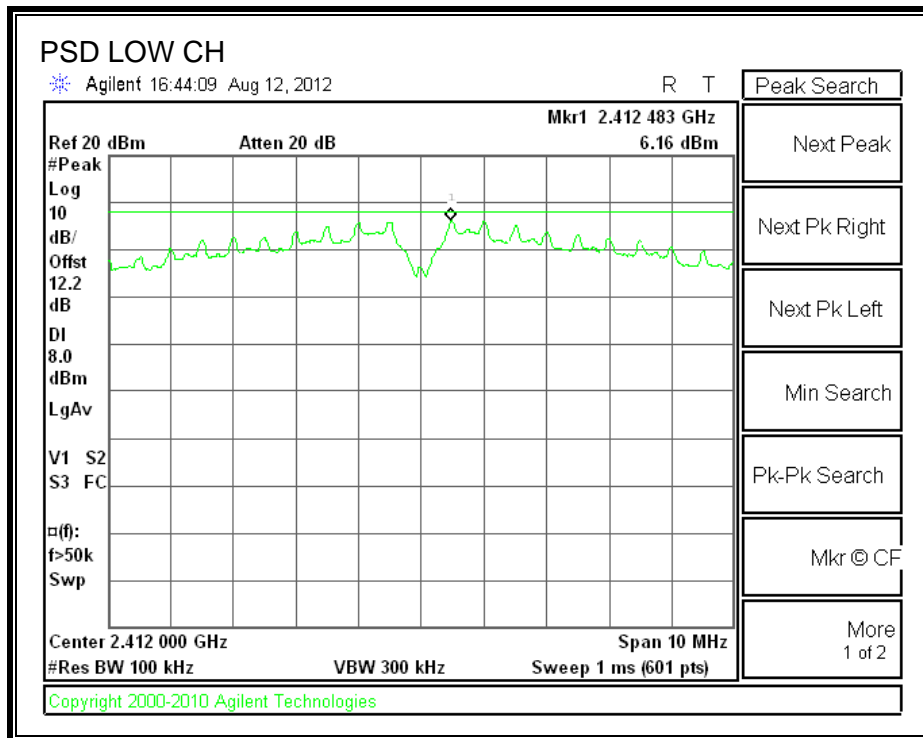

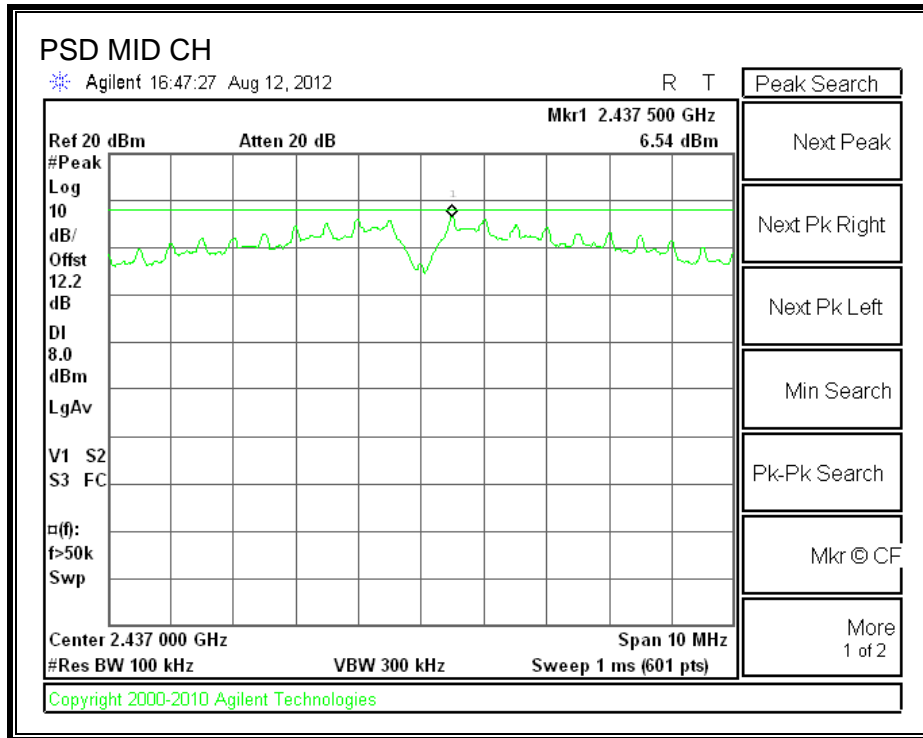

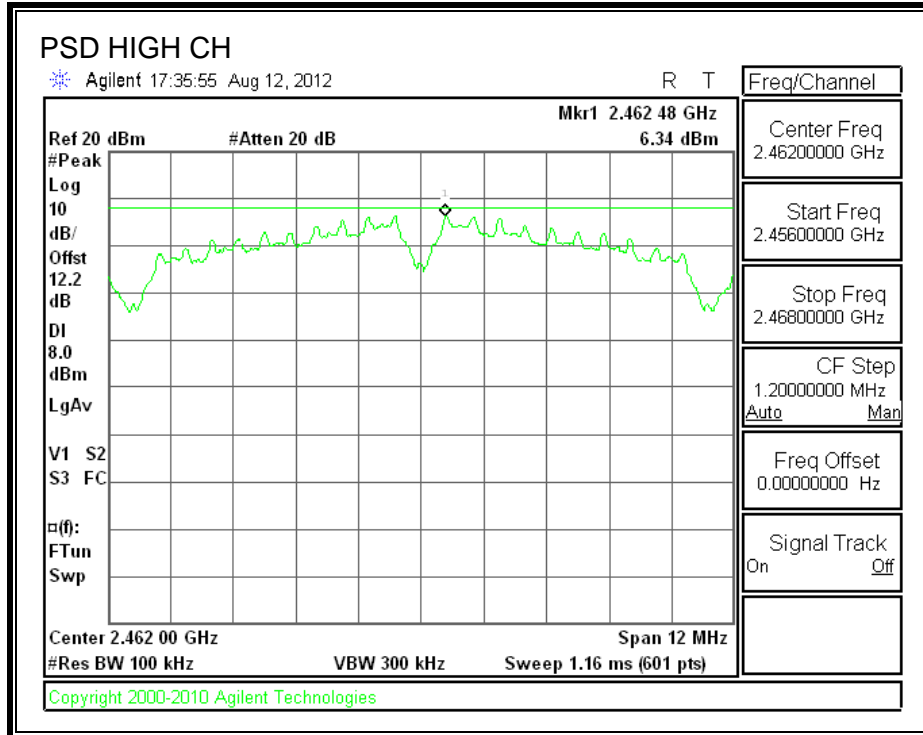

7.1.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS

SPURIOUS EMISSIONS, LOW CHANNEL

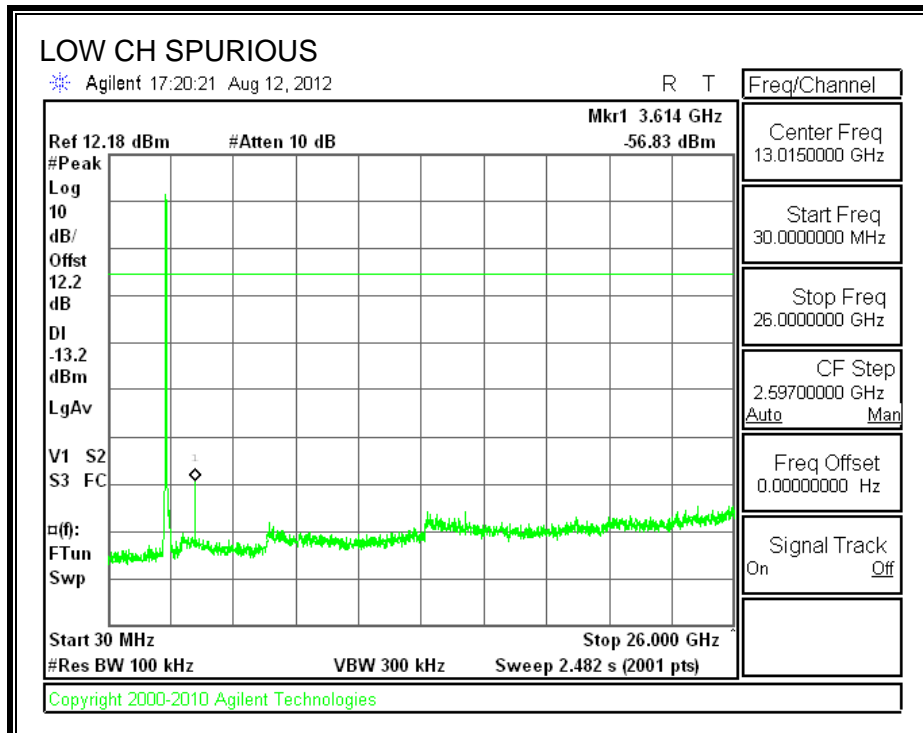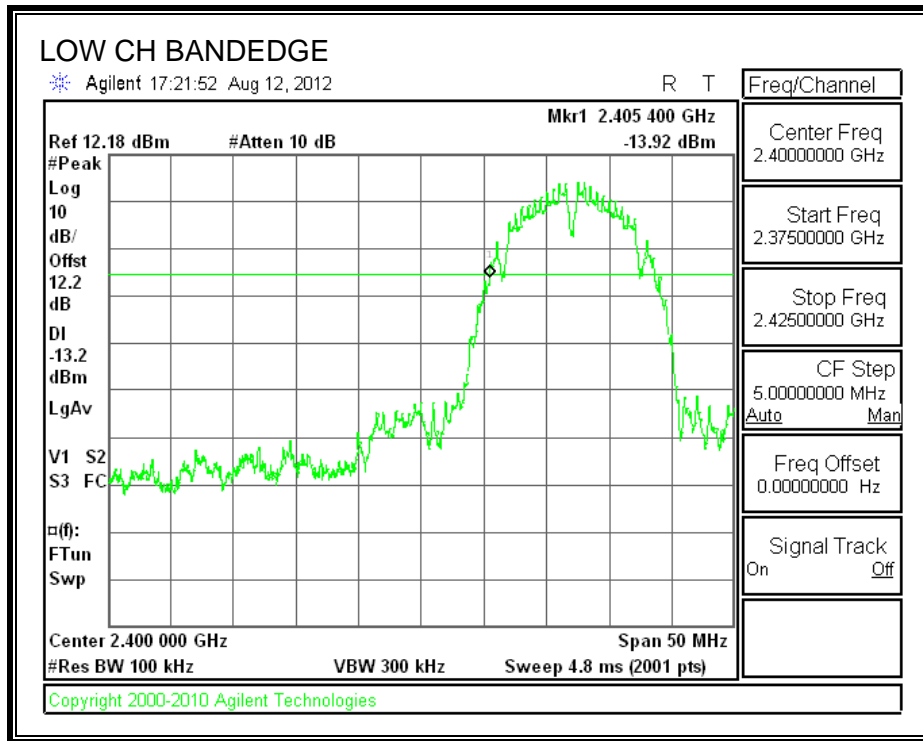

SPURIOUS EMISSIONS, MID CHANNEL

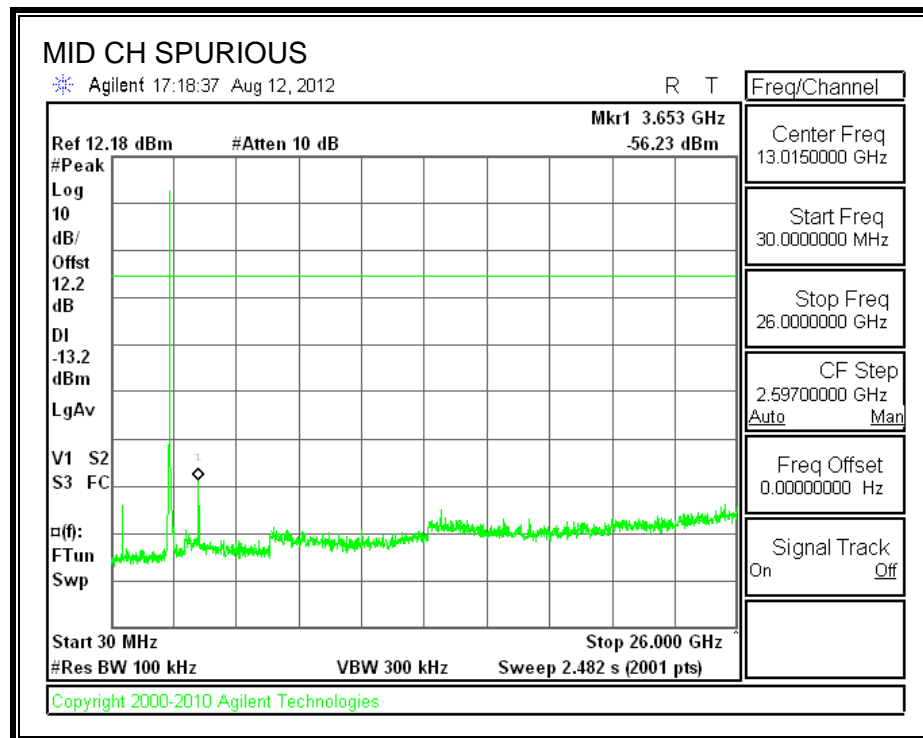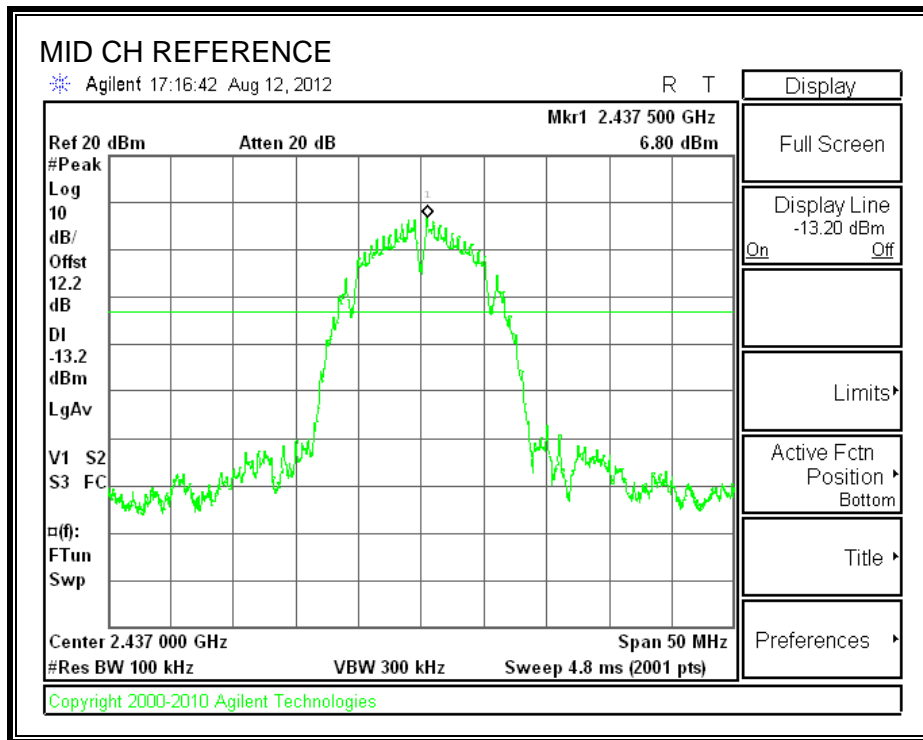

7.2. 802.11g MODE IN THE 2.4 GHz BAND

7.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	16.0000	0.5
Middle	2437	16.0000	0.5
High	2462	16.0000	0.5

6 dB BANDWIDTH

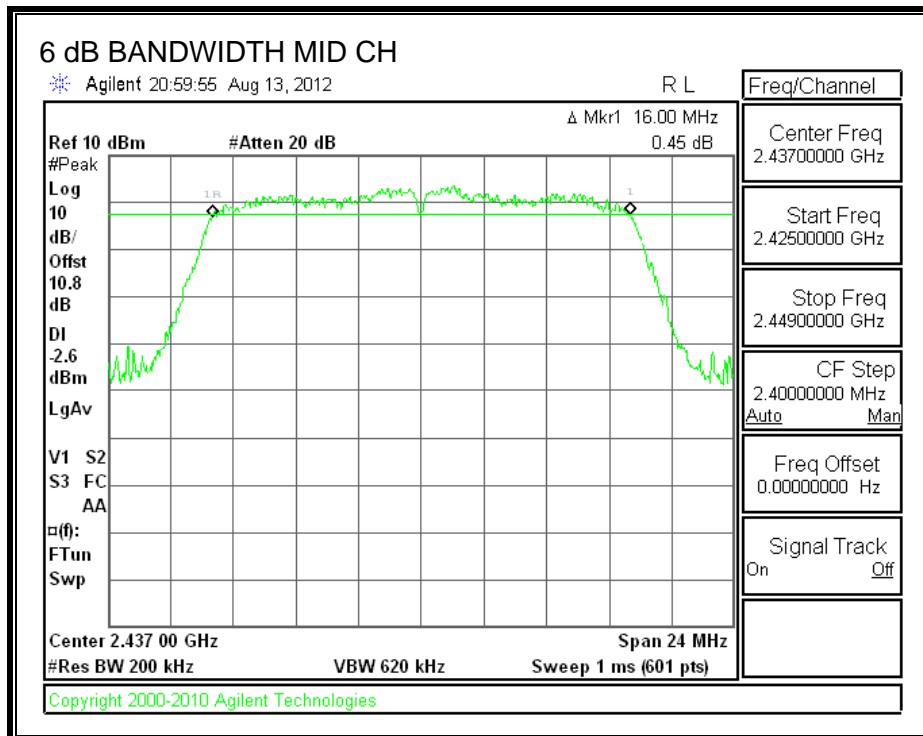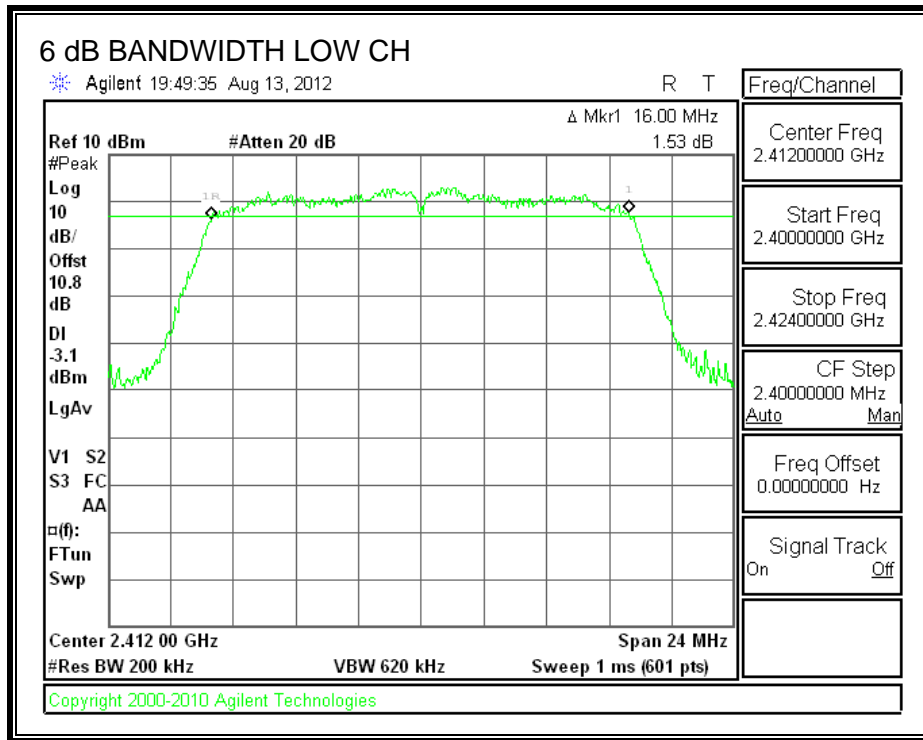

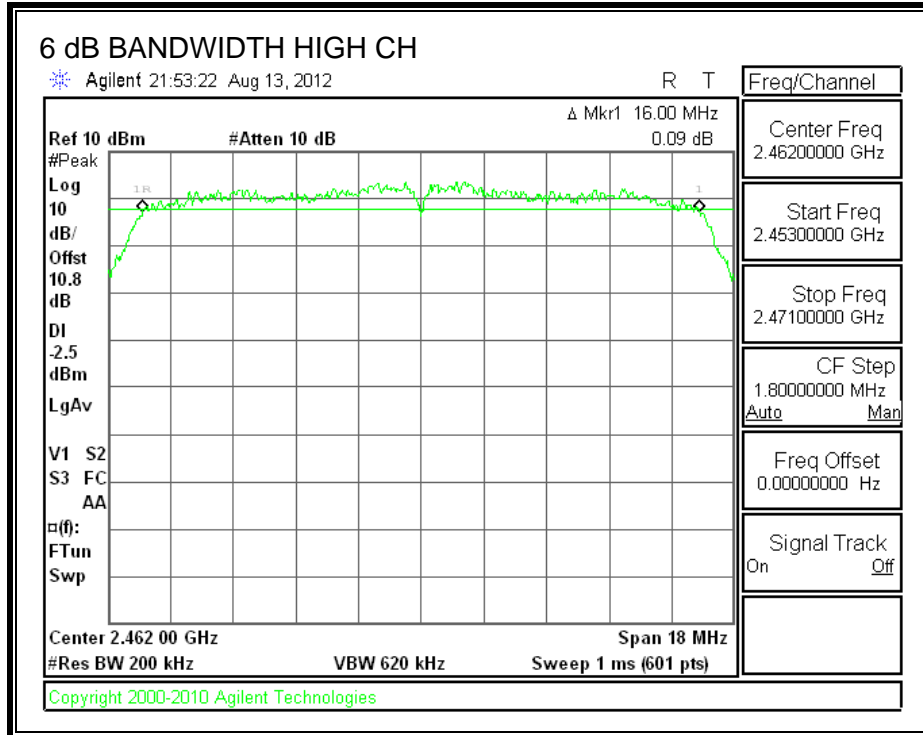

7.2.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE



The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.2833
Middle	2437	16.2785
High	2462	16.2507

99% BANDWIDTH

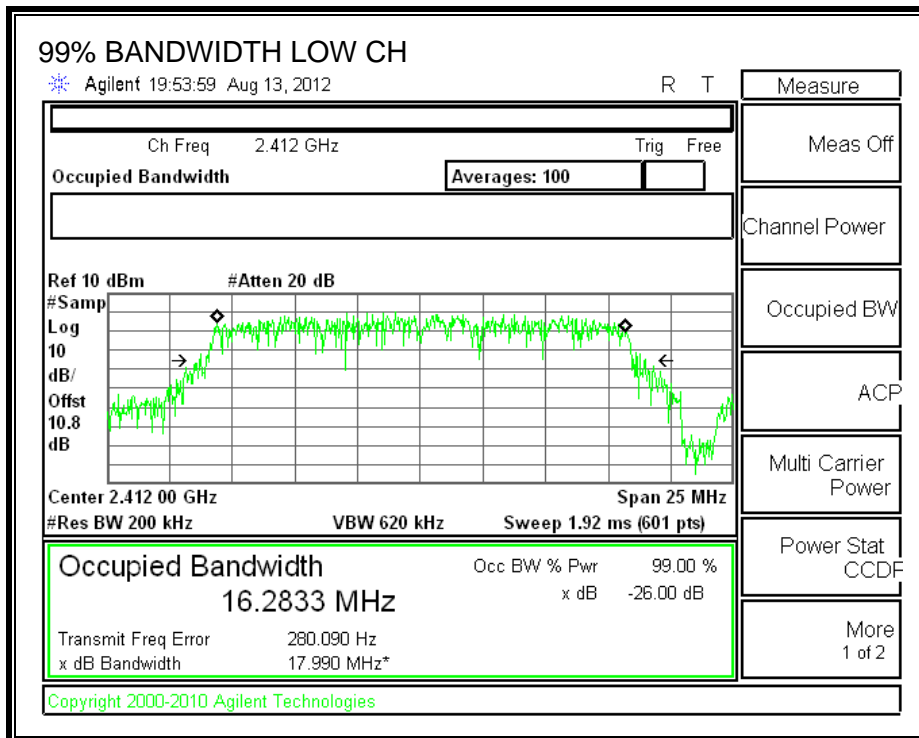

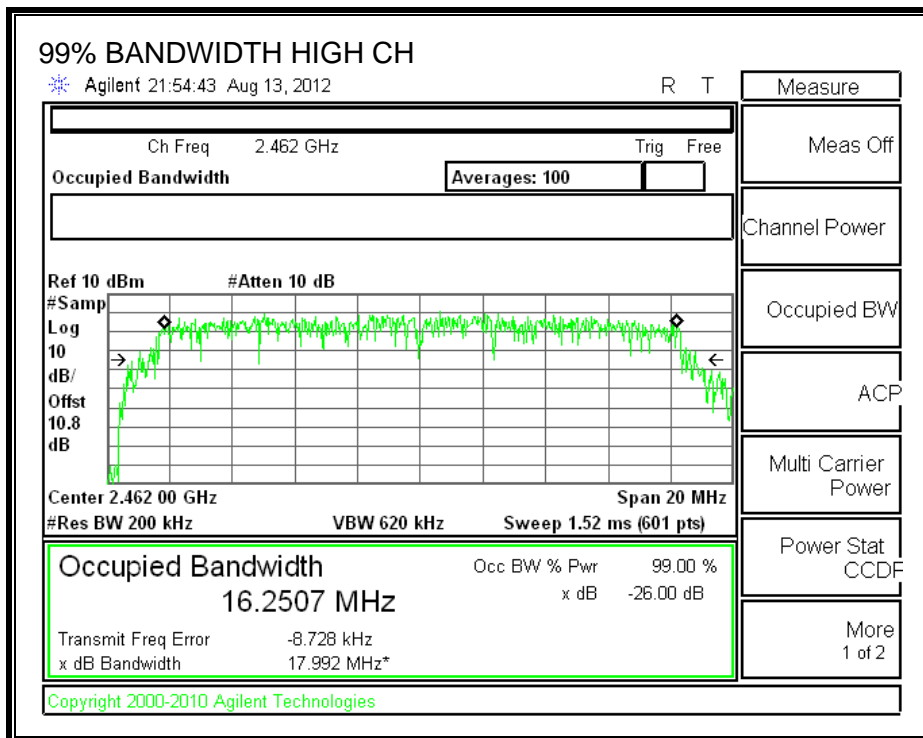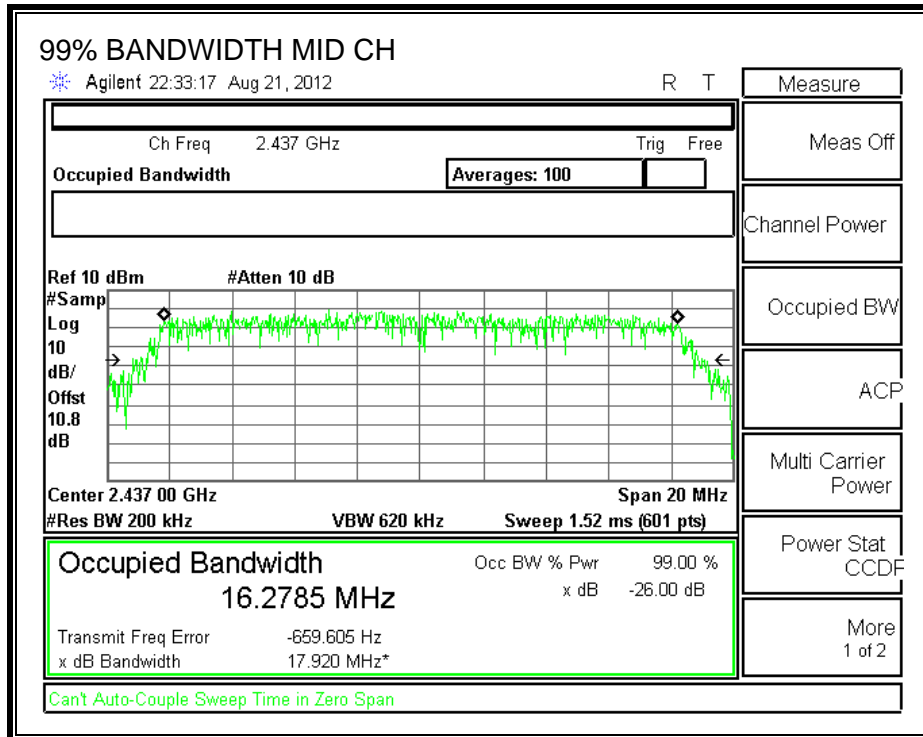

7.2.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2412	19.9	30	-10.10
Middle	2437	20.23	30	-9.77
High	2462	20.4	30	-9.60

OUTPUT POWER

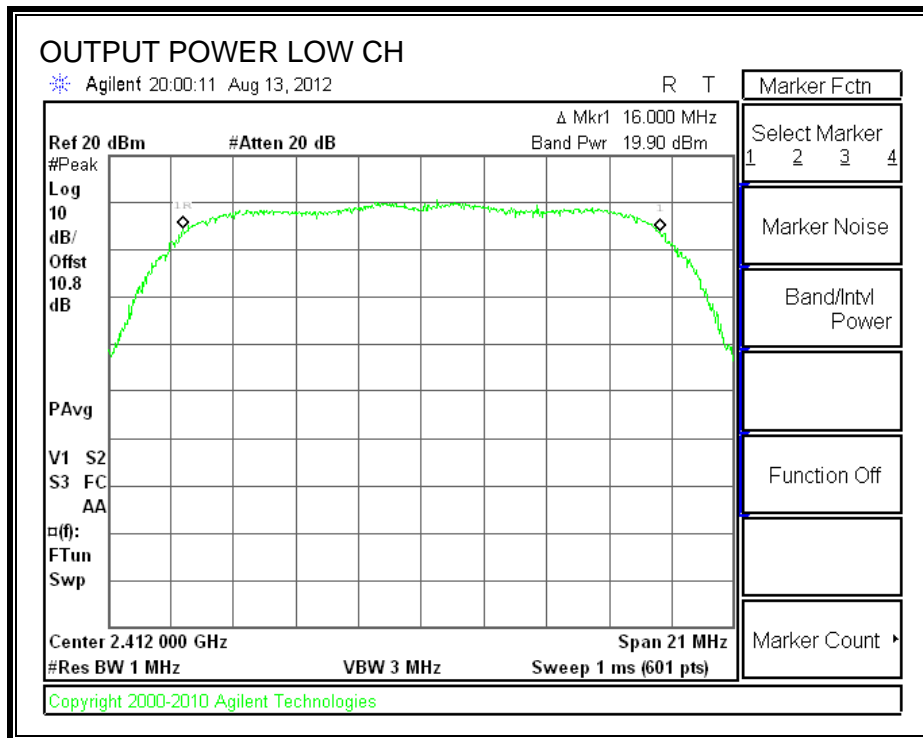

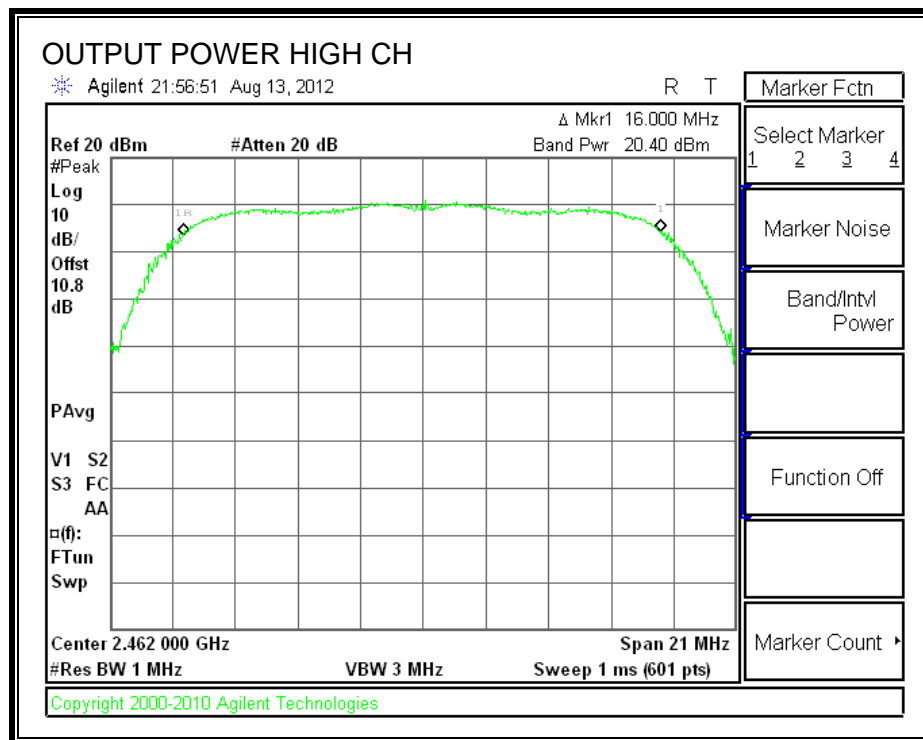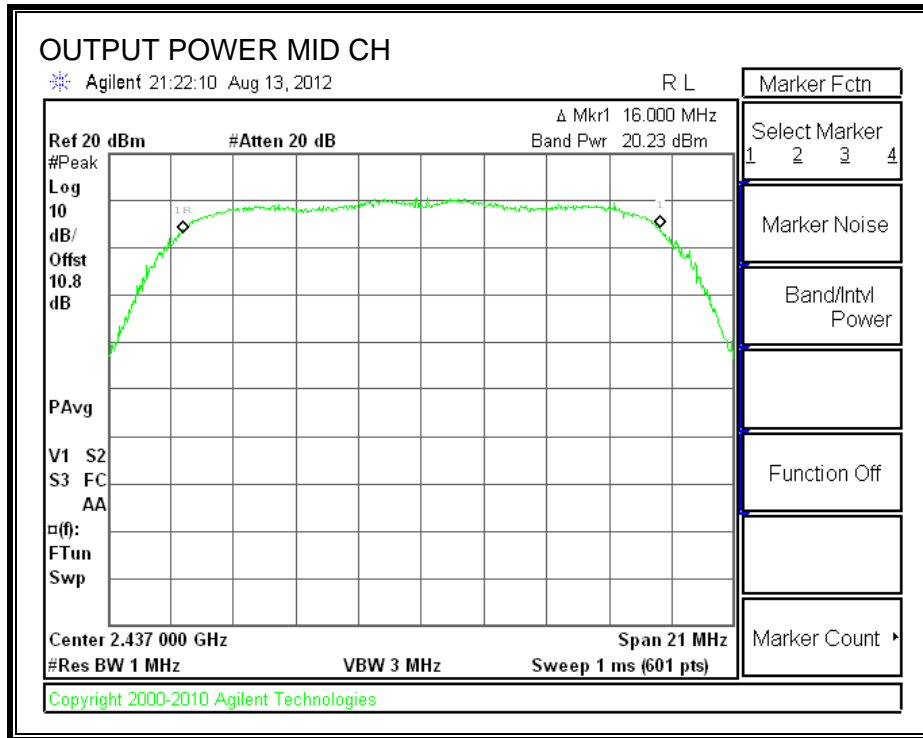

7.2.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and .7dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	12.07
Middle	2437	12.30
High	2462	12.45

7.2.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-13.78	8	-21.78
Middle	2437	-12.59	8	-20.59
High	2462	-12.44	8	-20.44

POWER SPECTRAL DENSITY

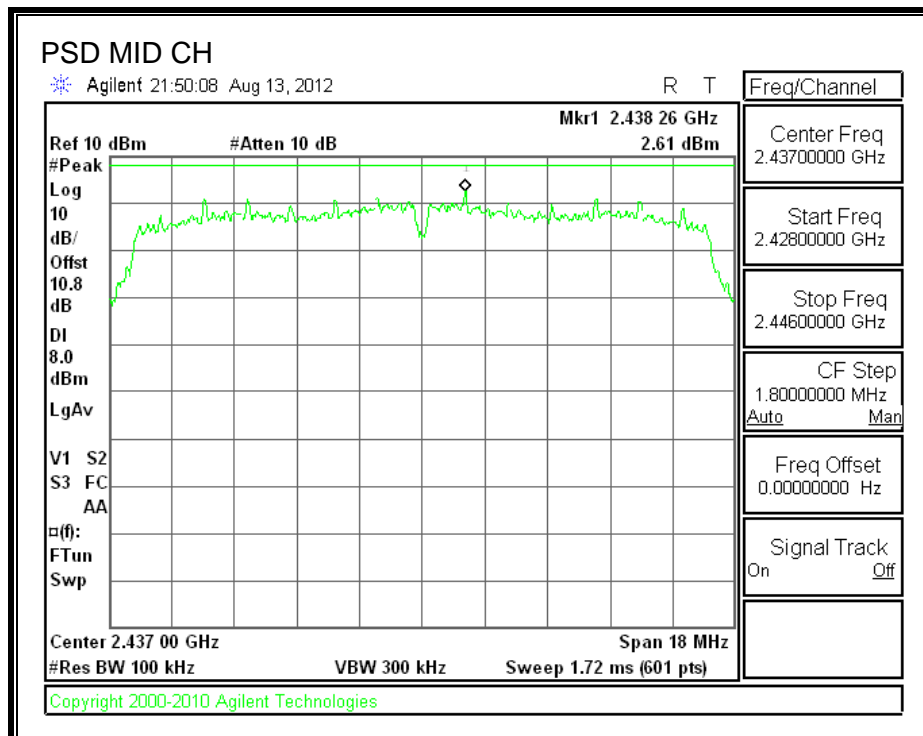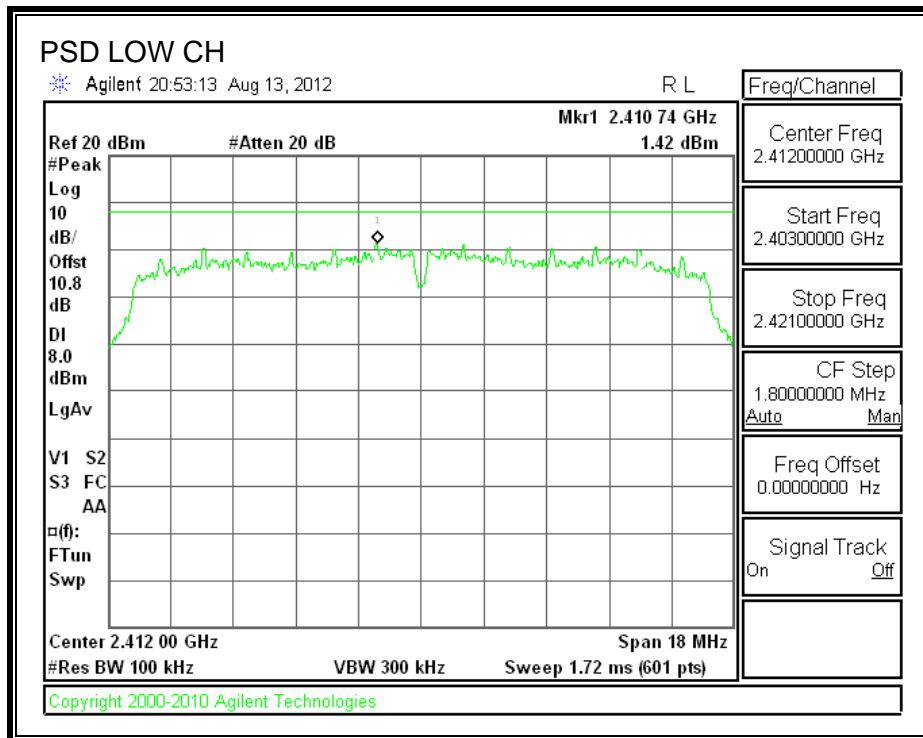

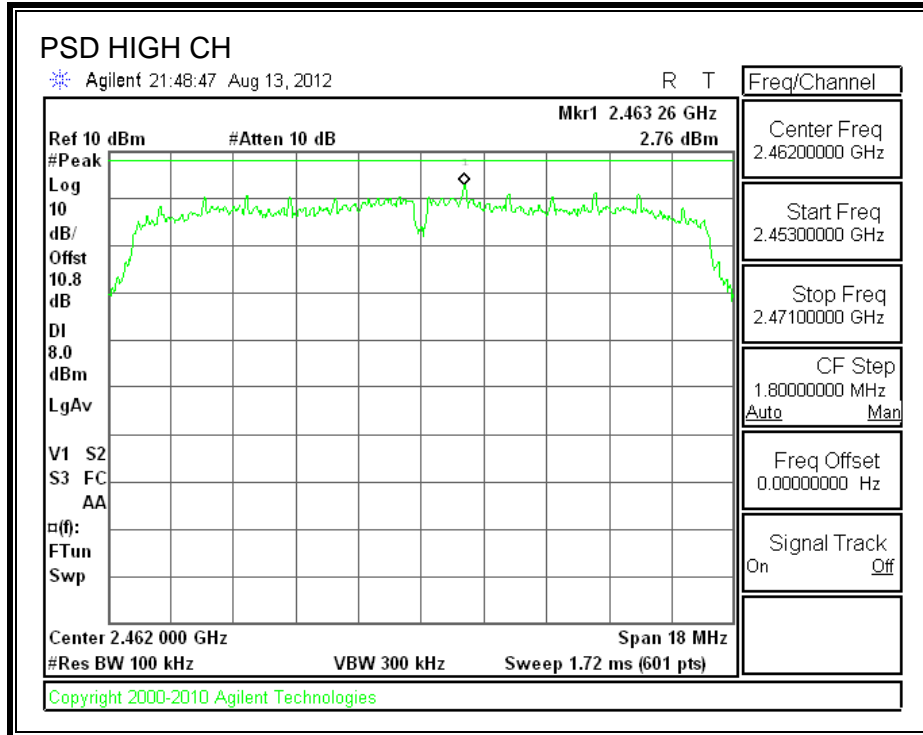

7.2.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

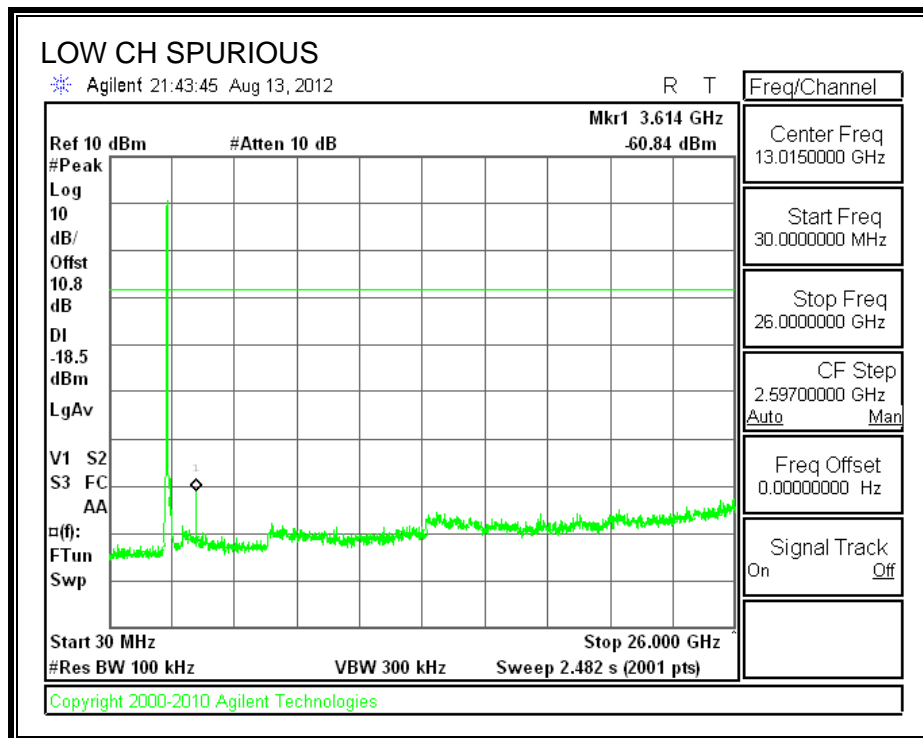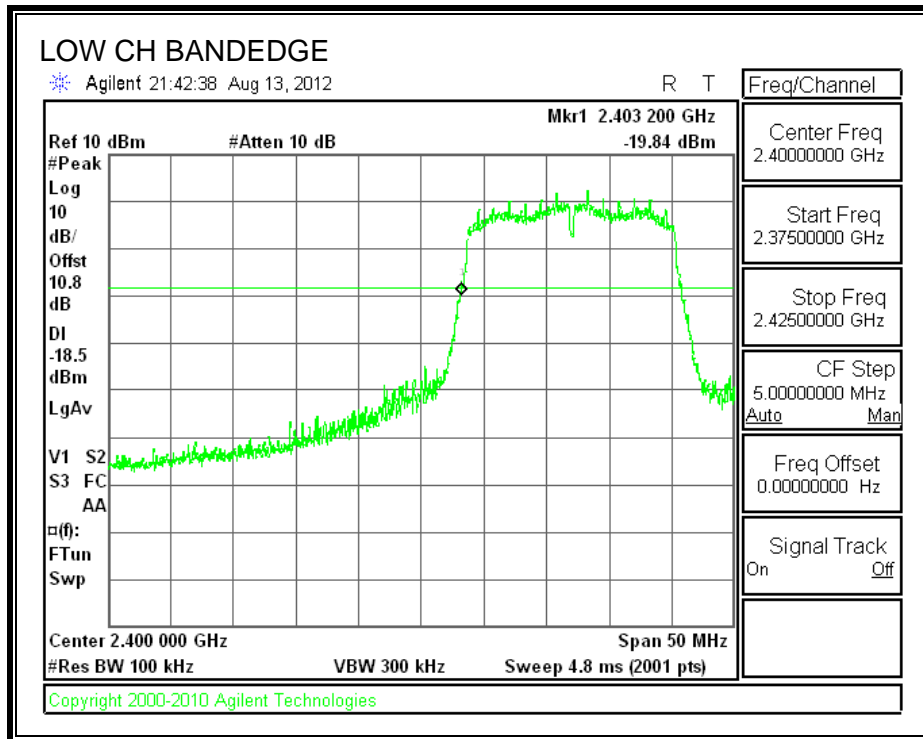

SPURIOUS EMISSIONS, MID CHANNEL

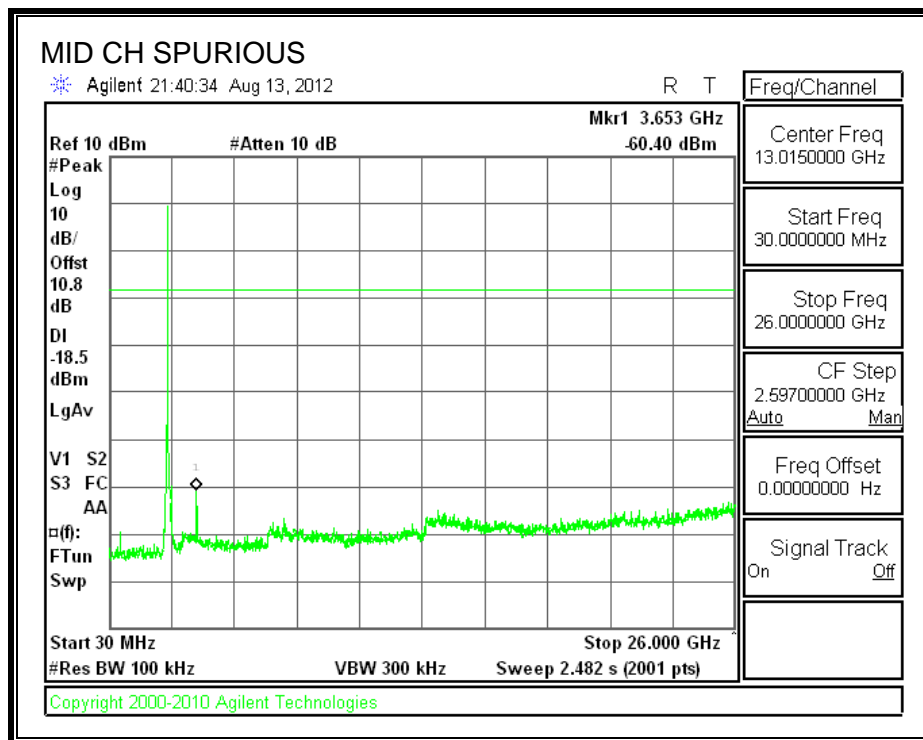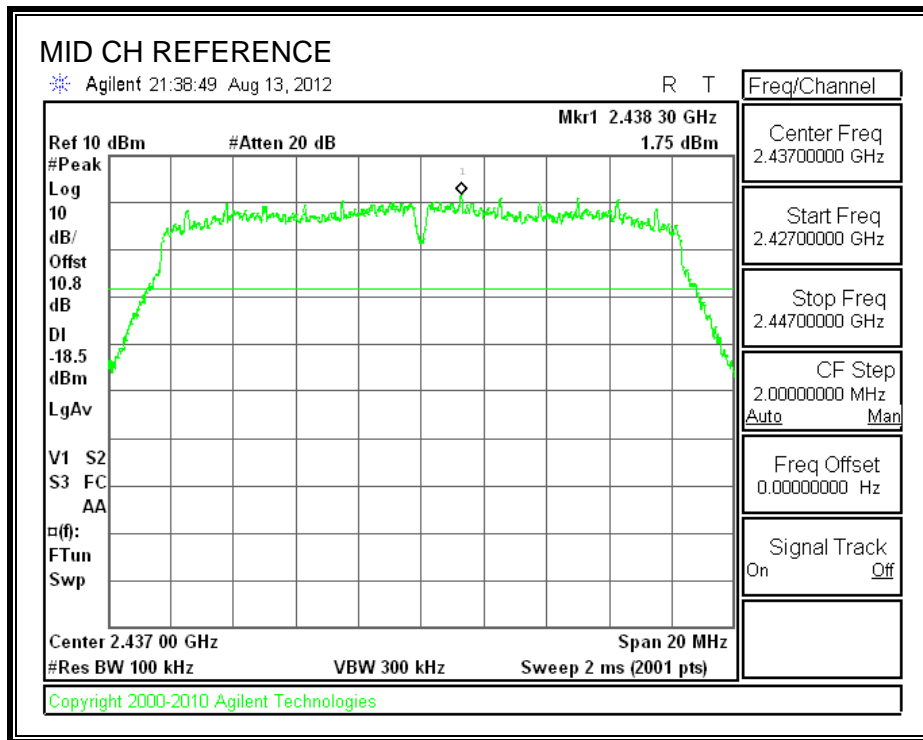

SPURIOUS EMISSIONS, HIGH CHANNEL

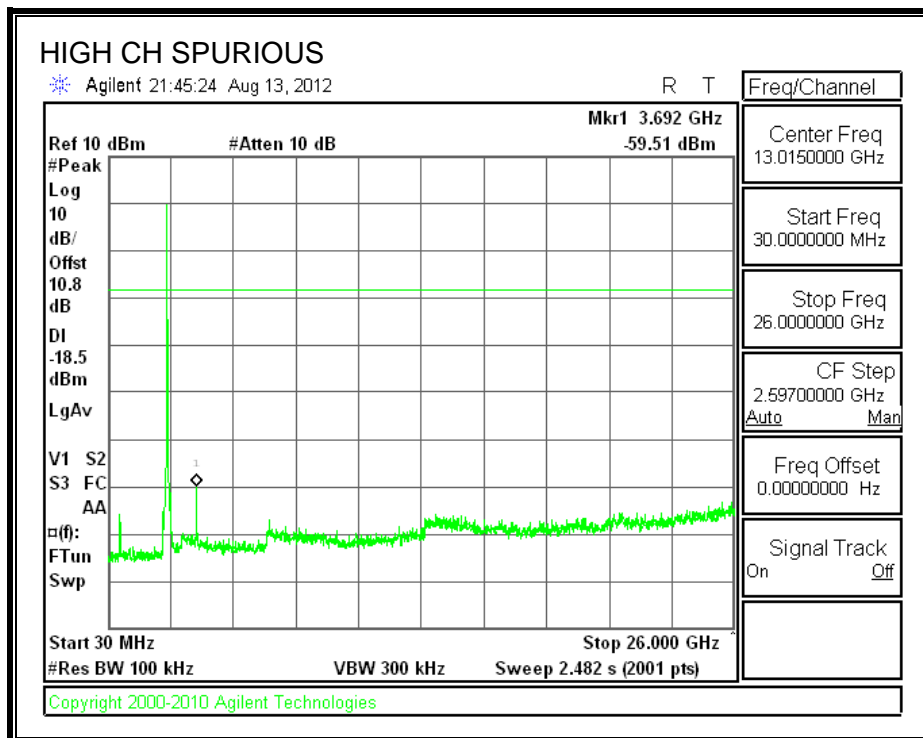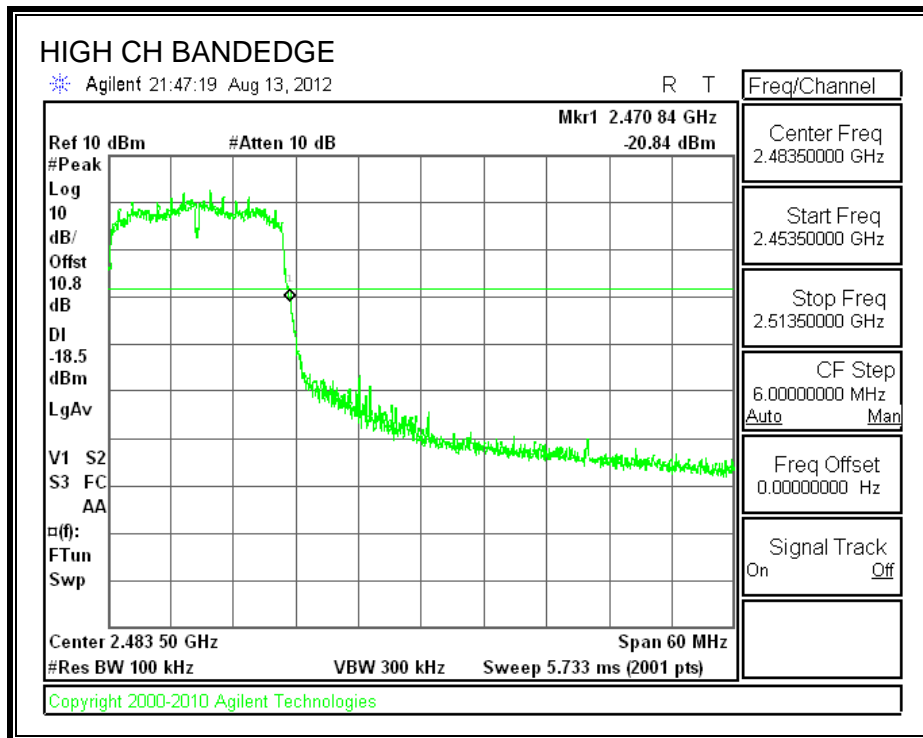

7.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

7.3.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	17.29	0.5
Middle	2437	17.33	0.5
High	2462	17.29	0.5

6 dB BANDWIDTH

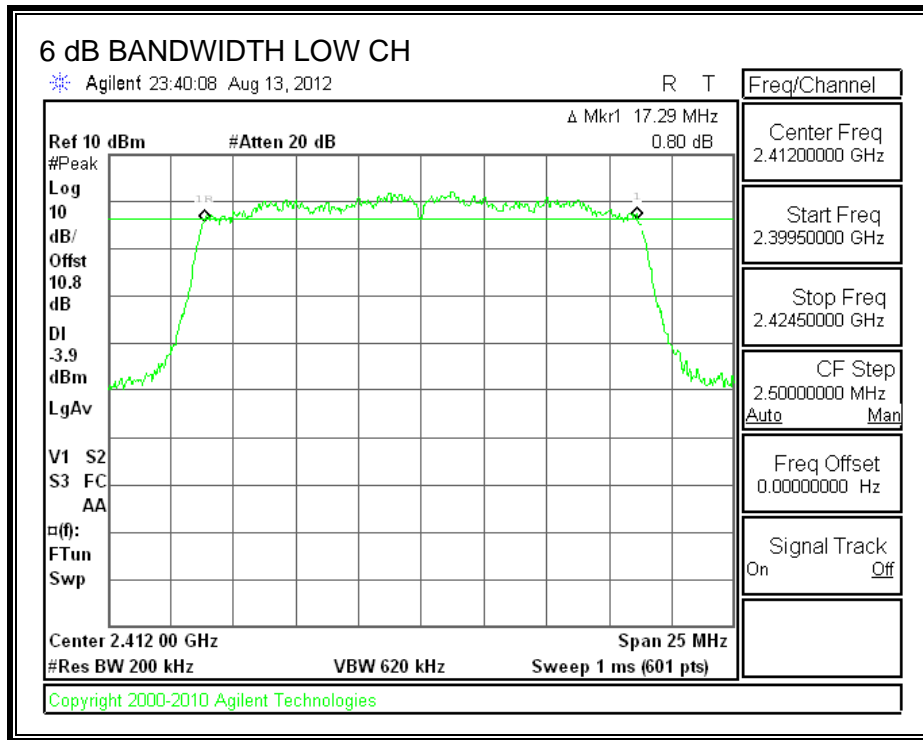

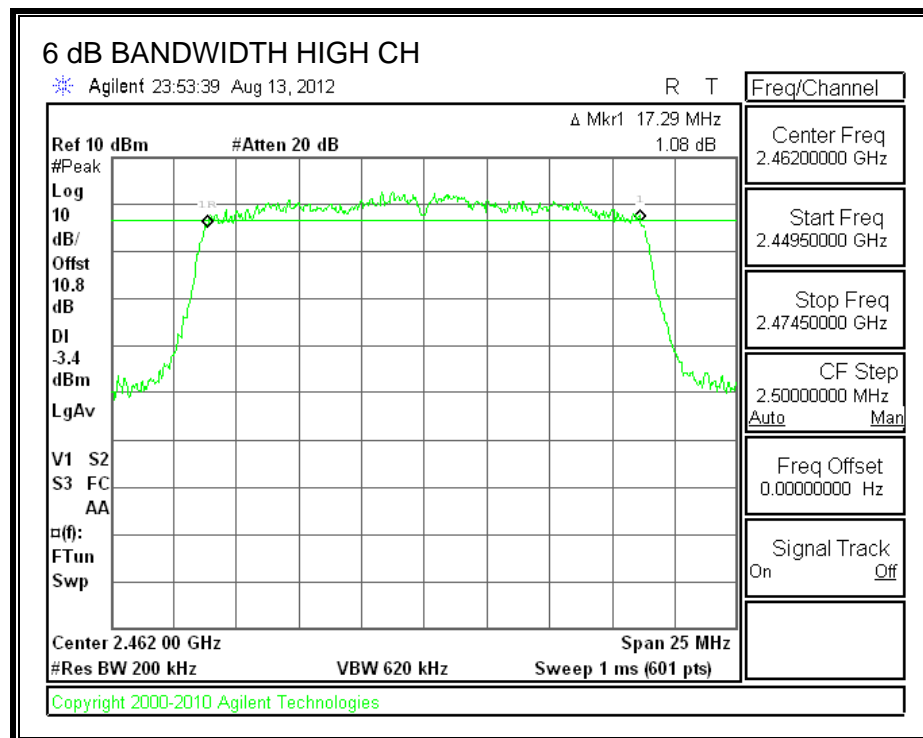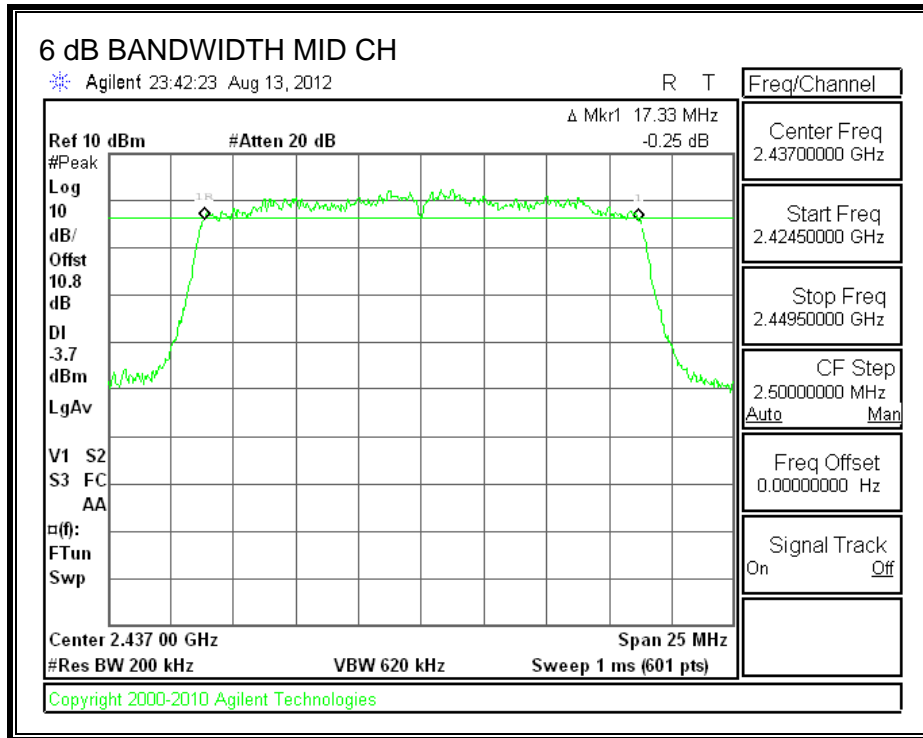

7.3.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE



The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.4709
Middle	2437	17.4035
High	2462	17.3716

99% BANDWIDTH

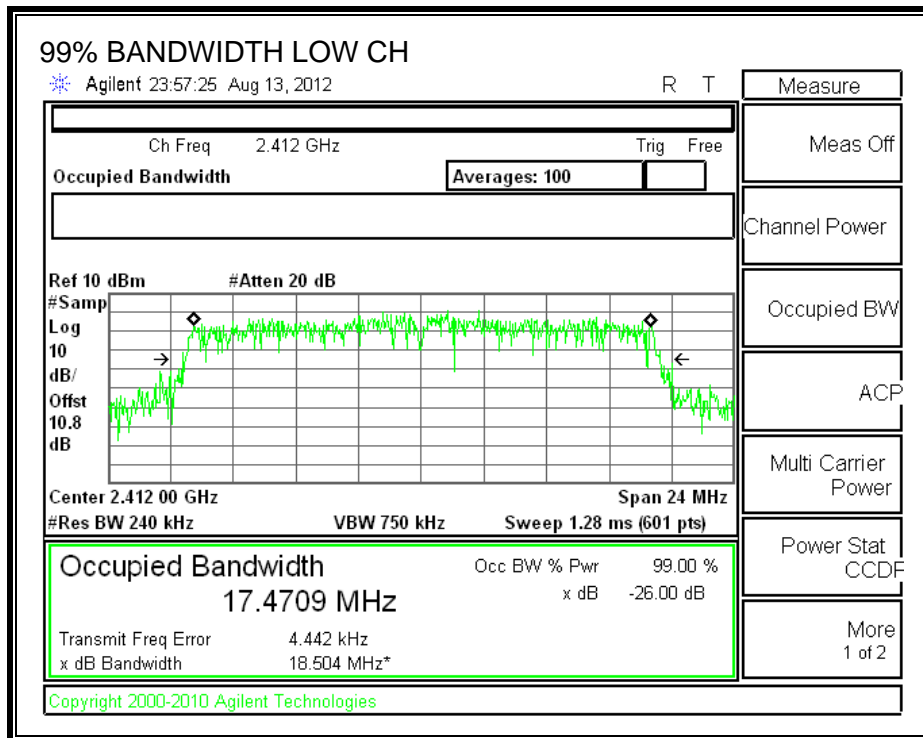

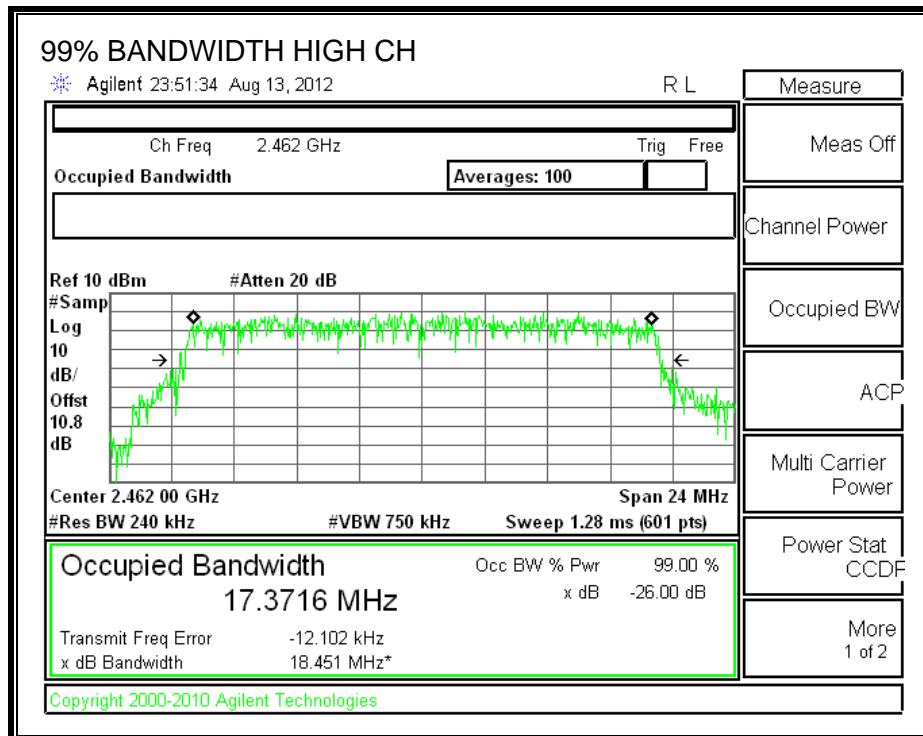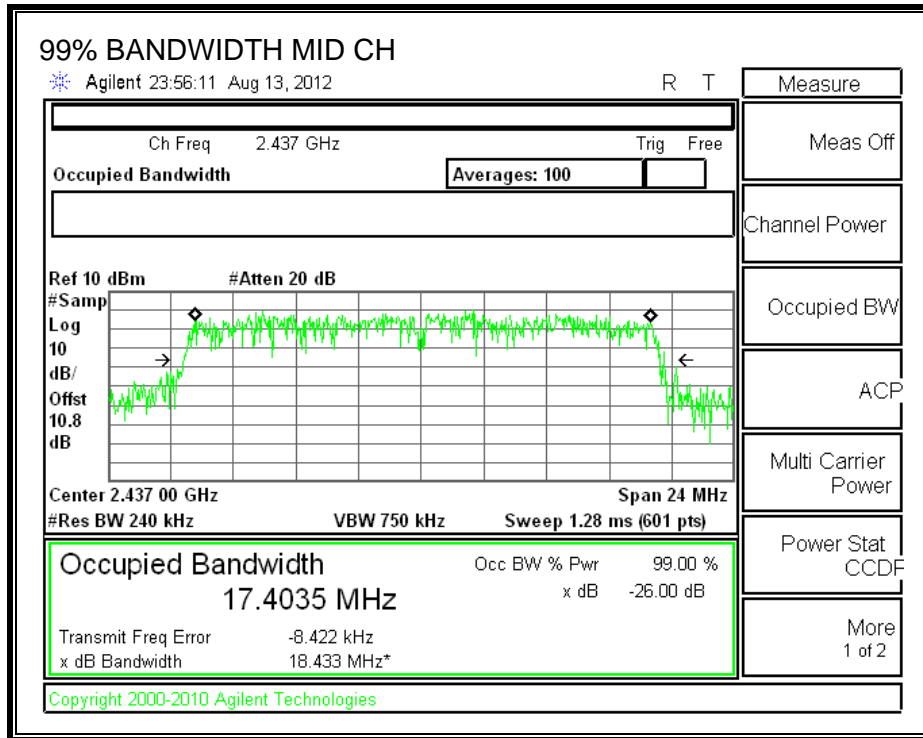

7.3.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2412	18.9	30	-11.10
Middle	2437	19.38	30	-10.62
High	2462	19.5	30	-10.50

OUTPUT POWER

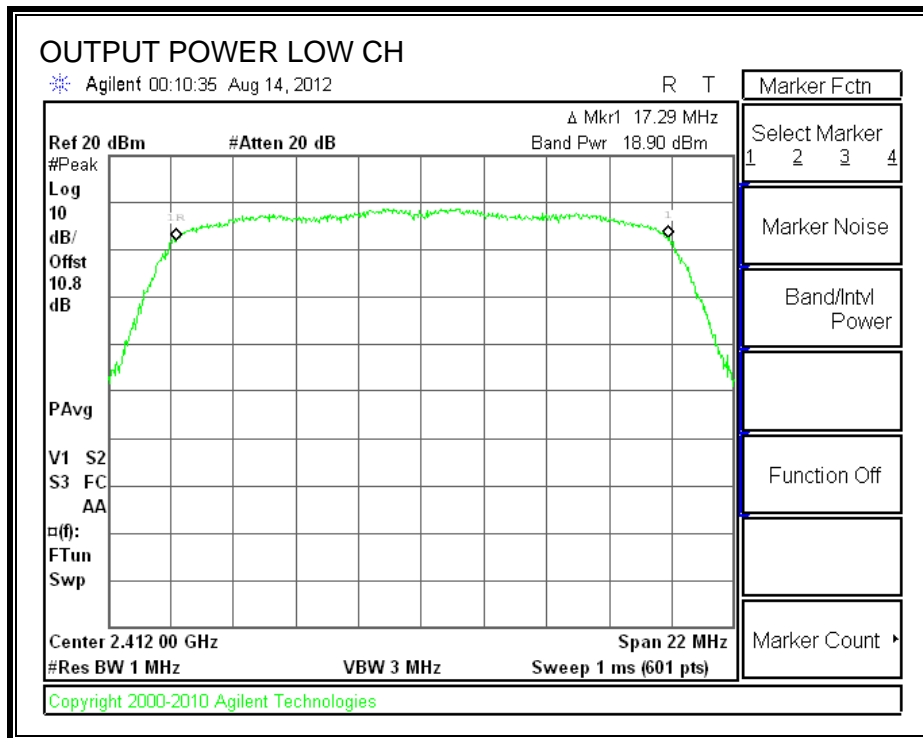

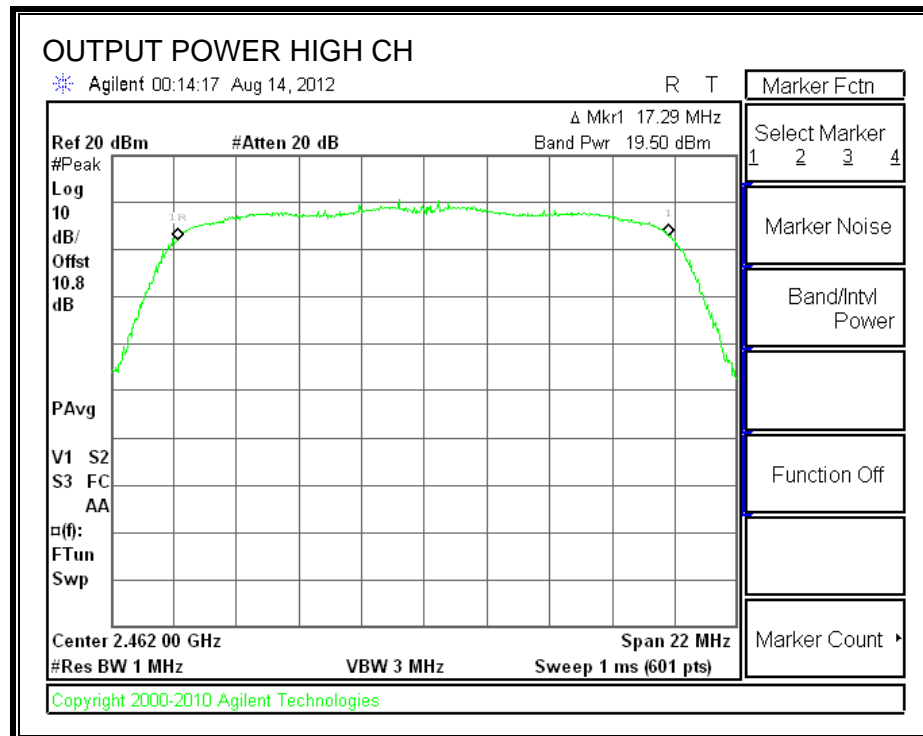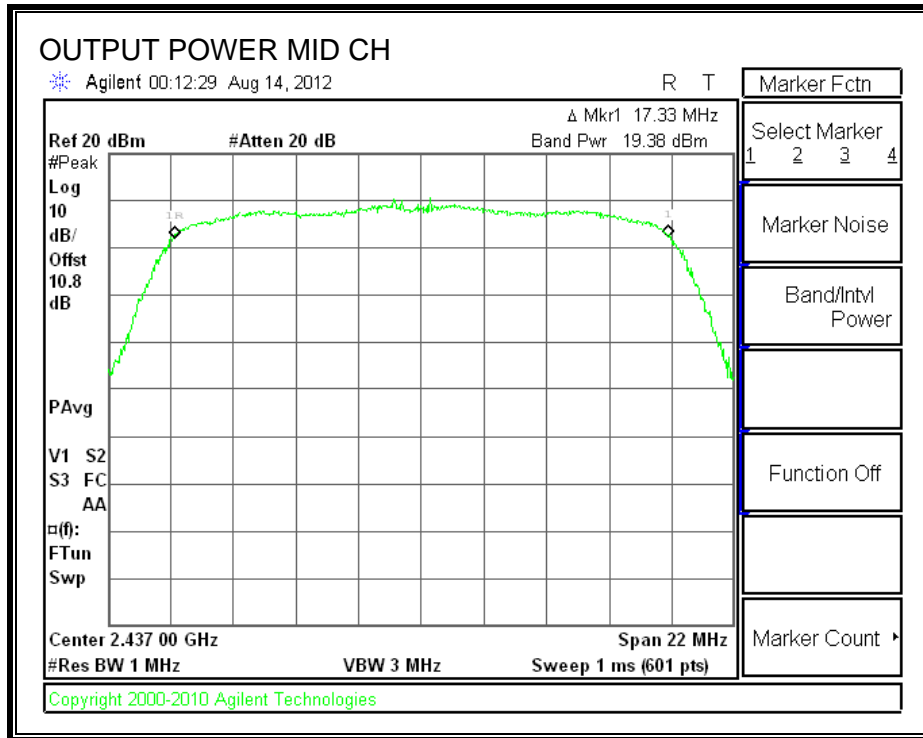

7.3.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.7dB (including 10 dB pad and .7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Power (dBm)
Low	2412	11.22
Middle	2437	11.51
High	2462	11.68

7.3.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-14.16	8	-22.16
Middle	2437	-13.84	8	-21.84
High	2462	-13.36	8	-21.36

POWER SPECTRAL DENSITY

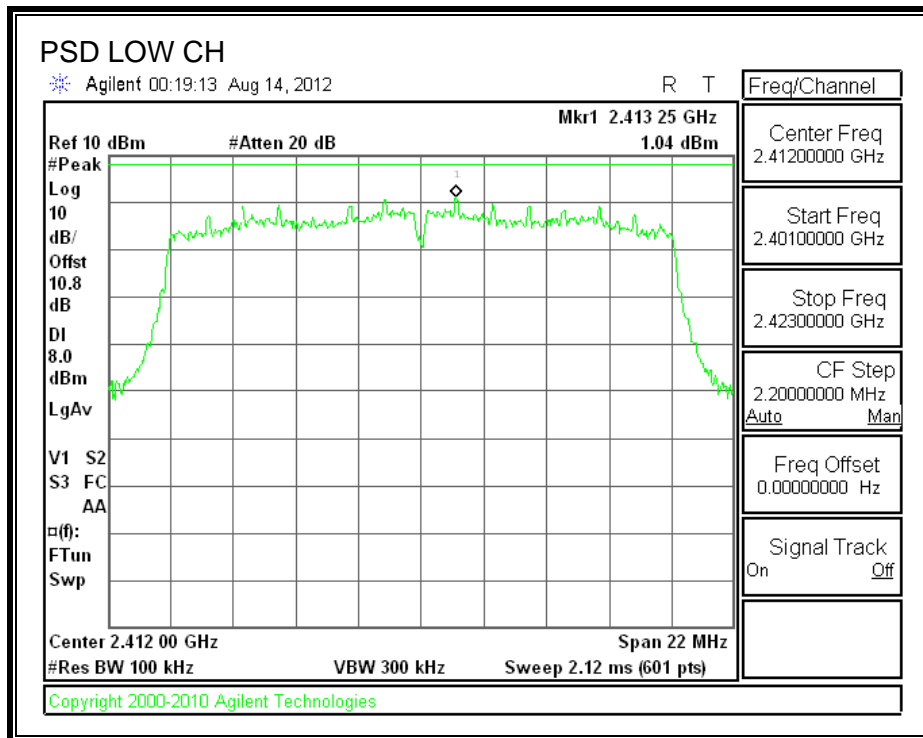

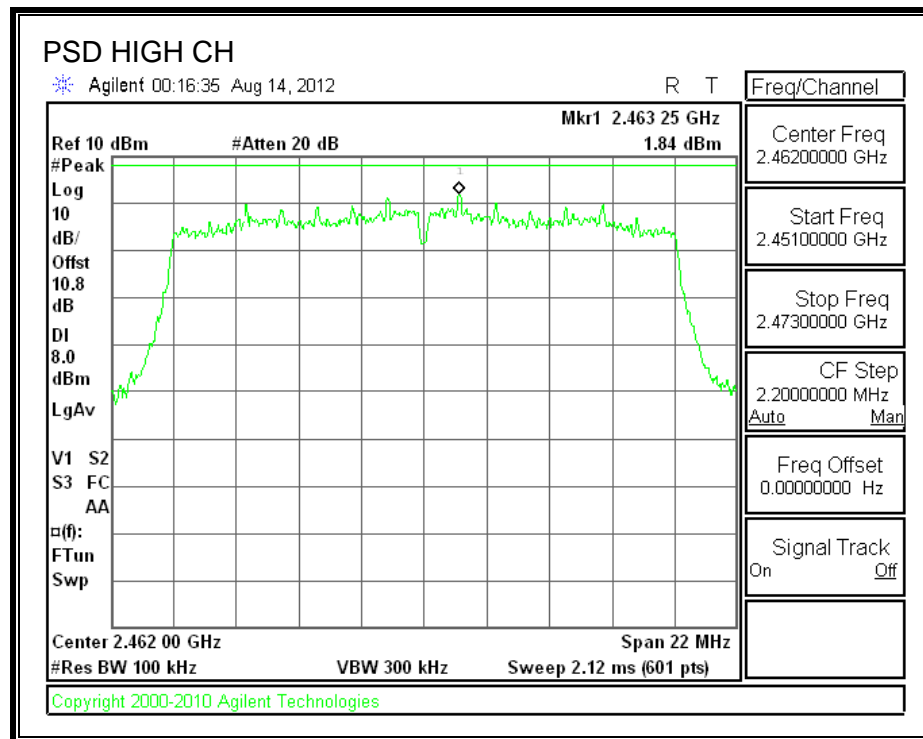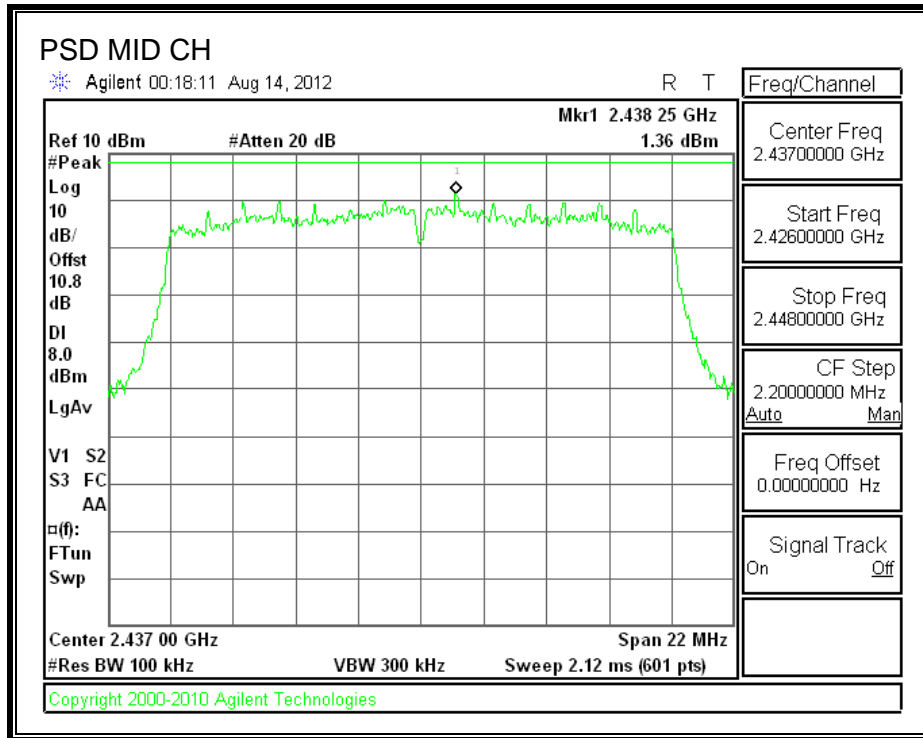

7.3.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

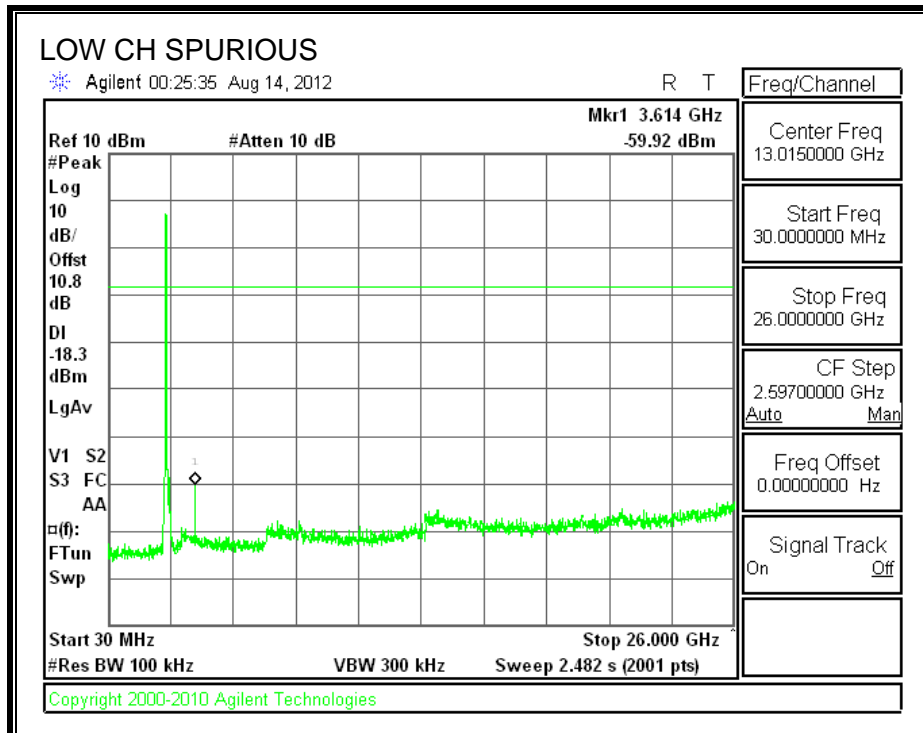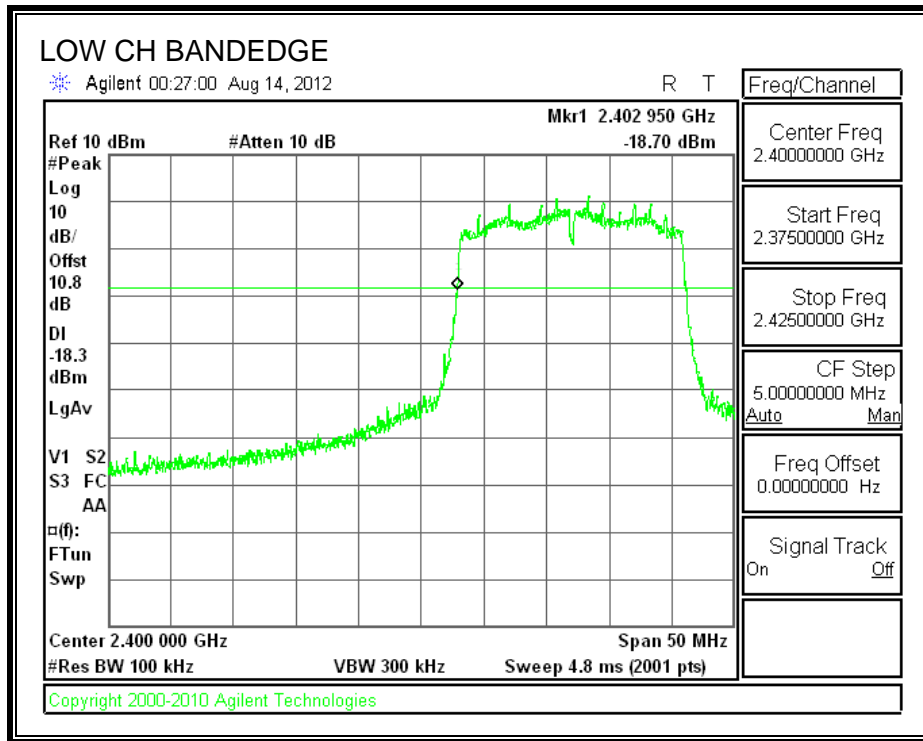

SPURIOUS EMISSIONS, MID CHANNEL

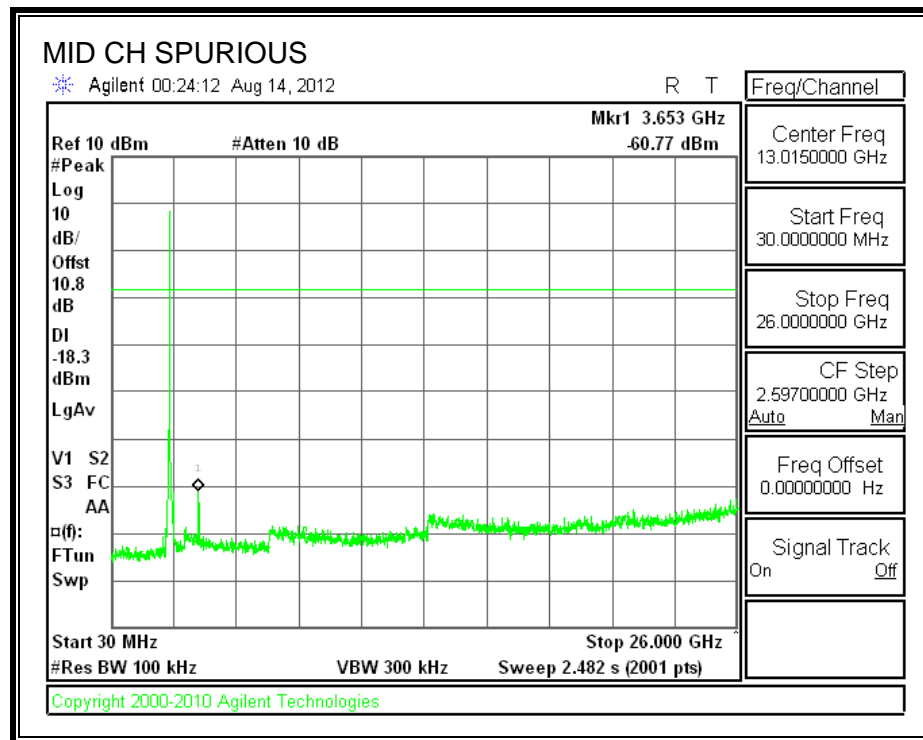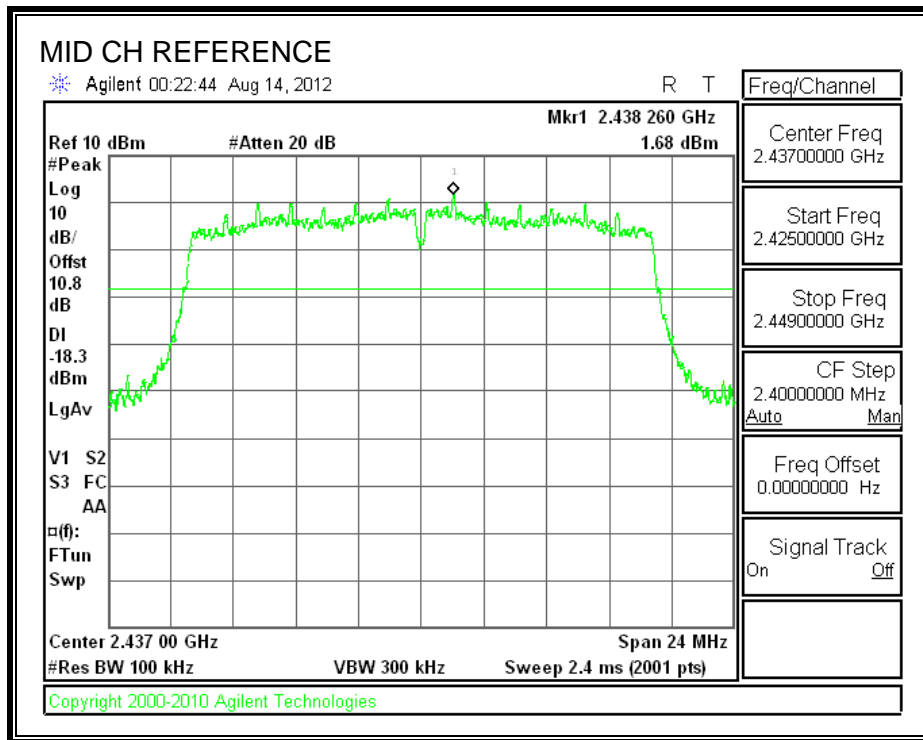

SPURIOUS EMISSIONS, HIGH CHANNEL

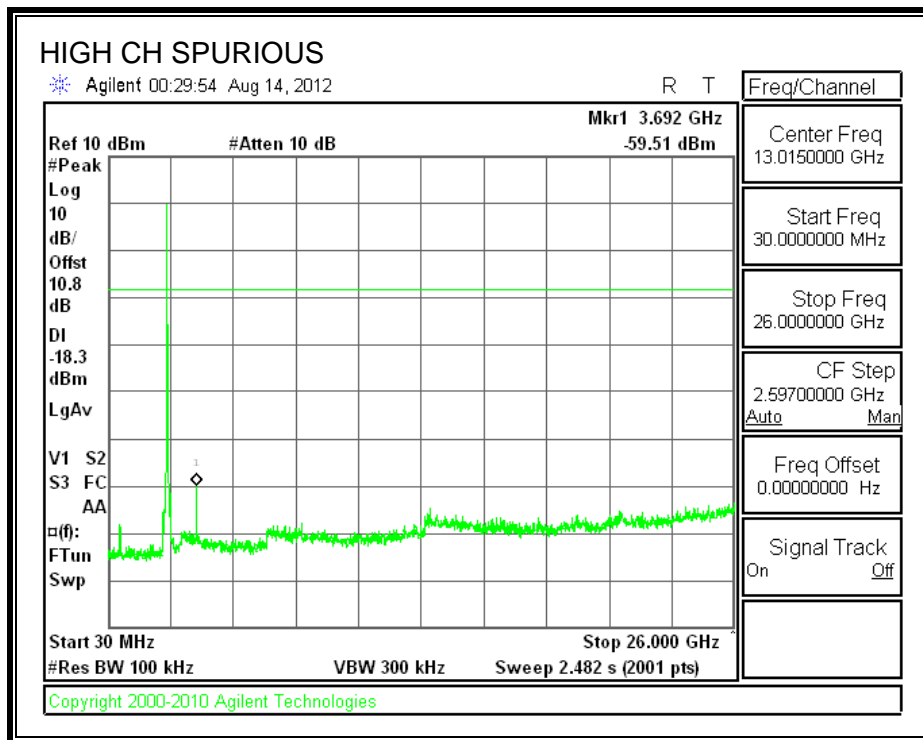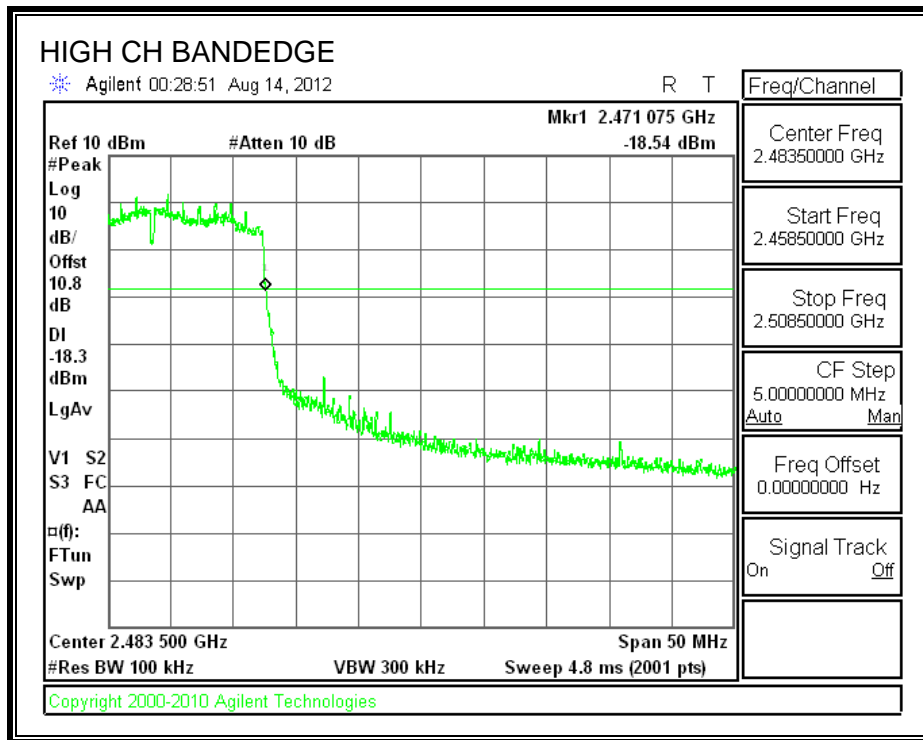

7.4. 802.11a MODE IN THE 5.8 GHz BAND

7.4.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".


RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	16.12	0.5
Middle	5785	16.42	0.5
High	5825	16	0.5

6 dB BANDWIDTH

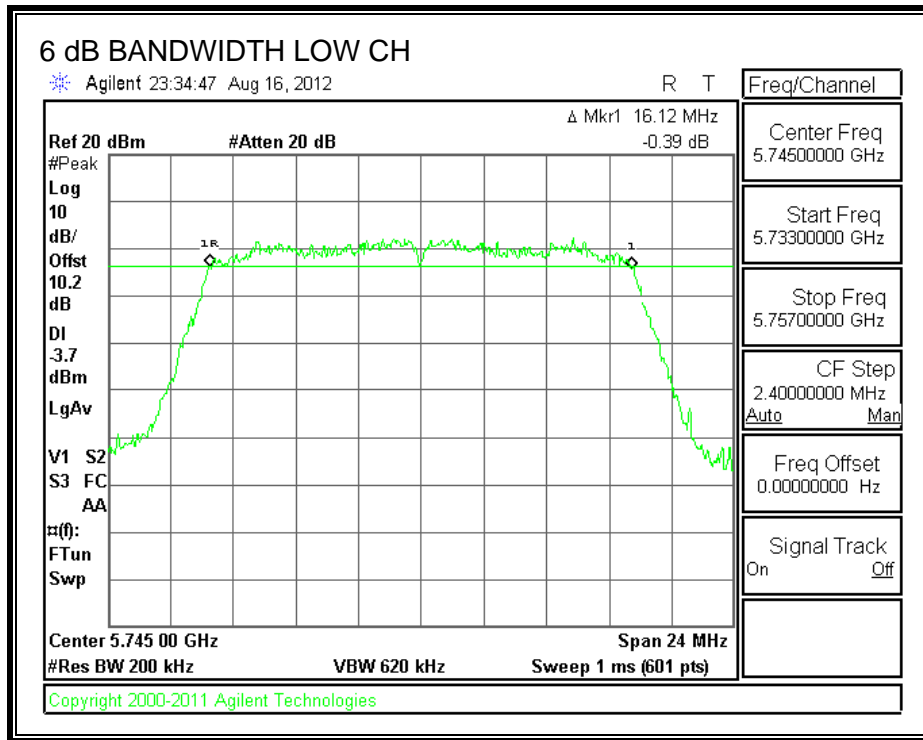

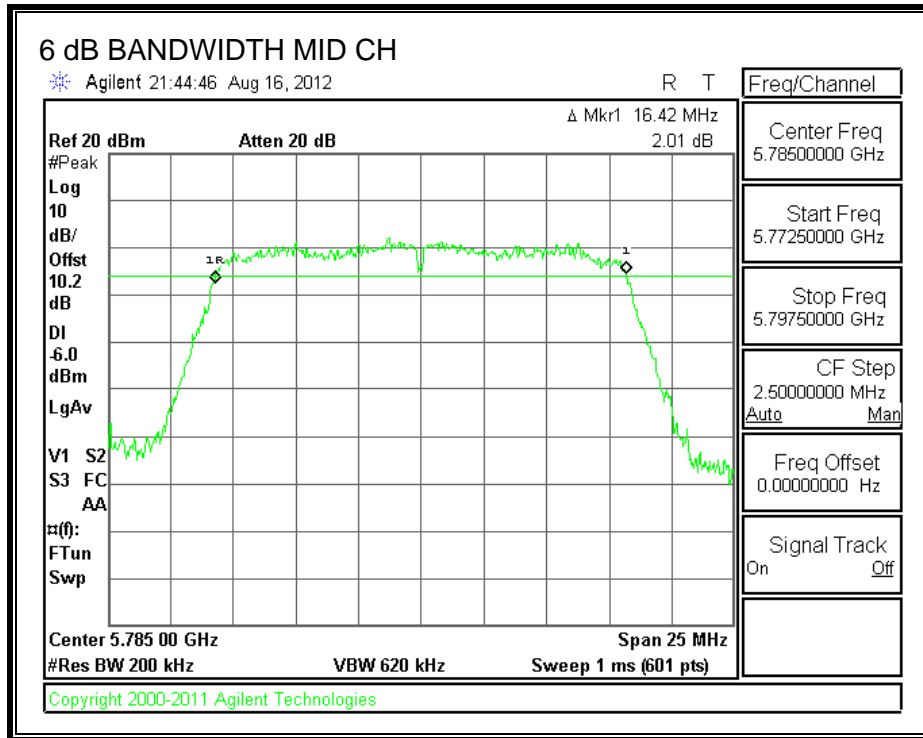

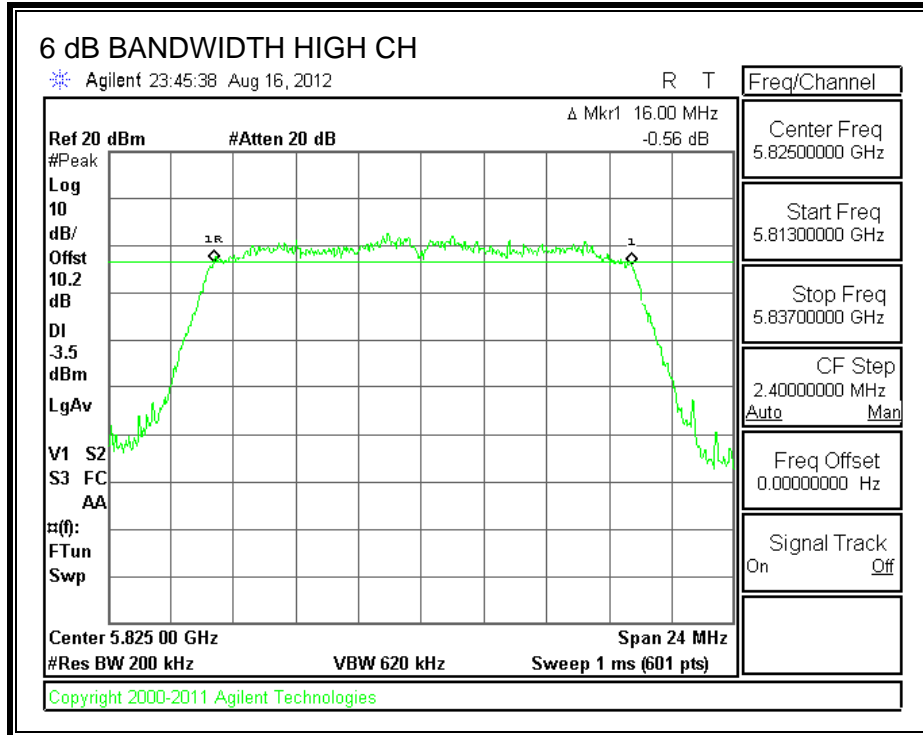

7.4.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	16.17
Middle	5785	16.1921
High	5825	16.2861

99% BANDWIDTH

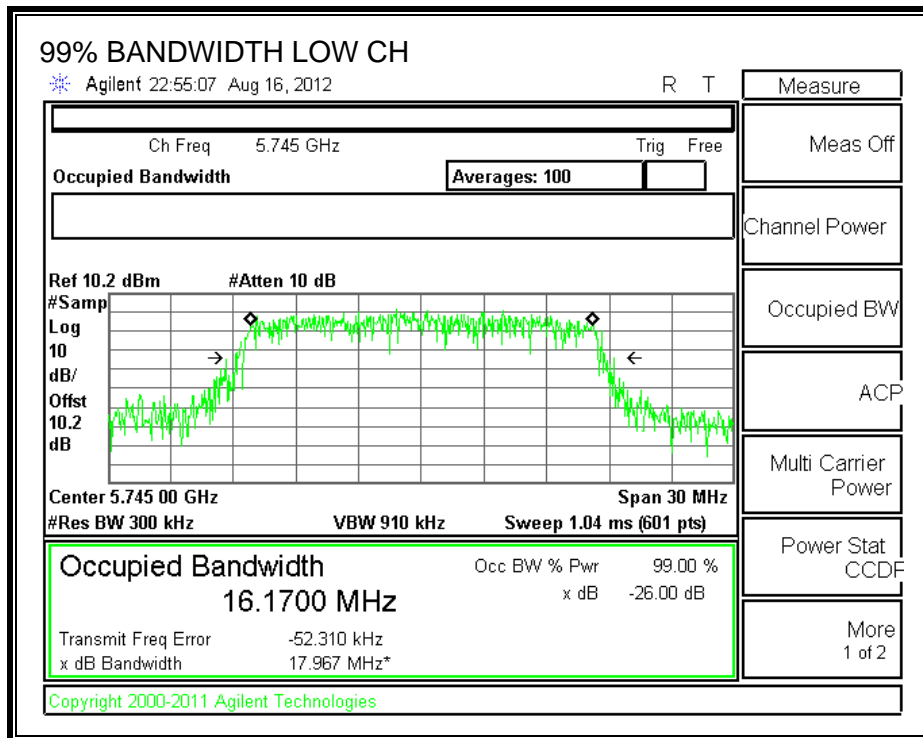

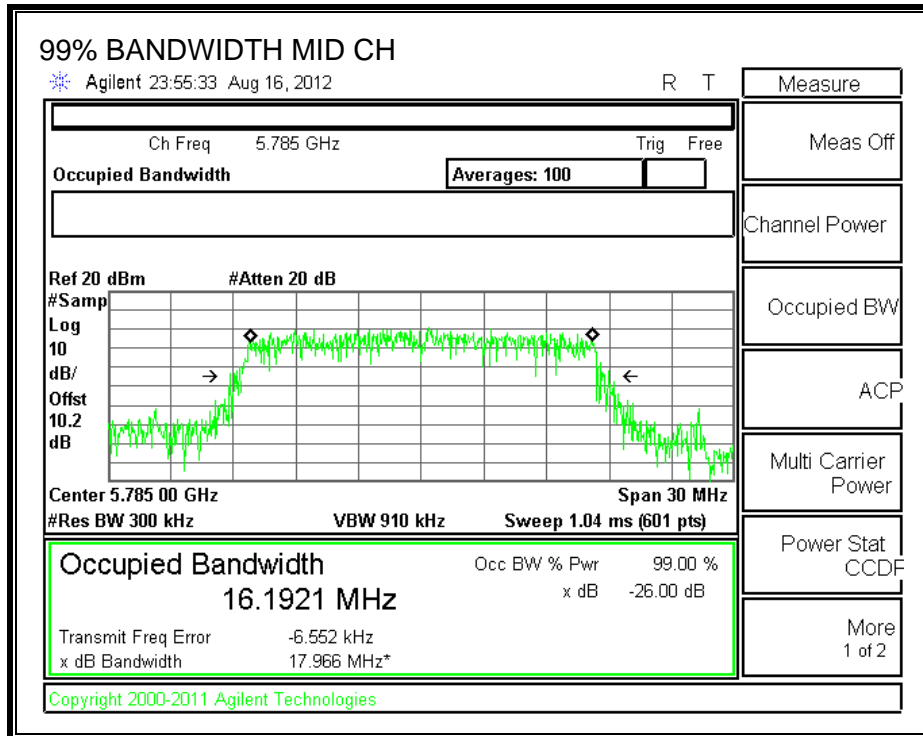

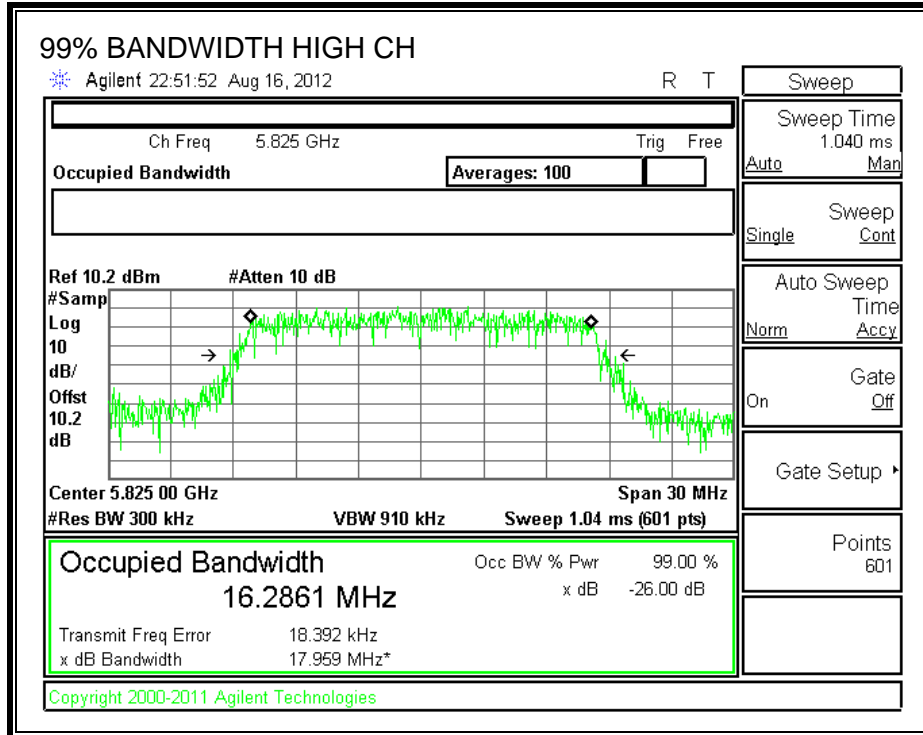

7.4.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	5745	19.5	30	-10.50
Middle	5785	19.2	30	-10.80
High	5825	19.08	30	-10.92

OUTPUT POWER

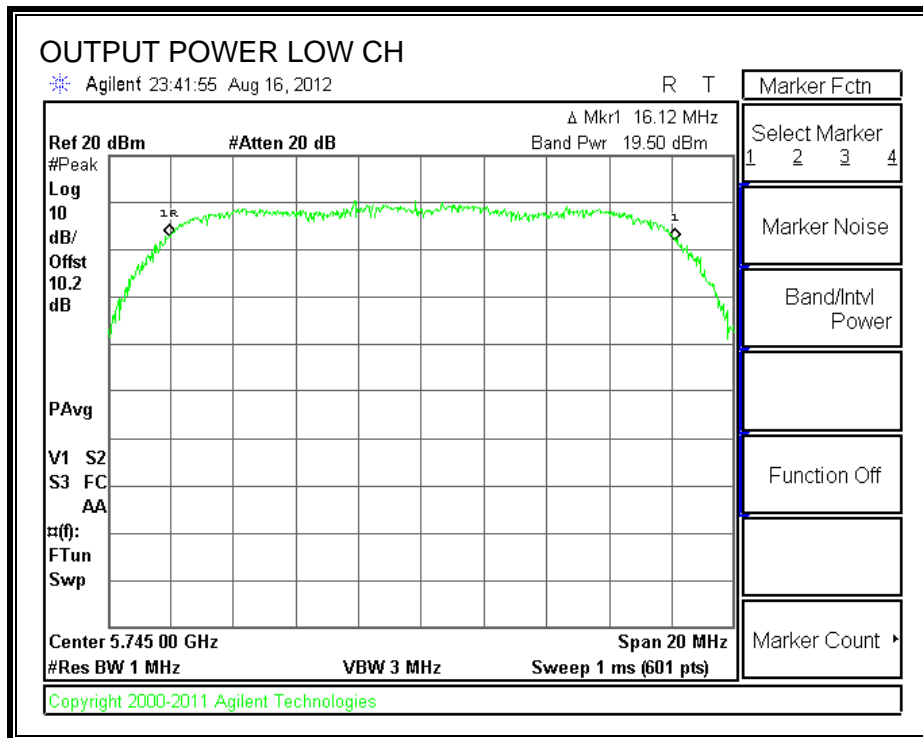

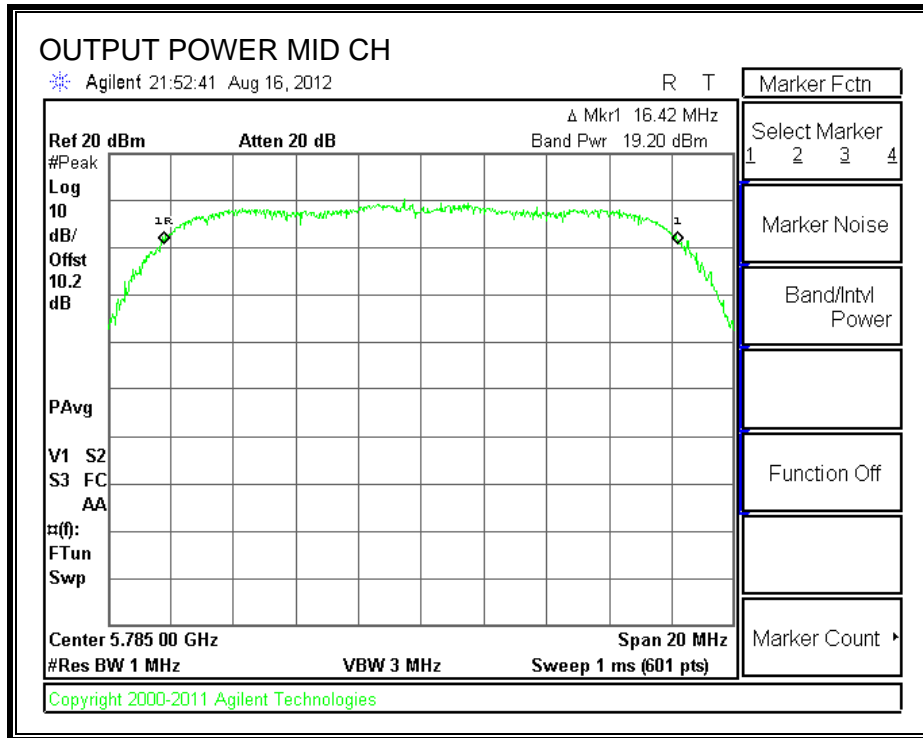

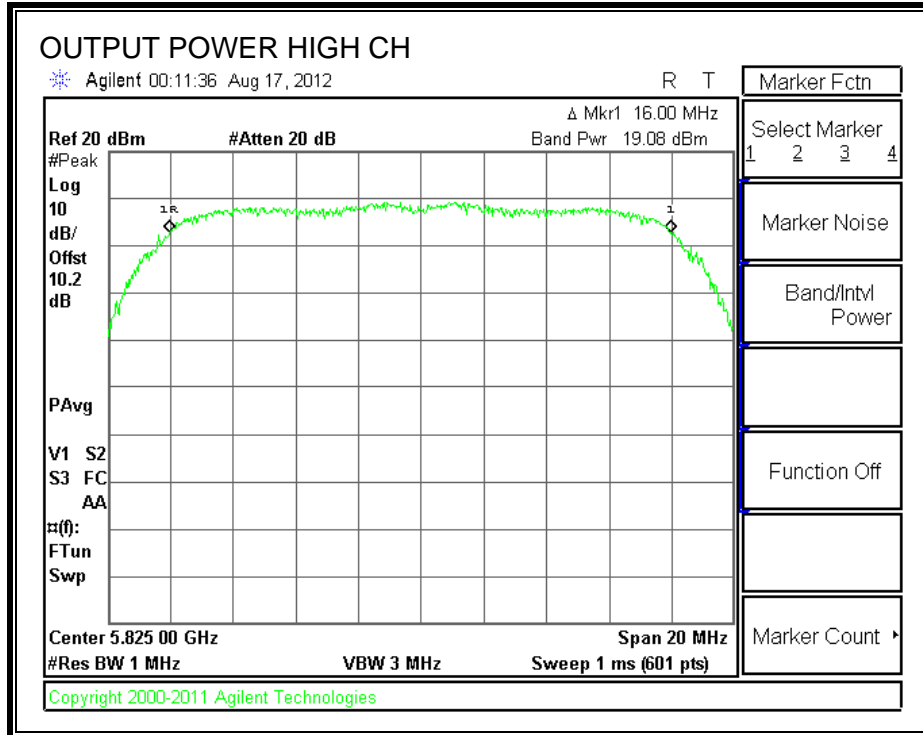

7.4.1. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.53dB (including 10 dB pad and 1.53dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5745	11.53
Mid	5785	11.37
High	5805	11.26

7.4.2. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".


RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5745	-14.02	8	-22.02
Middle	5785	-14.13	8	-22.13
High	5825	-13.48	8	-21.48

POWER SPECTRAL DENSITY

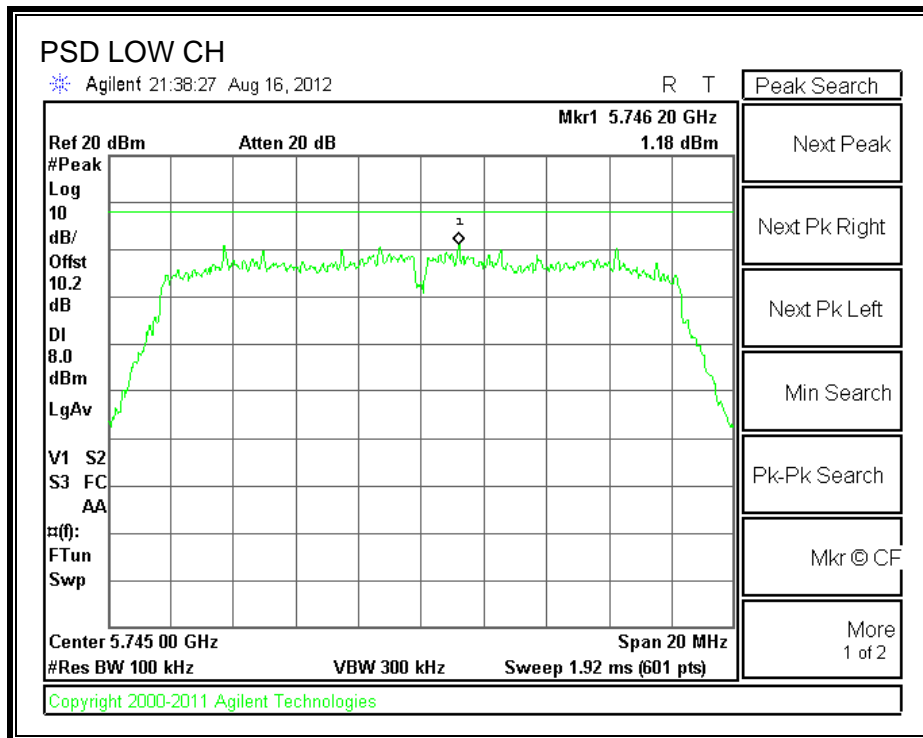

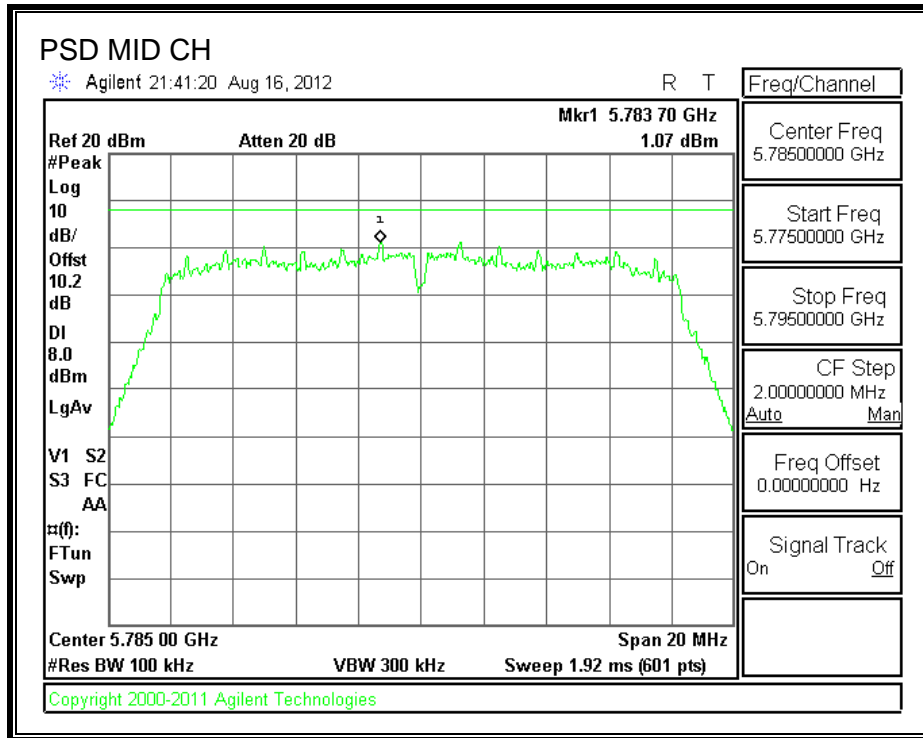

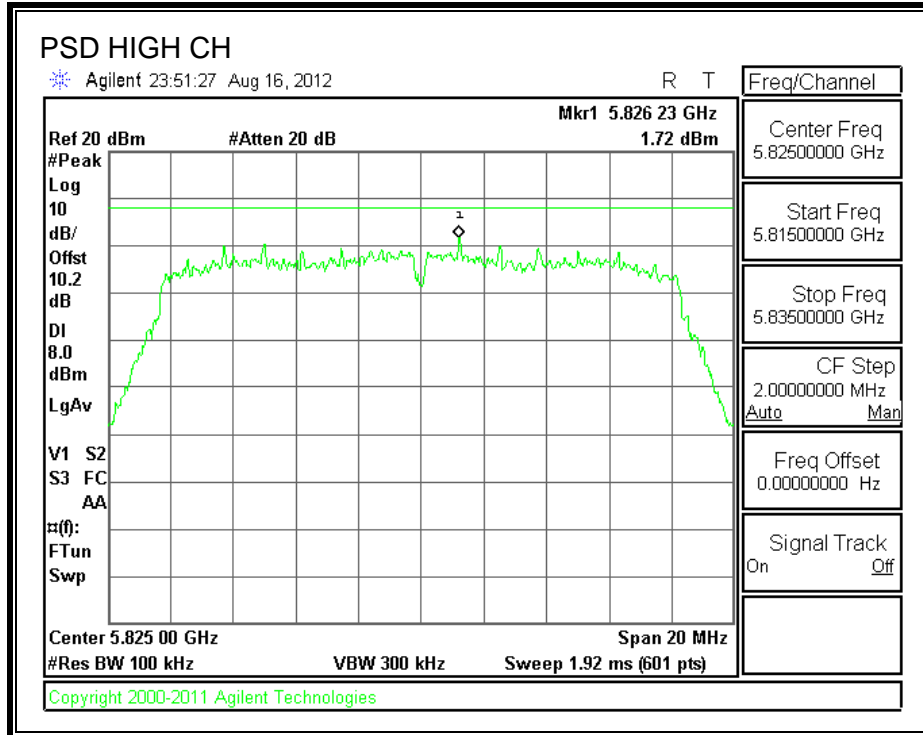

7.4.3. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

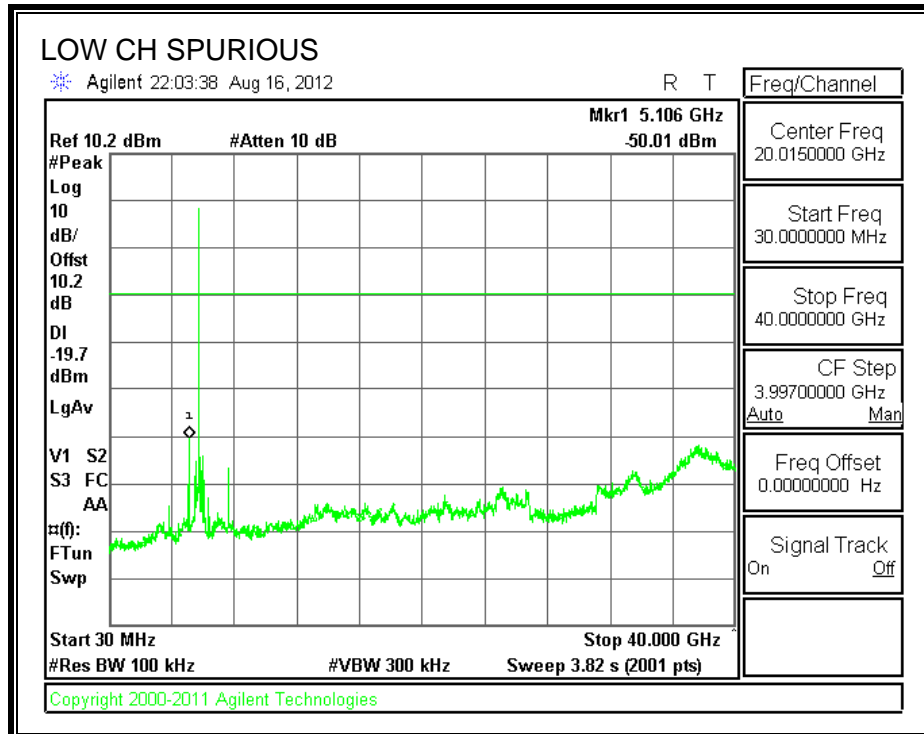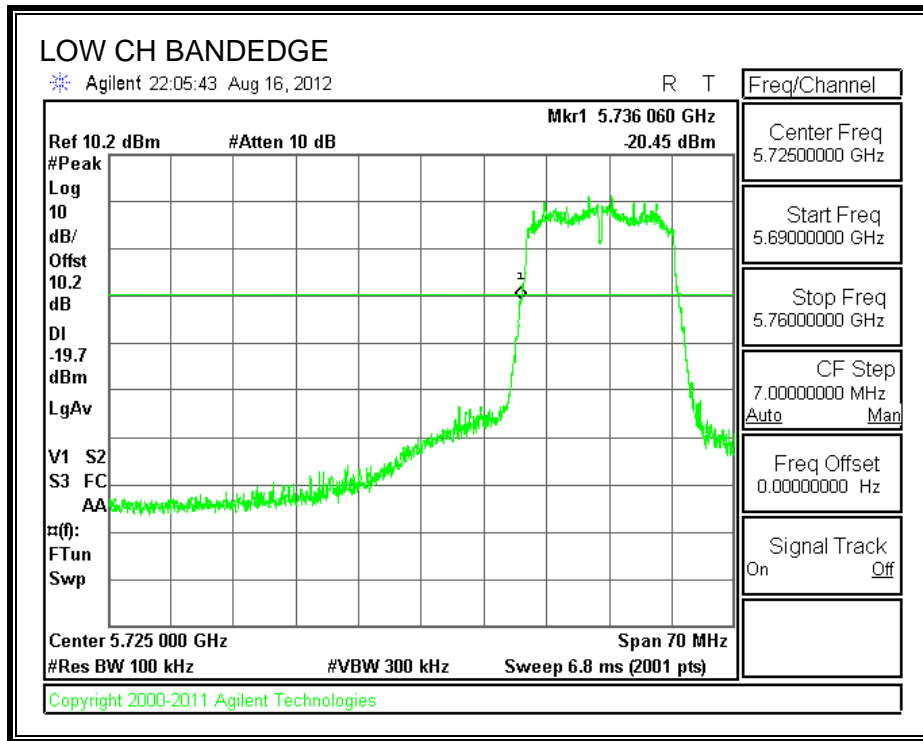

SPURIOUS EMISSIONS, MID CHANNEL

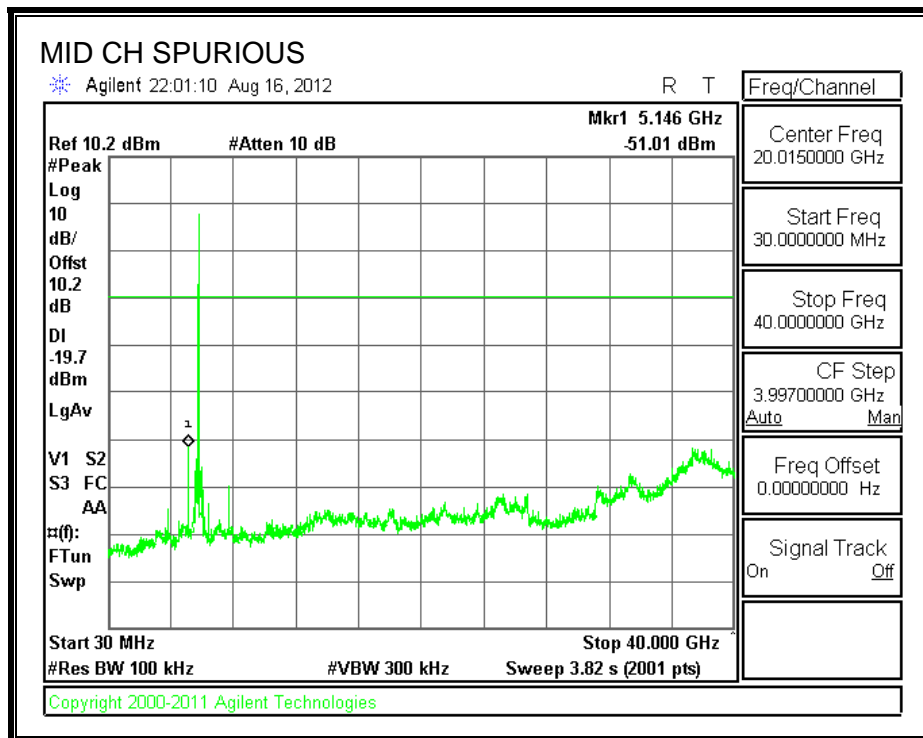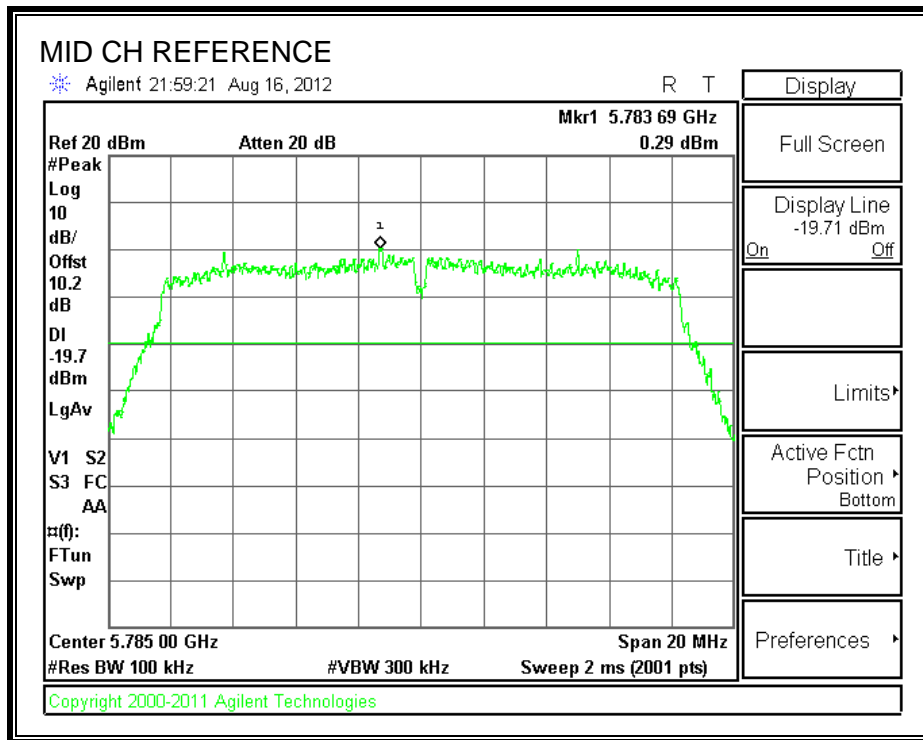

SPURIOUS EMISSIONS, HIGH CHANNEL

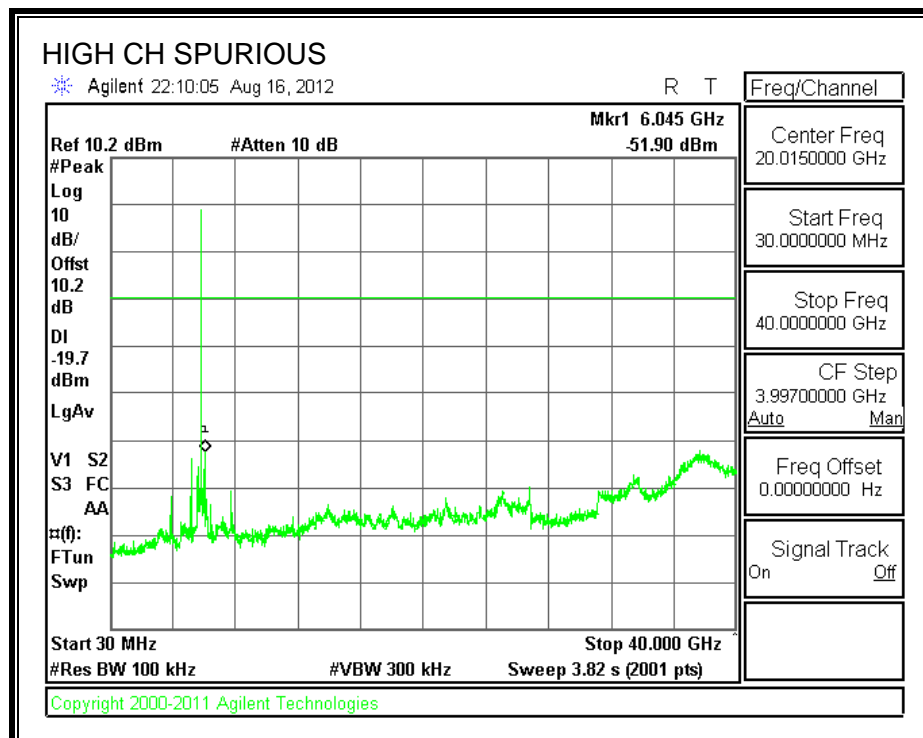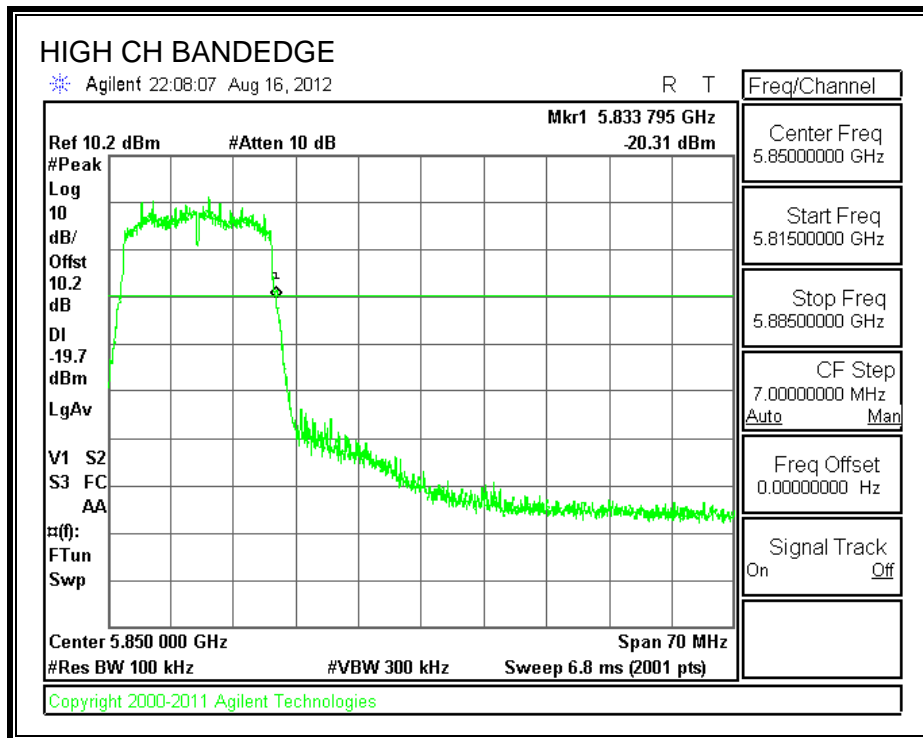

7.5. 802.11n HT20 MODE IN THE 5.8 GHz BAND

7.5.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	17.29	0.5
Middle	5785	17.33	0.5
High	5825	17.29	0.5

6 dB BANDWIDTH

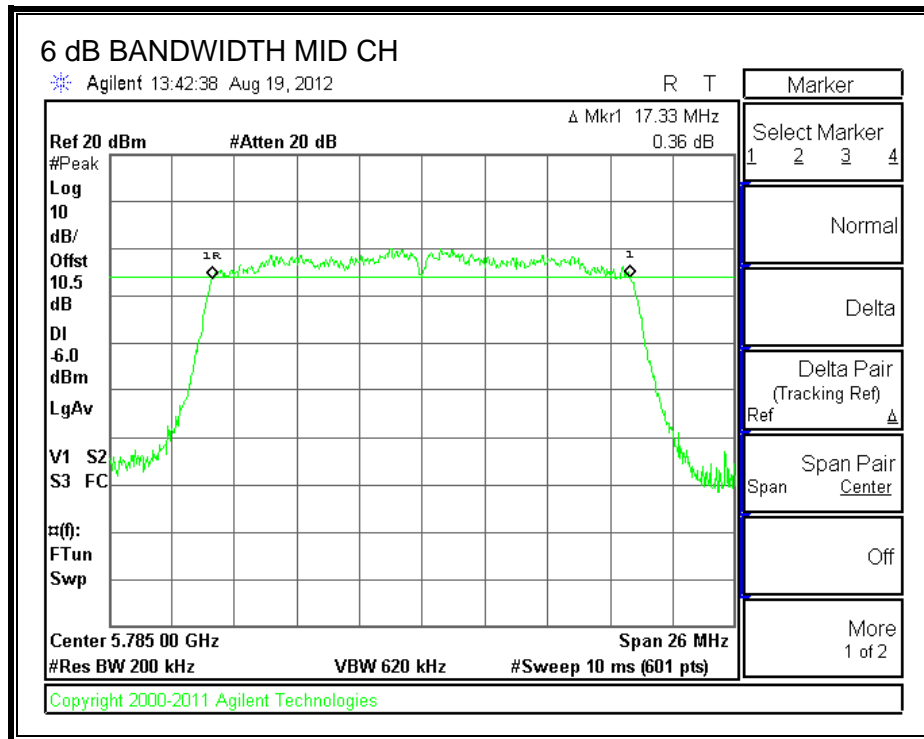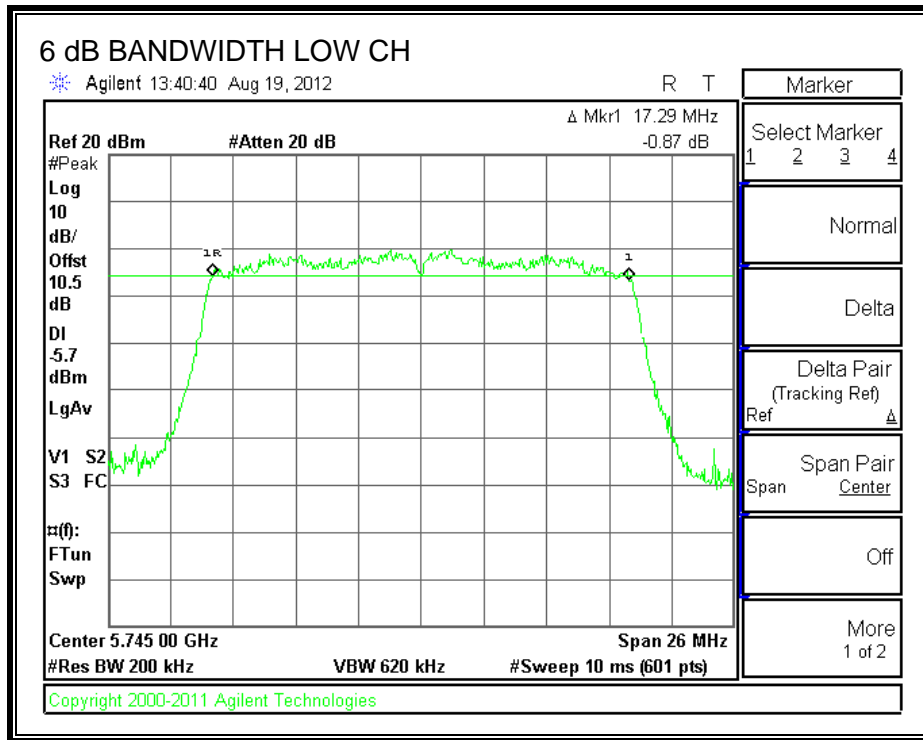

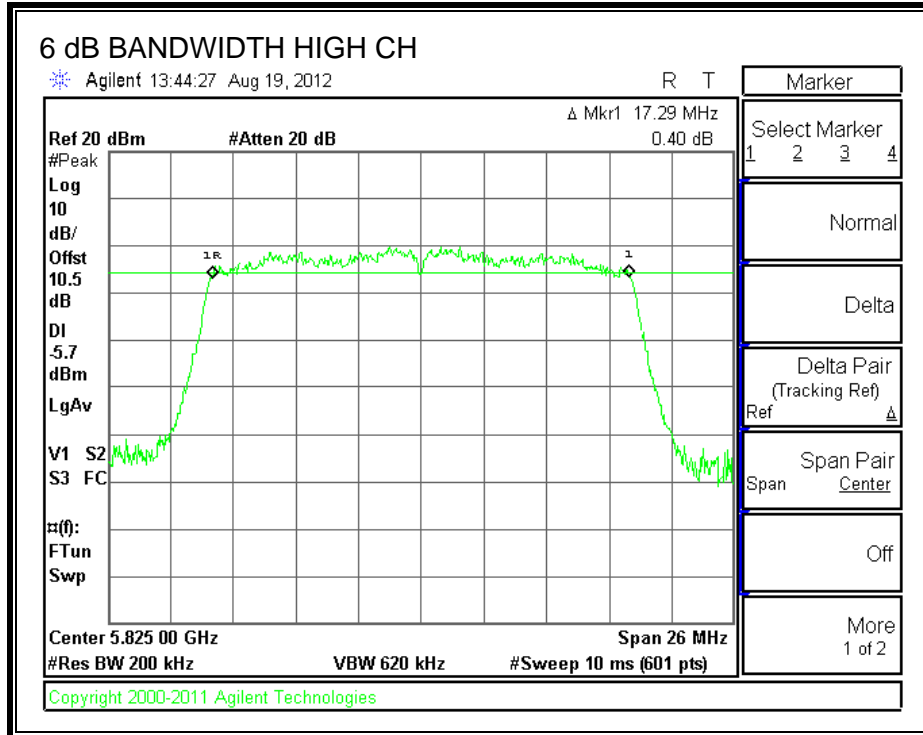

7.5.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	17.265
Middle	5785	17.274
High	5825	17.243

99% BANDWIDTH

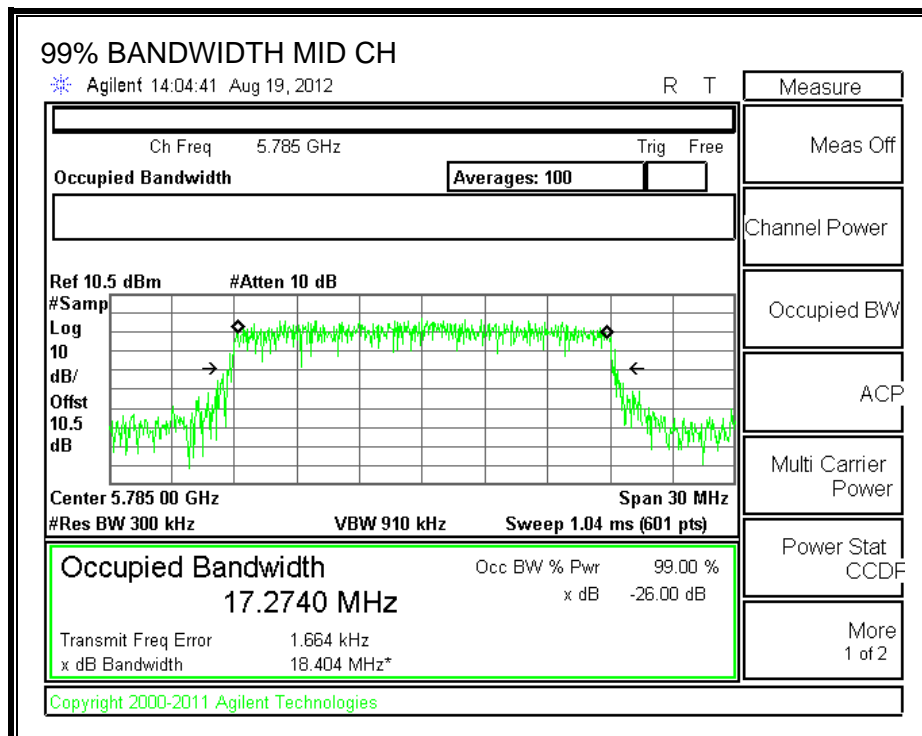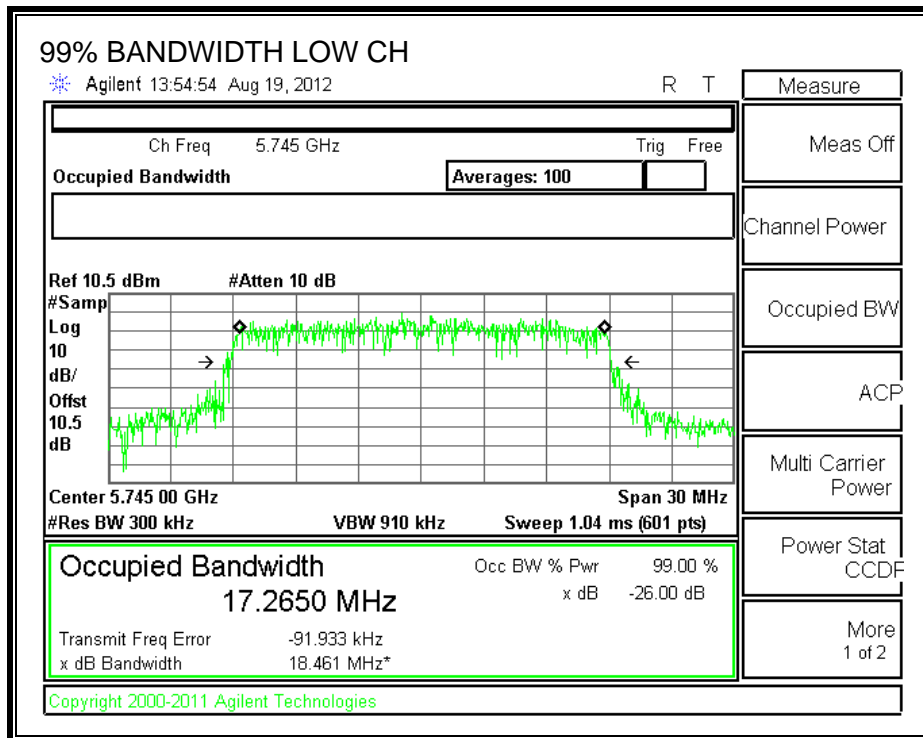

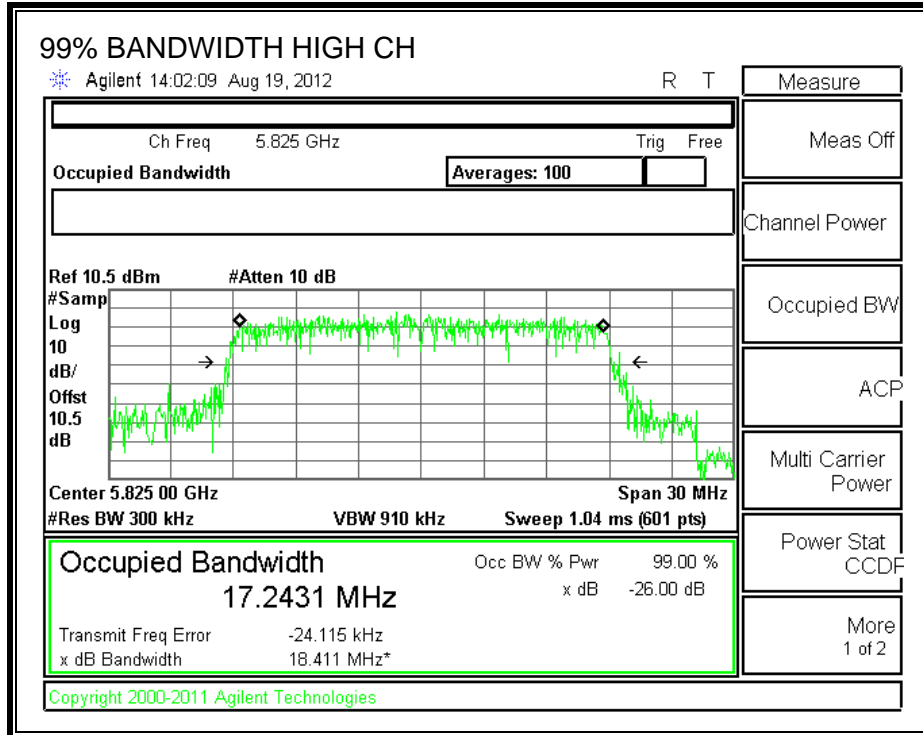

7.5.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	5745	16.63	30	-13.37
Middle	5785	16.63	30	-13.37
High	5825	16.55	30	-13.45

OUTPUT POWER

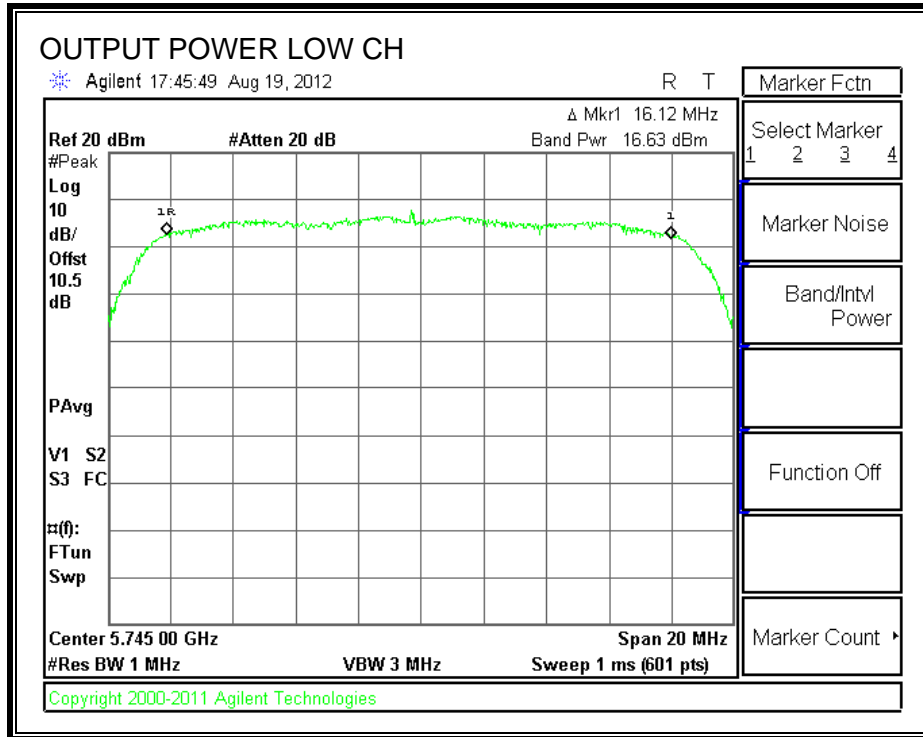

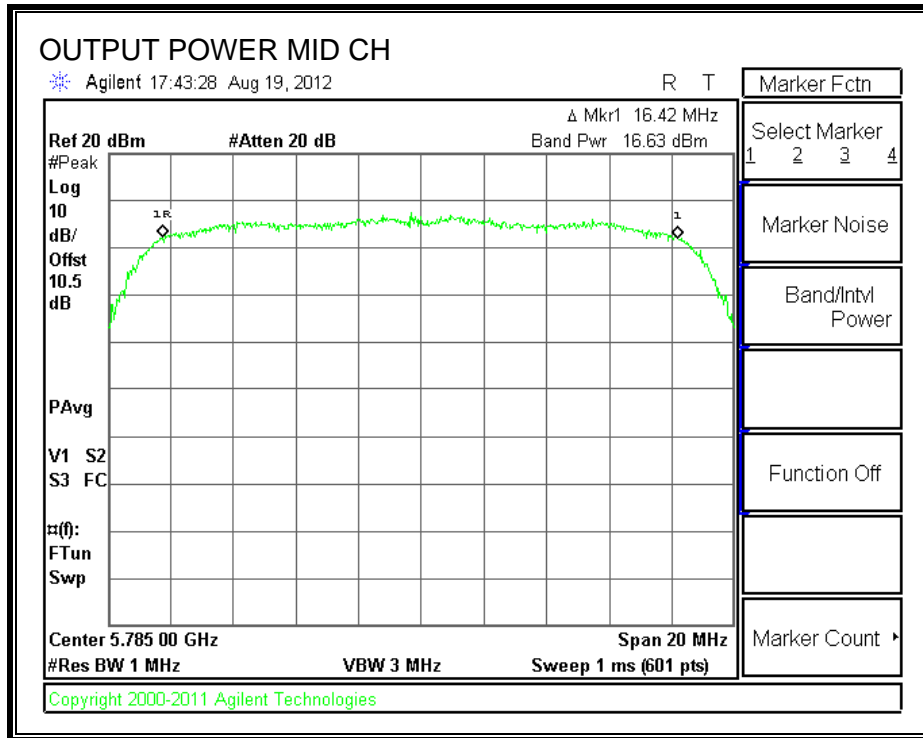

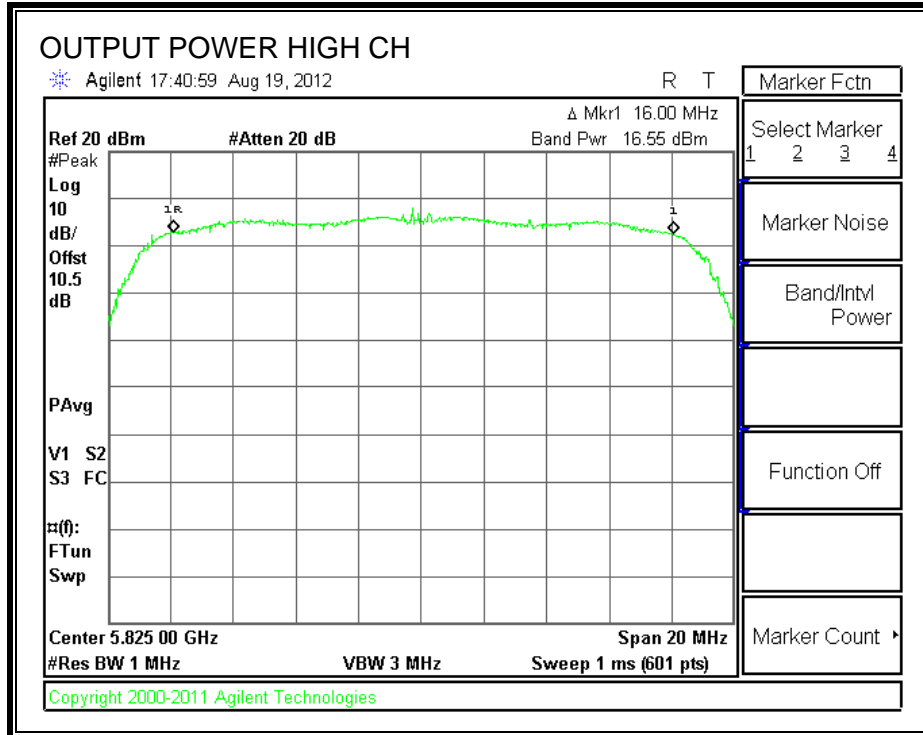

7.5.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11.53dB (including 10 dB pad and 1.53dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

Channel	Frequency (MHz)	Power (dBm)
Low	5745	10.31
Mid	5785	10.14
High	5805	10.23

7.5.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5745	-14.02	8	-22.02
Middle	5785	-14.13	8	-22.13
High	5825	-13.48	8	-21.48

POWER SPECTRAL DENSITY

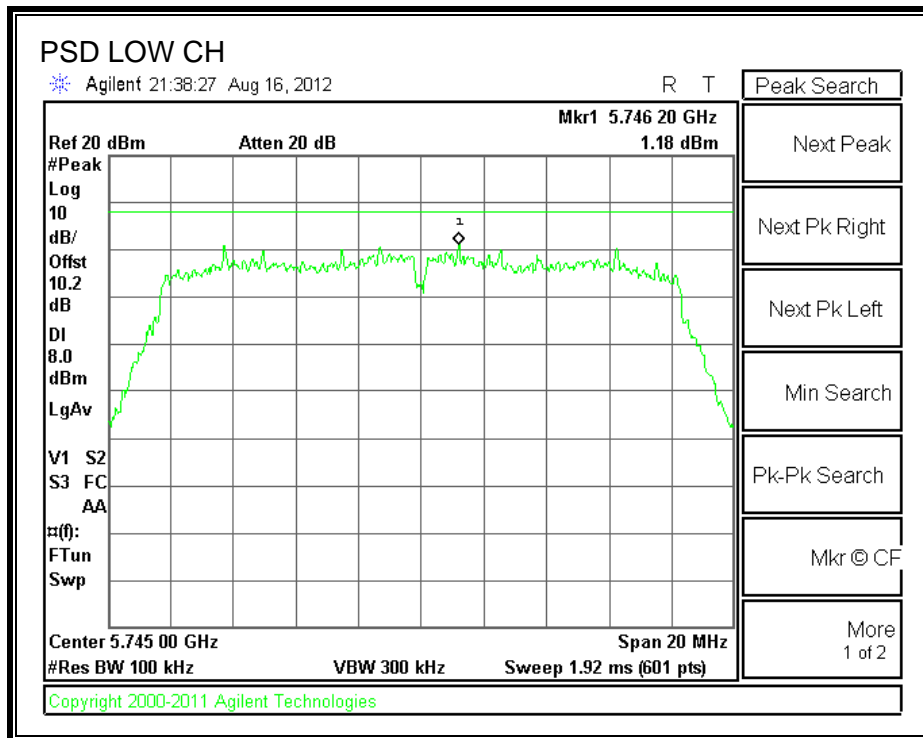

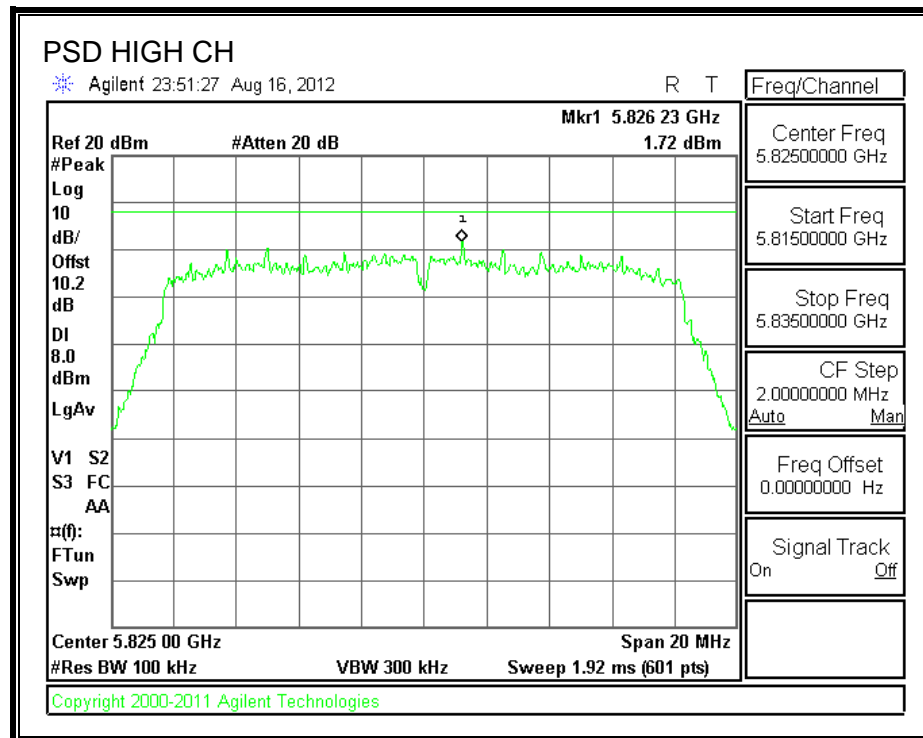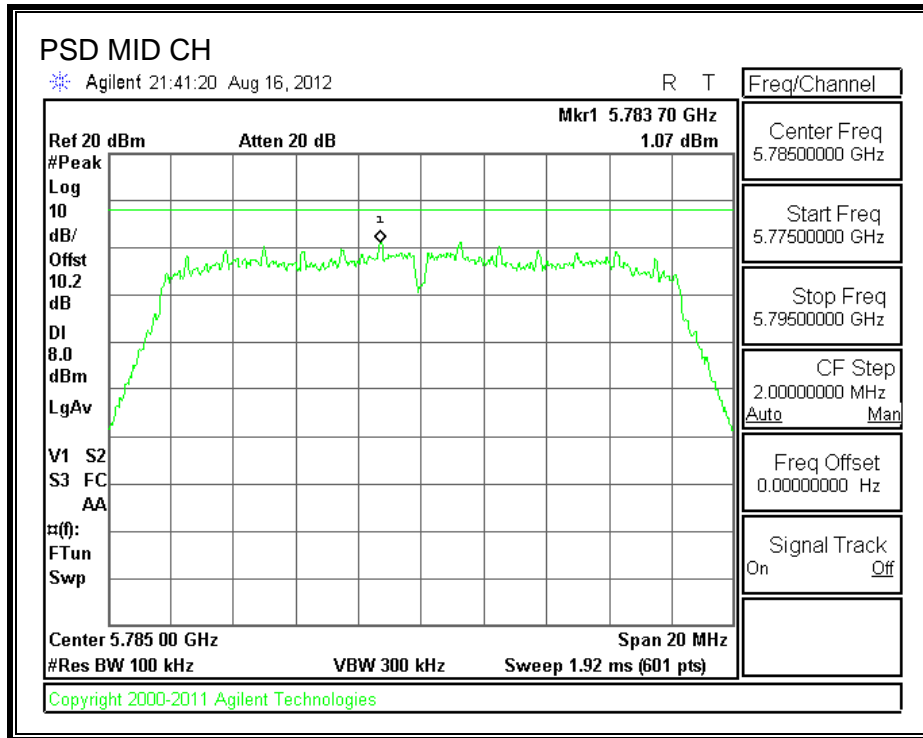

7.5.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE



KDB 558074 D01 v01 "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under 15.247".

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

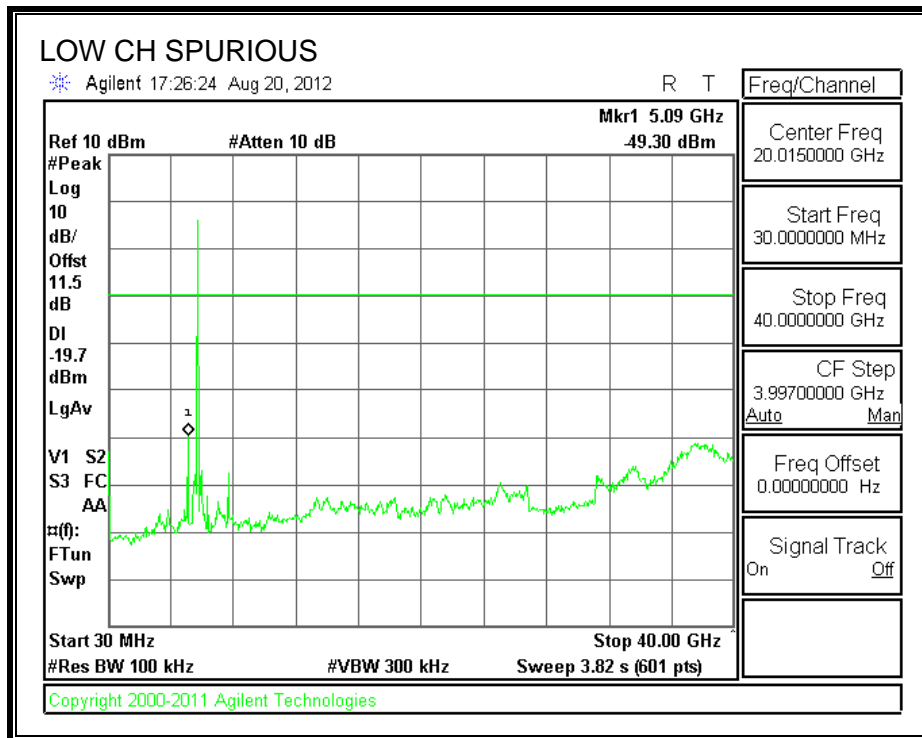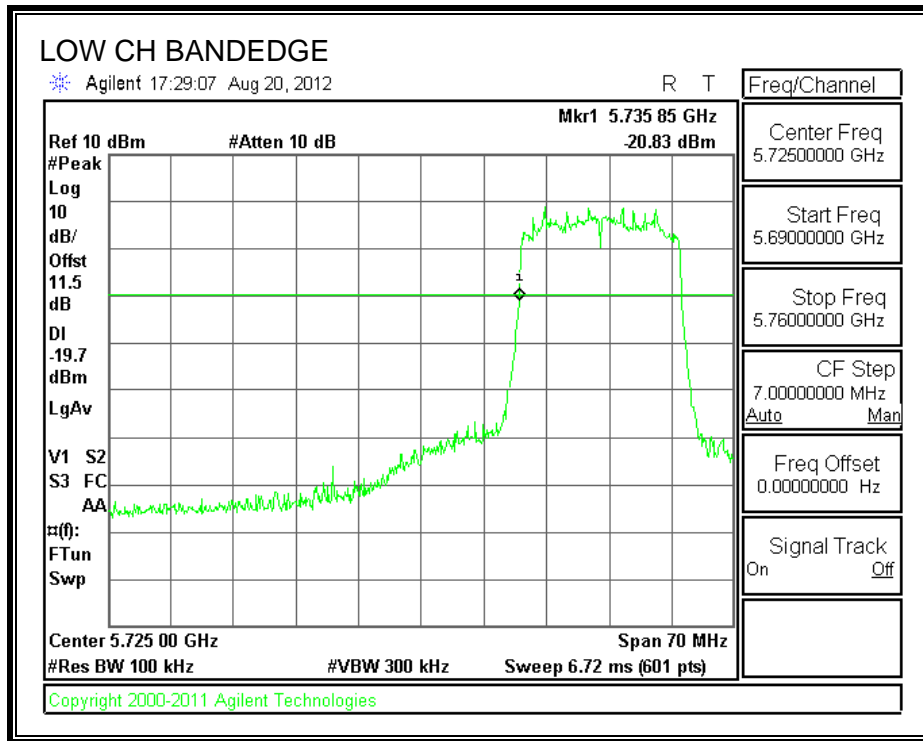

SPURIOUS EMISSIONS, MID CHANNEL

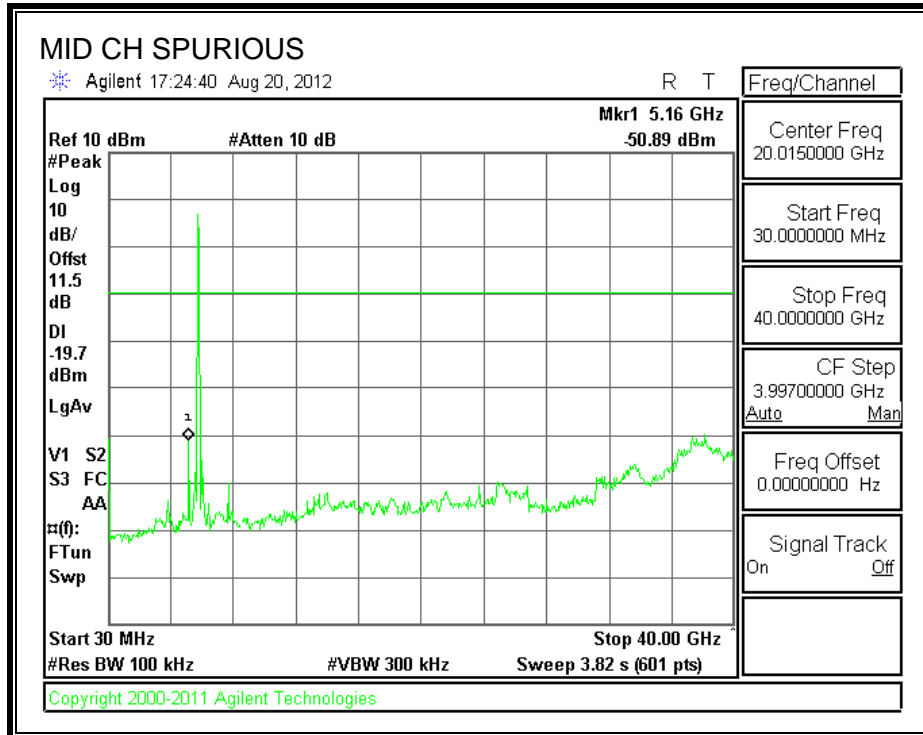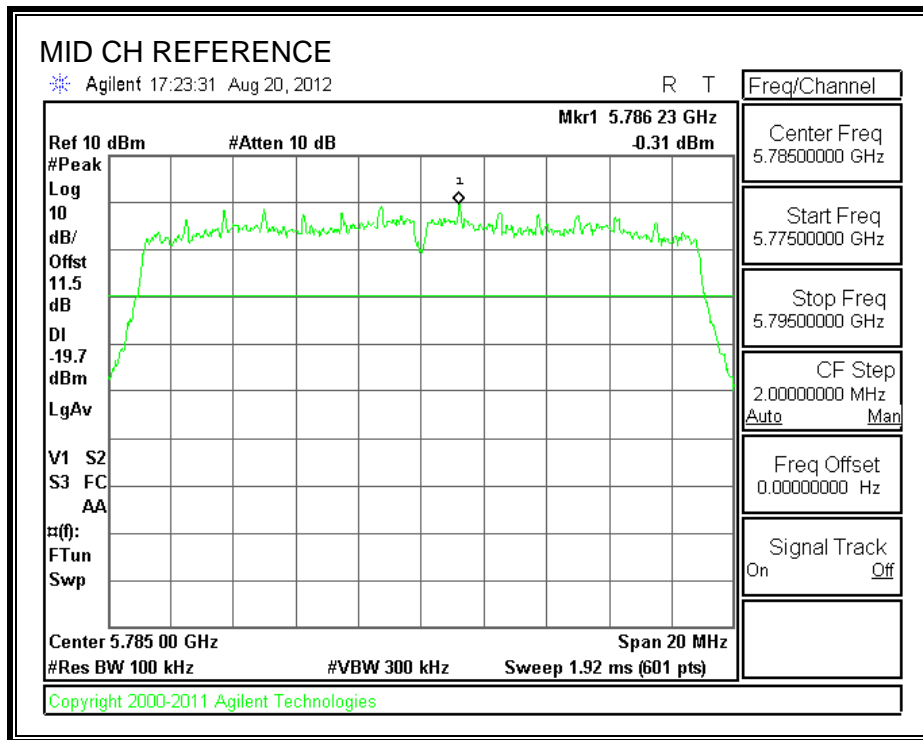

SPURIOUS EMISSIONS, HIGH CHANNEL

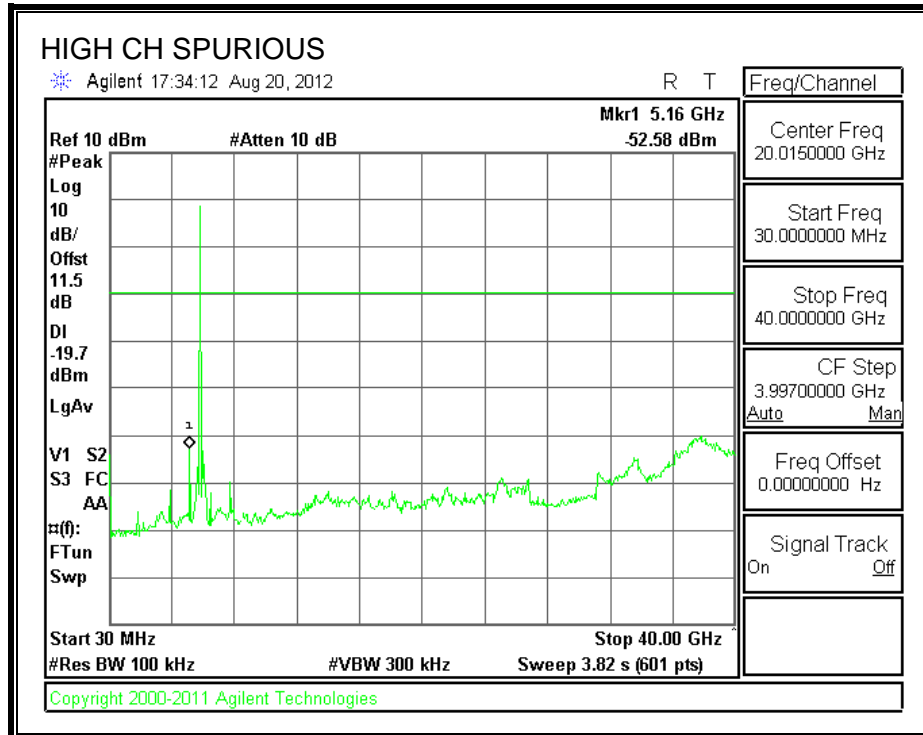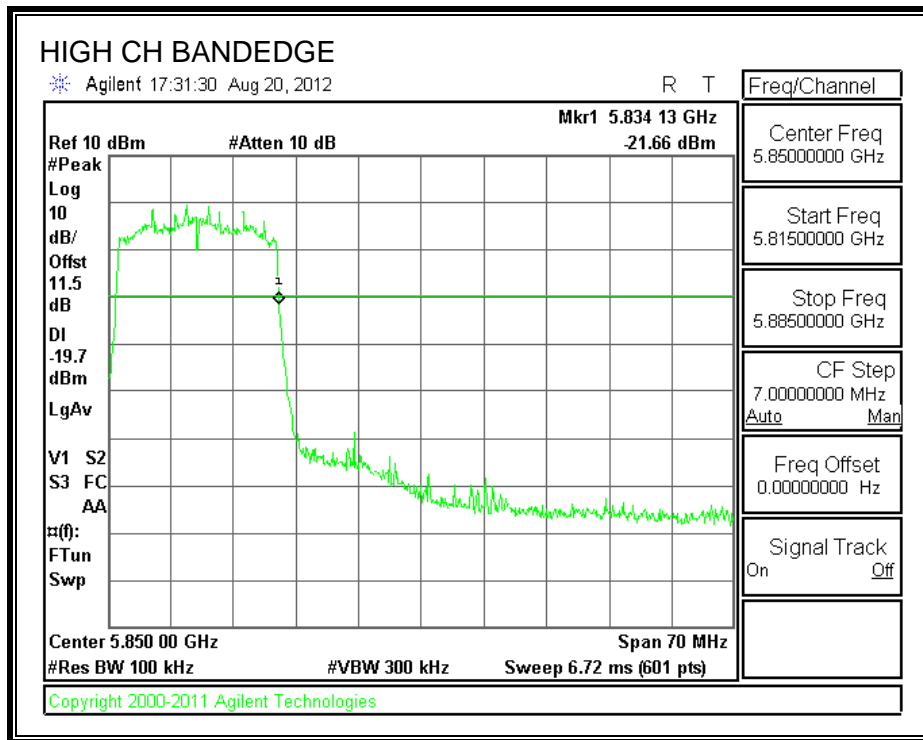

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.2.1. TX ABOVE 1 GHz FOR 802.11b 1TX MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

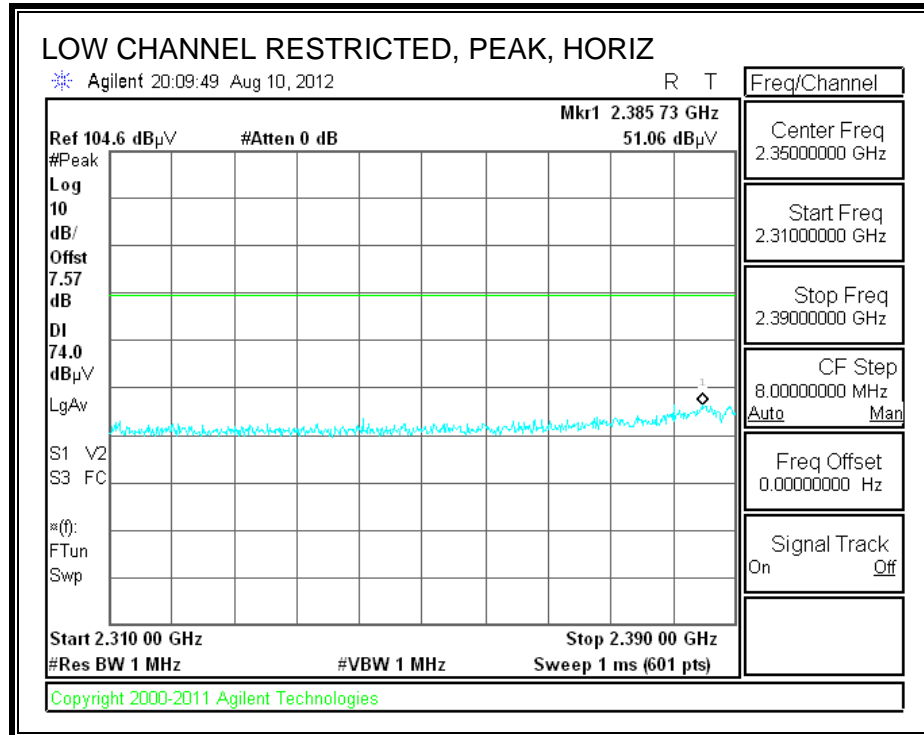

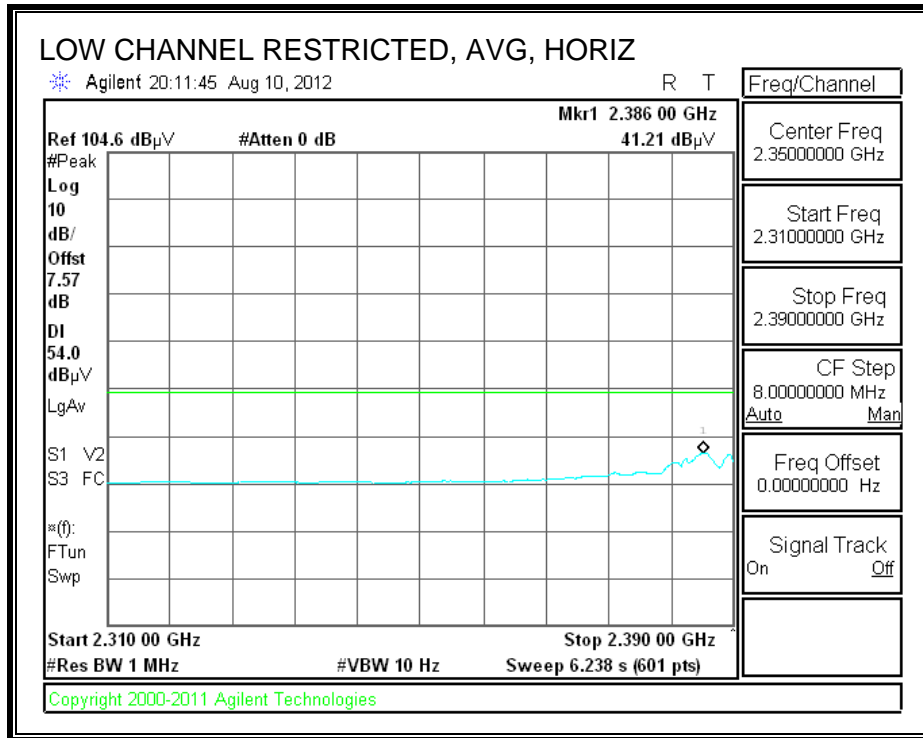



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

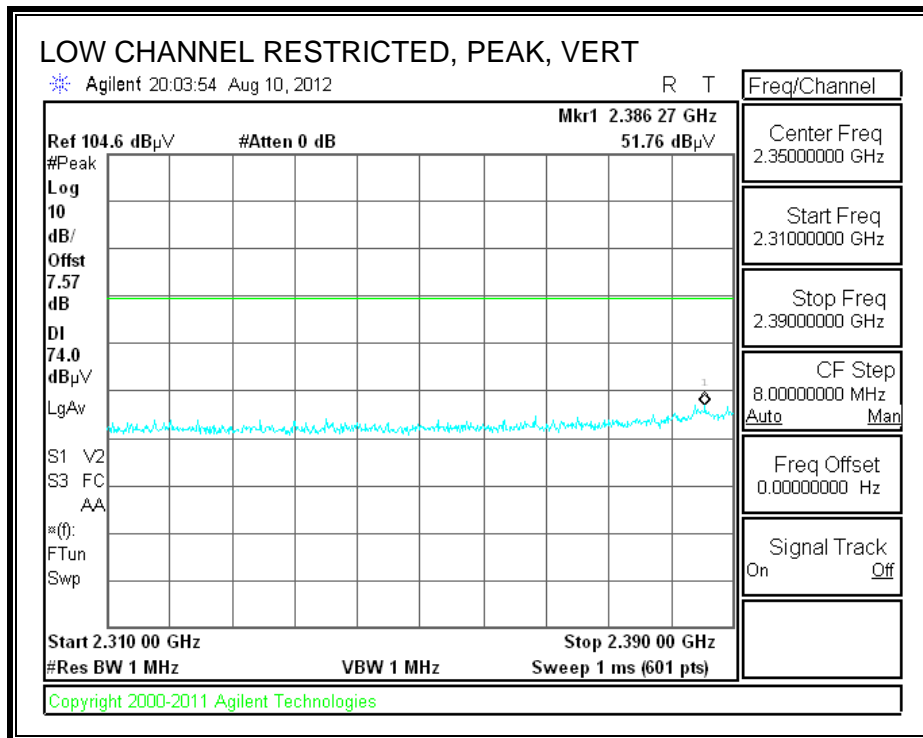

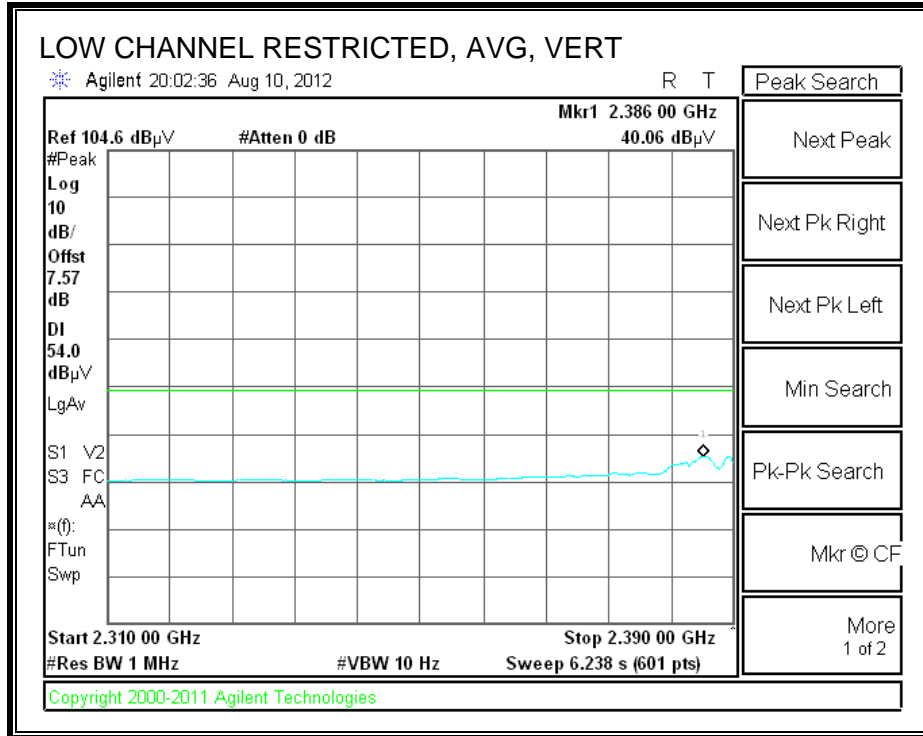



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

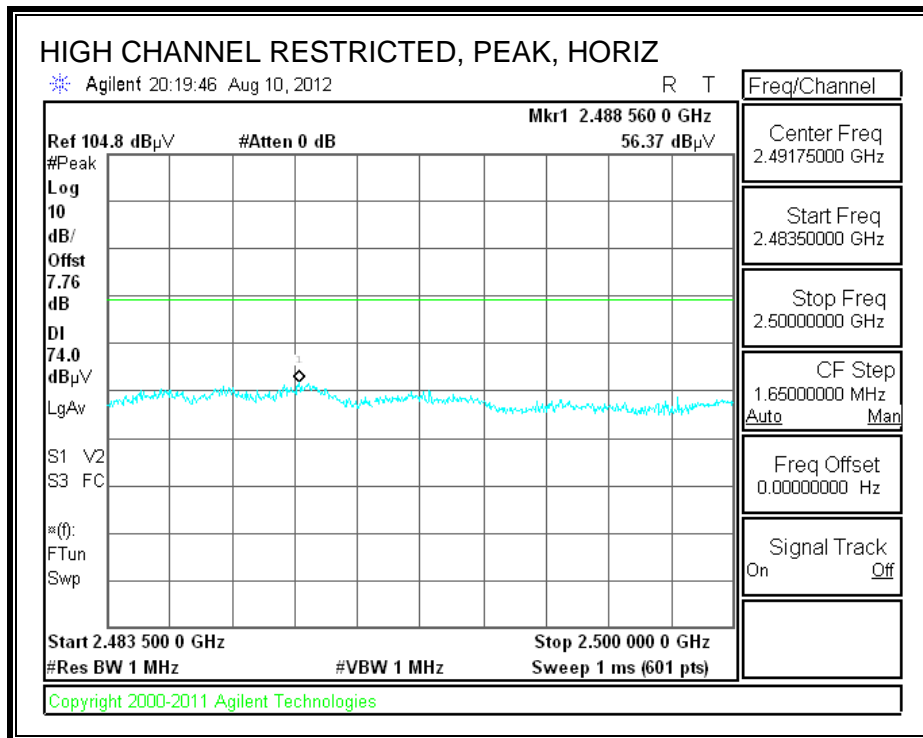

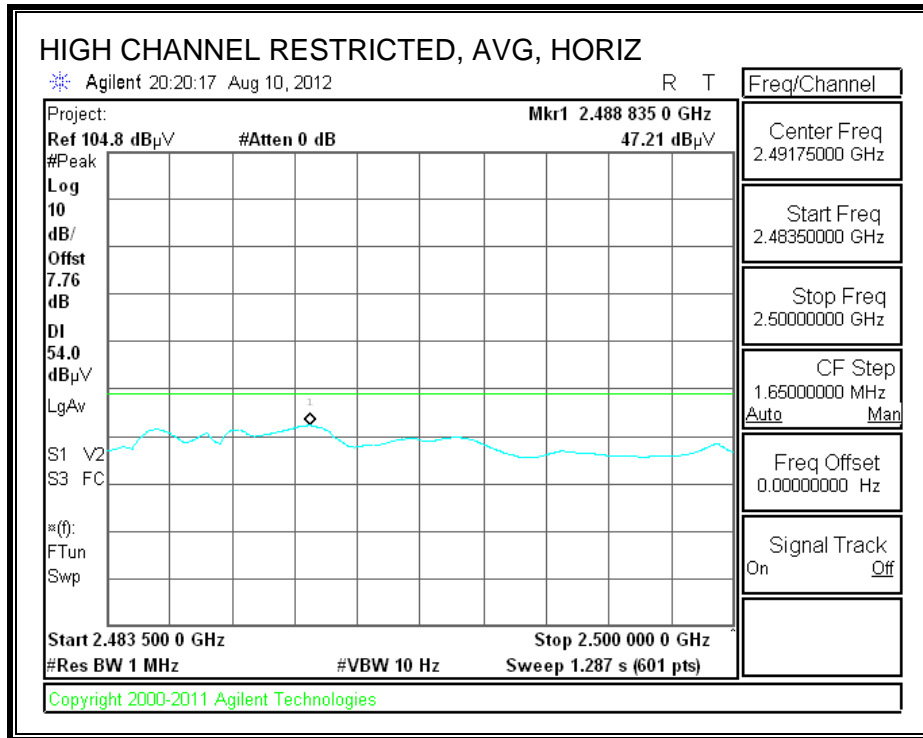

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

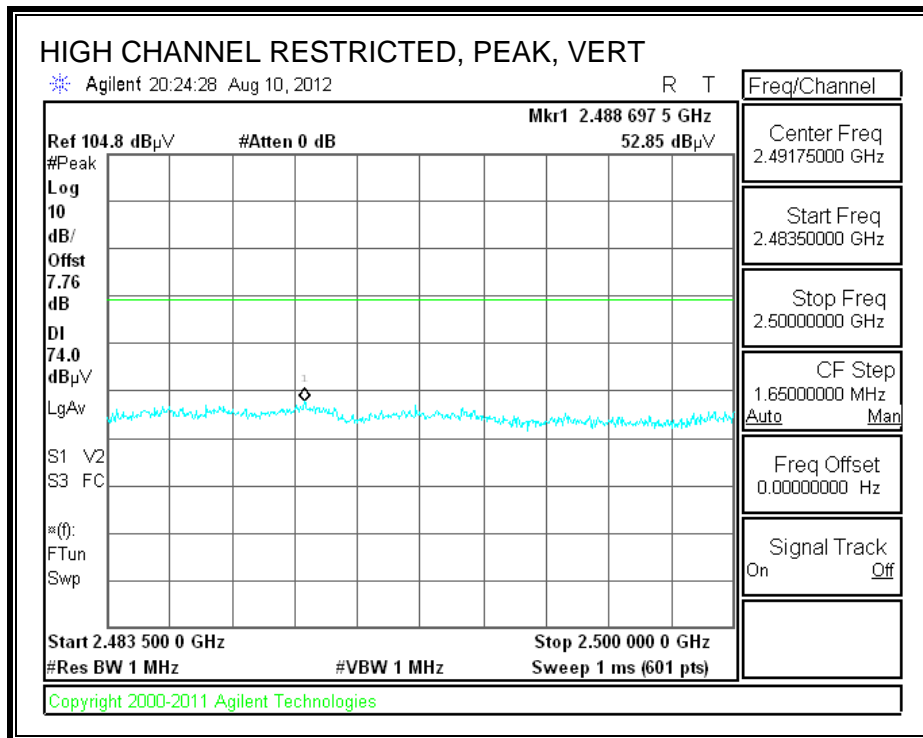

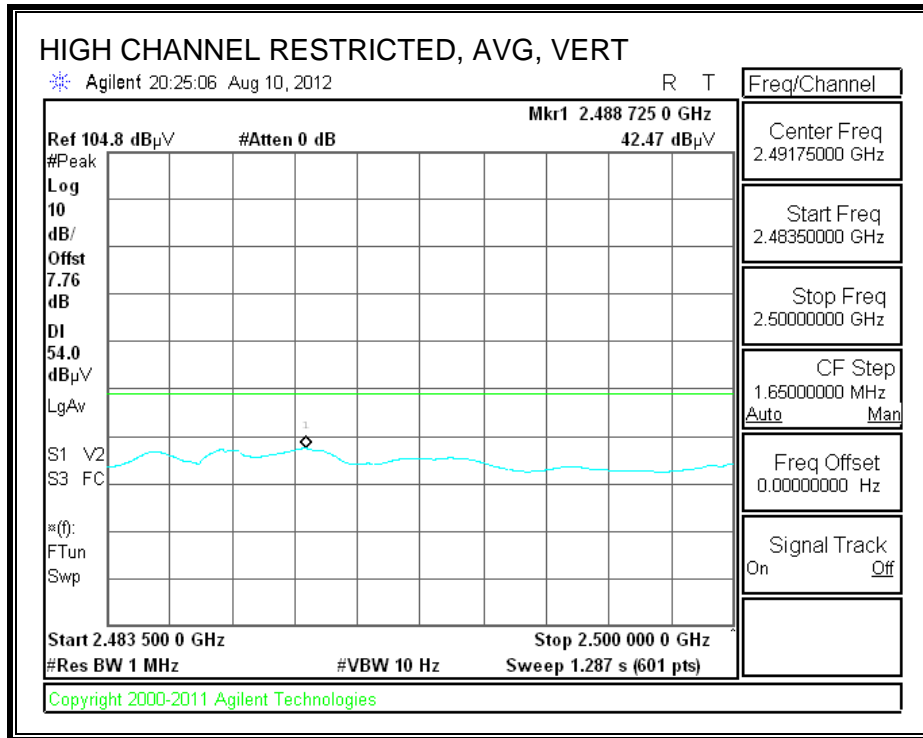

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber-B

Company: LG Electronics MobileComm USA, INC.
 Project #: 12U14550
 Date: 8/11/2012
 Test Engineer: Thanh Nguyen
 Configuration: EUT at worst case
 Mode: Tx b mode

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T59; S/N: 3245 @3m	T145 Agilent 3008A0056		T125; ARA 18.26GHz; S/N:1007	FCC 15.205

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	40.5	28.1	33.1	6.3	-34.8	0.0	0.0	45.0	32.6	74	54	-29.0	-21.4	Noise floor/V
4.824	3.0	40.2	28.2	33.1	6.3	-34.8	0.0	0.0	44.8	32.8	74	54	-29.2	-21.2	Noise floor/H
Mid Ch															
4.874	3.0	40.2	28.3	33.1	6.3	-34.8	0.0	0.0	44.8	33.0	74	54	-29.2	-21.0	V
7.311	3.0	41.3	29.4	35.8	8.5	-34.9	0.0	0.0	50.7	38.8	74	54	-23.3	-15.2	Noise floor/V
4.874	3.0	41.2	30.0	33.1	6.3	-34.8	0.0	0.0	45.9	34.7	74	54	-28.1	-19.3	H
7.311	3.0	42.4	30.5	35.8	8.5	-34.9	0.0	0.0	51.8	39.9	74	54	-22.2	-14.1	Noise floor/H
High ch															
4.924	3.0	40.2	28.1	33.2	6.3	-34.8	0.0	0.0	44.9	32.8	74	54	-29.1	-21.2	V
7.386	3.0	41.8	30.1	35.9	8.5	-34.9	0.0	0.0	51.3	39.6	74	54	-22.7	-14.4	Noise floor/V
4.924	3.0	40.8	32.4	33.2	6.3	-34.8	0.0	0.0	45.5	37.1	74	54	-28.5	-16.9	V
7.386	3.0	40.7	30.1	35.9	8.5	-34.9	0.0	0.0	50.3	39.7	74	54	-23.7	-14.3	Noise floor/H


Rev. 11.10.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


8.2.2. TX ABOVE 1 GHz FOR 802.11g 1TX MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

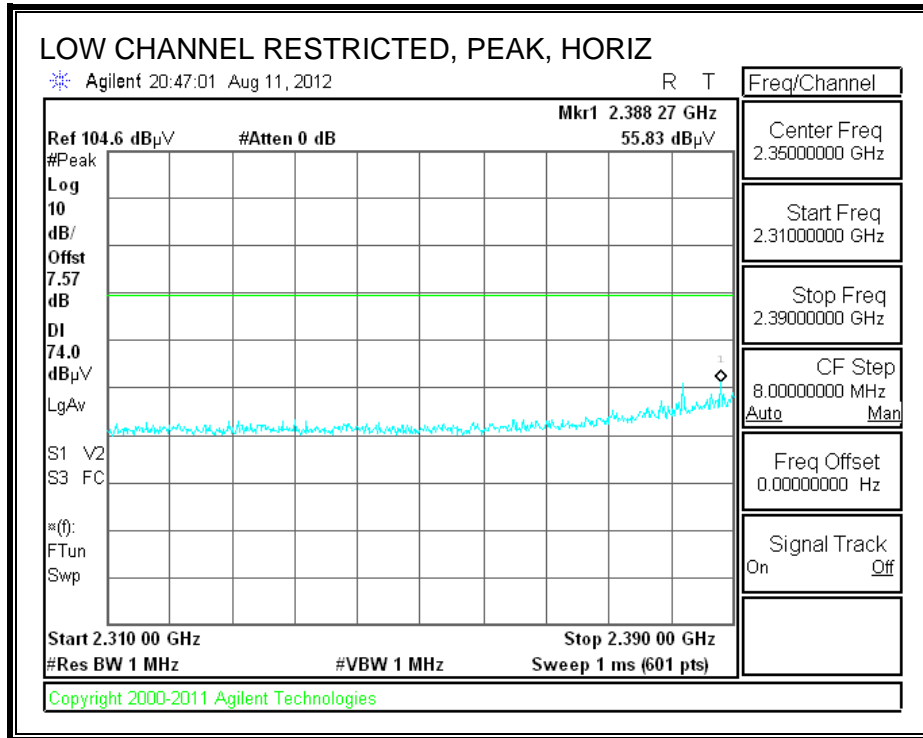

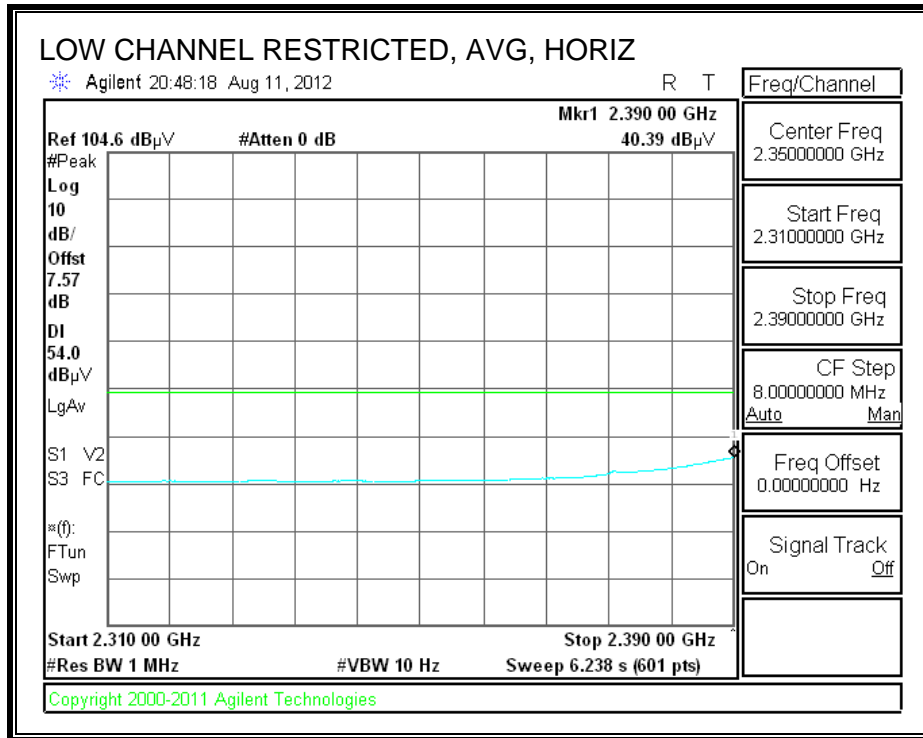



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

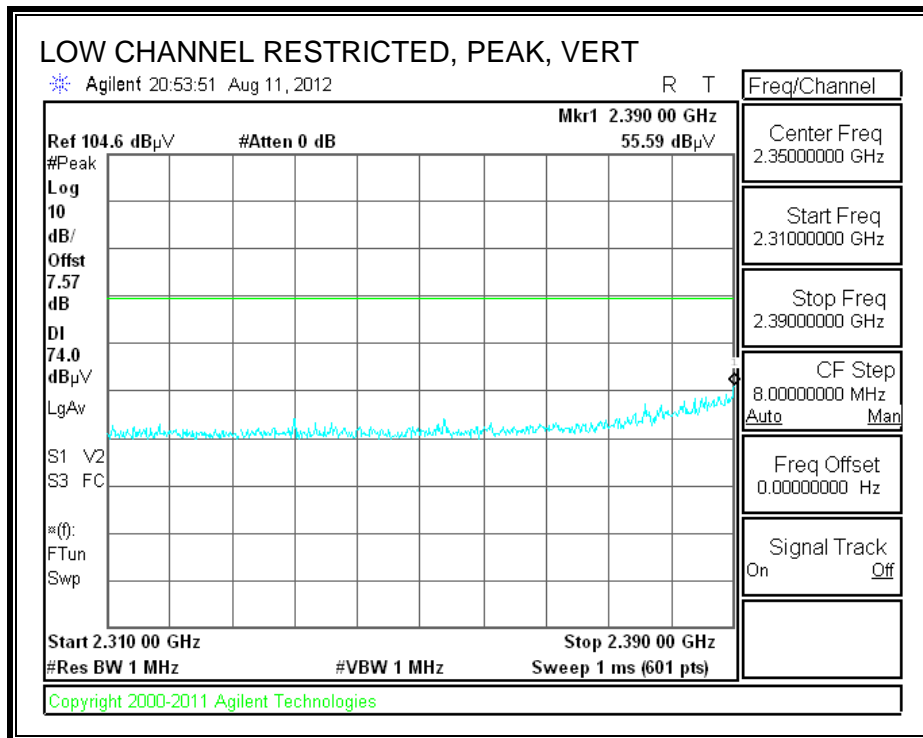

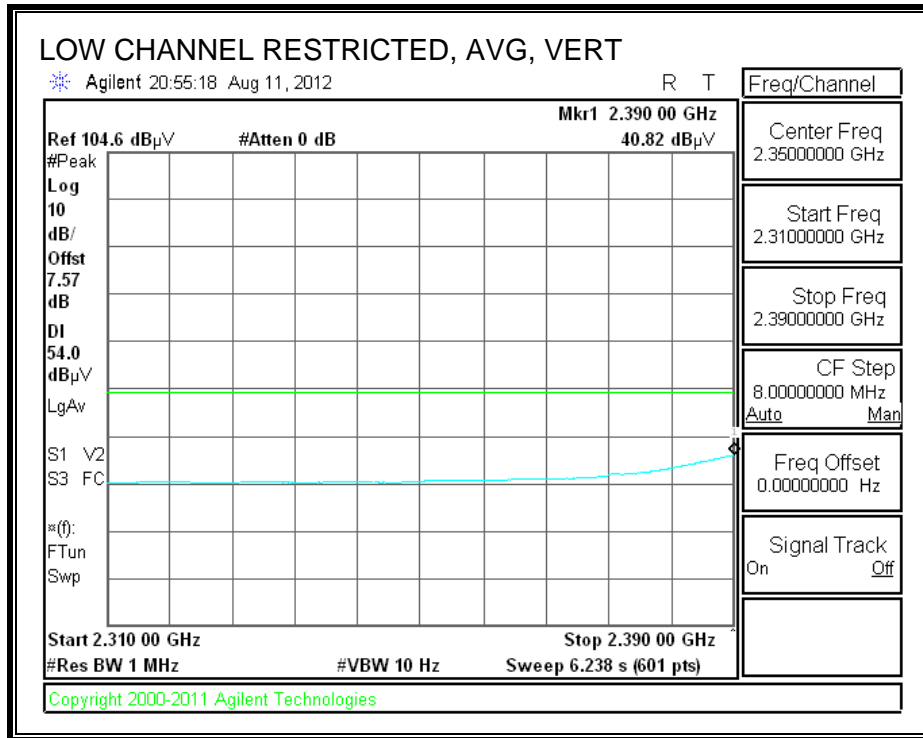



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

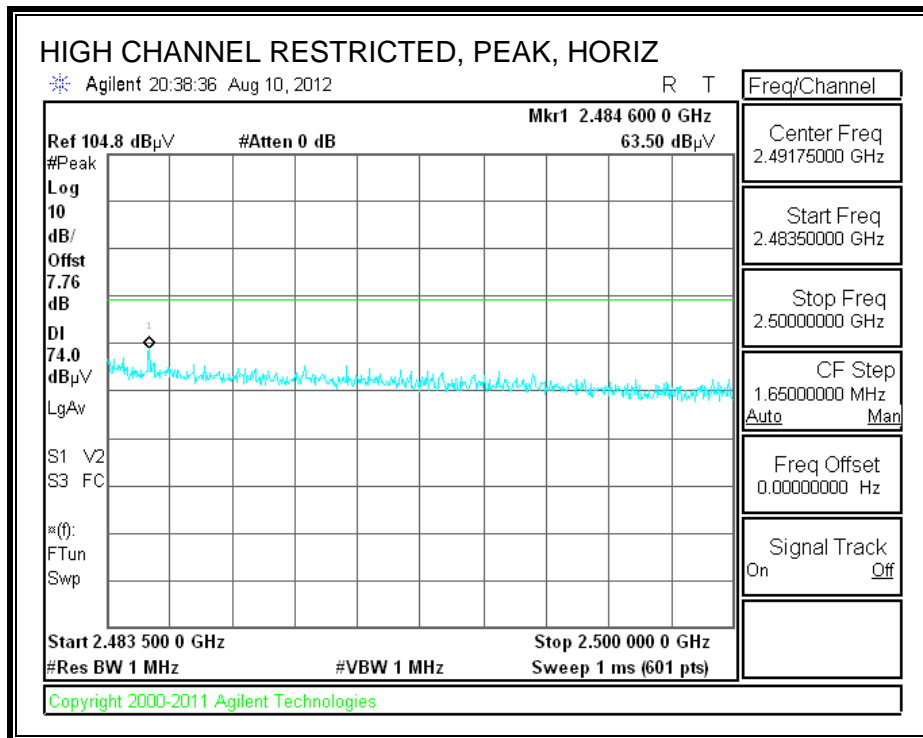

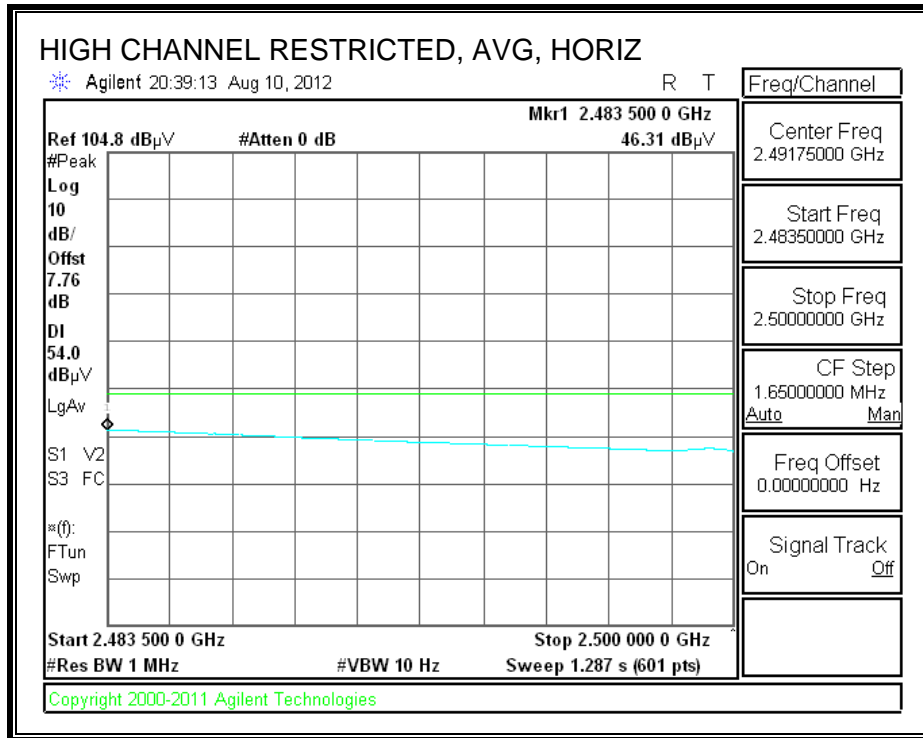

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

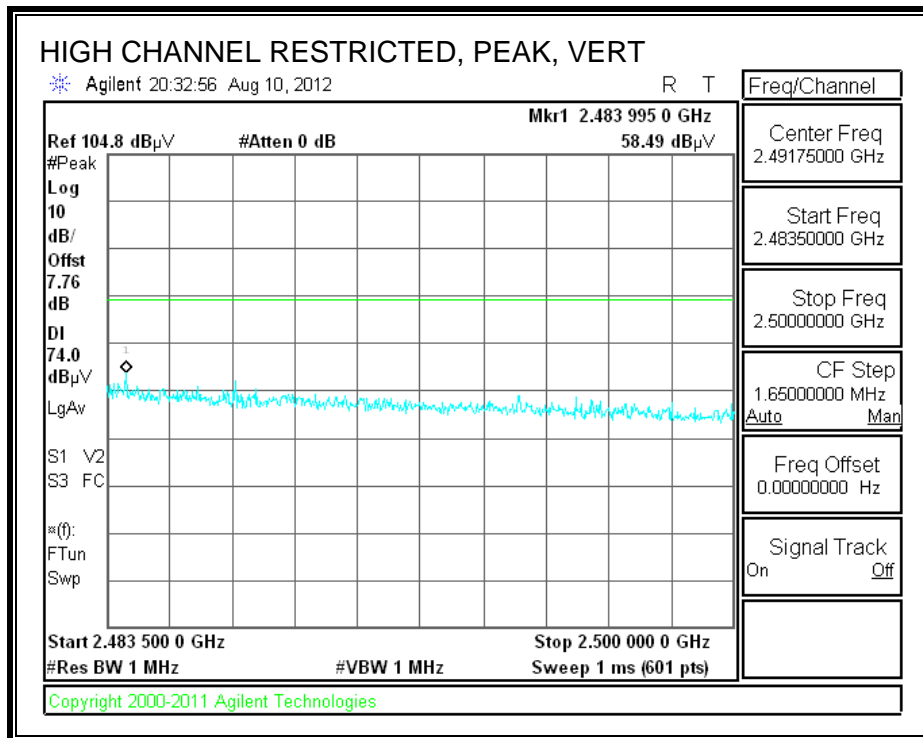

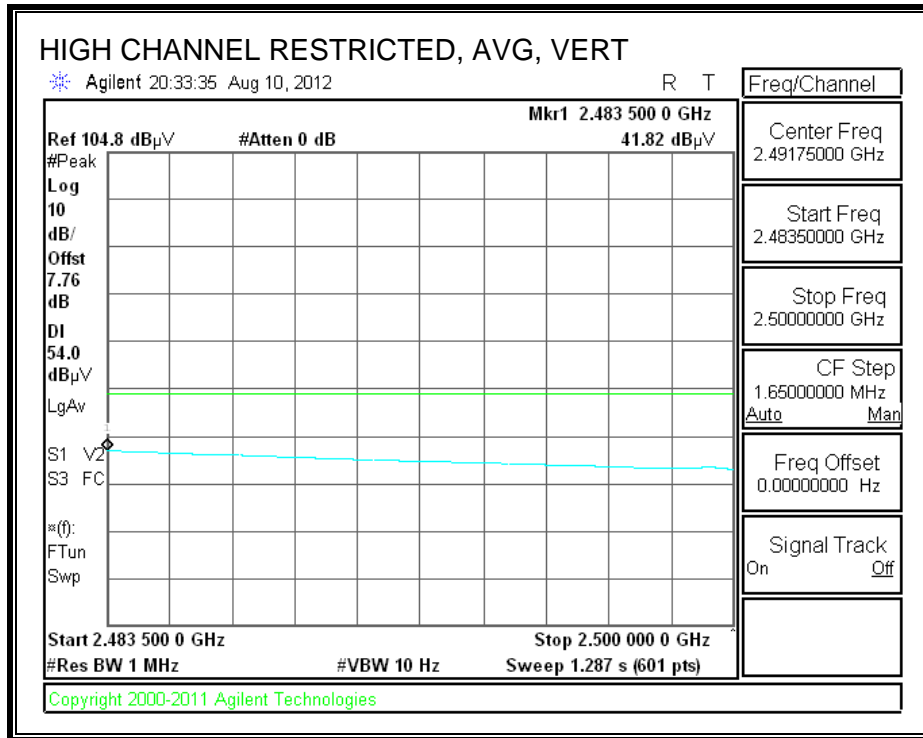

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber-B

Company: LG Electronics MobileComm USA, INC.
 Project #: 12U14550
 Date: 8/12/2012
 Test Engineer: Thanh Nguyen
 Configuration: EUT at worst case
 Mode: Tx g mode

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T59; S/N: 3245 @3m	T145 Agilent 3008A0056		T125; ARA 18-26GHz; S/N:1007	FCC 15.205

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	Average Measurements RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	40.5	28.1	33.1	6.3	-34.8	0.0	0.0	45.0	32.6	74	54	-29.0	-21.4	Noise floor/V
4.824	3.0	40.2	28.2	33.1	6.3	-34.8	0.0	0.0	44.8	32.8	74	54	-29.2	-21.2	Noise floor/H
Mid Ch															
4.874	3.0	40.2	28.3	33.1	6.3	-34.8	0.0	0.0	44.8	33.0	74	54	-29.2	-21.0	V
7.311	3.0	40.7	28.6	35.8	8.5	-34.9	0.0	0.0	50.1	38.0	74	54	-23.9	-16.0	Noise floor/V
4.874	3.0	41.4	29.2	33.1	6.3	-34.8	0.0	0.0	46.0	33.8	74	54	-28.0	-20.2	H
7.311	3.0	41.6	29.4	35.8	8.5	-34.9	0.0	0.0	51.0	38.8	74	54	-23.0	-15.2	Noise floor/H
High ch															
4.924	3.0	40.4	28.4	33.2	6.3	-34.8	0.0	0.0	45.2	33.1	74	54	-28.8	-20.9	V
7.386	3.0	41.8	30.1	35.9	8.5	-34.9	0.0	0.0	51.3	39.6	74	54	-22.7	-14.4	Noise floor/V
4.924	3.0	41.4	30.1	33.2	6.3	-34.8	0.0	0.0	46.1	34.8	74	54	-27.9	-19.2	V
7.386	3.0	44.6	31.9	35.9	8.5	-34.9	0.0	0.0	54.2	41.4	74	54	-19.8	-12.6	Noise floor/H


Rev. 11.10.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		


8.2.3. TX ABOVE 1 GHz FOR 802.11n HT20 1TX MODE IN THE 2.4 GHz BAND


RESTRICTED BANEDGE (LOW CHANNEL, HORIZONTAL)

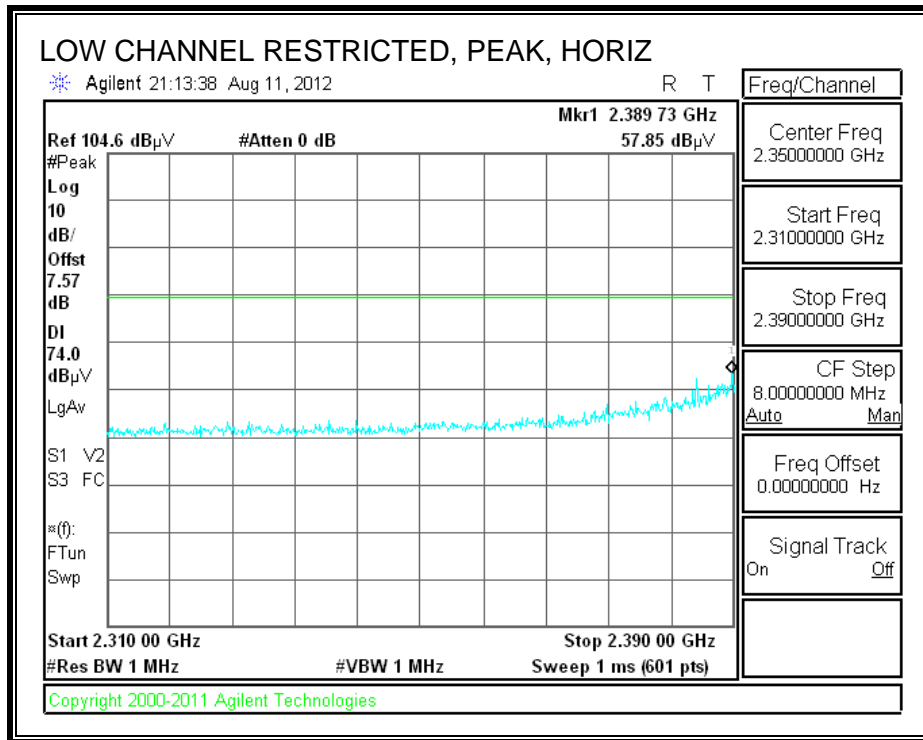

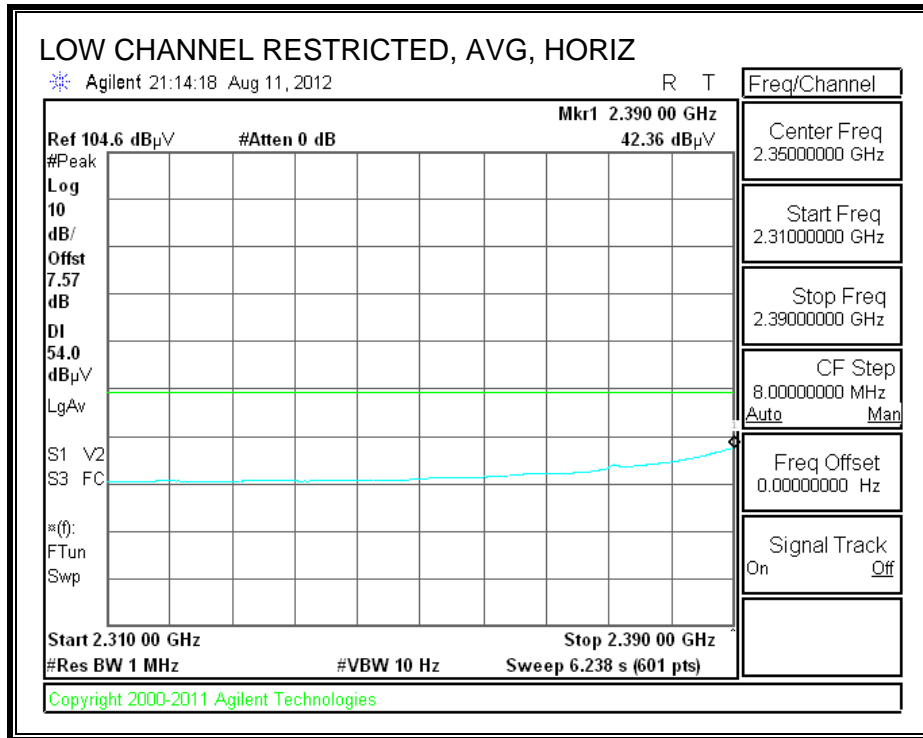



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

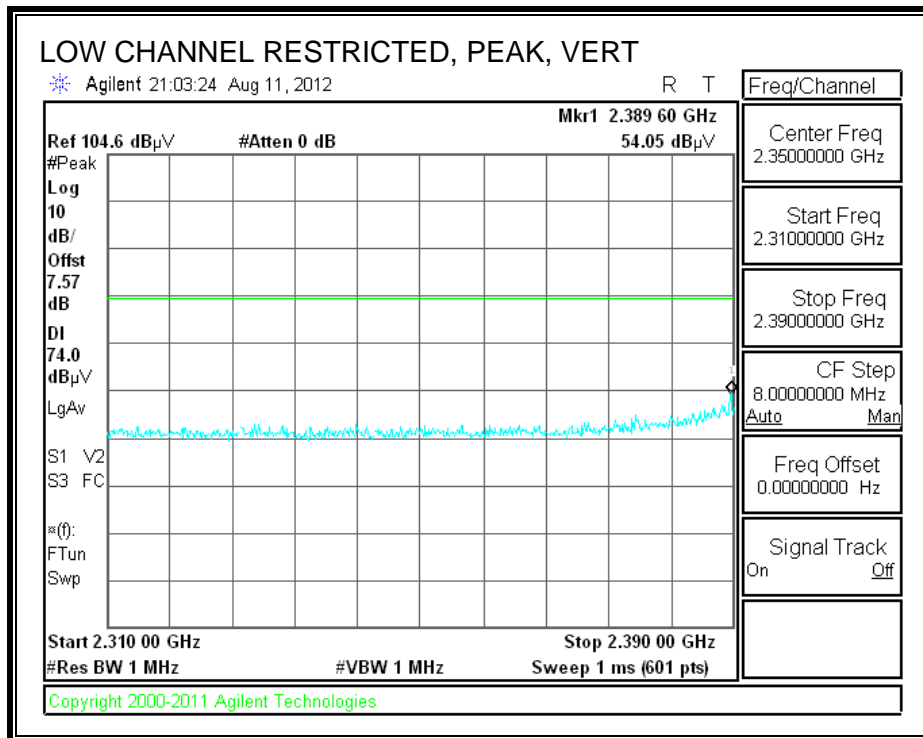

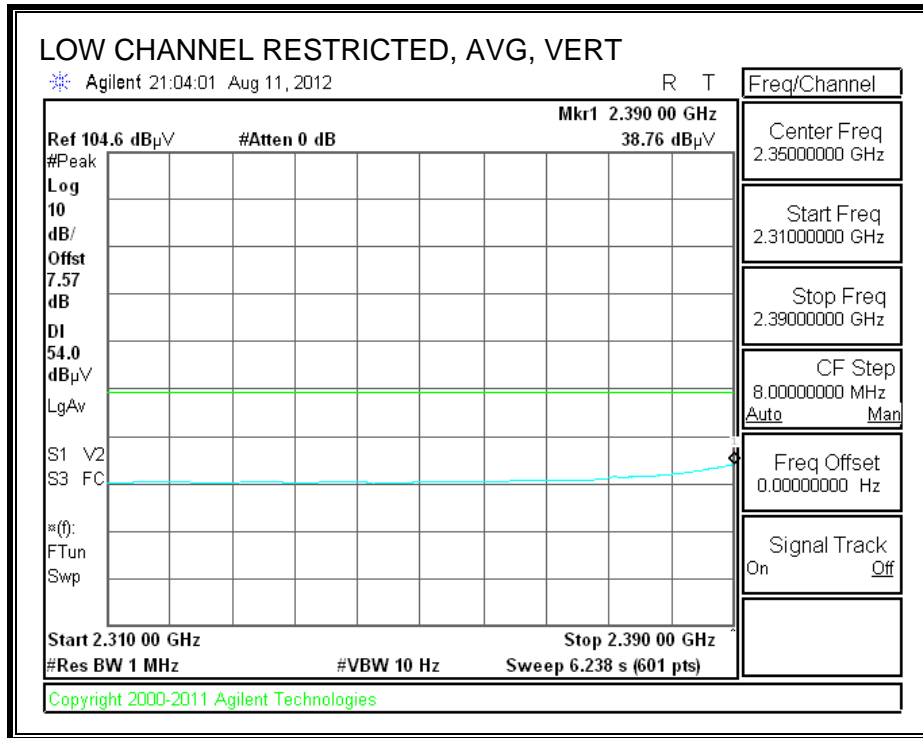



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

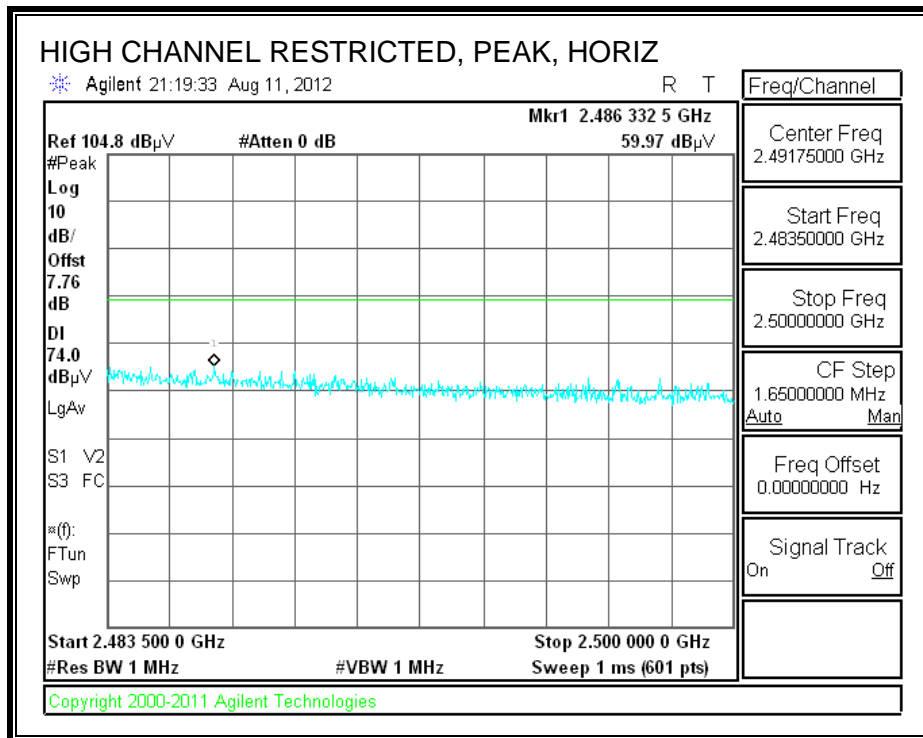

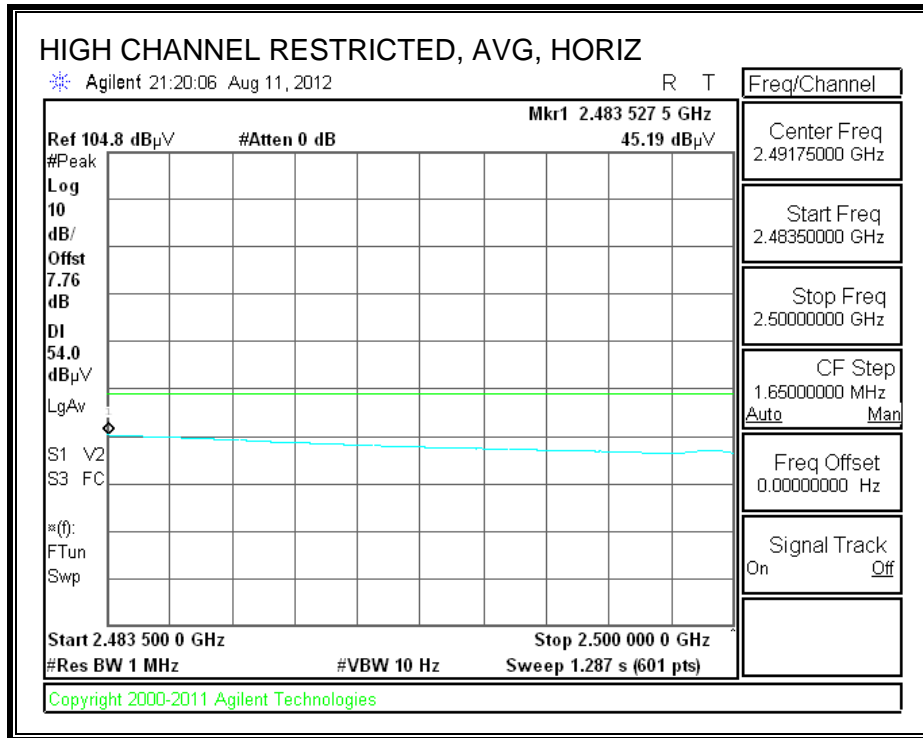

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

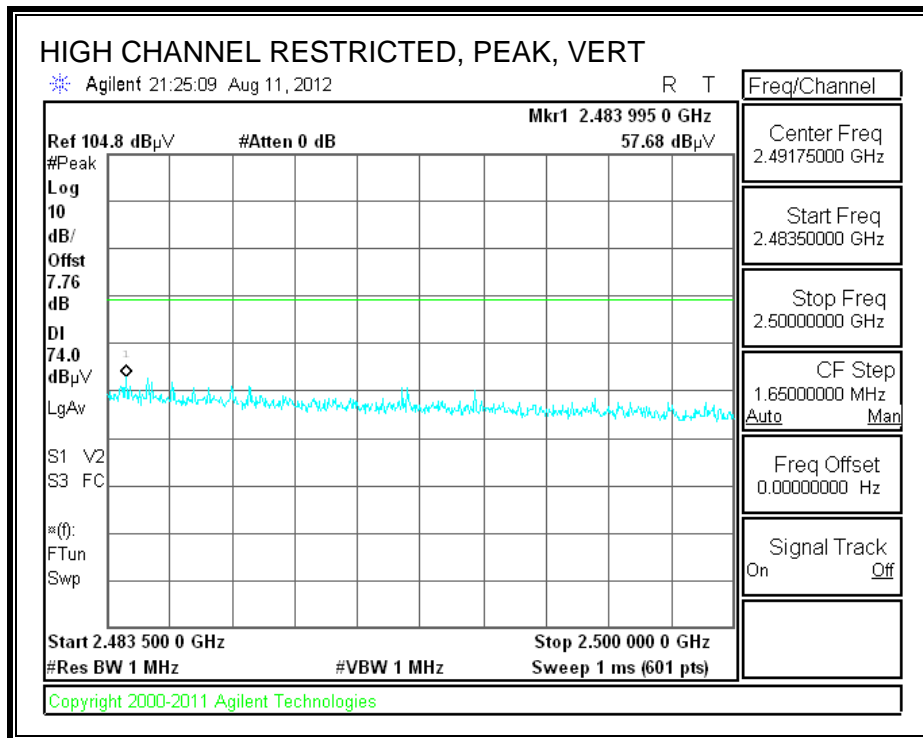

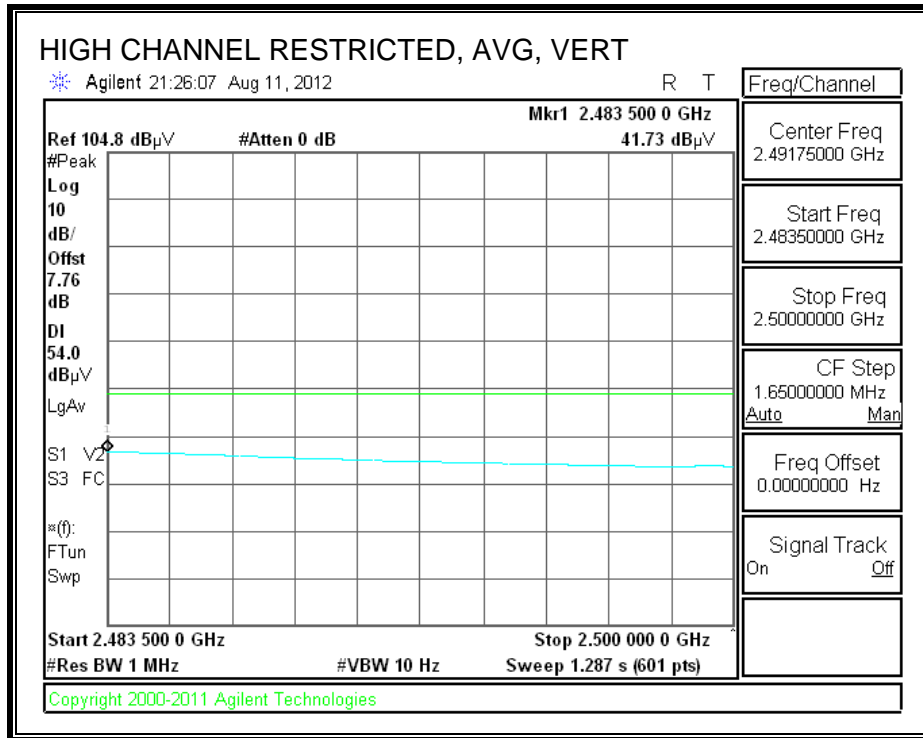

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 5m Chamber-B

Company: LG Electronics MobileComm USA, INC.
 Project #: 12U14550
 Date: 8/11/2012
 Test Engineer: Thanh Nguyen
 Configuration: EUT at worst case
 Mode: Tx n mode, HT 20

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit
T59; S/N: 3245 @3m	T145 Agilent 3008A0056		T125; ARA 18-26GHz; S/N:1007	FCC 15.205

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_001	Average Measurements RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low ch															
4.824	3.0	40.7	28.3	33.1	6.3	-34.8	0.0	0.0	45.3	32.9	74	54	-28.7	-21.1	Noise floor/V
4.824	3.0	40.1	27.9	33.1	6.3	-34.8	0.0	0.0	44.7	32.5	74	54	-29.3	-21.5	Noise floor/H
Mid Ch															
4.874	3.0	40.4	28.5	33.1	6.3	-34.8	0.0	0.0	45.0	33.1	74	54	-29.0	-20.9	V
7.311	3.0	41.4	29.1	35.8	8.5	-34.9	0.0	0.0	50.8	38.5	74	54	-23.2	-15.5	Noise floor/V
4.874	3.0	41.7	30.2	33.1	6.3	-34.8	0.0	0.0	46.3	34.8	74	54	-27.7	-19.2	H
7.311	3.0	41.4	30.2	34.2	8.5	-34.9	0.0	0.0	49.2	38.0	74	54	-24.8	-16.0	Noise floor/H
High ch															
4.924	3.0	40.3	28.6	33.2	6.3	-34.8	0.0	0.0	45.0	33.3	74	54	-29.0	-20.7	V
7.386	3.0	41.6	31.2	35.9	8.5	-34.9	0.0	0.0	51.1	40.7	74	54	-22.9	-13.3	Noise floor/V
4.924	3.0	41.3	30.3	33.2	6.3	-34.8	0.0	0.0	46.0	35.0	74	54	-28.0	-19.0	V
7.386	3.0	42.4	30.6	35.9	8.5	-34.9	0.0	0.0	51.9	40.1	74	54	-22.1	-13.9	Noise floor/H

Rev. 11.10.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.2.4. TRANSMITTER ABOVE 1 GHz FOR 802.11a MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: LG Electronics Mobilecomm USA, Inc.
Project #: 12U14550
Date: 8/15/2012
Test Engineer: Thanh Nguyen
Configuration: EUT at worst case
Mode: Tx 5.8 GHz band

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T60; S/N: 2238 @3m	T34 HP 8449B		T125; ARA 18-26GHz; S/N:1007	FCC 15.205

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_002	

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch 5745MHz															
11.490	3.0	34.3	21.0	38.9	11.2	-32.4	0.0	0.0	51.9	38.7	74	54	-22.1	-15.3	Noise floor/V
11.490	3.0	34.8	21.0	38.9	11.2	-32.4	0.0	0.0	52.4	38.7	74	54	-21.6	-15.3	Noise floor/H
Mid ch 5785MHz															
11.570	3.0	35.0	21.0	38.9	11.3	-32.4	0.0	0.0	52.9	38.9	74	54	-21.1	-15.1	Noise floor/H
11.570	3.0	34.6	21.0	38.9	11.3	-32.4	0.0	0.0	52.4	38.9	74	54	-21.6	-15.1	Noise floor/V
High ch 5825MHz															
11.650	3.0	33.5	21.1	39.0	11.4	-32.4	0.0	0.0	51.6	39.1	74	54	-22.4	-14.9	Noise floor/V
11.650	3.0	34.5	21.1	39.0	11.4	-32.4	0.0	0.0	52.6	39.1	74	54	-21.4	-14.9	Noise floor/H

Rev. 11.10.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.2.5. TRANSMITTER ABOVE 1 GHz FOR 802.11n HT20 MODE IN THE 5.8 GHz BAND

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
 Compliance Certification Services, Fremont 3m Chamber

Company: LG Electronics Mobilecomm USA, Inc.
 Project #: 12U14550
 Date: 8/15/2012
 Test Engineer: Thanh Nguyen
 Configuration: EUT at worst case
 Mode: Tx HT 20 _5.8 GHz band

Test Equipment:

Horn 1-18GHz	Pre-amplifer 1-26GHz	Pre-amplifer 26-40GHz	Horn > 18GHz	Limit
T60; S/N: 2238 @3m	T34 HP 8449B		T125; ARA 18-26GHz; S/N:1007	FCC 15.205

Hi Frequency Cables

3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
3' cable 22807700	12' cable 22807600	20' cable 22807500		R_002	Average Measurements RBW=1MHz ; VBW=10Hz


f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Ch 5745MHz															
11.490	3.0	34.7	21.3	38.9	11.2	-32.4	0.0	0.0	52.3	38.9	74	54	-21.7	-15.1	Noise floor/V
11.490	3.0	35.2	21.2	38.9	11.2	-32.4	0.0	0.0	52.9	38.9	74	54	-21.1	-15.1	Noise floor/H
Mid ch 5785MHz															
11.570	3.0	35.4	21.2	38.9	11.3	-32.4	0.0	0.0	53.2	39.1	74	54	-20.8	-14.9	Noise floor/H
11.570	3.0	35.2	21.2	38.9	11.3	-32.4	0.0	0.0	53.1	39.1	74	54	-20.9	-14.9	Noise floor/V
High ch 5825MHz															
11.650	3.0	34.0	21.1	39.0	11.4	-32.4	0.0	0.0	52.1	39.2	74	54	-21.9	-14.8	Noise floor/V
11.650	3.0	34.6	21.2	39.0	11.4	-32.4	0.0	0.0	52.6	39.3	74	54	-21.4	-14.7	Noise floor/H

Rev. 11.10.11

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

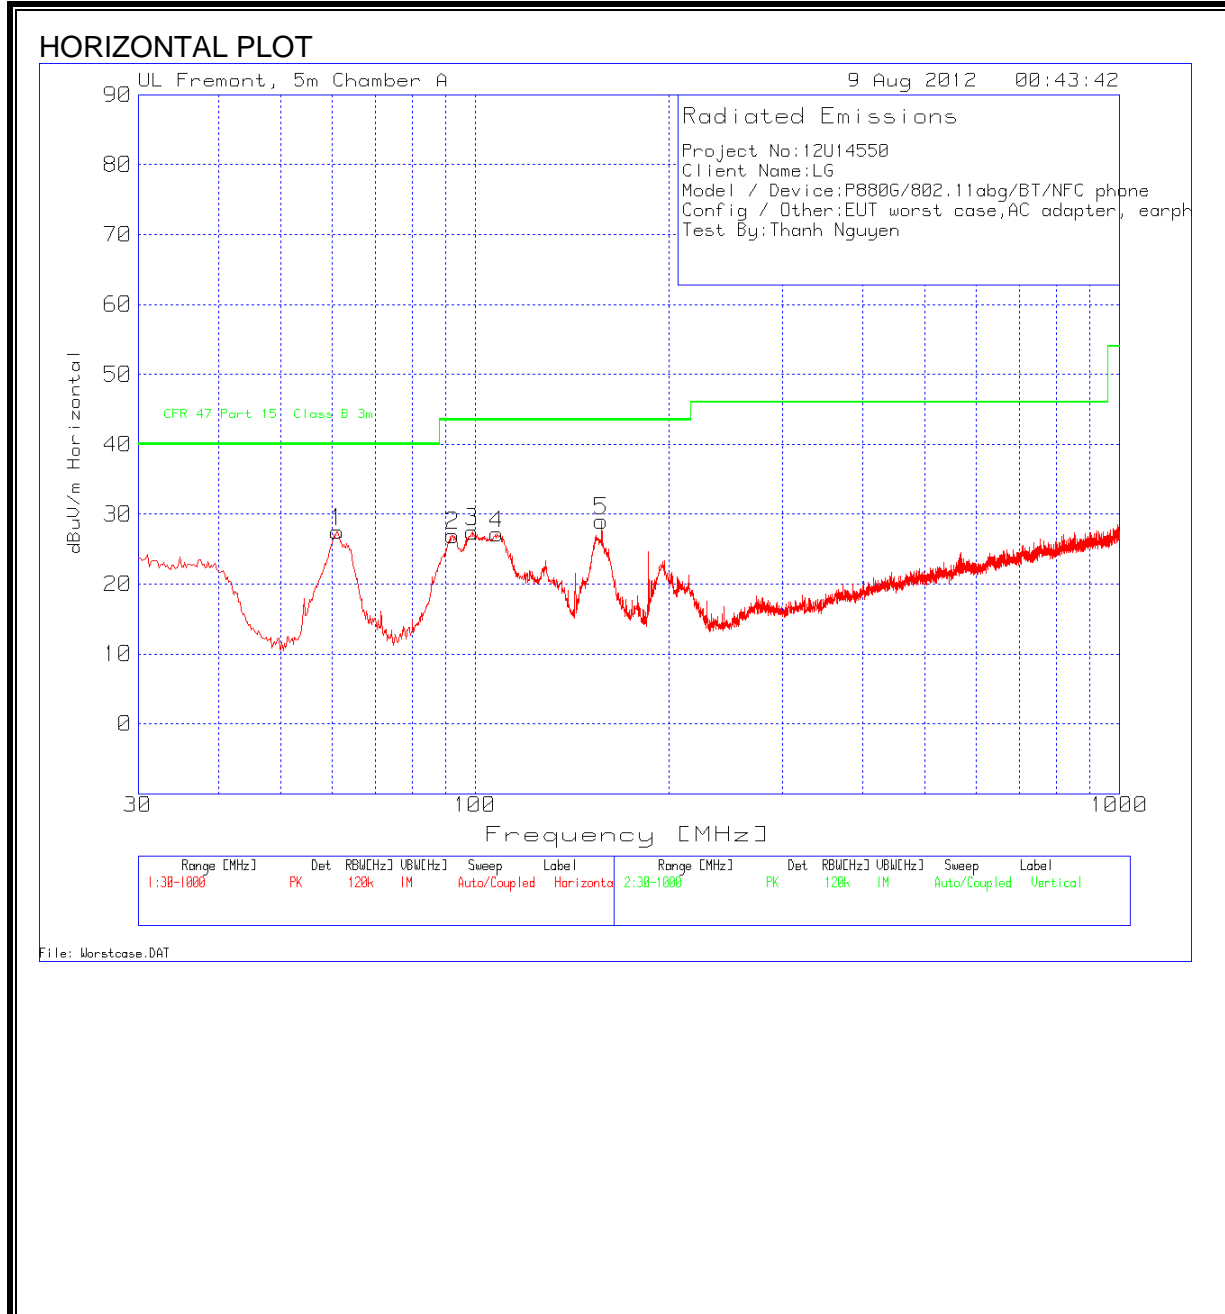


HORIZONTAL DATA

Project No:12U14550									
Client Name:LG									
Model / Device:P880G/802.11abg/BT/NFC phone									
Config / Other:EUT worst case,AC adapter, earph									
Test By:Thanh Nguyen									

Horizontal 30 - 1000MHz									
Test Frequency	Meter Reading	Detector	25MHz-1GHz ChmbrA Amplifie d.TX (dB)	T243 Sunol Bilog.TXT (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
61.209	47.33	PK	-27.2	7.4	27.53	40	-12.47	300	Horz
92.4181	45.89	PK	-27	8.1	26.99	43.5	-16.51	200	Horz
99.0088	44.42	PK	-26.9	9.9	27.42	43.5	-16.08	300	Horz
108.3133	41.65	PK	-26.8	12.3	27.15	43.5	-16.35	300	Horz
157.3561	43.49	PK	-26.5	12	28.99	43.5	-14.51	200	Horz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

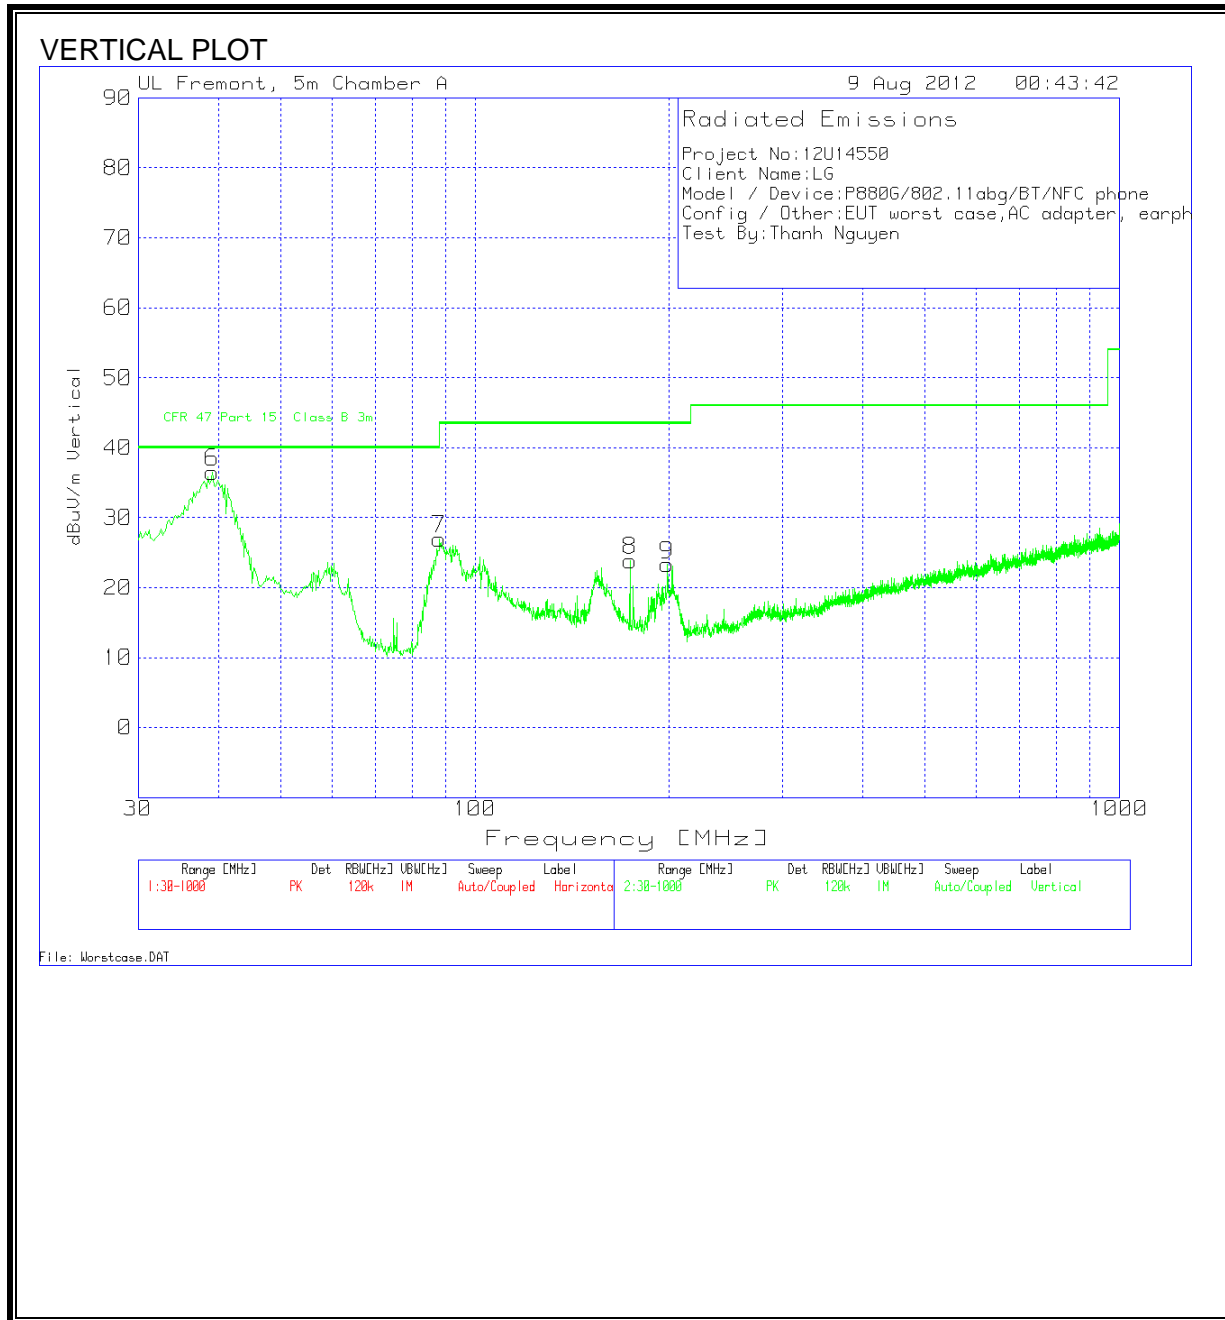

VERTICAL DATA

Project No:12U14550									
Client Name:LG									
Model / Device:P880G/802.11abg/BT/NFC phone									
Config / Other:EUT worst case,AC adapter, earph									
Test By:Thanh Nguyen									
Vertical 30 - 1000MHz									
Test Frequency	Meter Reading	Detector	25MHz-1GHz ChmbrA Amplified TX (dB)	T243 Sunol Bilog.TXT (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
39.1107	49.24	PK	-27.4	14.6	36.44	40	-3.56	100	Vert
39.117	43.71	QP	-27.4	14.6	30.91	40	-9.09	344	Vert
88.1535	46.52	PK	-27	7.4	26.92	43.5	-16.58	100	Vert
174.2206	38.85	PK	-26.4	11.4	23.85	43.5	-19.65	100	Vert
199.0328	37.28	PK	-26.2	12.2	23.28	43.5	-20.22	100	Vert

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4

RESULTS

6 WORST EMISSIONS

Project No:12U14550									
Client Name:LG Electronics									
Model/Device:Dual Band Phone with BT&WLAN,NFC									
Test Volt/Freq:115VAC/60Hz									
Test By:Thanh Nguyen									
Line-L1 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.1545	48.52	PK	0.1	0	48.62	65.8	-17.18	-	-
0.1545	35.78	Av	0.1	0	35.88	-	-	55.8	-19.92
0.519	43.72	PK	0.1	0	43.82	56	-12.18	-	-
0.519	32.03	Av	0.1	0	32.13	-	-	46	-13.87
3.489	41.11	PK	0.1	0.1	41.31	56	-14.69	-	-
3.489	27.99	Av	0.1	0.1	28.19	-	-	46	-17.81
6.7155	43.15	PK	0.1	0.1	43.35	60	-16.65	-	-
6.7155	28.33	Av	0.1	0.1	28.53	-	-	50	-21.47
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.3705	41.86	PK	0.1	0	41.96	58.5	-16.54	-	-
0.3705	28.8	Av	0.1	0	28.9	-	-	48.5	-19.6
0.555	42.36	PK	0.1	0	42.46	56	-13.54	-	-
0.555	30.17	Av	0.1	0	30.27	-	-	46	-15.73
0.681	41.83	PK	0.1	0	41.93	56	-14.07	-	-
0.681	29.44	Av	0.1	0	29.54	-	-	46	-16.46
6.153	39.25	PK	0.1	0.1	39.45	60	-20.55	-	-
6.153	23.77	Av	0.1	0.1	23.97	-	-	50	-26.03

LINE 1 RESULTS

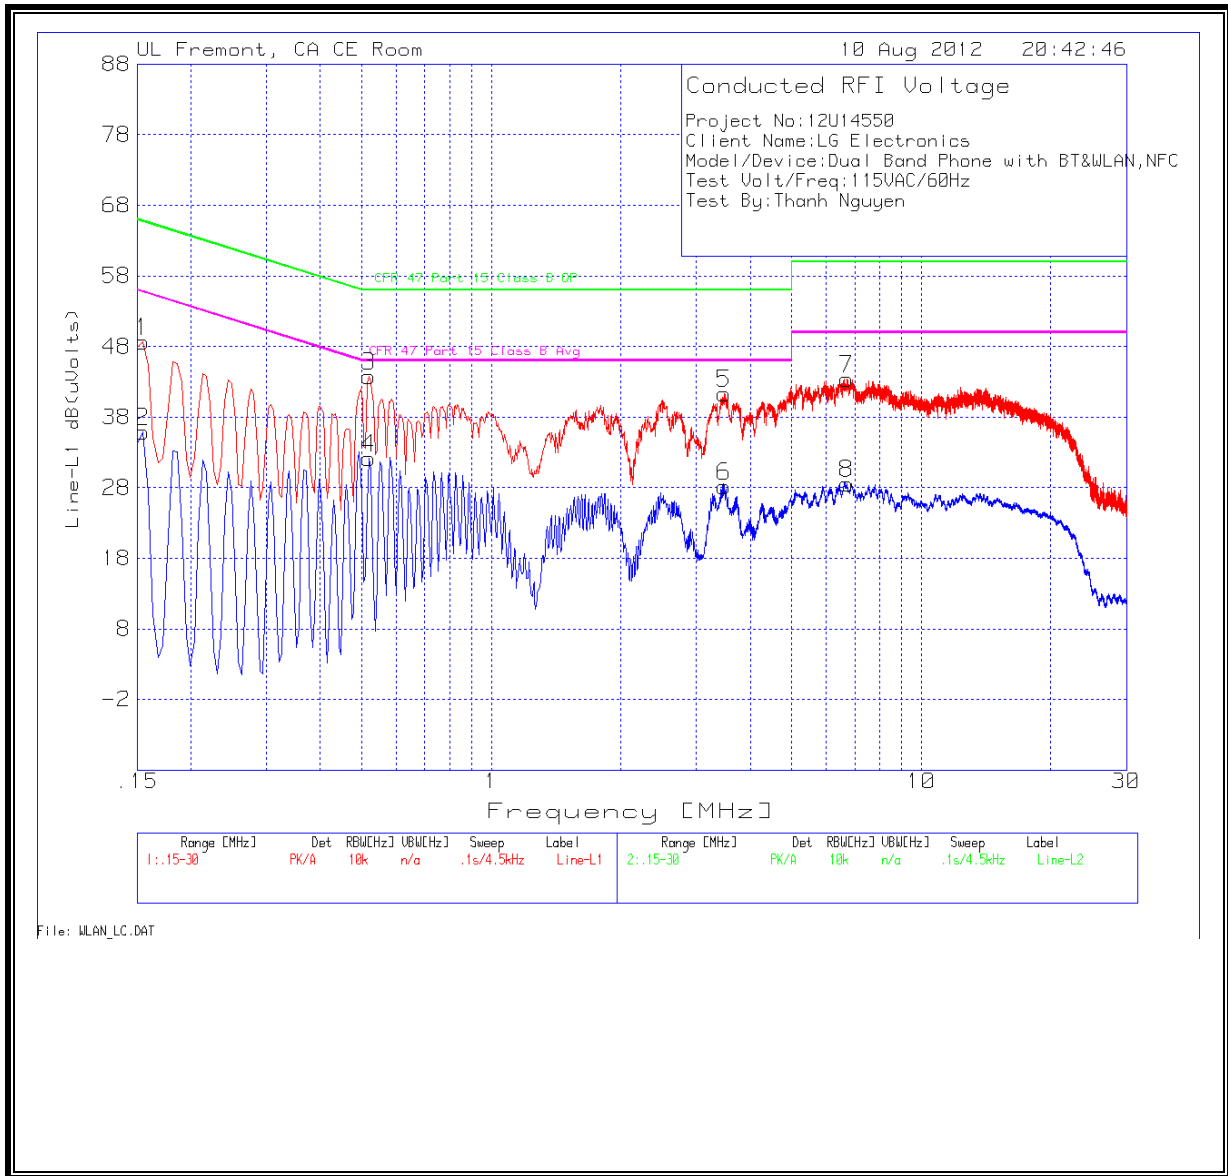

LINE 2 RESULTS

