



Plot 7-218. Upper Band Edge Plot (Band 2 - 1.4MHz QPSK - Full RB Configuration)

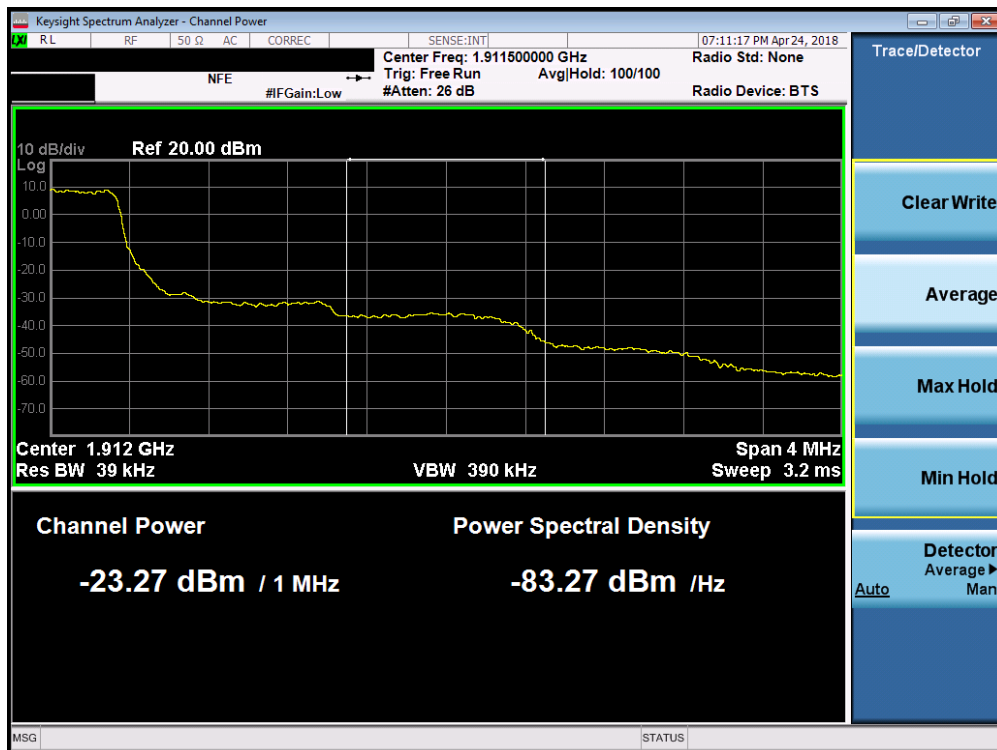


Plot 7-219. Upper Extended Band Edge Plot (Band 2 - 1.4MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 132 of 195

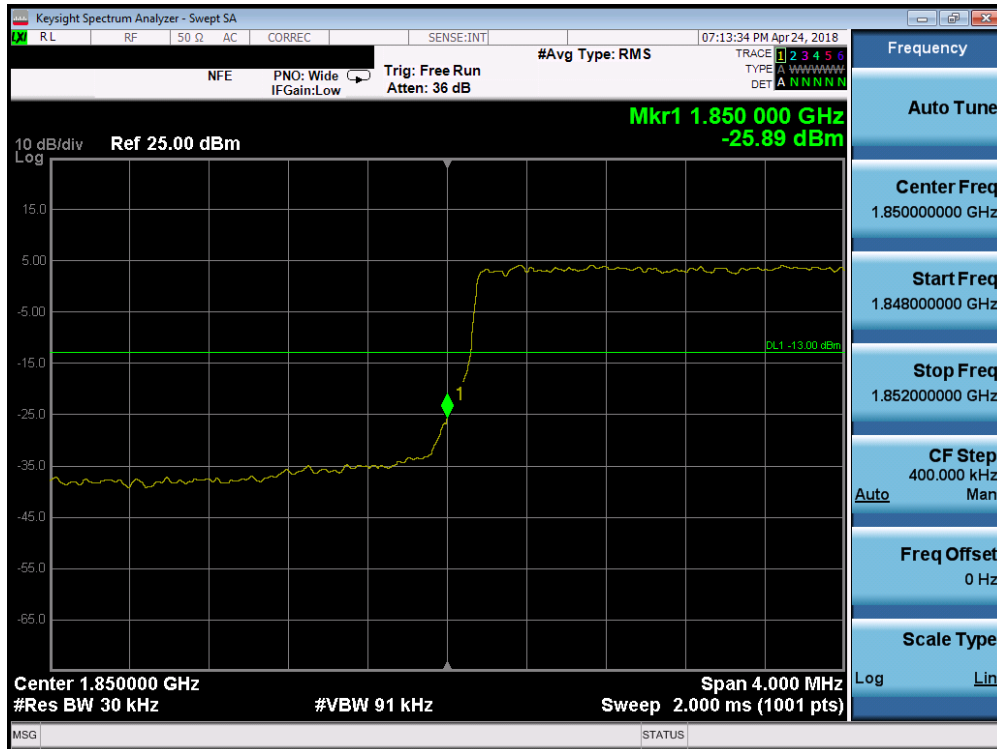


Plot 7-220. Lower Band Edge Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

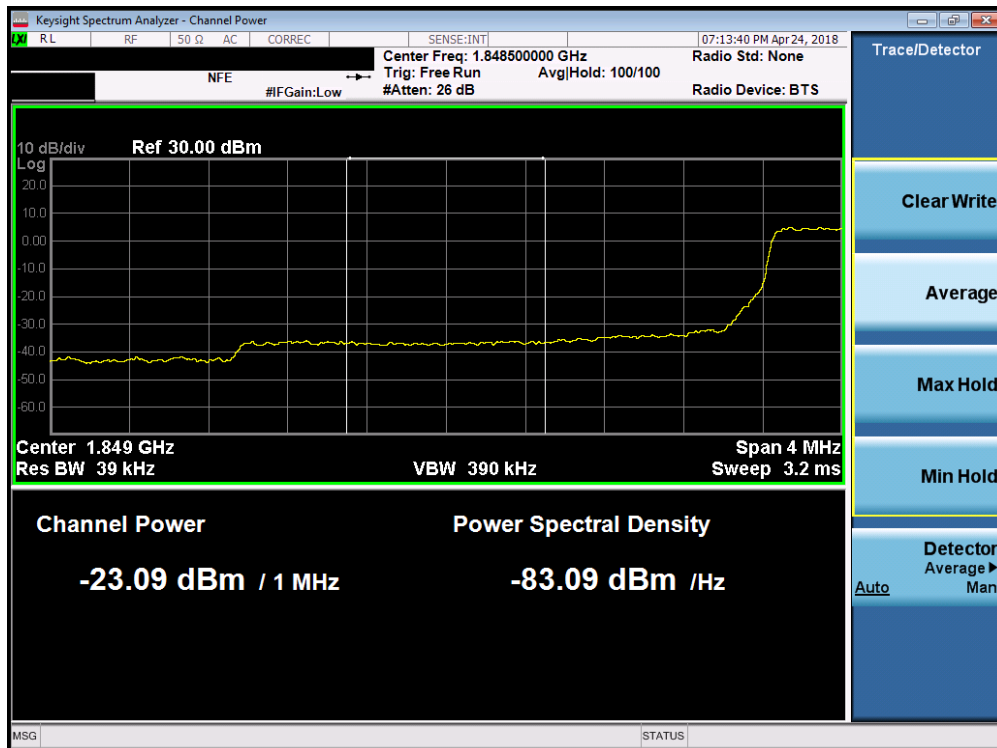


Plot 7-221. Lower Extended Band Edge Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 133 of 195

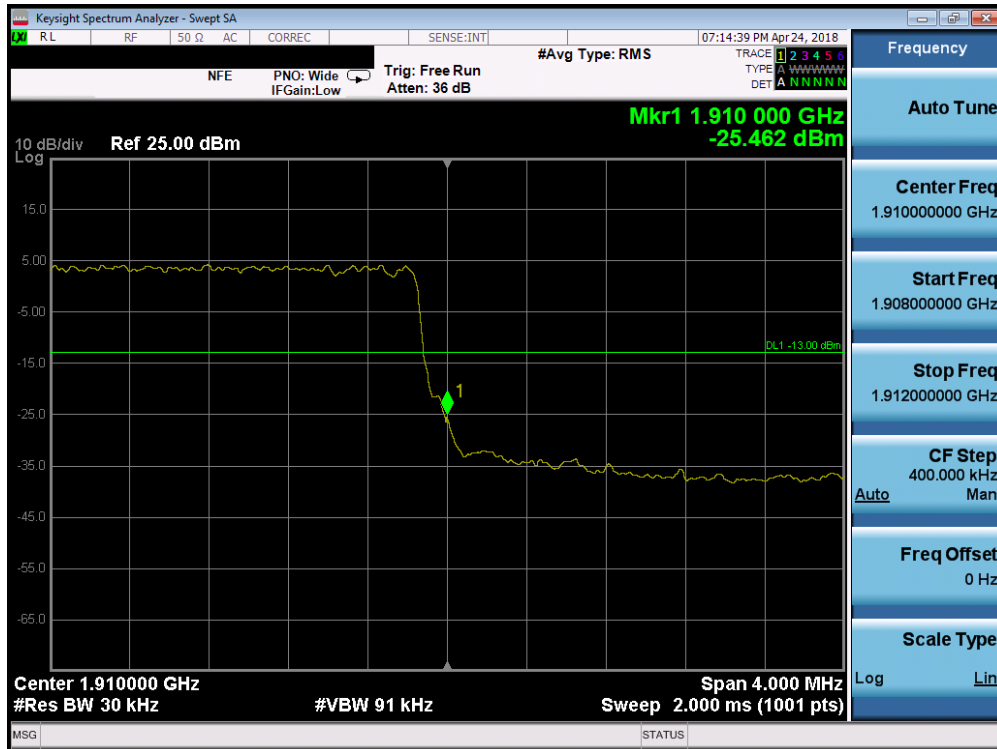


Plot 7-222. Upper Band Edge Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

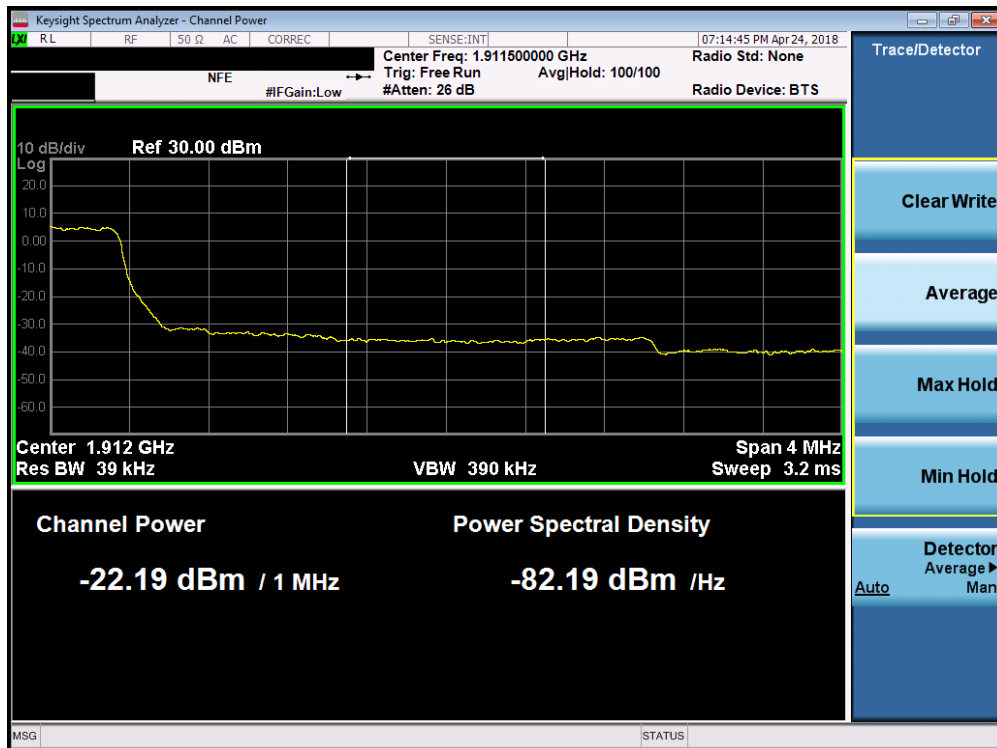


Plot 7-223. Upper Extended Band Edge Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 134 of 195

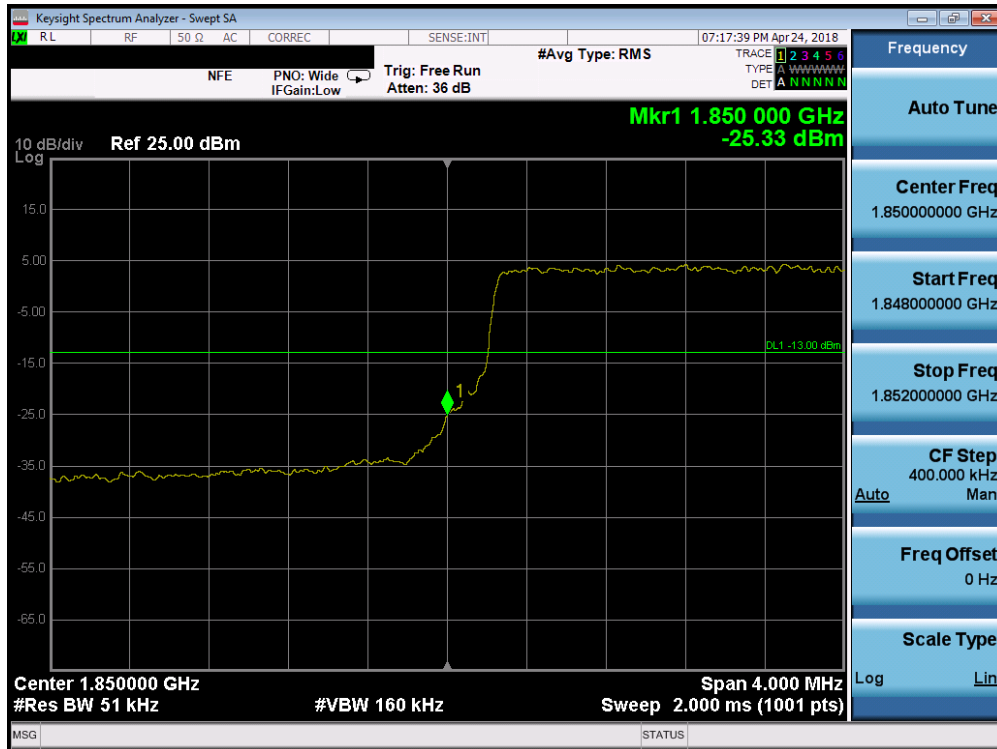


Plot 7-224. Lower Band Edge Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

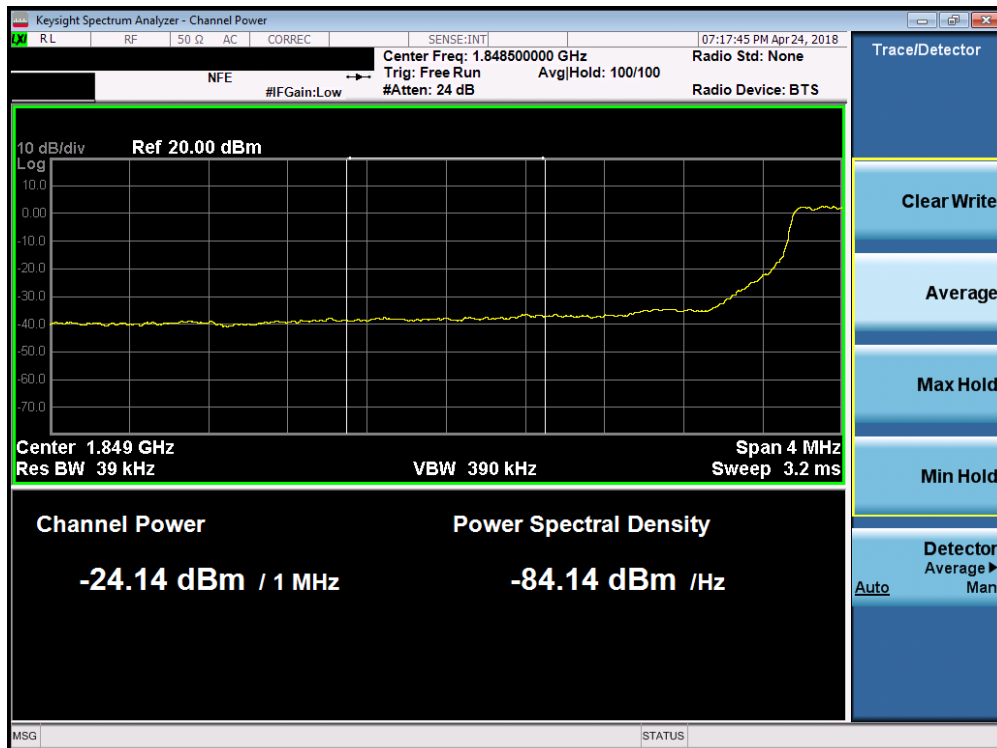


Plot 7-225. Lower Extended Band Edge Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 135 of 195

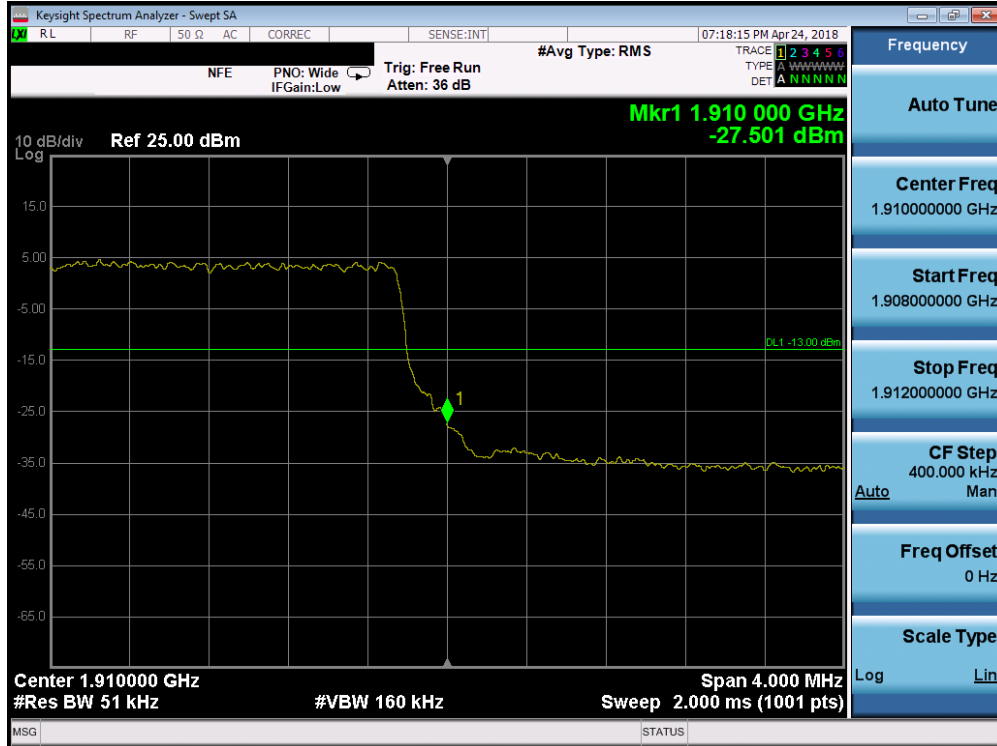


Plot 7-226. Upper Band Edge Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

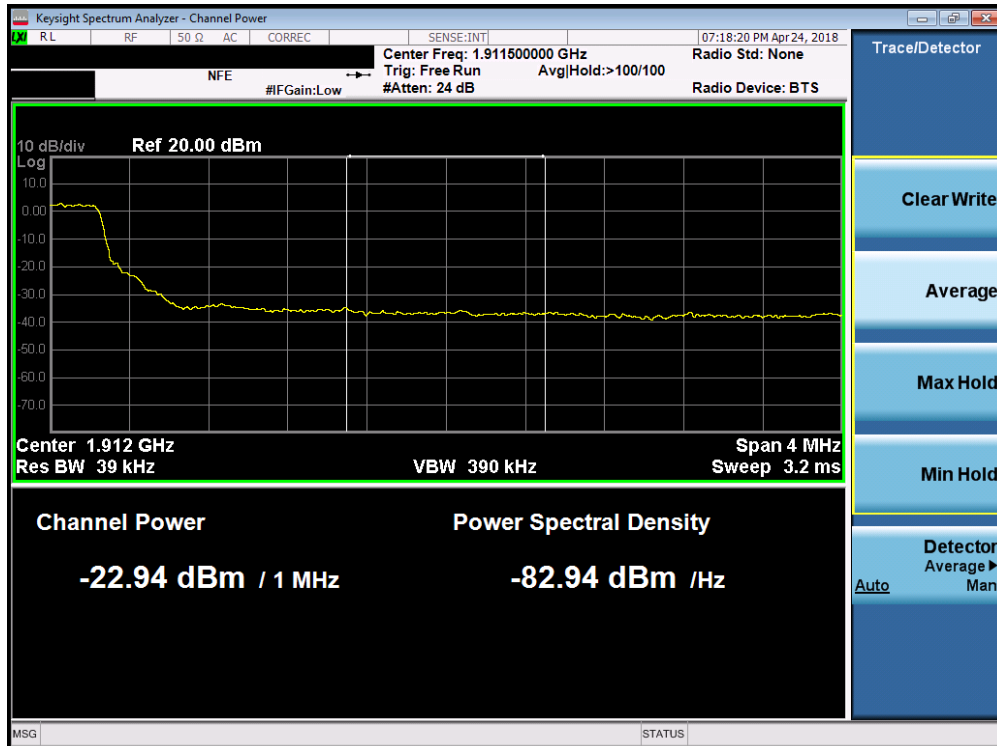


Plot 7-227. Upper Extended Band Edge Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 136 of 195

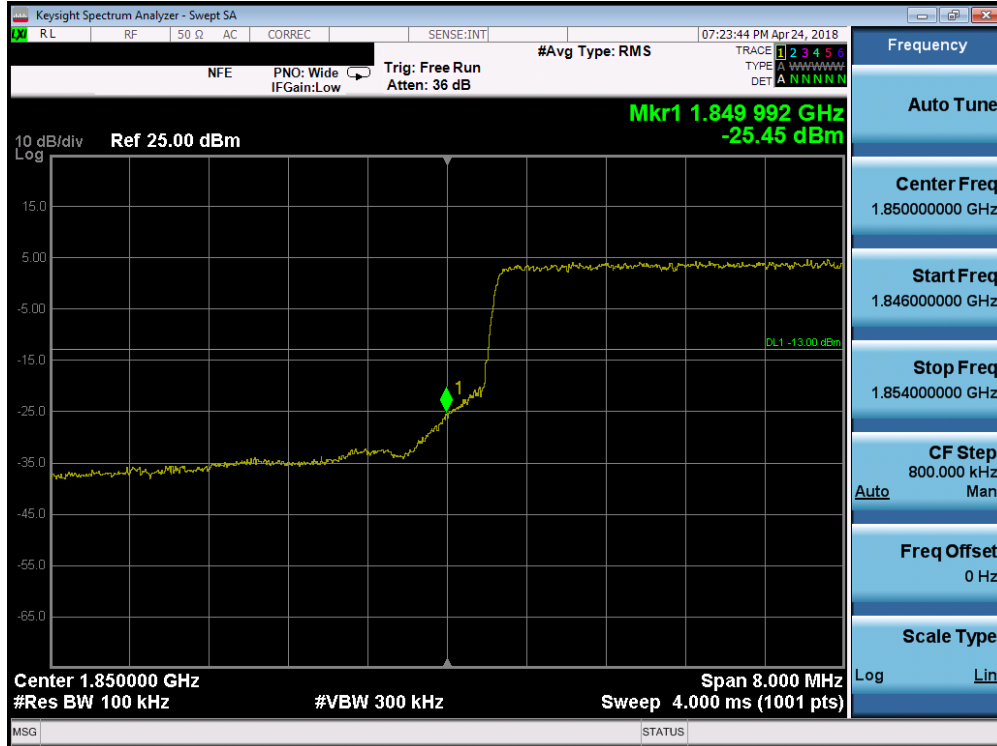


Plot 7-228. Lower Band Edge Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

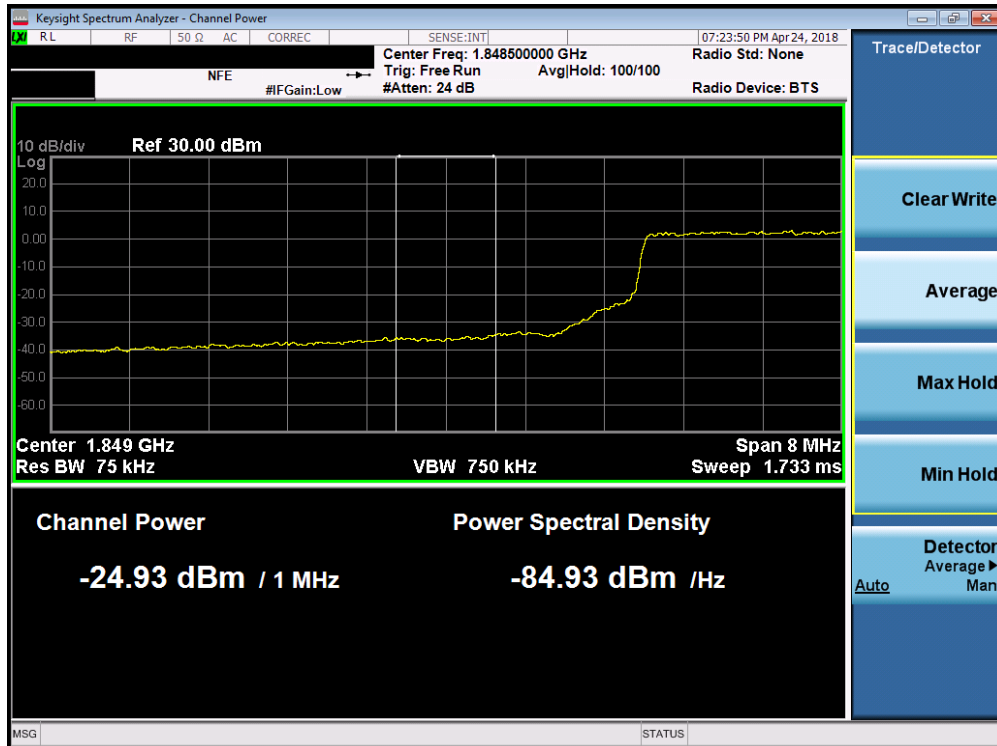


Plot 7-229. Lower Extended Band Edge Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 137 of 195

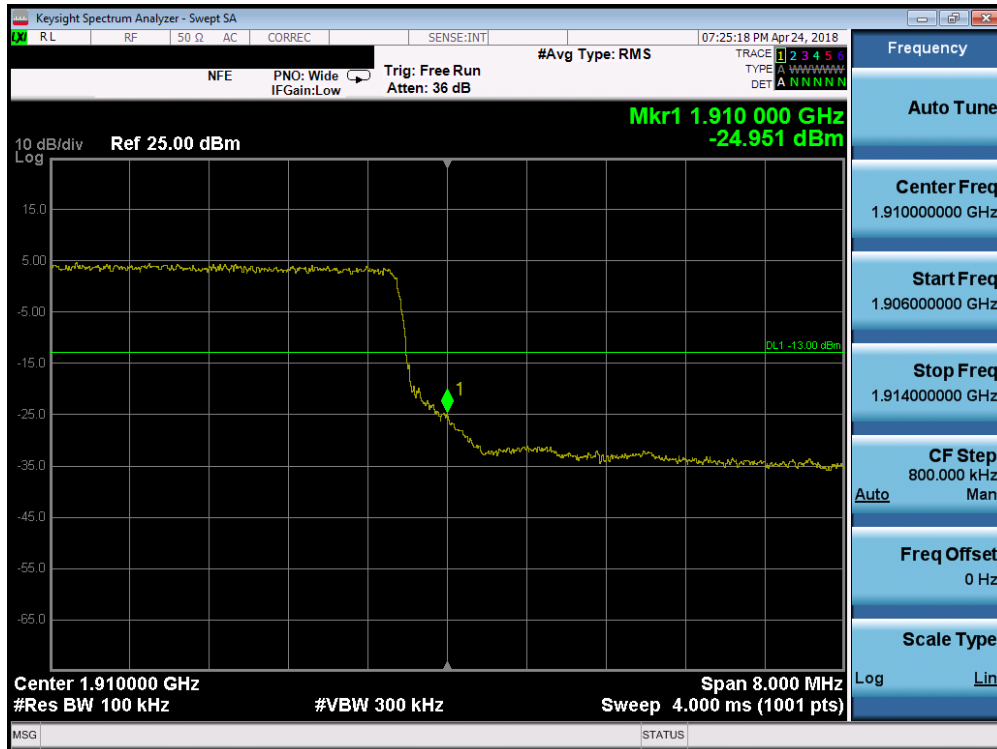


Plot 7-230. Upper Band Edge Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

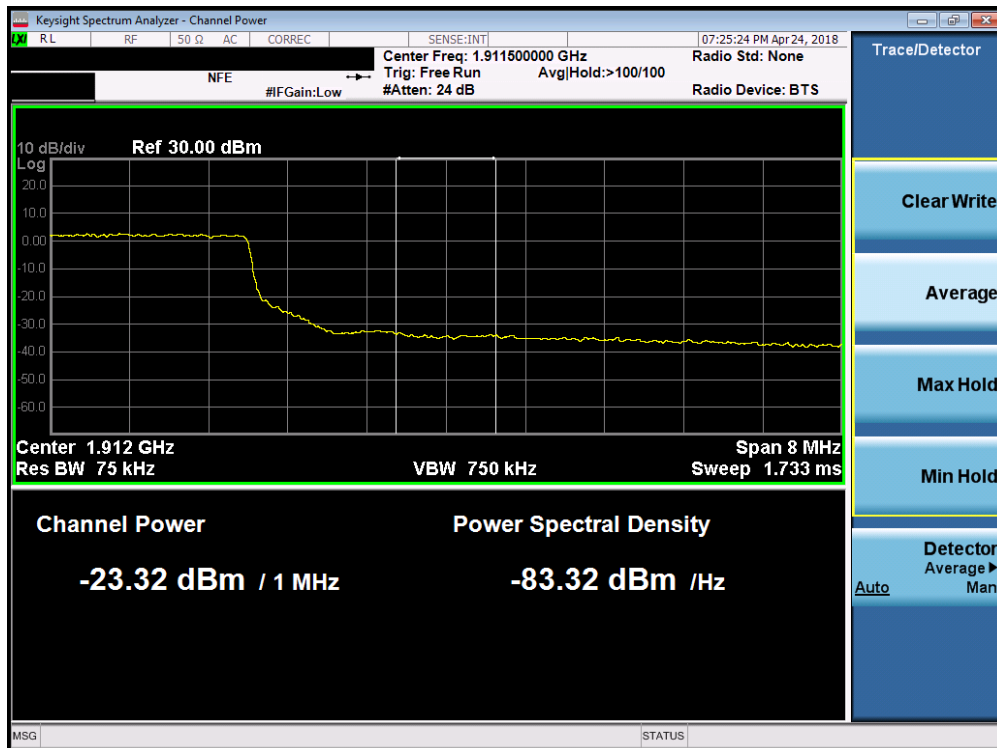


Plot 7-231. Upper Extended Band Edge Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 138 of 195

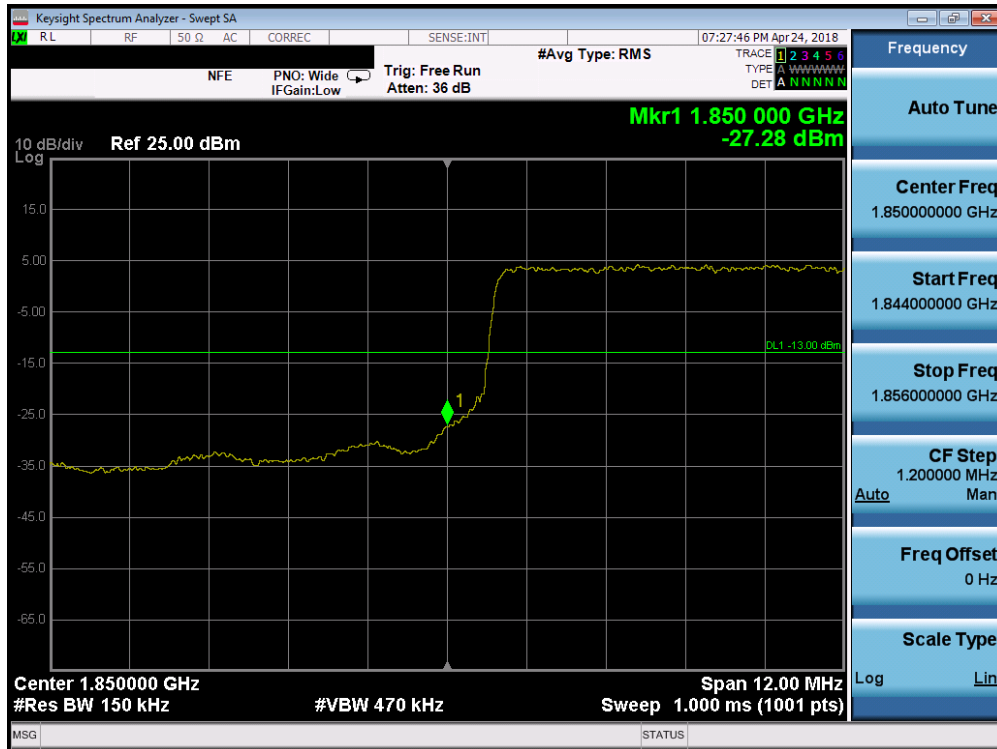


Plot 7-232. Lower Band Edge Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

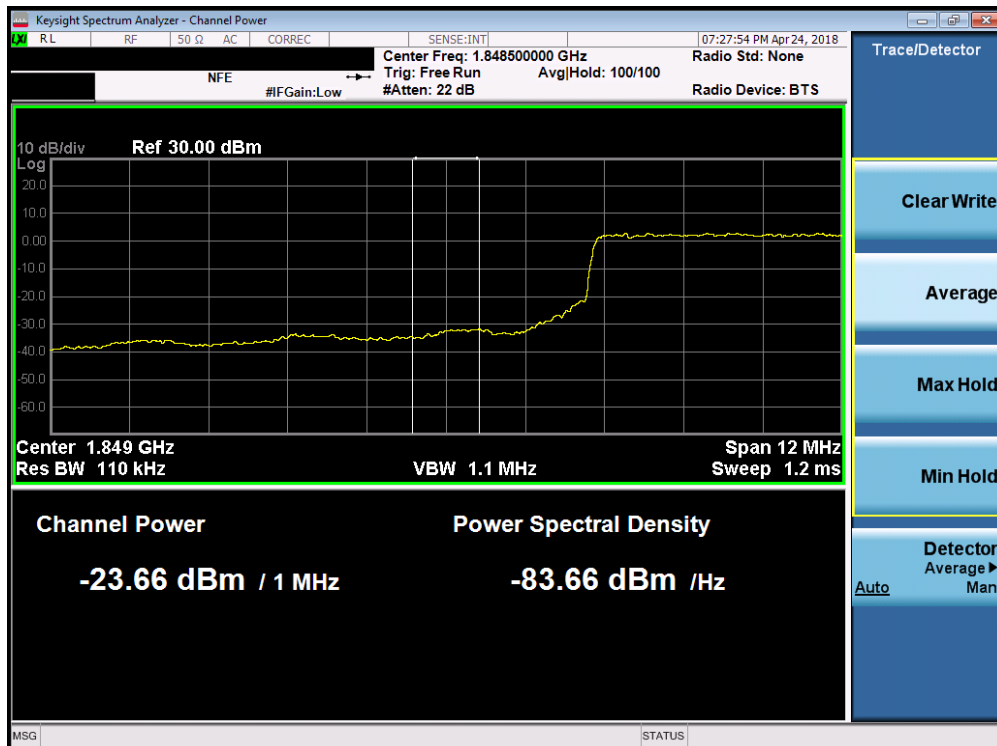


Plot 7-233. Lower Extended Band Edge Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 139 of 195

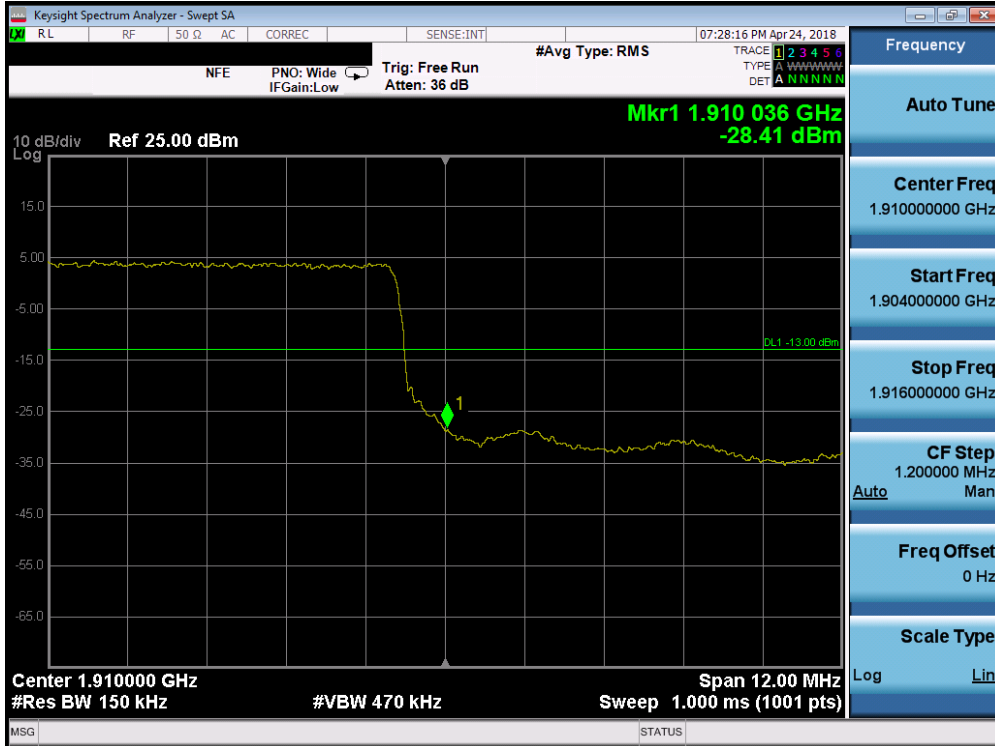


Plot 7-234. Upper Band Edge Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

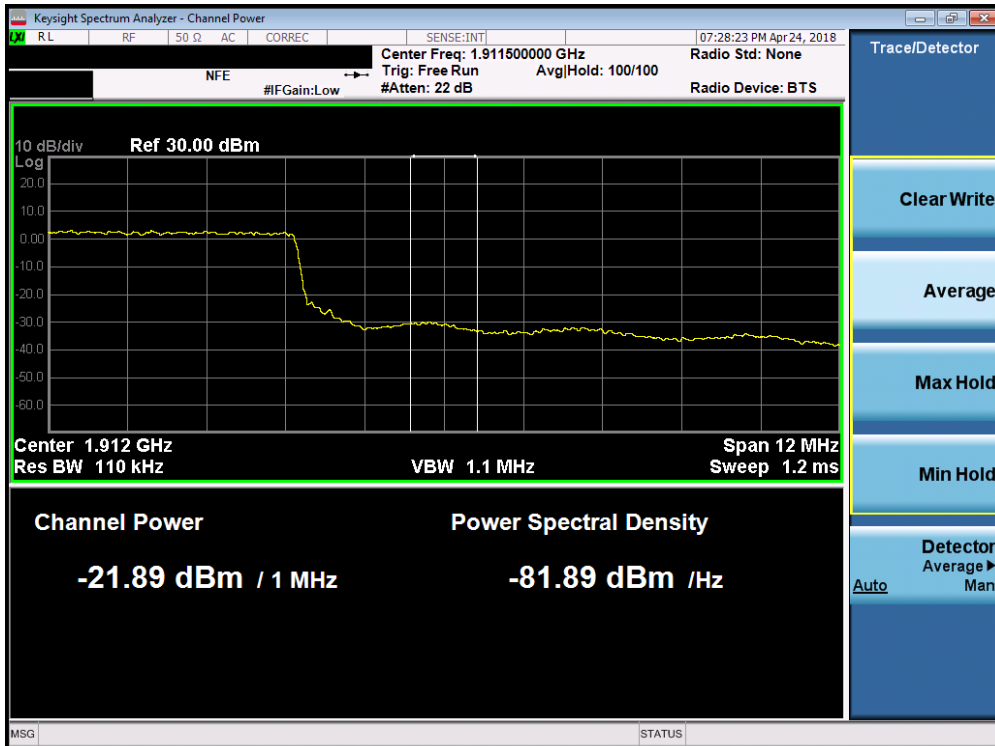


Plot 7-235. Upper Extended Band Edge Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 140 of 195

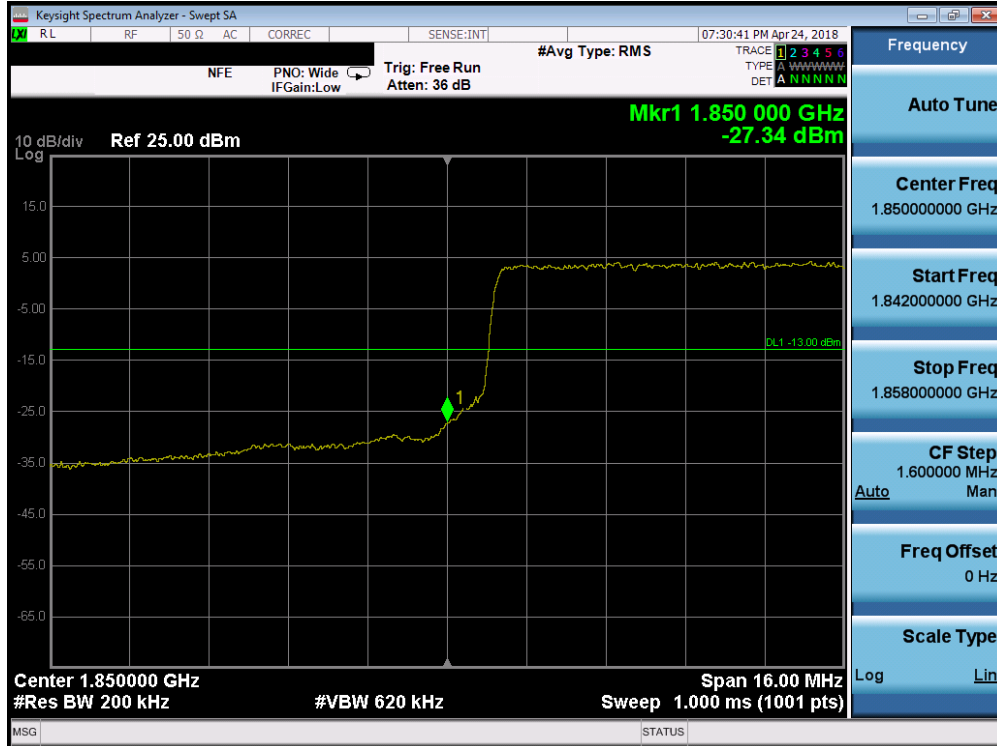

Plot 7-236. Lower Band Edge Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

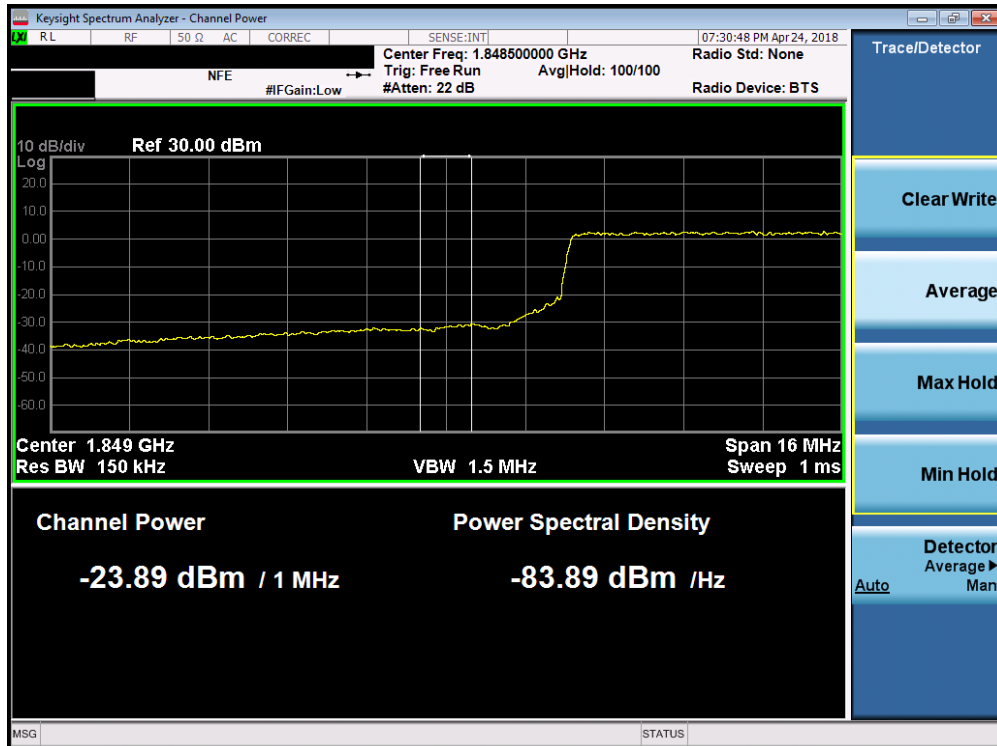


Plot 7-237. Lower Extended Band Edge Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 141 of 195




Plot 7-238. Upper Band Edge Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

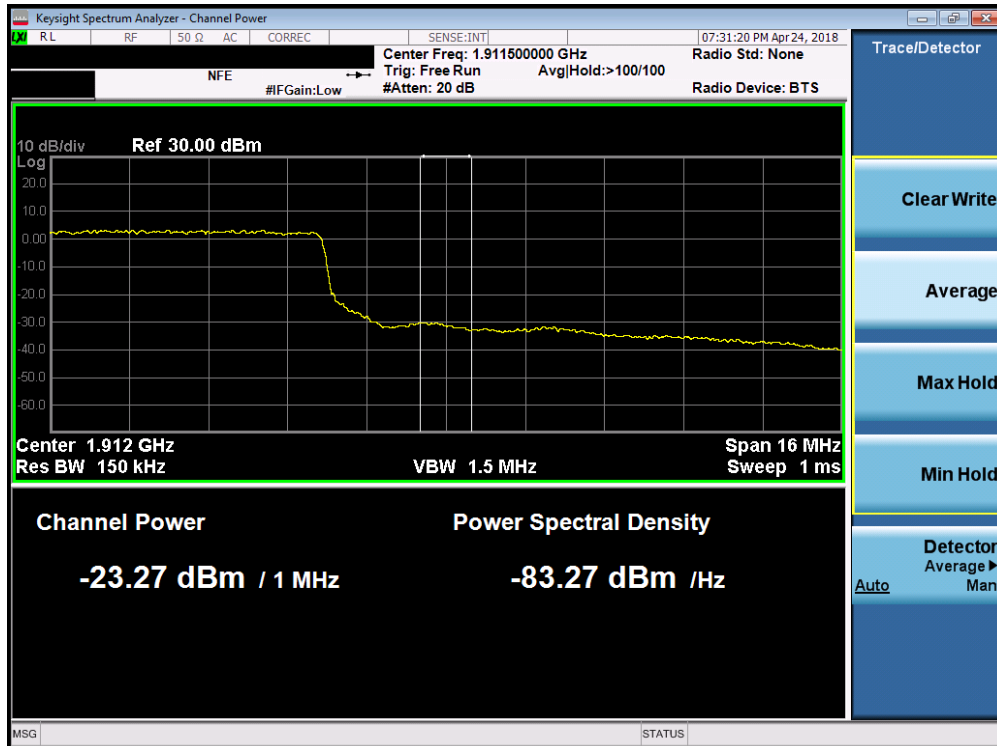


Plot 7-239. Upper Extended Band Edge Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 142 of 195

Band 41

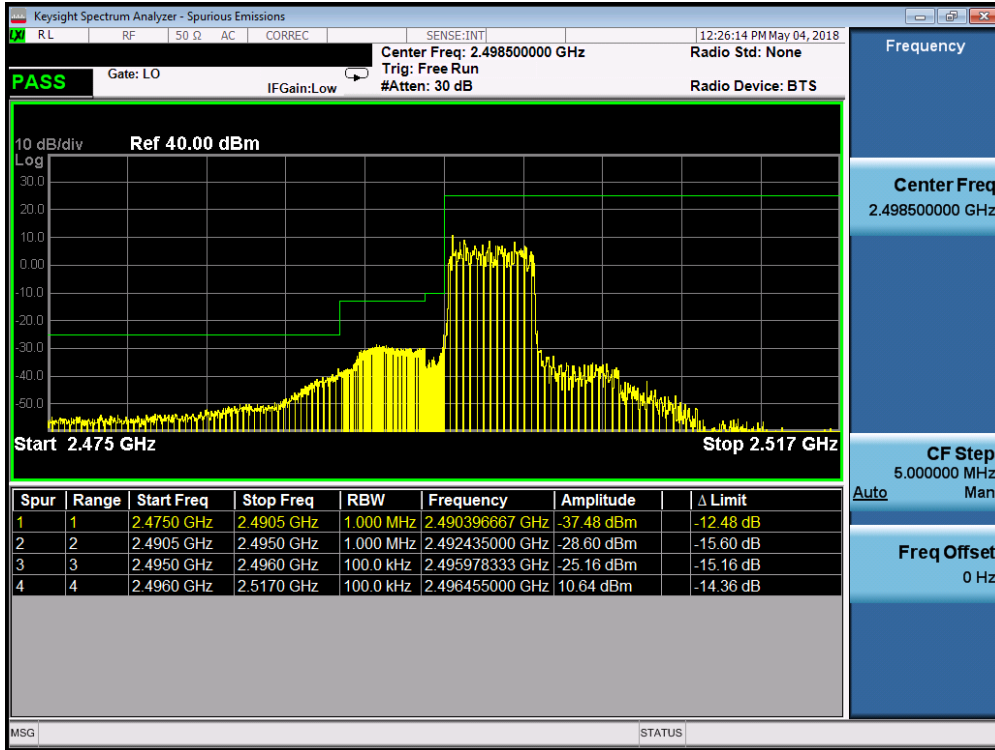


Plot 7-240. Lower ACP Plot at 2496 MHz (Band 41 - 5.0MHz QPSK - RB Size 25)

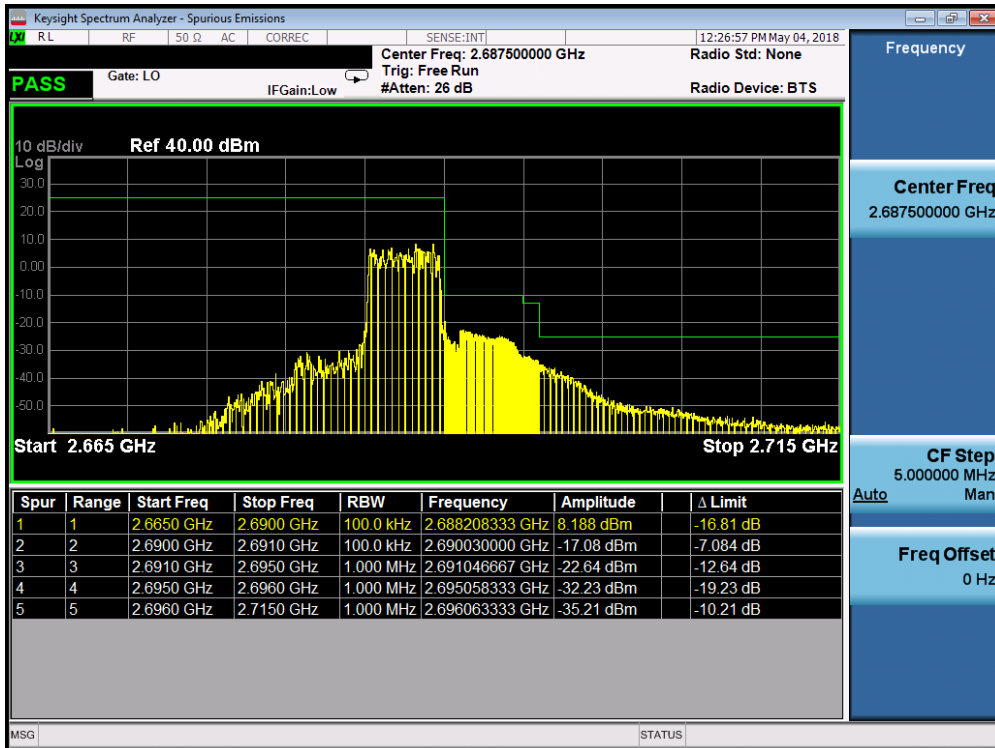


Plot 7-241. Upper ACP Plot (Band 41 - 5.0MHz QPSK - RB Size 25)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 143 of 195

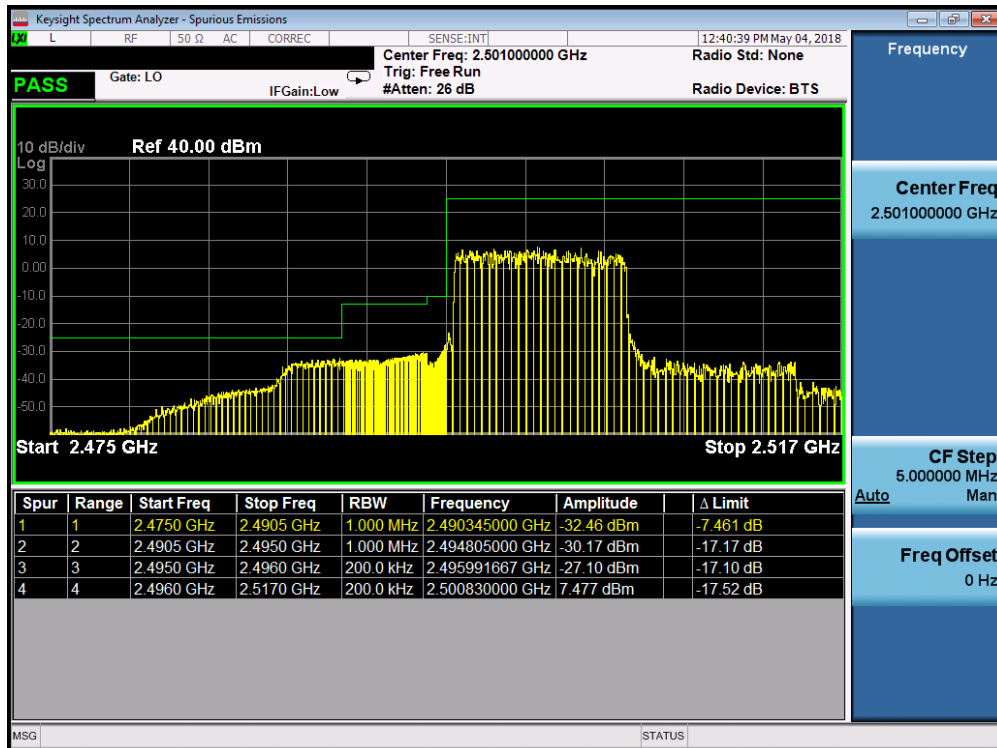


Plot 7-242. Lower ACP Plot at 2496 MHz (Band 41 - 10.0MHz QPSK - RB Size 25)

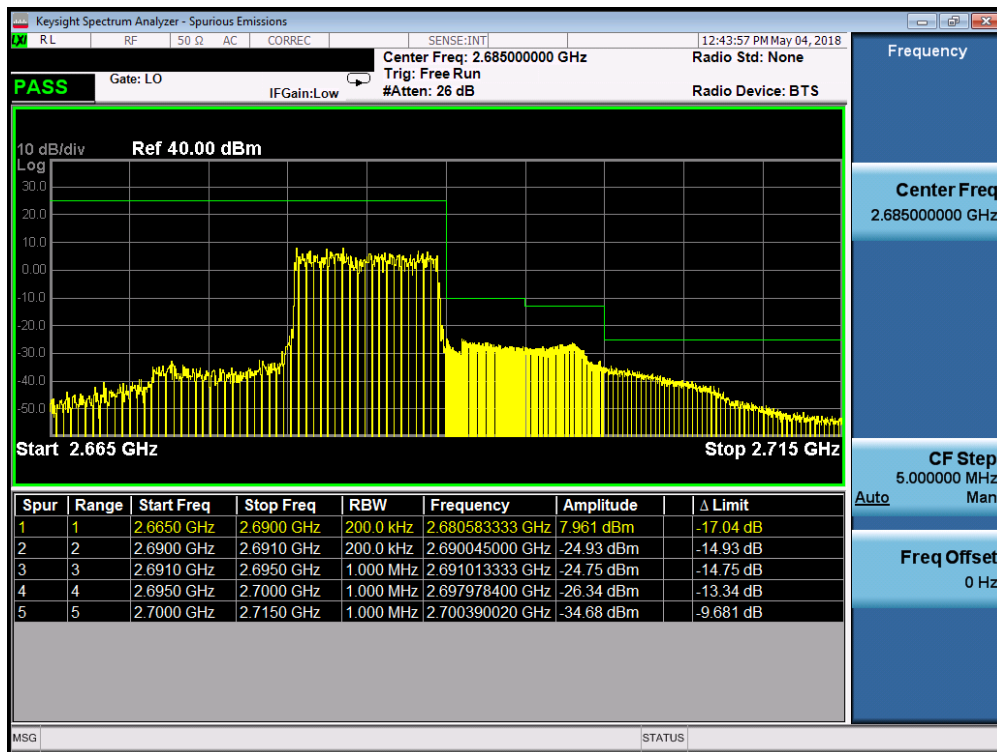


Plot 7-243. Upper ACP Plot (Band 41 - 10.0MHz QPSK - RB Size 25)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 144 of 195

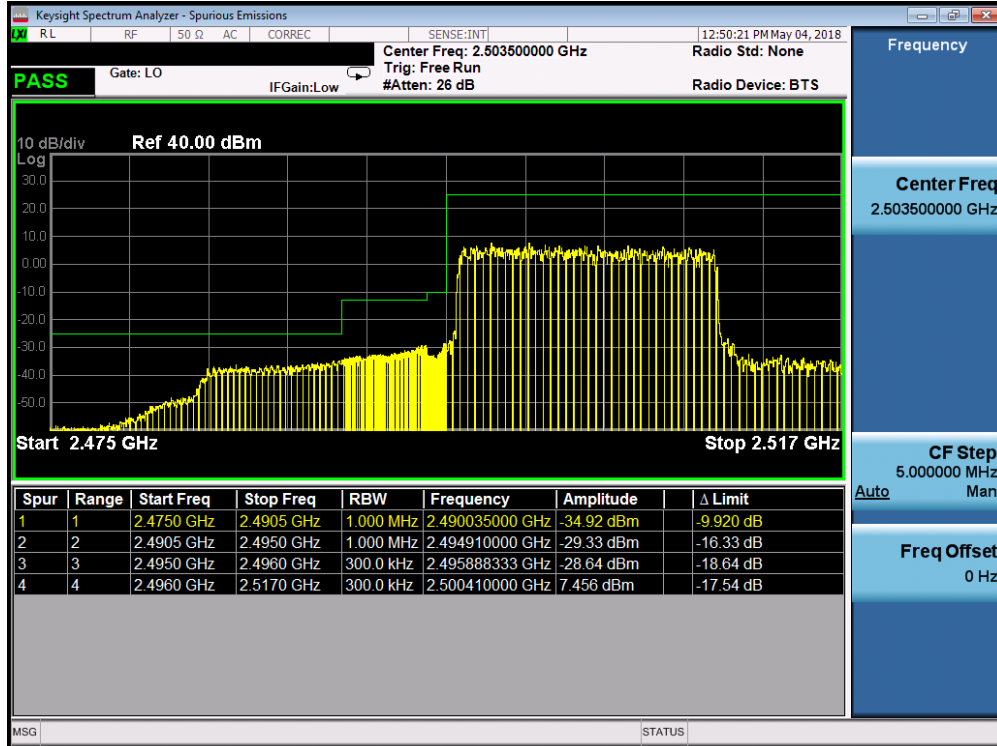


Plot 7-244. Lower ACP Plot at 2496 MHz (Band 41 - 15.0MHz QPSK - RB Size 25)

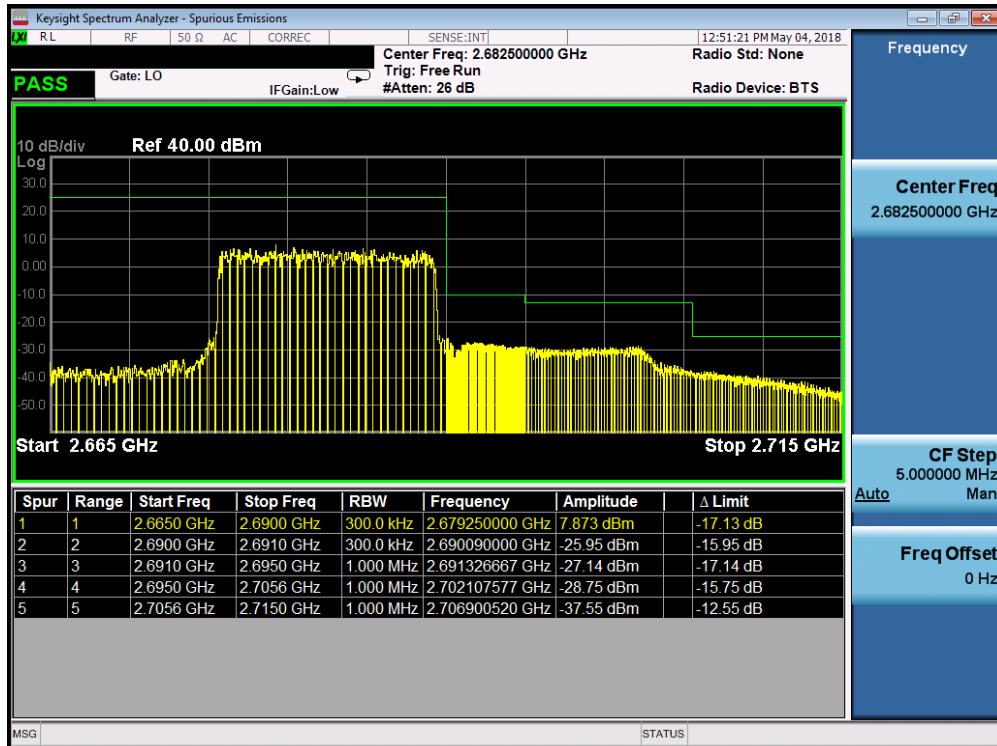


Plot 7-245. Upper ACP Plot (Band 41 - 15.0MHz QPSK - RB Size 25)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 145 of 195

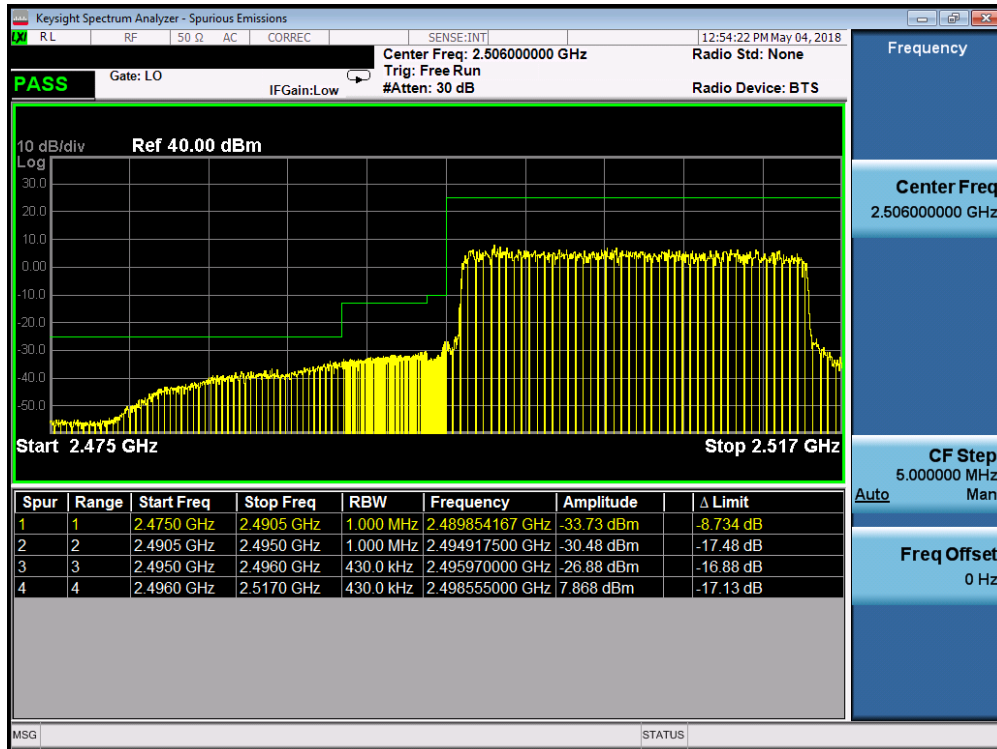

Plot 7-246. Lower ACP Plot at 2496 MHz (Band 41 - 20.0MHz QPSK - RB Size 25)

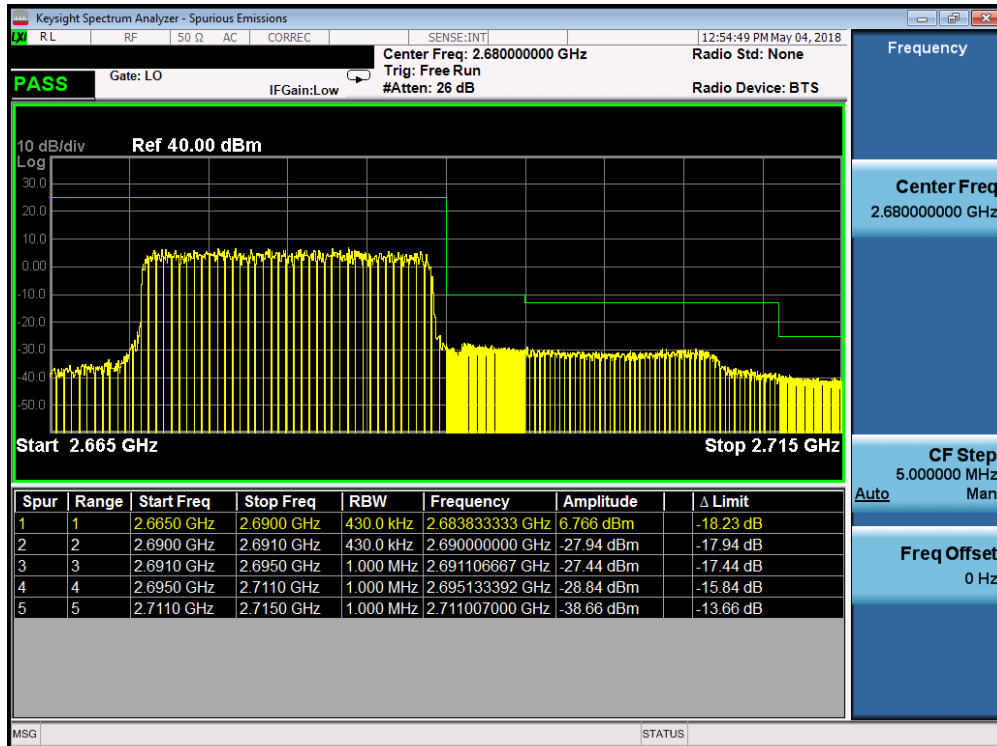

Plot 7-247. Upper ACP Plot (Band 41 - 20.0MHz QPSK - RB Size 25)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 146 of 195

7.5 Peak-Average Ratio

Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 5.7.1

Test Settings

1. The signal analyzer’s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal “RF Burst” trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the “on time” of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

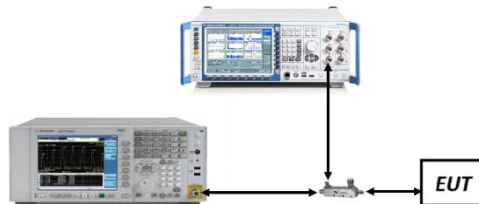



Figure 7-4. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 147 of 195	

Band 2

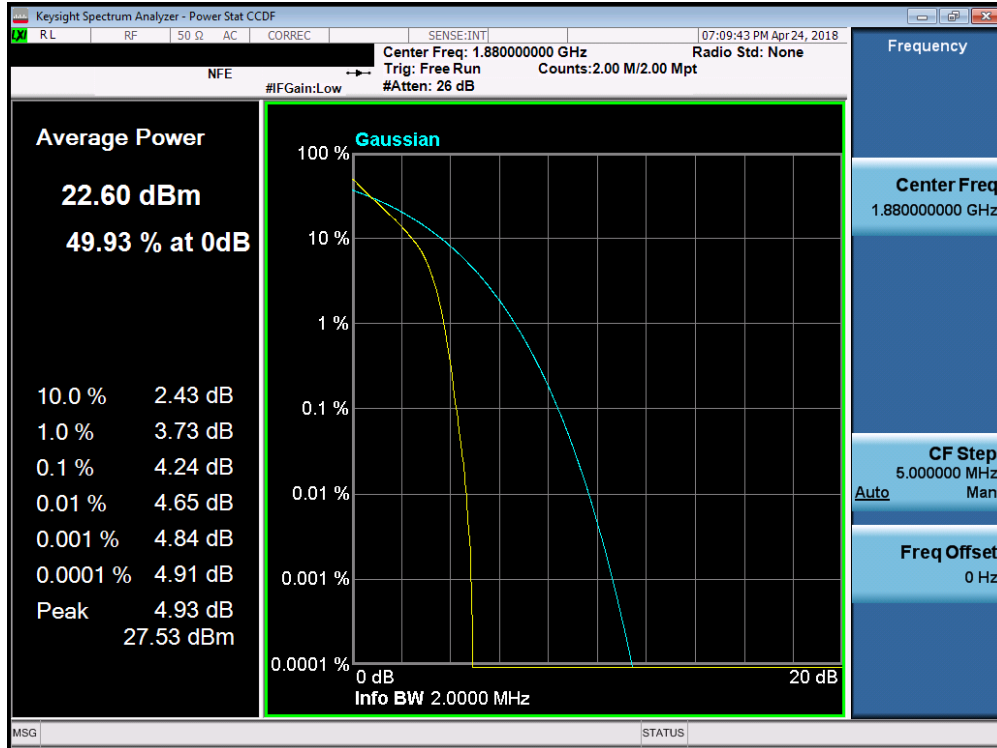


Plot 7-248. PAR Plot (Band 2 - 1.4MHz QPSK - Full RB Configuration)

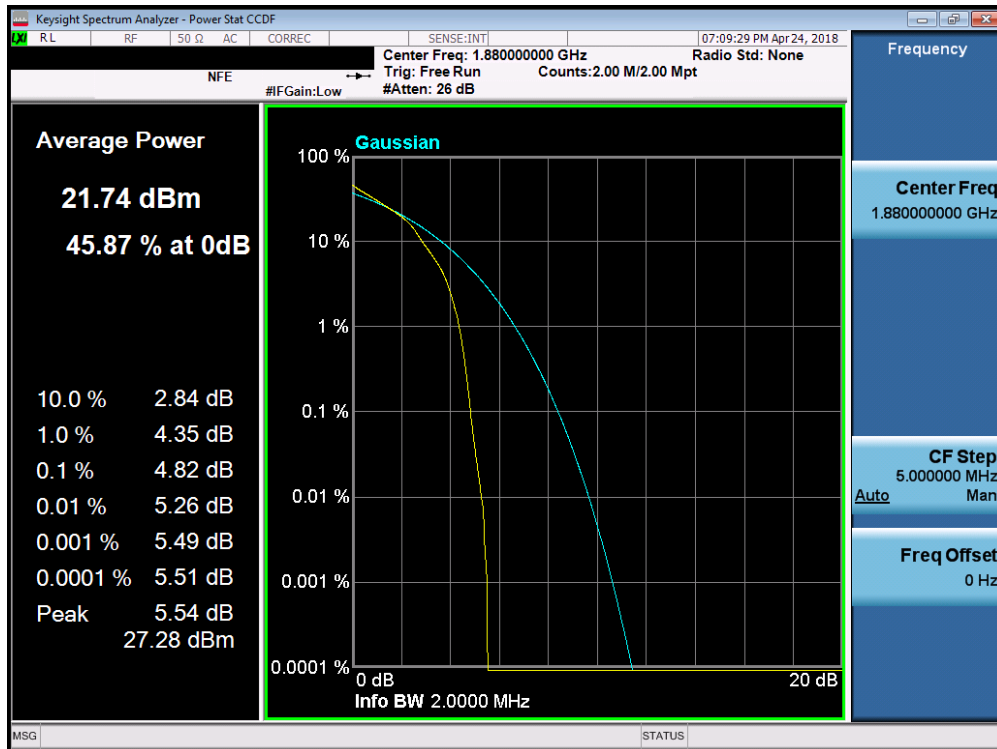


Plot 7-249. PAR Plot (Band 2 - 1.4MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 148 of 195

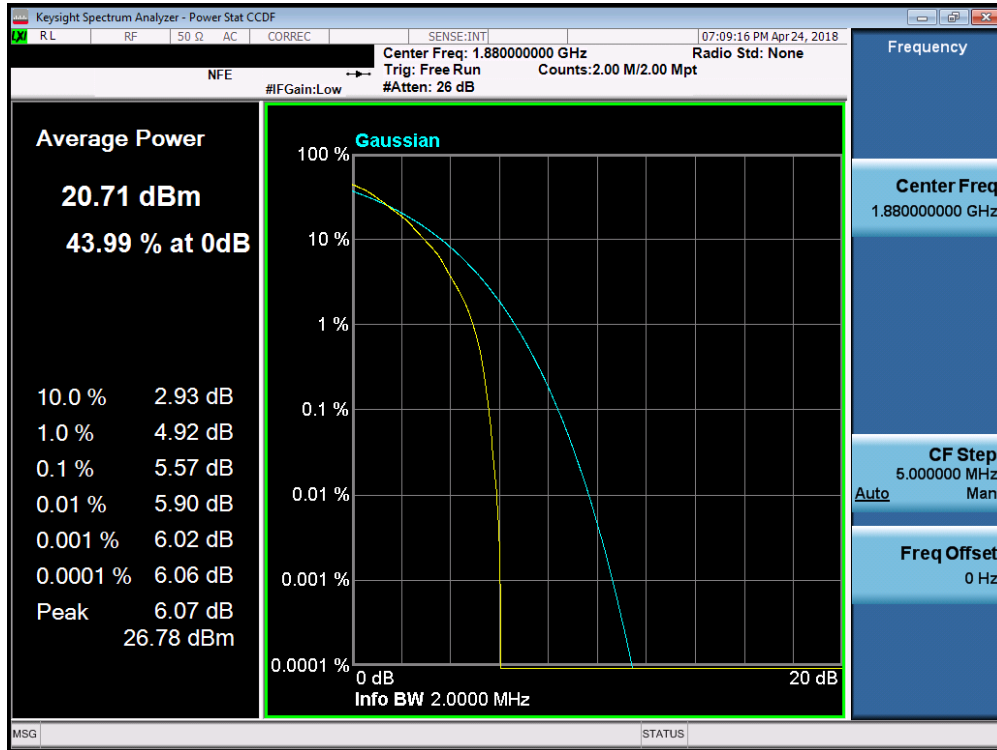


Plot 7-250. PAR Plot (Band 2 - 1.4MHz 64-QAM - Full RB Configuration)

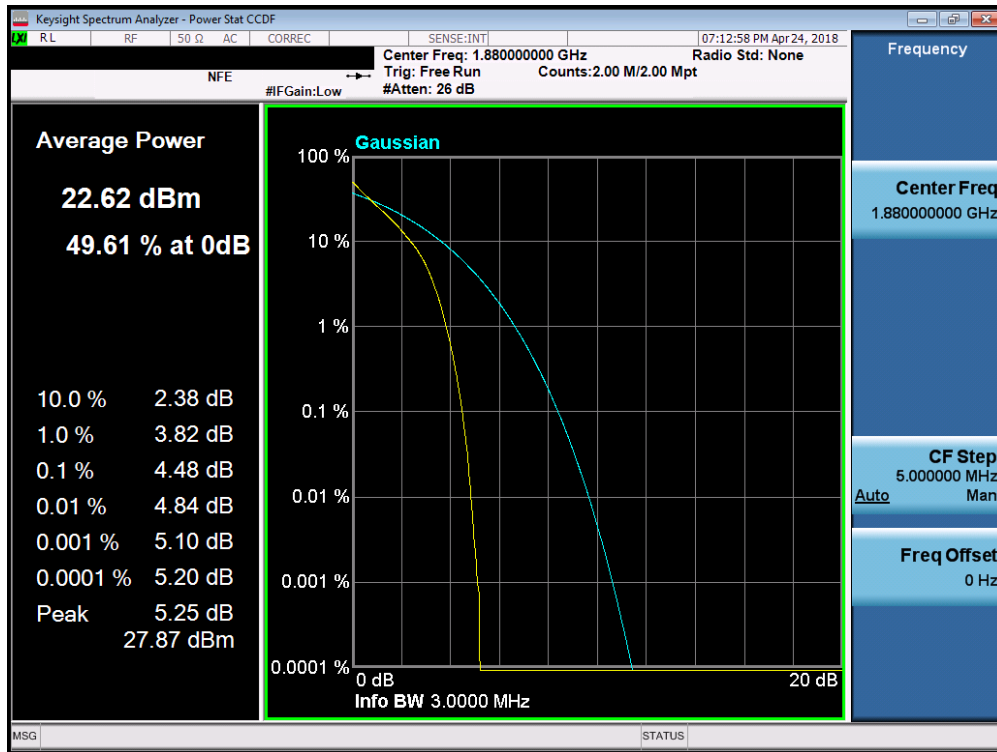


Plot 7-251. PAR Plot (Band 2 - 3.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 149 of 195

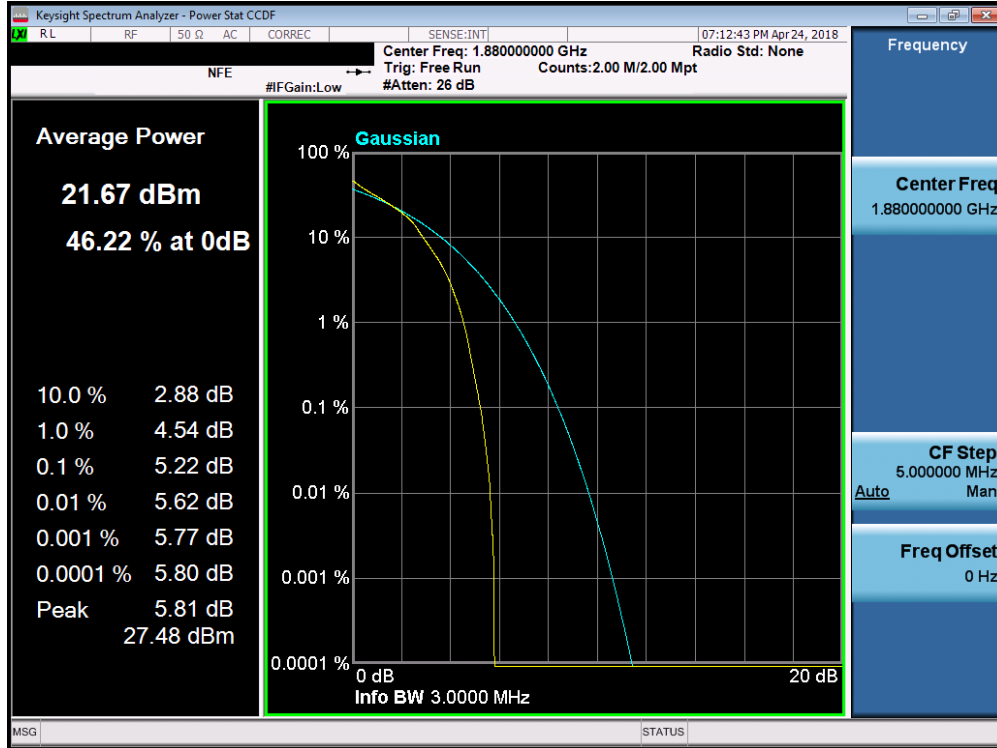


Plot 7-252. PAR Plot (Band 2 - 3.0MHz 16-QAM - Full RB Configuration)

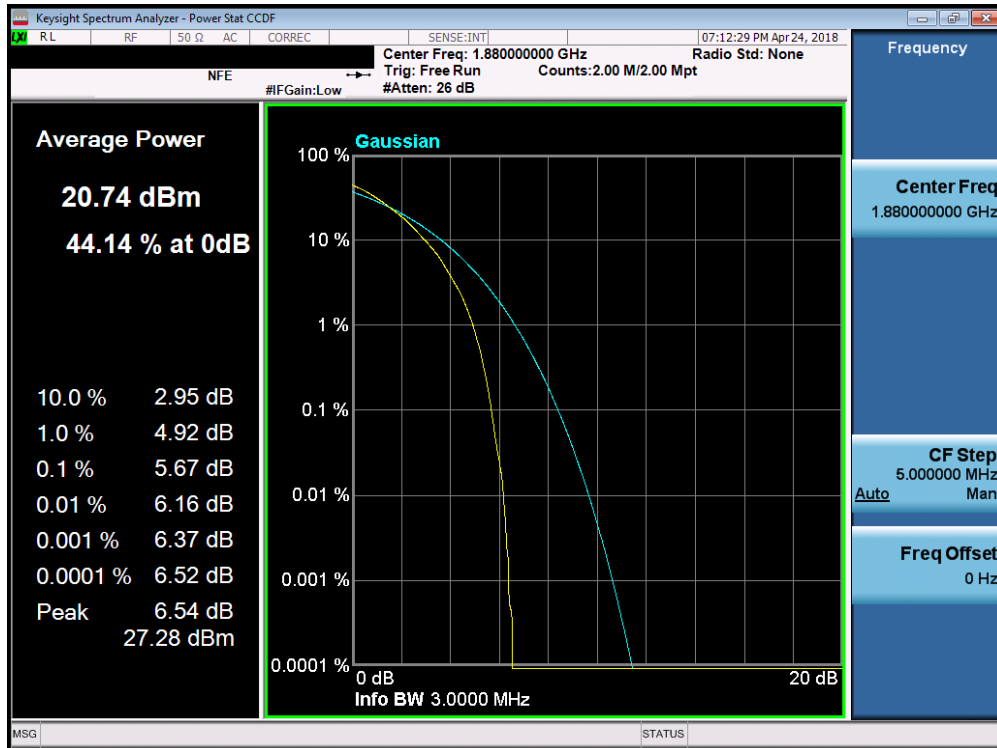


Plot 7-253. PAR Plot (Band 2 - 3.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 150 of 195

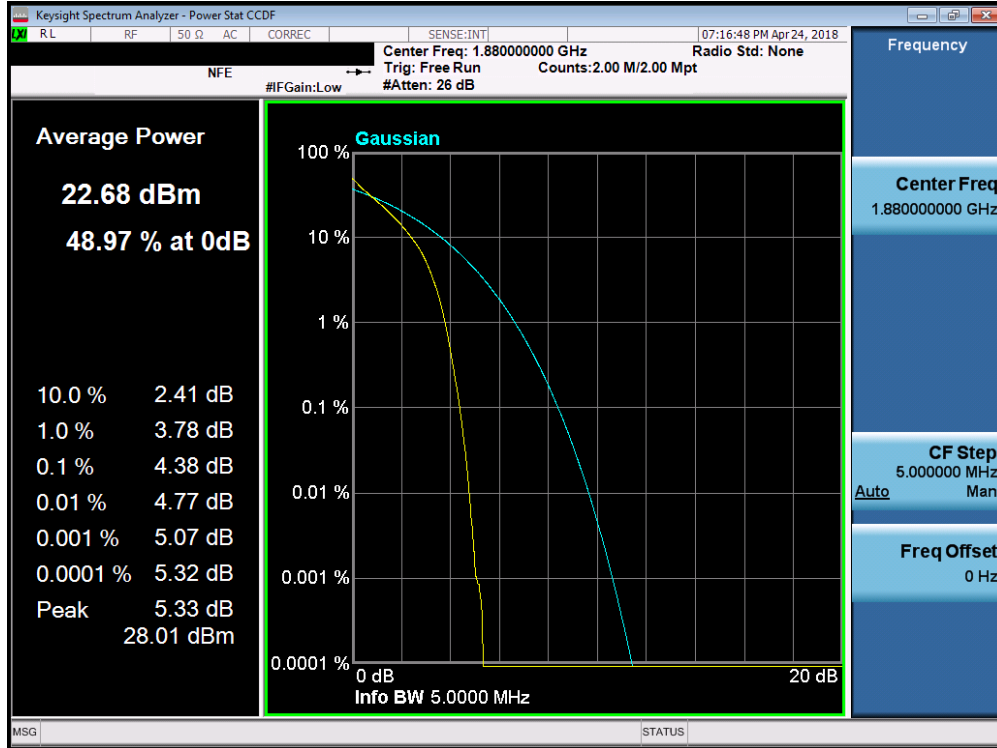


Plot 7-254. PAR Plot (Band 2 - 5.0MHz QPSK - Full RB Configuration)

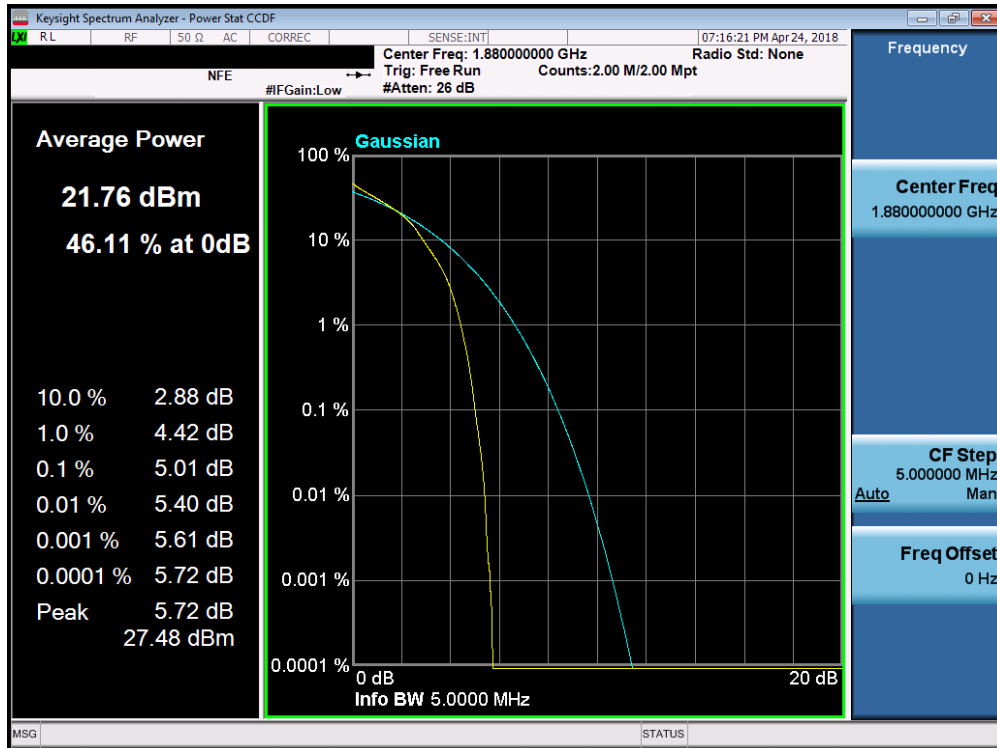


Plot 7-255. PAR Plot (Band 2 - 5.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 151 of 195

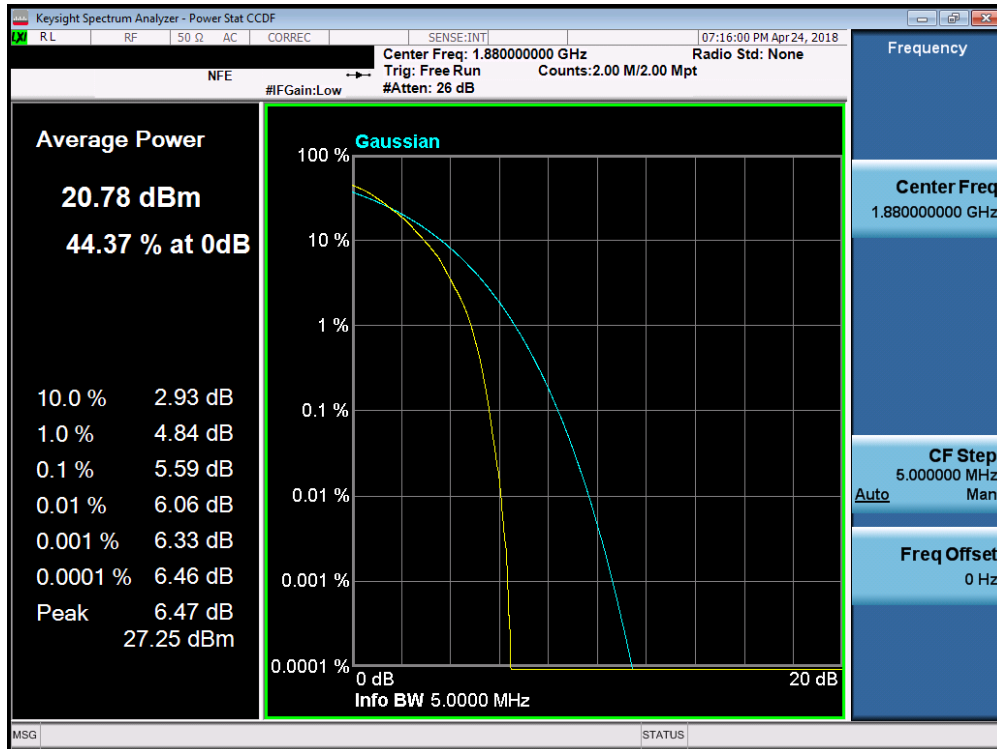


Plot 7-256. PAR Plot (Band 2 - 5.0MHz 64-QAM - Full RB Configuration)

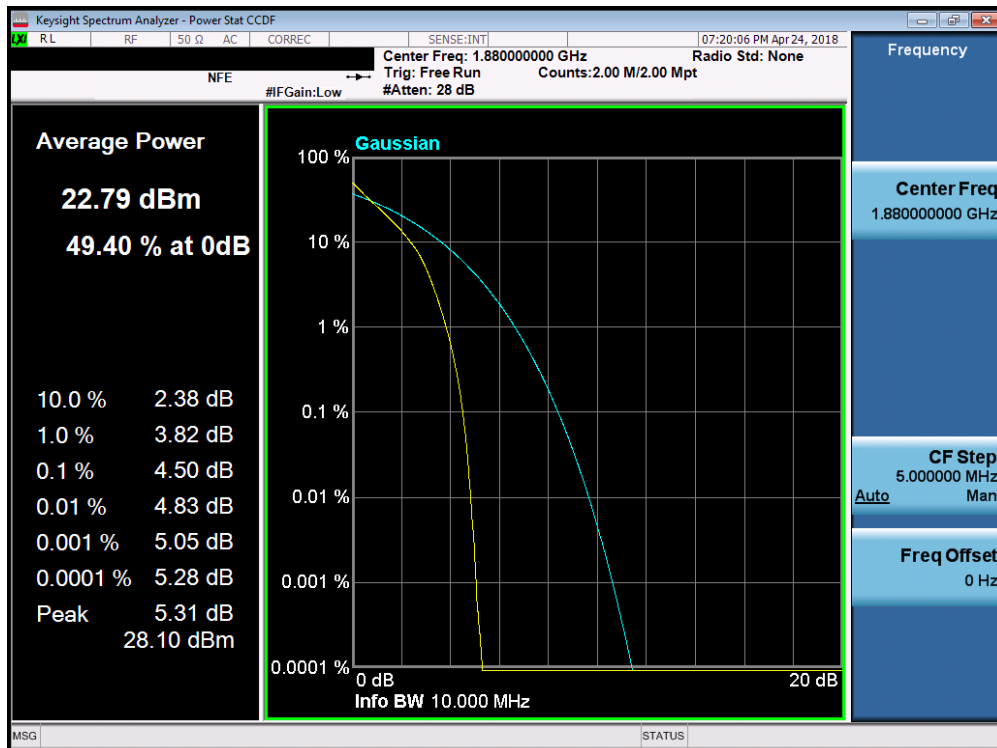


Plot 7-257. PAR Plot (Band 2 - 10.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 152 of 195

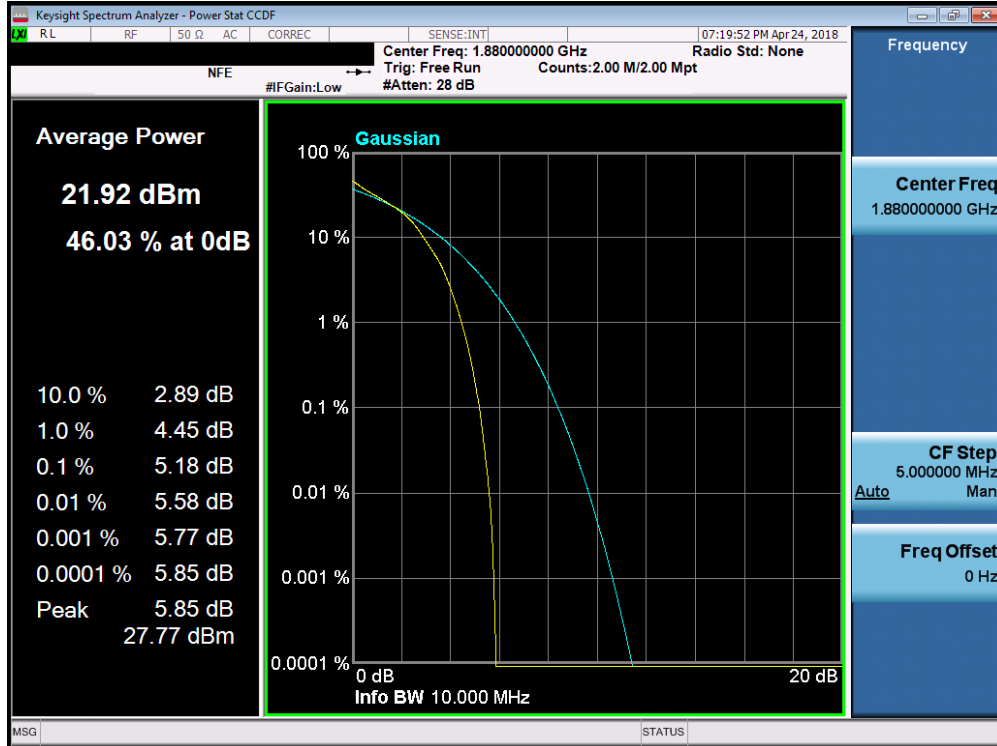


Plot 7-258. PAR Plot (Band 2 - 10.0MHz 16-QAM - Full RB Configuration)

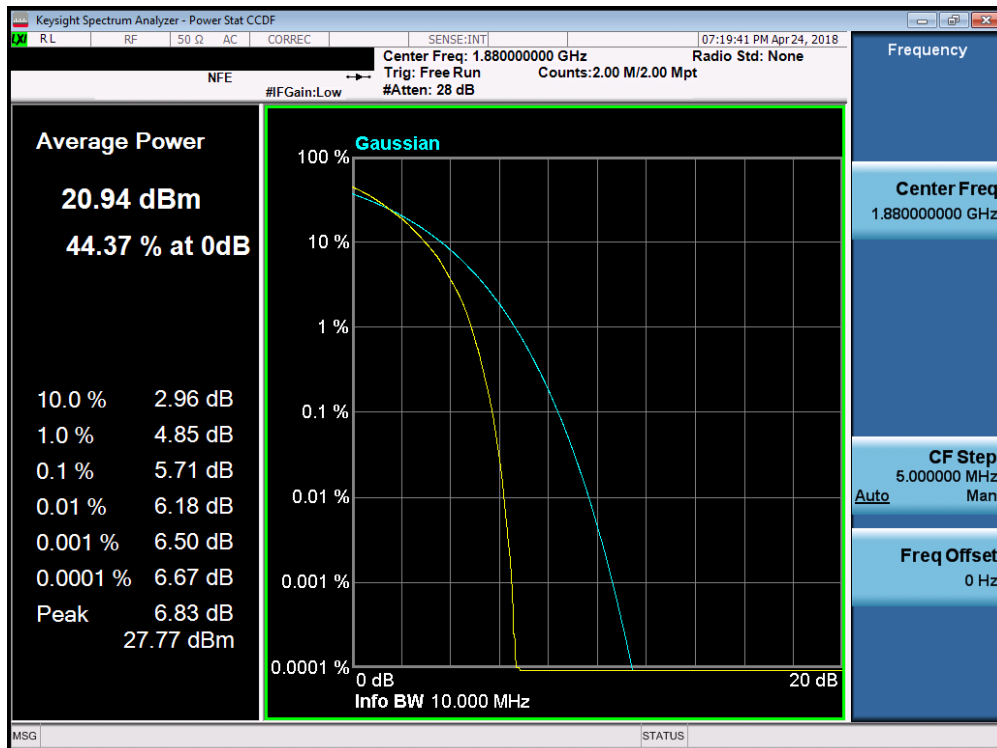


Plot 7-259. PAR Plot (Band 2 - 10.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 153 of 195

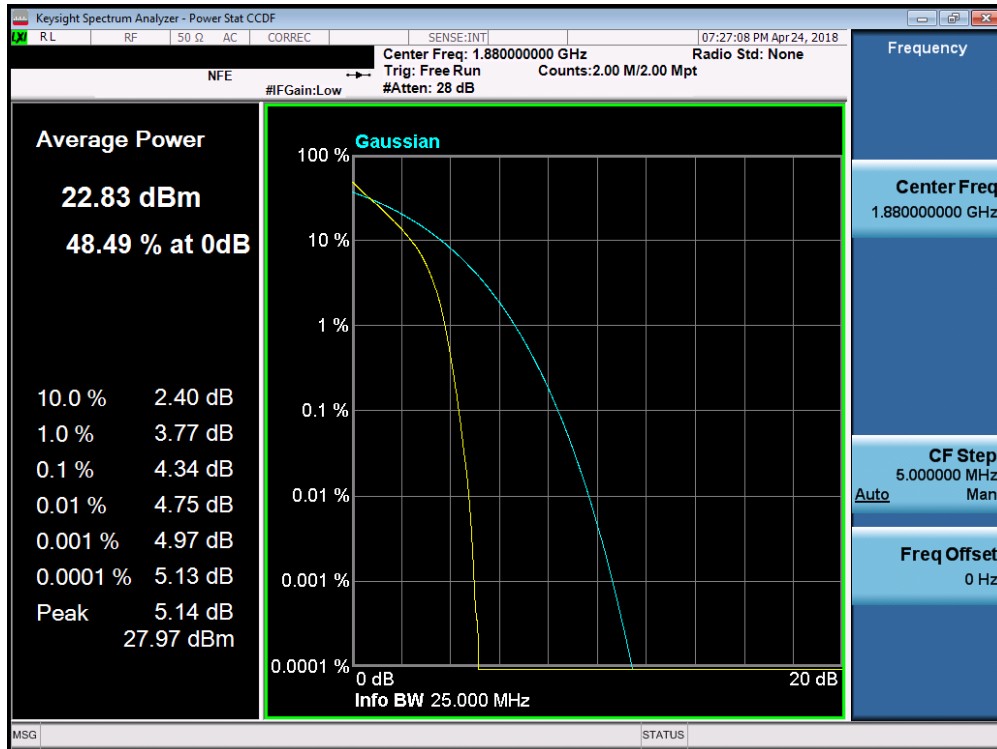


Plot 7-260. PAR Plot (Band 2 - 15.0MHz QPSK - Full RB Configuration)

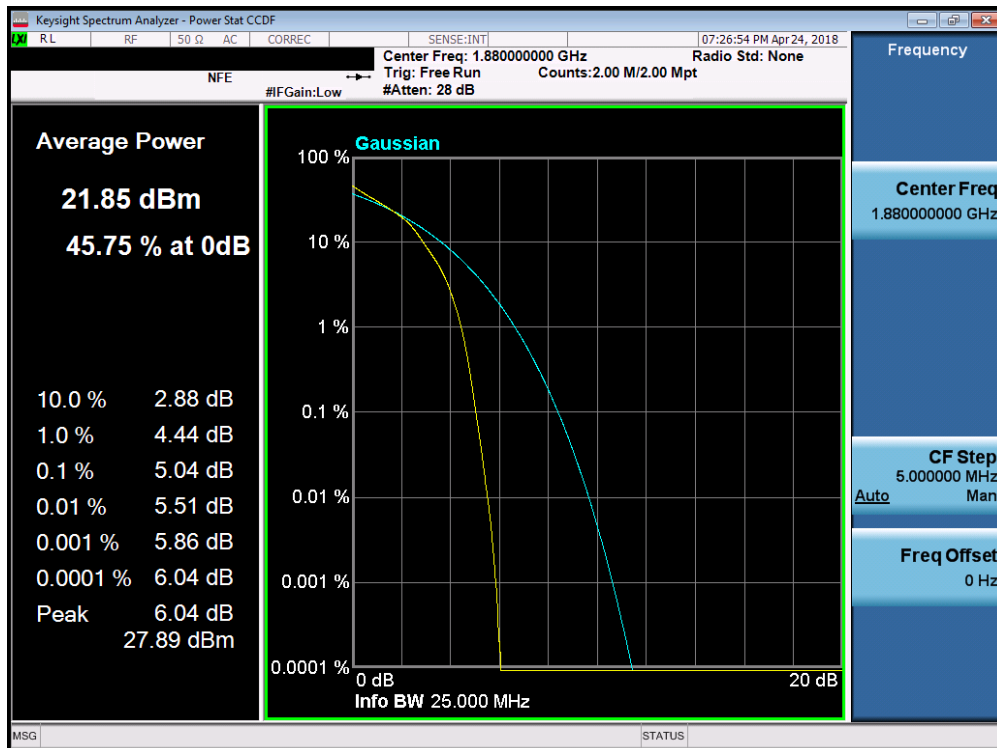


Plot 7-261. PAR Plot (Band 2 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 154 of 195

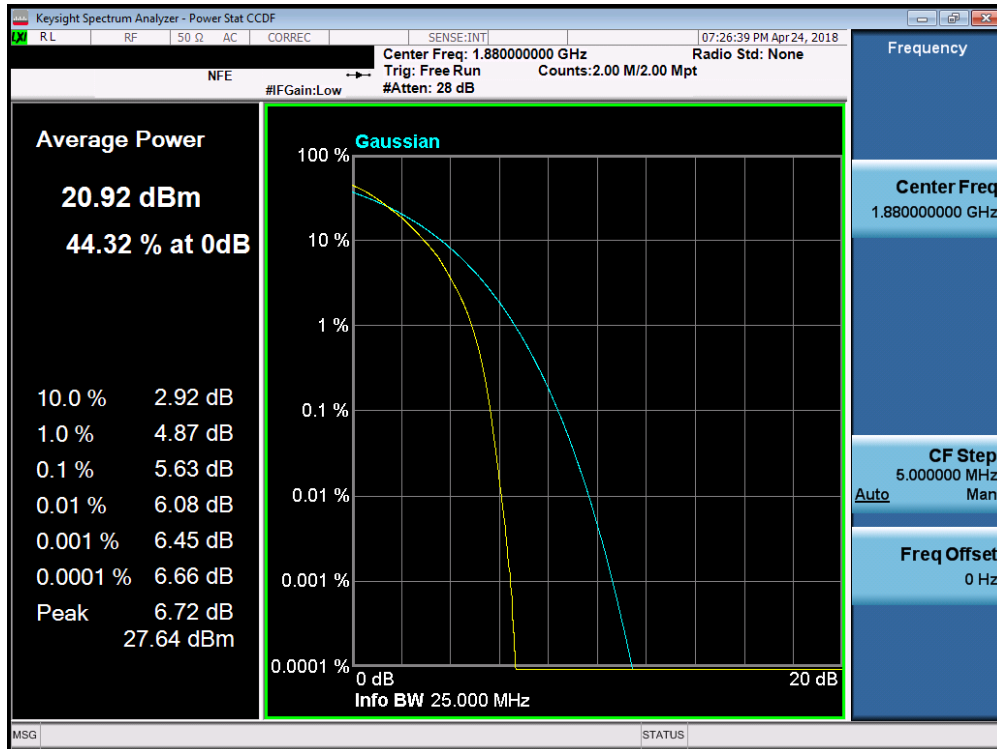


Plot 7-262. PAR Plot (Band 2 - 15.0MHz 64-QAM - Full RB Configuration)

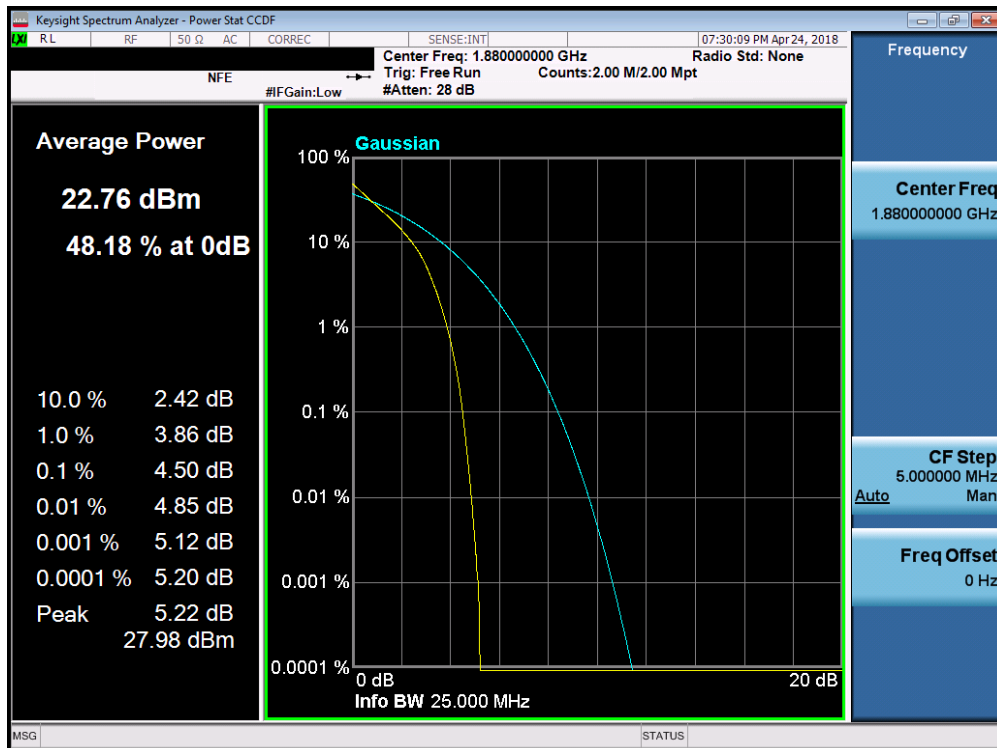


Plot 7-263. PAR Plot (Band 2 - 20.0MHz QPSK - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 155 of 195

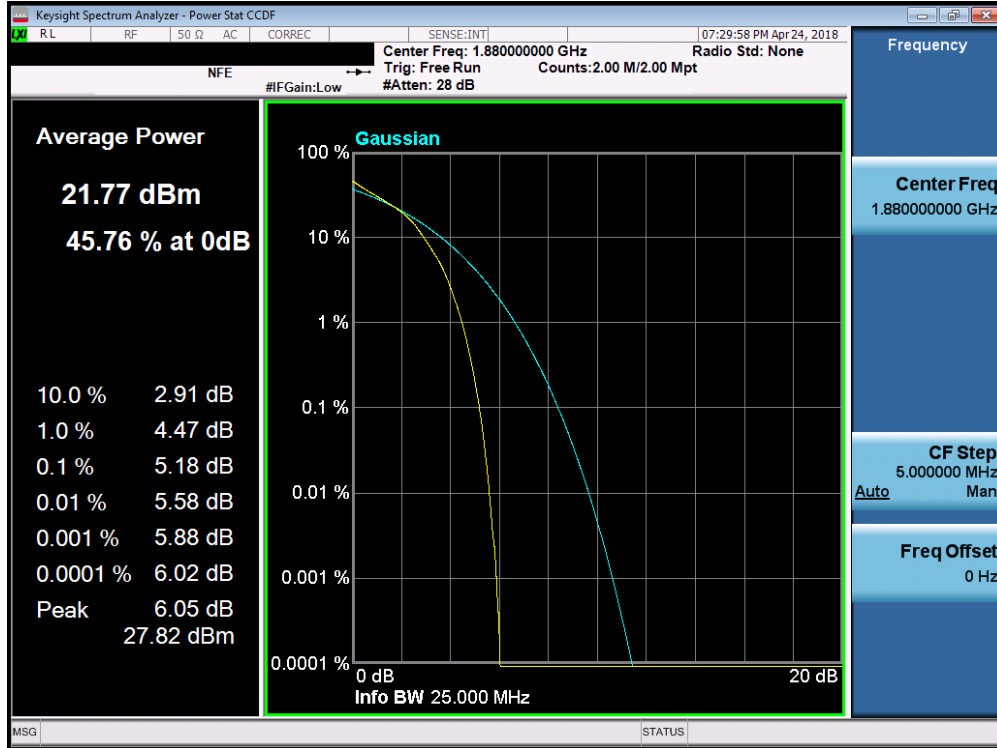

Plot 7-264. PAR Plot (Band 2 - 20.0MHz 16-QAM - Full RB Configuration)

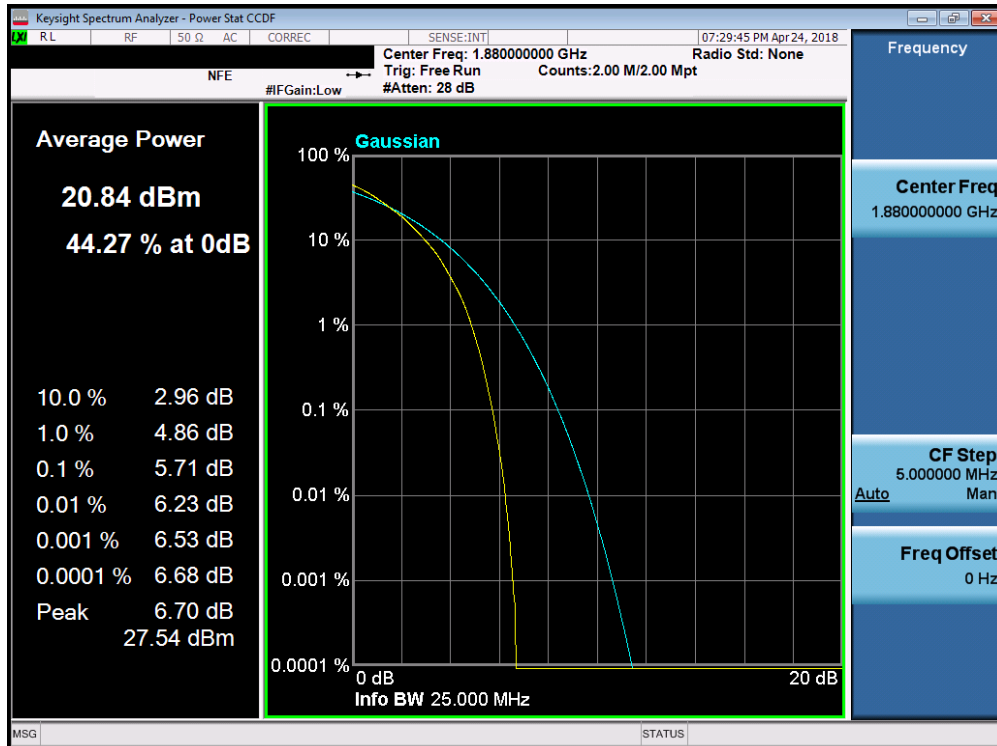

Plot 7-265. PAR Plot (Band 2 - 20.0MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 156 of 195

7.6 Radiated Power (ERP/EIRP)

Test Overview

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation. For signals with burst transmission, the signal analyzer’s “time domain power” measurement capability is used
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”. Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation. For signals with burst transmission, the “gating” function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 157 of 195	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

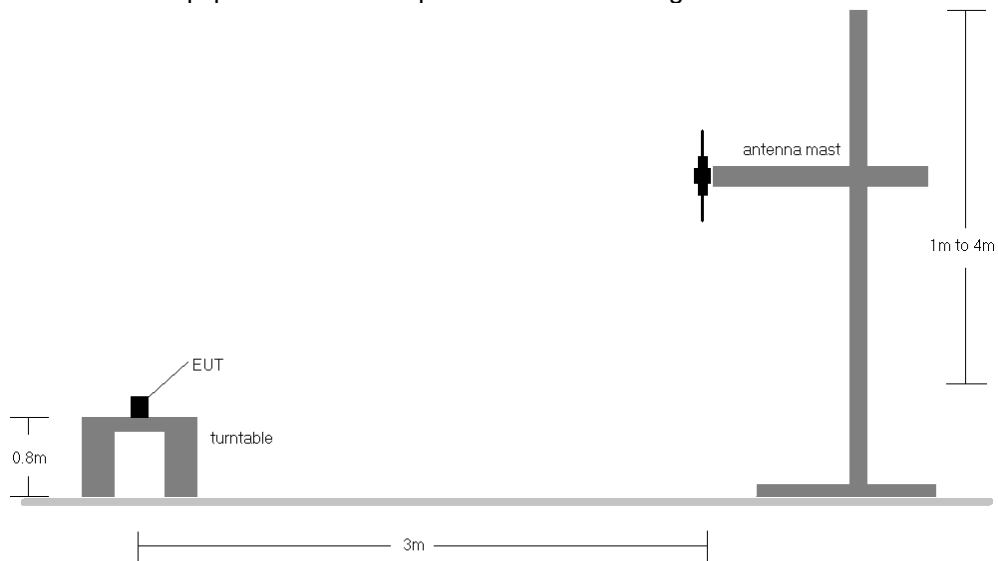


Figure 7-5. Radiated Test Setup <1GHz

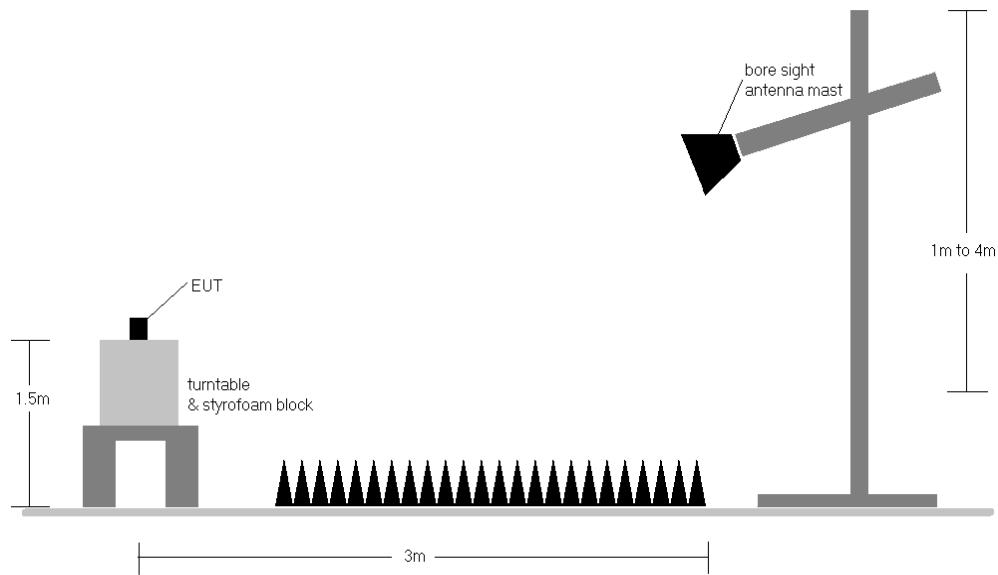


Figure 7-6. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 158 of 195

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
665.50	5	QPSK	V	150	15	1 / 24	17.00	1.10	15.95	0.039	34.77	-18.82
680.50	5	QPSK	V	150	17	1 / 24	19.08	1.10	18.03	0.064	34.77	-16.74
695.50	5	QPSK	V	150	35	1 / 0	20.62	1.10	19.57	0.091	34.77	-15.20
695.50	5	16-QAM	V	150	35	1 / 24	19.44	1.10	18.39	0.069	34.77	-16.38
695.50	5	64-QAM	V	150	35	1 / 24	19.46	1.10	18.41	0.069	34.77	-16.36
688.00	10	QPSK	V	150	5	1 / 49	15.84	1.10	14.79	0.030	34.77	-19.98
680.50	10	QPSK	V	150	5	1 / 49	19.30	1.10	18.25	0.067	34.77	-16.52
693.00	10	QPSK	V	150	30	1 / 49	20.51	1.10	19.46	0.088	34.77	-15.31
693.00	10	16-QAM	V	150	30	1 / 49	18.76	1.10	17.71	0.059	34.77	-17.06
693.00	10	64-QAM	V	150	30	1 / 49	20.07	1.10	19.02	0.080	34.77	-15.75
670.50	15	QPSK	V	150	25	1 / 74	17.72	1.10	16.67	0.046	34.77	-18.10
680.50	15	QPSK	V	150	96	1 / 74	19.85	1.10	18.80	0.076	34.77	-15.97
690.50	15	QPSK	V	150	13	1 / 74	20.91	1.10	19.86	0.097	34.77	-14.91
690.50	15	16-QAM	V	150	13	1 / 74	19.89	1.10	18.84	0.077	34.77	-15.93
690.50	15	64-QAM	V	150	13	1 / 74	19.86	1.10	18.81	0.076	34.77	-15.96
673.00	20	QPSK	V	150	23	1 / 99	19.83	1.10	18.78	0.076	34.77	-15.99
683.00	20	QPSK	V	150	9	1 / 99	20.84	1.10	19.79	0.095	34.77	-14.98
688.00	20	QPSK	V	150	23	1 / 99	21.90	1.10	20.85	0.122	34.77	-13.92
688.00	20	16-QAM	V	150	23	1 / 99	21.23	1.10	20.18	0.104	34.77	-14.59
688.00	20	64-QAM	V	150	23	1 / 99	20.51	1.10	19.46	0.088	34.77	-15.31
688.00	20	QPSK	H	150	235	1 / 99	18.06	1.10	17.01	0.050	34.77	-17.76

Table 7-3. ERP Data (Band 71)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 159 of 195	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
699.70	1.4	QPSK	V	150	105	1 / 5	20.43	1.10	19.38	0.087	34.77	-15.39	21.53	0.142	36.99	-15.46
707.50	1.4	QPSK	V	150	95	1 / 5	20.50	1.13	19.48	0.089	34.77	-15.29	21.63	0.146	36.99	-15.36
715.30	1.4	QPSK	V	150	98	1 / 0	21.32	1.16	20.33	0.108	34.77	-14.44	22.48	0.177	36.99	-14.51
715.30	1.4	16-QAM	V	150	98	1 / 5	19.76	1.16	18.77	0.075	34.77	-16.00	20.92	0.124	36.99	-16.07
699.70	1.4	64-QAM	V	150	105	1 / 5	20.03	1.10	18.98	0.079	34.77	-15.79	21.13	0.130	36.99	-15.86
700.50	3	QPSK	V	150	109	1 / 14	20.27	1.10	19.22	0.084	34.77	-15.55	21.37	0.137	36.99	-15.62
707.50	3	QPSK	V	150	103	1 / 14	20.15	1.13	19.13	0.082	34.77	-15.64	21.28	0.134	36.99	-15.71
714.50	3	QPSK	V	150	102	1 / 14	21.05	1.16	20.06	0.101	34.77	-14.71	22.21	0.166	36.99	-14.78
714.50	3	16-QAM	V	150	102	1 / 14	19.84	1.16	18.85	0.077	34.77	-15.92	21.00	0.126	36.99	-15.99
700.50	3	64-QAM	V	150	109	1 / 14	20.16	1.10	19.11	0.082	34.77	-15.66	21.26	0.134	36.99	-15.73
701.50	5	QPSK	V	150	99	1 / 24	20.37	1.11	19.33	0.086	34.77	-15.45	21.48	0.140	36.99	-15.51
707.50	5	QPSK	V	150	103	1 / 24	20.81	1.13	19.79	0.095	34.77	-14.98	21.94	0.156	36.99	-15.05
713.50	5	QPSK	V	150	92	1 / 24	20.96	1.15	19.96	0.099	34.77	-14.81	22.11	0.163	36.99	-14.88
713.50	5	16-QAM	V	150	92	1 / 24	19.78	1.15	18.78	0.076	34.77	-15.99	20.93	0.124	36.99	-16.06
707.50	5	64-QAM	V	150	103	1 / 24	20.46	1.13	19.44	0.088	34.77	-15.33	21.59	0.144	36.99	-15.40
704.00	10	QPSK	V	150	103	1 / 49	21.16	1.12	20.13	0.103	34.77	-14.64	22.28	0.169	36.99	-14.71
707.50	10	QPSK	V	150	96	1 / 49	20.79	1.13	19.77	0.095	34.77	-15.00	21.92	0.156	36.99	-15.07
711.00	10	QPSK	V	150	103	1 / 49	21.31	1.14	20.30	0.107	34.77	-14.47	22.45	0.176	36.99	-14.54
707.50	10	16-QAM	V	150	96	1 / 49	20.19	1.13	19.17	0.083	34.77	-15.60	21.32	0.136	36.99	-15.67
704.00	10	64-QAM	V	150	103	1 / 49	19.80	1.12	18.77	0.075	34.77	-16.00	20.92	0.123	36.99	-16.07
715.30	1	QPSK	H	150	283	1 / 0	19.02	1.16	18.03	0.064	34.77	-16.74	20.18	0.104	36.99	-16.81

Table 7-4. ERP Data (Band 12)

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
779.50	5	QPSK	V	150	19	1 / 0	18.18	1.32	17.35	0.054	34.77	-17.42	19.50	0.089	36.99	-17.49
782.00	5	QPSK	V	150	18	1 / 24	17.73	1.33	16.91	0.049	34.77	-17.86	19.06	0.081	36.99	-17.93
784.50	5	QPSK	V	150	23	1 / 0	17.52	1.34	16.71	0.047	34.77	-18.06	18.86	0.077	36.99	-18.13
779.50	5	16-QAM	V	150	19	1 / 0	16.52	1.32	15.69	0.037	34.77	-19.08	17.84	0.061	36.99	-19.15
782.00	5	64-QAM	V	150	18	1 / 24	16.79	1.33	15.97	0.040	34.77	-18.80	18.12	0.065	36.99	-18.87
782.00	10	QPSK	V	150	9	1 / 0	18.24	1.33	17.42	0.055	34.77	-17.35	19.57	0.091	36.99	-17.42
782.00	10	16-QAM	V	150	9	1 / 0	16.82	1.33	16.00	0.040	34.77	-18.77	18.15	0.065	36.99	-18.84
782.00	10	64-QAM	V	150	9	1 / 0	17.05	1.33	16.23	0.042	34.77	-18.54	18.38	0.069	36.99	-18.61
782.00	10	QPSK	H	150	15	1 / 0	16.48	1.33	15.66	0.037	34.77	-19.11	17.81	0.060	36.99	-19.18

Table 7-5. ERP Data (Band 13)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 160 of 195	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
824.70	1.4	QPSK	V	150	3	1 / 0	20.35	1.50	19.70	0.093	38.45	-18.75	21.85	0.153	40.61	-18.76
836.50	1.4	QPSK	V	150	0	1 / 0	20.24	1.50	19.59	0.091	38.45	-18.86	21.74	0.149	40.61	-18.87
848.30	1.4	QPSK	V	150	358	1 / 5	19.47	1.50	18.82	0.076	38.45	-19.63	20.97	0.125	40.61	-19.64
824.70	1.4	16-QAM	V	150	3	1 / 0	19.12	1.50	18.47	0.070	38.45	-19.98	20.62	0.115	40.61	-19.99
824.70	1.4	64-QAM	V	150	3	1 / 0	19.15	1.50	18.50	0.071	38.45	-19.95	20.65	0.116	40.61	-19.96
825.50	3	QPSK	V	150	5	1 / 0	20.31	1.50	19.66	0.092	38.45	-18.79	21.81	0.152	40.61	-18.80
836.50	3	QPSK	V	150	2	1 / 0	20.36	1.50	19.71	0.094	38.45	-18.74	21.86	0.153	40.61	-18.75
847.50	3	QPSK	V	150	358	1 / 0	19.73	1.50	19.08	0.081	38.45	-19.37	21.23	0.133	40.61	-19.38
836.50	3	16-QAM	V	150	2	1 / 0	18.94	1.50	18.29	0.067	38.45	-20.16	20.44	0.111	40.61	-20.17
836.50	3	64-QAM	V	150	2	1 / 0	18.85	1.50	18.20	0.066	38.45	-20.25	20.35	0.108	40.61	-20.26
826.50	5	QPSK	V	150	3	1 / 0	20.30	1.50	19.65	0.092	38.45	-18.80	21.80	0.151	40.61	-18.81
836.50	5	QPSK	V	150	3	1 / 0	20.09	1.50	19.44	0.088	38.45	-19.01	21.59	0.144	40.61	-19.02
846.50	5	QPSK	V	150	358	1 / 0	19.78	1.50	19.13	0.082	38.45	-19.32	21.28	0.134	40.61	-19.33
836.50	5	16-QAM	V	150	3	1 / 0	19.35	1.50	18.70	0.074	38.45	-19.75	20.85	0.122	40.61	-19.76
836.50	5	64-QAM	V	150	3	1 / 0	19.24	1.50	18.59	0.072	38.45	-19.86	20.74	0.119	40.61	-19.87
829.00	10	QPSK	V	150	3	1 / 0	20.29	1.50	19.64	0.092	38.45	-18.81	21.79	0.151	40.61	-18.82
836.50	10	QPSK	V	150	4	1 / 0	20.72	1.50	20.07	0.102	38.45	-18.38	22.22	0.167	40.61	-18.39
844.00	10	QPSK	V	150	358	1 / 0	20.50	1.50	19.85	0.097	38.45	-18.60	22.00	0.158	40.61	-18.61
836.50	10	16-QAM	V	150	4	1 / 0	18.82	1.50	18.17	0.066	38.45	-20.28	20.32	0.108	40.61	-20.29
836.50	10	64-QAM	V	150	4	1 / 0	19.08	1.50	18.43	0.070	38.45	-20.02	20.58	0.114	40.61	-20.03
836.50	10	QPSK	H	150	25	1 / 0	16.93	1.50	16.28	0.042	38.45	-22.17	18.43	0.070	40.61	-22.18

Table 7-6. ERP Data (Band 5)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 161 of 195

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1710.70	1.4	QPSK	V	150	290	1 / 0	15.65	5.56	21.21	0.132	30.00	-8.79
1745.00	1.4	QPSK	V	150	290	1 / 0	16.45	5.32	21.77	0.150	30.00	-8.23
1779.30	1.4	QPSK	V	150	290	1 / 0	17.29	5.09	22.38	0.173	30.00	-7.62
1779.30	1.4	16-QAM	V	150	290	1 / 0	16.66	5.09	21.75	0.150	30.00	-8.25
1779.30	1.4	64-QAM	V	150	290	1 / 0	16.14	5.09	21.23	0.133	30.00	-8.77
1711.50	3	QPSK	V	150	287	1 / 0	15.52	5.55	21.07	0.128	30.00	-8.93
1745.00	3	QPSK	V	150	291	1 / 0	16.67	5.32	21.99	0.158	30.00	-8.01
1778.50	3	QPSK	V	150	290	1 / 0	17.31	5.10	22.41	0.174	30.00	-7.59
1745.00	3	16-QAM	V	150	291	1 / 0	16.43	5.32	21.75	0.150	30.00	-8.25
1778.50	3	64-QAM	V	150	290	1 / 0	16.44	5.10	21.54	0.142	30.00	-8.46
1712.50	5	QPSK	V	150	288	1 / 0	14.50	5.55	20.05	0.101	30.00	-9.95
1745.00	5	QPSK	V	150	292	1 / 0	16.57	5.32	21.89	0.155	30.00	-8.11
1777.50	5	QPSK	V	150	291	1 / 0	17.26	5.10	22.36	0.172	30.00	-7.64
1777.50	5	16-QAM	V	150	291	1 / 0	16.68	5.10	21.78	0.151	30.00	-8.22
1777.50	5	64-QAM	V	150	291	1 / 0	15.46	5.10	20.56	0.114	30.00	-9.44
1715.00	10	QPSK	V	150	291	1 / 0	15.42	5.53	20.95	0.124	30.00	-9.05
1745.00	10	QPSK	V	150	287	1 / 0	16.90	5.32	22.22	0.167	30.00	-7.78
1775.00	10	QPSK	V	150	291	1 / 0	16.80	5.12	21.92	0.156	30.00	-8.08
1745.00	10	16-QAM	V	150	287	1 / 0	16.09	5.32	21.41	0.138	30.00	-8.59
1745.00	10	64-QAM	V	150	287	1 / 0	15.33	5.32	20.65	0.116	30.00	-9.35
1717.50	15	QPSK	V	150	290	1 / 0	14.81	5.51	20.32	0.108	30.00	-9.68
1745.00	15	QPSK	V	150	287	1 / 0	16.51	5.32	21.83	0.152	30.00	-8.17
1772.50	15	QPSK	V	150	293	1 / 0	16.69	5.14	21.83	0.152	30.00	-8.17
1745.00	15	16-QAM	V	150	287	1 / 0	16.24	5.32	21.56	0.143	30.00	-8.44
1745.00	15	64-QAM	V	150	287	1 / 0	15.51	5.32	20.83	0.121	30.00	-9.17
1720.00	20	QPSK	V	150	289	1 / 0	14.48	5.49	19.97	0.099	30.00	-10.03
1745.00	20	QPSK	V	150	286	1 / 0	16.13	5.32	21.45	0.140	30.00	-8.55
1770.00	20	QPSK	V	150	292	1 / 0	17.02	5.15	22.17	0.165	30.00	-7.83
1770.00	20	16-QAM	V	150	292	1 / 0	16.63	5.15	21.78	0.151	30.00	-8.22
1770.00	20	64-QAM	V	150	292	1 / 0	16.04	5.15	21.19	0.132	30.00	-8.81
1778.50	3	QPSK	H	150	12	1 / 0	16.50	5.10	21.60	0.144	30.00	-8.40

Table 7-7. EIRP Data (Band 4/66)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 162 of 195

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1850.70	1.4	QPSK	H	150	359	1 / 0	17.75	4.82	22.57	0.181	33.01	-10.44
1880.00	1.4	QPSK	H	150	359	1 / 0	18.10	4.74	22.84	0.192	33.01	-10.17
1909.30	1.4	QPSK	H	150	362	1 / 0	16.93	4.68	21.61	0.145	33.01	-11.40
1850.70	1.4	16-QAM	H	150	359	1 / 0	17.60	4.82	22.42	0.174	33.01	-10.59
1880.00	1.4	64-QAM	H	150	359	1 / 0	17.02	4.74	21.76	0.150	33.01	-11.25
1851.50	3	QPSK	H	150	339	1 / 0	19.61	4.82	24.43	0.277	33.01	-8.58
1880.00	3	QPSK	H	150	332	1 / 0	19.82	4.74	24.56	0.286	33.01	-8.45
1908.50	3	QPSK	H	150	328	1 / 0	18.92	4.68	23.60	0.229	33.01	-9.41
1880.00	3	16-QAM	H	150	332	1 / 0	19.64	4.74	24.38	0.274	33.01	-8.63
1880.00	3	64-QAM	H	150	332	1 / 0	18.72	4.74	23.46	0.222	33.01	-9.55
1852.50	5	QPSK	H	150	336	1 / 0	19.74	4.81	24.55	0.285	33.01	-8.46
1880.00	5	QPSK	H	150	333	1 / 0	20.35	4.74	25.09	0.323	33.01	-7.92
1907.50	5	QPSK	H	150	332	1 / 0	20.13	4.68	24.81	0.303	33.01	-8.20
1880.00	5	16-QAM	H	150	333	1 / 0	20.08	4.74	24.82	0.303	33.01	-8.19
1880.00	5	64-QAM	H	150	333	1 / 0	19.42	4.74	24.16	0.261	33.01	-8.85
1855.00	10	QPSK	H	150	348	1 / 0	19.84	4.81	24.65	0.291	33.01	-8.36
1880.00	10	QPSK	H	150	352	1 / 0	19.21	4.74	23.95	0.248	33.01	-9.06
1905.00	10	QPSK	H	150	344	1 / 0	19.59	4.68	24.27	0.268	33.01	-8.74
1855.00	10	16-QAM	H	150	348	1 / 0	19.72	4.81	24.53	0.284	33.01	-8.48
1855.00	10	64-QAM	H	150	348	1 / 0	18.77	4.81	23.58	0.228	33.01	-9.43
1857.50	15	QPSK	H	150	359	1 / 0	18.32	4.80	23.12	0.205	33.01	-9.89
1880.00	15	QPSK	H	150	337	1 / 0	20.23	4.74	24.97	0.314	33.01	-8.04
1902.50	15	QPSK	H	150	355	1 / 0	17.96	4.69	22.65	0.184	33.01	-10.36
1880.00	15	16-QAM	H	150	337	1 / 0	20.17	4.74	24.91	0.310	33.01	-8.10
1880.00	15	64-QAM	H	150	337	1 / 0	19.11	4.74	23.85	0.243	33.01	-9.16
1860.00	20	QPSK	H	150	344	1 / 0	20.08	4.79	24.87	0.307	33.01	-8.14
1880.00	20	QPSK	H	150	348	1 / 0	19.34	4.74	24.08	0.256	33.01	-8.93
1900.00	20	QPSK	H	150	337	1 / 0	20.30	4.69	24.99	0.315	33.01	-8.02
1900.00	20	16-QAM	H	150	337	1 / 0	20.04	4.69	24.73	0.297	33.01	-8.28
1900.00	20	64-QAM	H	150	337	1 / 0	19.02	4.69	23.71	0.235	33.01	-9.30
1880.00	5	QPSK	V	150	280	1 / 0	15.92	4.74	20.66	0.116	33.01	-12.35

Table 7-8. EIRP Data (Band 2)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset			Page 163 of 195

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2498.50	5	QPSK	H	150	3	25 / 0	18.21	5.73	23.94	0.248	33.01	-9.07
2593.00	5	QPSK	H	150	8	1 / 0	19.28	6.07	25.35	0.343	33.01	-7.66
2687.50	5	QPSK	H	150	23	1 / 0	16.99	6.48	23.47	0.223	33.01	-9.54
2593.00	5	16-QAM	H	150	8	1 / 0	17.25	6.07	23.32	0.215	33.01	-9.69
2593.00	5	64-QAM	H	150	8	1 / 0	16.36	6.07	22.43	0.175	33.01	-10.58
2501.00	10	QPSK	H	150	3	50 / 0	18.21	5.73	23.94	0.248	33.01	-9.07
2593.00	10	QPSK	H	150	7	1 / 0	19.23	6.07	25.30	0.339	33.01	-7.71
2685.00	10	QPSK	H	150	15	1 / 0	17.01	6.47	23.48	0.223	33.01	-9.53
2593.00	10	16-QAM	H	150	7	1 / 0	17.19	6.07	23.26	0.212	33.01	-9.75
2593.00	10	64-QAM	H	150	7	1 / 0	16.43	6.07	22.50	0.178	33.01	-10.51
2503.50	15	QPSK	H	150	3	1 / 74	19.01	5.74	24.75	0.299	33.01	-8.26
2593.00	15	QPSK	H	150	8	1 / 0	19.17	6.07	25.24	0.334	33.01	-7.77
2682.50	15	QPSK	H	150	23	1 / 0	16.31	6.46	22.77	0.189	33.01	-10.24
2593.00	15	16-QAM	H	150	8	1 / 0	18.42	6.07	24.49	0.281	33.01	-8.52
2593.00	15	64-QAM	H	150	8	1 / 0	17.27	6.07	23.34	0.216	33.01	-9.67
2506.00	20	QPSK	H	150	0	1 / 99	19.14	5.75	24.89	0.308	33.01	-8.12
2593.00	20	QPSK	H	150	5	1 / 99	18.40	6.07	24.47	0.280	33.01	-8.54
2680.00	20	QPSK	H	150	21	1 / 0	17.29	6.45	23.74	0.237	33.01	-9.27
2506.00	20	16-QAM	H	150	0	1 / 99	18.38	5.75	24.13	0.259	33.01	-8.88
2506.00	20	64-QAM	H	150	0	1 / 99	17.49	5.75	23.24	0.211	33.01	-9.77
2593.00	5	QPSK	V	150	32	1 / 0	13.36	6.07	19.43	0.088	33.01	-13.58

Table 7-9. EIRP Data (Band 41)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 164 of 195	

7.7 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: ZNFQ610TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 165 of 195

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

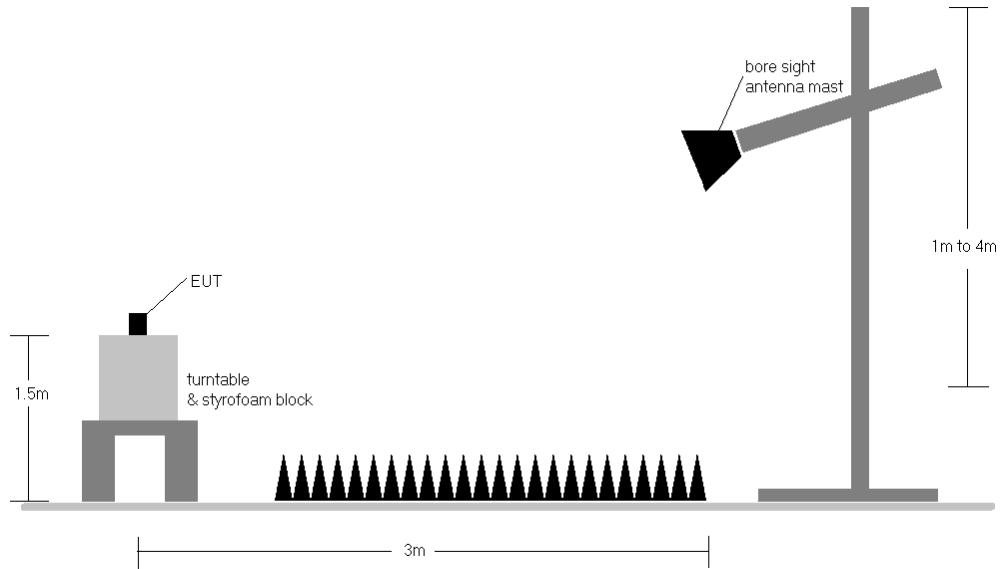



Figure 7-7. Test Instrument & Measurement Setup

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 5) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 166 of 195	

Band 71

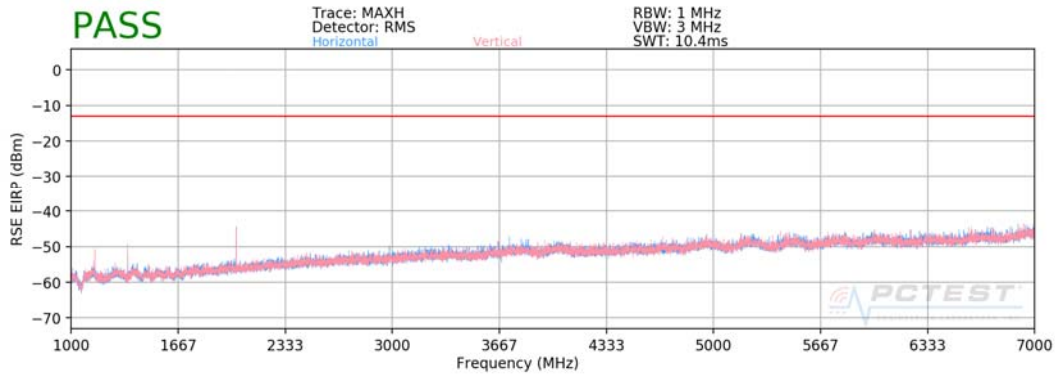

Plot 7-266. Radiated Spurious Plot above 1GHz (Band 71)

OPERATING FREQUENCY: 668.00 MHz
 CHANNEL: 133172
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1336.00	V	150	10	-62.07	9.17	-52.89	-39.9
2004.00	V	150	12	-61.28	9.45	-51.83	-38.8
2672.00	V	-	-	-69.73	8.80	-60.93	-47.9

Table 7-10. Radiated Spurious Data (Band 71 – Low Channel)

FCC ID: ZNFQ610TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 167 of 195

OPERATING FREQUENCY: 680.50 MHz
 CHANNEL: 133297
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1361.00	V	150	346	-60.44	9.03	-51.41	-38.4
2041.50	V	150	30	-58.42	9.31	-49.11	-36.1
2722.00	V	-	-	-69.51	8.82	-60.69	-47.7

Table 7-11. Radiated Spurious Data (Band 71 – Mid Channel)


OPERATING FREQUENCY: 693.00 MHz
 CHANNEL: 133422
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1386.00	V	150	355	-60.67	8.71	-51.96	-39.0
2079.00	V	150	41	-58.05	9.14	-48.91	-35.9
2772.00	V	-	-	-69.91	8.70	-61.21	-48.2

Table 7-12. Radiated Spurious Data (Band 71 – High Channel)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 168 of 195	

Band 12

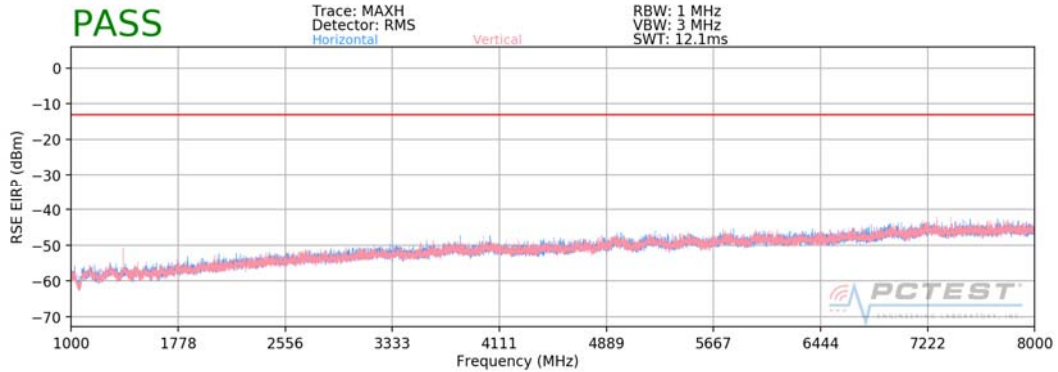

Plot 7-267. Radiated Spurious Plot above 1GHz (Band 12)

OPERATING FREQUENCY: 699.70 MHz
 CHANNEL: 23017
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1399.40	V	150	354	-70.68	8.54	-62.14	-49.1
2099.10	V	150	38	-63.42	9.04	-54.38	-41.4
2798.80	V	-	-	-69.48	8.61	-60.87	-47.9

Table 7-13. Radiated Spurious Data (Band 12 – Low Channel)

FCC ID: ZNFQ610TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 169 of 195

OPERATING FREQUENCY: 707.50 MHz
 CHANNEL: 23095
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1415.00	V	150	354	-69.32	8.48	-60.84	-47.8
2122.50	V	150	63	-67.85	8.94	-58.92	-45.9
2830.00	V	-	-	-68.08	8.32	-59.76	-46.8

Table 7-14. Radiated Spurious Data (Band 12 – Mid Channel)


OPERATING FREQUENCY: 715.30 MHz
 CHANNEL: 23173
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1430.60	V	150	171	-68.45	8.43	-60.02	-47.0
2145.90	V	150	364	-67.71	8.83	-58.87	-45.9
2861.20	V	-	-	-67.86	8.08	-59.78	-46.8

Table 7-15. Radiated Spurious Data (Band 12 – High Channel)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 170 of 195	

Band 13

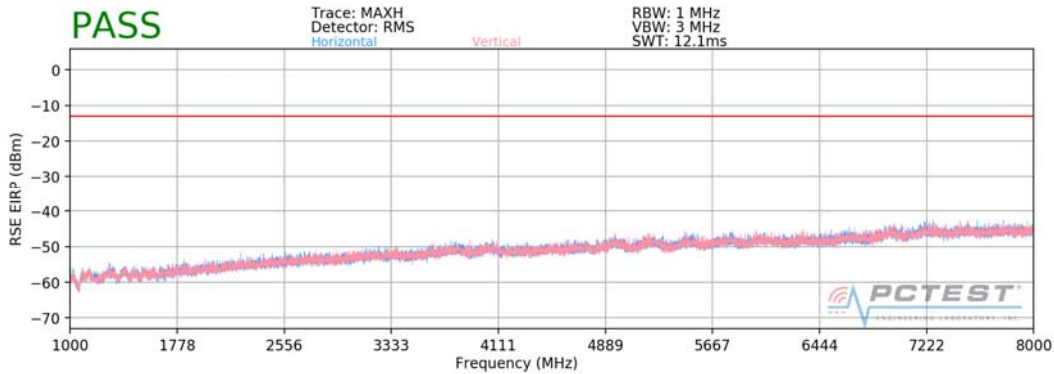

Plot 7-268. Radiated Spurious Plot above 1GHz (Band 13)

OPERATING FREQUENCY: 782.00 MHz
 CHANNEL: 23230
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2346.00	V	-	-	-71.44	9.04	-62.39	-49.4
3128.00	V	-	-	-69.17	8.56	-60.61	-47.6

Table 7-16. Radiated Spurious Data (Band 13 – Mid Channel)


MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1564.00	V	-	-	-73.92	8.77	-65.15	-25.1

Table 7-17. Radiated Spurious Data (Band 13 – 1559-1610MHz Band)

FCC ID: ZNFQ610TA			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 171 of 195	

Band 5

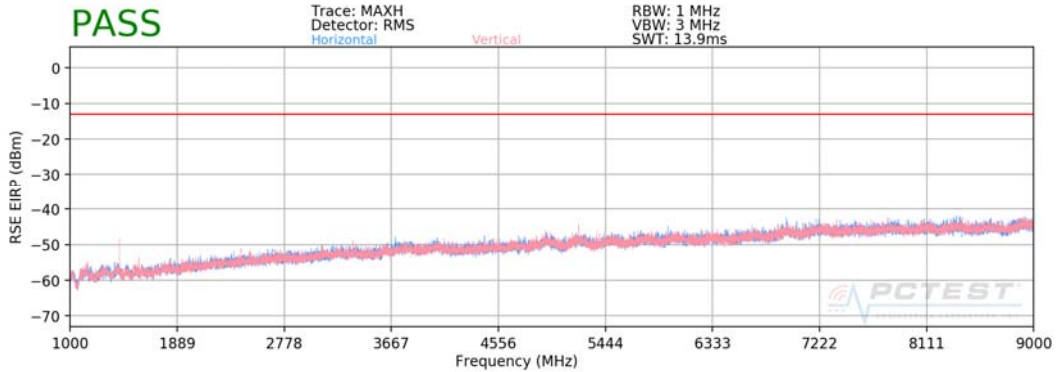

Plot 7-269. Radiated Spurious Plot above 1GHz (Band 5)

OPERATING FREQUENCY: 829.00 MHz
 CHANNEL: 20450
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1658.00	V	-	-	-73.41	9.36	-64.06	-51.1
2487.00	V	150	278	-65.51	8.58	-56.93	-43.9
3316.00	V	-	-	-68.87	8.41	-60.46	-47.5

Table 7-18. Radiated Spurious Data (Band 5 – Low Channel)

FCC ID: ZNFQ610TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 172 of 195

OPERATING FREQUENCY: 836.50 MHz
 CHANNEL: 20525
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1673.00	V	-	-	-72.58	9.45	-63.13	-50.1
2509.50	V	150	63	-60.37	8.50	-51.87	-38.9
3346.00	V	-	-	-68.38	8.71	-59.67	-46.7

Table 7-19. Radiated Spurious Data (Band 5 – Mid Channel)


OPERATING FREQUENCY: 844.00 MHz
 CHANNEL: 20600
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1688.00	V	150	71	-74.21	9.54	-64.67	-51.7
2532.00	V	150	73	-60.05	8.45	-51.60	-38.6
3376.00	V	-	-	-68.71	8.92	-59.79	-46.8

Table 7-20. Radiated Spurious Data (Band 5 – High Channel)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 173 of 195	

Band 66/4

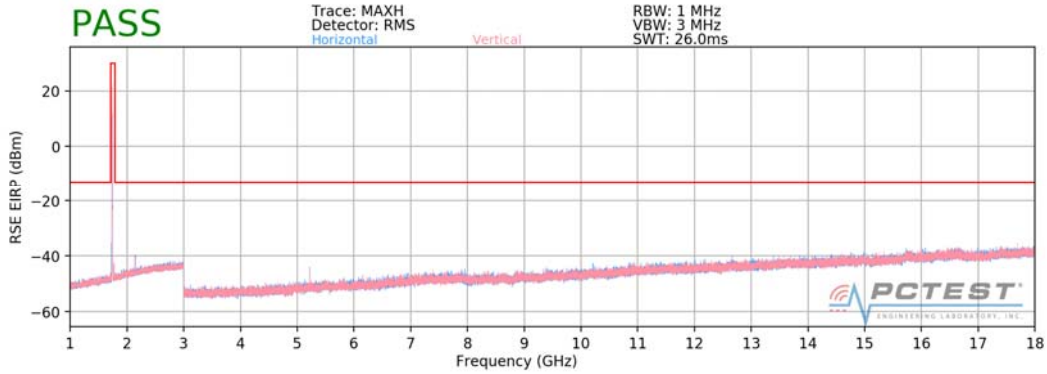

Plot 7-270. Radiated Spurious Plot above 1GHz (Band 66/4)

OPERATING FREQUENCY: 1711.50 MHz
 CHANNEL: 131987
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3423.00	V	150	30	-66.87	9.21	-57.67	-44.7
5134.50	V	150	287	-69.45	11.99	-57.47	-44.5
6846.00	V	-	-	-65.92	10.48	-55.45	-42.4

Table 7-21. Radiated Spurious Data (Band 66/4 – Low Channel)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 174 of 195

OPERATING FREQUENCY: 1745.00 MHz
 CHANNEL: 132322
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3490.00	V	150	178	-67.92	9.17	-58.75	-45.7
5235.00	V	150	51	-69.97	12.49	-57.48	-44.5
6980.00	V	-	-	-65.77	10.26	-55.51	-42.5

Table 7-22. Radiated Spurious Data (Band 66/4 – Mid Channel)


OPERATING FREQUENCY: 1778.50 MHz
 CHANNEL: 132657
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 3.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3557.00	V	150	13	-66.19	8.75	-57.44	-44.4
5335.50	V	150	41	-70.17	12.57	-57.60	-44.6
7114.00	V	-	-	-64.15	10.17	-53.97	-41.0

Table 7-23. Radiated Spurious Data (Band 66/4 – High Channel)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 175 of 195

Band 2

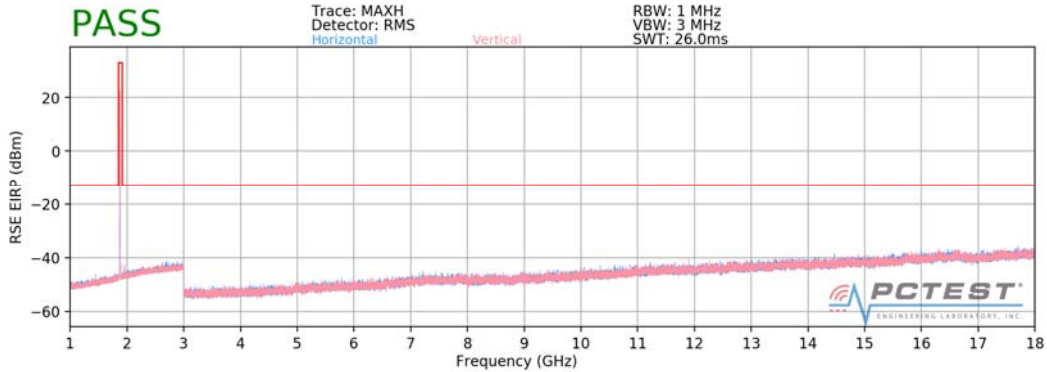

Plot 7-271. Radiated Spurious Plot above 1GHz (Band 2)

OPERATING FREQUENCY: 1852.50 MHz
 CHANNEL: 18625
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3705.00	V	275	73	-68.70	8.95	-59.75	-46.8
5557.50	V	111	17	-65.96	12.71	-53.25	-40.3
7410.00	V	-	-	-67.84	10.25	-57.59	-44.6

Table 7-24. Radiated Spurious Data (Band 2 – Low Channel)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 176 of 195

OPERATING FREQUENCY: 1880.00 MHz
 CHANNEL: 18900
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3760.00	V	294	67	-61.86	9.36	-52.50	-39.5
5640.00	V	107	272	-64.88	12.96	-51.92	-38.9
7520.00	V	-	-	-68.54	10.63	-57.91	-44.9

Table 7-25. Radiated Spurious Data (Band 2 – Mid Channel)


OPERATING FREQUENCY: 1907.50 MHz
 CHANNEL: 19175
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3815.00	V	169	64	-66.32	9.50	-56.83	-43.8
5722.50	V	102	286	-68.52	12.97	-55.55	-42.6
7630.00	V	-	-	-68.71	10.67	-58.04	-45.0

Table 7-26. Radiated Spurious Data (Band 2 – High Channel)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 177 of 195	

Band 41

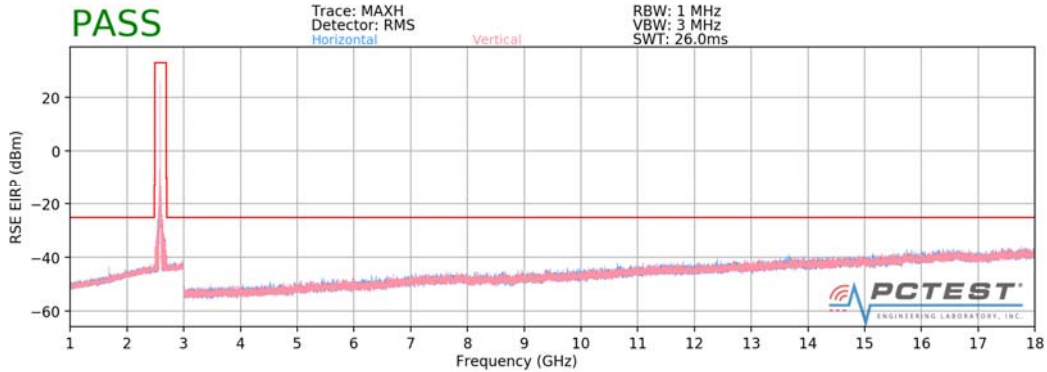

Plot 7-272. Radiated Spurious Plot 1GHz - 18GHz (Band 41)

OPERATING FREQUENCY: 2502.50 MHz
 CHANNEL: 39715
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5005.00	V	106	341	-69.29	10.09	-59.20	-34.2
7507.50	V	111	235	-64.35	12.10	-52.25	-27.3
10010.00	V	183	31	-61.99	13.19	-48.81	-23.8
12512.50	V	294	333	-63.05	13.23	-49.82	-24.8
15015.00	V	233	358	-57.80	14.08	-43.71	-18.7
17517.50	V	-	-	-60.41	14.02	-46.39	-21.4

Table 7-27. Radiated Spurious Data (Band 41 – Low Channel)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 178 of 195

OPERATING FREQUENCY: 2593.00 MHz
 CHANNEL: 40620
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5186.00	V	321	28	-69.91	10.27	-59.65	-34.6
7779.00	V	330	182	-63.08	12.28	-50.79	-25.8
10372.00	V	-	-	-65.14	13.12	-52.02	-27.0

Table 7-28. Radiated Spurious Data (Band 41 – Mid Channel)

OPERATING FREQUENCY: 2687.50 MHz
 CHANNEL: 41565
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -25 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5375.00	V	-	-	-70.10	10.43	-59.68	-34.7
8062.50	V	132	137	-67.60	12.63	-54.97	-30.0
10750.00	V	400	14	-63.77	13.12	-50.65	-25.6
13437.50	V	289	8	-61.27	14.00	-47.27	-22.3
16125.00	V	-	-	-66.07	13.62	-52.45	-27.4

Table 7-29. Radiated Spurious Data (Band 41 – High Channel)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 179 of 195	

7.8 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 22, the frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency. For Part 24, Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 180 of 195	

Band 71 Frequency Stability Measurements

OPERATING FREQUENCY: 680,500,000 Hz
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	680,499,900	-100	-0.0000147
100 %		- 30	680,500,138	138	0.0000203
100 %		- 20	680,500,155	155	0.0000228
100 %		- 10	680,500,035	35	0.0000051
100 %		0	680,499,848	-152	-0.0000223
100 %		+ 10	680,499,961	-39	-0.0000057
100 %		+ 20	680,499,984	-16	-0.0000024
100 %		+ 30	680,500,163	163	0.0000240
100 %		+ 40	680,499,935	-65	-0.0000096
100 %		+ 50	680,500,268	268	0.0000394
BATT. ENDPOINT		3.10	+ 20	680,499,888	-112

Table 7-30. Frequency Stability Data (Band 71)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFQ610TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 181 of 195

Band 71 Frequency Stability Measurements

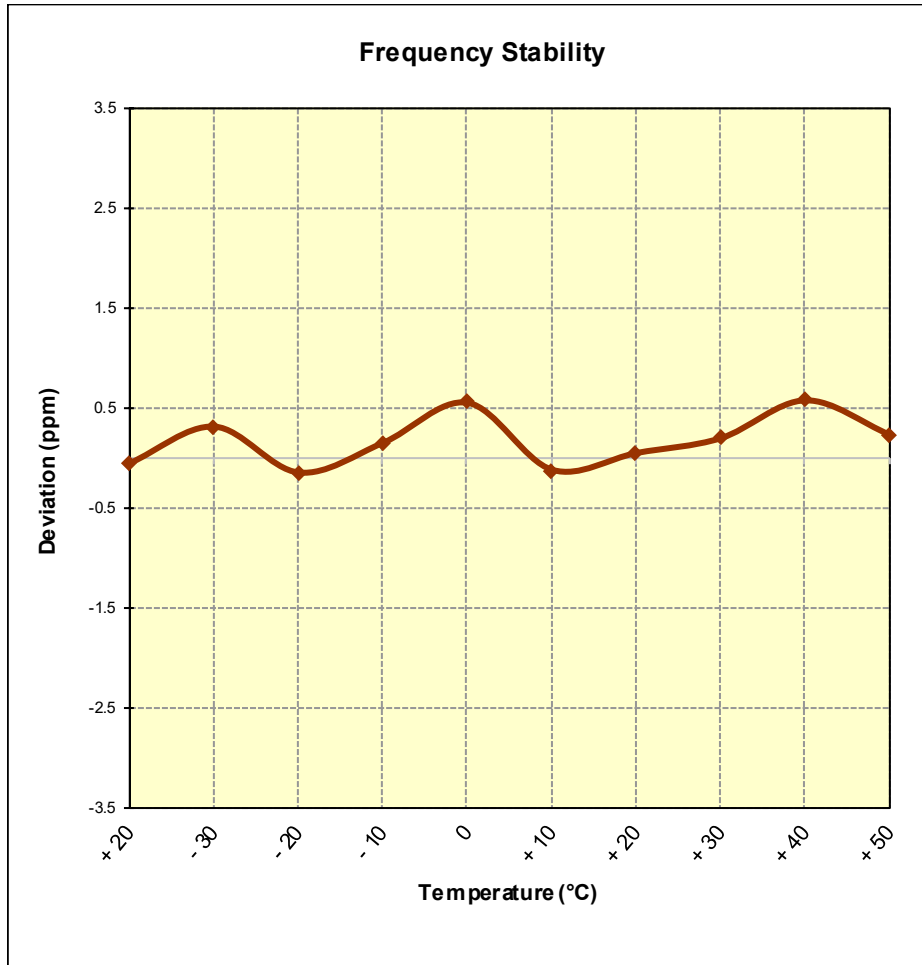


Figure 7-8. Frequency Stability Graph (Band 71)

FCC ID: ZNFQ610TA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 182 of 195

Band 12 Frequency Stability Measurements

OPERATING FREQUENCY: 707,500,000 Hz
 CHANNEL: 23790
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	707,499,958	-42	-0.0000059
100 %		- 30	707,500,220	220	0.0000311
100 %		- 20	707,499,890	-110	-0.0000155
100 %		- 10	707,500,104	104	0.0000147
100 %		0	707,500,392	392	0.0000554
100 %		+ 10	707,499,910	-90	-0.0000127
100 %		+ 20	707,500,031	31	0.0000044
100 %		+ 30	707,500,138	138	0.0000195
100 %		+ 40	707,500,409	409	0.0000578
100 %		+ 50	707,500,162	162	0.0000229
BATT. ENDPOINT	3.10	+ 20	707,499,843	-157	-0.0000222

Table 7-31. Frequency Stability Data (Band 12)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFQ610TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 183 of 195

Band 12 Frequency Stability Measurements

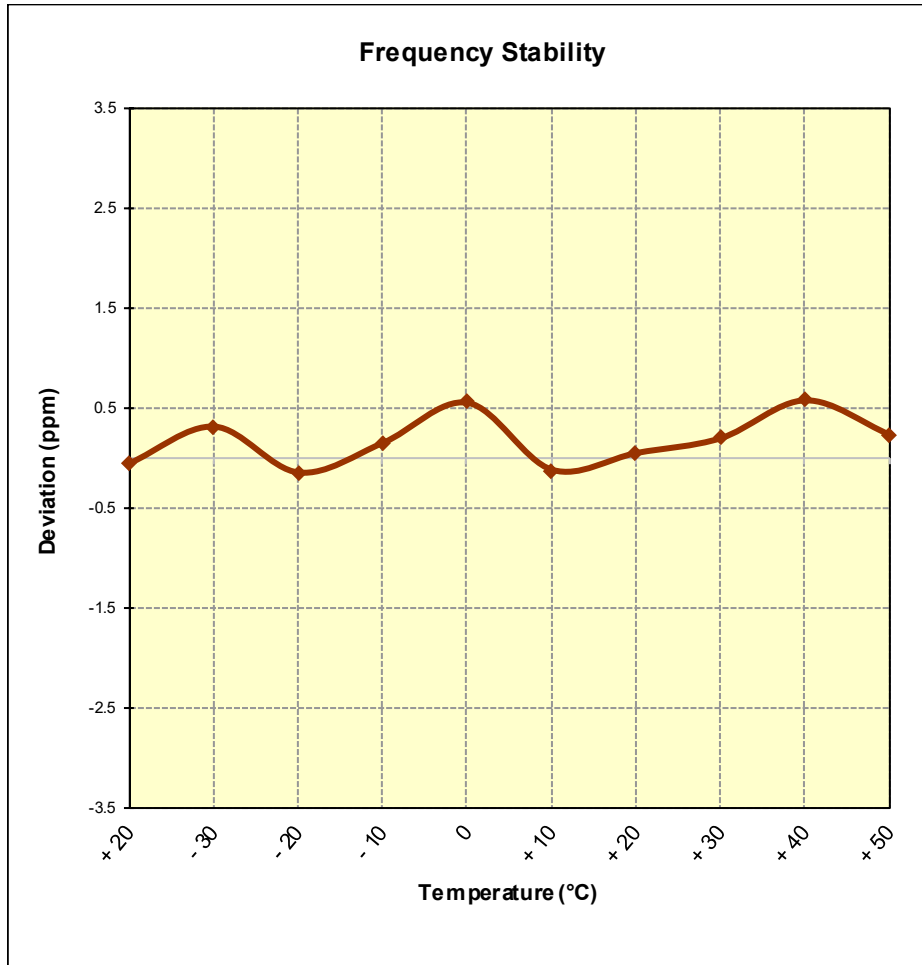


Figure 7-9. Frequency Stability Graph (Band 12)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 184 of 195

Band 13 Frequency Stability Measurements

OPERATING FREQUENCY: 782,000,000 Hz
 CHANNEL: 23230
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	781,999,705	-295	-0.0000377
100 %		- 30	781,999,936	-64	-0.0000082
100 %		- 20	782,000,175	175	0.0000224
100 %		- 10	781,999,953	-47	-0.0000060
100 %		0	782,000,093	93	0.0000119
100 %		+ 10	782,000,082	82	0.0000105
100 %		+ 20	781,999,881	-119	-0.0000152
100 %		+ 30	781,999,765	-235	-0.0000301
100 %		+ 40	781,999,860	-140	-0.0000179
100 %		+ 50	781,999,871	-129	-0.0000165
BATT. ENDPOINT	3.10	+ 20	781,999,773	-227	-0.0000290

Table 7-32. Frequency Stability Data (Band 13)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 185 of 195	

Band 13 Frequency Stability Measurements

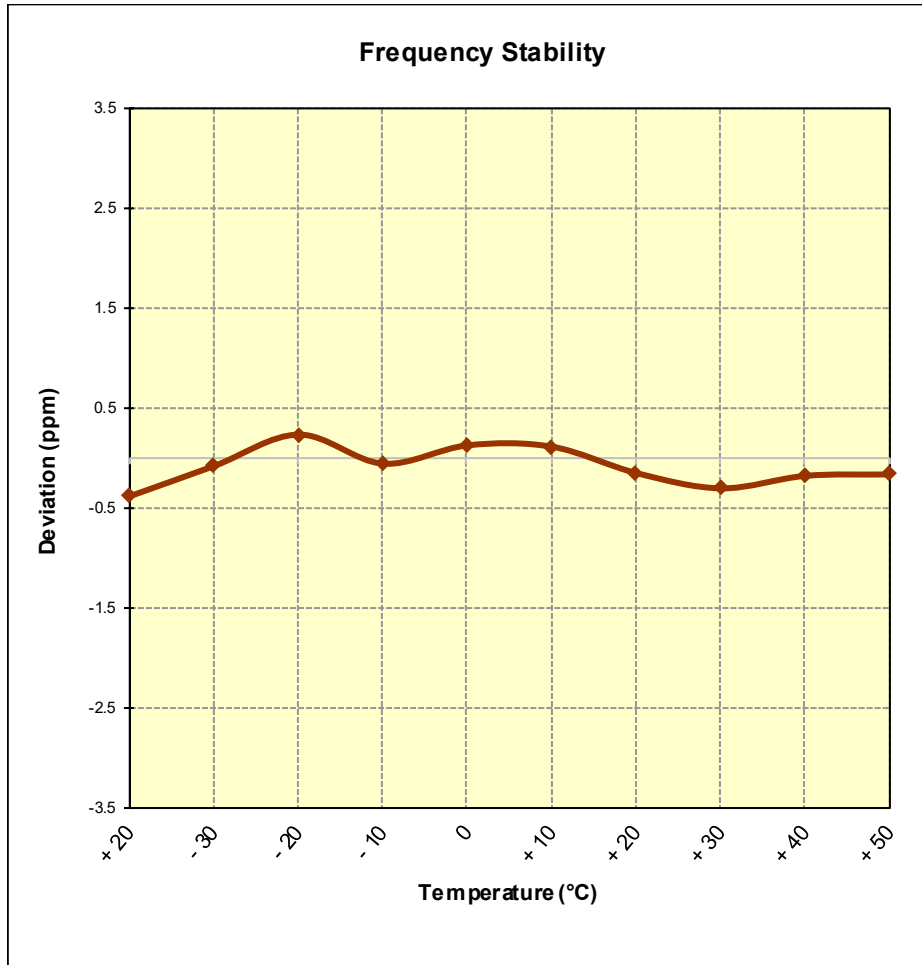


Figure 7-10. Frequency Stability Graph (Band 13)

FCC ID: ZNFQ610TA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 186 of 195

Band 5 Frequency Stability Measurements

OPERATING FREQUENCY: 836,500,000 Hz
 CHANNEL: 20525
 REFERENCE VOLTAGE: 3.80 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	836,499,849	-151	-0.0000181
100 %		- 30	836,500,000	0	0.0000000
100 %		- 20	836,499,967	-33	-0.0000039
100 %		- 10	836,500,138	138	0.0000165
100 %		0	836,500,079	79	0.0000094
100 %		+ 10	836,499,780	-220	-0.0000263
100 %		+ 20	836,499,802	-198	-0.0000237
100 %		+ 30	836,500,211	211	0.0000252
100 %		+ 40	836,499,584	-416	-0.0000497
100 %		+ 50	836,499,921	-79	-0.0000094
BATT. ENDPOINT	3.10	+ 20	836,499,643	-357	-0.0000427

Table 7-33. Frequency Stability Data (Band 5)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 187 of 195	

Band 5 Frequency Stability Measurements

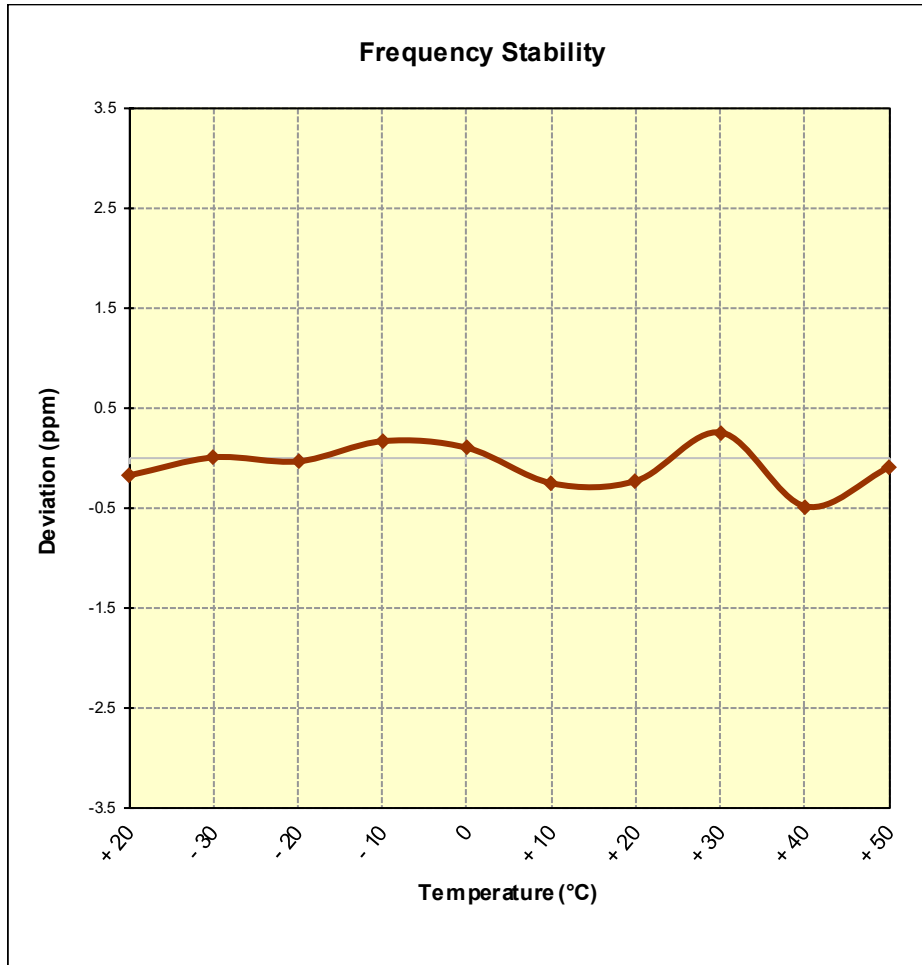


Figure 7-11. Frequency Stability Graph (Band 5)

FCC ID: ZNFQ610TA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 188 of 195

Band 66/4 Frequency Stability Measurements

OPERATING FREQUENCY: 1,745,000,000 Hz
 CHANNEL: 132322
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,744,999,888	-112	-0.0000064
100 %		- 30	1,744,999,849	-151	-0.0000087
100 %		- 20	1,745,000,114	114	0.0000065
100 %		- 10	1,745,000,102	102	0.0000058
100 %		0	1,745,000,032	32	0.0000018
100 %		+ 10	1,744,999,878	-122	-0.0000070
100 %		+ 20	1,745,000,122	122	0.0000070
100 %		+ 30	1,745,000,218	218	0.0000125
100 %		+ 40	1,744,999,948	-52	-0.0000030
100 %		+ 50	1,744,999,619	-381	-0.0000218
BATT. ENDPOINT	3.10	+ 20	1,745,000,129	129	0.0000074

Table 7-34. Frequency Stability Data (Band 66/4)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFQ610TA			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset			Page 189 of 195

Band 66/4 Frequency Stability Measurements

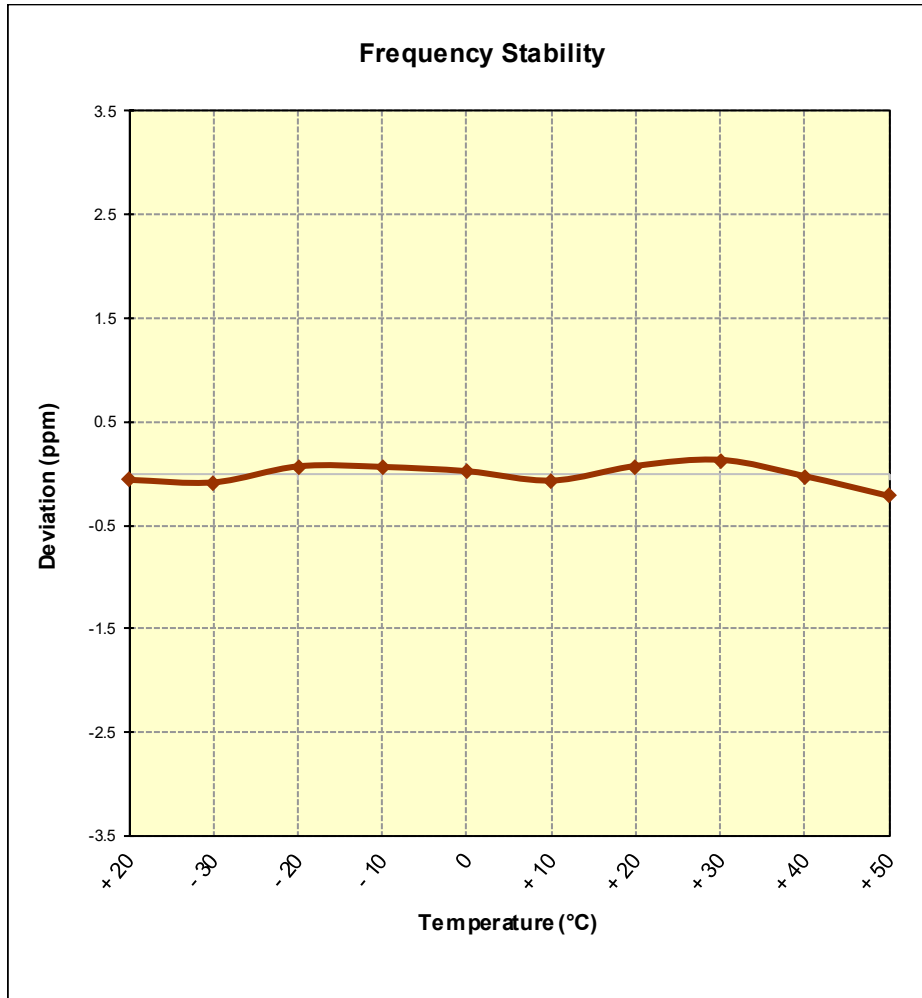


Figure 7-12. Frequency Stability Graph (Band 66/4)

FCC ID: ZNFQ610TA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 190 of 195

Band 2 Frequency Stability Measurements

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 18900
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	1,879,999,663	-337	-0.0000179
100 %		- 30	1,880,000,142	142	0.0000076
100 %		- 20	1,880,000,142	142	0.0000076
100 %		- 10	1,879,999,949	-51	-0.0000027
100 %		0	1,880,000,217	217	0.0000115
100 %		+ 10	1,879,999,807	-193	-0.0000103
100 %		+ 20	1,880,000,127	127	0.0000068
100 %		+ 30	1,879,999,703	-297	-0.0000158
100 %		+ 40	1,880,000,088	88	0.0000047
100 %		+ 50	1,879,999,932	-68	-0.0000036
BATT. ENDPOINT		3.10	+ 20	1,880,000,252	252

Table 7-35. Frequency Stability Data (Band 2)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFQ610TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 191 of 195

Band 2 Frequency Stability Measurements

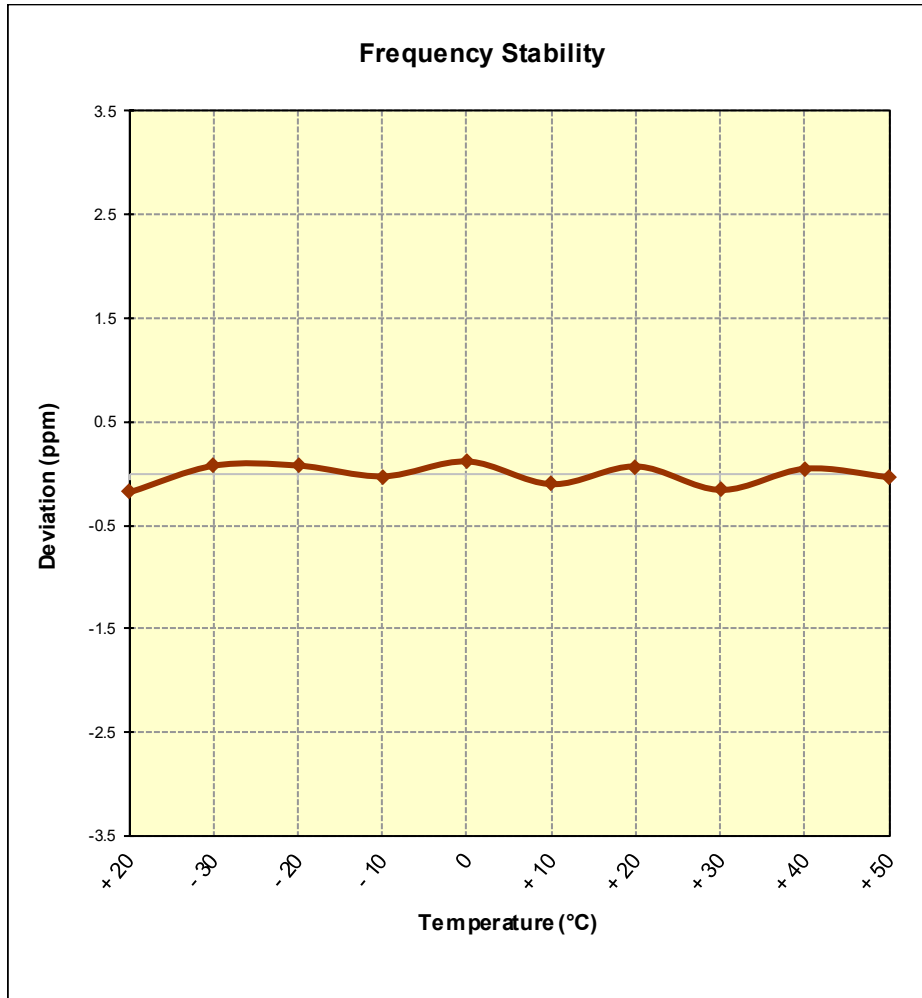


Figure 7-13. Frequency Stability Graph (Band 2)

FCC ID: ZNFQ610TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 192 of 195

Band 41 Frequency Stability Measurements

OPERATING FREQUENCY: 2,593,000,000 Hz
 CHANNEL: 40620
 REFERENCE VOLTAGE: 3.80 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	2,593,000,085	85	0.0000033
100 %		- 30	2,592,999,946	-54	-0.0000021
100 %		- 20	2,592,999,998	-2	-0.0000001
100 %		- 10	2,593,000,052	52	0.0000020
100 %		0	2,592,999,850	-150	-0.0000058
100 %		+ 10	2,593,000,291	291	0.0000112
100 %		+ 20	2,593,000,058	58	0.0000022
100 %		+ 30	2,592,999,955	-45	-0.0000017
100 %		+ 40	2,593,000,247	247	0.0000095
100 %		+ 50	2,592,999,862	-138	-0.0000053
BATT. ENDPOINT	3.10	+ 20	2,592,999,884	-116	-0.0000045

Table 7-36. Frequency Stability Data (Band 41)

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFQ610TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 193 of 195

Band 41 Frequency Stability Measurements

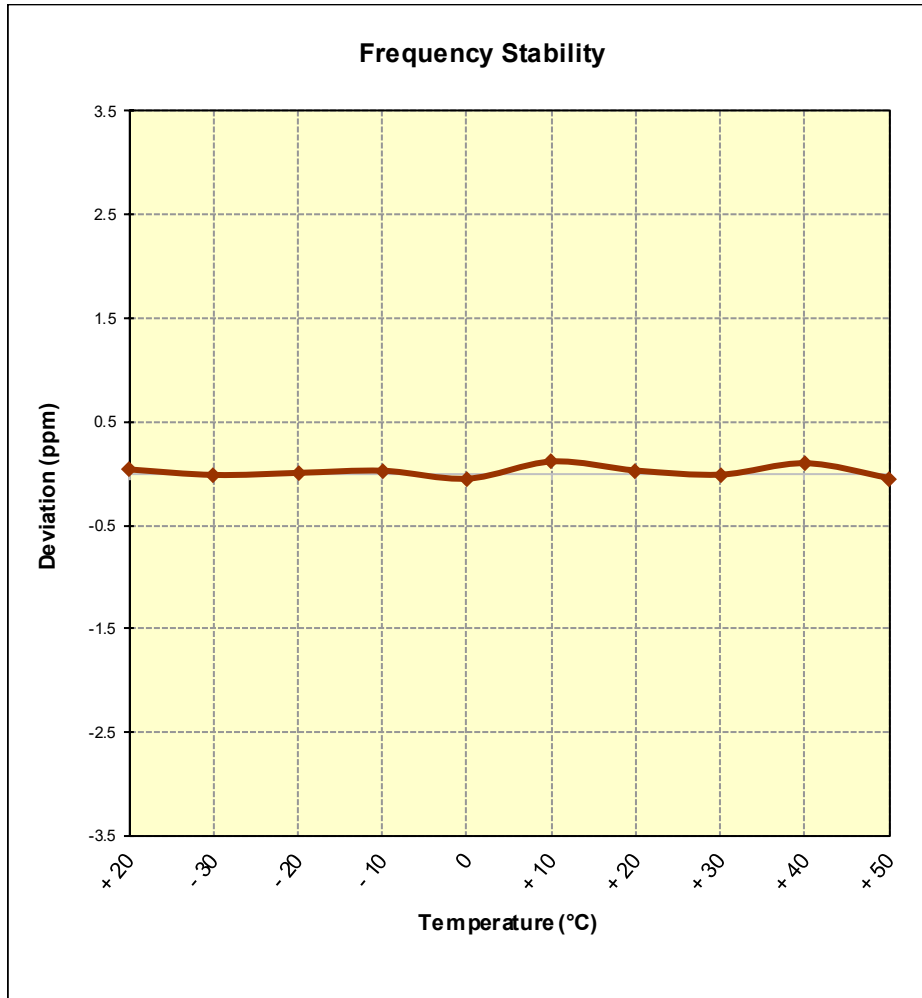


Figure 7-14. Frequency Stability Graph (Band 41)

FCC ID: ZNFQ610TA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1-ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset		Page 194 of 195

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFQ610TA** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules for LTE operation only.

FCC ID: ZNFQ610TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1805210108-03-R1.ZNF	Test Dates: 4/20/2018-6/15/2018	EUT Type: Portable Handset	Page 195 of 195