

MEASUREMENT REPORT
UNII 802.11a/n/ac

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
April 12 - June 19, 2018
Test Site/Location:
PCTEST Lab. Columbia, MD
Test Report Serial No.:
1M1804120069-06-R1.ZNF


| | |
|-------------------|--|
| FCC ID: | ZNFQ710WA |
| IC: | 2703C-Q710WA |
| APPLICANT: | LG Electronics MobileComm U.S.A |

Application Type: Certification
Model: LM-Q710WA
Additional Models: LMQ710WA, Q710WA
HVIN: LM-Q710WA, LMQ710WA, Q710WA
EUT Type: Portable Handset
Frequency Range: 5180 – 5825MHz
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Parts: Part 15 Subpart E (15.407)
ISED Specification: RSS-247 Issue 2
Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02 v02r01

This revised Test Report (S/N:1M1804120069-06-R1.ZNF) supersedes and replaces the previously issued test report (S/N: 1M1804120069-06.ZNF) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




| | | | |
|---|--|---|--|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 1 of 91 |

TABLE OF CONTENTS

| | | |
|-------|--|----|
| 1.0 | INTRODUCTION..... | 4 |
| 1.1 | Scope..... | 4 |
| 1.2 | PCTEST Test Location..... | 4 |
| 1.3 | Test Facility / Accreditations..... | 4 |
| 2.0 | PRODUCT INFORMATION..... | 5 |
| 2.1 | Equipment Description..... | 5 |
| 2.2 | Device Capabilities..... | 5 |
| 2.3 | Test Configuration..... | 6 |
| 2.4 | EMI Suppression Device(s)/Modifications..... | 6 |
| 3.0 | DESCRIPTION OF TESTS..... | 7 |
| 3.1 | Evaluation Procedure..... | 7 |
| 3.2 | AC Line Conducted Emissions..... | 7 |
| 3.3 | Radiated Emissions..... | 8 |
| 3.4 | Environmental Conditions..... | 8 |
| 4.0 | ANTENNA REQUIREMENTS..... | 9 |
| 5.0 | MEASUREMENT UNCERTAINTY..... | 10 |
| 6.0 | TEST EQUIPMENT CALIBRATION DATA..... | 11 |
| 7.0 | TEST RESULTS..... | 12 |
| 7.1 | Summary..... | 12 |
| 7.2 | 26dB Bandwidth Measurement – 802.11a/n/ac..... | 13 |
| 7.3 | 6dB Bandwidth Measurement – 802.11a/n/ac..... | 30 |
| 7.4 | UNII Output Power Measurement – 802.11a/n/ac..... | 36 |
| 7.5 | Maximum Power Spectral Density – 802.11a/n/ac..... | 38 |
| 7.6 | Radiated Spurious Emission Measurements – Above 1GHz..... | 60 |
| 7.6.1 | Radiated Spurious Emission Measurements..... | 63 |
| 7.6.2 | Radiated Band Edge Measurements (20MHz BW)..... | 72 |
| 7.6.3 | Radiated Band Edge Measurements (40MHz BW)..... | 75 |
| 7.6.4 | Radiated Band Edge Measurements (80MHz BW)..... | 78 |
| 7.7 | Radiated Spurious Emissions Measurements – Below 1GHz..... | 81 |
| 7.8 | Line-Conducted Test Data..... | 85 |
| 8.0 | CONCLUSION..... | 91 |

| | | | |
|---|--|---|--|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 2 of 91 |



MEASUREMENT REPORT



| UNII Band | Channel Bandwidth (MHz) | Tx Frequency (MHz) | Conducted Power | |
|-----------|-------------------------|--------------------|-----------------|------------------|
| | | | Max. Power (mW) | Max. Power (dBm) |
| 1 | 20 | 5180 - 5240 | 86.896 | 19.39 |
| 2A | | 5260 - 5320 | 83.176 | 19.20 |
| 2C | | 5500 - 5700 | 93.111 | 19.69 |
| 3 | | 5745 - 5825 | 82.224 | 19.15 |
| 1 | 40 | 5190 - 5230 | 25.177 | 14.01 |
| 2A | | 5270 - 5310 | 26.424 | 14.22 |
| 2C | | 5510 - 5670 | 29.923 | 14.76 |
| 3 | | 5755 - 5795 | 28.445 | 14.54 |
| 1 | 80 | 5210 | 11.041 | 10.43 |
| 2A | | 5290 | 13.152 | 11.19 |
| 2C | | 5530 - 5610 | 11.482 | 10.60 |
| 3 | | 5775 | 19.055 | 12.80 |

EUT Overview

| | | | |
|--|---|-------------------------------|---------------------------------|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 3 of 91 |

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

| | | | | |
|---|---|--------------------------------------|---|--|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 4 of 91 | |

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFQ710WA**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 00131, 00123, 00107, 00131, 00149

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

| Band 1 | | Band 2A | | Band 2C | | Band 3 | |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
| 36 | 5180 | 52 | 5260 | 100 | 5500 | 149 | 5745 |
| : | : | : | : | : | : | : | : |
| 42 | 5210 | 56 | 5280 | 120 | 5580 | 157 | 5785 |
| : | : | : | : | : | : | : | : |
| 48 | 5240 | 64 | 5320 | 140 | 5700 | 165 | 5825 |

Table 2-1. 802.11a / 802.11n / 802.11ac (20MHz) Frequency / Channel Operations

| Band 1 | | Band 2A | | Band 2C | | Band 3 | |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
| 38 | 5190 | 54 | 5270 | 102 | 5510 | 151 | 5755 |
| : | : | : | : | : | : | : | : |
| 46 | 5230 | 62 | 5310 | 110 | 5550 | 159 | 5795 |
| | | | | : | : | | |
| | | | | 134 | 5670 | | |

Table 2-2. 802.11n / 802.11ac (40MHz BW) Frequency / Channel Operations

| Band 1 | | Band 2A | | Band 2C | | Band 3 | |
|--------|-----------------|---------|-----------------|---------|-----------------|--------|-----------------|
| Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) | Ch. | Frequency (MHz) |
| 42 | 5210 | 58 | 5290 | 106 | 5530 | 155 | 5775 |
| | | | | : | : | | |
| | | | | 122 | 5610 | | |

Table 2-3. 802.11ac (80MHz BW) Frequency / Channel Operations

| | | | | | |
|--|---|---------------------------------------|--|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 5 of 91 | |

Notes:

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

| Maximum Achievable Duty Cycles | | |
|--------------------------------|-----------|----------------|
| 802.11 Mode/Band | | Duty Cycle [%] |
| | | ANT1 |
| 5GHz | a | 99.2 |
| | n (HT20) | 99.2 |
| | ac (HT20) | 98.3 |
| | n (HT40) | 98.6 |
| | ac (HT40) | 96.4 |
| | ac (HT80) | 92.9 |

Table 2-4. Measured Duty Cycles

Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
 6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
 13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
 29.3/32.5, 58.5/65, 87.8/97.5, 117/130, 175.5/195, 234/260, 263.3/292.5, 292.5/325, 351/390, 390/433.3 (ac – 80MHz BW)

2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, and 7.2, 7.3, 7.4, and 7.5 for antenna port conducted emissions test setups.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 6 of 91 | |

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielded enclosure is manufactured by AP Americas. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst-case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.8. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

| | | | | |
|--|---|-------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 7 of 91 | |

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3-meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4-meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1-meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5-meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst-case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

| | | | |
|--|---|-------------------------------|---------------------------------|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 8 of 91 |

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

| | | | | |
|---|---|---|---|--|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 9 of 91 | |

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution | Expanded Uncertainty (\pm dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13 |
| Line Conducted Disturbance | 3.09 |
| Radiated Disturbance (<1GHz) | 4.98 |
| Radiated Disturbance (>1GHz) | 5.07 |
| Radiated Disturbance (>18GHz) | 5.09 |

| | | | | |
|---|--|---|---|--|
| FCC ID: ZNFQ710WA |  <small>ENGINEERING LABORATORY, INC.</small> | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 10 of 91 | |

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
|-------------------|------------------|--------------------------------------|------------|--------------|------------|---------------|
| - | WL25-1 | Conducted Cable Set (25GHz) | 6/14/2017 | Annual | 6/14/2018 | WL25-1 |
| Agilent | N9020A | MXA Signal Analyzer | 1/24/2018 | Annual | 1/24/2019 | US46470561 |
| Agilent | N9038A | MXE EMI Receiver | 4/26/2017 | Annual | 4/26/2018 | MY51210133 |
| Anritsu | MA2411B | Pulse Power Sensor | 10/22/2017 | Annual | 10/22/2018 | 846215 |
| Anritsu | ML2495A | Power Meter | 10/22/2017 | Annual | 10/22/2018 | 941001 |
| COM-Power | AL-130R | Active Loop Antenna | 6/5/2017 | Annual | 6/5/2018 | 121085 |
| Emco | 3115 | Horn Antenna (1-18GHz) | 3/28/2018 | Biennial | 3/28/2020 | 9704-5182 |
| EMCO | 3160-09 | Small Horn (18 - 26.5GHz) | 8/23/2016 | Biennial | 8/23/2018 | 135427 |
| EMCO | 3160-10 | Small Horn (26.5 - 40GHz) | 8/23/2016 | Biennial | 8/23/2018 | 130993 |
| ETS Lindgren | 3117 | 1-18 GHz DRG Horn (Medium) | 12/1/2016 | Biennial | 12/1/2018 | 125518 |
| ETS-Lindgren | 3164-05 | Quad Ridge Horn (Small) 2 - 18GHz | 5/31/2016 | Biennial | 5/31/2018 | 208255 |
| Huber+Suhner | Sucoflex 102A | 40GHz Radiated Cable | 5/19/2017 | Annual | 5/19/2018 | 251425001 |
| Pasternack | NMLC-1 | Line Conducted Emissions Cable (NM) | 5/31/2017 | Annual | 5/31/2018 | NMLC-1 |
| Rohde & Schwarz | ESU40 | EMI Test Receiver (40GHz) | 7/31/2017 | Annual | 7/31/2018 | 100348 |
| Rohde & Schwarz | FSW67 | Signal / Spectrum Analyzer | 8/11/2017 | Annual | 8/11/2018 | 103200 |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit | 7/3/2017 | Annual | 7/3/2018 | 102134 |
| Rohde & Schwarz | SFUNIT-Rx | Shielded Filter Unit | 7/3/2017 | Annual | 7/3/2018 | 102133 |
| Rohde & Schwarz | TS-PR26 | 18-26.5 GHz Pre-Amplifier | 5/11/2017 | Annual | 5/11/2018 | 100040 |
| Rohde & Schwarz | TS-PR40 | 26.5-40 GHz Pre-Amplifier | 5/11/2017 | Annual | 5/11/2018 | 100037 |
| Solar Electronics | 8012-50-R-24-BNC | Line Impedance Stabilization Network | 8/14/2017 | Biennial | 8/14/2019 | 310233 |
| Sunol | DRH-118 | Horn Antenna (1-18GHz) | 8/11/2017 | Biennial | 8/11/2019 | A050307 |
| Sunol Sciences | JB6 | JB6 Antenna | 9/27/2016 | Biennial | 9/27/2018 | A082816 |

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

| | | | | |
|--|---|-------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 11 of 91 | |

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFQ710WA
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

| FCC Part Section(s) | RSS Section(s) | Test Description | Test Limit | Test Condition | Test Result | Reference |
|------------------------------------|----------------|---|--|----------------|-------------|---------------------|
| N/A | RSS-Gen [6.6] | 26dB Bandwidth | N/A | CONDUCTED | PASS | Section 7.2 |
| 15.407(e) | RSS-Gen [6.6] | 6dB Bandwidth | >500kHz(5725-5850MHz) | | PASS | Section 7.3 |
| 15.407 (a.1.iv), (a.2), (a.3) | RSS-247 [6.2] | Maximum Conducted Output Power | Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2]) | | PASS | Section 7.4 |
| 15.407 (a.1.iv), (a.2), (a.3) | RSS-247 [6.2] | Maximum Power Spectral Density | Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2]) | | PASS | Section 7.5 |
| 15.407(h) | RSS-247 [6.3] | Dynamic Frequency Selection | See DFS Test Report | | PASS | See DFS Test Report |
| 15.407(b.1), (2), (3), (4) | RSS-247 [6.2] | Undesirable Emissions | Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2]) | RADIATED | PASS | Section 7.6 |
| 15.205, 15.407(b.1), (4), (5), (6) | RSS-Gen [8.9] | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9]) | | PASS | Section 7.6, 7.7 |
| 15.407 | RSS-Gen [8.8] | AC Conducted Emissions 150kHz – 30MHz | < FCC 15.207 (RSS-Gen [8.8]) limits | LINE CONDUCTED | PASS | Section 7.8 |

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “UNII Automation,” Version 4.6.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “Chamber Automation,” Version 0.2.8.

| | | | | |
|--|---|---|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 12 of 91 | |

7.2 26dB Bandwidth Measurement – 802.11a/n/ac

RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

| | | | |
|--|--|-------------------------------|---------------------------------|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 13 of 91 |


| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured 26dB Bandwidth [MHz] |
|---------|-----------------|-------------|------------------|------------------|-------------------------------|
| Band 1 | 5180 | 36 | a | 6 | 20.52 |
| | 5200 | 40 | a | 6 | 31.86 |
| | 5240 | 48 | a | 6 | 33.14 |
| | 5180 | 36 | n (20MHz) | 6.5/7.2 (MCS0) | 20.65 |
| | 5200 | 40 | n (20MHz) | 6.5/7.2 (MCS0) | 29.25 |
| | 5240 | 48 | n (20MHz) | 6.5/7.2 (MCS0) | 35.05 |
| | 5190 | 38 | n (40MHz) | 13.5/15 (MCS0) | 43.57 |
| | 5230 | 46 | n (40MHz) | 13.5/15 (MCS0) | 42.53 |
| Band 2A | 5210 | 42 | ac (80MHz) | 29.3/32.5 (MCS0) | 82.93 |
| | 5260 | 52 | a | 6 | 31.23 |
| | 5280 | 56 | a | 6 | 31.80 |
| | 5320 | 64 | a | 6 | 20.12 |
| | 5260 | 52 | n (20MHz) | 6.5/7.2 (MCS0) | 24.54 |
| | 5280 | 56 | n (20MHz) | 6.5/7.2 (MCS0) | 26.54 |
| | 5320 | 64 | n (20MHz) | 6.5/7.2 (MCS0) | 20.71 |
| | 5270 | 54 | n (40MHz) | 13.5/15 (MCS0) | 41.73 |
| Band 2C | 5310 | 62 | n (40MHz) | 13.5/15 (MCS0) | 42.75 |
| | 5290 | 58 | ac (80MHz) | 29.3/32.5 (MCS0) | 85.72 |
| | 5500 | 100 | a | 6 | 20.49 |
| | 5600 | 120 | a | 6 | 34.18 |
| | 5700 | 140 | a | 6 | 24.19 |
| | 5500 | 100 | n (20MHz) | 6.5/7.2 (MCS0) | 20.55 |
| | 5600 | 120 | n (20MHz) | 6.5/7.2 (MCS0) | 28.82 |
| | 5700 | 140 | n (20MHz) | 6.5/7.2 (MCS0) | 21.18 |
| | 5510 | 102 | n (40MHz) | 13.5/15 (MCS0) | 42.09 |
| | 5590 | 118 | n (40MHz) | 13.5/15 (MCS0) | 41.96 |
| | 5670 | 134 | n (40MHz) | 13.5/15 (MCS0) | 42.33 |
| 5530 | 106 | ac (80MHz) | 29.3/32.5 (MCS0) | 84.00 | |
| 5610 | 122 | ac (80MHz) | 29.3/32.5 (MCS0) | 82.38 | |

Table 7-2. Conducted Bandwidth Measurements

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 14 of 91 |

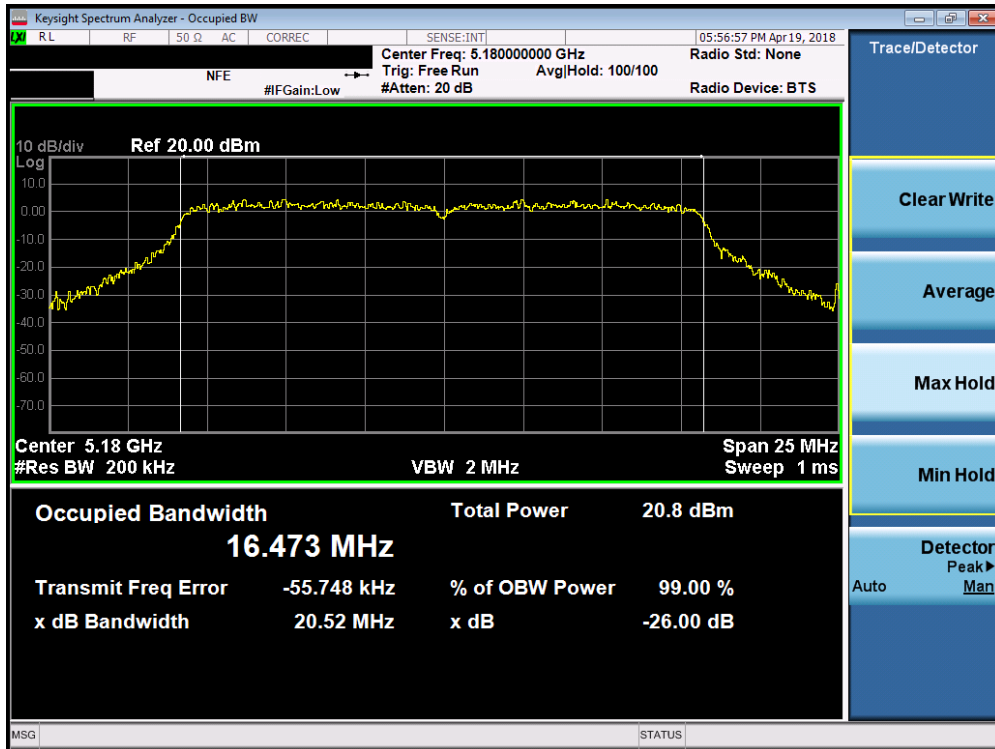


Plot 7-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

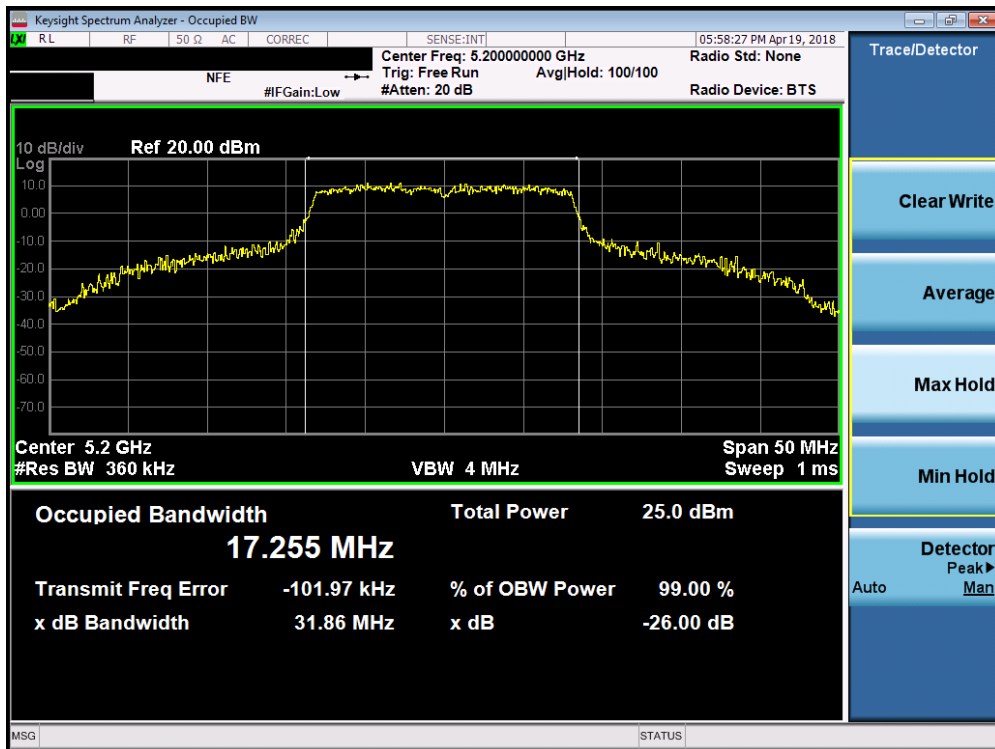


Plot 7-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 15 of 91 |

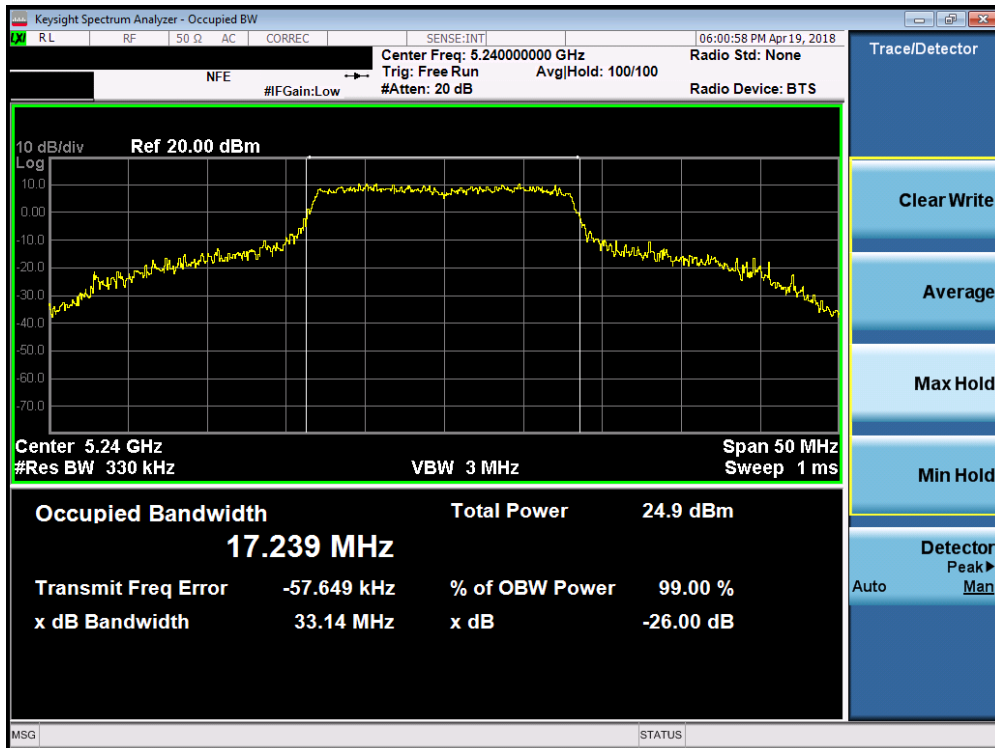


Plot 7-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

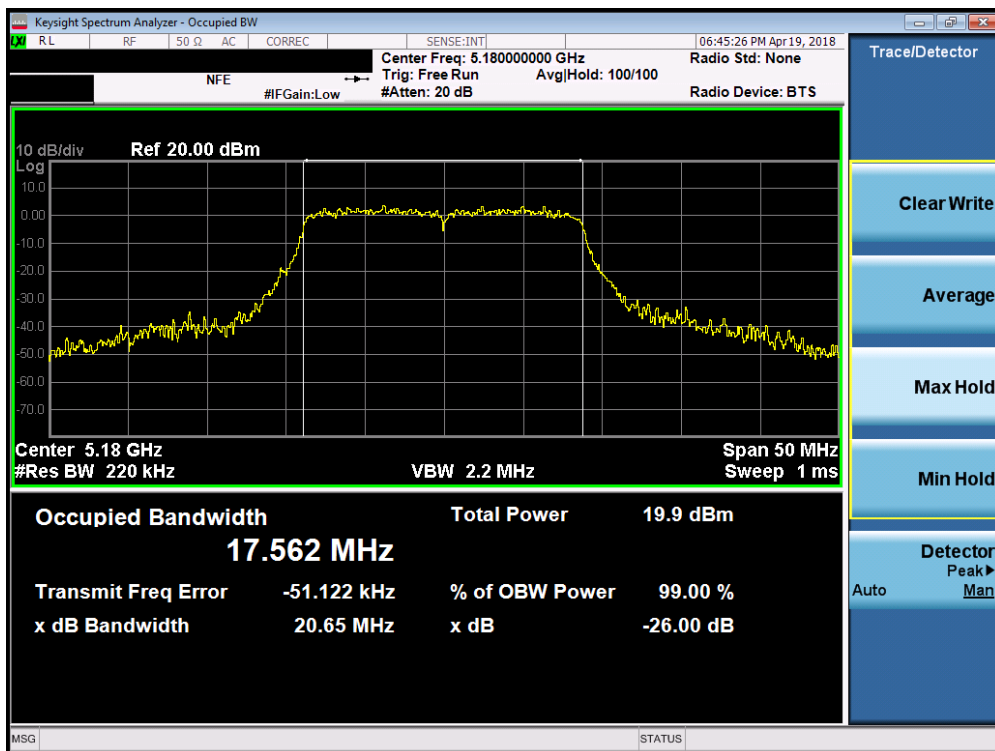


Plot 7-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 16 of 91 |

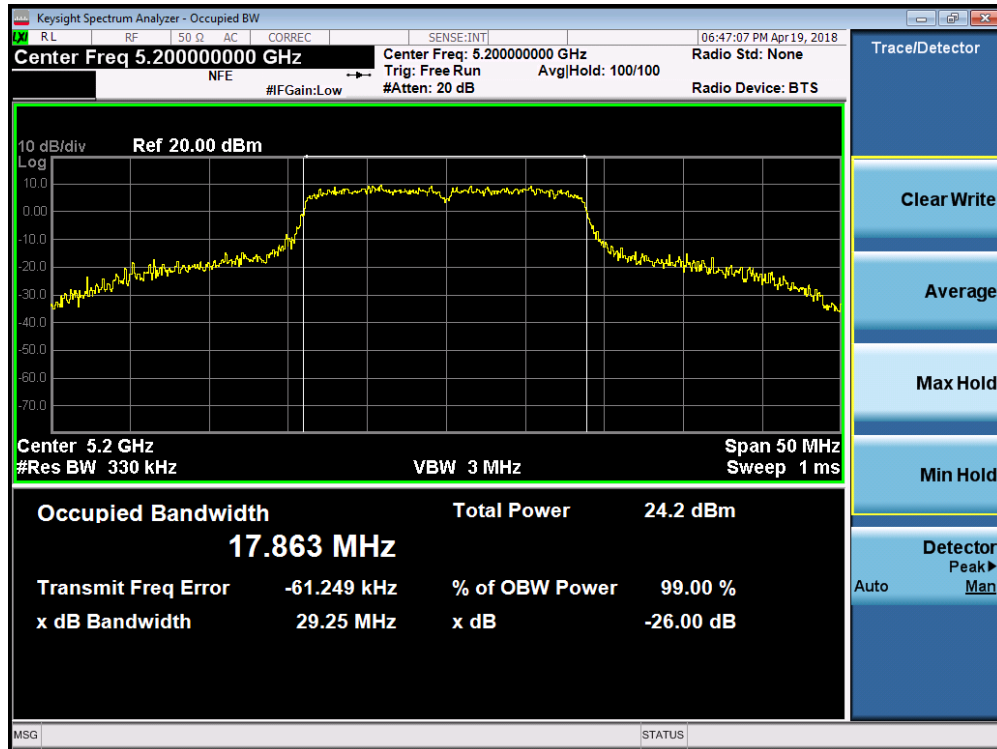


Plot 7-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

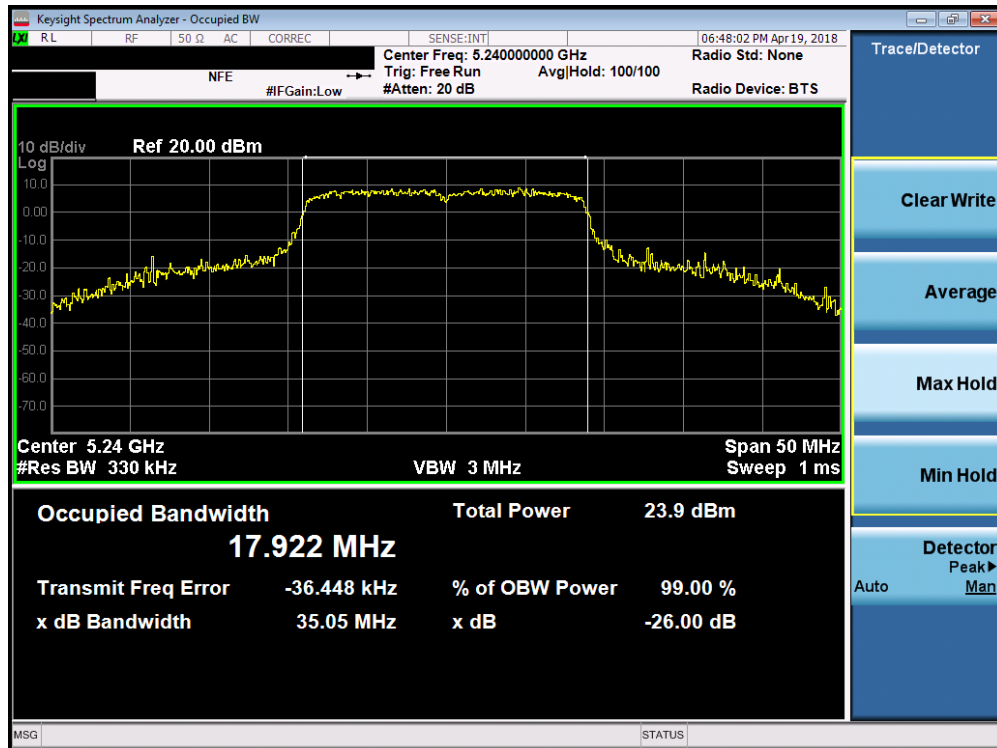


Plot 7-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 17 of 91 |

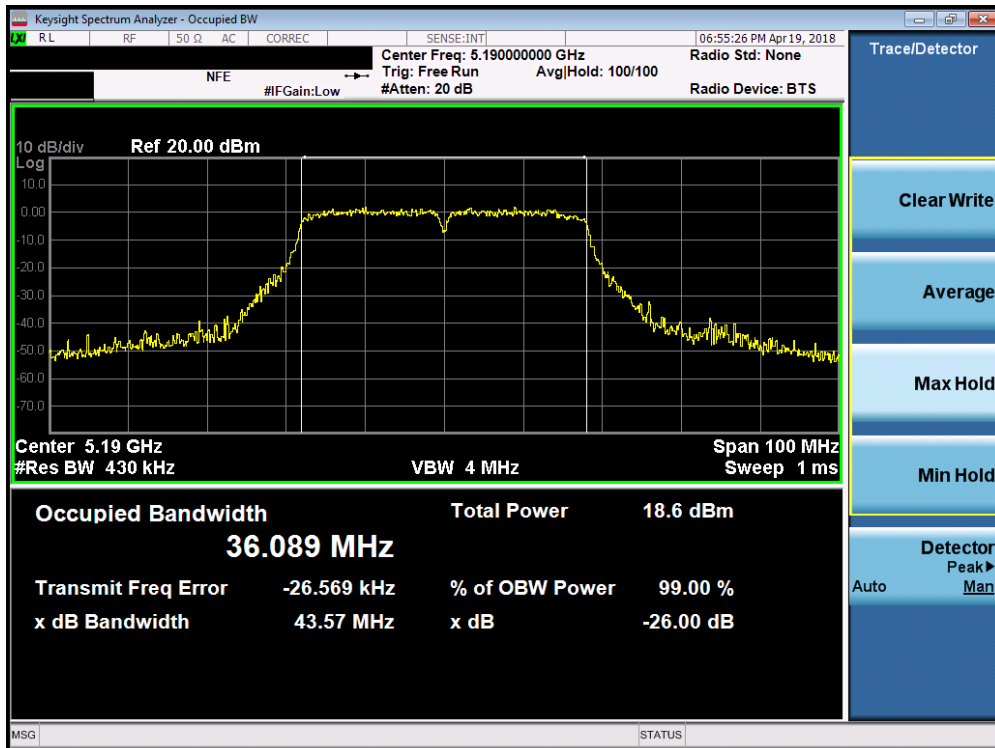


Plot 7-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

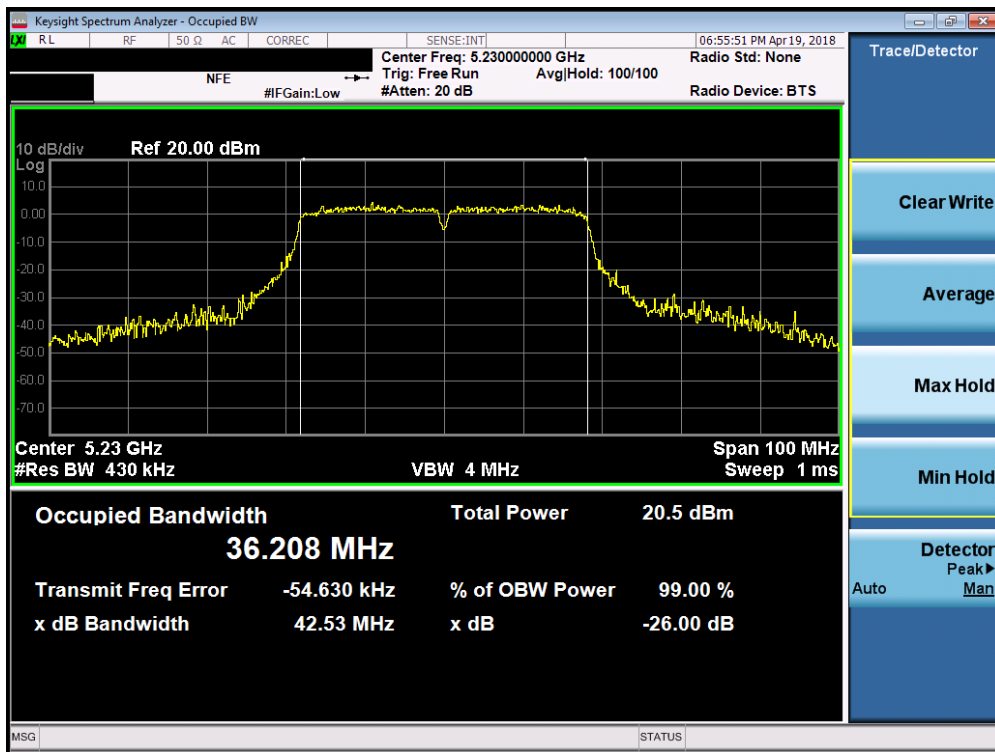


Plot 7-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 18 of 91 |

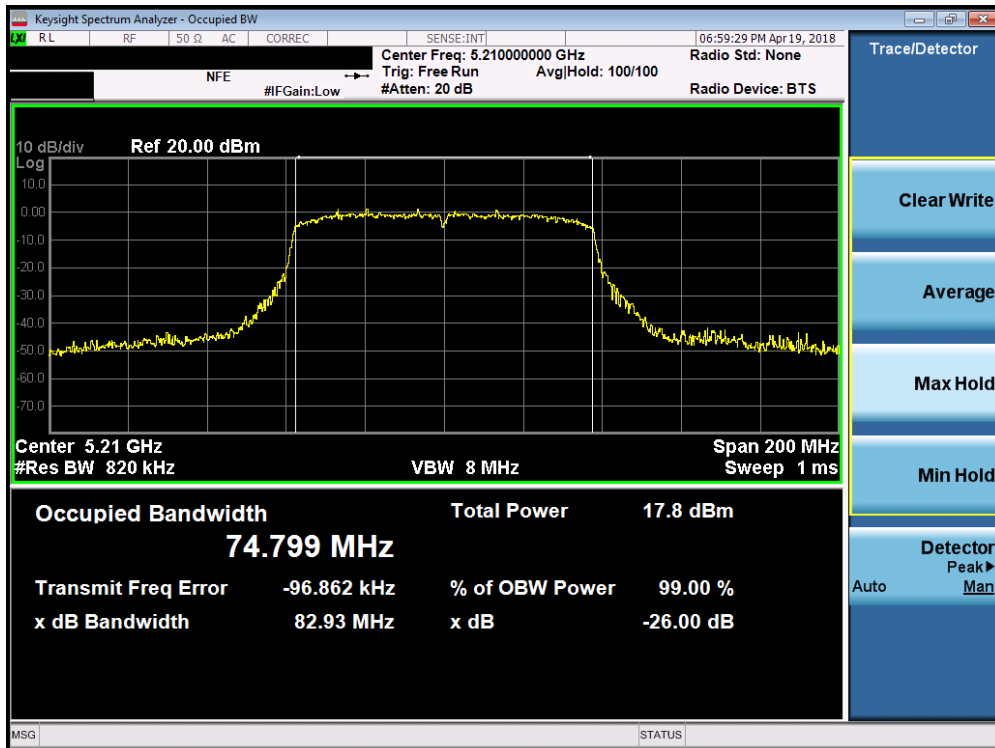


Plot 7-9. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

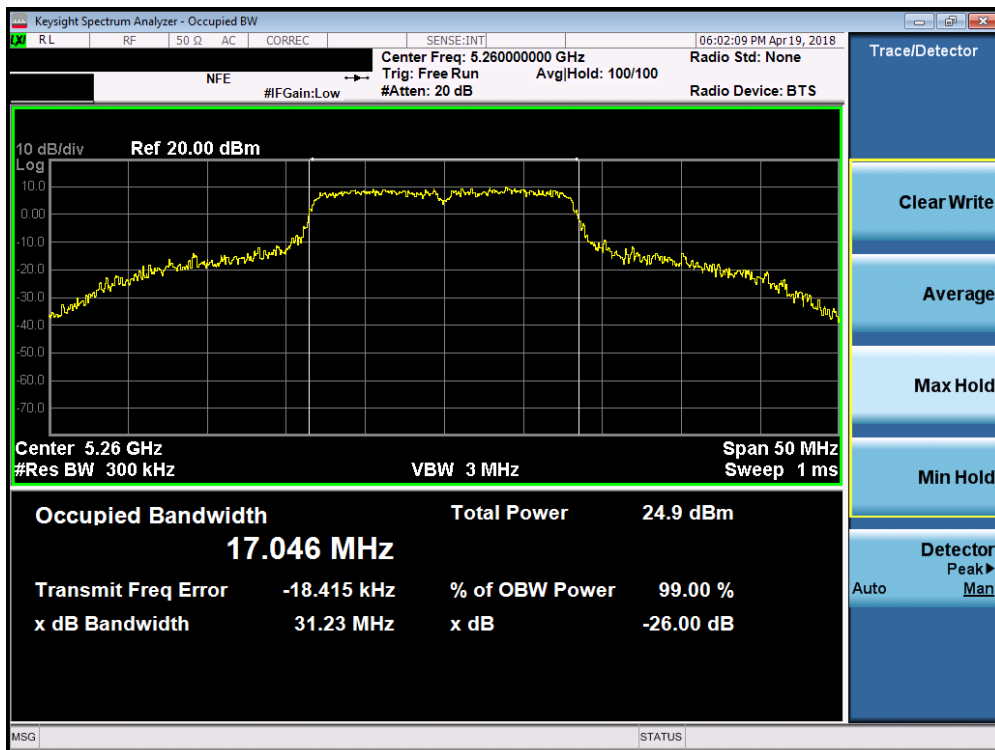


Plot 7-10. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 52)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 19 of 91 |

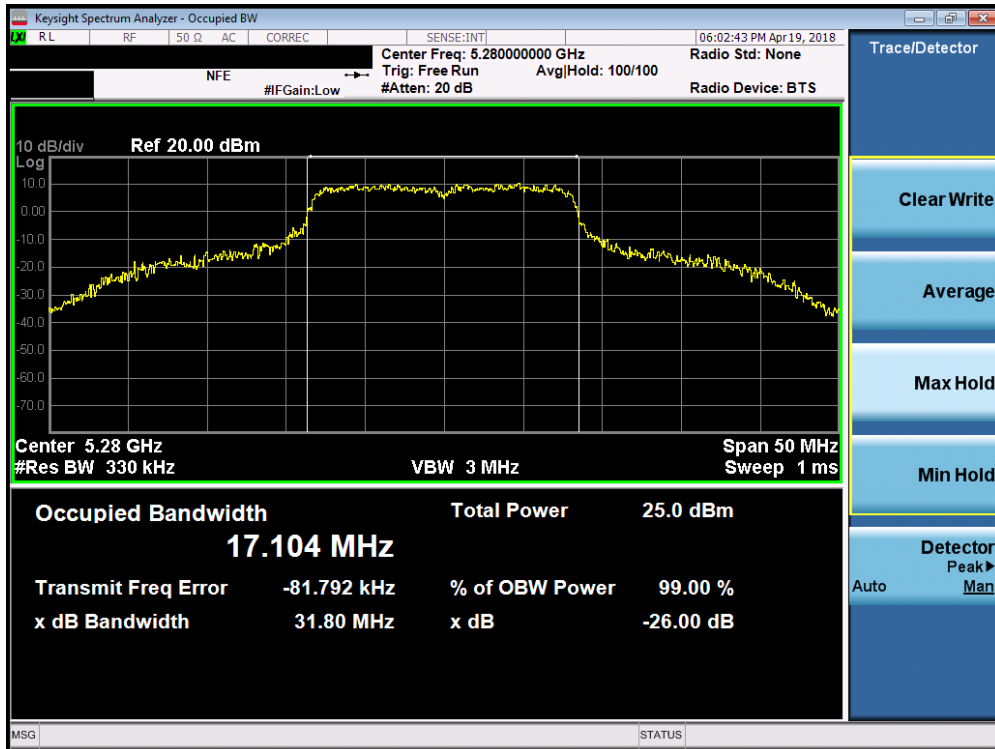


Plot 7-11. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 56)

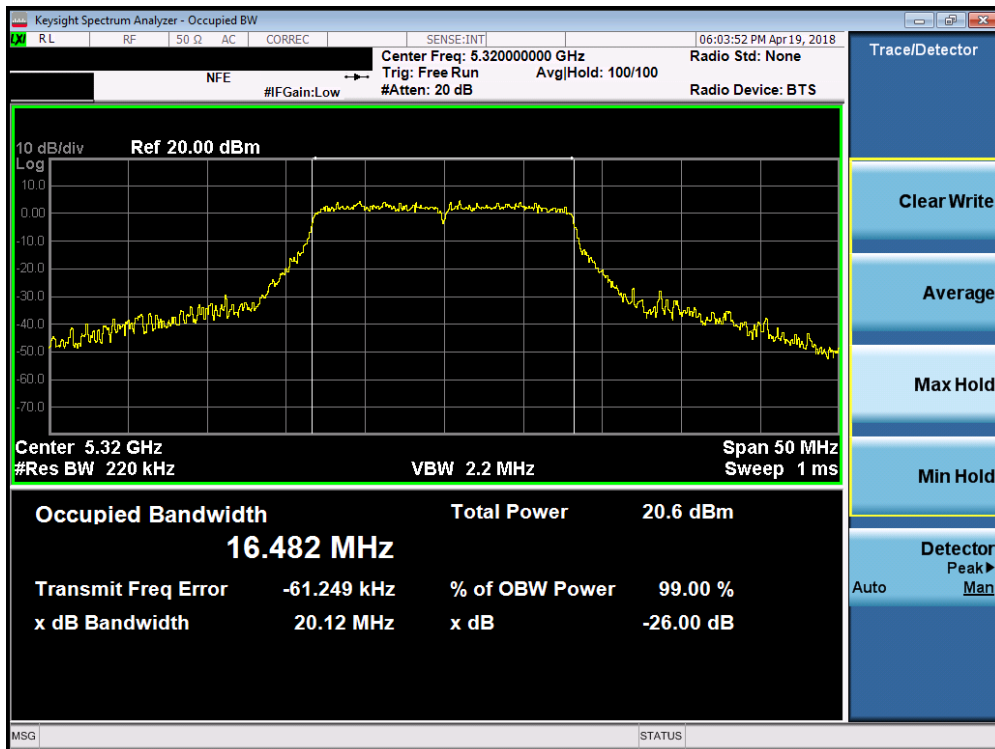


Plot 7-12. 26dB Bandwidth Plot (802.11a (UNII Band 2A) – Ch. 64)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 20 of 91 |

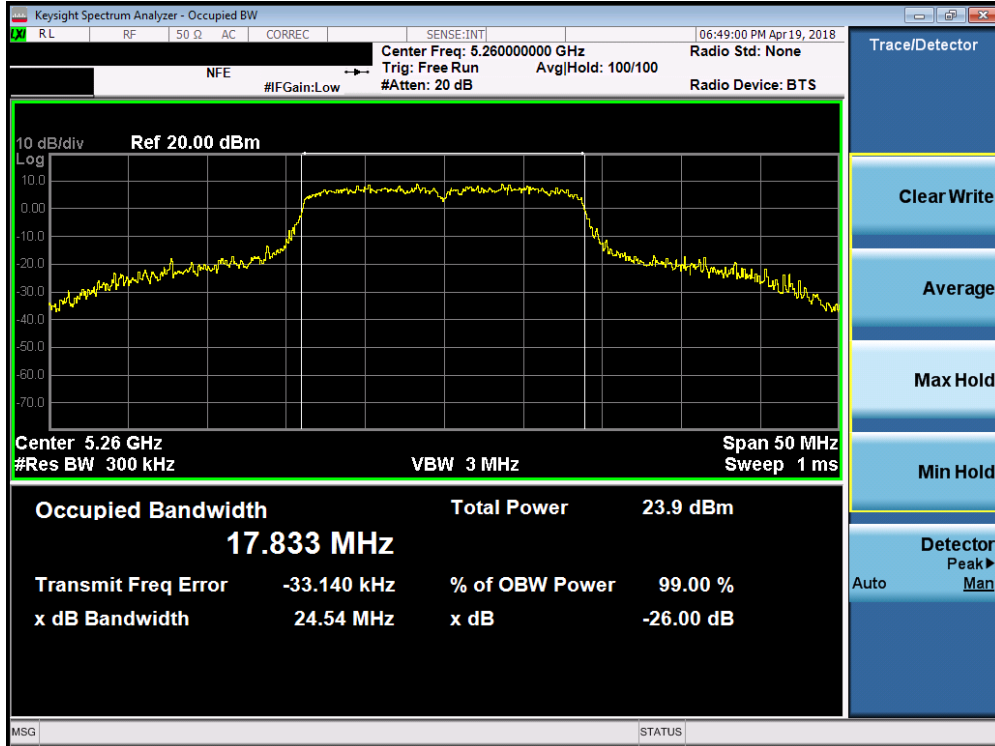


Plot 7-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

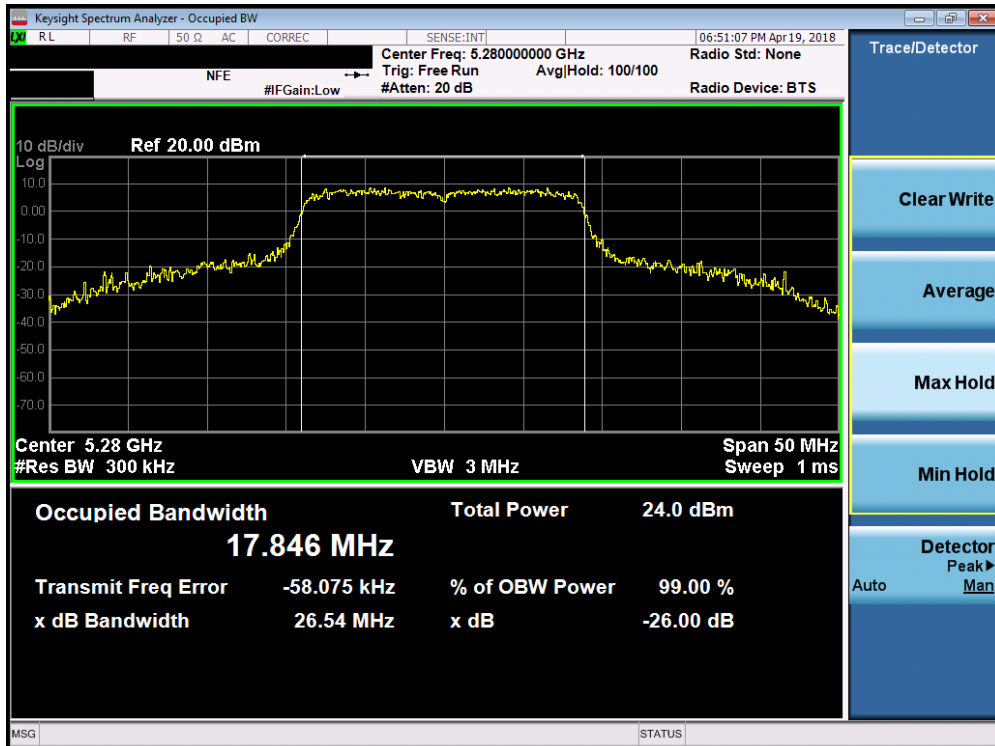


Plot 7-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 21 of 91 |

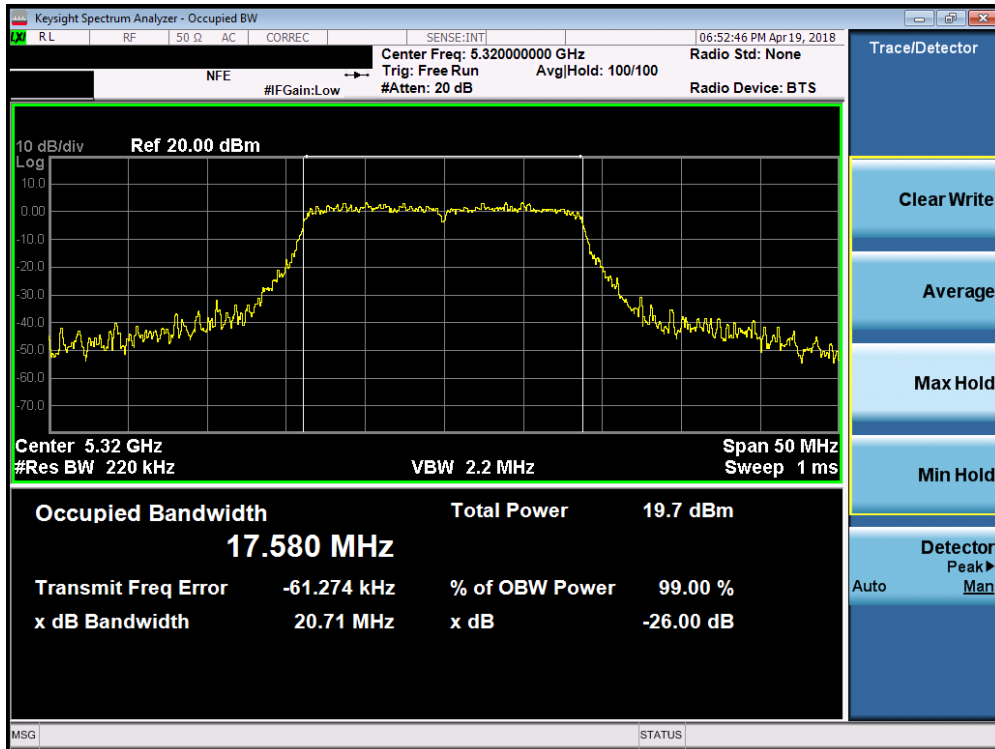


Plot 7-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

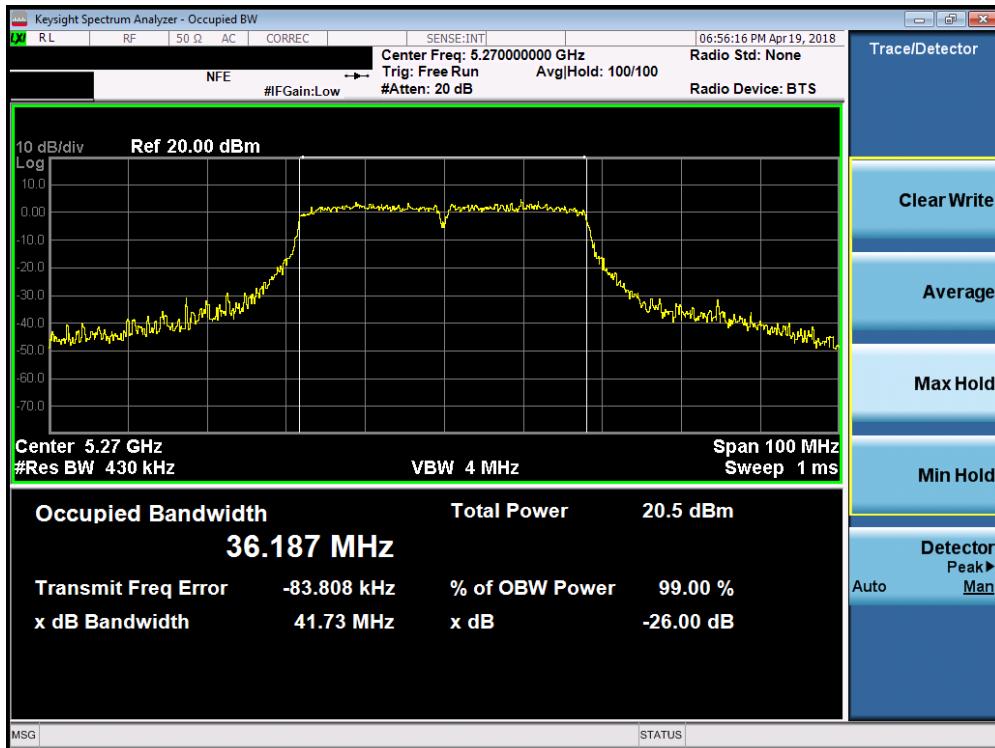


Plot 7-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 22 of 91 |

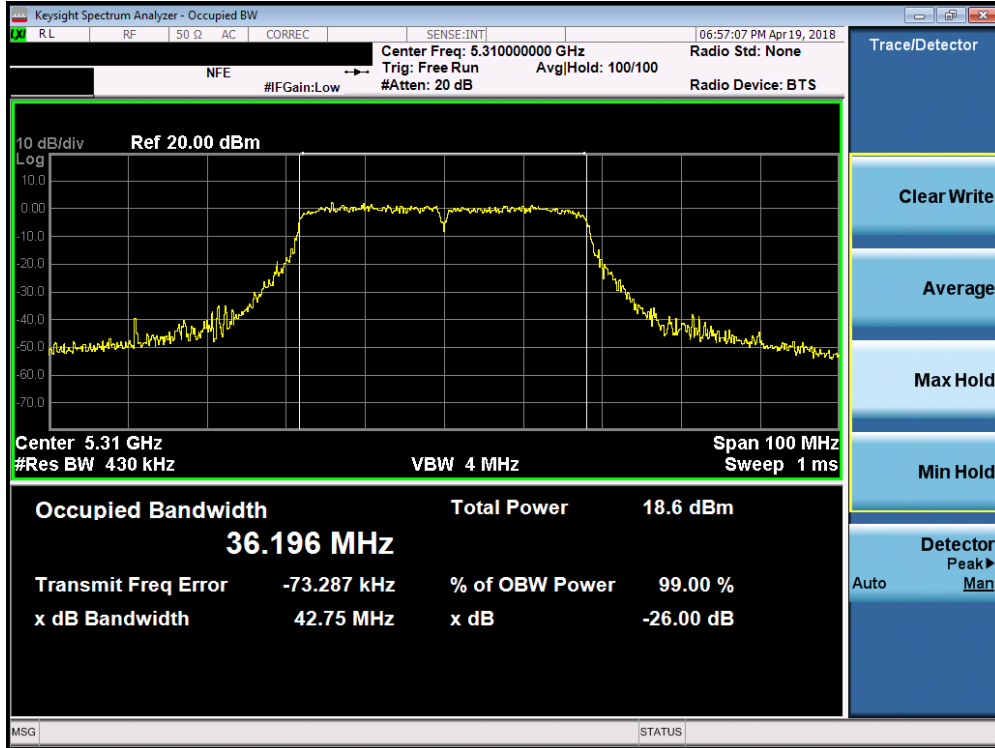


Plot 7-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

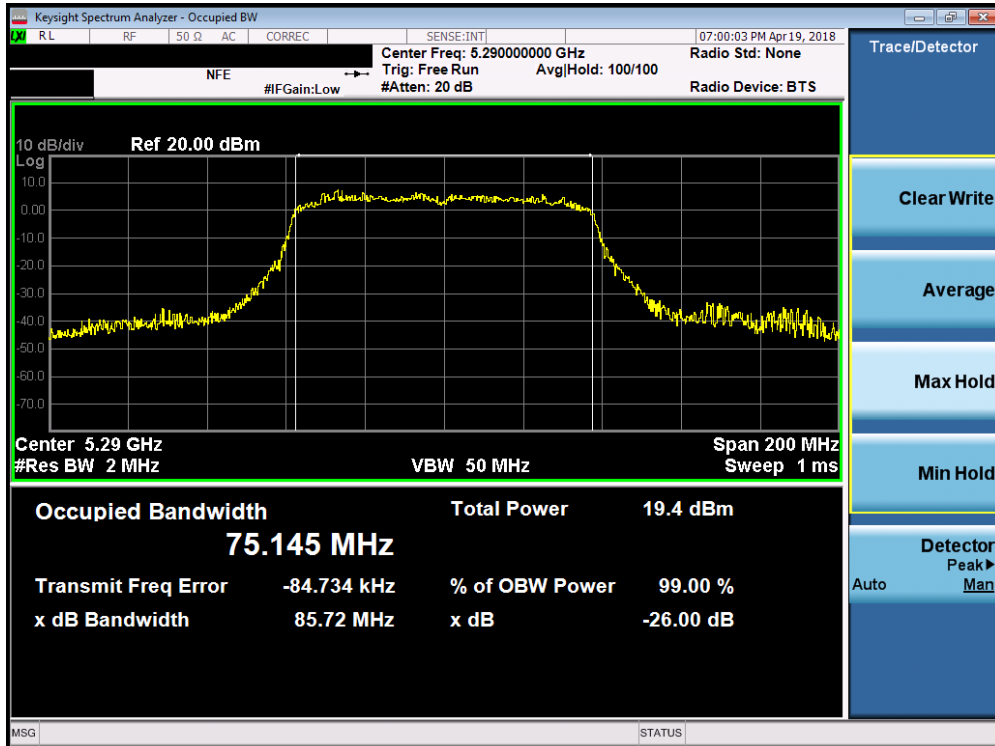


Plot 7-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 23 of 91 |

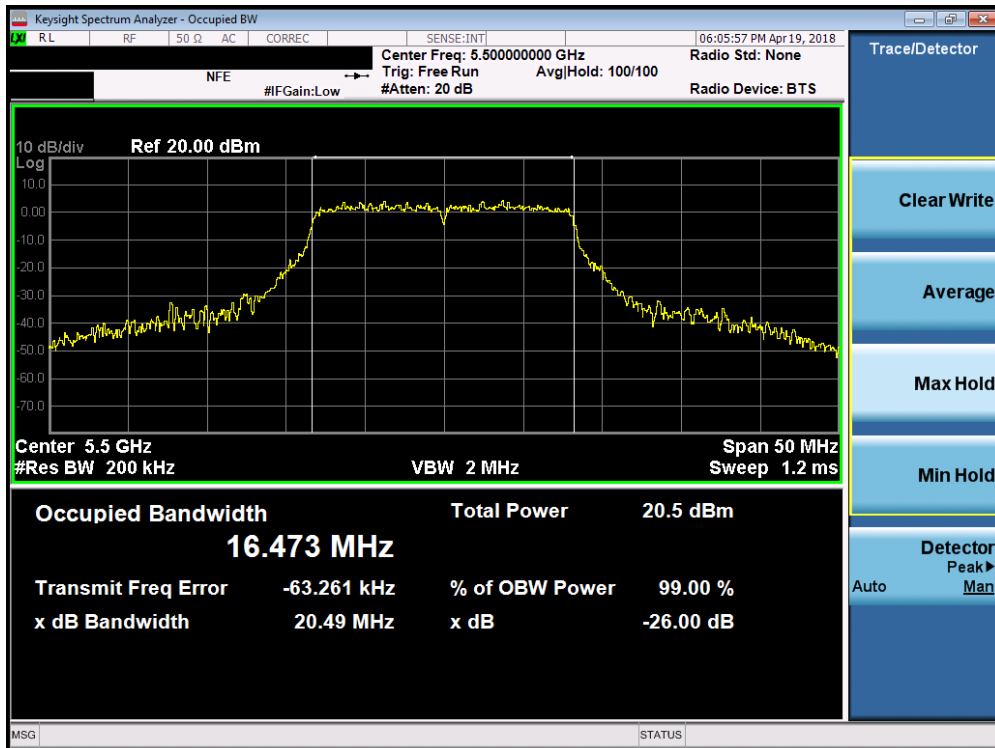


Plot 7-19. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 100)

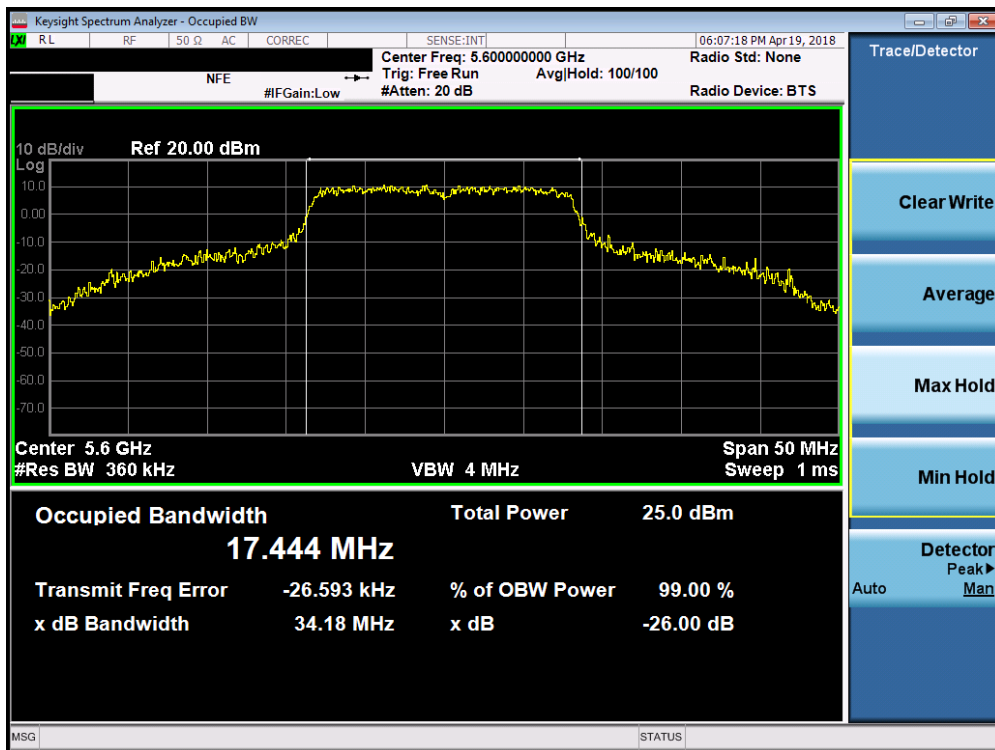


Plot 7-20. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch.120)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 24 of 91 |

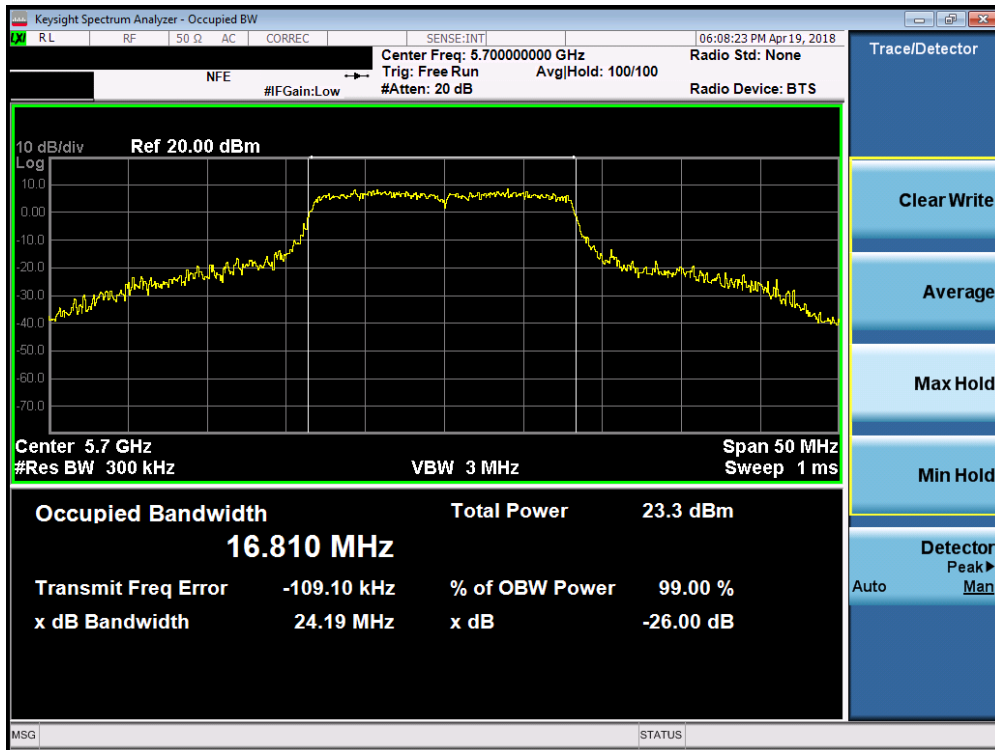


Plot 7-21. 26dB Bandwidth Plot (802.11a (UNII Band 2C) – Ch. 140)

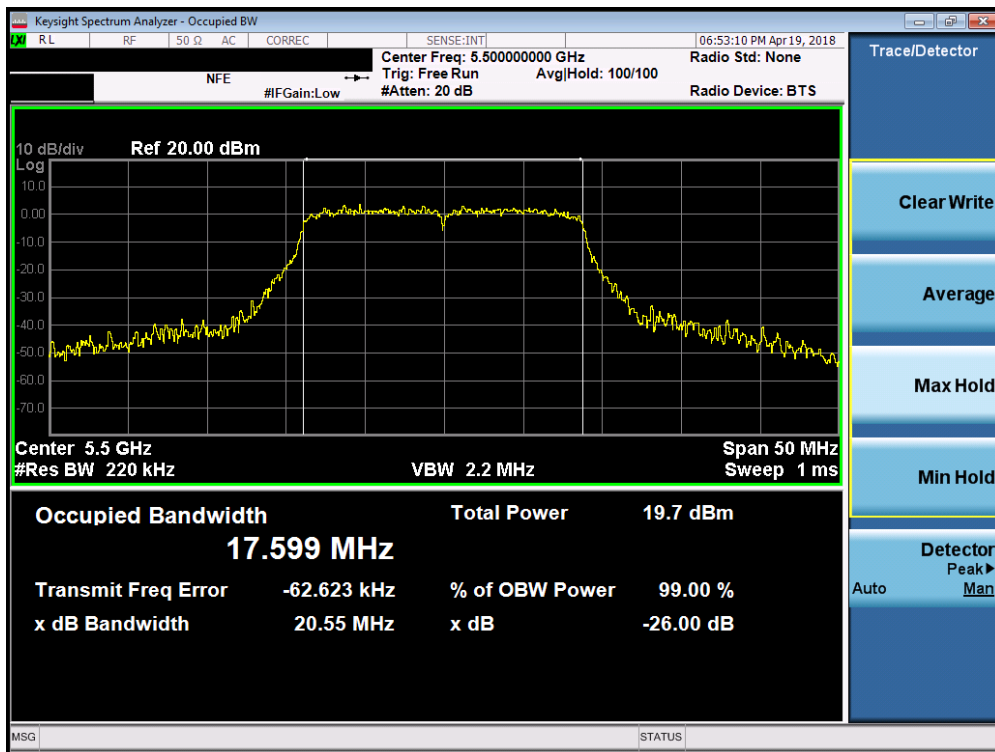


Plot 7-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 25 of 91 |

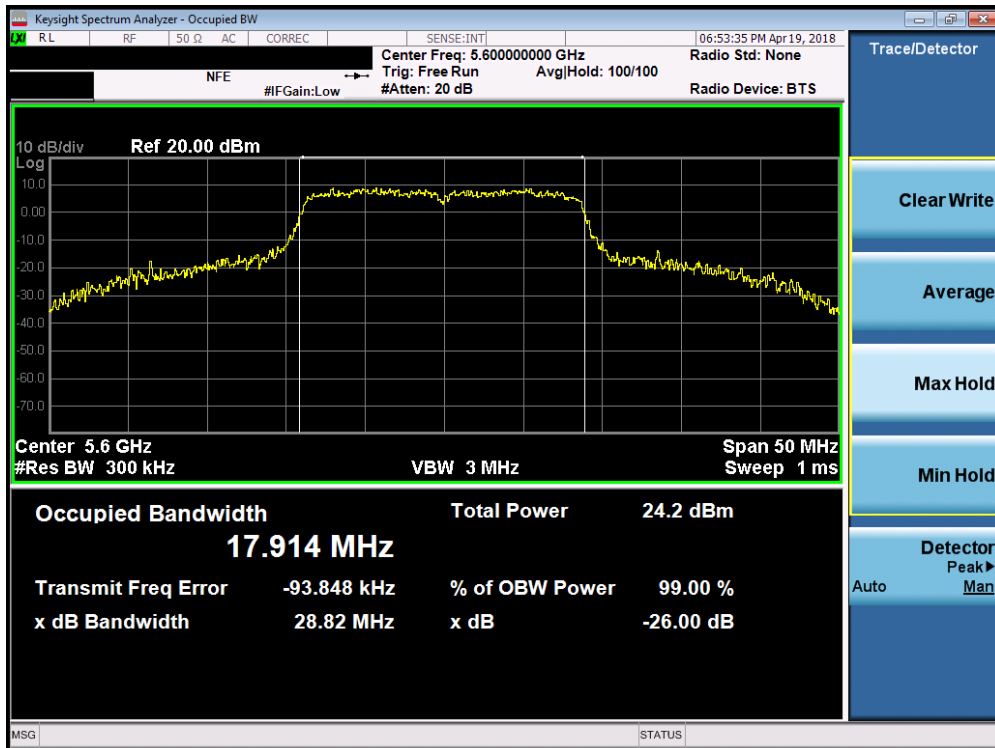


Plot 7-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

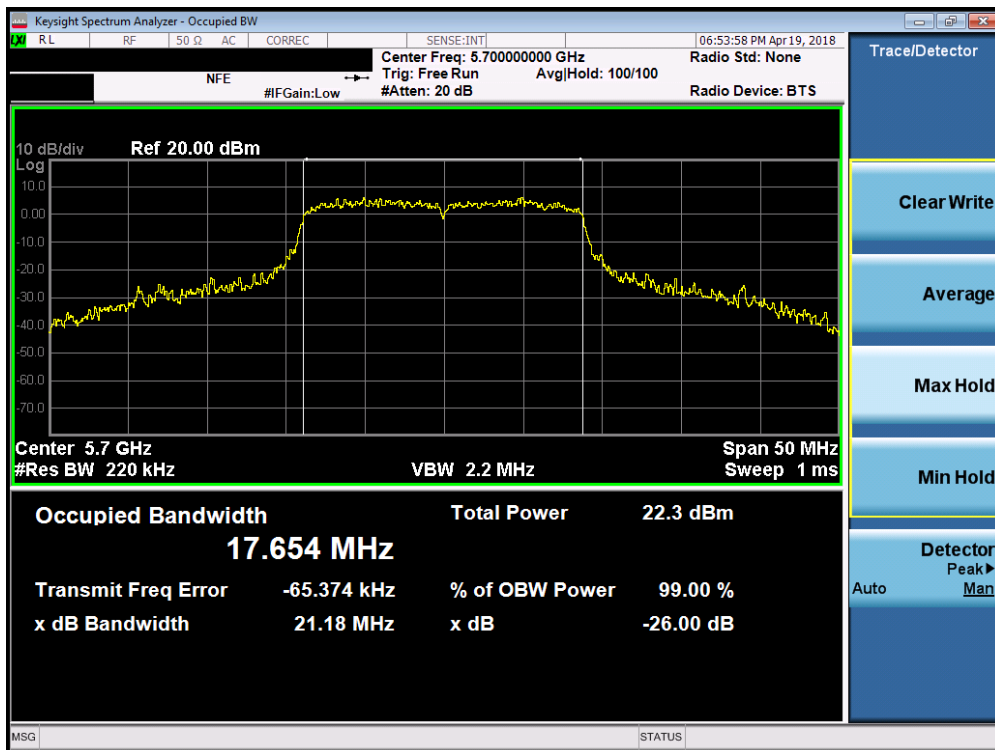


Plot 7-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 140)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 26 of 91 |

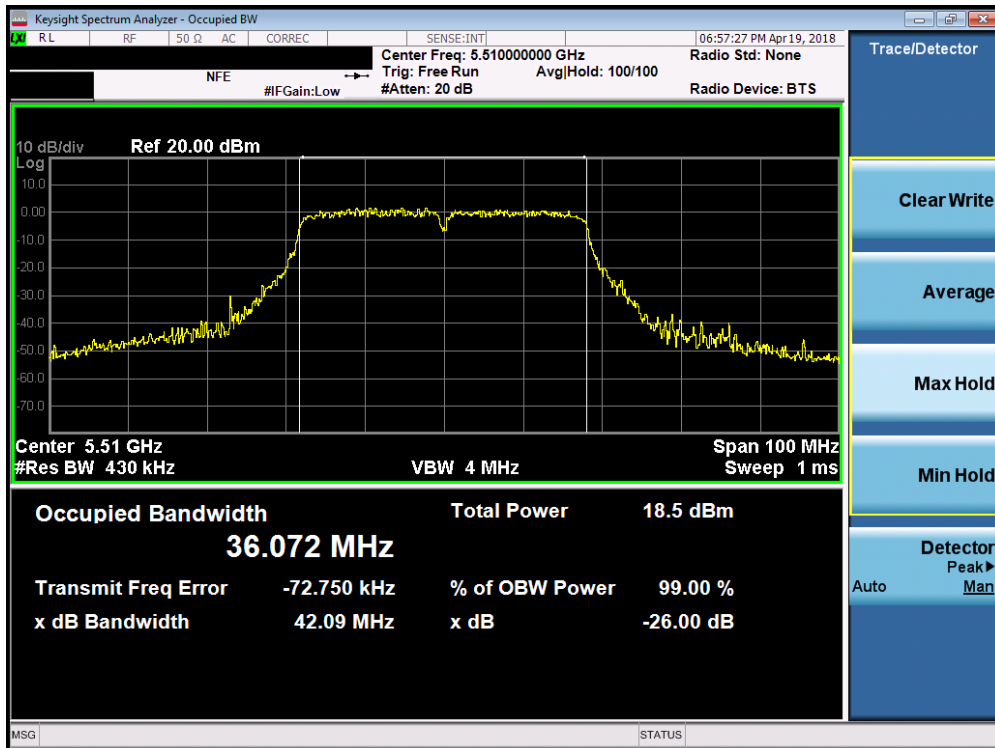


Plot 7-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

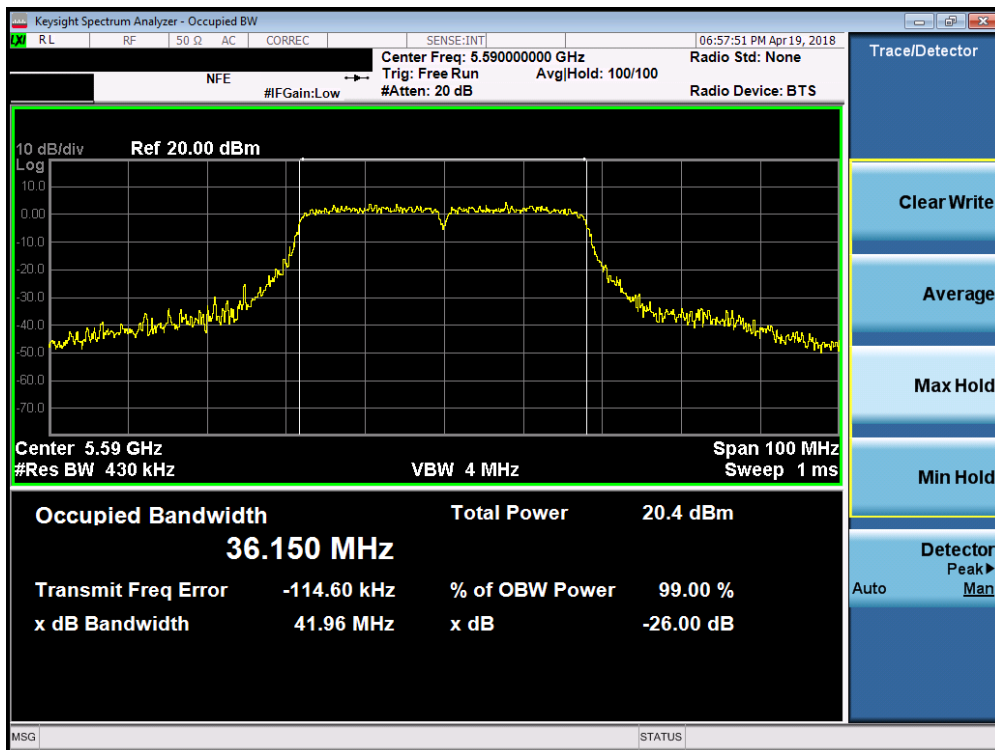


Plot 7-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 27 of 91 |

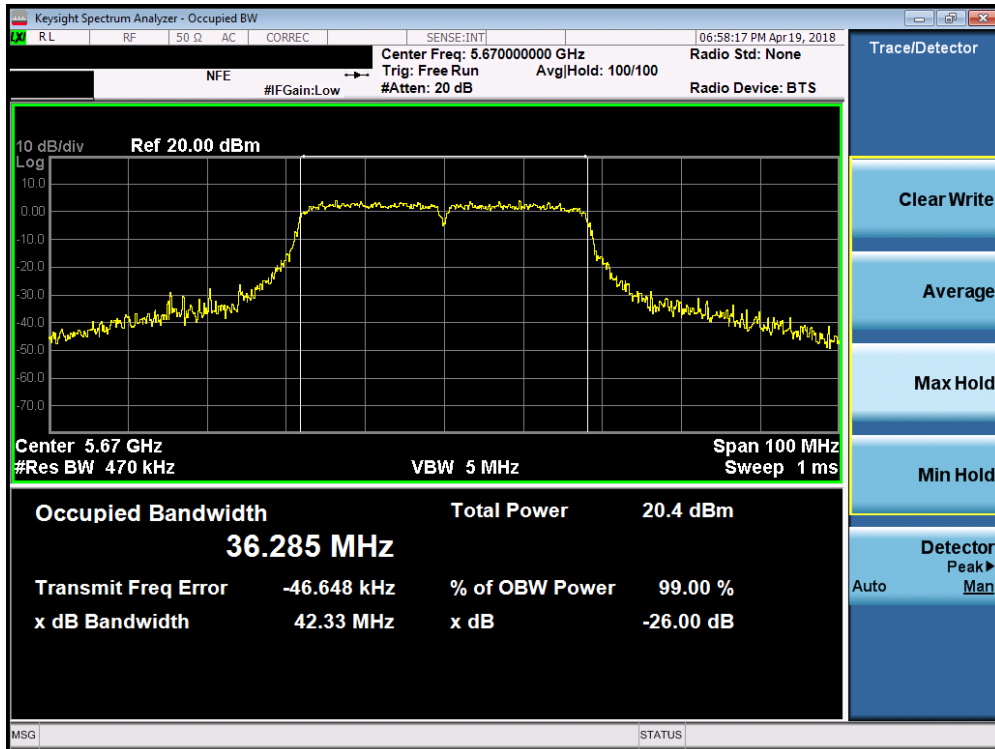


Plot 7-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 134)

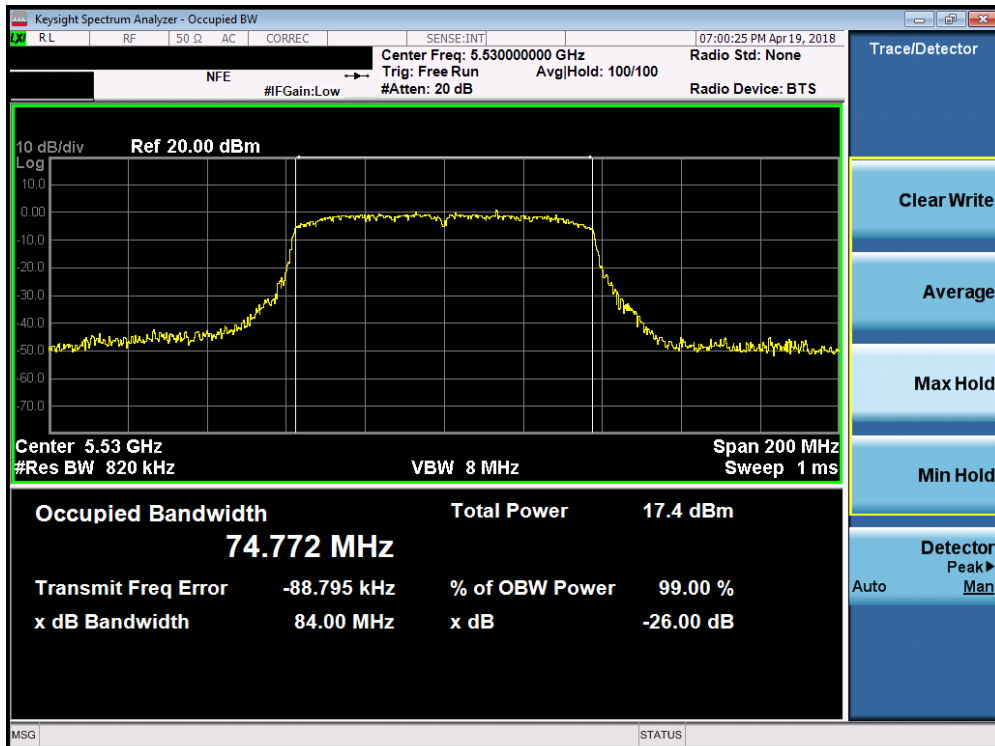

Plot 7-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 28 of 91 |

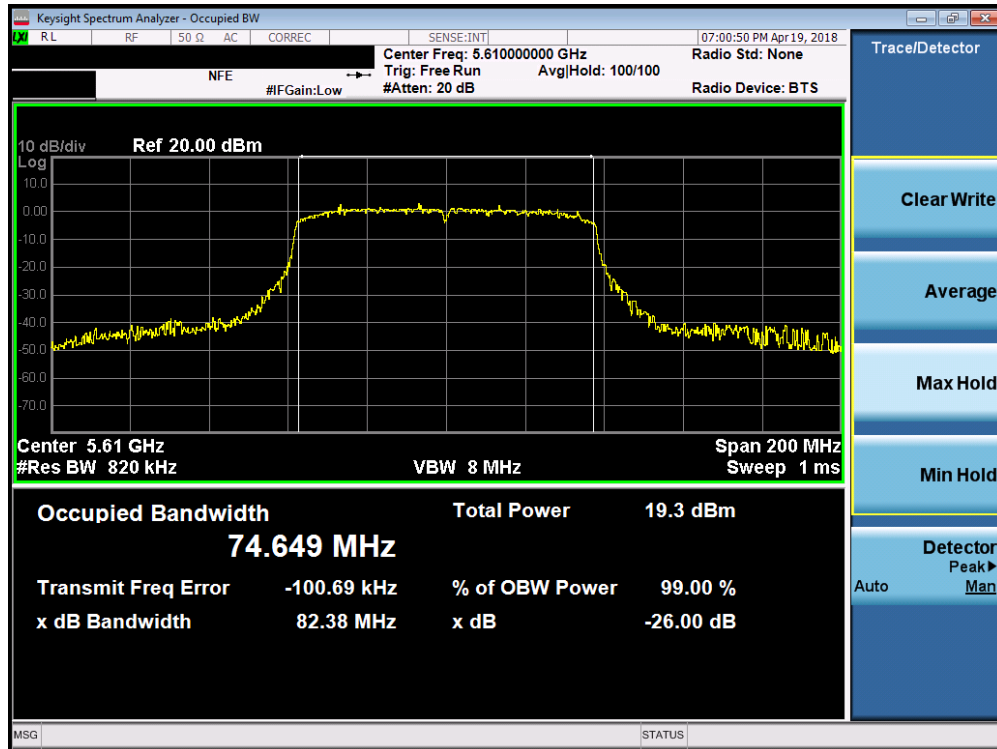

Plot 7-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 29 of 91 | |

7.3 6dB Bandwidth Measurement – 802.11a/n/ac §15.407 (e); RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be \geq 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None.

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 30 of 91 |

6 dB Bandwidth Measurements


| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured 6dB Bandwidth [MHz] |
|---------------|-----------------|-------------|-------------|------------------|------------------------------|
| Band 3 | 5745 | 149 | a | 6 | 16.01 |
| | 5785 | 157 | a | 6 | 15.54 |
| | 5825 | 165 | a | 6 | 16.07 |
| | 5745 | 149 | n (20MHz) | 6.5/7.2 (MCS0) | 16.67 |
| | 5785 | 157 | n (20MHz) | 6.5/7.2 (MCS0) | 16.22 |
| | 5825 | 165 | n (20MHz) | 6.5/7.2 (MCS0) | 16.94 |
| | 5755 | 151 | n (40MHz) | 13.5/15 (MCS0) | 35.17 |
| | 5795 | 159 | n (40MHz) | 13.5/15 (MCS0) | 35.29 |
| | 5775 | 155 | ac (80MHz) | 29.3/32.5 (MCS0) | 75.21 |

Table 7-3. Conducted Bandwidth Measurements

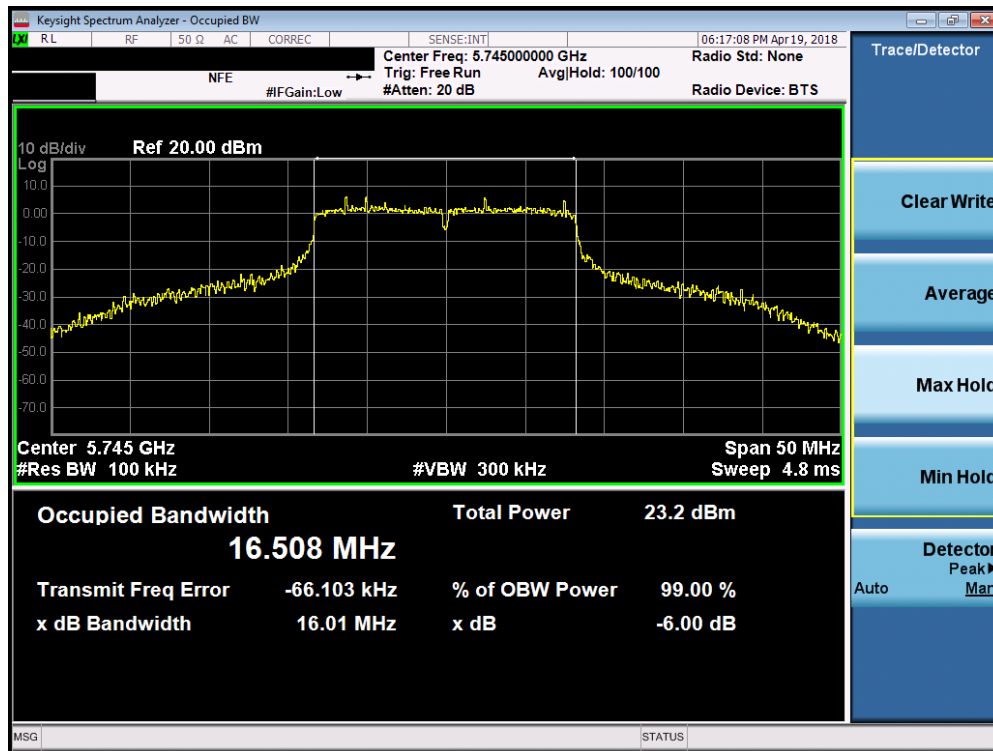


Plot 7-30. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 149)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 31 of 91 |

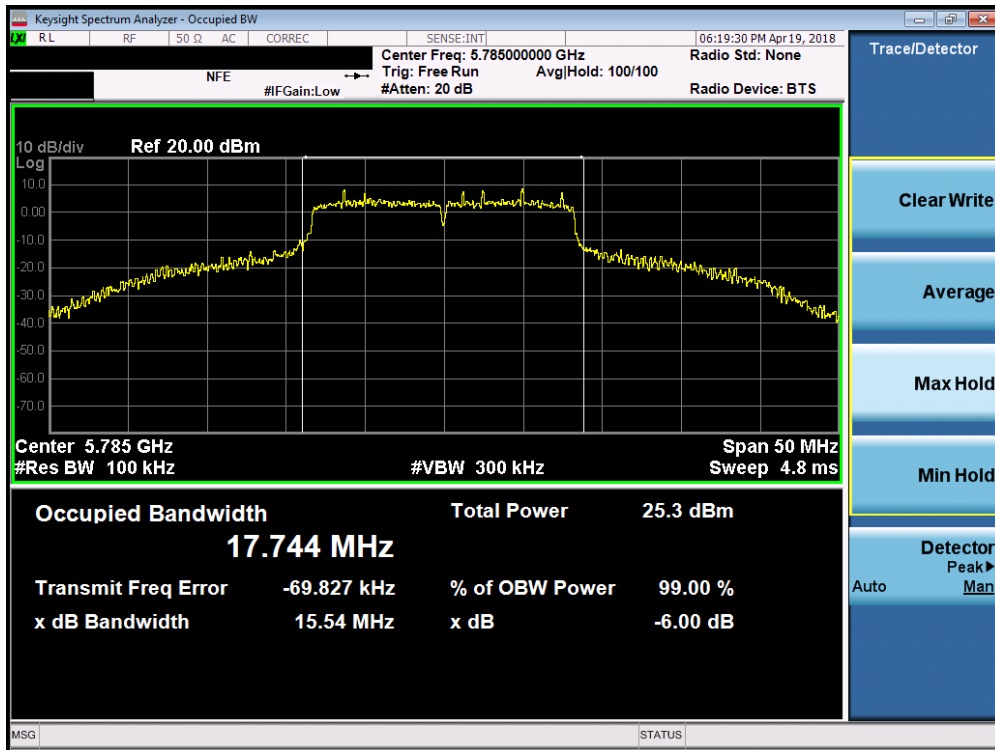


Plot 7-31. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 157)

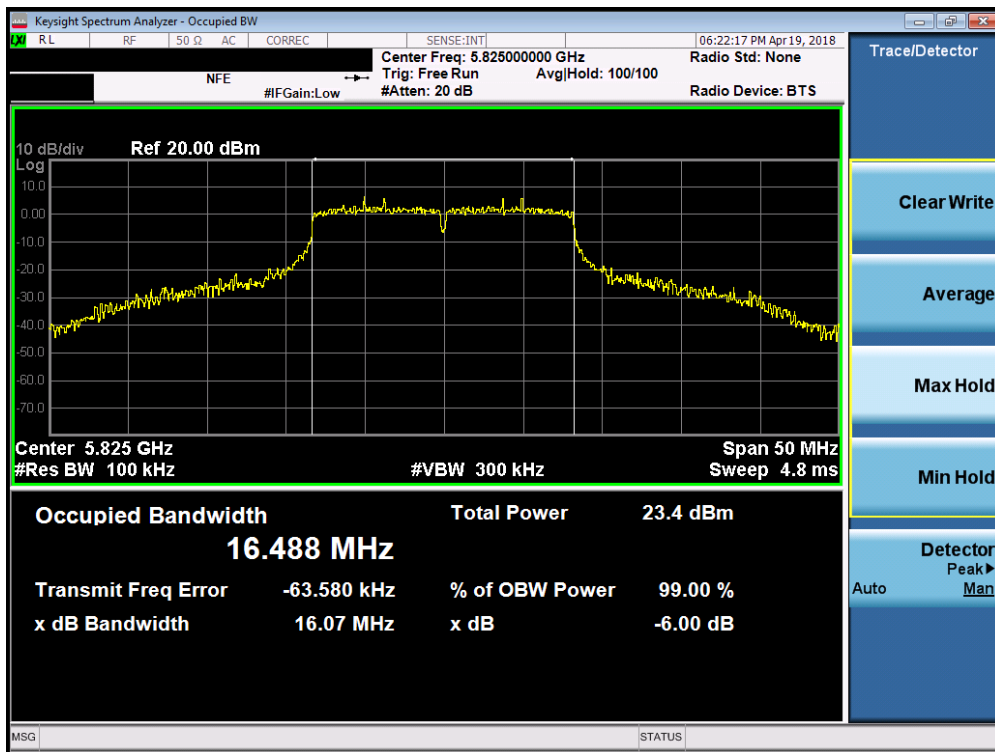


Plot 7-32. 6dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 165)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 32 of 91 |

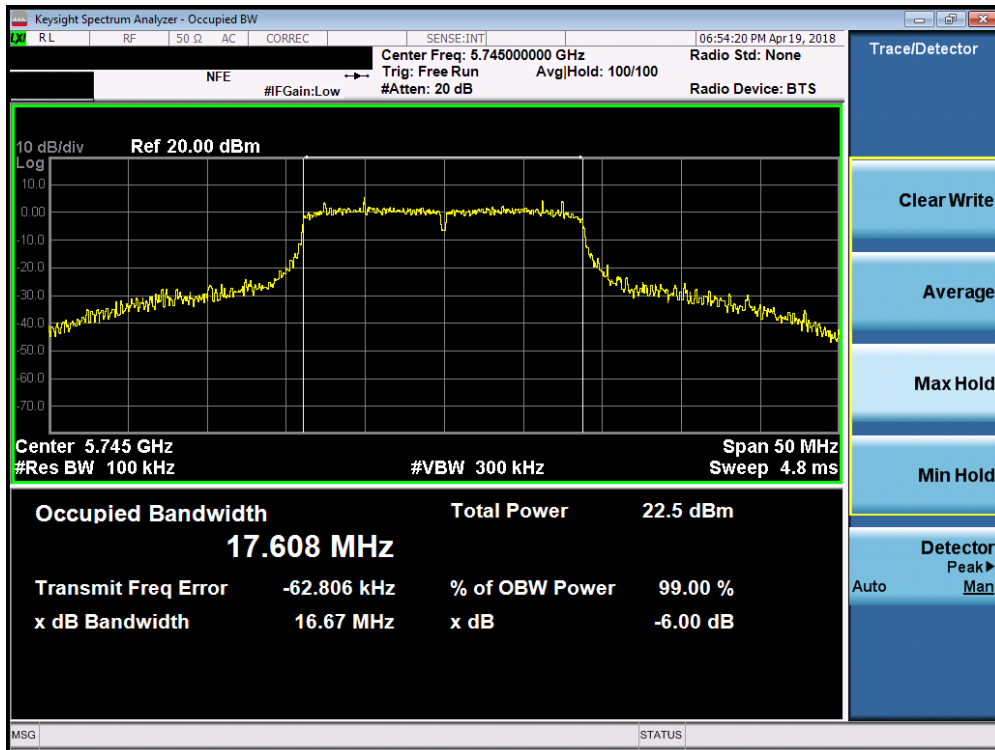


Plot 7-33. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

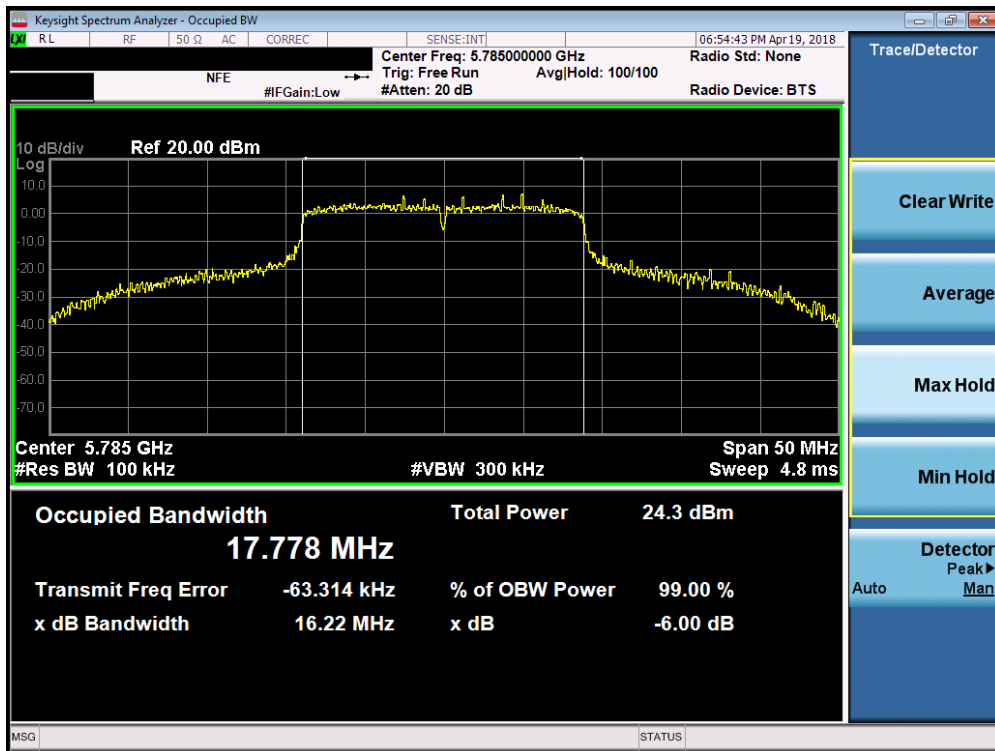


Plot 7-34. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 33 of 91 |

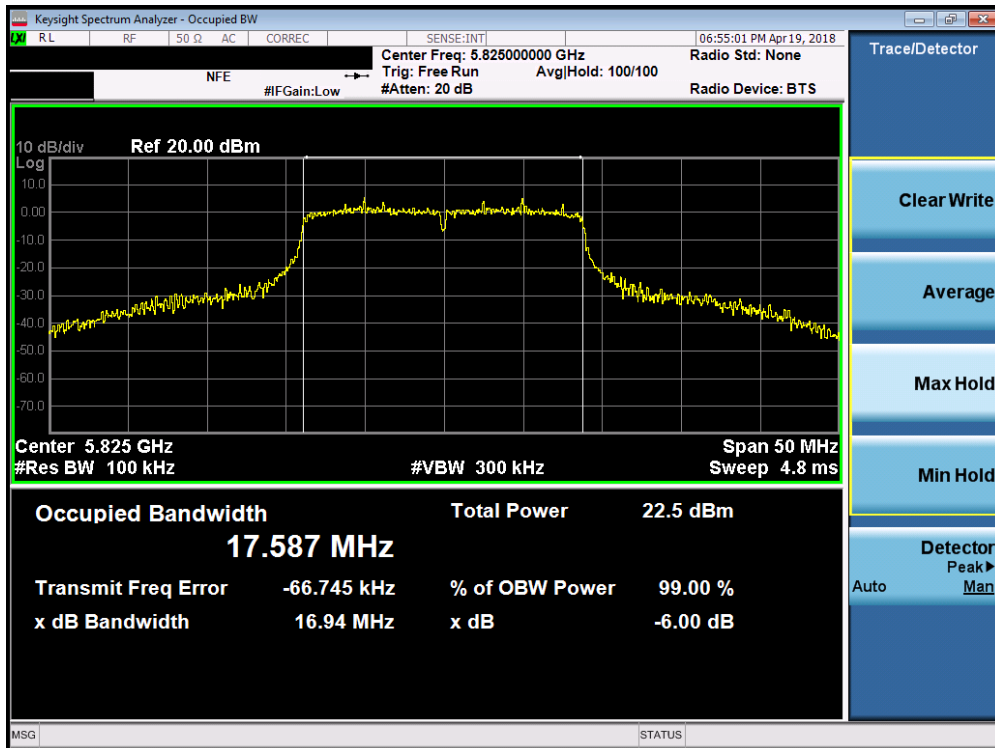


Plot 7-35. 6dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

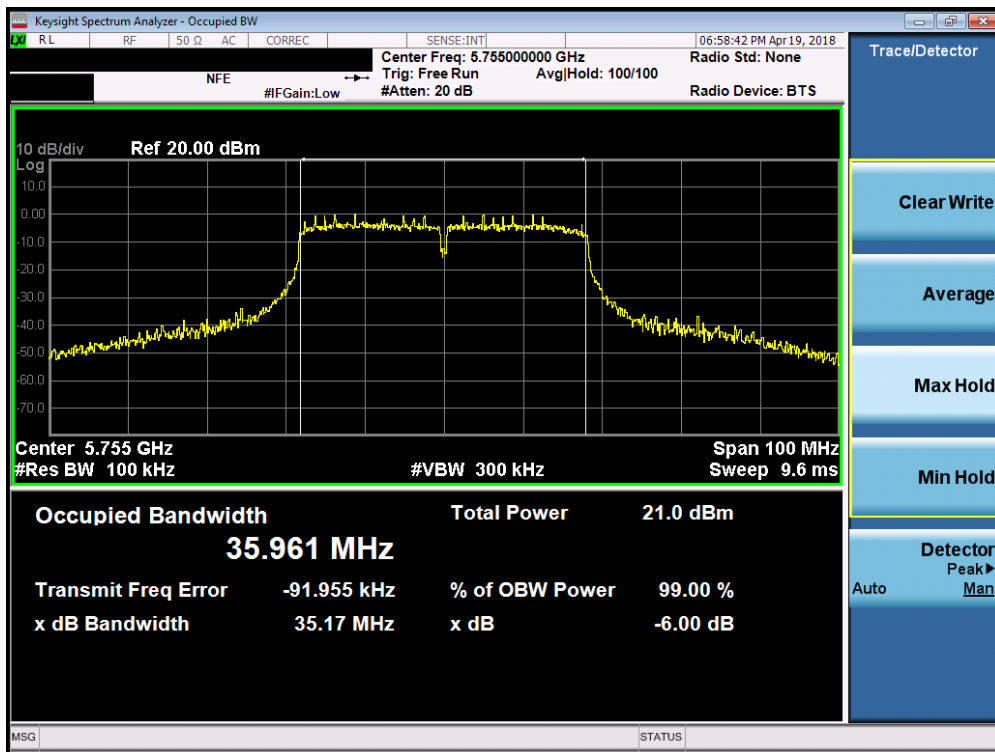


Plot 7-36. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 34 of 91 |

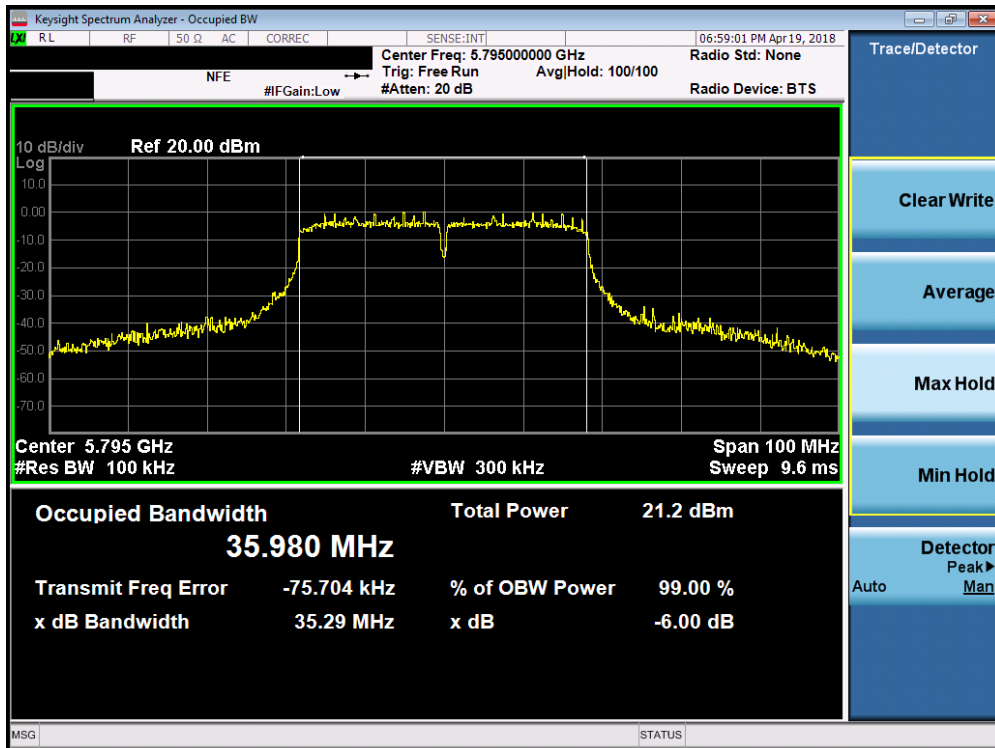

Plot 7-37. 6dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

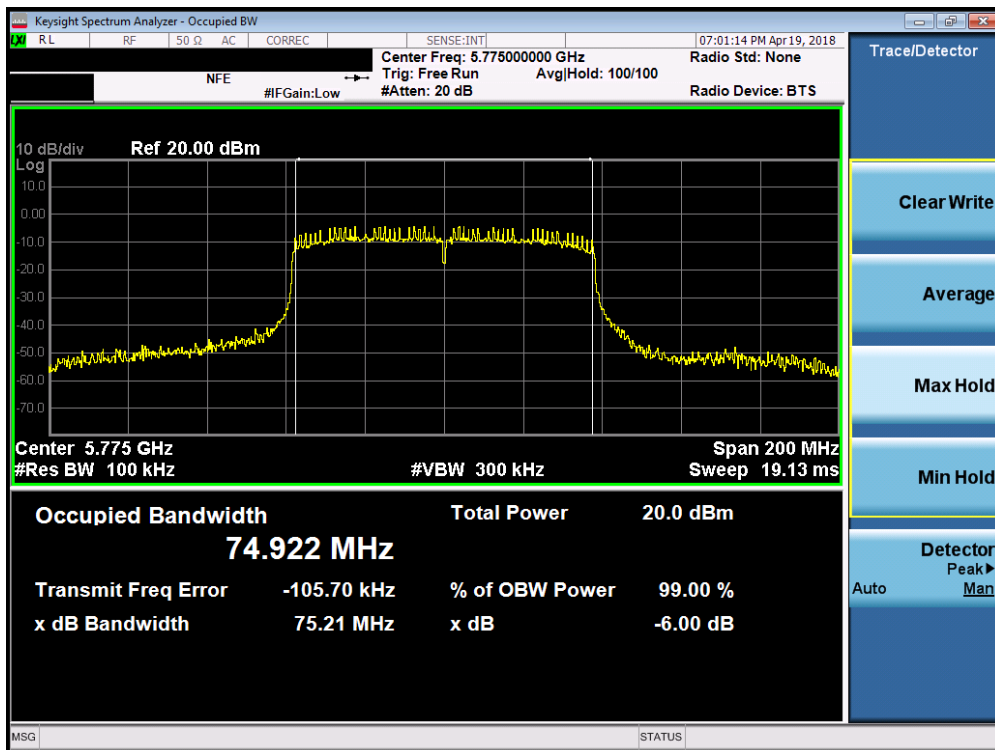

Plot 7-38. 6dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 35 of 91 |

7.4 UNII Output Power Measurement – 802.11a/n/ac §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW or $10 + 10 \log_{10}B$, dBm.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20.12) = 24.04\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20.49) = 24.12\text{dBm}$. The maximum e.i.r.p. shall not exceed the lesser of 1.0 W or $17 + 10 \log_{10}B$, dBm.

In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G
 KDB 789033 D02 v02r01 – Section E3)b) Method PM-G

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-3. Test Instrument & Measurement Setup

Test Notes

None

| | | | |
|--|---|-------------------------------|---------------------------------|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 36 of 91 |

Conducted Output Power Measurements

| 5GHz (20MHz Bandwidth) | Freq [MHz] | Channel | Detector | IEEE Transmission Mode | | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------------------|------------|---------|----------|------------------------|---------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| | | | | 802.11a | 802.11n | | | | | | |
| | | | | 5180 | 36 | | | | | | |
| 5200 | 40 | AVG | 19.39 | 18.44 | 23.98 | -4.59 | -0.39 | 19.00 | 23.01 | -4.01 | |
| 5220 | 44 | AVG | 19.24 | 18.40 | 23.98 | -4.74 | -0.39 | 18.85 | 23.01 | -4.16 | |
| 5240 | 48 | AVG | 19.21 | 18.24 | 23.98 | -4.77 | -0.39 | 18.82 | 23.01 | -4.19 | |
| 5260 | 52 | AVG | 19.05 | 18.10 | 23.98 | -4.93 | -0.39 | 18.66 | 30.00 | -11.34 | |
| 5280 | 56 | AVG | 19.13 | 18.24 | 23.98 | -4.85 | -0.39 | 18.74 | 30.00 | -11.26 | |
| 5300 | 60 | AVG | 19.20 | 18.19 | 23.98 | -4.78 | -0.39 | 18.81 | 30.00 | -11.19 | |
| 5320 | 64 | AVG | 15.11 | 14.04 | 23.98 | -8.87 | -0.39 | 14.72 | 30.00 | -15.28 | |
| 5500 | 100 | AVG | 15.36 | 14.12 | 23.98 | -8.62 | -0.39 | 14.97 | 30.00 | -15.03 | |
| 5600 | 120 | AVG | 19.16 | 18.33 | 23.98 | -4.82 | -0.39 | 18.77 | - | - | |
| 5700 | 140 | AVG | 17.41 | 16.35 | 23.98 | -6.57 | -0.39 | 17.02 | 30.00 | -12.98 | |
| 5745 | 149 | AVG | 17.59 | 16.57 | 30.00 | -12.41 | -0.39 | 17.20 | - | - | |
| 5785 | 157 | AVG | 19.15 | 18.27 | 30.00 | -10.85 | -0.39 | 18.76 | - | - | |
| 5825 | 165 | AVG | 17.36 | 16.29 | 30.00 | -12.64 | -0.39 | 16.97 | - | - | |

Table 7-4. 20MHz BW (UNII) Maximum Conducted Output Power

| 5GHz (40MHz Bandwidth) | Freq [MHz] | Channel | Detector | IEEE Transmission Mode | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------------------|------------|---------|----------|------------------------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| | | | | 802.11n | | | | | | |
| | | | | 5190 | | | | | | |
| 5230 | 46 | AVG | 14.01 | 23.98 | -9.97 | -0.39 | 13.62 | 23.01 | -9.39 | |
| 5270 | 54 | AVG | 14.22 | 23.98 | -9.76 | -0.39 | 13.83 | 30.00 | -16.17 | |
| 5310 | 62 | AVG | 12.13 | 23.98 | -11.85 | -0.39 | 11.74 | 30.00 | -18.26 | |
| 5510 | 102 | AVG | 12.55 | 23.98 | -11.43 | -0.39 | 12.16 | 30.00 | -17.84 | |
| 5550 | 110 | AVG | 14.76 | 23.98 | -9.22 | -0.39 | 14.37 | 30.00 | -15.63 | |
| 5590 | 118 | AVG | 14.24 | 23.98 | -9.74 | -0.39 | 13.85 | - | - | |
| 5670 | 134 | AVG | 14.25 | 23.98 | -9.73 | -0.39 | 13.86 | 30.00 | -16.14 | |
| 5755 | 151 | AVG | 14.40 | 30.00 | -15.60 | -0.39 | 14.01 | - | - | |
| 5795 | 159 | AVG | 14.54 | 30.00 | -15.46 | -0.39 | 14.15 | - | - | |

Table 7-5. 40MHz BW (UNII) Maximum Conducted Output Power

| 5GHz (80MHz Bandwidth) | Freq [MHz] | Channel | Detector | Conducted Power Limit [dBm] | Conducted Power Margin [dB] | Ant. Gain [dBi] | Max e.i.r.p. [dBm] | Max e.i.r.p. Limit [dBm] | e.i.r.p. Margin [dB] |
|------------------------|------------|---------|----------|-----------------------------|-----------------------------|-----------------|--------------------|--------------------------|----------------------|
| | 5210 | 42 | AVG | 23.98 | -13.55 | -0.39 | 10.04 | 23.01 | -12.97 |
| | 5290 | 58 | AVG | 23.98 | -12.79 | -0.39 | 10.80 | 30.00 | -19.20 |
| | 5530 | 106 | AVG | 23.98 | -13.38 | -0.39 | 10.21 | 30.00 | -19.79 |
| | 5775 | 155 | AVG | 30.00 | -17.20 | -0.39 | 12.41 | - | - |

Table 7-6. 80BW (UNII) Maximum Conducted Output Power

| | | | | | |
|--|---|---------------------------------------|--|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | | Page 37 of 91 |

7.5 Maximum Power Spectral Density – 802.11a/n/ac §15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.

In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 789033 D02 v02r01 – Section F

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times$ (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-4. Test Instrument & Measurement Setup

Test Notes

None

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 38 of 91 |

Power Spectral Density Measurements


| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Density [dBm] | Max Power Density [dBm/MHz] | Margin [dB] |
|---------|-----------------|-------------|------------------|------------------|------------------------------|-----------------------------|-------------|
| Band 1 | 5180 | 36 | a | 6 | 3.96 | 11.0 | -7.04 |
| | 5200 | 40 | a | 6 | 7.92 | 11.0 | -3.08 |
| | 5240 | 48 | a | 6 | 7.68 | 11.0 | -3.32 |
| | 5180 | 36 | n (20MHz) | 6.5/7.2 (MCS0) | 2.79 | 11.0 | -8.21 |
| | 5200 | 40 | n (20MHz) | 6.5/7.2 (MCS0) | 6.85 | 11.0 | -4.15 |
| | 5240 | 48 | n (20MHz) | 6.5/7.2 (MCS0) | 6.60 | 11.0 | -4.40 |
| | 5190 | 38 | n (40MHz) | 13.5/15 (MCS0) | -2.10 | 11.0 | -13.10 |
| | 5230 | 46 | n (40MHz) | 13.5/15 (MCS0) | -0.09 | 11.0 | -11.09 |
| Band 2A | 5210 | 42 | ac (80MHz) | 29.3/32.5 (MCS0) | -6.85 | 11.0 | -17.85 |
| | 5260 | 52 | a | 6 | 7.82 | 11.0 | -3.18 |
| | 5280 | 56 | a | 6 | 7.62 | 11.0 | -3.38 |
| | 5320 | 64 | a | 6 | 3.54 | 11.0 | -7.46 |
| | 5260 | 52 | n (20MHz) | 6.5/7.2 (MCS0) | 7.06 | 11.0 | -3.94 |
| | 5280 | 56 | n (20MHz) | 6.5/7.2 (MCS0) | 6.61 | 11.0 | -4.39 |
| | 5320 | 64 | n (20MHz) | 6.5/7.2 (MCS0) | 2.75 | 11.0 | -8.26 |
| | 5270 | 54 | n (40MHz) | 13.5/15 (MCS0) | -0.20 | 11.0 | -11.20 |
| Band 2C | 5310 | 62 | n (40MHz) | 13.5/15 (MCS0) | -2.07 | 11.0 | -13.07 |
| | 5290 | 58 | ac (80MHz) | 29.3/32.5 (MCS0) | -5.71 | 11.0 | -16.71 |
| | 5500 | 100 | a | 6 | 3.65 | 11.0 | -7.35 |
| | 5600 | 120 | a | 6 | 7.71 | 11.0 | -3.29 |
| | 5700 | 140 | a | 6 | 5.96 | 11.0 | -5.04 |
| | 5500 | 100 | n (20MHz) | 6.5/7.2 (MCS0) | 2.65 | 11.0 | -8.35 |
| | 5600 | 120 | n (20MHz) | 6.5/7.2 (MCS0) | 6.88 | 11.0 | -4.12 |
| | 5700 | 140 | n (20MHz) | 6.5/7.2 (MCS0) | 5.19 | 11.0 | -5.81 |
| | 5510 | 102 | n (40MHz) | 13.5/15 (MCS0) | -1.92 | 11.0 | -12.92 |
| | 5590 | 118 | n (40MHz) | 13.5/15 (MCS0) | -0.08 | 11.0 | -11.08 |
| 5670 | 134 | n (40MHz) | 13.5/15 (MCS0) | -0.24 | 11.0 | -11.24 | |
| 5530 | 106 | ac (80MHz) | 29.3/32.5 (MCS0) | -7.05 | 11.0 | -18.05 | |
| 5610 | 122 | ac (80MHz) | 29.3/32.5 (MCS0) | -5.18 | 11.0 | -16.18 | |

Table 7-7. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 39 of 91 | |


| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Density [dBm] | Antenna Gain [dBi] | e.i.r.p. Power Density [dBm/MHz] | ISED Max e.i.r.p. Power Density [dBm/MHz] | Margin [dB] |
|--------|-----------------|-------------|-------------|------------------|------------------------------|--------------------|----------------------------------|---|-------------|
| Band 1 | 5180 | 36 | a | 6 | 3.96 | -0.39 | 3.57 | 10.0 | -6.43 |
| | 5200 | 40 | a | 6 | 7.92 | -0.39 | 7.53 | 10.0 | -2.47 |
| | 5240 | 48 | a | 6 | 7.68 | -0.39 | 7.29 | 10.0 | -2.71 |
| | 5180 | 36 | n (20MHz) | 6.5/7.2 (MCS0) | 2.79 | -0.39 | 2.40 | 10.0 | -7.60 |
| | 5200 | 40 | n (20MHz) | 6.5/7.2 (MCS0) | 6.85 | -0.39 | 6.46 | 10.0 | -3.54 |
| | 5240 | 48 | n (20MHz) | 6.5/7.2 (MCS0) | 6.60 | -0.39 | 6.21 | 10.0 | -3.79 |
| | 5190 | 38 | n (40MHz) | 13.5/15 (MCS0) | -2.10 | -0.39 | -2.49 | 10.0 | -12.49 |
| | 5230 | 46 | n (40MHz) | 13.5/15 (MCS0) | -0.09 | -0.39 | -0.48 | 10.0 | -10.48 |
| | 5210 | 42 | ac (80MHz) | 29.3/32.5 (MCS0) | -6.85 | -0.39 | -7.24 | 10.0 | -17.24 |

Table 7-8. ISED Band 1 Conducted Power Spectral Density Measurements

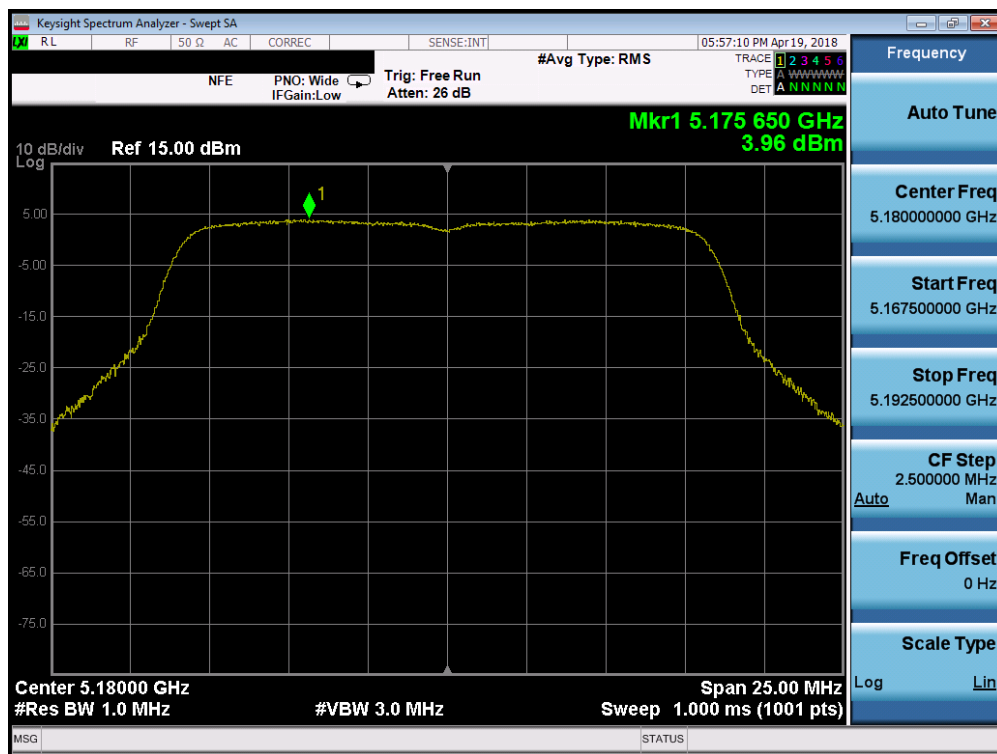


Plot 7-39. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 40 of 91 |

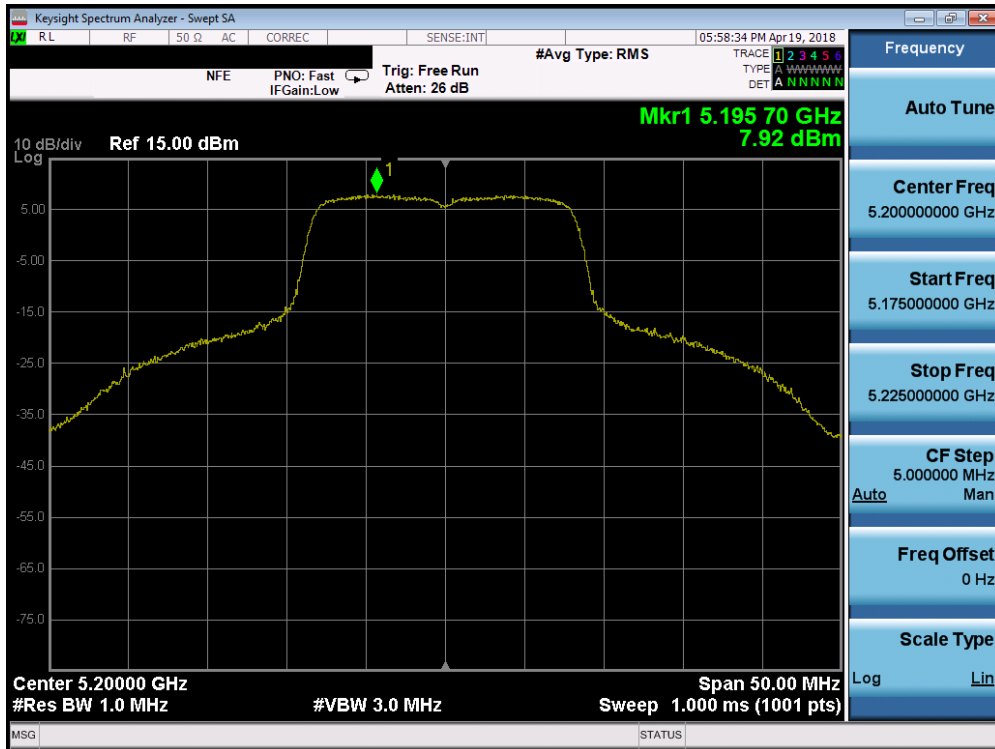


Plot 7-40. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

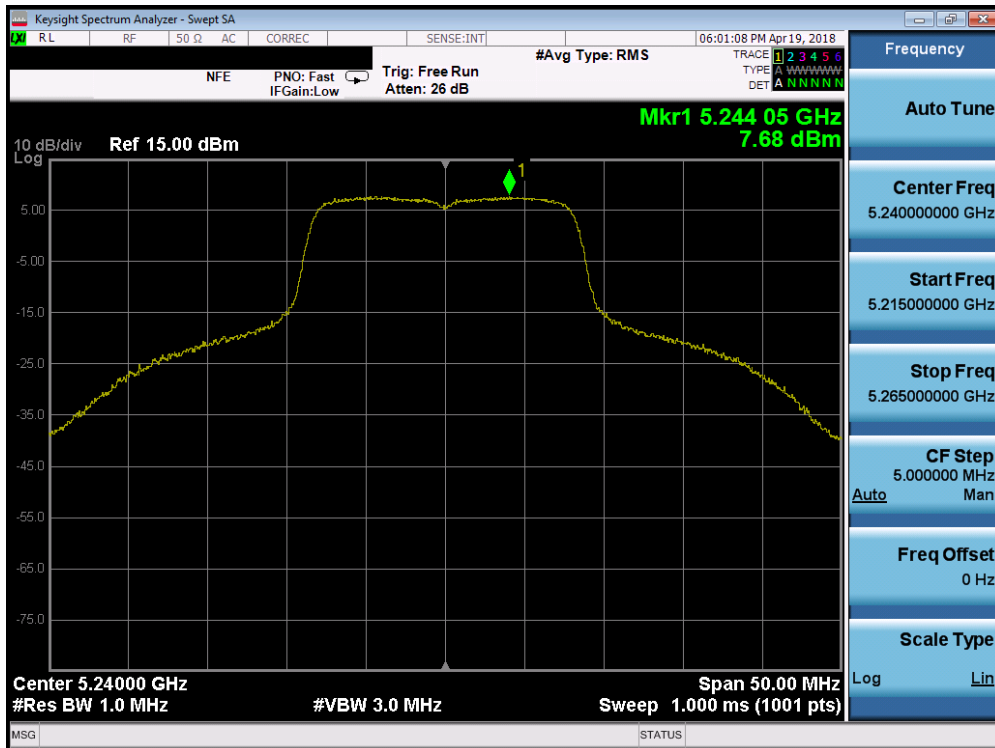


Plot 7-41. Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 41 of 91 |

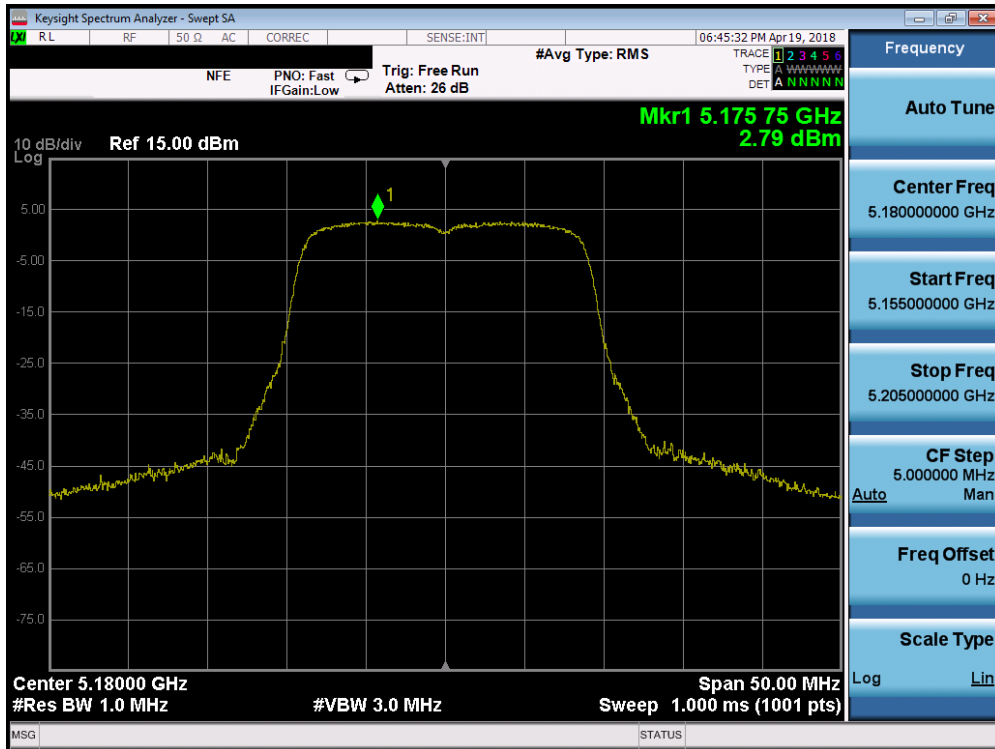


Plot 7-42. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

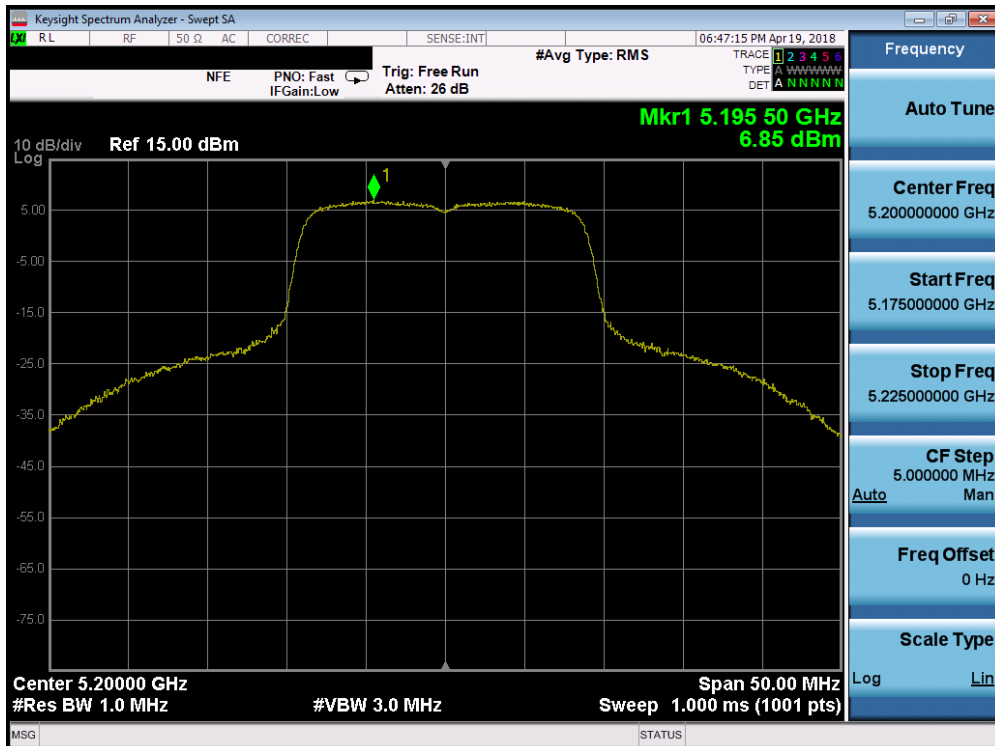


Plot 7-43. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 42 of 91 |

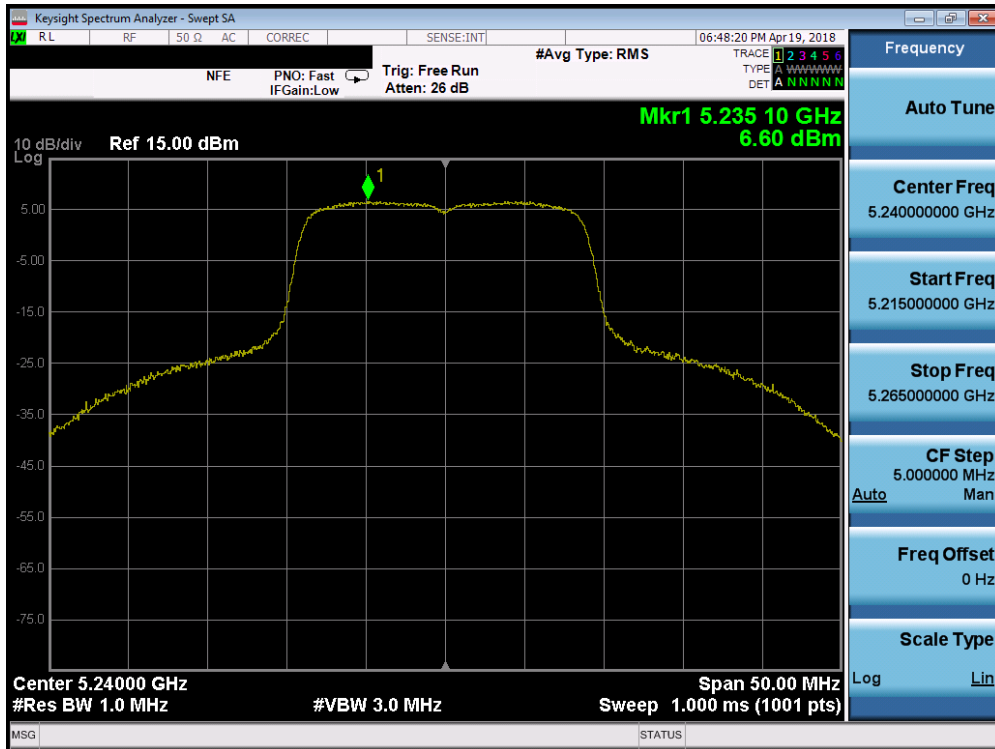


Plot 7-44. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

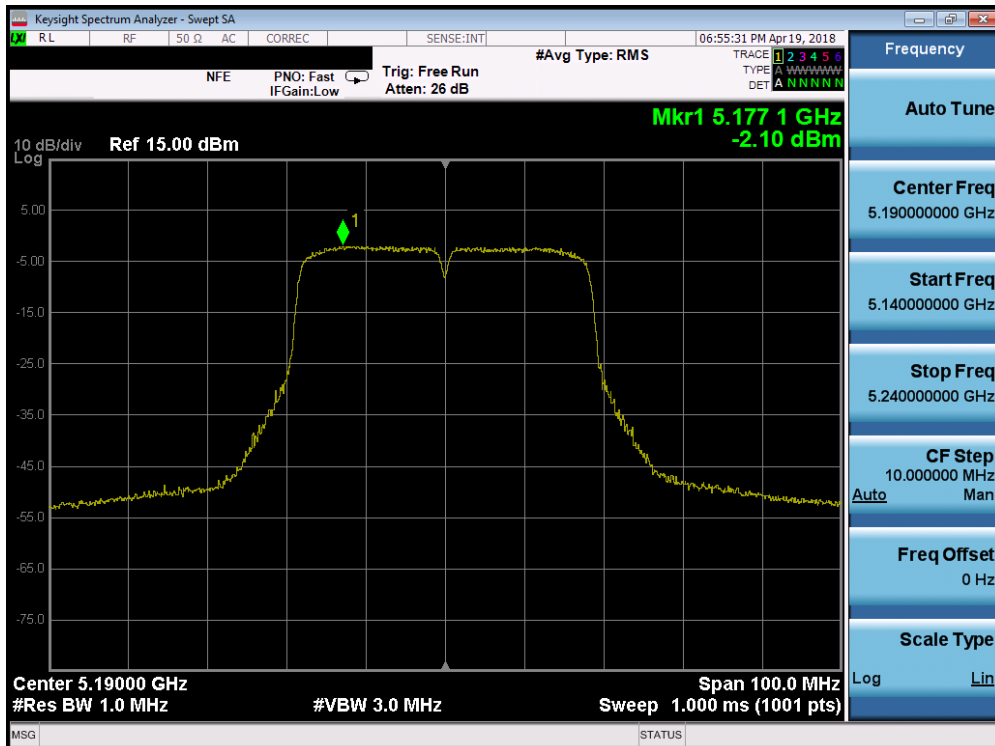


Plot 7-45. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 43 of 91 |

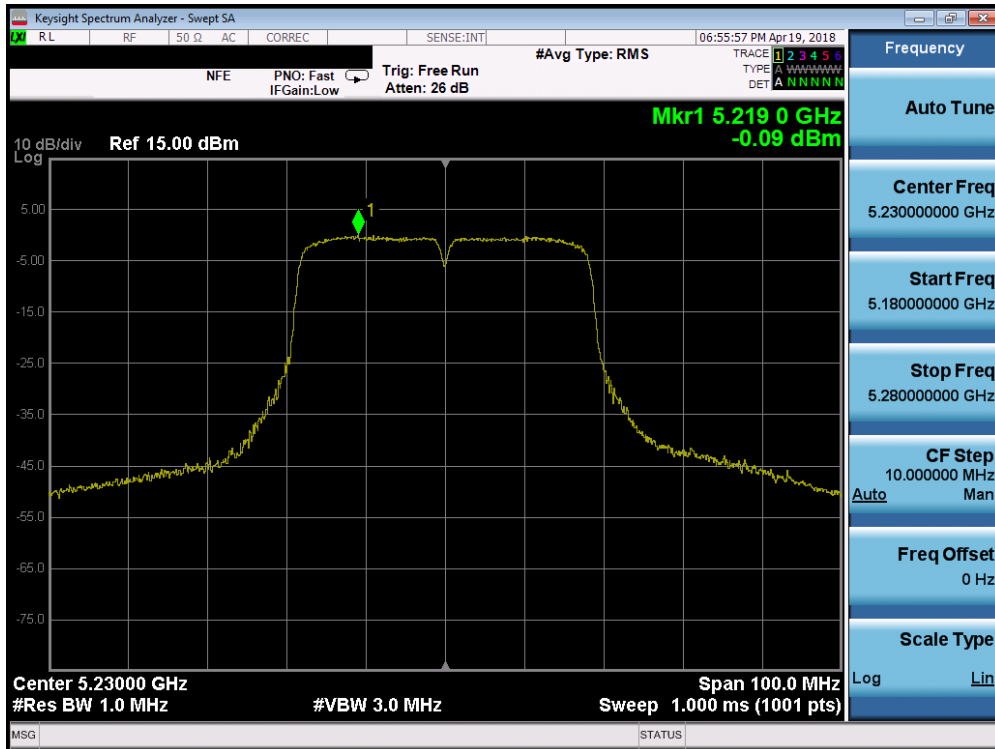


Plot 7-46. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

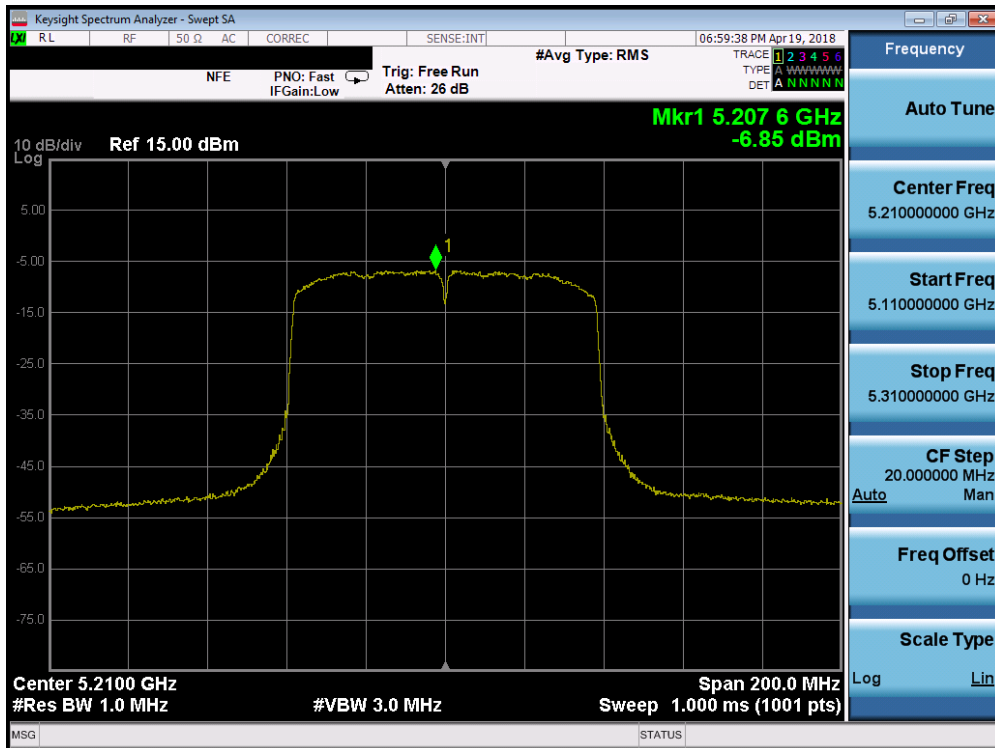


Plot 7-47. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 44 of 91 |

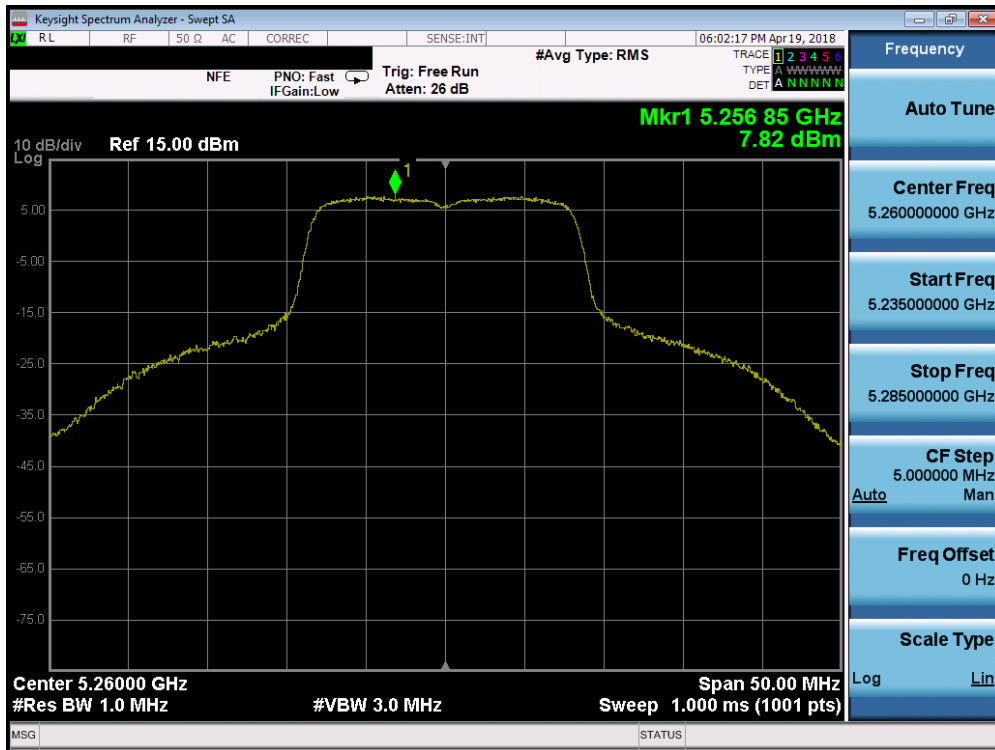


Plot 7-48. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 52)

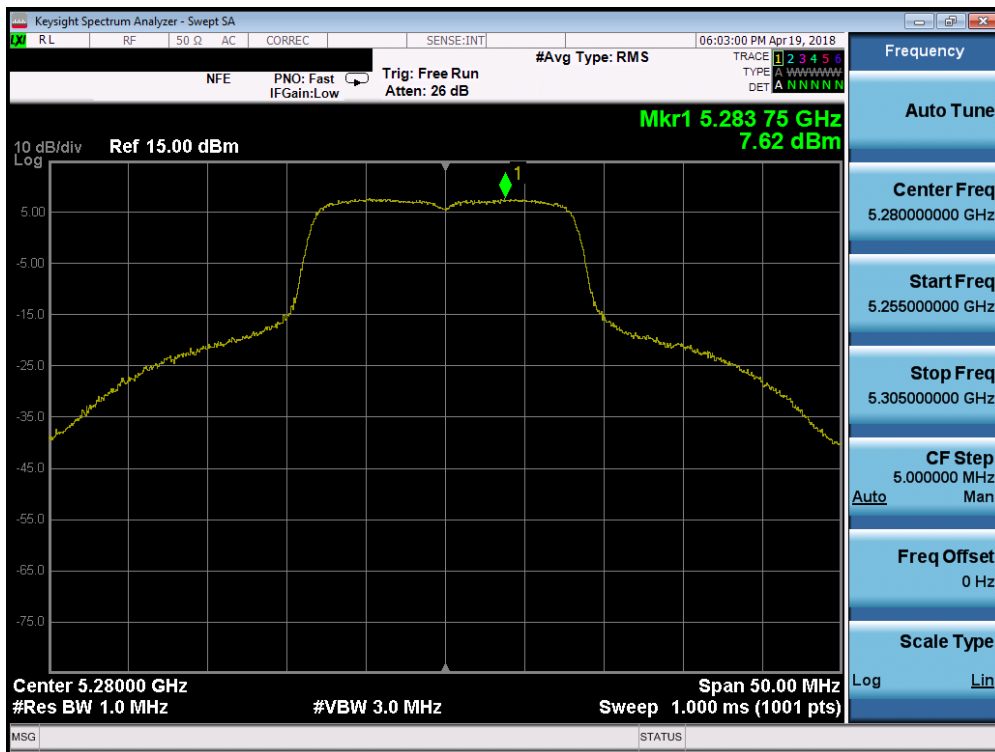


Plot 7-49. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 56)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 45 of 91 |

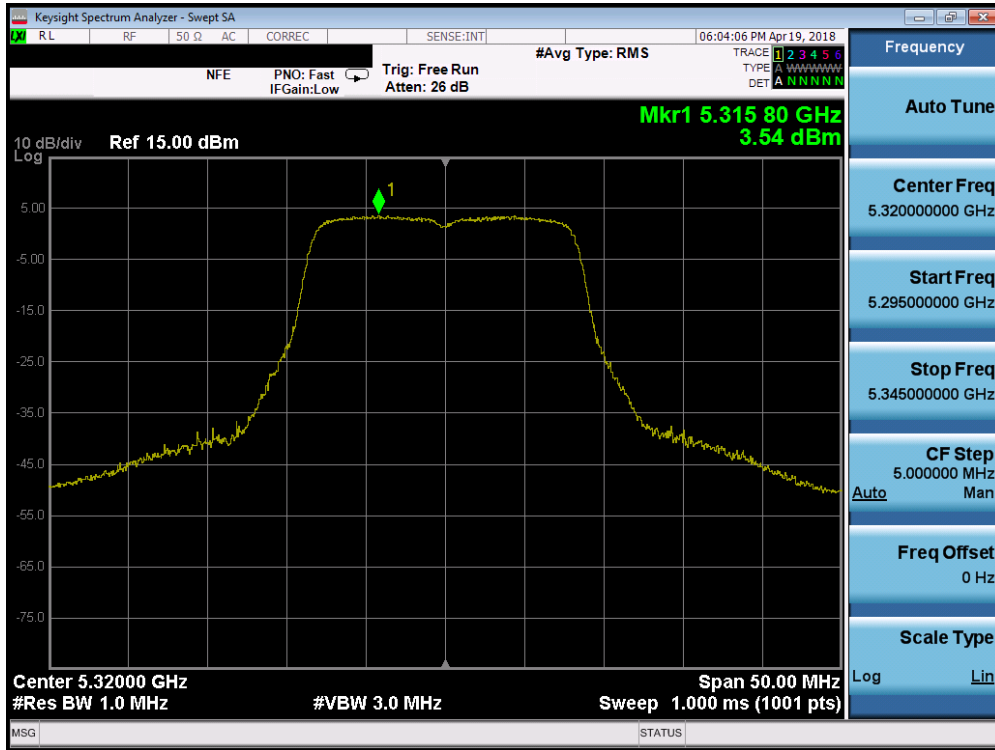


Plot 7-50. Power Spectral Density Plot (802.11a (UNII Band 2A) – Ch. 64)

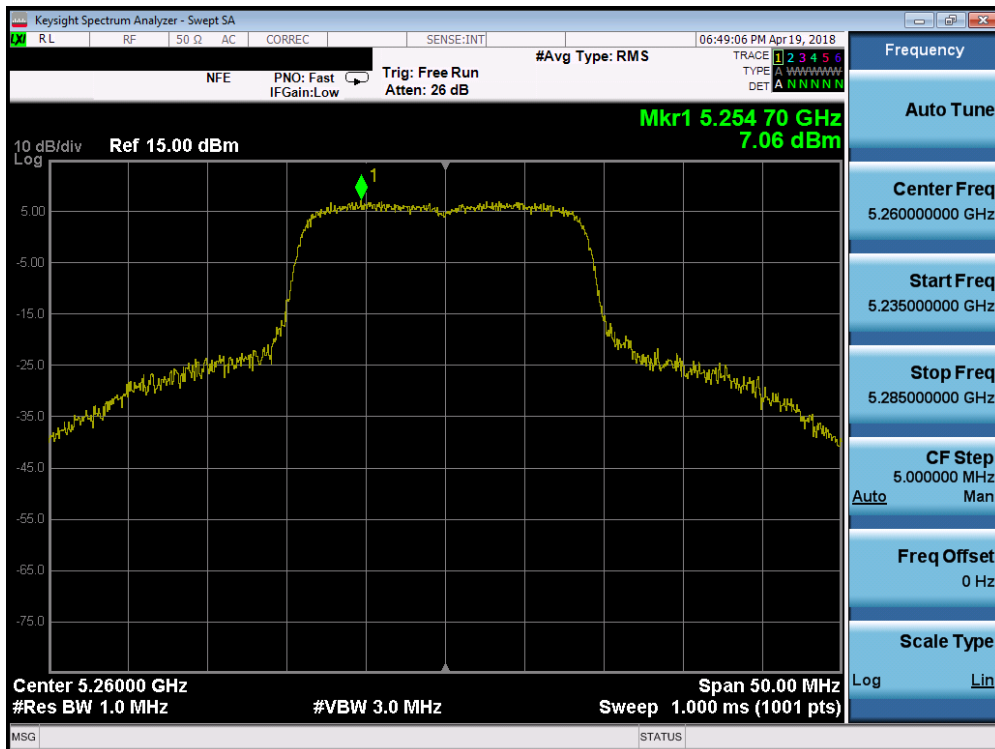


Plot 7-51. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 52)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 46 of 91 |

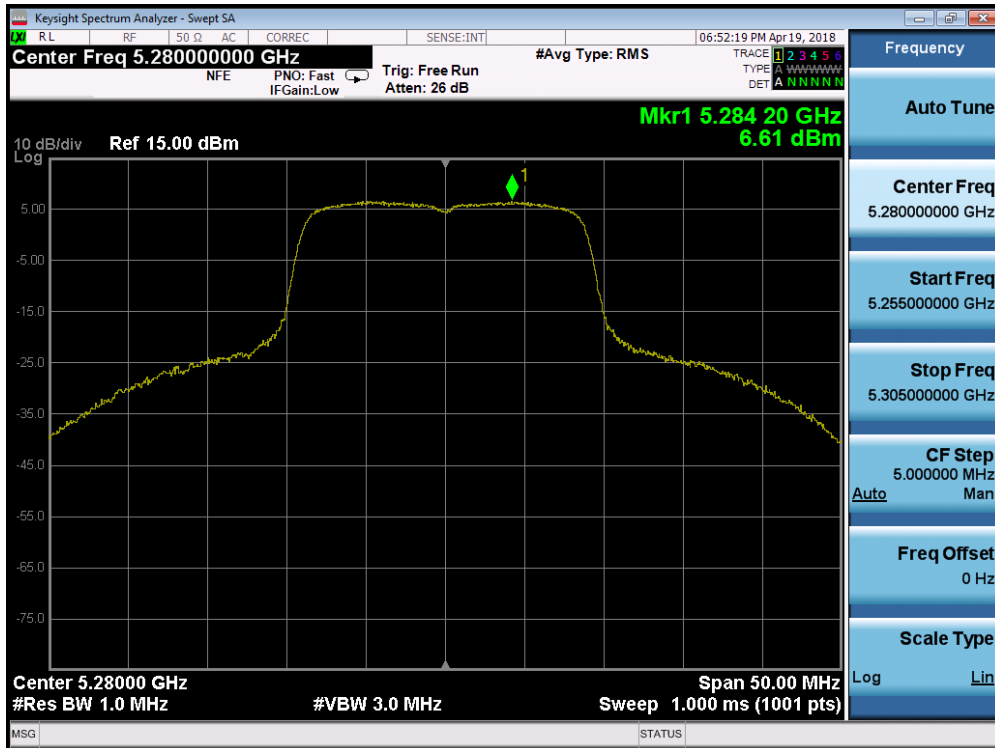


Plot 7-52. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 56)

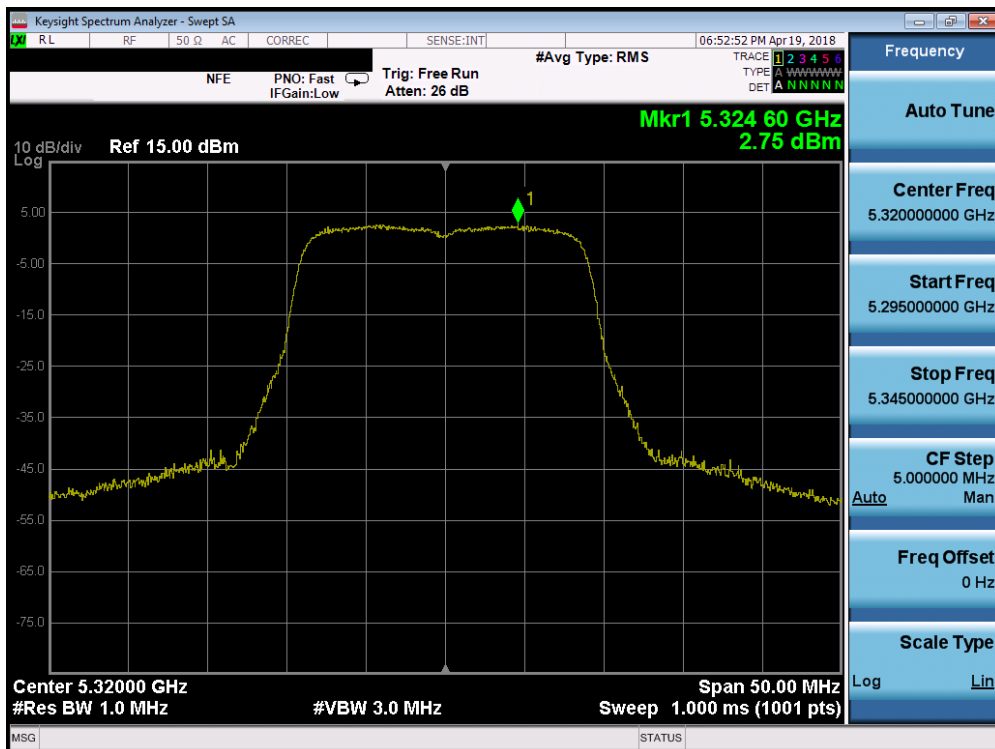


Plot 7-53. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2A) – Ch. 64)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 47 of 91 |

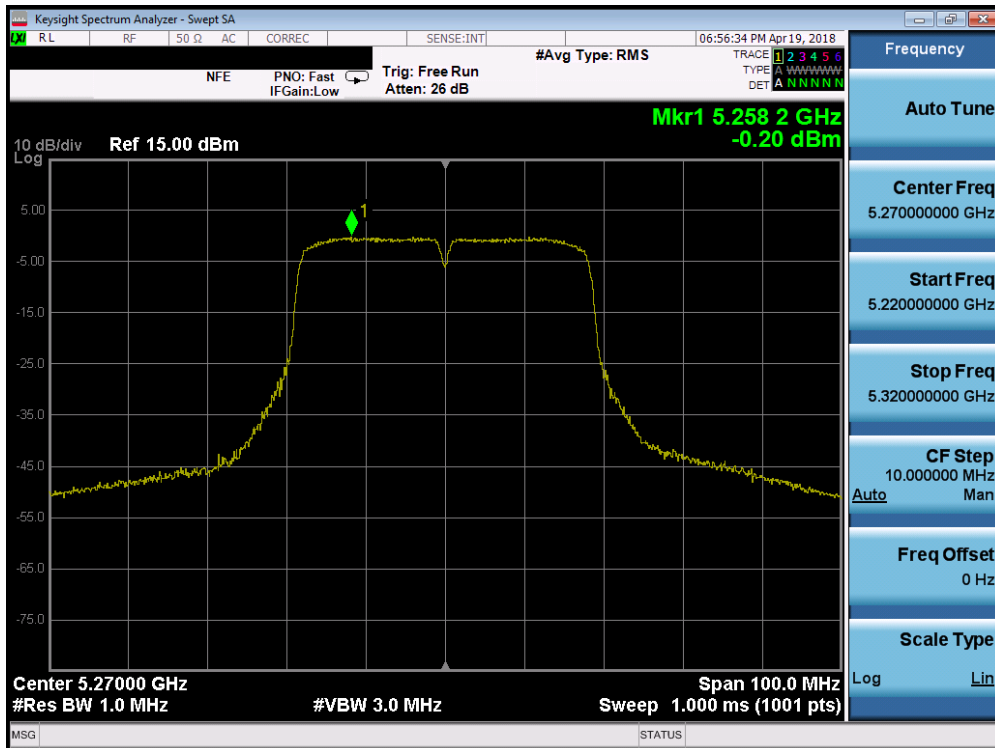


Plot 7-54. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 54)

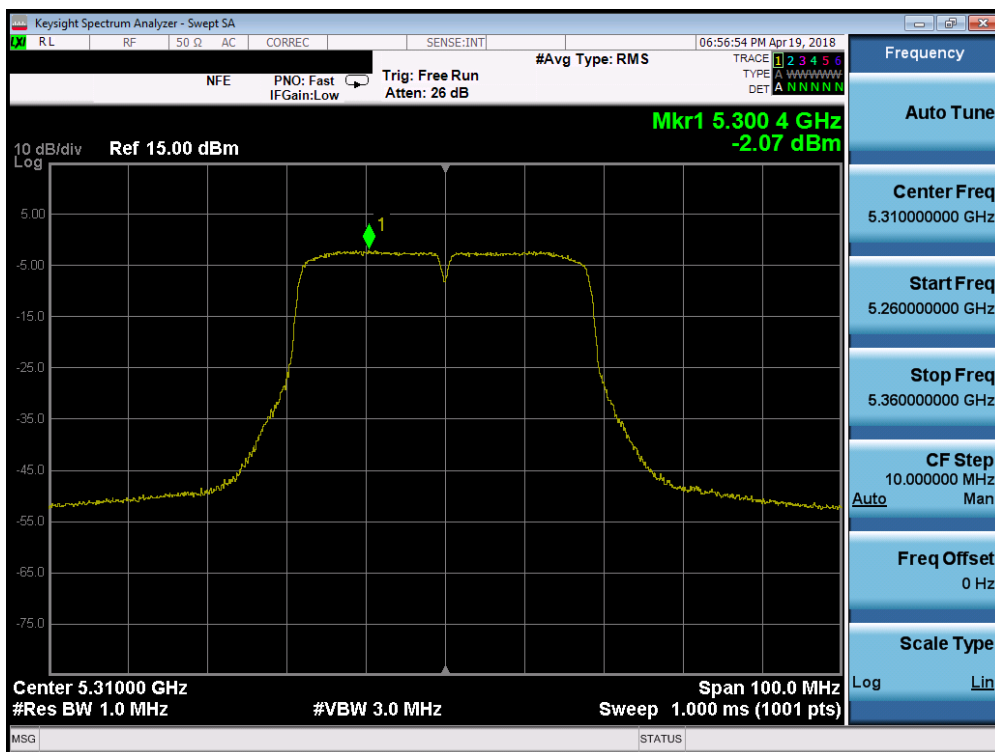


Plot 7-55. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2A) – Ch. 62)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 48 of 91 |

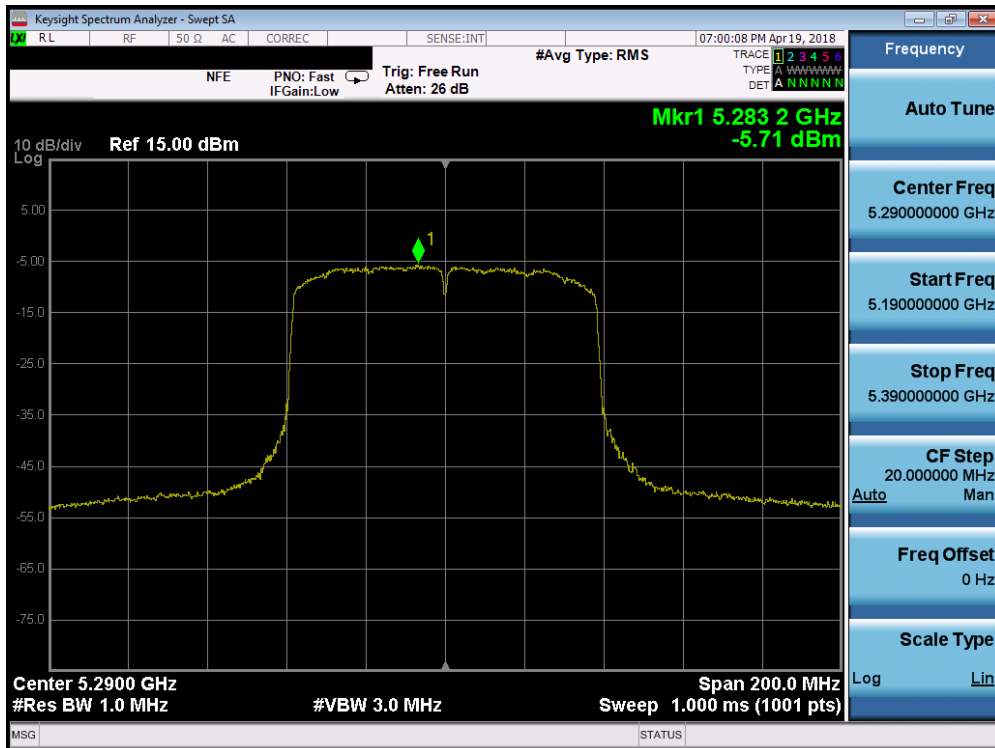


Plot 7-56. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2A) – Ch. 58)

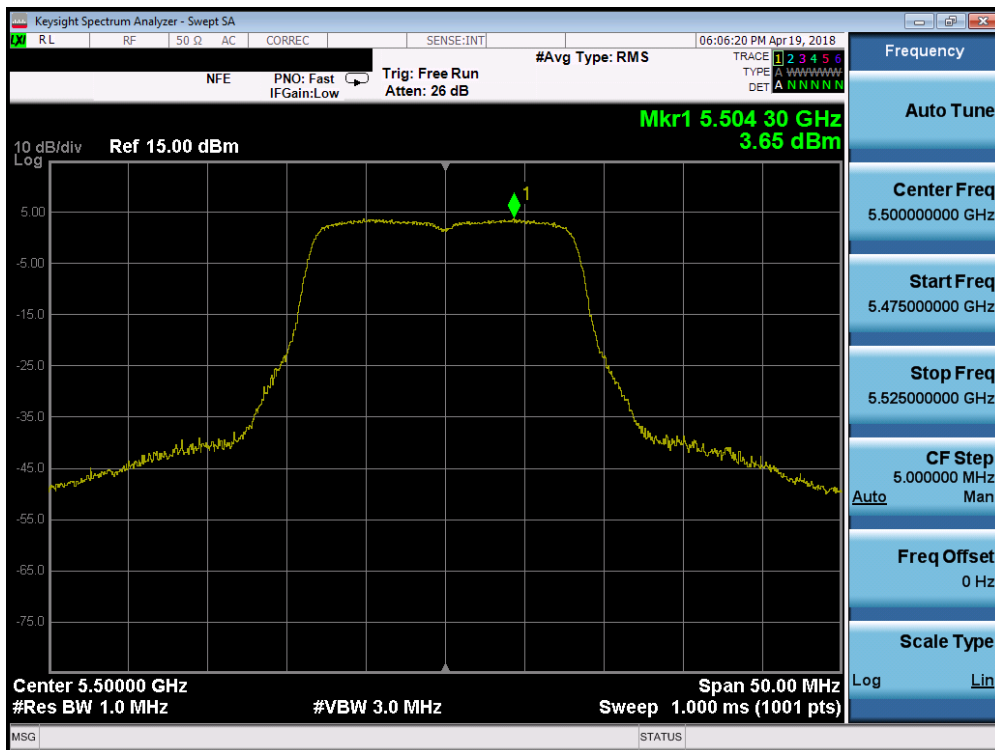


Plot 7-57. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 100)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 49 of 91 |

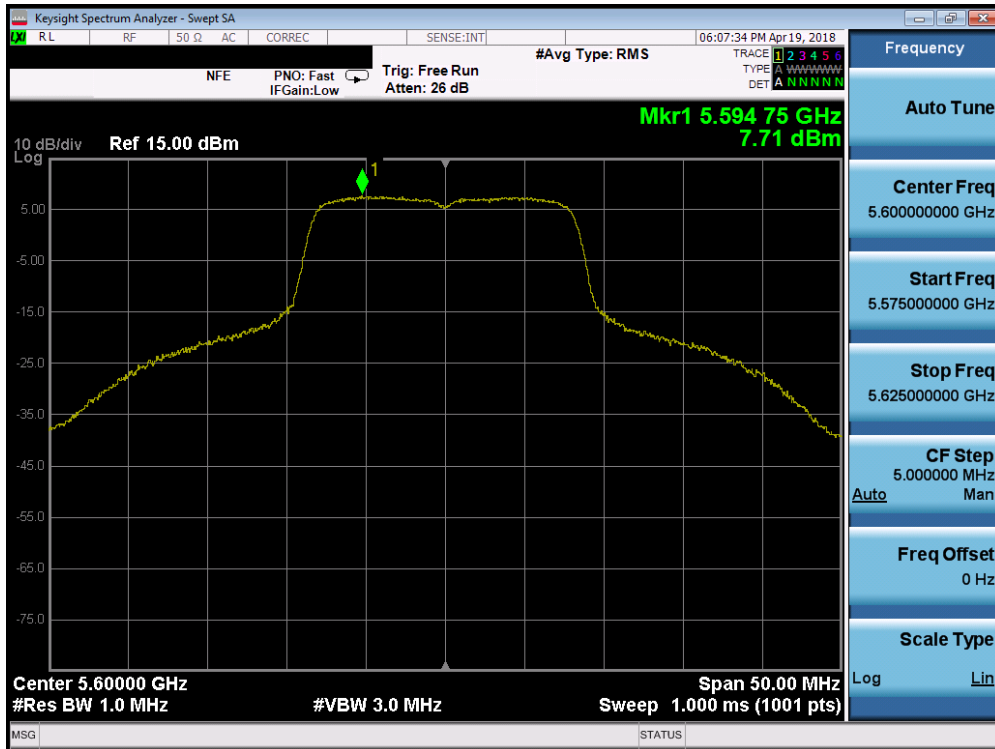


Plot 7-58. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 120)

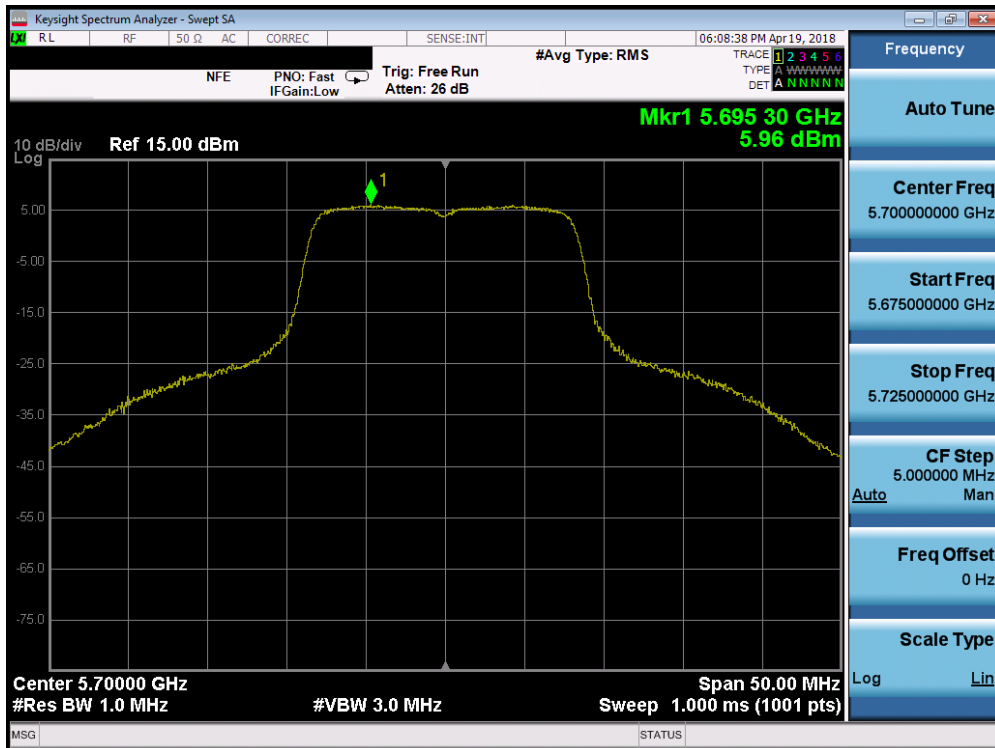


Plot 7-59. Power Spectral Density Plot (802.11a (UNII Band 2C) – Ch. 140)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 50 of 91 |

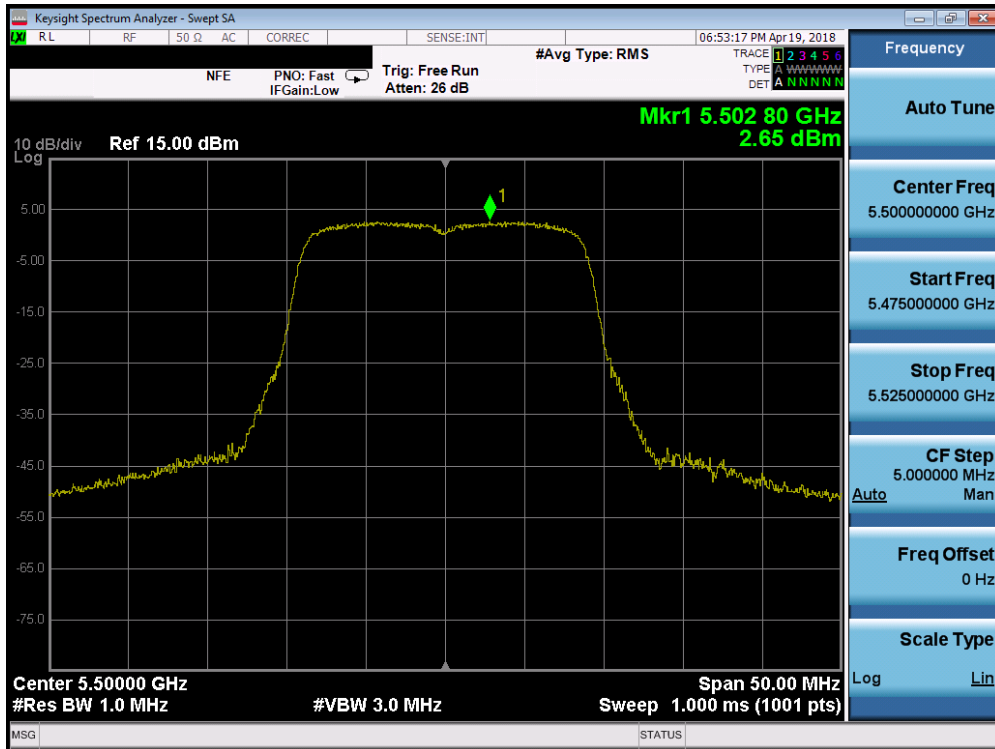


Plot 7-60. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 100)

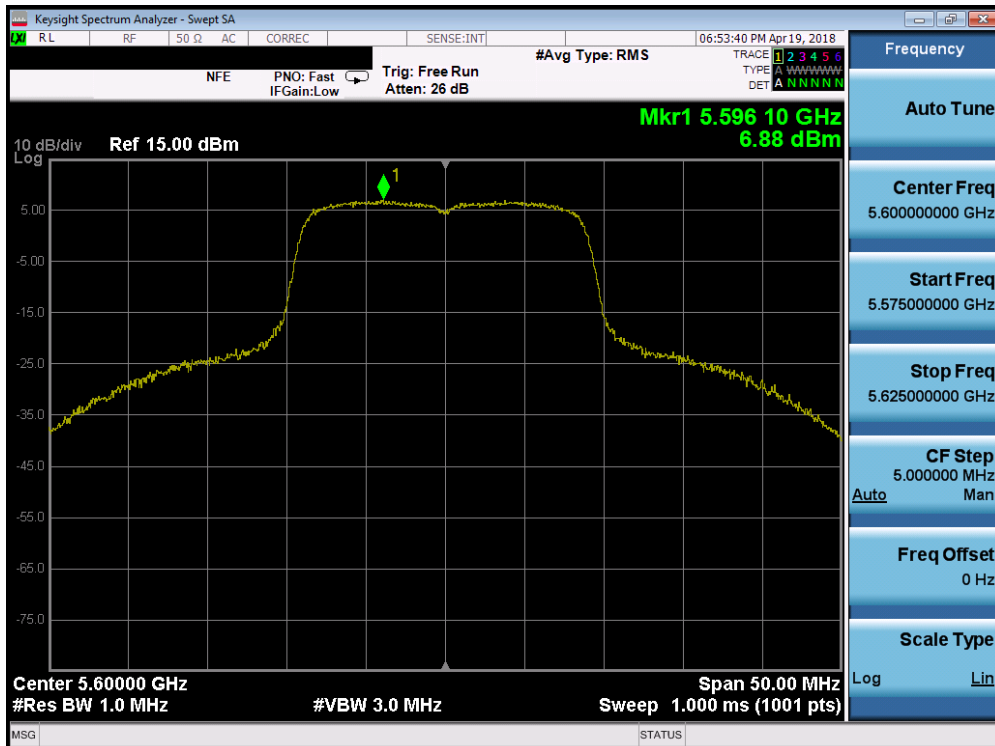


Plot 7-61. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 120)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 51 of 91 |

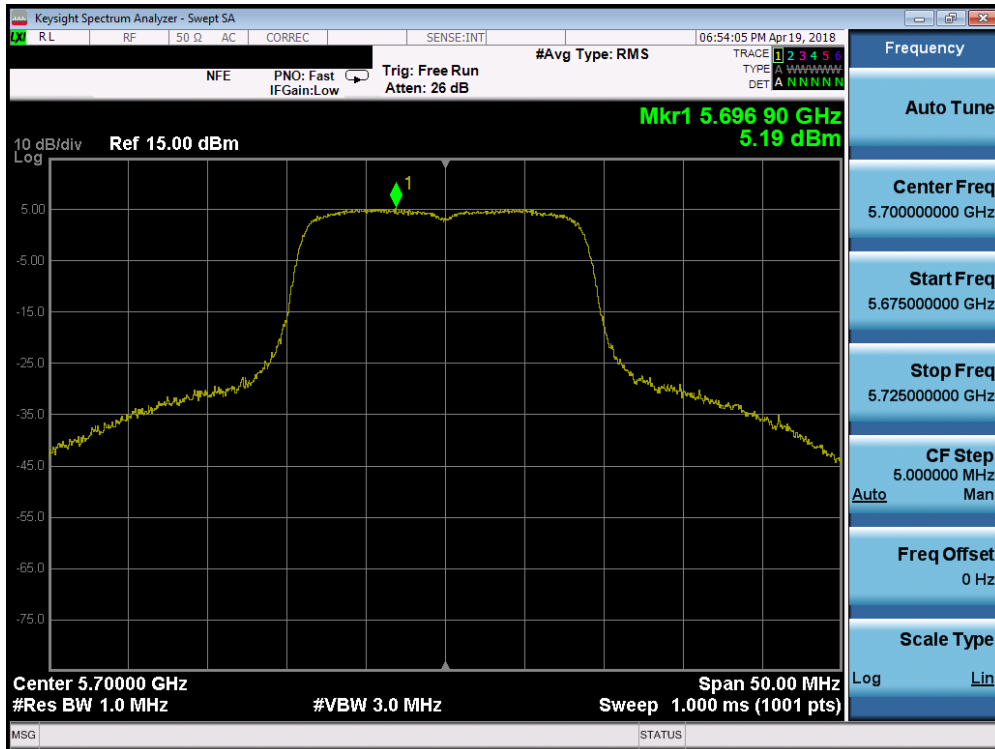


Plot 7-62. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2C) – Ch. 140)

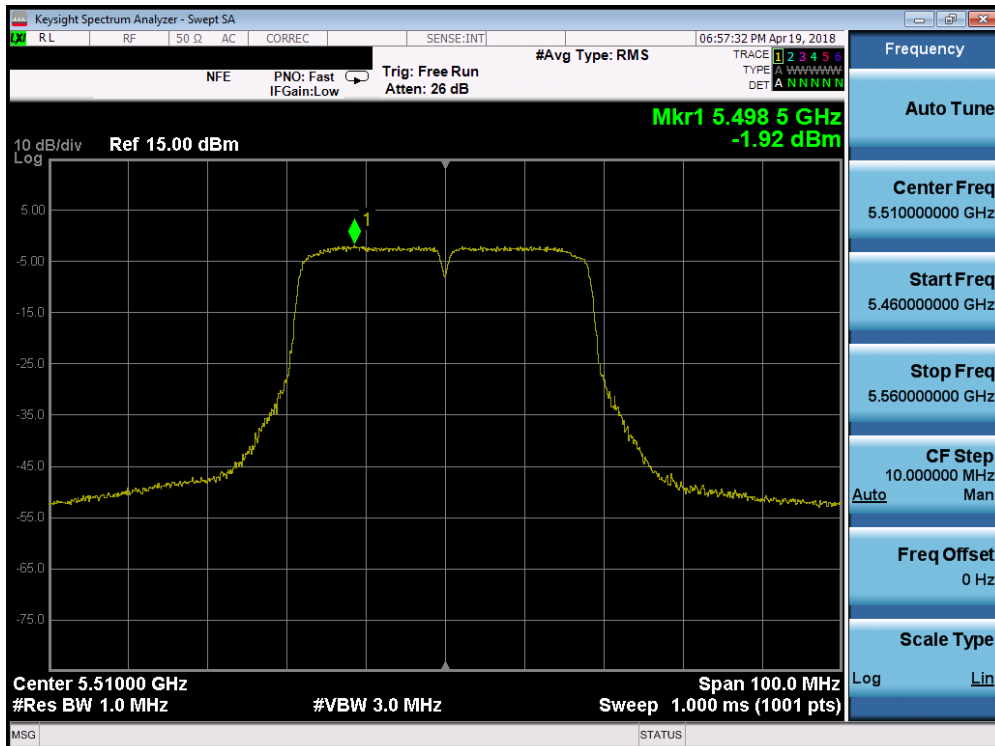


Plot 7-63. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 102)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 52 of 91 |

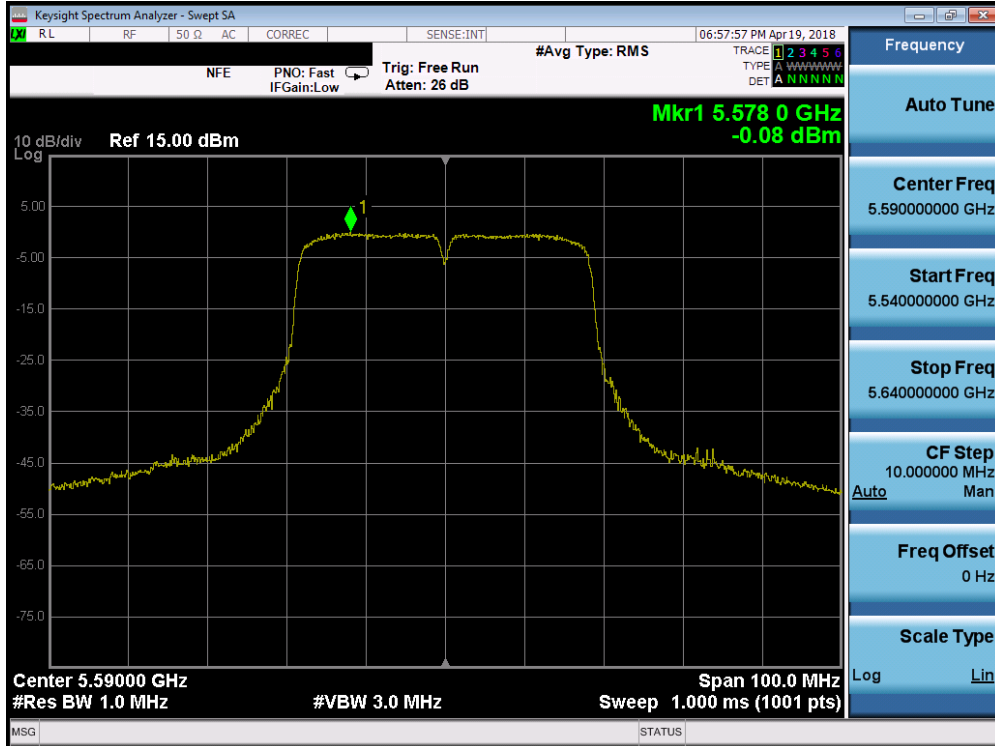


Plot 7-64. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 118)

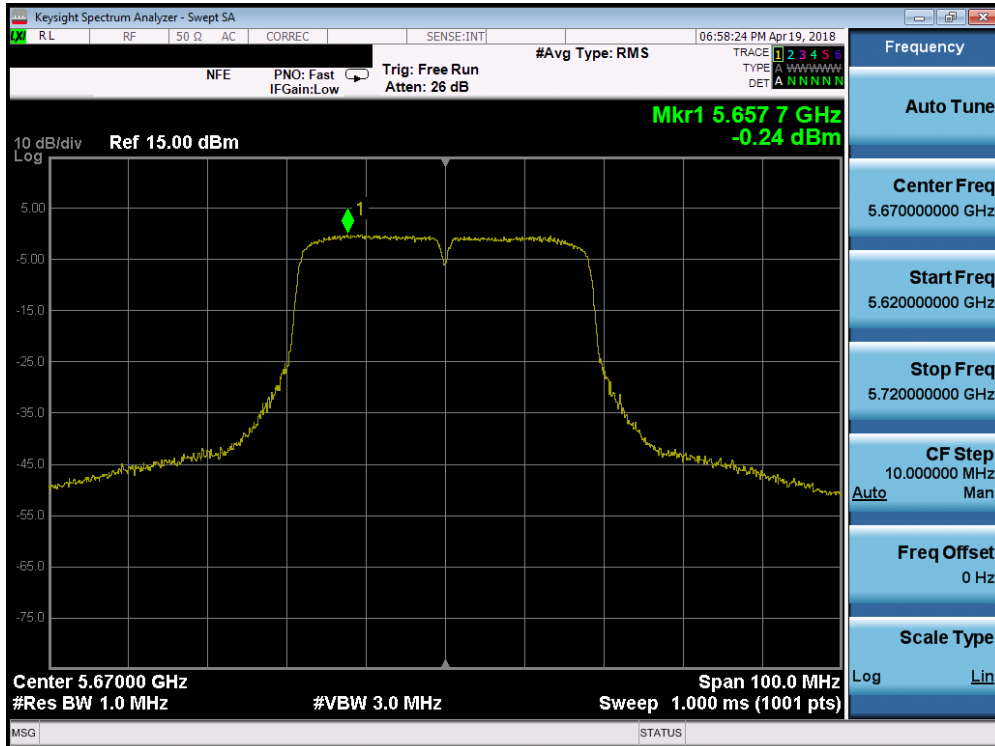


Plot 7-65. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2C) – Ch. 134)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 53 of 91 |

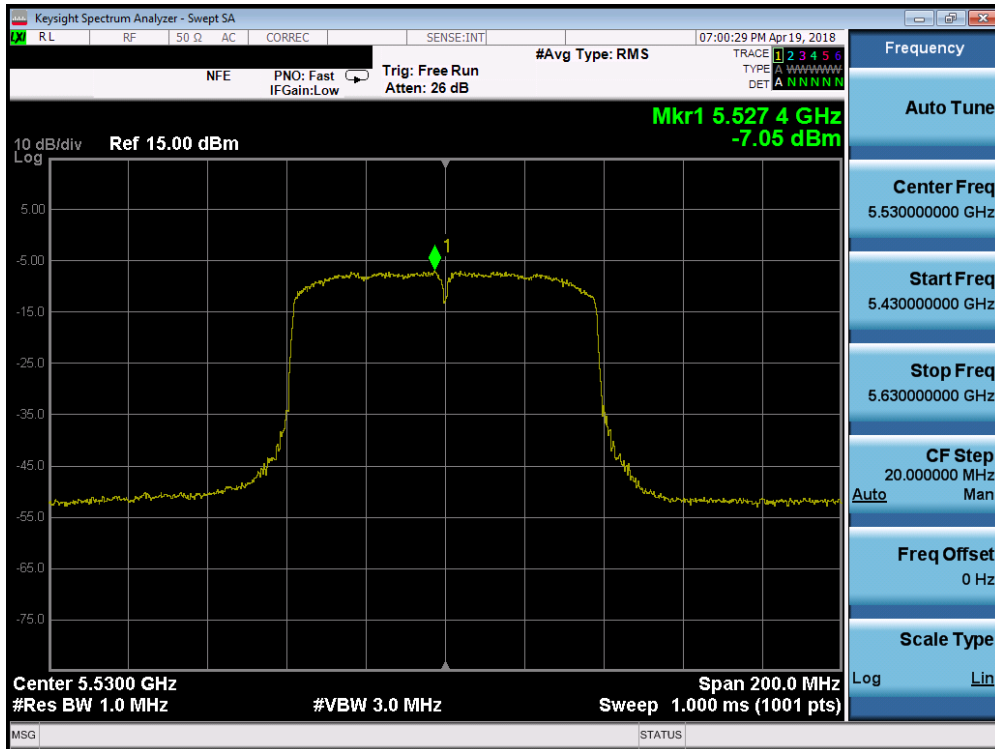

Plot 7-66. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 106)

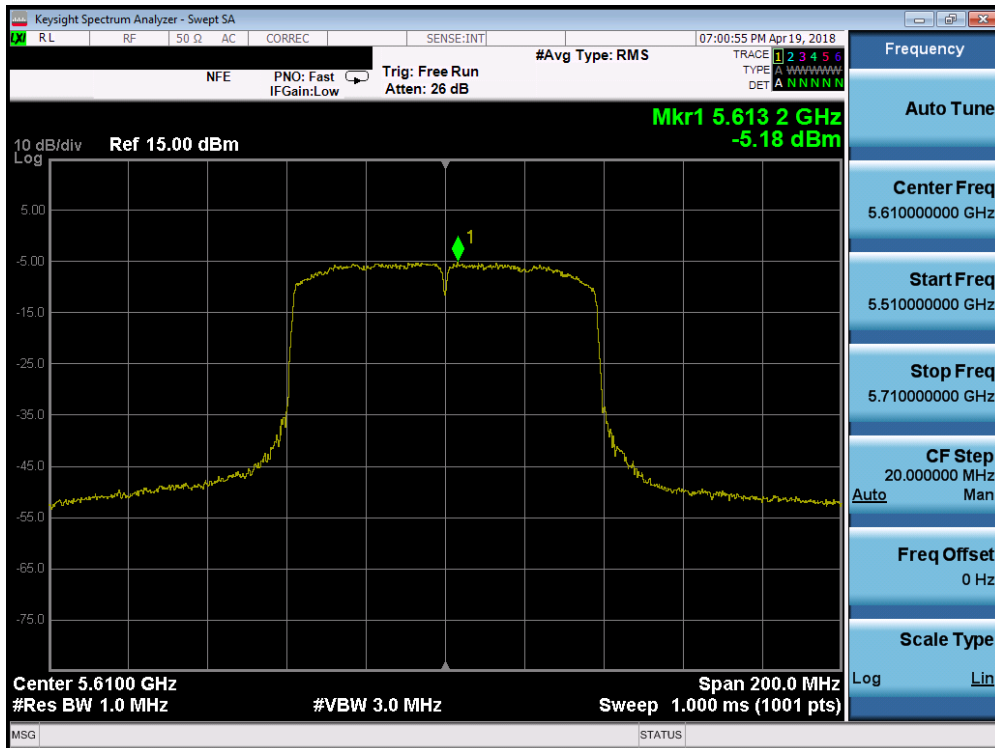


Plot 7-67. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2C) – Ch. 122)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 54 of 91 |


| | Frequency [MHz] | Channel No. | 802.11 Mode | Data Rate [Mbps] | Measured Power Density [dBm] | Max Permissible Power Density [dBm/500kHz] | Margin [dB] |
|---------------|-----------------|-------------|-------------|------------------|------------------------------|--|-------------|
| Band 3 | 5745 | 149 | a | 6 | 3.20 | 30.0 | -26.80 |
| | 5785 | 157 | a | 6 | 4.99 | 30.0 | -25.01 |
| | 5825 | 165 | a | 6 | 3.27 | 30.0 | -26.73 |
| | 5745 | 149 | n (20MHz) | 6.5/7.2 (MCS0) | 2.33 | 30.0 | -27.67 |
| | 5785 | 157 | n (20MHz) | 6.5/7.2 (MCS0) | 4.11 | 30.0 | -25.89 |
| | 5825 | 165 | n (20MHz) | 6.5/7.2 (MCS0) | 2.35 | 30.0 | -27.65 |
| | 5755 | 151 | n (40MHz) | 13.5/15 (MCS0) | -2.65 | 30.0 | -32.65 |
| | 5795 | 159 | n (40MHz) | 13.5/15 (MCS0) | -2.35 | 30.0 | -32.35 |
| | 5775 | 155 | ac (80MHz) | 29.3/32.5 (MCS0) | -7.25 | 30.0 | -37.25 |

Table 7-9. Band 3 Conducted Power Spectral Density Measurements

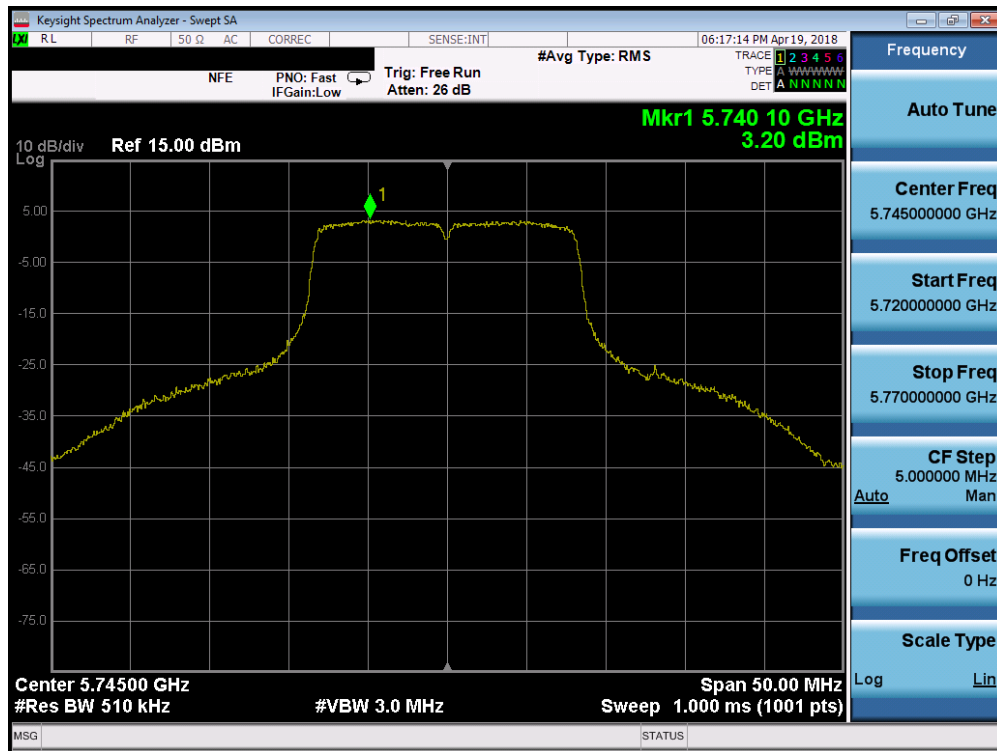


Plot 7-68. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 149)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 55 of 91 |

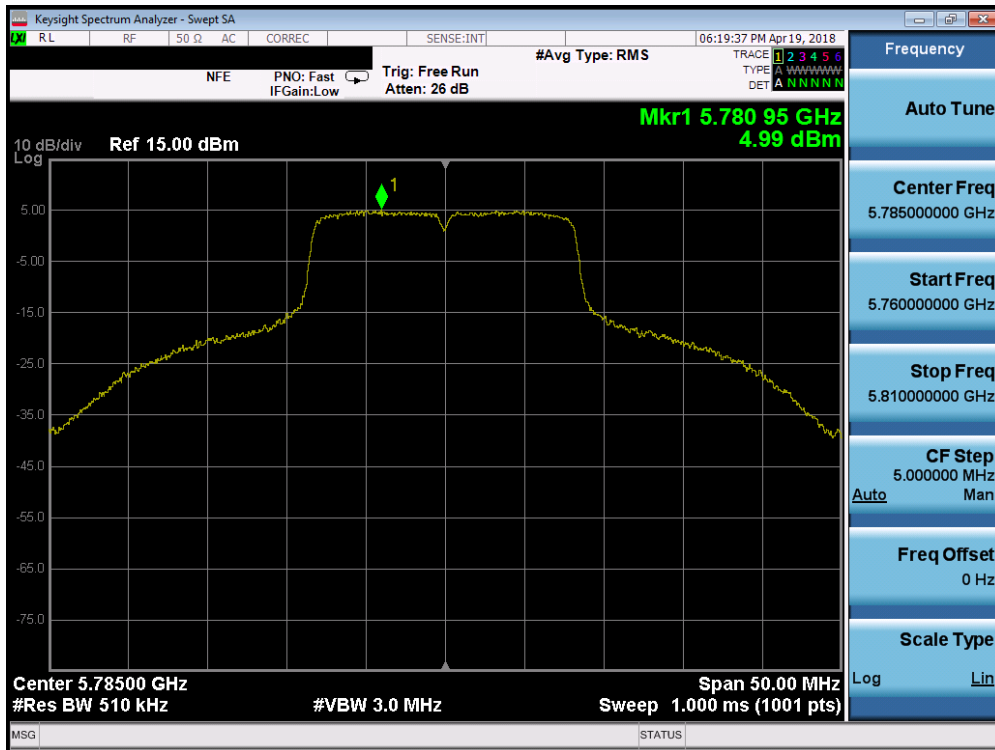


Plot 7-69. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 157)

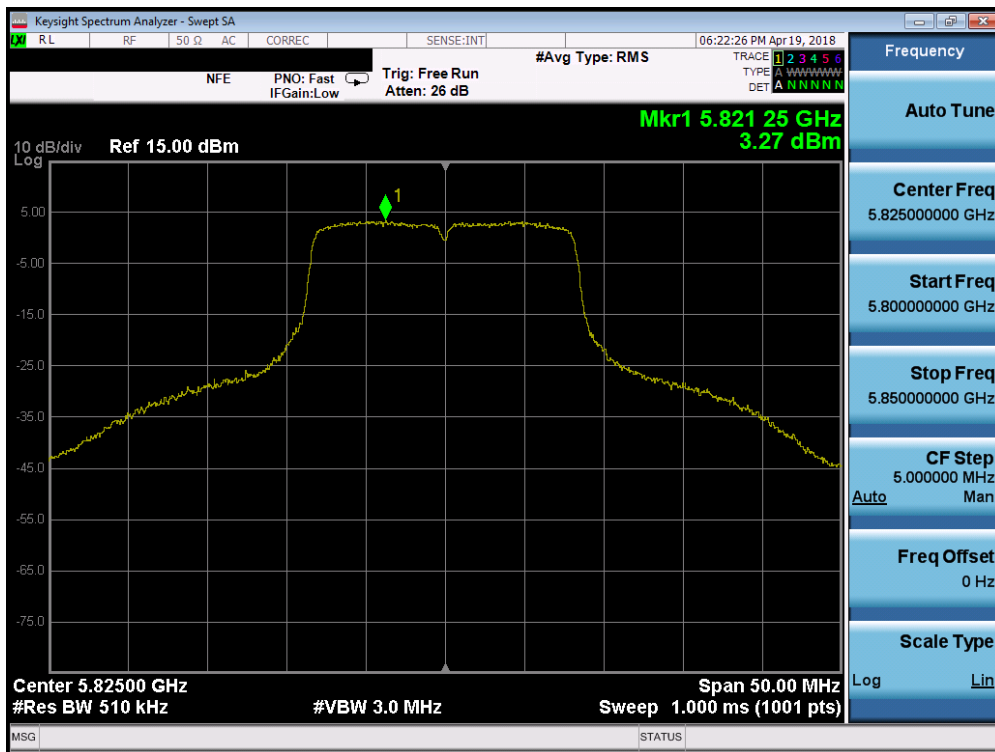


Plot 7-70. Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 165)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 56 of 91 |

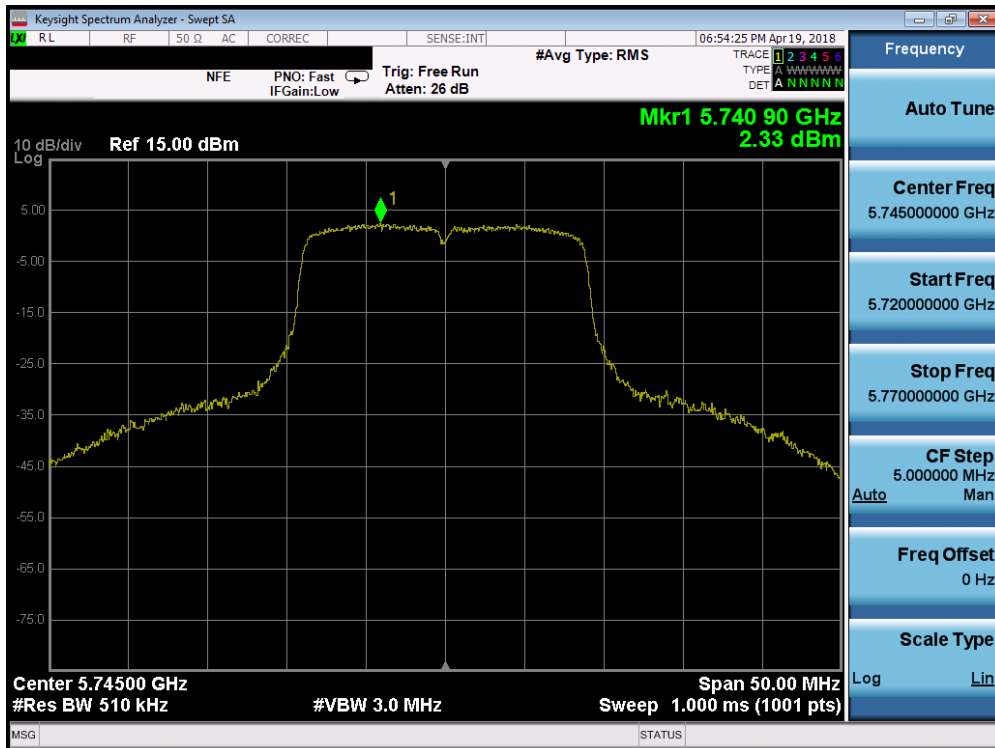


Plot 7-71. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 149)

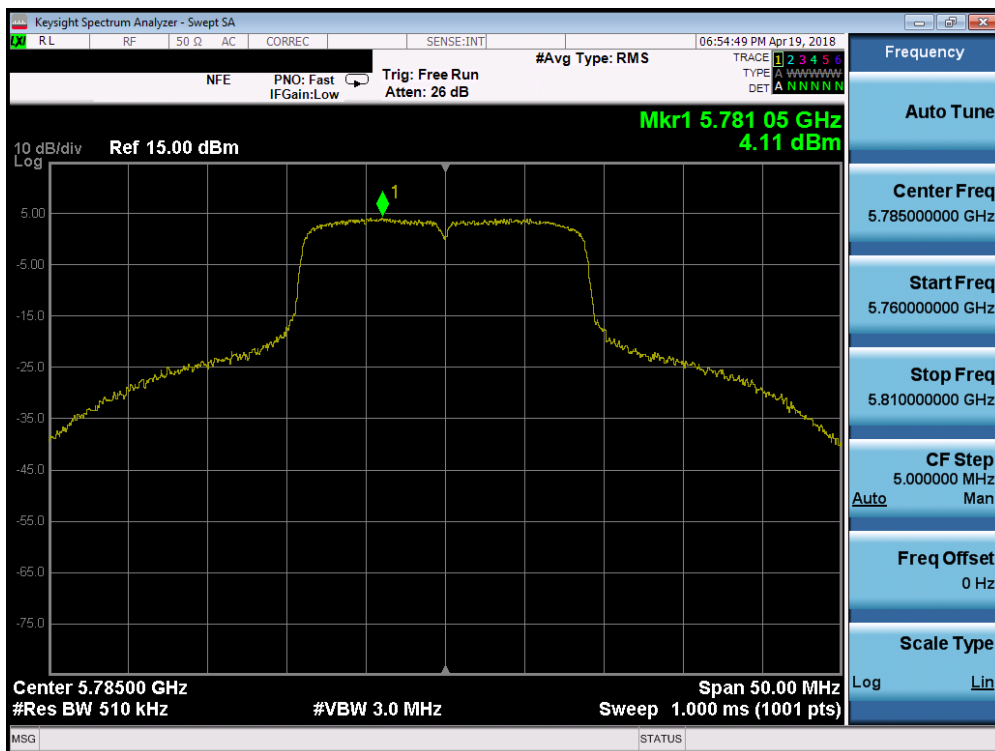


Plot 7-72. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 157)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 57 of 91 |

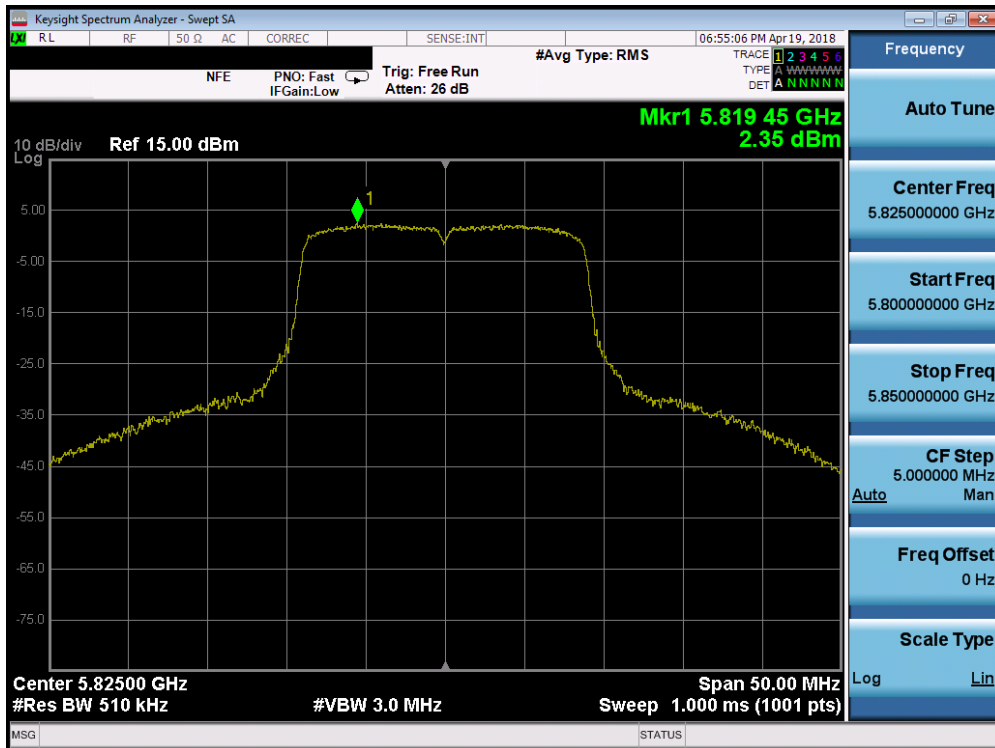


Plot 7-73. Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 165)

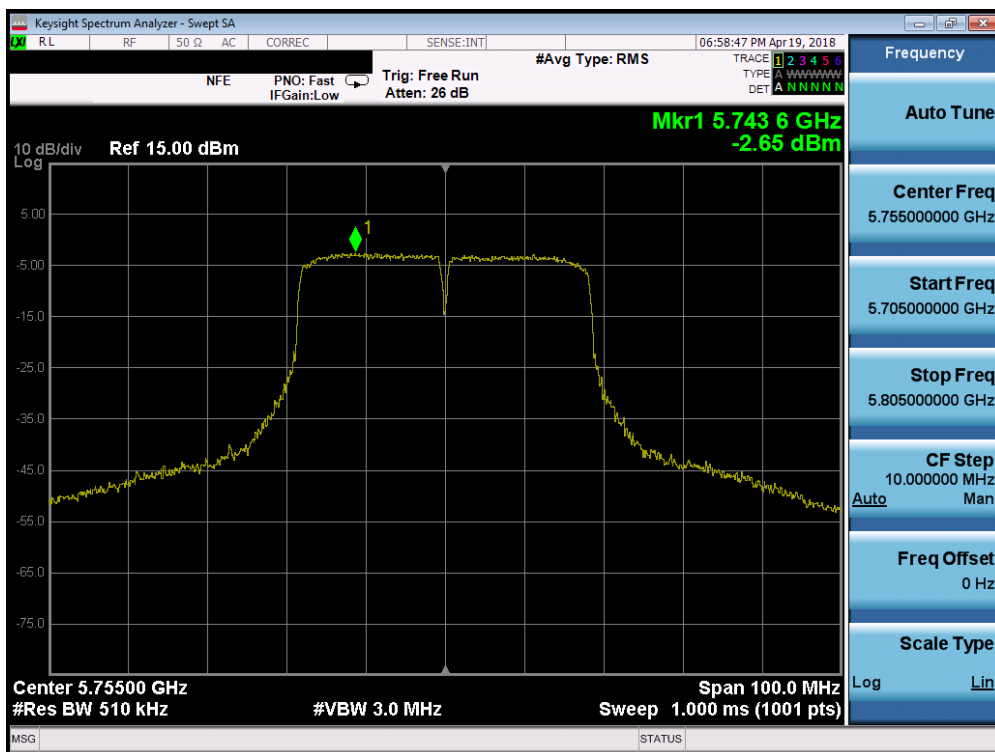


Plot 7-74. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 151)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 58 of 91 |

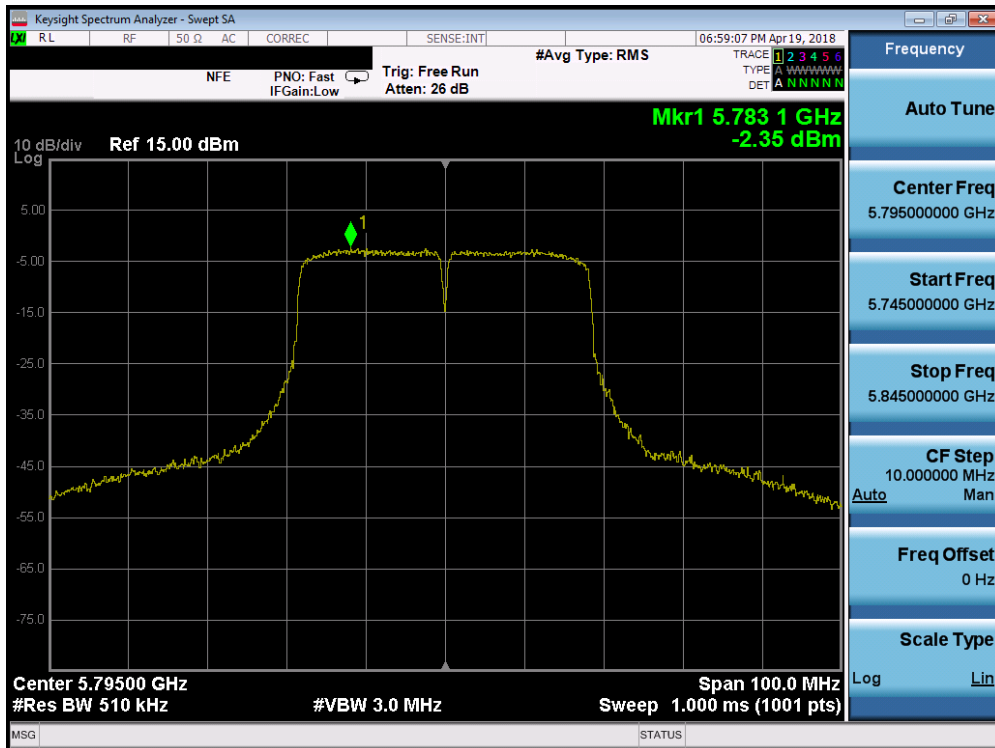

Plot 7-75. Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 159)

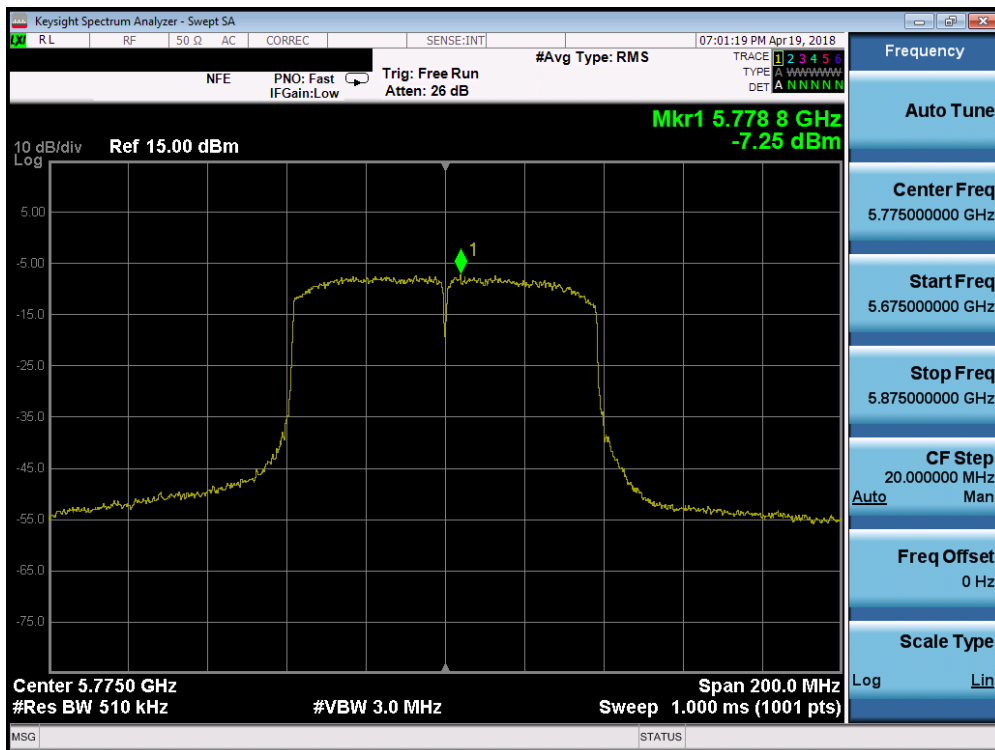

Plot 7-76. Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 155)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 59 of 91 |

7.6 Radiated Spurious Emission Measurements – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW), and 802.11ac (80MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-10 per Section 15.209 and RSS-Gen (8.9).

| Frequency | Field Strength [$\mu\text{V/m}$] | Measured Distance [Meters] |
|-----------------|---------------------------------------|-------------------------------|
| Above 960.0 MHz | 500 | 3 |

Table 7-10. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 60 of 91 |

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

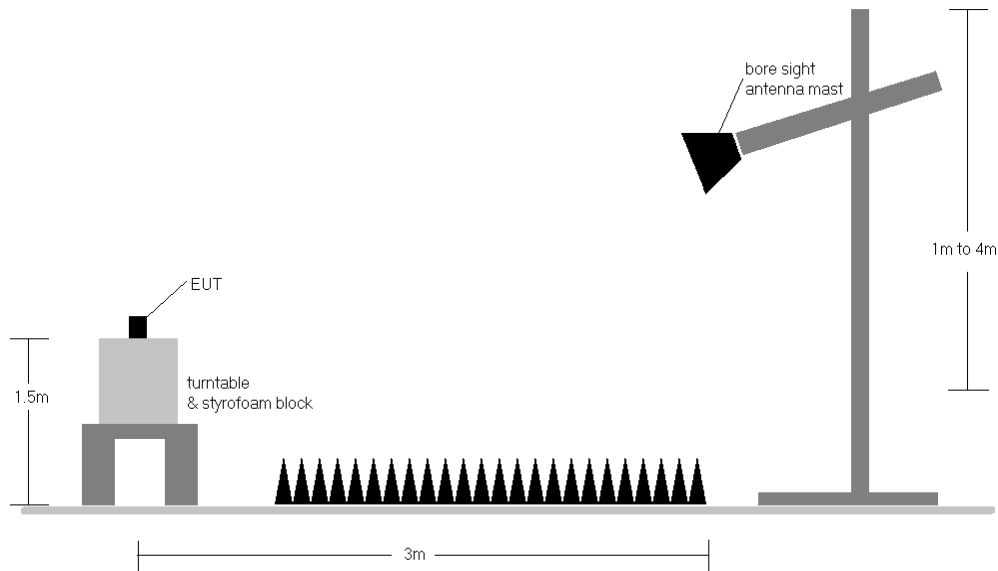


Figure 7-5. Test Instrument & Measurement Setup

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 61 of 91 |

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-10.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-10. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels


- Field Strength Level [dBμV/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dBμV/m] – Limit [dBμV/m]

Radiated Band Edge Measurement Offset


- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Pre-amplifier Gain

| | | | |
|---|---|--------------------------------------|--|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 62 of 91 |


7.6.1 Radiated Spurious Emission Measurements

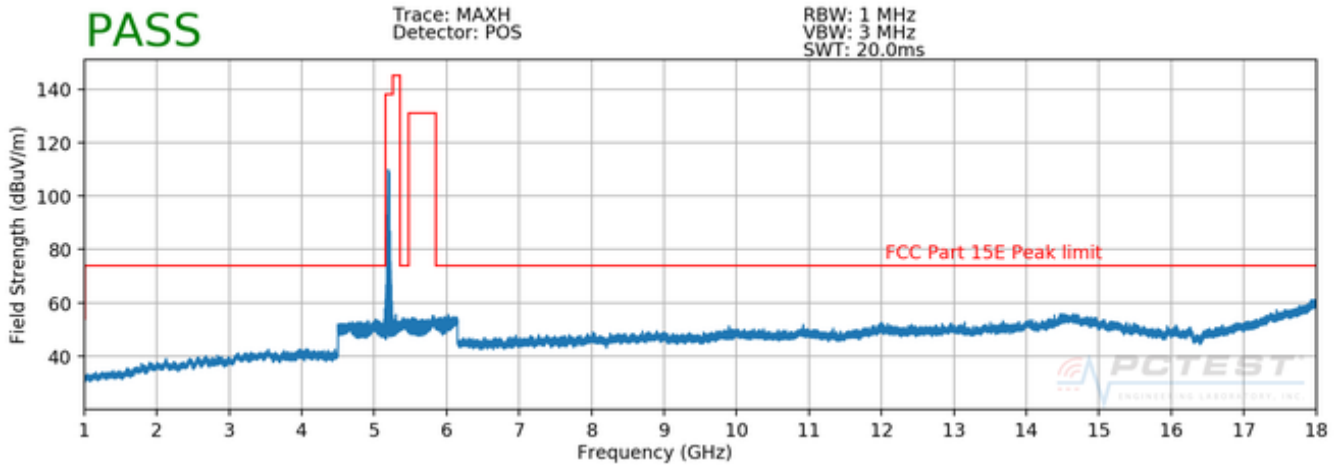

Plot 7-77. Radiated Spurious Plot above 1GHz (802.11a – U1 Ch. 40)

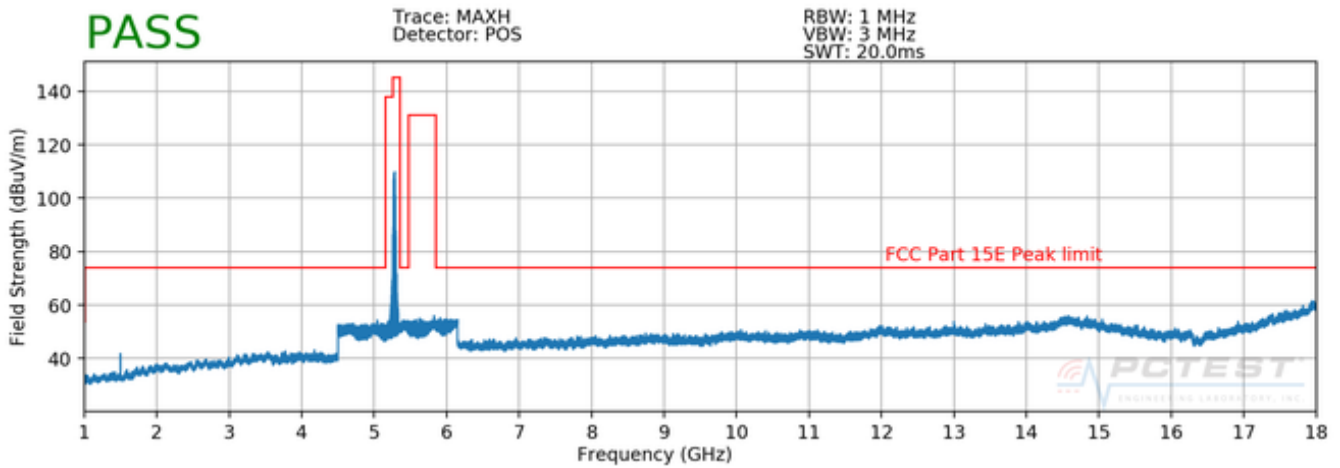


Plot 7-78. Radiated Spurious Plot above 1GHz (802.11a – U2a Ch. 56)

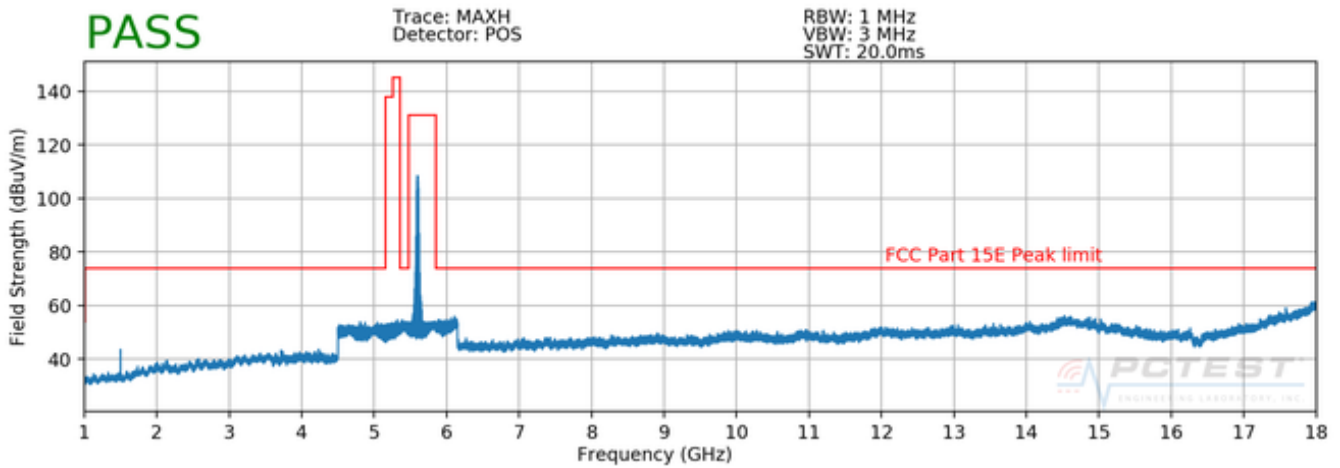

Plot 7-79. Radiated Spurious Plot above 1GHz (802.11a – U2c Ch. 120)


| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 63 of 91 |

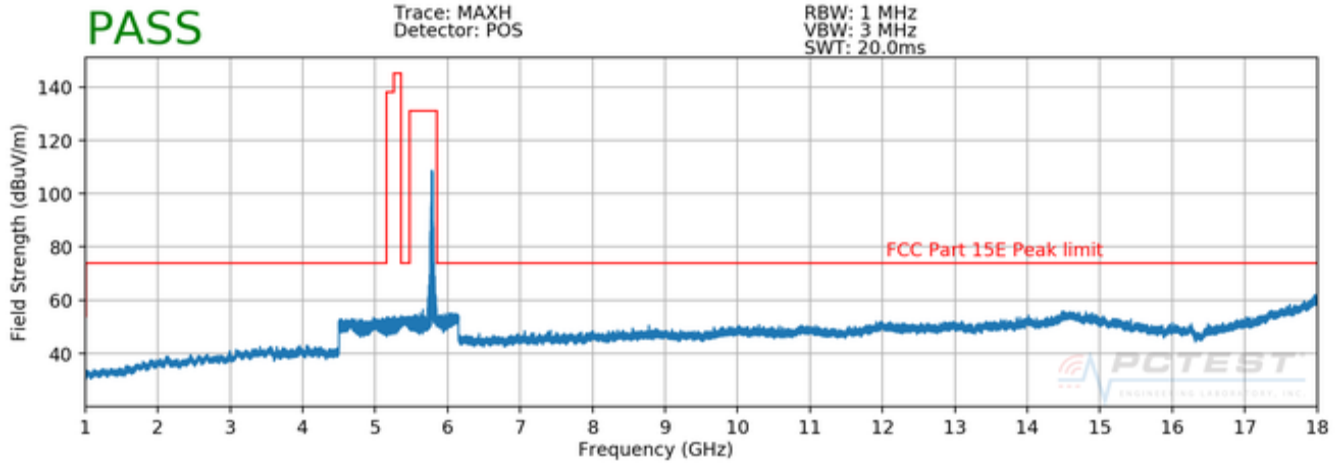


Plot 7-80. Radiated Spurious Plot above 1GHz (802.11a – U3 Ch. 157)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 64 of 91 |

Radiated Spurious Emissions Measurements (Above 18GHz)

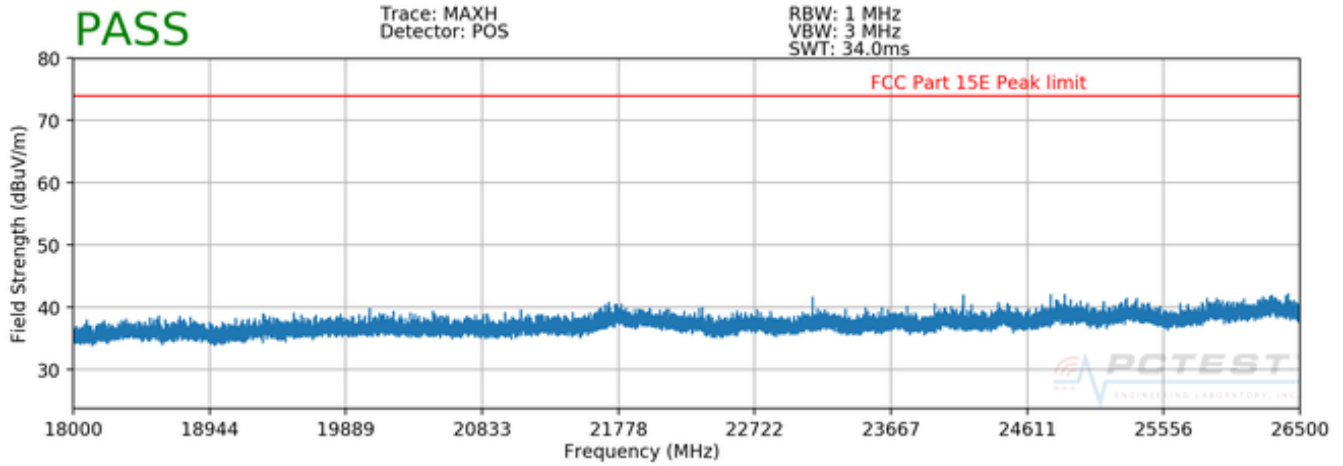

Plot 7-81. Radiated Spurious Plot 18GHz - 26.5GHz (802.11a)

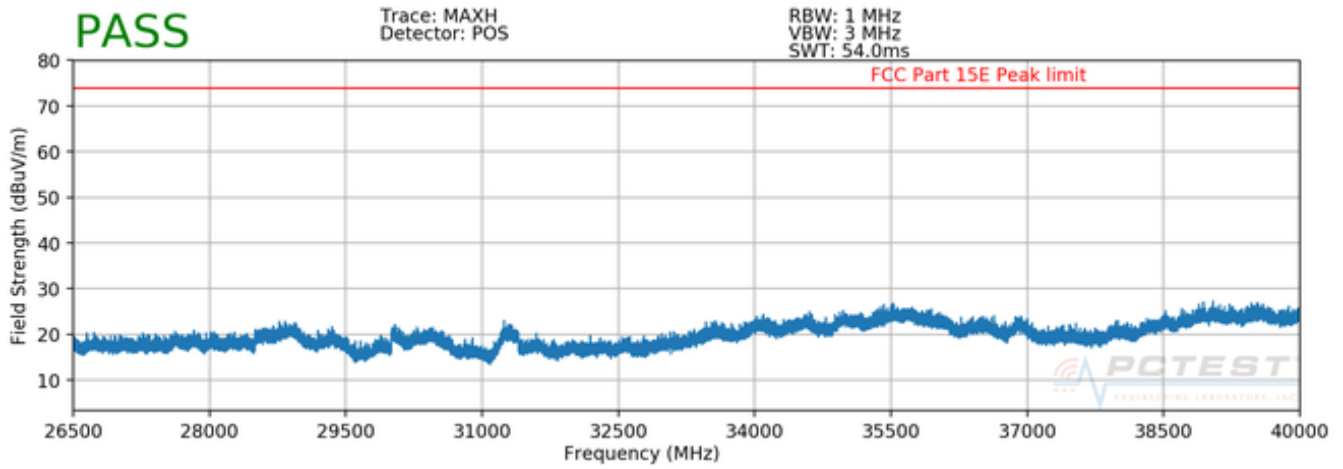

Plot 7-82. Radiated Spurious Plot 26.5GHz - 40GHz (802.11a)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 65 of 91 |

Radiated Spurious Emission Measurements

§15.407(b) §15.205 & §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5180MHz
 Channel: 36

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10360.00 | Peak | V | - | - | -64.82 | 11.48 | 0.00 | 53.66 | 68.20 | -14.54 |
| * 15540.00 | Average | V | - | - | -77.54 | 13.68 | 0.00 | 43.14 | 53.98 | -10.84 |
| * 15540.00 | Peak | V | - | - | -65.64 | 13.68 | 0.00 | 55.04 | 73.98 | -18.94 |
| * 20720.00 | Average | V | 100 | 106 | -76.14 | 7.94 | -9.54 | 29.26 | 53.98 | -24.72 |
| * 20720.00 | Peak | V | 100 | 106 | -66.57 | 7.94 | -9.54 | 38.83 | 73.98 | -35.15 |
| 25900.00 | Peak | V | - | - | -63.66 | 8.46 | -9.54 | 42.26 | 68.20 | -25.94 |

Table 7-11. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10400.00 | Peak | V | - | - | -65.37 | 11.67 | 0.00 | 53.30 | 68.20 | -14.90 |
| * 15600.00 | Average | V | - | - | -77.19 | 13.27 | 0.00 | 43.08 | 53.98 | -10.90 |
| * 15600.00 | Peak | V | - | - | -65.34 | 13.27 | 0.00 | 54.93 | 73.98 | -19.05 |
| * 20800.00 | Average | V | 100 | 104 | -74.71 | 7.95 | -9.54 | 30.70 | 53.98 | -23.28 |
| * 20800.00 | Peak | V | 100 | 104 | -65.82 | 7.95 | -9.54 | 39.59 | 73.98 | -34.39 |
| 26000.00 | Peak | V | - | - | -63.31 | 8.60 | -9.54 | 42.75 | 68.20 | -25.45 |

Table 7-12. Radiated Measurements

| | | | | | |
|--|---|---------------------------------------|--|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | | Page 66 of 91 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5240MHz
 Channel: 48

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10480.00 | Peak | V | - | - | -65.39 | 11.70 | 0.00 | 53.31 | 68.20 | -14.89 |
| * 15720.00 | Average | V | - | - | -77.24 | 12.83 | 0.00 | 42.59 | 53.98 | -11.39 |
| * 15720.00 | Peak | V | - | - | -64.75 | 12.83 | 0.00 | 55.08 | 73.98 | -18.90 |
| * 20960.00 | Average | V | 100 | 106 | -75.43 | 7.91 | -9.54 | 29.94 | 53.98 | -24.04 |
| * 20960.00 | Peak | V | 100 | 106 | -66.69 | 7.91 | -9.54 | 38.68 | 73.98 | -35.30 |
| 26200.00 | Peak | V | - | - | -64.16 | 8.62 | -9.54 | 41.92 | 68.20 | -26.28 |

Table 7-13. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5260MHz
 Channel: 52

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10520.00 | Peak | V | - | - | -65.32 | 11.68 | 0.00 | 53.36 | 68.20 | -14.84 |
| * 15780.00 | Average | V | - | - | -77.36 | 12.91 | 0.00 | 42.55 | 53.98 | -11.43 |
| * 15780.00 | Peak | V | - | - | -65.84 | 12.91 | 0.00 | 54.07 | 73.98 | -19.91 |
| * 21040.00 | Average | V | 100 | 108 | -75.57 | 7.92 | -9.54 | 29.81 | 53.98 | -24.17 |
| * 21040.00 | Peak | V | 100 | 108 | -66.33 | 7.92 | -9.54 | 39.05 | 73.98 | -34.93 |
| 26300.00 | Peak | V | - | - | -64.59 | 8.73 | -9.54 | 41.60 | 68.20 | -26.60 |

Table 7-14. Radiated Measurements

| | | | |
|--|---|-------------------------------|---------------------------------|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 67 of 91 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5280MHz
 Channel: 56

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| 10560.00 | Peak | V | - | - | -65.75 | 11.56 | 0.00 | 52.81 | 68.20 | -15.39 |
| * 15840.00 | Average | V | - | - | -77.16 | 12.86 | 0.00 | 42.70 | 53.98 | -11.28 |
| * 15840.00 | Peak | V | - | - | -65.25 | 12.86 | 0.00 | 54.61 | 73.98 | -19.37 |
| * 21120.00 | Average | V | 100 | 108 | -74.87 | 7.96 | -9.54 | 30.55 | 53.98 | -23.43 |
| * 21120.00 | Peak | V | 100 | 108 | -65.38 | 7.96 | -9.54 | 40.04 | 73.98 | -33.94 |
| 26400.00 | Peak | V | - | - | -64.59 | 8.94 | -9.54 | 41.81 | 68.20 | -26.39 |

Table 7-15. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5320MHz
 Channel: 64

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 10640.00 | Average | V | - | - | -77.33 | 11.80 | 0.00 | 41.47 | 53.98 | -12.51 |
| * 10640.00 | Peak | V | - | - | -65.61 | 11.80 | 0.00 | 53.19 | 73.98 | -20.79 |
| * 15960.00 | Average | V | - | - | -76.87 | 13.23 | 0.00 | 43.36 | 53.98 | -10.61 |
| * 15960.00 | Peak | V | - | - | -65.30 | 13.23 | 0.00 | 54.93 | 73.98 | -19.04 |
| * 21280.00 | Average | V | 100 | 74 | -75.52 | 8.04 | -9.54 | 29.98 | 53.98 | -24.00 |
| * 21280.00 | Peak | V | 100 | 74 | -65.32 | 8.04 | -9.54 | 40.18 | 73.98 | -33.80 |
| 26600.00 | Peak | V | - | - | -50.39 | -8.30 | -9.54 | 38.76 | 68.20 | -29.44 |

Table 7-16. Radiated Measurements

| | | | | | |
|--|---|---------------------------------------|--|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | | Page 68 of 91 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11000.00 | Average | V | - | - | -76.81 | 12.04 | 0.00 | 42.23 | 53.98 | -11.75 |
| * 11000.00 | Peak | V | - | - | -65.65 | 12.04 | 0.00 | 53.39 | 73.98 | -20.59 |
| 16500.00 | Peak | V | - | - | -65.39 | 12.28 | 0.00 | 53.89 | 68.20 | -14.31 |
| 22000.00 | Peak | V | 100 | 75 | -65.75 | 8.43 | -9.54 | 40.13 | 68.20 | -28.07 |
| 27500.00 | Peak | V | - | - | -47.77 | -8.80 | -9.54 | 40.89 | 68.20 | -27.31 |

Table 7-17. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5600MHz
 Channel: 120

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11200.00 | Average | V | - | - | -77.36 | 11.28 | 0.00 | 40.92 | 53.98 | -13.06 |
| * 11200.00 | Peak | V | - | - | -65.73 | 11.28 | 0.00 | 52.55 | 73.98 | -21.43 |
| 16800.00 | Peak | V | - | - | -65.25 | 13.32 | 0.00 | 55.07 | 68.20 | -13.13 |
| * 22400.00 | Average | V | 100 | 109 | -74.09 | 8.08 | -9.54 | 31.45 | 53.98 | -22.53 |
| * 22400.00 | Peak | V | 100 | 109 | -65.25 | 8.08 | -9.54 | 40.29 | 73.98 | -33.69 |
| 28000.00 | Peak | V | - | - | -48.06 | -9.08 | -9.54 | 40.32 | 68.20 | -27.88 |

Table 7-18. Radiated Measurements

| | | | | | |
|--|---|---------------------------------------|--|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 69 of 91 | |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11400.00 | Average | V | - | - | -77.39 | 11.73 | 0.00 | 41.34 | 53.98 | -12.64 |
| * 11400.00 | Peak | V | - | - | -65.28 | 11.73 | 0.00 | 53.45 | 73.98 | -20.53 |
| 17100.00 | Peak | V | - | - | -64.90 | 15.44 | 0.00 | 57.54 | 68.20 | -10.66 |
| * 22800.00 | Average | V | 100 | 35 | -72.07 | 8.37 | -9.54 | 33.76 | 53.98 | -20.22 |
| * 22800.00 | Peak | V | 100 | 35 | -64.87 | 8.37 | -9.54 | 40.96 | 73.98 | -33.02 |
| 28500.00 | Peak | V | - | - | -46.86 | -8.95 | -9.54 | 41.65 | 68.20 | -26.55 |

Table 7-19. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11490.00 | Average | V | - | - | -76.96 | 11.70 | 0.00 | 41.74 | 53.98 | -12.24 |
| * 11490.00 | Peak | V | - | - | -64.27 | 11.70 | 0.00 | 54.43 | 73.98 | -19.55 |
| 17235.00 | Peak | V | - | - | -65.68 | 17.09 | 0.00 | 58.41 | 68.20 | -9.79 |
| * 22980.00 | Average | V | 100 | 33 | -70.35 | 8.16 | -9.54 | 35.27 | 53.98 | -18.71 |
| * 22980.00 | Peak | V | 100 | 33 | -63.51 | 8.16 | -9.54 | 42.11 | 73.98 | -31.87 |
| 28725.00 | Peak | V | - | - | -44.90 | -9.24 | -9.54 | 43.32 | 68.20 | -24.88 |

Table 7-20. Radiated Measurements

| | | | | | |
|--|---|---------------------------------------|--|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) | |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | | Page 70 of 91 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5785MHz
 Channel: 157

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11570.00 | Average | V | - | - | -77.24 | 11.91 | 0.00 | 41.67 | 53.98 | -12.31 |
| * 11570.00 | Peak | V | - | - | -64.70 | 11.91 | 0.00 | 54.21 | 73.98 | -19.77 |
| 17355.00 | Peak | V | - | - | -65.20 | 18.72 | 0.00 | 60.52 | 68.20 | -7.68 |
| 23140.00 | Peak | V | 100 | 33 | -61.62 | 8.37 | -9.54 | 44.21 | 68.20 | -23.99 |
| 28925.00 | Peak | V | - | - | -47.92 | -9.65 | -9.54 | 39.89 | 68.20 | -28.31 |

Table 7-21. Radiated Measurements

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Distance Correction Factor [dB] | Field Strength [dBμV/m] | Limit [dBμV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|---------------------------------|-------------------------|----------------|-------------|
| * 11650.00 | Average | V | - | - | -76.67 | 12.16 | 0.00 | 42.49 | 53.98 | -11.49 |
| * 11650.00 | Peak | V | - | - | -65.17 | 12.16 | 0.00 | 53.99 | 73.98 | -19.99 |
| 17475.00 | Peak | V | - | - | -65.06 | 18.73 | 0.00 | 60.67 | 68.20 | -7.53 |
| 23300.00 | Peak | V | 100 | 33 | -63.55 | 8.50 | -9.54 | 42.41 | 68.20 | -25.79 |
| 29125.00 | Peak | V | - | - | -47.39 | -9.87 | -9.54 | 40.20 | 68.20 | -28.00 |


Table 7-22. Radiated Measurements

| | | | | | |
|--|---|-------------------------------|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 71 of 91 | |


7.6.2 Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]; RSS-Gen [8.9]

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11a |
| Worst Case Transfer Rate: | 6Mbps |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5180MHz |
| Channel: | 36 |

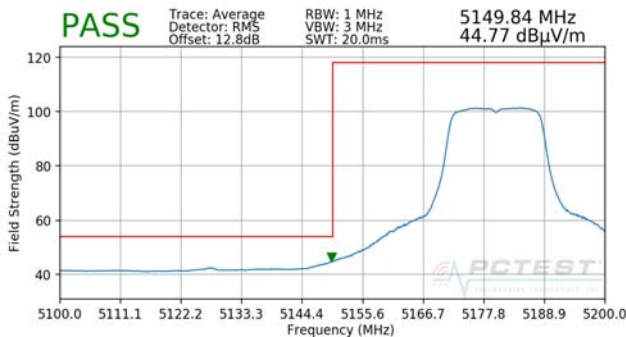


Plot 7-83. Radiated Lower Band Edge Plot (Average – UNII Band 1)

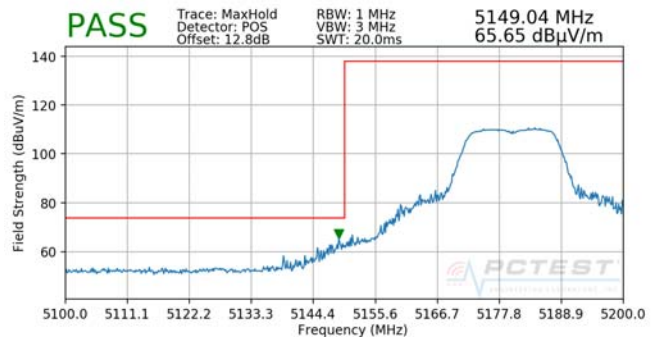


Plot 7-84. Radiated Lower Band Edge Plot (Peak – UNII Band 1)

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11a |
| Worst Case Transfer Rate: | 6Mbps |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5320MHz |
| Channel: | 64 |

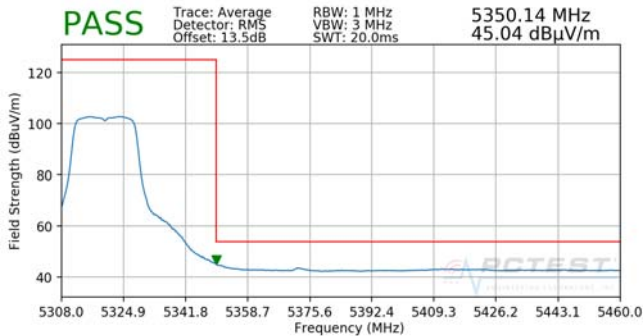


Plot 7-85. Radiated Upper Band Edge Plot (Average – UNII Band 2A)

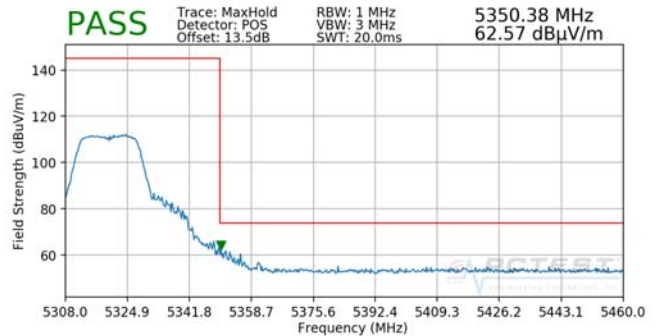


Plot 7-86. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 72 of 91 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5500MHz
 Channel: 100

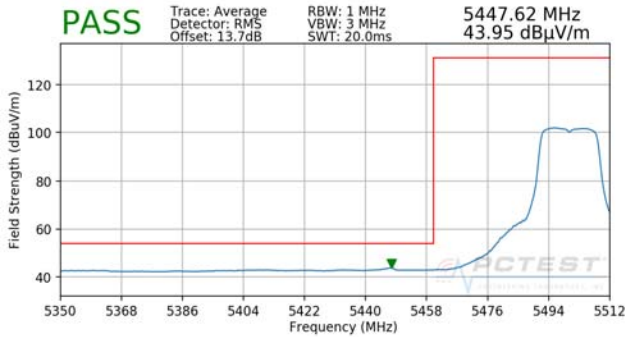


Plot 7-87. Radiated Lower Band Edge Plot (Average – UNII Band 2C)

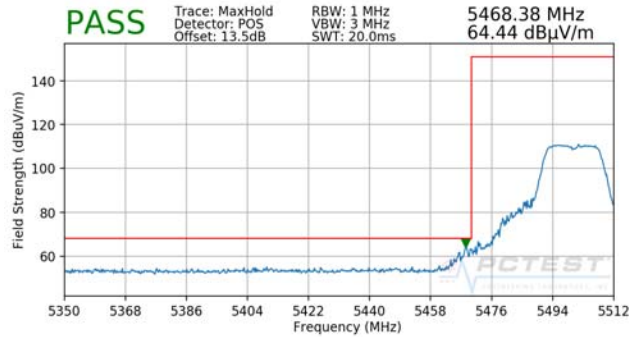


Plot 7-88. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149

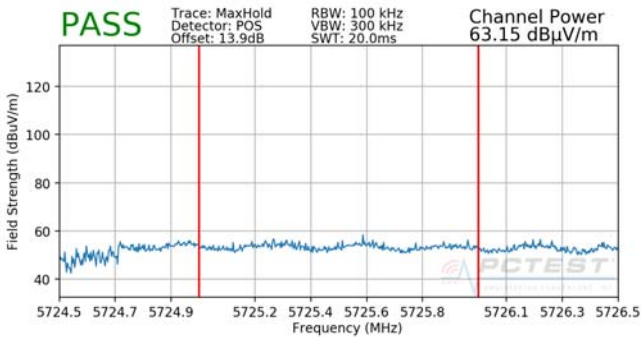


Plot 7-89. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

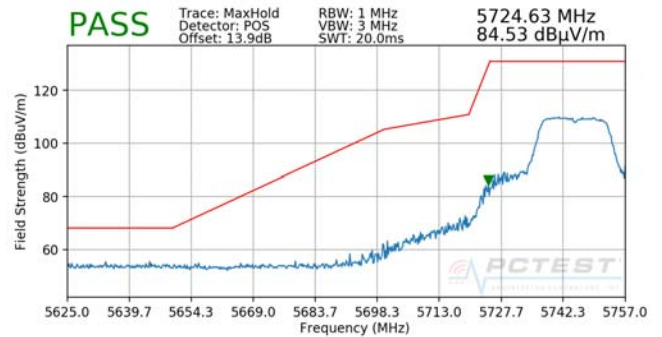

Plot 7-90. Radiated Lower Band Edge Plot (Peak – UNII Band 3)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 73 of 91 |

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5825MHz
 Channel: 165

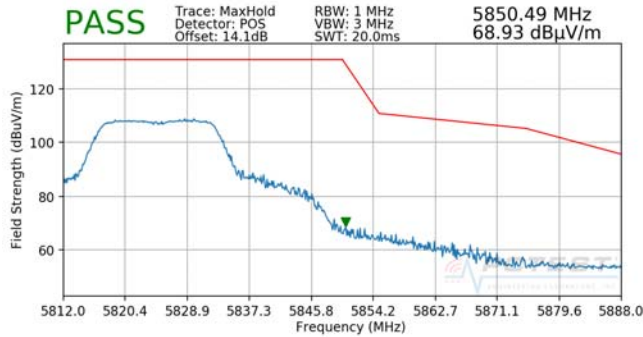


**Plot 7-91. Radiated Upper Band Edge Plot
(Peak – UNII Band 3)**


| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 74 of 91 | |

7.6.3 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11n |
| Worst Case Transfer Rate: | MCS0 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5190MHz |
| Channel: | 38 |

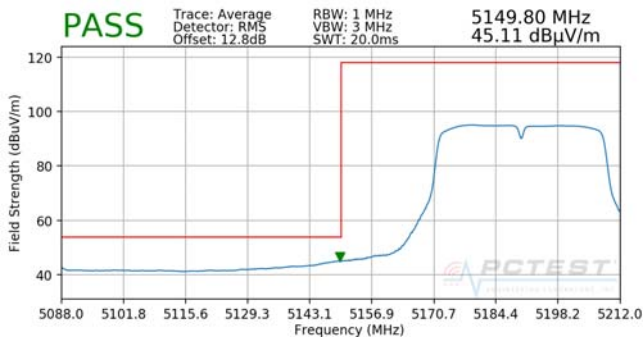


**Plot 7-92. Radiated Lower Band Edge Plot
(Average – UNII Band 1)**

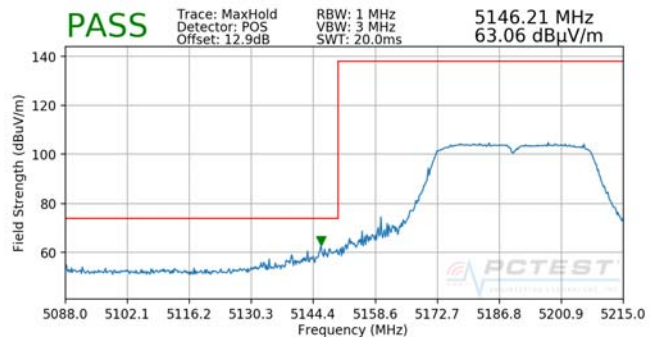


**Plot 7-93. Radiated Lower Band Edge Plot
(Peak – UNII Band 1)**

| | |
|---------------------------|----------|
| Worst Case Mode: | 802.11n |
| Worst Case Transfer Rate: | MCS0 |
| Distance of Measurements: | 3 Meters |
| Operating Frequency: | 5310MHz |
| Channel: | 62 |

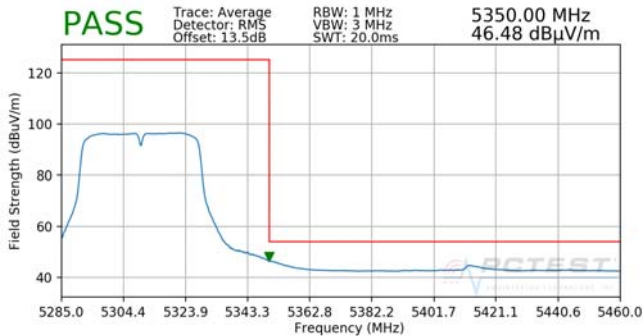


**Plot 7-94. Radiated Upper Band Edge Plot
(Average – UNII Band 2A)**

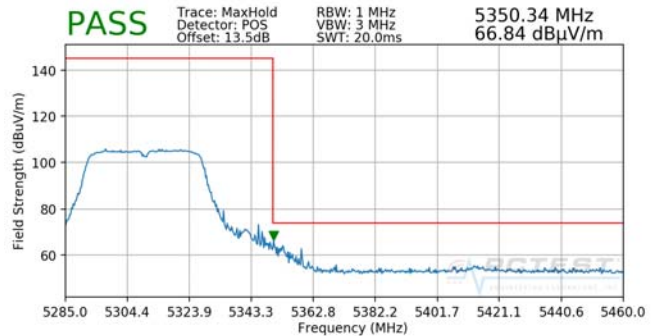

**Plot 7-95. Radiated Upper Band Edge Plot
(Peak – UNII Band 2A)**

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 75 of 91 |

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5510MHz
 Channel: 102

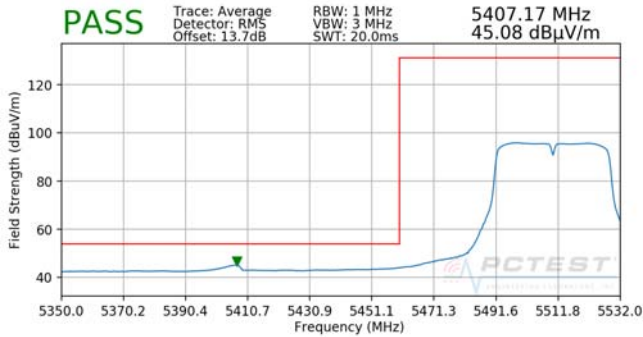


Plot 7-96. Radiated Lower Band Edge Plot (Average – UNII Band 2C)




Plot 7-97. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5670MHz
 Channel: 134

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5755MHz
 Channel: 151

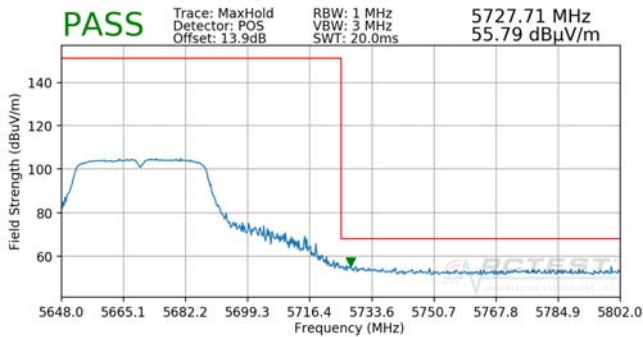


Plot 7-98. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

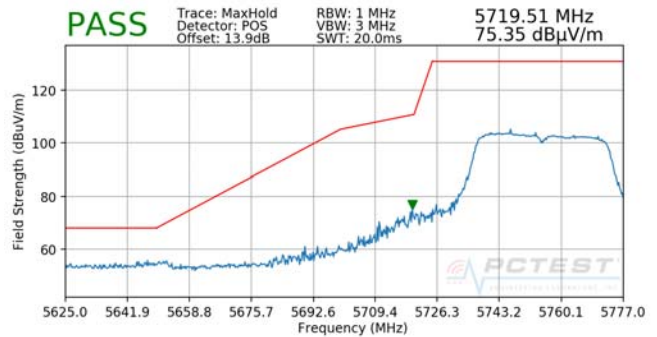

Plot 7-99. Radiated Lower Band Edge Plot (Peak – UNII Band 3)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 76 of 91 |

Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5795MHz
 Channel: 159

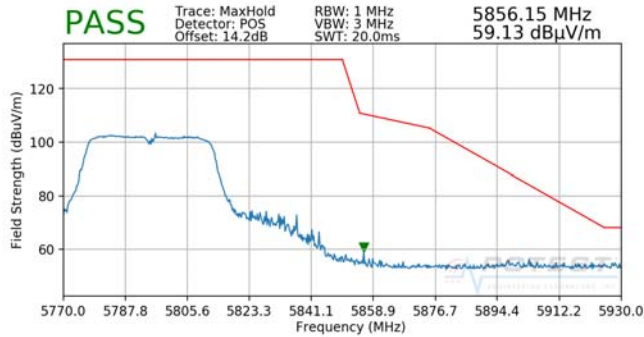


Plot 7-100. Radiated Upper Band Edge Plot (Peak – UNII Band 3)


| | | | |
|--|---|-------------------------------|---------------------------------|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 77 of 91 |

7.6.4 Radiated Band Edge Measurements (80MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5210MHz
 Channel: 42

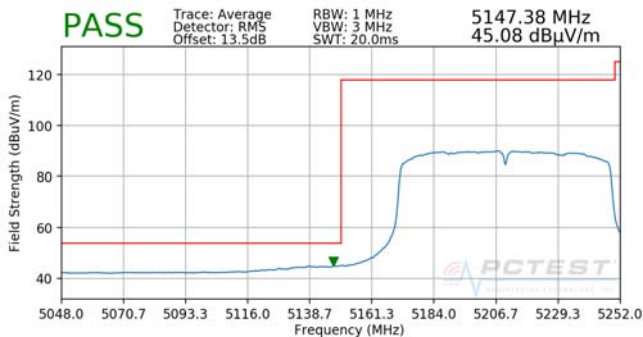


Plot 7-101. Radiated Lower Band Edge Plot (Average – UNII Band 1)

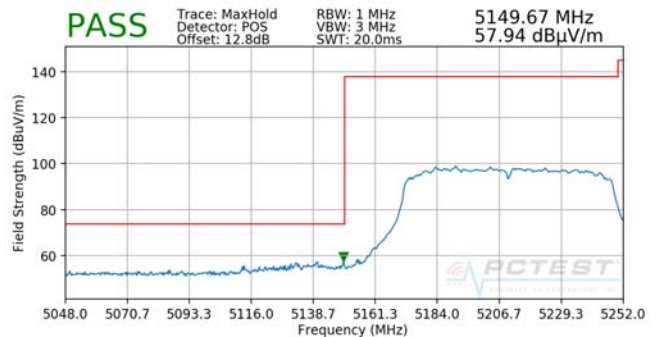


Plot 7-102. Radiated Lower Band Edge Plot (Peak – UNII Band 1)

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5290MHz
 Channel: 58

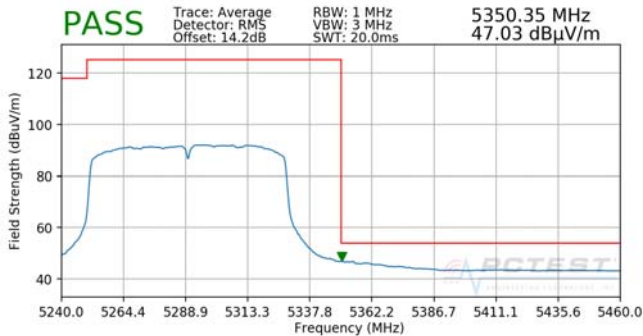


Plot 7-103. Radiated Upper Band Edge Plot (Average – UNII Band 2A)

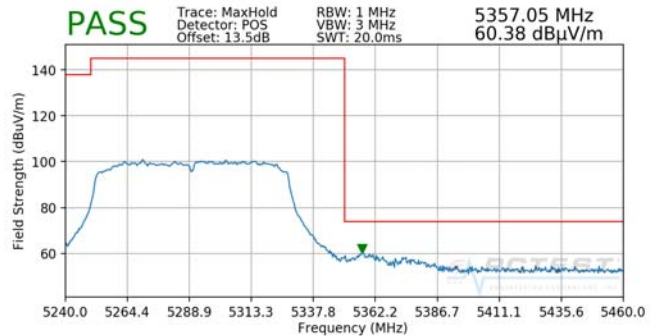


Plot 7-104. Radiated Upper Band Edge Plot (Peak – UNII Band 2A)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 78 of 91 |

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5530MHz
 Channel: 106

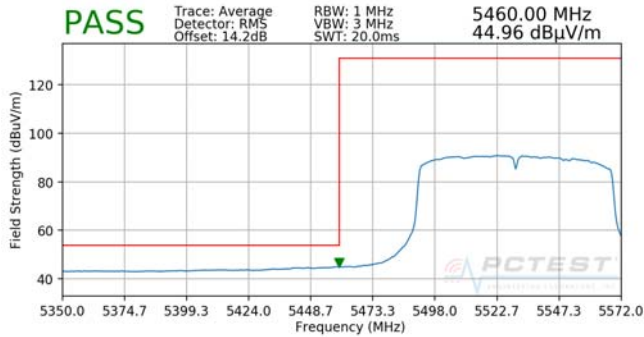


Plot 7-105. Radiated Lower Band Edge Plot (Average – UNII Band 2C)

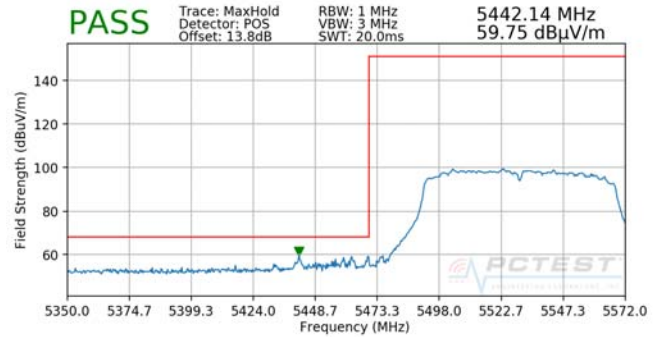

Plot 7-106. Radiated Lower Band Edge Plot (Peak – UNII Band 2C)


Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

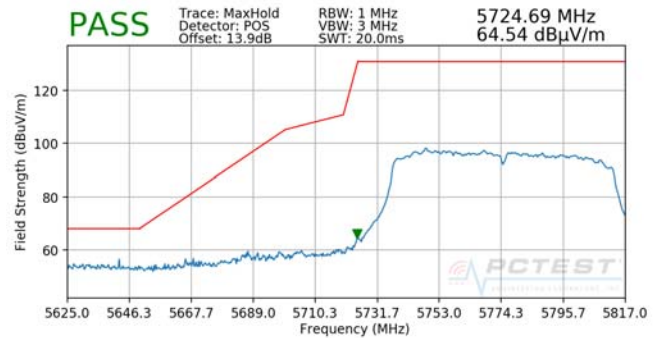

Plot 7-107. Radiated Lower Band Edge Plot (Peak – UNII Band 3)

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 79 of 91 |

Worst Case Mode: 802.11ac
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5775MHz
 Channel: 155

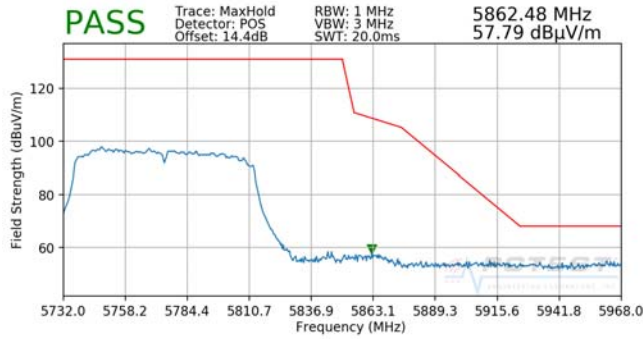

Plot 7-108. Radiated Upper Band Edge Plot (Peak - UNII Band 3)

| | | | |
|--|---|-------------------------------|---------------------------------|
| FCC ID: ZNFQ710WA |  MEASUREMENT REPORT (CERTIFICATION)  | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 80 of 91 |

7.7 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-23 per Section 15.209 and RSS-Gen (8.9).

| Frequency | Field Strength [$\mu\text{V/m}$] | Measured Distance [Meters] |
|-------------------|---------------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz) | 300 |
| 0.490 – 1.705 MHz | 24000/F (kHz) | 30 |
| 1.705 – 30.00 MHz | 30 | 30 |
| 30.00 – 88.00 MHz | 100 | 3 |
| 88.00 – 216.0 MHz | 150 | 3 |
| 216.0 – 960.0 MHz | 200 | 3 |
| Above 960.0 MHz | 500 | 3 |

Table 7-23. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 81 of 91 | |

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

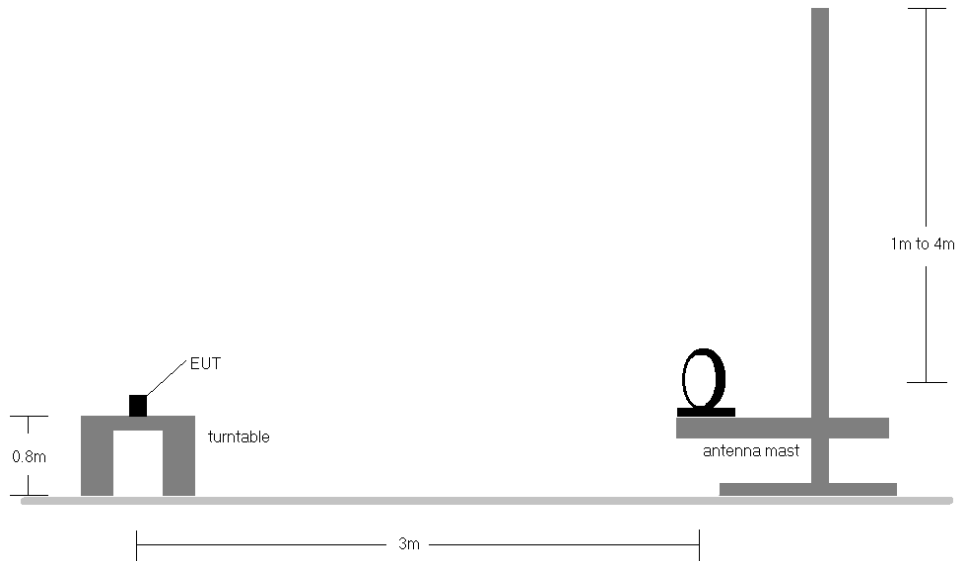


Figure 7-6. Radiated Test Setup < 30MHz

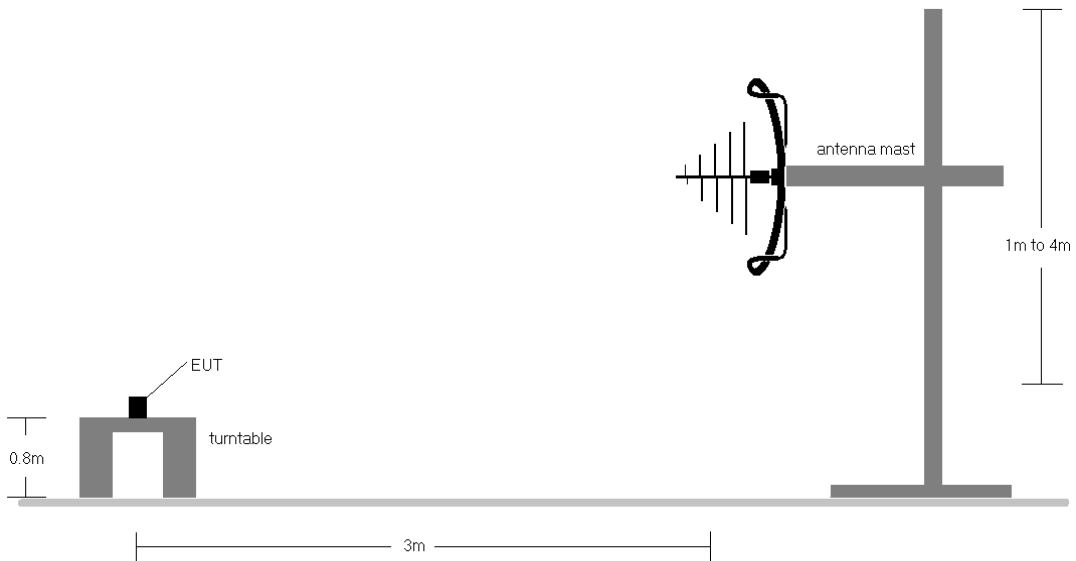


Figure 7-7. Radiated Test Setup < 1GHz


| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 82 of 91 | |

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-23.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

| | | | | |
|---|---|---|---|--|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 83 of 91 | |

Radiated Spurious Emissions Measurements (Below 1GHz)
§15.209; RSS-Gen [8.9]

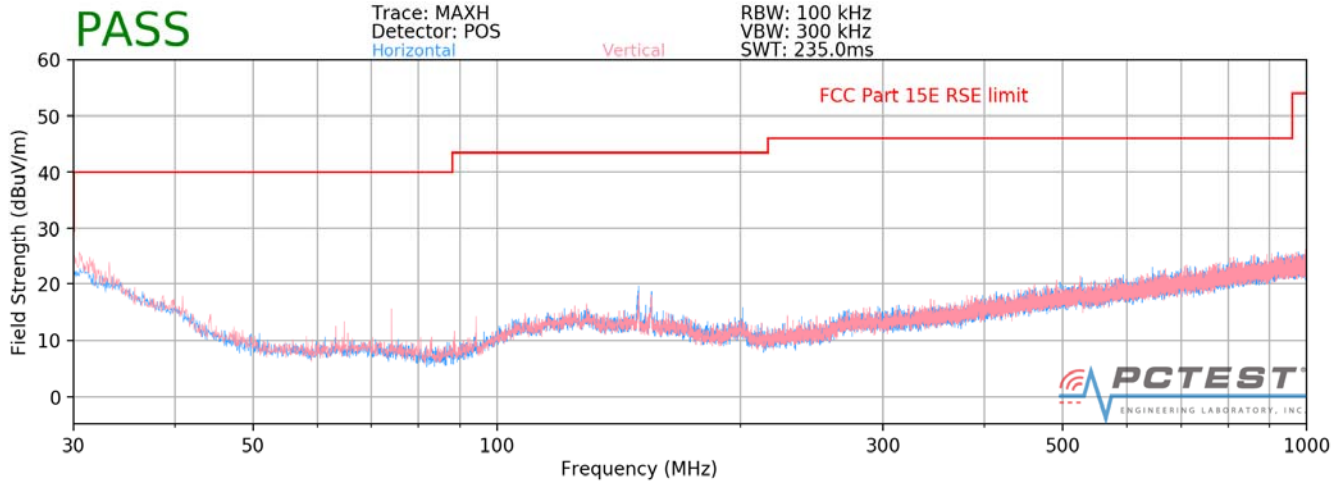

Plot 7-109. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157)

| | | | | |
|--|---|---|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 84 of 91 |

7.8 Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

| Frequency of emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 – 0.5 | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 – 30 | 60 | 50 |

Table 7-24. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 85 of 91 | |

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


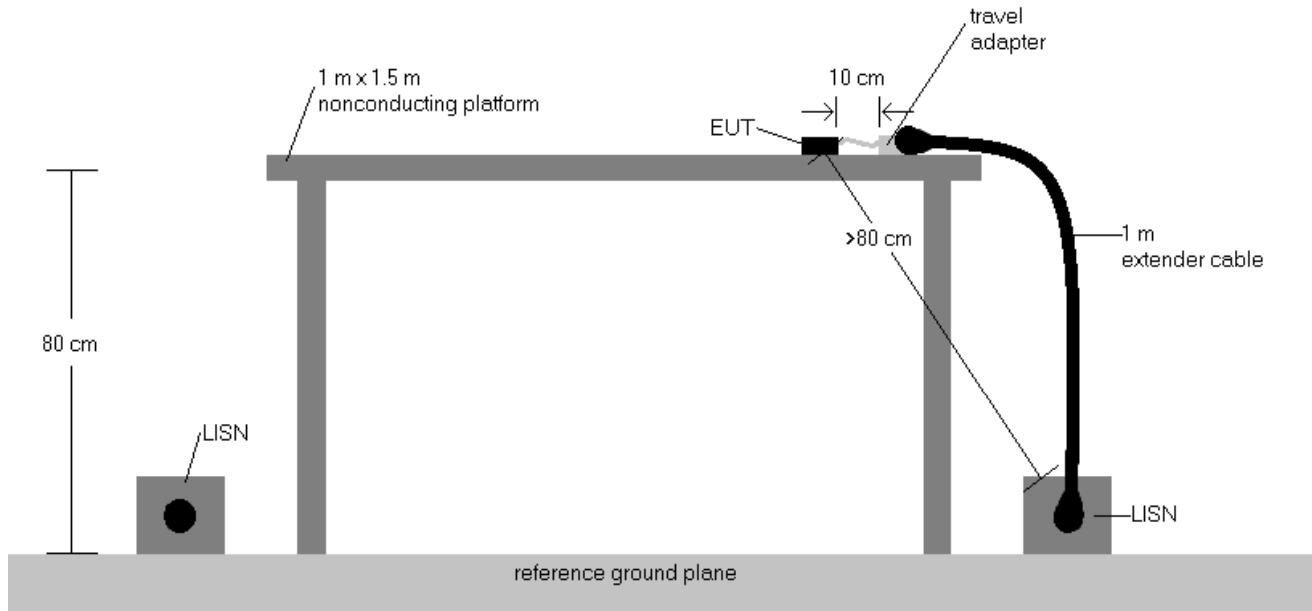


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

| | | | | |
|--|---|---------------------------------------|---|---------------------------------|
| FCC ID: ZNFQ710WA |  | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 86 of 91 | |

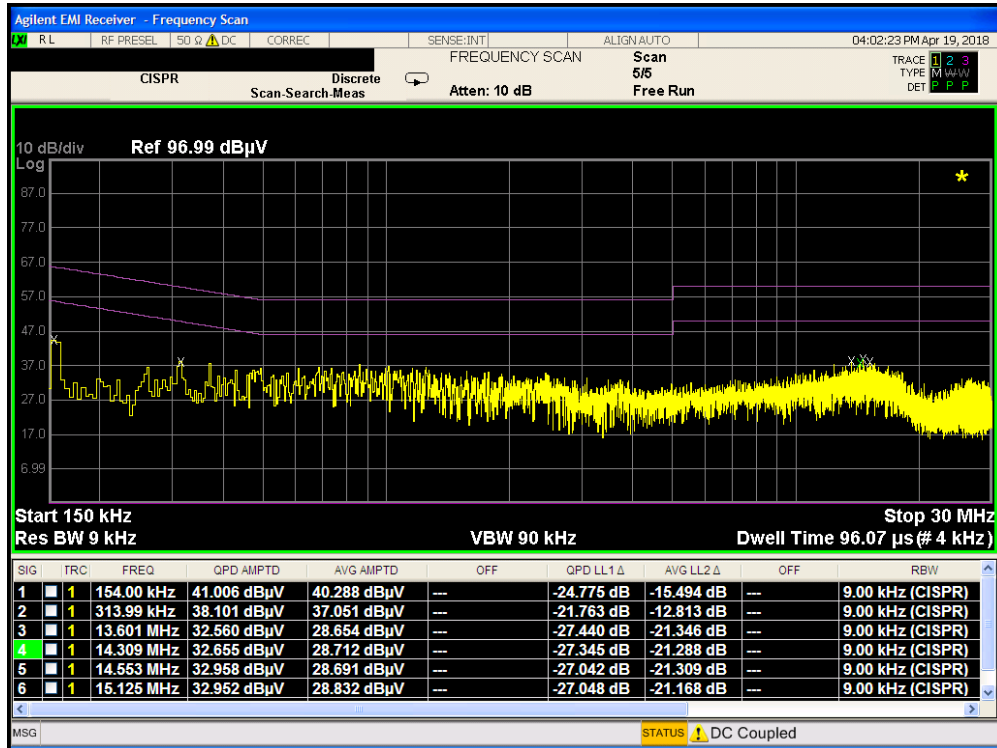


Plot 7-110. Line Conducted Plot with 802.11a UNII Band 1 (L1)

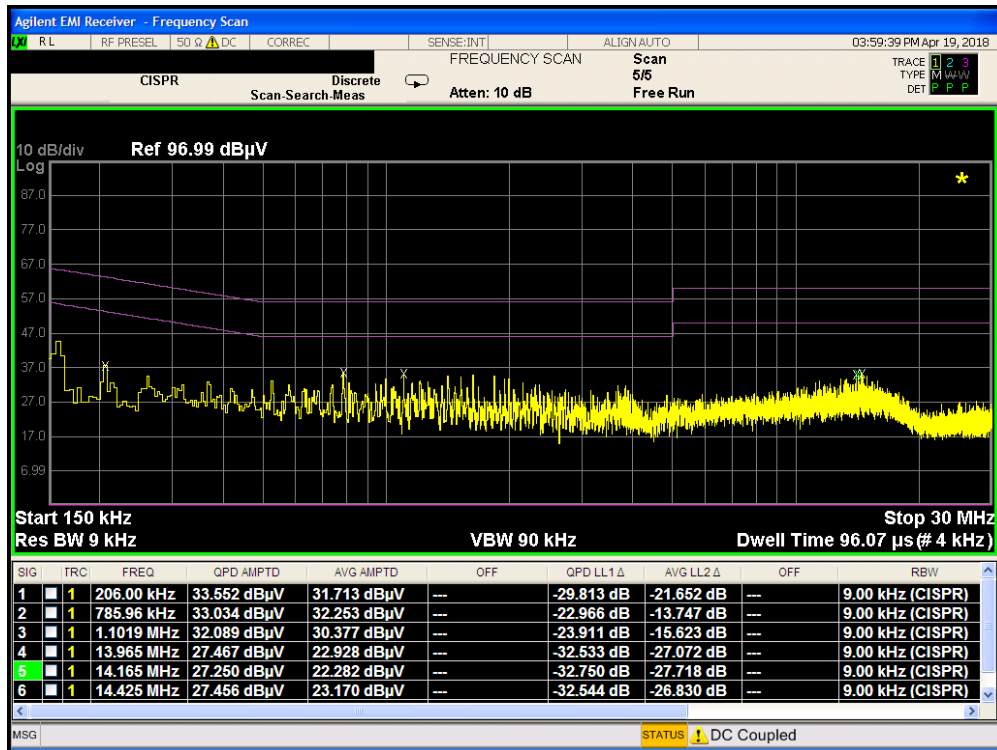


Plot 7-111. Line Conducted Plot with 802.11a UNII Band 1 (N)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 87 of 91 |

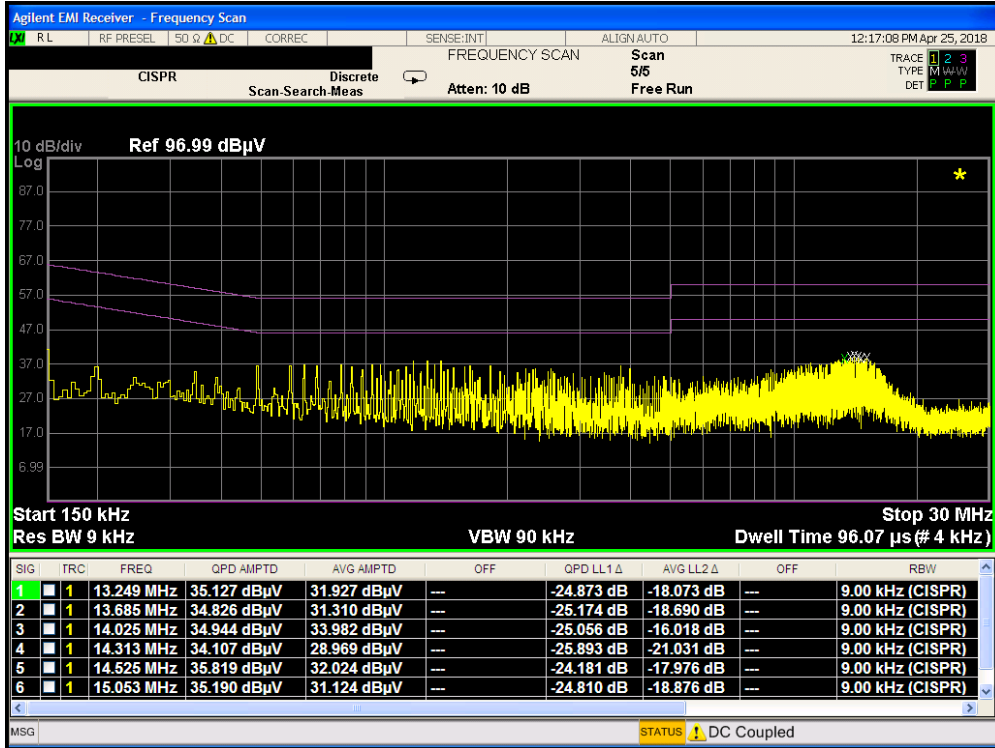


Plot 7-112. Line Conducted Plot with 802.11a UNII Band 2A (L1)

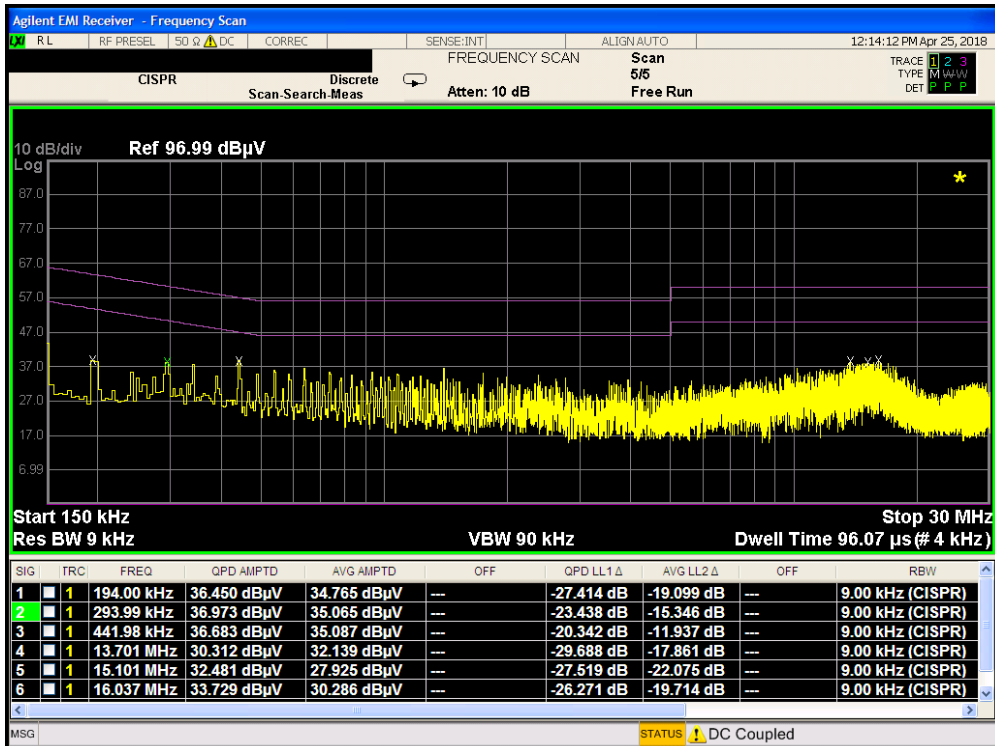


Plot 7-113. Line Conducted Plot with 802.11a UNII Band 2A (N)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 88 of 91 |

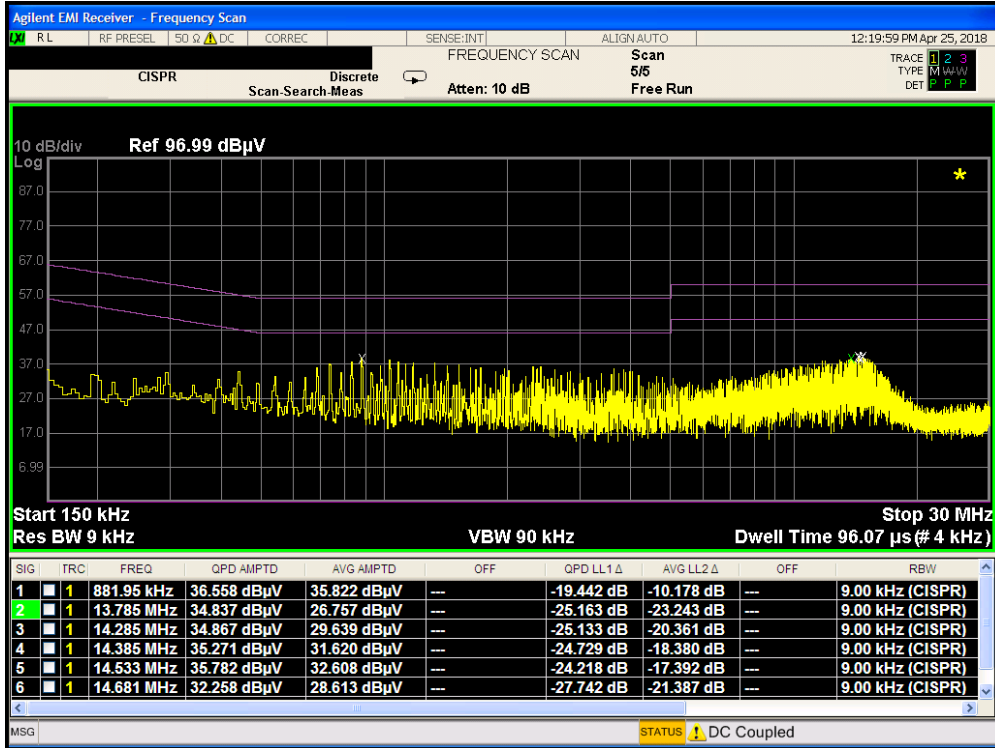


Plot 7-114. Line Conducted Plot with 802.11a UNII Band 2C (L1)

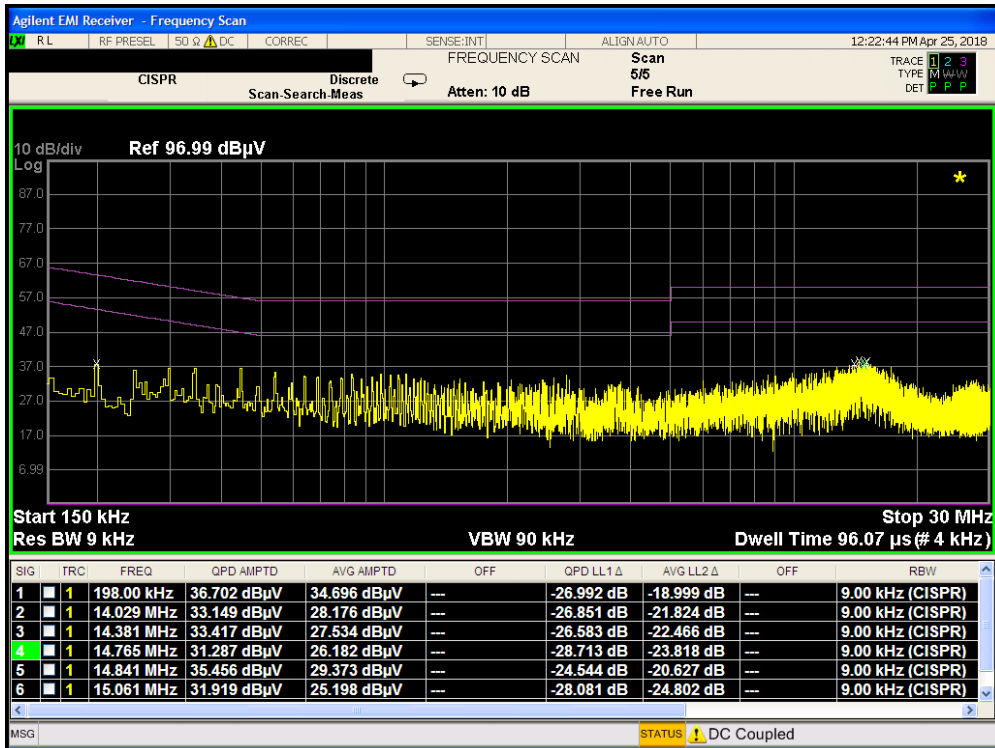


Plot 7-115. Line Conducted Plot with 802.11a UNII Band 2C (N)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 89 of 91 |

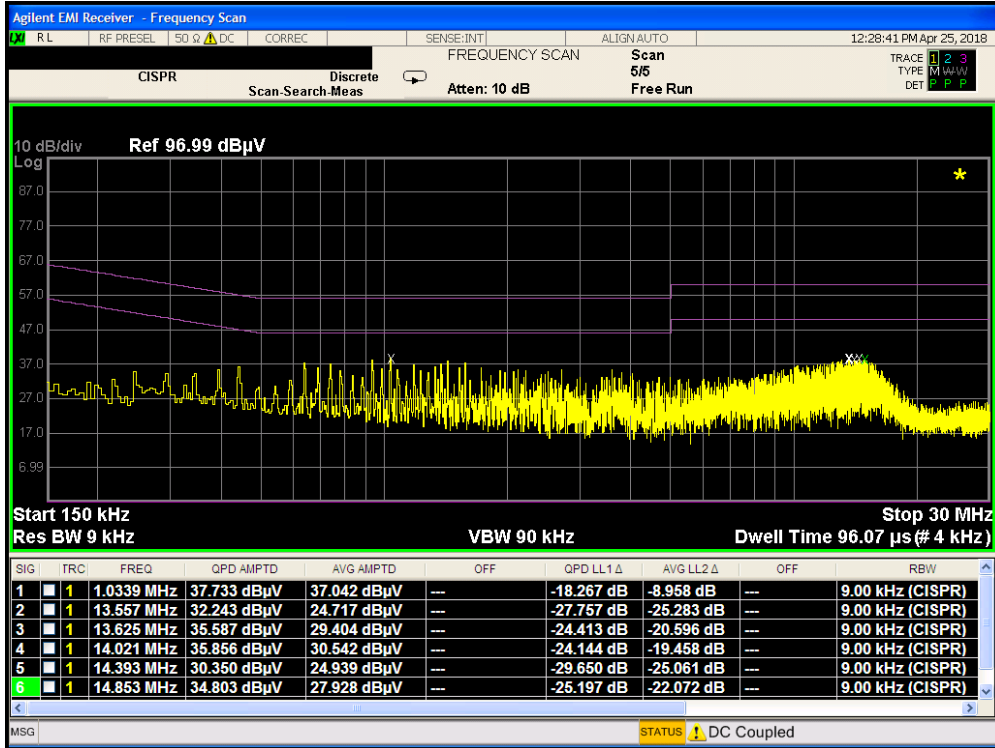

Plot 7-116. Line Conducted Plot with 802.11a UNII Band 3 (L1)

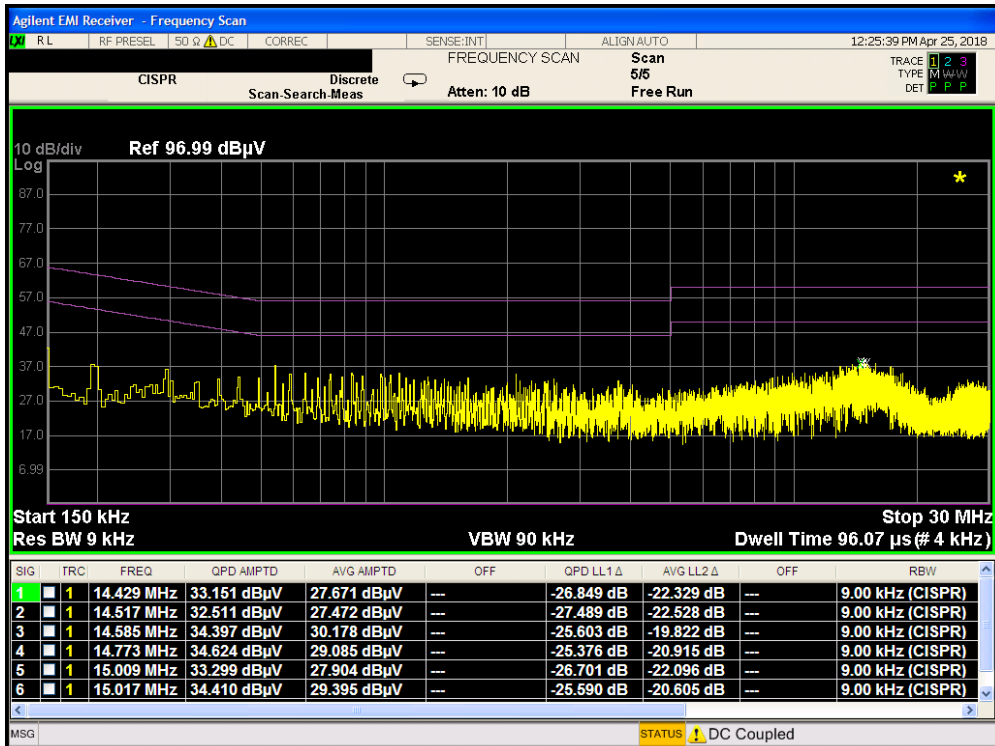

Plot 7-117. Line Conducted Plot with 802.11a UNII Band 3 (N)

| | | | | |
|--|---|---------------------------------------|--|---------------------------------|
| FCC ID: ZNFQ710WA | | MEASUREMENT REPORT (CERTIFICATION) | | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1-ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | | Page 90 of 91 |

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFQ710WA** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules and RSS-247 of the Innovation, Science and Economic Development Canada Rules.

| | | | | |
|---|--|---|---|--|
| FCC ID: ZNFQ710WA |  <small>ENGINEERING LABORATORY, INC.</small> | MEASUREMENT REPORT (CERTIFICATION) |  | Approved by: Quality Manager |
| Test Report S/N: 1M1804120069-06-R1.ZNF | Test Dates: April 12 - June 19, 2018 | EUT Type: Portable Handset | Page 91 of 91 | |