PCTEST ENGINEERING LABORATORY, INC.
7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
http://www.pctestlab.com

MEASUREMENT REPORT
LTE

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
9/5 - 10/19/2017
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M1710020260-03-R1.ZNF

FCC ID:	**ZNFSP200**
APPLICANT:	**LG Electronics MobileComm U.S.A**

Application Type:	Certification
Model:	LG-SP200
Additional Models:	LGSP200, SP200, LM-X210ULMA, LMX210ULMA, X210ULMA
EUT Type:	Portable Handset
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	22, 24, & 27
Test Procedure(s):	ANSI/TIA-603-D-2010, KDB 971168 D01 v02r02
Test Device Serial No.:	*identical prototype* [S/N: 38UXZ]

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

Note: This revised test report (1M1710020260-03-R1.ZNF) supersedes and replaces the previously issued test report (1M1710020260-03.ZNF) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez
President

ACCREDITED
TESTING CERT#2041.01

TABLE OF CONTENTS



MEASUREMENT REPORT
FCC Part 22, 24, & 27



Mode	FCC Rule Part	Tx Frequency (MHz)	ERP		EIRP		Emission Designator	Modulation
			Max. Power (W)	Max. Power (dBm)	Max. Power (W)	Max. Power (dBm)		
LTE Band 12	27	699.7 - 715.3	0.129	21.11	0.212	23.26	1M10G7D	QPSK
LTE Band 12	27	699.7 - 715.3	0.103	20.11	0.168	22.26	1M11W7D	16QAM
LTE Band 12	27	700.5 - 714.5	0.130	21.15	0.214	23.30	2M71G7D	QPSK
LTE Band 12	27	700.5 - 714.5	0.104	20.18	0.171	22.33	2M71W7D	16QAM
LTE Band 12	27	701.5 - 713.5	0.137	21.38	0.225	23.53	4M55G7D	QPSK
LTE Band 12	27	701.5 - 713.5	0.110	20.42	0.181	22.57	4M54W7D	16QAM
LTE Band 12	27	704 - 711	0.136	21.33	0.223	23.48	9M04G7D	QPSK
LTE Band 12	27	704 - 711	0.110	20.42	0.181	22.57	9M02W7D	16QAM
LTE Band 13	27	779.5 - 784.5	0.115	20.59	0.188	22.74	4M58G7D	QPSK
LTE Band 13	27	779.5 - 784.5	0.093	19.68	0.152	21.83	4M53W7D	16QAM
LTE Band 13	27	782	0.090	19.52	0.147	21.67	9M03G7D	QPSK
LTE Band 13	27	782	0.069	18.39	0.113	20.54	9M06W7D	16QAM
LTE Band 5/26	22H	824.7 - 848.3	0.201	23.03	0.330	25.18	1M09G7D	QPSK
LTE Band 5/26	22H	824.7 - 848.3	0.168	22.26	0.276	24.41	1M10W7D	16QAM
LTE Band 5/26	22H	825.5 - 847.5	0.209	23.20	0.342	25.35	2M70G7D	QPSK
LTE Band 5/26	22H	825.5 - 847.5	0.159	22.02	0.261	24.17	2M70W7D	16QAM
LTE Band 5/26	22H	826.5 - 846.5	0.204	23.09	0.334	25.24	4M53G7D	QPSK
LTE Band 5/26	22H	826.5 - 846.5	0.164	22.14	0.268	24.29	4M52W7D	16QAM
LTE Band 5/26	22H	829 - 844	0.204	23.09	0.334	25.24	9M02G7D	QPSK
LTE Band 5/26	22H	829 - 844	0.159	22.03	0.262	24.18	8M99W7D	16QAM
LTE Band 26	22H	831.5 - 841.5	0.196	22.93	0.322	25.08	13M5G7D	QPSK
LTE Band 26	22H	831.5 - 841.5	0.160	22.04	0.262	24.19	13M5W7D	16QAM
LTE Band 4	27	1710.7 - 1754.3			0.337	25.28	1M10G7D	QPSK
LTE Band 4	27	1710.7 - 1754.3			0.285	24.55	1M10W7D	16QAM
LTE Band 4	27	1711.5 - 1753.5			0.371	25.69	2M71G7D	QPSK
LTE Band 4	27	1711.5 - 1753.5			0.300	24.77	2M71W7D	16QAM
LTE Band 4	27	1712.5 - 1752.5			0.350	25.44	4M57G7D	QPSK
LTE Band 4	27	1712.5 - 1752.5			0.284	24.54	4M53W7D	16QAM
LTE Band 4	27	1715 - 1750			0.324	25.11	9M05G7D	QPSK
LTE Band 4	27	1715 - 1750			0.283	24.52	9M05W7D	16QAM
LTE Band 4	27	1717.5 - 1747.5			0.353	25.48	13M5G7D	QPSK
LTE Band 4	27	1717.5 - 1747.5			0.293	24.67	13M5W7D	16QAM
LTE Band 4	27	1720 - 1745			0.356	25.51	18M1G7D	QPSK
LTE Band 4	27	1720 - 1745			0.302	24.80	18M0W7D	16QAM
LTE Band 2/25	24E	1850.7 - 1914.3			0.387	25.88	1M09G7D	QPSK
LTE Band 2/25	24E	1850.7 - 1914.3			0.308	24.88	1M11W7D	16QAM
LTE Band 2/25	24E	1851.5 - 1913.5			0.414	26.16	2M72G7D	QPSK
LTE Band 2/25	24E	1851.5 - 1913.5			0.320	25.05	2M71W7D	16QAM
LTE Band 2/25	24E	1852.5 - 1912.5			0.394	25.96	4M56G7D	QPSK
LTE Band 2/25	24E	1852.5 - 1912.5			0.317	25.02	4M54W7D	16QAM
LTE Band 2/25	24E	1855 - 1910			0.385	25.85	9M05G7D	QPSK
LTE Band 2/25	24E	1855 - 1910			0.313	24.95	9M03W7D	16QAM
LTE Band 2/25	24E	1857.5 - 1907.5			0.431	26.35	13M5G7D	QPSK
LTE Band 2/25	24E	1857.5 - 1907.5			0.343	25.35	13M5W7D	16QAM
LTE Band 2/25	24E	1860 - 1905			0.430	26.33	18M0G7D	QPSK
LTE Band 2/25	24E	1860 - 1905			0.341	25.32	18M0W7D	16QAM
LTE Band 41	27	2498.5 - 2687.5			0.462	26.64	4M52G7D	QPSK
LTE Band 41	27	2498.5 - 2687.5			0.349	25.42	4M51W7D	16QAM
LTE Band 41	27	2501 - 2685			0.394	25.95	9M03G7D	QPSK
LTE Band 41	27	2501 - 2685			0.298	24.74	8M98W7D	16QAM
LTE Band 41	27	2503.5 - 2682.5			0.397	25.98	13M5G7D	QPSK
LTE Band 41	27	2503.5 - 2682.5			0.322	25.08	13M5W7D	16QAM
LTE Band 41	27	2506 - 2680			0.409	26.11	18M0G7D	QPSK
LTE Band 41	27	2506 - 2680			0.329	25.17	18M0W7D	16QAM

EUT Overview

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.

- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS)."

- PCTEST facility is a registered (22831) test laboratory with the site description on file with ISED.

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFSP200**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, Bluetooth (1x, EDR, LE)

LTE Band 26/5 (814.7 – 849 MHz) overlaps the entire frequency range of LTE Band 5 (824 – 849 MHz). Therefore, test data provided in this report covers Band 5 and the portion of Band 26/5 subject to Part 22.

LTE Band 25/2 (1850 - 1915 MHz) overlaps the entire frequency range of LTE Band 2 (1850 - 1910 MHz). Therefore, test data provided in this report covers Band 2 as well as Band 25/2.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-D-2010 and KDB 971168 D01 v02r02. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the document titled "Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards" (ANSI/TIA-603-D-2010) and "Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems" (KDB 971168 D01 v02r02) were used in the measurement of the EUT.

3.1 Block C Frequency Range

§27.5(b)(3)

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

3.2 Block A Frequency Range

§27.5(c)

698-746 MHz band. The following frequencies are available for licensing pursuant to this part in the 698-746 MHz band: (1) Three paired channel blocks of 12 megahertz each are available for assignment as follows:

Block A: 698-704 MHz and 728-734 MHz;
Block B: 704-710 MHz and 734-740 MHz; and
Block C: 710-716 MHz and 740-746 MHz.

3.3 Cellular - Base Frequency Blocks

§22.905

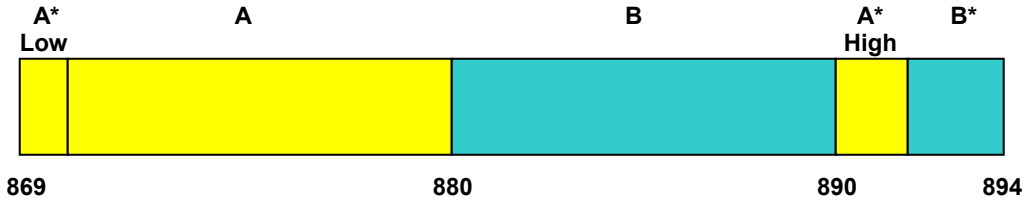

BLOCK 1: 869 – 880 MHz (A* Low + A)
BLOCK 2: 880 – 890 MHz (B)
BLOCK 3: 890 – 891.5 MHz (A* High)
BLOCK 4: 891.5 – 894 MHz (B*)

3.4 Cellular - Mobile Frequency Blocks

§22.905

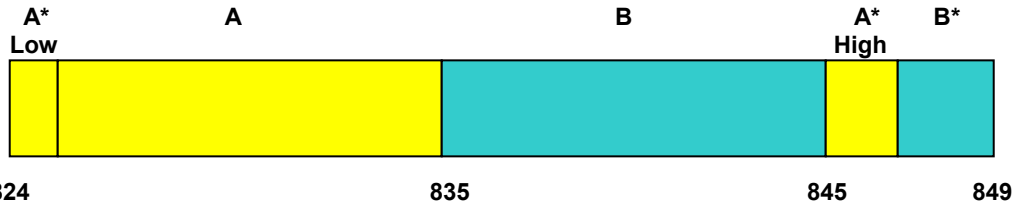

BLOCK 1: 824 – 835 MHz (A* Low + A)
BLOCK 2: 835 – 845 MHz (B)
BLOCK 3: 845 – 846.5 MHz (A* High)
BLOCK 4: 846.5 – 849 MHz (B*)

3.5 PCS - Base Frequency Blocks

§24.229

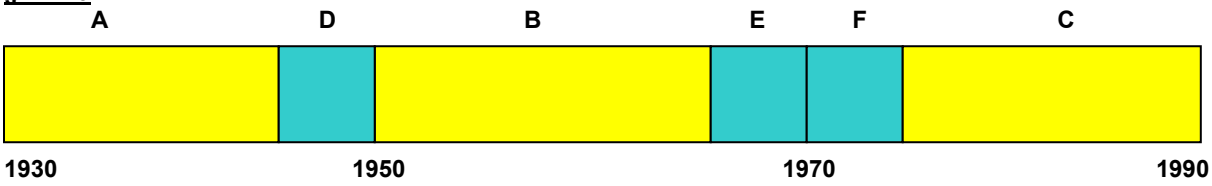

BLOCK 1: 1930 – 1945 MHz (A)
BLOCK 2: 1945 – 1950 MHz (D)
BLOCK 3: 1950 – 1965 MHz (B)
BLOCK 4: 1965 – 1970 MHz (E)
BLOCK 5: 1970 – 1975 MHz (F)
BLOCK 6: 1975 – 1990 MHz (C)

3.6 PCS - Mobile Frequency Blocks

§24.229

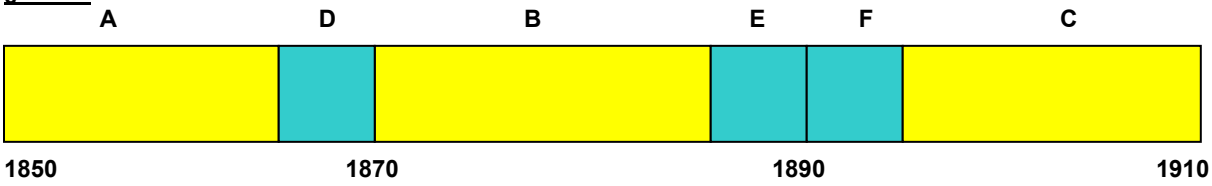

BLOCK 1: 1850 – 1865 MHz (A)
BLOCK 2: 1865 – 1870 MHz (D)
BLOCK 3: 1870 – 1885 MHz (B)
BLOCK 4: 1885 – 1890 MHz (E)
BLOCK 5: 1890 – 1895 MHz (F)
BLOCK 6: 1895 – 1910 MHz (C)

3.7 AWS - Base Frequency Blocks

§27.5(h)

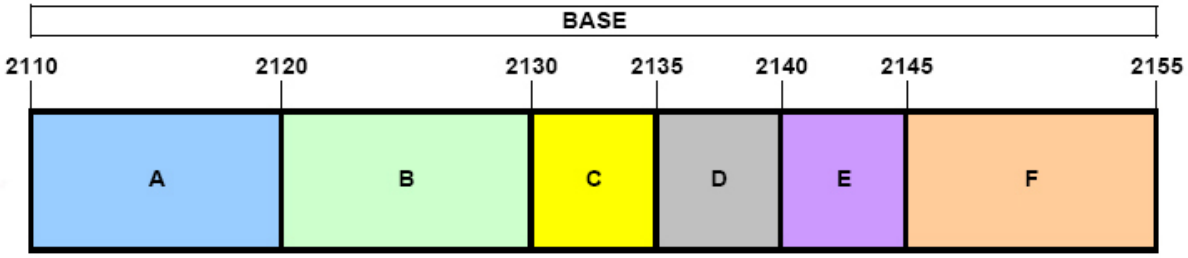

BLOCK 1: 2110 – 2120 MHz (A)
BLOCK 2: 2120 – 2130 MHz (B)
BLOCK 3: 2130 – 2135 MHz (C)
BLOCK 4: 2135 – 2140 MHz (D)
BLOCK 5: 2140 – 2145 MHz (E)
BLOCK 6: 2145 – 2155 MHz (F)

3.8 AWS - Mobile Frequency Blocks

§27.5(h)

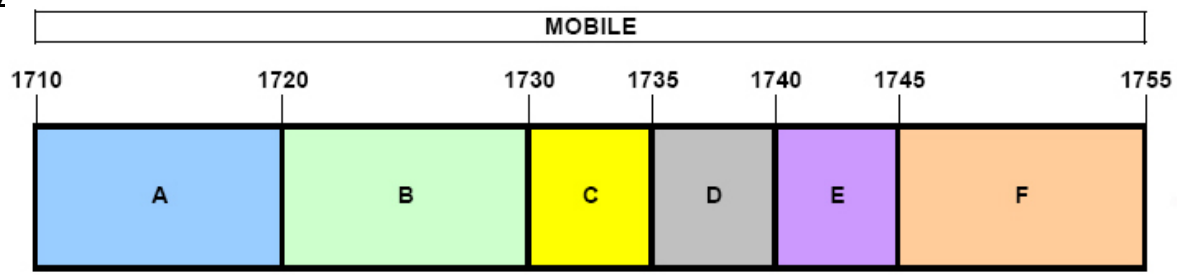

BLOCK 1: 1710 – 1720 MHz (A)
BLOCK 2: 1720 – 1730 MHz (B)
BLOCK 3: 1730 – 1735 MHz (C)
BLOCK 4: 1735 – 1740 MHz (D)
BLOCK 5: 1740 – 1745 MHz (E)
BLOCK 6: 1745 – 1755 MHz (F)

3.9 BRS/EBS Frequency Block

§27.5

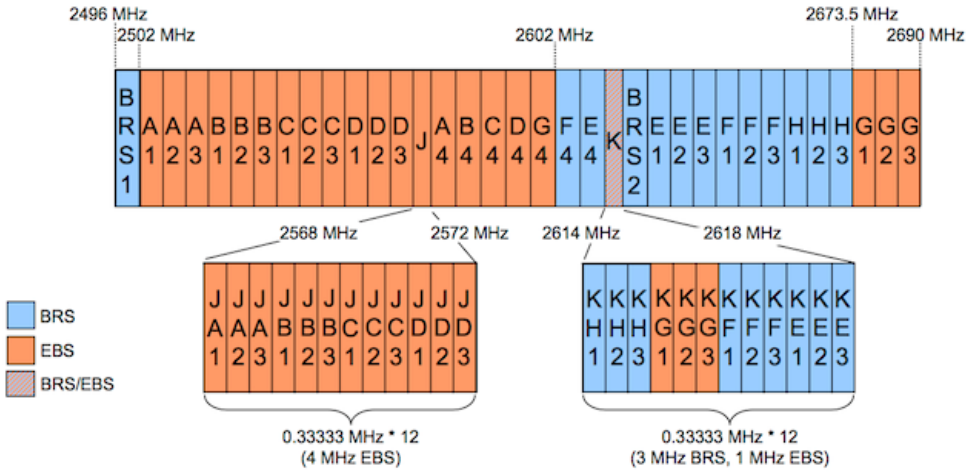

3.10 Radiated Power and Radiated Spurious Emissions

§2.1053 §22.913(a)(2) §22.917(a) §24.232(c) §24.238(a) §27.50(b)(10) §27.50(c)(10) §27.50(d)(4) §27.53(a)(4) §27.53(f) §27.53(g) §27.53(h) §27.53(m) RSS-130(4.4) RSS-132(5.4) RSS-132(5.5) RSS-133(6.4) RSS-133(6.5) RSS-139(6.5) RSS-139(6.6) RSS-199(4.5)

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer "Channel Power" function with the integration band set to the emissions' occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v02r02.

Per the guidance of ANSI/TIA-603-D-2010, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_{d\ [dBm]} = P_{g\ [dBm]} - \text{cable loss}_{\ [dB]} + \text{antenna gain}_{\ [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_{g\ [dBm]}$ – cable loss $_{[dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of 43 + $10\log_{10}$(Power $_{[Watts]}$). For Band 41, the calculated P_d levels are compared to the absolute spurious emission limit of -25dBm which is equivalent to the required minimum attenuation of 55 + $10\log_{10}$(Power $_{[Watts]}$).

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (±dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	6/21/2017	Annual	6/21/2018	RE1
-	LTx2	Licensed Transmitter Cable Set	8/10/2017	Annual	8/10/2018	LTx2
Agilent	N9038A	MXE EMI Receiver	4/26/2017	Annual	4/26/2018	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	3/27/2017	Annual	3/27/2018	MY52350166
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	6/21/2017	Annual	6/21/2018	441119
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	6/21/2017	Annual	6/21/2018	441112
Emco	3115	Horn Antenna (1-18GHz)	3/10/2016	Biennial	3/10/2018	9704-5182
EMCO	3160-09	Small Horn (18 - 26.5GHz)	8/23/2016	Biennial	8/23/2018	135427
Espec	ESX-2CA	Environmental Chamber	4/11/2017	Annual	4/11/2018	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	4/26/2016	Biennial	4/26/2018	128337
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini Circuits	PWR-SEN-4GHS	USB Power Sensor	3/24/2017	Annual	3/24/2018	11401010036
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	PWR-SEN-4RMS	USB Power Sensor	3/24/2017	Annual	3/24/2018	11210140001
Mini-Circuits	TVA-11-422	RF Power Amp	N/A			QA1303002
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
PCTEST	-	EMC Switch System	6/21/2017	Annual	6/21/2018	NM1
PCTEST	-	EMC Switch System	6/21/2017	Annual	6/21/2018	NM2
Rohde & Schwarz	CMW500	Radio Communication Tester	5/4/2017	Annual	5/4/2018	112347
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	3/7/2017	Annual	3/7/2018	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/11/2017	Annual	5/11/2018	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	4/19/2017	Annual	4/19/2018	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	7/31/2017	Annual	7/31/2018	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/11/2017	Annual	8/11/2018	103200
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	3/30/2016	Biennial	3/30/2018	9105-2404
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	3/14/2016	Biennial	3/14/2018	A051107

Table 5-1. Test Equipment

Note:

Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
G = Phase Modulation
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

16QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
W = Amplitude/Angle Modulated
7 = Quantized/Digital Info
D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analzyer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics MobileComm U.S.A

FCC ID: ZNFSP200

FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)

Mode(s): LTE

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	RSS-Gen(4.6.1) RSS-133(2.3) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 2.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Out of Band Emissions	> 43 + 10log$_{10}$ (P[Watts]) at Band Edge and for all out-of-band emissions		PASS	Section 7.3, 7.4
27.53(m)	RSS-199(4.5)	Out of Band Emissions	Undesirable emissions must meet the limits detailed in 27.53(m) (RSS-199 [6.4])		PASS	Section 7.3, 7.4
24.232(d)	RSS-130(4.4) RSS-132(5.4) RSS-133(6.4) RSS-139(6.5)	Peak-Average Ratio	< 13 dB		PASS	Section 7.5
2.1046	RSS-130(4.4) RSS-132(5.4) RSS-133(4.1) RSS-139(4.1) RSS-199(4.4)	Transmitter Conducted Output Power	N/A		PASS	See RF Exposure Report
2.1055 22.355 24.235 27.54	RSS-130(4.3) RSS-132(5.3) RSS-133(6.3) RSS-139(6.4) RSS-199(4.3)	Frequency Stability	< 2.5 ppm (Part 22) and fundamental emissions stay within authorized frequency block (Part 24, 27)		PASS	Section 7.8

Table 7-1. Summary of Conducted Test Results

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
22.913(a)(2)	RSS-132(5.4)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 26/5)	< 7 Watts max. ERP < 11.5 Watts max. EIRP	RADIATED	PASS	Section 7.6
27.50(b)(10) 27.50(c)(10)	RSS-130(4.4)	Effective Radiated Power / Equivalent Isotropic Radiated Power (Band 12, 13)	< 3 Watts max. ERP < 5 Watts max. EIRP		PASS	Section 7.6
24.232(c) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power (Band 25/2, 41)	< 2 Watts max. EIRP		PASS	Section 7.6
27.50(d)(4)	RSS-139(6.5)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP		PASS	Section 7.6
2.1053 22.917(a) 24.238(a) 27.53(c) 27.53(g) 27.53(h)	RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.6)	Undesirable Emissions	> 43 + 10log$_{10}$ (P[Watts]) for all out-of-band emissions		PASS	Section 7.7
27.53(f)	N/A	Undesirable Emissions (Band 13)	< -70 dBW/MHz (for wideband signals) < -80 dBW (for discrete emissions less than 700Hz BW) For all emissions in the band 1559 – 1610 MHz		PASS	Section 7.7
27.53(m)	RSS-199(4.5)	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 27.53(m) (RSS-199 [6.4])		PASS	Section 7.7

Table 7-2. Summary of Radiated Test Results

Notes:

1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
2) The analyzer plots (Sections 7.2, 7.3, 7.4, 7.5) were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "LTE Automation," Version 4.8.

7.2 Occupied Bandwidth

§2.1049 RSS-Gen (4.6.1) RSS-133(2.3) RSS-139(2.3)

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW ≥ 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

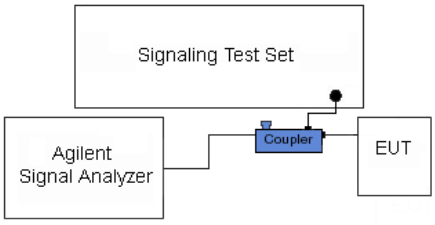

Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None.

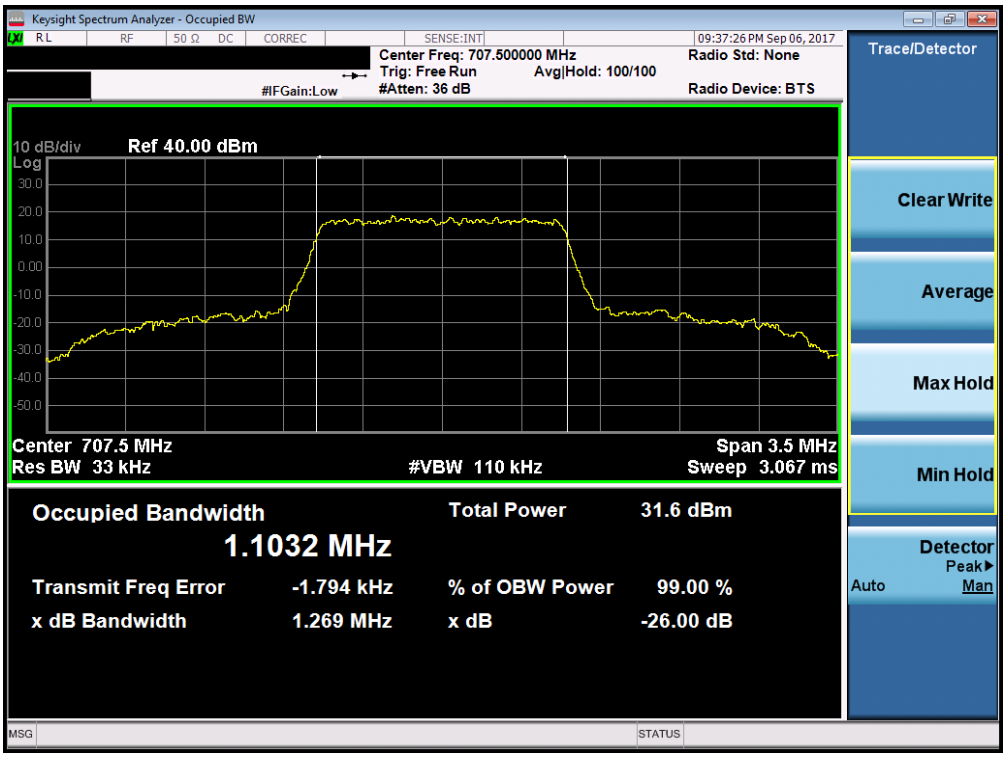

Plot 7-3. Occupied Bandwidth Plot (Band 12 - 1.4.0MHz QPSK - Full RB Configuration)

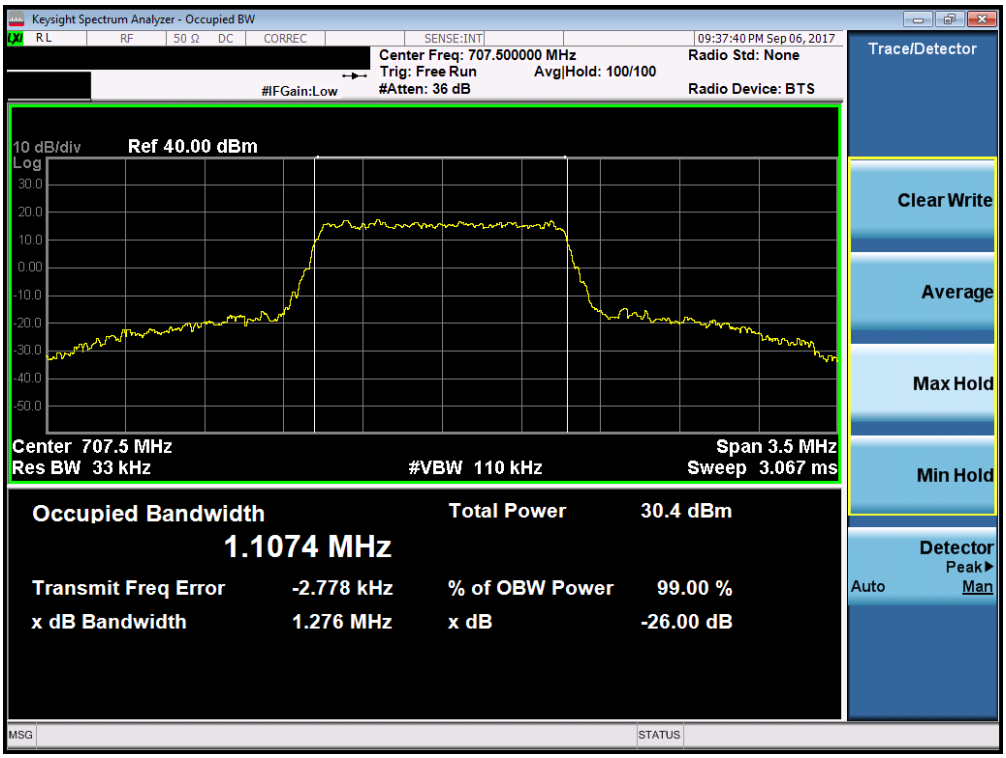

Plot 7-4. Occupied Bandwidth Plot (Band 12 - 1.4.0MHz 16-QAM - Full RB Configuration)

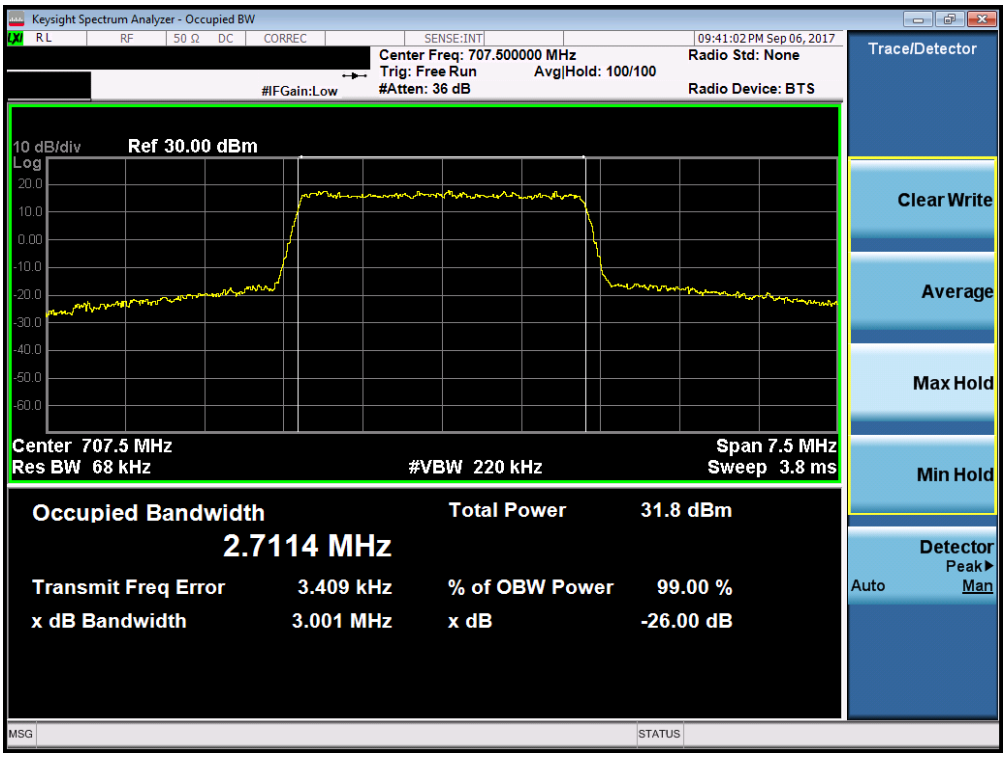

Plot 7-5. Occupied Bandwidth Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)

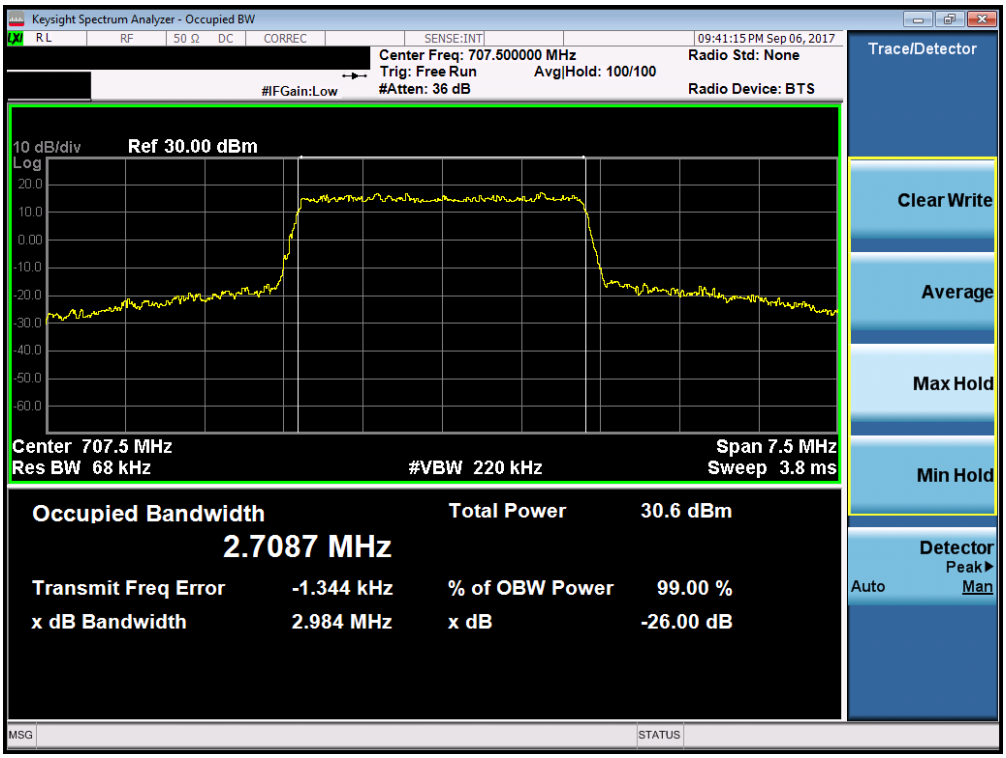

Plot 7-6. Occupied Bandwidth Plot (Band 12 - 3.0MHz 16-QAM - Full RB Configuration)

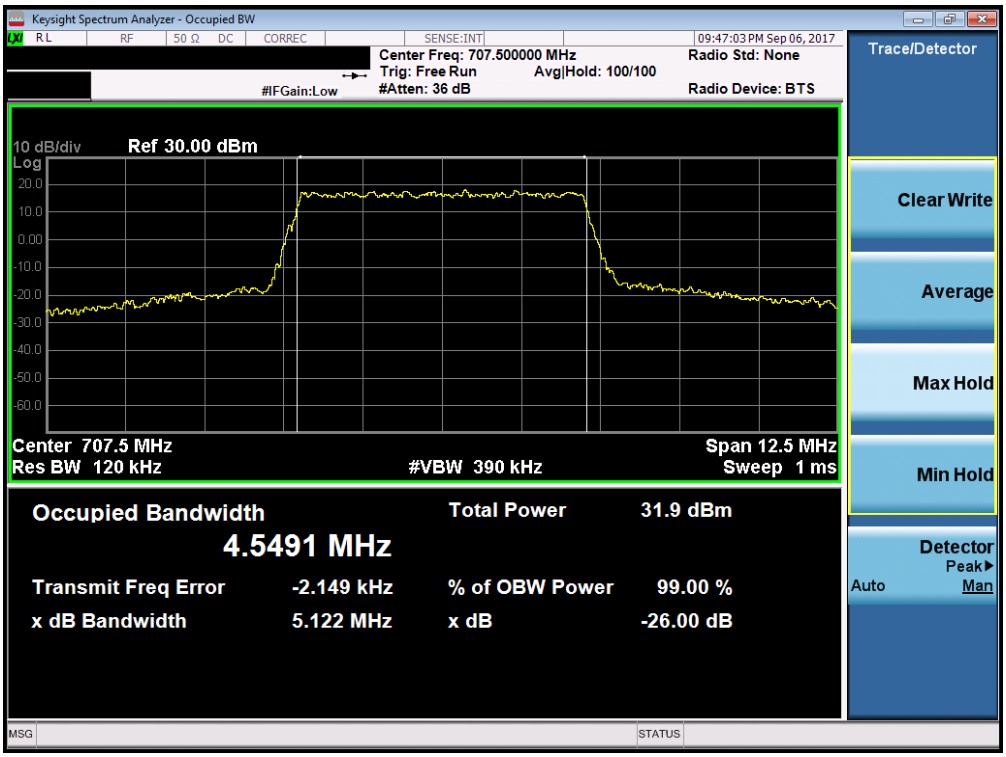

Plot 7-7. Occupied Bandwidth Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)

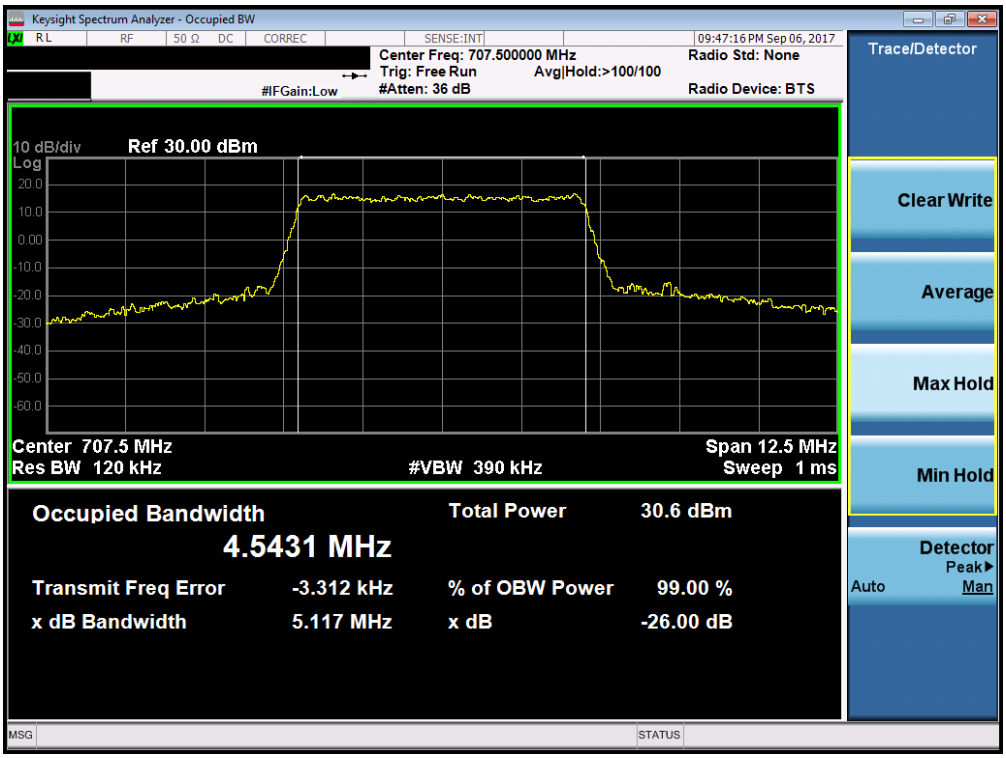

Plot 7-8. Occupied Bandwidth Plot (Band 12 - 5.0MHz 16-QAM - Full RB Configuration)

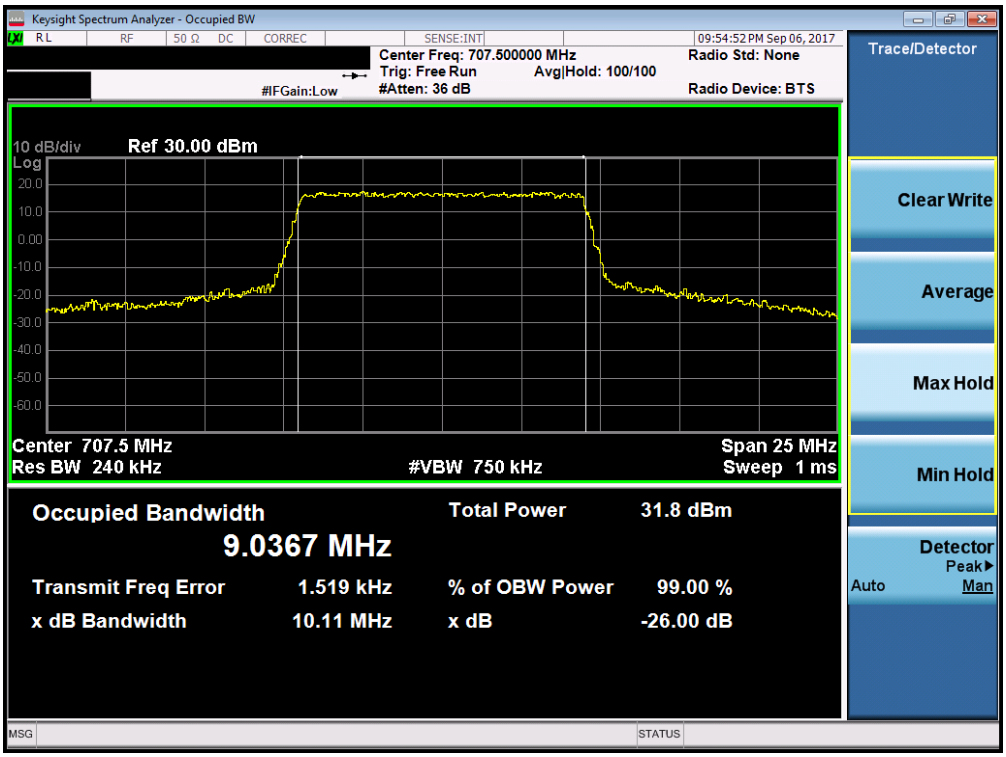

Plot 7-9. Occupied Bandwidth Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)

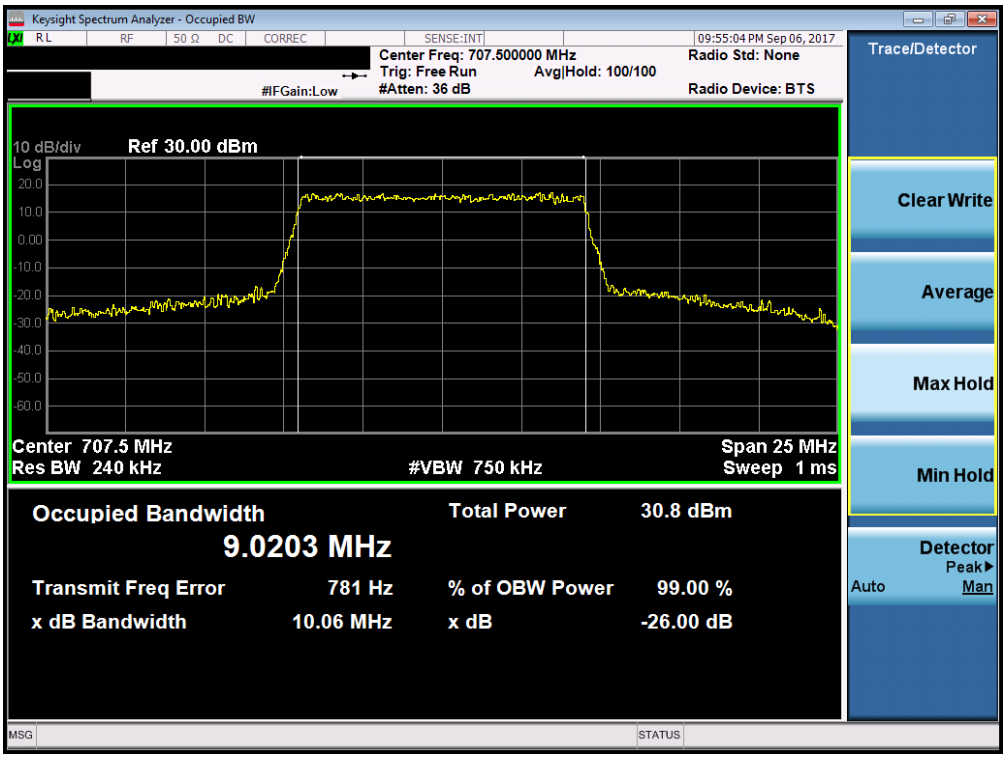

Plot 7-10. Occupied Bandwidth Plot (Band 12 - 10.0MHz 16-QAM - Full RB Configuration)

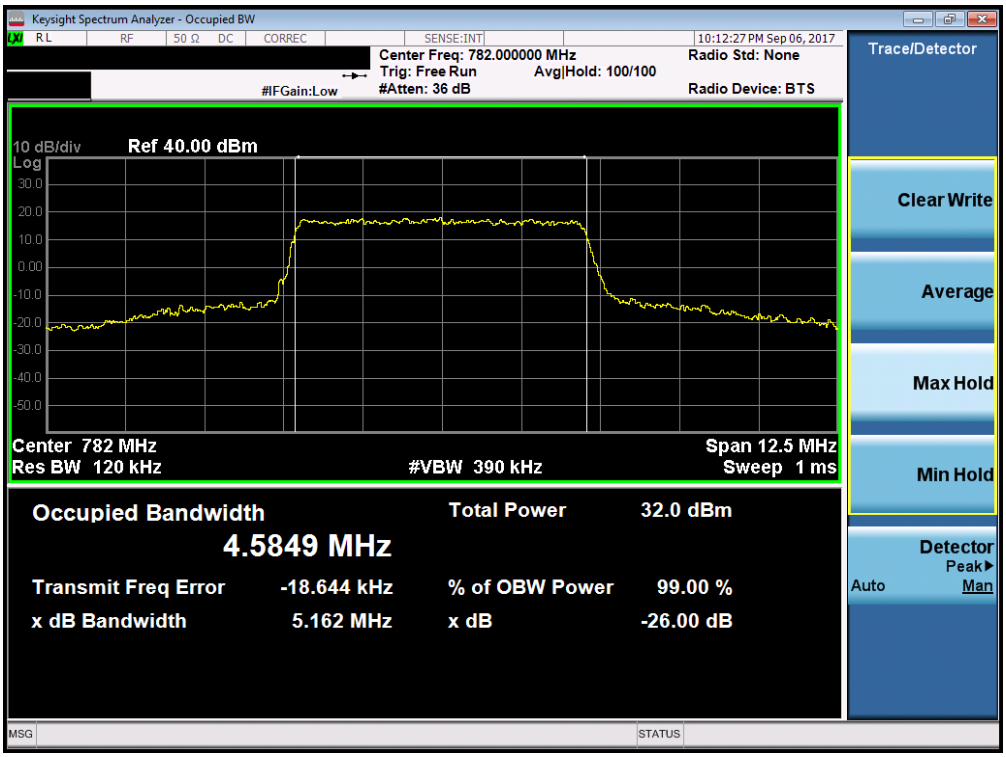

Plot 7-11. Occupied Bandwidth Plot (Band 13 - 5.0MHz QPSK - Full RB Configuration)

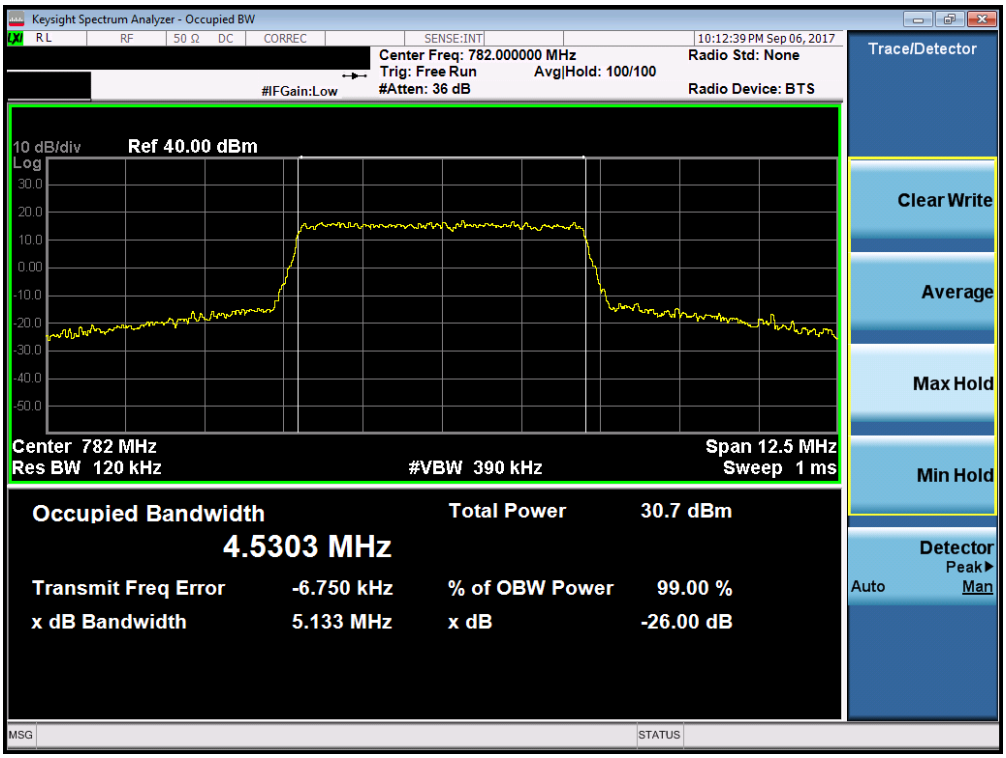

Plot 7-12. Occupied Bandwidth Plot (Band 13 - 5.0MHz 16-QAM - Full RB Configuration)

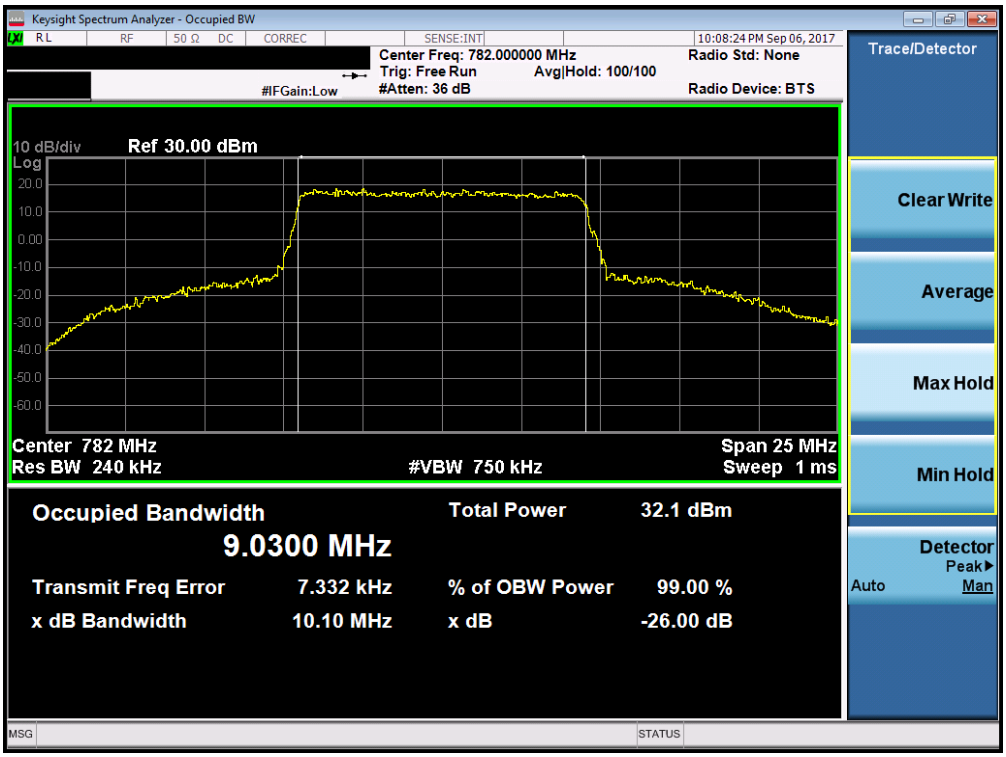

Plot 7-13. Occupied Bandwidth Plot (Band 13 - 10.0MHz QPSK - Full RB Configuration)

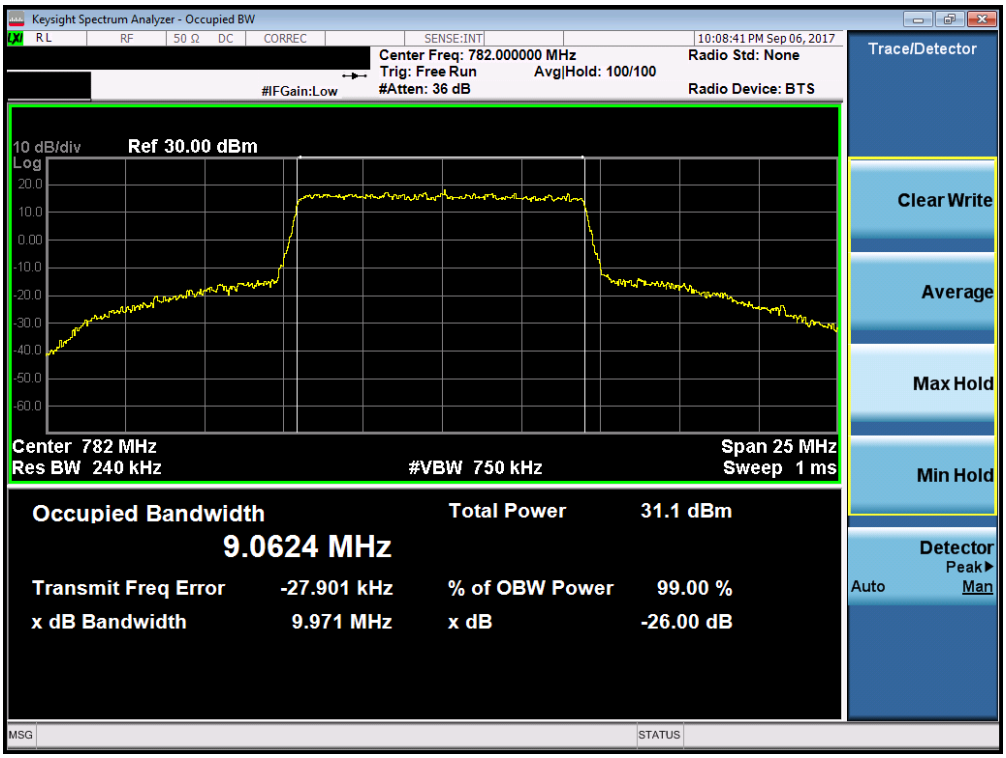

Plot 7-14. Occupied Bandwidth Plot (Band 13 - 10.0MHz 16-QAM - Full RB Configuration)

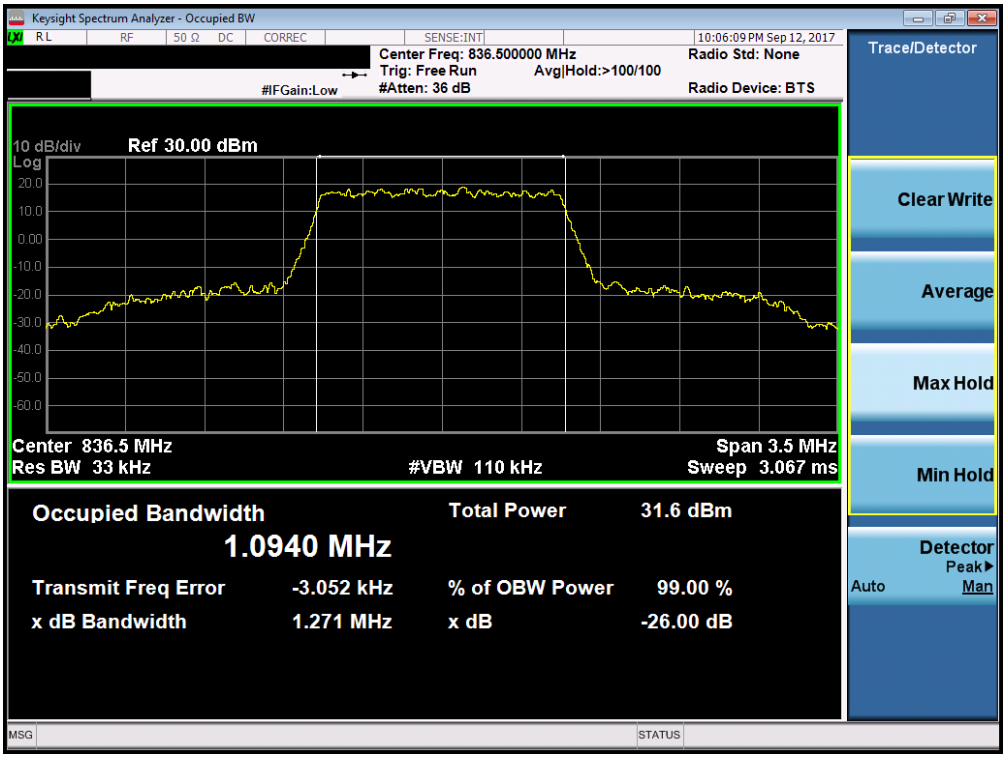

Plot 7-15. Occupied Bandwidth Plot (Band 26/5 - 1.4MHz QPSK - Full RB Configuration)

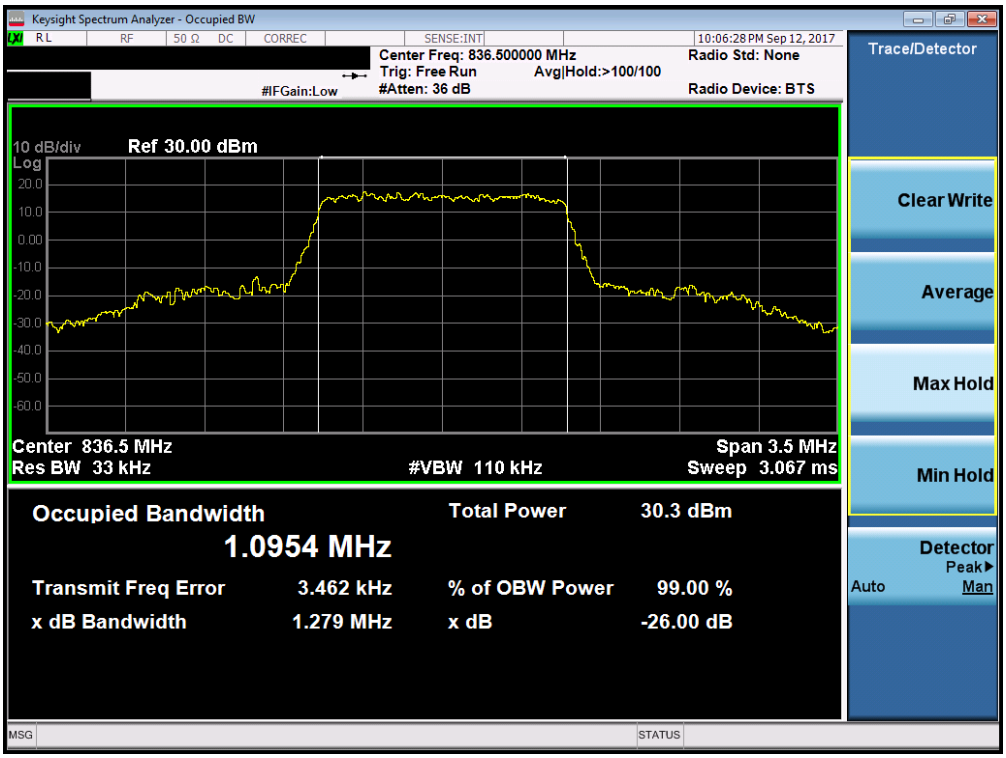

Plot 7-16. Occupied Bandwidth Plot (Band 26/5 - 1.4MHz 16-QAM - Full RB Configuration)

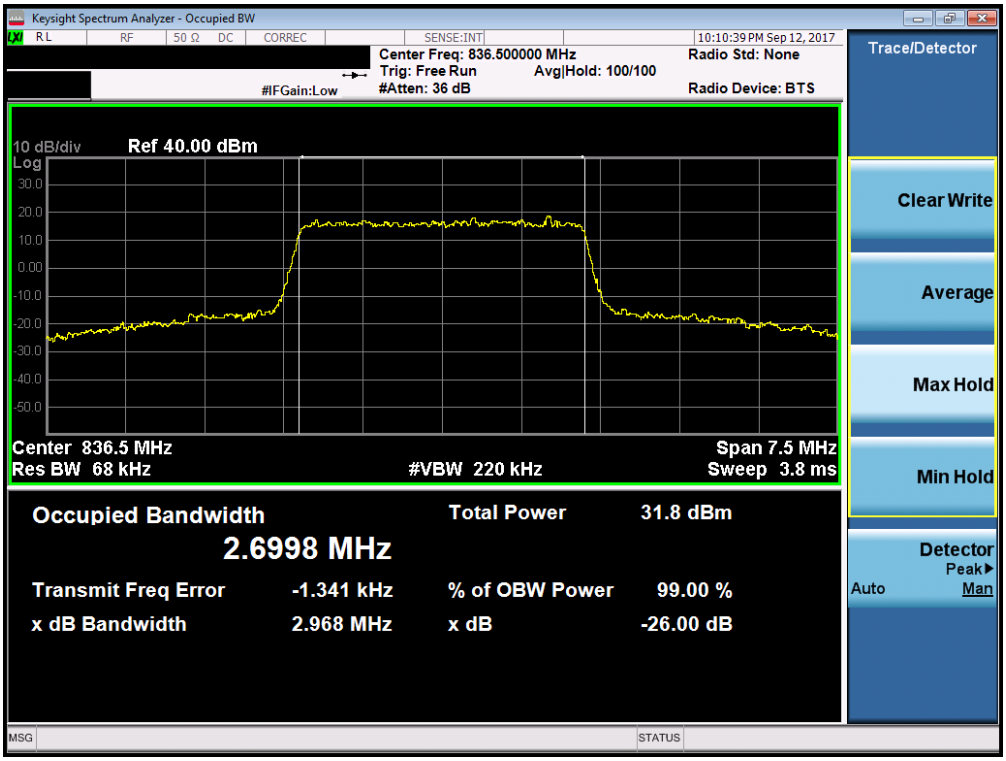

Plot 7-17. Occupied Bandwidth Plot (Band 26/5 - 3.0MHz QPSK - Full RB Configuration)

Plot 7-18. Occupied Bandwidth Plot (Band 26/5 - 3.0MHz 16-QAM - Full RB Configuration)

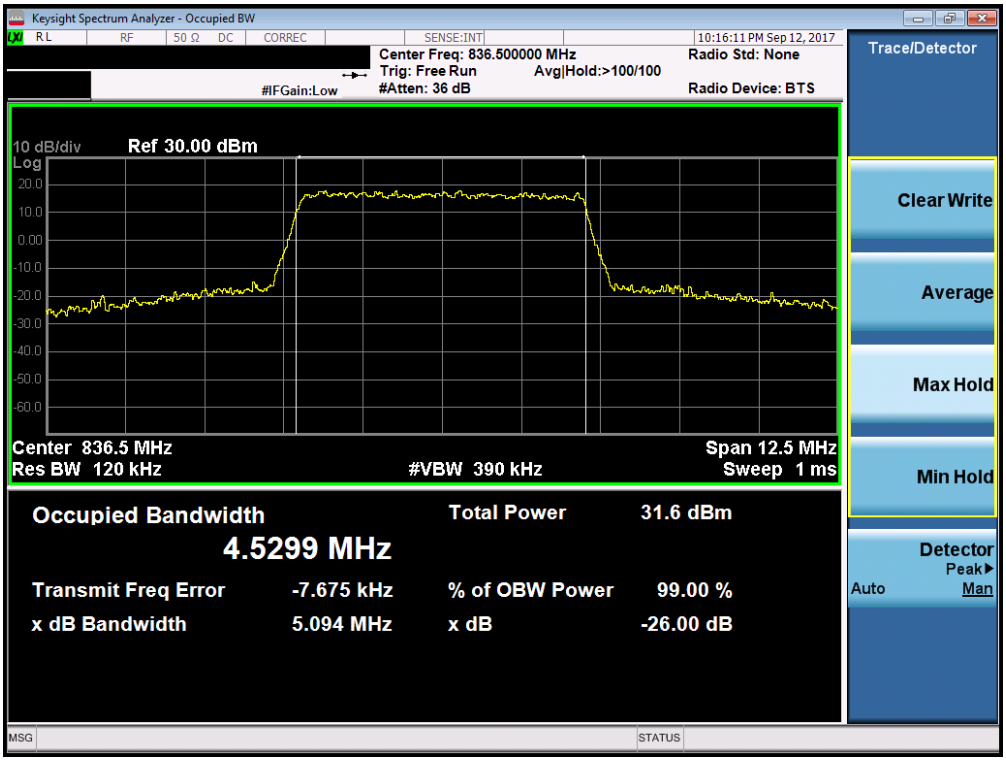

Plot 7-19. Occupied Bandwidth Plot (Band 26/5 - 5.0MHz QPSK - Full RB Configuration)

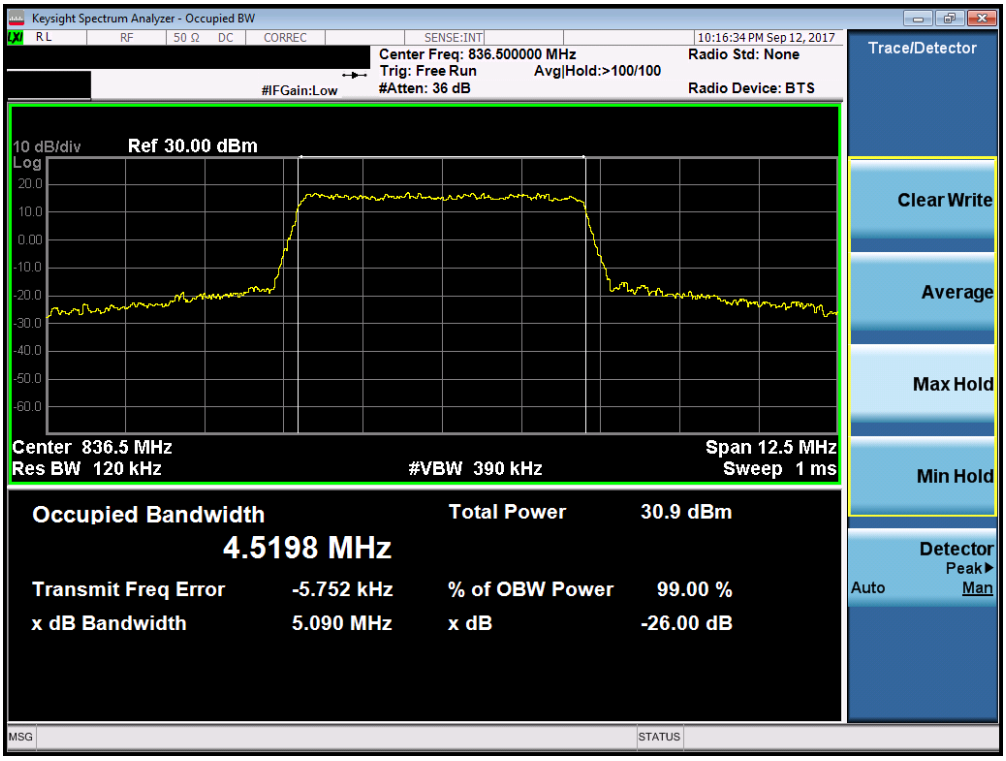

Plot 7-20. Occupied Bandwidth Plot (Band 26/5 - 5.0MHz 16-QAM - Full RB Configuration)

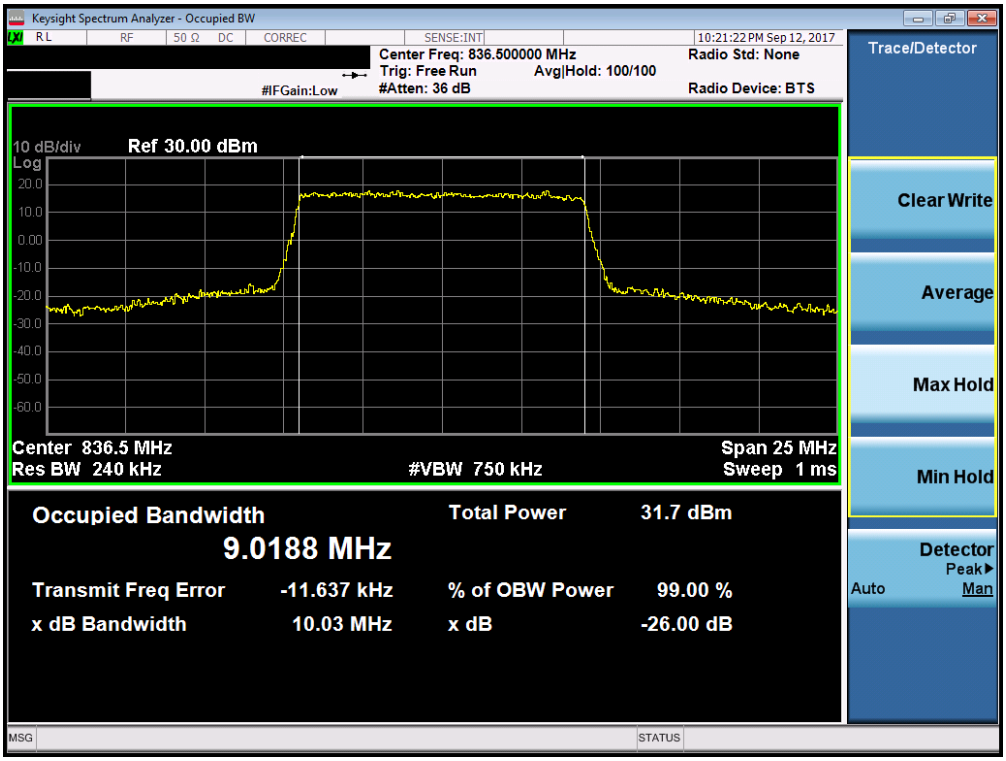

Plot 7-21. Occupied Bandwidth Plot (Band 26/5 - 10.0MHz QPSK - Full RB Configuration)

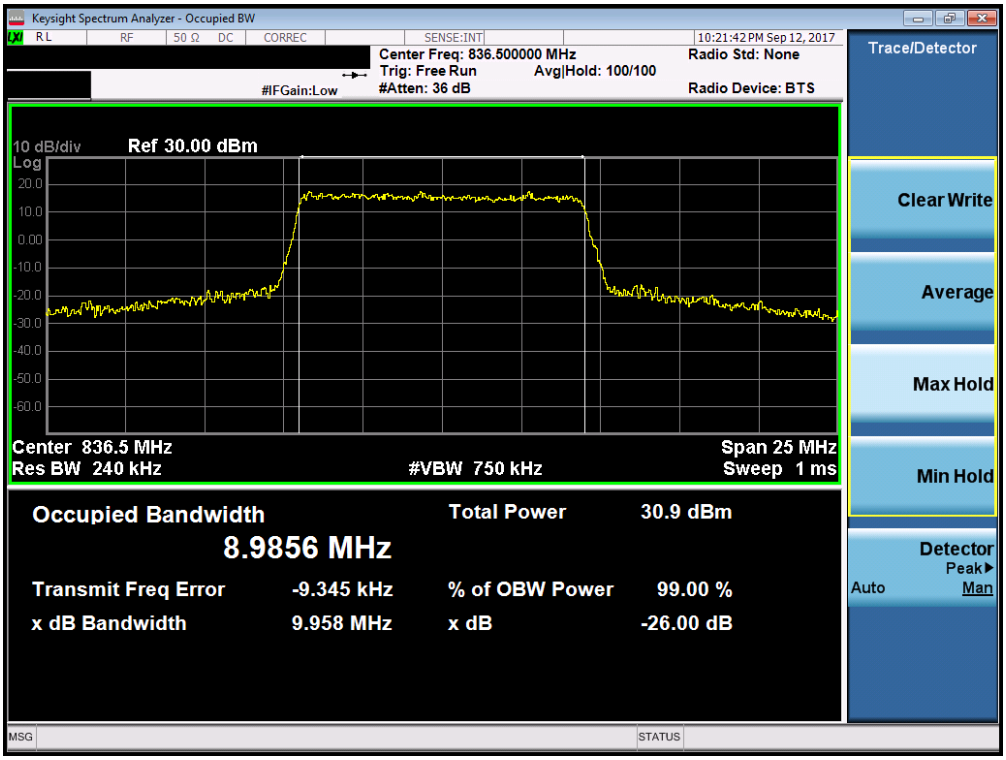

Plot 7-22. Occupied Bandwidth Plot (Band 26/5 - 10.0MHz 16-QAM - Full RB Configuration)

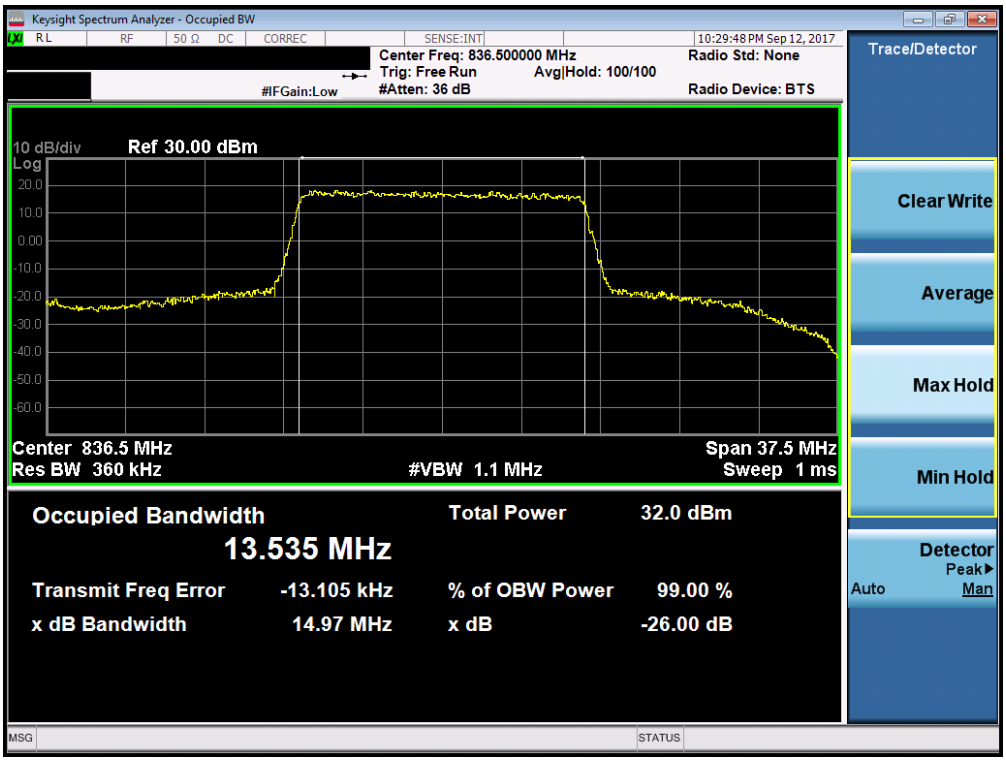

Plot 7-23. Occupied Bandwidth Plot (Band 26 - 15.0MHz QPSK - Full RB Configuration)

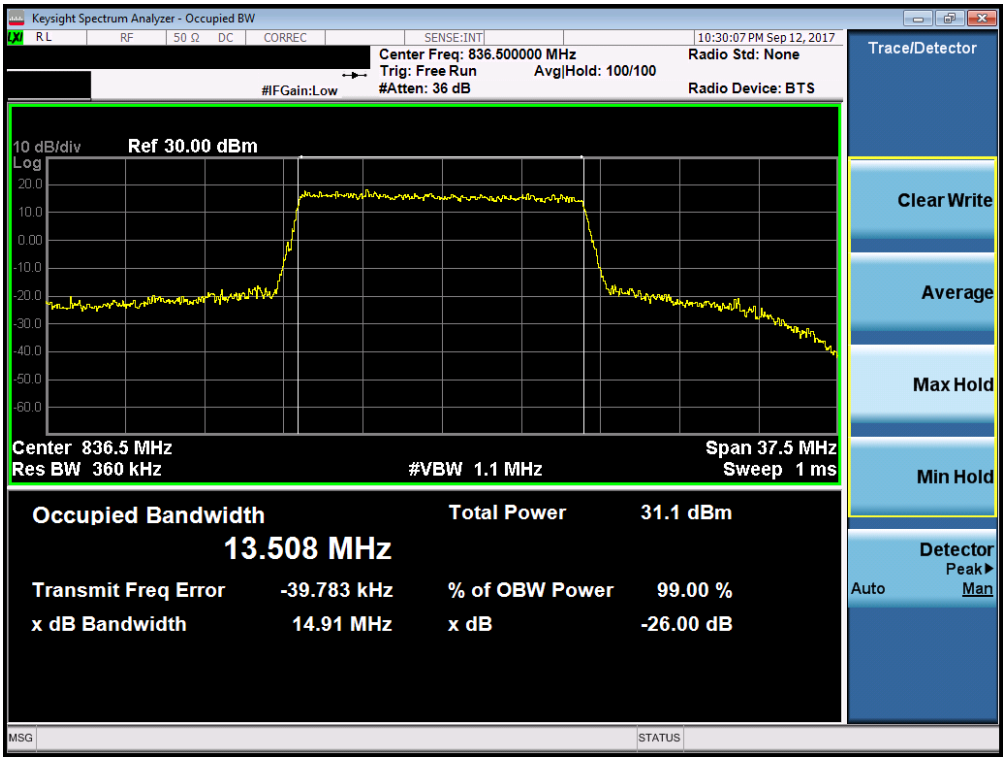

Plot 7-24. Occupied Bandwidth Plot (Band 26 - 15.0MHz 16-QAM - Full RB Configuration)

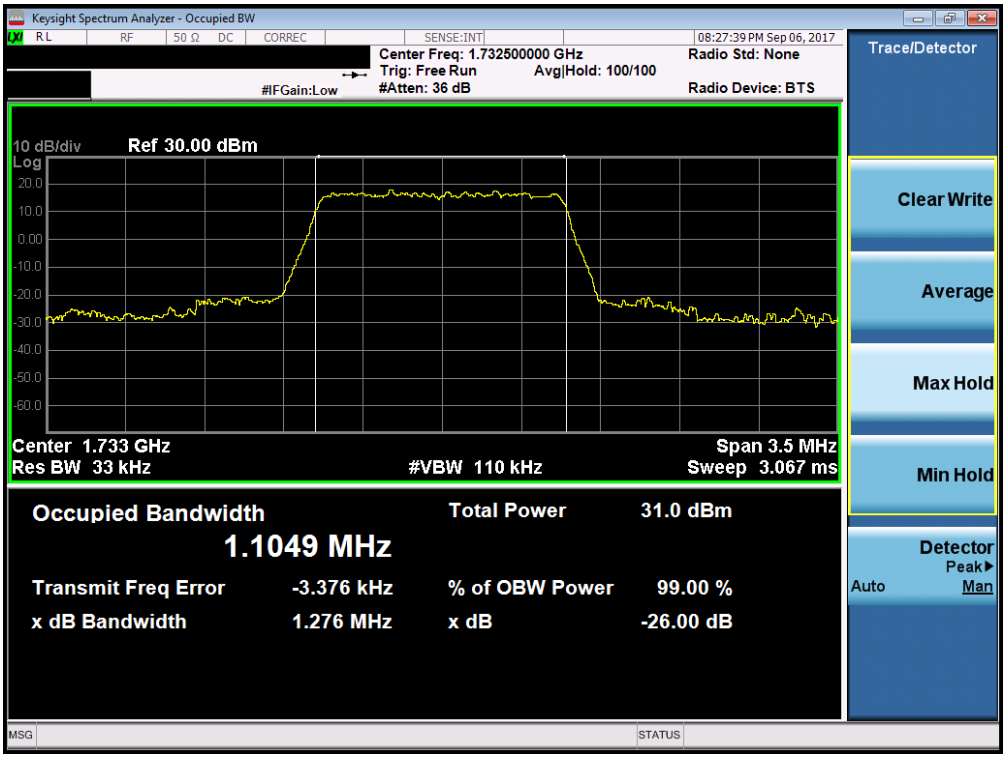

Plot 7-25. Occupied Bandwidth Plot (Band 4 – 1.4MHz QPSK - Full RB Configuration)

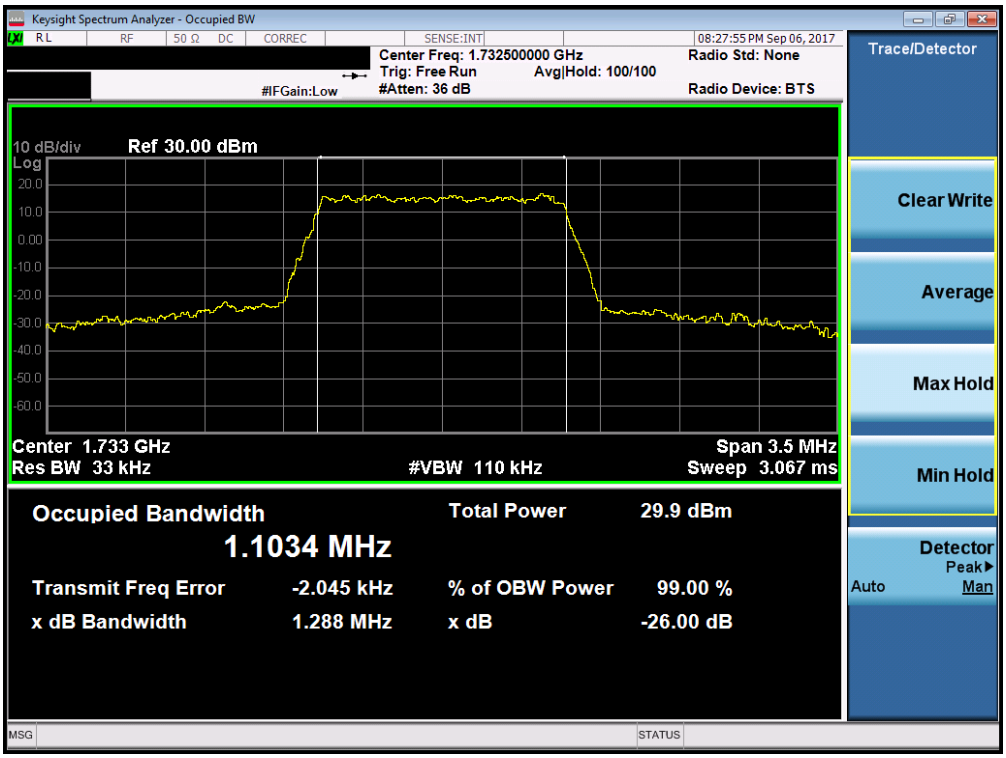

Plot 7-26. Occupied Bandwidth Plot (Band 4 – 1.4MHz 16-QAM - Full RB Configuration)

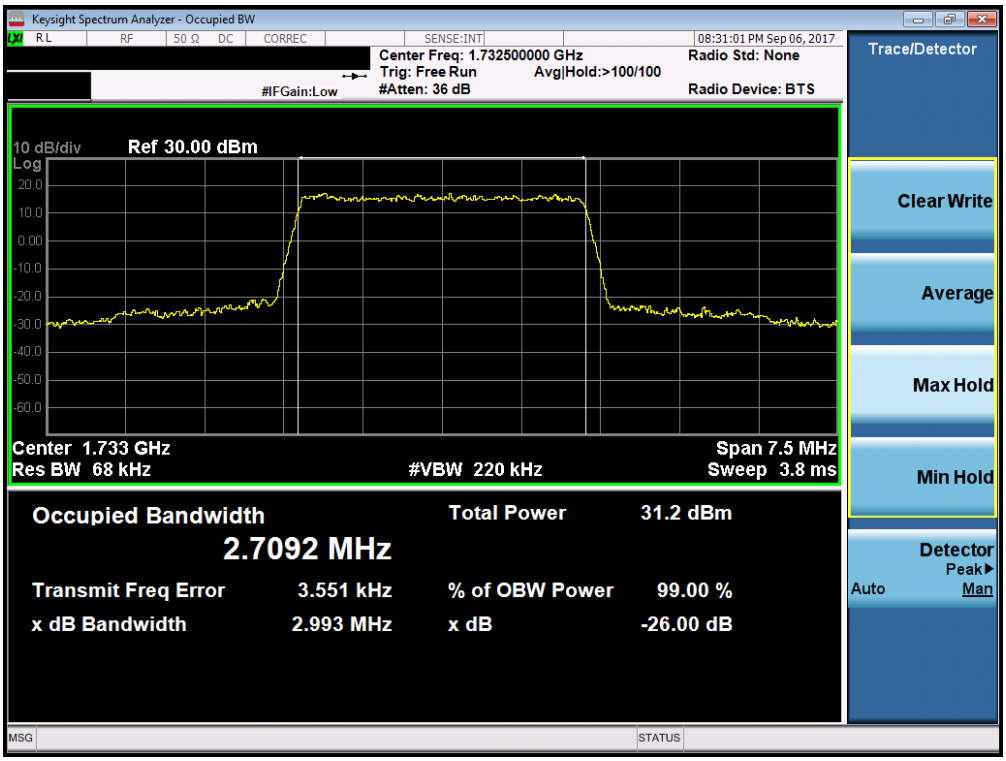

Plot 7-27. Occupied Bandwidth Plot (Band 4 - 3.0MHz QPSK - Full RB Configuration)

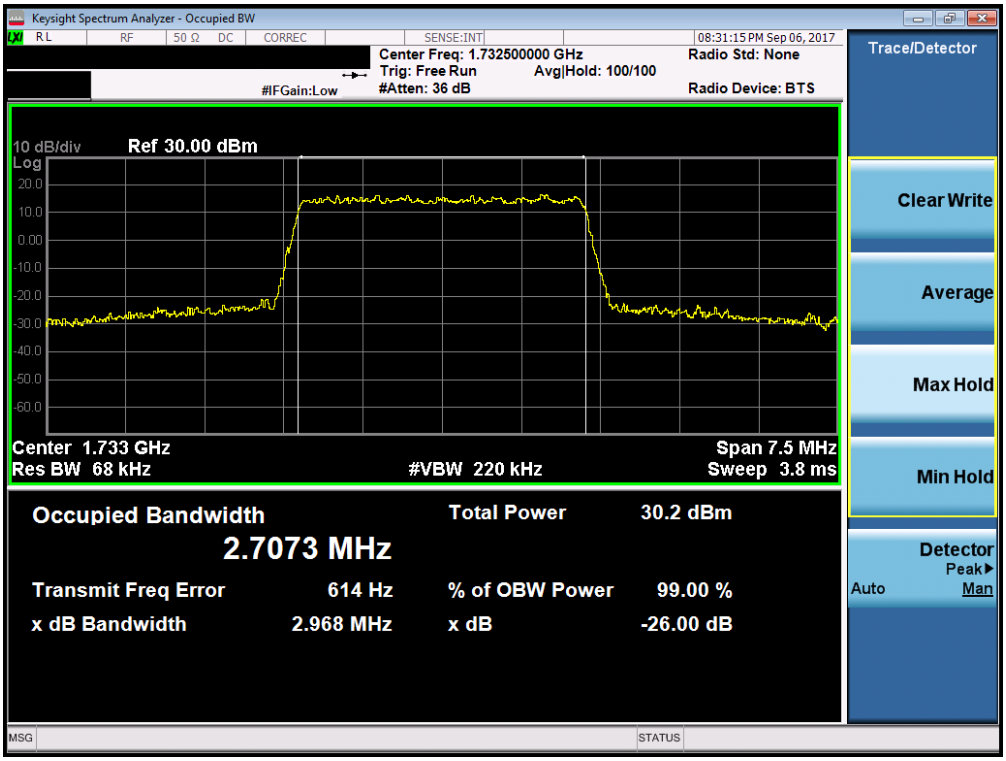

Plot 7-28. Occupied Bandwidth Plot (Band 4 - 3.0MHz 16-QAM - Full RB Configuration)

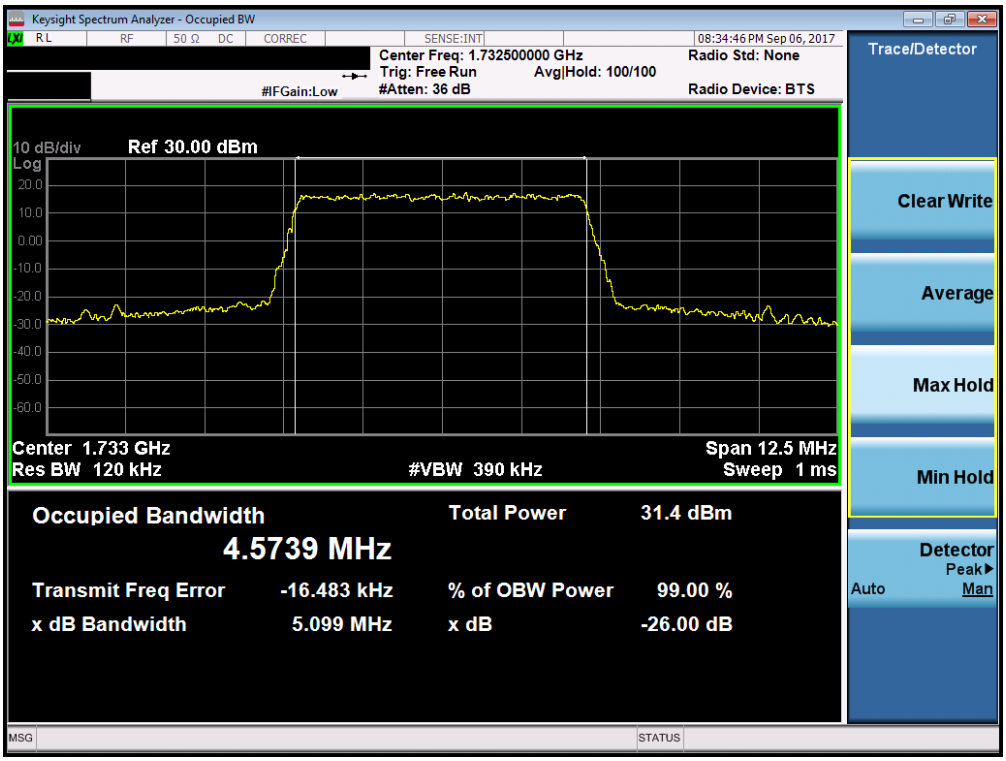

Plot 7-29. Occupied Bandwidth Plot (Band 4 - 5.0MHz QPSK - Full RB Configuration)

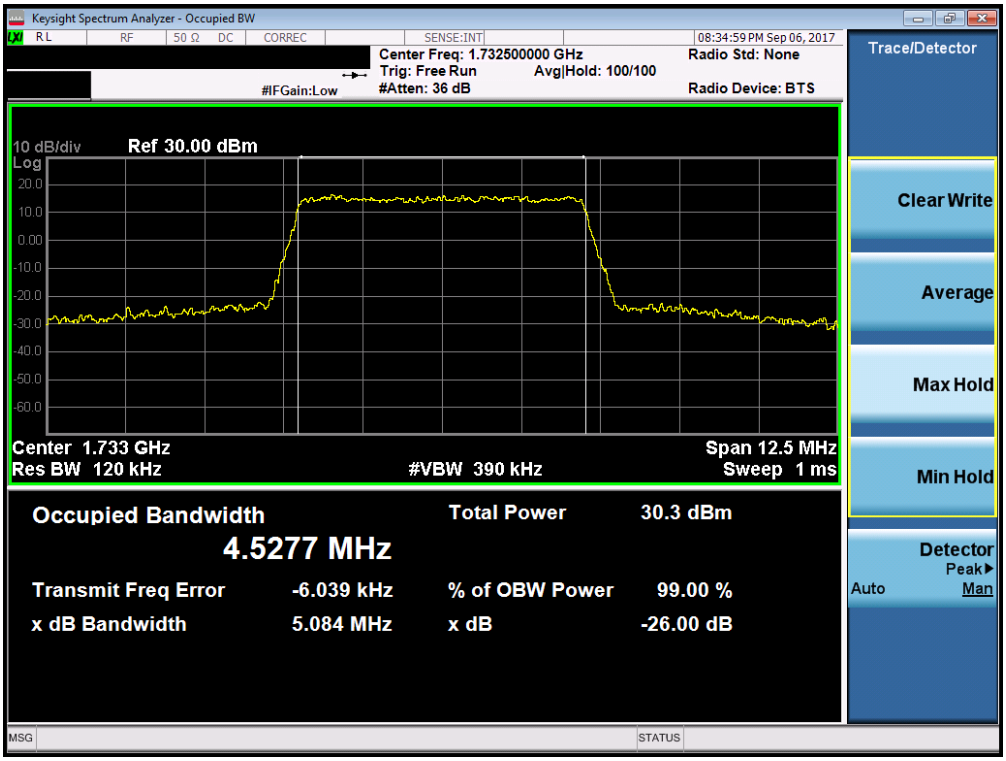

Plot 7-30. Occupied Bandwidth Plot (Band 4 - 5.0MHz 16-QAM - Full RB Configuration)

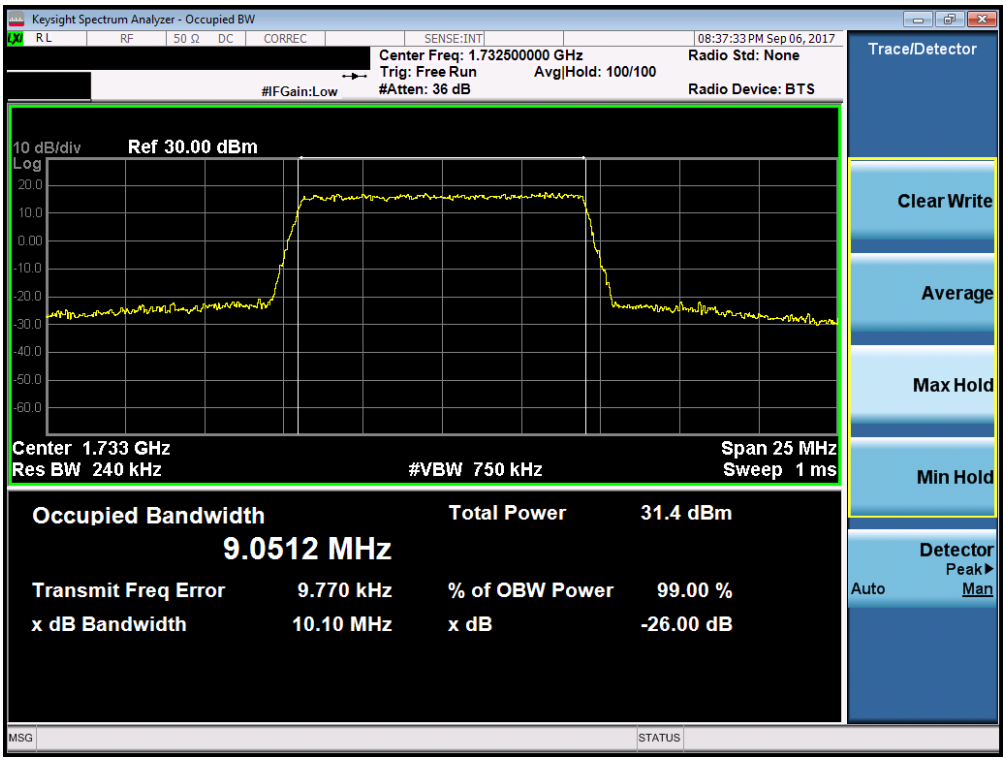

Plot 7-31. Occupied Bandwidth Plot (Band 4 - 10.0MHz QPSK - Full RB Configuration)

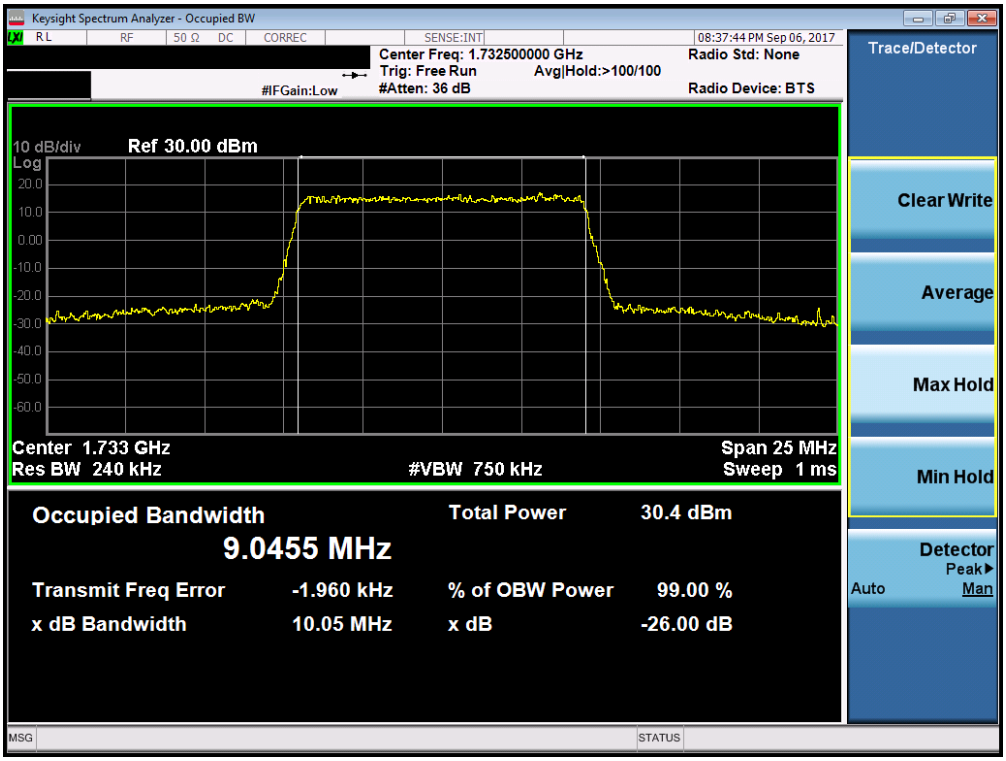

Plot 7-32. Occupied Bandwidth Plot (Band 4 - 10.0MHz 16-QAM - Full RB Configuration)

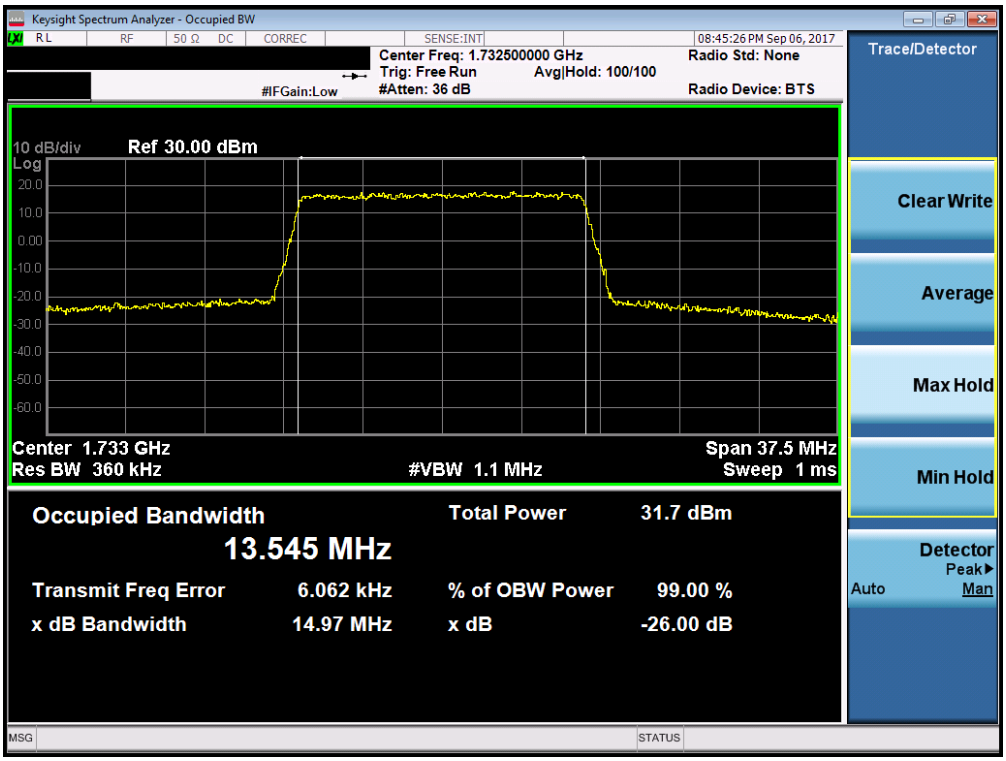

Plot 7-33. Occupied Bandwidth Plot (Band 4 - 15.0MHz QPSK - Full RB Configuration)

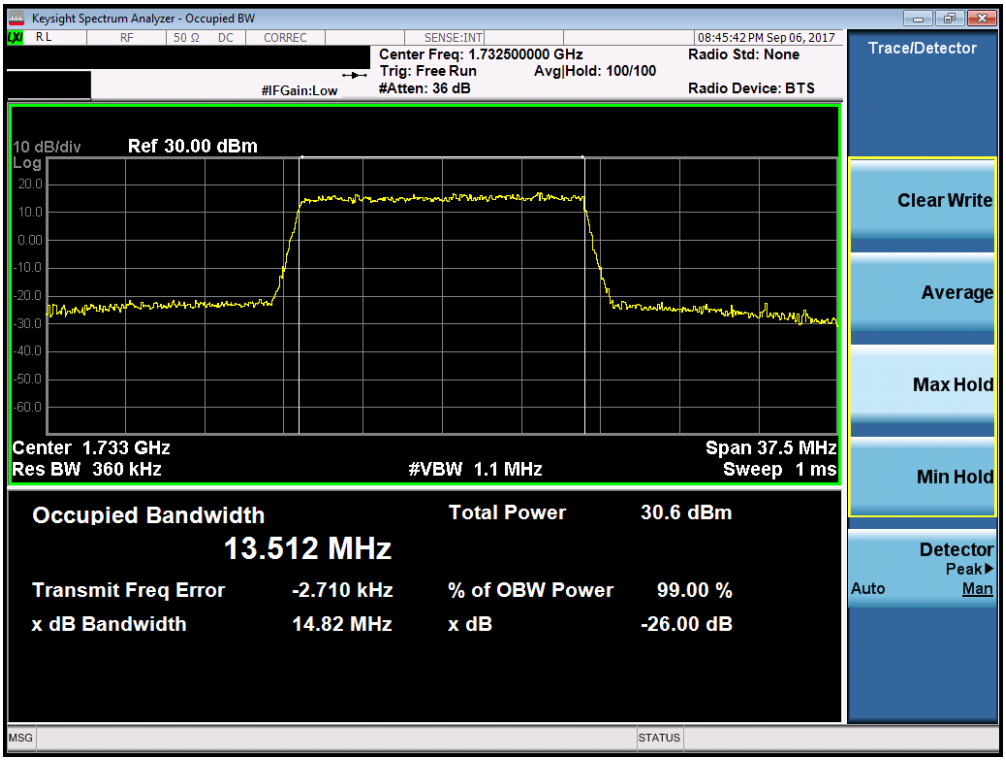

Plot 7-34. Occupied Bandwidth Plot (Band 4 - 15.0MHz 16-QAM - Full RB Configuration)

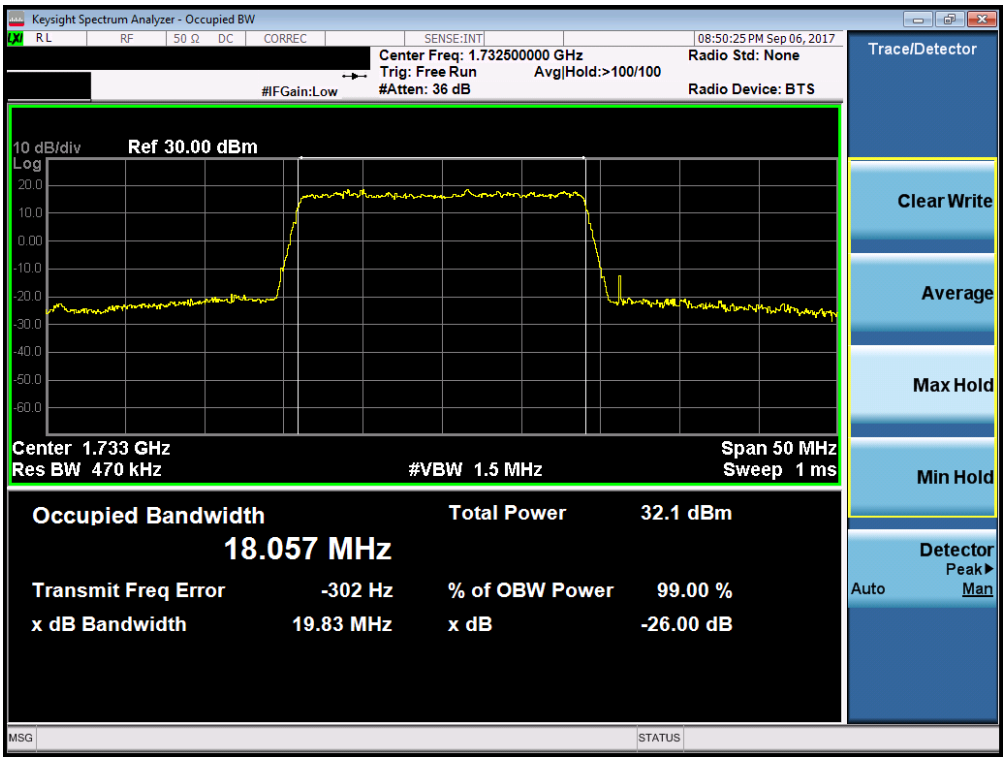

Plot 7-35. Occupied Bandwidth Plot (Band 4 - 20.0MHz QPSK - Full RB Configuration)

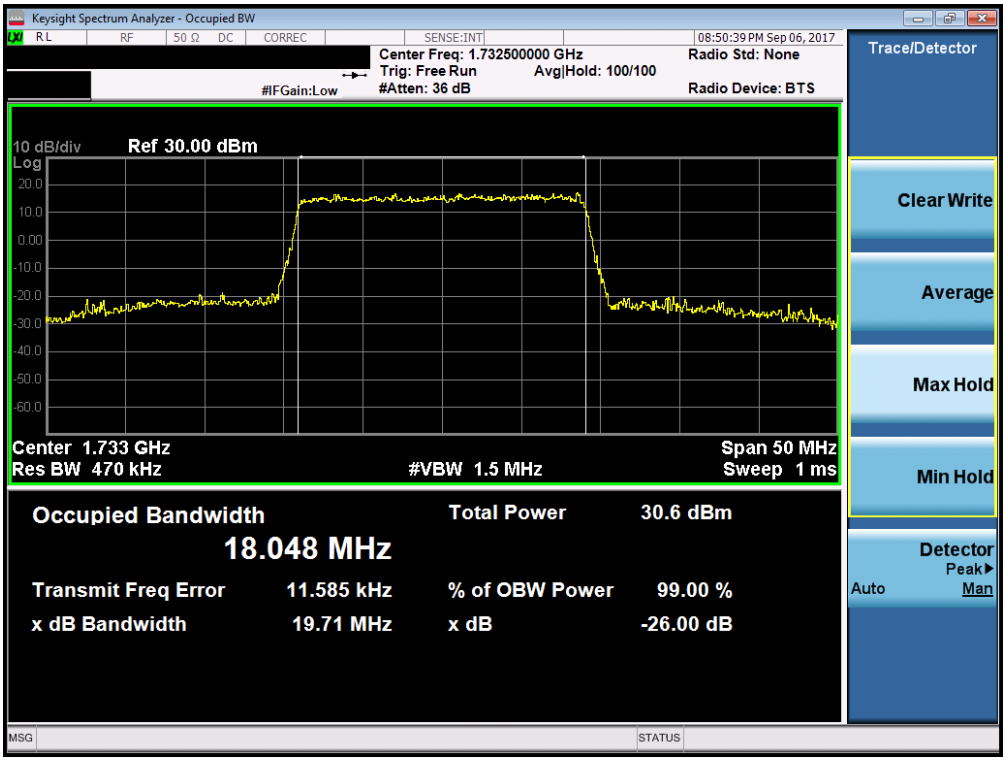

Plot 7-36. Occupied Bandwidth Plot (Band 4 - 20.0MHz 16-QAM - Full RB Configuration)

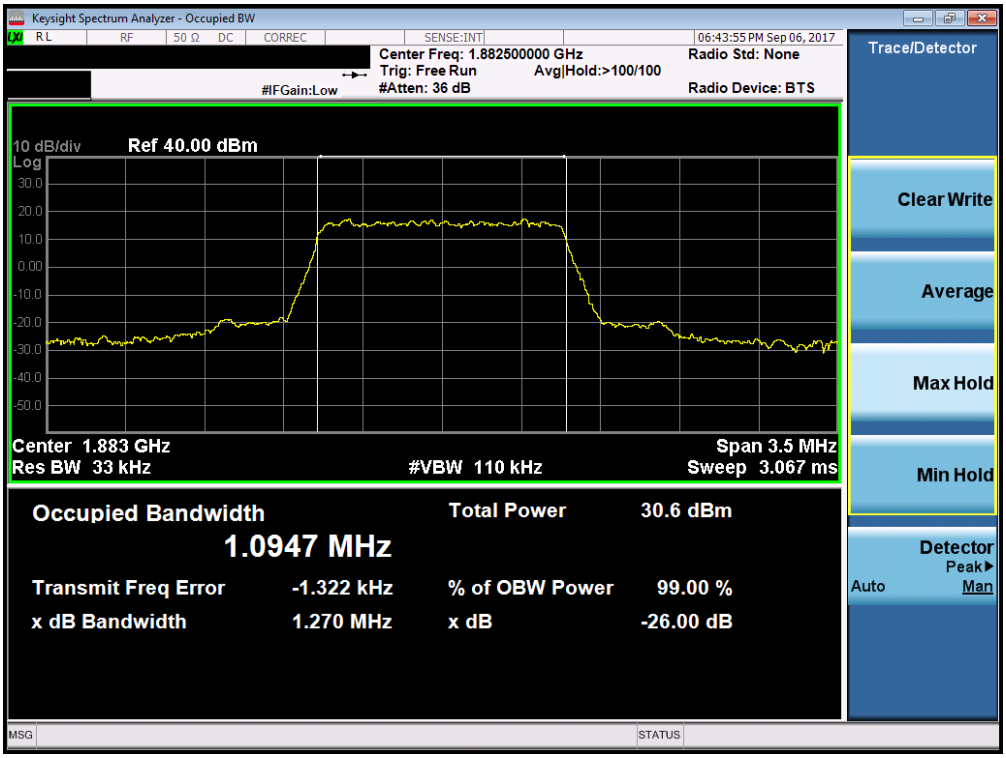

Plot 7-37. Occupied Bandwidth Plot (Band 25/2 – 1.4MHz QPSK - Full RB Configuration)

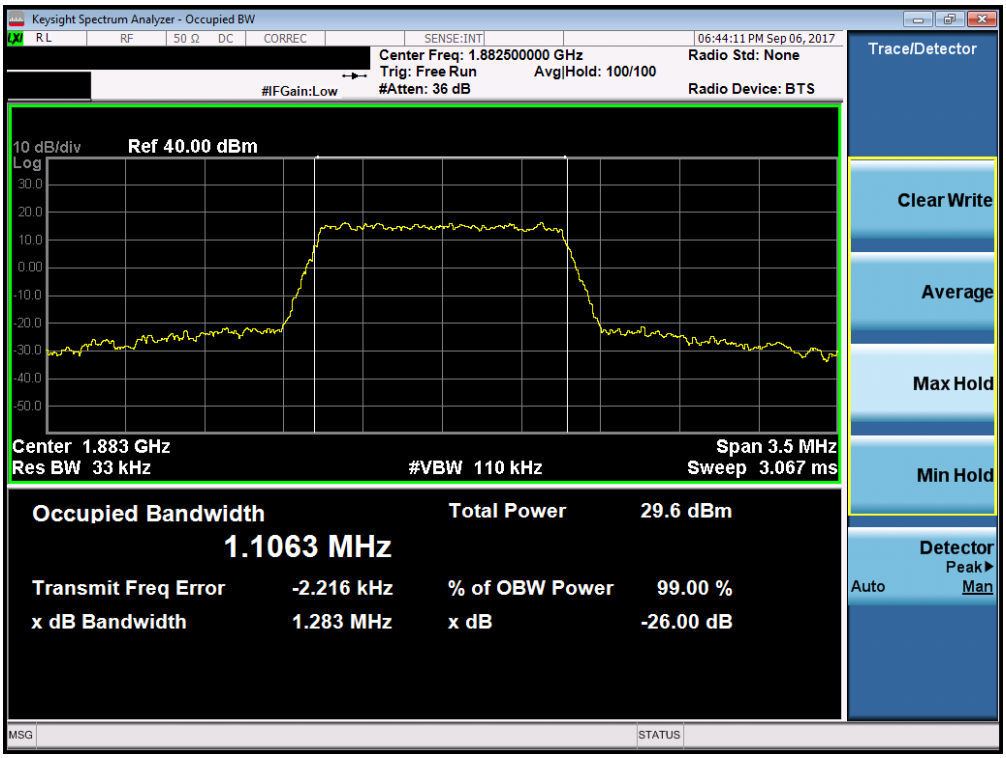

Plot 7-38. Occupied Bandwidth Plot (Band 25/2 – 1.4MHz 16-QAM - Full RB Configuration)

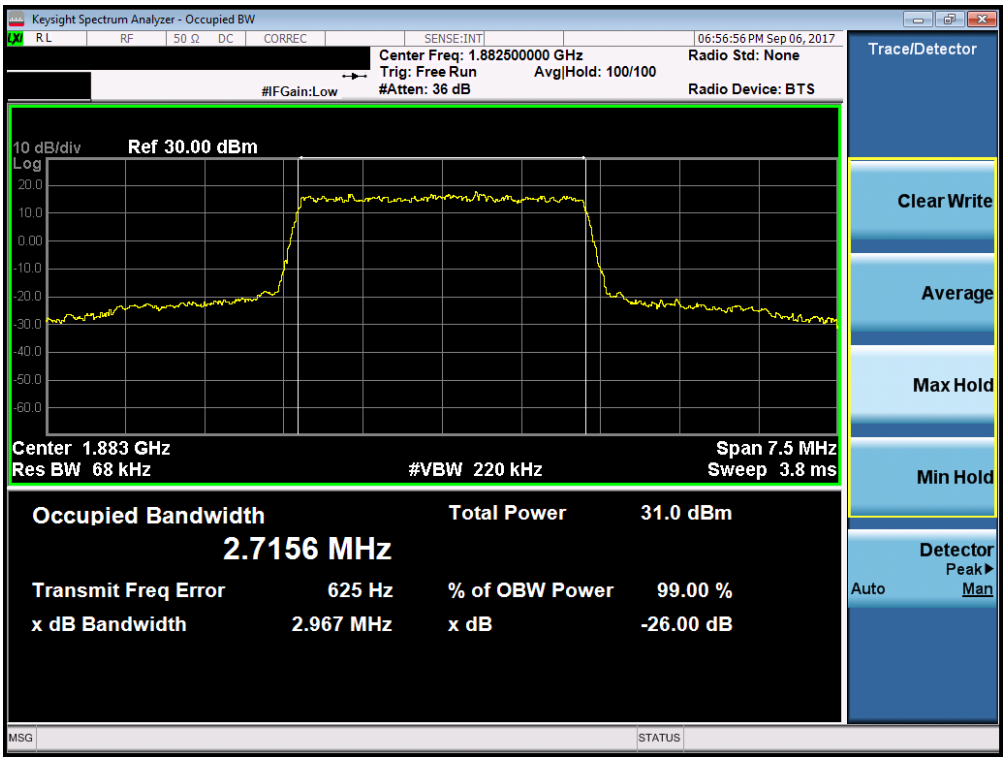

Plot 7-39. Occupied Bandwidth Plot (Band 25/2 - 3.0MHz QPSK - Full RB Configuration)

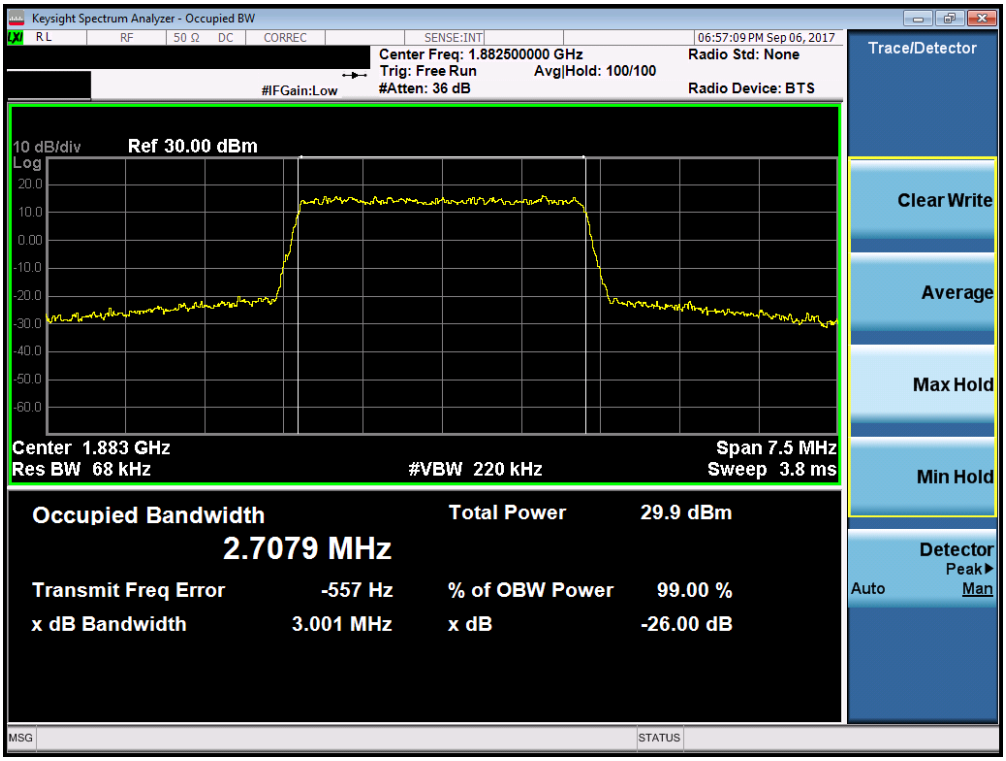

Plot 7-40. Occupied Bandwidth Plot (Band 25/2 - 3.0MHz 16-QAM - Full RB Configuration)

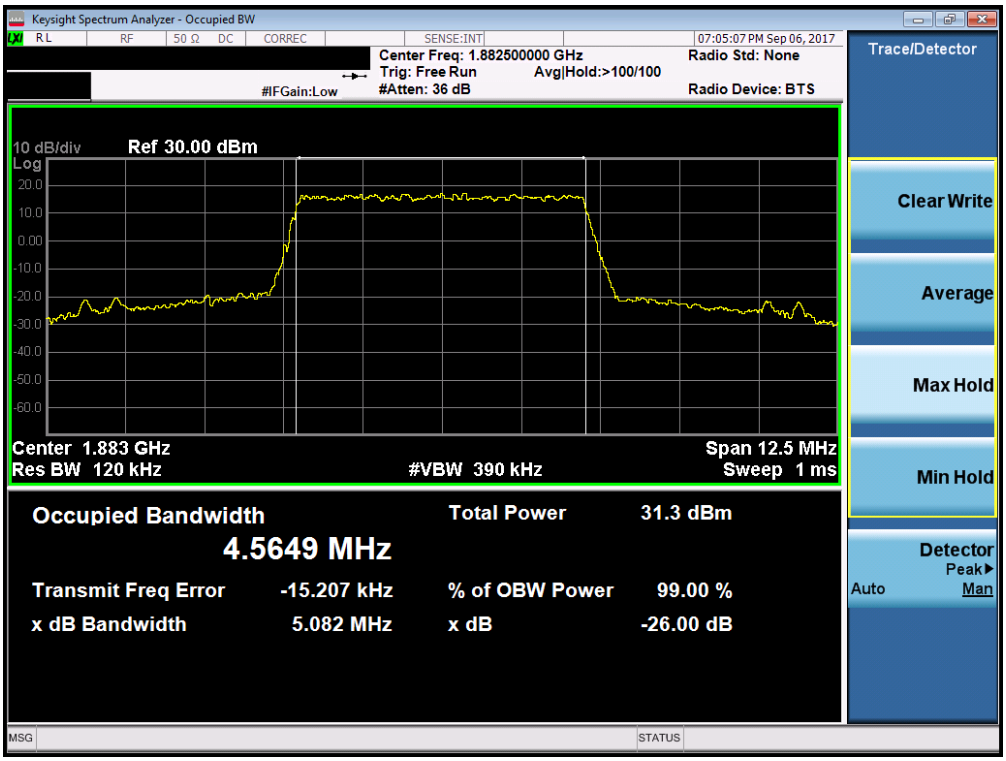

Plot 7-41. Occupied Bandwidth Plot (Band 25/2 - 5.0MHz QPSK - Full RB Configuration)

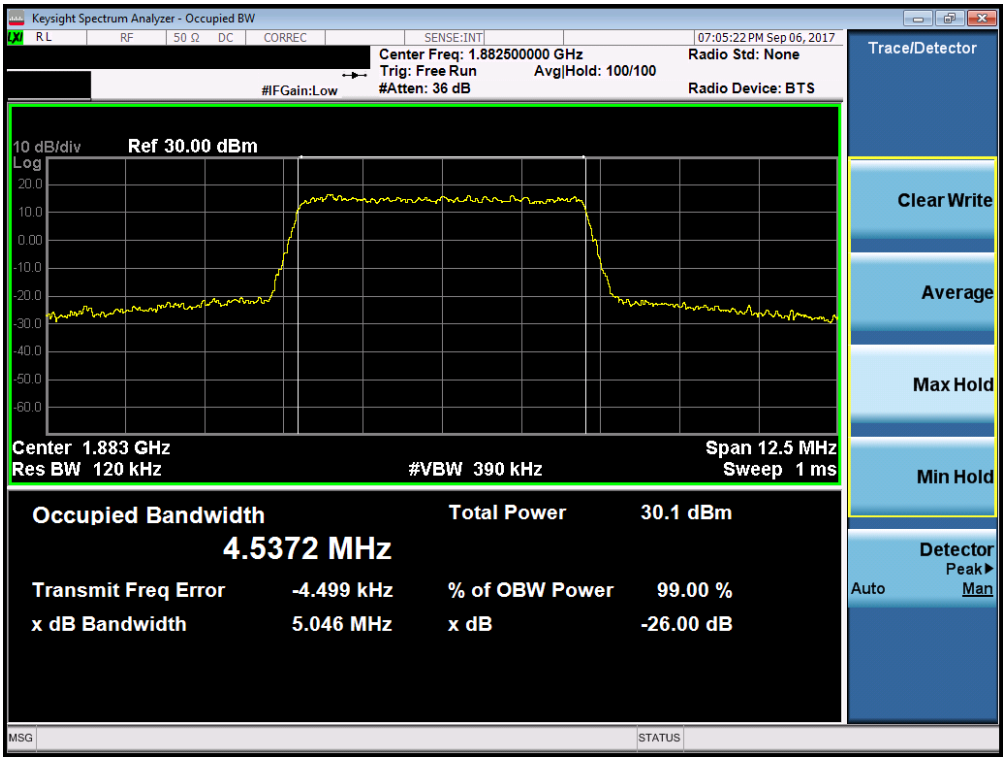

Plot 7-42. Occupied Bandwidth Plot (Band 25/2 - 5.0MHz 16-QAM - Full RB Configuration)

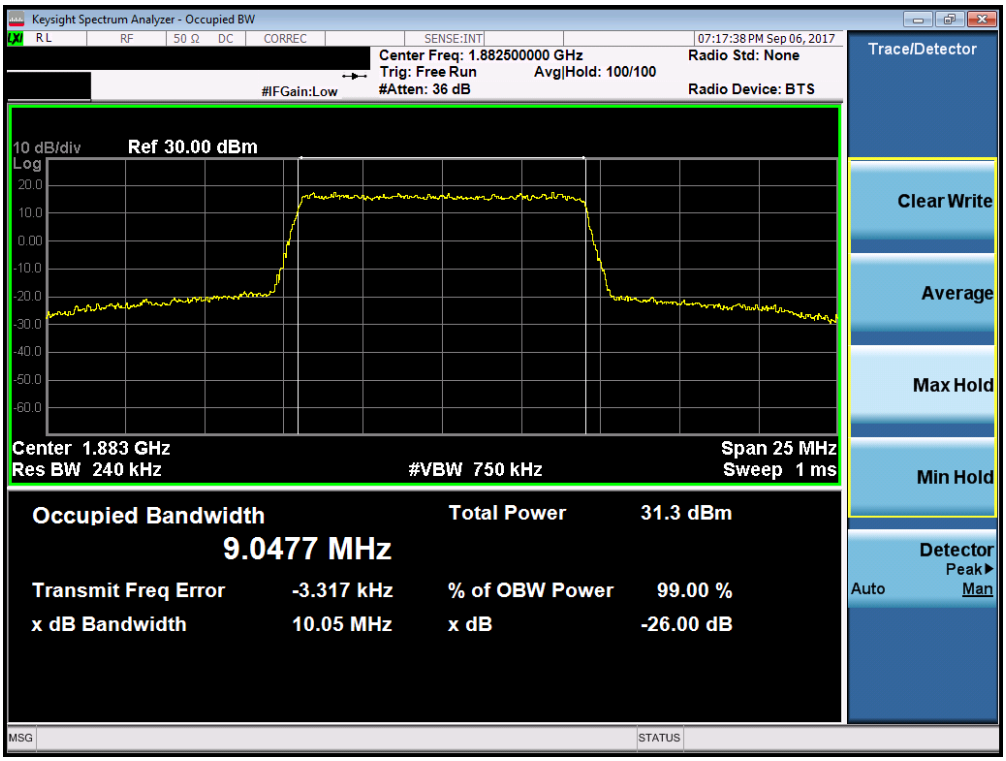

Plot 7-43. Occupied Bandwidth Plot (Band 25/2 - 10.0MHz QPSK - Full RB Configuration)

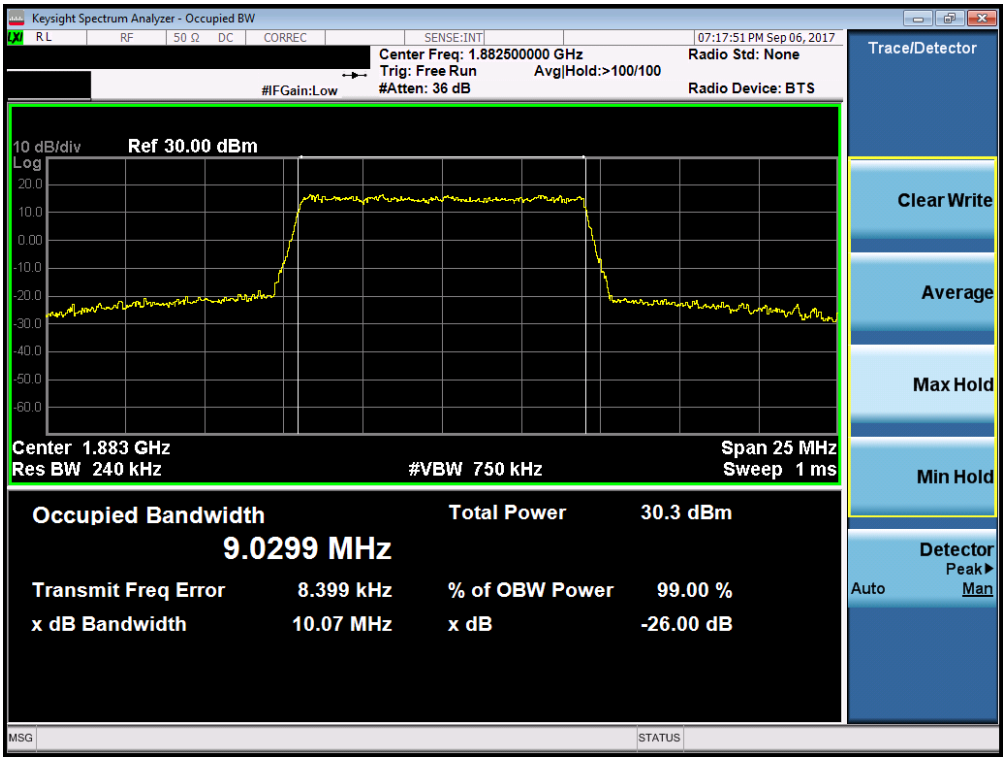

Plot 7-44. Occupied Bandwidth Plot (Band 25/2 - 10.0MHz 16-QAM - Full RB Configuration)

Plot 7-45. Occupied Bandwidth Plot (Band 25/2 - 15.0MHz QPSK - Full RB Configuration)

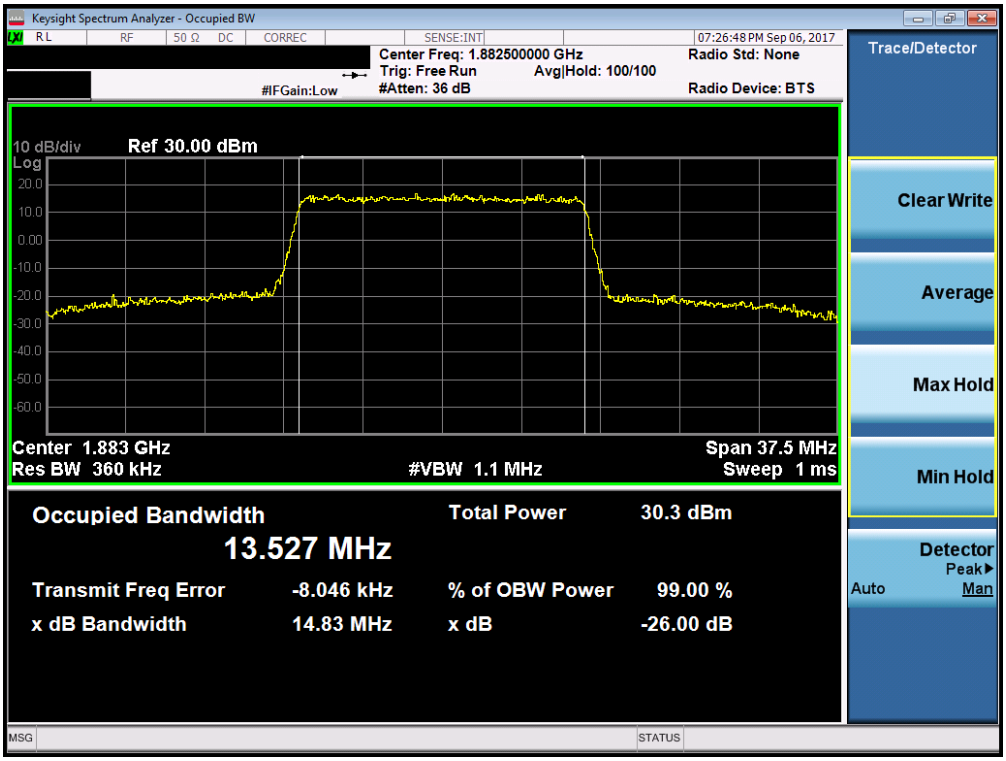

Plot 7-46. Occupied Bandwidth Plot (Band 25/2 - 15.0MHz 16-QAM - Full RB Configuration)

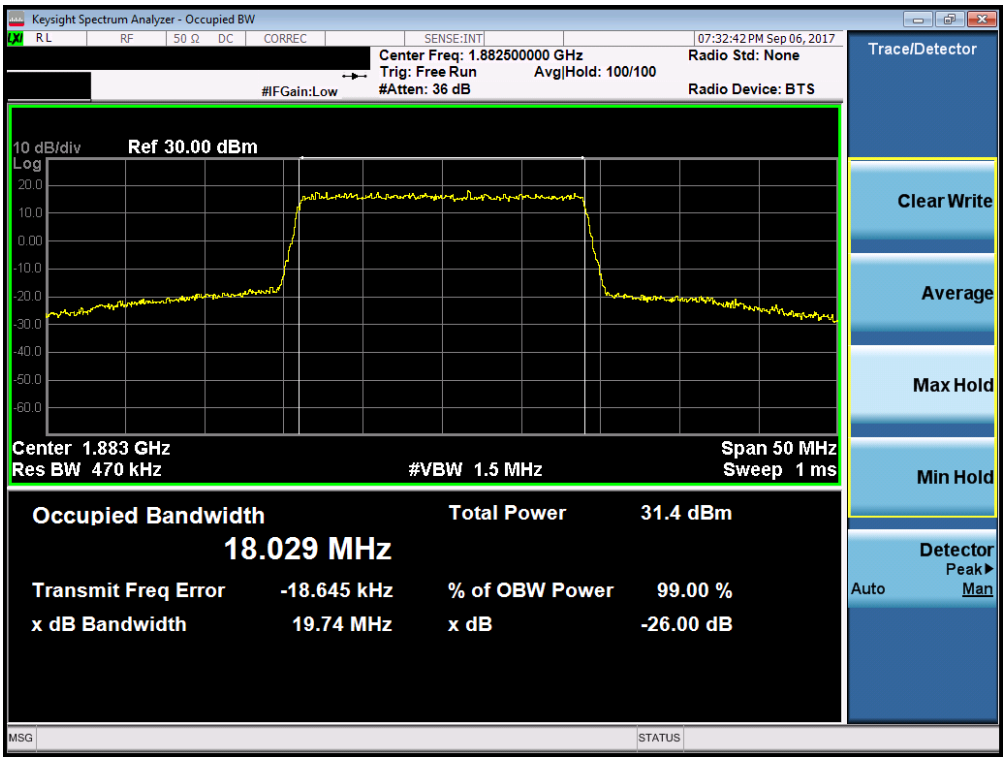

Plot 7-47. Occupied Bandwidth Plot (Band 25/2 - 20.0MHz QPSK - Full RB Configuration)

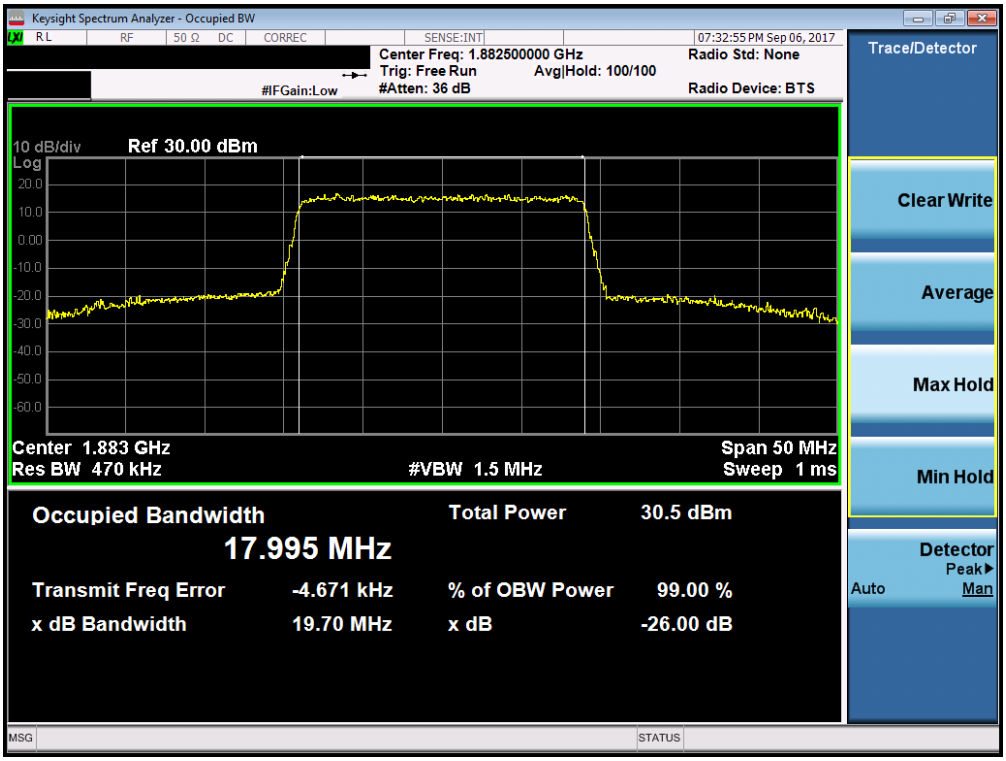

Plot 7-48. Occupied Bandwidth Plot (Band 25/2 - 20.0MHz 16-QAM - Full RB Configuration)

Plot 7-49. Occupied Bandwidth Plot (Band 41 - 5.0MHz QPSK - Full RB Configuration)

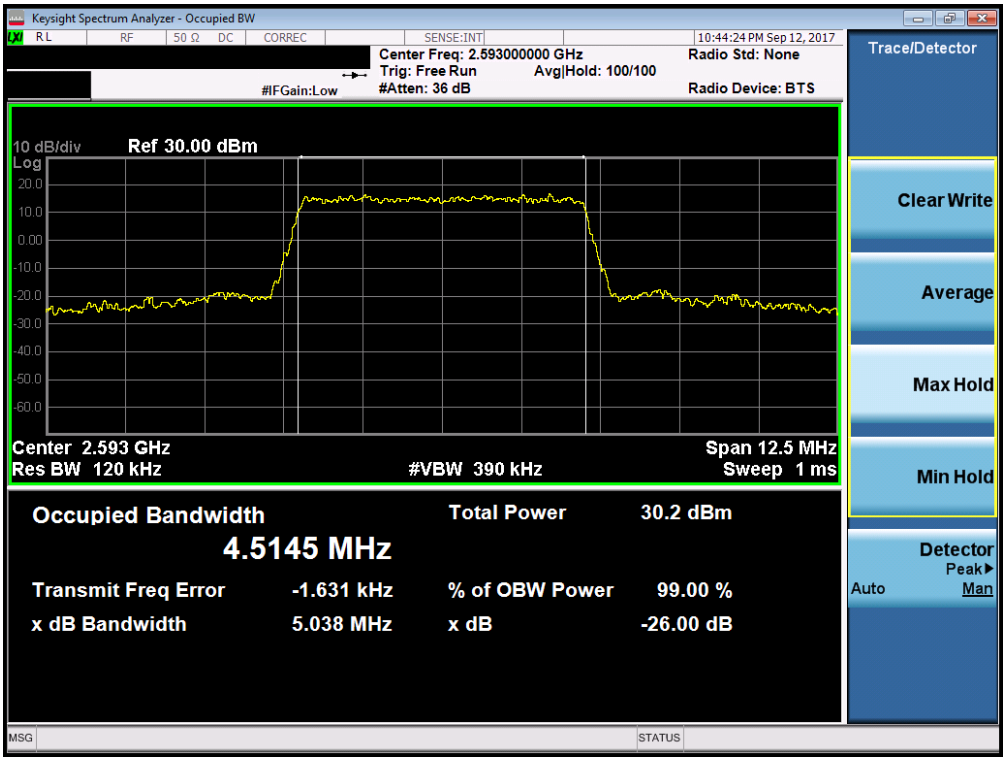

Plot 7-50. Occupied Bandwidth Plot (Band 41 - 5.0MHz 16-QAM - Full RB Configuration)

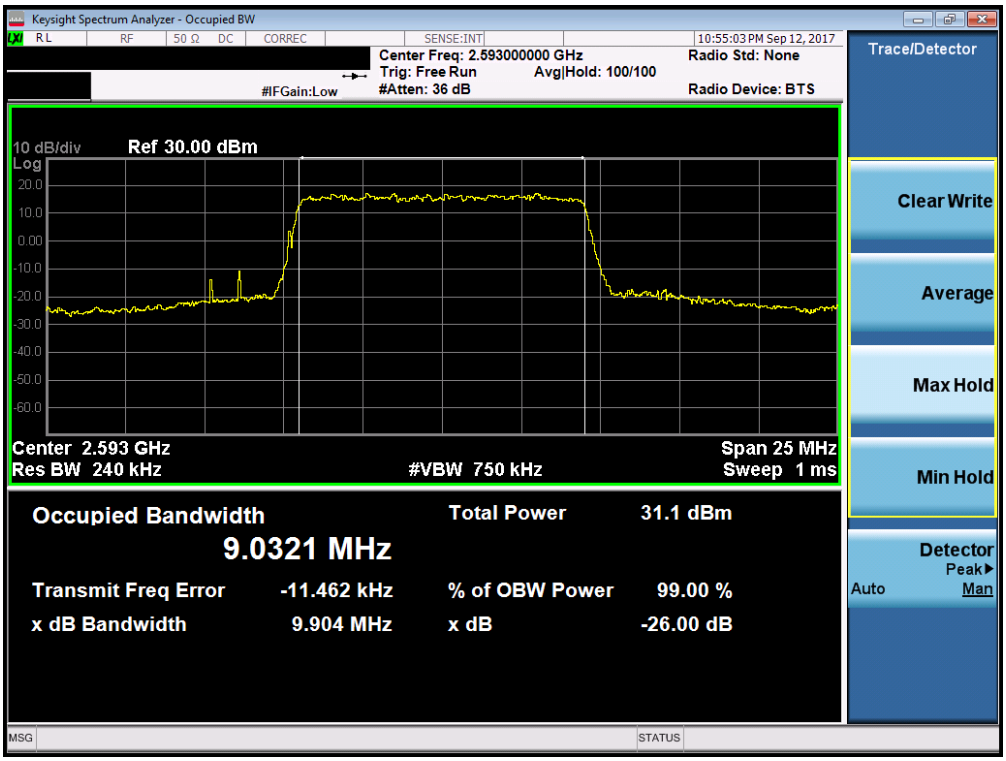

Plot 7-51. Occupied Bandwidth Plot (Band 41 - 10.0MHz QPSK - Full RB Configuration)

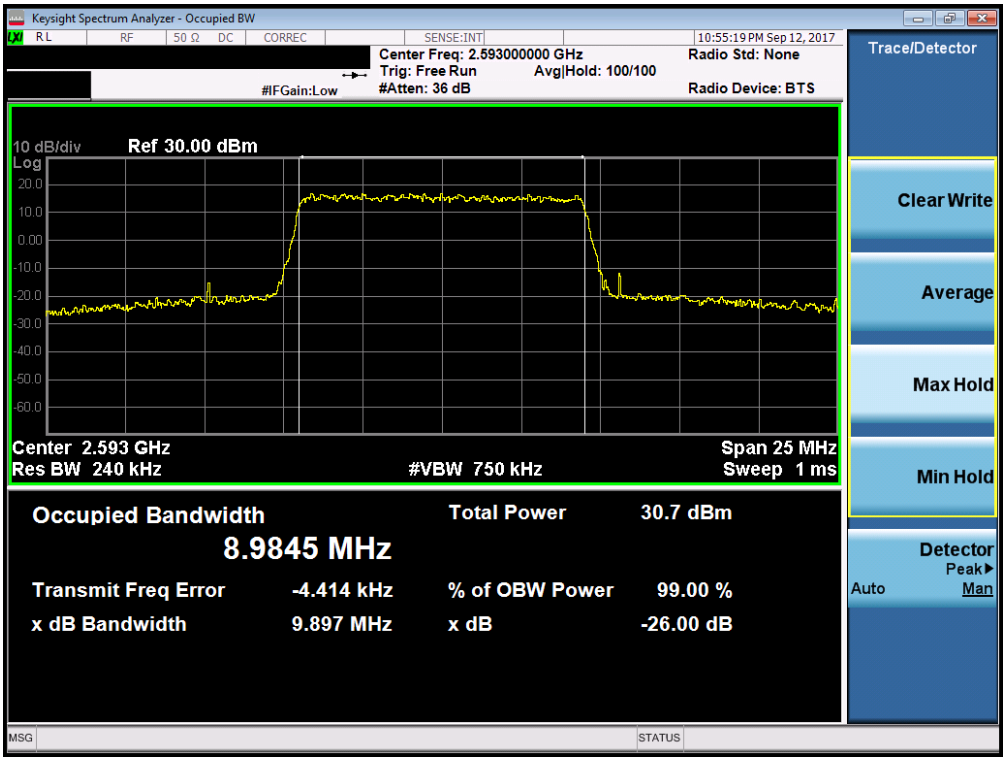

Plot 7-52. Occupied Bandwidth Plot (Band 41 - 10.0MHz 16-QAM - Full RB Configuration)

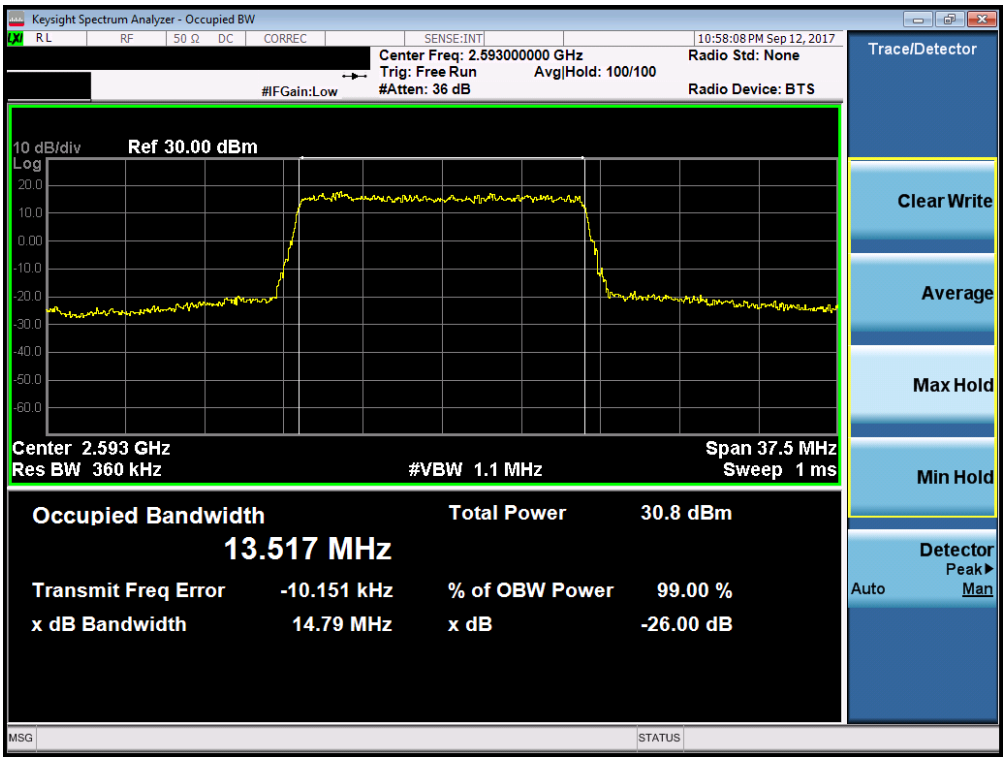

Plot 7-53. Occupied Bandwidth Plot (Band 41 - 15.0MHz QPSK - Full RB Configuration)

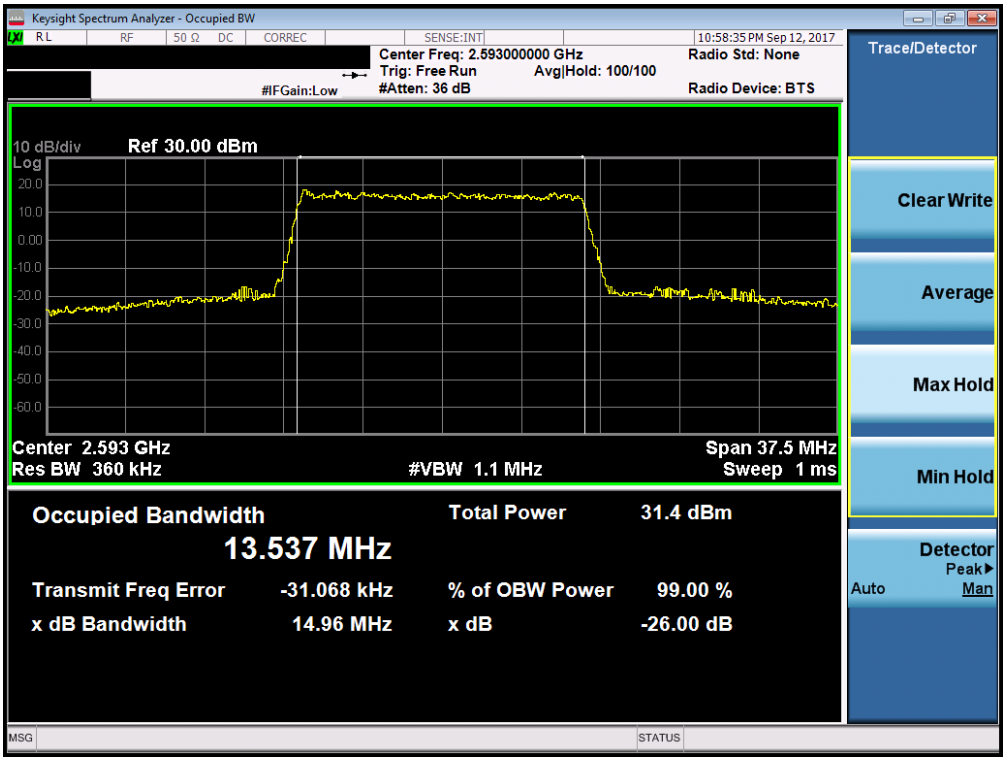

Plot 7-54. Occupied Bandwidth Plot (Band 41 - 15.0MHz 16-QAM - Full RB Configuration)

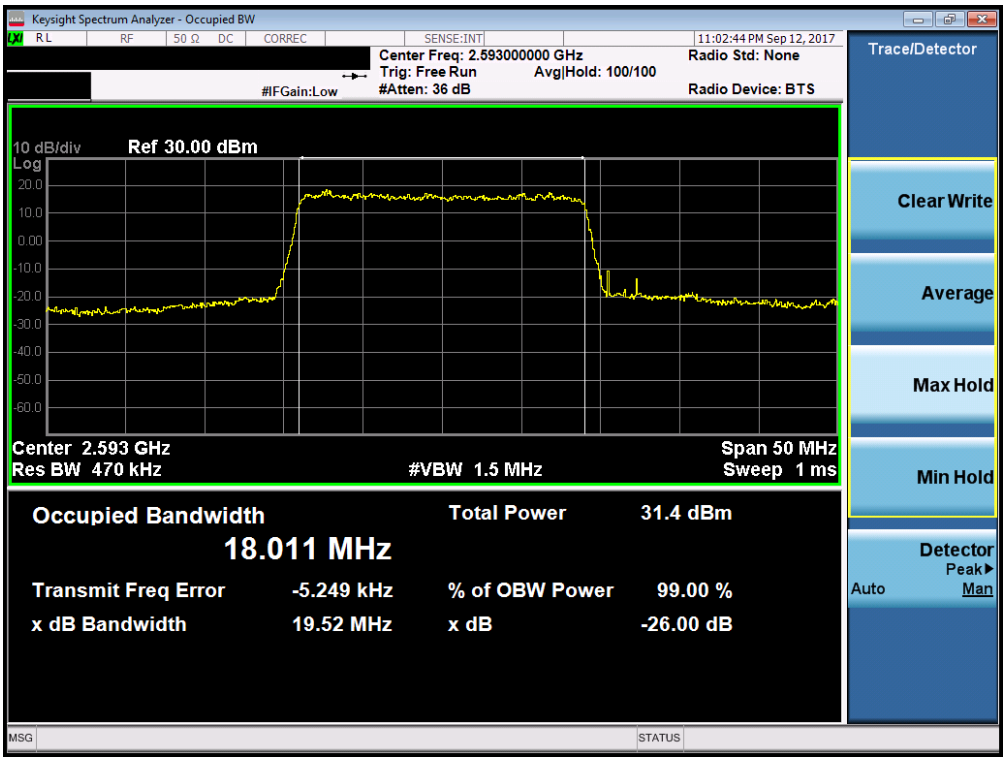

Plot 7-55. Occupied Bandwidth Plot (Band 41 - 20.0MHz QPSK - Full RB Configuration)

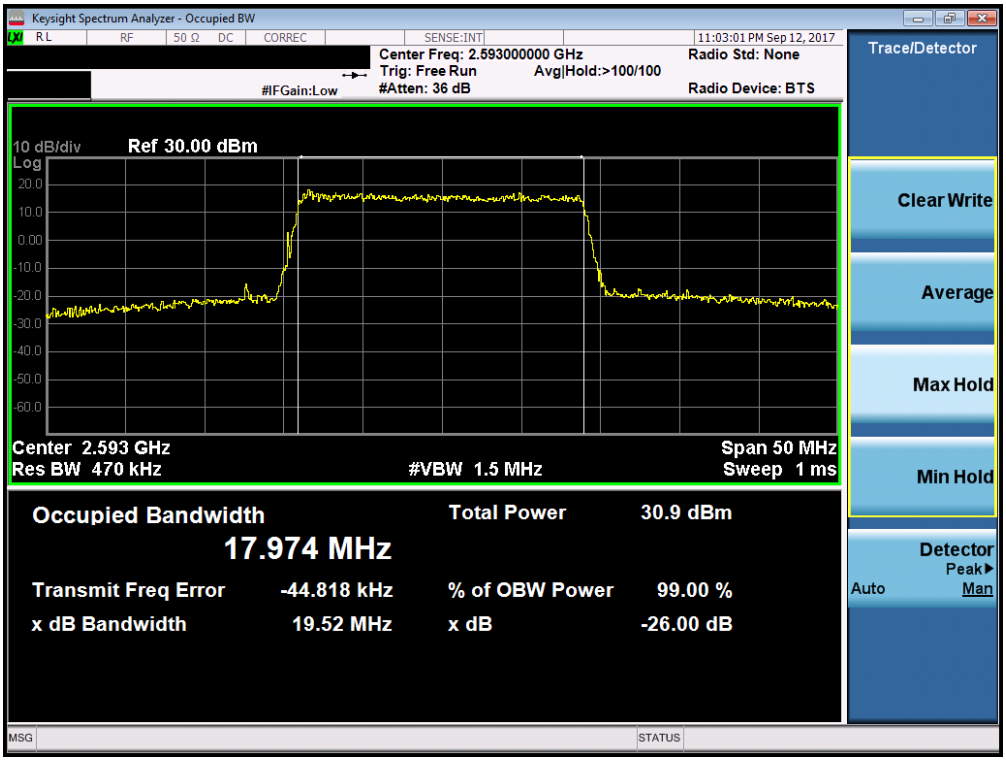

Plot 7-56. Occupied Bandwidth Plot (Band 41 - 20.0MHz 16-QAM - Full RB Configuration)

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(c)(2) §27.53(g) §27.53(h) §27.53(m) §27.53(a)(4) RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.6) RSS-199(4.5)

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + $log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

For Band 41, the minimum permissible attenuation level of any spurious emission is 55 + $log_{10}(P_{[Watts]})$.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

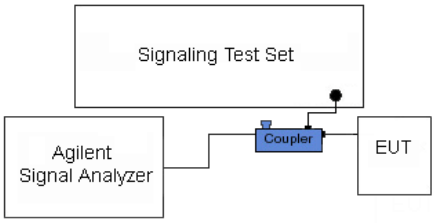

Figure 7-2. Test Instrument & Measurement Setup

Test Notes

Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1 GHz and 1 MHz or greater for frequencies greater than 1 GHz. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

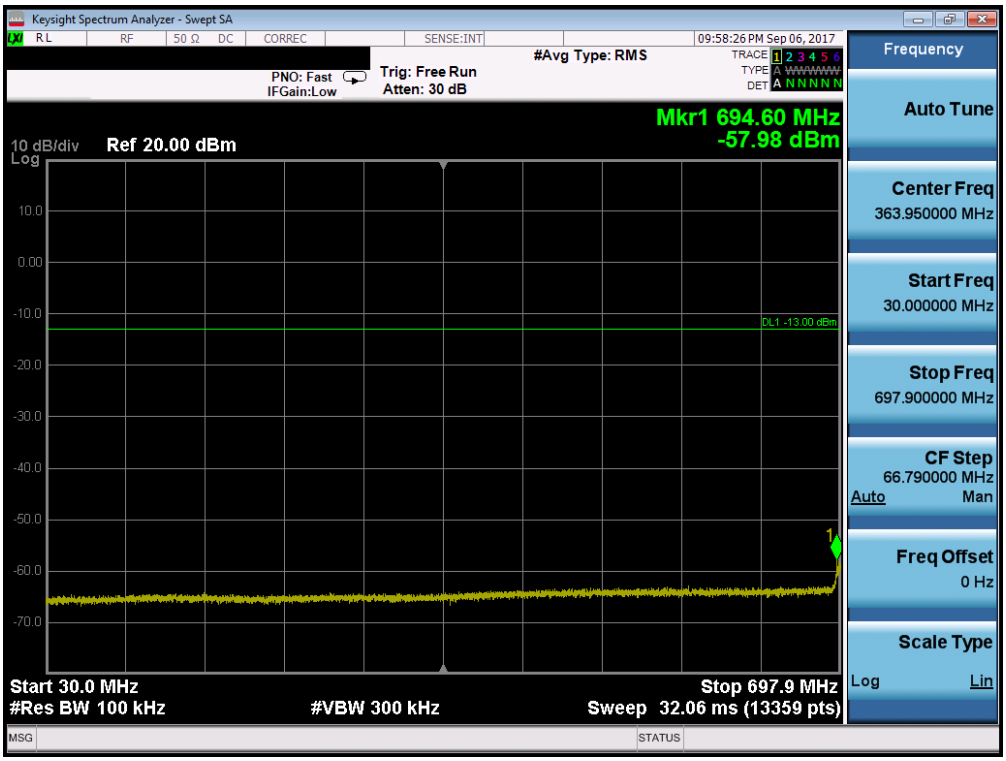

Plot 7-57. Conducted Spurious Plot (Band 12 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

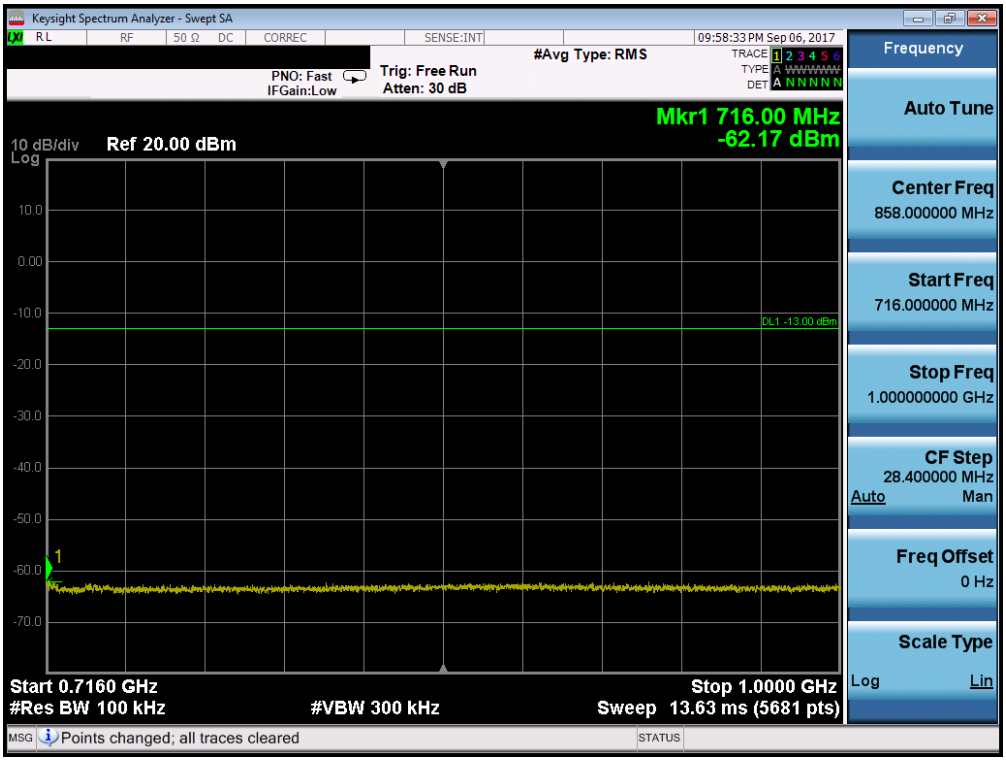

Plot 7-58. Conducted Spurious Plot (Band 12 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

Plot 7-59. Conducted Spurious Plot (Band 12 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

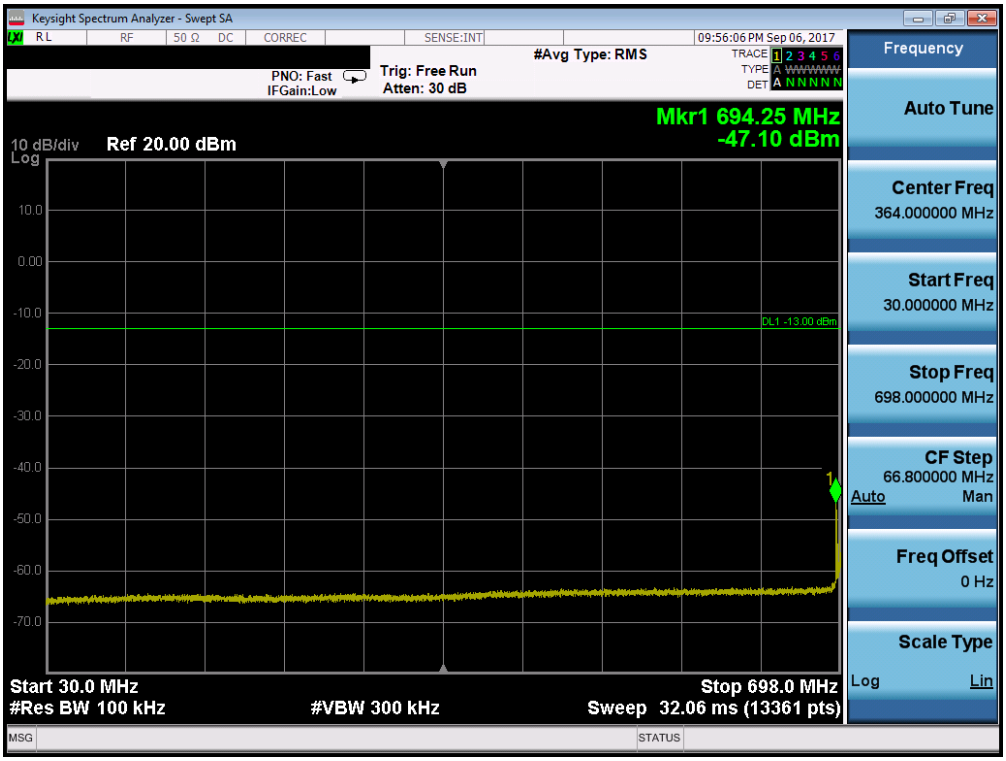

Plot 7-60. Conducted Spurious Plot (Band 12 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

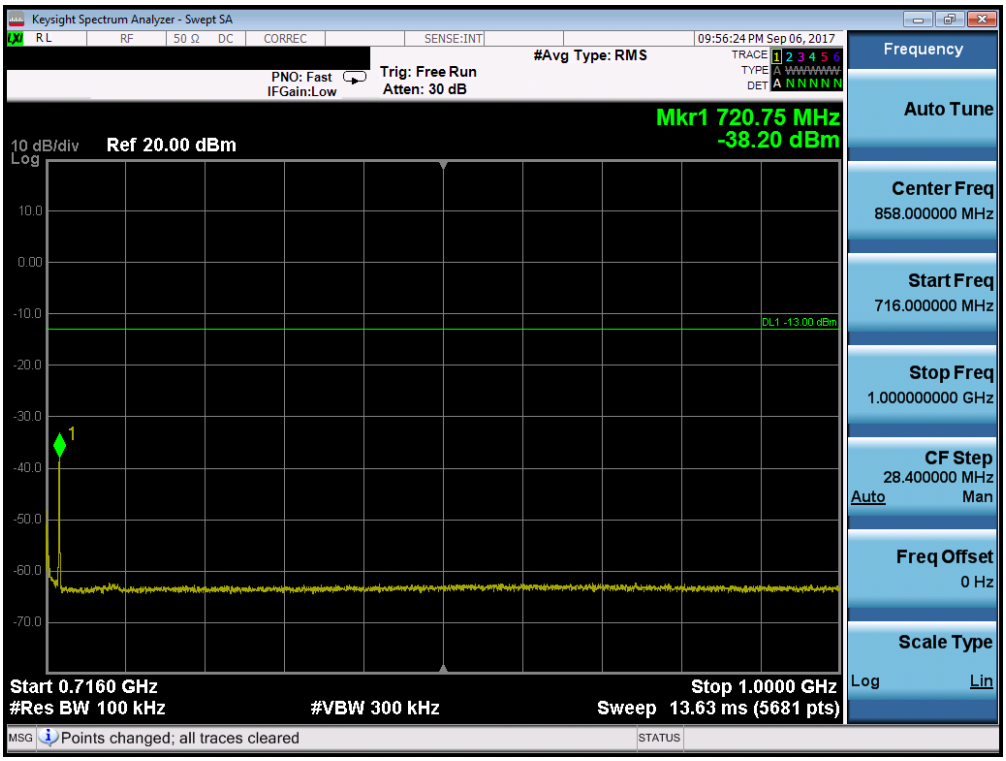

Plot 7-61. Conducted Spurious Plot (Band 12 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

Plot 7-62. Conducted Spurious Plot (Band 12 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

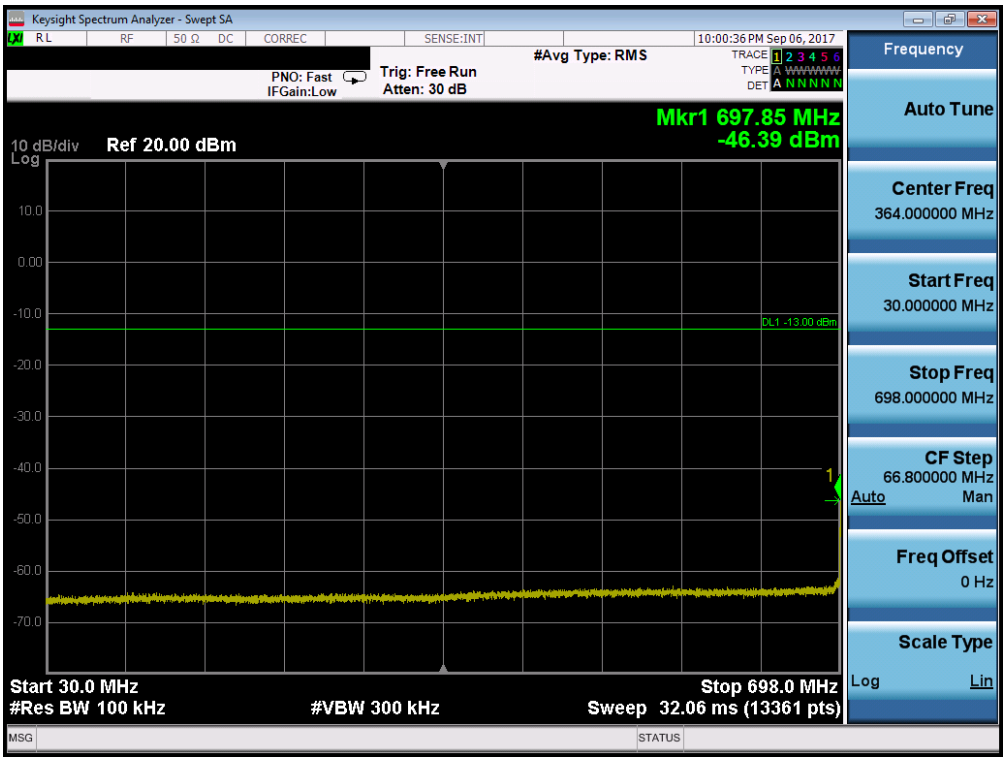

Plot 7-63. Conducted Spurious Plot (Band 12 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

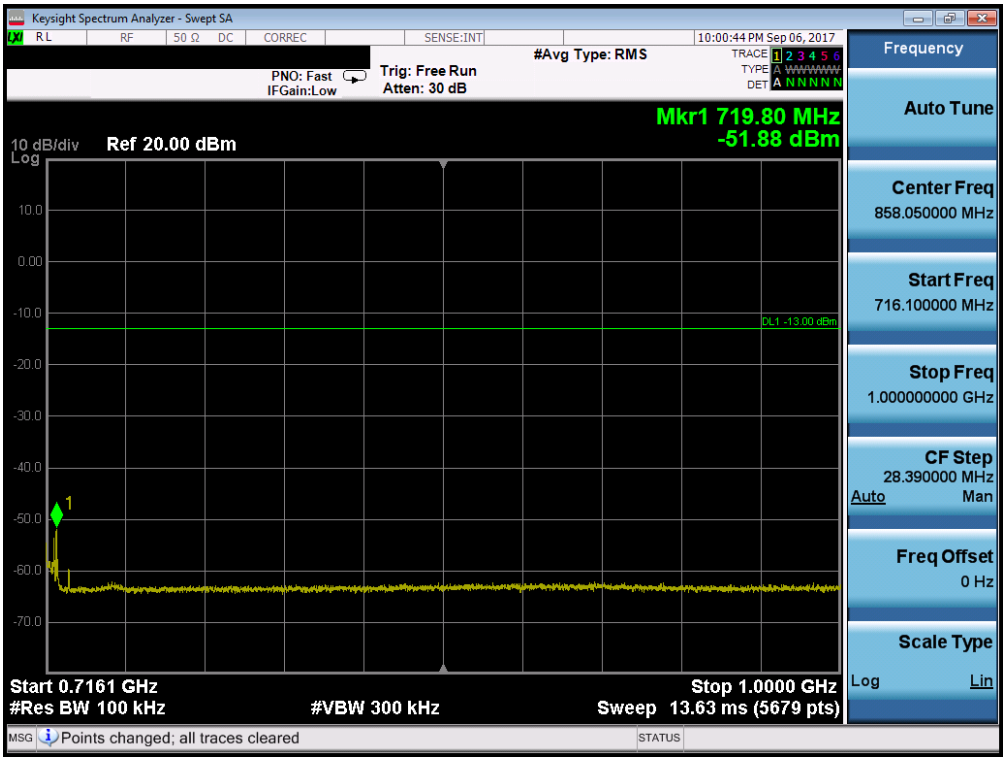

Plot 7-64. Conducted Spurious Plot (Band 12 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

Plot 7-65. Conducted Spurious Plot (Band 12 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

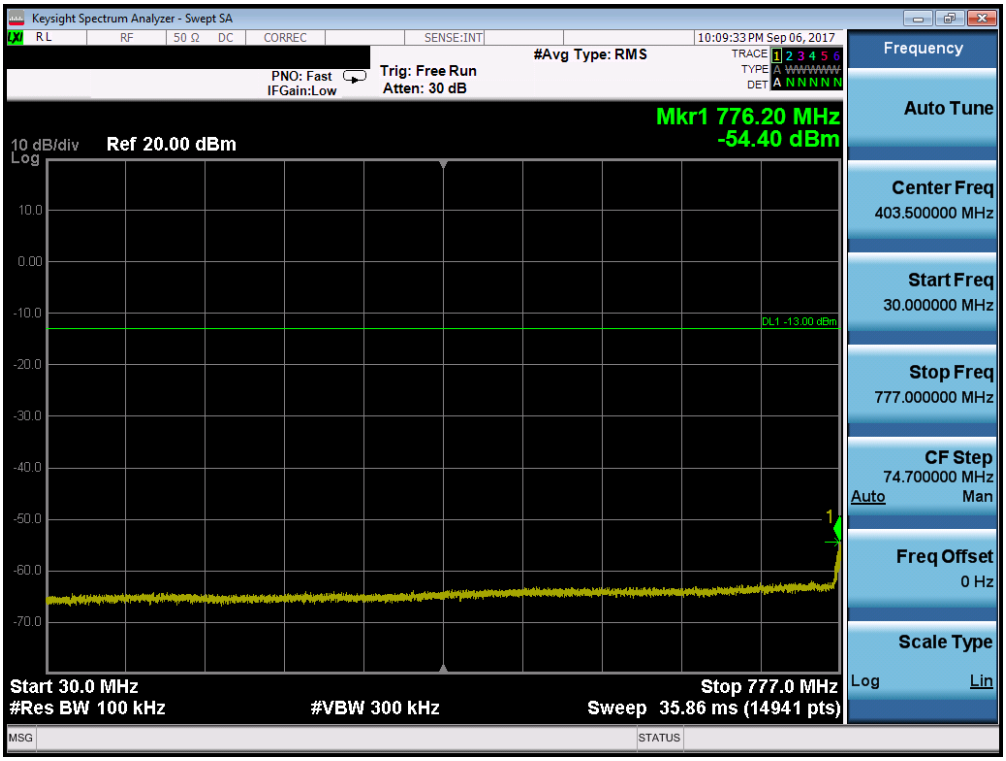

Plot 7-66. Conducted Spurious Plot (Band 13 - 10.0MHz QPSK - RB Size 1, RB Offset 0)

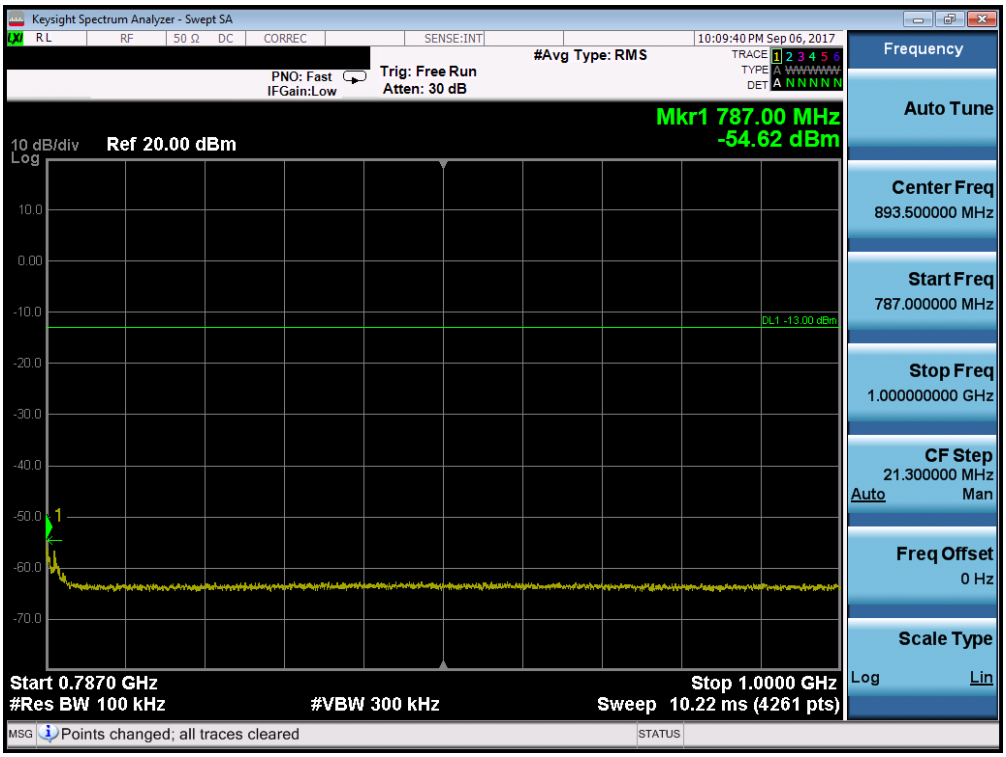

Plot 7-67. Conducted Spurious Plot (Band 13 - 10.0MHz QPSK - RB Size 1, RB Offset 0)

Plot 7-68. Conducted Spurious Plot (Band 13 - 10.0MHz QPSK - RB Size 1, RB Offset 0)

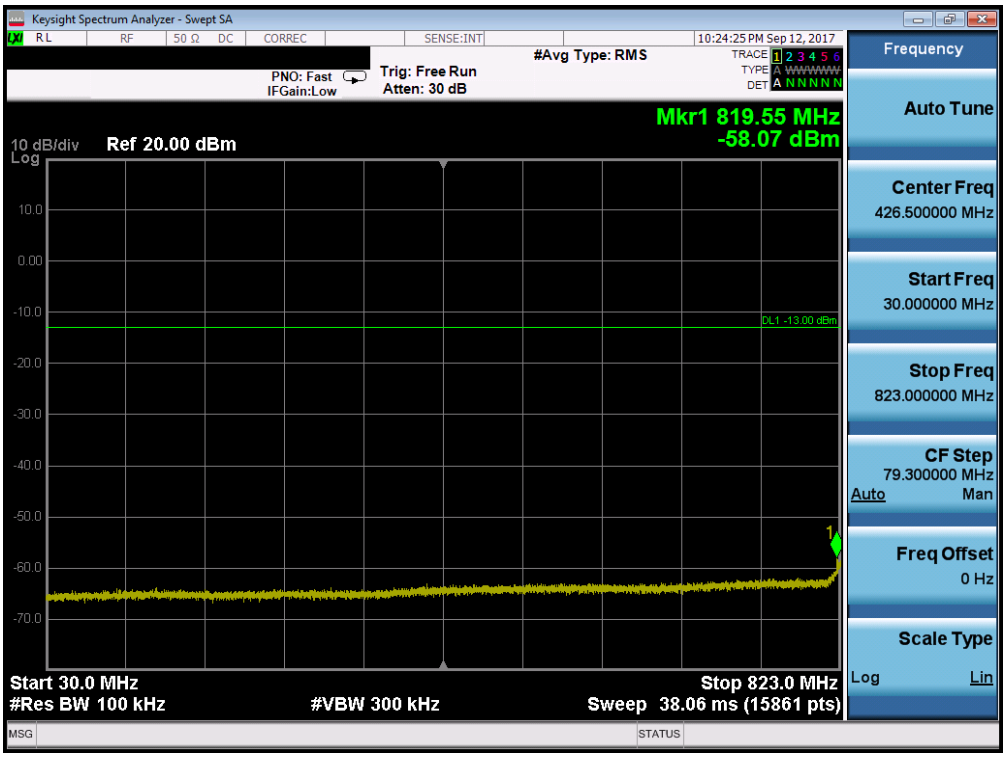

Plot 7-69. Conducted Spurious Plot (Band 26/5 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

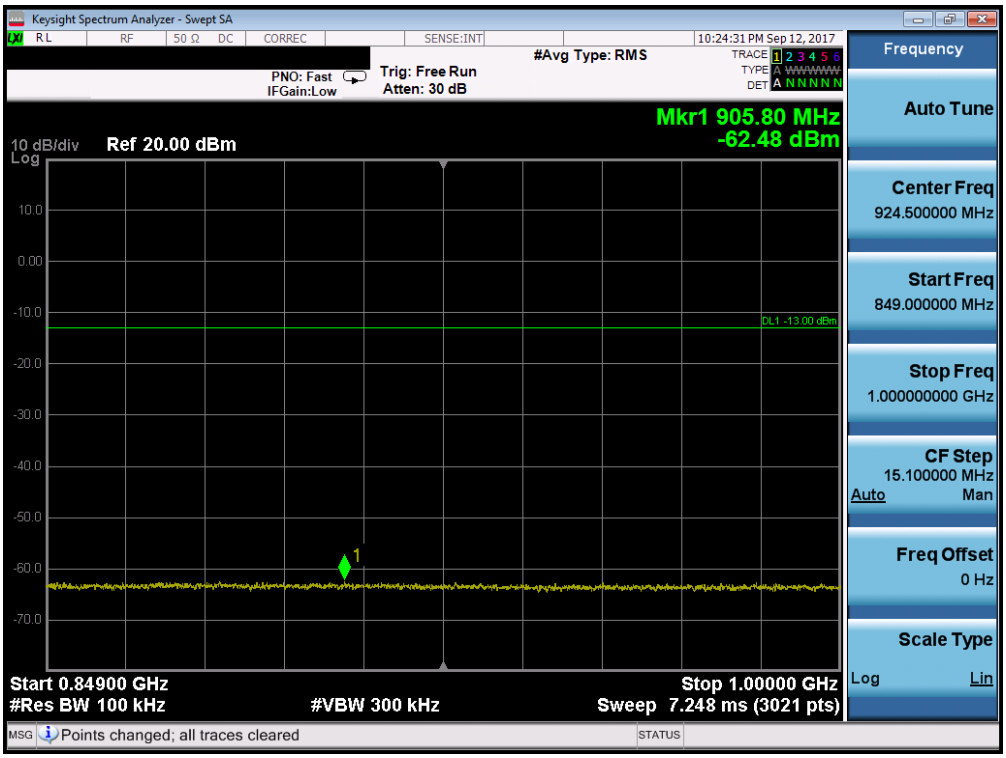

Plot 7-70. Conducted Spurious Plot (Band 26/5 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

Plot 7-71. Conducted Spurious Plot (Band 26/5 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

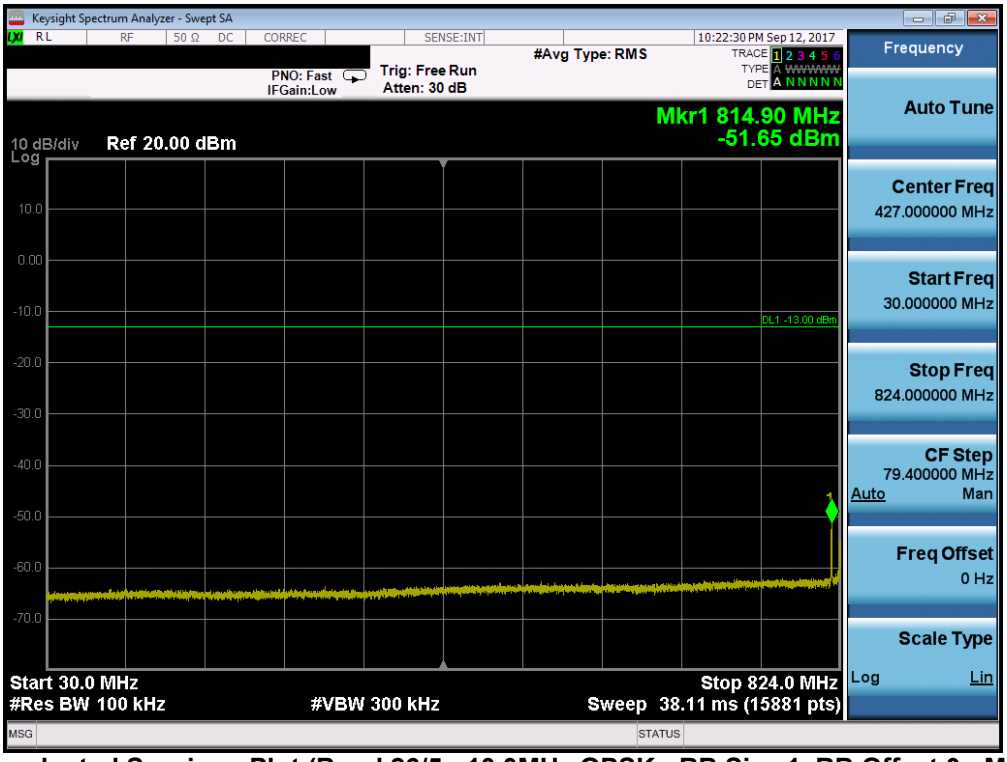

Plot 7-72. Conducted Spurious Plot (Band 26/5 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

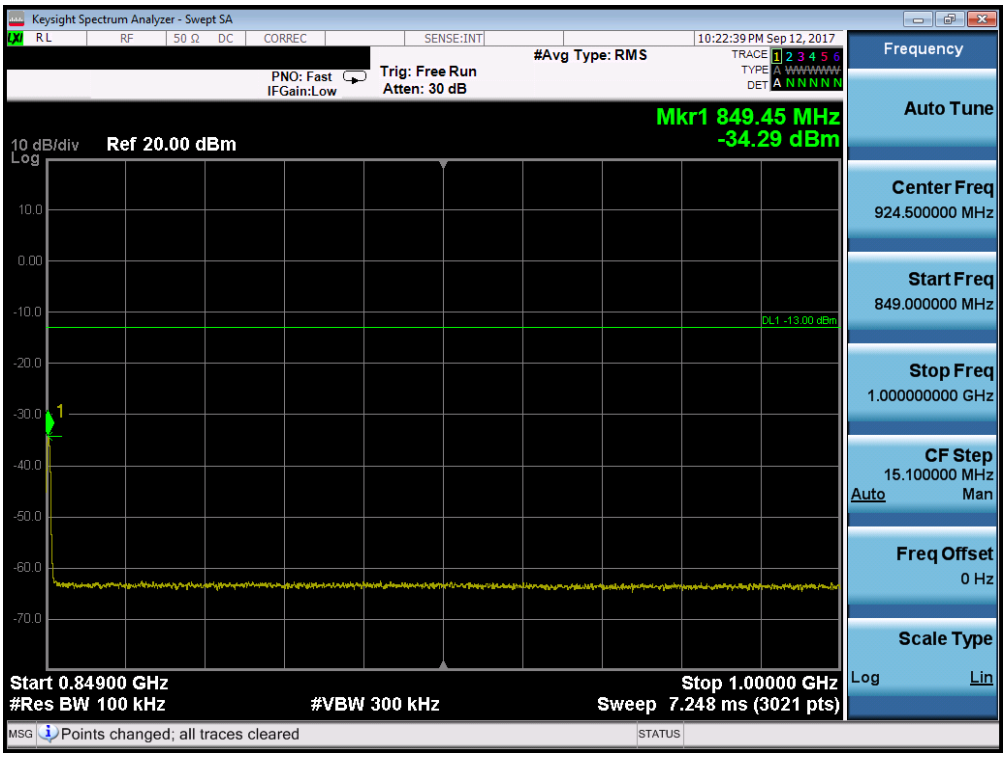

Plot 7-73. Conducted Spurious Plot (Band 26/5 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

Plot 7-74. Conducted Spurious Plot (Band 26/5 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

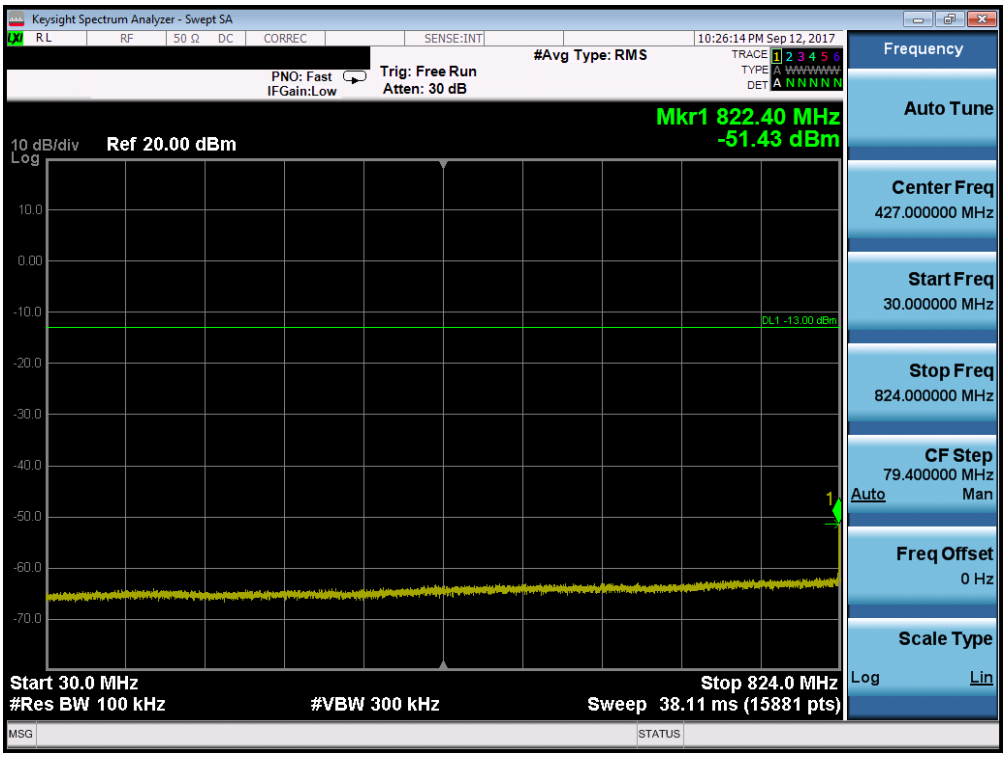

Plot 7-75. Conducted Spurious Plot (Band 26/5 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

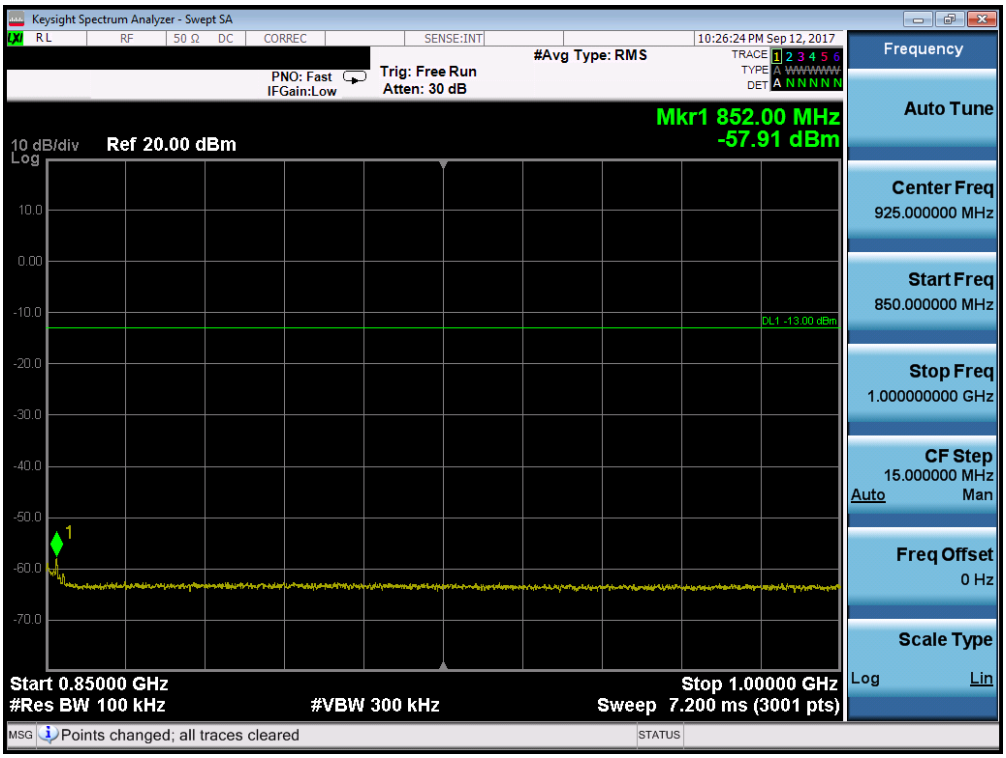

Plot 7-76. Conducted Spurious Plot (Band 26/5 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

Plot 7-77. Conducted Spurious Plot (Band 26/5 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

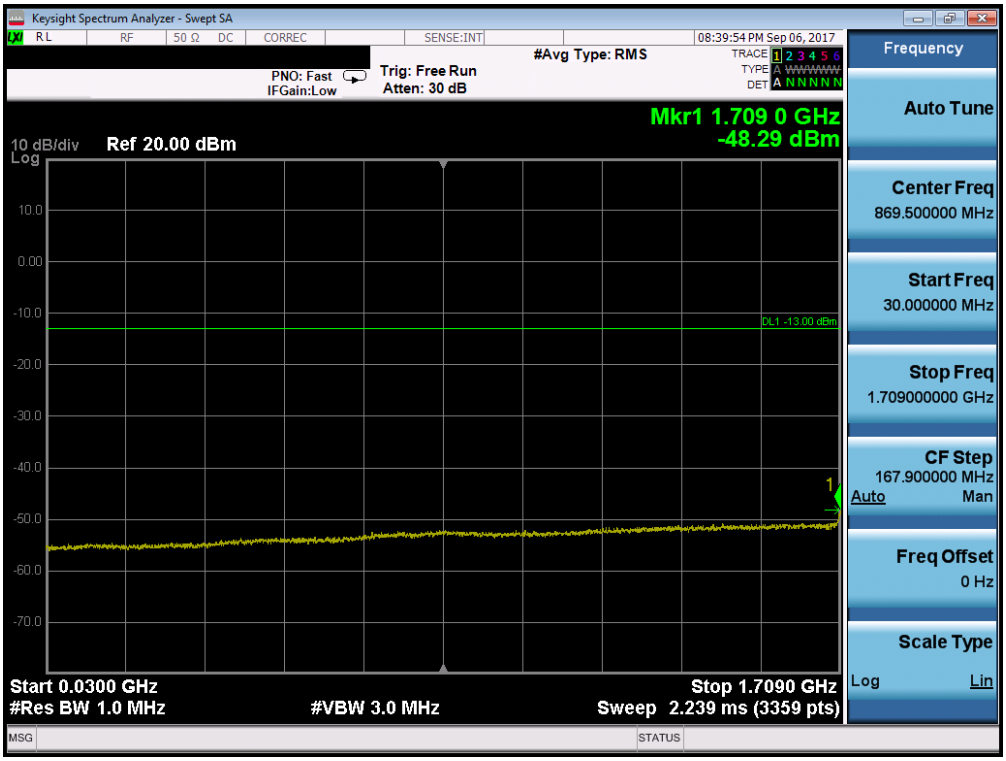

Plot 7-78. Conducted Spurious Plot (Band 4 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

Plot 7-79. Conducted Spurious Plot (Band 4 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

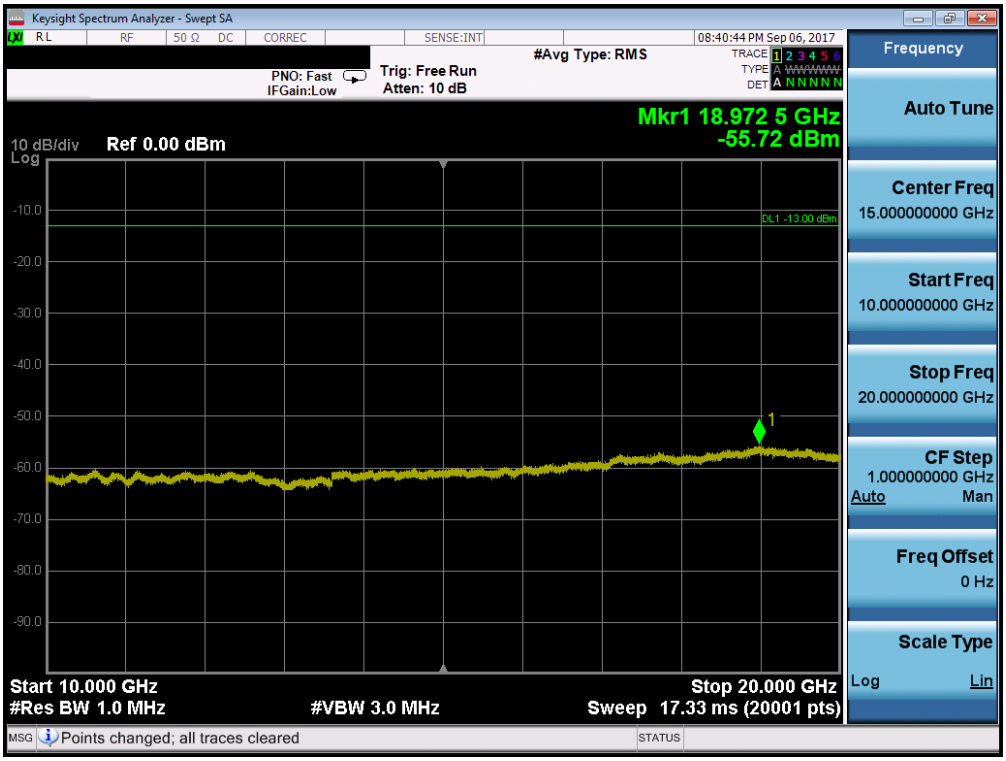

Plot 7-80. Conducted Spurious Plot (Band 4 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

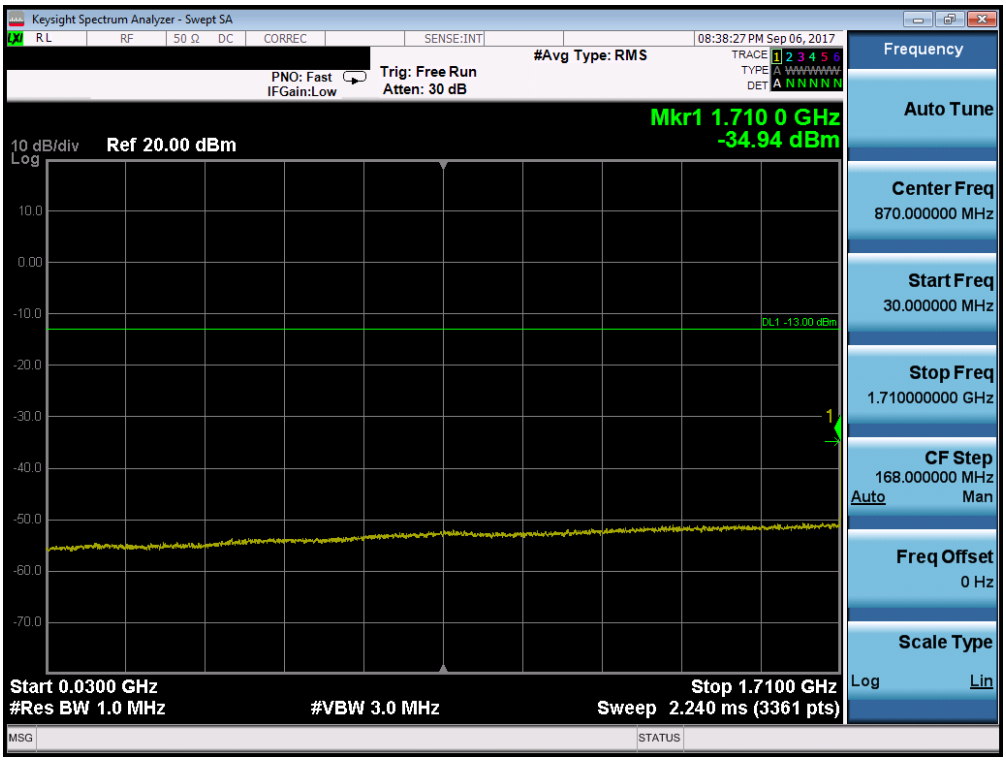

Plot 7-81. Conducted Spurious Plot (Band 4 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

Plot 7-82. Conducted Spurious Plot (Band 4 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

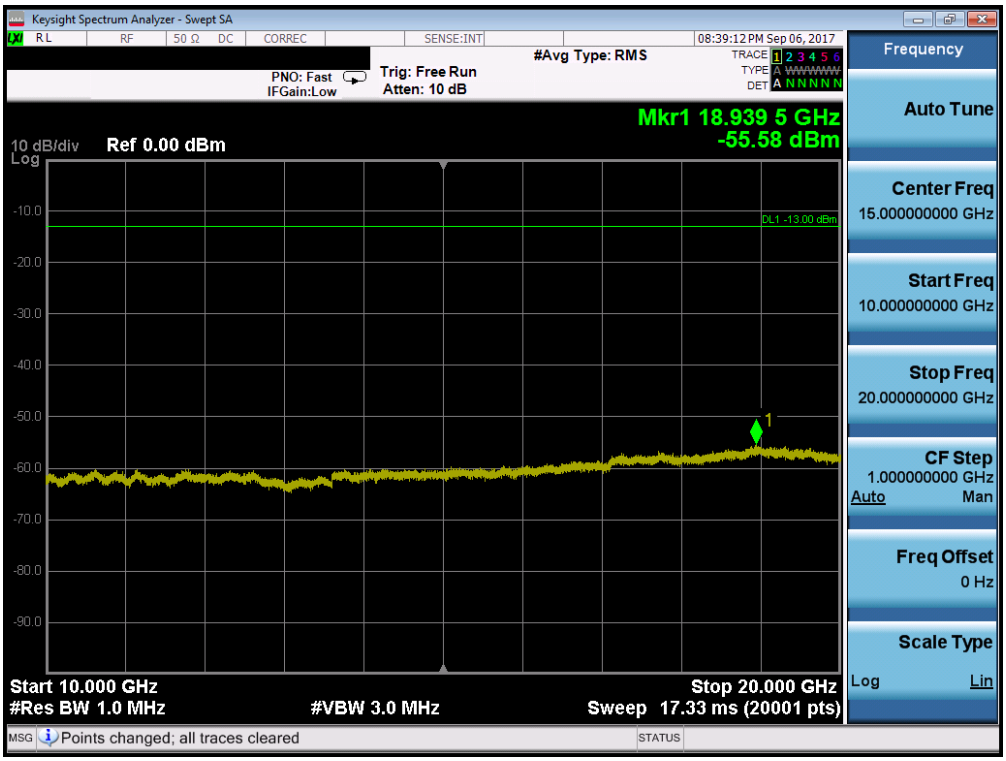

Plot 7-83. Conducted Spurious Plot (Band 4 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

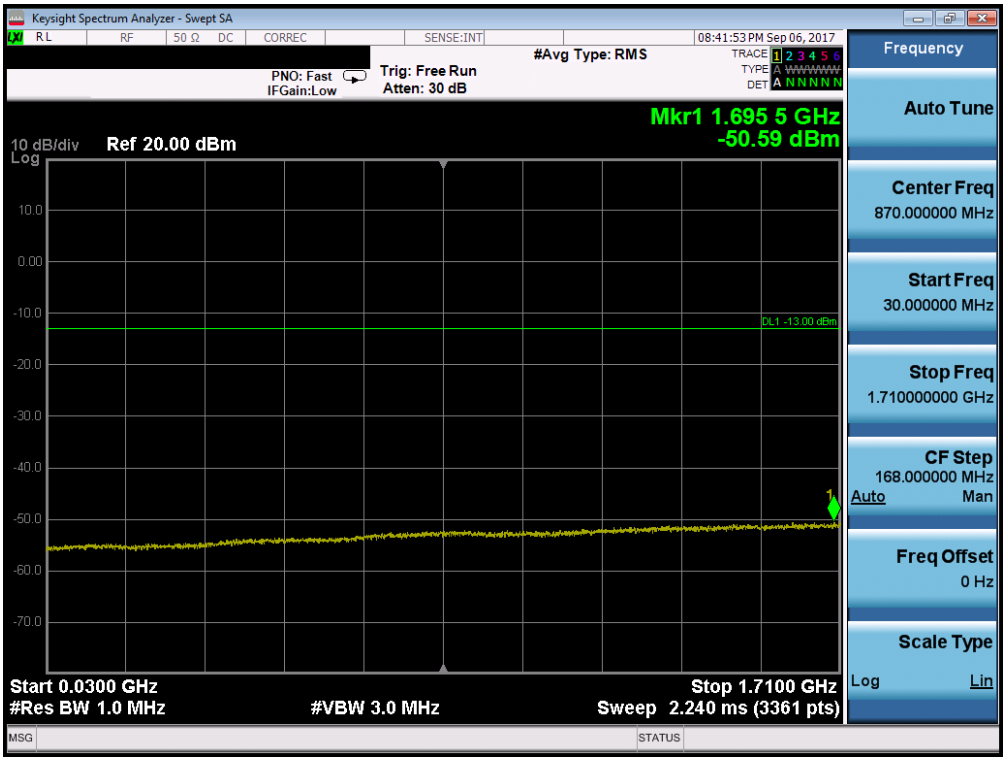

Plot 7-84. Conducted Spurious Plot (Band 4 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

Plot 7-85. Conducted Spurious Plot (Band 4 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

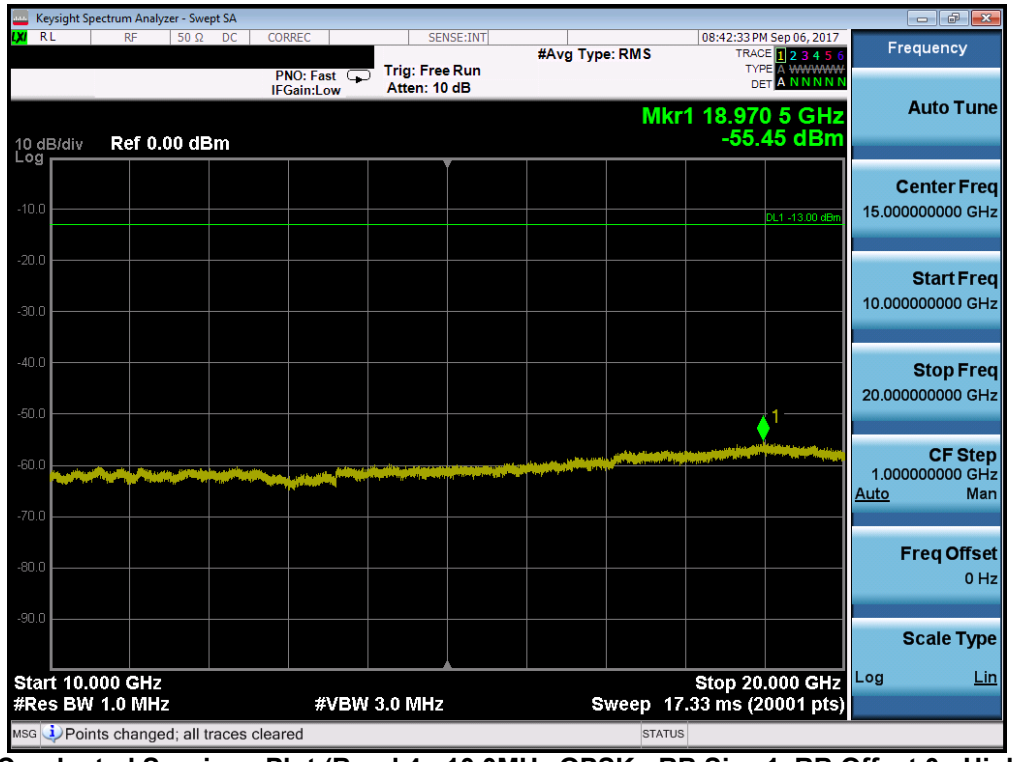

Plot 7-86. Conducted Spurious Plot (Band 4 - 10.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

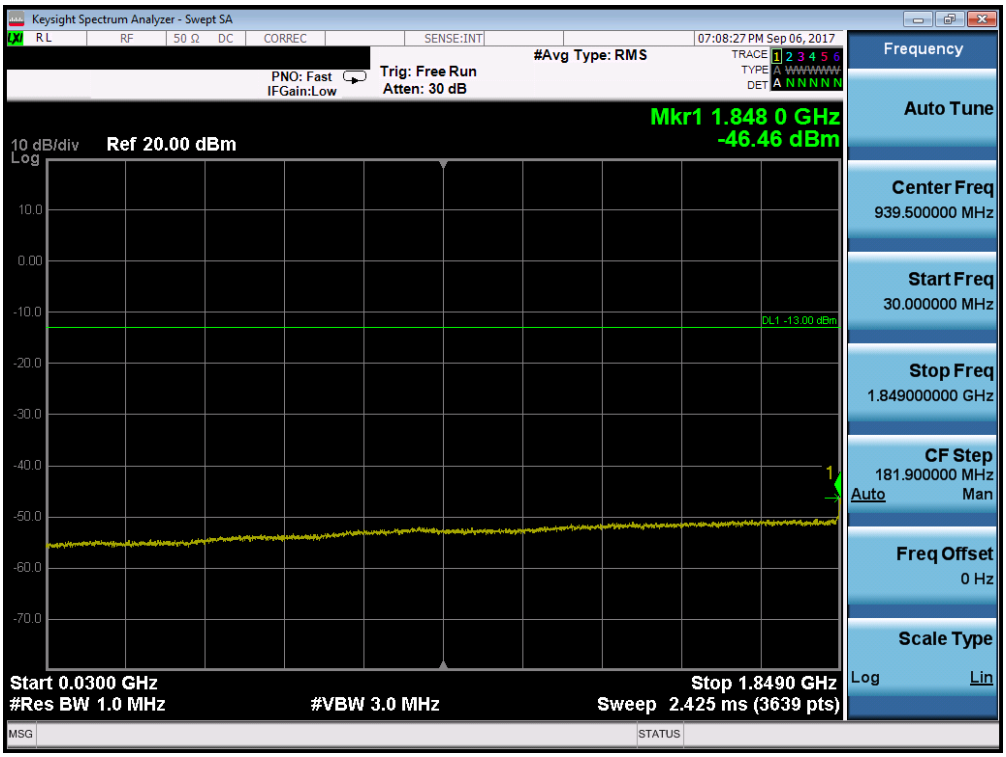

Plot 7-87. Conducted Spurious Plot (Band 25/2 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

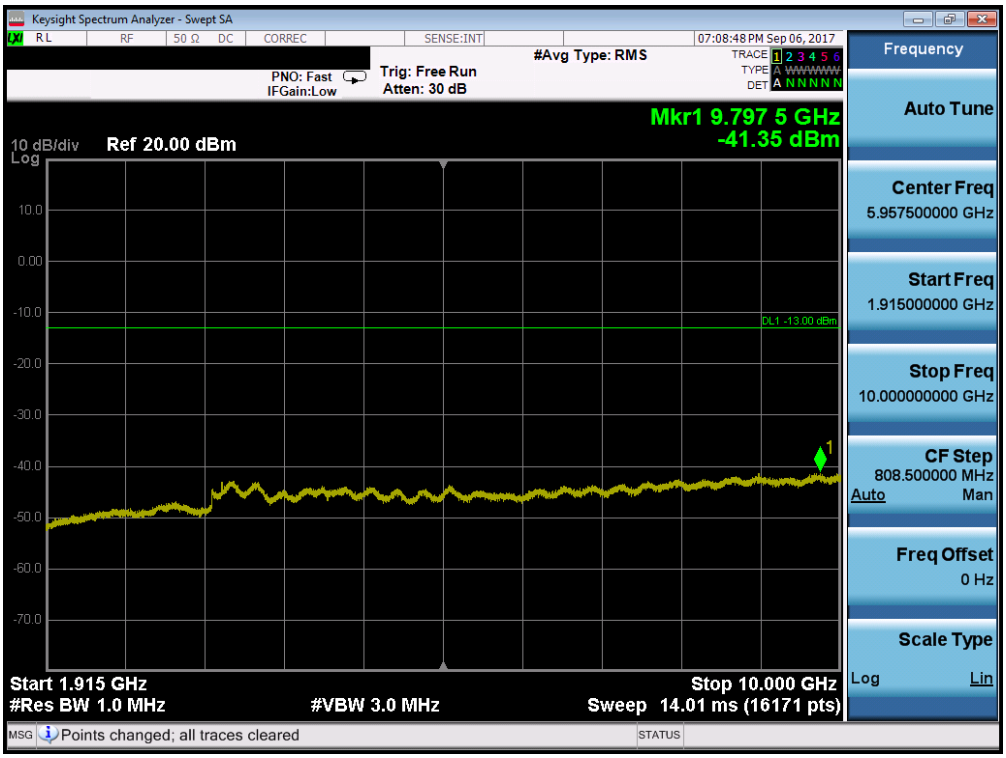

Plot 7-88. Conducted Spurious Plot (Band 25/2 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

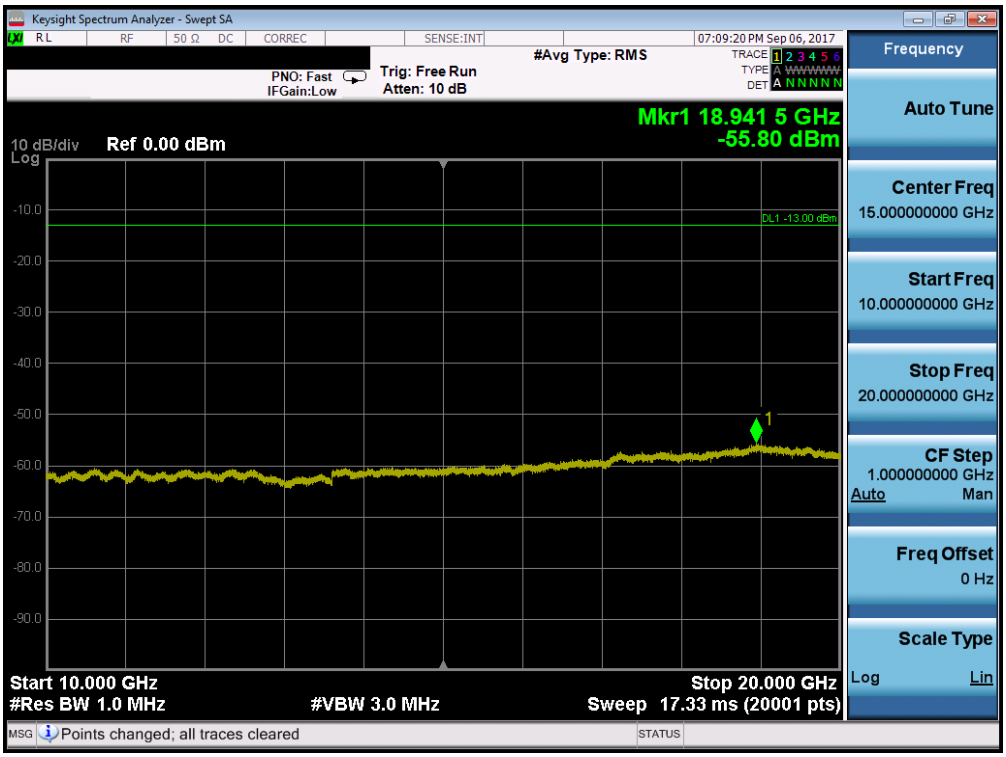

Plot 7-89. Conducted Spurious Plot (Band 25/2 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

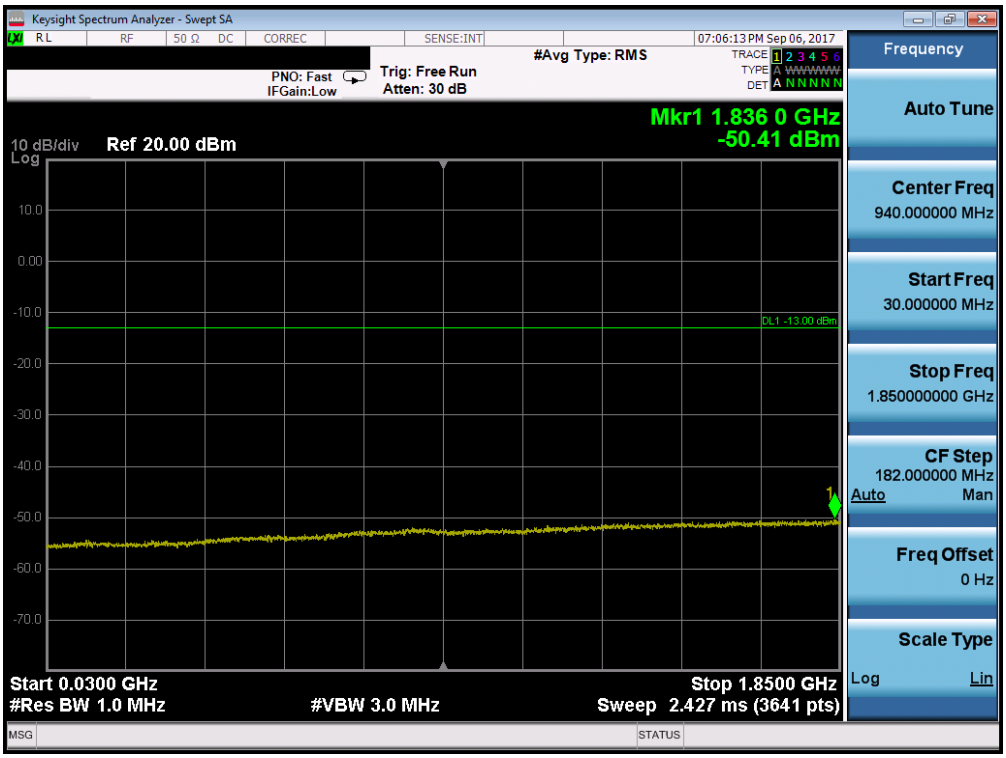

Plot 7-90. Conducted Spurious Plot (Band 25/2 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

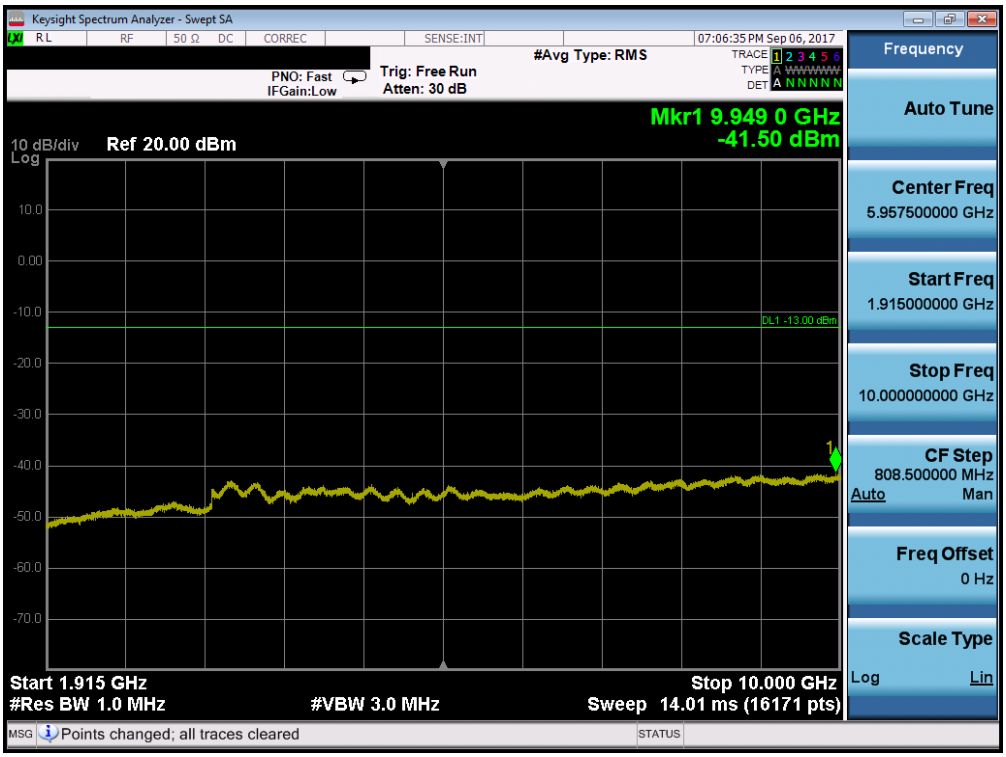

Plot 7-91. Conducted Spurious Plot (Band 25/2 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

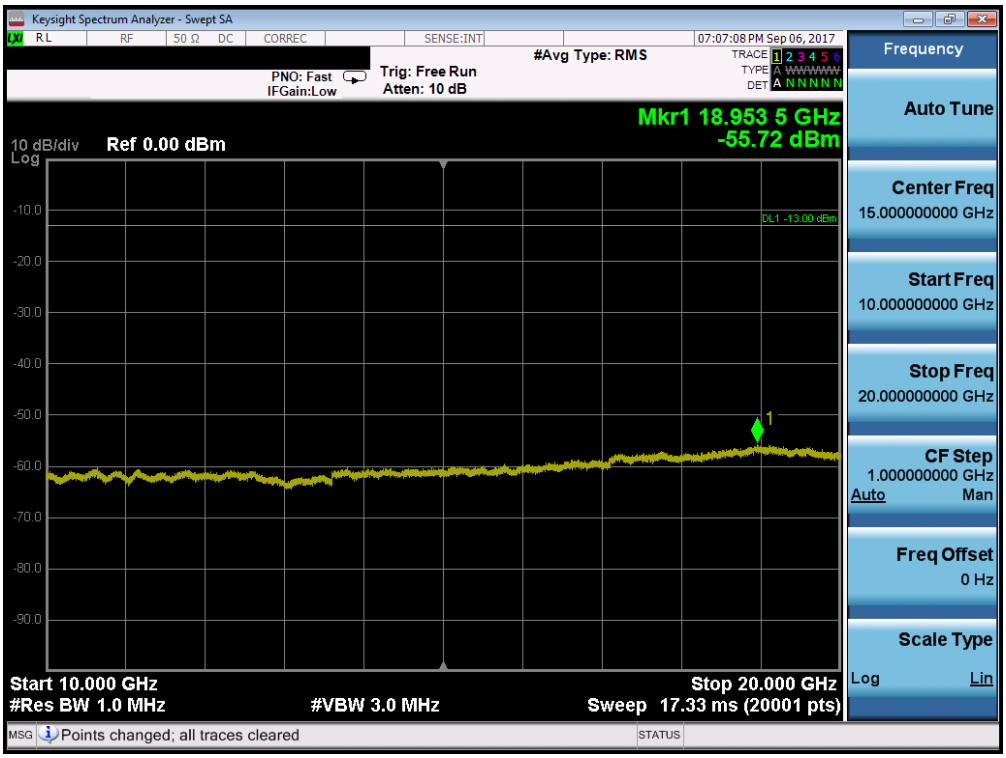

Plot 7-92. Conducted Spurious Plot (Band 25/2 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

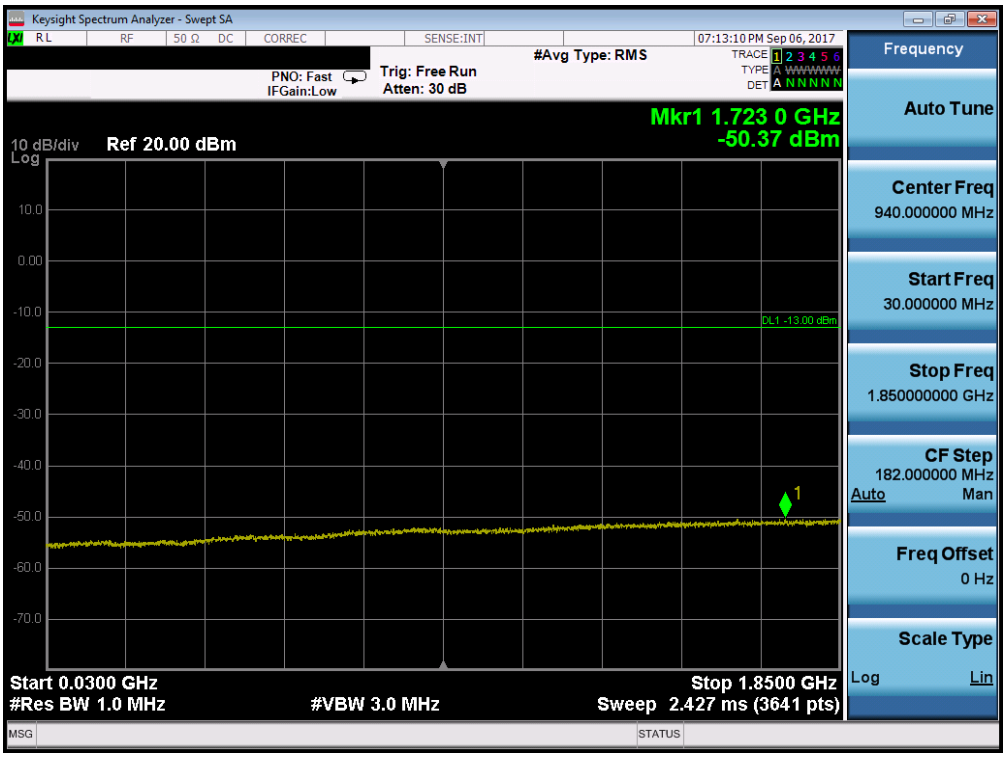

Plot 7-93. Conducted Spurious Plot (Band 25/2 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

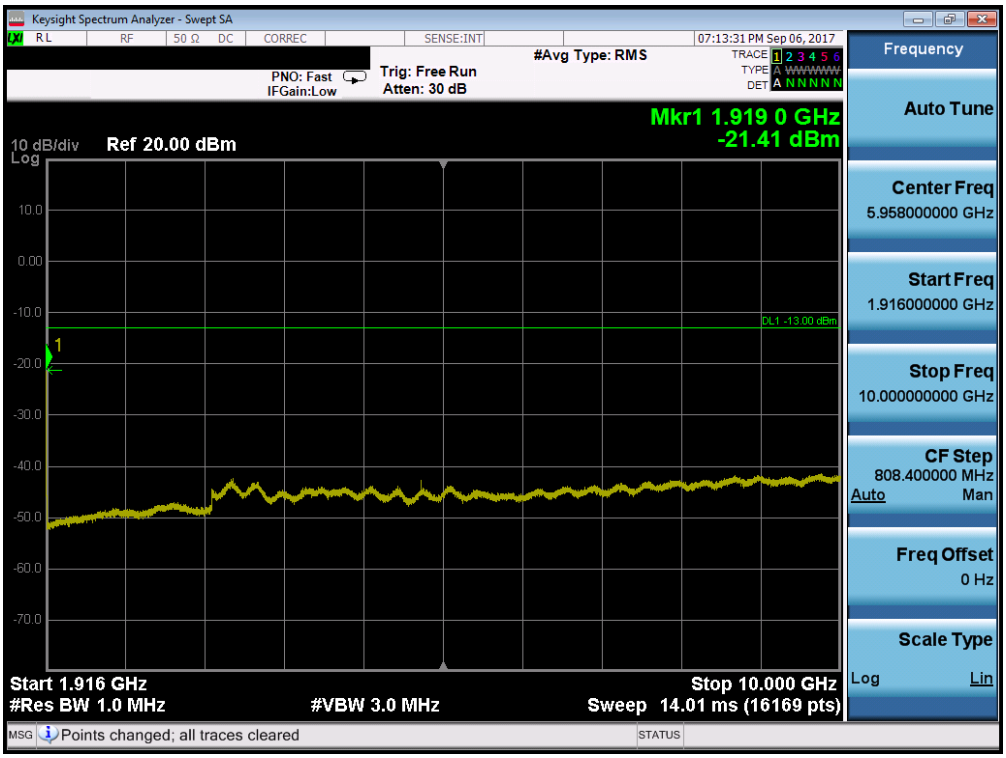

Plot 7-94. Conducted Spurious Plot (Band 25/2 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

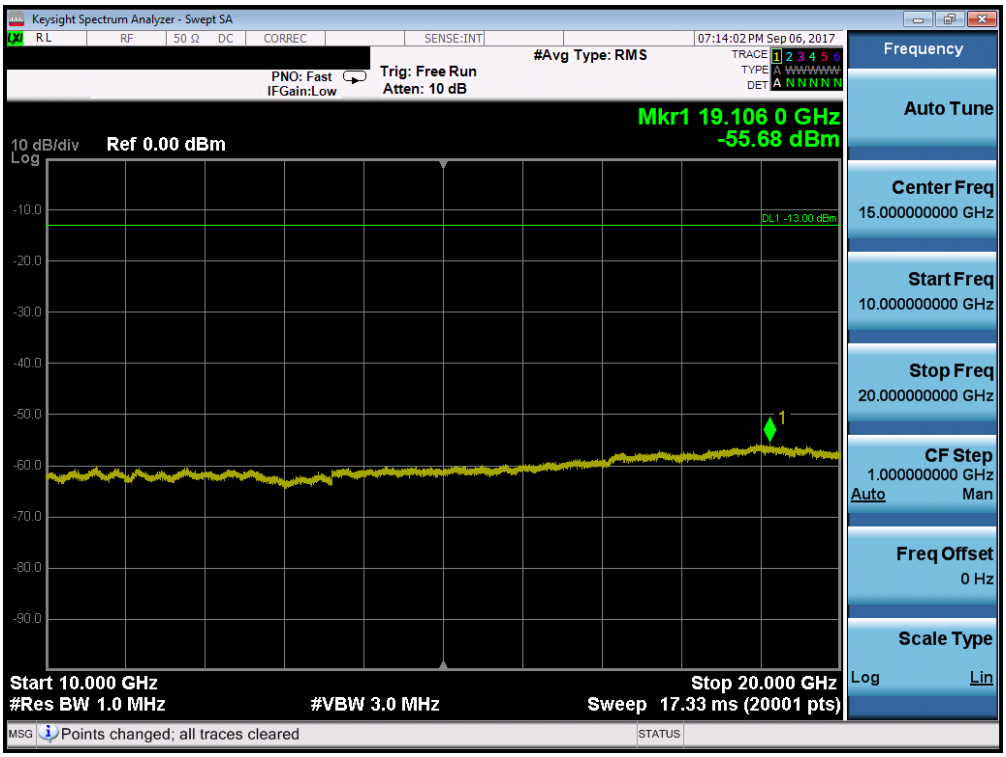

Plot 7-95. Conducted Spurious Plot (Band 25/2 - 5.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

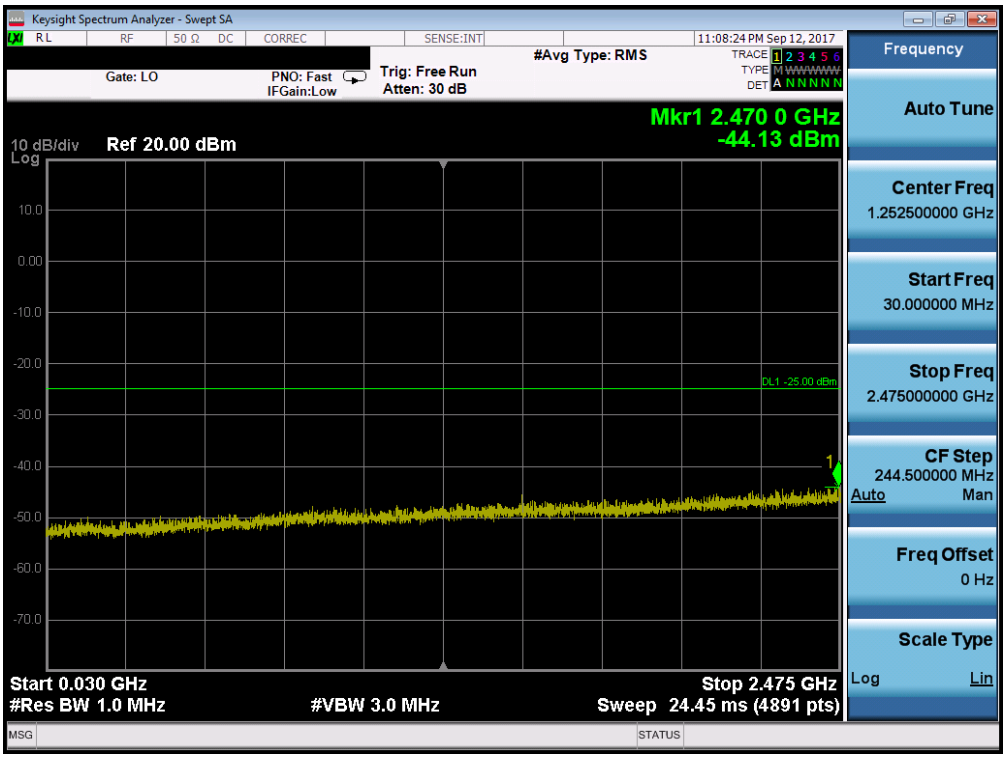

Plot 7-96. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

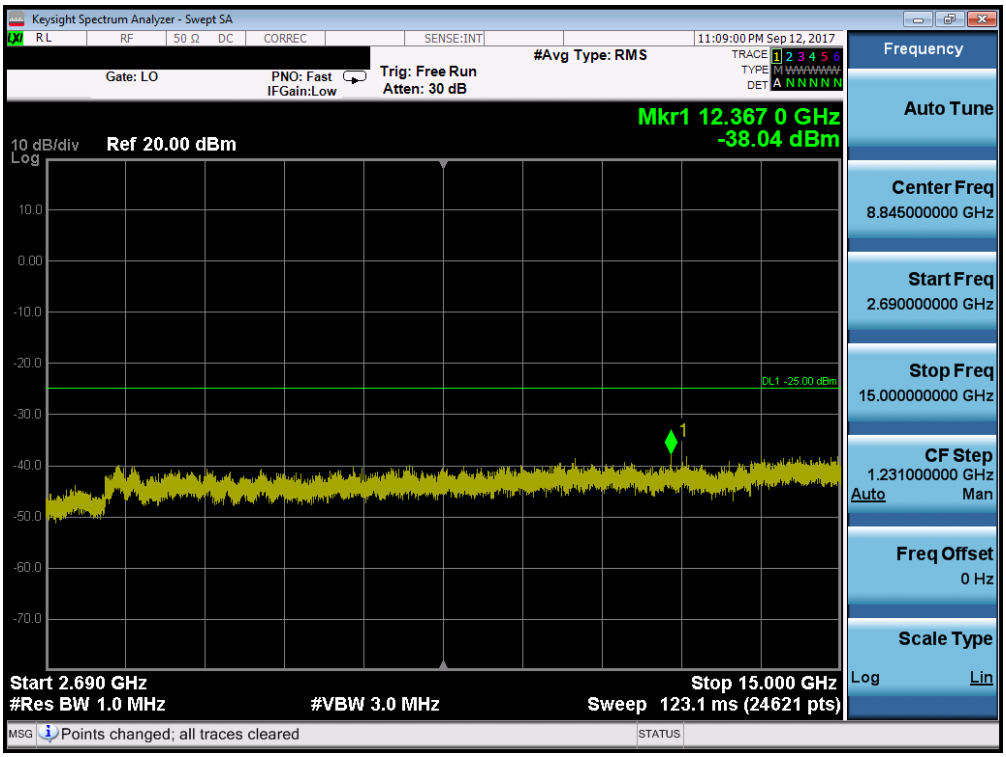

Plot 7-97. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

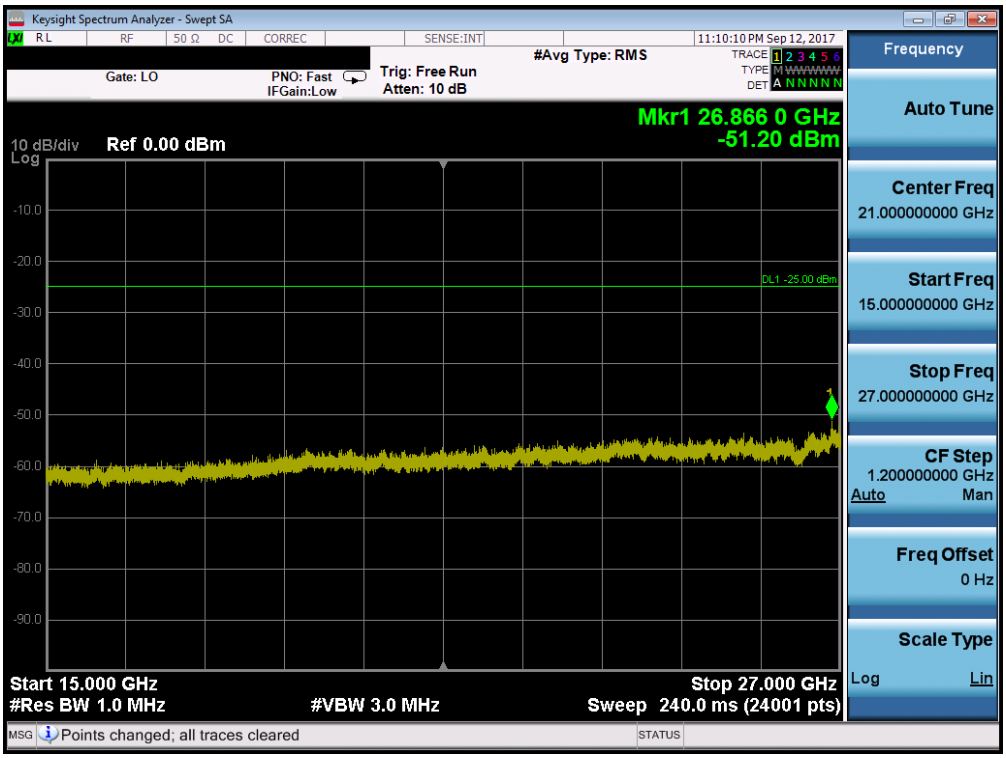

Plot 7-98. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Low Channel)

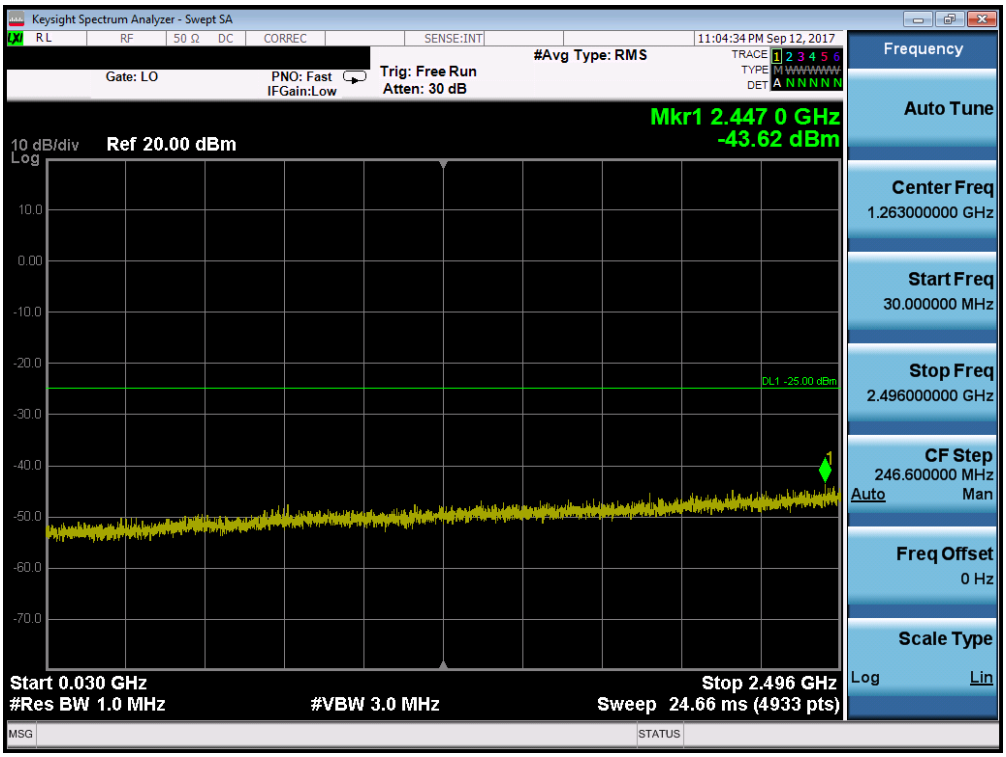

Plot 7-99. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

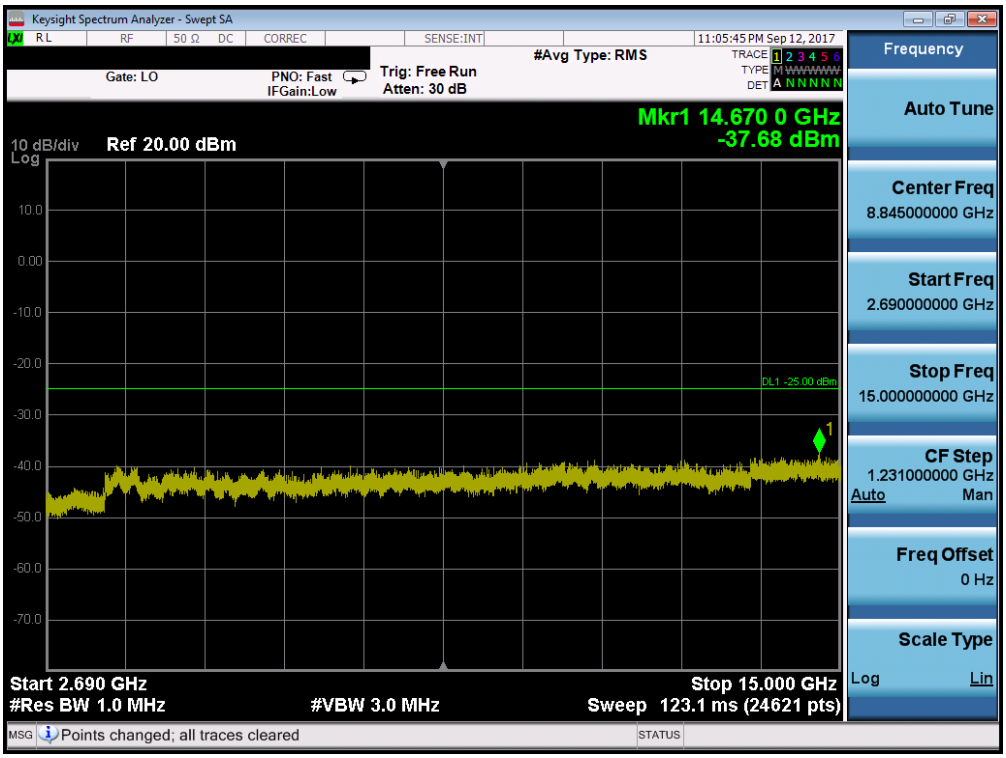

Plot 7-100. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

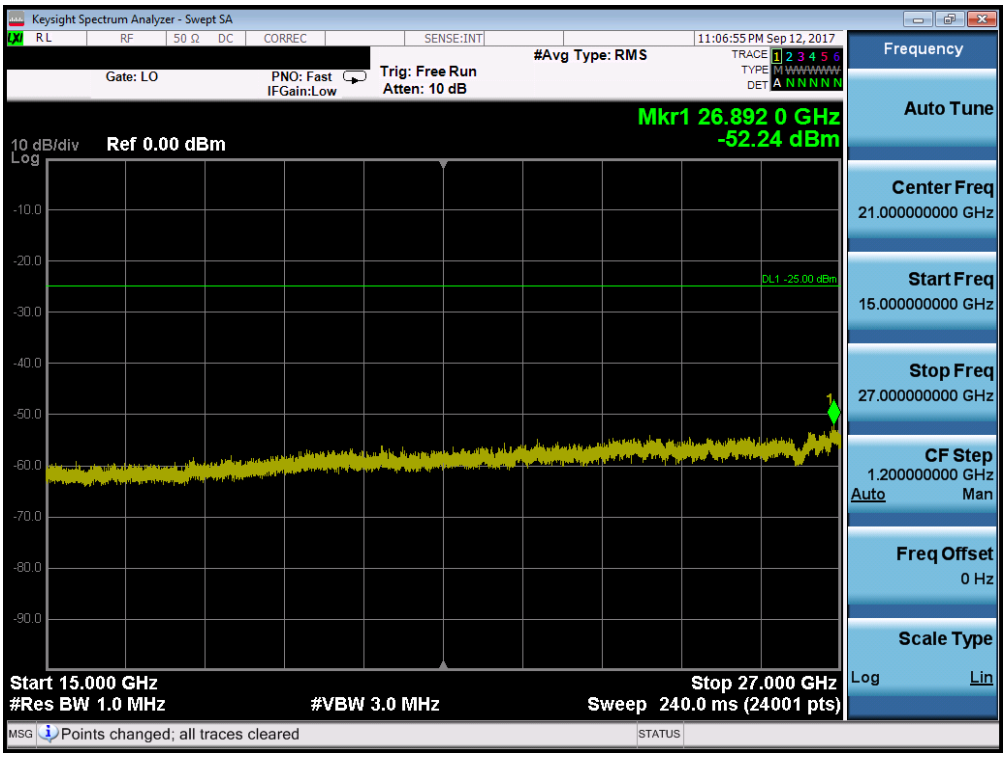

Plot 7-101. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - Mid Channel)

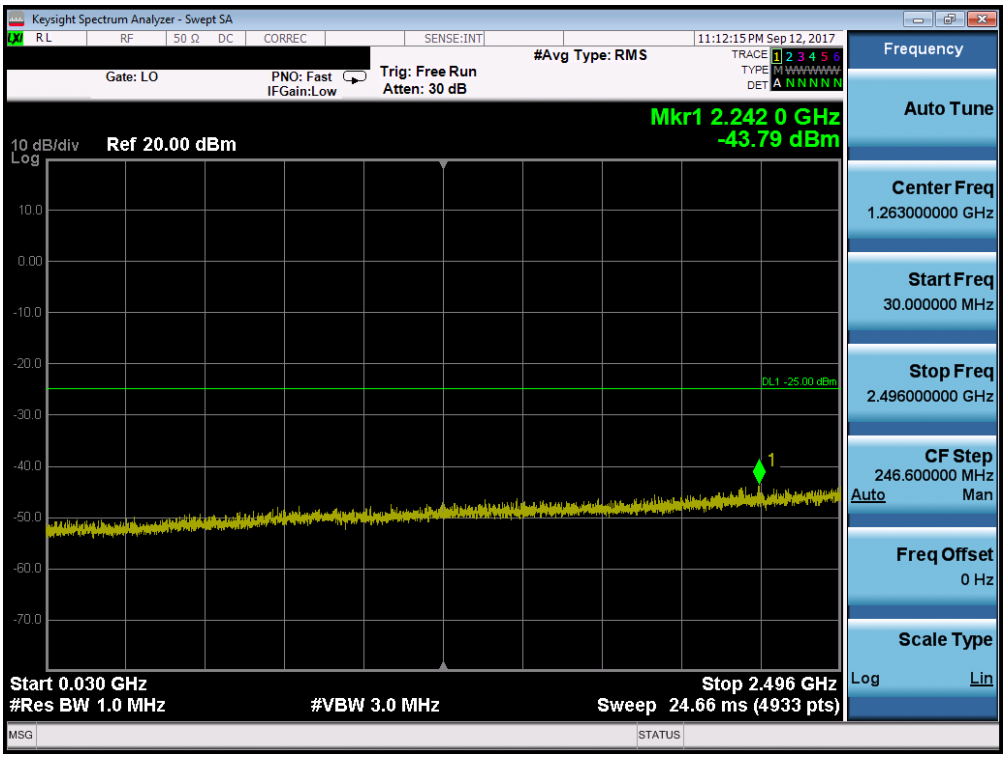

Plot 7-102. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

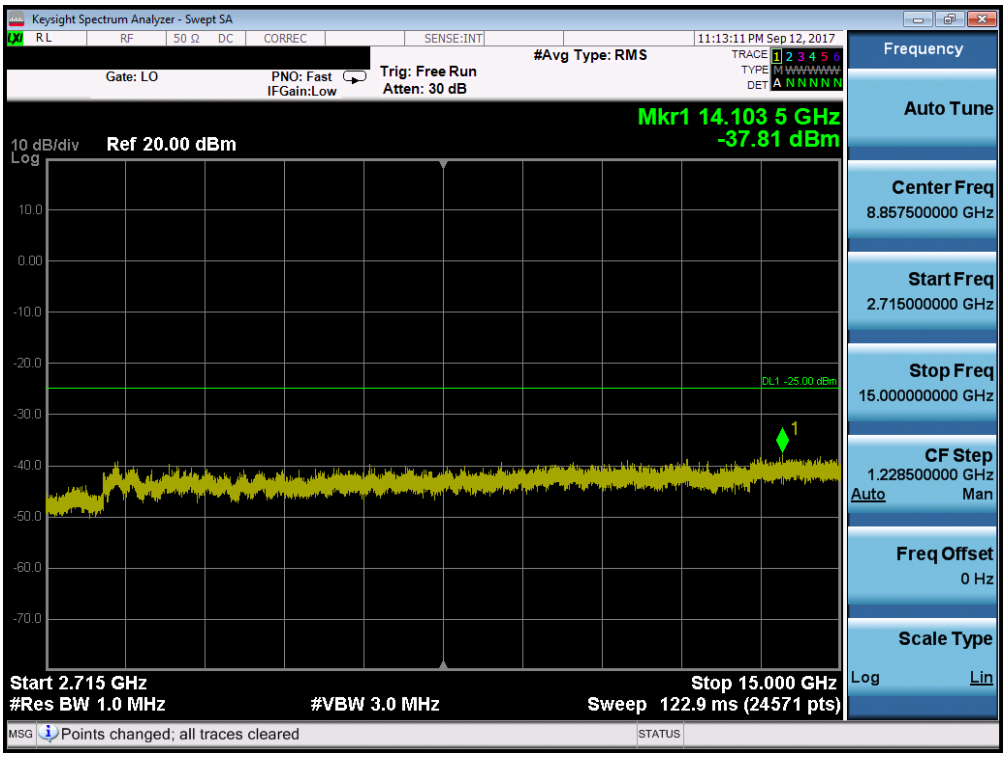

Plot 7-103. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

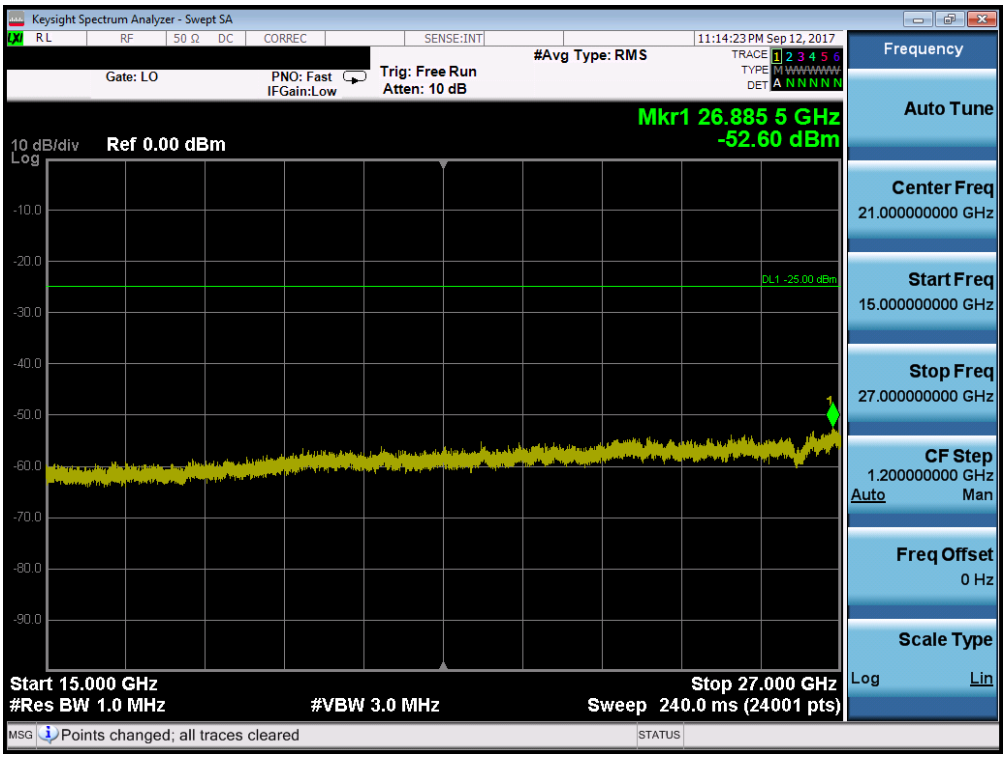

Plot 7-104. Conducted Spurious Plot (Band 41 - 20.0MHz QPSK - RB Size 1, RB Offset 0 - High Channel)

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §22.917(a) §24.238(a) §27.53(c) §27.53(g) §27.53(h) §27.53(m) §27.53(a)(4) RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.6) RSS-199(4.5)

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is 43 + $\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 41 is as noted in the Test Notes on the following page.

Test Procedure Used

KDB 971168 D01 v02r02 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW ≥ 1% of the emission bandwidth
4. VBW ≥ 3 x RBW
5. Detector = RMS
6. Number of sweep points ≥ 2 x Span/RBW
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

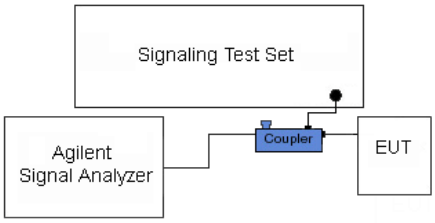

Figure 7-3. Test Instrument & Measurement Setup

Test Notes

Per 22.917(b) 24.238(a) 27.53(h) RSS-130(4.6) RSS-132(5.5) RSS-133(6.5) RSS-139(6.5) RSS-199(4.5) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Per 27.53(g) RSS-130(4.6) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c)(5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c)(4) is 65 + $10\log_{10}(P)$ = -35dBm in a 6.25kHz bandwidth.

Per 27.53(m) RSS-199(4.5) for operations in the BRS/EBS bands, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.

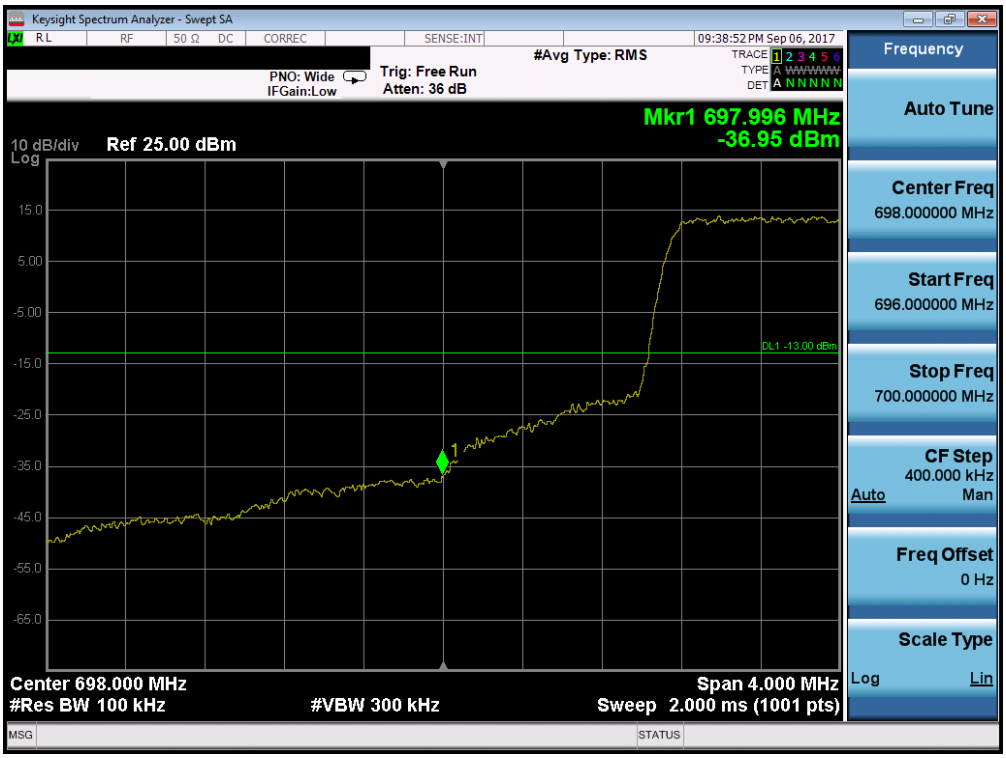

Plot 7-105. Lower Band Edge Plot (Band 12 - 1.4.0MHz QPSK - Full RB Configuration)

Plot 7-106. Upper Band Edge Plot (Band 12 - 1.4.0MHz QPSK - Full RB Configuration)

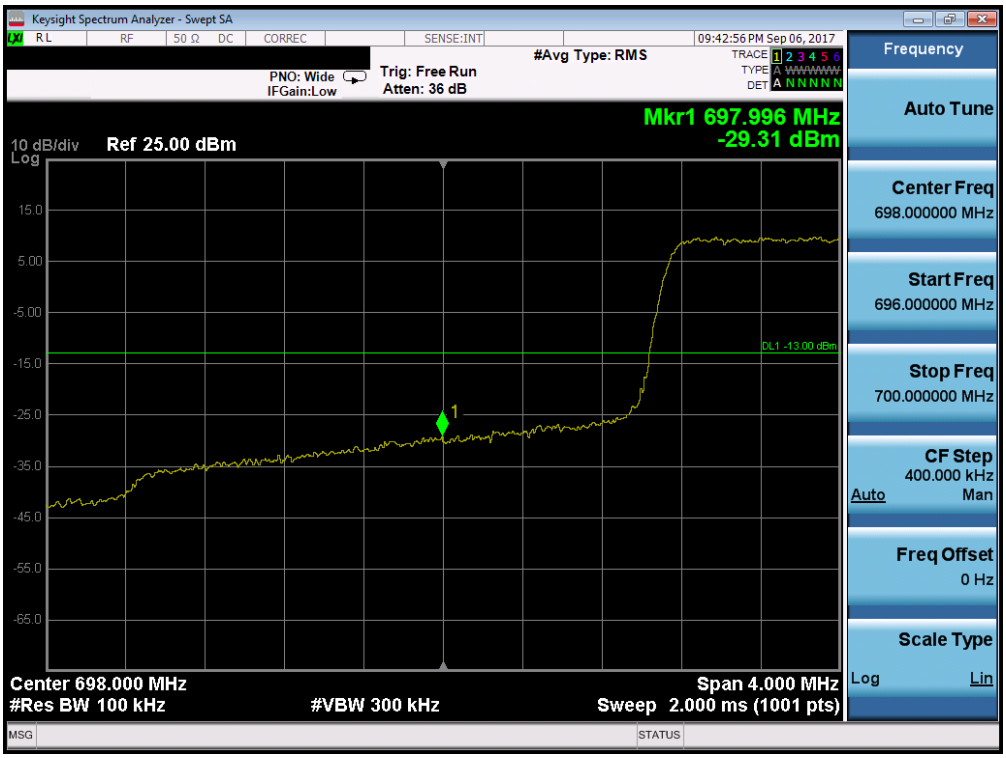

Plot 7-107. Lower Band Edge Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)

Plot 7-108. Upper Band Edge Plot (Band 12 - 3.0MHz QPSK - Full RB Configuration)

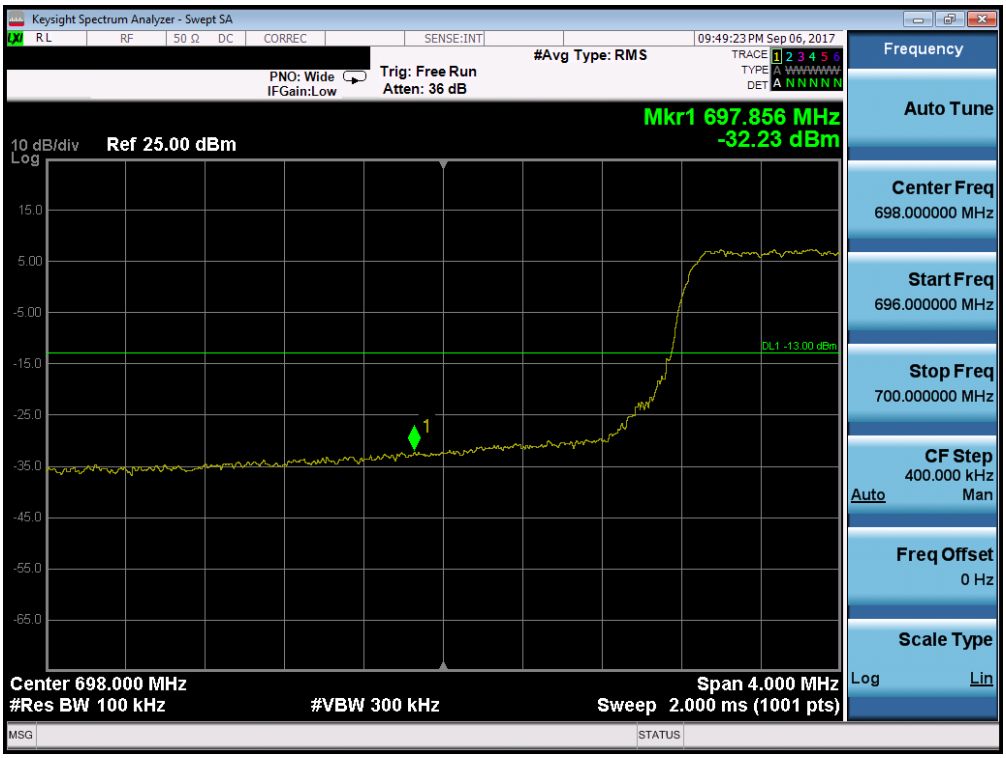

Plot 7-109. Lower Band Edge Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)

Plot 7-110. Upper Band Edge Plot (Band 12 - 5.0MHz QPSK - Full RB Configuration)

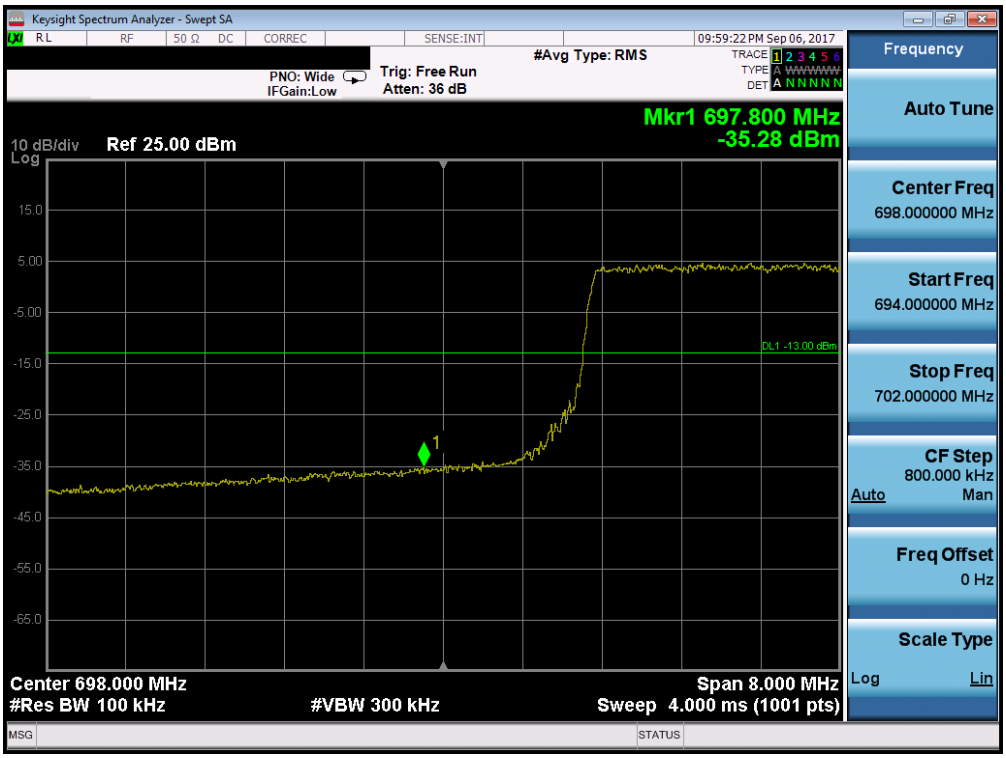

Plot 7-111. Lower Band Edge Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)

Plot 7-112. Upper Band Edge Plot (Band 12 - 10.0MHz QPSK - Full RB Configuration)

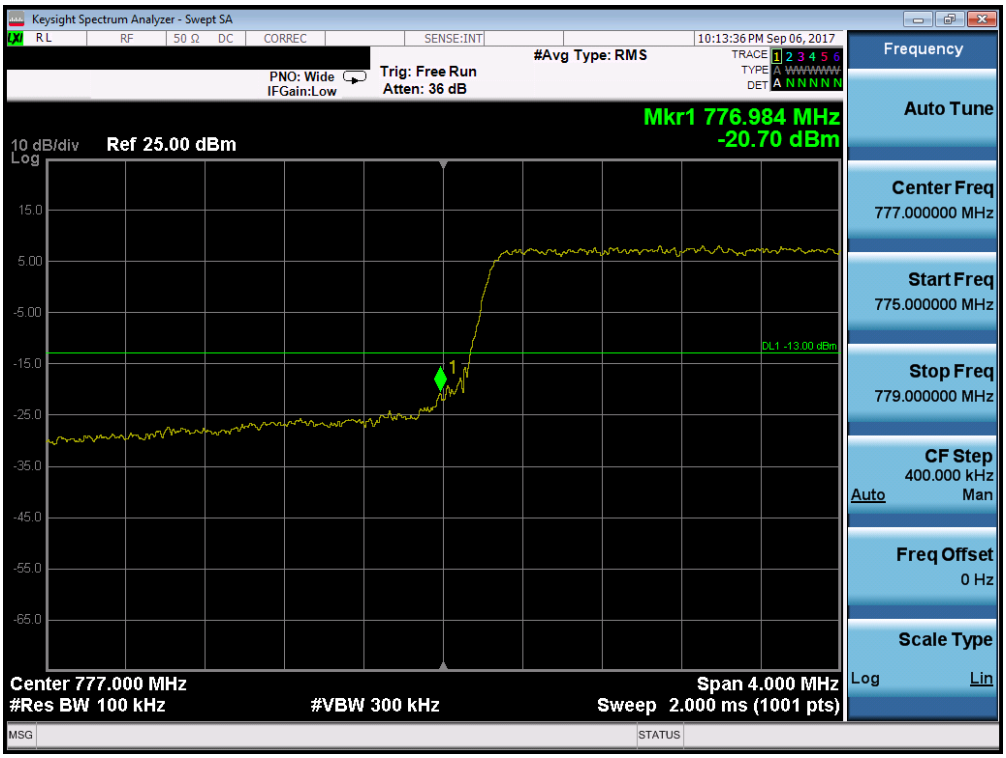

Plot 7-113. Lower Band Edge Plot (Band 13 - 5.0MHz QPSK - Full RB Configuration)

Plot 7-114. Upper Band Edge Plot (Band 13 - 5.0MHz QPSK - Full RB Configuration)

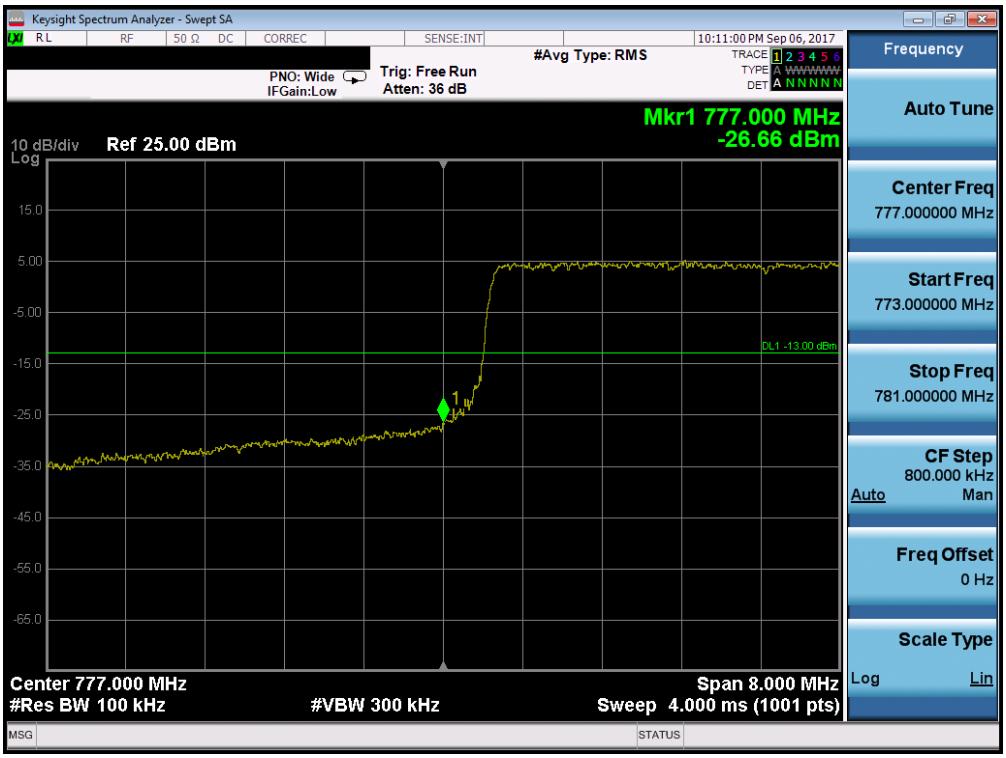

Plot 7-115. Lower Band Edge Plot (Band 13 - 10.0MHz QPSK - Full RB Configuration)

Plot 7-116. Upper Band Edge Plot (Band 13 - 10.0MHz QPSK - Full RB Configuration)

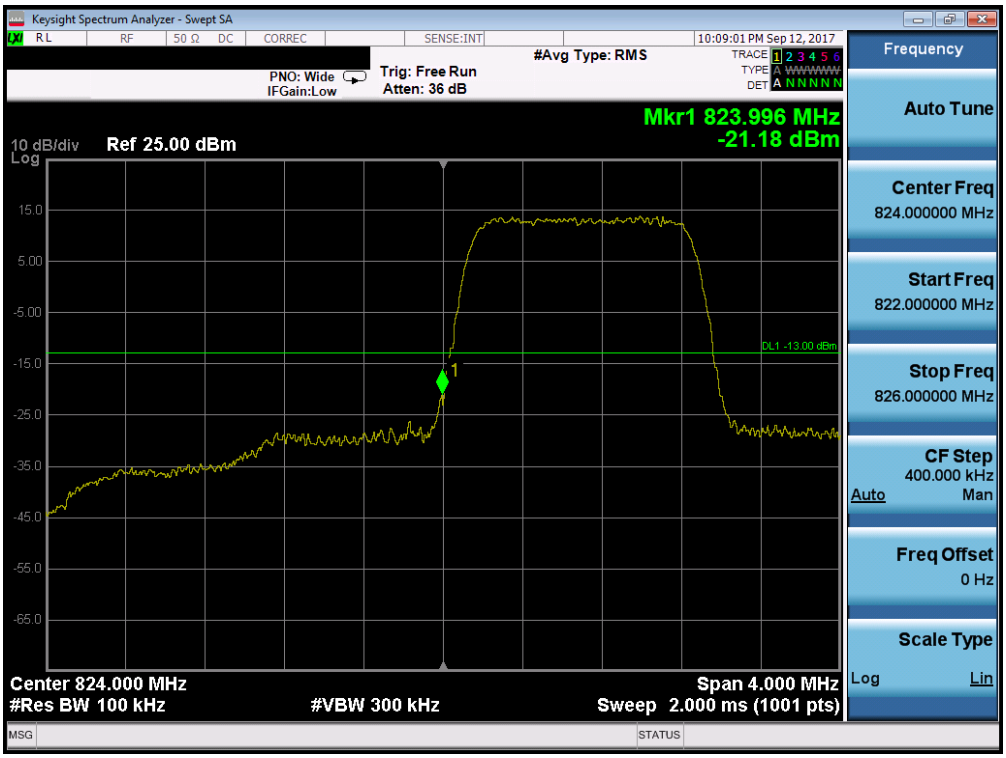

Plot 7-117. Lower Band Edge Plot (Band 26/5 – 1.4MHz QPSK - Full RB Configuration)

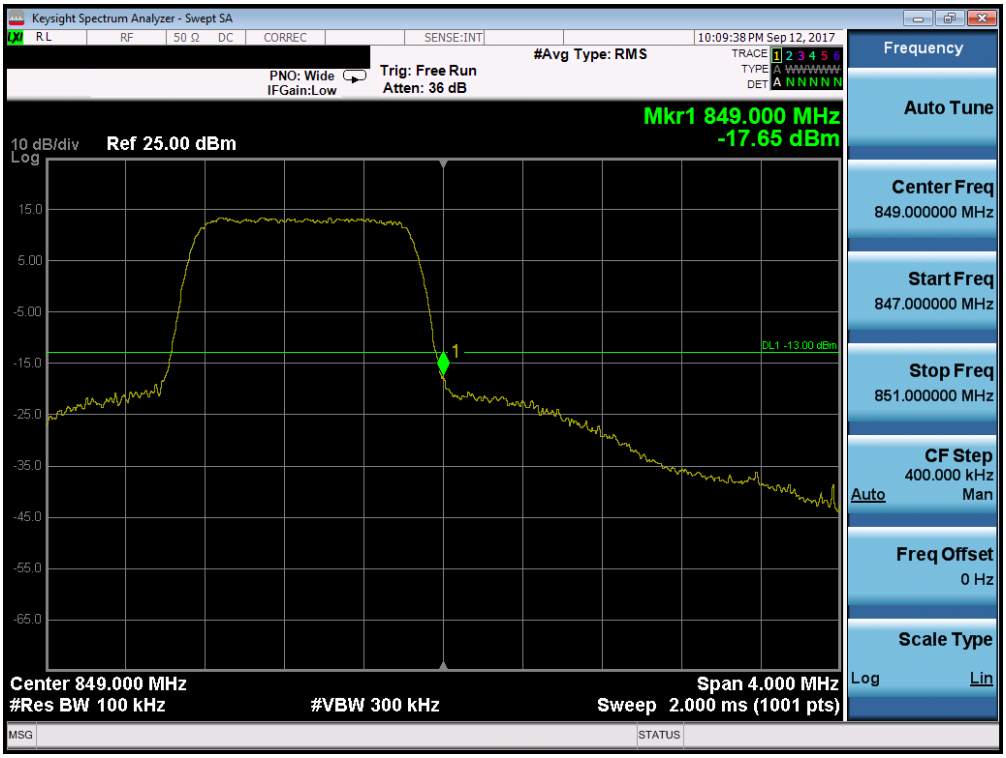

Plot 7-118. Upper Band Edge Plot (Band 26/5 – 1.4MHz QPSK - Full RB Configuration)

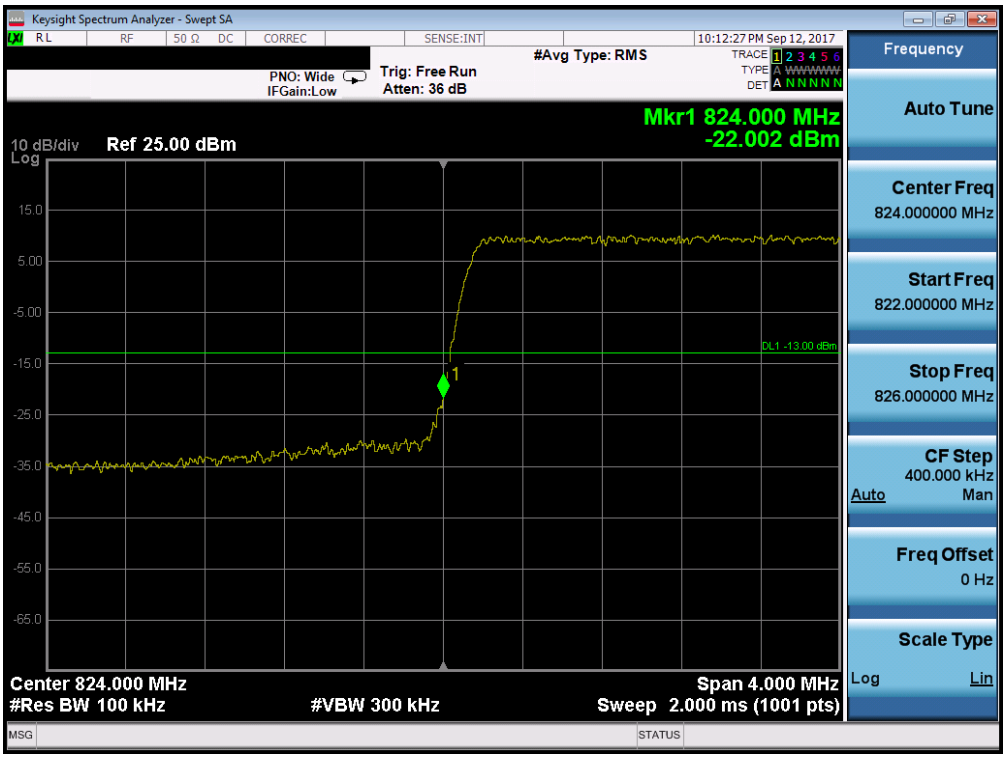

Plot 7-119. Lower Band Edge Plot (Band 26/5 - 3.0MHz QPSK - Full RB Configuration)

Plot 7-120. Upper Band Edge Plot (Band 26/5 - 3.0MHz QPSK - Full RB Configuration)

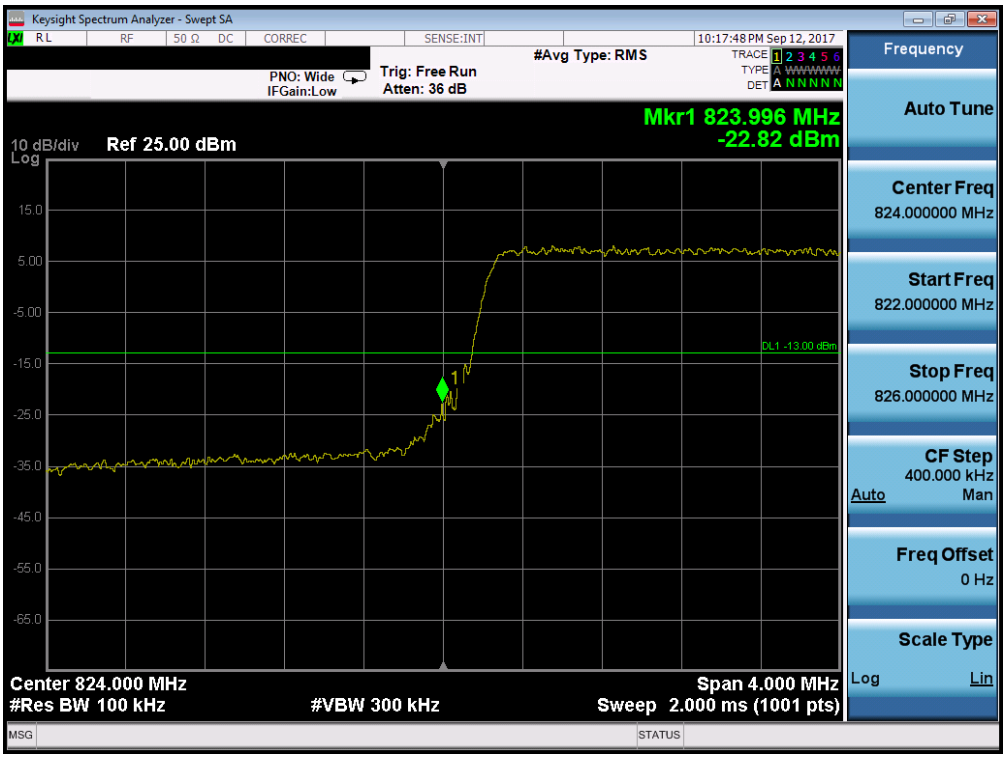

Plot 7-121. Lower Band Edge Plot (Band 26/5 - 5.0MHz QPSK - Full RB Configuration)

Plot 7-122. Upper Band Edge Plot (Band 26/5 - 5.0MHz QPSK - Full RB Configuration)

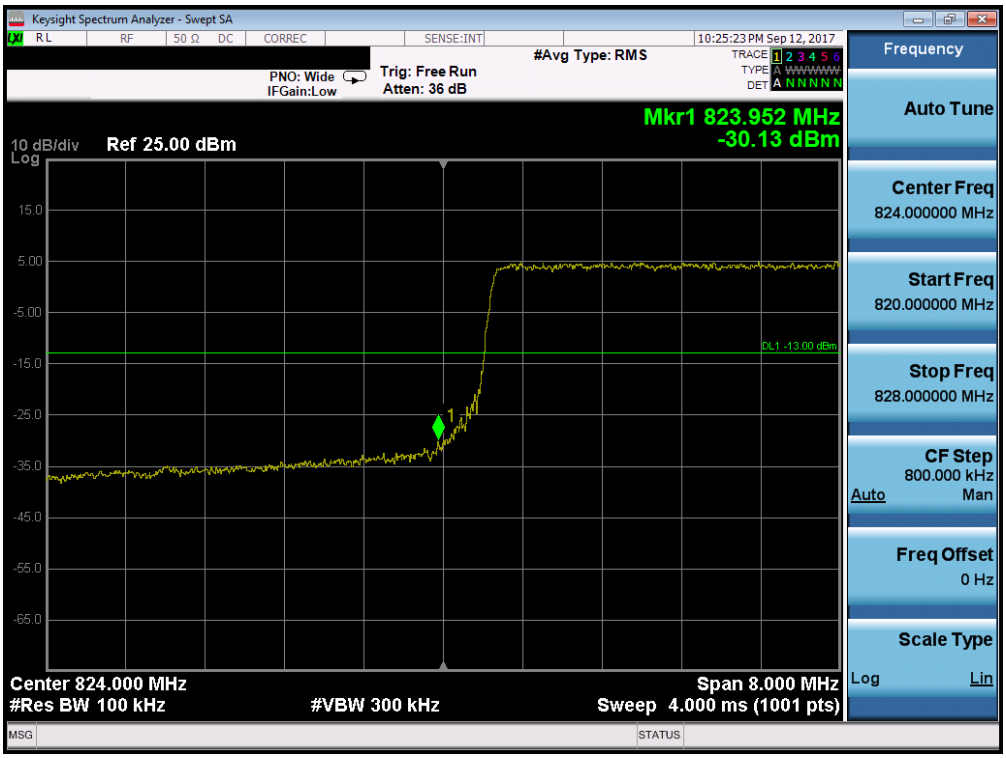

Plot 7-123. Lower Band Edge Plot (Band 26/5 - 10.0MHz QPSK - Full RB Configuration)

Plot 7-124. Upper Band Edge Plot (Band 26/5 - 10.0MHz QPSK - Full RB Configuration)

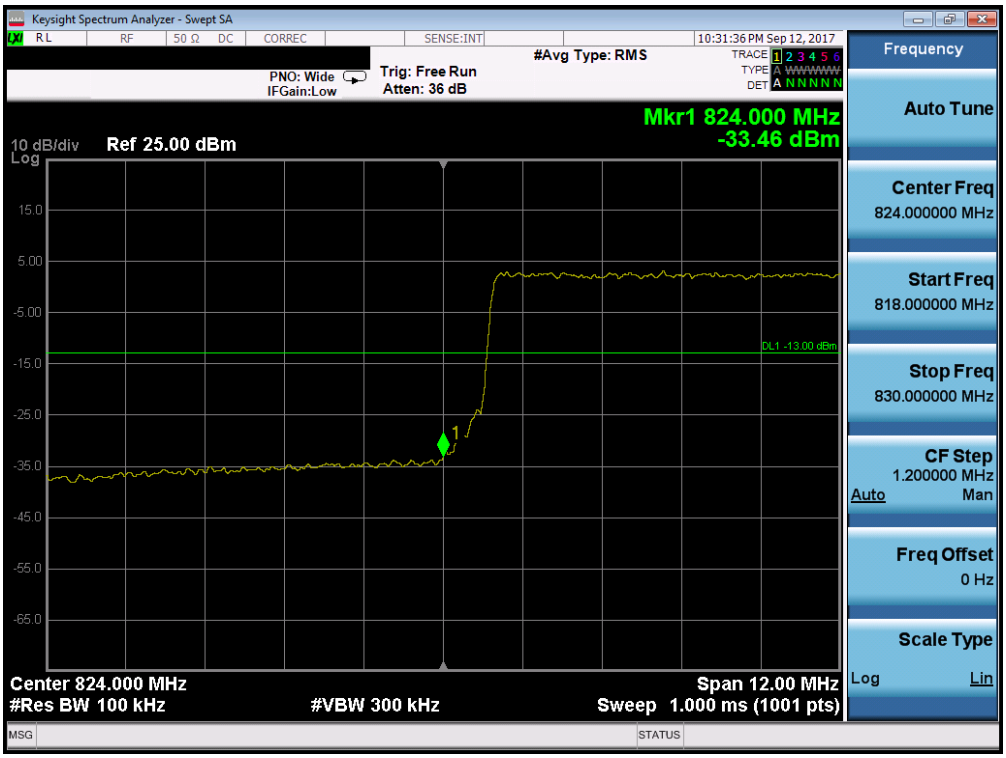

Plot 7-125. Lower Band Edge Plot (Band 26 - 15.0MHz QPSK - Full RB Configuration)