



**FCC OET BULLETIN 65 SUPPLEMENT C 01-01
IEEE Std 1528-2003 and IEEE Std 1528a-2005**

(Class II Permissive Change)

SAR EVALUATION REPORT

For

LTE Phone Bluetooth and WLAN

Model: US780, LG-US780, LGUS780 AS780, LG-AS780 and LGAS780

FCC ID: ZNFUS780

Report Number: 13U14853-1A

Issue Date: 3/28/2013

Prepared for

LG ELECTRONICS MOBILECOMM U.S.A., INC.

1000 SYLVAN AVE.

ENGLEWOOD CLIFFS, NJ 07632

Prepared by

UL CCS

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	3/12/2013	Initial Issue	--
A	3/28/2013	<ol style="list-style-type: none">1. Sec. 1. : Updated the highest reported SAR values2. Deleted Sec. 1.1 Highest reported SAR3. Sec. 14.3.3.: Updated note next to the Sum SAR4. Sec. 14.3.3.1.: Added additional Sum SAR data based on the worst-case SAR from Sec. 14.3.3.	Sunny Shih

Table of Contents

1. Attestation of Test Results..... 7

2. Test Methodology 8

3. Facilities and Accreditation 8

4. Calibration and Uncertainty 9

 4.1. *Measuring Instrument Calibration* 9

 4.2. *Measurement Uncertainty*..... 10

5. Measurement System Description and Setup..... 12

6. SAR Measurement Procedure..... 13

 6.1. *Normal SAR Measurement Procedure*..... 13

 6.2. *Volume Scan Procedures* 15

7. Device Under Test..... 16

 7.1. *Band and Air Interfaces* 16

 7.2. *Simultaneous Transmission Condition* 17

 7.3. *KDB 941225 D05 SAR for LTE Devices v02*..... 18

8. Exposure Conditions..... 20

 8.1. *Head Exposure Conditions for WWAN and LTE and WiFi* 20

 8.2. *Body-worn Accessory Exposure Conditions* 20

 8.3. *Hotspot Mode Exposure Conditions*..... 21

9. RF Output Power Measurement..... 22

 9.1. *CDMA BC0*..... 22

 9.2. *CDMA BC1* 25

 9.3. *CDMA BC15*..... 28

 9.4. *LTE Band 2* 31

 9.5. *LTE Band 4* 37

 9.6. *LTE Band 5* 43

 9.7. *LTE Band 12* 49

 9.8. *LTE Band 25* 55

 9.9. *Power Reduction for SV-LTE Mode*..... 61

 9.10. *WiFi (2.4 GHz Band)*..... 71

 9.11. *WiFi (5 GHz Bands)*..... 72

 9.12. *Bluetooth* 74

10. Tissue Dielectric Properties 75

10.1. *Composition of Ingredients for the Tissue Material Used in the SAR Tests*..... 76

10.2. *Tissue Dielectric Parameter Check Results* 77

11. System Performance Check **80**

11.1. *System Performance Check Measurement Conditions* 80

11.2. *Reference SAR Values for System Performance Check*..... 80

11.3. *System Performance Check Results* 81

12. SAR Test Results **82**

12.1. *CDMA BC0*..... 82

12.1.1. *Head Exposure Conditions*..... 82

12.1.2. *Body-worn Accessory Exposure Conditions* 83

12.1.3. *Hotspot Mode Exposure Conditions* 83

12.2. *CDMA BC1*..... 84

12.2.1. *Head Exposure Conditions*..... 84

12.2.2. *Body-worn Accessory Exposure Conditions* 85

12.2.3. *Hotspot Mode Exposure Conditions* 85

12.3. *CDMA BC15*..... 86

12.3.1. *Head Exposure Conditions*..... 86

12.3.2. *Body-worn Accessory Exposure Conditions* 87

12.3.3. *Hotspot Mode Exposure Conditions* 87

12.4. *LTE Band 2 (10MHz Bandwidth)* 88

12.4.1. *Head Exposure Conditions*..... 88

12.4.2. *Body-worn Accessory Exposure Conditions* 89

12.4.3. *Hotspot Mode Exposure Conditions* 90

12.5. *LTE Band 4 (10MHz Bandwidth)* 91

12.5.1. *Head Exposure Conditions*..... 91

12.5.2. *Body-worn Accessory Exposure Conditions* 92

12.5.3. *Hotspot Mode Exposure Conditions* 93

12.6. *LTE Band 5 (10MHz Bandwidth)* 94

12.6.1. *Head Exposure Conditions*..... 94

12.6.2. *Body-worn Accessory Exposure Conditions* 95

12.6.3. *Hotspot Mode Exposure Conditions* 96

12.7. *LTE Band 12 (10MHz Bandwidth)*..... 97

12.7.1. *Head Exposure Conditions*..... 97

12.7.2. *Body-worn Accessory Exposure Conditions* 98

12.7.3. *Hotspot Mode Exposure Conditions* 99

12.8. *LTE Band 25 (10MHz Bandwidth)*..... 100

12.8.1.	Head Exposure Conditions.....	100
12.8.2.	Body-worn Accessory Exposure Conditions.....	101
12.8.3.	Hotspot Mode Exposure Conditions.....	102
12.9.	<i>Wi-Fi (2.4 GHz Band)</i>	103
12.9.1.	Head Exposure Conditions.....	103
12.9.2.	Body-worn Accessory Exposure Conditions.....	103
12.9.3.	Hotspot Mode Exposure Conditions.....	103
12.10.	<i>Wi-Fi (5 GHz Bands)</i>	104
12.10.1.	Head Exposure Conditions.....	104
12.10.2.	Body-worn Accessory Exposure Conditions.....	105
12.11.	<i>Power Reduction for SV-LTE Mode</i>	106
12.11.1.	Power Reduction for CDMA BC1.....	106
12.11.2.	Power Reduction for CDMA BC15.....	106
12.11.3.	Power Reduction for LTE Band 2.....	106
12.11.4.	Power Reduction for LTE Band 4.....	107
12.11.5.	Power Reduction for LTE Band 5.....	107
12.11.6.	Power Reduction for LTE Band 12.....	107
12.11.7.	Power Reduction for LTE Band 25.....	108
13.	SAR Measurement Variability.....	109
13.1.	<i>The Highest Measured SAR Configuration in Each Frequency Band</i>	109
13.2.	<i>Repeated Measurement Results</i>	109
14.	Simultaneous Transmission SAR Analysis.....	110
14.1.	<i>Estimated SAR for Bluetooth</i>	111
14.1.1.	Standalone SAR Test Exclusion.....	111
14.1.2.	Estimated SAR.....	111
14.2.	<i>Head Exposure Conditions</i>	112
14.2.1.	Sum of the SAR for CDMA & WiFi 2.4 / 5 GHz Bands.....	112
14.2.2.	Sum of the SAR for LTE & WiFi 2.4 / 5 GHz Bands.....	114
14.2.3.	Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 / 5 GHz Bands.....	117
14.3.	<i>Body-worn Accessory Exposure Conditions</i>	125
14.3.1.	Sum of the SAR for CDMA, WiFi 2.4 / 5 GHz Bands & Bluetooth.....	125
14.3.2.	Sum of the SAR for LTE, WiFi 2.4 / 5 GHz Bands & Bluetooth.....	127
14.3.3.	Sum of the SAR for SV-LTE (Max. Pwr), WiFi 2.4 / 5 GHz Bands & Bluetooth.....	129
14.3.3.1.	Sum of the SAR for SV-LTE (Pwr Reduction), WiFi 2.4 / 5 GHz Bands & Bluetooth....	137
14.4.	<i>Hotspot Mode Exposure Conditions</i>	142
14.4.1.	Sum of the SAR for CDMA & WiFi 2.4 GHz Band.....	142

14.4.2. Sum of the SAR for LTE & WiFi 2.4 GHz Band 143

14.4.3. Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 GHz Band 144

15. Appendixes 147

15.1. System Performance Check Plots 147

15.2. SAR Test Plots for CDMA BC0..... 147

15.3. SAR Test Plots for CDMA BC1..... 147

15.4. SAR Test Plots for CDMA BC15..... 147

15.5. SAR Test Plots for LTE Band 2 147

15.6. SAR Test Plots for LTE Band 4 147

15.7. SAR Test Plots for LTE Band 5 147

15.8. SAR Test Plots for LTE Band 12 147

15.9. SAR Test Plots for LTE Band 25 147

15.10. SAR Test Plots for WiFi 2.4 GHz Band 147

15.11. SAR Test Plots for WiFi 5 GHz Bands 147

15.12. Calibration Certificate for E-Field Probe EX3DV4 - SN 3885 147

15.13. Calibration Certificate for E-Field Probe EX3DV4 - SN 3871 147

15.14. Calibration Certificate for E-Field Probe EX3DV3 - SN 3531 147

15.15. Calibration Certificate for E-Field Probe EX3DV4 - SN 3749 147

15.16. Calibration Certificate for D750V2 - SN 1019..... 147

15.17. Calibration Certificate for D835V2 - SN 4d117..... 147

15.18. Calibration Certificate for D1750V2 - SN 1053..... 147

15.19. Calibration Certificate for D1900V2 - SN 5d140..... 147

15.20. Calibration Certificate for D2450V2 - SN 748..... 147

15.21. Calibration Certificate for D5GHzV2 - SN 1003..... 147

16. External Photos 148

17. Antenna Dimensions & Separation Distances 149

18. Setup Photos 150

1. Attestation of Test Results



Applicant	LG ELECTRONICS MOBILECOMM U.S.A., INC.			
DUT description	LTE Phone Bluetooth and WLAN			
Model	US780, LG-US780, LGUS780 AS780, LG-AS780 and LGAS780			
Test device is	An identical prototype			
Device category	Portable			
Exposure category	General Population/Uncontrolled Exposure			
Date tested	2/7/2013 – 2/22/2013			
The highest reported SAR values	RF exposure condition	Licensed Tx	DTS	UNII
	Head	0.778 W/kg	0.258 W/kg	0.196 W/kg
	Body-worn Accessory	1.136 W/kg	0.271 W/kg	0.225 W/kg
	Wireless Router	1.136 W/kg	0.271 W/kg	N/A W/kg
	Simultaneous Transmission	1.538 W/kg	1.538 W/kg	1.492 W/kg
Applicable Standards	OET Bulletin 65 Supplement C IEEE Std 1528-2003 and IEEE Std 1528a-2005 FCC Published RF exposure KDB procedures, and TCB workshop updates			
Test Results	Pass			

UL CCS tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released For UL CCS By:

Prepared By:

Sunny Shih
 Engineering Leader
 UL CCS

Devin Chang
 SAR Engineer
 UL CCS

2. Test Methodology

The tests documented in this report were performed in accordance with FCC OET Bulletin 65 Supplement C Edition 01-01, IEEE STD 1528-2003, IEEE Std 1528a-2005 and the following FCC Published RF exposure KDB procedures:

- 447498 D01 General RF Exposure Guidance v05
- 648474 D04 SAR Handsets Multi Xmitter and Ant v01
- 941225 D01 SAR test for 3G devices v02
- 941225 D05 SAR for LTE Devices v02
- 941225 D06 Hot Spot SAR v01
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01
- 865664 D02 SAR Reporting v01
- 690783 D01 SAR Listings on Grants v01r02

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date		
				MM	DD	Year
S-Parameter Network Analyzer	Agilent	8753ES	MY40001647	6	27	2013
Dielectronic Probe kit	SPEAG	SM DAK 040 CA	1082	9	18	2013
Synthesized Signal Generator	HP	8665B	3438A00633	2	22	2013
Power Meter	HP	438A	3513U04320	9	17	2013
Power Sensor A	HP	8481A	2237A31744	8	17	2013
Power Sensor B	HP	8481A	3318A95392	8	17	2013
Amplifier	MITEQ	4D00400600-50-30P	1622052	N/A		
Directional coupler	Werlatone	C8060-102	2149	N/A		
Synthesized Signal Generator	HP	8665B	3744A01084	5	3	2013
Power Meter	HP	438A	2822A05684	10	7	2013
Power Sensor A	HP	8481A	2702A66876	8	1	2013
Power Sensor B	HP	8482A	2349A08568	4	14	2013
Amplifier	MITEQ	4D00400600-50-30P	1620606	N/A		
Directional coupler	Werlatone	C8060-102	2141	N/A		
Base Station Simulator	R & S	CMU200	106301	6	6	2013
Base Station Simulator	R & S	CMU200	118339	5	20	2013
Base Station Simulator	Agilent	8960	GB42361452	4	4	2013
Thermometer	TRACEABLE	4242	122529162	9	19	2013
E-Field Probe	SPEAG	EX3DV4	3749	1	15	2014
E-Field Probe	SPEAG	EX3DV3	3531	11	15	2013
E-Field Probe	SPEAG	EX3DV4	3885	10	9	2013
E-Field Probe	SPEAG	EX3DV4	3871	8	20	2013
Data Acquisition Electronics	SPEAG	DAE4	1258	3	8	2013
Data Acquisition Electronics	SPEAG	DAE4	427	1	9	2014
Data Acquisition Electronics	SPEAG	DAE4	1352	10	8	2013
Data Acquisition Electronics	SPEAG	DAE4	1343	8	20	2013
System Validation Dipole	SPEAG	D750V2	1071	10	5	2013
System Validation Dipole	SPEAG	D835V2	4d117	4	10	2013
System Validation Dipole	SPEAG	D1750V2	1077	10	3	2013
System Validation Dipole	SPEAG	D1900V2	5d043	11	6	2013
System Validation Dipole	SPEAG	D2450V2	899	10	5	2013
System Validation Dipole	SPEAG	D5GHzV2	1003	9	18	2013
Power Meter	Agilent	N1912A	MY52310061	7	5	2013
Power Sensor Ch A	Agilent	N1921A	MY52260009	7	5	2013
Power Sensor Ch B	Agilent	N1921A	MY52270022	7	21	2013

4.2. Measurement Uncertainty

Measurement uncertainty for 3 to 6 GHz averaged over 1 gram (Head)

Component	Error, ±%	Prob Dist	Divisor	Sensitivity	U (Xi), %
Measurement System					
Probe Calibration (k=1)	6.55	Normal	1	1	6.55
Axial Isotropy	1.15	Rectangular	1.732	0.7	0.46
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7	0.93
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
Modulation Response	2.40	Rectangular	1.732	1	1.39
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner	0.80	Rectangular	1.732	1	0.46
Probe Positioning	6.70	Rectangular	1.732	1	3.87
Max.SAR Eval.	4.00	Rectangular	1.732	1	2.31
Test Sample Related					
Test Sample Positioning	2.90	Normal	1	1	2.90
Device Holder	3.60	Normal	1	1	3.60
Power Drift	5.00	Rectangular	1.732	1	2.89
Power Scaling	0.00	Rectangular	1.732	1	0.00
Phantom and Setup					
Phantom Uncertainty	6.10	Rectangular	1.732	1	3.52
SAR Correction	1.90	Rectangular	1.732	1	1.10
Liquid Permittivity - measurement	4.74	Rectangular	1.732	0.26	0.71
Liquid Conductivity - measurement	-1.96	Rectangular	1.732	0.78	-0.88
Liquid Permittivity - temperature uncertainty	0.40	Rectangular	1.732	0.23	0.05
Liquid Conductivity - temperature uncertainty	3.40	Rectangular	1.732	0.78	1.53
Combined Standard Uncertainty Uc(y) =					11.09
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =					22.18 %
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =					1.74 dB

Measurement uncertainty for 30 MHz to 3 GHz averaged over 1 gram (Head)

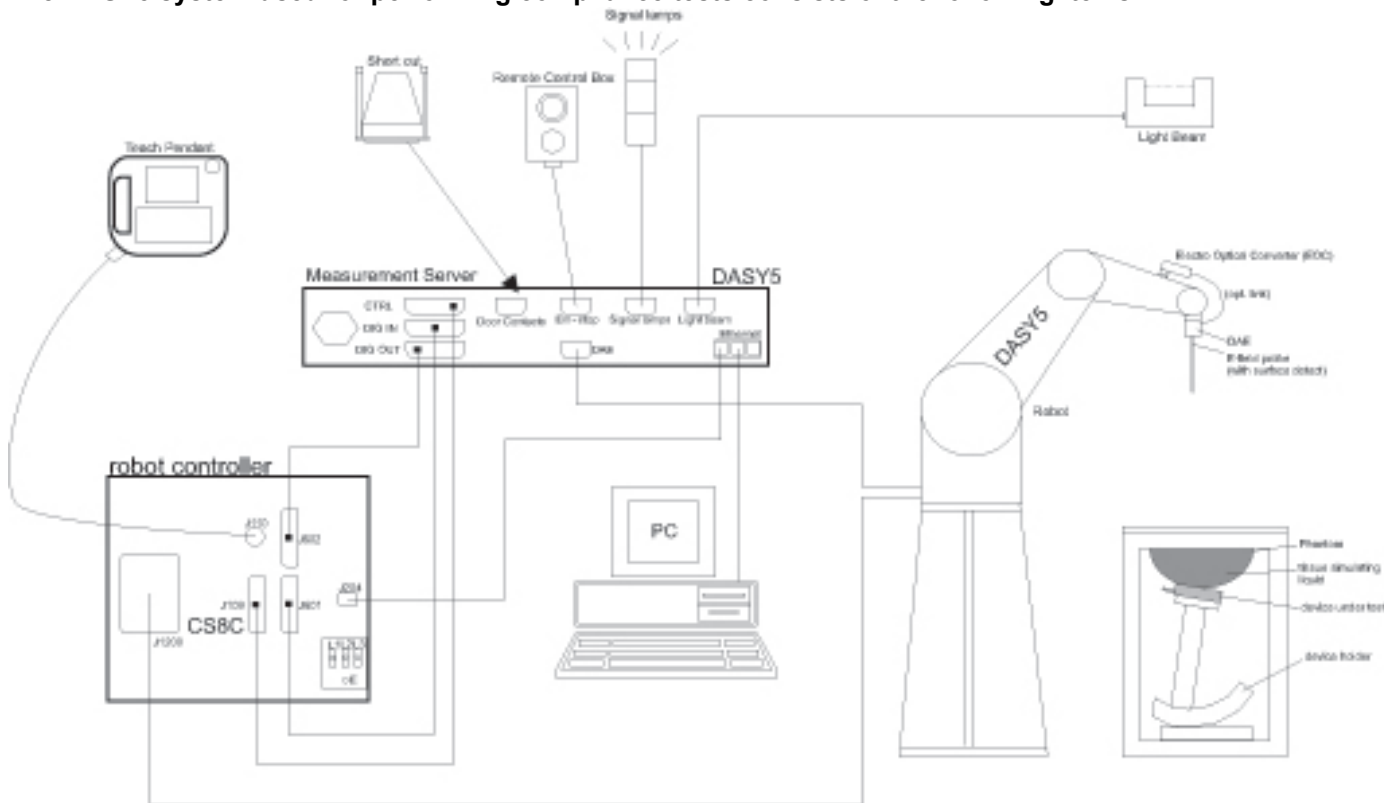
Component	Error, ±%	Prob Dist	Divisor	Sensitivity	U (Xi), %
Measurement System					
Probe Calibration (k=1)	6.00	Normal	1	1	6.00
Axial Isotropy	1.15	Rectangular	1.732	0.7	0.46
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7	0.93
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
Modulation Response	2.40	Rectangular	1.732	1	1.39
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner	0.40	Rectangular	1.732	1	0.23
Probe Positioning	2.90	Rectangular	1.732	1	1.67
Max.SAR Eval.	2.00	Rectangular	1.732	1	1.15
Test Sample Related					
Test Sample Positioning	2.90	Normal	1	1	2.90
Device Holder	3.60	Normal	1	1	3.60
Power Drift	5.00	Rectangular	1.732	1	2.89
Power Scaling	0.00	Rectangular	1.732	1	0.00
Phantom and Setup					
Phantom Uncertainty	6.10	Rectangular	1.732	1	3.52
SAR Correction	1.90	Rectangular	1.732	1	1.10
Liquid Permittivity - measurement	-4.89	Rectangular	1.732	0.26	-0.73
Liquid Conductivity - measurement	4.50	Rectangular	1.732	0.78	2.03
Liquid Permittivity - temperature uncertainty	0.40	Rectangular	1.732	0.23	0.05
Liquid Conductivity - temperature uncertainty	3.40	Rectangular	1.732	0.78	1.53
Combined Standard Uncertainty Uc(y) =					10.15
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =					20.30 %
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =					1.61 dB

Measurement uncertainty for 30 MHz to 6 GHz averaged over 1 gram (Body)

Component	Error, ±%	Prob Dist	Divisor	Sensitivity	U (X), %
Measurement System					
Probe Calibration (k=1)	6.55	Normal	1	1	6.55
Axial Isotropy	1.15	Rectangular	1.732	0.7	0.46
Hemispherical Isotropy	2.30	Rectangular	1.732	0.7	0.93
Boundary Effect	0.90	Rectangular	1.732	1	0.52
Probe Linearity	3.45	Rectangular	1.732	1	1.99
Modulation Response	2.40	Rectangular	1.732	1	1.39
System Detection Limits	1.00	Rectangular	1.732	1	0.58
Readout Electronics	0.30	Normal	1	1	0.30
Response Time	0.80	Rectangular	1.732	1	0.46
Integration Time	2.60	Rectangular	1.732	1	1.50
RF Ambient Noise	3.00	Rectangular	1.732	1	1.73
RF Ambient Reflections	3.00	Rectangular	1.732	1	1.73
Probe Positioner	0.80	Rectangular	1.732	1	0.46
Probe Positioning	6.70	Rectangular	1.732	1	3.87
Max.SAR Eval.	4.00	Rectangular	1.732	1	2.31
Test Sample Related					
Test Sample Positioning	2.90	Normal	1	1	2.90
Device Holder	3.60	Normal	1	1	3.60
Power Drift	5.00	Rectangular	1.732	1	2.89
Power Scaling	0.00	Rectangular	1.732	1	0.00
Phantom and Setup					
Phantom Uncertainty	7.90	Rectangular	1.732	1	4.56
SAR Correction	1.90	Rectangular	1.732	1	1.10
Liquid Permittivity - measurement	-4.71	Rectangular	1.732	0.26	-0.71
Liquid Conductivity - measurement	4.45	Rectangular	1.732	0.78	2.00
Liquid Permittivity - temperature uncertainty	0.40	Rectangular	1.732	0.23	0.05
Liquid Conductivity - temperature uncertainty	3.40	Rectangular	1.732	0.78	1.53
Combined Standard Uncertainty U _c (y) =					11.60
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				23.20 %	
Expanded Uncertainty U, Coverage Factor = 2, > 95 % Confidence =				1.81 dB	

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01 (Draft)

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

Model US780, LG-US780, LGUS780 AS780, LG-AS780 and LGAS780 LTE Phone Bluetooth and WLAN	
Operating Configuration(s)	Held to head, Body-worn (Voice call)
RF Exposure Condition(s)	Head, Body-worn Accessory, Hotspot (wireless router) - WiFi Hotspot mode permits the device to share its cellular data connection with other 2.4 GHz WiFi-enabled devices (channels 1 - 11).
Device dimension (L x W)	13.16 cm x 6.84 cm
Accessory	Headset

7.1. Band and Air Interfaces

Wireless Technology and Frequency Bands	CDMA BC0 / BC1 / BC15 LTE Band 2, 4, 5, 12, 25 WiFi: 2.4 GHz / 5 GHz Bluetooth: 2.4 GHz.
Mode	CDMA: 1xRTT 1xEv-Do (Rel. 0) 1xEv-Do (Rev. A) LTE: QPSK, 16QAM WiFi 802.11a/b/g/n HT20/HT40 Bluetooth 4.0+LE
Duty Cycle	CDMA BC0, BC1, BC15: 100% LTE Band 2, 4, 5, 12, 25: 100% WiFi 802.11a/b/g/n: 100%
DTM (Dual Tx Mode) Class	Not Supported
WiFi Direct	WiFi Direct support <ul style="list-style-type: none"> • 2.4 GHz band • 5.2 GHz band (5.15-5.25) channel 36, 40, 44 and 48 • 5.8 GHz band (5.745-5.805) channel 149, 153, 157 and 161 WiFi Direct support Client Mode only.

7.2. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	<ul style="list-style-type: none"> • CDMA BC0, BC1, BC15 Voice + 2.4GHz WiFi • CDMA BC0, BC1, BC15 Voice + 5GHz WiFi • CDMA BC0, BC1, BC15 Data/EVDO + 2.4GHz WiFi • CDMA BC0, BC1, BC15 Data/EVDO + 5GHz WiFi • LTE B2, 4, 5, 12, 25 Data + 2.4GHz WiFi • LTE B2, 4, 5, 12, 25 Data + 5GHz WiFi • CDMA BC0, BC1, BC15 Voice + LTE B2, 4, 5, 12, 25 Data (SV-LTE) • CDMA BC0, BC1, BC15 Voice + LTE B2, 4, 5, 12, 25 Data + 2.4GHz WiFi (SV-LTE) • CDMA BC0, BC1, BC15 Voice + LTE B2, 4, 5, 12, 25 Data + 5GHz WiFi (SV-LTE)
Body-worn Accessory	<ul style="list-style-type: none"> • CDMA BC0, BC1, BC15 Voice + 2.4GHz WiFi • CDMA BC0, BC1, BC15 Voice + 5GHz WiFi • CDMA BC0, BC1, BC15 Data/EVDO + 2.4GHz WiFi • CDMA BC0, BC1, BC15 Data/EVDO + 5GHz WiFi • LTE B2, 4, 5, 12,25 Data + 2.4GHz WiFi • LTE B2, 4, 5, 12,25 Data + 5GHz WiFi • CDMA BC0, BC1, BC15 Voice + LTE B2, 4, 5, 12, 25 Data (SV-LTE) • CDMA BC0, BC1, BC15 Voice + LTE B2, 4, 5, 12, 25 Data + 2.4GHz WiFi (SV-LTE) • CDMA BC0, BC1, BC15 Voice + LTE B2, 4, 5, 12, 25 Data + 5GHz WiFi (SV-LTE) • CDMA BC0, BC1, BC15 Voice + 2.4GHz Bluetooth • LTE B2, 4, 5, 12, 25 Data + 2.4GHz Bluetooth • CDMA BC0, BC1, BC15 Voice+ LTE B2, 4, 5, 12, 25 Data + 2.4GHz Bluetooth (SV-LTE)
Hotspot	<ul style="list-style-type: none"> • CDMA BC0, BC1, BC15 Data/EVDO + 2.4GHz WiFi • LTE B2, 4, 5, 12, 25 Data + 2.4GHz WiFi • CDMA BC0, BC1, BC15 Voice+ LTE B2, 4, 5, 12, 25 Data + 2.4GHz WiFi (SV-LTE)

Note:

1. Simultaneous transmission between BT and WiFi is not supported.
2. Simultaneous transmission between CDMA 1xdata/EVDO and LTE data is not supported.
3. SVLTE is supported only. (SVDO is not supported.)
4. VoIP is supported.
5. Maximum output power will be used for SAR compliance. If necessary, power reduction will be used for SAR compliance.

7.3. KDB 941225 D05 SAR for LTE Devices v02

Item	Description						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 2						
	Tx: 1850 - 1910 MHz			Rx: 1930 - 1990 MHz			
	Band 4						
	Tx: 1710 - 1755 MHz			Rx: 2100 - 2155 MHz			
	Band 5						
	Tx: 824 - 849 MHz			Rx: 869 - 894 MHz			
	Band 12						
	Tx: 699 - 716 MHz			Rx: 729 - 746 MHz			
	Band 25						
	Tx: 1850 - 1915 MHz			Rx: 1930 - 1995 MHz			
	Band 2	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			18650/ 1855	18625/ 1852.5	18615/ 1851.5	18607/ 1850.7
	Mid			18900/ 1880	18900/ 1880	18900/ 1880	18900/ 1880
	High			19150/ 1905	19175/ 1907.5	19185/ 1908.5	19193/ 1909.3
	Band 4	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20000/ 1715	19975/ 1712.5	19965/ 1711.5	19957/ 1710.7
	Mid			20175/ 1732.5	20175/ 1732.5	20175/ 1732.5	20175/ 1732.5
	High			20350/ 1750	20375/ 1752.5	20385/ 1753.5	20393/ 1754.3
	Band 5	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5
	High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3
	Band 12	Channel Bandwidth					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz
Low			23060/ 704	23035/ 701.5	23025/ 700.5	23017/ 699.7	
Mid			23095/ 707.5	23095/ 707.5	23095/ 707.5	23095/ 707.5	
High			23130/ 711	23155/ 713.5	23165/ 714.5	23173/ 715.3	
Band 25	Channel Bandwidth						
	20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz	
Low			26090/ 1855	26065/ 1852.5	26055/ 1851.5	26047/ 1850.7	
Mid			26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	26365/ 1882.5	
High			26640/ 1910	26665/ 1912.5	26675/ 1913.5	26683/ 1914.3	

941225 D05 SAR for LTE Devices v02 (Continued)

LTE transmitter and antenna implementation	CDMA has one Tx/Rx antenna and LTE has on TX/RX antenna and one Rx only antenna.																																						
Maximum power reduction (MPR)	<p style="text-align: center;">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
Power reduction	Yes, refer to section 9.9.																																						
Spectrum plots for RB configurations	When a properly configured basestation simulator is not used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration should be included in the SAR report to demonstrate that the tested RB allocations have been correctly established at the maximum output power conditions.																																						

8. Exposure Conditions

Refer to Section 17 “Antenna Dimensions and Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Head Exposure Conditions for WWAN and LTE and WiFi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Conditions

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	6 mm	Yes	

For LTE Band 2, 4, 12 and 25

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	

For LTE Band 5

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	

For WiFi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	8 mm	Yes	

8.3. Hotspot Mode Exposure Conditions

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	6 mm	Yes	
Edge 1 (Top)	117.3 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 2 (Right)	47.2 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 3 (Bottom)	2.6 mm	Yes	
Edge 4 (Left)	2 mm	Yes	

For LTE Band 2, 4, 12 and 25

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	
Edge 1 (Top)	118.6 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 2 (Right)	3 mm	Yes	
Edge 3 (Bottom)	2.6 mm	Yes	
Edge 4 (Left)	32.9 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01

For LTE Band 5

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	7 mm	Yes	
Edge 1 (Top)	3 mm	Yes	
Edge 2 (Right)	3 mm	Yes	
Edge 3 (Bottom)	90.3 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 4 (Left)	69.7 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01

For WiFi

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	8 mm	Yes	
Edge 1 (Top)	3 mm	Yes	
Edge 2 (Right)	40.8 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 3 (Bottom)	126.5 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01
Edge 4 (Left)	33.8 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01

9. RF Output Power Measurement

9.1. CDMA BC0

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance	1xRTT (dBm)	1xEVDO Rel. 0 (dBm)	1xEVDO Rev. A (dBm)
Max	26.2	26.2	26.2
Target	25.7	25.7	25.7
Min	24.2	24.2	24.2

1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application	Rev. License
CDMA2000 Mobile Test	B.13.08, L

- Call Setup > Shift & Preset
- Cell Info > Cell Parameters > System ID (SID) > 7
 - > Network ID (NID) > 1
 - > Reg. Ch. #: 610
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > Please see following table or details
- FCH Service Option (SO) Setup > Please see following table or details
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
 - > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Rvs Power Ctrl > Active bits
 - Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC 0	RC1 SO55 (Loopback)	1013	824.70	26.1
		384	836.52	26.2
		777	848.31	26.2
	RC3 SO55 (Loopback)	1013	824.70	26.1
		384	836.52	26.2
		777	848.31	26.2
	RC3 SO32 (+F-SCH)	1013	824.70	26.1
		384	836.52	26.2
		777	848.31	26.2

1xEV-Do Rel. 0

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	B.13.10, L

EVDO Release 0 - RTAPS

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Parm:
 - Cell Power > -93 dBm/1.23 MHz
 - System ID: 7; NID: 1, Reg. Ch. #: 610
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Parm:
 - Cell Power > -93 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	FTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)
BC0	307.2 kbps (2 slot, QPSK)	1013	824.70	26.2
		384	836.52	26.2
		777	848.31	26.2

1xEV-DO Rev. A

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application Rev, License
 1xEV-DO Terminal Test B.13.10, L

EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > --93 and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -93, and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

Band	FETAP Traffic Format	Channel	f (MHz)	Avg Pwr (dBm)
BC0	307.2k, QPSK/ ACK channel is transmitted at all the slots	1013	824.70	26.2
		384	836.52	26.2
		777	848.31	26.2

9.2. CDMA BC1

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance	1xRTT (dBm)	1xEVDO Rel. 0 (dBm)	1xEVDO Rev. A (dBm)
Max	25.2	25.2	25.2
Target	24.7	24.7	24.7
Min	23.2	23.2	23.2

1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
CDMA2000 Mobile Test	B.13.08, L

- Call Setup > Shift & Preset
- Cell Info > Cell Parameters > System ID (SID) > 7
 - > Network ID (NID) > 1
 - > Reg. Ch. #: 600
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > Please see following table or details
- FCH Service Option (SO) Setup > Please see following table or details
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
 - > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Rvs Power Ctrl > Active bits
 - Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC 1	RC1 SO55 (Loopback)	25	1851.25	25.2
		600	1880.00	25.2
		1175	1908.75	25.2
	RC3 SO55 (Loopback)	25	1851.25	25.2
		600	1880.00	25.2
		1175	1908.75	25.1
	RC3 SO32 (+F-SCH)	25	1851.25	25.1
		600	1880.00	25.1
		1175	1908.75	25.1

1xEV-Do Rel. 0

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	B.13.10, L

EVDO Release 0 - RTAPS

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Parm:
 - Cell Power > -93 dBm/1.23 MHz
 - System ID: 7; NID: 1, Reg. Ch. #: 600
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Parm:
 - Cell Power > -93 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	FTAP Rate	RTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)
BC1	307.2 kbps (2 slot, QPSK)	153.6 kbps	25	1851.25	25.2
			600	1880.00	25.2
			1175	1908.75	25.1

1xEV-Do Rev. A

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application Rev, License
 1xEV-DO Terminal Test B.13.10, L

EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > --93 and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -93, and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

Band	FETAP Traffic Format	RETAP Data Payload	Channel	f (MHz)	Avg Pwr (dBm)
BC1	307.2k, QPSK/ ACK channel is transmitted at all the slots	4096	25	1851.25	25.2
			600	1880.00	25.2
			1175	1908.75	25.1

9.3. CDMA BC15

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance	1xRTT (dBm)	1xEVDO Rel. 0 (dBm)	1xEVDO Rev. A (dBm)
Max	25.2	25.2	25.2
Target	24.7	24.7	24.7
Min	23.2	23.2	23.2

1xRTT

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev. License</u>
CDMA2000 Mobile Test	B.13.08, L

- Call Setup > Shift & Preset
- Cell Info > Cell Parameters > System ID (SID) > 7
 - > Network ID (NID) > 1
 - > Reg. Ch. #: 500
- Protocol Rev > 6 (IS-2000-0)
- Radio Config (RC) > Please see following table or details
- FCH Service Option (SO) Setup > Please see following table or details
- Traffic Data Rate > Full
- TDSO SCH Info > F-SCH Parameters > F-SCH Data Rate > 153.6 kbps
 - > R-SCH Parameters > R-SCH Data Rate > 153.6 kbps
- Rvs Power Ctrl > Active bits
 - Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC 15	RC1 SO55 (Loopback)	25	1711.25	25.2
		450	1732.50	25.2
		875	1753.75	25.2
	RC3 SO55 (Loopback)	25	1711.25	25.2
		450	1732.50	25.2
		875	1753.75	25.1
	RC3 SO32 (+F-SCH)	25	1711.25	25.1
		450	1732.50	25.1
		875	1753.75	25.1

1xEV-Do Rel. 0

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	B.13.10, L

EVDO Release 0 - RTAPS

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Parm:
 - Cell Power > -93 dBm/1.23 MHz
 - System ID: 7; NID: 1, Reg. Ch. #: 500
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > RTAP
 - RTAP Rate > 153.6 kbps
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
 - Access Network Info > Cell Parameters > Sector ID > 00000000 : 00000000 : 00000000 : 00000000 >
 - Subnet Mask > 0
 - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Parm:
 - Cell Power > -93 dBm/1.23 MHz
 - Cell Band > (Select US Cellular or US PCS)
 - Channel > (Enter channel number)
 - Application Config > Enhanced Test Application Protocol > FTAP (default)
 - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
 - Rvs Power Ctrl > Active bits
 - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

RESULTS

Band	FTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)
BC15	307.2 kbps (2 slot, QPSK)	25	1711.25	25.1
		450	1732.50	25.2
		875	1753.75	25.2

1xEV-DO Rev. A

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

Application Rev, License
 1xEV-DO Terminal Test B.13.10, L

EVDO Rev. A – RETAP

- Call Setup > Shift & Preset
- Cell Power > --93 and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

EVDO Rev. A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -93, and -96 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Generator Info > Termination Parameters > Max Forward Packet Duration >16 Slots
- Rvs Power Ctrl > All Up bits (to get the maximum power)

RESULTS

Band	FETAP Traffic Format	Channel	f (MHz)	Avg Pwr (dBm)
BC15	307.2k, QPSK/ ACK channel is transmitted at all the slots	25	1711.25	25.1
		450	1732.50	25.2
		875	1753.75	25.2

9.4. LTE Band 2

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance	QPSK (dBm)	16QAM (dBm)
Max	23.7	22.7
Target	23.2	22.2
Min	21.7	20.7

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Results

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
10	18650	1855.0	QPSK	1	0	0	23.5
				1	24	0	23.6
				1	49	0	23.6
				25	0	1	22.2
				25	12	1	22.3
				25	24	1	22.3
			16QAM	50	0	1	22.2
				1	0	1	22.4
				1	24	1	22.5
				1	49	1	22.5
				25	0	2	21.3
				25	12	2	21.3
	18900	1880.0	QPSK	25	24	2	21.3
				25	24	2	21.3
				50	0	2	21.2
				1	0	0	23.6
				1	24	0	23.7
				1	49	0	23.7
			16QAM	25	0	1	22.3
				25	12	1	22.2
				25	24	1	22.2
				50	0	1	22.2
				1	0	1	22.3
				1	24	1	22.5
	19150	1905.0	QPSK	1	49	1	22.5
				25	0	2	21.3
				25	12	2	21.3
				25	24	2	21.3
				50	0	2	21.2
				1	0	0	23.7
16QAM			1	24	0	23.7	
			1	49	0	23.6	
			25	0	1	22.5	
			25	12	1	22.4	
			25	24	1	22.2	
			50	0	1	22.2	
1	0	1	22.0				
1	24	1	22.1				
1	49	1	22.0				
25	0	2	21.6				
25	12	2	21.5				
25	24	2	21.4				
50	0	2	21.2				

LTE Band 2 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
5	18625	1855.0	QPSK	1	0	0	23.2
				1	12	0	23.5
				1	24	0	23.4
				12	0	1	22.5
				12	6	1	22.4
				12	11	1	22.5
			16QAM	25	0	1	22.4
				1	0	1	22.4
				1	12	1	22.6
				1	24	1	22.6
				12	0	2	21.3
				12	6	2	21.2
	18900	1880.0	QPSK	12	11	2	21.3
				25	0	2	21.2
				1	0	0	23.6
				1	12	0	23.6
				1	24	0	23.6
				12	0	1	22.6
			16QAM	12	6	1	22.5
				12	11	1	22.5
				25	0	1	22.5
				1	0	1	22.4
				1	12	1	22.4
				1	24	1	22.4
	19175	1907.5	QPSK	12	0	2	21.3
				12	6	2	21.3
				12	11	2	21.3
				25	0	2	21.3
				1	0	0	23.5
				1	12	0	23.7
16QAM			1	24	0	23.6	
			12	0	1	22.5	
			12	6	1	22.5	
			12	11	1	22.6	
			25	0	1	22.5	
			1	0	1	22.5	
1	12	1	22.7				
1	24	1	22.6				
12	0	2	21.4				
12	6	2	21.4				
12	11	2	21.6				
25	0	2	21.2				

LTE Band 2 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
3	18615	1851.5	QPSK	1	0	0	23.4
				1	12	0	23.7
				1	24	0	23.7
				12	0	1	22.5
				12	6	1	22.6
				12	11	1	22.6
			16QAM	25	0	1	22.6
				1	0	1	22.1
				1	12	1	22.4
				1	24	1	22.4
				12	0	2	21.4
				12	6	2	21.4
	18900	1880.0	QPSK	12	11	2	21.4
				25	0	2	21.3
				1	0	0	23.6
				1	12	0	23.6
				1	24	0	23.6
				12	0	1	22.6
			16QAM	12	6	1	22.6
				12	11	1	22.6
				25	0	1	22.6
				1	0	1	22.6
				1	12	1	22.6
				1	24	1	22.7
	19185	1908.5	QPSK	12	0	2	21.4
				12	6	2	21.4
				12	11	2	21.4
				25	0	2	21.3
				1	0	0	23.6
				1	12	0	23.7
16QAM			1	24	0	23.5	
			12	0	1	22.5	
			12	6	1	22.6	
			12	11	1	22.5	
			25	0	1	22.6	
			1	0	1	22.3	
16QAM	1	12	1	22.4			
	1	24	1	22.2			
	12	0	2	21.4			
	12	6	2	21.4			
	12	11	2	21.4			
	25	0	2	21.4			

LTE Band 2 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
1.4	18607	1850.7	QPSK	1	0	0	23.4
				1	12	0	23.4
				1	24	0	23.6
				12	0	0	23.5
				12	6	0	23.5
				12	11	0	23.6
			16QAM	25	0	1	22.5
				1	0	1	22.2
				1	12	1	22.2
				1	24	1	22.4
				12	0	1	22.4
				12	6	1	22.4
	18900	1880.0	QPSK	12	11	1	22.5
				25	0	2	21.2
				1	0	0	23.7
				1	12	0	23.7
				1	24	0	23.7
				12	0	0	23.7
			16QAM	12	6	0	23.7
				12	11	0	23.7
				25	0	1	22.6
				1	0	1	21.9
				1	12	1	21.9
				1	24	1	21.9
	19193	1909.3	QPSK	12	0	1	22.4
				12	6	1	22.4
				12	11	1	22.4
				25	0	2	21.4
				1	0	0	23.6
				1	12	0	23.5
16QAM			1	24	0	23.5	
			12	0	0	23.6	
			12	6	0	23.5	
			12	11	0	23.5	
			25	0	1	22.4	
			1	0	1	22.4	
16QAM	1	12	1	22.3			
	1	24	1	22.2			
	12	0	1	22.3			
	12	6	1	22.3			
	12	11	1	22.3			
	25	0	2	21.2			

9.5. LTE Band 4

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance	QPSK (dBm)	16QAM (dBm)
Max	23.7	22.7
Target	23.2	22.2
Min	21.7	20.7

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-
Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.					

Results

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
10	20000	1715.0	QPSK	1	0	0	23.7
				1	24	0	23.6
				1	49	0	23.6
				25	0	1	22.3
				25	12	1	22.2
				25	24	1	22.1
			16QAM	50	0	1	22.1
				1	0	1	22.4
				1	24	1	22.4
				1	49	1	22.4
				25	0	2	21.3
				25	12	2	21.2
	20175	1732.5	QPSK	25	24	2	21.2
				50	0	2	21.1
				1	0	0	23.7
				1	24	0	23.6
				1	49	0	23.7
				25	0	1	22.2
			16QAM	25	12	1	22.2
				25	24	1	22.2
				50	0	1	22.1
				1	0	1	22.0
				1	24	1	22.0
				1	49	1	22.0
	20350	1750.0	QPSK	25	0	2	21.2
				25	12	2	21.3
				25	24	2	21.2
				50	0	2	21.1
				1	0	0	23.6
				1	24	0	23.5
16QAM			1	49	0	23.6	
			25	0	1	22.2	
			25	12	1	22.2	
			25	24	1	22.1	
			50	0	1	22.1	
			1	0	1	22.4	
16QAM	1	24	1	22.4			
	1	49	1	22.4			
	25	0	2	21.2			
	25	12	2	21.2			
	25	24	2	21.1			
	50	0	2	21.0			

LTE Band 4 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
5	19975	1712.5	QPSK	1	0	0	23.4
				1	12	0	23.6
				1	24	0	23.6
				12	0	1	22.5
				12	6	1	22.6
				12	11	1	22.6
			16QAM	25	0	1	22.5
				1	0	1	22.5
				1	12	1	22.6
				1	24	1	22.6
				12	0	2	21.0
				12	6	2	21.1
	20175	1732.5	QPSK	12	11	2	21.1
				25	0	2	21.0
				1	0	0	23.7
				1	12	0	23.6
				1	24	0	23.7
				12	0	1	22.6
			16QAM	12	6	1	22.5
				12	11	1	22.5
				25	0	1	22.5
				1	0	1	22.3
				1	12	1	22.3
				1	24	1	22.3
	20375	1752.5	QPSK	12	0	2	21.2
				12	6	2	21.1
				12	11	2	21.1
				25	0	2	21.0
				1	0	0	23.5
				1	12	0	23.7
16QAM			1	24	0	23.6	
			12	0	1	22.6	
			12	6	1	22.6	
			12	11	1	22.5	
			25	0	1	22.5	
			1	0	1	22.5	
16QAM	1	12	1	22.6			
	1	24	1	22.5			
	12	0	2	21.0			
	12	6	2	21.2			
	12	11	2	21.1			
	25	0	2	21.0			

LTE Band 4 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
3	19965	1711.5	QPSK	1	0	0	23.5
				1	7	0	23.6
				1	14	0	23.7
				8	0	1	22.5
				8	4	1	22.5
				8	7	1	22.6
			16QAM	15	0	1	22.5
				1	0	1	22.1
				1	7	1	22.2
				1	14	1	22.3
				8	0	2	21.0
				8	4	2	21.0
				8	7	2	21.1
				15	0	2	21.0
				20175	1732.5	QPSK	1
	1	7	0				23.7
	1	14	0				23.7
	8	0	1				22.6
	8	4	1				22.5
	8	7	1				22.6
	16QAM	15	0			1	22.5
		1	0			1	22.4
		1	7			1	22.3
		1	14			1	22.3
		8	0			2	21.1
		8	4			2	21.0
		8	7			2	21.1
		15	0			2	21.0
		20385	1753.5			QPSK	1
	1			7	0		23.5
1	14			0	23.6		
8	0			1	22.6		
8	4			1	22.5		
8	7			1	22.5		
16QAM	15			0	1	22.5	
	1			0	1	22.4	
	1			7	1	22.2	
	1			14	1	22.3	
	8			0	2	21.1	
	8			4	2	21.0	
	8			7	2	21.0	
	15			0	2	20.9	

LTE Band 4 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
1.4	19957	1710.7	QPSK	1	0	0	23.5
				1	2	0	23.5
				1	5	0	23.7
				3	0	0	23.5
				3	1	0	23.5
				3	2	0	23.6
			16QAM	6	0	1	22.7
				1	0	1	22.4
				1	2	1	22.3
				1	5	1	21.9
				3	0	1	22.2
				3	1	1	22.2
	20175	1732.5	QPSK	3	2	1	22.3
				6	0	2	21.2
				1	0	0	23.6
				1	2	0	23.6
				1	5	0	23.6
				3	0	0	23.7
			16QAM	3	1	0	23.7
				3	2	0	23.7
				6	0	1	22.7
				1	0	1	22.6
				1	2	1	22.4
				1	5	1	22.5
	20393	1754.3	QPSK	3	0	1	22.5
				3	1	1	22.5
				3	2	1	22.5
				6	0	2	21.2
				1	0	0	23.5
				1	2	0	23.6
16QAM			1	5	0	23.7	
			3	0	0	23.5	
			3	1	0	23.4	
			3	2	0	23.6	
			6	0	1	22.6	
			1	0	1	21.9	
16QAM	1	2	1	22.0			
	1	5	1	21.8			
	3	0	1	22.1			
	3	1	1	22.2			
	3	2	1	22.4			
	6	0	2	21.1			

9.6. LTE Band 5

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance	QPSK (dBm)	16QAM (dBm)
Max	23.7	22.7
Target	23.2	22.2
Min	21.7	20.7

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2	41	20	>10	≤ 1
			5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Results

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
10	20450	829.0	QPSK	1	0	0	23.7
				1	24	0	23.7
				1	49	0	23.6
				25	0	1	22.3
				25	12	1	22.3
				25	24	1	22.4
			16QAM	50	0	1	22.3
				1	0	1	22.6
				1	24	1	22.6
				1	49	1	22.5
				25	0	2	21.4
				25	12	2	21.4
	20525	836.5	QPSK	25	24	2	21.4
				25	24	2	21.4
				50	0	2	21.3
				1	0	0	23.7
				1	24	0	23.7
				1	49	0	23.6
			16QAM	25	0	1	22.5
				25	12	1	22.5
				25	24	1	22.5
				50	0	1	22.4
				1	0	1	22.6
				1	24	1	22.6
	20600	844.0	QPSK	1	49	1	22.5
				25	0	2	21.5
				25	12	2	21.5
				25	24	2	21.5
				50	0	2	21.4
				1	0	0	23.7
16QAM			1	24	0	23.7	
			1	49	0	23.7	
			25	0	1	22.5	
			25	12	1	22.5	
			25	24	1	22.5	
			50	0	1	22.4	
1	0	1	22.2				
1	24	1	22.3				
1	49	1	22.3				
25	0	2	21.5				
25	12	2	21.6				
25	24	2	21.6				
50	0	2	21.7				

LTE Band 5 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
5	20425	826.5	QPSK	1	0	0	23.5
				1	12	0	23.6
				1	24	0	23.6
				12	0	1	22.7
				12	6	1	22.6
				12	11	1	22.7
			16QAM	25	0	1	22.5
				1	0	1	22.5
				1	12	1	22.5
				1	24	1	22.5
				12	0	2	21.4
				12	6	2	21.4
	20525	836.5	QPSK	12	11	2	21.4
				25	0	2	21.3
				1	0	0	23.5
				1	12	0	23.7
				1	24	0	23.6
				12	0	1	22.5
			16QAM	12	6	1	22.7
				12	11	1	22.6
				25	0	1	22.6
				1	0	1	22.1
				1	12	1	22.2
				1	24	1	22.2
	20625	846.5	QPSK	12	0	2	21.5
				12	6	2	21.6
				12	11	2	21.6
				25	0	2	21.5
				1	0	0	23.6
				1	12	0	23.7
16QAM			1	24	0	23.6	
			12	0	1	22.7	
			12	6	1	22.6	
			12	11	1	22.7	
			25	0	1	22.7	
			1	0	1	22.5	
16QAM	1	12	1	22.5			
	1	24	1	22.4			
	12	0	2	21.6			
	12	6	2	21.6			
	12	11	2	21.6			
	25	0	2	21.4			

LTE Band 5 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
3	20415	825.5	QPSK	1	0	0	23.6
				1	7	0	23.6
				1	14	0	23.5
				8	0	1	22.6
				8	4	1	22.6
				8	7	1	22.6
			16QAM	15	0	1	22.6
				1	0	1	22.1
				1	7	1	22.2
				1	14	1	22.2
				8	0	2	21.4
				8	4	2	21.5
	20525	836.5	QPSK	8	7	2	21.4
				8	4	2	21.5
				8	7	2	21.4
				15	0	2	21.3
				1	0	0	23.6
				1	7	0	23.6
			16QAM	1	14	0	23.7
				8	0	1	22.7
				8	4	1	22.7
				8	7	1	22.7
				15	0	1	22.7
				1	0	1	22.3
	20635	847.5	QPSK	1	7	1	22.3
				1	14	1	22.3
				1	14	1	22.3
				8	0	2	21.5
				8	4	2	21.5
				8	7	2	21.6
			16QAM	15	0	2	21.5
				1	0	0	23.6
				1	7	0	23.7
				1	14	0	23.5
				8	0	1	22.7
				8	4	1	22.6
20635	847.5	QPSK	8	7	1	22.6	
			15	0	1	22.7	
			1	0	1	22.3	
			1	7	1	22.2	
			1	14	1	22.1	
			8	0	2	21.5	
		16QAM	8	4	2	21.5	
			8	7	2	21.5	
			8	7	2	21.5	
			15	0	2	21.5	

LTE Band 5 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
1.4	20407	824.7	QPSK	1	0	0	23.7
				1	2	0	23.6
				1	5	0	23.6
				3	0	0	23.6
				3	1	0	23.6
				3	2	0	23.6
			16QAM	6	0	1	22.6
				1	0	1	21.8
				1	2	1	21.8
				1	5	1	21.8
				3	0	1	22.3
				3	1	1	22.3
	20525	836.5	QPSK	3	2	1	22.3
				6	0	2	21.4
				1	0	0	23.7
				1	2	0	23.7
				1	5	0	23.6
				3	0	0	23.6
			16QAM	3	1	0	23.3
				3	2	0	23.6
				6	0	1	22.6
				1	0	1	22.3
				1	2	1	22.3
				1	5	1	22.4
	20643	848.3	QPSK	3	0	1	22.3
				3	1	1	22.3
				3	2	1	22.3
				6	0	2	21.5
				1	0	0	23.6
				1	2	0	23.6
16QAM			1	5	0	23.5	
			3	0	0	23.6	
			3	1	0	23.6	
			3	2	0	23.6	
			6	0	1	22.6	
			1	0	1	22.2	
16QAM	1	2	1	22.2			
	1	5	1	22.2			
	3	0	1	22.3			
	3	1	1	22.3			
	3	2	1	22.4			
	6	0	2	21.4			

9.7. LTE Band 12

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance	QPSK (dBm)	16QAM (dBm)
Max	23.7	22.7
Target	23.2	22.2
Min	21.7	20.7

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2	41	20	>10	≤ 1
			5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Results

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
10	23060	704.0	QPSK	1	0	0	23.6
				1	24	0	23.6
				1	49	0	23.5
				25	0	1	22.0
				25	12	1	22.0
				25	24	1	22.2
			16QAM	50	0	1	22.0
				1	0	1	22.6
				1	24	1	22.4
				1	49	1	22.3
				25	0	2	21.1
				25	12	2	21.0
	23095	707.5	QPSK	25	24	2	21.2
				50	0	2	21.0
				1	0	0	23.6
				1	24	0	23.7
				1	49	0	23.6
				25	0	1	22.2
			16QAM	25	12	1	22.2
				25	24	1	22.3
				50	0	1	22.2
				1	0	1	22.3
				1	24	1	22.6
				1	49	1	22.5
	23130	711.0	QPSK	25	0	2	21.2
				25	12	2	21.2
				25	24	2	21.4
				50	0	2	21.1
				1	0	0	23.7
				1	24	0	23.7
16QAM			1	49	0	23.7	
			25	0	1	22.3	
			25	12	1	22.3	
			25	24	1	22.3	
			50	0	1	22.3	
			1	0	1	22.5	
16QAM	1	24	1	22.5			
	1	49	1	22.5			
	25	0	2	21.3			
	25	12	2	21.2			
	25	24	2	21.2			
	50	0	2	21.2			

LTE Band 12 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
5	23035	701.5	QPSK	1	0	0	23.5
				1	12	0	23.5
				1	24	0	23.5
				12	0	1	22.3
				12	6	1	22.4
				12	11	1	22.4
			16QAM	25	0	1	22.3
				1	0	1	22.6
				1	12	1	22.7
				1	24	1	22.7
				12	0	2	21.5
				12	6	2	21.4
	23095	707.5	QPSK	12	11	2	21.4
				25	0	2	21.2
				1	0	0	23.4
				1	12	0	23.5
				1	24	0	23.5
				12	0	1	22.4
			16QAM	12	6	1	22.5
				12	11	1	22.4
				25	0	1	22.5
				1	0	1	22.2
				1	12	1	22.3
				1	24	1	22.3
	23155	713.5	QPSK	12	0	2	21.5
				12	6	2	21.5
				12	11	2	21.5
				25	0	2	21.5
				1	0	0	23.7
				1	12	0	23.6
16QAM			1	24	0	23.6	
			12	0	1	22.4	
			12	6	1	22.5	
			12	11	1	22.5	
			25	0	1	22.3	
			1	0	1	22.7	
1	12	1	22.6				
1	24	1	22.7				
12	0	2	21.4				
12	6	2	21.5				
12	11	2	21.6				
25	0	2	21.3				

LTE Band 12 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
3	23025	700.5	QPSK	1	0	0	23.5
				1	7	0	23.4
				1	14	0	23.5
				8	0	1	22.4
				8	4	1	22.3
				8	7	1	22.4
			16QAM	15	0	1	22.3
				1	0	1	22.3
				1	7	1	22.2
				1	14	1	22.3
				8	0	2	21.5
				8	4	2	21.4
	23095	707.5	QPSK	8	7	2	21.5
				15	0	2	21.4
				1	0	0	23.7
				1	7	0	23.6
				1	14	0	23.5
				8	0	1	22.5
			16QAM	8	4	1	22.5
				8	7	1	22.4
				15	0	1	22.5
				1	0	1	22.4
				1	7	1	22.4
				1	14	1	22.3
	23165	714.5	QPSK	8	0	2	21.5
				8	4	2	21.5
				8	7	2	21.4
				15	0	2	21.4
				1	0	0	23.5
				1	7	0	23.7
16QAM			1	14	0	23.6	
			8	0	1	22.5	
			8	4	1	22.4	
			8	7	1	22.4	
			15	0	1	22.5	
			1	0	1	22.3	
1	7	1	22.5				
1	14	1	22.4				
8	0	2	21.5				
8	4	2	21.5				
8	7	2	21.4				
15	0	2	21.4				

LTE Band 12 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
1.4	23017	699.7	QPSK	1	0	0	23.6
				1	2	0	23.6
				1	5	0	23.5
				3	0	0	23.6
				3	1	0	23.6
				3	2	0	23.5
			16QAM	6	0	1	22.4
				1	0	1	21.9
				1	2	1	21.9
				1	5	1	21.8
				3	0	1	22.5
				3	1	1	22.5
	23095	707.5	QPSK	3	2	1	22.3
				6	0	2	21.4
				1	0	0	23.7
				1	2	0	23.6
				1	5	0	23.6
				3	0	0	23.6
			16QAM	3	1	0	23.6
				3	2	0	23.6
				6	0	1	22.6
				1	0	1	22.4
				1	2	1	22.4
				1	5	1	22.4
	23173	715.3	QPSK	3	0	1	22.2
				3	1	1	22.4
				3	2	1	22.4
				6	0	2	21.4
				1	0	0	23.5
				1	2	0	23.5
16QAM			1	5	0	23.6	
			3	0	0	23.6	
			3	1	0	23.6	
			3	2	0	23.7	
			6	0	1	22.5	
			1	0	1	22.5	
16QAM	1	2	1	22.4			
	1	5	1	22.5			
	3	0	1	22.5			
	3	1	1	22.6			
	3	2	1	22.6			
	6	0	2	21.5			

9.8. LTE Band 25

	Min	Max
Tune-up Tolerance (dB):	-1.5	0.5

Output Power Tolerance	QPSK (dBm)	16QAM (dBm)
Max	23.7	22.7
Target	23.2	22.2
Min	21.7	20.7

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-
Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.					

Results

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
10	26090	1855.0	QPSK	1	0	0	23.6
				1	24	0	23.7
				1	49	0	23.7
				25	0	1	22.5
				25	12	1	22.3
				25	24	1	22.3
			16QAM	50	0	1	22.3
				1	0	1	22.4
				1	24	1	22.5
				1	49	1	22.5
				25	0	2	21.4
				25	12	2	21.3
	26365	1882.5	QPSK	25	24	2	21.3
				50	0	2	21.3
				1	0	0	23.6
				1	24	0	23.7
				1	49	0	23.6
				25	0	1	22.4
			16QAM	25	12	1	22.3
				25	24	1	22.4
				50	0	1	22.3
				1	0	1	22.4
				1	24	1	22.5
				1	49	1	22.5
	26640	1910.0	QPSK	25	0	2	21.3
				25	12	2	21.3
				25	24	2	21.4
				50	0	2	21.3
				1	0	0	23.7
				1	24	0	23.7
16QAM			1	49	0	23.7	
			25	0	1	22.4	
			25	12	1	22.4	
			25	24	1	22.4	
			50	0	1	22.5	
			1	0	1	22.4	
16QAM	1	24	1	22.5			
	1	49	1	22.5			
	25	0	2	21.5			
	25	12	2	21.5			
	25	24	2	21.5			
	50	0	2	21.5			

LTE Band 25 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
5	26065	1852.5	QPSK	1	0	0	23.5
				1	12	0	23.7
				1	24	0	23.7
				12	0	1	22.6
				12	6	1	22.7
				12	11	1	22.7
			16QAM	25	0	1	22.6
				1	0	1	22.6
				1	12	1	22.5
				1	24	1	22.6
				12	0	2	21.4
				12	6	2	21.4
	26365	1882.5	QPSK	12	11	2	21.5
				25	0	2	21.3
				1	0	0	23.7
				1	12	0	23.6
				1	24	0	23.6
				12	0	1	22.6
			16QAM	12	6	1	22.6
				12	11	1	22.6
				25	0	1	22.5
				1	0	1	22.6
				1	12	1	22.6
				1	24	1	22.5
	26665	1912.5	QPSK	12	0	2	21.4
				12	6	2	21.5
				12	11	2	21.5
				25	0	2	21.3
				1	0	0	23.7
				1	12	0	23.5
16QAM			1	24	0	23.5	
			12	0	1	22.6	
			12	6	1	22.5	
			12	11	1	22.5	
			25	0	1	22.5	
			1	0	1	22.3	
1	12	1	22.7				
1	24	1	22.6				
12	0	2	21.4				
12	6	2	21.3				
12	11	2	21.3				
25	0	2	21.3				

LTE Band 25 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
3	26055	1851.5	QPSK	1	0	0	23.5
				1	7	0	23.6
				1	14	0	23.7
				8	0	1	22.6
				8	4	1	22.6
				8	7	1	22.7
			16QAM	15	0	1	22.6
				1	0	1	22.3
				1	7	1	22.3
				1	14	1	22.5
				8	0	2	21.3
				8	4	2	21.4
				8	7	2	21.5
				15	0	2	21.4
				26365	1882.5	QPSK	1
	1	7	0				23.7
	1	14	0				23.7
	8	0	1				22.5
	8	4	1				22.7
	8	7	1				22.6
	16QAM	15	0			1	22.6
		1	0			1	22.4
		1	7			1	22.4
		1	14			1	22.4
		8	0			2	21.3
		8	4			2	21.3
		8	7			2	21.3
		15	0			2	21.3
		26675	1913.5			QPSK	1
	1			7	0		23.4
1	14			0	23.5		
8	0			1	22.4		
8	4			1	22.5		
8	7			1	22.4		
16QAM	15			0	1	22.5	
	1			0	1	22.2	
	1			7	1	22.2	
	1			14	1	22.1	
	8			0	2	21.3	
	8			4	2	21.3	
	8			7	2	21.2	
	15			0	2	21.2	

LTE Band 25 Results (continued)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	MPR	Avg Pwr (dBm)
1.4	26047	1850.7	QPSK	1	0	0	23.6
				1	2	0	23.6
				1	5	0	23.6
				3	0	0	23.5
				3	1	0	23.6
				3	2	0	23.6
			16QAM	6	0	1	22.5
				1	0	1	22.3
				1	2	1	22.2
				1	5	1	22.4
				3	0	1	22.4
				3	1	1	22.4
	26365	1882.5	QPSK	3	2	1	22.5
				6	0	2	21.2
				1	0	0	23.6
				1	2	0	23.6
				1	5	0	23.6
				3	0	0	23.7
			16QAM	3	1	0	23.6
				3	2	0	23.6
				6	0	1	22.5
				1	0	1	22.4
				1	2	1	22.3
				1	5	1	22.4
	26683	1914.3	QPSK	3	0	1	22.5
				3	1	1	22.5
				3	2	1	22.5
				6	0	2	21.2
				1	0	0	23.6
				1	2	0	23.6
16QAM			1	5	0	23.6	
			3	0	0	23.6	
			3	1	0	23.5	
			3	2	0	23.5	
			6	0	1	22.5	
			1	0	1	22.0	
16QAM	1	2	1	22.0			
	1	5	1	22.0			
	3	0	1	22.4			
	3	1	1	22.4			
	3	2	1	22.4			
	6	0	2	21.3			

9.9. Power Reduction for SV-LTE Mode

Mode	CDMA Current Voice Power for BC0, BC1 & BC15	LTE Max. Power
SV-LTE	P ≤ 18.5 dBm	23.2dBm
	P > 18.5 dBm	19.2dBm

- LTE power reduction is determined by CDMA current voice power.
 The CDMA current voice power criterion has been mentioned on the table above.
 This power reduction algorithm for SVLTE is totally based on Qualcomm’s chipset solution.
 Normally, manufacturer determines the CDMA current voice power criterion and the reduction value.

* Reference

For US780, CDMA current voice power criterion: 18.5dBm for SVLTE mode

Reduction value for SVLTE mode: 4dB

- CDMA BC0= Cellular CDMA, CDMA BC1= PCS CDMA, CDMA BC15= AWS
- CDMA Nominal power
 CDMA BC0 power: 25.7dBm, CDMA BC1 power: 24.7dBm, CDMA BC15 power: 24.7dBm
- LTE Nominal power
 LTE Band data power: 23.2 dBm
 Power tune-up tolerance: +0.5dB/-1.5dB

SV-LTE: (CDMA BC0 + LTE Band 2)

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P > 18.5 dBm		LTE Band 2 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	26.1	18650	1 0	19.5
			1 24	19.5
			1 49	19.5
			25 0	19.7
			25 12	19.5
			25 24	19.5
			50 0	19.5
384	26.2	18900	1 0	19.5
			1 24	19.6
			1 49	19.5
			25 0	19.6
			25 12	19.6
			25 24	19.5
			50 0	19.5
777	26.2	19150	1 0	19.5
			1 24	19.4
			1 49	19.4
			25 0	19.4
			25 12	19.4
			25 24	19.5
			50 0	19.4

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P ≤ 18.5 dBm		LTE Band 2 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	18.4	18650	1 0	23.5
			1 24	23.6
			1 49	23.6
			25 0	22.2
			25 12	22.3
			25 24	22.3
			50 0	22.2
384	18.4	18900	1 0	23.6
			1 24	23.7
			1 49	23.7
			25 0	22.3
			25 12	22.2
			25 24	22.2
			50 0	22.2
777	18.4	19150	1 0	23.7
			1 24	23.7
			1 49	23.6
			25 0	22.5
			25 12	22.4
			25 24	22.2
			50 0	22.2

SV-LTE: (CDMA BC0 + LTE Band 4)

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P > 18.5 dBm		LTE Band 4 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	26.1	20000	1 0	19.7
			1 24	19.6
			1 49	19.6
			25 0	19.7
			25 12	19.7
			25 24	19.6
			50 0	19.6
384	26.2	20175	1 0	19.6
			1 24	19.5
			1 49	19.4
			25 0	19.7
			25 12	19.6
			25 24	19.6
			50 0	19.7
777	26.2	20350	1 0	19.6
			1 24	19.5
			1 49	19.7
			25 0	19.5
			25 12	19.5
			25 24	19.6
			50 0	19.6

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P ≤ 18.5 dBm		LTE Band 4 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	18.4	20000	1 0	23.7
			1 24	23.6
			1 49	23.6
			25 0	22.3
			25 12	22.2
			25 24	22.1
			50 0	22.1
384	18.4	20175	1 0	23.7
			1 24	23.6
			1 49	23.7
			25 0	22.2
			25 12	22.2
			25 24	22.2
			50 0	22.1
777	18.4	20350	1 0	23.6
			1 24	23.5
			1 49	23.6
			25 0	22.2
			25 12	22.2
			25 24	22.1
			50 0	22.1

SV-LTE: (CDMA BC0 + LTE Band 5)

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P > 18.5 dBm		LTE Band 5 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	26.1	20450	1 0	19.7
			1 24	19.6
			1 49	19.6
			25 0	19.6
			25 12	19.6
			25 24	19.5
			50 0	19.5
384	26.2	20525	1 0	19.6
			1 24	19.5
			1 49	19.5
			25 0	19.4
			25 12	19.5
			25 24	19.6
			50 0	19.4
777	26.2	20600	1 0	19.7
			1 24	19.4
			1 49	19.5
			25 0	19.6
			25 12	19.6
			25 24	19.5
			50 0	19.4

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P ≤ 18.5 dBm		LTE Band 5 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	18.1	20450	1 0	23.7
			1 24	23.7
			1 49	23.6
			25 0	22.3
			25 12	22.3
			25 24	22.4
			50 0	22.3
384	18.1	20525	1 0	23.7
			1 24	23.7
			1 49	23.6
			25 0	22.5
			25 12	22.5
			25 24	22.5
			50 0	22.4
777	18	20600	1 0	23.7
			1 24	23.7
			1 49	23.7
			25 0	22.5
			25 12	22.5
			25 24	22.5
			50 0	22.4

SV-LTE: (CDMA BC0 + LTE Band 12)

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P > 18.5 dBm		LTE Band 12 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	26.1	23060	1 0	19.5
			1 24	19.6
			1 49	19.7
			25 0	19.4
			25 12	19.4
			25 24	19.6
			50 0	19.4
384	26.2	23095	1 0	19.4
			1 24	19.7
			1 49	19.7
			25 0	19.6
			25 12	19.6
			25 24	19.7
			50 0	19.6
777	26.2	23130	1 0	19.5
			1 24	19.7
			1 49	19.4
			25 0	19.7
			25 12	19.7
			25 24	19.7
			50 0	19.6

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P ≤ 18.5 dBm		LTE Band 12 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	18.4	23060	1 0	23.6
			1 24	23.6
			1 49	23.5
			25 0	22.0
			25 12	22.0
			25 24	22.2
			50 0	22.0
384	18.4	23095	1 0	23.6
			1 24	23.7
			1 49	23.6
			25 0	22.2
			25 12	22.2
			25 24	22.3
			50 0	22.2
777	18.4	23130	1 0	23.7
			1 24	23.7
			1 49	23.7
			25 0	22.3
			25 12	22.3
			25 24	22.3
			50 0	22.3

SV-LTE: (CDMA BC0 + LTE Band 25)

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P > 18.5 dBm		LTE Band 25 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	26.1	26090	1 0	19.5
			1 24	19.7
			1 49	19.6
			25 0	19.5
			25 12	19.5
			25 24	19.5
			50 0	19.5
384	26.2	26365	1 0	19.7
			1 24	19.7
			1 49	19.6
			25 0	19.7
			25 12	19.6
			25 24	19.5
			50 0	19.5
777	26.2	26640	1 0	19.7
			1 24	19.6
			1 49	19.5
			25 0	19.7
			25 12	19.5
			25 24	19.4
			50 0	19.5

CMU200		R&S CMW 500		
CDMA BC0 (1xRTT) P ≤ 18.5 dBm		LTE Band 25 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
1013	18.1	26090	1 0	23.6
			1 24	23.7
			1 49	23.7
			25 0	22.5
			25 12	22.3
			25 24	22.3
			50 0	22.3
384	18.1	26365	1 0	23.6
			1 24	23.7
			1 49	23.6
			25 0	22.4
			25 12	22.3
			25 24	22.4
			50 0	22.3
777	18.1	26640	1 0	23.7
			1 24	23.7
			1 49	23.7
			25 0	22.4
			25 12	22.4
			25 24	22.4
			50 0	22.5

SV-LTE: (CDMA BC1 + LTE Band 2)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 2 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	18650	1 0	19.5
			1 24	19.5
			1 49	19.6
			25 0	19.7
			25 12	19.7
			25 24	19.6
			50 0	19.6
600	25.2	18900	1 0	19.7
			1 24	19.5
			1 49	19.7
			25 0	19.4
			25 12	19.7
			25 24	19.4
			50 0	19.7
1175	25.1	19150	1 0	19.5
			1 24	19.5
			1 49	19.5
			25 0	19.6
			25 12	19.6
			25 24	19.7
			50 0	19.6

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 2 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.1	18650	1 0	23.5
			1 24	23.6
			1 49	23.6
			25 0	22.2
			25 12	22.3
			25 24	22.3
			50 0	22.2
600	18.0	18900	1 0	23.6
			1 24	23.7
			1 49	23.7
			25 0	22.3
			25 12	22.2
			25 24	22.2
			50 0	22.2
1175	18.1	19150	1 0	23.7
			1 24	23.7
			1 49	23.6
			25 0	22.5
			25 12	22.4
			25 24	22.2
			50 0	22.2

SV-LTE: (CDMA BC1 + LTE Band 4)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 4 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	20000	1 0	19.7
			1 24	19.7
			1 49	19.6
			25 0	19.7
			25 12	19.5
			25 24	19.6
			50 0	19.6
600	25.2	20175	1 0	19.5
			1 24	19.6
			1 49	19.6
			25 0	19.5
			25 12	19.7
			25 24	19.5
			50 0	19.6
1175	25.1	20350	1 0	19.7
			1 24	19.7
			1 49	19.6
			25 0	19.6
			25 12	19.7
			25 24	19.7
			50 0	19.5

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 4 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.1	20000	1 0	23.7
			1 24	23.6
			1 49	23.6
			25 0	22.3
			25 12	22.2
			25 24	22.1
			50 0	22.1
600	18.1	20175	1 0	23.7
			1 24	23.6
			1 49	23.7
			25 0	22.2
			25 12	22.2
			25 24	22.2
			50 0	22.1
1175	18.1	20350	1 0	23.6
			1 24	23.5
			1 49	23.6
			25 0	22.2
			25 12	22.2
			25 24	22.1
			50 0	22.1

SV-LTE: (CDMA BC1 + LTE Band 5)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 5 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	20450	1 0	19.7
			1 24	19.7
			1 49	19.6
			25 0	19.7
			25 12	19.6
			25 24	19.6
			50 0	19.6
600	25.2	20525	1 0	19.7
			1 24	19.7
			1 49	19.7
			25 0	19.5
			25 12	19.6
			25 24	19.6
			50 0	19.6
1175	25.1	20600	1 0	19.7
			1 24	19.4
			1 49	19.6
			25 0	19.6
			25 12	19.6
			25 24	19.6
			50 0	19.4

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 5 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.1	20450	1 0	23.7
			1 24	23.7
			1 49	23.6
			25 0	22.3
			25 12	22.3
			25 24	22.4
			50 0	22.3
600	18.1	20525	1 0	23.7
			1 24	23.7
			1 49	23.6
			25 0	22.5
			25 12	22.5
			25 24	22.5
			50 0	22.4
1175	18	20600	1 0	23.7
			1 24	23.7
			1 49	23.7
			25 0	22.5
			25 12	22.5
			25 24	22.5
			50 0	22.4

SV-LTE: (CDMA BC1 + LTE Band 12)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 12 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	23060	1 0	19.4
			1 24	19.6
			1 49	19.7
			25 0	19.4
			25 12	19.4
			25 24	19.6
			50 0	19.5
600	25.2	23095	1 0	19.4
			1 24	19.7
			1 49	19.7
			25 0	19.6
			25 12	19.6
			25 24	19.6
			50 0	19.5
1175	25.1	23130	1 0	19.6
			1 24	19.7
			1 49	19.6
			25 0	19.6
			25 12	19.7
			25 24	19.6
			50 0	19.6

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 12 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.4	23060	1 0	23.6
			1 24	23.6
			1 49	23.5
			25 0	22.0
			25 12	22.0
			25 24	22.2
			50 0	22.0
600	18.4	23095	1 0	23.6
			1 24	23.7
			1 49	23.6
			25 0	22.2
			25 12	22.2
			25 24	22.3
			50 0	22.2
1175	18.4	23130	1 0	23.7
			1 24	23.7
			1 49	23.7
			25 0	22.3
			25 12	22.3
			25 24	22.3
			50 0	22.3

SV-LTE: (CDMA BC1 + LTE Band 25)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 25 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	26090	1 0	19.5
			1 24	19.7
			1 49	19.7
			25 0	19.6
			25 12	19.6
			25 24	19.6
			50 0	19.6
600	25.2	26365	1 0	19.7
			1 24	19.6
			1 49	19.7
			25 0	19.7
			25 12	19.7
			25 24	19.7
			50 0	19.6
1175	25.1	26640	1 0	19.6
			1 24	19.4
			1 49	19.6
			25 0	19.5
			25 12	19.4
			25 24	19.4
			50 0	19.4

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 25 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.1	26090	1 0	23.6
			1 24	23.7
			1 49	23.7
			25 0	22.5
			25 12	22.3
			25 24	22.3
			50 0	22.3
600	18.2	26365	1 0	23.6
			1 24	23.7
			1 49	23.6
			25 0	22.4
			25 12	22.3
			25 24	22.4
			50 0	22.3
1175	18.2	26640	1 0	23.7
			1 24	23.7
			1 49	23.7
			25 0	22.4
			25 12	22.4
			25 24	22.4
			50 0	22.5

SV-LTE: (CDMA BC15 + LTE Band 2)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 2 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	18650	1 0	19.6
			1 24	19.5
			1 49	19.5
			25 0	19.7
			25 12	19.6
			25 24	19.5
			50 0	19.5
450	25.2	18900	1 0	19.5
			1 24	19.6
			1 49	19.7
			25 0	19.6
			25 12	19.6
			25 24	19.5
			50 0	19.5
875	25.1	19150	1 0	19.4
			1 24	19.4
			1 49	19.5
			25 0	19.5
			25 12	19.4
			25 24	19.6
			50 0	19.5

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 2 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.2	18650	1 0	23.5
			1 24	23.6
			1 49	23.6
			25 0	22.2
			25 12	22.3
			25 24	22.3
			50 0	22.2
450	18.2	18900	1 0	23.6
			1 24	23.7
			1 49	23.7
			25 0	22.3
			25 12	22.2
			25 24	22.2
			50 0	22.2
875	18.2	19150	1 0	23.7
			1 24	23.7
			1 49	23.6
			25 0	22.5
			25 12	22.4
			25 24	22.2
			50 0	22.2

SV-LTE: (CDMA BC15 + LTE Band 4)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 4 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	20000	1 0	19.6
			1 24	19.6
			1 49	19.4
			25 0	19.7
			25 12	19.7
			25 24	19.6
			50 0	19.6
450	25.2	20175	1 0	19.7
			1 24	19.5
			1 49	19.5
			25 0	19.7
			25 12	19.7
			25 24	19.7
			50 0	19.6
875	25.1	20350	1 0	19.6
			1 24	19.6
			1 49	19.5
			25 0	19.6
			25 12	19.6
			25 24	19.6
			50 0	19.7

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 4 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.2	20000	1 0	23.7
			1 24	23.6
			1 49	23.6
			25 0	22.3
			25 12	22.2
			25 24	22.1
			50 0	22.1
450	18.2	20175	1 0	23.7
			1 24	23.6
			1 49	23.7
			25 0	22.2
			25 12	22.2
			25 24	22.2
			50 0	22.1
875	18.2	20350	1 0	23.6
			1 24	23.5
			1 49	23.6
			25 0	22.2
			25 12	22.2
			25 24	22.1
			50 0	22.1

SV-LTE: (CDMA BC15 + LTE Band 5)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 5 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	20450	1 0	19.6
			1 24	19.7
			1 49	19.7
			25 0	19.6
			25 12	19.6
			25 24	19.5
			50 0	19.5
450	25.2	20525	1 0	19.6
			1 24	19.6
			1 49	19.6
			25 0	19.4
			25 12	19.5
			25 24	19.6
			50 0	19.7
875	25.1	20600	1 0	19.6
			1 24	19.4
			1 49	19.7
			25 0	19.5
			25 12	19.4
			25 24	19.5
			50 0	19.4

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 5 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.1	20450	1 0	23.7
			1 24	23.7
			1 49	23.6
			25 0	22.3
			25 12	22.3
			25 24	22.4
			50 0	22.3
450	18.1	20525	1 0	23.7
			1 24	23.7
			1 49	23.6
			25 0	22.5
			25 12	22.5
			25 24	22.5
			50 0	22.4
875	18.1	20600	1 0	23.7
			1 24	23.7
			1 49	23.7
			25 0	22.5
			25 12	22.5
			25 24	22.5
			50 0	22.4

SV-LTE: (CDMA BC15 + LTE Band 12)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 12 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	23060	1 0	19.3
			1 24	19.5
			1 49	19.5
			25 0	19.5
			25 12	19.4
			25 24	19.5
			50 0	19.4
450	25.2	23095	1 0	19.5
			1 24	19.7
			1 49	19.7
			25 0	19.6
			25 12	19.5
			25 24	19.7
			50 0	19.6
875	25.1	23130	1 0	19.7
			1 24	19.7
			1 49	19.6
			25 0	19.6
			25 12	19.7
			25 24	19.7
			50 0	19.7

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 12 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.4	23060	1 0	23.6
			1 24	23.6
			1 49	23.5
			25 0	22.0
			25 12	22.0
			25 24	22.2
			50 0	22.0
450	18.4	23095	1 0	23.6
			1 24	23.7
			1 49	23.6
			25 0	22.2
			25 12	22.2
			25 24	22.3
			50 0	22.2
875	18.4	23130	1 0	23.7
			1 24	23.7
			1 49	23.7
			25 0	22.3
			25 12	22.3
			25 24	22.3
			50 0	22.3

SV-LTE: (CDMA BC15 + LTE Band 25)

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P > 18.5 dBm		LTE Band 25 (QPSK) Limited = 19.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	25.2	26090	1 0	19.4
			1 24	19.5
			1 49	19.7
			25 0	19.5
			25 12	19.5
			25 24	19.5
			50 0	19.4
450	25.2	26365	1 0	19.7
			1 24	19.6
			1 49	19.6
			25 0	19.6
			25 12	19.5
			25 24	19.5
			50 0	19.5
875	25.1	26640	1 0	19.6
			1 24	19.6
			1 49	19.6
			25 0	19.6
			25 12	19.6
			25 24	19.4
			50 0	19.6

CMU200		R&S CMW 500		
CDMA BC1 (1xRTT) P ≤ 18.5 dBm		LTE Band 25 (QPSK) Limited = 23.7 dBm		
Ch. #	Avg Pwr (dBm)	Ch. #	UL RB Setting	Avg Pwr (dBm)
25	18.1	26090	1 0	23.6
			1 24	23.7
			1 49	23.7
			25 0	22.5
			25 12	22.3
			25 24	22.3
			50 0	22.3
450	18.1	26365	1 0	23.6
			1 24	23.7
			1 49	23.6
			25 0	22.4
			25 12	22.3
			25 24	22.4
			50 0	22.3
875	18.1	26640	1 0	23.7
			1 24	23.7
			1 49	23.7
			25 0	22.4
			25 12	22.4
			25 24	22.4
			50 0	22.5

9.10. WiFi (2.4 GHz Band)

	Min	Max
Tune-up Tolerance (dB):	-2	0.7

Output Power Tolerance	IEEE 802.11 (dBm)		
	b	g	n (HT20)
Max	16.7	14.7	13.7
Target	16.0	14.0	13.0
Min	14.0	12.0	11.0

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	∇
		2.437	6	√	∇
		2.462	11 [#]	√	∇

Notes:

√ = "default test channels"

∇ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Band (MHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)
2.4	802.11b	1	2412	16.2
		6	2437	16.2
		11	2462	16.1
	802.11g	1	2412	14.5
		6	2437	14.2
		11	2462	14.4
	802.11n (HT20)	1	2412	13.2
		6	2437	13.1
		11	2462	13.1

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

9.11. WiFi (5 GHz Bands)

	Min	Max
Tune-up Tolerance (dB):	-2	0.7

Output Power Tolerance	IEEE 802.11 (dBm)		
	a	n (HT20)	n (HT40)
Max	12.7	11.7	12.2
Target	12.0	11.0	11.5
Min	10.0	9.0	9.5

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11a	
802.11a	5.2 GHz	5.180	36	√	
		5.200	40		*
		2.220	44		*
		5.240	48	√	
	5.3 GHz	5.260	52	√	
		5.280	56		*
		5.300	60		*
		5.320	64	√	
	5.5 GHz	5.500	100		
		5.520	104	√	
		5.540	108		*
		5.560	112		*
		5.580	116	√	
		5.600	120		*
		5.620	124	√	
		5.640	128		*
	5.8 GHz	5.660	132		*
		5.680	136	√	
		5.700	140		*
		5.745	149	√	
DTS (15.247)	5.8 GHz	5.765	153		*
		5.785	157	√	
		5.805	161		*
		5.825	165	√	

√ = "default test channels"
 * = possible 802.11a channels with maximum average output > the "default test channels"
 # = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Band (MHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)
5.2	802.11a	36	5180	12.1
		40	5200	12.1
		44	5220	11.9
		48	5240	12.3
	802.11n (HT20)	36	5180	11.3
		40	5200	11.0
		48	5240	11.1
	802.11n (HT40)	38	5190	12.1
		46	5230	12.2
	5.3	802.11a	52	5260
56			5280	12.0
60			5300	12.4
64			5320	12.5
802.11n (HT20)		52	5260	11.2
		60	5300	11.4
		64	5320	11.6
802.11n (HT40)		54	5270	12.1
		62	5310	12.2
5.5	802.11a	100	5500	11.8
		104	5520	11.6
		108	5540	11.8
		112	5560	11.9
		116	5580	12.2
		120	5600	Not supported
		124	5620	Not supported
		128	5640	Not supported
		132	5660	11.9
		136	5680	12.0
	140	5700	12.3	
	802.11n (HT20)	100	5500	10.7
		116	5580	11.2
		140	5700	11.2
	802.11n (HT40)	102	5510	11.3
		110	5550	11.7
		134	5670	11.8
	5.8	802.11a	149	5745
153			5765	12.2
157			5785	12.5
161			5805	12.4
165			5825	12.4
802.11n (HT20)		149	5745	11.6
		157	5785	11.4
		161	5805	11.3
802.11n (HT40)		151	5755	11.2
		159	5795	11.1

Note(s):

SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels. As per KDB 248227

9.12. Bluetooth

	Min	Max
Tune-up Tolerance (dB):	-3.5	1.5

Output Power Tolerance	IEEE 802.15 (dBm)
Max	10.5
Target	9.0
Min	5.5

10. Tissue Dielectric Properties

IEEE Std 1528-2003 Table 2

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

FCC OET Bulletin 65 Supplement C 01-01

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2/7/2013	Head 835	e'	41.64	Relative Permittivity (ϵ_r):	41.64	41.50	0.34	5
		e"	19.95	Conductivity (σ):	0.93	0.90	2.93	5
	Head 820	e'	41.85	Relative Permittivity (ϵ_r):	41.85	41.60	0.59	5
		e"	20.02	Conductivity (σ):	0.91	0.90	1.61	5
	Head 850	e'	41.44	Relative Permittivity (ϵ_r):	41.44	41.50	-0.14	5
		e"	19.86	Conductivity (σ):	0.94	0.92	2.60	5
2/7/2013	Head 2450	e'	38.46	Relative Permittivity (ϵ_r):	38.46	39.20	-1.89	5
		e"	13.67	Conductivity (σ):	1.86	1.80	3.46	5
	Head 2410	e'	38.62	Relative Permittivity (ϵ_r):	38.62	39.28	-1.68	5
		e"	13.52	Conductivity (σ):	1.81	1.76	2.91	5
	Head 2475	e'	38.36	Relative Permittivity (ϵ_r):	38.36	39.17	-2.06	5
		e"	13.74	Conductivity (σ):	1.89	1.83	3.49	5
2/7/2013	Body 2450	e'	50.80	Relative Permittivity (ϵ_r):	50.80	52.70	-3.61	5
		e"	14.60	Conductivity (σ):	1.99	1.95	2.00	5
	Body 2410	e'	50.93	Relative Permittivity (ϵ_r):	50.93	52.76	-3.47	5
		e"	14.44	Conductivity (σ):	1.94	1.91	1.44	5
	Body 2475	e'	50.69	Relative Permittivity (ϵ_r):	50.69	52.67	-3.76	5
		e"	14.73	Conductivity (σ):	2.03	1.99	2.11	5
2/11/2013	Body 1900	e'	51.7100	Relative Permittivity (ϵ_r):	51.71	53.30	-2.98	5
		e"	14.5100	Conductivity (σ):	1.53	1.52	0.85	5
	Body 1850	e'	51.9200	Relative Permittivity (ϵ_r):	51.92	53.30	-2.59	5
		e"	14.3600	Conductivity (σ):	1.48	1.52	-2.82	5
	Body 1910	e'	51.6500	Relative Permittivity (ϵ_r):	51.65	53.30	-3.10	5
		e"	14.5300	Conductivity (σ):	1.54	1.52	1.52	5
2/11/2013	Head 1900	e'	38.3700	Relative Permittivity (ϵ_r):	38.37	40.00	-4.08	5
		e"	13.5300	Conductivity (σ):	1.43	1.40	2.10	5
	Head 1850	e'	38.6000	Relative Permittivity (ϵ_r):	38.60	40.00	-3.50	5
		e"	13.4200	Conductivity (σ):	1.38	1.40	-1.40	5
	Head 1910	e'	38.3100	Relative Permittivity (ϵ_r):	38.31	40.00	-4.22	5
		e"	13.5300	Conductivity (σ):	1.44	1.40	2.64	5
2/12/2013	Head 1750	e'	39.2500	Relative Permittivity (ϵ_r):	39.25	40.08	-2.08	5
		e"	13.8500	Conductivity (σ):	1.35	1.37	-1.56	5
	Head 1710	e'	39.4000	Relative Permittivity (ϵ_r):	39.40	40.15	-1.86	5
		e"	13.7500	Conductivity (σ):	1.31	1.35	-2.90	5
	Head 1755	e'	39.2200	Relative Permittivity (ϵ_r):	39.22	40.08	-2.14	5
		e"	13.8400	Conductivity (σ):	1.35	1.37	-1.55	5
2/12/2013	Head 835	e'	41.8929	Relative Permittivity (ϵ_r):	41.89	41.50	0.95	5
		e"	19.4705	Conductivity (σ):	0.90	0.90	0.44	5
	Head 820	e'	42.0784	Relative Permittivity (ϵ_r):	42.08	41.60	1.14	5
		e"	19.5113	Conductivity (σ):	0.89	0.90	-0.99	5
	Head 850	e'	41.7116	Relative Permittivity (ϵ_r):	41.71	41.50	0.51	5
		e"	19.3972	Conductivity (σ):	0.92	0.92	0.19	5

Tissue Dielectric Parameter Check Results (continued)

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
2/13/2013	Body 835	e'	54.7700	Relative Permittivity (ϵ_r):	54.77	55.20	-0.78	5
		e''	21.8500	Conductivity (σ):	1.01	0.97	4.58	5
	Body 820	e'	54.9200	Relative Permittivity (ϵ_r):	54.92	55.28	-0.65	5
		e''	21.9400	Conductivity (σ):	1.00	0.97	3.29	5
	Body 850	e'	54.6000	Relative Permittivity (ϵ_r):	54.60	55.16	-1.01	5
		e''	21.7800	Conductivity (σ):	1.03	0.99	4.28	5
2/14/2013	Body 1750	e'	51.2600	Relative Permittivity (ϵ_r):	51.26	53.44	-4.08	5
		e''	15.0200	Conductivity (σ):	1.46	1.49	-1.66	5
	Body 1710	e'	51.3800	Relative Permittivity (ϵ_r):	51.38	53.54	-4.04	5
		e''	14.9200	Conductivity (σ):	1.42	1.46	-2.94	5
	Body 1755	e'	51.2600	Relative Permittivity (ϵ_r):	51.26	53.43	-4.06	5
		e''	15.0200	Conductivity (σ):	1.47	1.49	-1.58	5
2/14/2013	Head 1750	e'	38.8300	Relative Permittivity (ϵ_r):	38.83	40.08	-3.13	5
		e''	13.8800	Conductivity (σ):	1.35	1.37	-1.34	5
	Head 1710	e'	39.0000	Relative Permittivity (ϵ_r):	39.00	40.15	-2.85	5
		e''	13.7900	Conductivity (σ):	1.31	1.35	-2.62	5
	Head 1755	e'	38.8400	Relative Permittivity (ϵ_r):	38.84	40.08	-3.09	5
		e''	13.8900	Conductivity (σ):	1.36	1.37	-1.19	5
2/14/2013	Head 1900	e'	38.8800	Relative Permittivity (ϵ_r):	38.88	40.00	-2.80	5
		e''	13.3200	Conductivity (σ):	1.41	1.40	0.51	5
	Head 1850	e'	39.0200	Relative Permittivity (ϵ_r):	39.02	40.00	-2.45	5
		e''	13.2100	Conductivity (σ):	1.36	1.40	-2.94	5
	Head 1910	e'	38.8300	Relative Permittivity (ϵ_r):	38.83	40.00	-2.93	5
		e''	13.3400	Conductivity (σ):	1.42	1.40	1.20	5
2/14/2013	Body 1900	e'	51.1300	Relative Permittivity (ϵ_r):	51.13	53.30	-4.07	5
		e''	14.2700	Conductivity (σ):	1.51	1.52	-0.82	5
	Body 1850	e'	51.3600	Relative Permittivity (ϵ_r):	51.36	53.30	-3.64	5
		e''	14.0800	Conductivity (σ):	1.45	1.52	-4.71	5
	Body 1910	e'	51.0800	Relative Permittivity (ϵ_r):	51.08	53.30	-4.17	5
		e''	14.3100	Conductivity (σ):	1.52	1.52	-0.02	5
2/15/2013	Body 750	e'	53.2329	Relative Permittivity (ϵ_r):	53.23	55.55	-4.16	5
		e''	23.6268	Conductivity (σ):	0.99	0.96	2.31	5
	Body 710	e'	53.6863	Relative Permittivity (ϵ_r):	53.69	55.70	-3.62	5
		e''	23.9714	Conductivity (σ):	0.95	0.96	-1.42	5
	Body 715	e'	53.6275	Relative Permittivity (ϵ_r):	53.63	55.68	-3.69	5
		e''	23.9076	Conductivity (σ):	0.95	0.96	-1.03	5
2/15/2013	Head 750	e'	40.2000	Relative Permittivity (ϵ_r):	40.20	41.96	-4.20	5
		e''	22.1100	Conductivity (σ):	0.92	0.89	3.24	5
	Head 710	e'	40.7600	Relative Permittivity (ϵ_r):	40.76	42.17	-3.34	5
		e''	22.4200	Conductivity (σ):	0.89	0.89	-0.55	5
	Head 715	e'	40.7100	Relative Permittivity (ϵ_r):	40.71	42.14	-3.40	5
		e''	22.3400	Conductivity (σ):	0.89	0.89	-0.25	5
2/18/2013	Body 1900	e'	51.1300	Relative Permittivity (ϵ_r):	51.13	53.30	-4.07	5
		e''	14.6600	Conductivity (σ):	1.55	1.52	1.89	5
	Body 1850	e'	51.3200	Relative Permittivity (ϵ_r):	51.32	53.30	-3.71	5
		e''	14.4600	Conductivity (σ):	1.49	1.52	-2.14	5
	Body 1910	e'	51.0900	Relative Permittivity (ϵ_r):	51.09	53.30	-4.15	5
		e''	14.7200	Conductivity (σ):	1.56	1.52	2.85	5

Tissue Dielectric Parameter Check Results (continued)

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)		
2/18/2013	Head 750	e'	41.3300	Relative Permittivity (ϵ_r):	41.33	41.96	-1.51	5	
		e"	22.3800	Conductivity (σ):	0.93	0.89	4.50	5	
	Head 710	e'	41.9100	Relative Permittivity (ϵ_r):	41.91	42.17	-0.61	5	
		e"	22.7200	Conductivity (σ):	0.90	0.89	0.78	5	
	Head 715	e'	41.8400	Relative Permittivity (ϵ_r):	41.84	42.14	-0.71	5	
		e"	22.6700	Conductivity (σ):	0.90	0.89	1.22	5	
2/18/2013	Body 1750	e'	51.4600	Relative Permittivity (ϵ_r):	51.46	53.44	-3.71	5	
		e"	15.2400	Conductivity (σ):	1.48	1.49	-0.22	5	
	Body 1710	e'	51.5300	Relative Permittivity (ϵ_r):	51.53	53.54	-3.76	5	
		e"	15.1800	Conductivity (σ):	1.44	1.46	-1.25	5	
	Body 1755	e'	51.4500	Relative Permittivity (ϵ_r):	51.45	53.43	-3.70	5	
		e"	15.2400	Conductivity (σ):	1.49	1.49	-0.14	5	
2/18/2013	Head 5180	e'	37.7200	Relative Permittivity (ϵ_r):	37.72	36.01	4.74	10	
		e"	15.8200	Conductivity (σ):	4.56	4.63	-1.60	5	
	Head 5200	e'	37.6700	Relative Permittivity (ϵ_r):	37.67	35.99	4.67	10	
		e"	15.7700	Conductivity (σ):	4.56	4.65	-1.96	5	
	Head 5600	e'	37.1700	Relative Permittivity (ϵ_r):	37.17	35.53	4.60	10	
		e"	16.0400	Conductivity (σ):	4.99	5.06	-1.30	5	
	Head 5800	e'	36.8900	Relative Permittivity (ϵ_r):	36.89	35.30	4.50	10	
		e"	16.1700	Conductivity (σ):	5.21	5.27	-1.05	5	
	Head 5825	e'	36.8300	Relative Permittivity (ϵ_r):	36.83	35.30	4.33	10	
		e"	16.1700	Conductivity (σ):	5.24	5.27	-0.62	5	
	2/18/2013	Body 835	e'	52.7700	Relative Permittivity (ϵ_r):	52.77	55.20	-4.40	5
			e"	21.8600	Conductivity (σ):	1.01	0.97	4.63	5
Body 820		e'	52.9500	Relative Permittivity (ϵ_r):	52.95	55.28	-4.21	5	
		e"	21.9400	Conductivity (σ):	1.00	0.97	3.29	5	
Body 850		e'	52.5600	Relative Permittivity (ϵ_r):	52.56	55.16	-4.71	5	
		e"	21.8100	Conductivity (σ):	1.03	0.99	4.42	5	
2/21/2013	Body 5180	e'	47.2100	Relative Permittivity (ϵ_r):	47.21	49.05	-3.74	10	
		e"	18.8500	Conductivity (σ):	5.43	5.27	2.99	5	
	Body 5200	e'	47.1700	Relative Permittivity (ϵ_r):	47.17	49.02	-3.77	10	
		e"	18.8500	Conductivity (σ):	5.45	5.29	2.94	5	
	Body 5600	e'	46.5800	Relative Permittivity (ϵ_r):	46.58	48.48	-3.91	10	
		e"	19.2200	Conductivity (σ):	5.98	5.76	3.88	5	
	Body 5800	e'	46.1300	Relative Permittivity (ϵ_r):	46.13	48.20	-4.29	10	
		e"	19.3500	Conductivity (σ):	6.24	6.00	4.01	5	
	Body 5825	e'	46.0800	Relative Permittivity (ϵ_r):	46.08	48.20	-4.40	10	
		e"	19.3500	Conductivity (σ):	6.27	6.00	4.45	5	
2/21/2013	Head 750	e'	39.9100	Relative Permittivity (ϵ_r):	39.91	41.96	-4.89	5	
		e"	21.6800	Conductivity (σ):	0.90	0.89	1.24	5	
	Head 710	e'	40.5900	Relative Permittivity (ϵ_r):	40.59	42.17	-3.74	5	
		e"	22.0800	Conductivity (σ):	0.87	0.89	-2.06	5	
	Head 715	e'	40.4000	Relative Permittivity (ϵ_r):	40.40	42.14	-4.13	5	
		e"	21.9900	Conductivity (σ):	0.87	0.89	-1.81	5	

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
 For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
 For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D750V3	1071	10/5/2012	750	1g	8.29	8.79
				10g	5.49	5.82
D835V2	4d117	4/10/2012	835	1g	9.38	9.52
				10g	6.15	6.31
D1750V2	1077	10/3/2012	1750	1g	36.1	37.7
				10g	19.3	20.3
D1900V2	5d043	11/6/2012	1900	1g	39.9	40.9
				10g	20.9	21.6
D2450V2	899	10/5/2012	2450	1g	53.6	51.7
				10g	25.0	24.3
D5GHV2	1003	9/18/2012	5.2GHz	1g	76.5	74.8
				10g	21.9	20.9
			5.6GHz	1g	82.8	79.0
				10g	23.6	22.0
			5.8GHz	1g	76.9	77.0
				10g	22.0	21.4

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio $\pm 3\%$	Plots No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
2/7/2013	D835V2	4d117	Head	1g	1.02	0.991	9.9	9.38	5.65	2.84	
				10g	0.682	0.647	6.5	6.15	5.20		
2/7/2013	D2450V2	899	Head	1g	5.64	5.59	55.9	53.6	4.29	0.89	
				10g	2.48	2.55	25.5	25	2.00		
2/7/2013	D2450V2	899	Body	1g	5.47	5.49	54.9	51.7	6.19	-0.37	1,2
				10g	2.34	2.56	25.6	24.3	5.35		
2/11/2013	D1900V2	5d043	Body	1g	3.89	3.91	39.1	40.9	-4.40	-0.51	
				10g	1.97	2.10	21.0	21.6	-2.78		
2/11/2013	D1900V2	5d043	Head	1g	4.40	4.19	41.9	39.9	5.01	4.77	
				10g	2.27	2.16	21.6	20.9	3.35		
2/12/2013	D1750V2	1077	Head	1g	3.65	3.55	35.5	36.1	-1.66	2.74	
				10g	1.95	1.88	18.8	19.3	-2.59		
2/12/2013	D835V2	4d117	Head	1g	1.00	0.983	9.8	9.38	4.80	1.70	
				10g	0.674	0.644	6.4	6.15	4.72		
2/13/2013	D835V2	4d117	Body	1g	1.05	1.02	10.2	9.52	7.14	2.86	3,4
				10g	0.70	0.669	6.7	6.31	6.02		
2/14/2013	D1750V2	1077	Body	1g	3.74	3.64	36.4	37.7	-3.45	2.67	
				10g	1.95	1.95	19.5	20.3	-3.94		
2/14/2013	D1750V2	1077	Head	1g	3.62	3.46	34.6	36.1	-4.16	4.42	5,6
				10g	1.94	1.83	18.3	19.3	-5.18		
2/14/2013	D1900V2	5d043	Head	1g	4.09	4.01	40.1	39.9	0.50	1.96	
				10g	2.09	2.09	20.9	20.9	0.00		
2/14/2013	D1900V2	5d043	Body	1g	4.30	4.23	42.3	40.9	3.42	1.63	
				10g	2.16	2.22	22.2	21.6	2.78		
2/15/2013	D750V3	1071	Body	1g	0.945	0.936	9.4	8.79	6.48	0.95	
				10g	0.641	0.623	6.2	5.82	7.04		
2/15/2013	D750V3	1071	Head	1g	0.933	0.901	9.0	8.29	8.69	3.43	7,8
				10g	0.632	0.588	5.9	5.49	7.10		
2/18/2013	D1900V2	5d043	Body	1g	4.38	4.33	43.3	40.9	5.87	1.14	9,10
				10g	2.22	2.26	22.6	21.6	4.63		
2/18/2013	D750V3	1071	Head	1g	0.902	0.873	8.7	8.29	5.31	3.22	
				10g	0.612	0.568	5.7	5.49	3.46		
2/18/2013	D1750V2	1077	Body	1g	3.70	3.63	36.3	37.7	-3.71	1.89	
				10g	1.95	1.94	19.4	20.3	-4.43		
2/18/2013	D5GHzV2 5.2 GHz	1003	Head	1g	6.64	7.44	74.4	76.5	-2.75	-12.05	
				10g	1.89	2.13	21.3	21.9	-2.74		
2/18/2013	D5GHzV2 5.6 GHz	1003	Head	1g	7.91	8.33	83.3	82.8	0.60	-5.31	
				10g	2.19	2.34	23.4	23.6	-0.85		
2/18/2013	D5GHzV2 5.8 GHz	1003	Head	1g	7.19	7.60	76.0	76.9	-1.17	-5.70	11,12
				10g	1.98	2.14	21.4	22	-2.73		
2/18/2013	D835V2	4d117	Body	1g	1.14	0.997	10.0	9.52	4.73	12.54	
				10g	0.757	0.654	6.5	6.31	3.65		
2/21/2013	D5GHzV2 5.2 GHz	1003	Body	1g	7.36	7.82	78.2	74.8	4.55	-6.25	13,14
				10g	2.04	2.21	22.1	20.9	5.74		
2/21/2013	D5GHzV2 5.6 GHz	1003	Body	1g	8.06	8.46	84.6	79	7.09	-4.96	15,16
				10g	2.23	2.36	23.6	22	7.27		
2/21/2013	D5GHzV2 5.8 GHz	1003	Body	1g	7.07	7.68	76.8	77	-0.26	-8.63	
				10g	1.99	2.15	21.5	21.4	0.47		
2/21/2013	D750V3	1071	Head	1g	0.887	0.856	8.6	8.29	3.26	3.49	
				10g	0.603	0.558	5.6	5.49	1.64		

12. SAR Test Results

12.1. CDMA BC0

12.1.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xRTT (RC3 SO55)	1013	824.70	26.2	26.1				1
		384	836.52	26.2	26.2	0.337	0.337	1	
		777	848.31	26.2	26.2				1
Left Tilt (15°)	1xRTT (RC3 SO55)	1013	824.70	26.2	26.1				1
		384	836.52	26.2	26.2	0.279	0.279		
		777	848.31	26.2	26.2				1
Right Touch	1xRTT (RC3 SO55)	1013	824.70	26.2	26.1				1
		384	836.52	26.2	26.2	0.319	0.319		
		777	848.31	26.2	26.2				1
Right Tilt (15°)	1xRTT (RC3 SO55)	1013	824.70	26.2	26.1				1
		384	836.52	26.2	26.2	0.210	0.210		
		777	848.31	26.2	26.2				1
Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xEVDO (Rel. 0)	1013	824.70	26.2	26.2				1
		384	836.52	26.2	26.2	0.279	0.279		
		777	848.31	26.2	26.2				1
Left Tilt (15°)	1xEVDO (Rel. 0)	1013	824.70	26.2	26.2				1
		384	836.52	26.2	26.2	0.230	0.230		
		777	848.31	26.2	26.2				1
Right Touch	1xEVDO (Rel. 0)	1013	824.70	26.2	26.2				1
		384	836.52	26.2	26.2	0.311	0.311		
		777	848.31	26.2	26.2				1
Right Tilt (15°)	1xEVDO (Rel. 0)	1013	824.70	26.2	26.2				1
		384	836.52	26.2	26.2	0.225	0.225		
		777	848.31	26.2	26.2				1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.1.2. Body-worn Accessory Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xRTT (RC3 SO32)	10	1013	824.70	26.2	26.1				1
			384	836.52	26.2	26.2	0.621	0.621		
			777	848.31	26.2	26.2				1
Front	1xRTT (RC3 SO32)	10	1013	824.70	26.2	26.1				1
			384	836.52	26.2	26.2	0.382	0.382		
			777	848.31	26.2	26.2				1
Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xEVDO (Rel. 0)	10	1013	824.70	26.2	26.2				1
			384	836.52	26.2	26.2	0.652	0.652	2	
			777	848.31	26.2	26.2				1
Front	1xEVDO (Rel. 0)	10	1013	824.70	26.2	26.2				1
			384	836.52	26.2	26.2	0.386	0.386		
			777	848.31	26.2	26.2				1

Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.1.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 3	1xRTT (RC3 SO32)	10	1013	824.70	26.2	26.1				1
			384	836.52	26.2	26.2	0.219	0.219		
			777	848.31	26.2	26.2				1
Edge 4	1xRTT (RC3 SO32)	10	1013	824.70	26.2	26.1				1
			384	836.52	26.2	26.2	0.517	0.517		
			777	848.31	26.2	26.2				1
Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 3	1xEVDO (Rel. 0)	10	1013	824.70	26.2	26.2				1
			384	836.52	26.2	26.2	0.199	0.199		
			777	848.31	26.2	26.2				1
Edge 4	1xEVDO (Rel. 0)	10	1013	824.70	26.2	26.2				1
			384	836.52	26.2	26.2	0.575	0.575		
			777	848.31	26.2	26.2				1

Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.2. CDMA BC1

12.2.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xRTT (RC3 SO55)	25	1851.25	25.2	25.2				1
		600	1880.00	25.2	25.2	0.778	0.778	1	
		1175	1908.75	25.2	25.1				1
Left Tilt (15°)	1xRTT (RC3 SO55)	25	1851.25	25.2	25.2				1
		600	1880.00	25.2	25.2	0.299	0.299		
		1175	1908.75	25.2	25.1				1
Right Touch	1xRTT (RC3 SO55)	25	1851.25	25.2	25.2				1
		600	1880.00	25.2	25.2	0.527	0.527		
		1175	1908.75	25.2	25.1				1
Right Tilt (15°)	1xRTT (RC3 SO55)	25	1851.25	25.2	25.2				1
		600	1880.00	25.2	25.2	0.283	0.283		
		1175	1908.75	25.2	25.1				1
Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xEVDO (Rel. 0)	25	1851.25	25.2	25.2				1
		600	1880.00	25.2	25.2	0.722	0.722		
		1175	1908.75	25.2	25.1				1
Left Tilt (15°)	1xEVDO (Rel. 0)	25	1851.25	25.2	25.2				1
		600	1880.00	25.2	25.2	0.308	0.308		
		1175	1908.75	25.2	25.1				1
Right Touch	1xEVDO (Rel. 0)	25	1851.25	25.2	25.2				1
		600	1880.00	25.2	25.2	0.562	0.562		
		1175	1908.75	25.2	25.1				1
Right Tilt (15°)	1xEVDO (Rel. 0)	25	1851.25	25.2	25.2				1
		600	1880.00	25.2	25.2	0.271	0.271		
		1175	1908.75	25.2	25.1				1

Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.2.2. Body-worn Accessory Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xRTT (RC3 SO32)	10	25	1851.25	25.2	25.1	1.020	1.044		
			600	1880.00	25.2	25.1	0.882	0.903		
			1175	1908.75	25.2	25.1	1.080	1.105		
Front	1xRTT (RC3 SO32)	10	25	1851.25	25.2	25.1				1
			600	1880.00	25.2	25.1	0.603	0.617		
			1175	1908.75	25.2	25.1				
Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xEVDO (Rel. 0)	10	25	1851.25	25.2	25.2	0.969	0.969		
			600	1880.00	25.2	25.2	0.827	0.827		
			1175	1908.75	25.2	25.1	1.110	1.136	2	
Front	1xEVDO (Rel. 0)	10	25	1851.25	25.2	25.2				1
			600	1880.00	25.2	25.2	0.664	0.664		
			1175	1908.75	25.2	25.1				

Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.2.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 3	1xRTT (RC3 SO32)	10	25	1851.25	25.2	25.1				1
			600	1880.00	25.2	25.1	0.532	0.544		
			1175	1908.75	25.2	25.1				
Edge 4	1xRTT (RC3 SO32)	10	25	1851.25	25.2	25.1				1
			600	1880.00	25.2	25.1	0.585	0.599		
			1175	1908.75	25.2	25.1				
Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 3	1xEVDO (Rel. 0)	10	25	1851.25	25.2	25.2				1
			600	1880.00	25.2	25.2	0.578	0.578		
			1175	1908.75	25.2	25.1				
Edge 4	1xEVDO (Rel. 0)	10	25	1851.25	25.2	25.2				1
			600	1880.00	25.2	25.2	0.541	0.541		
			1175	1908.75	25.2	25.1				

Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.3. CDMA BC15

12.3.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xRTT (RC3 SO55)	25	1711.25	25.2	25.2				1
		450	1732.50	25.2	25.2	0.372	0.372	1	
		875	1753.75	25.2	25.1				1
Left Tilt (15°)	1xRTT (RC3 SO55)	25	1711.25	25.2	25.2				1
		450	1732.50	25.2	25.2	0.174	0.174		
		875	1753.75	25.2	25.1				1
Right Touch	1xRTT (RC3 SO55)	25	1711.25	25.2	25.2				1
		450	1732.50	25.2	25.2	0.267	0.267		
		875	1753.75	25.2	25.1				1
Right Tilt (15°)	1xRTT (RC3 SO55)	25	1711.25	25.2	25.2				1
		450	1732.50	25.2	25.2	0.163	0.163		
		875	1753.75	25.2	25.1				1
Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xEVDO (Rel. 0)	25	1711.25	25.2	25.1				1
		450	1732.50	25.2	25.2	0.313	0.313		
		875	1753.75	25.2	25.2				1
Left Tilt (15°)	1xEVDO (Rel. 0)	25	1711.25	25.2	25.1				1
		450	1732.50	25.2	25.2	0.157	0.157		
		875	1753.75	25.2	25.2				1
Right Touch	1xEVDO (Rel. 0)	25	1711.25	25.2	25.1				1
		450	1732.50	25.2	25.2	0.257	0.257		
		875	1753.75	25.2	25.2				1
Right Tilt (15°)	1xEVDO (Rel. 0)	25	1711.25	25.2	25.1				1
		450	1732.50	25.2	25.2	0.132	0.132		
		875	1753.75	25.2	25.2				1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.3.2. Body-worn Accessory Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xRTT (RC3 SO32)	10	25	1711.25	25.2	25.1	0.761	0.779		
			450	1732.50	25.2	25.1	0.944	0.966		
			875	1753.75	25.2	25.1	0.962	0.984		
Front	1xRTT (RC3 SO32)	10	25	1711.25	25.2	25.1				1
			450	1732.50	25.2	25.1	0.597	0.611		
			875	1753.75	25.2	25.1				
Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xEVDO (Rel. 0)	10	25	1711.25	25.2	25.1	0.845	0.865		
			450	1732.50	25.2	25.2	1.000	1.000		
			875	1753.75	25.2	25.2	1.030	1.030	2	
Front	1xEVDO (Rel. 0)	10	25	1711.25	25.2	25.1				1
			450	1732.50	25.2	25.2	0.531	0.531		
			875	1753.75	25.2	25.2				

Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.3.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 3	1xRTT (RC3 SO32)	10	25	1711.25	25.2	25.1				1
			450	1732.50	25.2	25.1	0.444	0.454		
			875	1753.75	25.2	25.1				
Edge 4	1xRTT (RC3 SO32)	10	25	1711.25	25.2	25.1				1
			450	1732.50	25.2	25.1	0.331	0.339		
			875	1753.75	25.2	25.1				
Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 3	1xEVDO (Rel. 0)	10	25	1711.25	25.2	25.1				1
			450	1732.50	25.2	25.2	0.444	0.444		
			875	1753.75	25.2	25.2				
Edge 4	1xEVDO (Rel. 0)	10	25	1711.25	25.2	25.1				1
			450	1732.50	25.2	25.2	0.322	0.322		
			875	1753.75	25.2	25.2				

Note(s):

1. According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.4. LTE Band 2 (10MHz Bandwidth)

12.4.1. Head Exposure Conditions

Test Position	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note	
						Tune-up limit	Meas.	Meas.	Scaled			
Left Touch	QPSK	18650	1855.0	1	24	23.7	23.6				1	
				25	24	22.7	22.3				1	
		18900	1880.0	1	24	23.7	23.7	0.137	0.137			
				25	0	22.7	22.3	0.099	0.109			
		19150	1905.0	1	24	23.7	23.7					1
				25	0	22.7	22.5					1
Left Tilt (15°)	QPSK	18650	1855.0	1	24	23.7	23.6				1	
				25	24	22.7	22.3				1	
		18900	1880.0	1	24	23.7	23.7	0.074	0.074			
				25	0	22.7	22.3	0.054	0.059			
		19150	1905.0	1	24	23.7	23.7					1
				25	0	22.7	22.5					1
Right Touch	QPSK	18650	1855.0	1	24	23.7	23.6				1	
				25	24	22.7	22.3				1	
		18900	1880.0	1	24	23.7	23.7	0.253	0.253	1		
				25	0	22.7	22.3	0.189	0.207			
		19150	1905.0	1	24	23.7	23.7					1
				25	0	22.7	22.5					1
Right Tilt (15°)	QPSK	18650	1855.0	1	24	23.7	23.6				1	
				25	24	22.7	22.3				1	
		18900	1880.0	1	24	23.7	23.7	0.076	0.076			
				25	0	22.7	22.3	0.055	0.060			
		19150	1905.0	1	24	23.7	23.7					1
				25	0	22.7	22.5					1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.4.2. Body-worn Accessory Exposure Conditions

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Rear	10	QPSK	18650	1855.0	1	24	23.7	23.6				1
					25	24	22.7	22.3				1
			18900	1880.0	1	24	23.7	23.7	0.327	0.327	2	
					25	0	22.7	22.3	0.262	0.287		
			19150	1905.0	1	24	23.7	23.7				1
					25	0	22.7	22.5				1
Front	10	QPSK	18650	1855.0	1	24	23.7	23.6				1
					25	24	22.7	22.3				1
			18900	1880.0	1	24	23.7	23.7	0.207	0.207		
					25	0	22.7	22.3	0.165	0.181		
			19150	1905.0	1	24	23.7	23.7				1
					25	0	22.7	22.5				1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.4.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note	
							Tune-up limit	Meas.	Meas.	Scaled			
Edge 2	10	QPSK	18650	1855.0	1	24	23.7	23.6				1	
					25	24	22.7	22.3				1	
			18900	1880.0	1	24	23.7	23.7	0.147	0.147			
					25	0	22.7	22.3	0.117	0.128			
			19150	1905.0	1	24	23.7	23.7					1
					25	0	22.7	22.5					1
Edge 3	10	QPSK	18650	1855.0	1	24	23.7	23.6				1	
					25	24	22.7	22.3				1	
			18900	1880.0	1	24	23.7	23.7	0.140	0.140			
					25	0	22.7	22.3	0.102	0.112			
			19150	1905.0	1	24	23.7	23.7					1
					25	0	22.7	22.5					1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.5. LTE Band 4 (10MHz Bandwidth)

12.5.1. Head Exposure Conditions

Test Position	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note	
						Tune-up limit	Meas.	Meas.	Scaled			
Left Touch	QPSK	20000	1715.0	1	0	23.7	23.7				1	
				25	0	22.7	0.3				1	
		20175	1732.5	1	49	23.7	23.7	0.158	0.158			
				25	12	22.7	22.2	0.122	0.137			
		20350	1750.0	1	0	23.7	23.6					1
				25	0	22.7	22.2					1
Left Tilt (15°)	QPSK	20000	1715.0	1	0	23.7	23.7				1	
				25	0	22.7	0.3				1	
		20175	1732.5	1	49	23.7	23.7	0.060	0.060			
				25	12	22.7	22.2	0.052	0.058			
		20350	1750.0	1	0	23.7	23.6					1
				25	0	22.7	22.2					1
Right Touch	QPSK	20000	1715.0	1	0	23.7	23.7				1	
				25	0	22.7	0.3				1	
		20175	1732.5	1	49	23.7	23.7	0.187	0.187	1		
				25	12	22.7	22.2	0.105	0.118			
		20350	1750.0	1	0	23.7	23.6					1
				25	0	22.7	22.2					1
Right Tilt (15°)	QPSK	20000	1715.0	1	0	23.7	23.7				1	
				25	0	22.7	0.3				1	
		20175	1732.5	1	49	23.7	23.7	0.056	0.056			
				25	12	22.7	22.2	0.046	0.052			
		20350	1750.0	1	0	23.7	23.6					1
				25	0	22.7	22.2					1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.5.2. Body-worn Accessory Exposure Conditions

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Rear	10	QPSK	20000	1715.0	1	0	23.7	23.7				1
					25	0	22.7	0.3				1
			20175	1732.5	1	49	23.7	23.7	0.243	0.243	2	
					25	12	22.7	22.2	0.192	0.215		
			20350	1750.0	1	0	23.7	23.6				1
					25	0	22.7	22.2				1
Front	10	QPSK	20000	1715.0	1	0	23.7	23.7				1
					25	0	22.7	0.3				1
			20175	1732.5	1	49	23.7	23.7	0.167	0.167		
					25	12	22.7	22.2	0.110	0.123		
			20350	1750.0	1	0	23.7	23.6				1
					25	0	22.7	22.2				1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.5.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note		
							Tune-up limit	Meas.	Meas.	Scaled				
Edge 2	10	QPSK	20000	1715.0	1	0	23.7	23.7				1		
					25	0	22.7	0.3				1		
			20175	1732.5	1	49	23.7	23.7	0.097	0.097				
					25	12	22.7	22.2	0.072	0.080				
			20350	1750.0	1	0	23.7	23.6						1
					25	0	22.7	22.2						1
Edge 3	10	QPSK	20000	1715.0	1	0	23.7	23.7				1		
					25	0	22.7	0.3				1		
			20175	1732.5	1	49	23.7	23.7	0.220	0.220				
					25	12	22.7	22.2	0.174	0.195				
			20350	1750.0	1	0	23.7	23.6						1
					25	0	22.7	22.2						1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.6. LTE Band 5 (10MHz Bandwidth)

12.6.1. Head Exposure Conditions

Test Position	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note	
						Tune-up limit	Meas.	Meas.	Scaled			
Left Touch	QPSK	20450	829.0	1	24	23.7	23.7				1	
				25	24	22.7	22.4				1	
		20525	836.6	1	24	23.7	23.7	0.397	0.397	1		
				25	12	22.7	22.5	0.302	0.316			
		20600	844.0	1	24	23.7	23.7					1
				25	12	22.7	22.5					1
Left Tilt (15°)	QPSK	20450	829.0	1	24	23.7	23.7				1	
				25	24	22.7	22.4				1	
		20525	836.6	1	24	23.7	23.7	0.297	0.297			
				25	12	22.7	22.5	0.222	0.232			
		20600	844.0	1	24	23.7	23.7					1
				25	12	22.7	22.5					1
Right Touch	QPSK	20450	829.0	1	24	23.7	23.7				1	
				25	24	22.7	22.4				1	
		20525	836.6	1	24	23.7	23.7	0.283	0.283			
				25	12	22.7	22.5	0.208	0.218			
		20600	844.0	1	24	23.7	23.7					1
				25	12	22.7	22.5					1
Right Tilt (15°)	QPSK	20450	829.0	1	24	23.7	23.7				1	
				25	24	22.7	22.4				1	
		20525	836.6	1	24	23.7	23.7	0.190	0.190			
				25	12	22.7	22.5	0.139	0.146			
		20600	844.0	1	24	23.7	23.7					1
				25	12	22.7	22.5					1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.6.2. Body-worn Accessory Exposure Conditions

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Rear	10	QPSK	20450	829.0	1	24	23.7	23.7				1
					25	24	22.7	22.4				1
			20525	836.6	1	24	23.7	23.7	0.348	0.348	2	
					25	12	22.7	22.5	0.256	0.268		
			20600	844.0	1	24	23.7	23.7				1
					25	12	22.7	22.5				1
Front	10	QPSK	20450	829.0	1	24	23.7	23.7				1
					25	24	22.7	22.4				1
			20525	836.6	1	24	23.7	23.7	0.138	0.138		
					25	12	22.7	22.5	0.102	0.107		
			20600	844.0	1	24	23.7	23.7				1
					25	12	22.7	22.5				1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.6.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note	
							Tune-up limit	Meas.	Meas.	Scaled			
Edge 1	10	QPSK	20450	829.0	1	24	23.7	23.7				1	
					25	24	22.7	22.4				1	
			20525	836.6	1	24	23.7	23.7	0.082	0.082			
					25	12	22.7	22.5	0.059	0.061			
			20600	844.0	1	24	23.7	23.7					1
					25	12	22.7	22.5					1
Edge 2	10	QPSK	20450	829.0	1	24	23.7	23.7				1	
					25	24	22.7	22.4				1	
			20525	836.6	1	24	23.7	23.7	0.217	0.217			
					25	12	22.7	22.5	0.157	0.164			
			20600	844.0	1	24	23.7	23.7					1
					25	12	22.7	22.5					1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.7. LTE Band 12 (10MHz Bandwidth)

12.7.1. Head Exposure Conditions

Test Position	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note	
						Tune-up limit	Meas.	Meas.	Scaled			
Left Touch	QPSK	23060	704.0	1	24	23.7	23.6				1	
				25	24	22.7	22.2				1	
		23095	707.5	1	24	23.7	23.7	0.144	0.144			
				25	24	22.7	22.3	0.0996	0.109			
		23130	711.0	1	24	23.7	23.7					1
				25	12	22.7	22.3					1
Left Tilt (15°)	QPSK	23060	704.0	1	24	23.7	23.6				1	
				25	24	22.7	22.2				1	
		23095	707.5	1	24	23.7	23.7	0.0824	0.082			
				25	24	22.7	22.3	0.0568	0.062			
		23130	711.0	1	24	23.7	23.7					1
				25	12	22.7	22.3					1
Right Touch	QPSK	23060	704.0	1	24	23.7	23.6				1	
				25	24	22.7	22.2				1	
		23095	707.5	1	24	23.7	23.7	0.174	0.174	1		
				25	24	22.7	22.3	0.113	0.124			
		23130	711.0	1	24	23.7	23.7					1
				25	12	22.7	22.3					1
Right Tilt (15°)	QPSK	23060	704.0	1	24	23.7	23.6				1	
				25	24	22.7	22.2				1	
		23095	707.5	1	24	23.7	23.7	0.098	0.098			
				25	24	22.7	22.3	0.068	0.075			
		23130	711.0	1	24	23.7	23.7					1
				25	12	22.7	22.3					1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.7.2. Body-worn Accessory Exposure Conditions

Test Position	Dist. (mm)	Mode	UL Ch #	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Rear	10	QPSK	23060	704.0	1	24	23.7	23.6				1
					25	24	22.7	22.2				1
			23095	707.5	1	24	23.7	23.7	0.393	0.393	2	
					25	24	22.7	22.3	0.270	0.296		
			23130	711.0	1	24	23.7	23.7				1
					25	12	22.7	22.3				1
Front	10	QPSK	23060	704.0	1	24	23.7	23.6				1
					25	24	22.7	22.2				1
			23095	707.5	1	24	23.7	23.7	0.163	0.163		
					25	24	22.7	22.3	0.110	0.121		
			23130	711.0	1	24	23.7	23.7				1
					25	12	22.7	22.3				1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.7.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note	
							Tune-up limit	Meas.	Meas.	Scaled			
Edge 2	10	QPSK	23060	704.0	1	24	23.7	23.6				1	
					25	24	22.7	22.2				1	
			23095	707.5	1	24	23.7	23.7	0.234	0.234			
					25	24	22.7	22.3	0.164	0.180			
			23130	711.0	1	24	23.7	23.7					1
					25	12	22.7	22.3					1
Edge 3	10	QPSK	23060	704.0	1	24	23.7	23.6				1	
					25	24	22.7	22.2				1	
			23095	707.5	1	24	23.7	23.7	0.0951	0.095			
					25	24	22.7	22.3	0.0616	0.068			
			23130	711.0	1	24	23.7	23.7					1
					25	12	22.7	22.3					1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.8. LTE Band 25 (10MHz Bandwidth)

12.8.1. Head Exposure Conditions

Test Position	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note	
						Tune-up limit	Meas.	Meas.	Scaled			
Left Touch	QPSK	26090	1855.0	1	24	23.7	23.7				1	
				25	0	22.7	22.5				1	
		26365	1882.5	1	24	23.7	23.7	0.117	0.117			
				25	0	22.7	22.4	0.094	0.101			
		26640	1910.0	1	24	23.7	23.7					1
				25	12	22.7	22.4					1
Left Tilt (15°)	QPSK	26090	1855.0	1	24	23.7	23.7				1	
				25	0	22.7	22.5				1	
		26365	1882.5	1	24	23.7	23.7	0.069	0.069			
				25	0	22.7	22.4	0.054	0.058			
		26640	1910.0	1	24	23.7	23.7					1
				25	12	22.7	22.4					1
Right Touch	QPSK	26090	1855.0	1	24	23.7	23.7				1	
				25	0	22.7	22.5				1	
		26365	1882.5	1	24	23.7	23.7	0.293	0.293	1		
				25	0	22.7	22.4	0.225	0.241			
		26640	1910.0	1	24	23.7	23.7					1
				25	12	22.7	22.4					1
Right Tilt (15°)	QPSK	26090	1855.0	1	24	23.7	23.7				1	
				25	0	22.7	22.5				1	
		26365	1882.5	1	24	23.7	23.7	0.088	0.088			
				25	0	22.7	22.4	0.066	0.071			
		26640	1910.0	1	24	23.7	23.7					1
				25	12	22.7	22.4					1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.8.2. Body-worn Accessory Exposure Conditions

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Rear	10	QPSK	26090	1855.0	1	24	23.7	23.7				1
					25	0	22.7	22.5				1
			26365	1882.5	1	24	23.7	23.7	0.342	0.342	2	
					25	0	22.7	22.4	0.260	0.279		
			26640	1910.0	1	24	23.7	23.7				1
					25	12	22.7	22.4				1
Front	10	QPSK	26090	1855.0	1	24	23.7	23.7				1
					25	0	22.7	22.5				1
			26365	1882.5	1	24	23.7	23.7	0.227	0.227		
					25	0	22.7	22.4	0.170	0.182		
			26640	1910.0	1	24	23.7	23.7				1
					25	12	22.7	22.4				1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.8.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	10	QPSK	26090	1855.0	1	24	23.7	23.7				1
					25	0	22.7	22.5				1
			26365	1882.5	1	24	23.7	23.7	0.173	0.173		
					25	0	22.7	22.4	0.129	0.138		
			26640	1910.0	1	24	23.7	23.7				1
					25	12	22.7	22.4				1
Edge 3	10	QPSK	26090	1855.0	1	24	23.7	23.7				1
					25	0	22.7	22.5				1
			26365	1882.5	1	24	23.7	23.7	0.135	0.135		
					25	0	22.7	22.4	0.107	0.115		
			26640	1910.0	1	24	23.7	23.7				1
					25	12	22.7	22.4				1

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.9. Wi-Fi (2.4 GHz Band)

12.9.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	802.11b	1	2412	16.7	16.2				1
		6	2437	16.7	16.2	0.231	0.258	1	
		11	2462	16.7	16.1				1
Left Tilt (15°)	802.11b	1	2412	16.7	16.2				1
		6	2437	16.7	16.2	0.227	0.254		
		11	2462	16.7	16.1				1
Right Touch	802.11b	1	2412	16.7	16.2				1
		6	2437	16.7	16.2	0.180	0.201		
		11	2462	16.7	16.1				1
Right Tilt (15°)	802.11b	1	2412	16.7	16.2				1
		6	2437	16.7	16.2	0.187	0.209		
		11	2462	16.7	16.1				1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.9.2. Body-worn Accessory Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	802.11b	10	1	2412	16.7	16.2				1
			6	2437	16.7	16.2	0.243	0.271	2	
			11	2462	16.7	16.1				1
Front	802.11b	10	1	2412	16.7	16.2				1
			6	2437	16.7	16.2	0.068	0.075		
			11	2462	16.7	16.1				1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.9.3. Hotspot Mode Exposure Conditions

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11b	10	1	2412	16.7	16.2				1
			6	2437	16.7	16.2	0.141	0.157		
			11	2462	16.7	16.1				1

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.10. Wi-Fi (5 GHz Bands)

12.10.1. Head Exposure Conditions

Band	Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	
					Tune-up limit	Meas.	Meas.	Scaled		
5.2	Left Touch	802.11a	36	5180	12.7	12.1	0.114	0.131		
			48	5240	12.7	12.3	0.126	0.138		
	Left Tilt (15°)	802.11a	36	5180	12.7	12.1	0.119	0.137		
			48	5240	12.7	12.3	0.123	0.135		
	Right Touch	802.11a	36	5180	12.7	12.1	0.155	0.178		
			48	5240	12.7	12.3	0.179	0.196	1	
Right Tilt (15°)	802.11a	36	5180	12.7	12.1	0.120	0.138			
		48	5240	12.7	12.3	0.128	0.140			
5.3	Left Touch	802.11a	52	5260	12.7	12.4	0.131	0.140		
			64	5320	12.7	12.5	0.161	0.169		
	Left Tilt (15°)	802.11a	52	5260	12.7	12.4	0.146	0.156		
			64	5320	12.7	12.5	0.166	0.174		
	Right Touch	802.11a	52	5260	12.7	12.4	0.131	0.140		
			64	5320	12.7	12.5	0.167	0.175	2	
Right Tilt (15°)	802.11a	52	5260	12.7	12.4	0.144	0.154			
		64	5320	12.7	12.5	0.122	0.128			
5.5	Left Touch	802.11a	100	5500	12.7	11.8	0.095	0.117		
			112	5560	12.7	11.9	0.085	0.103		
			124	5620	Not supported					
			140	5700	12.7	12.3	0.101	0.111		
	Left Tilt (15°)	802.11a	100	5500	12.7	11.8	0.109	0.134		
			112	5560	12.7	11.9	0.135	0.162	3	
			124	5620	Not supported					
			140	5700	12.7	12.3	0.106	0.116		
	Right Touch	802.11a	100	5500	12.7	11.8	0.097	0.119		
			112	5560	12.7	11.9	0.081	0.097		
			124	5620	Not supported					
			140	5700	12.7	12.3	0.083	0.091		
Right Tilt (15°)	802.11a	100	5500	12.7	11.8	0.068	0.084			
		112	5560	12.7	11.9	0.084	0.101			
		124	5620	Not supported						
		140	5700	12.7	12.3	0.096	0.105			
5.8	Left Touch	802.11a	149	5745	12.7	12.2	0.084	0.094		
			157	5785	12.7	12.5	0.092	0.096		
			165	5825	12.7	12.4	0.097	0.104		
	Left Tilt (15°)	802.11a	149	5745	12.7	12.2	0.130	0.146		
			157	5785	12.7	12.5	0.119	0.125		
			165	5825	12.7	12.4	0.131	0.140		
	Right Touch	802.11a	149	5745	12.7	12.2	0.086	0.096		
			157	5785	12.7	12.5	0.078	0.081		
			165	5825	12.7	12.4	0.090	0.096		
	Right Tilt (15°)	802.11a	149	5745	12.7	12.2	0.118	0.132		
			157	5785	12.7	12.5	0.146	0.153	4	
			165	5825	12.7	12.4	0.107	0.115		

12.10.2. Body-worn Accessory Exposure Conditions

Band	Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	
					Tune-up limit	Meas.	Meas.	Scaled		
5.2	Rear	802.11a	36	5180	12.7	12.1	0.154	0.177	5	
			48	5240	12.7	12.3	0.196	0.215		
	Front	802.11a	36	5180	12.7	12.1	0.046	0.053		
			48	5240	12.7	12.3	0.038	0.042		
5.3	Rear	802.11a	52	5260	12.7	12.4	0.160	0.171	6	
			64	5320	12.7	12.5	0.215	0.225		
	Front	802.11a	52	5260	12.7	12.4	0.037	0.040		
			64	5320	12.7	12.5	0.034	0.036		
5.5	Rear	802.11a	100	5500	12.7	11.8	0.103	0.127	7	
			112	5560	12.7	11.9	0.107	0.129		
			124	5620	Not supported					
			140	5700	12.7	12.3	0.093	0.102		
	Front	802.11a	100	5500	12.7	11.8	0.030	0.037		
			112	5560	12.7	11.9	0.028	0.034		
			124	5620	Not supported					
			140	5700	12.7	12.3	0.032	0.035		
5.8	Rear	802.11a	149	5745	12.7	12.2	0.105	0.118	8	
			157	5785	12.7	12.5	0.115	0.120		
			165	5825	12.7	12.4	0.123	0.132		
	Front	802.11a	149	5745	12.7	12.2	0.026	0.029		
			157	5785	12.7	12.5	0.022	0.023		
			165	5825	12.7	12.4	0.023	0.025		

12.11. Power Reduction for SV-LTE Mode

12.11.1. Power Reduction for CDMA BC1

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Note
					Tune-up limit	Meas.	Meas.	Scaled	
Rear	1xRTT (RC3 SO32)	10	1175	1908.75	18.5	18.1	0.237	0.260	

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.11.2. Power Reduction for CDMA BC15

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Note
					Tune-up limit	Meas.	Meas.	Scaled	
Rear	1xRTT (RC3 SO32)	10	875	1753.75	18.5	18.2	0.249	0.267	

Note(s):

- According to KDB 447498, Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz.

12.11.3. Power Reduction for LTE Band 2

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Note
							Tune-up limit	Meas.	Meas.	Scaled	
Rear	10	QPSK	18900	1880.0	1	24	19.7	19.5	0.123	0.129	

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.11.4. Power Reduction for LTE Band 4

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Note
							Tune-up limit	Meas.	Meas.	Scaled	
Rear	10	QPSK	20175	1732.5	1	49	19.7	19.6	0.074	0.076	

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.11.5. Power Reduction for LTE Band 5

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Note
							Tune-up limit	Meas.	Meas.	Scaled	
Rear	10	QPSK	20525	836.6	1	24	19.7	19.7	0.153	0.153	

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.11.6. Power Reduction for LTE Band 12

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Note
							Tune-up limit	Meas.	Meas.	Scaled	
Rear	10	QPSK	23095	707.5	1	24	19.7	19.7	0.162	0.162	

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.11.7. Power Reduction for LTE Band 25

Test Position	Dist. (mm)	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Note
							Tune-up limit	Meas.	Meas.	Scaled	
Rear	10	QPSK	26365	1882.5	1	24	19.7	19.6	0.117	0.120	

Note(s):

5. Per KDB 941225 D05 SAR for LTE Devices v02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Head Exposure Condition

Not Applicable. Highest measured SAR is < 0.80 W/kg.

Body-worn Accessory Exposure Condition

Frequency band	Test Position	Mode	Ch. #	Freq. (MHz)	Measured 1g SAR (W/kg)
CDMA BC1	Rear	1xEVDO (Rel. 0)	1175	1908.75	1.110
CDMA BC15	Rear	1xEVDO (Rel. 0)	875	1753.75	1.030

Hotspot Mode Exposure Conditions

Not Applicable. Highest measured SAR is < 0.80 W/kg.

Note(s):

1. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg.
2. Repeated measurement was performed on the highest measured SAR configuration in each frequency band only.

13.2. Repeated Measurement Results

Head Exposure Condition

Not Applicable. Highest measured SAR is < 0.80 W/kg.

Body-worn Accessory Exposure Condition

Frequency band	Test Position	Mode	Ch #	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
					Original	Repeated		
CDMA BC1	Rear	1xEVDO (Rel. 0)	1175	1908.8	1.110	1.020	1.09	
CDMA BC15	Rear	1xEVDO (Rel. 0)	875	1753.75	1.030	0.959	1.07	

Hotspot Mode Exposure Conditions

Not Applicable. Highest measured SAR is < 0.80 W/kg.

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

14.1. Estimated SAR for Bluetooth

14.1.1. Standalone SAR Test Exclusion

Based on the criteria for Standalone SAR test exclusion listed in Section 4.3.1. of KDB 447498 D01 General RF Exposure Guidance v05:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0, \text{ for 1-g SAR}$$

Body-worn Accessory Exposure Conditions

Max. Power of Channel		Min. Test Separation Distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
10.5	11	10	2.441	1.8

Conclusion:

The computed value is < 3; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

14.1.2. Estimated SAR

As SAR was not measured for Bluetooth, estimated Standalone SAR values were computed for Bluetooth for the purpose of Simultaneous Transmission SAR Analysis using the following formula:

$$(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})/x}] \text{ W/kg,}$$

With x = 7.5 for 1-g SAR

This standalone SAR estimation was performed in accordance with the separation distances listed in Section 17. "Antenna Locations" and only at the applicable simultaneous transmission test positions. The estimated SAR results are as follow:

Test Position	Max. Power of Channel (mW)	Min. Test Separation Distance (mm)	Frequency (GHz)	Estimated 1-g SAR Values (W/kg)
Rear/Front	11	10	2.441	0.229

Note(s):

1. Power and distance are rounded to the nearest mW and mm before calculation
2. If the minimum test separation distance is <5mm then 5mm is used in the calculation

14.2. Head Exposure Conditions

14.2.1. Sum of the SAR for CDMA & WiFi 2.4 / 5 GHz Bands

Test Position	Voice/Data (Highest SAR)	Data					Σ 1-g SAR (mW/g)
	CDMA BC0	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.337	0.258					0.595
	0.337		0.138				0.475
	0.337			0.169			0.506
	0.337				0.117		0.454
	0.337					0.104	0.441
Left Tilt	0.279	0.254					0.533
	0.279		0.137				0.416
	0.279			0.174			0.453
	0.279				0.162		0.441
	0.279					0.146	0.425
Right Touch	0.319	0.201					0.520
	0.319		0.196				0.515
	0.319			0.175			0.494
	0.319				0.119		0.438
	0.319					0.096	0.415
Right Tilt	0.225	0.209					0.434
	0.225		0.140				0.365
	0.225			0.154			0.379
	0.225				0.105		0.330
	0.225					0.153	0.378
Test Position	Voice/Data (Highest SAR)	Data					Σ 1-g SAR (mW/g)
	CDMA BC1	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.778	0.258					1.036
	0.778		0.138				0.916
	0.778			0.169			0.947
	0.778				0.117		0.895
	0.778					0.104	0.882
Left Tilt	0.308	0.254					0.562
	0.308		0.137				0.445
	0.308			0.174			0.482
	0.308				0.162		0.470
	0.308					0.146	0.454
Right Touch	0.562	0.201					0.763
	0.562		0.196				0.758
	0.562			0.175			0.737
	0.562				0.119		0.681
	0.562					0.096	0.658
Right Tilt	0.283	0.209					0.492
	0.283		0.140				0.423
	0.283			0.154			0.437
	0.283				0.105		0.388
	0.283					0.153	0.436

Sum of the SAR for CDMA & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Voice/Data (Highest SAR)	Data					Σ 1-g SAR (mW/g)
	CDMA BC15	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.372	0.258					0.630
	0.372		0.138				0.510
	0.372			0.169			0.541
	0.372				0.117		0.489
	0.372					0.104	0.476
Left Tilt	0.174	0.254					0.428
	0.174		0.137				0.311
	0.174			0.174			0.348
	0.174				0.162		0.336
	0.174					0.146	0.320
Right Touch	0.267	0.201					0.468
	0.267		0.196				0.463
	0.267			0.175			0.442
	0.267				0.119		0.386
	0.267					0.096	0.363
Right Tilt	0.163	0.209					0.372
	0.163		0.140				0.303
	0.163			0.154			0.317
	0.163				0.105		0.268
	0.163					0.153	0.316

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.2.2. Sum of the SAR for LTE & WiFi 2.4 / 5 GHz Bands

Test Position	Data	Data					Σ 1-g SAR (mW/g)
	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.137	0.258					0.395
	0.137		0.138				0.275
	0.137			0.169			0.306
	0.137				0.117		0.254
	0.137					0.104	0.241
Left Tilt	0.074	0.254					0.328
	0.074		0.137				0.211
	0.074			0.174			0.248
	0.074				0.162		0.236
	0.074					0.146	0.220
Right Touch	0.253	0.201					0.454
	0.253		0.196				0.449
	0.253			0.175			0.428
	0.253				0.119		0.372
	0.253					0.096	0.349
Right Tilt	0.076	0.209					0.285
	0.076		0.140				0.216
	0.076			0.154			0.230
	0.076				0.105		0.181
	0.076					0.153	0.229
Test Position	Data	Data					Σ 1-g SAR (mW/g)
	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.158	0.258					0.416
	0.158		0.138				0.296
	0.158			0.169			0.327
	0.158				0.117		0.275
	0.158					0.104	0.262
Left Tilt	0.060	0.254					0.314
	0.060		0.137				0.197
	0.060			0.174			0.234
	0.060				0.162		0.222
	0.060					0.146	0.206
Right Touch	0.187	0.201					0.388
	0.187		0.196				0.383
	0.187			0.175			0.362
	0.187				0.119		0.306
	0.187					0.096	0.283
Right Tilt	0.056	0.209					0.265
	0.056		0.140				0.196
	0.056			0.154			0.210
	0.056				0.105		0.161
	0.056					0.153	0.209

Sum of the SAR for LTE & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Data	Data					Σ 1-g SAR (mW/g)
	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.397	0.258					0.655
	0.397		0.138				0.535
	0.397			0.169			0.566
	0.397				0.117		0.514
	0.397					0.104	0.501
Left Tilt	0.297	0.254					0.551
	0.297		0.137				0.434
	0.297			0.174			0.471
	0.297				0.162		0.459
	0.297					0.146	0.443
Right Touch	0.283	0.201					0.484
	0.283		0.196				0.479
	0.283			0.175			0.458
	0.283				0.119		0.402
	0.283					0.096	0.379
Right Tilt	0.190	0.209					0.399
	0.190		0.140				0.330
	0.190			0.154			0.344
	0.190				0.105		0.295
	0.190					0.153	0.343
Test Position	Data	Data					Σ 1-g SAR (mW/g)
	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.144	0.258					0.402
	0.144		0.138				0.282
	0.144			0.169			0.313
	0.144				0.117		0.261
	0.144					0.104	0.248
Left Tilt	0.082	0.254					0.336
	0.082		0.137				0.219
	0.082			0.174			0.256
	0.082				0.162		0.244
	0.082					0.146	0.228
Right Touch	0.174	0.201					0.375
	0.174		0.196				0.370
	0.174			0.175			0.349
	0.174				0.119		0.293
	0.174					0.096	0.270
Right Tilt	0.098	0.209					0.307
	0.098		0.140				0.238
	0.098			0.154			0.252
	0.098				0.105		0.203
	0.098					0.153	0.251

Sum of the SAR for LTE & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Data	Data					Σ 1-g SAR (mW/g)
	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.117	0.258					0.375
	0.117		0.138				0.255
	0.117			0.169			0.286
	0.117				0.117		0.234
	0.117					0.104	0.221
Left Tilt	0.069	0.254					0.323
	0.069		0.137				0.206
	0.069			0.174			0.243
	0.069				0.162		0.231
	0.069					0.146	0.215
Right Touch	0.293	0.201					0.494
	0.293		0.196				0.489
	0.293			0.175			0.468
	0.293				0.119		0.412
	0.293					0.096	0.389
Right Tilt	0.088	0.209					0.297
	0.088		0.140				0.228
	0.088			0.154			0.242
	0.088				0.105		0.193
	0.088					0.153	0.241

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.2.3. Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 / 5 GHz Bands

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC0	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.337	0.137	0.258					0.732
	0.337	0.137		0.138				0.612
	0.337	0.137			0.169			0.643
	0.337	0.137				0.117		0.591
	0.337	0.137					0.104	0.578
Left Tilt	0.279	0.074	0.254					0.607
	0.279	0.074		0.137				0.490
	0.279	0.074			0.174			0.527
	0.279	0.074				0.162		0.515
	0.279	0.074					0.146	0.499
Right Touch	0.319	0.253	0.201					0.773
	0.319	0.253		0.196				0.768
	0.319	0.253			0.175			0.747
	0.319	0.253				0.119		0.691
	0.319	0.253					0.096	0.668
Right Tilt	0.210	0.076	0.209					0.495
	0.210	0.076		0.140				0.426
	0.210	0.076			0.154			0.440
	0.210	0.076				0.105		0.391
	0.210	0.076					0.153	0.439
Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC0	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.337	0.158	0.258					0.753
	0.337	0.158		0.138				0.633
	0.337	0.158			0.169			0.664
	0.337	0.158				0.117		0.612
	0.337	0.158					0.104	0.599
Left Tilt	0.279	0.060	0.254					0.593
	0.279	0.060		0.137				0.476
	0.279	0.060			0.174			0.513
	0.279	0.060				0.162		0.501
	0.279	0.060					0.146	0.485
Right Touch	0.319	0.187	0.201					0.707
	0.319	0.187		0.196				0.702
	0.319	0.187			0.175			0.681
	0.319	0.187				0.119		0.625
	0.319	0.187					0.096	0.602
Right Tilt	0.210	0.056	0.209					0.475
	0.210	0.056		0.140				0.406
	0.210	0.056			0.154			0.420
	0.210	0.056				0.105		0.371
	0.210	0.056					0.153	0.419

Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC0	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.337	0.397	0.258					0.992
	0.337	0.397		0.138				0.872
	0.337	0.397			0.169			0.903
	0.337	0.397				0.117		0.851
	0.337	0.397					0.104	0.838
Left Tilt	0.279	0.297	0.254					0.830
	0.279	0.297		0.137				0.713
	0.279	0.297			0.174			0.750
	0.279	0.297				0.162		0.738
	0.279	0.297					0.146	0.722
Right Touch	0.319	0.283	0.201					0.803
	0.319	0.283		0.196				0.798
	0.319	0.283			0.175			0.777
	0.319	0.283				0.119		0.721
	0.319	0.283					0.096	0.698
Right Tilt	0.210	0.190	0.209					0.609
	0.210	0.190		0.140				0.540
	0.210	0.190			0.154			0.554
	0.210	0.190				0.105		0.505
	0.210	0.190					0.153	0.553
Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC0	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.337	0.144	0.258					0.739
	0.337	0.144		0.138				0.619
	0.337	0.144			0.169			0.650
	0.337	0.144				0.117		0.598
	0.337	0.144					0.104	0.585
Left Tilt	0.279	0.082	0.254					0.615
	0.279	0.082		0.137				0.498
	0.279	0.082			0.174			0.535
	0.279	0.082				0.162		0.523
	0.279	0.082					0.146	0.507
Right Touch	0.319	0.174	0.201					0.694
	0.319	0.174		0.196				0.689
	0.319	0.174			0.175			0.668
	0.319	0.174				0.119		0.612
	0.319	0.174					0.096	0.589
Right Tilt	0.210	0.098	0.209					0.517
	0.210	0.098		0.140				0.448
	0.210	0.098			0.154			0.462
	0.210	0.098				0.105		0.413
	0.210	0.098					0.153	0.461

Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC0	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.337	0.117	0.258					0.712
	0.337	0.117		0.138				0.592
	0.337	0.117			0.169			0.623
	0.337	0.117				0.117		0.571
	0.337	0.117					0.104	0.558
Left Tilt	0.279	0.069	0.254					0.602
	0.279	0.069		0.137				0.485
	0.279	0.069			0.174			0.522
	0.279	0.069				0.162		0.510
	0.279	0.069					0.146	0.494
Right Touch	0.319	0.293	0.201					0.813
	0.319	0.293		0.196				0.808
	0.319	0.293			0.175			0.787
	0.319	0.293				0.119		0.731
	0.319	0.293					0.096	0.708
Right Tilt	0.210	0.088	0.209					0.507
	0.210	0.088		0.140				0.438
	0.210	0.088			0.154			0.452
	0.210	0.088				0.105		0.403
	0.210	0.088					0.153	0.451
Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC1	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.778	0.137	0.258					1.173
	0.778	0.137		0.138				1.053
	0.778	0.137			0.169			1.084
	0.778	0.137				0.117		1.032
	0.778	0.137					0.104	1.019
Left Tilt	0.299	0.074	0.254					0.627
	0.299	0.074		0.137				0.510
	0.299	0.074			0.174			0.547
	0.299	0.074				0.162		0.535
	0.299	0.074					0.146	0.519
Right Touch	0.527	0.253	0.201					0.981
	0.527	0.253		0.196				0.976
	0.527	0.253			0.175			0.955
	0.527	0.253				0.119		0.899
	0.527	0.253					0.096	0.876
Right Tilt	0.283	0.076	0.209					0.568
	0.283	0.076		0.140				0.499
	0.283	0.076			0.154			0.513
	0.283	0.076				0.105		0.464
	0.283	0.076					0.153	0.512

Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC1	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.778	0.158	0.258					1.194
	0.778	0.158		0.138				1.074
	0.778	0.158			0.169			1.105
	0.778	0.158				0.117		1.053
	0.778	0.158					0.104	1.040
Left Tilt	0.299	0.060	0.254					0.613
	0.299	0.060		0.137				0.496
	0.299	0.060			0.174			0.533
	0.299	0.060				0.162		0.521
	0.299	0.060					0.146	0.505
Right Touch	0.527	0.187	0.201					0.915
	0.527	0.187		0.196				0.910
	0.527	0.187			0.175			0.889
	0.527	0.187				0.119		0.833
	0.527	0.187					0.096	0.810
Right Tilt	0.283	0.056	0.209					0.548
	0.283	0.056		0.140				0.479
	0.283	0.056			0.154			0.493
	0.283	0.056				0.105		0.444
	0.283	0.056					0.153	0.492
Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC1	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.778	0.397	0.258					1.433
	0.778	0.397		0.138				1.313
	0.778	0.397			0.169			1.344
	0.778	0.397				0.117		1.292
	0.778	0.397					0.104	1.279
Left Tilt	0.299	0.297	0.254					0.850
	0.299	0.297		0.137				0.733
	0.299	0.297			0.174			0.770
	0.299	0.297				0.162		0.758
	0.299	0.297					0.146	0.742
Right Touch	0.527	0.283	0.201					1.011
	0.527	0.283		0.196				1.006
	0.527	0.283			0.175			0.985
	0.527	0.283				0.119		0.929
	0.527	0.283					0.096	0.906
Right Tilt	0.283	0.190	0.209					0.682
	0.283	0.190		0.140				0.613
	0.283	0.190			0.154			0.627
	0.283	0.190				0.105		0.578
	0.283	0.190					0.153	0.626

Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC1	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.778	0.144	0.258					1.180
	0.778	0.144		0.138				1.060
	0.778	0.144			0.169			1.091
	0.778	0.144				0.117		1.039
	0.778	0.144					0.104	1.026
Left Tilt	0.299	0.082	0.254					0.635
	0.299	0.082		0.137				0.518
	0.299	0.082			0.174			0.555
	0.299	0.082				0.162		0.543
	0.299	0.082					0.146	0.527
Right Touch	0.527	0.174	0.201					0.902
	0.527	0.174		0.196				0.897
	0.527	0.174			0.175			0.876
	0.527	0.174				0.119		0.820
	0.527	0.174					0.096	0.797
Right Tilt	0.283	0.098	0.209					0.590
	0.283	0.098		0.140				0.521
	0.283	0.098			0.154			0.535
	0.283	0.098				0.105		0.486
	0.283	0.098					0.153	0.534
Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC1	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.778	0.117	0.258					1.153
	0.778	0.117		0.138				1.033
	0.778	0.117			0.169			1.064
	0.778	0.117				0.117		1.012
	0.778	0.117					0.104	0.999
Left Tilt	0.299	0.069	0.254					0.622
	0.299	0.069		0.137				0.505
	0.299	0.069			0.174			0.542
	0.299	0.069				0.162		0.530
	0.299	0.069					0.146	0.514
Right Touch	0.527	0.293	0.201					1.021
	0.527	0.293		0.196				1.016
	0.527	0.293			0.175			0.995
	0.527	0.293				0.119		0.939
	0.527	0.293					0.096	0.916
Right Tilt	0.283	0.088	0.209					0.580
	0.283	0.088		0.140				0.511
	0.283	0.088			0.154			0.525
	0.283	0.088				0.105		0.476
	0.283	0.088					0.153	0.524

Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC15	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.372	0.137	0.258					0.767
	0.372	0.137		0.138				0.647
	0.372	0.137			0.169			0.678
	0.372	0.137				0.117		0.626
	0.372	0.137					0.104	0.613
Left Tilt	0.174	0.074	0.254					0.502
	0.174	0.074		0.137				0.385
	0.174	0.074			0.174			0.422
	0.174	0.074				0.162		0.410
	0.174	0.074					0.146	0.394
Right Touch	0.267	0.253	0.201					0.721
	0.267	0.253		0.196				0.716
	0.267	0.253			0.175			0.695
	0.267	0.253				0.119		0.639
	0.267	0.253					0.096	0.616
Right Tilt	0.163	0.076	0.209					0.448
	0.163	0.076		0.140				0.379
	0.163	0.076			0.154			0.393
	0.163	0.076				0.105		0.344
	0.163	0.076					0.153	0.392
Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC15	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.372	0.158	0.258					0.788
	0.372	0.158		0.138				0.668
	0.372	0.158			0.169			0.699
	0.372	0.158				0.117		0.647
	0.372	0.158					0.104	0.634
Left Tilt	0.174	0.060	0.254					0.488
	0.174	0.060		0.137				0.371
	0.174	0.060			0.174			0.408
	0.174	0.060				0.162		0.396
	0.174	0.060					0.146	0.380
Right Touch	0.267	0.187	0.201					0.655
	0.267	0.187		0.196				0.650
	0.267	0.187			0.175			0.629
	0.267	0.187				0.119		0.573
	0.267	0.187					0.096	0.550
Right Tilt	0.163	0.056	0.209					0.428
	0.163	0.056		0.140				0.359
	0.163	0.056			0.154			0.373
	0.163	0.056				0.105		0.324
	0.163	0.056					0.153	0.372

Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC15	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.372	0.397	0.258					1.027
	0.372	0.397		0.138				0.907
	0.372	0.397			0.169			0.938
	0.372	0.397				0.117		0.886
	0.372	0.397					0.104	0.873
Left Tilt	0.174	0.297	0.254					0.725
	0.174	0.297		0.137				0.608
	0.174	0.297			0.174			0.645
	0.174	0.297				0.162		0.633
	0.174	0.297					0.146	0.617
Right Touch	0.267	0.283	0.201					0.751
	0.267	0.283		0.196				0.746
	0.267	0.283			0.175			0.725
	0.267	0.283				0.119		0.669
	0.267	0.283					0.096	0.646
Right Tilt	0.163	0.190	0.209					0.562
	0.163	0.190		0.140				0.493
	0.163	0.190			0.154			0.507
	0.163	0.190				0.105		0.458
	0.163	0.190					0.153	0.506
Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC15	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.372	0.144	0.258					0.774
	0.372	0.144		0.138				0.654
	0.372	0.144			0.169			0.685
	0.372	0.144				0.117		0.633
	0.372	0.144					0.104	0.620
Left Tilt	0.174	0.082	0.254					0.510
	0.174	0.082		0.137				0.393
	0.174	0.082			0.174			0.430
	0.174	0.082				0.162		0.418
	0.174	0.082					0.146	0.402
Right Touch	0.267	0.174	0.201					0.642
	0.267	0.174		0.196				0.637
	0.267	0.174			0.175			0.616
	0.267	0.174				0.119		0.560
	0.267	0.174					0.096	0.537
Right Tilt	0.163	0.098	0.209					0.470
	0.163	0.098		0.140				0.401
	0.163	0.098			0.154			0.415
	0.163	0.098				0.105		0.366
	0.163	0.098					0.153	0.414

Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 / 5 GHz Bands (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data					Σ 1-g SAR (mW/g)
	CDMA BC15	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	
Left Touch	0.372	0.117	0.258					0.747
	0.372	0.117		0.138				0.627
	0.372	0.117			0.169			0.658
	0.372	0.117				0.117		0.606
	0.372	0.117					0.104	0.593
Left Tilt	0.174	0.069	0.254					0.497
	0.174	0.069		0.137				0.380
	0.174	0.069			0.174			0.417
	0.174	0.069				0.162		0.405
	0.174	0.069					0.146	0.389
Right Touch	0.267	0.293	0.201					0.761
	0.267	0.293		0.196				0.756
	0.267	0.293			0.175			0.735
	0.267	0.293				0.119		0.679
	0.267	0.293					0.096	0.656
Right Tilt	0.163	0.088	0.209					0.460
	0.163	0.088		0.140				0.391
	0.163	0.088			0.154			0.405
	0.163	0.088				0.105		0.356
	0.163	0.088					0.153	0.404

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.3. Body-worn Accessory Exposure Conditions

14.3.1. Sum of the SAR for CDMA, WiFi 2.4 / 5 GHz Bands & Bluetooth

Test Position	Voice/Data (Highest SAR)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC0	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.652	0.271						0.923	
	0.652		0.215					0.867	
	0.652			0.225				0.877	
	0.652				0.129			0.781	
	0.652					0.132		0.784	
	0.652						0.229	0.881	2
Front	0.386	0.075						0.461	
	0.386		0.052					0.438	
	0.386			0.040				0.426	
	0.386				0.037			0.423	
	0.386					0.029		0.415	
	0.386						0.229	0.615	2
Test Position	Voice/Data (Highest SAR)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.110	0.271						1.381	
	1.110		0.215					1.325	
	1.110			0.225				1.335	
	1.110				0.129			1.239	
	1.110					0.132		1.242	
	1.110						0.229	1.339	2
Front	0.664	0.075						0.739	
	0.664		0.052					0.716	
	0.664			0.040				0.704	
	0.664				0.037			0.701	
	0.664					0.029		0.693	
	0.664						0.229	0.893	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for CDMA, WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice/Data (Highest SAR)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.030	0.271						1.301	
	1.030		0.215					1.245	
	1.030			0.225				1.255	
	1.030				0.129			1.159	
	1.030					0.132		1.162	
	1.030						0.229	1.259	2
Front	0.597	0.075						0.672	
	0.597		0.052					0.649	
	0.597			0.040				0.637	
	0.597				0.037			0.634	
	0.597					0.029		0.626	
	0.597						0.229	0.826	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.3.2. Sum of the SAR for LTE, WiFi 2.4 / 5 GHz Bands & Bluetooth

Test Position	Data	Data						Σ 1-g SAR (mW/g)	Note
	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.327	0.271						0.598	
	0.327		0.215					0.542	
	0.327			0.225				0.552	
	0.327				0.129			0.456	
	0.327					0.132		0.459	
	0.327						0.229	0.556	2
Front	0.207	0.075						0.282	
	0.207		0.052					0.259	
	0.207			0.040				0.247	
	0.207				0.037			0.244	
	0.207					0.029		0.236	
	0.207						0.229	0.436	2
Test Position	Data	Data						Σ 1-g SAR (mW/g)	Note
	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.243	0.271						0.514	
	0.243		0.215					0.458	
	0.243			0.225				0.468	
	0.243				0.129			0.372	
	0.243					0.132		0.375	
	0.243						0.229	0.472	2
Front	0.167	0.075						0.242	
	0.167		0.052					0.219	
	0.167			0.040				0.207	
	0.167				0.037			0.204	
	0.167					0.029		0.196	
	0.167						0.229	0.396	2
Test Position	Data	Data						Σ 1-g SAR (mW/g)	Note
	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.348	0.271						0.619	
	0.348		0.215					0.563	
	0.348			0.225				0.573	
	0.348				0.129			0.477	
	0.348					0.132		0.480	
	0.348						0.229	0.577	2
Front	0.138	0.075						0.213	
	0.138		0.052					0.190	
	0.138			0.040				0.178	
	0.138				0.037			0.175	
	0.138					0.029		0.167	
	0.138						0.229	0.367	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for TE, WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Data	Data						Σ 1-g SAR (mW/g)	Note
	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.393	0.271						0.664	
	0.393		0.215					0.608	
	0.393			0.225				0.618	
	0.393				0.129			0.522	
	0.393					0.132		0.525	
	0.393						0.229	0.622	2
Front	0.163	0.075						0.238	
	0.163		0.052					0.215	
	0.163			0.040				0.203	
	0.163				0.037			0.200	
	0.163					0.029		0.192	
	0.163						0.229	0.392	2
Test Position	Data	Data						Σ 1-g SAR (mW/g)	Note
	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.342	0.271						0.613	
	0.342		0.215					0.557	
	0.342			0.225				0.567	
	0.342				0.129			0.471	
	0.342					0.132		0.474	
	0.342						0.229	0.571	2
Front	0.227	0.075						0.302	
	0.227		0.052					0.279	
	0.227			0.040				0.267	
	0.227				0.037			0.264	
	0.227					0.029		0.256	
	0.227						0.229	0.456	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.3.3. Sum of the SAR for SV-LTE (Max. Pwr), WiFi 2.4 / 5 GHz Bands & Bluetooth

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC0	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.621	0.327	0.271						1.219	
	0.621	0.327		0.215					1.163	
	0.621	0.327			0.225				1.173	
	0.621	0.327				0.129			1.077	
	0.621	0.327					0.132		1.080	
	0.621	0.327						0.229	1.177	2
Front	0.382	0.207	0.075						0.664	
	0.382	0.207		0.052					0.641	
	0.382	0.207			0.040				0.629	
	0.382	0.207				0.037			0.626	
	0.382	0.207					0.029		0.618	
	0.382	0.207						0.229	0.818	2

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC0	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.621	0.243	0.271						1.135	
	0.621	0.243		0.215					1.079	
	0.621	0.243			0.225				1.089	
	0.621	0.243				0.129			0.993	
	0.621	0.243					0.132		0.996	
	0.621	0.243						0.229	1.093	2
Front	0.382	0.167	0.075						0.624	
	0.382	0.167		0.052					0.601	
	0.382	0.167			0.040				0.589	
	0.382	0.167				0.037			0.586	
	0.382	0.167					0.029		0.578	
	0.382	0.167						0.229	0.778	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Max. Pwr), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC0	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.621	0.348	0.271						1.240	
	0.621	0.348		0.215					1.184	
	0.621	0.348			0.225				1.194	
	0.621	0.348				0.129			1.098	
	0.621	0.348					0.132		1.101	
	0.621	0.348						0.229	1.198	2
Front	0.382	0.138	0.075						0.595	
	0.382	0.138		0.052					0.572	
	0.382	0.138			0.040				0.560	
	0.382	0.138				0.037			0.557	
	0.382	0.138					0.029		0.549	
	0.382	0.138						0.229	0.749	2

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC0	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.621	0.393	0.271						1.285	
	0.621	0.393		0.215					1.229	
	0.621	0.393			0.225				1.239	
	0.621	0.393				0.129			1.143	
	0.621	0.393					0.132		1.146	
	0.621	0.393						0.229	1.243	2
Front	0.382	0.163	0.075						0.620	
	0.382	0.163		0.052					0.597	
	0.382	0.163			0.040				0.585	
	0.382	0.163				0.037			0.582	
	0.382	0.163					0.029		0.574	
	0.382	0.163						0.229	0.774	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Max. Pwr), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC0	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.621	0.342	0.271						1.234	
	0.621	0.342		0.215					1.178	
	0.621	0.342			0.225				1.188	
	0.621	0.342				0.129			1.092	
	0.621	0.342					0.132		1.095	
	0.621	0.342						0.229	1.192	2
Front	0.382	0.227	0.075						0.684	
	0.382	0.227		0.052					0.661	
	0.382	0.227			0.040				0.649	
	0.382	0.227				0.037			0.646	
	0.382	0.227					0.029		0.638	
	0.382	0.227						0.229	0.838	2

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.327	0.271						1.703	1
	1.105	0.327		0.215					1.647	1
	1.105	0.327			0.225				1.657	1
	1.105	0.327				0.129			1.561	1
	1.105	0.327					0.132		1.564	1
	1.105	0.327						0.229	1.661	1,2
Front	0.617	0.207	0.075						0.899	
	0.617	0.207		0.052					0.876	
	0.617	0.207			0.040				0.864	
	0.617	0.207				0.037			0.861	
	0.617	0.207					0.029		0.853	
	0.617	0.207						0.229	1.053	2

Note(s):

1. Power Reduction was applied on the highest case Sum of SAR. Please refer to Sec. 12.11 for the SAR Results. See sec. 14.3.3.1 for the new calculated Sum of SAR.
2. The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Max. Pwr), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.243	0.271						1.619	1
	1.105	0.243		0.215					1.563	1
	1.105	0.243			0.225				1.573	1
	1.105	0.243				0.129			1.477	1
	1.105	0.243					0.132		1.480	1
	1.105	0.243						0.229	1.577	1,2
Front	0.617	0.167	0.075						0.859	
	0.617	0.167		0.052					0.836	
	0.617	0.167			0.040				0.824	
	0.617	0.167				0.037			0.821	
	0.617	0.167					0.029		0.813	
	0.617	0.167						0.229	1.013	2

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.348	0.271						1.724	1
	1.105	0.348		0.215					1.668	1
	1.105	0.348			0.225				1.678	1
	1.105	0.348				0.129			1.582	1
	1.105	0.348					0.132		1.585	1
	1.105	0.348						0.229	1.682	1,2
Front	0.617	0.138	0.075						0.830	
	0.617	0.138		0.052					0.807	
	0.617	0.138			0.040				0.795	
	0.617	0.138				0.037			0.792	
	0.617	0.138					0.029		0.784	
	0.617	0.138						0.229	0.984	2

Note(s):

1. Power Reduction was applied on the highest case Sum of SAR. Please refer to Sec. 12.11 for the SAR Results. See sec. 14.3.3.1 for the new calculated Sum of SAR.
2. The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Max. Pwr), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.393	0.271						1.769	1
	1.105	0.393		0.215					1.713	1
	1.105	0.393			0.225				1.723	1
	1.105	0.393				0.129			1.627	1
	1.105	0.393					0.132		1.630	1
	1.105	0.393						0.229	1.727	1,2
Front	0.617	0.163	0.075						0.855	
	0.617	0.163		0.052					0.832	
	0.617	0.163			0.040				0.820	
	0.617	0.163				0.037			0.817	
	0.617	0.163					0.029		0.809	
	0.617	0.163						0.229	1.009	2

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.342	0.271						1.718	1
	1.105	0.342		0.215					1.662	1
	1.105	0.342			0.225				1.672	1
	1.105	0.342				0.129			1.576	1
	1.105	0.342					0.132		1.579	1
	1.105	0.342						0.229	1.676	1,2
Front	0.617	0.227	0.075						0.919	
	0.617	0.227		0.052					0.896	
	0.617	0.227			0.040				0.884	
	0.617	0.227				0.037			0.881	
	0.617	0.227					0.029		0.873	
	0.617	0.227						0.229	1.073	2

Note(s):

1. Power Reduction was applied on the highest case Sum of SAR. Please refer to Sec. 12.11 for the SAR Results. See sec. 14.3.3.1 for the new calculated Sum of SAR.
2. The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Max. Pwr), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.327	0.271						1.582	1
	0.984	0.327		0.215					1.526	1
	0.984	0.327			0.225				1.536	1
	0.984	0.327				0.129			1.440	1
	0.984	0.327					0.132		1.443	1
	0.984	0.327						0.229	1.540	1,2
Front	0.611	0.207	0.075						0.893	
	0.611	0.207		0.052					0.870	
	0.611	0.207			0.040				0.858	
	0.611	0.207				0.037			0.855	
	0.611	0.207					0.029		0.847	
	0.611	0.207						0.229	1.047	2

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.243	0.271						1.498	1
	0.984	0.243		0.215					1.442	1
	0.984	0.243			0.225				1.452	1
	0.984	0.243				0.129			1.356	1
	0.984	0.243					0.132		1.359	1
	0.984	0.243						0.229	1.456	1,2
Front	0.611	0.167	0.075						0.853	
	0.611	0.167		0.052					0.830	
	0.611	0.167			0.040				0.818	
	0.611	0.167				0.037			0.815	
	0.611	0.167					0.029		0.807	
	0.611	0.167						0.229	1.007	2

Note(s):

1. Power Reduction was applied on the highest case Sum of SAR. Please refer to Sec. 12.11 for the SAR Results. See sec. 14.3.3.1 for the new calculated Sum of SAR.
2. The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Max. Pwr), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.348	0.271						1.603	1
	0.984	0.348		0.215					1.547	1
	0.984	0.348			0.225				1.557	1
	0.984	0.348				0.129			1.461	1
	0.984	0.348					0.132		1.464	1
	0.984	0.348						0.229	1.561	1,2
Front	0.611	0.138	0.075						0.824	
	0.611	0.138		0.052					0.801	
	0.611	0.138			0.040				0.789	
	0.611	0.138				0.037			0.786	
	0.611	0.138					0.029		0.778	
	0.611	0.138						0.229	0.978	2

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.393	0.271						1.648	1
	0.984	0.393		0.215					1.592	1
	0.984	0.393			0.225				1.602	1
	0.984	0.393				0.129			1.506	1
	0.984	0.393					0.132		1.509	1
	0.984	0.393						0.229	1.606	1,2
Front	0.611	0.163	0.075						0.849	
	0.611	0.163		0.052					0.826	
	0.611	0.163			0.040				0.814	
	0.611	0.163				0.037			0.811	
	0.611	0.163					0.029		0.803	
	0.611	0.163						0.229	1.003	2

Note(s):

1. Power Reduction was applied on the highest case Sum of SAR. Please refer to Sec. 12.11 for the SAR Results. See sec. 14.3.3.1 for the new calculated Sum of SAR.
2. The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Max. Pwr), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.342	0.271						1.597	1
	0.984	0.342		0.215					1.541	1
	0.984	0.342			0.225				1.551	1
	0.984	0.342				0.129			1.455	1
	0.984	0.342					0.132		1.458	1
	0.984	0.342						0.229	1.555	1,2
Front	0.611	0.227	0.075						0.913	
	0.611	0.227		0.052					0.890	
	0.611	0.227			0.040				0.878	
	0.611	0.227				0.037			0.875	
	0.611	0.227					0.029		0.867	
	0.611	0.227						0.229	1.067	

Note(s):

1. Power Reduction was applied on the highest case Sum of SAR. Please refer to Sec. 12.11 for the SAR Results. See sec. 14.3.3.1 for the new calculated Sum of SAR.
2. The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

14.3.3.1. Sum of the SAR for SV-LTE (Pwr Reduction), WiFi 2.4 / 5 GHz Bands & Bluetooth

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.129	0.271						1.505	
	1.105	0.129		0.215					1.449	
	1.105	0.129			0.225				1.459	
	1.105	0.129				0.129			1.363	
	1.105	0.129					0.132		1.366	
	1.105	0.129						0.229	1.463	2
Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.260	0.327	0.271						0.858	
	0.260	0.327		0.215					0.802	
	0.260	0.327			0.225				0.812	
	0.260	0.327				0.129			0.716	
	0.260	0.327					0.132		0.719	
	0.260	0.327						0.229	0.816	2

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.076	0.271						1.452	
	1.105	0.076		0.215					1.396	
	1.105	0.076			0.225				1.406	
	1.105	0.076				0.129			1.310	
	1.105	0.076					0.132		1.313	
	1.105	0.076						0.229	1.410	2
Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.260	0.243	0.271						0.774	
	0.260	0.243		0.215					0.718	
	0.260	0.243			0.225				0.728	
	0.260	0.243				0.129			0.632	
	0.260	0.243					0.132		0.635	
	0.260	0.243						0.229	0.732	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Pwr Reduction), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.153	0.271						1.529	
	1.105	0.153		0.215					1.473	
	1.105	0.153			0.225				1.483	
	1.105	0.153				0.129			1.387	
	1.105	0.153					0.132		1.390	
	1.105	0.153						0.229	1.487	2

Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.260	0.348	0.271						0.879	
	0.260	0.348		0.215					0.823	
	0.260	0.348			0.225				0.833	
	0.260	0.348				0.129			0.737	
	0.260	0.348					0.132		0.740	
	0.260	0.348						0.229	0.837	2

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.162	0.271						1.538	
	1.105	0.162		0.215					1.482	
	1.105	0.162			0.225				1.492	
	1.105	0.162				0.129			1.396	
	1.105	0.162					0.132		1.399	
	1.105	0.162						0.229	1.496	2

Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.260	0.393	0.271						0.924	
	0.260	0.393		0.215					0.868	
	0.260	0.393			0.225				0.878	
	0.260	0.393				0.129			0.782	
	0.260	0.393					0.132		0.785	
	0.260	0.393						0.229	0.882	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Pwr Reduction), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	1.105	0.120	0.271						1.496	
	1.105	0.120		0.215					1.440	
	1.105	0.120			0.225				1.450	
	1.105	0.120				0.129			1.354	
	1.105	0.120					0.132		1.357	
	1.105	0.120						0.229	1.454	2

Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC1	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.260	0.342	0.271						0.873	
	0.260	0.342		0.215					0.817	
	0.260	0.342			0.225				0.827	
	0.260	0.342				0.129			0.731	
	0.260	0.342					0.132		0.734	
	0.260	0.342						0.229	0.831	2

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.129	0.271						1.384	
	0.984	0.129		0.215					1.328	
	0.984	0.129			0.225				1.338	
	0.984	0.129				0.129			1.242	
	0.984	0.129					0.132		1.245	
	0.984	0.129						0.229	1.342	2

Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 2	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.267	0.327	0.271						0.865	
	0.267	0.327		0.215					0.809	
	0.267	0.327			0.225				0.819	
	0.267	0.327				0.129			0.723	
	0.267	0.327					0.132		0.726	
	0.267	0.327						0.229	0.823	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Pwr Reduction), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.076	0.271						1.331	
	0.984	0.076		0.215					1.275	
	0.984	0.076			0.225				1.285	
	0.984	0.076				0.129			1.189	
	0.984	0.076					0.132		1.192	
	0.984	0.076						0.229	1.289	2

Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 4	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.267	0.243	0.271						0.781	
	0.267	0.243		0.215					0.725	
	0.267	0.243			0.225				0.735	
	0.267	0.243				0.129			0.639	
	0.267	0.243					0.132		0.642	
	0.267	0.243						0.229	0.739	2

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.153	0.271						1.408	
	0.984	0.153		0.215					1.352	
	0.984	0.153			0.225				1.362	
	0.984	0.153				0.129			1.266	
	0.984	0.153					0.132		1.269	
	0.984	0.153						0.229	1.366	2

Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 5	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.267	0.348	0.271						0.886	
	0.267	0.348		0.215					0.830	
	0.267	0.348			0.225				0.840	
	0.267	0.348				0.129			0.744	
	0.267	0.348					0.132		0.747	
	0.267	0.348						0.229	0.844	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

Sum of the SAR for SV-LTE (Pwr Reduction), WiFi 2.4 / 5 GHz Bands & Bluetooth (continued)

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.162	0.271						1.417	
	0.984	0.162		0.215					1.361	
	0.984	0.162			0.225				1.371	
	0.984	0.162				0.129			1.275	
	0.984	0.162					0.132		1.278	
	0.984	0.162						0.229	1.375	2

Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.267	0.393	0.271						0.931	
	0.267	0.393		0.215					0.875	
	0.267	0.393			0.225				0.885	
	0.267	0.393				0.129			0.789	
	0.267	0.393					0.132		0.792	
	0.267	0.393						0.229	0.889	2

Test Position	Voice (Max. Pwr)	Data (Pwr Reduction)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.984	0.120	0.271						1.375	
	0.984	0.120		0.215					1.319	
	0.984	0.120			0.225				1.329	
	0.984	0.120				0.129			1.233	
	0.984	0.120					0.132		1.236	
	0.984	0.120						0.229	1.333	2

Test Position	Voice (Pwr Reduction)	Data (Max. Pwr)	Data						Σ 1-g SAR (mW/g)	Note
	CDMA BC15	LTE Band 25	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.3 GHz	WiFi 5.5 GHz	WiFi 5.8 GHz	Bluetooth		
Rear	0.267	0.342	0.271						0.880	
	0.267	0.342		0.215					0.824	
	0.267	0.342			0.225				0.834	
	0.267	0.342				0.129			0.738	
	0.267	0.342					0.132		0.741	
	0.267	0.342						0.229	0.838	2

Note(s):

- The estimated SAR is used only to determine simultaneous transmission SAR test exclusion, and it should not be reported as the standalone SAR. When SAR is estimated, it must be applied to determine the sum of 1-SAR test exclusion. When SAR to peak location separation ratio test exclusion is applied, the highest reported SAR for simultaneous transmission can be an estimated standalone SAR if the estimated SAR is the highest among the simultaneously transmitting antennas.

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.4. Hotspot Mode Exposure Conditions

14.4.1. Sum of the SAR for CDMA & WiFi 2.4 GHz Band

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Voice/Data (Highest SAR)			Data	Σ 1-g SAR (mW/g)
	CDMA BC0	CDMA BC1	CDMA BC15	WiFi 2.4 GHz	
Edge 1	0			0.157	0.157
		0		0.157	0.157
			0	0.157	0.157
Edge 2	0			0	0
		0		0	0
			0	0	0
Edge 3	0.219			0	0.219
		0.578		0	0.578
			0.454	0	0.454
Edge 4	0.575			0	0.575
		0.599		0	0.599
			0.339	0	0.339

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.4.2. Sum of the SAR for LTE & WiFi 2.4 GHz Band

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Data					Data	Σ 1-g SAR (mW/g)
	LTE Band 2	LTE Band 4	LTE Band 5	LTE Band 12	LTE Band 25	WiFi 2.4 GHz	
Edge 1	0					0.157	0.157
		0				0.157	0.157
			0.082			0.157	0.239
				0		0.157	0.157
					0	0.157	0.157
Edge 2	0.147					0	0.147
		0.097				0	0.097
			0.217			0	0.217
				0.234		0	0.234
					0.173	0	0.173
Edge 3	0.140					0	0.140
		0.220				0	0.220
			0			0	0
				0.095		0	0.095
					0.135	0	0.135
Edge 4	0					0	0
		0				0	0
			0			0	0
				0		0	0
					0	0	0

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.4.3. Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 GHz Band

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Voice (Max. Pwr)			Data (Max. Pwr)	Data	Σ 1-g SAR (mW/g)
	CDMA BC0	CDMA BC1	CDMA BC15	LTE Band 2	WiFi 2.4 GHz	
Edge 1	0			0	0.157	0.157
		0		0	0.157	0.157
			0	0	0.157	0.157
Edge 2	0			0.147	0.157	0.304
		0		0.147	0.157	0.304
			0	0.147	0.157	0.304
Edge 3	0.219			0.140	0.157	0.516
		0.544		0.140	0.157	0.841
			0.454	0.140	0.157	0.751
Edge 4	0.517			0	0.157	0.674
		0.599		0	0.157	0.756
			0.339	0	0.157	0.496

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Voice (Max. Pwr)			Data (Max. Pwr)	Data	Σ 1-g SAR (mW/g)
	CDMA BC0	CDMA BC1	CDMA BC15	LTE Band 4	WiFi 2.4 GHz	
Edge 1	0			0	0.157	0.157
		0		0	0.157	0.157
			0	0	0.157	0.157
Edge 2	0			0.097	0.157	0.254
		0		0.097	0.157	0.254
			0	0.097	0.157	0.254
Edge 3	0.219			0.220	0.157	0.596
		0.544		0.220	0.157	0.921
			0.454	0.220	0.157	0.831
Edge 4	0.517			0	0.157	0.674
		0.599		0	0.157	0.756
			0.339	0	0.157	0.496

Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 GHz / 5 GHz Bands (continued)

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Voice (Max. Pwr)			Data (Max. Pwr)	Data	Σ 1-g SAR (mW/g)
	CDMA BC0	CDMA BC1	CDMA BC15	LTE Band 5	WiFi 2.4 GHz	
Edge 1	0			0.082	0.157	0.239
		0		0.082	0.157	0.239
			0	0.082	0.157	0.239
Edge 2	0			0.217	0.157	0.374
		0		0.217	0.157	0.374
			0	0.217	0.157	0.374
Edge 3	0.219			0	0.157	0.376
		0.544		0	0.157	0.701
			0.454	0	0.157	0.611
Edge 4	0.517			0	0.157	0.674
		0.599		0	0.157	0.756
			0.339	0	0.157	0.496

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Voice (Max. Pwr)			Data (Max. Pwr)	Data			Σ 1-g SAR (mW/g)
	CDMA BC0	CDMA BC1	CDMA BC15	LTE Band 12	WiFi 2.4 GHz	WiFi 5.2 GHz	WiFi 5.8 GHz	
Edge 1	0			0	0.157			0.157
		0		0	0.157			0.157
			0	0	0.157			0.157
Edge 2	0			0.234	0.157			0.391
		0		0.234	0.157			0.391
			0	0.234	0.157			0.391
Edge 3	0.219			0.095	0.157			0.471
		0.544		0.095	0.157			0.796
			0.454	0.095	0.157			0.706
Edge 4	0.517			0	0.157			0.674
		0.599		0	0.157			0.756
			0.339	0	0.157			0.496

Sum of the SAR for SV-LTE (Max. Pwr) & WiFi 2.4 GHz / 5 GHz Bands (continued)

Rear and Front Test Configuration is covered by Body-worn Accessory Exposure Conditions.

Test Position	Voice (Max. Pwr)			Data (Max. Pwr)	Data	Σ 1-g SAR (mW/g)
	CDMA BC0	CDMA BC1	CDMA BC15	LTE Band 25	WiFi 2.4 GHz	
Edge 1	0			0	0.157	0.157
		0		0	0.157	0.157
			0	0	0.157	0.157
Edge 2	0			0.173	0.157	0.330
		0		0.173	0.157	0.330
			0	0.173	0.157	0.330
Edge 3	0.219			0.135	0.157	0.511
		0.544		0.135	0.157	0.836
			0.454	0.135	0.157	0.746
Edge 4	0.517			0	0.157	0.674
		0.599		0	0.157	0.756
			0.339	0	0.157	0.496

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. System Performance Check Plots
- 15.2. SAR Test Plots for CDMA BC0
- 15.3. SAR Test Plots for CDMA BC1
- 15.4. SAR Test Plots for CDMA BC15
- 15.5. SAR Test Plots for LTE Band 2
- 15.6. SAR Test Plots for LTE Band 4
- 15.7. SAR Test Plots for LTE Band 5
- 15.8. SAR Test Plots for LTE Band 12
- 15.9. SAR Test Plots for LTE Band 25
- 15.10. SAR Test Plots for WiFi 2.4 GHz Band
- 15.11. SAR Test Plots for WiFi 5 GHz Bands
- 15.12. Calibration Certificate for E-Field Probe EX3DV4 - SN 3885
- 15.13. Calibration Certificate for E-Field Probe EX3DV4 - SN 3871
- 15.14. Calibration Certificate for E-Field Probe EX3DV3 - SN 3531
- 15.15. Calibration Certificate for E-Field Probe EX3DV4 - SN 3749
- 15.16. Calibration Certificate for D750V2 - SN 1019
- 15.17. Calibration Certificate for D835V2 - SN 4d117
- 15.18. Calibration Certificate for D1750V2 - SN 1053
- 15.19. Calibration Certificate for D1900V2 - SN 5d140
- 15.20. Calibration Certificate for D2450V2 - SN 748
- 15.21. Calibration Certificate for D5GHzV2 - SN 1003