

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No. : DREFCC1804-0114(1)
2. Client / Applicant
 - Name : LG Electronics MobileComm USA, Inc.
 - Address : 1000 Sylvan Ave. Englewood Cliffs NJ 07632
3. Use of Report : Grant of Certification
4. Product Name / Model Name : Mobile phone / LM-V350EM
5. Test Standard : ANSI C 63.4 : 2014
FCC Part 15 Subpart B
(Class B personal computers and peripherals)
6. Date of Test : Mar. 27. 2018 ~ May. 11. 2018
7. Testing Environment : Temperature (20 ~ 25) °C , Humidity (34 ~ 45) % R.H.
8. Test Result : Refer to the attached Test Result

Affirmation	Tested by	Reviewed by
	Name : JinYoung Park (Signature)	Name : MyungJin Song (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.

This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

May. 11. 2018

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

CONTENTS

1. General Remarks	3
2. Test Laboratory.....	3
3. General Information of EUT.....	4
4. EUT Operations and Test Configurations	5
4.1 Principle of Configuration Selection	5
4.2 EUT Operation Mode	5
4.3 Test Configuration Mode.....	5
4.4 Supported Equipment	5
4.5 EUT In/Output Port	6
4.6 Test Voltage and Frequency	6
5. Test Summary	7
6. Test Environment.....	7
7. Test Results : Emission.....	8
7.1 Conducted Disturbance	8
7.2 Radiated Disturbance	11
8. Revision History.....	23

1. General Remarks

This report contains the result of tests performed by :

DT&C Co., Ltd.

42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042

<http://www.dtc.net>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

DT&C Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Remark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
	South Africa	SABS	0006	ISO/IEC 17025
Site Filing	USA	FCC	KR0034 101842 678747, 596748, 804488, 165783	Accredited 2.948 Listed
	Canada	IC	5740A-3 5740A-4	Registered
	Japan	VCCI	C-1427 R-1364, R-3385, R-4076, R-4180, T-1442, G-10338, G-754, G-10815	Registered
Certification	Korea	KC	KR0034	Designation
	Germany	TUV	CARAT 17 11 89112 005	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

The test site comply with the requirements of 2.948 according to ANSI 63.4 - 2014

3. General Information of EUT

Applicant	LG Electronics MobileComm USA, Inc. 1000 Sylvan Ave. Englewood Cliffs NJ 07632
Manufacturer	LG Electronics MobileComm USA, Inc. 1000 Sylvan Ave. Englewood Cliffs NJ 07632
Product Name	Mobile phone
Model Name	LM-V350EM
Add Model Name	LMV350EM, V350EM
RF Module Name	None
FCC ID	ZNFV350EM
Rated Power	DC 3.85 V
Remarks	None

Related Submittal(s) / Grant(s)
Original submittal only

4. EUT Operations and Test Configurations

4.1 Principle of Configuration Selection

Emission :

The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use. For each testing mode different configurations were used, Refer to the individual tests.

4.2 EUT Operation Mode

No.	Mode	Description
1	PC LINK	The EUT is reading, writing, and erasing internal storage.

4.3 Test Configuration Mode

No.	Mode	Description
1	'READ' & 'WRITE' & 'DELETE'	EUT was connected PC by USB cable and continuously operated.

4.4 Supported Equipment

Used*	Product Type	Manufacturer	Model	Remarks
AE	KEYBOARD	LITEON Technology	KB25	None
AE	MOUSE	LG	SM-9023	None
AE	LCD MONITOR	DELL	UP2414Qt	None
AE	PC	DELL	DCNE	None
AE	SSD 3.0	SAMSUNG	MU-PT250B	None
AE	PRINTER	Bixelon	SRP-770	None
AE	Headset	COSY	COV909	None

*Abbreviations:

AE - Auxiliary/Associated Equipment, or
SIM - Simulator

4.5 EUT In/Output Port

Name	Type*	Cable Max. >3m	Cable Shielded	Cable Back shell	Remarks
USB OUT	I/O	1.7	Shield	Plastic	KEYBOARD
USB OUT	I/O	1.7	Shield	Plastic	MOUSE
POWER IN	AC	1.8	Non-Shield	Plastic	LCD MONITOR
DSUB OUT	I/O	1.8	Shield	Plastic	LCD MONITOR
POWER IN	AC	1.8	Non-Shield	Plastic	PC
DSUB IN	I/O	1.8	Shield	Plastic	PC
PARALLEL IN	I/O	2.0	Shield	Plastic	PC
SERIAL IN	I/O	1.9	Shield	Plastic	PC
USB IN	I/O	1.7	Shield	Plastic	PC
USB IN	I/O	1.7	Shield	Plastic	PC
USB IN	I/O	1.0	Shield	Plastic	PC
STEREO IN/OUT	I/O	2.0	Non-Shield	Plastic	PC
USB OUT	I/O	1.0	Shield	Plastic	SSD 3.0
POWER IN	DC	1.8	Non-Shield	Plastic	PRINTER
PARALLEL OUT	I/O	2.0	Shield	Plastic	PRINTER
SERIAL OUT	I/O	1.9	Shield	Plastic	PRINTER
STEREO IN/OUT	I/O	2.0	Non-Shield	Plastic	Headset

*Abbreviations:
 AC = AC Power Port DC = DC Power Port N/E = Non-Electrical
 I/O = Signal Input or Output Port
 TP = Telecommunication Ports

4.6 Test Voltage and Frequency

Case	Voltage (V)	Frequency (Hz)	Phases	Remarks
1	AC 120	60 Hz	Single	None

5. Test Summary

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4 : 2014	C
Radiated Disturbance	ANSI C63.4 : 2014	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

-Conducted Disturbance

Frequency [MHz]	Phase	Result [dB μ V]	Detector	Limit [dB μ V]	Margin [dB]
11.43137	L1	44.43	CAV	50.00	5.57

-Radiated Disturbance

Frequency [MHz]	Pol.	Result [dB μ V/m]	Detector	Limit [dB μ V/m]	Margin [dB]
68.331	Vertical	34.55	QP	40.00	5.45

6. Test Environment

Test Items	Test date (YYYY-MM-DD)	Temp. (°C)	Humidity (% R.H.)	Pressure (kPa)
Conducted Disturbance	2018-03-27	25	34	100.0
Radiated Disturbance	2018-04-02	20	45	-
	2018-05-11	23	45	

7. Test Results : Emission

7.1 Conducted Disturbance

ANSI C63.4	Mains terminal disturbance voltage	Result	
<p>Method: The AMN placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment were at least 0,8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN. The measuring port of the LISN for EUT was connected to spectrum analyzer. Using conducted emission test software, the emissions were scanned with peak detector mode. After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and CISPR Average detector. For (0.15 ~ 30) MHz frequency range, Quasi-Peak detector with 10 kHz RBW and 30 kHz VBW was used. By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.</p>		Comply	
Fully configured sample scanned over the following frequency range	Frequency range on each side of line		Measurement Point
	150 kHz to 30 MHz		Mains
EUT mode (Refer to clauses 4)	Test configuration mode		1
	EUT Operation mode	1	
Limits – Class A			
Frequency (MHz)	Limit dB μ V		
	Quasi-Peak	Average	
0.15 to 0.50	79	66	
0.50 to 30	73	60	
Limits – Class B			
Frequency (MHz)	Limit dB μ V		
	Quasi-Peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	

Measurement uncertainty	
Expanded uncertainty U (95 %, Confidence level, $k = 2$)	2.36 dB

Measurement Instrument					
Description	Model	Manufacturer	Identifier	Cal. Date	Cal. Due
MEASUREMENT SOFTWARE	EMI-C VER. 2.00.0171	TSJ	N/A	N/A	N/A
EMI TEST RECEIVER	ESR7	ROHDE & SCHWARZ	101109	2017.11.16	2018.11.16
TWO-LINE V-NETWORK	ENV216	ROHDE & SCHWARZ	101979	2017.12.18	2018.12.18
LISN	LISN1600	TTI	197204	2017.06.07	2018.06.07
TRANSIENT LIMITER	TL-B0930A	EMCIS	11002	2017.09.07	2018.09.07
50 OHM TERMINATOR	CT-01	TME	N/A	2017.12.26	2018.12.26

Mains terminal disturbance voltage _ Measurement data			
Test configuration mode	1	EUT Operation mode	1
Test voltage (V)	120	Test Frequency (Hz)	60

Results of Conducted Emission



DT&C

Date 2018-03-27

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi/Atm 25 °C 34 % R.H. 100.0 kPa
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : CISPR22_B QP
 CISPR22_B AV

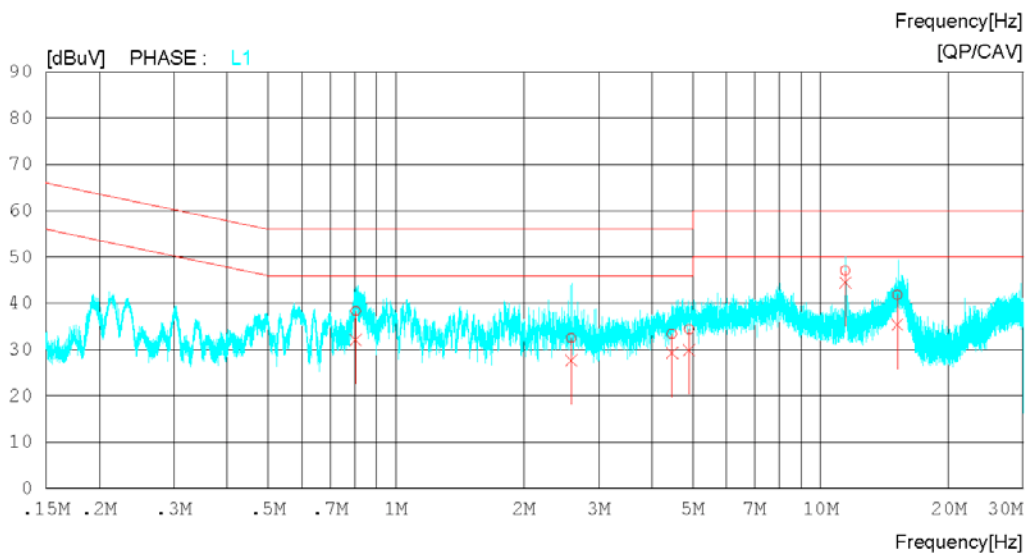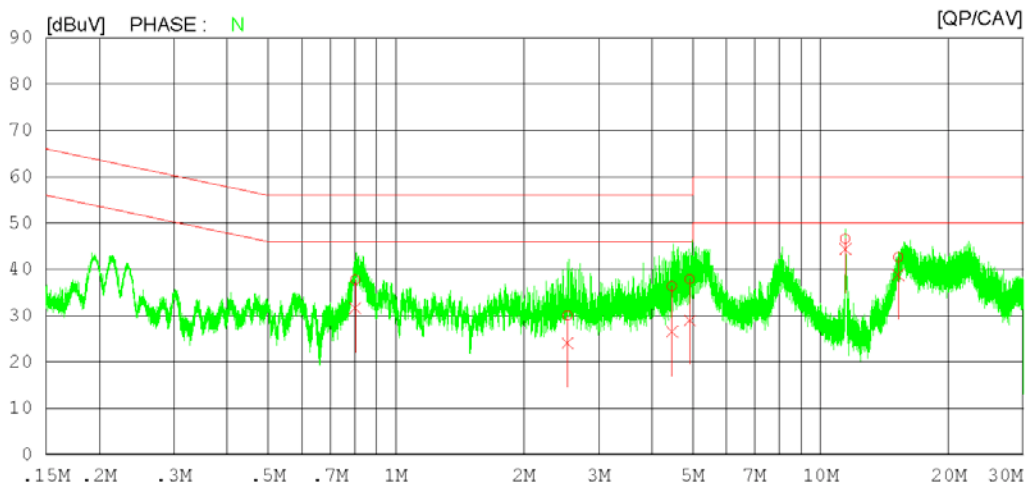

Results of Conducted Emission

DT&C

Date 2018-03-27

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi/Atm 25 'C 34 % R.H. 100.0 kPa
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.80150	17.71	11.60	20.05	37.76	31.65	56.00	46.00	18.24	14.35	N
2	2.53567	10.01	4.05	20.03	30.04	24.08	56.00	46.00	25.96	21.92	N
3	4.46838	16.18	6.38	20.17	36.35	26.55	56.00	46.00	19.65	19.45	N
4	4.92486	17.61	8.77	20.21	37.82	28.98	56.00	46.00	18.18	17.02	N
5	11.43079	25.72	23.41	20.94	46.66	44.35	60.00	50.00	13.34	5.65	N
6	15.23045	21.44	17.64	21.18	42.62	38.82	60.00	50.00	17.38	11.18	N
7	0.80343	18.10	11.87	20.15	38.25	32.02	56.00	46.00	17.75	13.98	L1
8	2.58921	12.28	7.48	20.14	32.42	27.62	56.00	46.00	23.58	18.38	L1
9	4.46810	13.07	8.95	20.27	33.34	29.22	56.00	46.00	22.66	16.78	L1
10	4.90315	14.09	9.58	20.31	34.40	29.89	56.00	46.00	21.60	16.11	L1
11	11.43137	26.03	23.42	21.01	47.04	44.43	60.00	50.00	12.96	5.57	L1
12	15.16040	20.55	14.13	21.18	41.73	35.31	60.00	50.00	18.27	14.69	L1

Calculation

N : Neutral phase, L1 : Live phase
C.FACTOR(dB) : Pulse Limiter(dB) + Cable loss(dB) + Insertion loss of LISN(dB)
Result(dBμV) : Reading Value(dBμV) + C.FACTOR(dB)
Margin(dB) : Limit(dBμV) - Result(dBμV)

7.2 Radiated Disturbance

ANSI C63.4	Radiated disturbance 30 MHz –18 GHz			Result
Method: Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 10 meter below 1GHz and 3 meter above 1GHz. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. For final measurement below 1 GHz frequency range, Quasi-Peak detector with (RBW = 120 kHz Bandwidth) was used. For final measurement above 1 GHz frequency range, Peak detector with (RBW = 1 MHz Bandwidth) and CISPR Average detector with (RBW = 1 MHz Bandwidth) were used.				Comply
EUT mode (Refer to clauses 4)	Test configuration mode		1	
	EUT Operation mode		1	
Radiated Disturbance below 1 000 MHz				
Frequency range (MHz)	Quasi-peak limit dB μ V/m			
	Class A (10 m distance)		Class B (3 m distance)	
30 to 88	39.1		40	
88 to 216	43.5		43.5	
216 to 960	46.4		46	
960 to 1 000	49.5		54	
According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.				
Frequency range (MHz)	Quasi-peak limit dB μ V/m			
	Class A (10 m distance)		Class B (10 m distance)	
30 to 230	40		30	
230 to 1 000	47		37	
Radiated Disturbance for above 1 000 MHz at a measurement distance of 3 m				
Frequency range (GHz)	Peak limit dB μ V/m		Average limit dB μ V/m	
	Class A	Class B	Class A	Class B
1 to 40	80	74	60	54
The test frequency range of Radiated Disturbance measurements are listed below.				
Highest frequency generated or used in the device or on which the device operates or tunes (MHz)			Upper frequency of measurement range (MHz)	
Below 108			1 000	
108 – 500			2 000	
500 – 1 000			5 000	
Above 1 000			5 th harmonic of the highest frequency or 40 GHz, whichever is lower	
Measurement uncertainty				
Expended uncertainty U (95 %, Confidence level, $k = 2$)			4.16 dB, (30 ~ 1 000) MHz 3.74 dB, (1 ~ 6) GHz	

Measurement Instrument					
Description	Model	Manufacturer	Identifier	Cal. Date	Cal. Due
MEASUREMENT SOFTWARE	EMI-R VER. 2.00.0177	TSJ	N/A	N/A	N/A
EMI TEST RECEIVER	ESU	ROHDE & SCHWARZ	100469	2017.07.06	2018.07.06
TRILOG BROAD BAND ANTENNA	VULB9160	SCHWARZBECK	9160-3339	2017.04.21	2019.04.21
LOW NOISE PRE AMPLIFIER	MLA-100K01-B01-26	TSJ	1252741	2018.02.19	2019.02.19
PRE AMPLIFIER	8449B	H.P	3008A00887	2017.09.06	2018.09.06
BROAD-BAND HORN ANTENNA	BBHA 9120D	SCHWARZBECK	9120D-1014	2016.08.05	2018.08.05
HORN ANTENNA	EM-6969	ELECTRO-METRICS	156	2018.01.02	2019.01.02
PREAMPLIFIER	MLA-0618-B03-34	TSJ	1785642	2017.03.02	2019.03.02
LOW NOISE PRE AMPLIFIER	MLA-1840-J02-40	TSJ	13184	2017.10.10	2018.10.10
HORN ANTENNA	SAS-574	A.H.SYSTEMS INC.	155	2017.07.31	2019.07.31

(NOTE : THE MEASUREMENT ANTENNAS WERE CALIBRATED IN ACCORDANCE TO THE REQUIREMENTS OF C63.5-2017.)

Radiated disturbance at (30 ~ 1000) MHz _ Measurement data			
Test configuration mode	1	EUT Operation mode	1
Test voltage (V)	120	Test Frequency (Hz)	60


RADIATED EMISSION

Date 2018-04-02

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 20 °C 45 % R.H.
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m)
 MARGIN: 3 dB

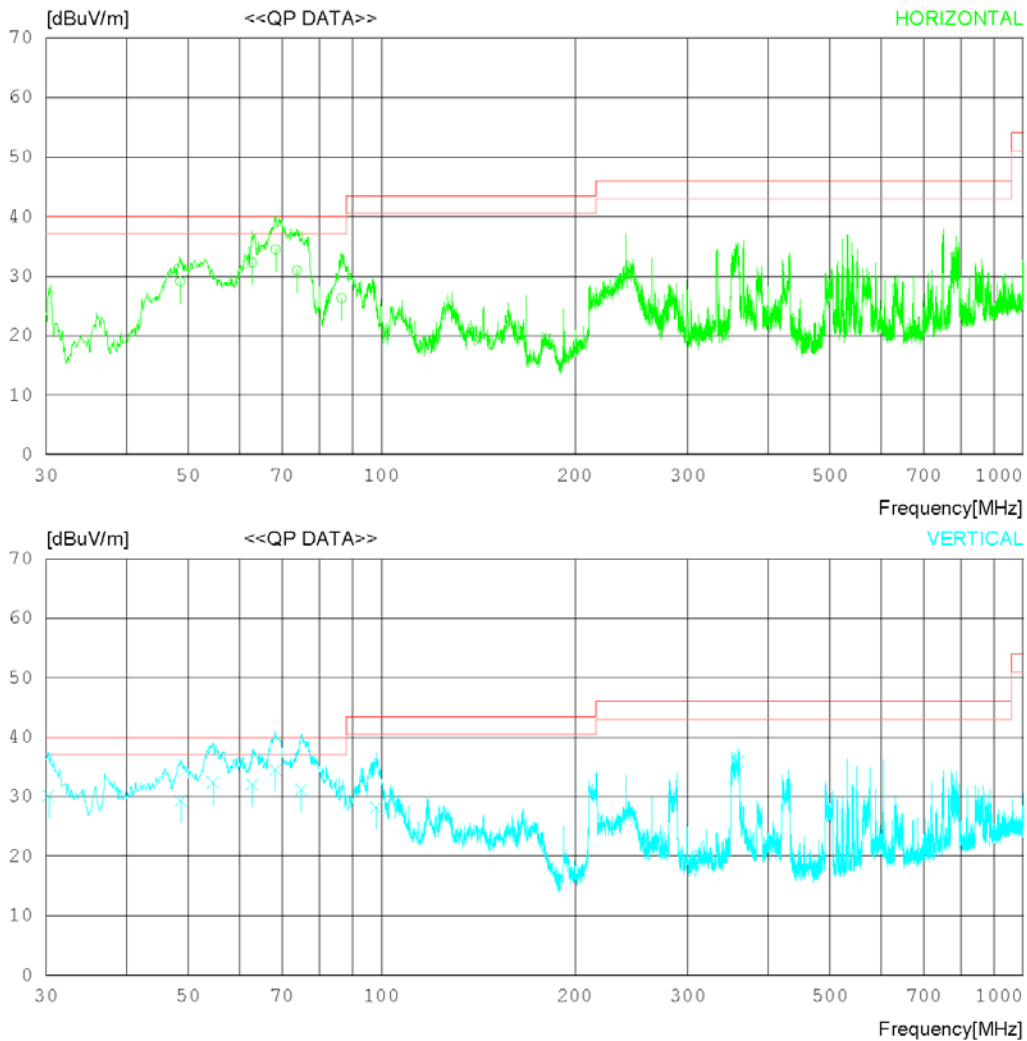

RADIATED EMISSION

Date 2018-04-02

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 20 °C 45 % R.H.
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	68.445	48.10	10.51	1.35	25.52	34.44	40.00	5.56	280	289
2	86.632	43.10	7.27	1.44	25.54	26.27	40.00	13.73	375	23
3	48.612	41.80	11.76	1.08	25.51	29.13	40.00	10.87	380	8
4	62.872	45.10	11.41	1.26	25.52	32.25	40.00	7.75	400	145
5	73.732	45.70	9.38	1.42	25.53	30.97	40.00	9.03	285	23
----- Vertical -----										
6	30.268	45.40	9.35	0.84	25.47	30.12	40.00	9.88	110	1
7	68.331	48.20	10.53	1.34	25.52	34.55	40.00	5.45	105	1
8	98.011	43.60	8.74	1.39	25.55	28.18	43.50	15.32	115	113
9	359.105	43.50	14.67	3.16	25.43	35.90	46.00	10.10	150	13
10	48.635	42.00	11.76	1.08	25.51	29.33	40.00	10.67	120	38
11	54.600	44.80	11.99	1.15	25.51	32.43	40.00	7.57	115	19
12	62.857	44.90	11.41	1.26	25.52	32.05	40.00	7.95	110	11
13	74.947	46.20	9.11	1.43	25.53	31.21	40.00	8.79	100	125

Radiated disturbance at (1 ~ 6) GHz _ Peak measurement data			
Test configuration mode	1	EUT Operation mode	1
Test voltage (V)	120	Test Frequency (Hz)	60



RADIATED EMISSION

Date 2018-05-11

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 23 °C 45 % R.H.
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

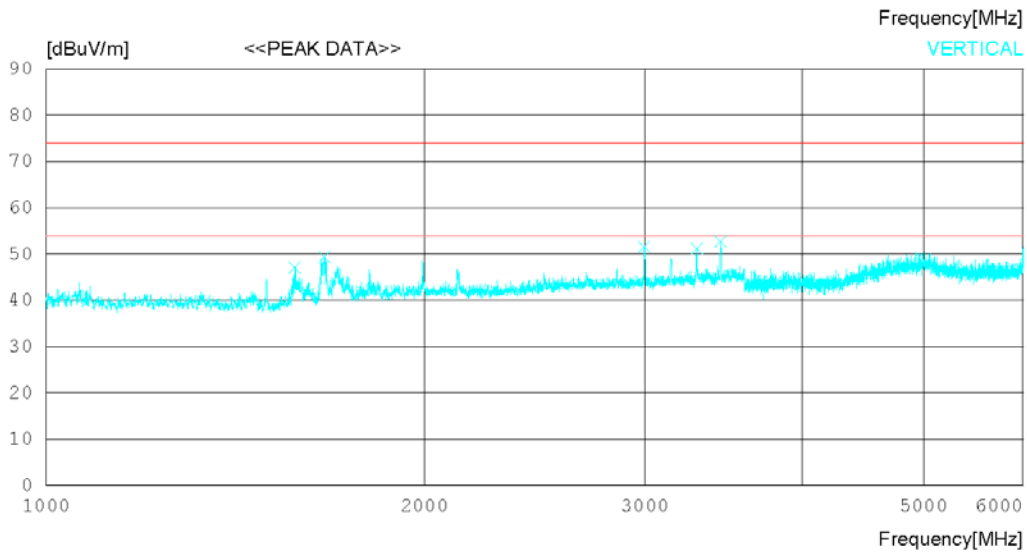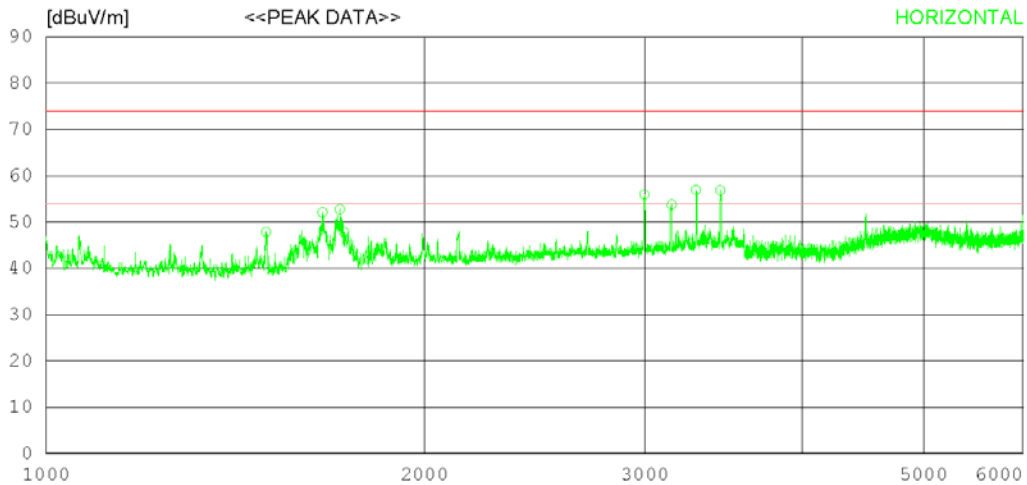

RADIATED EMISSION

Date 2018-05-11

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 23 °C 45 % R.H.
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1496.875	48.20	28.10	3.88	32.31	47.87	74.0	26.13	100	212
2	1661.250	51.70	28.77	4.00	32.38	52.09	74.0	21.91	100	332
3	1713.750	51.90	29.17	4.08	32.40	52.75	74.0	21.25	100	8
4	1728.125	46.80	29.34	4.11	32.41	47.84	74.0	26.16	100	328
5	2995.625	50.40	32.49	5.65	32.58	55.96	74.0	18.04	100	131
6	3149.375	47.80	32.65	5.85	32.59	53.71	74.0	20.29	100	302
7	3294.375	50.70	32.79	6.06	32.61	56.94	74.0	17.06	100	358
8	3444.375	50.40	32.80	6.28	32.62	56.86	74.0	17.14	100	358
----- Vertical -----										
9	1578.750	47.20	28.34	3.90	32.34	47.10	74.0	26.9	100	6
10	1666.250	48.90	28.80	4.01	32.38	49.33	74.0	24.67	100	135
11	2995.625	46.00	32.49	5.65	32.58	51.56	74.0	22.44	100	133
12	3298.750	44.90	32.80	6.06	32.61	51.15	74.0	22.85	100	115
13	3445.000	46.30	32.80	6.28	32.62	52.76	74.0	21.24	100	42

Radiated disturbance at (1 ~ 6) GHz _Average measurement data			
Test configuration mode	1	EUT Operation mode	1
Test voltage (V)	120	Test Frequency (Hz)	60



RADIATED EMISSION

Date 2018-05-11

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 23 °C 45 % R.H.
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

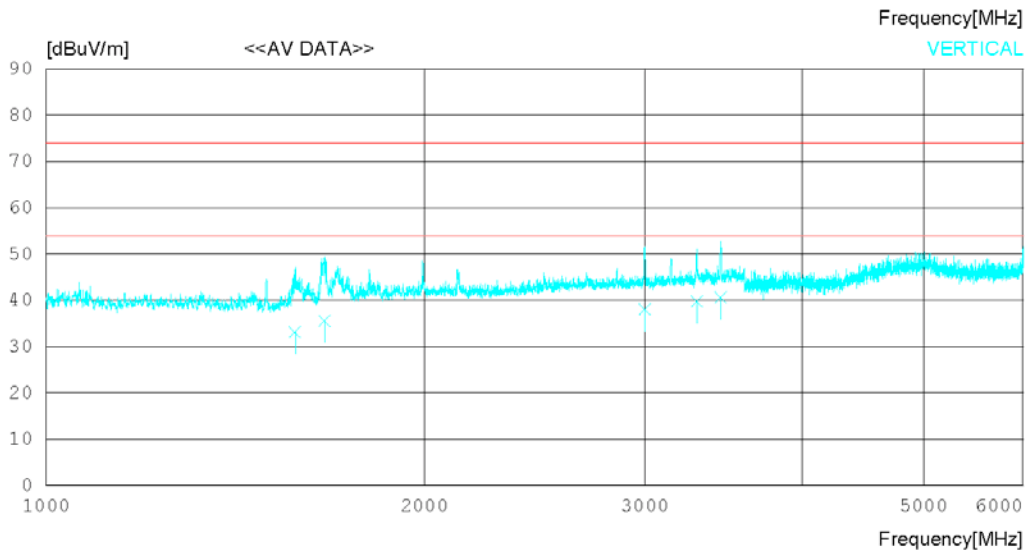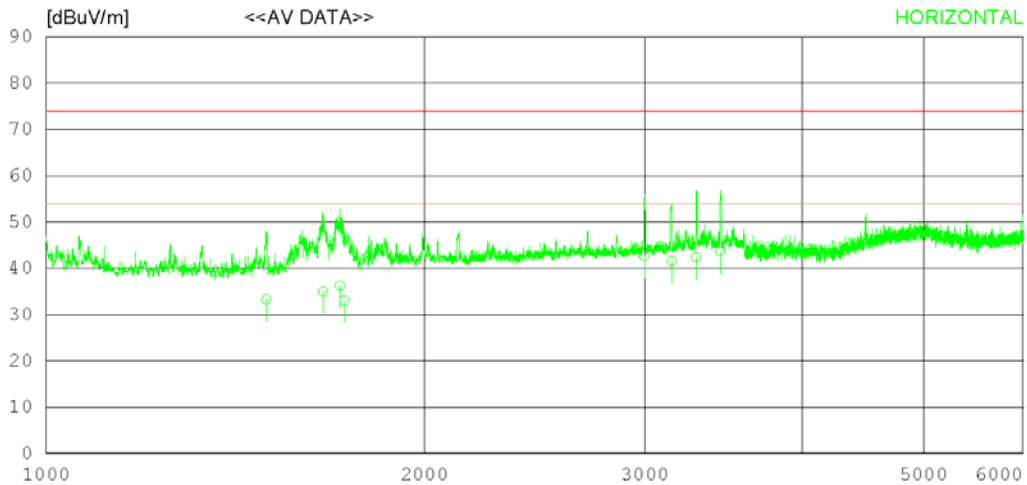

RADIATED EMISSION

Date 2018-05-11

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 23 °C 45 % R.H.
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1496.812	33.63	28.10	3.88	32.31	33.30	54.00	20.70	105	211
2	1660.308	34.57	28.77	4.00	32.38	34.96	54.00	19.04	100	311
3	1713.811	35.40	29.17	4.08	32.40	36.25	54.00	17.75	115	56
4	1728.169	32.06	29.34	4.11	32.41	33.10	54.00	20.90	100	11
5	2995.652	37.11	32.49	5.65	32.58	42.67	54.00	11.33	105	325
6	3148.105	35.68	32.65	5.85	32.59	41.59	54.00	12.41	110	112
7	3294.358	36.10	32.79	6.06	32.61	42.34	54.00	11.66	100	105
8	3444.129	37.18	32.80	6.28	32.62	43.64	54.00	10.36	100	6
----- Vertical -----										
9	1579.751	33.20	28.34	3.90	32.34	33.10	54.00	20.90	120	13
10	1665.054	35.13	28.80	4.01	32.38	35.56	54.00	18.44	105	120
11	2996.552	32.50	32.49	5.66	32.58	38.07	54.00	15.93	115	105
12	3298.621	33.53	32.80	6.06	32.61	39.78	54.00	14.22	110	151
13	3445.015	34.15	32.80	6.28	32.62	40.61	54.00	13.39	100	20


Radiated disturbance at (6 ~ 18) GHz _Peak measurement data			
Test configuration mode	1	EUT Operation mode	1
Test voltage (V)	120	Test Frequency (Hz)	60

RADIATED EMISSION

Date 2018-04-02

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 20 °C 45 % R.H.
 Test Condition PC LINK
 Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

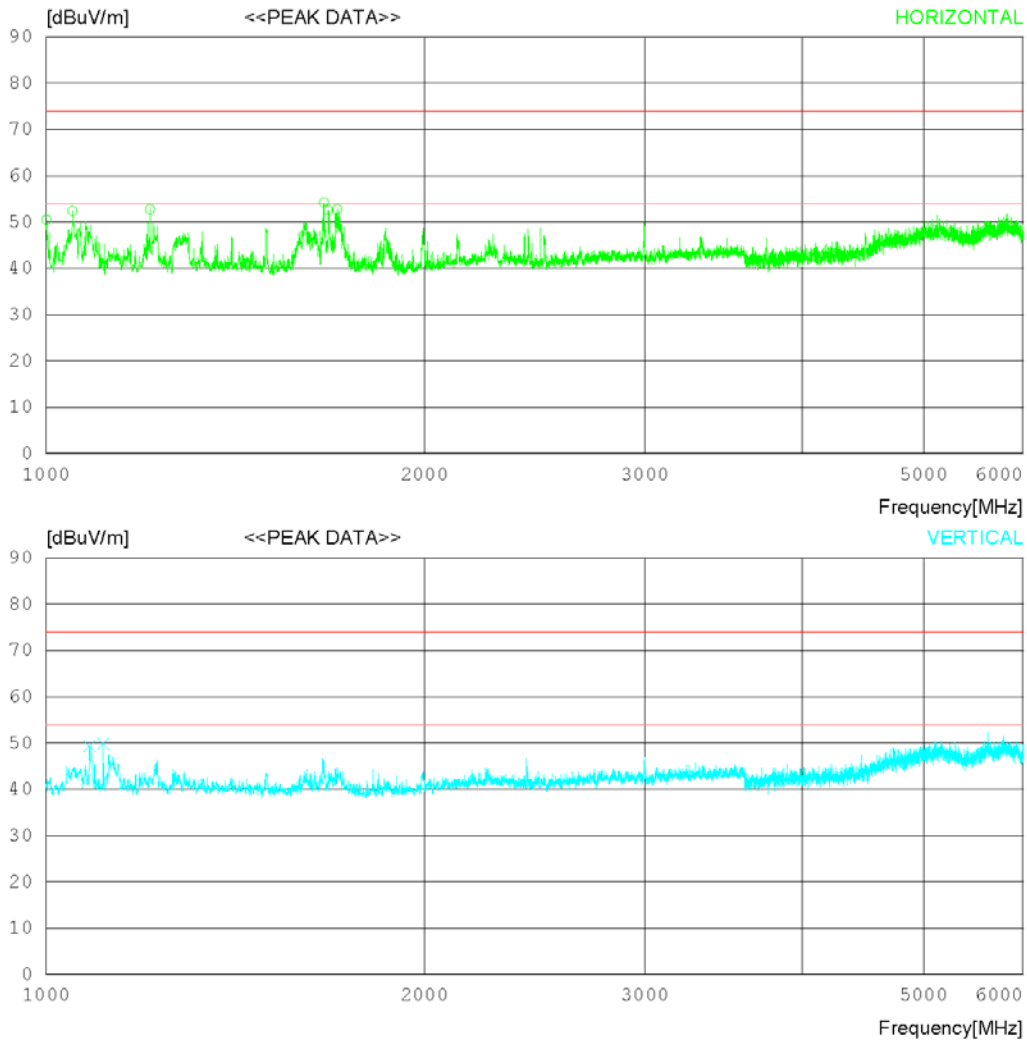

* The measurement is performed above 18 GHz up to 30 GHz and not found emissions above 18 GHz.

RADIATED EMISSION

Date 2018-04-02

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 20 °C 45 % R.H.
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1000.625	53.90	25.40	3.30	32.10	50.50	74.0	23.5	100	152
2	1050.000	55.70	25.40	3.43	32.12	52.41	74.0	21.59	100	152
3	1210.000	55.40	25.63	3.85	32.19	52.69	74.0	21.31	100	241
4	1664.375	57.10	25.24	4.26	32.38	54.22	74.0	19.78	100	174
5	1676.875	55.50	25.22	4.28	32.38	52.62	74.0	21.38	100	174
6	1706.250	55.60	25.21	4.32	32.40	52.73	74.0	21.27	100	358
----- Vertical -----										
7	1083.125	52.50	25.40	3.52	32.13	49.29	74.0	24.71	100	9
8	1110.000	53.00	25.42	3.58	32.15	49.85	74.0	24.15	100	0


Radiated disturbance at (6 ~ 18) GHz _ Average measurement data			
Test configuration mode	1	EUT Operation mode	1
Test voltage (V)	120	Test Frequency (Hz)	60

RADIATED EMISSION

Date 2018-04-02

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 20 °C 45 % R.H.
 Test Condition PC LINK
 Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

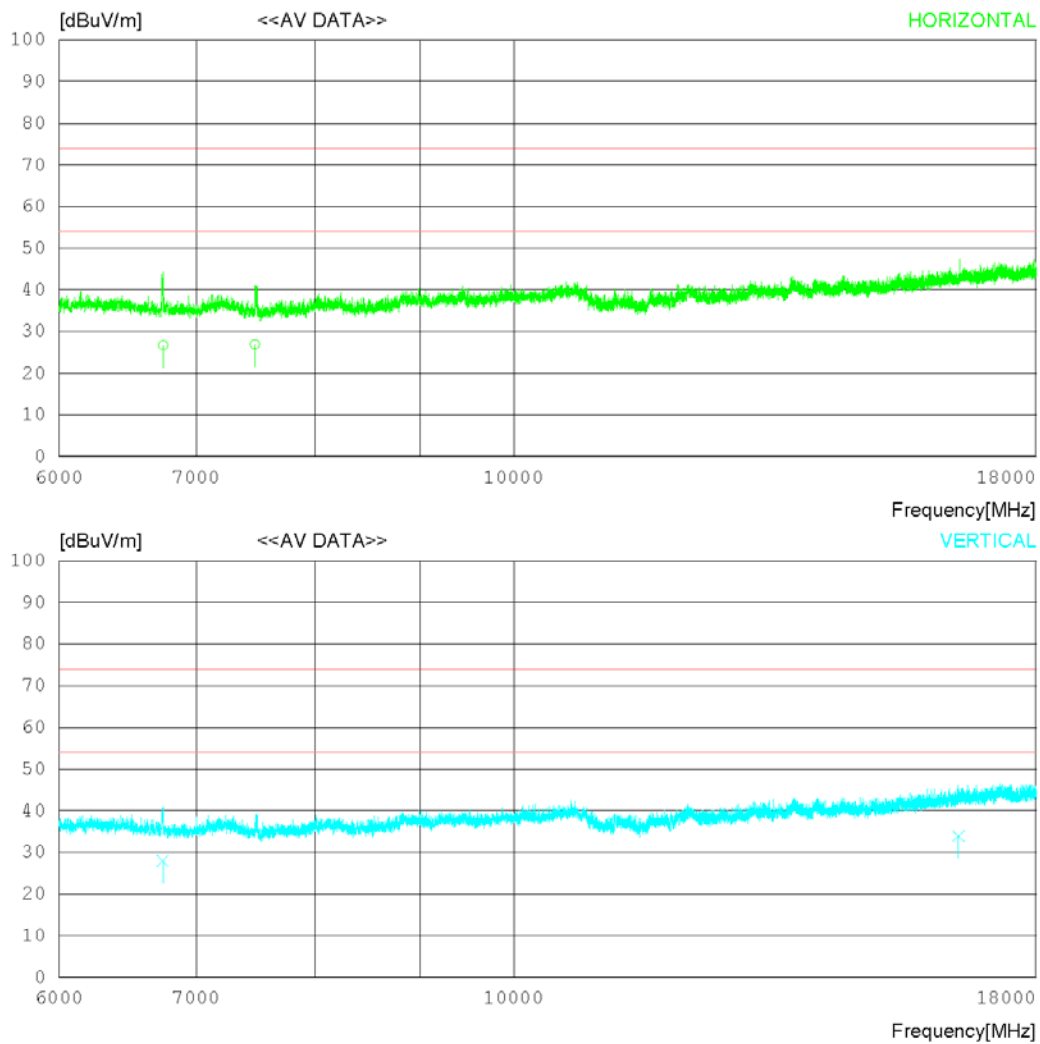

* The measurement is performed above 18 GHz up to 30 GHz and not found emissions above 18 GHz.

RADIATED EMISSION

Date 2018-04-02

Order No. DTNC1803-02188
 Power Supply 120 V 60 Hz
 Temp/Humi 20 °C 45 % R.H.
 Test Condition PC LINK

Model Name LM-V350EM

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING CAV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	6744.578	25.10	31.40	8.91	38.77	26.64	54.00	27.36	100	12
2	7480.532	24.60	31.37	9.64	38.76	26.85	54.00	27.15	100	235
----- Vertical -----										
3	6741.108	26.40	31.40	8.90	38.77	27.93	54.00	26.07	100	325
4	16490.140	20.10	36.88	13.28	36.35	33.91	54.00	20.09	100	12

Calculation

N : Neutral phase, L1 : Live phase
C.FACTOR(dB) : Pulse Limiter(dB) + Cable loss(dB) + Insertion loss of LISN(dB)
Result(dB μ V) : Reading Value(dB μ V) + C.FACTOR(dB)
Margin(dB) : Limit(dB μ V) - Result(dB μ V)

8. Revision History

Date	Description	Revised By	Reviewed By
Apr.10.2018	Initial report	JinYoung Park	MyungJin Song
May.11.2018	Radiated Disturbance Retest (1 GHz ~ 6 GHz)	JinYoung Park	MyungJin Song

-End of test report-