

2 Composition / Information on ingredients

The Item is composed of the following ingredients:

H ₂ O	Water, 35 – 58%
Sucrose	Sugar, white, refined, 40 – 60%
NaCl	Sodium Chloride, 0 – 6%
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7%
Relevant for safety; Refer to the respective Safety Data Sheet*.	

Figure D-1

Composition of 750 MHz Head and Body Tissue Equivalent Matter

Note: 750MHz liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 44 245 9700, Fax +41 44 245 9779
info@speag.com, http://www.speag.com

Measurement Certificate / Material Test

Item Name	Body Tissue Simulating Liquid (MSL750V2)
Product No.	SL AAM 075 AA (Batch: 170608-1)
Manufacturer	SPEAG

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient	Environment temperatur (22 ± 3)°C and humidity < 70%.
TSL Temperature	22°C
Test Date	20-Jun-17
Operator	CL

Additional Information

TSL Density	1.212 g/cm ³
TSL Heat-capacity	3.006 kJ/(kg·K)

f [MHz]	Measured			Target		Diff.to Target [%]	
	e'	e''	sigma	eps	sigma	Δ-eps	Δ-sigma
600	57.3	25.02	0.84	56.1	0.95	2.2	-12.2
625	57.1	24.67	0.86	56.0	0.95	1.9	-10.1
650	56.8	24.32	0.88	55.9	0.96	1.6	-8.0
675	56.6	24.02	0.90	55.8	0.96	1.3	-5.8
700	56.3	23.71	0.92	55.7	0.96	1.1	-3.8
725	56.1	23.48	0.95	55.6	0.96	0.8	-1.5
750	55.9	23.25	0.97	55.5	0.96	0.6	0.7
775	55.6	23.04	0.99	55.4	0.97	0.3	2.9
800	55.4	22.82	1.02	55.3	0.97	0.1	5.0
825	55.2	22.65	1.04	55.2	0.98	-0.1	6.3
838	55.1	22.56	1.05	55.2	0.98	-0.3	6.9
850	54.9	22.47	1.06	55.2	0.99	-0.4	7.5
875	54.7	22.34	1.09	55.1	1.02	-0.7	6.7
900	54.5	22.21	1.11	55.0	1.05	-0.9	5.9
925	54.3	22.08	1.14	55.0	1.06	-1.3	6.9
950	54.1	21.95	1.16	54.9	1.08	-1.6	7.9
975	53.8	21.86	1.19	54.9	1.09	-1.9	9.1
1000	53.6	21.76	1.21	54.8	1.10	-2.2	10.2

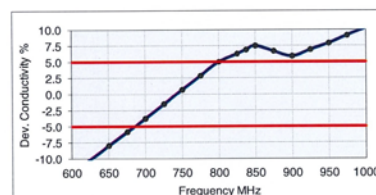
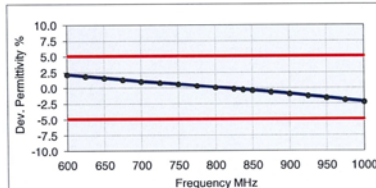




Figure D-2

750MHz Body Tissue Equivalent Matter

FCC ID: ZNFV405UA		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset			APPENDIX D: Page 2 of 5

Measurement Certificate / Material Test

Item Name **Head Tissue Simulating Liquid (HSL750V2)**
 Product No. SL AAH 075 AA (Batch: 170612-4)
 Manufacturer **SPEAG**

Measurement Method

TSL dielectric parameters measured using calibrated DAK probe.

Setup Validation

Validation results were within $\pm 2.5\%$ towards the target values of Methanol.

Target Parameters

Target parameters as defined in the IEEE 1528 and IEC 62209 compliance standards.

Test Condition

Ambient Environment temperatur ($22 \pm 3^\circ\text{C}$ and humidity $< 70\%$).
 TSL Temperature 22°C
 Test Date 20-Jun-17
 Operator CL

Additional Information

TSL Density 1.284 g/cm^3
 TSL Heat-capacity $2.701 \text{ kJ/(kg}^\circ\text{K)}$

f [MHz]	Measured			Target		Diff.to Target [%]	
	e'	e''	sigma	eps	sigma	$\Delta\text{-eps}$	$\Delta\text{-sigma}$
600	45.6	22.97	0.77	42.7	0.88	6.7	-13.1
625	45.2	22.73	0.79	42.6	0.88	6.2	-10.6
650	44.9	22.49	0.81	42.5	0.89	5.6	-8.2
675	44.5	22.27	0.84	42.3	0.89	5.1	-5.8
700	44.2	22.05	0.86	42.2	0.89	4.6	-3.5
725	43.8	21.88	0.88	42.1	0.89	4.2	-1.0
750	43.5	21.72	0.91	41.9	0.89	3.8	1.4
775	43.2	21.55	0.93	41.8	0.90	3.4	3.7
800	42.9	21.38	0.95	41.7	0.90	2.9	6.0
825	42.6	21.24	0.97	41.6	0.91	2.4	7.5
838	42.5	21.17	0.99	41.5	0.91	2.2	8.2
850	42.3	21.09	1.00	41.5	0.92	2.0	8.9
875	42.0	20.98	1.02	41.5	0.94	1.2	8.3
900	41.7	20.87	1.05	41.5	0.97	0.5	7.7
925	41.5	20.76	1.07	41.5	0.98	0.0	8.7
950	41.2	20.64	1.09	41.4	0.99	-0.6	9.7
975	40.9	20.55	1.11	41.4	1.00	-1.1	10.9
1000	40.6	20.46	1.14	41.3	1.01	-1.7	12.1

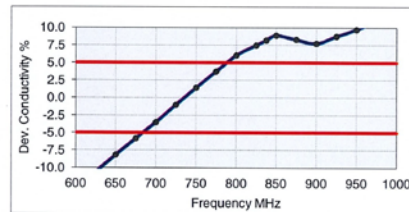
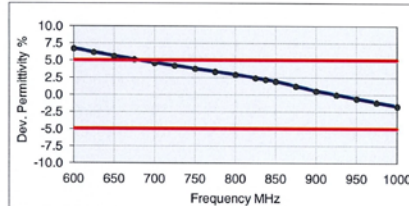




Figure D-3
750MHz Head Tissue Equivalent Matter

FCC ID: ZNFV405UA		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset			APPENDIX D: Page 3 of 5

3 Composition / Information on ingredients

The Item is composed of the following ingredients:

Water	50 – 73 %	
Non-ionic detergents	25 – 50 %	polyoxyethylenesorbitan monolaurate
NaCl	0 – 2 %	
Preservative	0.05 – 0.1 %	Preventol-D7

Safety relevant ingredients:

CAS-No. 55965-84-9	< 0.1 %	aqueous preparation, containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone
--------------------	---------	--

CAS-No. 9005-64-5	< 50 %	polyoxyethylenesorbitan monolaurate
-------------------	--------	-------------------------------------

According to international guidelines, the product is not a dangerous mixture and therefore not required to be marked by symbols.

Figure D-4
Composition of 2.4 GHz Head Tissue Equivalent Matter

Note: 2.4 GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

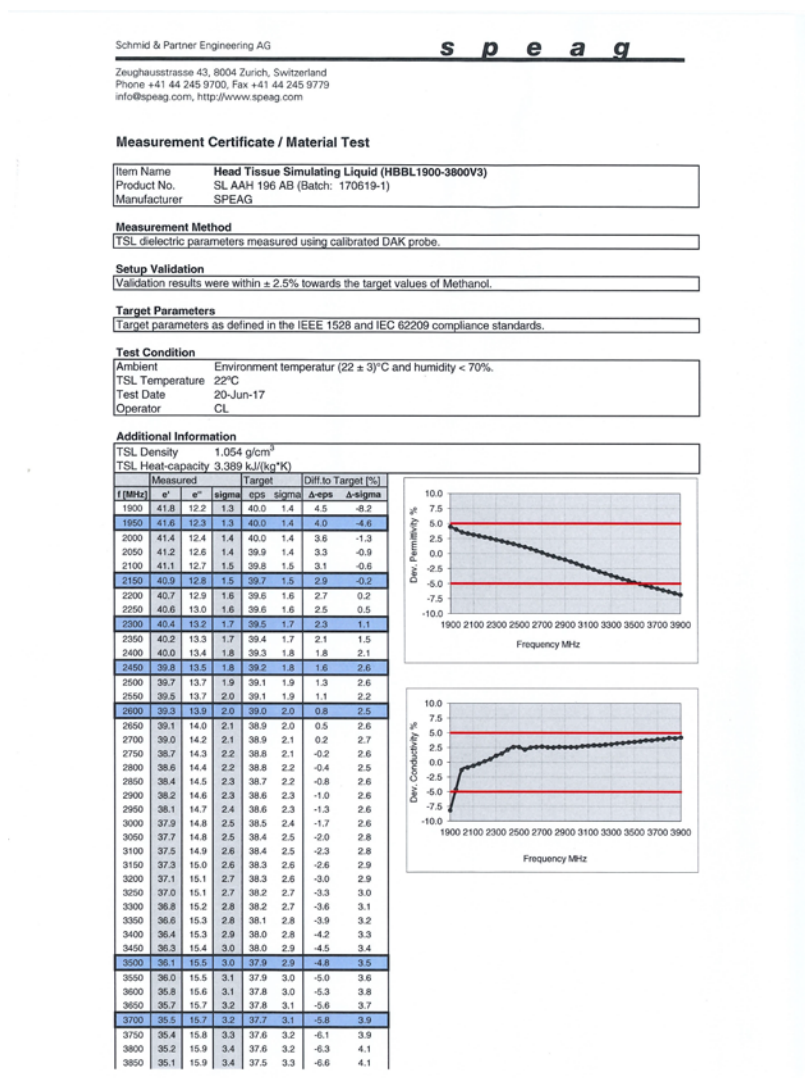




Figure D-5
2.4 GHz Head Tissue Equivalent Matter

FCC ID: ZNFV405UA		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset			APPENDIX D: Page 4 of 5

2 Composition / Information on ingredients

The Item is composed of the following ingredients:

Water	50 – 65%
Mineral oil	10 – 30%
Emulsifiers	8 – 25%
Sodium salt	0 – 1.5%

Figure D-6

Composition of 5 GHz Head Tissue Equivalent Matter

Note: 5GHz head liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

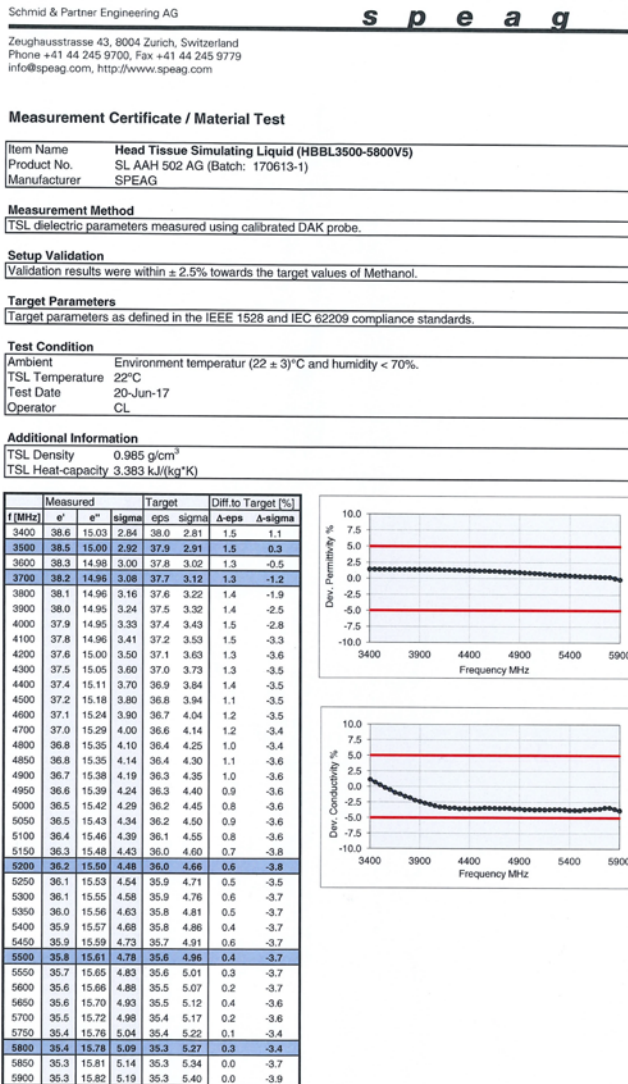




Figure D-7

5GHz Head Tissue Equivalent Matter

FCC ID: ZNFV405UA		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset			APPENDIX D: Page 5 of 5

APPENDIX E: SAR SYSTEM VALIDATION

Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.



Table E-1
SAR System Validation Summary – 1g

SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE TYPE	PROBE CAL. POINT		COND.	PERM.	CW VALIDATION			MOD. VALIDATION		
							(σ)	(ε _r)	SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
E	750	3/11/2018	3213	ES3DV3	750	Head	0.890	40.788	PASS	PASS	PASS	N/A	N/A	N/A
E	835	3/5/2018	3213	ES3DV3	835	Head	0.925	43.335	PASS	PASS	PASS	GMSK	PASS	N/A
H	1750	7/16/2018	7409	EX3DV4	1750	Head	1.331	41.186	PASS	PASS	PASS	N/A	N/A	N/A
G	1900	8/31/2017	3332	ES3DV3	1900	Head	1.457	40.398	PASS	PASS	PASS	GMSK	PASS	N/A
G	2300	10/16/2017	3332	ES3DV3	2300	Head	1.715	39.101	PASS	PASS	PASS	N/A	N/A	N/A
G	2450	10/16/2017	3332	ES3DV3	2450	Head	1.880	38.615	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
G	2600	10/16/2017	3332	ES3DV3	2600	Head	2.051	38.039	PASS	PASS	PASS	TDD	PASS	N/A
H	5250	7/5/2018	7409	EX3DV4	5250	Head	4.492	34.994	PASS	PASS	PASS	OFDM	N/A	PASS
H	5600	7/5/2018	7409	EX3DV4	5600	Head	4.839	34.496	PASS	PASS	PASS	OFDM	N/A	PASS
H	5750	7/5/2018	7409	EX3DV4	5750	Head	4.995	34.288	PASS	PASS	PASS	OFDM	N/A	PASS
J	750	5/24/2018	3347	ES3DV3	750	Body	0.951	55.133	PASS	PASS	PASS	N/A	N/A	N/A
J	835	5/26/2018	3347	ES3DV3	835	Body	0.973	54.458	PASS	PASS	PASS	GMSK	PASS	N/A
I	1750	7/30/2018	7406	EX3DV4	1750	Body	1.518	52.691	PASS	PASS	PASS	N/A	N/A	N/A
I	1900	6/18/2018	7406	EX3DV4	1900	Body	1.575	51.579	PASS	PASS	PASS	GMSK	PASS	N/A
K	2300	4/3/2018	3319	ES3DV3	2300	Body	1.871	51.575	PASS	PASS	PASS	N/A	N/A	N/A
K	2450	4/3/2018	3319	ES3DV3	2450	Body	2.043	51.130	PASS	PASS	PASS	OFDM/TDD	PASS	PASS
K	2600	4/3/2018	3319	ES3DV3	2600	Body	2.225	50.665	PASS	PASS	PASS	TDD	PASS	N/A
D	5250	6/11/2018	7357	EX3DV4	5250	Body	5.529	48.096	PASS	PASS	PASS	OFDM	N/A	PASS
D	5600	6/11/2018	7357	EX3DV4	5600	Body	6.007	47.521	PASS	PASS	PASS	OFDM	N/A	PASS
D	5750	6/11/2018	7357	EX3DV4	5750	Body	6.214	47.275	PASS	PASS	PASS	OFDM	N/A	PASS

Table E-2
SAR System Validation Summary – 10g

SAR SYSTEM #	FREQ. [MHz]	DATE	PROBE SN	PROBE TYPE	PROBE CAL. POINT		COND.	PERM.	CW VALIDATION			MOD. VALIDATION		
							(σ)	(ε _r)	SENSITIVITY	PROBE LINEARITY	PROBE ISOTROPY	MOD. TYPE	DUTY FACTOR	PAR
I	1750	7/30/2018	7406	EX3DV4	1750	Body	1.518	52.691	PASS	PASS	PASS	N/A	N/A	N/A
I	1900	6/18/2018	7406	EX3DV4	1900	Body	1.575	51.579	PASS	PASS	PASS	GMSK	PASS	N/A
D	5250	6/11/2018	7357	EX3DV4	5250	Body	5.529	48.096	PASS	PASS	PASS	OFDM	N/A	PASS
D	5600	6/11/2018	7357	EX3DV4	5600	Body	6.007	47.521	PASS	PASS	PASS	OFDM	N/A	PASS
D	5750	6/11/2018	7357	EX3DV4	5750	Body	6.214	47.275	PASS	PASS	PASS	OFDM	N/A	PASS

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

FCC ID: ZNFV405UA		SAR EVALUATION REPORT		Approved by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset	APPENDIX E: Page 1 of 1		

APPENDIX G POWER REDUCTION VERIFICATION

Per the May 2017 TCBC Workshop Notes, demonstration of proper functioning of the power reduction mechanisms is required to support the corresponding SAR configurations. The verification process was divided into two parts: (1) evaluation of output power levels for individual or multiple triggering mechanisms and (2) evaluation of the triggering distances for proximity-based sensors.

G.1 Power Verification Procedure



The power verification was performed according to the following procedure:

1. A base station simulator was used to establish a conducted RF connection and the output power was monitored. The power measurements were confirmed to be within expected tolerances for all states before and after a power reduction mechanism was triggered.
2. Step 1 was repeated for all relevant modes and frequency bands for the mechanism being investigated.
3. Steps 1 and 2 were repeated for all individual power reduction mechanisms and combinations thereof. For the combination cases, one mechanism was switched to a 'triggered' state at a time; powers were confirmed to be within tolerances after each additional mechanism was activated.

G.2 Distance Verification Procedure

The distance verification procedure was performed according to the following procedure:

1. A base station simulator was used to establish an RF connection and to monitor the power levels. The device being tested was placed below the relevant section of the phantom with the relevant side or edge of the device facing toward the phantom.
2. The device was moved toward and away from the phantom to determine the distance at which the mechanism triggers and the output power is reduced, per KDB Publication 616217 D04v01r02 and FCC Guidance. Each applicable test position was evaluated. The distances were confirmed to be the same or larger (more conservative) than the minimum distances provided by the manufacturer.
3. Steps 1 and 2 were repeated for low, mid, and high bands, as appropriate (see note below Table G-2 for more details).
4. Steps 1 through 3 were repeated for all distance-based power reduction mechanisms.

FCC ID: ZNFV405UA	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset			APPENDIX G: Page 1 of 2

G.3 Main Antenna Verification Summary

Table G-1
Power Measurement Verification for Main Antenna

Mechanism(s)	Mode/Band	Conducted Power (dBm)	
		Un-triggered (Max)	Mechanism #1 (Reduced)
Proximity Sensor	UMTS B4	24.89	23.64
Proximity Sensor	UMTS B2	24.86	23.62
Proximity Sensor	CDMA BC1	24.61	23.23
Proximity Sensor	LTE B4	24.81	23.42
Proximity Sensor	LTE B66	24.79	23.54
Proximity Sensor	LTE B2	24.92	23.14
Proximity Sensor	LTE B25	24.55	23.04

Table G-2
Distance Measurement Verification for Main Antenna

Mechanism(s)	Test Condition	Band	Distance Measurements (mm)		Minimum Distance per Manufacturer (mm)
			Moving Toward	Moving Away	
Proximity Sensor	Phablet - Back Side	Mid	3	8	3
Proximity Sensor	Phablet - Bottom Edge	Mid	4	6	4



*Note: Mid band refers to: CDMA BC1, UMTS B2/4, LTE B2/4/25/66

G.4 WIFI Verification Summary

Table G-3
Power Measurement Verification WIFI

Mechanism(s)	Mode/Band	Conducted Power (dBm)	
		Un-triggered (Max)	Mechanism #1 (Reduced)
Held-to-Ear	802.11b	18.52	14.52
Held-to-Ear	802.11g	16.07	14.00
Held-to-Ear	802.11n (2.4GHz)	14.79	13.65
Held-to-Ear	802.11a	16.08	13.20
Held-to-Ear	802.11n (20MHz)	15.05	13.03
Held-to-Ear	802.11n (40MHz)	14.44	13.40
Held-to-Ear	802.11ac (20MHz)	15.01	13.16
Held-to-Ear	802.11ac (40MHz)	14.36	13.44

*Note: MIMO WIFI modes and 802.11ac (2.4 GHz) were not evaluated due to equipment limitations.

FCC ID: ZNFV405UA	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset			APPENDIX G: Page 2 of 2

APPENDIX H: DOWNLINK LTE CA RF CONDUCTED POWERS

1.1 LTE Downlink Only Carrier Aggregation Test Reduction Methodology

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number of component carriers (CCs) supported by the product implementation. Per April 2018 TCBC Workshop Notes, the following test reduction methodology was applied to determine the combinations required for conducted power measurements.

LTE DLCA Test Reduction Methodology:

- The supported combinations were arranged by the number of component carriers in columns.
- Any limitations on the PCC or SCC for each combination were identified alongside the combination (e.g. CA_2A-2A-4A-12A, but B12 can only be configured as a SCC).
- Power measurements were performed for "supersets" (LTE CA combinations with multiple components carriers) and any "subsets" (LTE CA combinations with fewer component carriers) that were not completely covered by the supersets.
- Only subsets that have the exact same components as a superset were excluded for measurement.
- When there were certain restrictions on component carriers that existed in the superset that were not applied for the subset, the subset configuration was additionally evaluated.
- Both inter-band and intra-band downlink carrier aggregation scenarios were considered.
- Downlink CA combinations for SISO and 4x4 Downlink MIMO operations were measured independently, per May 2017 TCBC Workshop notes.



Table 1 – Example of Exclusion Table for SISO Configurations

[illegible]

Table 2 – Example of Exclusion Table for 4x4 Downlink MIMO Configurations

Table 1: 5G NR FR2 Frequency Range Configurations							Table 2: 5G NR FR2 Frequency Range Configurations						
Index	ACC	Supported Channel Bandwidth (MHz)			Restriction	Completely Covered by Measurement Supers	Index	ACC	Supported Channel Bandwidth (MHz)			Restriction	Completely Covered by Measurement Supers
		CC1	CC2						CC1	CC2	CC3		
ACC#M1	CA [24]	5, 10, 15, 20	5, 10, 15, 20		ACC#M6		ACC#N1	CA [24] 2A-6A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M2	CA [24]	5, 10, 15, 20	5, 10, 15, 20		ACC#M7		ACC#N2	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M3	CA [24] 2A	5, 10, 15, 20	5, 10, 15, 20		No		ACC#N3	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M4	CA [24] 4A-7A	5, 10, 15, 20	5, 10, 15, 20		ACC#M8		ACC#N4	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M5	CA [24] 5A-12A	5, 10, 15, 20	5, 10, 15, 20		ACC#M9		ACC#N5	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M6	CA [24] 5A	5, 10, 15, 20	5, 10		ACC#M10		ACC#N6	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M7	CA [24] 5A-12A	5, 10, 15, 20	5, 10		No		ACC#N7	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M8	CA [24] 5A	5, 10, 15, 20	5, 10		ACC#M11		ACC#N8	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M9	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M12		ACC#N9	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M10	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M13		ACC#N10	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M11	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M14		ACC#N11	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M12	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M15		ACC#N12	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M13	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M16		ACC#N13	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M14	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M17		ACC#N14	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M15	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M18		ACC#N15	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M16	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M19		ACC#N16	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M17	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M20		ACC#N17	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M18	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M21		ACC#N18	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M19	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M22		ACC#N19	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M20	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M23		ACC#N20	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M21	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M24		ACC#N21	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M22	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M25		ACC#N22	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	
ACC#M23	CA [24] 5A-12A	5, 10, 15, 20	5, 10		ACC#M26		ACC#N23	CA [24] 2A-7A	5, 10, 15, 20	5, 10, 15, 20	5, 10, 15, 20	No	

Note: [CC] indicates component carrier with 4x4 DL MIMO antenna configuration

FCC ID: ZNFV405UA	 SAR EVALUATION REPORT 	Reviewed by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset	APPENDIX H: Page 1 of 4

1.2 LTE Downlink Only Carrier Aggregation Test Selection and Setup

SAR test exclusion for LTE downlink Carrier Aggregation is determined by power measurements according to the number component carriers (CCs) supported by the product implementation. For those configurations required by April 2018 TCBC Workshop Notes, conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

General PCC and SCC configuration selection procedure

- PCC uplink channel, channel bandwidth, modulation and RB configurations were selected based on section C)3)b)ii) of KDB 941225 D05 V01r02. The downlink PCC channel was paired with the selected PCC uplink channel according to normal configurations without carrier aggregation.
- To maximize aggregated bandwidth, highest channel bandwidth available for that CA combination was selected for SCC. For inter-band CA, the SCC downlink channels were selected near the middle of their transmission bands. For contiguous intra-band CA, the downlink channel spacing between the component carriers was set to multiple of 300 kHz less than the nominal channel spacing defined in section 5.4.1A of 3GPP TS 36.521. For non-contiguous intra-band CA, the downlink channel spacing between the component carriers was set to be larger than the nominal channel spacing and provided maximum separation between the component carriers.
- All selected PCC and SCC(s) remained fully within the uplink/downlink transmission band of the respective component carrier.
- When a device supports LTE capabilities with overlapping transmission frequency ranges, the standalone powers from the band with a larger transmission frequency range can be used to select measurement configurations for the band with the fully covered transmission frequency range.




Figure 1
DL CA Power Measurement Setup

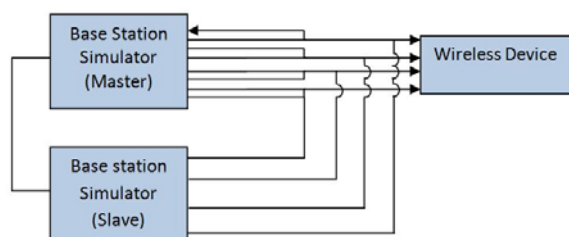




Figure 2
DL CA with DL 4x4 MIMO Power Measurement Setup

FCC ID: ZNFV405UA	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset			APPENDIX H: Page 2 of 4

1.3 Downlink Carrier Aggregation RF Conducted Powers

1.3.1 LTE Band 66 as PCC

Table 1
Maximum Output Powers

Combination	PCC								SCC 1				SCC 2				Power		
	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Modulation	PCC UL RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2C-66A	LTE B66	15	132597	1772.5	QPSK	1	0	67061	2172.5	LTE B2	20	900	1960	LTE B2	20	702	1940.2	25.19	25.20

Table 2
Reduced Output Powers

Combination	PCC									SCC 1				SCC 2				Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Modulation	PCC UL RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2C-66A	LTE B66	15	132047	1717.5	16QAM	1	0	66511	2117.5	LTE B2	20	900	1960	LTE B2	20	702	1940.2	24.07	24.20

1.3.2 LTE Band 2 as PCC

Table 3
Maximum Output Powers

Combination	PCC									SCC 1				SCC 2				Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Modulation	PCC UL RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx.Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2C-66A	LTE B2	15	19125	1902.5	QPSK	1	0	1125	1982.5	LTE B2	20	954	1965.4	LTE B66	20	66786	2145	25.18	25.15



Table 4
Reduced Output Powers

Combination	PCC									SCC 1				SCC 2				Power	
	PCC Band	PCC BW [MHz]	PCC (UL) Ch.	PCC (UL) Freq. [MHz]	Modulation	PCC UL RB	PCC UL RB Offset	PCC (DL) Ch.	PCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	SCC Band	SCC BW [MHz]	SCC (DL) Ch.	SCC (DL) Freq. [MHz]	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_2C-66A	LTE B2	10	19150	1905	QPSK	1	25	1150	1985	LTE B2	20	1006	1970.6	LTE B66	20	66786	2145	24.14	24.20

1.4 DL CA with DL 4x4 MIMO RF Conduction Powers

This device supports downlink 4x4 MIMO operations for some LTE bands. Uplink transmission is limited to a single output stream. When carrier aggregation was applicable, the general test selection and setup procedures described in Section 1.2 were applied.

Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

FCC ID: ZNFV405UA	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Reviewed by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset	APPENDIX H: Page 3 of 4		

1.4.1 LTE Band 66 as PCC

Table 5
Maximum Output Powers

Combination	PCC										SCC 1				SCC 2				Power			
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	DL Ant. Config.	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA [2C]-[66A]	LTE B66	15	132597	1772.5	QPSK	1	0	67061	2172.5	4x4 MIMO	LTE B2	20	900	1960	4x4 MIMO	LTE B2	20	702	1940.2	4x4 MIMO	25.16	25.20

Table 6
Reduced Output Powers

Combination	PCC										SCC 1				SCC 2				Power			
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	DL Ant. Config.	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA [2C]-[66A]	LTE B66	15	132047	1717.5	16QAM	1	0	66511	2117.5	4x4 MIMO	LTE B2	20	900	1960	4x4 MIMO	LTE B2	20	702	1940.2	4x4 MIMO	24.12	24.20



1.4.2 LTE Band 2 as PCC

Table 7
Maximum Output Powers

Combination	PCC										SCC 1				SCC 2				Power			
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	DL Ant. Config.	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA [2C]-[66A]	LTE B2	15	19125	1902.5	QPSK	1	0	1125	1982.5	4x4 MIMO	LTE B2	20	954	1965.4	4x4 MIMO	LTE B66	20	66786	2145	4x4 MIMO	25.15	25.15

Table 8
Reduced Output Powers

Combination	PCC										SCC 1					SCC 2					Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	Modulation	PCC UL RB	PCC UL RB Offset	PCC (DL) Channel	PCC (DL) Frequency [MHz]	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	DL Ant. Config.	SCC Band	SCC Bandwidth [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	DL Ant. Config.	LTE Tx Power with DL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA [2C]-[66A]	LTE B2	10	19150	1905	QPSK	1	25	1150	1985	4x4 MIMO	LTE B2	20	1006	1970.6	4x4 MIMO	LTE B66	20	66786	2145	4x4 MIMO	24.19	24.20

FCC ID: ZNFV405UA	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 LG	Reviewed by: Quality Manager
Test Dates: 07/23/18 - 08/06/18	DUT Type: Portable Handset	APPENDIX H: Page 4 of 4		