

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1904-0098(2)
2. Customer
 - Name : LG Electronics USA, Inc.
 - Address : 1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / LM-V500EM
FCC ID : ZNFV500EM
5. Test Method Used : KDB558074 D01v05r01, ANSI C63.10-2013
Test Specification : FCC Part 15 Subpart C.247
6. Date of Test : 2019.02.25 ~ 2019.04.01
7. Testing Environment : See appended test report.
8. Test Result : Refer to the attached test result.

Affirmation	Tested by	Reviewed by
	Name : JaeJin Lee  (Signature)	Name : Geunki Son  (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2019 . 04 . 23 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1904-0098	Apr. 15, 2019	Initial issue
DRTFCC1904-0098(1)	Apr. 19, 2019	Corrected the duty cycle information in section 8.5
DRTFCC1904-0098(2)	Apr. 23, 2019	Added the PSD limit and corrected the duty cycle information

Table of Contents

1. EUT DESCRIPTION	4
2. INFORMATION ABOUT TESTING.....	5
2.1 Test mode.....	5
2.2 Auxiliary equipment	5
2.3 Tested environment	6
2.4 EMI suppression Device(s) / Modifications	6
2.5 Measurement Uncertainty.....	6
3. SUMMARY OF TESTS	7
4. TEST METHODOLOGY	8
4.1 EUT configuration	8
4.2 EUT exercise	8
4.3 General test procedures	8
4.4 Description of test modes	8
5. INSTRUMENT CALIBRATION	9
6. FACILITIES AND ACCREDITATIONS	9
6.1 Facilities	9
6.2 Equipment	9
7. ANTENNA REQUIREMENTS	9
8. TEST RESULT	10
8.1 6dB bandwidth.....	10
8.2 Maximum peak conducted output power.....	48
8.3 Maximum power spectral density	56
8.4 Out of band emissions at the band edge / conducted spurious emissions.....	94
8.5 Radiated spurious emissions	263
8.6 Power-line conducted emissions	280
9. LIST OF TEST EQUIPMENT.....	283
APPENDIX I.....	284
APPENDIX II.....	288

1. EUT DESCRIPTION

FCC Equipment Class	Digital Transmission System(DTS)
Product	Mobile Phone
Model Name	LM-V500EM
Add Model Name	LMV500EM, V500EM
Power Supply	DC 4.00 V
Frequency Range	▪ 802.11b/g/n/ac(20 MHz) : 2412 MHz ~ 2472 MHz
Max. RF Output Power	2.4GHz Band ▪ 802.11b : 18.95 dBm ▪ 802.11g : 25.87 dBm ▪ 802.11n (HT20) : 25.73 dBm ▪ 802.11ac (VHT20) : 25.29 dBm
Modulation Type	▪ 802.11b: CCK, DSSS ▪ 802.11g/n/ac: OFDM
Antenna Specification	Antenna type: PIFA Antenna Antenna gain: Refer to the clause 7 in test report.

Transmitting configuration of EUT

Mode	SISO		MIMO(CDD)	MIMO(SDM)
	Ant 1	Ant 2	Ant 1 & 2	Ant 1 & 2
	Data rate			
802.11b	1~11 Mbps	1~11 Mbps	-	-
802.11g	6~54 Mbps	6~54 Mbps	6~54 Mbps	-
802.11n(HT20)	MCS 0 ~ 7	MCS 0 ~ 7	-	MCS 8 ~ 15
802.11ac(VHT20)	MCS 0 ~ 8(1SS)	MCS 0 ~ 8(1SS)	MCS 0 ~ 8(1SS)	MCS 0 ~ 8(2SS)

Note1: SDM = Spatial Diversity Multiplexing, CDD = Cycle Delay Diversity, SS = Spatial Streams

Note2: This device supports WLAN DBS(dual-band simultaneous) transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna. (Ant 1: 2.4GHz band transmitting & ANT 2: 5GHz band transmitting) And the test results for WLAN DBS were included in UNII test report of this device.

2. INFORMATION ABOUT TESTING

2.1 Test mode

Test mode	Worst case data rate	Tested Frequency (MHz)				
TM 1	802.11b 1 Mbps (Single transmitting)	2412	2437	2462	2467	2472
TM 2	802.11g 36 Mbps (Single transmitting)	2412	2437	2462	2467	2472
TM 3	802.11n(HT20) MCS 4 (Single transmitting)	2412	2437	2462	2467	2472
TM 4	802.11ac(VHT20) NSS1 MCS 4 (Single transmitting)	2412	2437	2462	2467	2472
TM 5	802.11g 36 Mbps (CDD Multiple transmitting)	2412	2437	2462	2467	2472
TM 6	802.11n(HT20) MCS 4 (CDD Multiple transmitting)	2412	2437	2462	2467	2472
TM 7	802.11ac(VHT20) NSS1 MCS 4 (CDD Multiple transmitting)	2412	2437	2462	2467	2472
TM 8	802.11n(HT20) MCS 13 (SDM Multiple transmitting)	2412	2437	2462	2467	2472
TM 9	802.11ac(VHT20) NSS2 MCS 4 (SDM Multiple transmitting)	2412	2437	2462	2467	2472

Note1: The worst case data rate was determined according to the power measurements.

Note2: We have done all TX test cases and attached the MIMO test result of 802.11g/n/ac mode since MIMO is the worst case.

Note3: The power measurement results for all modes and data rate were reported.

2.2 Auxiliary equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

2.3 Tested environment

Temperature	: 20 °C ~ 25 °C
Relative humidity content	: 39 % ~ 45 %
Details of power supply	: DC 4.0 V

2.4 EMI suppression Device(s) / Modifications

EMI suppression device(s) added and/or modifications made during testing
 → None

2.5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014 and ANSI C 63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Test items	Measurement uncertainty
Transmitter Output Power	0.7 dB (The confidence level is about 95 %, $k = 2$)
Conducted spurious emission	0.9 dB (The confidence level is about 95 %, $k = 2$)
AC conducted emission	2.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (1 GHz Below)	5.1 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (1 GHz ~ 18 GHz)	5.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated spurious emission (18 GHz Above)	5.3 dB (The confidence level is about 95 %, $k = 2$)

3. SUMMARY OF TESTS

FCC Part Section(s)	Parameter	Limit	Test Condition	Status Note 1
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Transmitter Output Power	< 1 Watt		C
15.247(d)	Out of Band Emissions / Band Edge	20 dBc in any 100 kHz BW		C
15.247(e)	Transmitter Power Spectral Density	< 8 dBm/3 kHz		C
15.247(d) 15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	FCC 15.209 limits	Radiated	C Note 3,4
15.207	AC Line Conducted Emissions	FCC 15.207 limits	AC Line Conducted	C
15.203	Antenna Requirements	FCC 15.203	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable
 Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.
 Note 3: This test item was performed in each axis and the worst case data was reported.
 Note 4: This device supports wireless charging & 60G wireless transmission capability.
 So per KDB648474 D03v01r04, the radiated test items were performed all not charging, charging and 60G wireless transmission conditions, the handset is placed on the representative charging pad under normal conditions and in a simulated call configuration.

4. TEST METHODOLOGY

The measurement procedures described in the ANSI C63.10-2013 and the guidance provided in KDB558074 D01v05r01 were used in measurement of the EUT.

The EUT was tested per the guidance of KDB558074 D01v05r01. And ANSI C63.10-2013 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

4.1 EUT configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT exercise

The EUT was operated in the test mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

4.3 General test procedures

Conducted Emissions

The power-line conducted emission test procedure is not described on the KDB558074 D01v05r01.

So this test was fulfilled with the requirements in Section 6.2 of ANSI C63.10-2013.

The EUT is placed on the wooden table, which is 0.8 m above ground plane and the conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and Average detector

Radiated Emissions

Basically the radiated tests were performed with KDB558074 D01v05r01. But some requirements and procedures like test site requirements, EUT setup and maximizing procedure were fulfilled with the requirements in Section 5 and 6 of the ANSI C63.10 as stated on section 12.1 of the KDB558074 D01V05R01.

The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of the EUT were rotated through three orthogonal axes.

4.4 Description of test modes

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics. A test program is used to control the EUT for staying in continuous transmitting mode.

5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

6. FACILITIES AND ACCREDITATIONS

6.1 Facilities

DT&C Co., Ltd.	
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014.	
- FCC MRA Accredited Test Firm No. : KR0034	
www.dtnet.net	
Telephone	: + 82-31-321-2664
FAX	: + 82-31-321-1664

6.2 Equipment

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, loop, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

7. ANTENNA REQUIREMENTS

7.1 According to FCC 47 CFR §15.203

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The antenna is attached on the device by means of unique coupling method (Spring Tension).
Therefore this E.U.T Complies with the requirement of §15.203**

7.2 Directional antenna gain:

Bands	SISO		MIMO (CDD) ^{Note 1.}	MIMO (SDM) ^{Note 2}
	ANT 1 [dBi]	ANT 2 [dBi]	Directional Gain [dBi]	Directional Gain [dBi]
2.4 GHz	-4.10	-3.11	-0.58	-3.58

Note 1. Directional gain (Correlated signal with unequal antenna gain and equal transmit power)

$$10 \log \left[\left(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20} \right)^2 / N_{ANT} \right] \text{ dBi}$$

Note 2. Directional gain (Completely uncorrelated signal with unequal antenna gain and equal transmit power)

$$10 \log \left[\left(10^{G1/10} + 10^{G2/10} + \dots + 10^{GN/10} \right) / N_{ANT} \right] \text{ dBi}$$

8. TEST RESULT

8.1 6dB bandwidth

■ Test Requirements and limit, §15.247(a)

The bandwidth at 6 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6 dB bandwidth is 500 kHz.

■ Test Configuration:

Refer to the APPENDIX I.

■ Test Procedure

- **KDB558074 D01v05r01 - Section 8.2**
- **ANSI C63.10-2013 – Section 11.8.2**

Option 2

1. Set resolution bandwidth (RBW) = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = **Peak**.
4. Trace mode = **Max hold**.
5. Sweep = **Auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level in the fundamental emission.

■ Test Results: **Comply**

Test Mode	Frequency	Test Results[MHz]	
		ANT 1	ANT 2
TM 1	2412	10.13	11.01
	2437	10.13	11.34
	2462	10.12	11.46
	2467	10.11	11.05
	2472	10.14	11.18
TM 5	2412	16.45	16.38
	2437	16.49	16.49
	2462	16.41	16.48
	2467	16.44	16.45
	2472	16.46	16.43
TM 6	2412	17.69	17.68
	2437	17.74	17.72
	2462	17.66	17.72
	2467	17.69	17.69
	2472	17.67	17.62
TM 7	2412	17.70	17.66
	2437	17.70	17.74
	2462	17.67	17.71
	2467	17.71	17.69
	2472	17.70	17.65
TM 8	2412	17.69	17.64
	2437	17.73	17.72
	2462	17.66	17.70
	2467	17.62	17.71
	2472	17.68	17.65
TM 9	2412	17.69	17.63
	2437	17.72	17.71
	2462	17.61	17.67
	2467	17.63	17.68
	2472	17.64	17.60

RESULT PLOTS

6 dB Bandwidth

TM 1 & ANT 1 & 2412



6 dB Bandwidth

TM 1 & ANT 1 & 2437



6 dB Bandwidth

TM 1 & ANT 1 & 2462



6 dB Bandwidth

TM 1 & ANT 1 & 2467




6 dB Bandwidth

TM 1 & ANT 1 & 2472




6 dB Bandwidth

TM 5 & ANT 1 & 2412

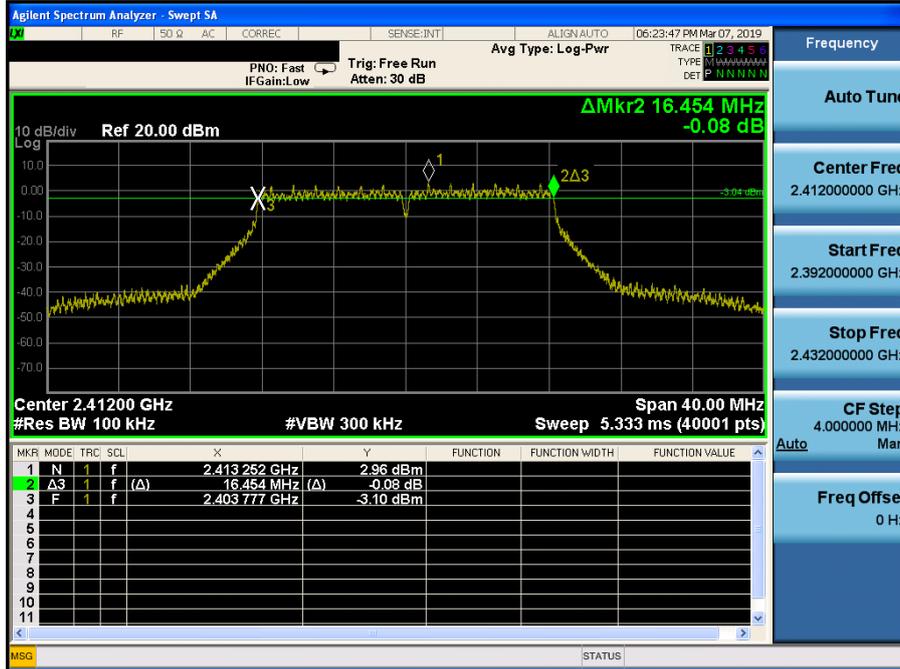


6 dB Bandwidth

TM 5 & ANT 1 & 2437

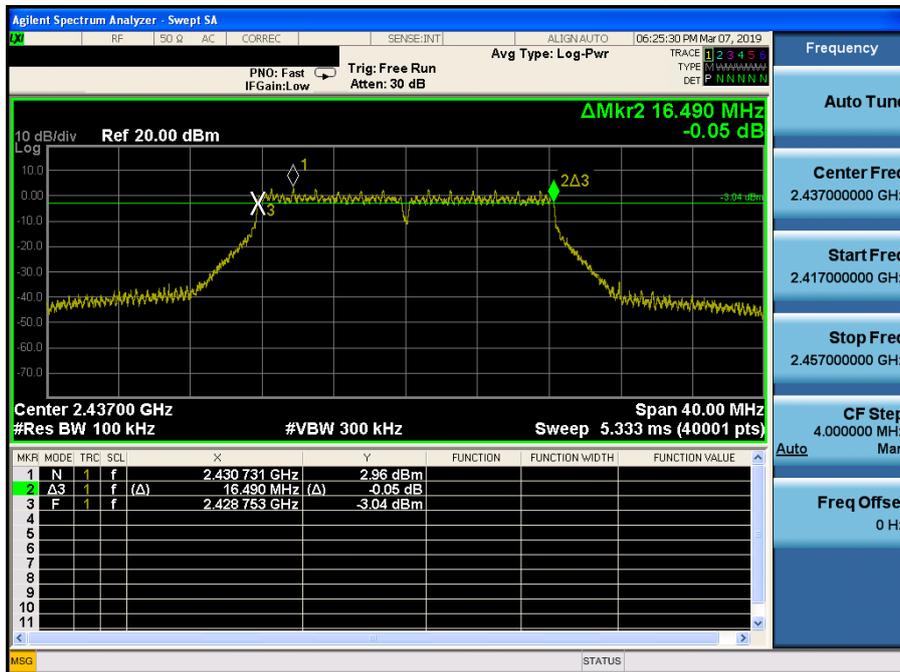


6 dB Bandwidth

TM 5 & ANT 1 & 2462

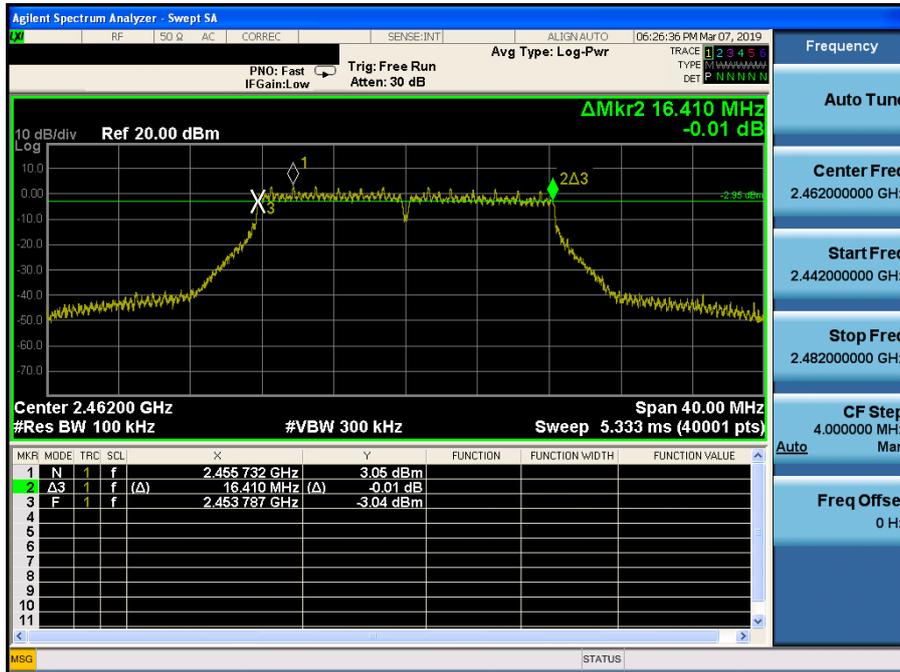


6 dB Bandwidth

TM 5 & ANT 1 & 2467

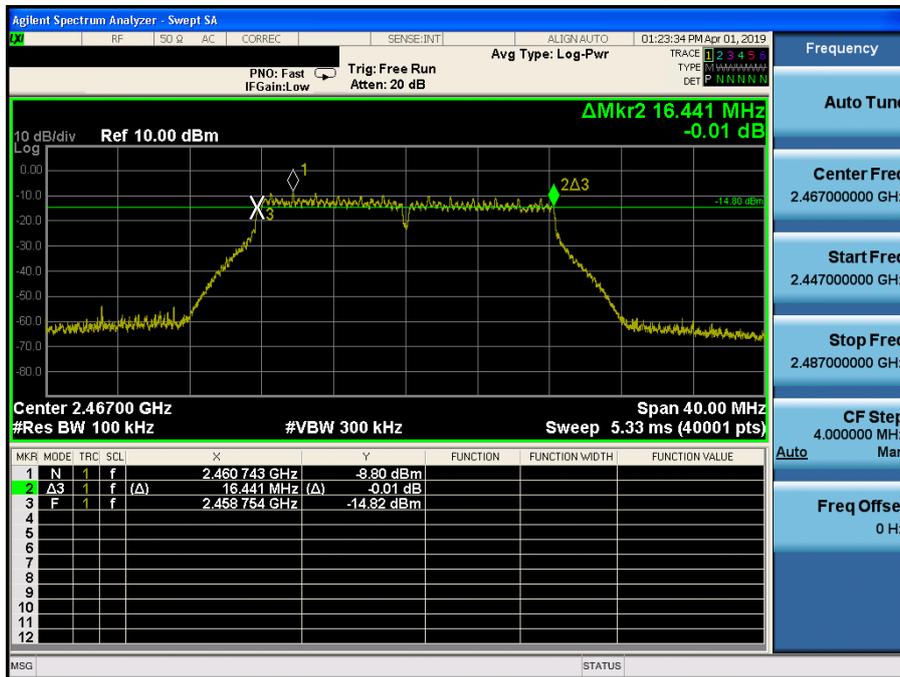


6 dB Bandwidth

TM 6 & ANT 1 & 2412

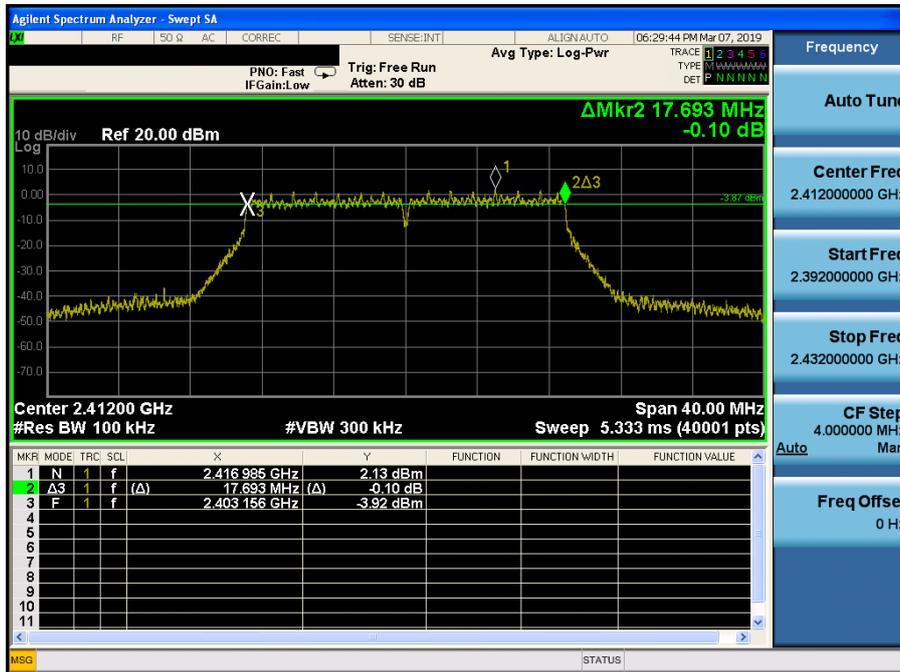


6 dB Bandwidth

TM 6 & ANT 1 & 2437

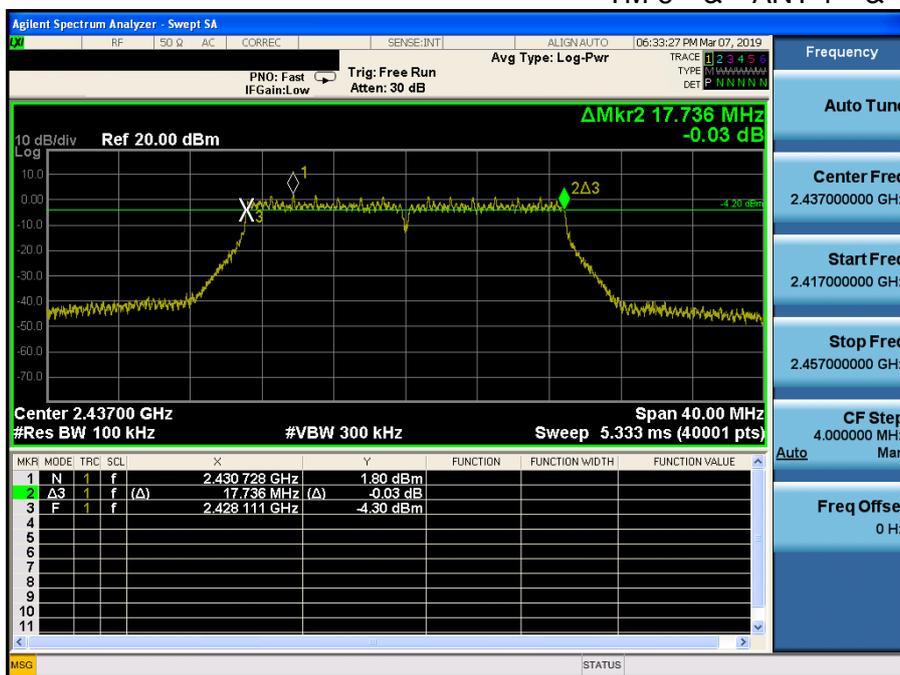


6 dB Bandwidth

TM 6 & ANT 1 & 2462

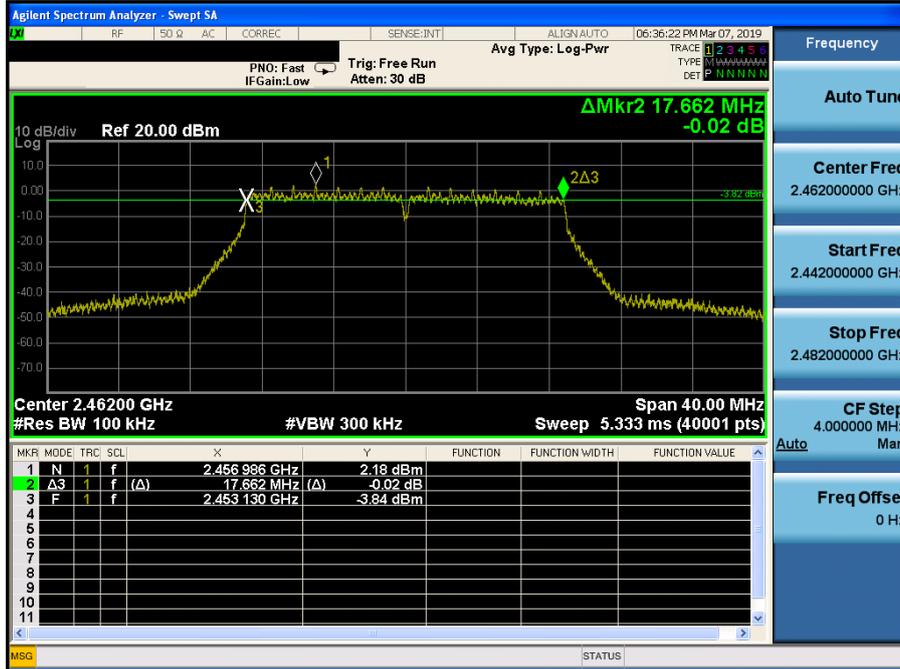


6 dB Bandwidth

TM 6 & ANT 1 & 2467

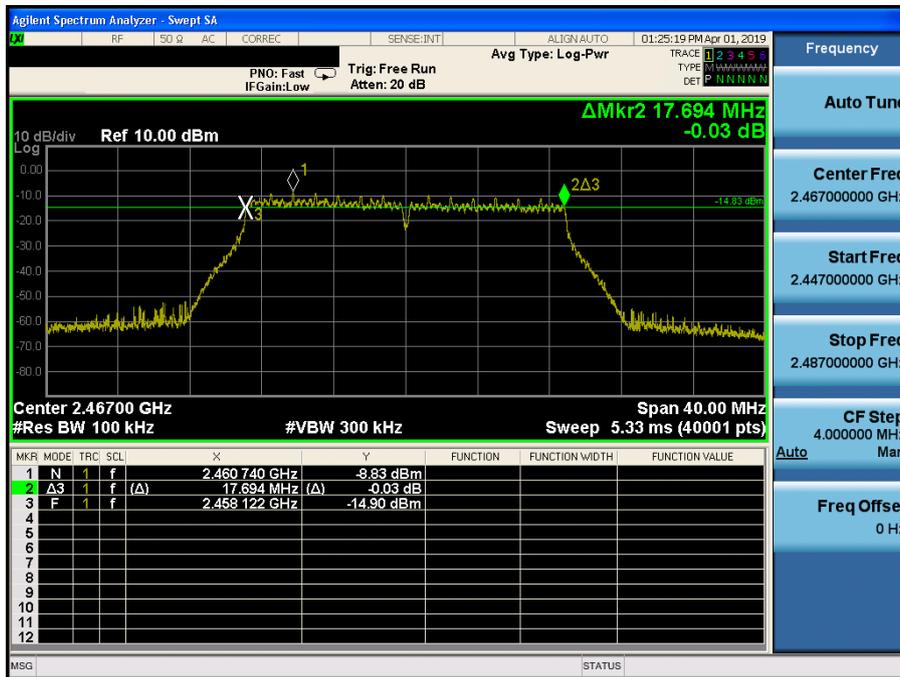


6 dB Bandwidth

TM 6 & ANT 1 & 2472

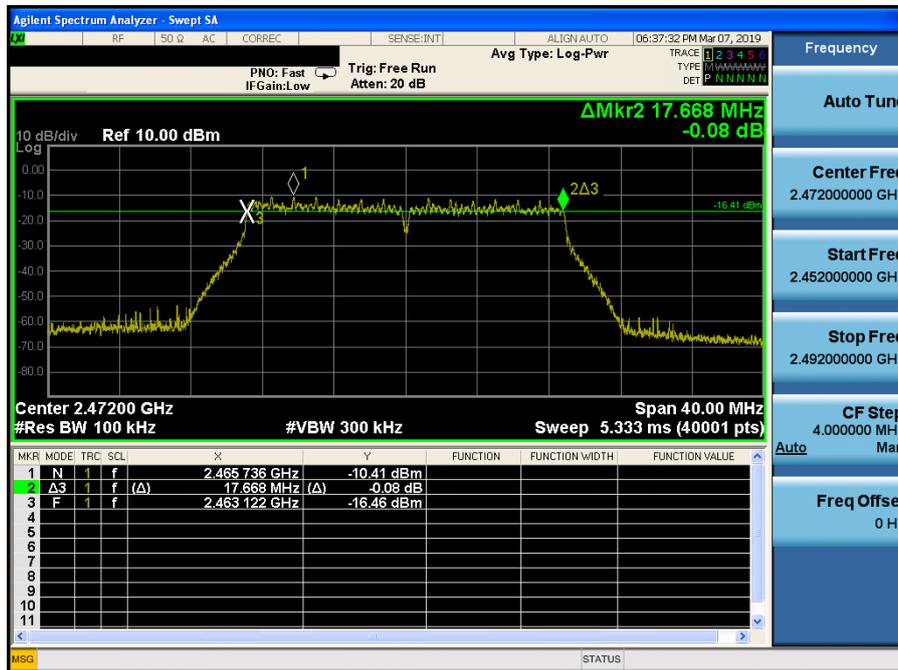


6 dB Bandwidth

TM 7 & ANT 1 & 2412

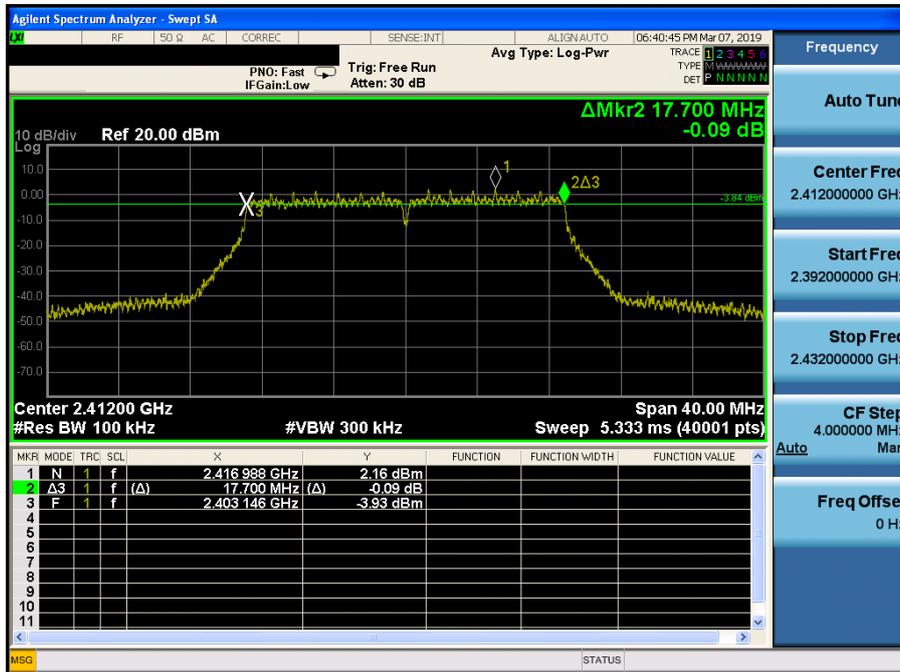


6 dB Bandwidth

TM 7 & ANT 1 & 2437

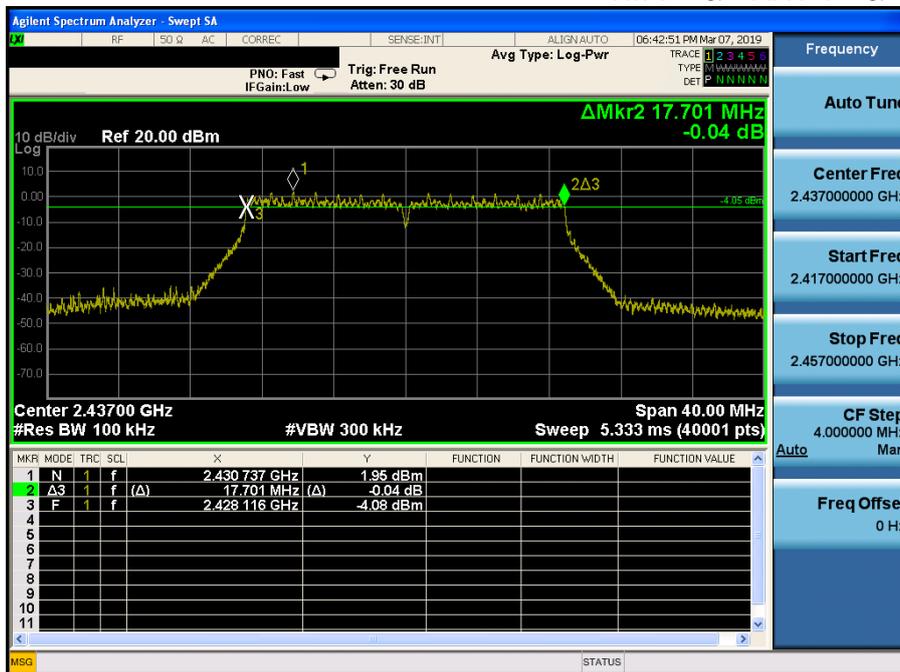


6 dB Bandwidth

TM 7 & ANT 1 & 2462

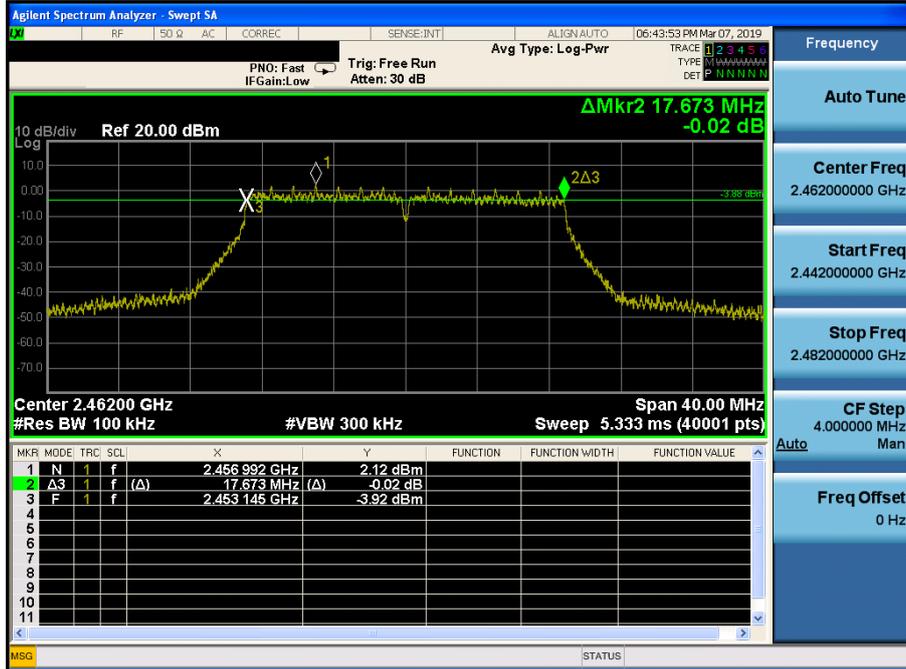


6 dB Bandwidth

TM 7 & ANT 1 & 2467

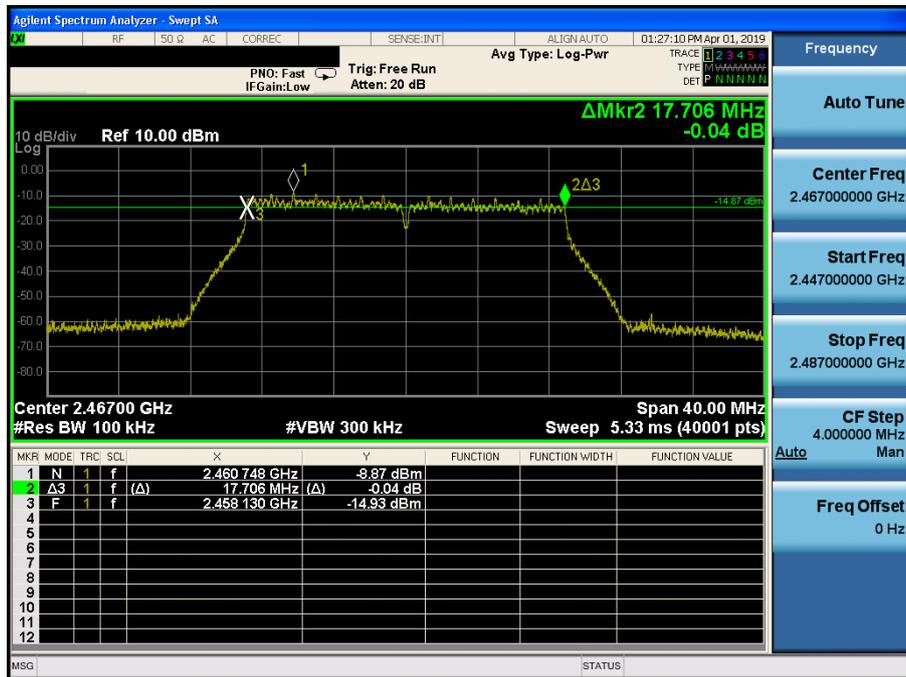


6 dB Bandwidth

TM 7 & ANT 1 & 2472

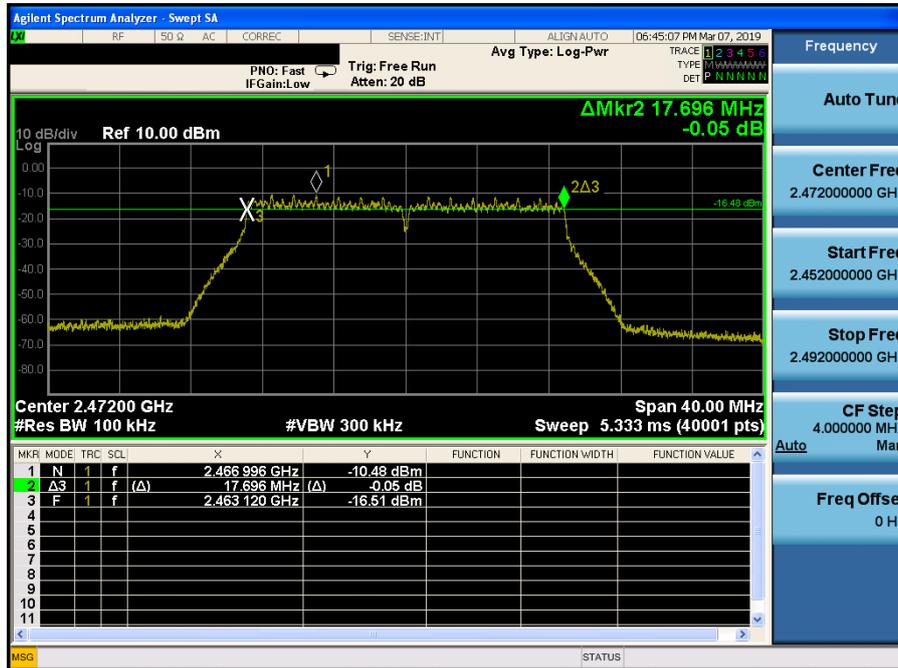


6 dB Bandwidth

TM 8 & ANT 1 & 2412

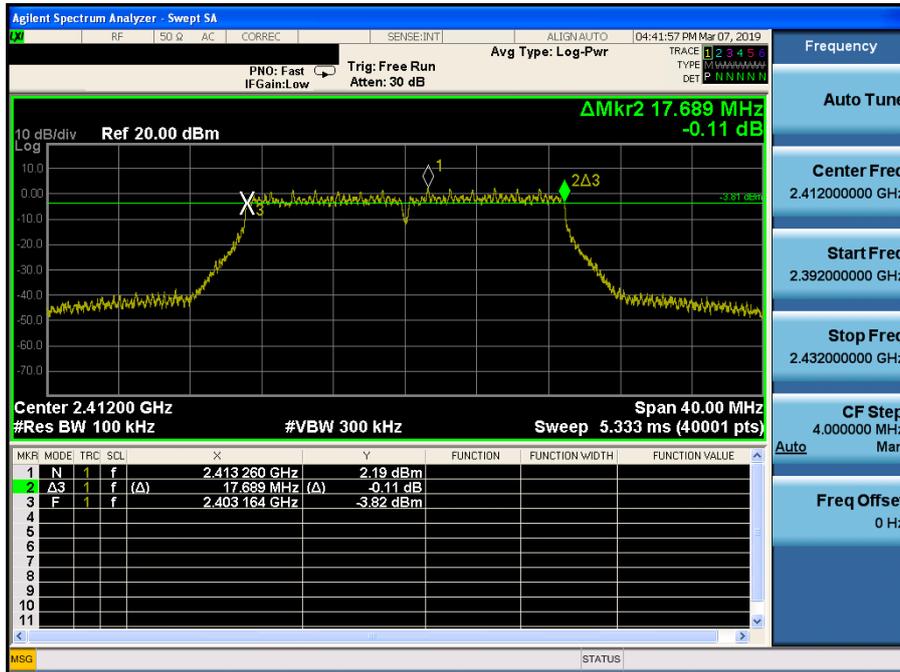


6 dB Bandwidth

TM 8 & ANT 1 & 2437

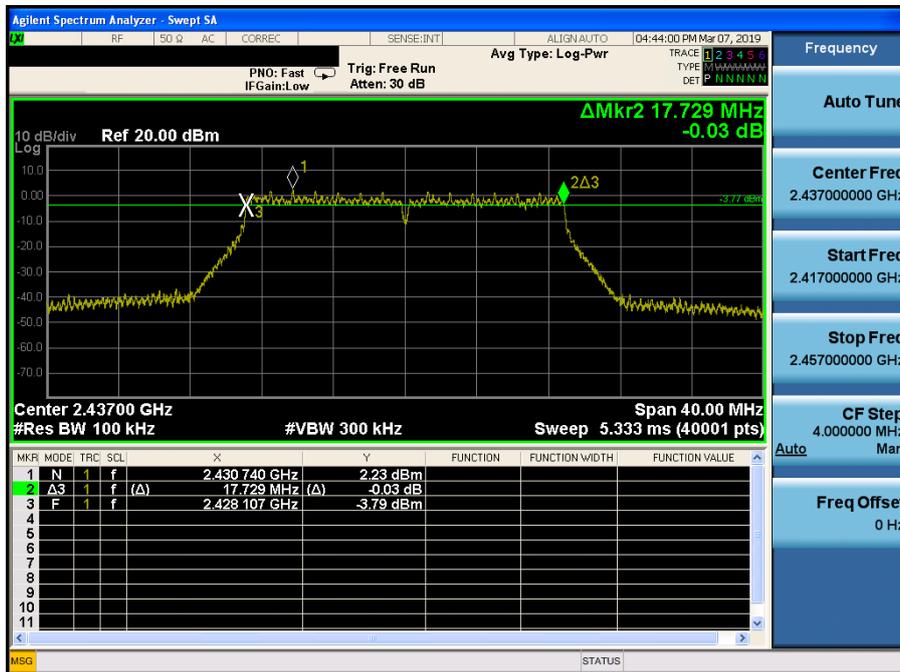


6 dB Bandwidth

TM 8 & ANT 1 & 2462

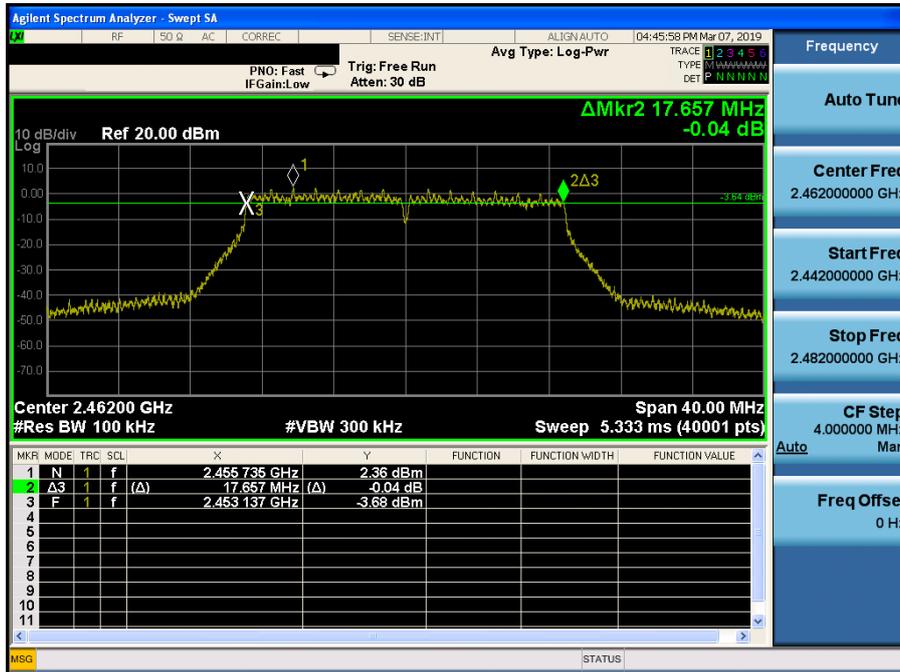


6 dB Bandwidth

TM 8 & ANT 1 & 2467

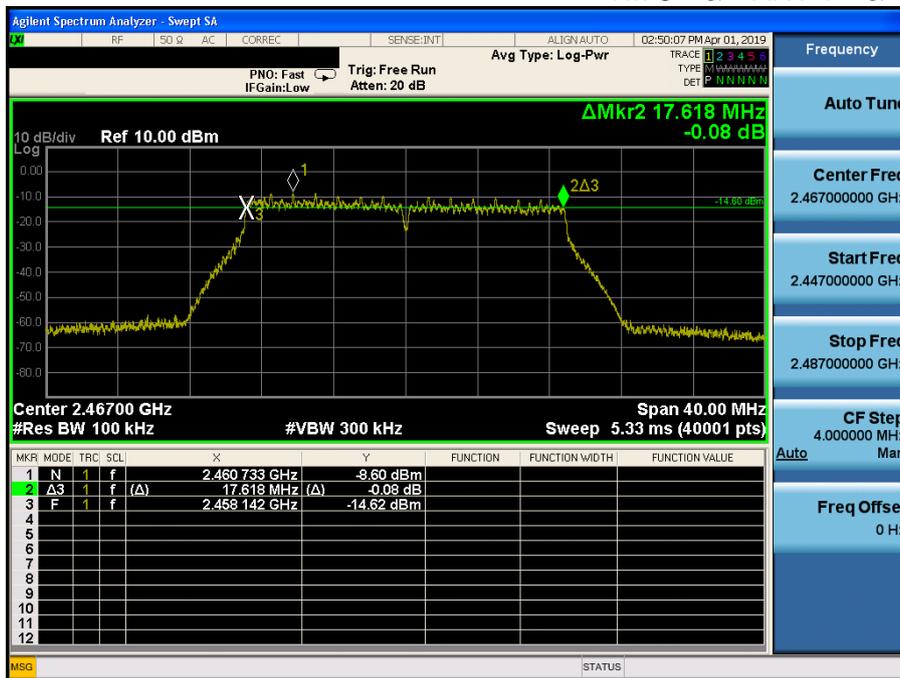


6 dB Bandwidth

TM 8 & ANT 1 & 2472

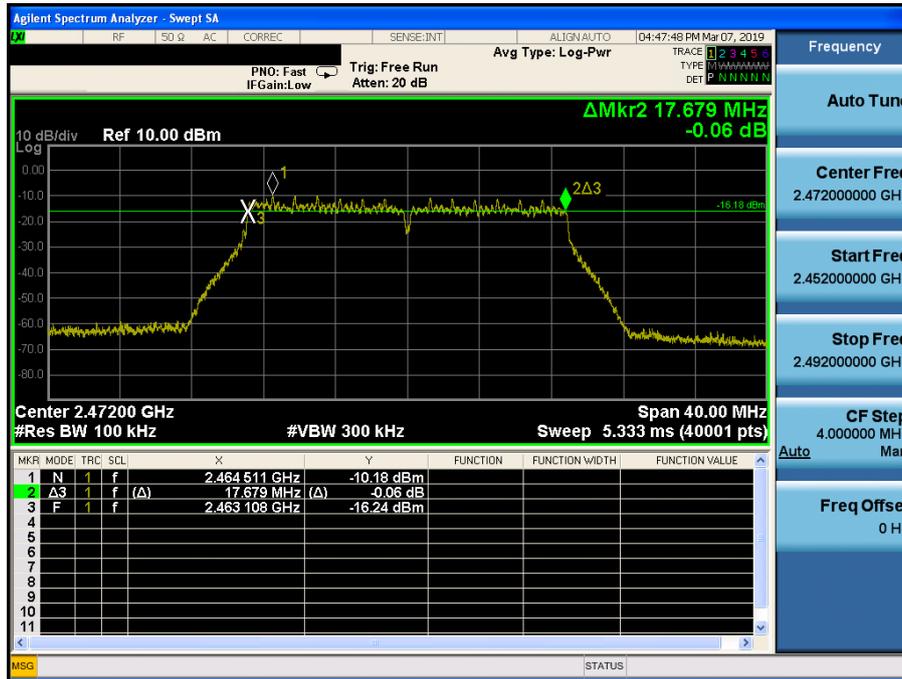


6 dB Bandwidth

TM 9 & ANT 1 & 2412

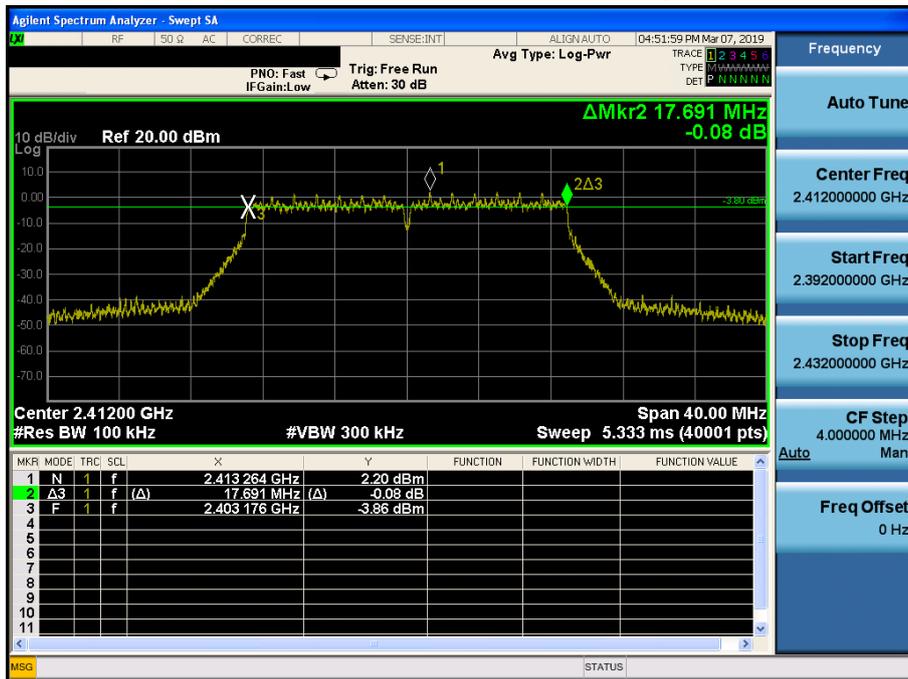


6 dB Bandwidth

TM 9 & ANT 1 & 2437

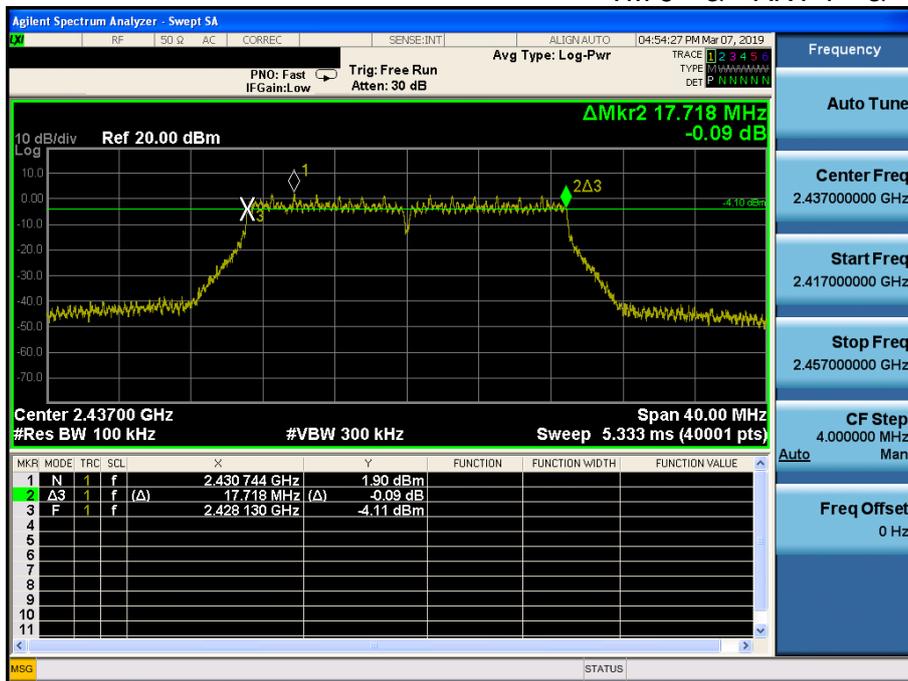


6 dB Bandwidth

TM 9 & ANT 1 & 2462

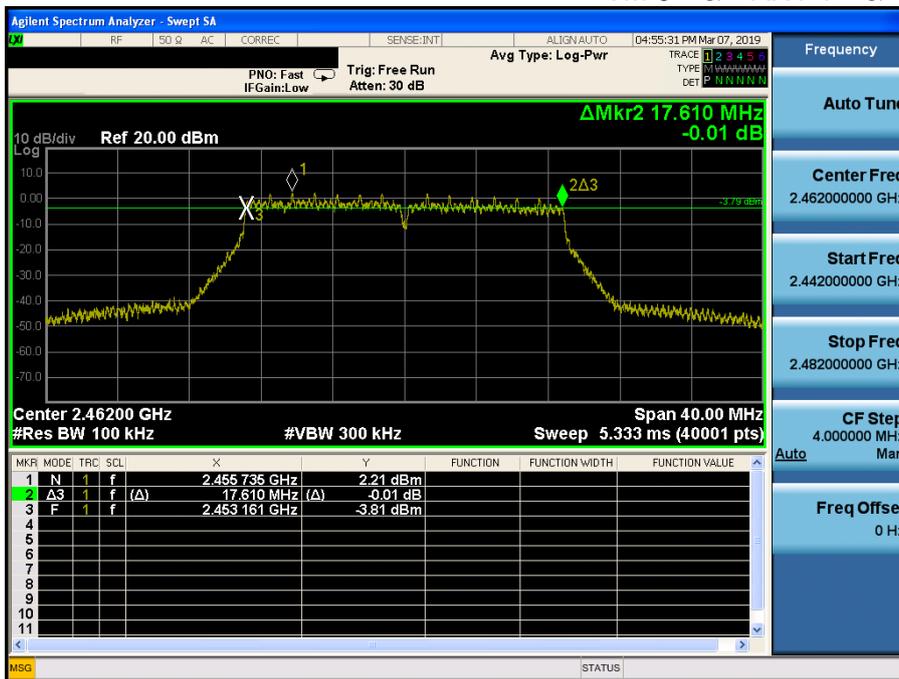


6 dB Bandwidth

TM 9 & ANT 1 & 2467

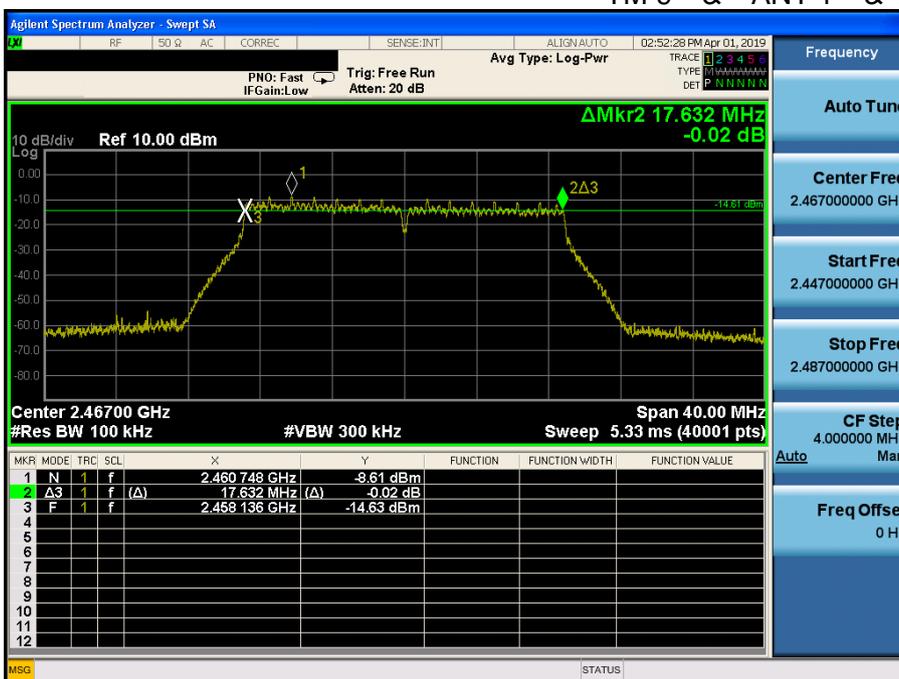

6 dB Bandwidth

TM 9 & ANT 1 & 2472

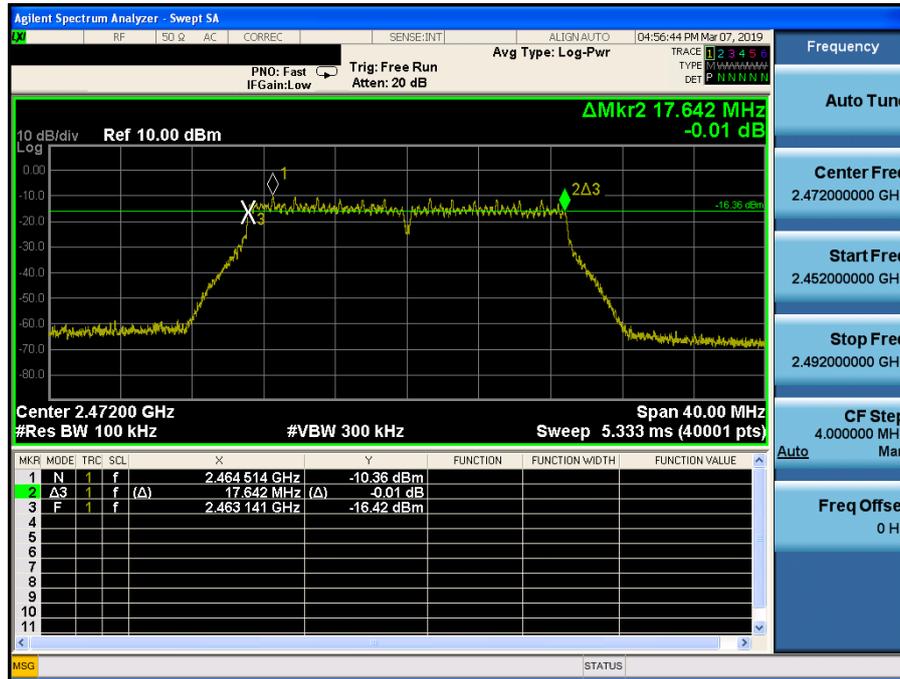


6 dB Bandwidth

TM 1 & ANT 2 & 2412




6 dB Bandwidth

TM 1 & ANT 2 & 2437

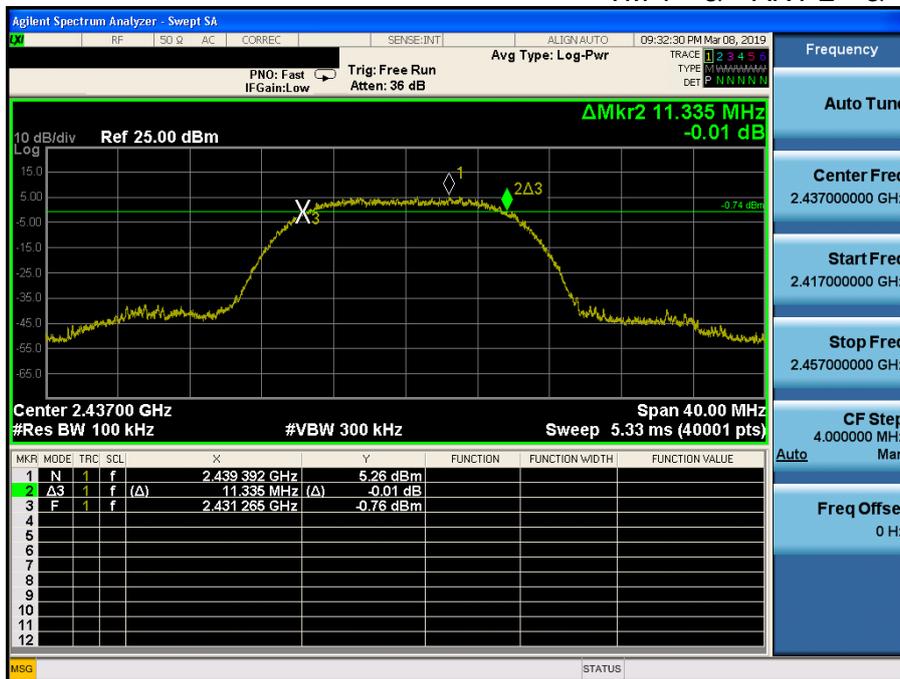


6 dB Bandwidth

TM 1 & ANT 2 & 2462

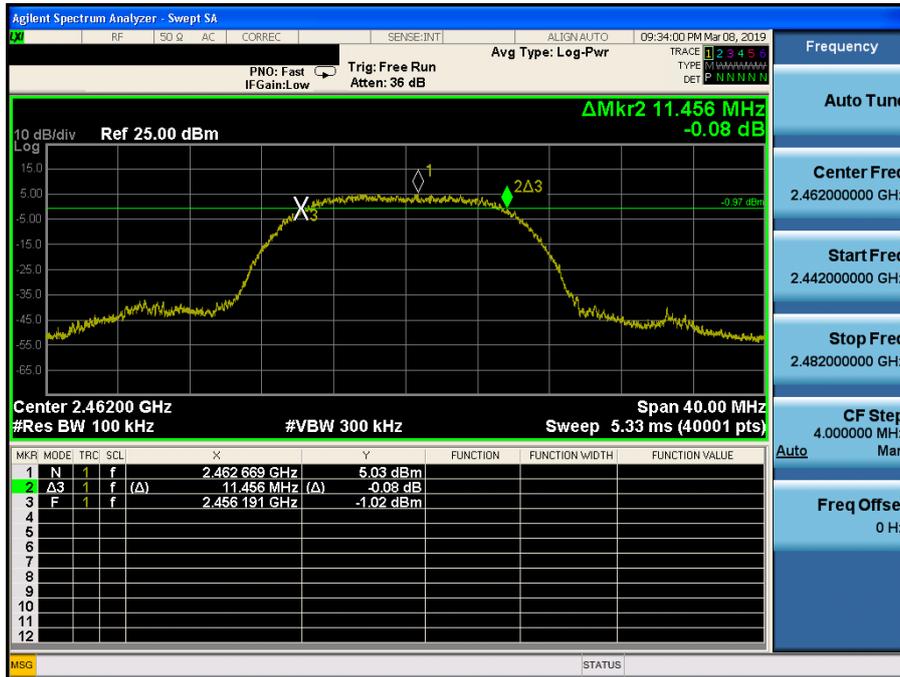


6 dB Bandwidth

TM 1 & ANT 2 & 2467

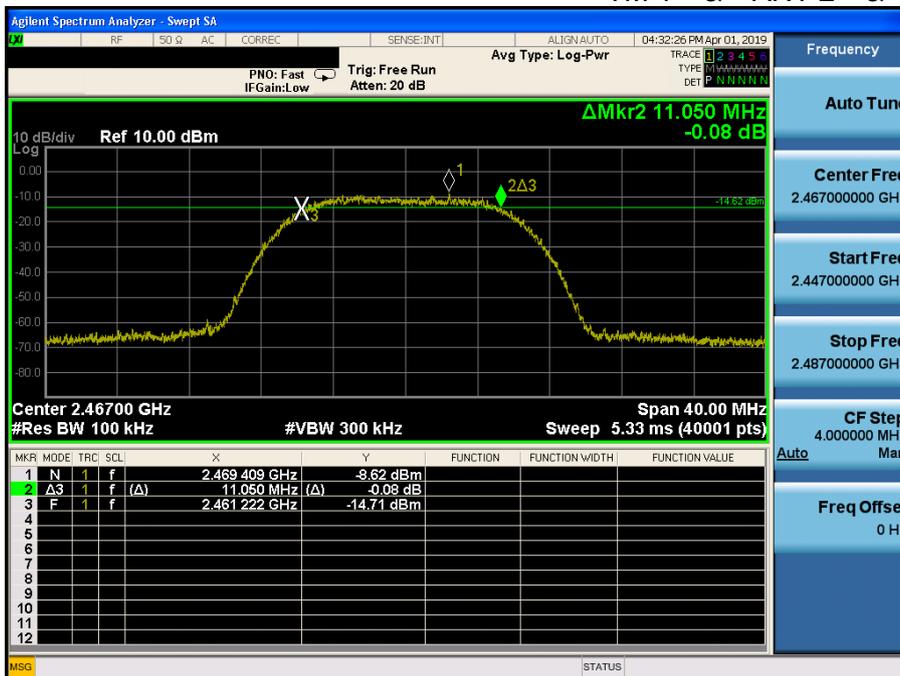

6 dB Bandwidth

TM 1 & ANT 2 & 2472

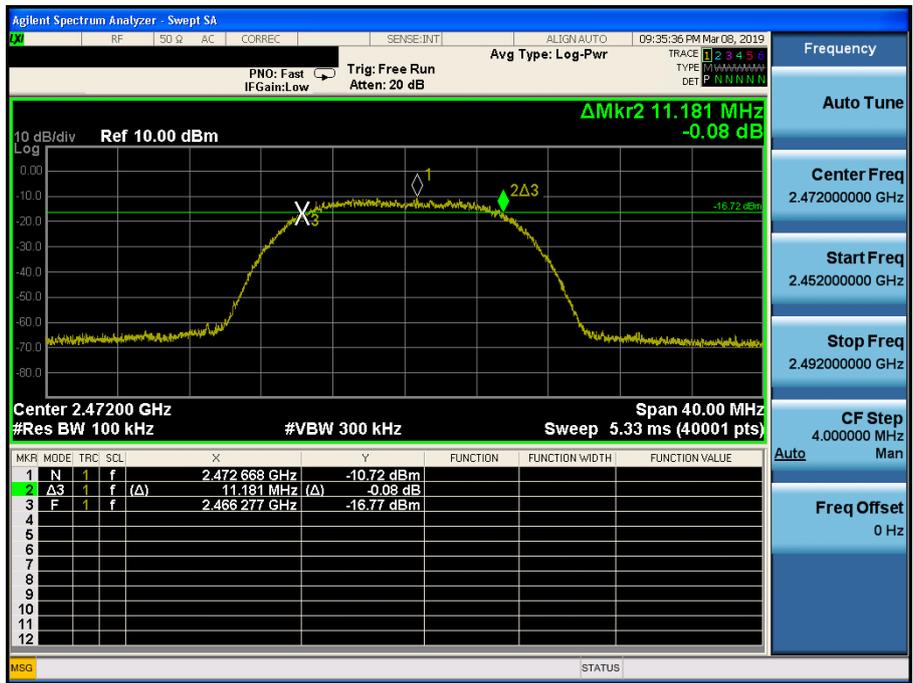


6 dB Bandwidth

TM 5 & ANT 2 & 2412



6 dB Bandwidth

TM 5 & ANT 2 & 2437

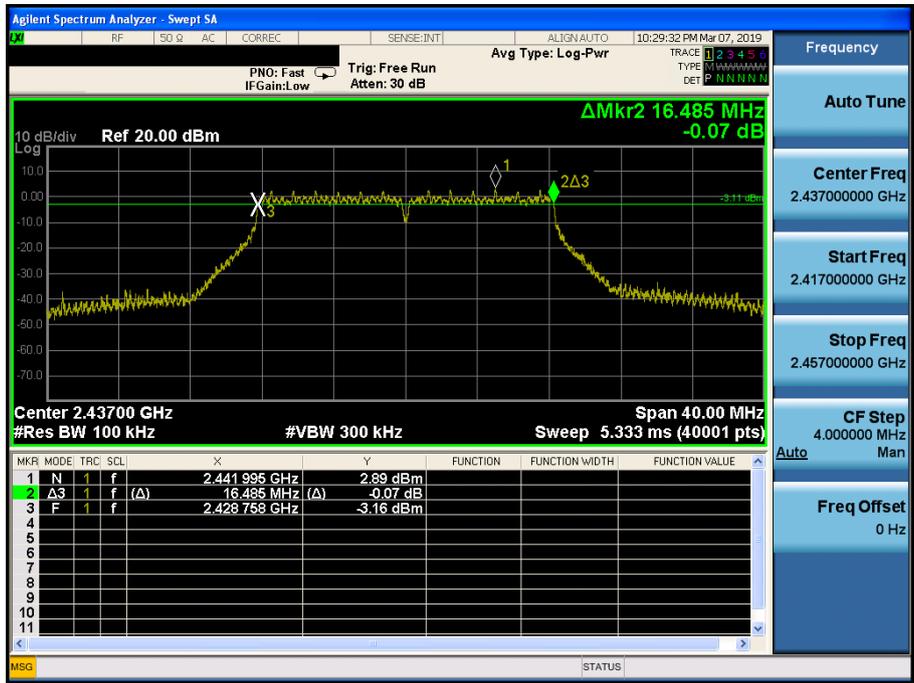


6 dB Bandwidth

TM 5 & ANT 2 & 2462




6 dB Bandwidth

TM 5 & ANT 2 & 2467

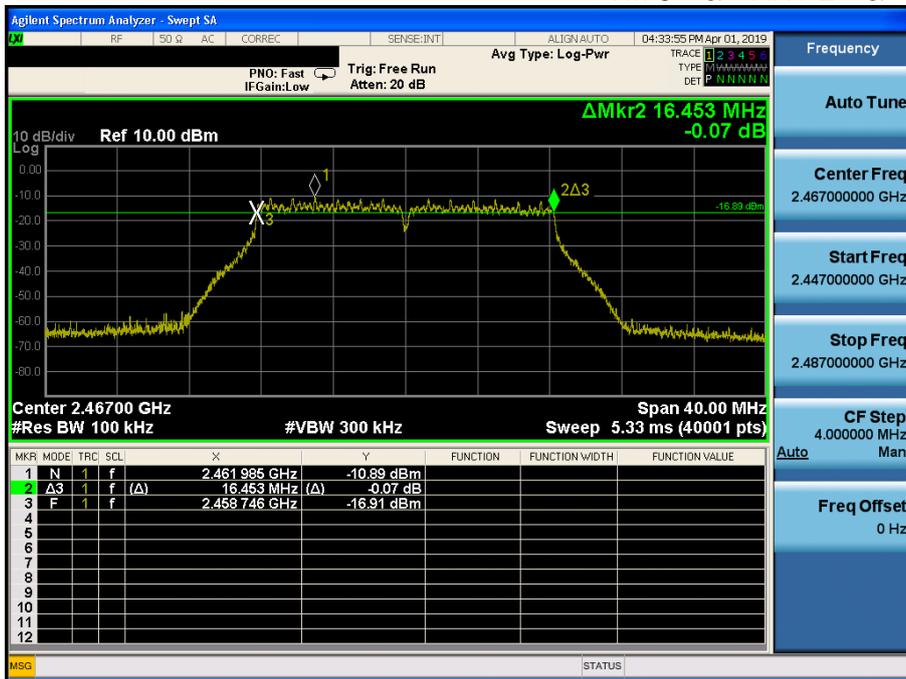


6 dB Bandwidth

TM 5 & ANT 2 & 2472

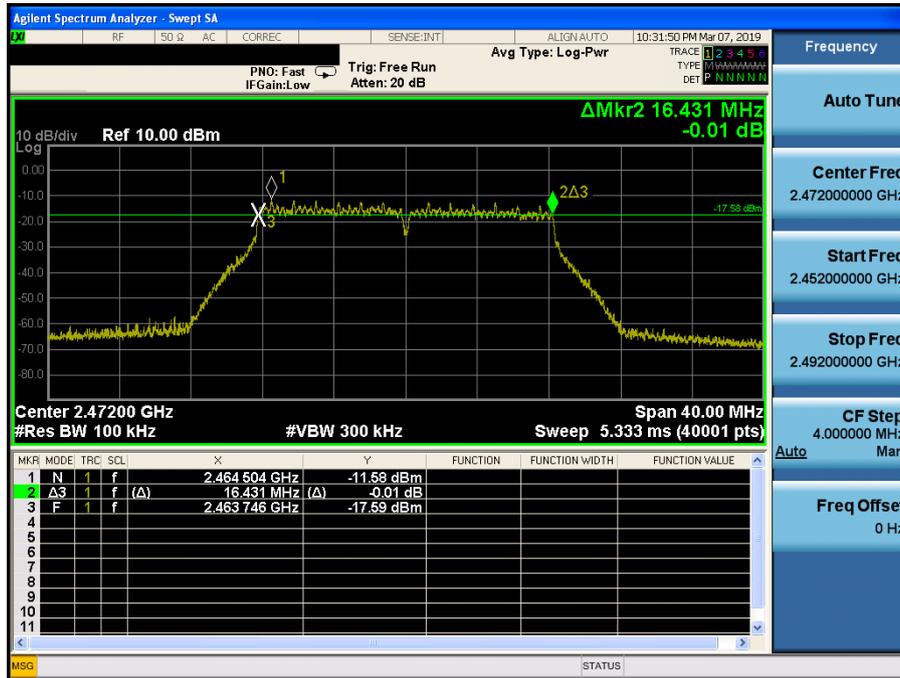


6 dB Bandwidth

TM 6 & ANT 2 & 2412

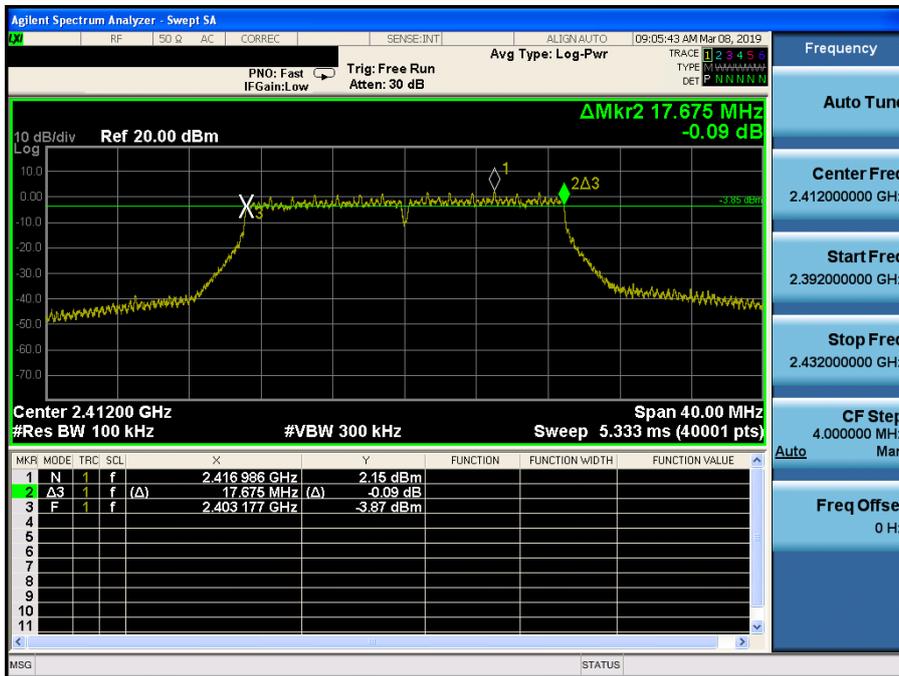


6 dB Bandwidth

TM 6 & ANT 2 & 2437

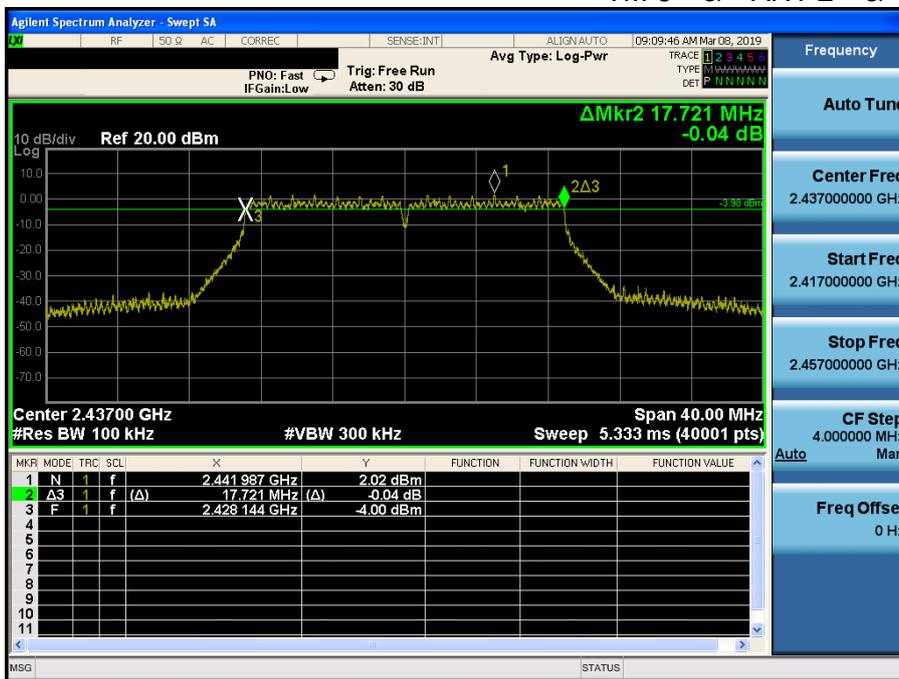


6 dB Bandwidth

TM 6 & ANT 2 & 2462

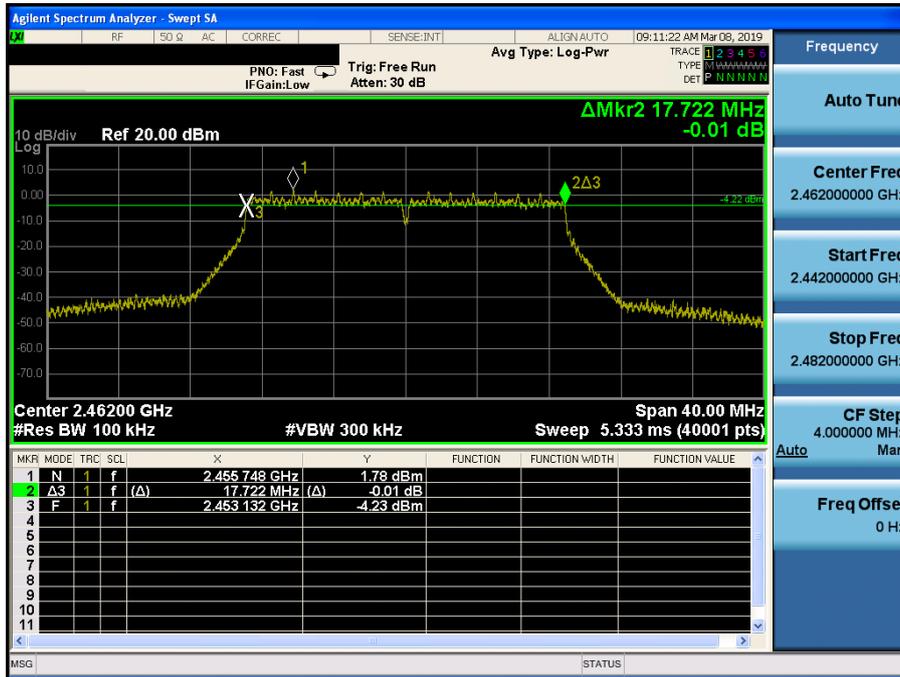


6 dB Bandwidth

TM 6 & ANT 2 & 2467

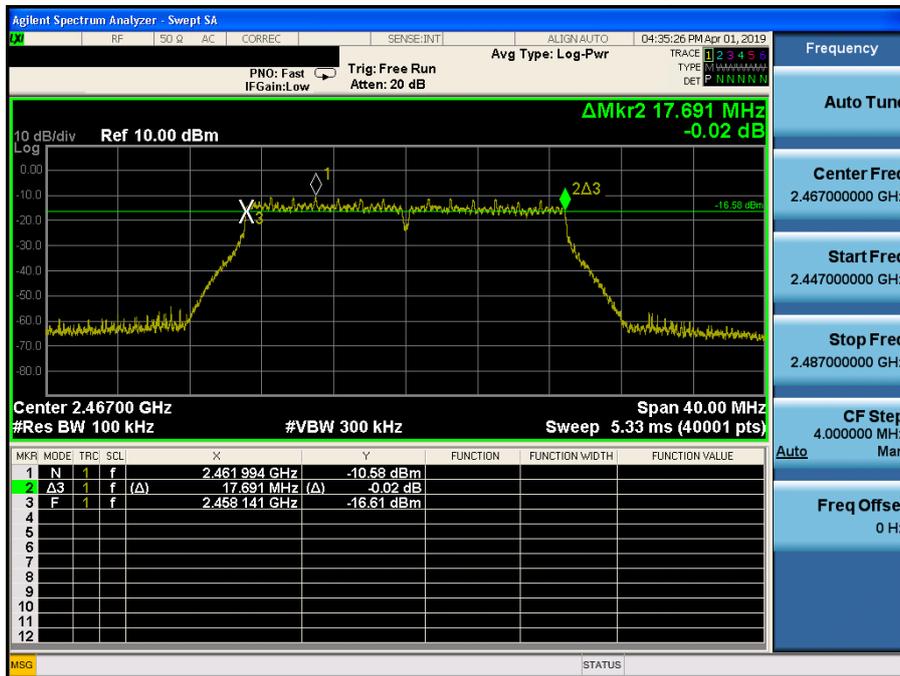


6 dB Bandwidth

TM 6 & ANT 2 & 2472

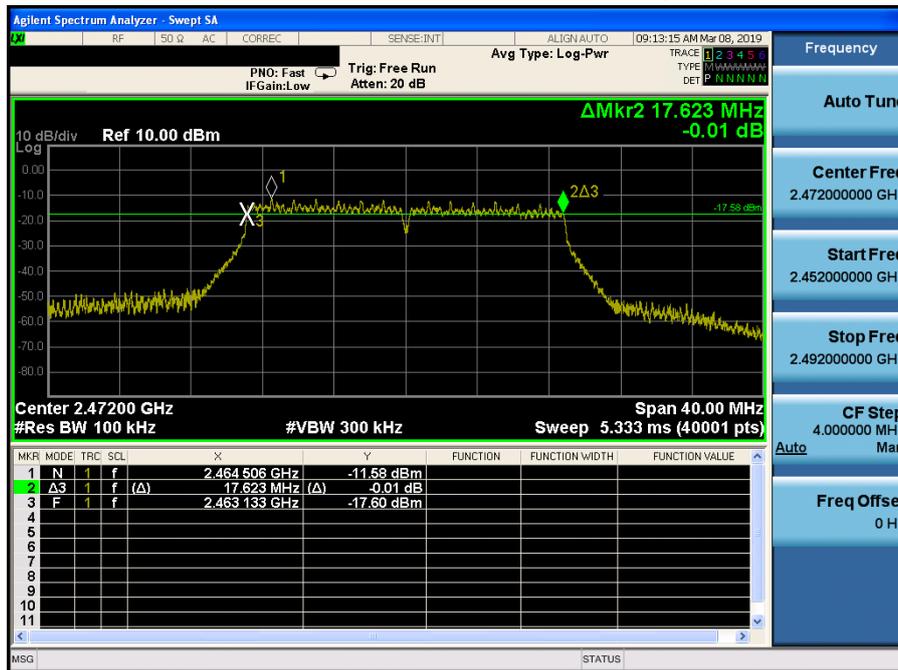


6 dB Bandwidth

TM 7 & ANT 2 & 2412

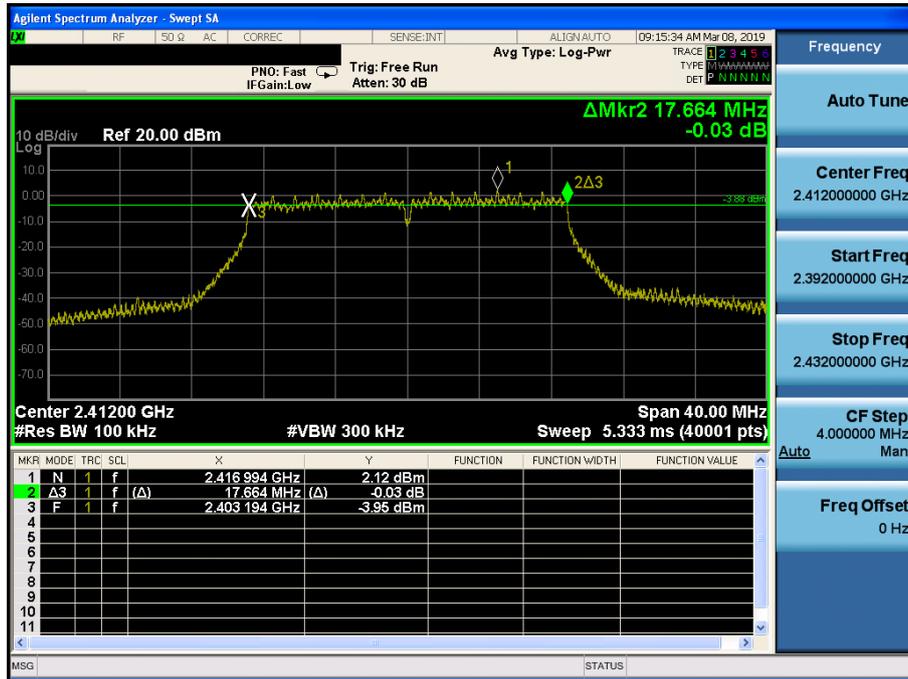


6 dB Bandwidth

TM 7 & ANT 2 & 2437

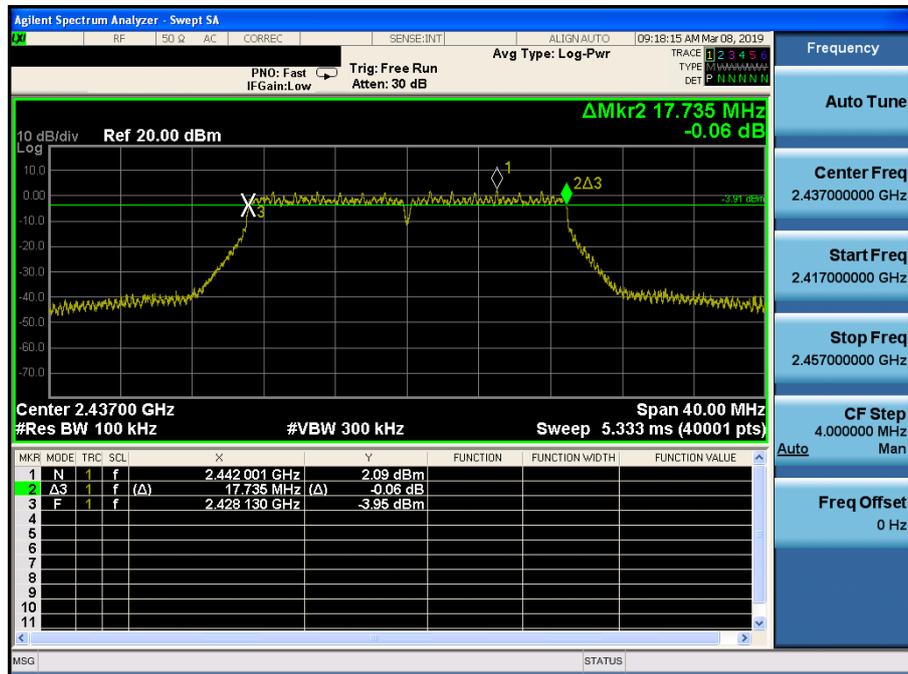


6 dB Bandwidth

TM 7 & ANT 2 & 2462

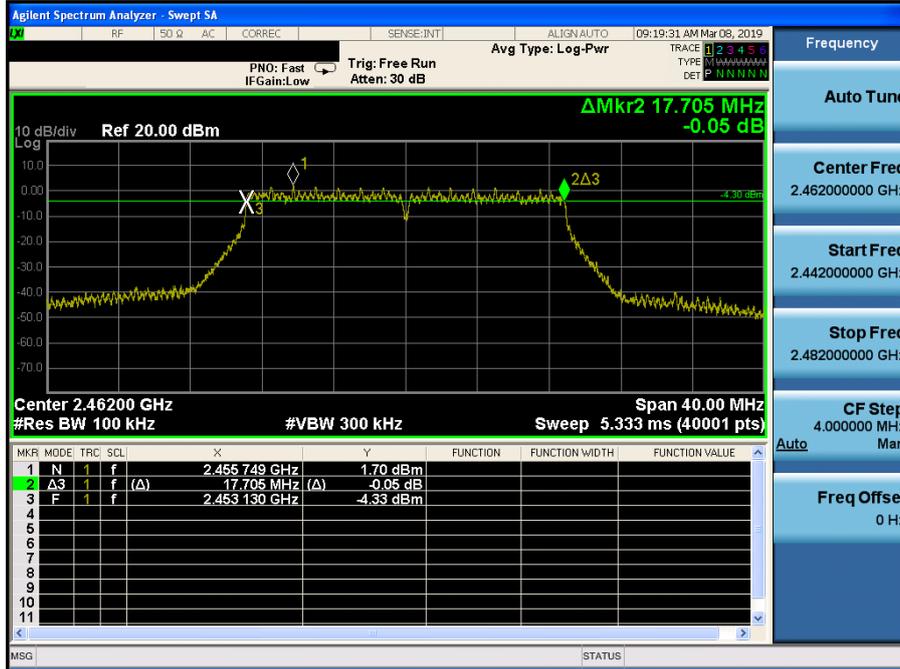


6 dB Bandwidth

TM 7 & ANT 2 & 2467

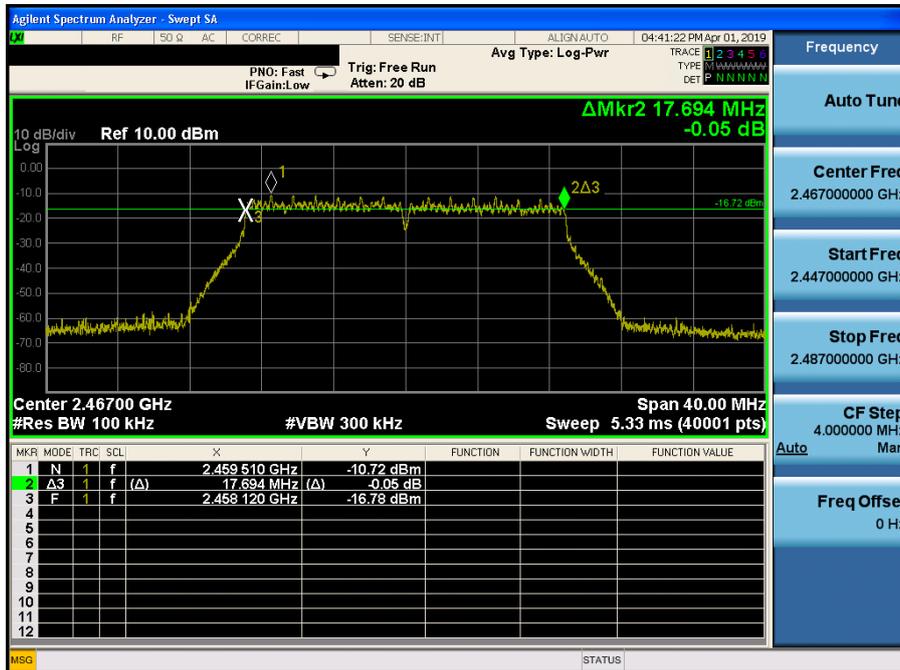


6 dB Bandwidth

TM 7 & ANT 2 & 2472

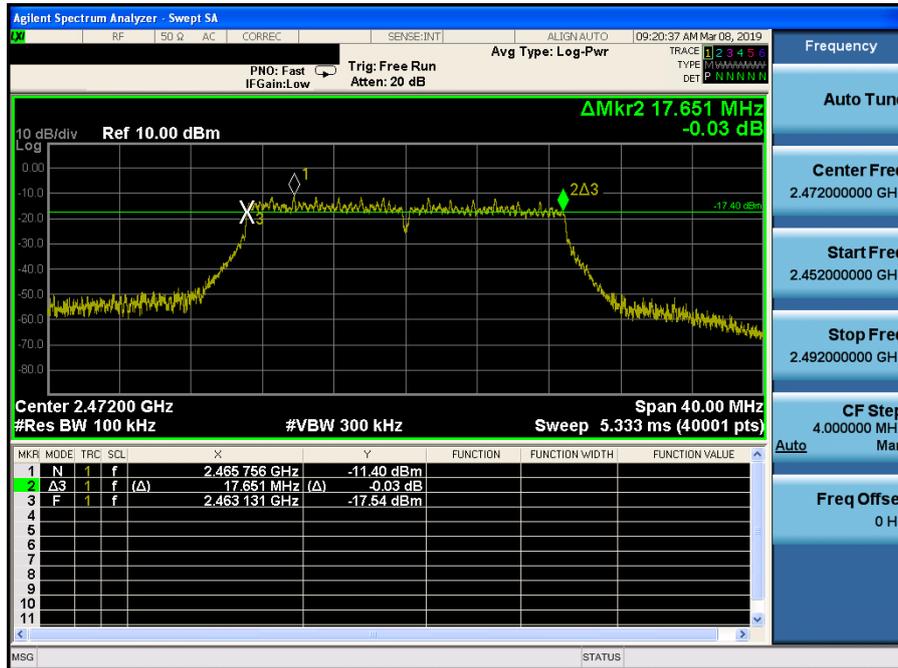


6 dB Bandwidth

TM 8 & ANT 2 & 2412

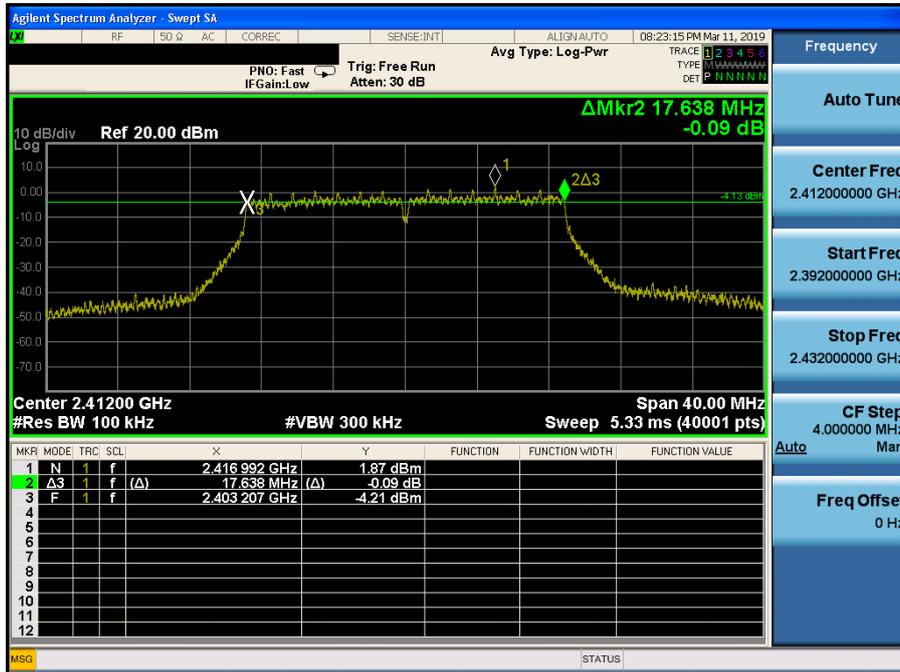


6 dB Bandwidth

TM 8 & ANT 2 & 2437

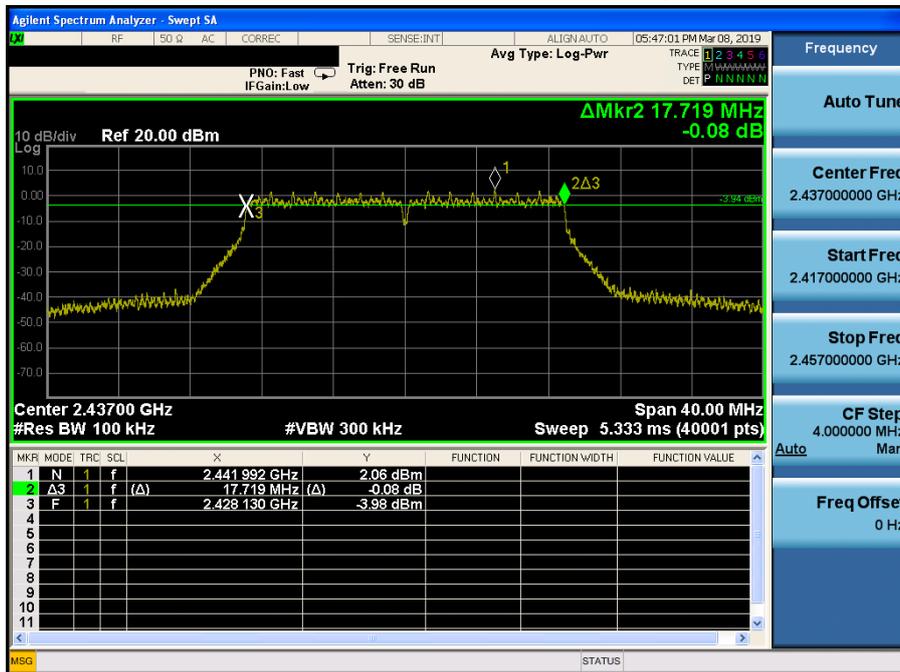


6 dB Bandwidth

TM 8 & ANT 2 & 2462

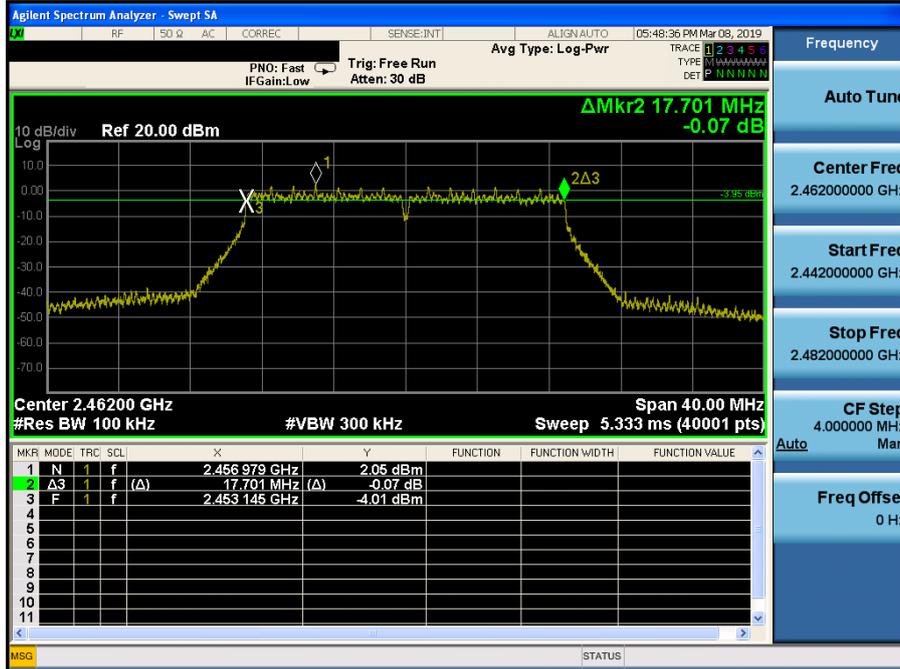


6 dB Bandwidth

TM 8 & ANT 2 & 2467

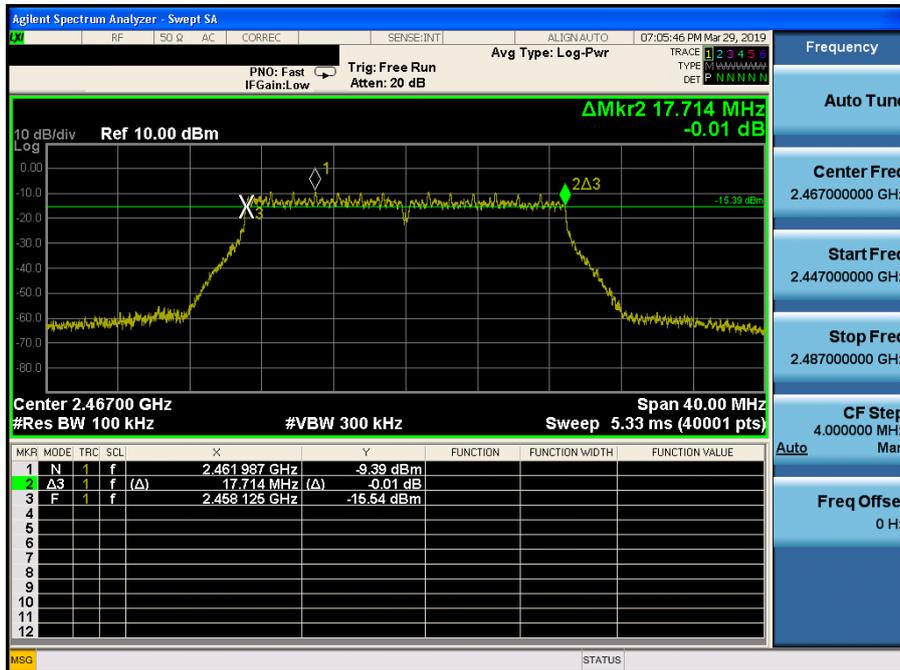


6 dB Bandwidth

TM 8 & ANT 2 & 2472

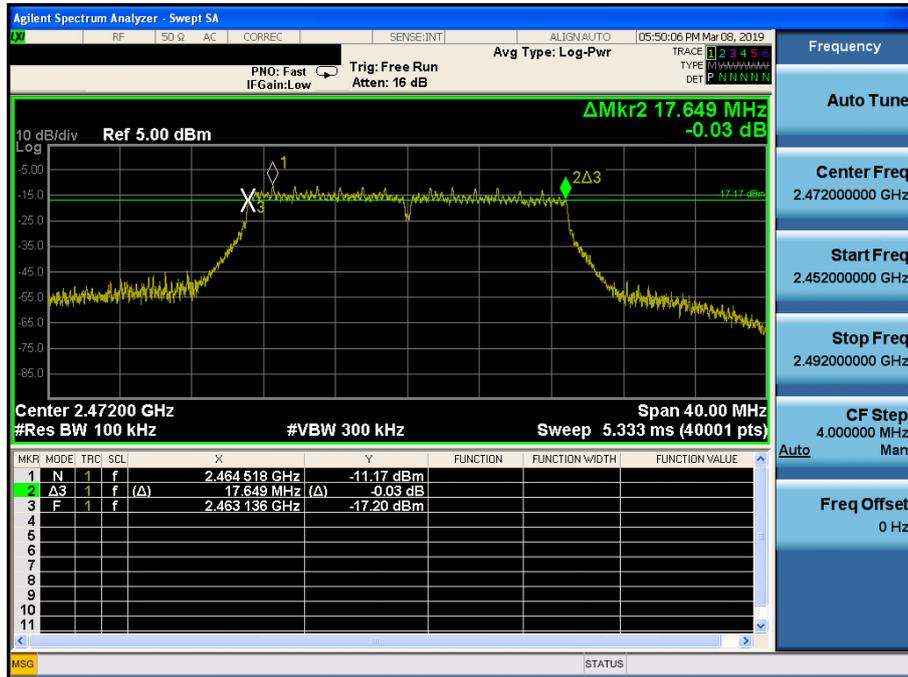


6 dB Bandwidth

TM 9 & ANT 2 & 2412

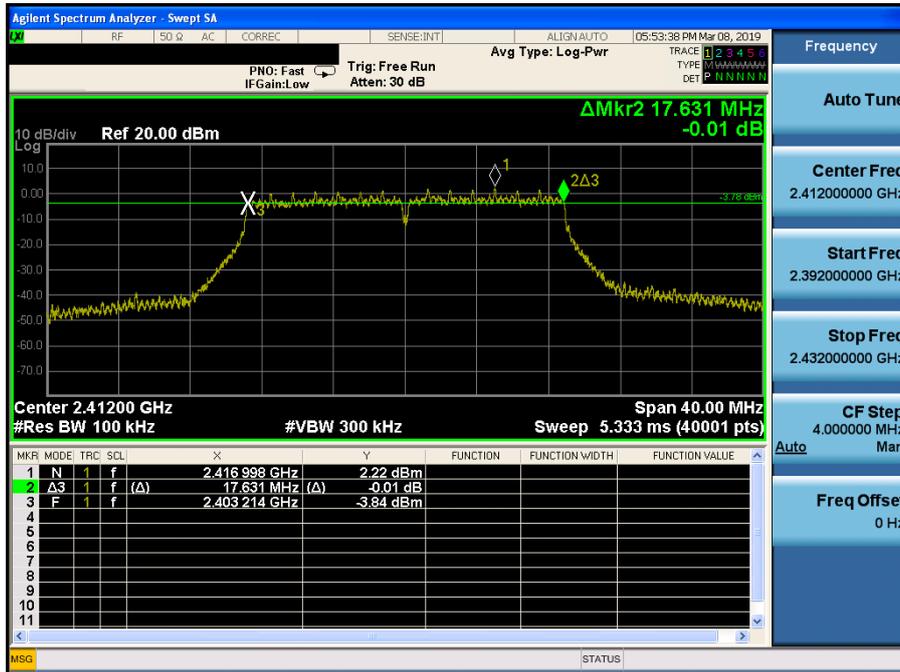


6 dB Bandwidth

TM 9 & ANT 2 & 2437

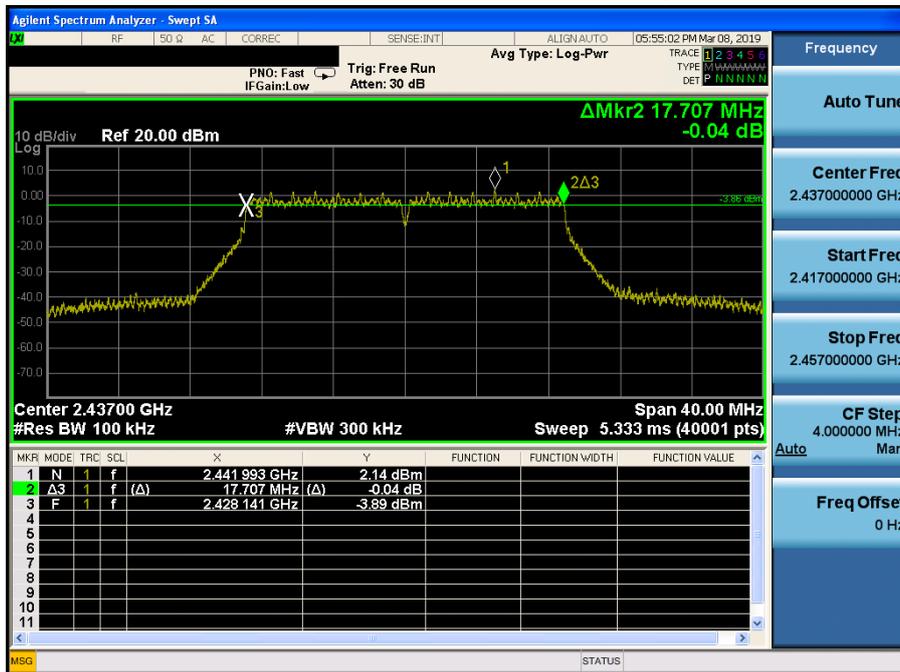


6 dB Bandwidth

TM 9 & ANT 2 & 2462

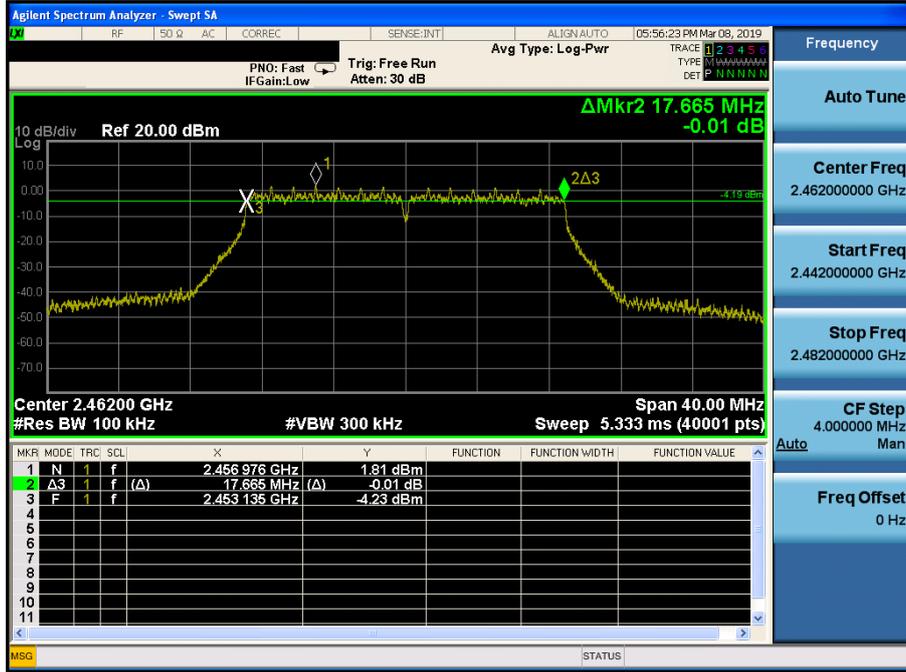


6 dB Bandwidth

TM 9 & ANT 2 & 2467

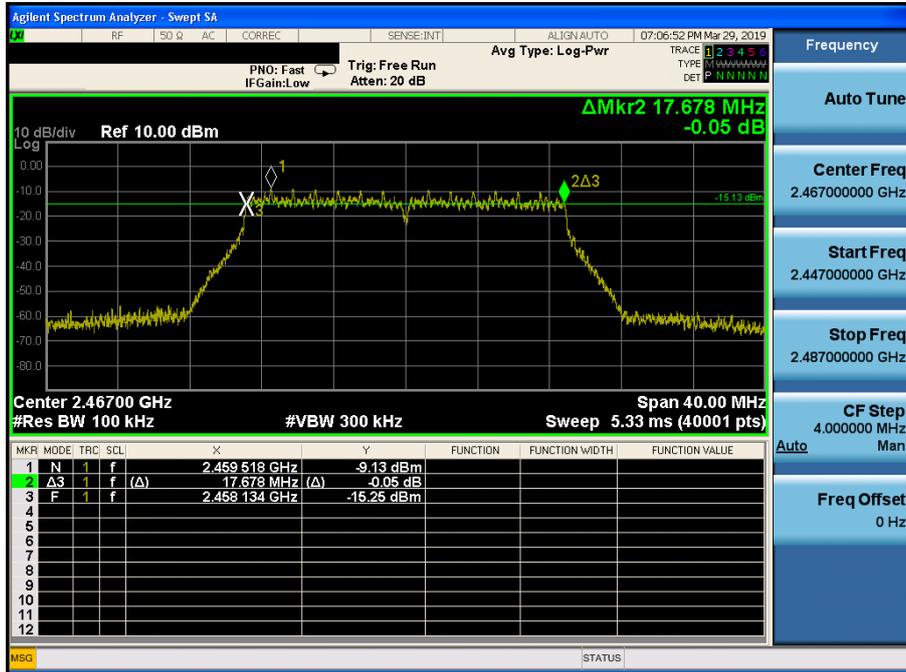

6 dB Bandwidth

TM 9 & ANT 2 & 2472

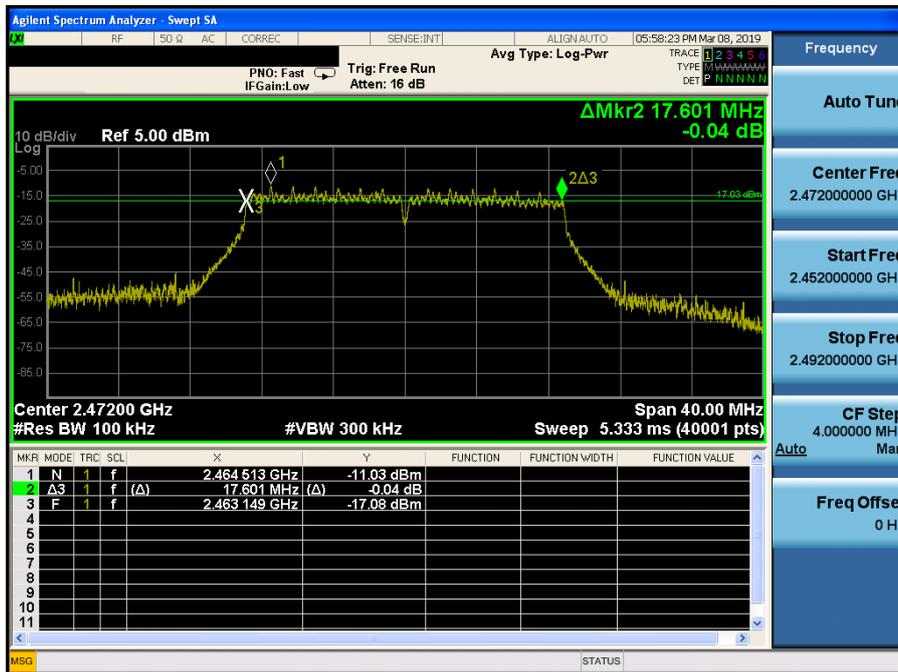


8.2 Maximum peak conducted output power

■ Test Requirements and limit, §15.247(b)

The maximum permissible conducted output power is **1 Watt**.

■ Test Configuration

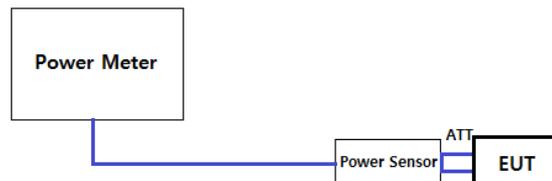

■ Test Procedure

1. PKPM1 Peak power meter method of KDB558074 D01V05R01

The maximum conducted output powers were measured using a broadband peak RF power meter which has greater video bandwidth than DUT's DTS bandwidth and utilize a fast-responding diode detector.

2. Method AVGPM-G (Measurement using a gated RF average power meter) of KDB558074 D01V05R01

The average conducted output powers were measured using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

■ Test Results: **Comply**

▪ Single transmitting

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for 802.11b								
			Data Rate [Mbps]								
			1	2	5.5	11	-	-	-	-	
ANT 1	2412	PK	18.57	18.56	18.54	18.52	-	-	-	-	
		AV	15.67	15.63	15.62	15.59	-	-	-	-	
	2437	PK	18.34	18.30	18.27	18.21	-	-	-	-	
		AV	15.51	15.53	15.52	15.50	-	-	-	-	
	2462	PK	18.44	18.40	18.38	18.35	-	-	-	-	
		AV	15.59	15.57	15.59	15.56	-	-	-	-	
	2467	PK	5.38	5.32	5.28	5.25	-	-	-	-	
		AV	2.29	2.28	2.23	2.22	-	-	-	-	
	2472	PK	3.77	3.69	3.62	3.55	-	-	-	-	
		AV	0.68	0.66	0.65	0.61	-	-	-	-	
	ANT 2	2412	PK	18.95	18.91	18.94	18.92	-	-	-	-
			AV	15.89	15.92	15.97	15.90	-	-	-	-
2437		PK	18.65	18.76	18.81	18.77	-	-	-	-	
		AV	15.60	15.62	15.68	15.60	-	-	-	-	
2462		PK	18.66	18.74	18.76	18.71	-	-	-	-	
		AV	15.74	15.78	15.82	15.78	-	-	-	-	
2467		PK	5.31	5.35	5.22	5.26	-	-	-	-	
		AV	2.21	2.25	2.16	2.23	-	-	-	-	
2472		PK	3.71	3.66	3.67	3.62	-	-	-	-	
		AV	0.75	0.71	0.69	0.80	-	-	-	-	

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for 802.11g								
			Data Rate [Mbps]								
			6	9	12	18	24	36	48	54	
ANT 1	2412	PK	20.83	20.46	20.33	21.26	20.77	22.71	22.44	22.13	
		AV	15.56	15.07	15.04	14.75	14.24	14.11	13.16	13.09	
	2437	PK	20.97	20.57	20.51	21.52	21.12	22.97	22.71	22.50	
		AV	15.56	15.16	15.14	14.91	14.46	14.35	13.42	13.34	
	2462	PK	18.47	18.01	17.97	18.82	18.25	20.34	20.07	19.88	
		AV	15.62	15.19	15.15	14.82	14.39	14.28	13.34	13.29	
	2467	PK	7.38	7.28	7.18	8.59	8.45	10.68	10.99	11.20	
		AV	2.19	2.14	2.01	2.26	2.24	1.88	1.96	2.00	
	2472	PK	6.30	6.21	6.13	7.49	7.31	9.58	9.82	10.04	
		AV	0.90	0.82	0.71	0.92	0.88	0.59	0.71	0.74	
	ANT 2	2412	PK	21.18	21.06	20.84	21.72	21.03	22.79	22.45	22.17
			AV	16.05	15.69	15.63	15.11	14.59	14.09	13.11	13.13
2437		PK	21.05	20.97	20.79	21.65	20.91	22.74	22.44	22.21	
		AV	15.81	15.51	15.47	15.02	14.58	14.04	13.15	13.19	
2462		PK	20.80	20.68	20.44	21.24	20.64	22.48	22.08	21.72	
		AV	15.84	15.55	15.50	15.08	14.65	14.21	13.18	13.21	
2467		PK	7.03	7.16	7.05	8.39	8.49	10.10	10.36	10.60	
		AV	1.99	1.94	2.01	2.02	2.07	1.93	1.89	1.87	
2472		PK	5.54	5.58	5.57	7.14	7.19	9.68	9.88	9.83	
		AV	0.55	0.61	0.47	0.69	0.70	0.54	0.69	0.62	

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11n(HT20)</u>								
			Data Rate [MCS]								
			0	1	2	3	4	5	6	7	
ANT 1	2412	PK	19.40	19.36	20.21	20.28	22.75	22.36	21.97	21.66	
		AV	13.71	13.82	13.52	13.62	13.09	12.94	11.94	12.12	
	2437	PK	19.51	19.49	20.38	20.48	22.87	22.52	22.19	21.95	
		AV	13.83	13.90	13.67	13.73	13.26	13.09	12.15	12.38	
	2462	PK	19.36	19.31	20.12	20.22	22.75	22.39	22.04	21.82	
		AV	13.73	13.85	13.51	13.64	13.14	13.02	12.08	12.24	
	2467	PK	7.59	7.38	8.53	8.64	10.67	10.95	11.16	11.32	
		AV	2.08	1.98	2.00	2.04	1.99	1.86	1.97	2.05	
	2472	PK	6.52	6.34	7.55	7.67	9.78	10.04	10.28	10.42	
		AV	0.85	0.77	0.72	0.82	0.84	0.85	0.91	0.89	
	ANT 2	2412	PK	19.50	19.52	20.32	20.21	22.59	22.33	21.71	21.46
			AV	14.08	14.23	13.76	13.78	13.19	13.14	12.17	12.14
2437		PK	19.36	19.42	20.29	20.14	22.57	22.24	21.70	21.39	
		AV	14.12	14.01	13.61	13.64	13.11	13.09	12.21	12.19	
2462		PK	19.37	19.40	20.12	19.97	22.44	22.11	21.48	21.15	
		AV	14.17	14.00	13.65	13.66	13.19	13.15	12.19	12.18	
2467		PK	7.24	7.16	8.32	8.59	9.77	10.38	10.59	10.52	
		AV	1.86	1.80	1.95	2.05	2.03	1.95	1.98	1.97	
2472		PK	5.74	5.59	6.84	7.26	9.63	9.73	9.88	10.02	
		AV	0.64	0.62	0.65	0.60	0.69	0.78	0.75	0.85	

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11ac(VHT20)</u>									
			Data Rate [MCS]									
			0	1	2	3	4	5	6	7	8	
ANT 1	2422	PK	19.30	19.04	20.22	20.32	22.25	22.22	21.00	20.94	20.20	
		AV	13.78	13.75	13.60	13.59	13.09	13.03	12.23	11.94	11.14	
	2437	PK	19.32	19.09	20.35	20.51	22.49	22.42	21.27	21.20	20.48	
		AV	13.72	13.68	13.51	13.49	13.01	13.00	12.36	12.20	11.54	
	2462	PK	19.30	19.00	20.11	20.23	22.11	22.09	20.92	20.89	20.50	
		AV	13.78	13.76	13.64	13.63	13.09	13.04	12.29	12.18	11.25	
	2467	PK	7.63	7.34	8.73	9.03	10.89	11.08	11.23	11.40	11.50	
		AV	1.98	1.92	2.17	2.28	2.22	2.16	2.25	2.30	2.29	
	2472	PK	6.50	6.31	7.46	7.18	9.58	9.78	9.99	9.90	10.06	
		AV	0.69	0.74	0.75	0.83	0.72	0.87	0.74	0.85	0.87	
	ANT 2	2422	PK	19.54	19.49	20.74	20.49	21.90	21.99	21.31	21.09	20.72
			AV	14.12	14.11	13.80	13.76	13.19	13.26	12.02	11.98	11.13
2437		PK	19.50	19.42	20.62	20.48	21.79	21.85	21.17	20.95	20.52	
		AV	14.07	14.05	13.72	13.70	13.21	13.27	13.11	13.09	12.31	
2462		PK	19.58	19.56	20.87	20.64	22.11	22.09	21.61	21.44	21.08	
		AV	14.10	14.07	14.89	14.82	14.21	14.23	14.01	14.00	13.10	
2467		PK	7.21	7.35	8.34	8.41	10.04	10.15	10.51	10.60	10.71	
		AV	1.74	1.78	1.86	1.87	1.82	1.88	1.89	1.95	1.99	
2472		PK	5.91	5.55	6.93	7.15	9.13	9.10	9.36	9.51	10.05	
		AV	0.53	0.51	0.56	0.59	0.58	0.50	0.52	0.63	0.55	

• Multiple transmitting CDD

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11g</u>								
			Data Rate [Mbps]								
			6	9	12	18	24	36	48	54	
ANT 1	2412	PK	20.83	20.46	20.33	21.26	20.77	22.71	22.44	22.13	
		AV	15.56	15.07	15.04	14.75	14.24	14.11	13.16	13.09	
	2437	PK	20.97	20.57	20.51	21.52	21.12	22.97	22.71	22.50	
		AV	15.56	15.16	15.14	14.91	14.46	14.35	13.42	13.34	
	2462	PK	18.47	18.01	17.97	18.82	18.25	20.34	20.07	19.88	
		AV	15.62	15.19	15.15	14.82	14.39	14.28	13.34	13.29	
	2467	PK	7.38	7.28	7.18	8.59	8.45	10.68	10.99	11.20	
		AV	2.19	2.14	2.01	2.26	2.24	1.88	1.96	2.00	
	2472	PK	6.30	6.21	6.13	7.49	7.31	9.58	9.82	10.04	
		AV	0.90	0.82	0.71	0.92	0.88	0.59	0.71	0.74	
	ANT 2	2412	PK	21.18	21.06	20.84	21.72	21.03	22.79	22.45	22.17
			AV	16.05	15.69	15.63	15.11	14.59	14.09	13.11	13.13
2437		PK	21.05	20.97	20.79	21.65	20.91	22.74	22.44	22.21	
		AV	15.81	15.51	15.47	15.02	14.58	14.04	13.15	13.19	
2462		PK	20.80	20.68	20.44	21.24	20.64	22.48	22.08	21.72	
		AV	15.84	15.55	15.50	15.08	14.65	14.21	13.18	13.21	
2467		PK	7.03	7.16	7.05	8.39	8.49	10.10	10.36	10.60	
		AV	1.99	1.94	2.01	2.02	2.07	1.93	1.89	1.87	
2472		PK	5.54	5.58	5.57	7.14	7.19	9.68	9.88	9.83	
		AV	0.55	0.61	0.47	0.69	0.70	0.54	0.69	0.62	
Sum (ANT 1+2)		2412	PK	24.02	23.78	23.60	24.51	23.91	25.76	25.46	25.16
		2437	PK	24.02	23.78	23.66	24.60	24.03	25.87	25.59	25.37
	2462	PK	22.80	22.56	22.39	23.21	22.62	24.55	24.20	23.91	
	2467	PK	10.22	10.23	10.13	11.50	11.48	13.41	13.70	13.92	
	2472	PK	8.95	8.92	8.87	10.33	10.26	12.64	12.86	12.95	

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11n(HT20)</u>								
			Data Rate [MCS]								
			0	1	2	3	4	5	6	7	
ANT 1	2412	PK	19.40	19.36	20.21	20.28	22.75	22.36	21.97	21.66	
		AV	13.71	13.82	13.52	13.62	13.09	12.94	11.94	12.12	
	2437	PK	19.51	19.49	20.38	20.48	22.87	22.52	22.19	21.95	
		AV	13.83	13.90	13.67	13.73	13.26	13.09	12.15	12.38	
	2462	PK	19.36	19.31	20.12	20.22	22.75	22.39	22.04	21.82	
		AV	13.73	13.85	13.51	13.64	13.14	13.02	12.08	12.24	
	2467	PK	7.59	7.38	8.53	8.64	10.67	10.95	11.16	11.32	
		AV	2.08	1.98	2.00	2.04	1.99	1.86	1.97	2.05	
	2472	PK	6.52	6.34	7.55	7.67	9.78	10.04	10.28	10.42	
		AV	0.85	0.77	0.72	0.82	0.84	0.85	0.91	0.89	
	ANT 2	2412	PK	19.50	19.52	20.32	20.21	22.59	22.33	21.71	21.46
			AV	14.08	14.23	13.76	13.78	13.19	13.14	12.17	12.14
2437		PK	19.36	19.42	20.29	20.14	22.57	22.24	21.70	21.39	
		AV	14.12	14.01	13.61	13.64	13.11	13.09	12.21	12.19	
2462		PK	19.37	19.40	20.12	19.97	22.44	22.11	21.48	21.15	
		AV	14.17	14.00	13.65	13.66	13.19	13.15	12.19	12.18	
2467		PK	7.24	7.16	8.32	8.59	9.77	10.38	10.59	10.52	
		AV	1.86	1.80	1.95	2.05	2.03	1.95	1.98	1.97	
2472		PK	5.74	5.59	6.84	7.26	9.63	9.73	9.88	10.02	
		AV	0.64	0.62	0.65	0.60	0.69	0.78	0.75	0.85	
Sum (ANT 1+2)		2412	PK	22.46	22.45	23.28	23.26	25.68	25.36	24.85	24.57
		2437	PK	22.45	22.47	23.35	23.32	25.73	25.39	24.96	24.69
	2462	PK	22.38	22.37	23.13	23.11	25.61	25.26	24.78	24.51	
	2467	PK	10.43	10.28	11.44	11.63	13.25	13.68	13.89	13.95	
	2472	PK	9.16	8.99	10.22	10.48	12.72	12.90	13.09	13.23	

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11ac(VHT20)</u>									
			Data Rate [MCS]									
			0	1	2	3	4	5	6	7	8	
ANT 1	2412	PK	19.30	19.04	20.22	20.32	22.25	22.22	21.00	20.94	20.20	
		AV	13.78	13.75	13.60	13.59	13.09	13.03	12.23	11.94	11.14	
	2437	PK	19.32	19.09	20.35	20.51	22.49	22.42	21.27	21.20	20.48	
		AV	13.72	13.68	13.51	13.49	13.01	13.00	12.36	12.20	11.54	
	2462	PK	19.30	19.00	20.11	20.23	22.11	22.09	20.92	20.89	20.50	
		AV	13.78	13.76	13.64	13.63	13.09	13.04	12.29	12.18	11.25	
	2467	PK	7.63	7.34	8.73	9.03	10.89	11.08	11.23	11.40	11.50	
		AV	1.98	1.92	2.17	2.28	2.22	2.16	2.25	2.30	2.29	
	2472	PK	6.50	6.31	7.46	7.18	9.58	9.78	9.99	9.90	10.06	
		AV	0.69	0.74	0.75	0.83	0.72	0.87	0.74	0.85	0.87	
	ANT 2	2412	PK	19.54	19.49	20.74	20.49	21.90	21.99	21.31	21.09	20.72
			AV	14.12	14.11	13.80	13.76	13.19	13.26	12.02	11.98	11.13
2437		PK	19.50	19.42	20.62	20.48	21.79	21.85	21.17	20.95	20.52	
		AV	14.07	14.05	13.72	13.70	13.21	13.27	13.11	13.09	12.31	
2462		PK	19.58	19.56	20.87	20.64	22.11	22.09	21.61	21.44	21.08	
		AV	14.10	14.07	14.89	14.82	14.21	14.23	14.01	14.00	13.10	
2467		PK	7.21	7.35	8.34	8.41	10.04	10.15	10.51	10.60	10.71	
		AV	1.74	1.78	1.86	1.87	1.82	1.88	1.89	1.95	1.99	
2472		PK	5.91	5.55	6.93	7.15	9.13	9.10	9.36	9.51	10.05	
		AV	0.53	0.51	0.56	0.59	0.58	0.50	0.52	0.63	0.55	
Sum (ANT 1+2)		2412	PK	22.43	22.28	23.50	23.42	25.09	25.12	24.17	24.03	23.48
		2437	PK	22.42	22.27	23.50	23.51	25.16	25.15	24.23	24.09	23.51
	2462	PK	22.45	22.30	23.52	23.45	25.12	25.10	24.29	24.18	23.81	
	2467	PK	10.44	10.36	11.55	11.74	13.50	13.65	13.90	14.03	14.13	
	2472	PK	9.23	8.96	10.21	10.18	12.37	12.46	12.70	12.72	13.07	

Multiple transmitting SDM

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11n(HT20)</u>								
			Data Rate [MCS]								
			8	9	10	11	12	13	14	15	
ANT 1	2412	PK	19.24	19.20	20.29	20.25	22.25	22.36	21.31	21.39	
		AV	13.84	13.83	13.65	13.64	13.03	13.17	12.20	12.14	
	2437	PK	19.48	19.41	20.45	20.39	22.32	22.39	21.40	21.46	
		AV	13.88	13.86	13.61	13.60	13.02	13.21	12.28	12.21	
	2462	PK	19.25	19.19	20.25	20.22	22.31	22.42	21.38	21.44	
		AV	13.86	13.85	13.64	13.62	13.05	13.19	12.31	12.28	
	2467	PK	7.35	7.20	8.68	8.75	10.34	10.66	10.83	10.98	
		AV	2.10	2.04	2.21	2.23	2.31	2.33	2.32	2.35	
	2472	PK	6.23	6.20	7.45	7.65	8.75	8.99	9.12	9.76	
		AV	0.71	0.76	0.81	0.84	0.83	0.85	0.90	0.86	
	ANT 2	2412	PK	19.45	19.39	20.40	20.43	22.18	21.96	21.02	21.18
			AV	14.33	14.32	13.96	13.95	13.29	13.31	12.14	12.17
2437		PK	19.35	19.31	20.34	20.41	22.24	22.25	21.14	21.33	
		AV	14.20	14.19	13.84	13.82	13.21	13.25	12.19	12.25	
2462		PK	19.27	19.20	20.27	20.31	22.15	21.98	21.10	21.24	
		AV	14.08	14.06	13.75	13.74	13.05	13.08	12.01	12.03	
2467		PK	7.05	7.13	8.56	8.66	10.30	10.69	10.49	10.78	
		AV	1.89	1.95	1.98	2.04	1.96	1.95	1.92	2.00	
2472		PK	5.75	5.84	7.18	7.29	9.27	9.43	9.75	9.60	
		AV	0.70	0.59	0.60	0.77	0.64	0.59	0.58	0.61	
Sum (ANT 1+2)		2412	PK	22.36	22.31	23.36	23.35	25.23	25.17	24.18	24.30
		2437	PK	22.43	22.37	23.41	23.41	25.29	25.33	24.28	24.41
	2462	PK	22.27	22.21	23.27	23.28	25.24	25.22	24.25	24.35	
	2467	PK	10.21	10.18	11.63	11.72	13.33	13.69	13.67	13.89	
	2472	PK	9.01	9.03	10.33	10.48	12.03	12.23	12.46	12.69	

ANT	Freq. (MHz)	Det.	Maximum Peak Conducted Output Power (dBm) for <u>802.11ac(VHT20)</u>								
			Data Rate [MCS]								
			0	1	2	3	4	5	6	7	8
ANT 1	2412	PK	19.32	19.13	20.20	20.17	22.35	22.13	21.78	21.53	20.35
		AV	13.85	13.80	13.57	13.54	13.19	13.05	12.28	12.27	11.21
	2437	PK	19.38	19.15	20.04	19.99	20.17	20.03	19.65	19.41	18.29
		AV	14.04	14.00	13.74	13.70	13.42	13.29	12.59	12.57	11.59
	2462	PK	19.19	19.01	20.11	20.05	20.24	20.01	13.61	13.44	12.20
		AV	13.78	13.74	13.59	13.55	13.26	13.11	12.38	12.37	11.42
	2467	PK	7.49	7.36	8.79	8.83	10.78	11.01	10.79	10.88	11.14
		AV	2.05	2.04	2.27	2.24	2.25	2.30	2.31	2.29	2.26
	2472	PK	6.44	6.05	7.59	7.52	9.52	9.46	9.63	9.53	9.86
		AV	1.00	0.81	0.79	0.83	0.84	0.85	0.87	0.85	0.81
ANT 2	2412	PK	19.43	19.36	20.31	20.49	22.20	22.11	21.83	21.49	20.37
		AV	14.35	14.32	13.88	13.87	13.26	13.20	12.19	12.17	11.20
	2437	PK	19.26	19.21	20.32	20.54	22.34	22.29	22.06	21.82	20.79
		AV	14.31	14.27	13.89	13.86	13.19	13.11	12.07	12.04	11.14
	2462	PK	19.40	19.29	20.24	20.41	22.04	21.91	21.54	21.35	20.30
		AV	14.28	14.26	13.77	13.74	13.21	13.17	13.24	13.20	12.13
	2467	PK	7.22	7.27	8.51	8.74	10.39	10.48	10.86	10.68	10.74
		AV	1.89	1.96	2.00	2.03	1.96	1.97	1.99	1.98	2.02
	2472	PK	5.64	5.71	7.16	7.22	9.54	9.68	9.91	10.18	9.38
		AV	0.61	0.64	0.67	0.72	0.77	0.79	0.82	0.87	0.89
Sum (ANT 1+2)	2412	PK	22.39	22.26	23.27	23.34	25.29	25.13	24.82	24.52	23.37
	2437	PK	22.33	22.19	23.19	23.28	24.40	24.32	24.03	23.79	22.73
	2462	PK	22.31	22.16	23.19	23.24	24.24	24.07	22.19	22.00	20.93
	2467	PK	10.37	10.33	11.66	11.80	13.60	13.76	13.84	13.79	13.95
	2472	PK	9.07	8.89	10.39	10.38	12.54	12.58	12.78	12.88	12.64

8.3 Maximum power spectral density

■ Test requirements and limit, §15.247(e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ Test Configuration:

Refer to the APPENDIX I.

■ Test Procedure

- **KDB558074 D01v05r01 - Section 8.4**
 - **ANSI C63.10-2013 – Section 11.10.2**
1. Set analyzer center frequency to DTS channel center frequency.
 2. Set the span to **1.5 times** the DTS bandwidth.
 3. Set the RBW to : **3 kHz ≤ RBW ≤ 100 kHz**
 4. Set the VBW ≥ **3 x RBW**
 5. Detector = **Peak**
 6. Sweep time = **Auto couple**
 7. Trace mode = **Max hold.**
 8. Allow trace to fully stabilize.
 9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


■ Test Results: **Comply**

Test Mode	Frequency	RBW	PKPSD [dBm]			Limit [dBm]
			ANT 1	ANT 2	SUM (ANT 1 + ANT 2)	
TM 1	2412	3 kHz	-8.18	-7.21	-	8.00
	2437	3 kHz	-8.06	-7.21	-	8.00
	2462	3 kHz	-8.01	-8.59	-	8.00
	2467	3 kHz	-21.01	-23.58	-	8.00
	2472	3 kHz	-24.07	-25.19	-	8.00
TM 5	2412	3 kHz	-10.68	-11.03	-7.84	8.00
	2437	3 kHz	-10.48	-10.06	-7.25	8.00
	2462	3 kHz	-11.22	-11.50	-8.35	8.00
	2467	3 kHz	-22.41	-24.77	-20.42	8.00
	2472	3 kHz	-24.18	-24.85	-21.49	8.00
TM 6	2412	3 kHz	-11.74	-11.79	-8.75	8.00
	2437	3 kHz	-12.55	-11.90	-9.20	8.00
	2462	3 kHz	-12.40	-12.49	-9.43	8.00
	2467	3 kHz	-23.23	-24.94	-20.99	8.00
	2472	3 kHz	-24.60	-25.79	-22.14	8.00
TM 7	2412	3 kHz	-12.51	-12.88	-9.68	8.00
	2437	3 kHz	-12.32	-12.52	-9.41	8.00
	2462	3 kHz	-12.14	-11.78	-8.95	8.00
	2467	3 kHz	-22.94	-24.90	-20.80	8.00
	2472	3 kHz	-24.68	-24.49	-21.57	8.00
TM 8	2412	3 kHz	-12.78	-13.39	-10.06	8.00
	2437	3 kHz	-13.37	-11.99	-9.62	8.00
	2462	3 kHz	-13.91	-12.39	-10.07	8.00
	2467	3 kHz	-24.66	-25.28	-21.95	8.00
	2472	3 kHz	-25.76	-25.99	-22.86	8.00
TM 9	2412	3 kHz	-12.29	-11.93	-9.10	8.00
	2437	3 kHz	-12.46	-12.25	-9.34	8.00
	2462	3 kHz	-12.83	-13.33	-10.06	8.00
	2467	3 kHz	-24.55	-25.05	-21.78	8.00
	2472	3 kHz	-24.54	-25.81	-22.12	8.00

RESULT PLOTS

Maximum PPSD

TM 1 & ANT 1 & 2412

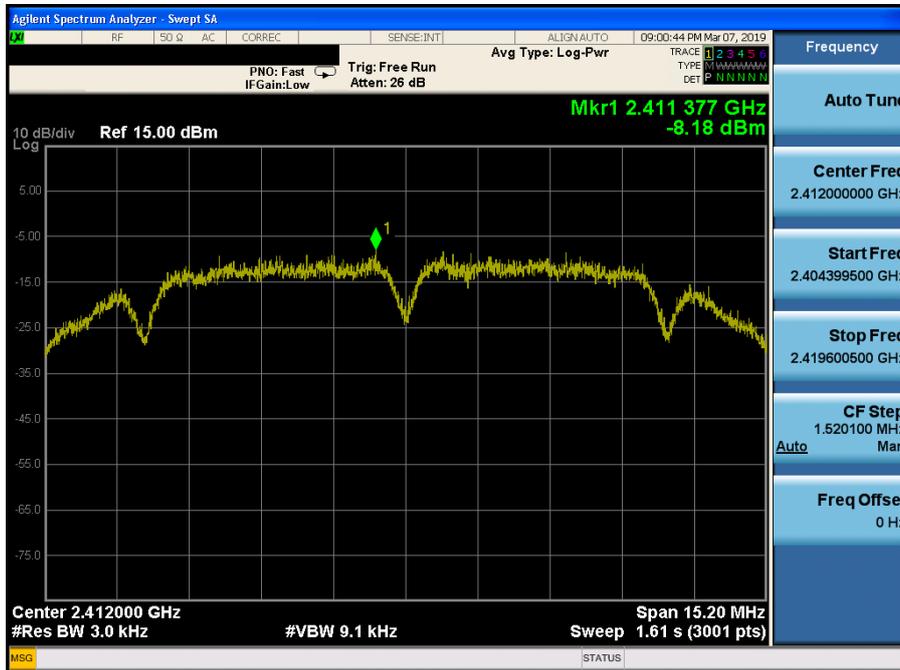


Maximum PPSD

TM 1 & ANT 1 & 2437



Maximum PPSD

TM 1 & ANT 1 & 2462

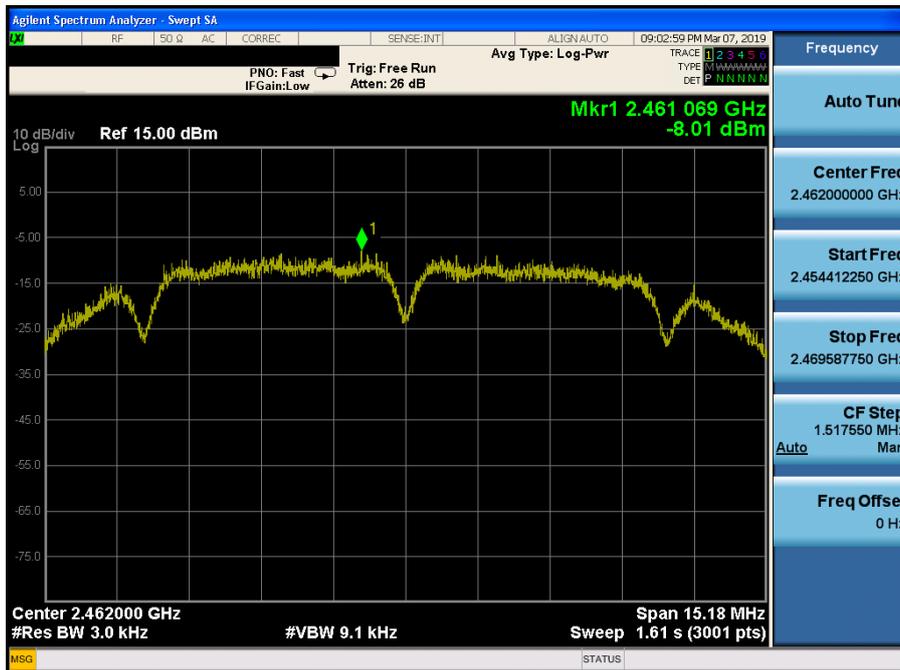

Maximum PPSD

TM 1 & ANT 1 & 2467




Maximum PPSD

TM 1 & ANT 1 & 2472




Maximum PPSD

TM 5 & ANT 1 & 2412

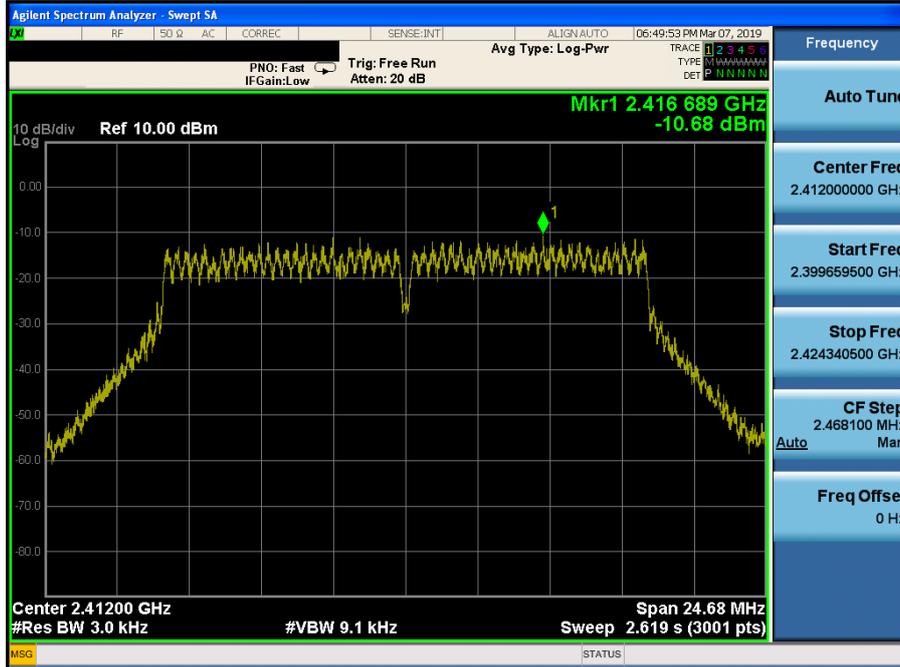


Maximum PPSD

TM 5 & ANT 1 & 2437

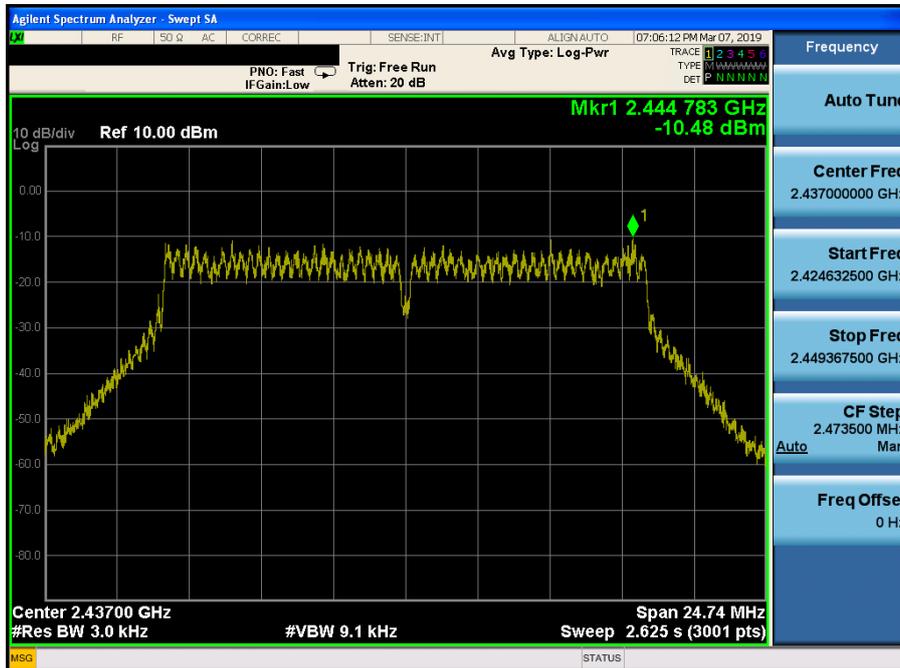


Maximum PPSD

TM 5 & ANT 1 & 2462

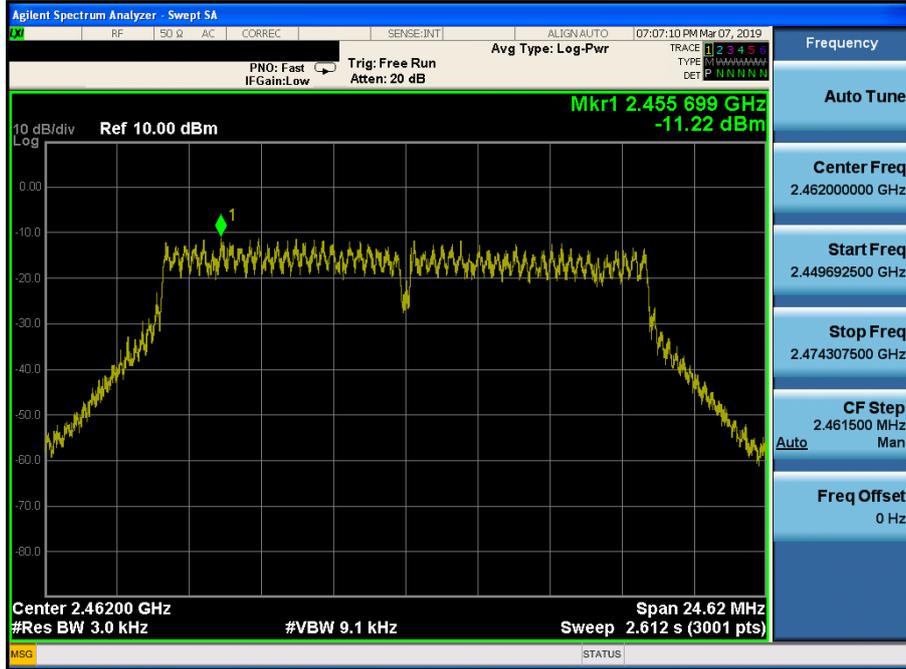


Maximum PPSD

TM 5 & ANT 1 & 2467

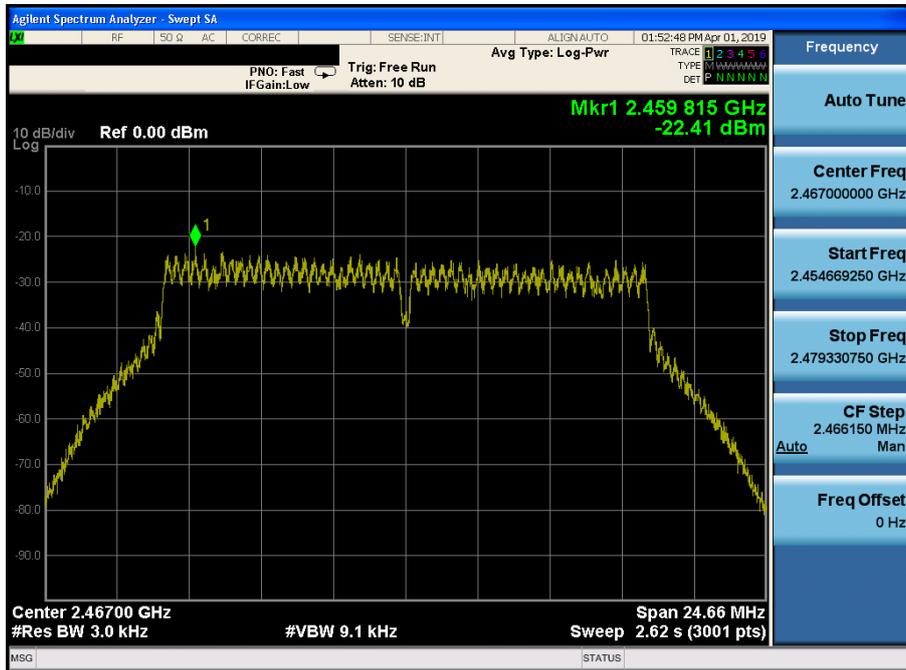


Maximum PPSD

TM 5 & ANT 1 & 2472

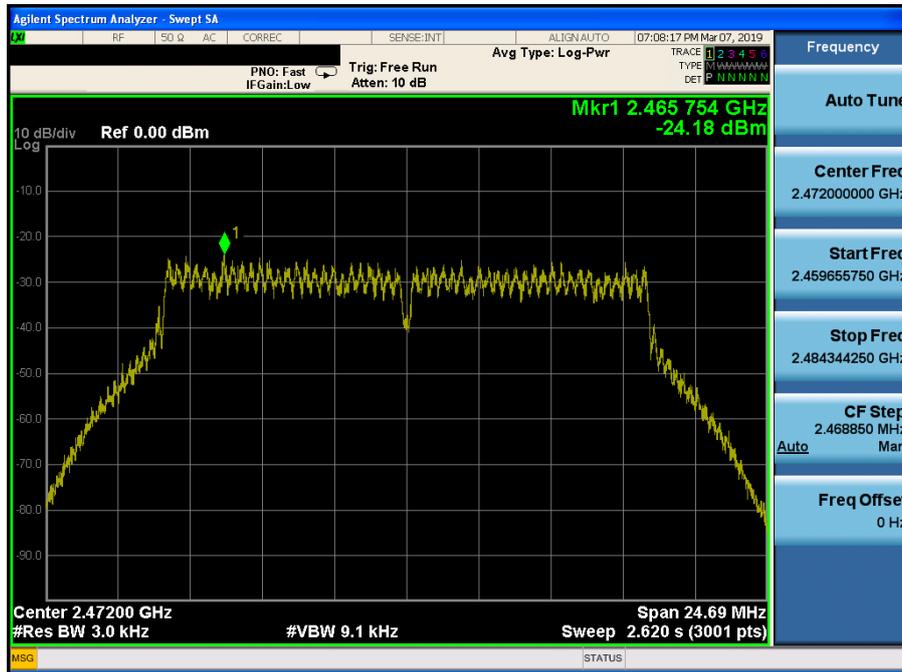


Maximum PPSD

TM 6 & ANT 1 & 2412

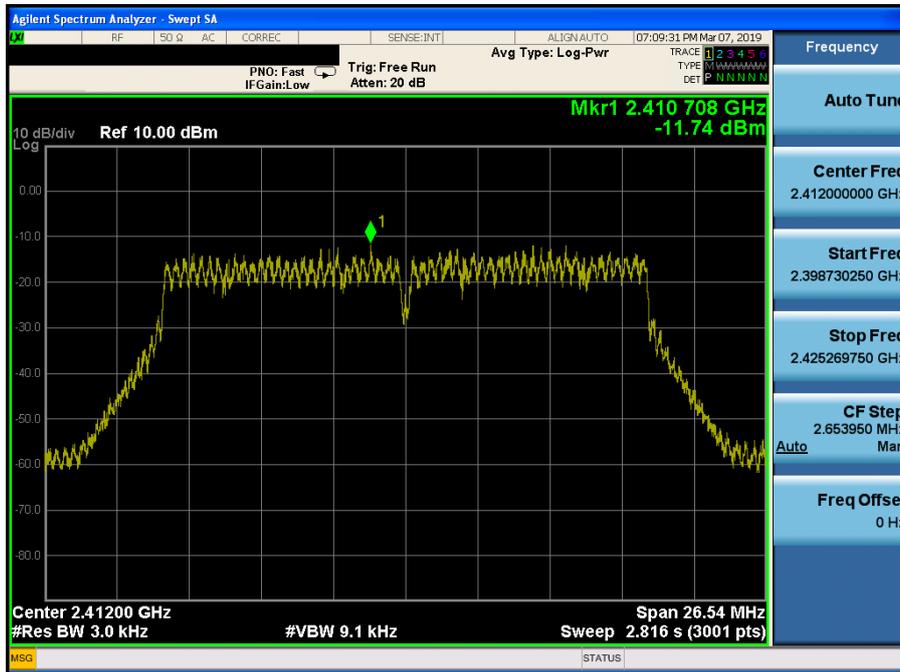


Maximum PPSD

TM 6 & ANT 1 & 2437

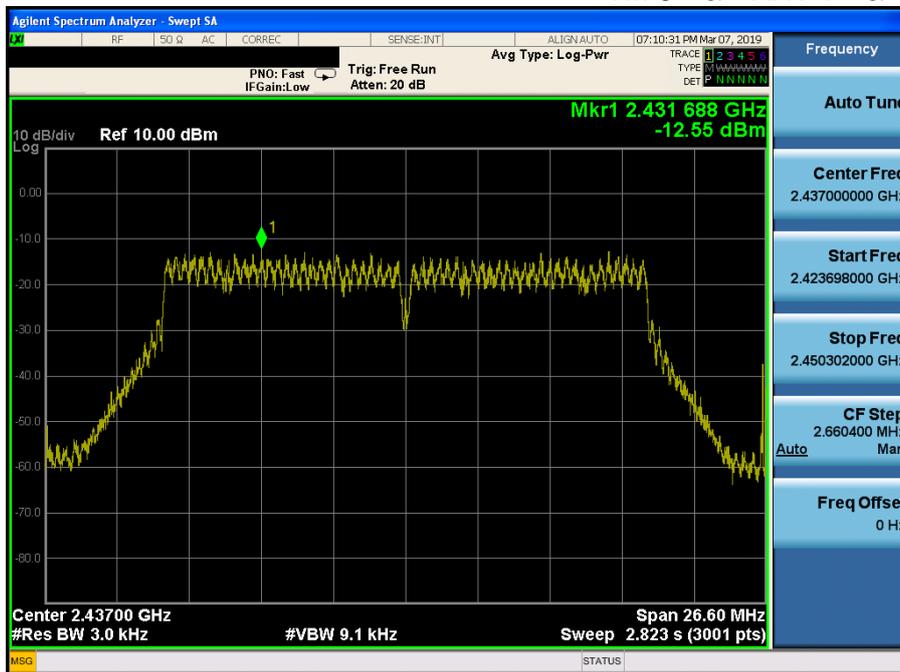


Maximum PPSD

TM 6 & ANT 1 & 2462

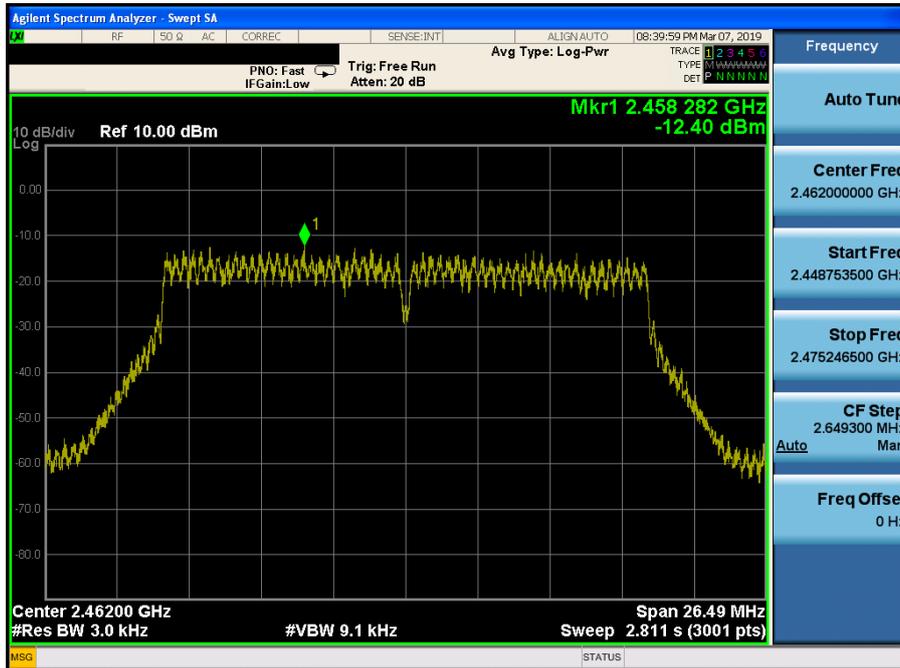


Maximum PPSD

TM 6 & ANT 1 & 2467

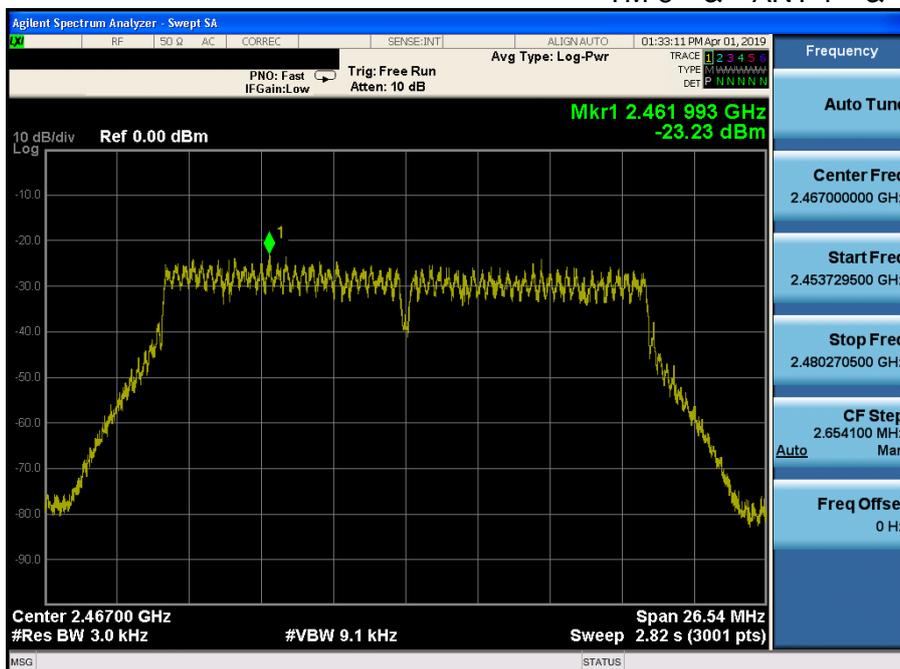


Maximum PPSD

TM 7 & ANT 1 & 2412

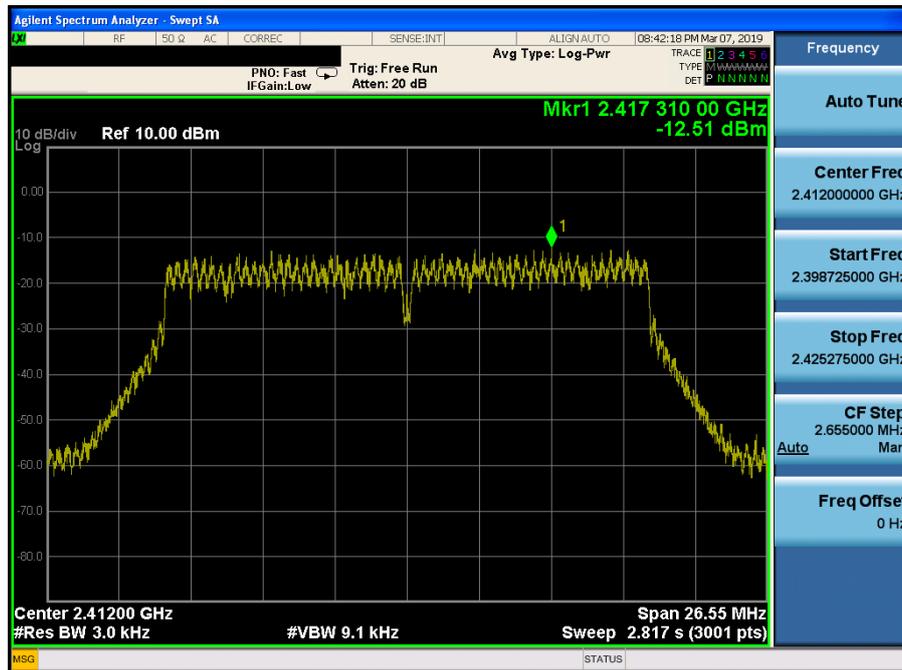


Maximum PPSD

TM 7 & ANT 1 & 2437

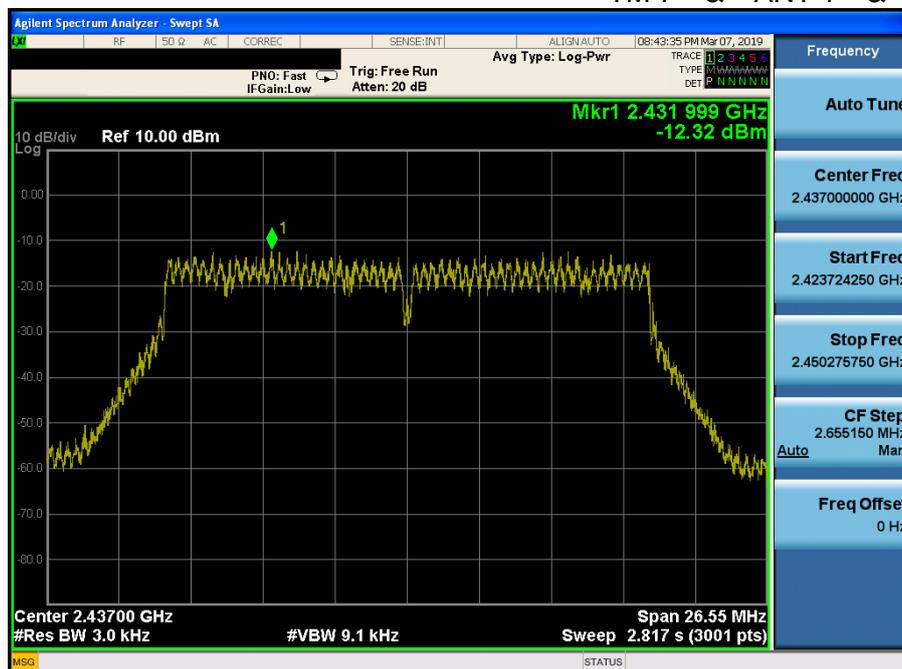


Maximum PPSD

TM 7 & ANT 1 & 2462

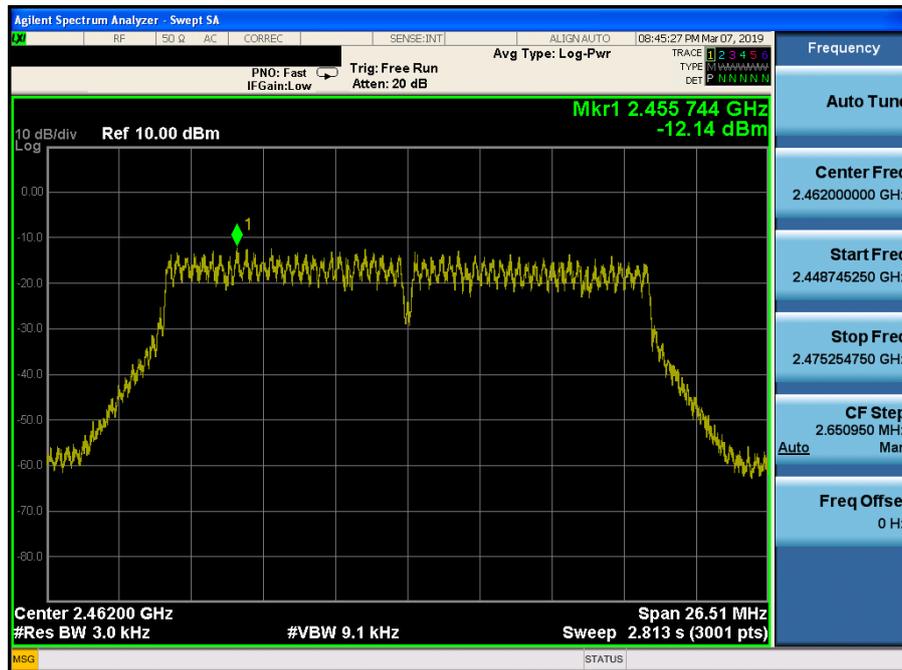


Maximum PPSD

TM 7 & ANT 1 & 2467

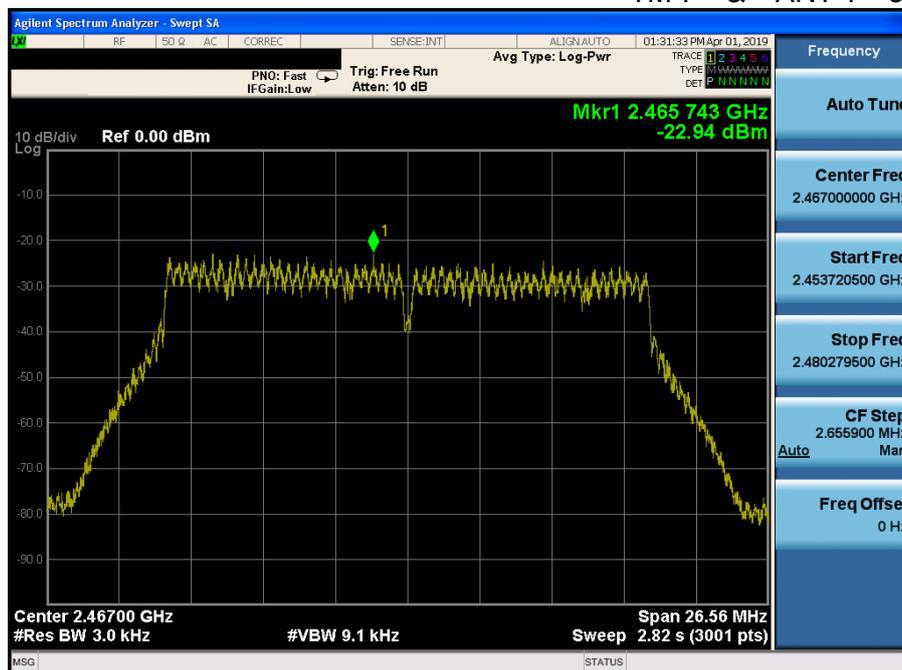


Maximum PPSD

TM 7 & ANT 1 & 2472

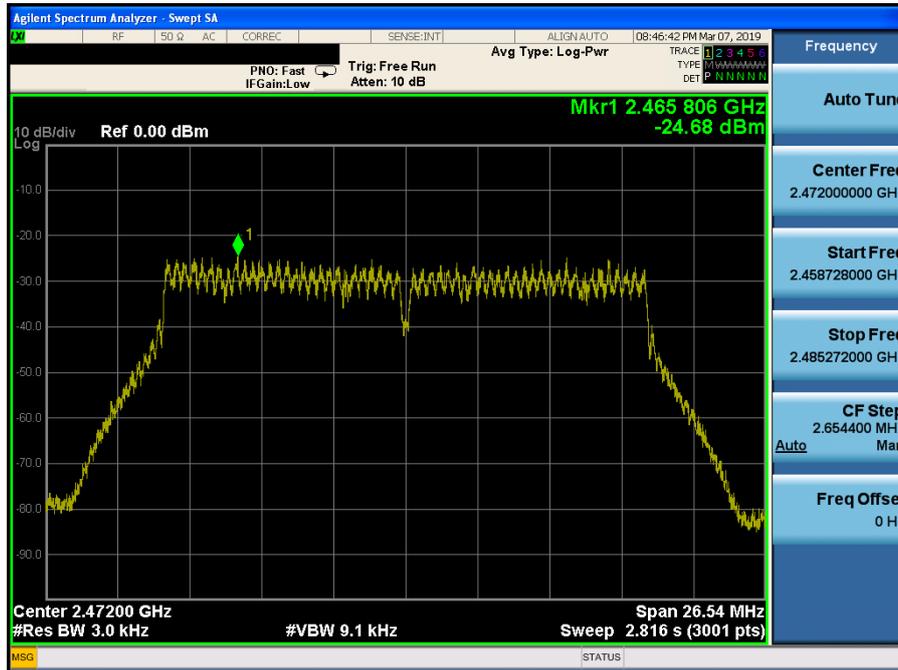

Maximum PPSD

TM 8 & ANT 1 & 2412

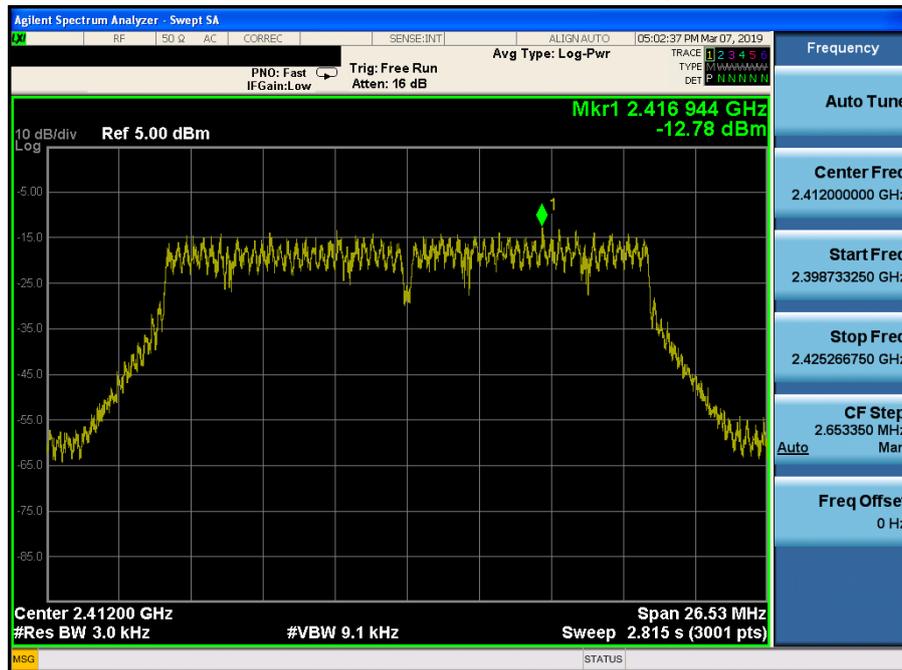

Maximum PPSD

TM 8 & ANT 1 & 2437

