

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1904-0100
2. Customer
 - Name : LG Electronics USA, Inc.
 - Address : 1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / LM-V500EM
FCC ID : ZNFV500EM
5. Test Method Used : ANSI C63.10-2013
Test Specification : FCC Part 15.225
6. Date of Test : 2019.03.04 ~ 2019.03.27
7. Testing Environment : Refer to appended test report.
8. Test Result : Refer to the attached test result.

Affirmation	Tested by	Reviewed by
	Name: SunGeun Lee (Signature) 	Name: GeunKi Son (Signature) 

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2019 . 04 . 15 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1904-0100	Apr. 15, 2019	Initial issue

CONTENTS

1. General Information.....	4
1.1. Testing Laboratory.....	4
1.2. Testing Environment.....	4
1.3. Measurement Uncertainty	4
1.4. Details of Applicant.....	5
1.5. Description of EUT	5
1.6. EUT CAPABILITIES	5
2. Information about test items.....	6
2.1 Test mode.....	6
2.2 Tested frequency	6
2.3 EMI Suppression Device(s)/Modifications	6
3. Antenna requirements.....	6
4. Test report	7
4.1 Summary of tests	7
4.2 Transmitter requirements.....	8
4.2.1 20dB bandwidth	8
4.2.2 In-band emissions	9
4.2.3 Out-of-band emissions	11
4.2.4 Frequency Stability.....	14
4.2.5 AC Line Conducted Emissions	15
APPENDIX	18

1. General Information

1.1. Testing Laboratory

DT&C Co., Ltd.	
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site complies with the requirements of § 2.948 according to ANSI C63.4-2014.	
- FCC MRA Accredited Test Firm No. : KR0034	
www.dtnet.net	
Telephone	: + 82-31-321-2664
FAX	: + 82-31-321-1664

1.2. Testing Environment

Ambient Condition	
▪ Temperature	+20 °C ~ +24 °C
▪ Relative Humidity	35 % ~ 40 %

1.3. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
AC conducted emission	2.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (Below 1 GHz)	5.1 dB (The confidence level is about 95 %, $k = 2$)

1.4. Details of Applicant

Applicant : LG Electronics USA, Inc.
 Address : 1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
 Contact person : Kyung-Su Han

1.5. Description of EUT

FCC Equipment Class	Low Power Communications Device Transmitter(DXX)
EUT	Mobile Phone
Model Name	LM-V500EM
Add Model Name	LMV500EM, V500EM
Serial Number	Identical prototype
Power Supply	DC 4.0 V
Frequency Band	13.56 MHz
Modulation Type	ASK
Channel(s)	1
Antenna type	Loop Antenna

1.6. EUT CAPABILITIES

This EUT contains the following capabilities:

850/1900 GSM/EDGE, 850/1900 WCDMA/HSUPA, Multi-band LTE, 802.11b/g/n/ac WLAN(2.4GHz),
 802.11a/n/ac WLAN(5GHz), Bluetooth(BDR, EDR, LE), NFC, WPC, 60G Wireless transmission.

2. Information about test items

2.1 Test mode

Test mode1	Continuous transmitting mode
Test mode2	Continuous transmitting mode(With Wireless charging pad)
Test mode3	Continuous transmitting mode(With Dual Display + WPC)

Note 1: This device supports wireless charging & 60G wireless transmission capability.

So per KDB648474 D03v01r04, the radiated test items were performed all not charging, charging and 60G wireless transmission conditions. For wireless charging condition, the handset is placed on the representative charging pad under normal conditions and in a simulated call configuration.

Note 2: The worst case data rate was determined according to the fundamental emission level. And data rate was tested at the worst case(106 kbps).

2.2 Tested frequency

Channel	TX Frequency(MHz)
Lowest	13.56
Middle	-
Highest	-

2.3 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing
 → None

3. Antenna requirements

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

**The antenna is attached on the device by means of unique coupling method (Spring Tension).
 Therefore this E.U.T Complies with the requirement of §15.203**

4. Test report

4.1 Summary of tests

FCC part section(s)	RSS section(s)	Parameter	Limit	Test condition	Status Note 1
2.1049	-	20 dB Bandwidth	-	Radiated	C
-	RSS-Gen [6.7]	Occupied Bandwidth	-		NA
15.225 (a)	RSS-210 [B6(a)]	In-Band Emissions	15,848 $\mu\text{V}/\text{m}$ @ 30 m 13.553 – 13.567 MHz		C Note 3
15.225 (b)	RSS-210 [B6(b)]	In-Band Emissions	334 $\mu\text{V}/\text{m}$ @ 30 m 13.410 – 13.553 MHz 13.567 – 13.710 MHz		C Note 3
15.225 (c)	RSS-210 [B6(c)]	In-Band Emissions	106 $\mu\text{V}/\text{m}$ @ 30 m 13.110 – 13.410 MHz 13.710 – 14.010 MHz		C Note 3
15.225 (d) 15.209	RSS-210 [B6(d)] RSS-GEN [8.9]	Out-of Band Emissions	Emissions outside of the specified band (13.110-14.010 MHz) must meet the radiated limits detailed in 15.209		C Note 3
15.225 (e)	RSS-210 [B6]	Frequency Stability	± 0.01 % of operating frequency	Temp & Humid Test Chamber	C
15.207	RSS-Gen [8.8]	AC Conducted Emissions	FCC Part 15.207	AC Line Conducted	C
15.203	-	Antenna Requirements	FCC Part 15.203	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.

Note 3: This test items were performed both normal and charging & 60G wireless transmission capability conditions.

4.2 Transmitter requirements

4.2.1 20dB bandwidth

- Procedure:

The 20 dB Bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

And spectrum analyzer setting use following test procedure of **ANCSI C63.10-2013 – Section 6.9.2.**

1. Center frequency = EUT channel center frequency
2. Span = 2 ~ 5 times the OBW
3. RBW = 1 % ~ 5 % OBW
4. VBW ≥ 3 x RBW
5. Detector = Peak
6. Trace = Max hold
7. The trace was allowed to stabilize
8. Determine the reference value = Set the spectrum analyzer marker to the highest level of the displayed trace
9. Using the marker-delta function of the instrument, determine the “-xx dB down amplitude” using [(reference value) - xx].
10. Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

- Measurement Data: Comply




Note: The 20dB bandwidth was measured at all data rate and the worst case data was reported

- Minimum Standard: NA

4.2.2 In-band emissions

- Test Configuration

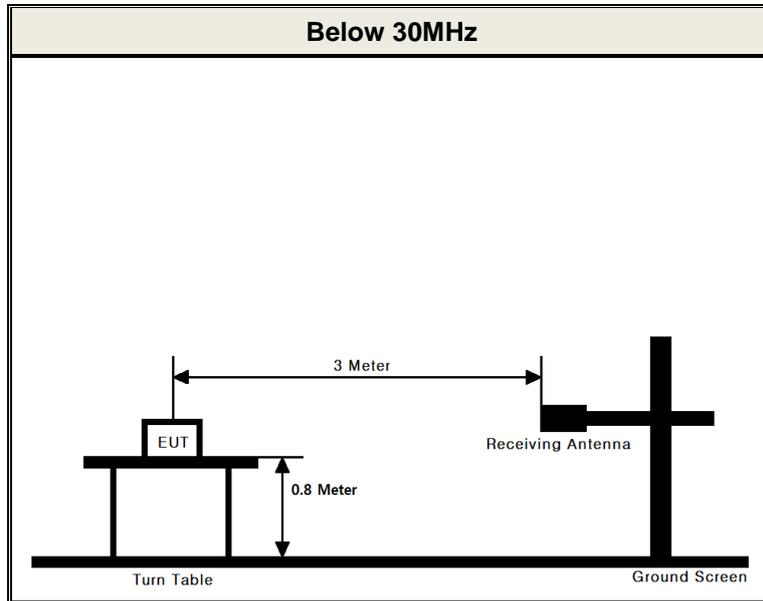

- Procedure: The radiated emission was tested according to the **section 6.4 of the ANSI C63.10-2013**.

The EUT was placed on a 0.8 m high non-conductive table and it was placed at 3m distance from the antenna. Measurements were performed for each of the three antenna orientations. (ie. parallel, perpendicular, and ground-parallel)

Also, measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

RBW = As specified in below table, VBW ≥ 3 x RBW, Sweep = Auto, Detector = Peak
Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Minimum Standard: Part 15.225(a), (b), (c) & RSS-210 [B6(a), (b), (c)]

Frequency Band [MHz]	Limit at 30 m measurement distance	
	[uV/m]	[dBuV/m]
13.553-13.567	15,848	84.00
13.410-13.553 13.567-13.710	334	50.47
13.110-13.410 13.710-14.010	106	40.51

- Measurement Data: Test mode 1

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Test Frequency Band [MHz]	Freq. [MHz]	EUT Axis.	ANT (Note 1)	Reading Level [dBuV]	T.F [dB/m]	Field Strength @3 m [dBuV/m]	Field Strength @30 m [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13.110 ~ 13.410	13.347	Z	P	19.80	19.22	39.02	-0.98	40.51	41.49
13.410 ~ 13.553	13.553	Z	P	25.20	19.22	44.42	4.42	50.47	46.05
13.553 ~ 13.567	13.560	Z	P	34.10	19.22	53.32	13.32	84.00	70.68
13.567 ~ 13.710	13.665	Z	P	23.20	19.22	42.42	2.42	50.47	48.05
13.710 ~ 14.010	13.772	Z	P	19.20	19.22	38.42	-1.58	40.51	42.09

- Measurement Data: Test mode 2

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Test Frequency Band [MHz]	Freq. [MHz]	EUT Axis.	ANT (Note 1)	Reading Level [dBuV]	T.F [dB/m]	Field Strength @3 m [dBuV/m]	Field Strength @30 m [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13.110 ~ 13.410	13.347	X	P	16.20	19.22	35.42	-4.58	40.51	45.09
13.410 ~ 13.553	13.553	X	P	21.80	19.22	41.02	1.02	50.47	49.45
13.553 ~ 13.567	13.559	X	P	30.20	19.22	49.42	9.42	84.00	74.58
13.567 ~ 13.710	13.665	X	P	19.30	19.22	38.52	-1.48	50.47	51.95
13.710 ~ 14.010	13.772	X	P	16.30	19.22	35.52	-4.48	40.51	44.99

- Measurement Data: Test mode 3

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Test Frequency Band [MHz]	Freq. [MHz]	EUT Axis.	ANT (Note 1)	Reading Level [dBuV]	T.F [dB/m]	Field Strength @3 m [dBuV/m]	Field Strength @30 m [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13.110 ~ 13.410	13.347	X	P	16.63	19.22	35.85	-4.15	40.51	44.66
13.410 ~ 13.553	13.553	X	P	21.93	19.22	41.15	1.15	50.47	49.32
13.553 ~ 13.567	13.559	X	P	30.23	19.22	49.45	9.45	84.00	74.55
13.567 ~ 13.710	13.666	X	P	19.23	19.22	38.45	-1.55	50.47	52.02
13.710 ~ 14.010	13.772	X	P	17.12	19.22	36.34	-3.66	40.51	44.17

Note 1. Loop antenna orientation

"P": Parallel, "V": perpendicular, "G": ground-parallel

Note 2. This test item was performed at 3 m and the data were extrapolated to the specified measurement distance of 30 m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)2.

 ▪ Extrapolation Factor = $20 \log_{10}(30/3)^2 = 40 \text{ dB}$
Note 3. All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

Note 4. Sample Calculation.


$$\text{Margin} = \text{Limit} - \text{Field Strength @ 30 m} \quad / \quad \text{Field Strength @ 30 m} = \text{Field Strength @ 3 m} - 40 \text{ dB}$$

$$\text{Field Strength @ 3 m} = \text{Reading} + \text{T.F} \quad / \quad \text{T.F} = \text{AF} + \text{CL}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss

4.2.3 Out-of-band emissions

- Test configuration

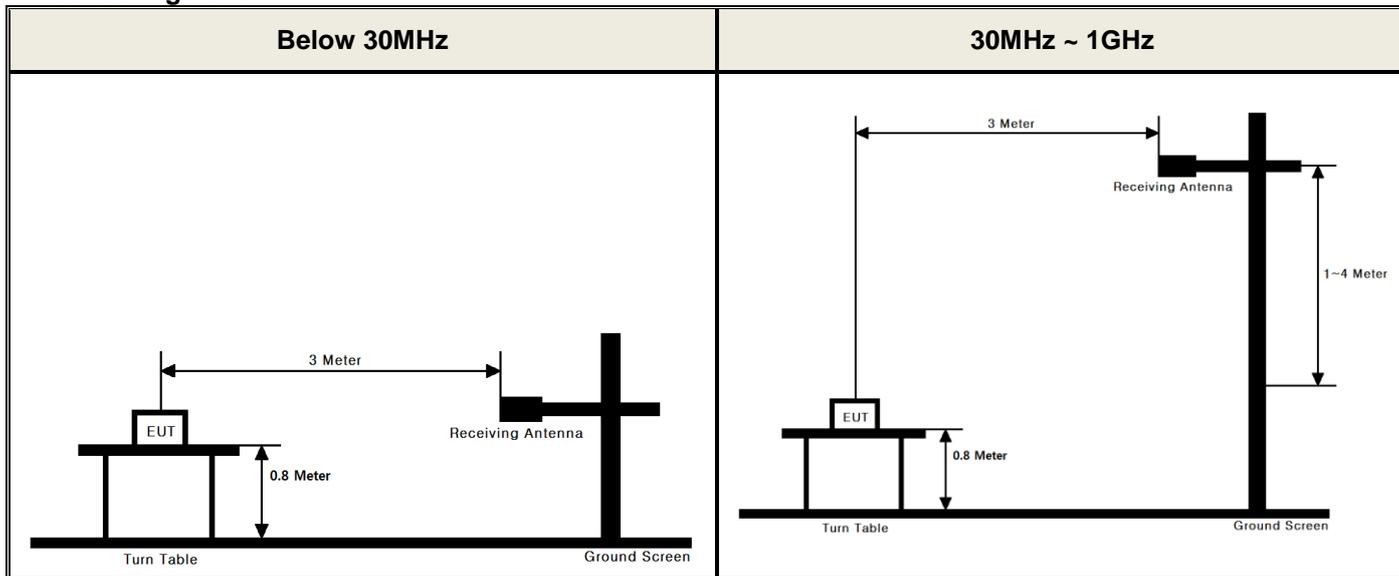

- Procedure: The radiated emission was tested according to the section 6.4, 6.5 of the ANSI C63.10-2013.

The EUT was tested from 9 kHz up to the 1 GHz excluding the band 13.110-14.010 MHz. The EUT was placed on a 0.8 m high non-conductive table and it was placed at 3m distance from the antenna. For measurements below 30MHz were performed for each of the three antenna orientations. (ie. parallel, perpendicular, and ground-parallel) For measurements above 30MHz were performed for each of the both horizontal and vertical polarizations. Also, measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

RBW = As specified in below table, VBW ≥ 3 x RBW, Sweep = Auto, Detector = Peak
Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Minimum Standard: Part 15.209, 225(d) & RSS-210[B6(d)], RSS-GEN[8.9]

• FCC Part 15.209(a):

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	200	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.209(b):

In the emission table above, the tighter limit applies at the band edges.

- Measurement Data: Test mode 1

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Frequency [MHz]	EUT Axis.	ANT (Note 1)	Reading [dBuV]	T.F [dB/m]	Distance factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
0.117	Z	P	49.8	18.66	80	-11.54	26.2	37.74
7.450	Z	P	14.1	19.23	40	-6.67	29.5	36.17
25.280	Z	P	12.3	20.10	40	-7.60	29.5	37.10
27.120	Z	P	9.9	20.38	40	-9.72	29.5	39.22
40.549	Z	V	29.6	-10.46	0	19.14	40	20.86
40.670	Z	H	25.6	-10.45	0	15.15	40	24.85
156.704	Z	V	25.9	-8.80	0	17.10	43.5	26.40
407.077	Z	H	26.8	-4.68	0	22.12	46	23.88
716.186	Z	H	27.1	1.80	0	28.90	46	17.10
814.056	Z	V	26.5	3.49	0	29.99	46	16.01
946.612	Z	H	26.8	5.58	0	32.38	46	13.62

- Measurement Data: Test mode 2

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Frequency [MHz]	EUT Axis.	ANT (Note 1)	Reading [dBuV]	T.F [dB/m]	Distance factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
0.145	X	P	52.2	18.67	80	-9.13	24.4	33.53
0.557	X	P	27.9	18.68	40	6.58	32.4	25.82
16.160	X	P	14.6	19.59	40	-5.81	29.5	35.31
27.120	X	P	10.4	20.38	40	-9.22	29.5	38.72
40.549	X	H	36.5	-10.46	0	26.04	40	13.96
40.549	X	V	44.4	-10.46	0	33.94	40	6.06
66.860	X	V	47.8	-12.08	0	35.72	40	4.28
142.518	X	V	44.3	-8.87	0	35.43	43.5	8.07
226.663	X	H	43.3	-10.09	0	33.21	46	12.79
765.060	X	V	26.1	2.97	0	29.07	46	16.93
863.537	X	H	27.1	4.00	0	31.10	46	14.90

- Measurement Data: Test mode 3

 Tested Frequency : 13.56 MHz
 Measurement Distance : 3 Meters

Frequency [MHz]	EUT Axis.	ANT (Note 1)	Reading [dBuV]	T.F [dB/m]	Distance factor [dB]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
0.145	X	P	49.12	18.65	80	-12.23	24.4	36.63
0.577	X	P	26.00	18.68	40	4.68	32.4	27.72
15.440	X	P	18.23	19.43	40	-2.34	29.5	31.84
27.200	X	P	12.11	20.39	40	-7.50	29.5	37.00
40.549	X	V	45.10	-10.46	0	34.64	40	5.36
40.670	X	H	34.90	-10.45	0	24.45	40	15.55
66.739	X	V	47.70	-12.07	0	35.63	40	4.37
72.273*	X	V	47.63	-12.98	0	34.65	40	5.35
150.156	X	H	45.40	-8.80	0	36.60	43.5	6.90
241.576	X	H	42.50	-9.62	0	32.88	46	13.12
518.019	X	H	29.40	-2.15	0	27.25	46	18.75
848.256	X	H	26.80	3.87	0	30.67	46	15.33

Note 1. Loop antenna orientation (30 MHz Below)

"P"= Parallel, "V"= perpendicular, "G"= ground-parallel

Bilog antenna polarization (30 MHz above)

"H"= Horizontal, "V"= Vertical

Note 2. All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

Note 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.

Note 4. Sample calculation

$$\text{Margin} = \text{Limit} - \text{Field Strength}$$

$$\text{Field Strength} = \text{Reading} + \text{T.F} - \text{Distance factor}$$

$$\text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

$$\text{Distance factor} = 20\log(\text{Measurement distance} / \text{The measured distance})^2$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

4.2.4 Frequency Stability

- Procedure:

Part 15.225 requires that devices operating in the 13.553 – 13.567 MHz shall maintain the carrier frequency within 0.01 % of the operating frequency over the temperature variation of -20 degrees to + 50 degrees C at normal supply voltage.

- Measurement Data: Comply

Operating Frequency : 13,560,000 Hz

VOLTAGE (%)	POWER (V _{DC})	TEMP (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	4.00	+20(ref)	13,560,155	155	0.001140
100%		-20	13,560,486	486	0.003584
100%		-10	13,560,372	372	0.002743
100%		0	13,560,309	309	0.002279
100%		+10	13,560,254	254	0.001873
100%		+20	13,560,155	155	0.001140
100%		+30	13,560,146	146	0.001077
100%		+40	13,560,090	90	0.000664
100%		+50	13,560,047	47	0.000347
110%		4.40	+20	13,560,244	244
BATT.ENDPOINT	3.00	+20	13,560,086	86	0.000634

Note. At the request of the applicant, the voltage of highest level is tested at 110%.

- Minimum Standard: Part 15. 225(e) & RSS-210 [B6]

The frequency tolerance of the carrier signal shall be maintained within ± 0.01 % of the operating frequency.

4.2.5 AC Line Conducted Emissions

- Test Requirements and limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

- Test Configuration

See test photographs for the actual connections between EUT and support equipment.

- Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

- **Measurement Data: Comply** (refer to the next page)

Measurement Data

Results of Conducted Emission



DTNC

Date 2019-03-04

Order No.		Reference No.	
Model No.	LM-V500EM	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	24 °C / 38 %
Test Condition	NFC	Operator	SunGeun Lee

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

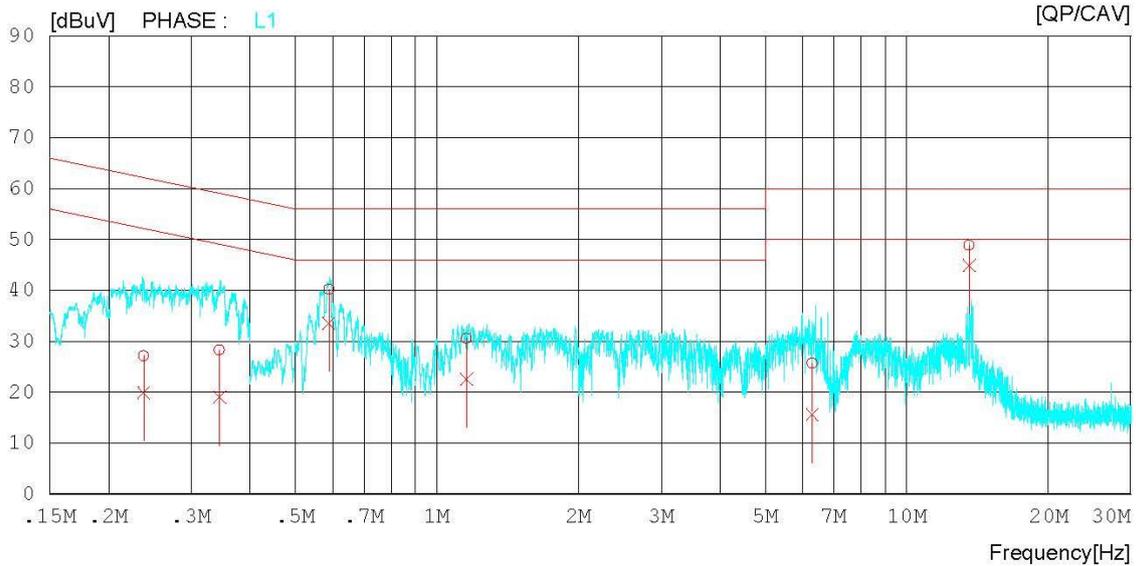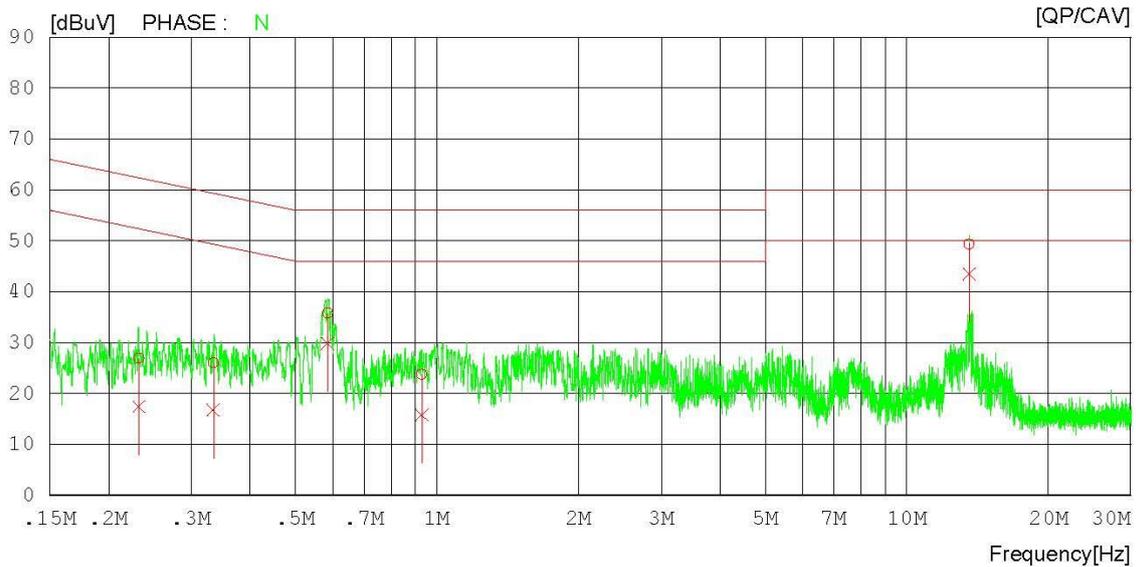

Measurement Data

Results of Conducted Emission

DTNC

Date 2019-03-04

Order No.		Reference No.	
Model No.	LM-V500EM	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	24 'C / 38 %
Test Condition	NFC	Operator	SunGeun Lee

Memo

 LIMIT : FCC P15.207 QP
 FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.23210	16.99	7.42	9.98	26.97	17.40	62.37	52.37	35.40	34.97	N
2	0.33443	16.08	6.78	9.99	26.07	16.77	59.34	49.34	33.27	32.57	N
3	0.58546	25.76	19.79	10.00	35.76	29.79	56.00	46.00	20.24	16.21	N
4	0.92800	13.73	5.80	10.01	23.74	15.81	56.00	46.00	32.26	30.19	N
5	13.56000	38.89	33.06	10.45	49.34	43.51	60.00	50.00	10.66	6.49	N
6	0.23757	17.11	9.93	9.95	27.06	19.88	62.18	52.18	35.12	32.30	L1
7	0.34460	18.25	9.00	9.95	28.20	18.95	59.09	49.09	30.89	30.14	L1
8	0.58878	30.22	23.56	9.97	40.19	33.53	56.00	46.00	15.81	12.47	L1
9	1.15480	20.57	12.53	9.99	30.56	22.52	56.00	46.00	25.44	23.48	L1
10	6.28900	15.45	5.41	10.20	25.65	15.61	60.00	50.00	34.35	34.39	L1
11	13.56000	38.46	34.47	10.41	48.87	44.88	60.00	50.00	11.13	5.12	L1

APPENDIX

TEST EQUIPMENT FOR TESTS

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	18/12/19	19/12/19	MY50410357
Multimeter	FLUKE	17B	18/12/18	19/12/18	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	18/12/19	19/12/19	255571
Thermohygrometer	BODYCOM	BJ5478	18/12/27	19/12/27	120612-1
IN/OUT Thermohygrometer	SATO	PC-5000TRH-II	18/07/18	19/07/18	N/A
HYGROMETER	TESTO	608-H1	19/01/31	20/01/31	34862883
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	18/07/06	19/07/06	U5542113
Loop Antenna	Schwarzbeck	FMZB1513	18/01/30	20/01/30	1513-128
BILOG ANTENNA	Schwarzbeck	VULB 9160	18/07/13	20/07/13	3359
PreAmplifier	tsj	MLA-10K01-B01-27	18/10/31	19/10/31	2005354
EMI Receiver	ROHDE&SCHWARZ	ESW44	18/08/06	19/08/06	101645
EMI Test Receiver	Rohde Schwarz	ESCI7	19/01/30	20/01/30	100910
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	18/09/27	19/09/27	101333
LISN	SCHWARZBECK	NNLK 8121	18/03/20	19/03/20	06183
			19/03/19	20/03/19	
Cable	HUBER+SUHNER	SUCOFLEX	18/12/21	19/12/21	C-1
Cable	HUBER+SUHNER	SUCOFLEX	18/12/21	19/12/21	C-2
Cable	HUBER+SUHNER	SUCOFLEX	18/12/21	19/12/21	C-3
Cable	HUBER+SUHNER	SUCOFLEX	18/12/21	19/12/21	C-4
Cable	DT&C	CABLE	18/07/05	19/07/05	RF-82

Note1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.