



Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.48

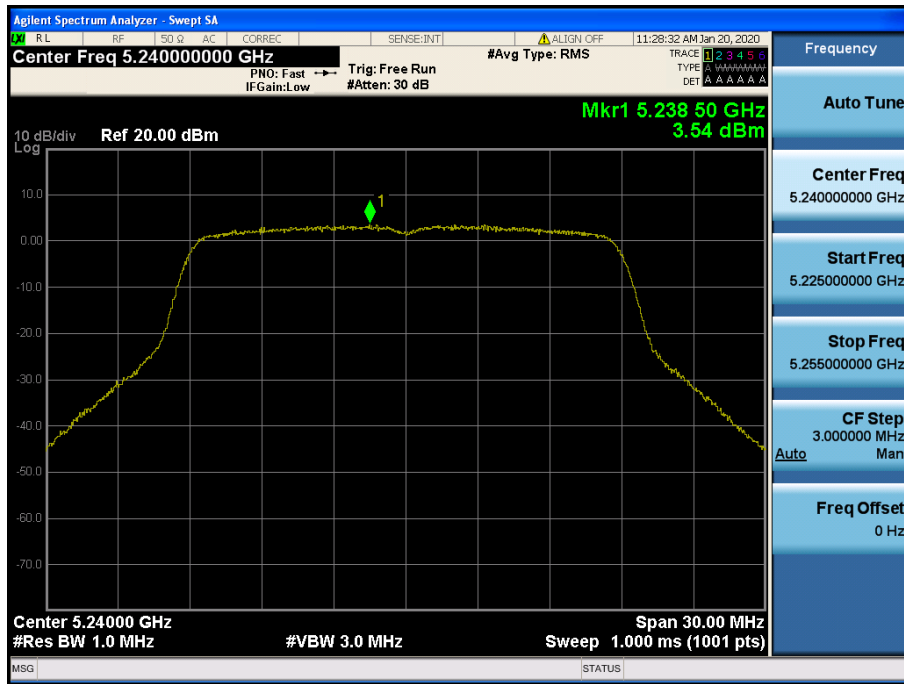


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.52

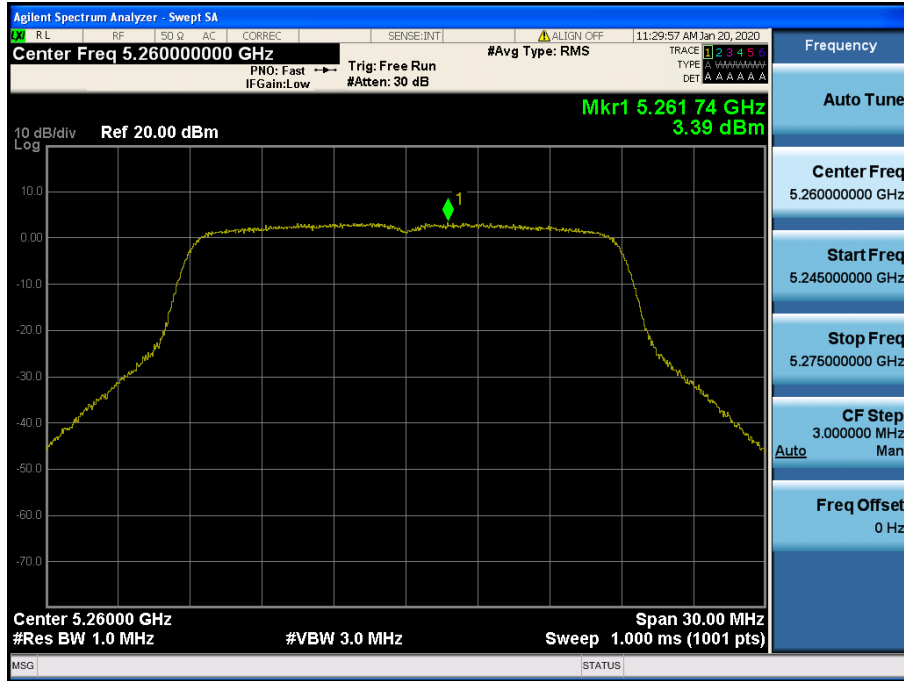


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.60

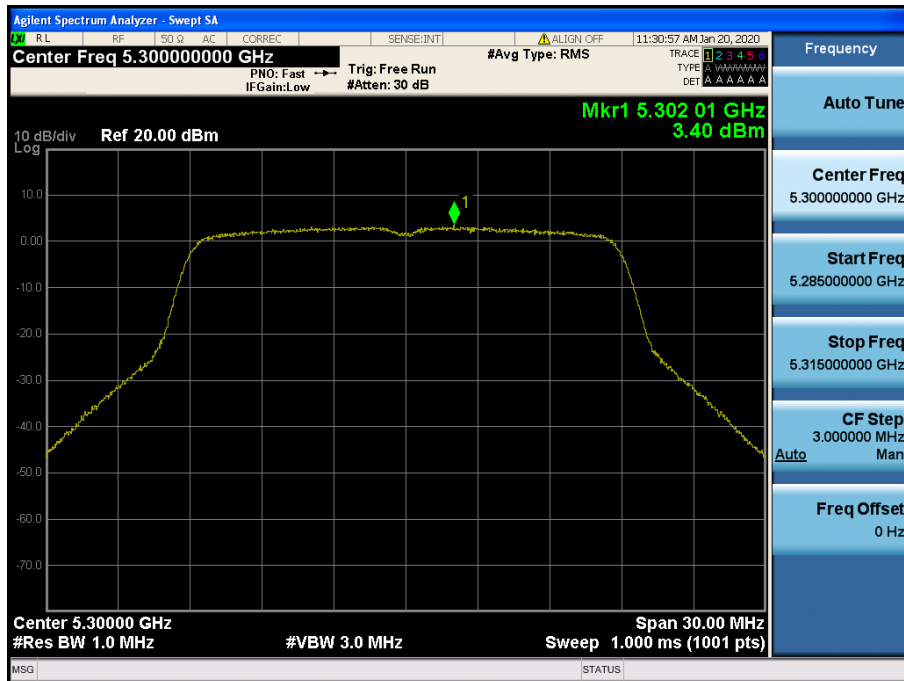


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.64

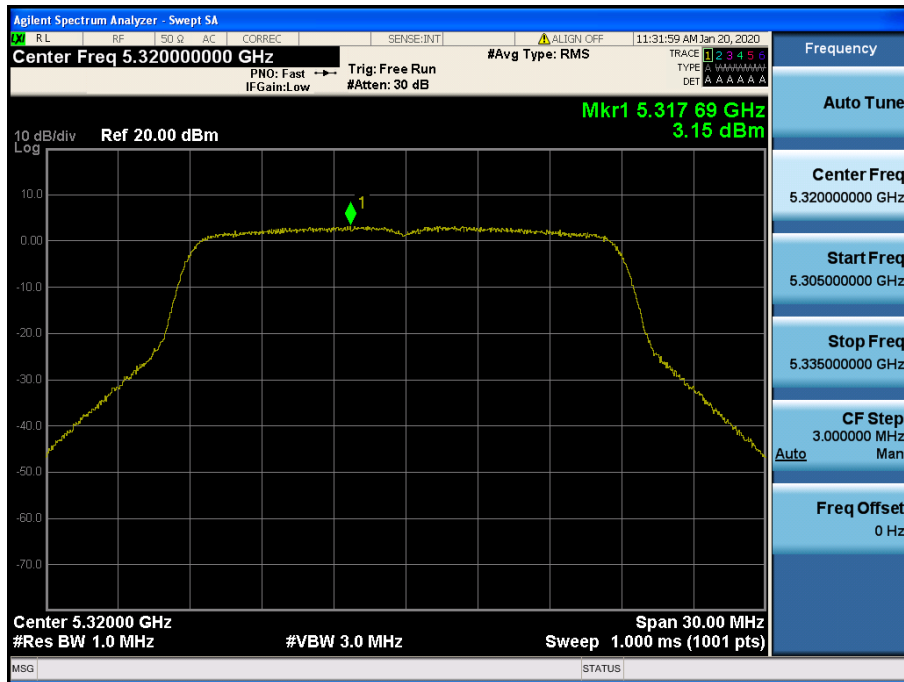


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.100

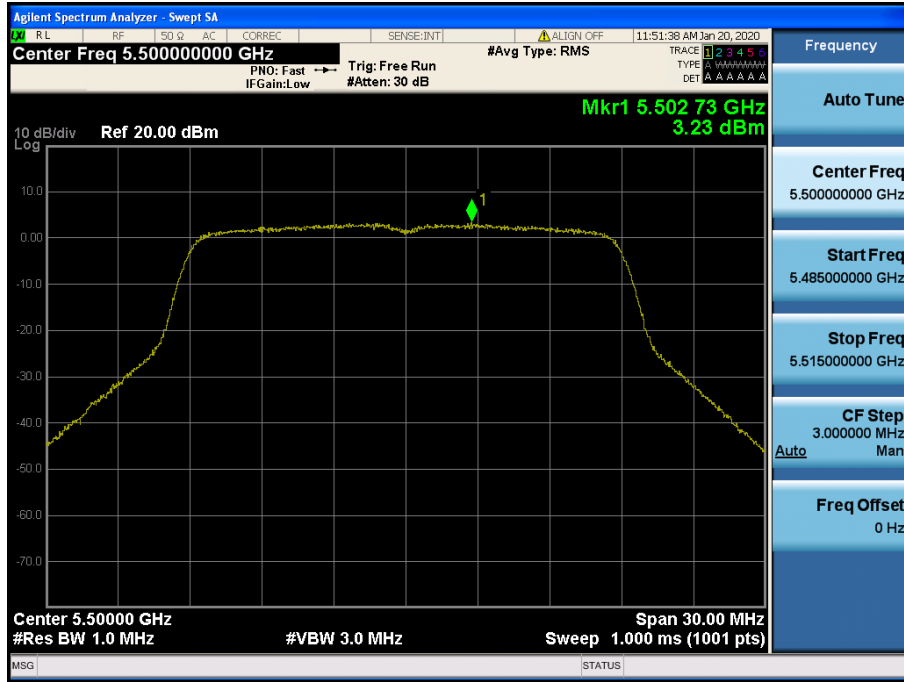


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.120

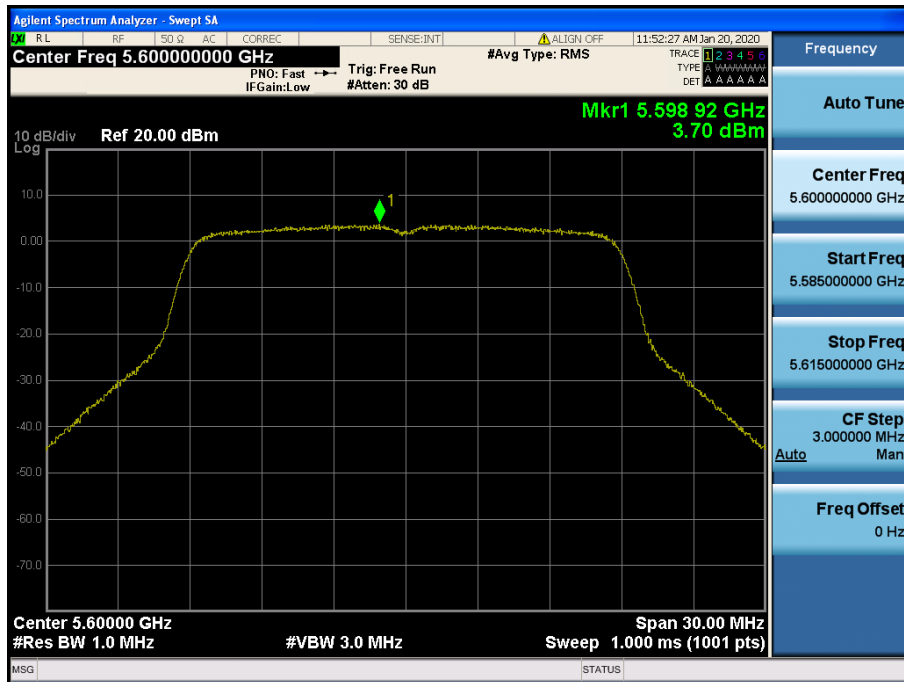


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.144

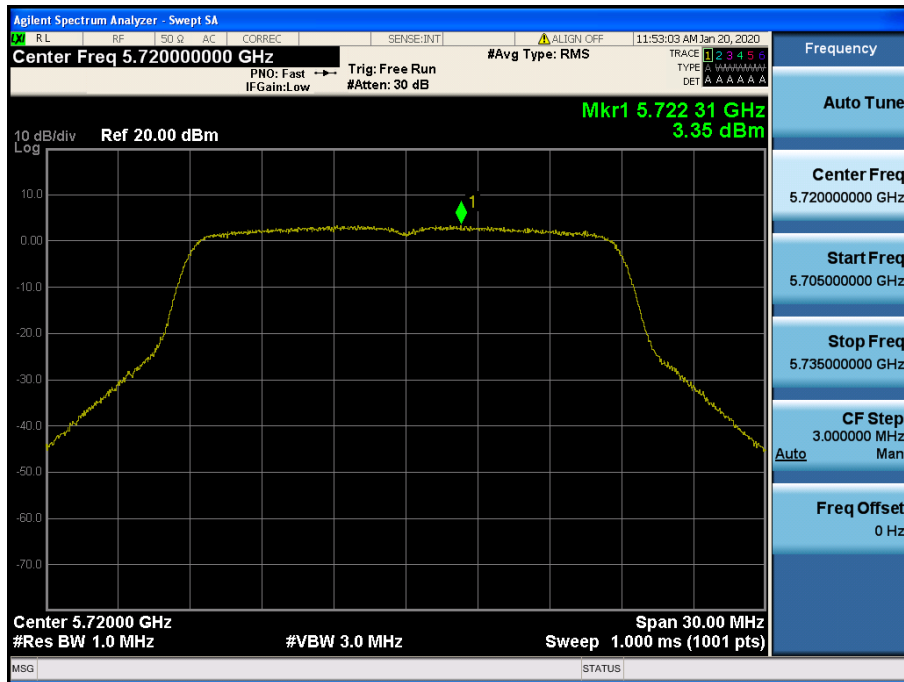


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.149

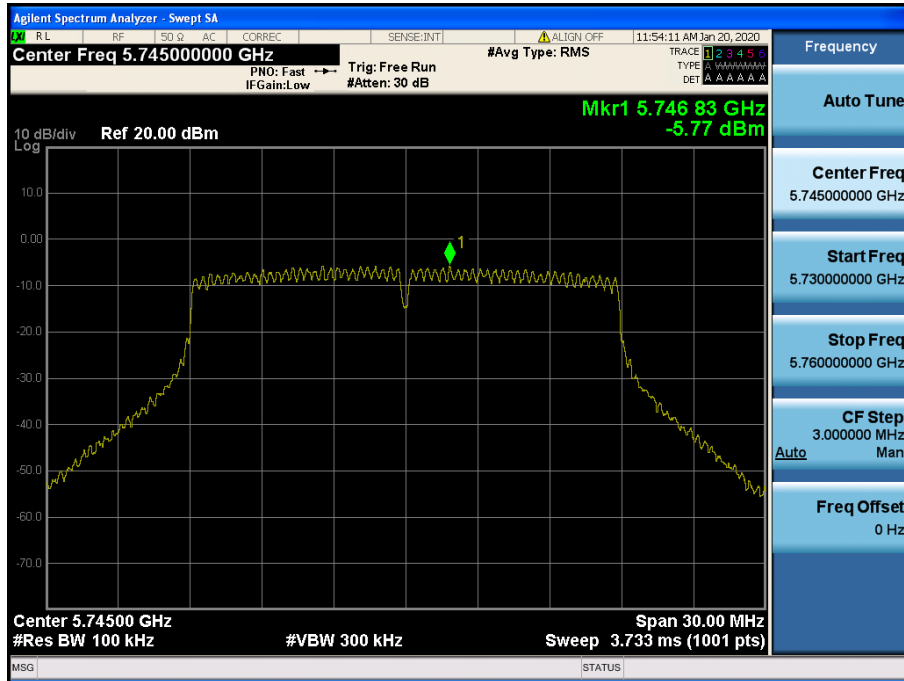


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.157

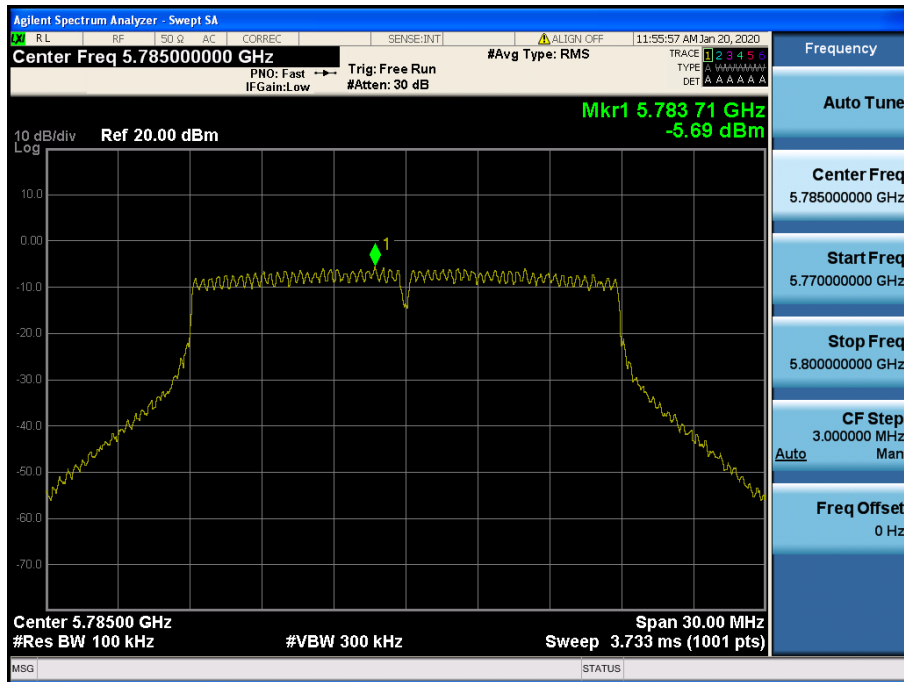


Maximum Power Spectral Density

Test Mode: 802.11n HT20 & ANT 2 & Ch.165

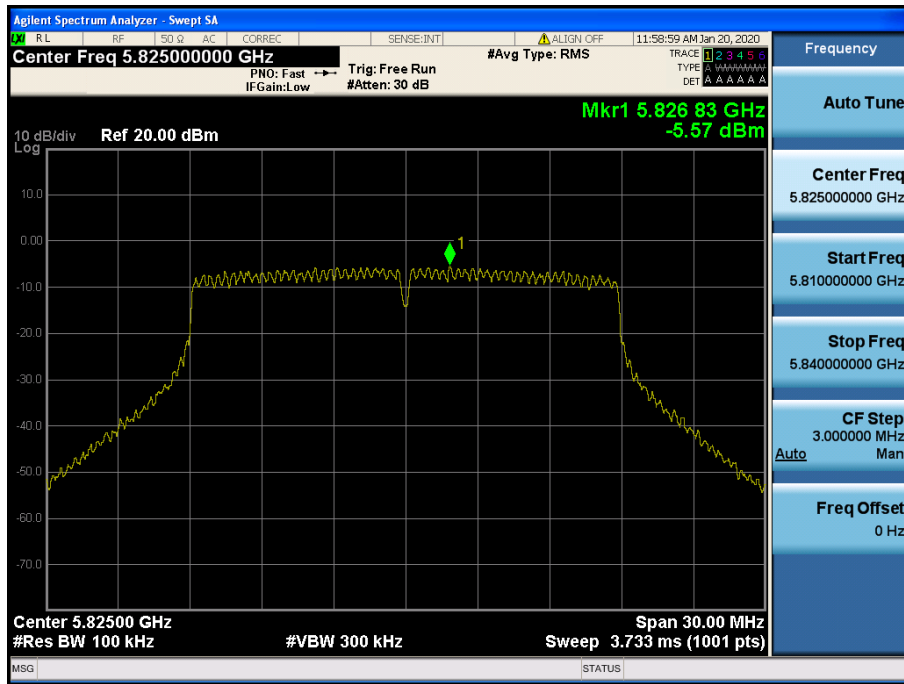


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.38

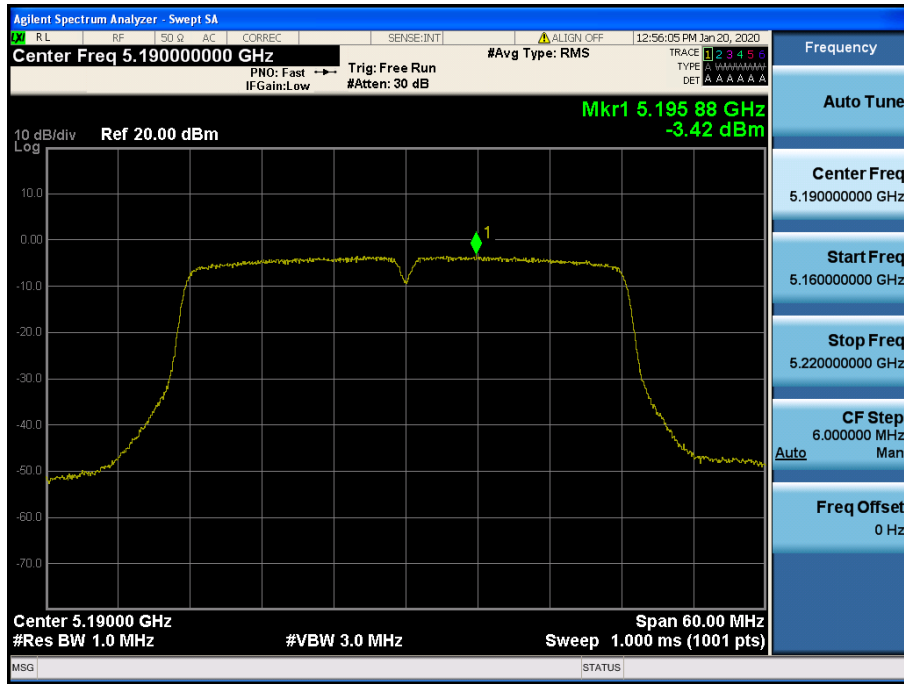


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.46

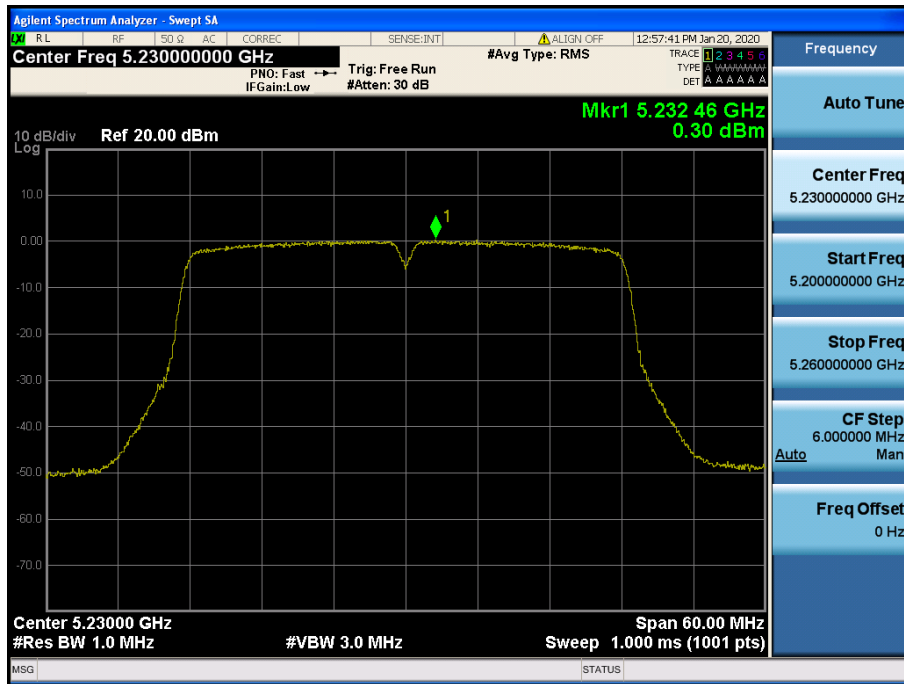


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.54

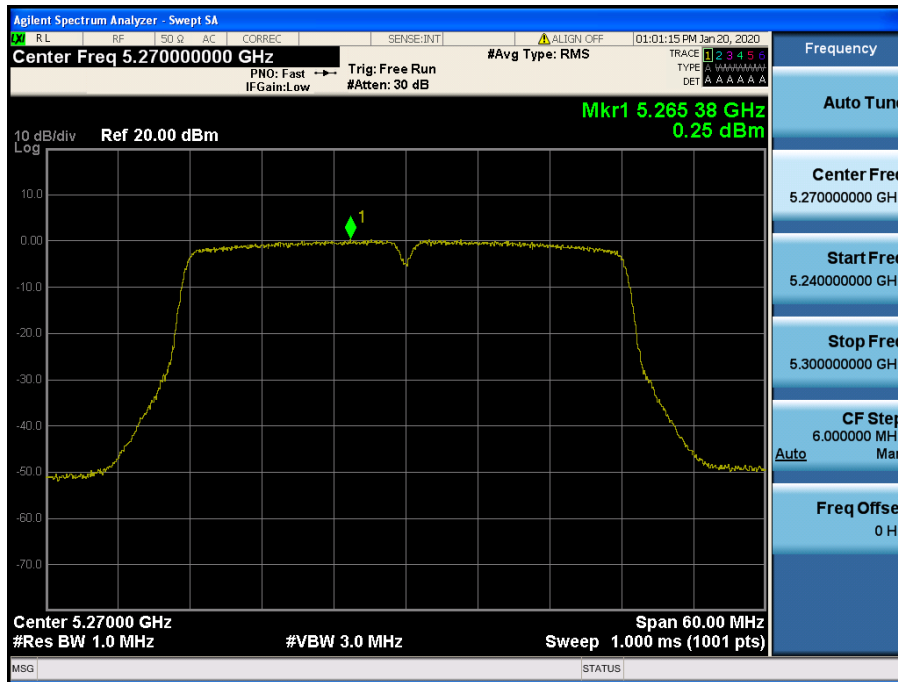


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.62

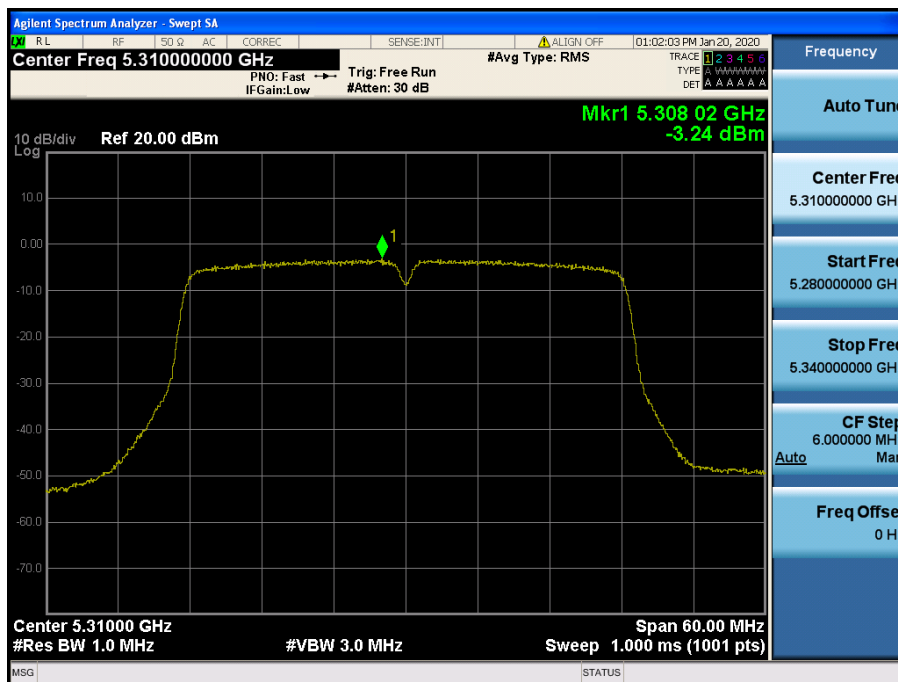


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.102

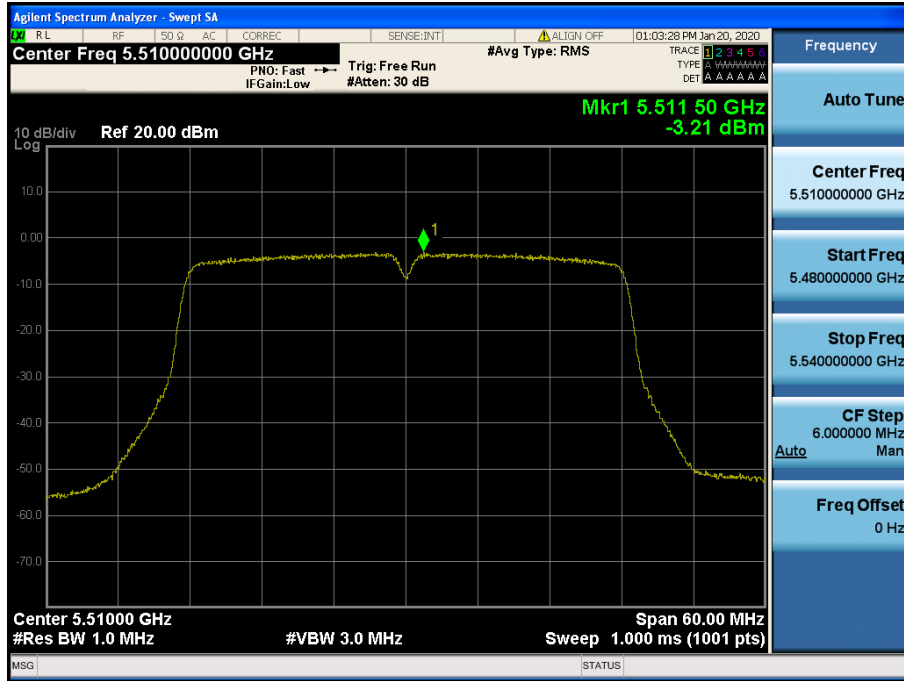


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.118

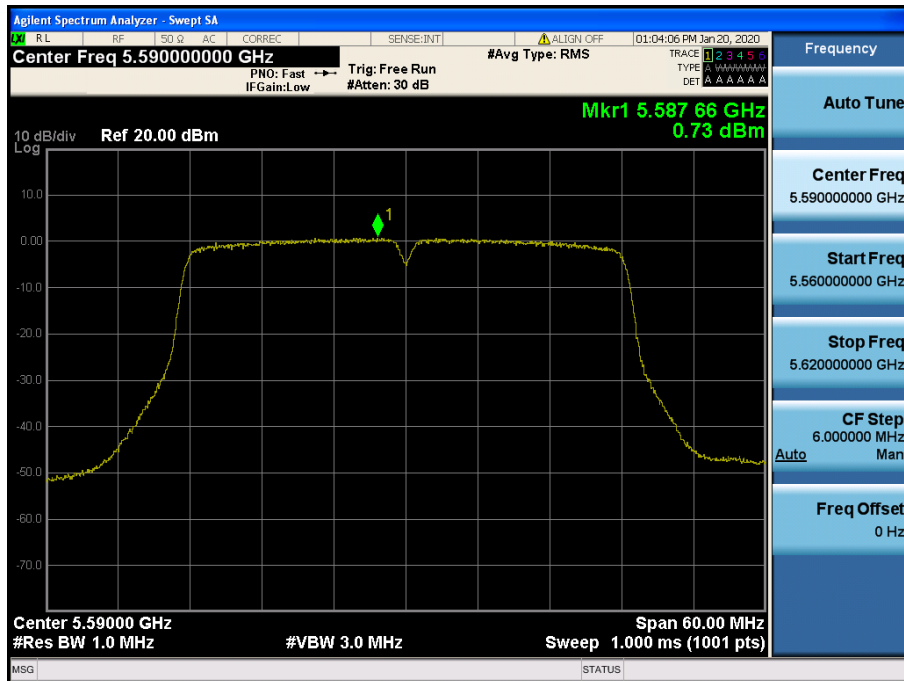


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.142

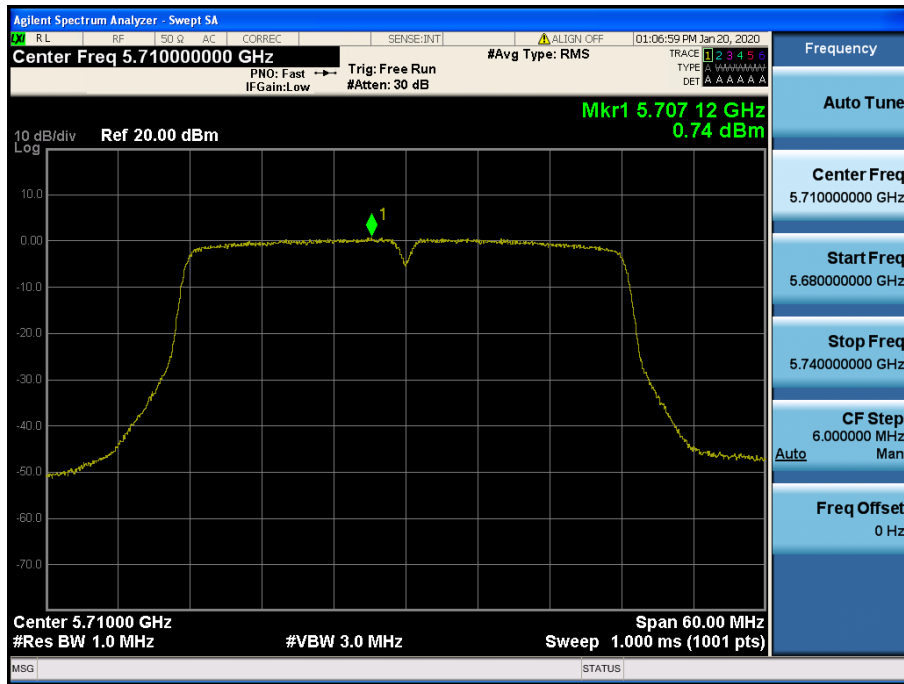


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.151

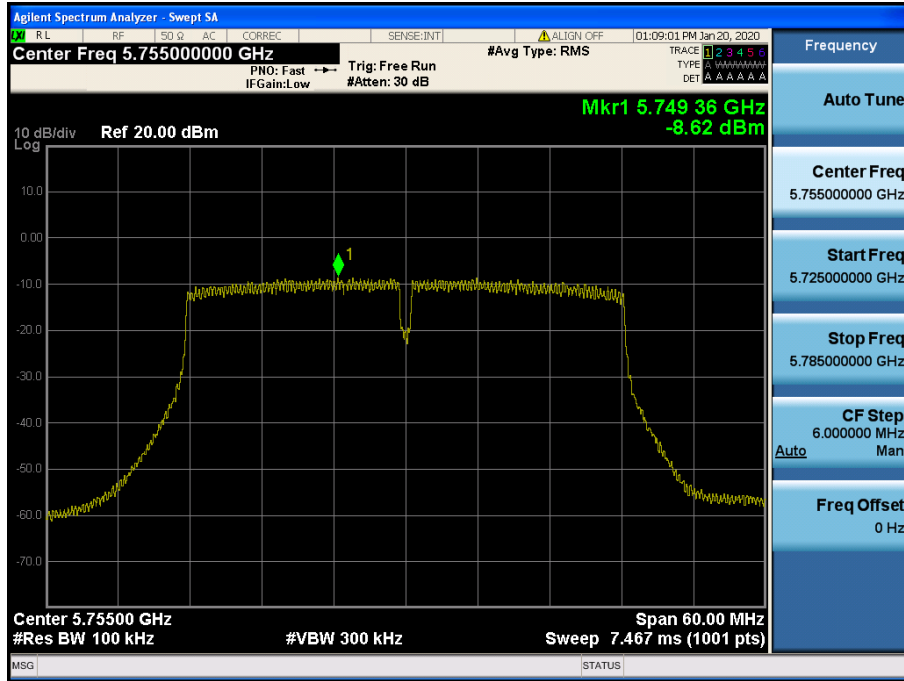


Maximum Power Spectral Density

Test Mode: 802.11n HT40 & ANT 2 & Ch.151

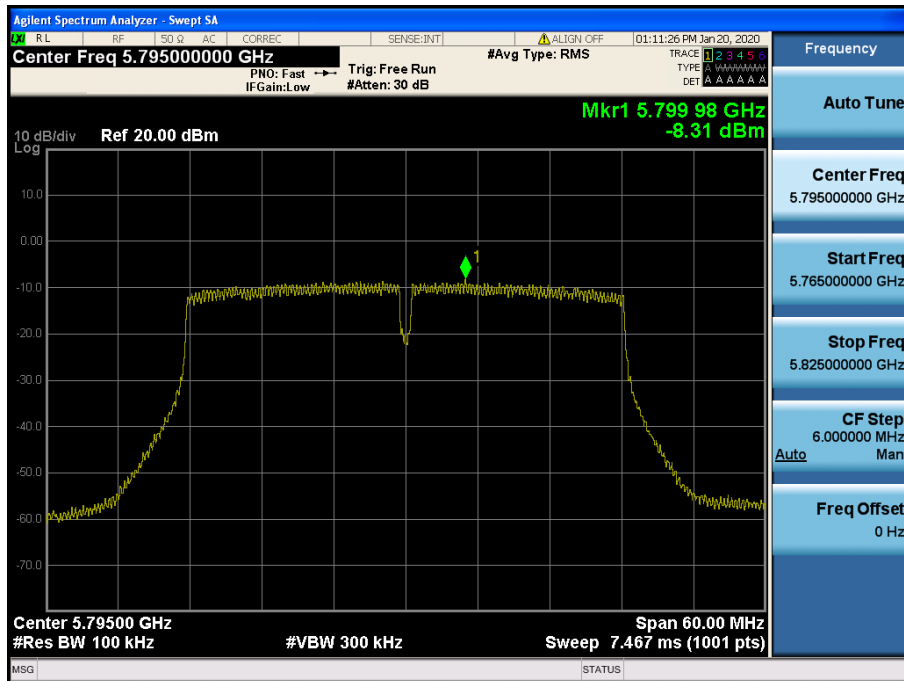


Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.42

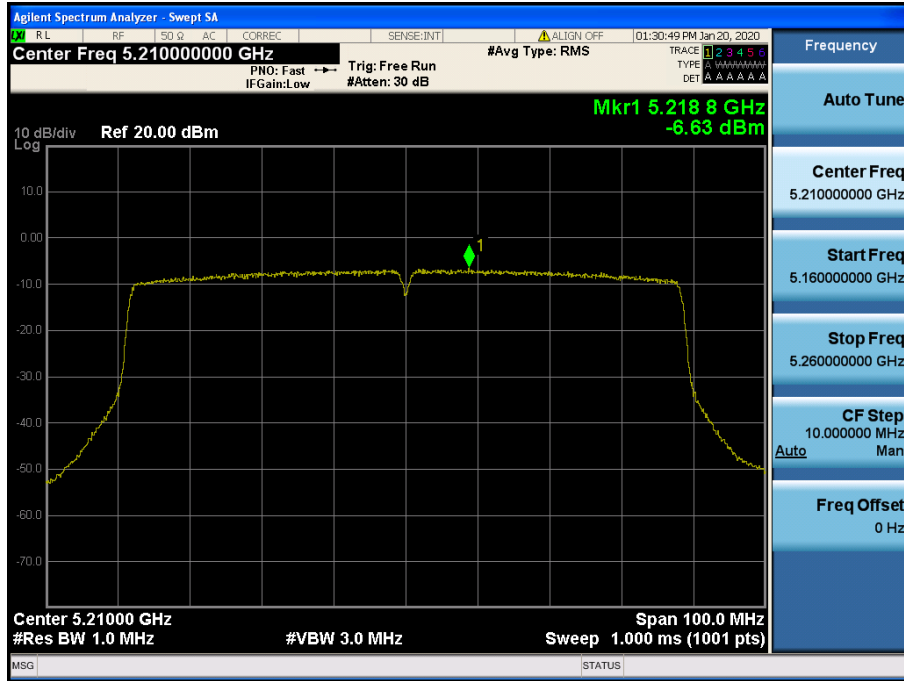

Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.58

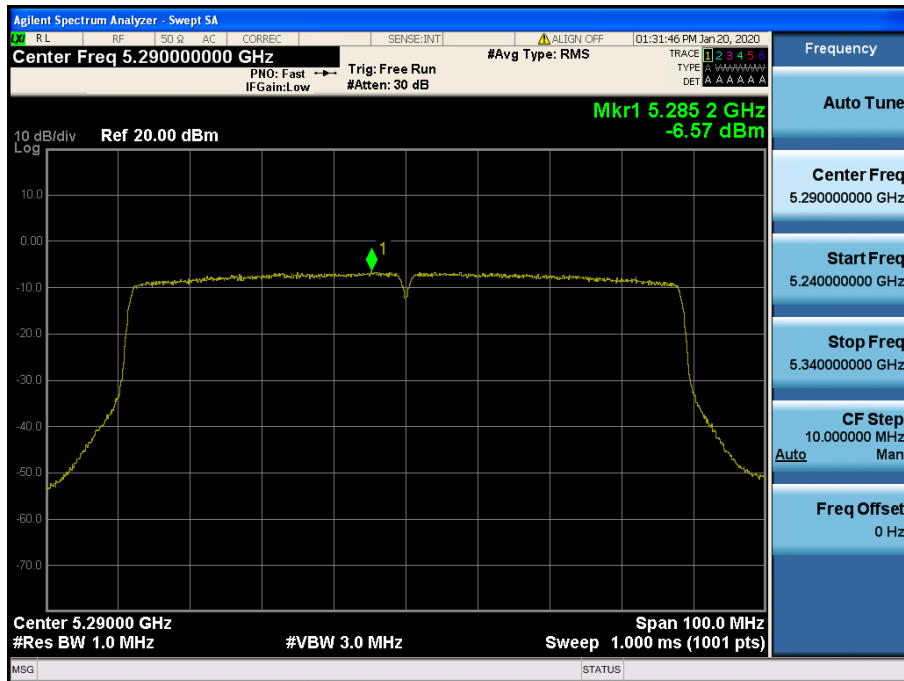


Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.106




Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.122

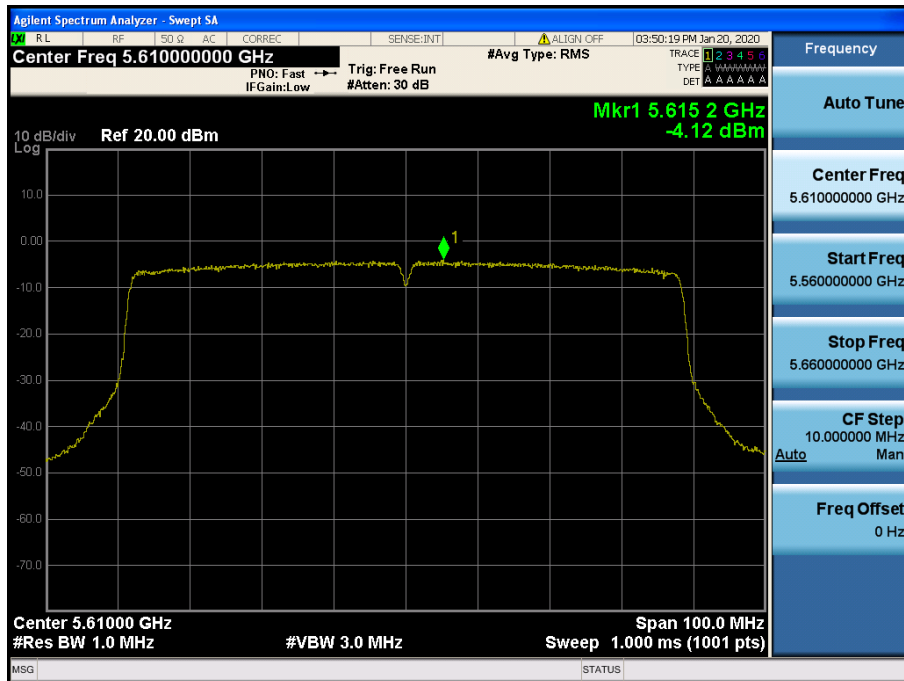


Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.138

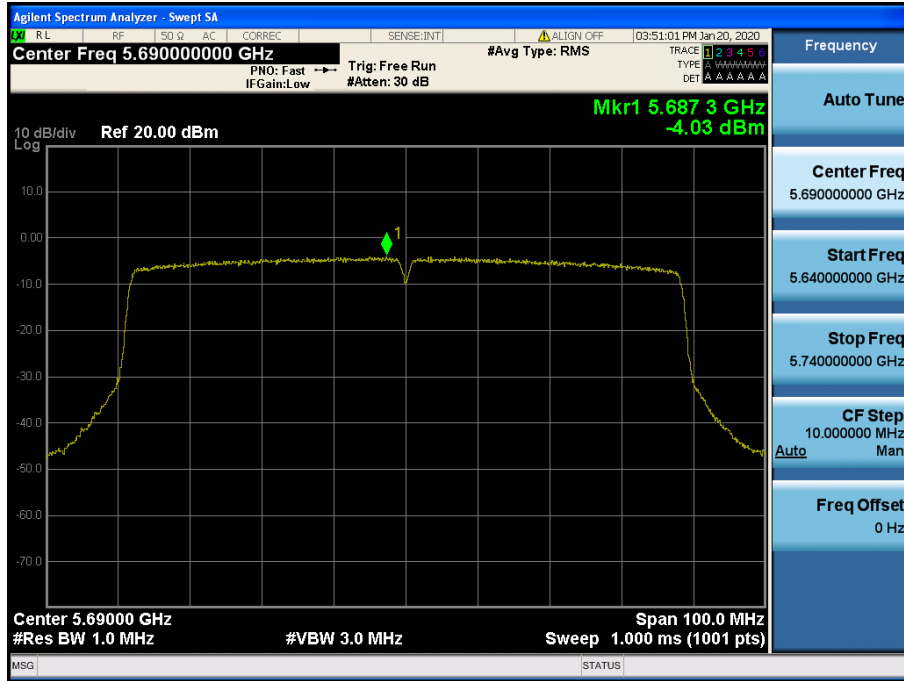

Maximum Power Spectral Density

Test Mode: 802.11ac VHT80 & ANT 2 & Ch.155

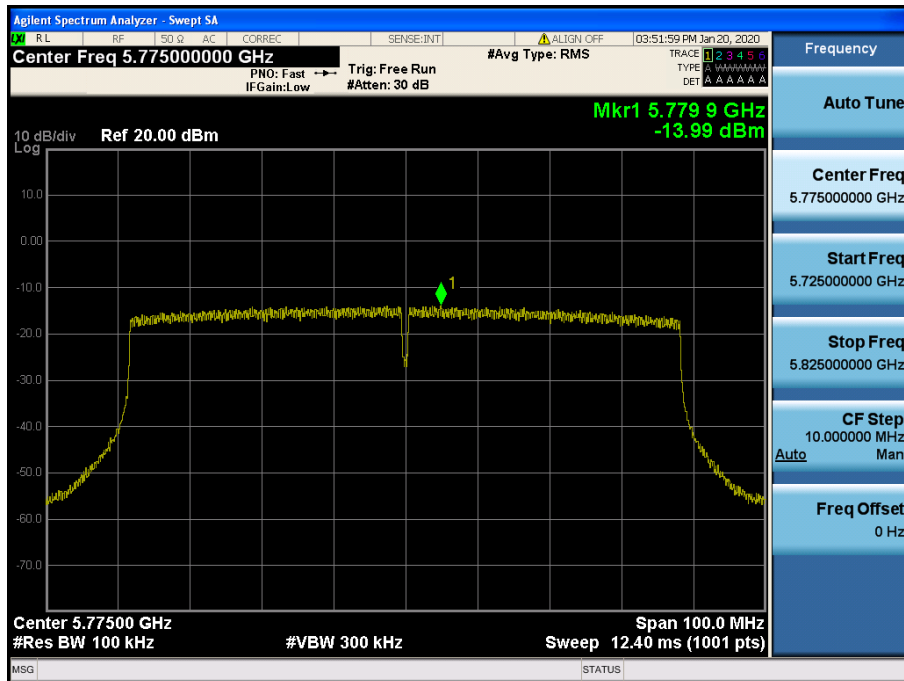

8.5 Radiated Spurious Emission Measurements

■ Test Requirements

▪ FCC Part 15.209(a) and (b)

Frequency (MHz)	Limit (uV/m)	Measurement Distance (meter)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	500	3

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

▪ FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	MHz	GHz	GHz
0.009 ~ 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 ~ 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.52025	160.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	12.57675 ~	160.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	12.57725	160.7 ~ 160.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	13.36 ~ 13.41	162.0125 ~ 167.17	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.42 ~ 16.423	167.72 ~ 173.2	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	16.69475 ~	240 ~ 285	2655 ~ 2900		
8.291 ~ 8.294	16.69525	322 ~ 335.4	3260 ~ 3267		
8.362 ~ 8.366	16.80425 ~	399.90 ~ 410	3332 ~ 3339		
8.37625 ~ 8.38675	16.80475	608 ~ 614	3345.8 ~ 3358		
	25.5 ~ 25.67	960 ~ 1240	3600 ~ 4000		
	37.5 ~ 38.25				
	73 ~ 74.6				
	74.8 ~ 75.2				

▪ **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

▪ **FCC Part 15.407 (b):** Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the **5.15-5.25 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (2) For transmitters operating in the **5.25-5.35 GHz band**: all emissions outside of the **5.15-5.35 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (3) For transmitters operating in the **5.47-5.725 GHz band**: all emissions outside of the **5.47-5.725 GHz band** shall not exceed an **EIRP of -27 dBm/MHz**.
- (4) For transmitters operating in the **5.725-5.85 GHz band**: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions **below 1 GHz** must comply with the general field strength limits set forth in **Section 15.209**. Further, any U-NII devices using an **AC power line** are required to comply also with the conducted limits set forth in **Section 15.207**.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

■ Test Configuration

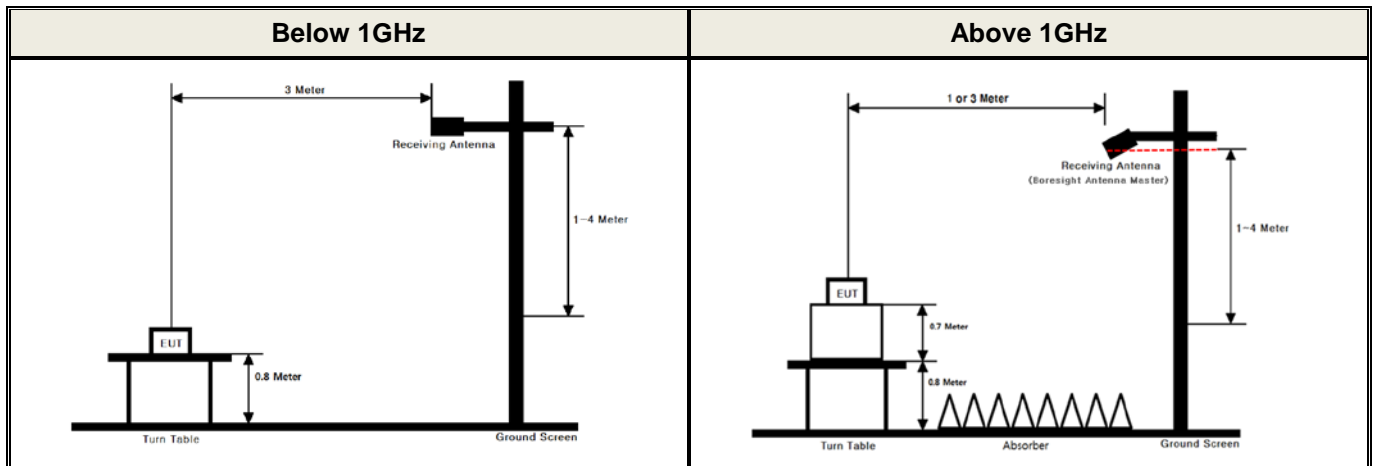

■ Test Procedure

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turn table shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1m or 3 m away from the receiving antenna, which is varied from 1m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiated spurious emission measured using following Measurement Procedure of **KDB789033 D02v02r01**

► General Requirements for Unwanted Emissions Measurements

The following requirements apply to all unwanted emissions measurements, both in and outside of the restricted bands:

▪ EUT Duty Cycle

- (1) The EUT shall be configured or modified to **transmit continuously** except as stated in (ii), below. The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (**to no lower than 98 percent**) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.
- (2) If **continuous transmission (or at least 98 percent duty cycle) cannot be achieved** due to hardware limitations of the EUT (e.g., overheating), the following additions to the measurement and reporting procedures are required:
 - The EUT shall be configured to operate at the maximum achievable duty cycle.
 - Measure the duty cycle, x, of the transmitter output signal.
 - Adjustments to measurement procedures (e.g., increasing test time and number of traces averaged) shall be performed as described in the procedures below.
 - The test report shall include the following additional information:
 - The reason for the duty cycle limitation.
 - The duty cycle achieved for testing and the associated transmit duration and interval between transmissions.
 - The sweep time and the amount of time used for trace stabilization during max-hold measurements for peak emission measurements.
- (3) Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

► Measurements below 1000 MHz

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Compliance shall be demonstrated using **CISPR quasi-peak detection**; however, **peak detection** is permitted as an alternative to quasi-peak detection.

► Measurements Above 1000 MHz (Peak)

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Peak emission levels are measured by setting the analyzer as follows:
 - (i) **RBW = 1 MHz.**
 - (ii) **VBW ≥ 3 MHz.**
 - (iii) **Detector = Peak.**
 - (iv) Sweep time = Auto.
 - (v) Trace mode = Max hold.
 - (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

► Measurements Above 1000 MHz (Method AD)

- (i) **RBW = 1 MHz.**
- (ii) **VBW ≥ 3 MHz.**
- (iii) **Detector = RMS**, if $\text{span} / (\# \text{ of points in sweep}) \leq \text{RBW} / 2$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (iv) Averaging type = power (i.e., RMS)
 - As an alternative, the detector and averaging type may be set for linear voltage averaging. Some analyzers require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- (v) Sweep time = Auto.
- (vi) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of $1/x$, where x is the duty cycle. For example, with 50 percent duty cycle, at least 200 traces shall be averaged.
- (vii) If tests are performed with the EUT transmitting at a duty cycle less than 98 percent, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:
 - **If power averaging (RMS) mode was used in step (iv) above, the correction factor is $10 \log(1/x)$, where x is the duty cycle.** For example, if the transmit duty cycle was 50 percent, then 3 dB must be added to the measured emission levels.
 - If linear voltage averaging mode was used in step (iv) above, the correction factor is $20 \log(1/x)$, where x is the duty cycle. For example, if the transmit duty cycle was 50 percent, then 6 dB must be added to the measured emission levels.
 - If a specific emission is demonstrated to be continuous (100 percent duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.

Please refer to Appendix II for the duty correction factor

DBS was tested with the following measurement methods.

► Measurements Above 1000 MHz (Method –VB-A)

a) **RBW = 1 MHz.**

b) Video bandwidth:

(i) If the EUT is configured to transmit with $D \geq 98\%$, then set $VBW \leq RBW / 100$ (i.e., 10 kHz), but not less than 10 Hz.

(ii) **If the EUT D is < 98%, then set $VBW \geq 1 / T$** , where T is defined in item a1) of 12.2.

c) Video bandwidth mode or display mode:

(i) The instrument shall be set with video filtering applied in the power domain. Typically, this requires setting the detector mode to RMS (power averaging) and setting the average-VBW type to power (rms).

(ii) As an alternative, the instrument may be set to linear detector mode. Video filtering shall be applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode to accomplish this. Others have a setting for average-VBW type, which can be set to “voltage” regardless of the display mode.

d) **Detector = peak.**

e) Sweep time = auto.

f) Trace mode = max hold.

g) Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where D is the duty cycle. For example, use at least 200 traces if the duty cycle is 25%. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 50 traces should be averaged.)

Mode	$T_{on}(ms)$	$1/T$ [kHz]
802.11a DBS	0.355	2.817

Please refer to Appendix II for the T.

Test Results
Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11a Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5147.52	H	Z	PK	51.82	2.43	N/A	N/A	54.25	74.00	19.75
		5148.50	H	Z	AV	41.60	2.43	0.04	N/A	44.07	54.00	9.93
		10358.35	V	X	PK	50.33	11.26	N/A	N/A	61.59	68.20	6.61
	40 (5200 MHz)	10398.40	V	X	PK	49.88	11.23	N/A	N/A	61.11	68.20	7.09
	48 (5240 MHz)	10480.07	V	X	PK	43.28	11.16	N/A	N/A	54.44	68.20	13.76
U-NII 2A	52 (5260 MHz)	10518.51	V	X	PK	48.65	11.16	N/A	N/A	59.81	68.20	8.39
	60 (5300 MHz)	10598.39	V	X	PK	48.79	11.24	N/A	N/A	60.03	74.00	13.97
		10597.95	V	X	AV	38.25	11.24	0.04	N/A	49.53	54.00	4.47
	64 (5320 MHz)	5350.85	H	Z	PK	51.15	3.98	N/A	N/A	55.13	74.00	18.87
		5351.22	H	Z	AV	40.82	3.99	0.04	N/A	44.85	54.00	9.15
		10638.54	V	X	PK	47.34	11.24	N/A	N/A	58.58	74.00	15.42
10638.39	V	X	AV	36.55	11.24	0.04	N/A	47.83	54.00	6.17		
U-NII 2C	100 (5500 MHz)	5458.49	H	Z	PK	51.14	4.17	N/A	N/A	55.31	74.00	18.69
		5458.91	H	Z	AV	40.70	4.17	0.04	N/A	44.91	54.00	9.09
		5469.34	H	Z	PK	52.04	4.16	N/A	N/A	56.20	68.20	12.00
		10998.52	V	X	PK	49.22	11.35	N/A	N/A	60.57	74.00	13.43
		10998.27	V	X	AV	38.51	11.35	0.04	N/A	49.90	54.00	4.10
	120 (5600 MHz)	11198.21	V	X	PK	48.59	11.47	N/A	N/A	60.06	74.00	13.94
		11198.29	V	X	AV	37.92	11.47	0.04	N/A	49.43	54.00	4.57
	144 (5720 MHz)	11437.99	V	X	PK	47.54	11.48	N/A	N/A	59.02	74.00	14.98
11438.26		V	X	AV	36.88	11.48	0.04	N/A	48.40	54.00	5.60	
U-NII 3	149 (5745 MHz)	5710.35	H	Z	PK	51.78	3.88	N/A	N/A	55.66	68.20	12.54
		5723.95	H	Z	PK	50.82	3.71	N/A	N/A	54.53	78.20	23.67
		11488.50	V	X	PK	46.67	11.46	N/A	N/A	58.13	74.00	15.87
		11488.35	V	X	AV	35.57	11.46	0.04	N/A	47.07	54.00	6.93
	157 (5785 MHz)	11568.09	V	X	PK	46.64	11.68	N/A	N/A	58.32	74.00	15.68
		11567.92	V	X	AV	36.36	11.68	0.04	N/A	48.08	54.00	5.92
	165 (5825 MHz)	5854.48	H	Z	PK	50.93	4.45	N/A	N/A	55.38	78.20	22.82
		5861.29	H	Z	PK	50.53	4.46	N/A	N/A	54.99	68.20	13.21
11647.66		V	X	PK	46.94	11.99	N/A	N/A	58.93	74.00	15.07	
11647.74		V	X	AV	36.77	12.00	0.04	N/A	48.81	54.00	5.19	

Note.

1. The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11n(HT20) Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5149.05	H	Z	PK	50.82	2.44	N/A	N/A	53.26	74.00	20.74
		5148.32	H	Z	AV	40.77	2.43	0.02	N/A	43.22	54.00	10.78
		10359.02	V	X	PK	47.57	11.26	N/A	N/A	58.83	68.20	9.37
	40 (5200 MHz)	10399.21	V	X	PK	47.23	11.23	N/A	N/A	58.46	68.20	9.74
	48 (5240 MHz)	10478.11	V	X	PK	47.34	11.16	N/A	N/A	58.50	68.20	9.70
U-NII 2A	52 (5260 MHz)	10519.19	V	X	PK	46.88	11.16	N/A	N/A	58.04	68.20	10.16
	60 (5300 MHz)	10599.32	V	X	PK	46.82	11.24	N/A	N/A	58.06	74.00	15.94
		10598.95	V	X	AV	36.06	11.24	0.02	N/A	47.32	54.00	6.68
	64 (5320 MHz)	5351.86	H	Z	PK	50.46	3.99	N/A	N/A	54.45	74.00	19.55
		5350.59	H	Z	AV	40.38	3.98	0.02	N/A	44.38	54.00	9.62
		10638.88	V	X	PK	45.41	11.24	N/A	N/A	56.65	74.00	17.35
		10639.35	V	X	AV	34.40	11.24	0.02	N/A	45.66	54.00	8.34
U-NII 2C	100 (5500 MHz)	5458.71	H	Z	PK	50.48	4.17	N/A	N/A	54.65	74.00	19.35
		5459.22	H	Z	AV	40.21	4.17	0.02	N/A	44.40	54.00	9.60
		5469.31	H	Z	PK	51.10	4.16	N/A	N/A	55.26	68.20	12.94
		10998.83	V	X	PK	47.47	11.35	N/A	N/A	58.82	74.00	15.18
		10999.14	V	X	AV	36.12	11.35	0.02	N/A	47.49	54.00	6.51
	120 (5600 MHz)	11199.23	V	X	PK	47.69	11.47	N/A	N/A	59.16	74.00	14.84
		11199.14	V	X	AV	36.04	11.47	0.02	N/A	47.53	54.00	6.47
	144 (5720 MHz)	11439.08	V	X	PK	46.03	11.48	N/A	N/A	57.51	74.00	16.49
		11439.05	V	X	AV	34.99	11.48	0.02	N/A	46.49	54.00	7.51
	U-NII 3	149 (5745 MHz)	5714.46	H	Z	PK	51.34	3.88	N/A	N/A	55.22	68.20
5723.67			H	Z	PK	52.26	3.72	N/A	N/A	55.98	78.20	22.22
11489.49			V	X	PK	44.39	11.46	N/A	N/A	55.85	74.00	18.15
11490.38			V	X	AV	34.56	11.46	0.02	N/A	46.04	54.00	7.96
157 (5785 MHz)		11570.26	V	X	PK	44.82	11.69	N/A	N/A	56.51	74.00	17.49
		11570.51	V	X	AV	34.24	11.69	0.02	N/A	45.95	54.00	8.05
165 (5825 MHz)		5853.22	H	Z	PK	49.96	4.44	N/A	N/A	54.40	78.20	23.80
		5863.83	H	Z	PK	50.81	4.39	N/A	N/A	55.20	68.20	13.00
		11649.88	V	X	PK	45.41	12.00	N/A	N/A	57.41	74.00	16.59
		11649.68	V	X	AV	34.74	12.00	0.02	N/A	46.76	54.00	7.24

Note.

- The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.
 $E[dBuV/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11n(HT40) Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5148.18	H	Z	PK	50.91	2.43	N/A	N/A	53.34	74.00	20.66
		5149.51	H	Z	AV	41.46	2.44	0.02	N/A	43.92	54.00	10.08
		10380.05	V	X	PK	44.46	11.24	N/A	N/A	55.70	68.20	12.50
	46 (5230 MHz)	10460.49	V	X	PK	44.48	11.17	N/A	N/A	55.65	68.20	12.55
U-NII 2A	54 (5270 MHz)	10539.80	V	X	PK	45.46	11.18	N/A	N/A	56.64	68.20	11.56
	62 (5310 MHz)	5350.98	H	Z	PK	51.41	3.98	N/A	N/A	55.39	74.00	18.61
		5350.85	H	Z	AV	41.34	3.98	0.02	N/A	45.34	54.00	8.66
		10619.78	V	X	PK	44.46	11.24	N/A	N/A	55.70	74.00	18.30
		10619.64	V	X	AV	33.30	11.24	0.02	N/A	44.56	54.00	9.44
U-NII 2C	102 (5510 MHz)	5459.88	H	Z	PK	50.85	4.17	N/A	N/A	55.02	74.00	18.98
		5459.30	H	Z	AV	40.34	4.17	0.02	N/A	44.53	54.00	9.47
		5461.24	H	Z	PK	50.40	4.17	N/A	N/A	54.57	68.20	13.63
		11019.48	V	X	PK	44.73	11.36	N/A	N/A	56.09	74.00	17.91
		11020.19	V	X	AV	34.50	11.36	0.02	N/A	45.88	54.00	8.12
	118 (5590 MHz)	11180.03	V	X	PK	45.47	11.46	N/A	N/A	56.93	74.00	17.07
		11180.07	V	X	AV	35.07	11.46	0.02	N/A	46.55	54.00	7.45
	142 (5710 MHz)	11419.66	V	X	PK	45.50	11.49	N/A	N/A	56.99	74.00	17.01
11420.16		V	X	AV	34.50	11.49	0.02	N/A	46.01	54.00	7.99	
U-NII 3	151 (5755 MHz)	5714.87	H	Z	PK	54.05	3.88	N/A	N/A	57.93	68.20	10.27
		5721.83	H	Z	PK	57.93	3.76	N/A	N/A	61.69	78.20	16.51
		11510.41	V	X	PK	44.06	11.49	N/A	N/A	55.55	74.00	18.45
		11510.07	V	X	AV	34.22	11.49	0.02	N/A	45.73	54.00	8.27
	159 (5795 MHz)	5852.35	H	Z	PK	50.28	4.44	N/A	N/A	54.72	78.20	23.48
		5861.29	H	Z	PK	50.54	4.46	N/A	N/A	55.00	68.20	13.20
		11589.93	V	X	PK	45.27	11.76	N/A	N/A	57.03	74.00	16.97
		11590.48	V	X	AV	34.52	11.76	0.02	N/A	46.30	54.00	7.70

Note.

1. The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11ac(VHT80) Normal

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5149.54	H	Z	PK	51.97	2.44	N/A	N/A	54.41	74.00	19.59
		5149.36	H	Z	AV	41.36	2.44	0.02	N/A	43.82	54.00	10.18
		10419.99	V	X	PK	42.82	11.21	N/A	N/A	54.03	68.20	14.17
U-NII 2A	58 (5290 MHz)	5352.06	H	Z	PK	51.05	3.99	N/A	N/A	55.04	74.00	18.96
		5351.09	H	Z	AV	40.99	3.99	0.02	N/A	45.00	54.00	9.00
		10580.04	V	X	PK	43.97	11.22	N/A	N/A	55.19	68.20	13.01
U-NII 2C	106 (5530 MHz)	5458.67	H	Z	PK	51.40	4.17	N/A	N/A	55.57	74.00	18.43
		5459.74	H	Z	AV	42.56	4.17	0.02	N/A	46.75	54.00	7.25
		5465.95	H	Z	PK	53.08	4.16	N/A	N/A	57.24	68.20	10.96
		11060.16	V	X	PK	44.82	11.39	N/A	N/A	56.21	74.00	17.79
		11059.81	V	X	AV	34.49	11.39	0.02	N/A	45.90	54.00	8.10
	122 (5610 MHz)	11220.28	V	X	PK	44.11	11.47	N/A	N/A	55.58	74.00	18.42
		11219.52	V	X	AV	33.61	11.47	0.02	N/A	45.10	54.00	8.90
	138 (5690 MHz)	11379.53	V	X	PK	44.20	11.49	N/A	N/A	55.69	74.00	18.31
11379.82		V	X	AV	33.71	11.49	0.02	N/A	45.22	54.00	8.78	
U-NII 3	155 (5775 MHz)	5714.62	H	Z	PK	55.72	3.88	N/A	N/A	59.60	68.20	8.60
		5720.70	H	Z	PK	56.46	3.78	N/A	N/A	60.24	78.20	17.96
		5854.28	H	Z	PK	51.63	4.45	N/A	N/A	56.08	78.20	22.12
		5861.24	H	Z	PK	52.26	4.46	N/A	N/A	56.72	68.20	11.48
		11550.42	V	X	PK	44.16	11.63	N/A	N/A	55.79	74.00	18.21
		11549.59	V	X	AV	33.80	11.62	0.02	N/A	45.44	54.00	8.56

Note.

- The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.
 $E[dBuV/m] = EIRP[dBm] + 95.2 \text{ dB} - 27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11n(HT20)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5148.39	H	Z	PK	51.14	2.43	N/A	N/A	53.57	74.00	20.43
		5149.38	H	Z	AV	40.92	2.44	0.02	N/A	43.38	54.00	10.62
		10360.32	V	X	PK	48.09	11.26	N/A	N/A	59.35	68.20	8.85
	40 (5200 MHz)	10399.67	V	X	PK	48.09	11.23	N/A	N/A	59.32	68.20	8.88
	48 (5240 MHz)	10481.01	V	X	PK	47.16	11.16	N/A	N/A	58.32	68.20	9.88
U-NII 2A	52 (5260 MHz)	10520.07	V	X	PK	46.89	11.16	N/A	N/A	58.05	68.20	10.15
	60 (5300 MHz)	10599.53	V	X	PK	47.20	11.24	N/A	N/A	58.44	74.00	15.56
		10599.68	V	X	AV	36.55	11.24	0.02	N/A	47.81	54.00	6.19
	64 (5320 MHz)	5351.39	H	Z	PK	51.47	3.99	N/A	N/A	55.46	74.00	18.54
		5351.69	H	Z	AV	40.64	3.99	0.02	N/A	44.65	54.00	9.35
		10639.47	V	X	PK	45.90	11.24	N/A	N/A	57.14	74.00	16.86
10640.27	V	X	AV	35.28	11.24	0.02	N/A	46.54	54.00	7.46		
U-NII 2C	100 (5500 MHz)	5458.74	H	Z	PK	50.30	4.17	N/A	N/A	54.47	74.00	19.53
		5459.44	H	Z	AV	40.08	4.17	0.02	N/A	44.27	54.00	9.73
		5463.85	H	Z	PK	50.87	4.17	N/A	N/A	55.04	68.20	13.16
		11000.13	V	X	PK	47.60	11.35	N/A	N/A	58.95	74.00	15.05
		10999.37	V	X	AV	36.83	11.35	0.02	N/A	48.20	54.00	5.80
	120 (5600 MHz)	11200.04	V	X	PK	46.82	11.47	N/A	N/A	58.29	74.00	15.71
		11200.18	V	X	AV	36.04	11.47	0.02	N/A	47.53	54.00	6.47
	144 (5720 MHz)	11440.48	V	X	PK	46.71	11.48	N/A	N/A	58.19	74.00	15.81
11440.22		V	X	AV	35.46	11.48	0.02	N/A	46.96	54.00	7.04	
U-NII 3	149 (5745 MHz)	5714.21	H	Z	PK	50.52	3.88	N/A	N/A	54.40	68.20	13.80
		5717.36	H	Z	PK	51.02	3.84	N/A	N/A	54.86	78.20	23.34
		11489.74	V	X	PK	45.25	11.46	N/A	N/A	56.71	74.00	17.29
		11490.32	V	X	AV	34.78	11.46	0.02	N/A	46.26	54.00	7.74
	157 (5785 MHz)	11570.25	V	X	PK	45.83	11.69	N/A	N/A	57.52	74.00	16.48
		11569.88	V	X	AV	35.12	11.69	0.02	N/A	46.83	54.00	7.17
	165 (5825 MHz)	5852.75	H	Z	PK	50.39	4.44	N/A	N/A	54.83	78.20	23.37
		5863.57	H	Z	PK	50.33	4.39	N/A	N/A	54.72	68.20	13.48
11649.71		V	X	PK	46.05	12.00	N/A	N/A	58.05	74.00	15.95	
11650.29		V	X	AV	35.33	12.01	0.02	N/A	47.36	54.00	6.64	

Note.

- The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11n(HT40)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	38 (5190 MHz)	5149.61	H	Z	PK	50.77	2.44	N/A	N/A	53.21	74.00	20.79
		5149.54	H	Z	AV	41.10	2.44	0.02	N/A	43.56	54.00	10.44
		10379.51	V	X	PK	44.00	11.24	N/A	N/A	55.24	68.20	12.96
	46 (5230 MHz)	10459.65	V	X	PK	45.80	11.17	N/A	N/A	56.97	68.20	11.23
U-NII 2A	54 (5270 MHz)	10540.28	V	X	PK	45.35	11.18	N/A	N/A	56.53	68.20	11.67
	62 (5310 MHz)	5350.10	H	Z	PK	52.16	3.98	N/A	N/A	56.14	74.00	17.86
		5350.88	H	Z	AV	40.79	3.98	0.02	N/A	44.79	54.00	9.21
		10620.03	V	X	PK	44.14	11.24	N/A	N/A	55.38	74.00	18.62
		10619.54	V	X	AV	33.45	11.24	0.02	N/A	44.71	54.00	9.29
U-NII 2C	102 (5510 MHz)	5459.32	H	Z	PK	50.18	4.17	N/A	N/A	54.35	74.00	19.65
		5458.43	H	Z	AV	40.37	4.17	0.02	N/A	44.56	54.00	9.44
		5469.90	H	Z	PK	51.34	4.16	N/A	N/A	55.50	68.20	12.70
		11019.62	V	X	PK	45.70	11.36	N/A	N/A	57.06	74.00	16.94
		11019.70	V	X	AV	34.97	11.36	0.02	N/A	46.35	54.00	7.65
	118 (5590 MHz)	11180.18	V	X	PK	45.75	11.46	N/A	N/A	57.21	74.00	16.79
		11179.68	V	X	AV	35.36	11.46	0.02	N/A	46.84	54.00	7.16
	142 (5710 MHz)	11419.66	V	X	PK	44.67	11.49	N/A	N/A	56.16	74.00	17.84
11419.54		V	X	AV	34.46	11.49	0.02	N/A	45.97	54.00	8.03	
U-NII 3	151 (5755 MHz)	5714.59	H	Z	PK	53.62	3.88	N/A	N/A	57.50	68.20	10.70
		5723.72	H	Z	PK	57.83	3.72	N/A	N/A	61.55	78.20	16.65
		11509.73	V	X	PK	45.02	11.49	N/A	N/A	56.51	74.00	17.49
		11510.29	V	X	AV	34.20	11.49	0.02	N/A	45.71	54.00	8.29
	159 (5795 MHz)	5855.91	H	Z	PK	50.64	4.46	N/A	N/A	55.10	78.20	23.10
		5865.21	H	Z	PK	50.89	4.35	N/A	N/A	55.24	68.20	12.96
		11590.18	V	X	PK	45.82	11.76	N/A	N/A	57.58	74.00	16.42
		11590.07	V	X	AV	34.62	11.76	0.02	N/A	46.40	54.00	7.60

Note.

1. The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(SDM) & 802.11ac(VHT80)

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	42 (5210 MHz)	5148.57	H	Z	PK	52.06	2.43	N/A	N/A	54.49	74.00	19.51
		5149.03	H	Z	AV	41.02	2.44	0.02	N/A	43.48	54.00	10.52
		10419.66	V	X	PK	44.29	11.21	N/A	N/A	55.50	68.20	12.70
U-NII 2A	58 (5290 MHz)	5350.27	H	Z	PK	51.15	3.98	N/A	N/A	55.13	74.00	18.87
		5351.11	H	Z	AV	40.77	3.99	0.02	N/A	44.78	54.00	9.22
		10579.62	V	X	PK	44.06	11.22	N/A	N/A	55.28	68.20	12.92
U-NII 2C	106 (5530 MHz)	5459.06	H	Z	PK	52.62	4.17	N/A	N/A	56.79	74.00	17.21
		5459.58	H	Z	AV	41.69	4.17	0.02	N/A	45.88	54.00	8.12
		5468.70	H	Z	PK	52.79	4.16	N/A	N/A	56.95	68.20	11.25
		11060.57	V	X	PK	45.92	11.39	N/A	N/A	57.31	74.00	16.69
	122 (5610 MHz)	11059.86	V	X	AV	34.63	11.39	0.02	N/A	46.04	54.00	7.96
		11219.84	V	X	PK	43.75	11.47	N/A	N/A	55.22	74.00	18.78
	138 (5690 MHz)	11219.60	V	X	AV	33.58	11.47	0.02	N/A	45.07	54.00	8.93
		11380.21	V	X	PK	43.85	11.49	N/A	N/A	55.34	74.00	18.66
U-NII 3	155 (5775 MHz)	11380.46	V	X	AV	33.76	11.49	0.02	N/A	45.27	54.00	8.73
		5713.53	H	Z	PK	55.31	3.88	N/A	N/A	59.19	68.20	9.01
		5722.59	H	Z	PK	54.41	3.74	N/A	N/A	58.15	78.20	20.05
		5853.18	H	Z	PK	51.13	4.44	N/A	N/A	55.57	78.20	22.63
		5866.70	H	Z	PK	52.03	4.31	N/A	N/A	56.34	68.20	11.86
		11549.88	V	X	PK	44.08	11.62	N/A	N/A	55.70	74.00	18.30
		11550.27	V	X	AV	33.74	11.63	0.02	N/A	45.39	54.00	8.61

Note.

- The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.
 $Margin = Limit - Result$ / $Result = Reading + T.F + DCCF + DCF$ / $T.F = AF + CL - AG$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.
 $E[dBuV/m] = EIRP[dBm] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11a & With Wireless charging pad

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5147.79	H	X	PK	51.71	2.43	N/A	N/A	54.14	74.00	19.86
		5148.89	H	X	AV	40.80	2.43	0.04	N/A	43.27	54.00	10.73
		10358.17	V	X	PK	49.95	11.26	N/A	N/A	61.21	68.20	6.99
U-NII 2A	60 (5300 MHz)	10598.02	V	X	PK	48.86	11.24	N/A	N/A	60.10	74.00	13.90
		10597.64	V	X	AV	38.12	11.24	0.04	N/A	49.40	54.00	4.60
	64 (5320 MHz)	5363.20	H	X	PK	49.45	4.05	N/A	N/A	53.50	74.00	20.50
		5351.89	H	X	AV	38.43	3.99	0.04	N/A	42.46	54.00	11.54
		10638.71	V	X	PK	47.36	11.24	N/A	N/A	58.60	74.00	15.40
		10638.35	V	X	AV	36.42	11.24	0.04	N/A	47.70	54.00	6.30
U-NII 2C	100 (5500 MHz)	5459.07	H	X	PK	50.42	4.17	N/A	N/A	54.59	74.00	19.41
		5458.31	H	X	AV	40.43	4.17	0.04	N/A	44.64	54.00	9.36
		5462.96	H	X	PK	51.85	4.17	N/A	N/A	56.02	68.20	12.18
		10998.54	V	X	PK	47.98	11.35	N/A	N/A	59.33	74.00	14.67
		10998.18	V	X	AV	37.14	11.35	0.04	N/A	48.53	54.00	5.47
U-NII 3	165 (5825 MHz)	5852.37	H	X	PK	50.24	4.44	N/A	N/A	54.68	78.20	23.52
		5864.99	H	X	AV	50.76	4.36	0.04	N/A	55.16	68.20	13.04
		11648.22	V	X	PK	46.46	12.00	N/A	N/A	58.46	74.00	15.54
		11647.96	V	X	AV	35.68	12.00	0.04	N/A	47.72	54.00	6.28

Note.

- The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11a & With Dual Display

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 1	36 (5180 MHz)	5149.15	H	Z	PK	51.94	2.44	N/A	N/A	54.38	74.00	19.62
		5149.68	H	Z	AV	41.67	2.44	0.04	N/A	44.15	54.00	9.85
		10358.18	V	X	PK	50.29	11.26	N/A	N/A	61.55	68.20	6.65
U-NII 2A	60 (5300 MHz)	10598.13	V	X	PK	49.49	11.24	N/A	N/A	60.73	74.00	13.27
		10597.62	V	X	AV	38.51	11.24	0.04	N/A	49.79	54.00	4.21
	64 (5320 MHz)	5350.98	H	Z	PK	50.10	3.98	N/A	N/A	54.08	74.00	19.92
		5350.53	H	Z	AV	40.43	3.98	0.04	N/A	44.45	54.00	9.55
		10641.69	V	X	PK	45.87	11.24	N/A	N/A	57.11	74.00	16.89
		10642.28	V	X	AV	35.37	11.24	0.04	N/A	46.65	54.00	7.35
U-NII 2C	100 (5500 MHz)	5459.44	H	Z	PK	51.36	4.17	N/A	N/A	55.53	74.00	18.47
		5458.94	H	Z	AV	40.59	4.17	0.04	N/A	44.80	54.00	9.20
		5463.85	H	Z	PK	50.56	4.17	N/A	N/A	54.73	68.20	13.47
		10998.63	V	X	PK	48.70	11.35	N/A	N/A	60.05	74.00	13.95
		10998.34	V	X	AV	37.93	11.35	0.04	N/A	49.32	54.00	4.68
U-NII 3	165 (5825 MHz)	5855.51	H	Z	PK	50.53	4.46	N/A	N/A	54.99	78.20	23.21
		5860.44	H	Z	PK	50.42	4.48	N/A	N/A	54.90	68.20	13.30
		11647.76	V	X	PK	46.95	12.00	N/A	N/A	58.95	74.00	15.05
		11647.79	V	X	AV	36.28	12.00	0.04	N/A	48.32	54.00	5.68

Note.

- The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : MIMO(CDD) & 802.11a & With Dual Display + WCP

Band	Tested Channel	Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
U-NII 2A	60 (5300 MHz)	10598.16	V	X	PK	50.19	11.24	N/A	N/A	61.43	74.00	12.57
		10597.90	V	X	AV	39.20	11.24	0.04	N/A	50.48	54.00	3.52
	64 (5320 MHz)	5350.94	H	X	PK	51.23	3.98	N/A	N/A	55.21	74.00	18.79
		5350.46	H	X	AV	40.53	3.98	0.04	N/A	44.55	54.00	9.45
		10642.07	V	X	PK	46.13	11.24	N/A	N/A	57.37	74.00	16.63
		10641.99	V	X	AV	34.96	11.24	0.04	N/A	46.24	54.00	7.76

Note.

1. No other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,

DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

- WiFi DBS(Dual-Band Simultaneous) Test Results

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : *Simultaneously transmission - Normal*

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	2TX	2.4GHz	802.11ax(HE20)	2462 MHz
	2TX	U-NII 2C	802.11a	5500 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.71	H	X	PK	51.51	5.80	N/A	N/A	57.31	74.00	16.69
2483.64	H	X	AV	41.57	5.80	N/A	N/A	47.37	54.00	6.63
4924.23	H	X	PK	49.73	2.07	N/A	N/A	51.80	74.00	22.20
4924.87	H	X	AV	39.24	2.08	N/A	N/A	41.32	54.00	12.68
5458.53	H	Z	PK	50.21	4.17	N/A	N/A	54.38	74.00	19.62
5459.51	H	Z	AV	40.18	4.17	N/A	N/A	44.35	54.00	9.65
5467.77	H	Z	PK	51.07	4.16	N/A	N/A	55.23	68.20	12.97
10998.91	V	X	PK	48.61	11.35	N/A	N/A	59.96	74.00	14.04
10999.11	V	X	AV	39.55	11.35	N/A	N/A	50.90	54.00	3.10

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) : *Simultaneously transmission - With Wireless charging pad*

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	2TX	2.4GHz	802.11ax(HE20)	2462 MHz
	2TX	U-NII 2C	802.11a	5500 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2484.71	H	X	PK	55.17	5.81	N/A	N/A	60.98	74.00	13.02
2483.56	H	X	AV	40.83	5.80	N/A	N/A	46.63	54.00	7.37
4923.28	H	X	PK	50.07	2.07	N/A	N/A	52.14	74.00	21.86
4923.90	H	X	AV	38.97	2.07	N/A	N/A	41.04	54.00	12.96
5458.55	H	X	PK	50.29	4.17	N/A	N/A	54.46	74.00	19.54
5458.84	H	X	AV	39.49	4.17	N/A	N/A	43.66	54.00	10.34
5462.02	H	X	PK	51.02	4.17	N/A	N/A	55.19	68.20	13.01
10999.25	H	X	PK	48.45	11.35	N/A	N/A	59.80	74.00	14.20
10998.02	H	X	AV	37.23	11.35	N/A	N/A	48.58	54.00	5.42

- The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.
- Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$
 Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor
- Information of Distance Factor
 For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.
 - Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$
 When distance factor is "N/A", the distance is 3 m and distance factor is not applied.
- The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :
Simultaneously transmission - With Dual Display

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	2TX	2.4GHz	802.11ax(HE20)	2462 MHz
	2TX	U-NII 2C	802.11a	5500 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.79	H	X	PK	54.97	0.00	N/A	N/A	54.97	74.00	19.03
2483.61	H	X	AV	44.05	5.80	N/A	N/A	49.85	54.00	4.15
4922.93	H	X	PK	50.29	2.07	N/A	N/A	52.36	74.00	21.64
4923.14	H	X	AV	39.19	2.07	N/A	N/A	41.26	54.00	12.74
5458.76	H	Z	PK	49.63	4.17	N/A	N/A	53.80	74.00	20.20
5457.79	H	Z	AV	40.09	4.17	N/A	N/A	44.26	54.00	9.74
5462.33	H	Z	PK	51.77	4.17	N/A	N/A	55.94	68.20	12.26
10998.65	V	X	PK	48.62	11.35	N/A	N/A	59.97	74.00	14.03
10998.46	V	X	AV	38.81	11.35	N/A	N/A	50.16	54.00	3.84

Radiated Spurious Emissions data(9 kHz ~ 40 GHz) :
Simultaneously transmission - With Dual Display + Wireless charging pad

	Antenna	Band	Mode	TX Frequency(MHz)
Transmitting Configuration	2TX	2.4GHz	802.11ax(HE20)	2462 MHz
	2TX	U-NII 2C	802.11a	5500 MHz

Freq. (MHz)	ANT Pol	EUT Position (Axis)	Detector Mode	Reading (dBuV)	T.F (dB/m)	DCCF (dB)	DCF (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
2483.95	H	X	PK	54.91	5.81	N/A	N/A	60.72	74.00	13.28
2483.69	H	X	AV	41.68	5.80	N/A	N/A	47.48	54.00	6.52
4923.16	H	X	PK	50.38	2.07	N/A	N/A	52.45	74.00	21.55
4923.31	H	X	AV	39.00	2.07	N/A	N/A	41.07	54.00	12.93
5459.14	H	X	PK	51.81	4.17	N/A	N/A	55.98	74.00	18.02
5458.90	H	X	AV	39.97	4.17	N/A	N/A	44.14	54.00	9.86
5466.21	H	X	PK	50.19	4.16	N/A	N/A	54.35	74.00	19.65
10998.07	H	X	PK	47.40	11.35	N/A	N/A	58.75	74.00	15.25
10998.66	H	X	AV	38.21	11.35	N/A	N/A	49.56	54.00	4.44

1. The radiated emissions were investigated up to the 10th harmonic of the fundamental frequency. And no other spurious and harmonic emissions were found greater than listed emissions on above table.

2. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} + \text{DCCF} + \text{DCF} \quad / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain,
 DCCF = Duty Cycle Correction Factor, DCF = Distance Correction Factor

3. Information of Distance Factor

For finding emissions, the test distance might be reduced from 3m to 1m. In this case, the distance factor(-9.54dB) is applied to the result.

- Calculation of distance factor = $20 \log(\text{applied distance} / \text{required distance}) = 20 \log(1 \text{ m} / 3 \text{ m}) = -9.54 \text{ dB}$

When distance factor is "N/A", the distance is 3 m and distance factor is not applied.

4. The limit is converted to field strength.

$$E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2 \text{ dB} = -27 \text{ dBm} + 95.2 = 68.2 \text{ dBuV/m}$$

8.6 AC Conducted Emissions

■ Test Requirements and limit, §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

■ Test Configuration

See test photographs for the actual connections between EUT and support equipment.

■ Test Procedure

Conducted emissions from the EUT were measured according to the ANSI C63.10-2013.

1. The test procedure is performed in a 6.5 m \times 3.5 m \times 3.5 m (L \times W \times H) shielded room. The EUT along with its peripherals were placed on a 1.0 m (W) \times 1.5 m (L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

■ Test Results: **Comply**

Note 1: See next pages for actual measured spectrum plots and data for worst case result.

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 1 & 802.11a & MIMO(CDD) & 5240 MHz

Results of Conducted Emission

DTNC



Date 2020-01-24

Order No.
Model No. LM-V600EA
Serial No.
Test Condition 5.1G

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 35 %
Operator Kim Jung woo

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

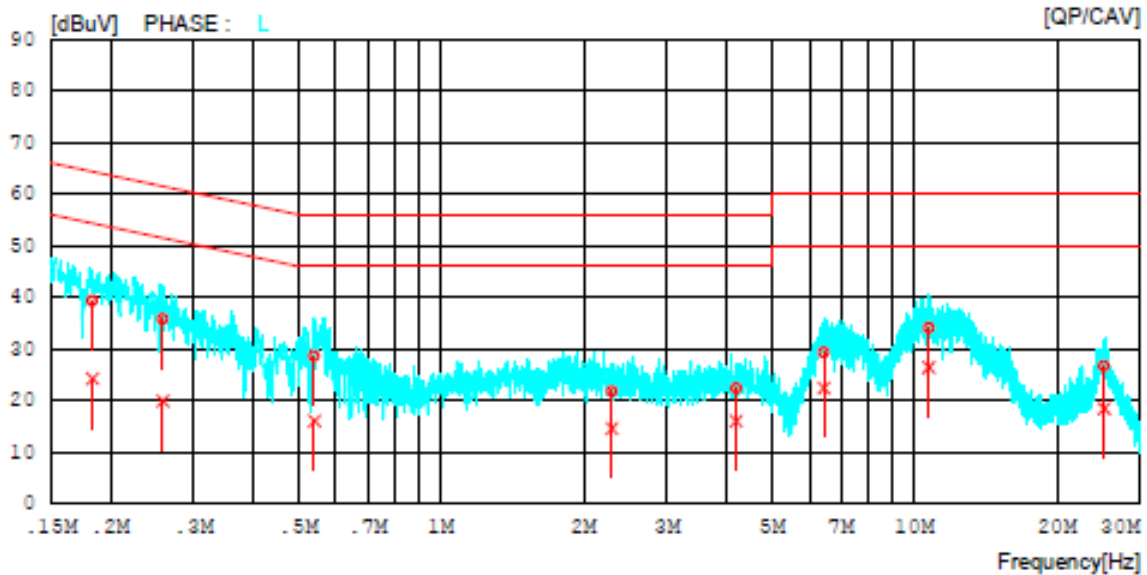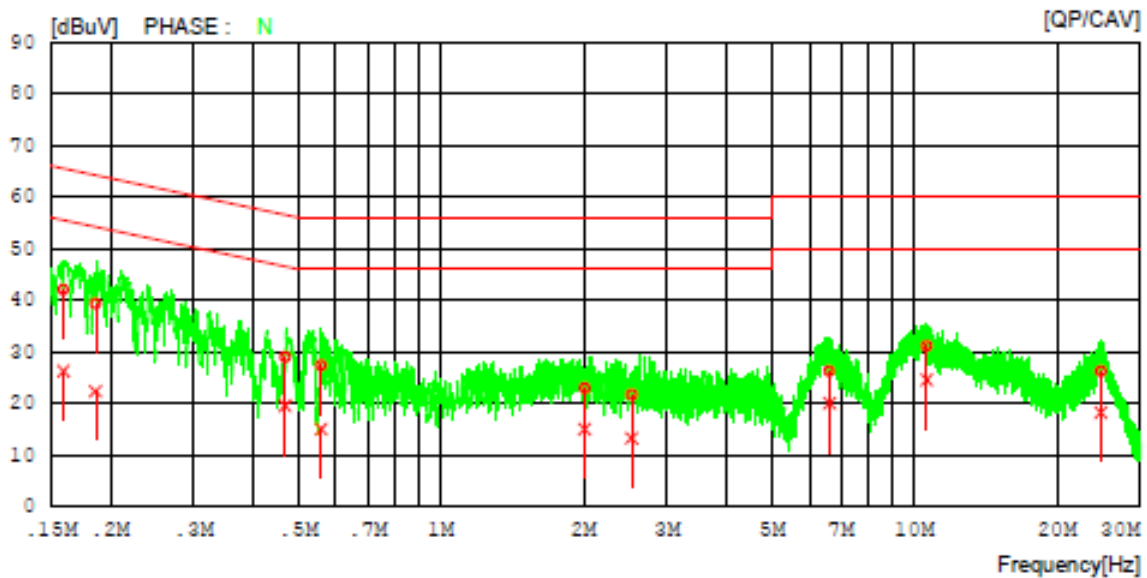

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 1 & 802.11a & MIMO(CDD) & 5240 MHz

Results of Conducted Emission

DTNC

Date 2020-01-24

Order No.		Reference No.	
Model No.	LM-V600EA	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 °C / 35 %
Test Condition	5.1G	Operator	Kim Jung woo

Memo

 LIMIT : FCC P15.207 QP
 FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]			
1	0.15930	32.16	16.33	9.94	42.10	26.27	65.50	55.50	23.40	29.23	N
2	0.18618	29.36	12.44	9.94	39.30	22.38	64.21	54.21	24.91	31.83	N
3	0.46829	19.00	9.67	9.95	28.95	19.62	56.54	46.54	27.59	26.92	N
4	0.55822	17.42	5.13	9.95	27.37	15.08	56.00	46.00	28.63	30.92	N
5	2.00913	12.91	5.06	10.03	22.94	15.09	56.00	46.00	33.06	30.91	N
6	2.52609	11.63	3.24	10.05	21.68	13.29	56.00	46.00	34.32	32.71	N
7	6.60897	16.08	9.88	10.20	26.28	20.08	60.00	50.00	33.72	29.92	N
8	10.60613	20.74	14.22	10.35	31.09	24.57	60.00	50.00	28.91	25.43	N
9	24.74592	15.62	7.63	10.65	26.27	18.28	60.00	50.00	33.73	31.72	N
10	0.18344	29.31	14.29	9.94	39.25	24.23	64.33	54.33	25.08	30.10	L
11	0.25828	25.77	9.98	9.94	35.71	19.92	61.49	51.49	25.78	31.57	L
12	0.53964	18.59	6.03	9.95	28.54	15.98	56.00	46.00	27.46	30.02	L
13	2.29446	11.78	4.47	10.04	21.82	14.51	56.00	46.00	34.18	31.49	L
14	4.20362	12.27	5.93	10.11	22.38	16.04	56.00	46.00	33.62	29.96	L
15	6.43704	19.07	12.15	10.20	29.27	22.35	60.00	50.00	30.73	27.65	L
16	10.72141	23.71	16.00	10.35	34.06	26.35	60.00	50.00	25.94	23.65	L
17	25.16196	16.07	7.82	10.63	26.70	18.45	60.00	50.00	33.30	31.55	L

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2A & 802.11a & MIMO(CDD) & 5320 MHz

Results of Conducted Emission

DTNC



Date 2020-01-24

Order No.
Model No. LM-V600EA
Serial No.
Test Condition 5.3G

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 35 %
Operator Kim Jung woo

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

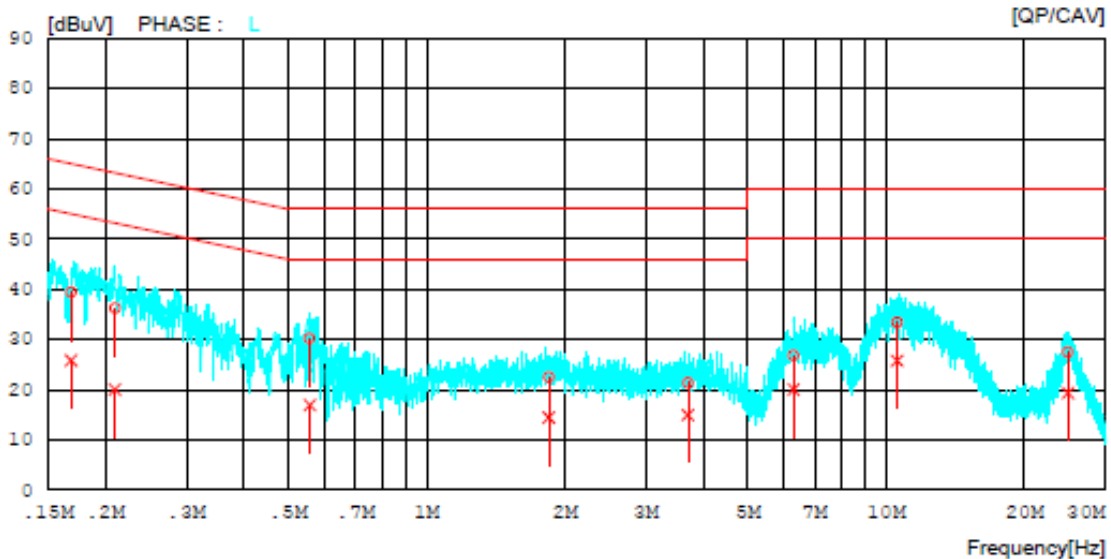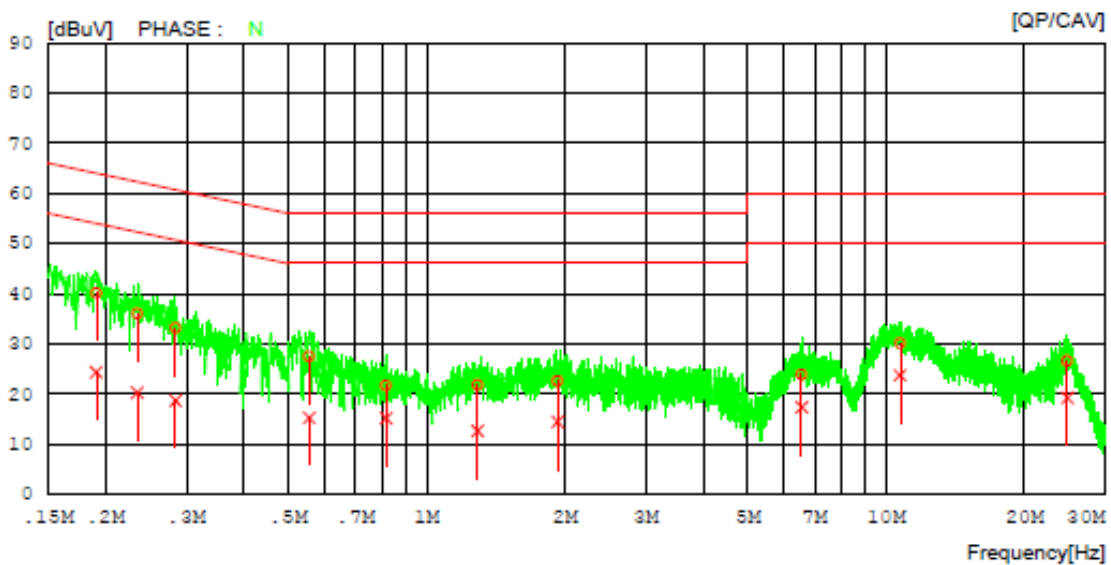

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2A & 802.11a & MIMO(CDD) & 5320 MHz

Results of Conducted Emission

DTNC

Date 2020-01-24

Order No.		Reference No.	
Model No.	LM-V600EA	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 °C / 35 %
Test Condition	5.3G	Operator	Kim Jung woo

Memo

 LIMIT : FCC P15.207 QP
 FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.19110	30.18	14.41	9.94	40.12	24.35	63.99	53.99	23.87	29.64	N
2	0.23467	26.06	10.32	9.94	36.00	20.26	62.28	52.28	26.28	32.02	N
3	0.28432	23.20	8.81	9.94	33.14	18.75	60.69	50.69	27.55	31.94	N
4	0.55536	17.49	5.36	9.95	27.44	15.31	56.00	46.00	28.56	30.69	N
5	0.81642	11.73	5.16	9.97	21.70	15.13	56.00	46.00	34.30	30.87	N
6	1.29124	11.79	2.68	9.99	21.78	12.67	56.00	46.00	34.22	33.33	N
7	1.92699	12.54	4.46	10.03	22.57	14.49	56.00	46.00	33.43	31.51	N
8	6.55196	13.68	7.19	10.20	23.88	17.39	60.00	50.00	36.12	32.61	N
9	10.71828	19.81	13.41	10.35	30.16	23.76	60.00	50.00	29.84	26.24	N
10	24.78419	15.96	8.62	10.65	26.61	19.27	60.00	50.00	33.39	30.73	N
11	0.16852	29.39	15.88	9.94	39.33	25.82	65.03	55.03	25.70	29.22	L
12	0.20993	26.26	10.04	9.94	36.20	19.98	63.21	53.21	27.01	33.23	L
13	0.55665	20.21	7.00	9.95	30.16	16.95	56.00	46.00	25.84	29.05	L
14	1.84413	12.45	4.41	10.03	22.48	14.44	56.00	46.00	33.52	31.56	L
15	3.70404	11.17	4.85	10.09	21.26	14.94	56.00	46.00	34.74	31.06	L
16	6.28671	16.55	9.77	10.20	26.75	19.97	60.00	50.00	33.25	30.03	L
17	10.56969	22.99	15.40	10.35	33.34	25.75	60.00	50.00	26.66	24.25	L
18	24.85897	16.88	8.71	10.63	27.51	19.34	60.00	50.00	32.49	30.66	L

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2C & 802.11a & MIMO(CDD) & 5500 MHz

Results of Conducted Emission

DTNC



Date 2020-01-24

Order No.
Model No. LM-V600EA
Serial No.
Test Condition 5.5G

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 'C / 35 %
Operator Kim Jung woo

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

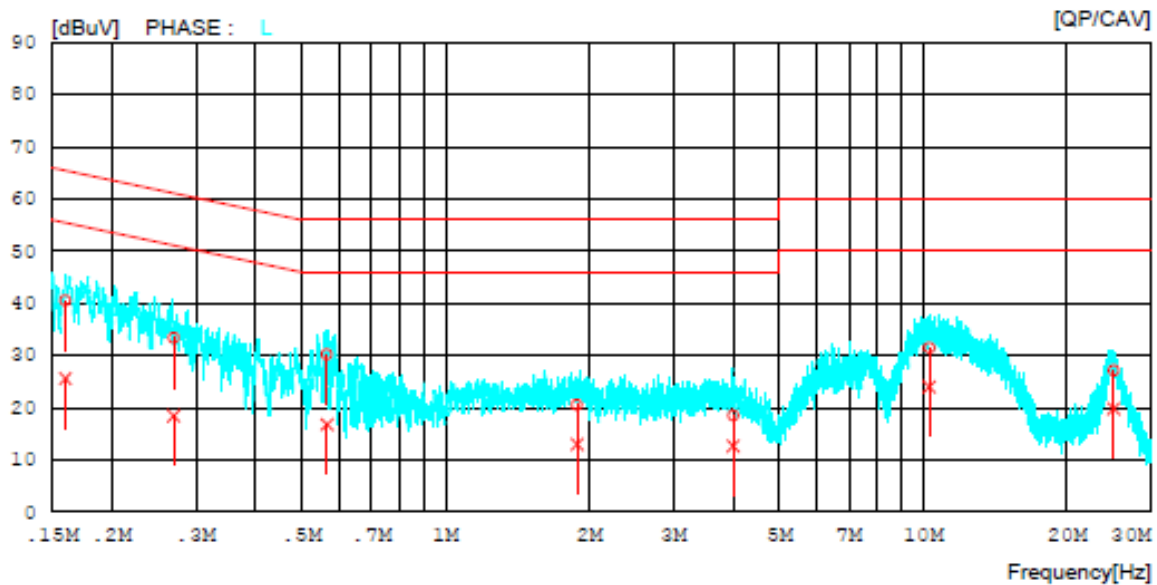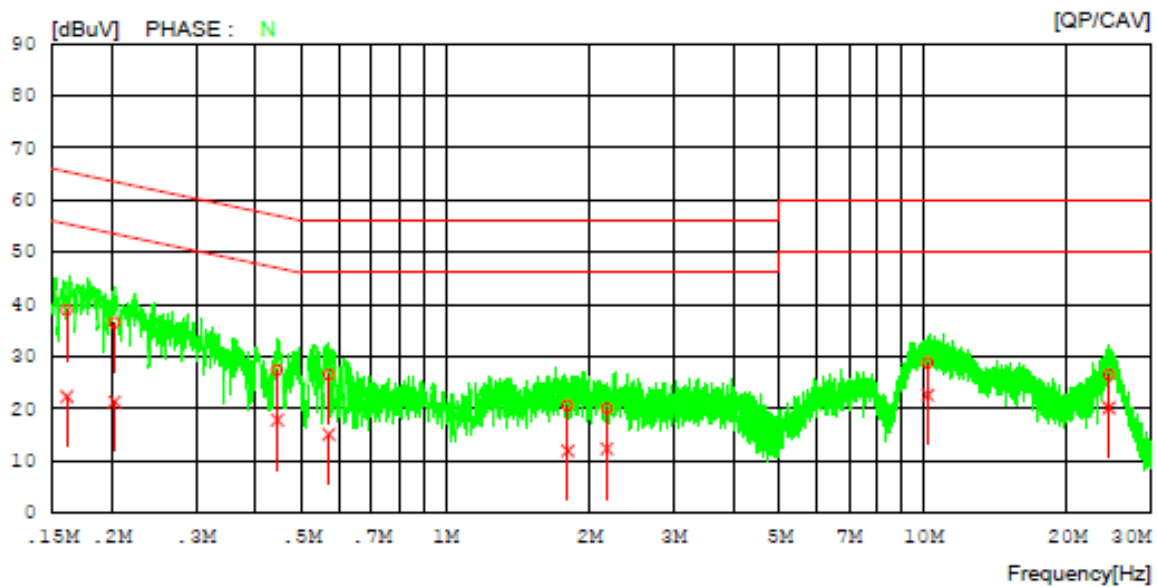

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2C & 802.11a & MIMO(CDD) & 5500 MHz

Results of Conducted Emission

DTNC

Date 2020-01-24

Order No.		Reference No.	
Model No.	LM-V600EA	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 °C / 35 %
Test Condition	5.5G	Operator	Kim Jung woo

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.16129	28.89	12.35	9.94	38.83	22.29	65.40	55.40	26.57	33.11	N
2	0.20302	26.53	11.43	9.94	36.47	21.37	63.49	53.49	27.02	32.12	N
3	0.44429	17.46	7.80	9.95	27.41	17.75	56.98	46.98	29.57	29.23	N
4	0.57011	16.59	5.09	9.95	26.54	15.04	56.00	46.00	29.46	30.96	N
5	1.80151	10.59	1.91	10.02	20.61	11.93	56.00	46.00	35.39	34.07	N
6	2.17718	9.96	2.32	10.03	19.99	12.35	56.00	46.00	36.01	33.65	N
7	10.21944	18.36	12.29	10.34	28.70	22.63	60.00	50.00	31.30	27.37	N
8	24.46507	15.89	9.54	10.64	26.53	20.18	60.00	50.00	33.47	29.82	N
9	0.16018	30.61	15.63	9.94	40.55	25.57	65.45	55.45	24.90	29.88	L
10	0.27005	23.41	8.48	9.94	33.35	18.42	61.12	51.12	27.77	32.70	L
11	0.56498	20.24	6.82	9.95	30.19	16.77	56.00	46.00	25.81	29.23	L
12	1.88549	10.52	2.92	10.03	20.55	12.95	56.00	46.00	35.45	33.05	L
13	4.00339	8.42	2.55	10.11	18.53	12.66	56.00	46.00	37.47	33.34	L
14	10.30004	21.08	13.67	10.34	31.42	24.01	60.00	50.00	28.58	25.99	L
15	25.05664	16.45	9.13	10.63	27.08	19.76	60.00	50.00	32.92	30.24	L

AC Line Conducted Emissions (Graph)

Test Mode: U-NII 2C & 802.11a & MIMO(CDD) & 5785 MHz

Results of Conducted Emission

DTNC



Date 2020-01-24

Order No.
Model No. LM-V600EA
Serial No.
Test Condition 5.7G

Reference No.
Power Supply 120 V, 60 Hz
Temp/Humi. 23 °C / 35 %
Operator Kim Jung woo

Memo

LIMIT : FCC P15.207 QP
FCC P15.207 AV

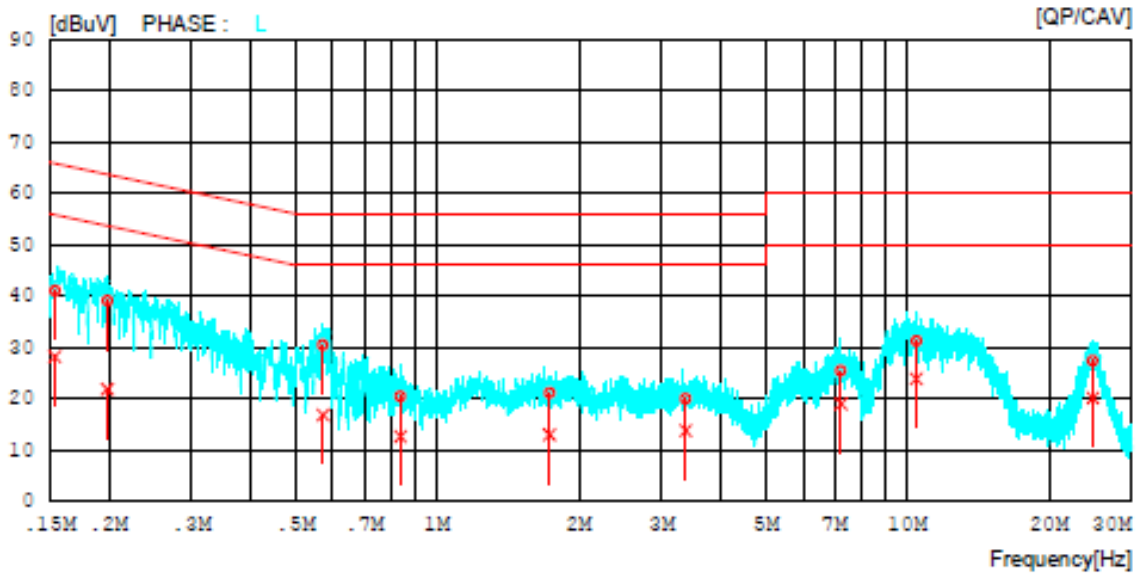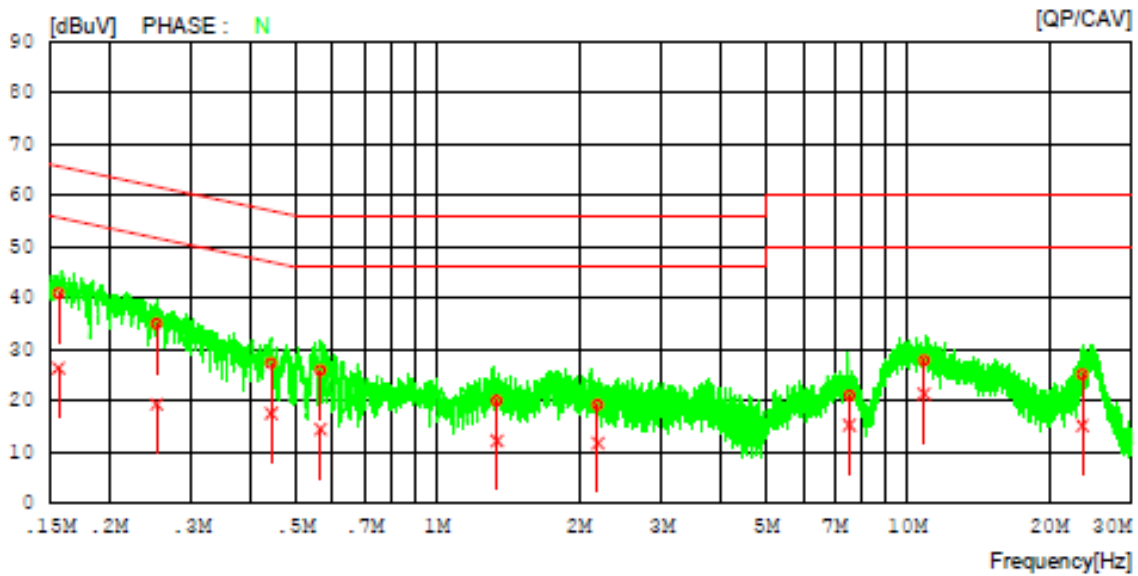

AC Line Conducted Emissions (Data List)

Test Mode: U-NII 2C & 802.11a & MIMO(CDD) & 5785 MHz

Results of Conducted Emission

DTNC

Date 2020-01-24

Order No.		Reference No.	
Model No.	LM-V600EA	Power Supply	120 V, 60 Hz
Serial No.		Temp/Humi.	23 °C / 35 %
Test Condition	5.7G	Operator	Kim Jung woo

Memo

 LIMIT : FCC P15.207 QP
 FCC P15.207 AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.15652	31.03	16.42	9.94	40.97	26.36	65.65	55.65	24.68	29.29	N
2	0.25291	25.03	9.39	9.94	34.97	19.33	61.66	51.66	26.69	32.33	N
3	0.44337	17.31	7.63	9.95	27.26	17.58	57.00	47.00	29.74	29.42	N
4	0.56458	15.95	4.50	9.95	25.90	14.45	56.00	46.00	30.10	31.55	N
5	1.33836	10.06	2.20	9.99	20.05	12.19	56.00	46.00	35.95	33.81	N
6	2.19356	9.24	1.69	10.03	19.27	11.72	56.00	46.00	36.73	34.28	N
7	7.52200	10.76	5.08	10.24	21.00	15.32	60.00	50.00	39.00	34.68	N
8	10.84413	17.43	10.98	10.37	27.80	21.35	60.00	50.00	32.20	28.65	N
9	23.52726	14.51	4.58	10.62	25.13	15.20	60.00	50.00	34.87	34.80	N
10	0.15367	31.07	18.26	9.94	41.01	28.20	65.80	55.80	24.79	27.60	L
11	0.19881	29.15	11.85	9.94	39.09	21.79	63.66	53.66	24.57	31.87	L
12	0.57158	20.48	6.88	9.95	30.43	16.83	56.00	46.00	25.57	29.17	L
13	0.83507	10.51	2.69	9.96	20.47	12.65	56.00	46.00	35.53	33.35	L
14	1.73250	11.09	2.95	10.01	21.10	12.96	56.00	46.00	34.90	33.04	L
15	3.37350	9.83	3.65	10.08	19.91	13.73	56.00	46.00	36.09	32.27	L
16	7.21892	15.21	8.79	10.22	25.43	19.01	60.00	50.00	34.57	30.99	L
17	10.45205	20.90	13.58	10.35	31.25	23.93	60.00	50.00	28.75	26.07	L
18	24.77582	16.69	9.53	10.63	27.32	20.16	60.00	50.00	32.68	29.84	L

9. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	19/12/16	20/12/16	MY49060056
Spectrum Analyzer	Agilent Technologies	N9020A	19/12/16	20/12/16	MY48011700
Spectrum Analyzer	Agilent Technologies	N9020A	19/12/16	20/12/16	MY46471251
Spectrum Analyzer	Agilent Technologies	N9030A	19/12/16	20/12/16	MY53310140
DC Power Supply	Agilent Technologies	66332A	19/12/19	20/12/19	US37476998
Multimeter	FLUKE	17B	19/12/16	20/12/16	26030065WS
Signal Generator	Rohde Schwarz	SMBV100A	19/12/16	20/12/16	255571
Signal Generator	ANRITSU	MG3695C	19/12/16	20/12/16	173501
Thermohygrometer	BODYCOM	BJ5478	19/12/18	20/12/18	120612-1
Thermohygrometer	BODYCOM	BJ5478	19/12/18	20/12/18	120612-2
Thermohygrometer	BODYCOM	BJ5478	19/09/18	20/09/18	N/A
Loop Antenna	ETS-Lindgren	6502	19/09/18	20/09/18	00226186
BILOG ANTENNA	Schwarzbeck	VULB 9160	19/04/23	21/04/23	9160-3362
Horn Antenna	ETS-Lindgren	3115	19/01/11	21/01/11	9202-3820
Horn Antenna	A.H.Systems Inc.	SAS-574	19/07/03	21/07/03	155
PreAmplifier	tsj	MLA-0118-B01-40	19/12/16	20/12/16	1852267
PreAmplifier	tsj	MLA-1840-J02-45	19/06/27	20/06/27	16966-10728
PreAmplifier	H.P	8447D	19/12/16	20/12/16	2944A07774
High Pass Filter	Wainwright Instruments	WHKX12-935-1000-15000-40SS	19/06/26	20/06/26	8
High Pass Filter	Wainwright Instruments	WHKX10-2838-3300-18000-60SS	19/06/26	20/06/26	1
High Pass Filter	Wainwright Instruments	WHNX8.0/26.5-6SS	19/06/27	20/06/27	3
Attenuator	Hefei Shunze	SS5T.92-10-40	19/06/27	20/06/27	16012202
Attenuator	SRTechnology	F01-B0606-01	19/06/27	20/06/27	13092403
Attenuator	Aeroflex/Weinschel	20515	19/06/27	20/06/27	Y2370
Attenuator	SMAJK	SMAJK-2-3	19/06/27	20/06/27	2
Attenuator	SMAJK	SMAJK-50-10	19/06/25	20/06/25	15081903
Power Meter & Wide Bandwidth Sensor	Anritsu	ML2496A ML2495A	19/06/24	20/06/24	1338004
			19/12/16	20/12/16	1306007
EMI Receiver	ROHDE&SCHWARZ	ESW44	19/07/30	20/07/30	101645
HYGROMETER	TESTO	608-H1	19/01/31	20/01/31	34862883
			20/01/21	21/01/21	
EMI Test Receiver	Rohde Schwarz	ESCI7	19/01/30	20/01/30	100910
			20/01/20	21/01/20	
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	19/09/17	20/09/17	101333
LISN	SCHWARZBECK	NNLK 8121	19/05/23	20/05/23	6183
Cable	Junkosha	MWX241	19/01/14	20/01/14	G-04
			20/01/13	21/01/13	
Cable	Junkosha	MWX241	19/01/14	20/01/14	G-07
			20/01/13	21/01/13	
Cable	DT&C	Cable	19/01/14	20/01/14	G-13
			20/01/13	21/01/13	
Cable	DT&C	Cable	19/01/14	20/01/14	G-14
			20/01/13	21/01/13	

Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Cable	HUBER+SUHNER	SUCOFLEX 104	19/01/14	20/01/14	G-15
			20/01/13	21/01/13	
Cable	Radiall	TESTPRO3	19/01/16	20/01/16	M-01
			20/01/16	21/01/16	
Cable	Junkosha	MWX315	19/01/16	20/01/16	M-05
			20/01/16	21/01/16	
Cable	Junkosha	MWX221	19/01/16	20/01/16	M-06
			20/01/16	21/01/16	
Cable	DT&C	Cable	19/01/16	20/01/16	RF-82
			20/01/16	21/01/16	


Note 1: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017

Note 2: The cable is not a regular calibration item, so it has been calibrated by DT & C itself.

APPENDIX I

Conducted Test set up Diagram

- Conducted Measurement

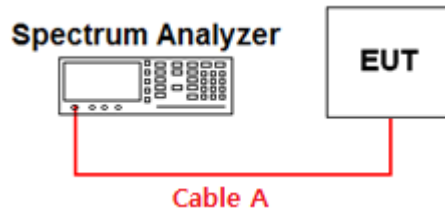

APPENDIX II

Duty Cycle Information

■ Test Procedure

Duty Cycle [X = On Time / (On + Off time)] is measured using Measurement Procedure of **KDB789033 D02v02r01**

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW \geq EBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW \geq RBW. Set detector = peak.
4. Note : The zero-span measurement method shall not be used unless both **RBW and VBW are $> 50/T$** , where T is defined in section II.B.1.a), and **the number of sweep points across duration T exceeds 100**. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

(T = **On time** of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)

■ Test Results:

Duty cycle: CDD

Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]	50/T [kHz]
			On Time [ms]	(On+Off) Time [ms]	x		
802.11a	6Mbps	5180	2.060	2.080	0.9904	0.04	24.27
802.11n (HT20)	MCS0	5180	5.420	5.440	0.9963	0.02	9.23
802.11n (HT40)	MCS0	5190	5.420	5.440	0.9963	0.02	9.23
802.11ac (VHT80)	MCS0	5210	5.430	5.450	0.9963	0.02	9.21

Duty cycle: SDM


Mode	Data Rate	Tested Frequency [MHz]	Maximum Achievable Duty Cycle (x) = On / (On+Off)			Duty Cycle Correction Factor [dB]	50/T [kHz]
			On Time [ms]	(On+Off) Time [ms]	x		
802.11n (HT20)	MCS8	5180	5.430	5.450	0.9963	0.02	9.21
802.11n (HT40)	MCS8	5190	5.430	5.450	0.9963	0.02	9.21
802.11ac (VHT80)	MCS0	5210	5.420	5.440	0.9963	0.02	9.23

Test Plot:

Single Transmit


Duty Cycle

Test Mode: 802.11a & Ch.36

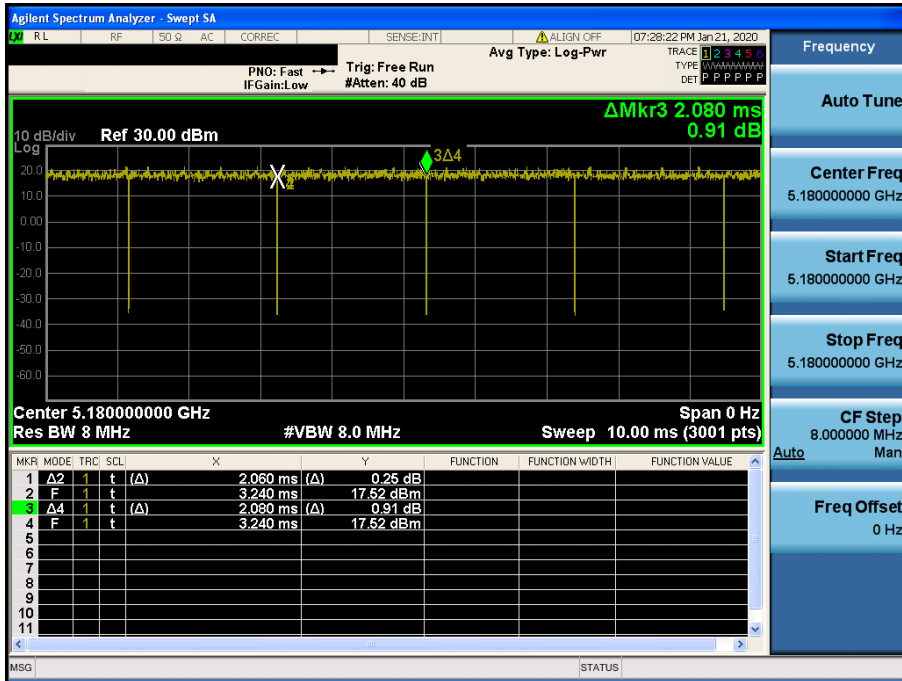


Duty Cycle

Test Mode: 802.11n HT20 & Ch.36

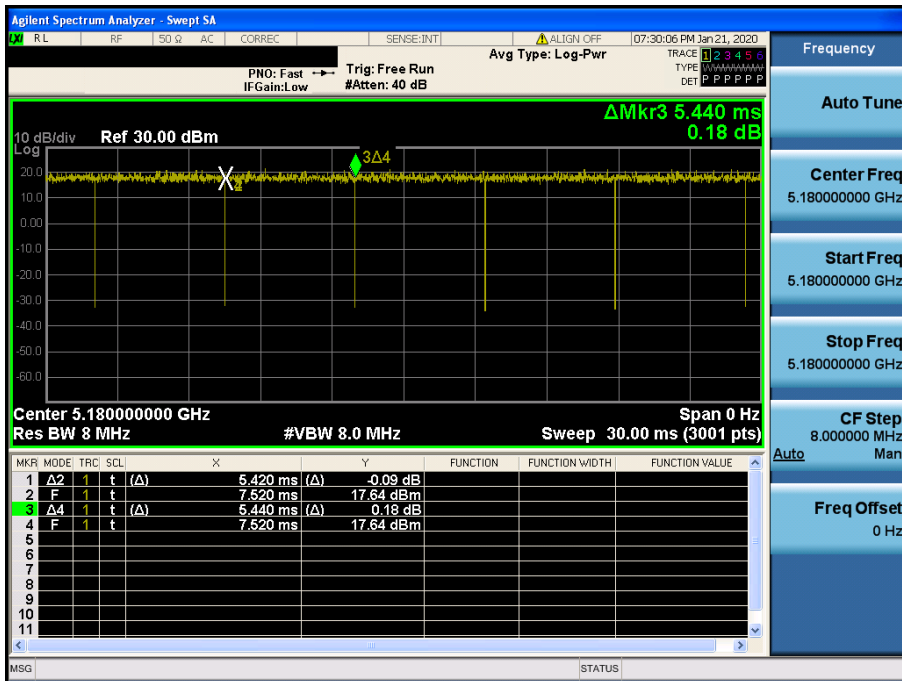


Duty Cycle

Test Mode: 802.11n HT40 & Ch.38

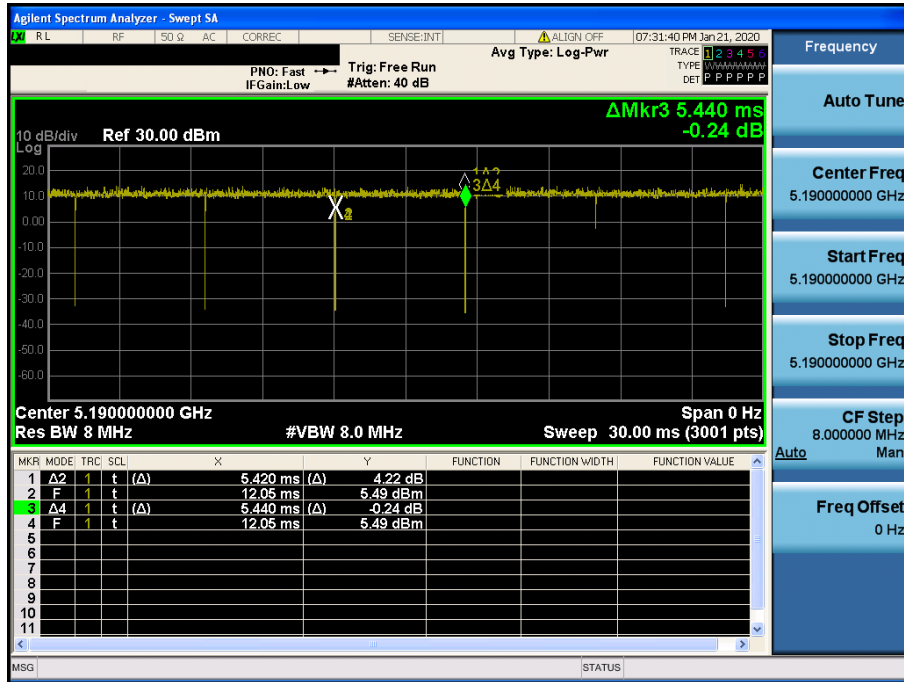

Duty Cycle


Test Mode: 802.11ac VHT80 & Ch.42

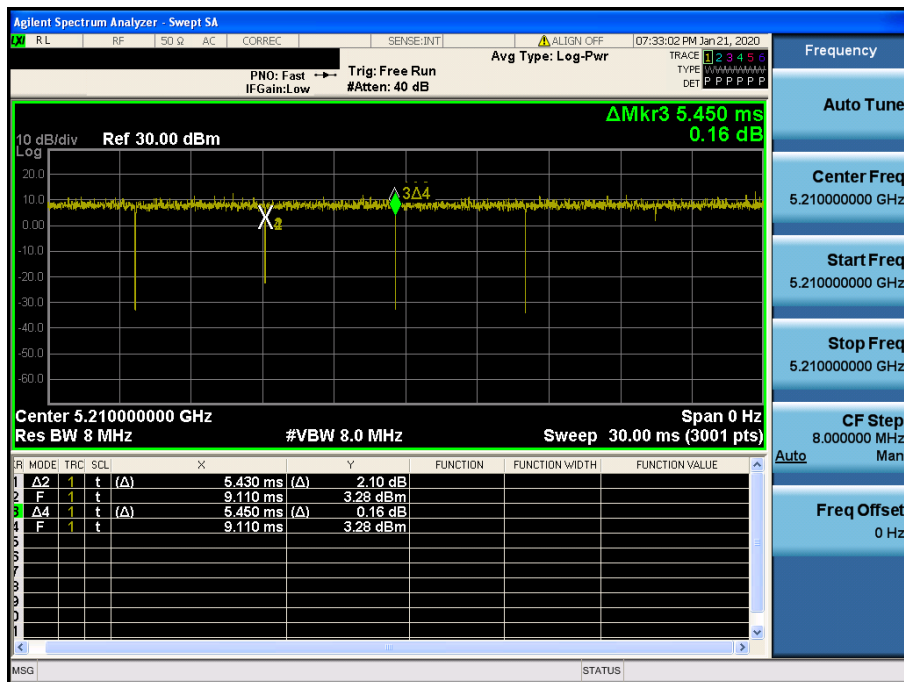

Multiple Transmit _ SDM


Duty Cycle

Test Mode: 802.11n HT20 & Ch.36

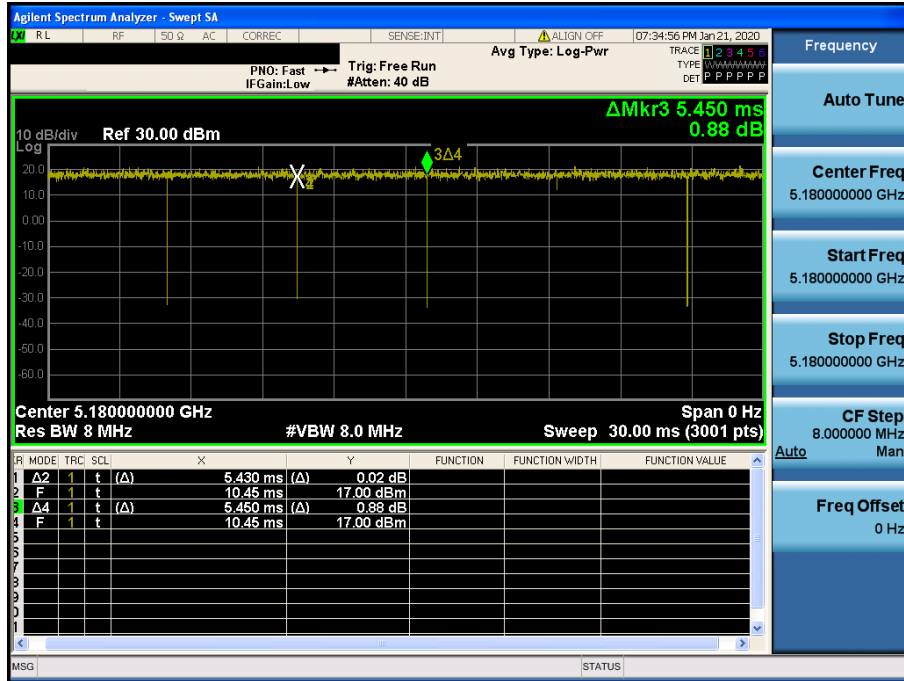


Duty Cycle

Test Mode: 802.11n HT40 & Ch.38

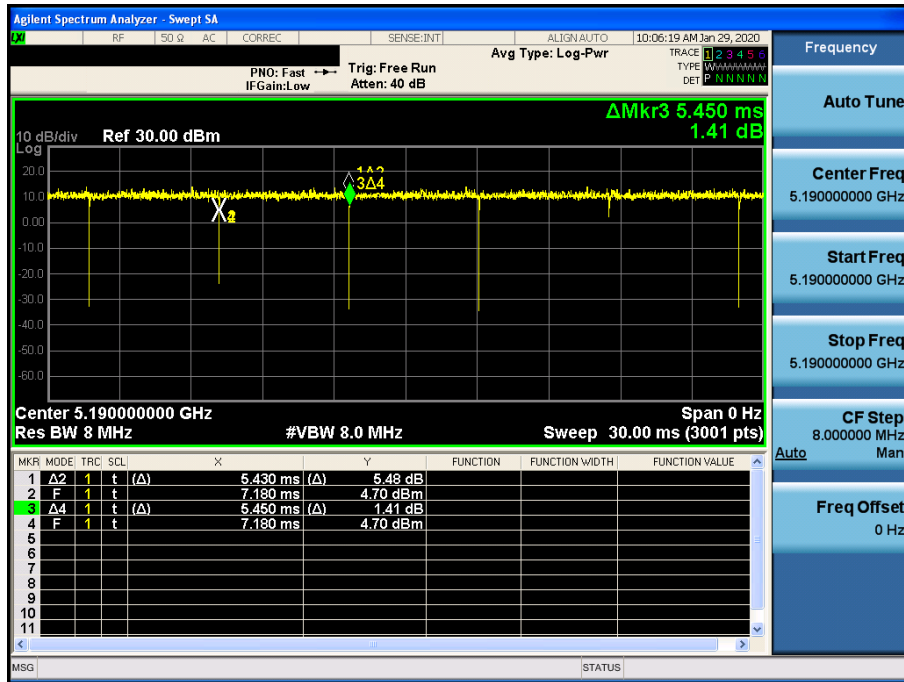

Duty Cycle


Test Mode: 802.11ac VHT80 & Ch.42

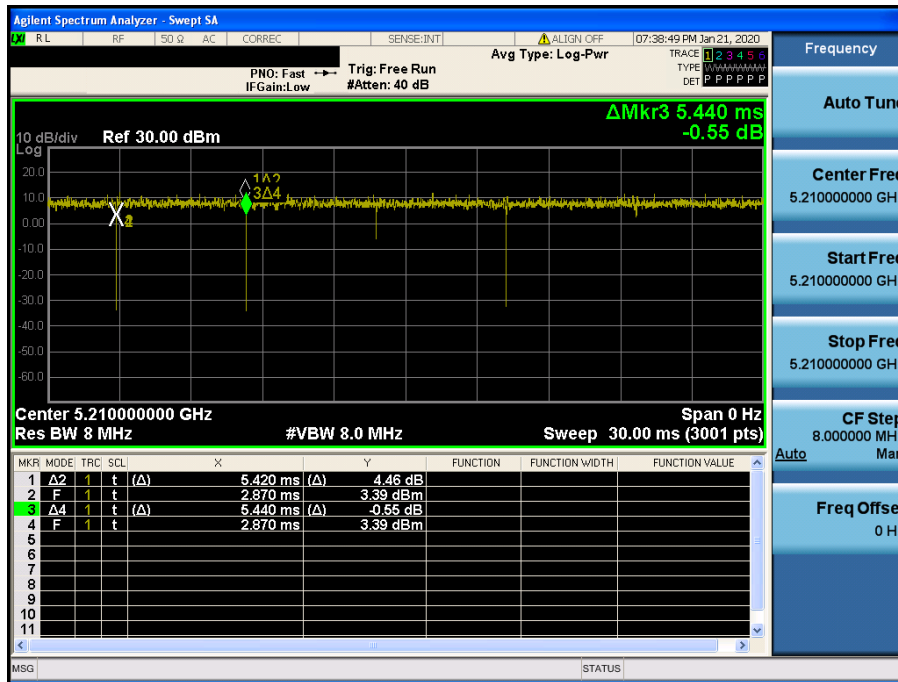

Multiple Transmit _ DBS

Duty Cycle

Test Mode: 802.11a & DBS & Ch.100

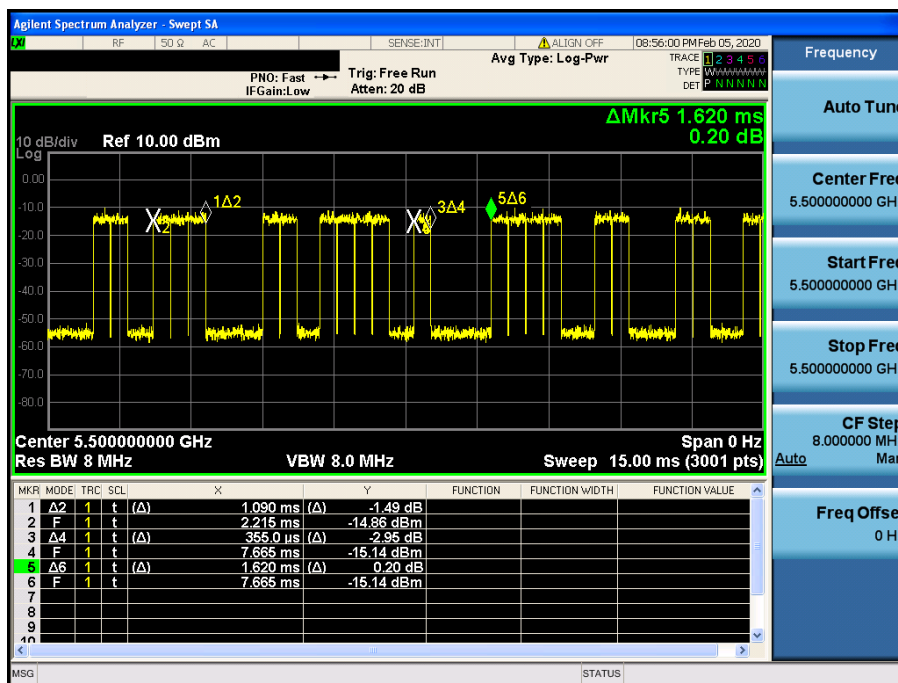


APPENDIX III

Unwanted Emissions (Radiated) Test Plot: MIMO(CDD)

802.11a & U-NII 1 & Ch.36 & Z axis & Hor

Detector Mode : PK

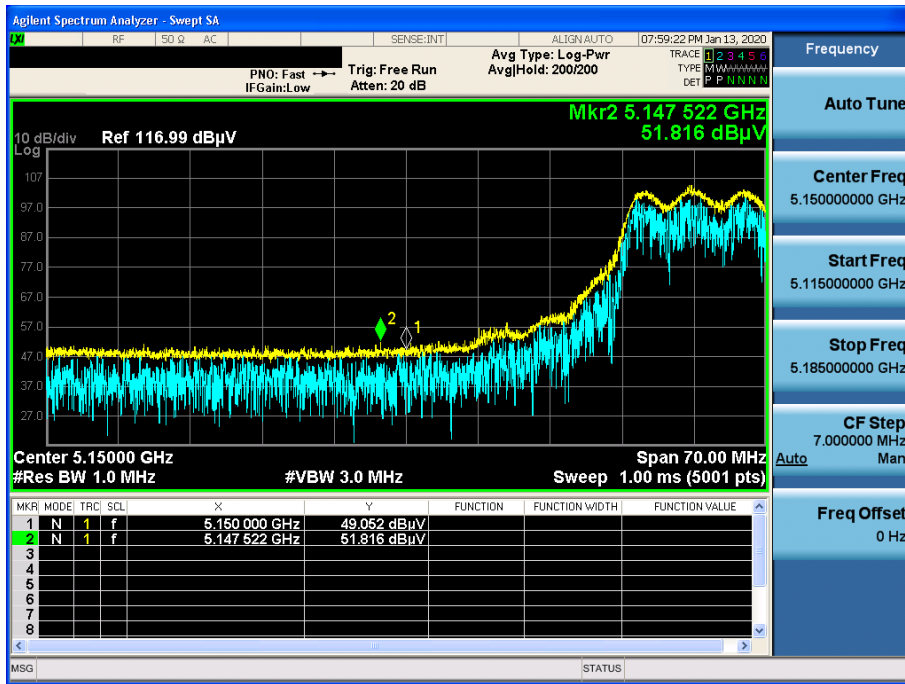


802.11a & U-NII 1 & Ch.36 & Z axis & Hor

Detector Mode : AV




802.11a & U-NII 1 & Ch.36 & X axis & Ver

Detector Mode : PK

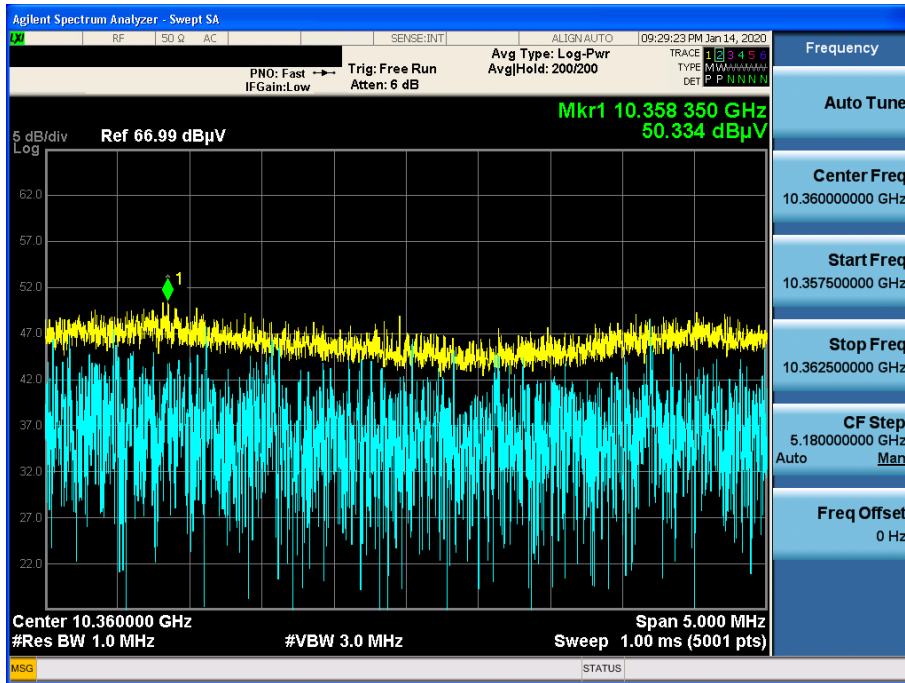

802.11a & U-NII 2A & Ch.64 & Z axis & Hor

Detector Mode : PK

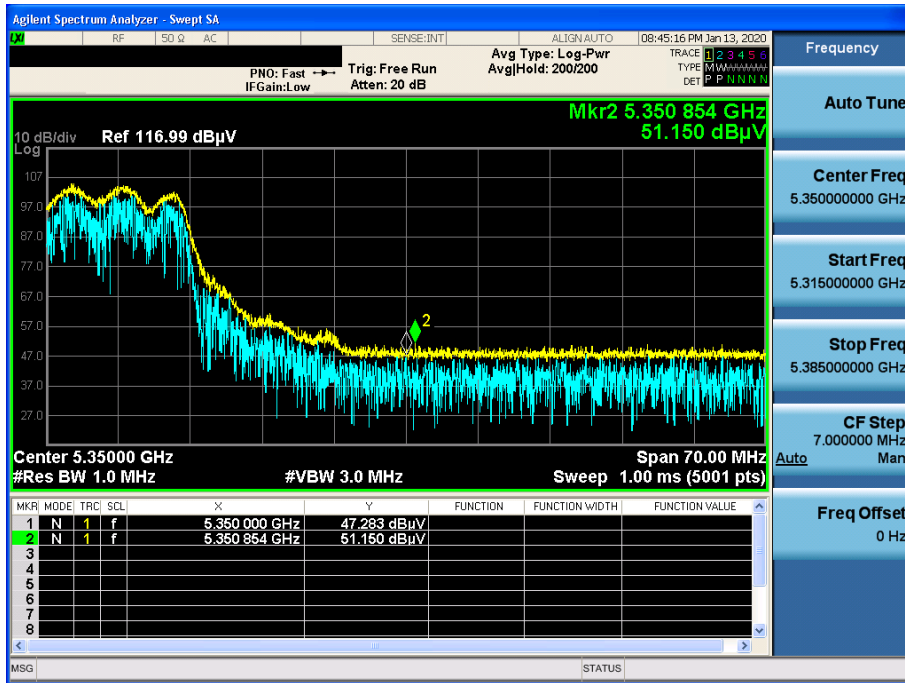


802.11a & U-NII 2A & Ch.64 & Z axis & Hor

Detector Mode : AV




802.11a & U-NII 2A & Ch.60 & X axis & Ver

Detector Mode : AV

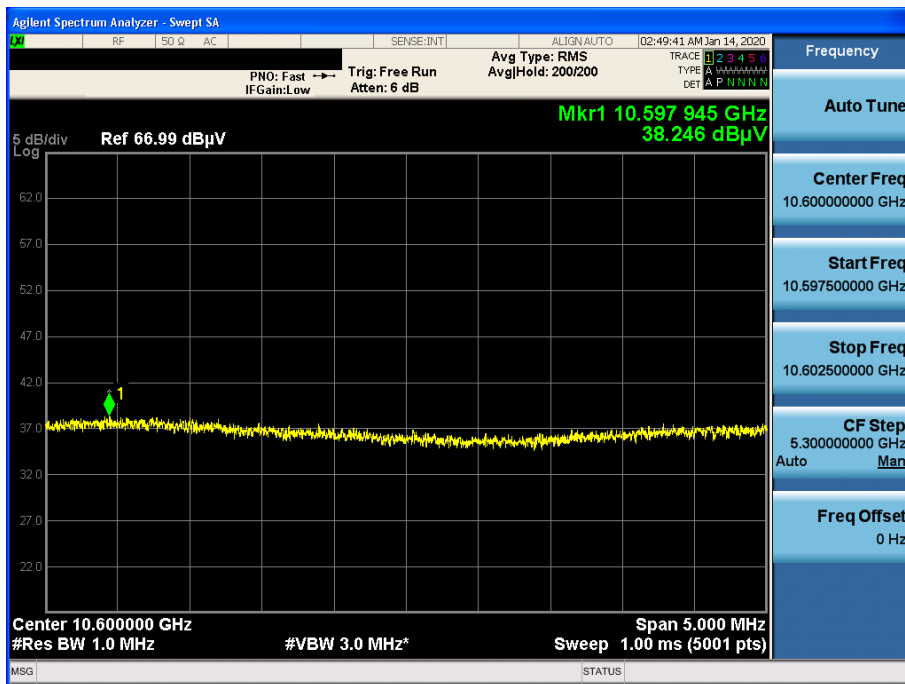


802.11a & U-NII 2C & Ch.100 & Z axis & Hor

Detector Mode : PK

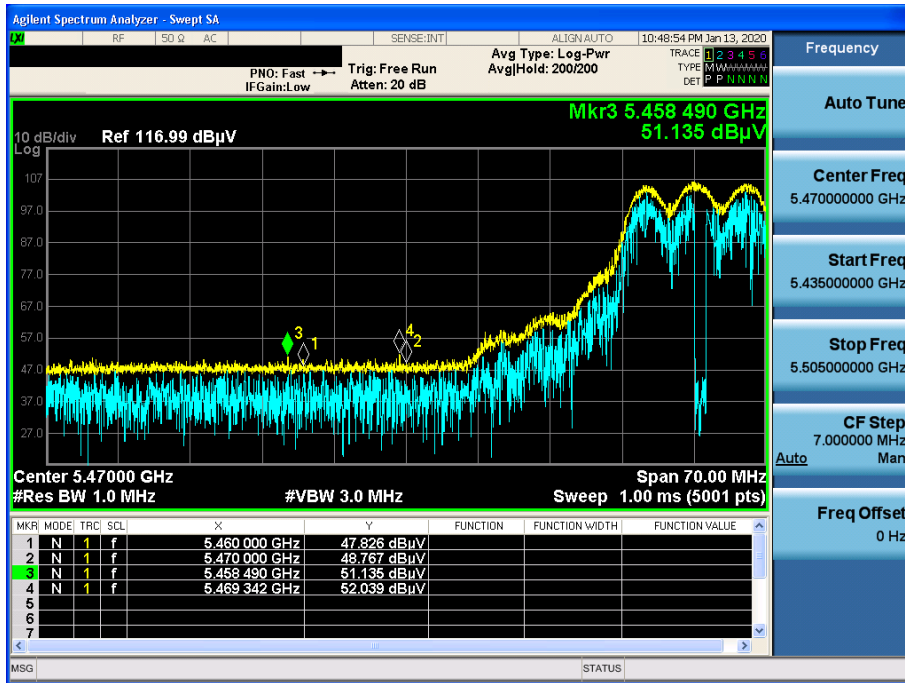


802.11a & U-NII 2C & Ch.100 & Z axis & Hor

Detector Mode : AV

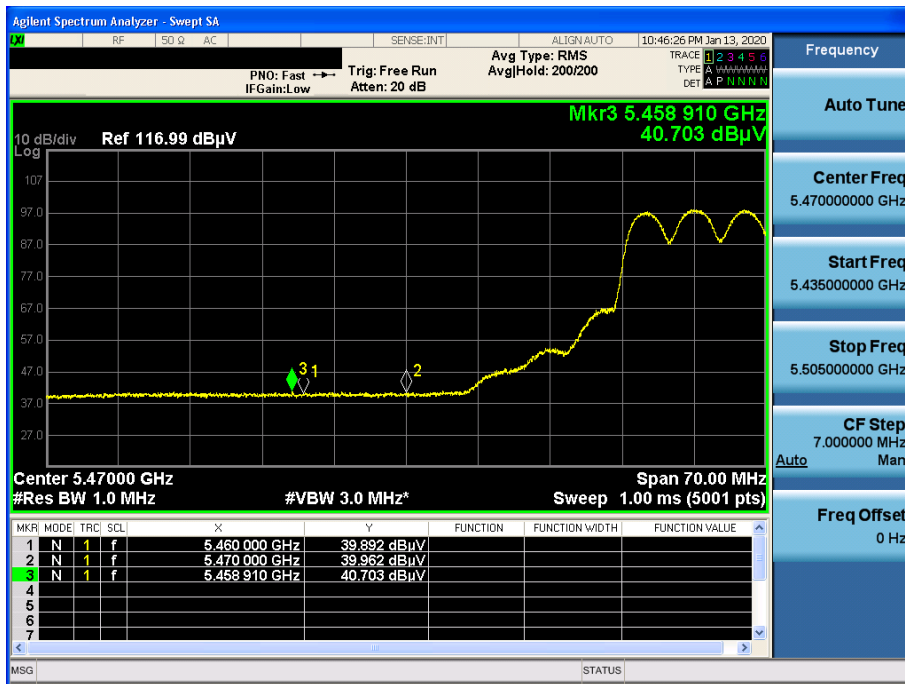


802.11a & U-NII 2C & Ch.100 & X axis & Ver

Detector Mode : AV

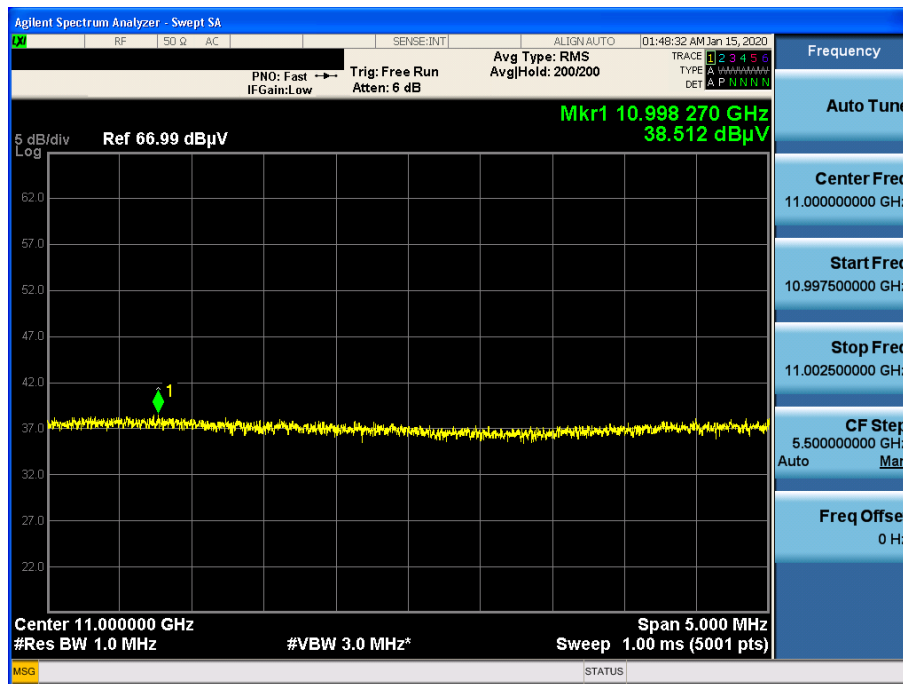


802.11a & U-NII 3 & Ch.149 & Z axis & Hor

Detector Mode : PK

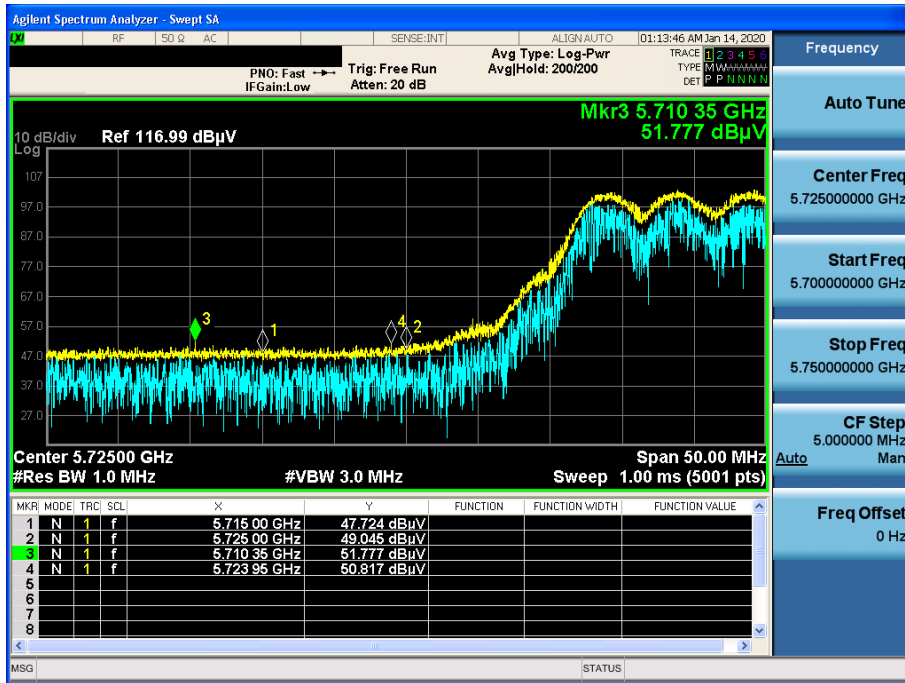


802.11a & U-NII 3 & Ch.165 & Z axis & Hor

Detector Mode : PK

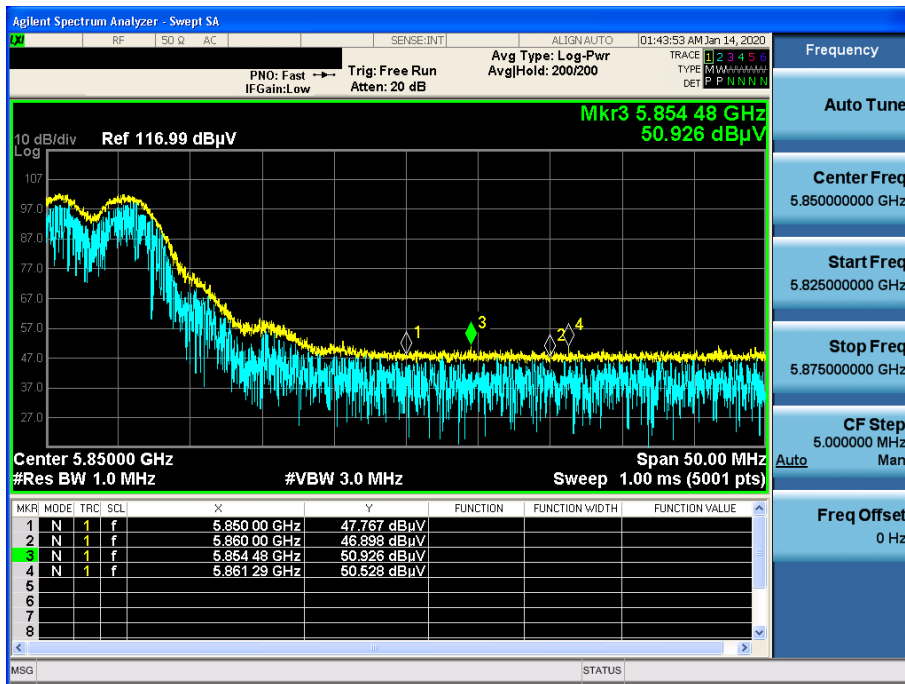


802.11a & U-NII 3 & Ch.165 & X axis & Ver

Detector Mode : AV

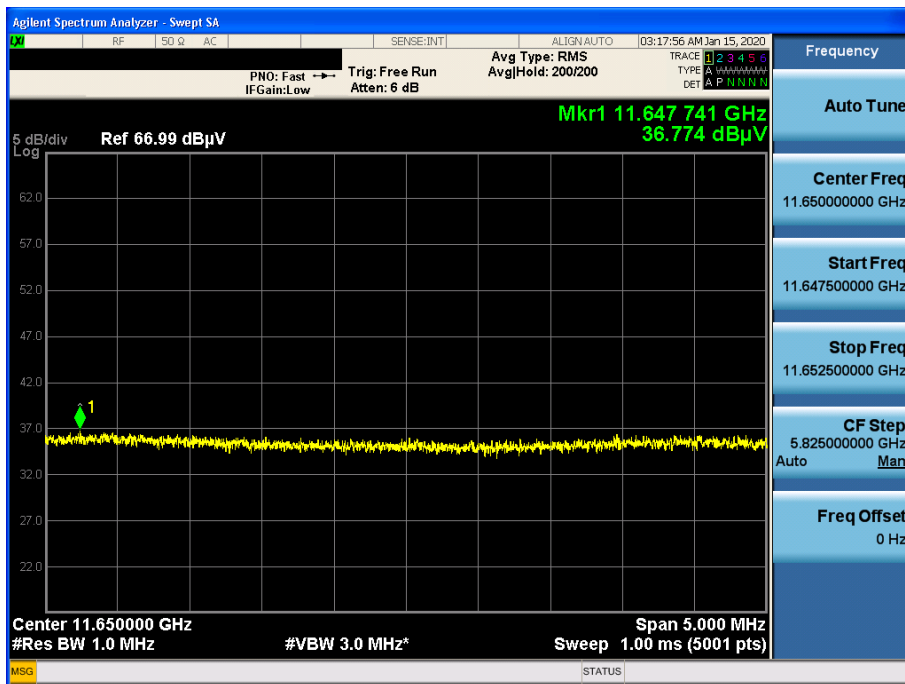


802.11n(HT20) & U-NII 1 & Ch.36 & Z axis & Hor

Detector Mode : PK

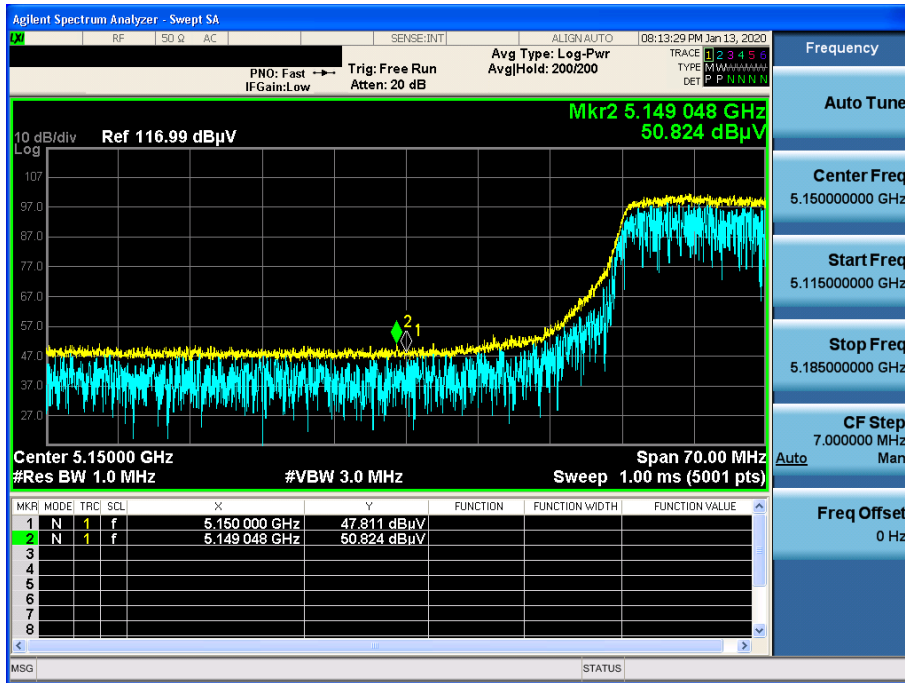


802.11n(HT20) & U-NII 1 & Ch.36 & Z axis & Hor

Detector Mode : AV

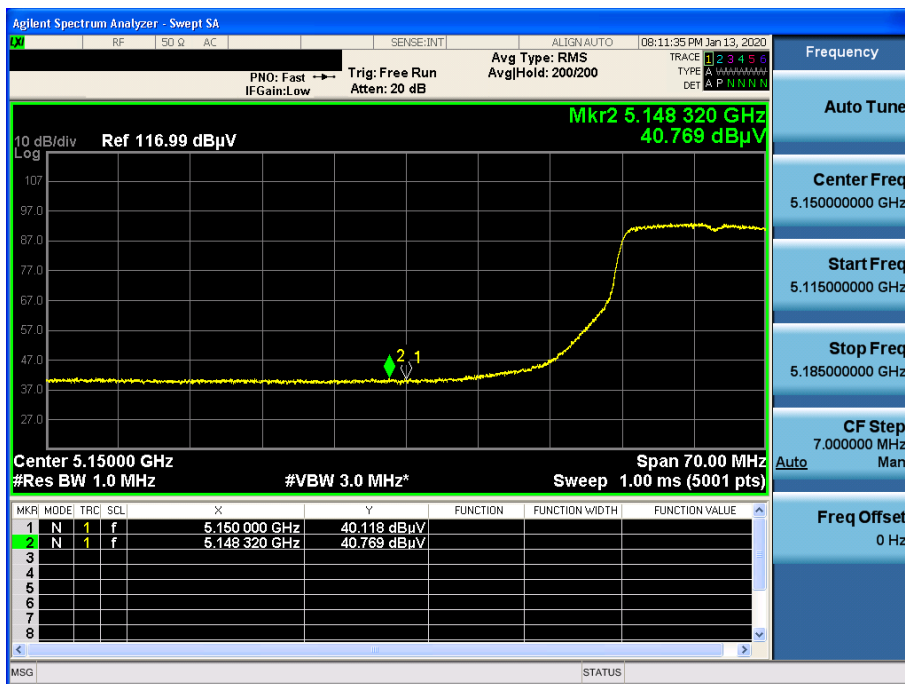


802.11n(HT20) & U-NII 1 & Ch.36 & X axis & Ver

Detector Mode : PK

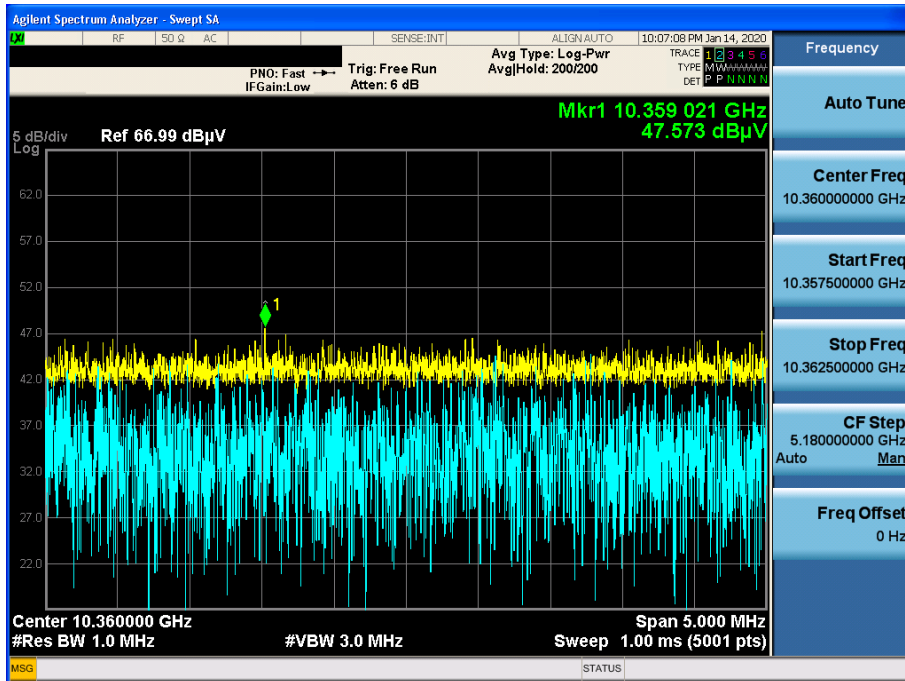

802.11n(HT20) & U-NII 2A & Ch.64 & Z axis & Hor

Detector Mode : PK

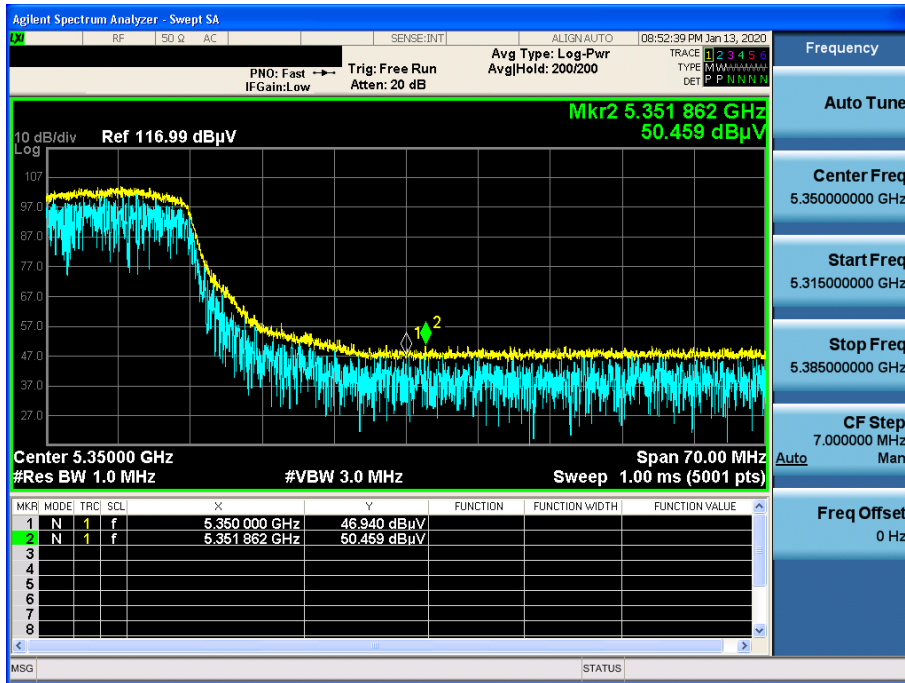


802.11n(HT20) & U-NII 2A & Ch.64 & Z axis & Hor

Detector Mode : AV




802.11n(HT20) & U-NII 2A & Ch.60 & X axis & Ver

Detector Mode : AV

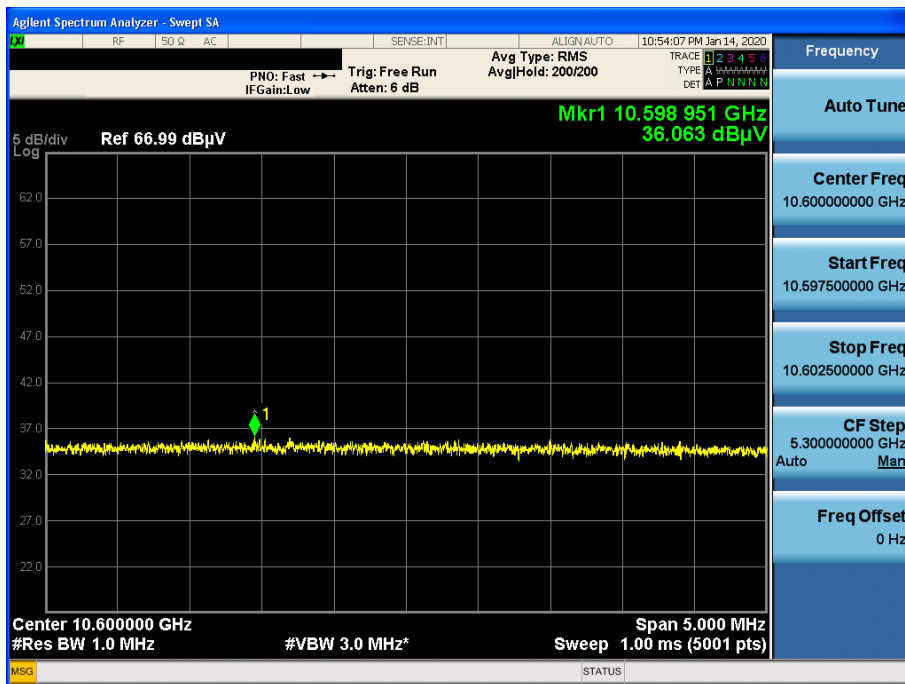


802.11n(HT20) & U-NII 2C & Ch.100 & Z axis & Hor

Detector Mode : PK

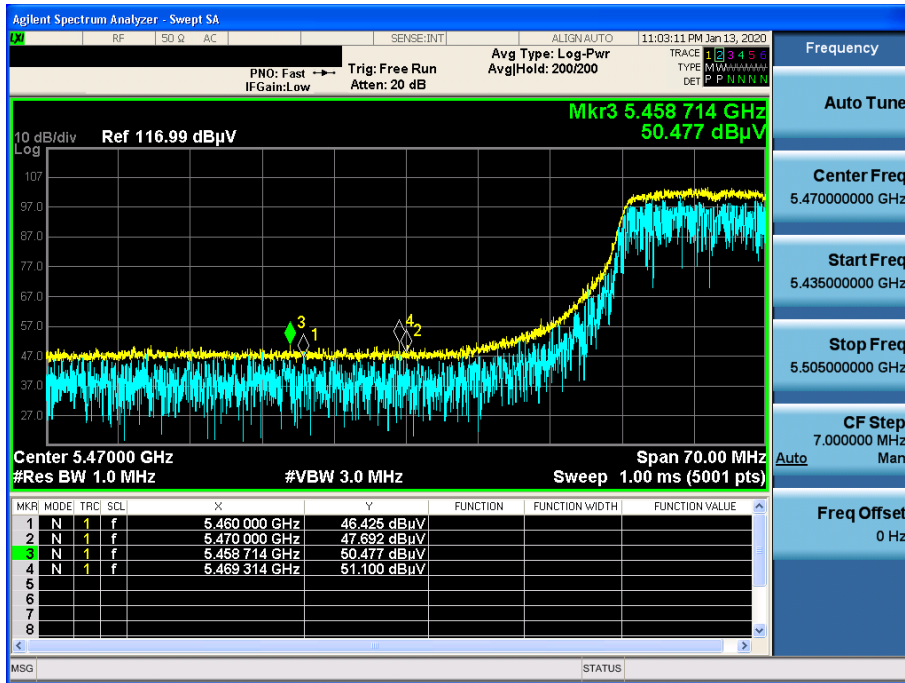


802.11n(HT20) & U-NII 2C & Ch.100 & Z axis & Hor

Detector Mode : AV

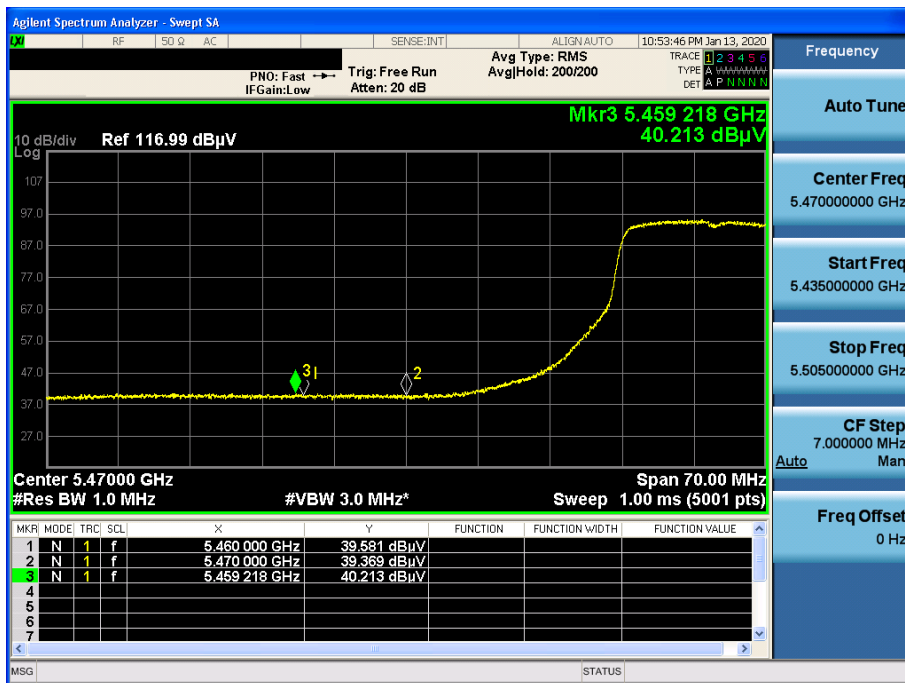


802.11n(HT20) & U-NII 2C & Ch.120 & X axis & Ver

Detector Mode : AV

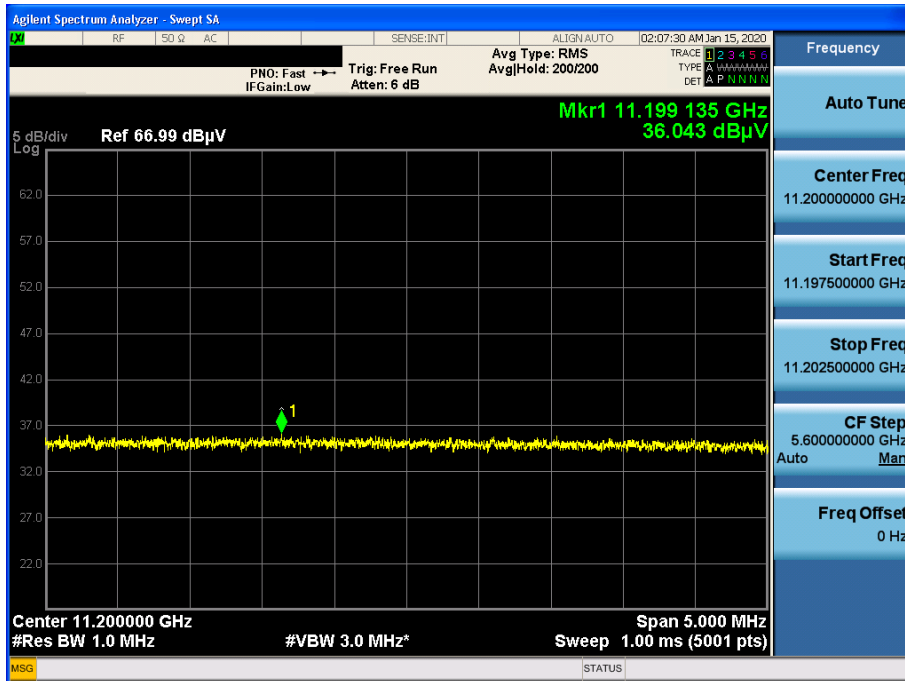


802.11n(HT20) & U-NII 3 & Ch.149 & Z axis & Hor

Detector Mode : PK

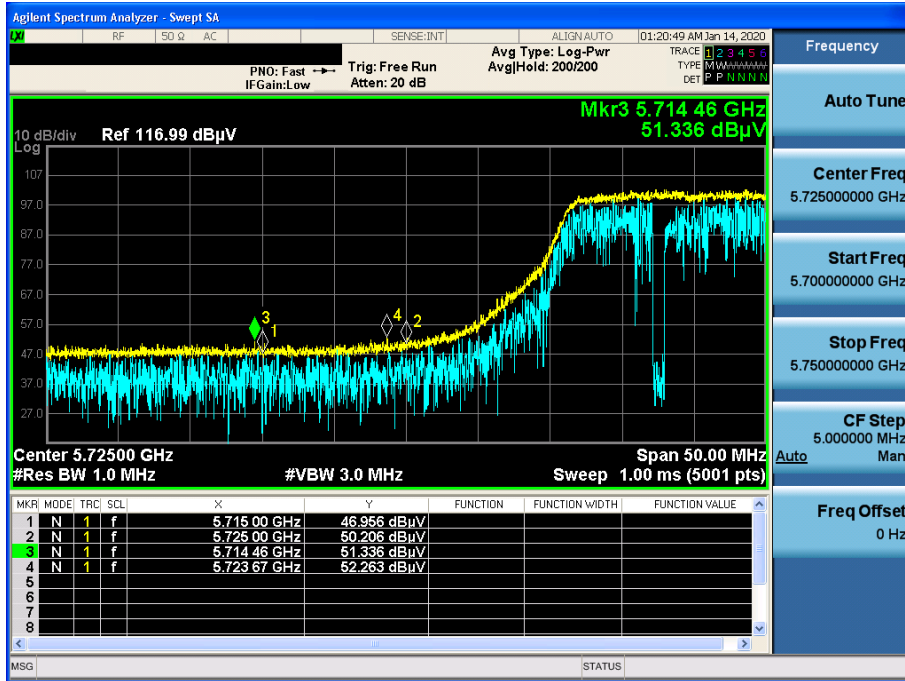

802.11n(HT20) & U-NII 3 & Ch.165 & Z axis & Hor

Detector Mode : PK

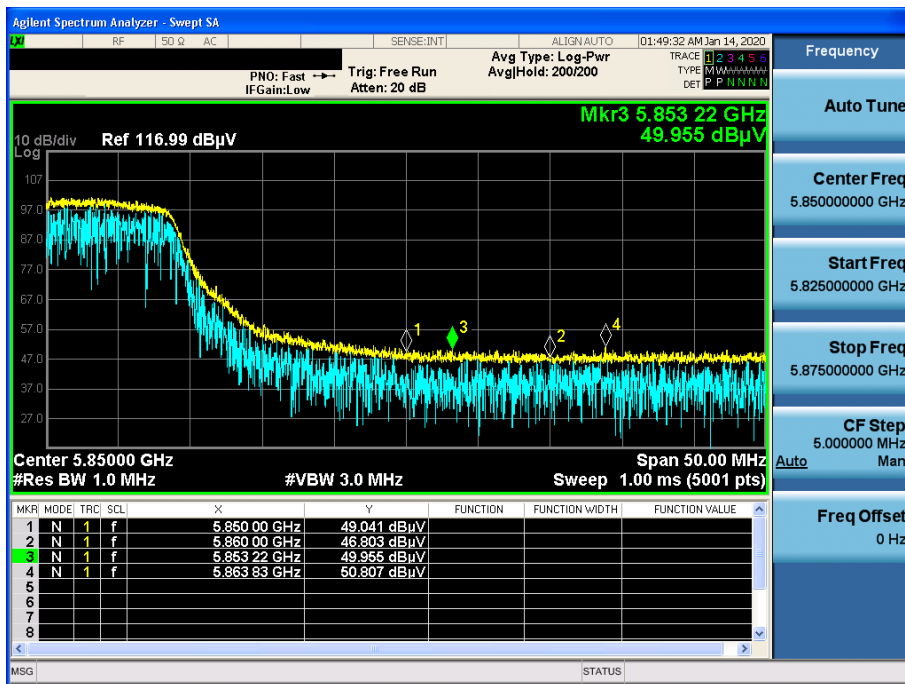

802.11n(HT20) & U-NII 3 & Ch.165 & X axis & Ver

Detector Mode : AV

