



Plot 7-755. PAR Plot (Band n66 - 5.0MHz 64-QAM - Full RB Configuration)

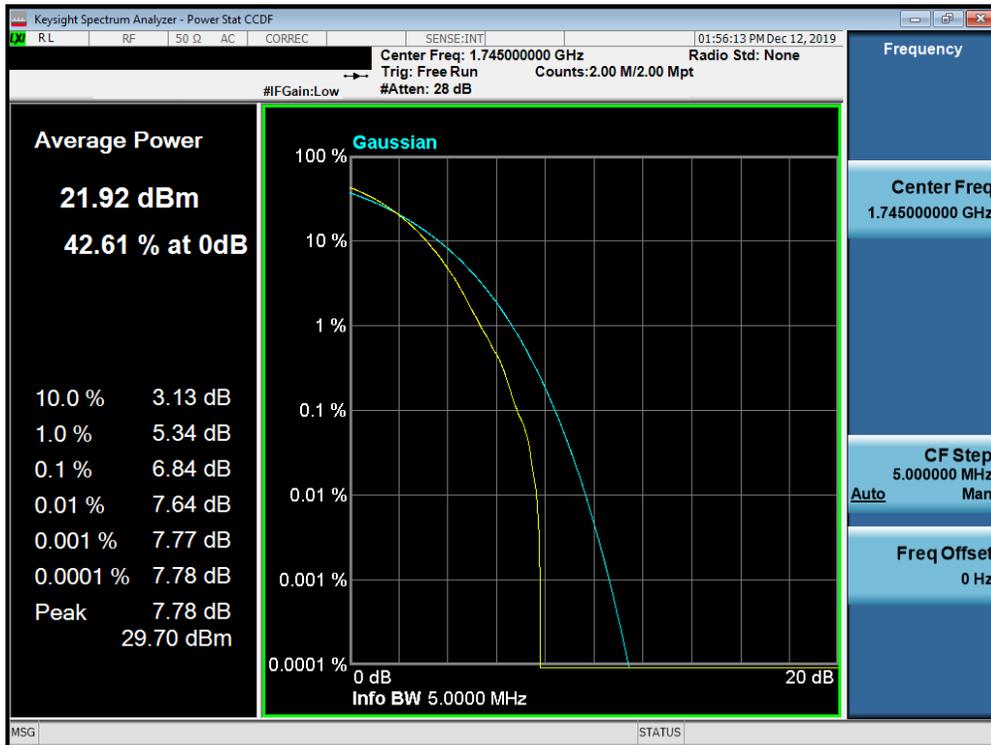


Plot 7-756. PAR Plot (Band n66 - 5.0MHz 256-QAM - Full RB Configuration)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 464 of 488

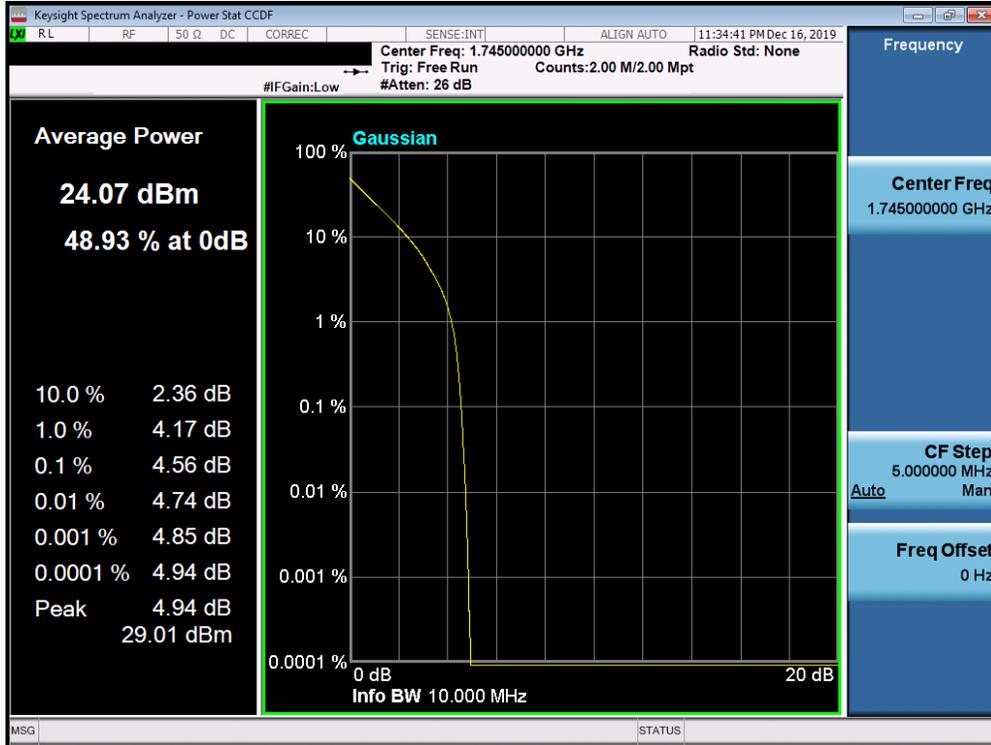


Plot 7-757. PAR Plot (Band n66 - 10.0MHz QPSK - Full RB Configuration)

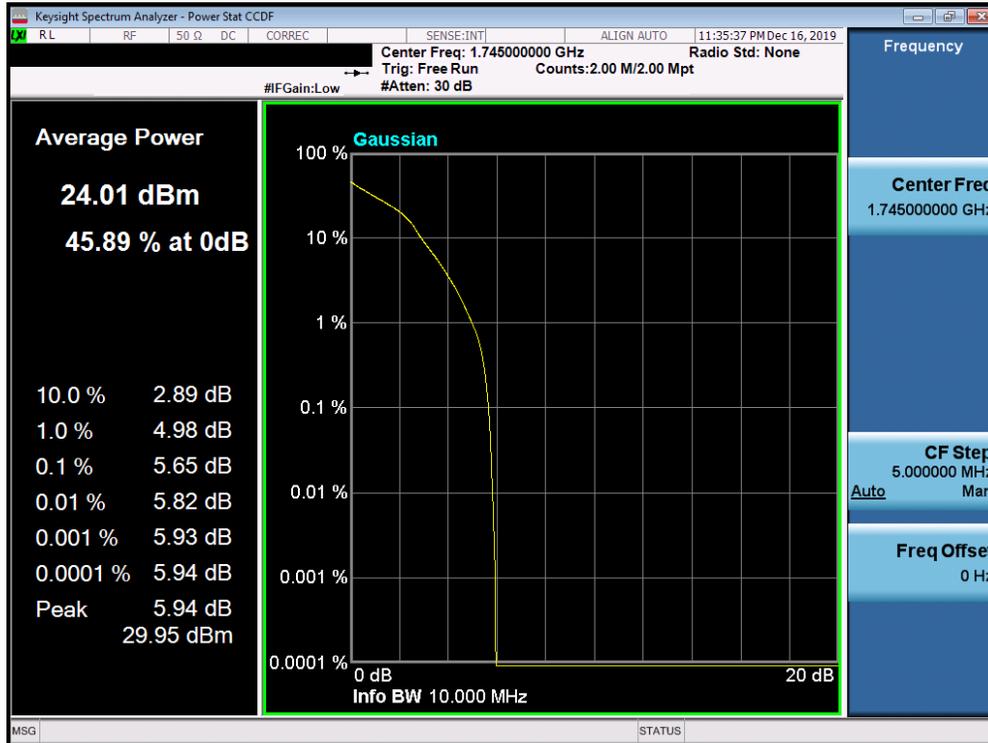


Plot 7-758. PAR Plot (Band n66 - 10.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 465 of 488

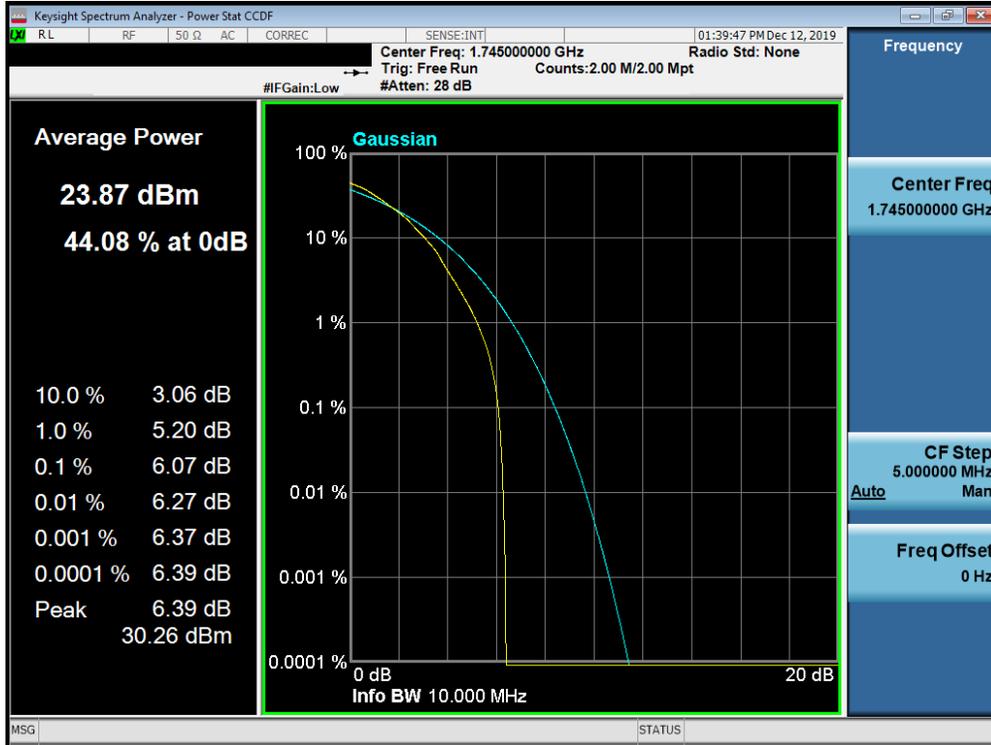


Plot 7-759. PAR Plot (Band n66 - 10.0MHz 64-QAM - Full RB Configuration)

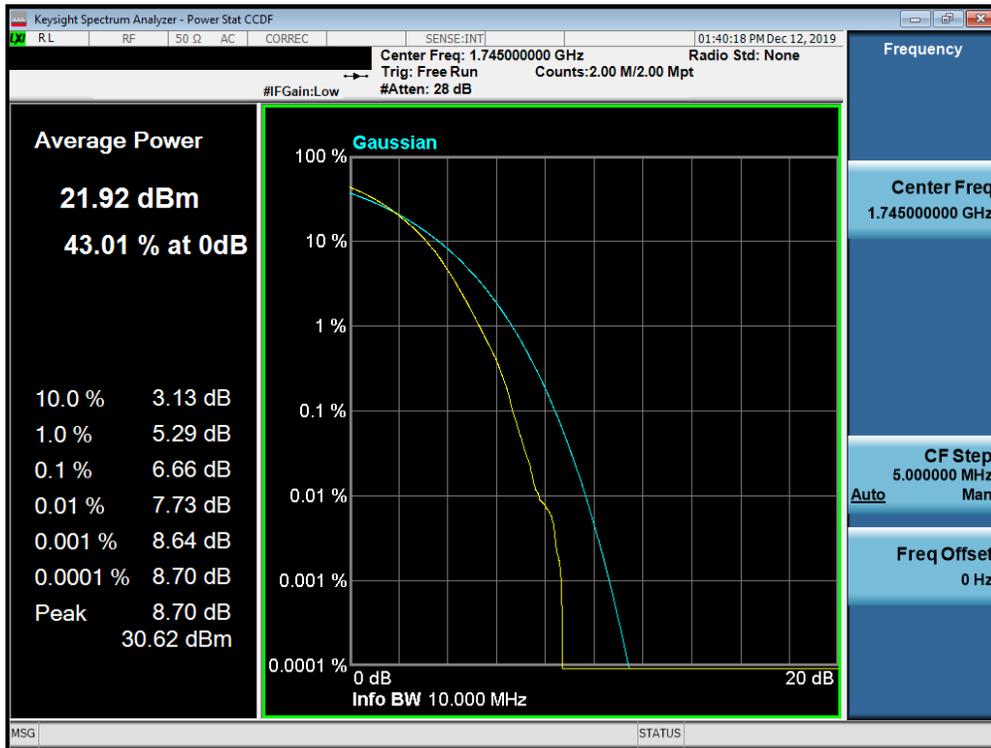


Plot 7-760. PAR Plot (Band n66 - 10.0MHz 256-QAM - Full RB Configuration)

FCC ID: ZNFV600TM			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset			Page 466 of 488

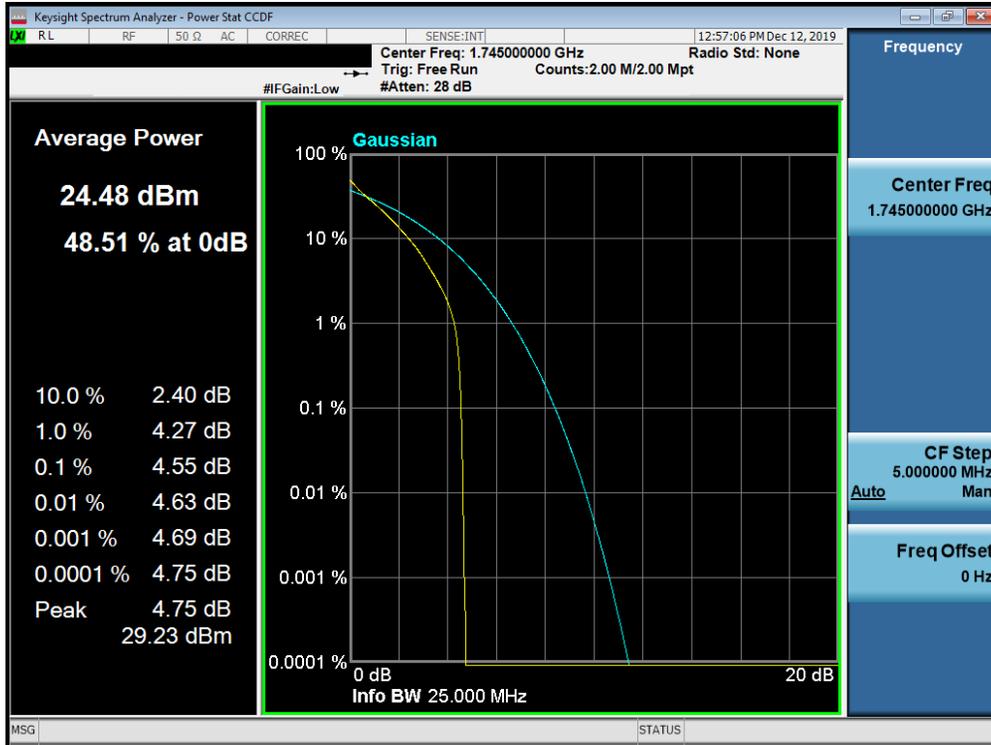


Plot 7-761. PAR Plot (Band n66 - 15.0MHz QPSK - Full RB Configuration)

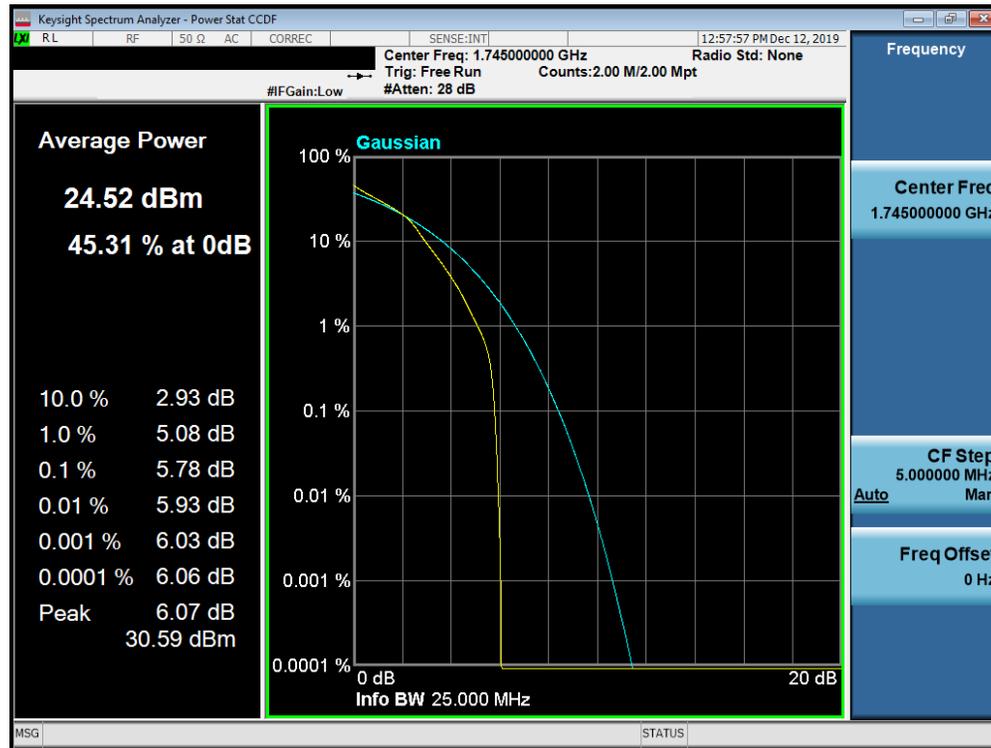


Plot 7-762. PAR Plot (Band n66 - 15.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 467 of 488

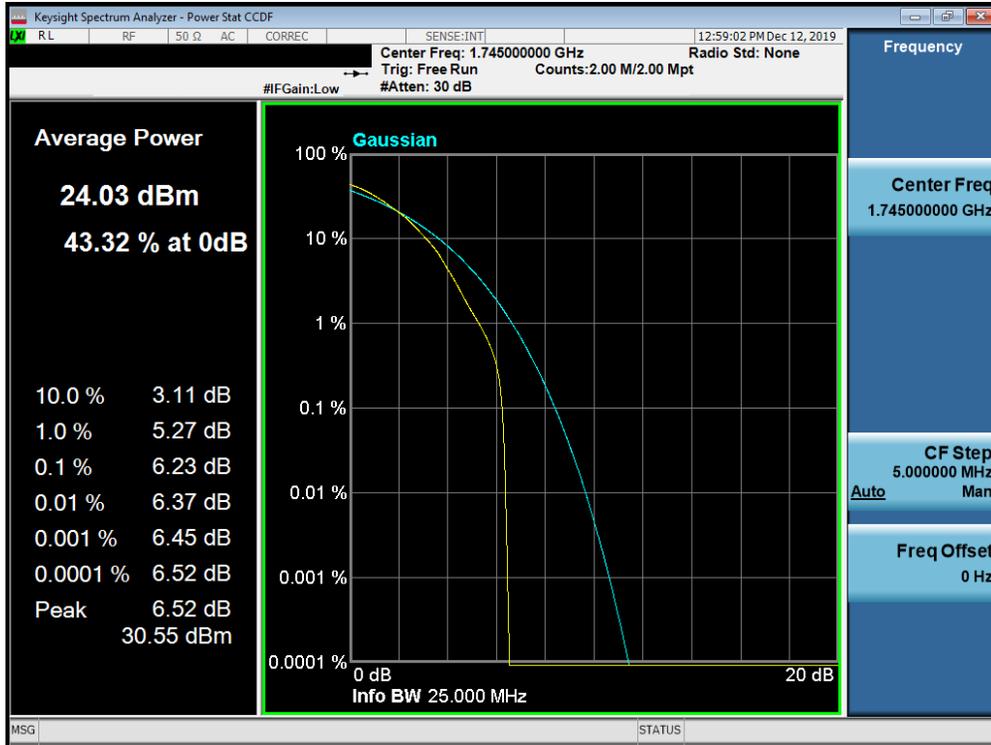


Plot 7-763. PAR Plot (Band n66 - 15.0MHz 64-QAM - Full RB Configuration)

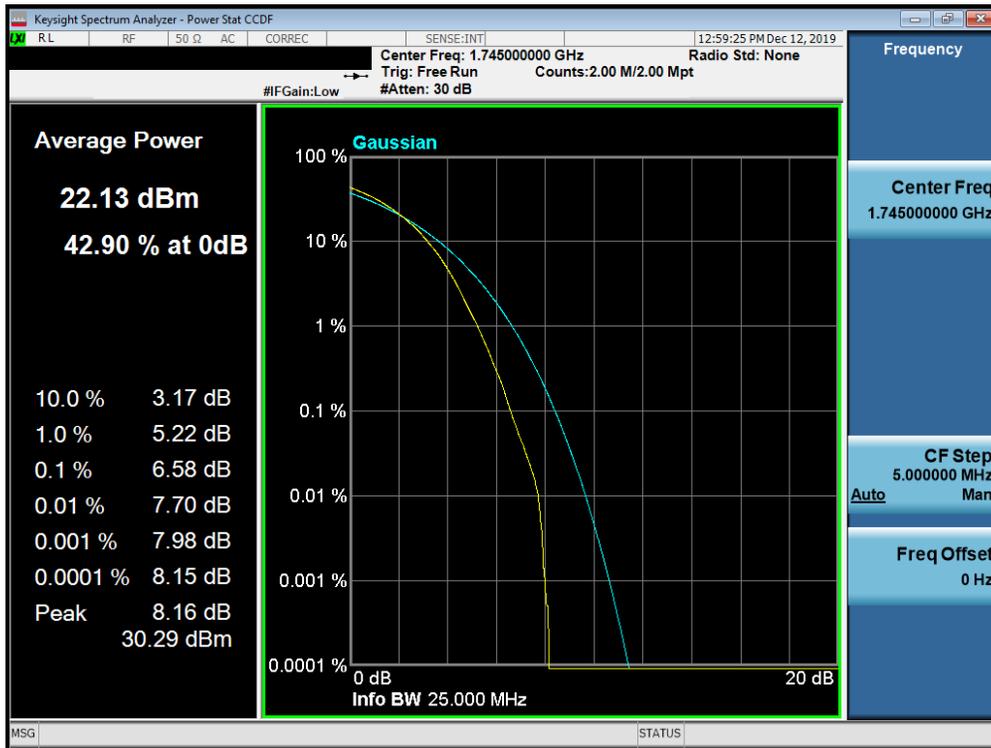


Plot 7-764. PAR Plot (Band n66 - 15.0MHz 56-QAM - Full RB Configuration)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 468 of 488

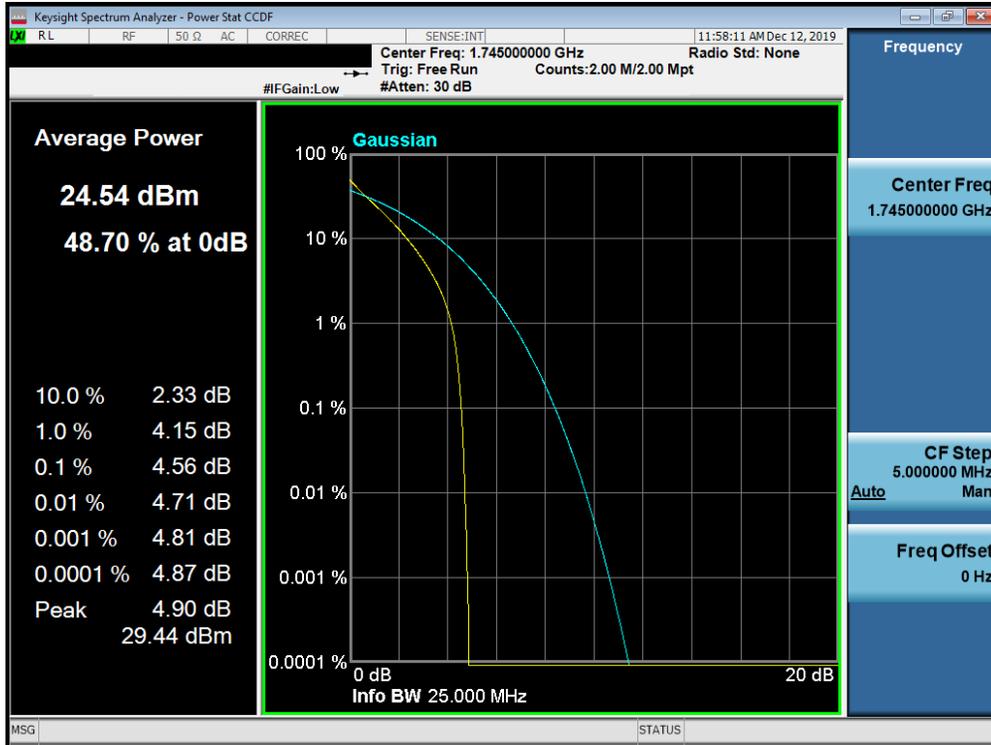


Plot 7-765. PAR Plot (Band n66 - 20.0MHz QPSK - Full RB Configuration)

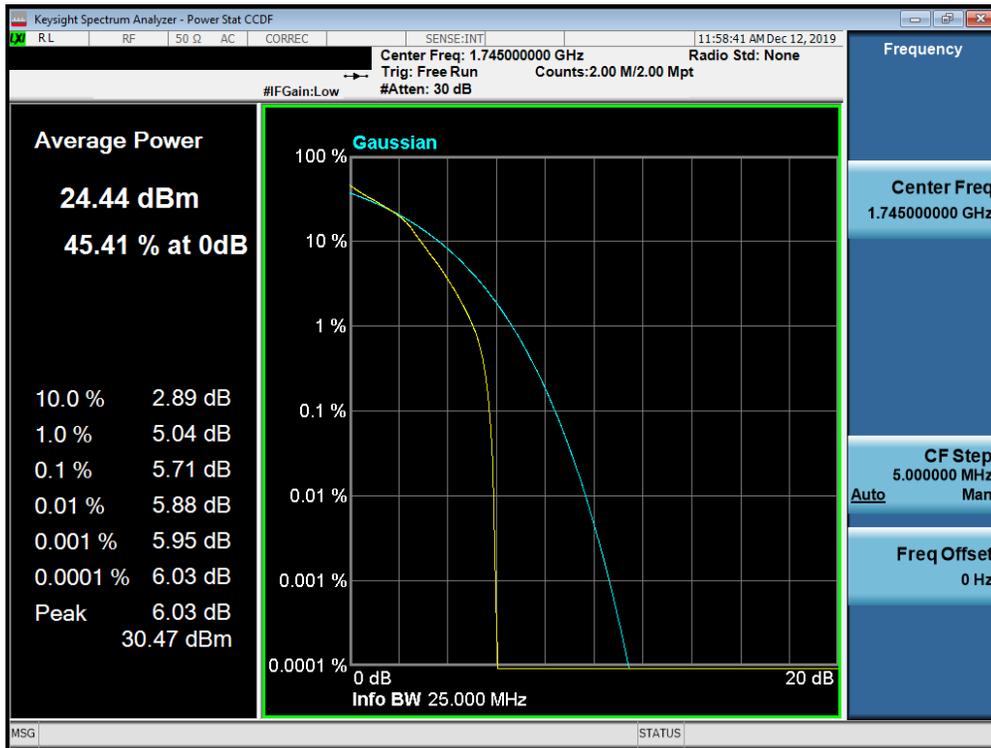


Plot 7-766. PAR Plot (Band n66 - 20.0MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 469 of 488

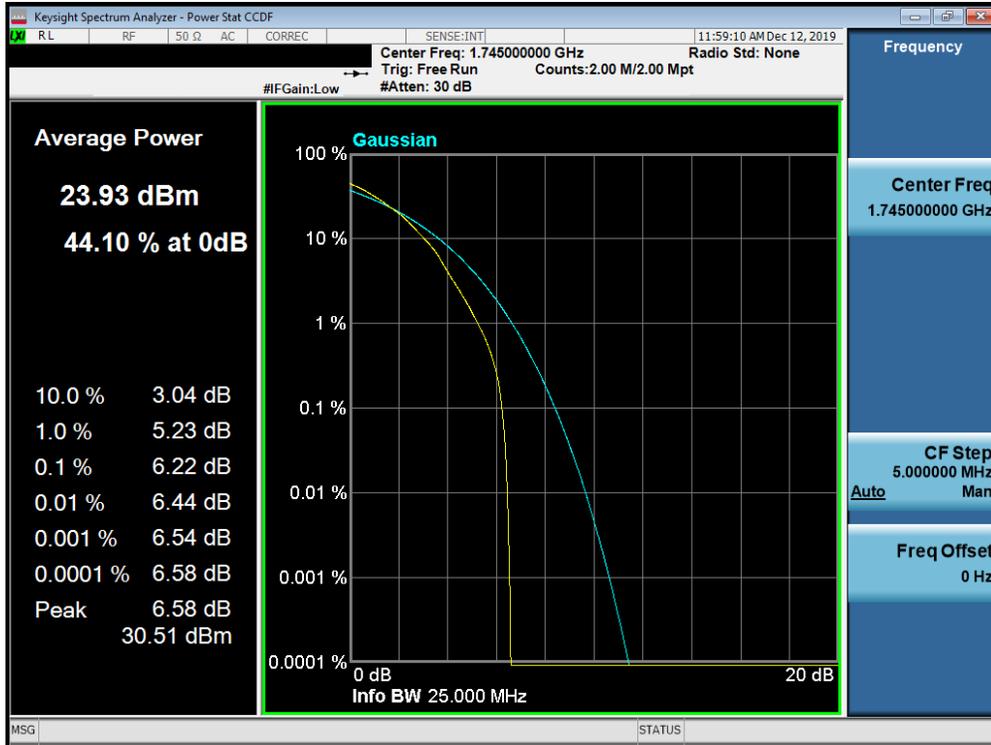

Plot 7-767. PAR Plot (Band n66 - 20.0MHz 64-QAM - Full RB Configuration)

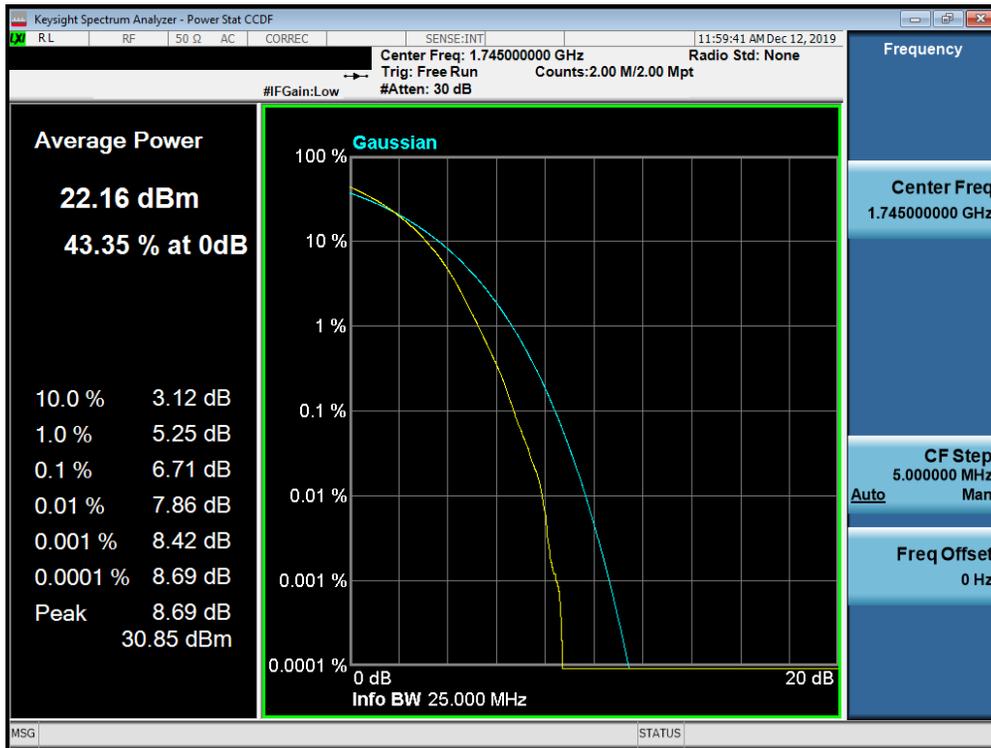

Plot 7-768. PAR Plot (Band n66 - 20.0MHz 256-QAM - Full RB Configuration)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 470 of 488

Radiated Powers (ERP/EIRP)

All SCS's and Waveforms (CP-OFDM vs DFT-s OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section. Additional Data added representing other configurations (eg. CP-OFDM).

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
665.50	5	QPSK	V	189	89	1 / 13	3.75	16.58	0.045	34.77	-18.19
680.50	5	QPSK	V	186	208	1 / 13	4.20	16.85	0.048	34.77	-17.92
695.50	5	QPSK	V	187	204	1 / 13	4.50	16.85	0.048	34.77	-17.92
695.50	5	16-QAM	V	187	204	1 / 13	4.50	16.14	0.041	34.77	-18.63
695.50	5	64-QAM	V	187	204	1 / 13	4.50	15.18	0.033	34.77	-19.59
695.50	5	256-QAM	V	187	204	1 / 13	4.50	14.32	0.027	34.77	-20.45
668.00	10	QPSK	V	191	57	1 / 26	3.80	16.76	0.047	34.77	-18.01
680.50	10	QPSK	V	187	201	1 / 26	4.20	16.97	0.050	34.77	-17.80
693.00	10	QPSK	V	184	207	1 / 26	4.40	16.91	0.049	34.77	-17.86
680.50	10	16-QAM	V	187	201	1 / 26	4.20	16.09	0.041	34.77	-18.68
680.50	10	64-QAM	V	187	201	1 / 26	4.20	15.05	0.032	34.77	-19.72
680.50	10	256-QAM	V	187	201	1 / 26	4.20	14.05	0.025	34.77	-20.72
670.50	15	QPSK	V	192	62	1 / 40	3.90	16.96	0.050	34.77	-17.81
680.50	15	QPSK	V	186	204	1 / 40	4.20	17.04	0.051	34.77	-17.73
690.50	15	QPSK	V	187	210	1 / 40	4.40	16.98	0.050	34.77	-17.79
680.50	15	16-QAM	V	186	204	1 / 40	4.20	16.10	0.041	34.77	-18.67
680.50	15	64-QAM	V	186	204	1 / 40	4.20	15.06	0.032	34.77	-19.71
680.50	15	256-QAM	V	186	204	1 / 40	4.20	14.06	0.025	34.77	-20.71
673.00	20	QPSK	V	190	56	1 / 53	4.00	17.54	0.057	34.77	-17.23
680.50	20	QPSK	V	188	208	1 / 53	4.20	17.07	0.051	34.77	-17.70
688.00	20	QPSK	V	188	207	1 / 53	4.40	16.85	0.048	34.77	-17.92
673.00	20	16-QAM	V	190	56	1 / 53	4.00	15.83	0.038	34.77	-18.94
673.00	20	64-QAM	V	190	56	1 / 53	4.00	14.92	0.031	34.77	-19.85
673.00	20	256-QAM	V	190	56	1 / 53	4.00	13.80	0.024	34.77	-20.97
673.00	20	QPSK	H	321	89	1 / 53	4.00	16.98	0.050	34.77	-17.79
673.00	20 (WCP)	QPSK	H	319	91	1 / 53	4.00	16.41	0.044	34.77	-18.36
673.00	20 (CP-OFDM)	QPSK	V	102	314	1 / 53	4.00	16.65	0.046	33.01	-16.36

Table 7-59. ERP Data (n71)

FCC ID: ZNFV600TM			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 471 of 488		

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1712.50	5	QPSK	H	198	331	1 / 24	9.43	16.58	0.046	30.00	-13.42
1745.00	5	QPSK	H	195	332	1 / 24	9.23	18.33	0.068	30.00	-11.67
1777.50	5	QPSK	H	133	331	1 / 24	9.26	21.32	0.135	30.00	-8.68
1777.50	5	16-QAM	H	133	331	1 / 24	9.26	20.55	0.113	30.00	-9.45
1777.50	5	64-QAM	H	133	331	1 / 24	9.26	19.48	0.089	30.00	-10.52
1777.50	5	256-QAM	H	133	331	1 / 24	9.26	18.51	0.071	30.00	-11.49
1715.00	10	QPSK	H	146	338	1 / 49	9.42	16.37	0.043	30.00	-13.63
1745.00	10	QPSK	H	138	334	1 / 49	9.23	17.67	0.058	30.00	-12.33
1775.00	10	QPSK	H	180	328	1 / 49	9.25	22.06	0.161	30.00	-7.94
1775.00	10	16-QAM	H	180	328	1 / 49	9.25	21.10	0.129	30.00	-8.90
1775.00	10	64-QAM	H	180	328	1 / 49	9.25	20.25	0.106	30.00	-9.75
1775.00	10	256-QAM	H	180	328	1 / 49	9.25	19.36	0.086	30.00	-10.64
1717.50	15	QPSK	H	109	334	1 / 74	9.40	16.38	0.043	30.00	-13.62
1745.00	15	QPSK	H	102	333	1 / 74	9.23	18.85	0.077	30.00	-11.15
1772.50	15	QPSK	H	123	334	1 / 74	9.25	19.56	0.090	30.00	-10.44
1772.50	15	16-QAM	H	123	334	1 / 74	9.25	18.26	0.067	30.00	-11.74
1772.50	15	64-QAM	H	123	334	1 / 74	9.25	17.95	0.062	30.00	-12.05
1772.50	15	256-QAM	H	123	334	1 / 74	9.25	16.40	0.044	30.00	-13.60
1720.00	20	QPSK	H	153	341	1 / 104	9.38	16.94	0.049	30.00	-13.06
1745.00	20	QPSK	H	136	327	1 / 104	9.23	18.52	0.071	30.00	-11.48
1770.00	20	QPSK	H	183	333	1 / 104	9.24	20.77	0.119	30.00	-9.23
1770.00	20	16-QAM	H	183	333	1 / 104	9.24	20.07	0.102	30.00	-9.93
1770.00	20	64-QAM	H	183	333	1 / 104	9.24	18.99	0.079	30.00	-11.01
1770.00	20	256-QAM	H	183	333	1 / 104	9.24	17.68	0.059	30.00	-12.32
1775.00	10	QPSK	V	160	284	1 / 49	9.14	17.75	0.060	30.00	-12.25
1775.00	10 (WCP)	QPSK	H	167	337	1 / 49	9.24	19.75	0.094	30.00	-10.25
1775.00	10 (CP-OFDM)	QPSK	H	180	331	1 / 49	9.25	19.63	0.092	30.00	-10.37

Table 7-60. EIRP Data (n66)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 472 of 488	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
1852.50	5	QPSK	H	118	336	1 / 1	9.51	22.09	0.162	33.01	-10.92
1882.50	5	QPSK	H	112	349	1 / 1	9.94	22.83	0.192	33.01	-10.19
1912.50	5	QPSK	H	191	346	1 / 1	10.28	21.29	0.135	33.01	-11.72
1882.50	5	16-QAM	H	112	349	1 / 1	9.94	21.79	0.151	33.01	-11.23
1882.50	5	64-QAM	H	112	349	1 / 1	9.94	20.59	0.114	33.01	-12.43
1882.50	5	256-QAM	H	112	349	1 / 1	9.94	19.83	0.096	33.01	-13.19
1855.00	10	QPSK	H	126	331	1 / 1	9.55	23.22	0.210	33.01	-9.79
1882.50	10	QPSK	H	115	349	1 / 1	9.94	22.54	0.179	33.01	-10.48
1910.00	10	QPSK	H	191	349	1 / 1	10.26	20.60	0.115	33.01	-12.41
1855.00	10	16-QAM	H	126	331	1 / 1	9.55	22.10	0.162	33.01	-10.91
1855.00	10	64-QAM	H	126	331	1 / 1	9.55	21.12	0.129	33.01	-11.89
1855.00	10	256-QAM	H	126	331	1 / 1	9.55	20.56	0.114	33.01	-12.45
1857.50	15	QPSK	H	126	354	1 / 1	9.58	22.69	0.186	33.01	-10.32
1882.50	15	QPSK	H	112	349	1 / 1	9.94	22.63	0.183	33.01	-10.39
1907.50	15	QPSK	H	112	345	1 / 1	10.24	23.18	0.208	33.01	-9.83
1857.50	15	16-QAM	H	126	354	1 / 1	9.58	21.77	0.150	33.01	-11.24
1857.50	15	64-QAM	H	126	354	1 / 1	9.58	20.80	0.120	33.01	-12.21
1857.50	15	256-QAM	H	126	354	1 / 1	9.58	20.02	0.100	33.01	-12.99
1860.00	20	QPSK	H	166	336	1 / 1	9.62	22.97	0.198	33.01	-10.04
1882.50	20	QPSK	H	118	349	1 / 1	9.94	22.89	0.194	33.01	-10.13
1905.00	20	QPSK	H	155	349	1 / 1	10.22	21.81	0.152	33.01	-11.20
1860.00	20	16-QAM	H	166	336	1 / 1	9.62	22.31	0.170	33.01	-10.70
1860.00	20	64-QAM	H	166	336	1 / 1	9.62	21.65	0.146	33.01	-11.36
1860.00	20	256-QAM	H	166	336	1 / 1	9.62	21.04	0.127	33.01	-11.97
1855.00	10	QPSK	V	248	157	1 / 1	9.94	21.69	0.147	33.01	-11.33
1855.00	10 (WCP)	QPSK	H	161	344	1 / 1	9.94	23.20	0.209	33.01	-9.82
1855.00	10 (CP-OFDM)	QPSK	H	120	330	1 / 1	9.94	21.88	0.154	33.01	-11.14

Table 7-61. EIRP Data (n25/2)

FCC ID: ZNFV600TM			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 473 of 488		

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2506.02	20	QPSK	H	101	313	1 / 25	12.26	9.42	21.68	0.147	33.01	-11.33
2593.20	20	QPSK	H	109	322	1 / 49	12.49	9.55	22.04	0.160	33.01	-10.97
2679.99	20	QPSK	H	102	315	1 / 25	11.60	9.83	21.43	0.139	33.01	-11.58
2593.20	20	16-QAM	H	109	322	1 / 49	11.29	9.55	20.84	0.121	33.01	-12.17
2593.20	20	64-QAM	H	109	322	1 / 49	10.05	9.55	19.60	0.091	33.01	-13.41
2593.20	20	256-QAM	H	109	322	1 / 49	9.53	9.55	19.08	0.081	33.01	-13.93
2516.01	40	QPSK	H	103	310	1 / 49	11.67	9.41	21.08	0.128	33.01	-11.93
2593.20	40	QPSK	H	107	319	1 / 49	10.43	9.55	19.98	0.100	33.01	-13.03
2670.00	40	QPSK	H	108	317	1 / 49	11.64	9.86	21.50	0.141	33.01	-11.51
2670.00	40	16-QAM	H	108	317	1 / 49	10.44	9.86	20.30	0.107	33.01	-12.71
2670.00	40	64-QAM	H	108	317	1 / 49	9.20	9.86	19.06	0.080	33.01	-13.95
2670.00	40	256-QAM	H	108	317	1 / 49	8.72	9.86	18.58	0.072	33.01	-14.43
2521.02	50	QPSK	H	110	314	1 / 74	11.84	9.41	21.25	0.133	33.01	-11.76
2593.02	50	QPSK	H	104	311	1 / 74	9.72	9.55	19.27	0.085	33.01	-13.74
2664.99	50	QPSK	H	112	322	1 / 74	11.35	9.87	21.22	0.132	33.01	-11.79
2521.02	50	16-QAM	H	110	314	1 / 74	10.84	9.41	20.25	0.106	33.01	-12.76
2521.02	50	64-QAM	H	110	314	1 / 74	9.48	9.41	18.89	0.077	33.01	-14.12
2521.02	50	256-QAM	H	110	314	1 / 74	9.15	9.41	18.56	0.072	33.01	-14.45

Table 7-62. EIRP (n41 (PC2))

FCC ID: ZNFV600TM			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 474 of 488	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	EIRP [dBm]	EIRP [Watts]	EIRP Limit [dBm]	Margin [dB]
2526.00	60	QPSK	H	137	314	1 / 99	11.09	9.40	20.49	0.112	33.01	-12.52
2593.02	60	QPSK	H	141	301	1 / 99	10.23	9.55	19.78	0.095	33.01	-13.23
2659.98	60	QPSK	H	107	311	1 / 99	11.29	9.88	21.17	0.131	33.01	-11.84
2659.98	60	16-QAM	H	107	311	1 / 99	9.86	9.88	19.74	0.094	33.01	-13.27
2659.98	60	64-QAM	H	107	311	1 / 99	8.50	9.88	18.38	0.069	33.01	-14.63
2659.98	60	256-QAM	H	107	311	1 / 99	8.17	9.88	18.05	0.064	33.01	-14.96
2536.02	80	QPSK	H	143	307	50 / 25	11.52	9.39	20.91	0.123	33.01	-12.10
2593.02	80	QPSK	H	141	302	50 / 25	10.22	9.55	19.77	0.095	33.01	-13.24
2649.99	80	QPSK	H	102	317	50 / 25	11.67	9.90	21.57	0.144	33.01	-11.44
2649.99	80	16-QAM	H	102	317	50 / 25	10.24	9.90	20.14	0.103	33.01	-12.87
2649.99	80	64-QAM	H	102	317	50 / 25	8.88	9.90	18.78	0.076	33.01	-14.23
2649.99	80	256-QAM	H	102	317	50 / 25	8.55	9.90	18.45	0.070	33.01	-14.56
2541.00	90	QPSK	H	145	304	1 / 123	11.49	9.39	20.88	0.122	33.01	-12.13
2593.02	90	QPSK	H	139	309	1 / 123	11.76	9.55	21.31	0.135	33.01	-11.70
2644.98	90	QPSK	H	100	319	1 / 123	12.65	9.87	22.52	0.179	33.01	-10.49
2644.98	90	16-QAM	H	100	319	1 / 123	11.75	9.87	21.62	0.145	33.01	-11.39
2644.98	90	64-QAM	H	100	319	1 / 123	11.07	9.87	20.94	0.124	33.01	-12.07
2644.98	90	256-QAM	H	100	319	1 / 123	10.67	9.87	20.54	0.113	33.01	-12.47
2546.01	100	QPSK	H	107	304	1 / 135	11.17	9.38	20.55	0.114	33.01	-12.46
2593.02	100	QPSK	H	109	322	1 / 135	12.05	9.55	21.60	0.145	33.01	-11.41
2640.00	100	QPSK	H	117	319	1 / 135	11.54	9.84	21.38	0.137	33.01	-11.63
2593.02	100	16-QAM	H	109	322	1 / 135	10.96	9.55	20.51	0.113	33.01	-12.50
2593.02	100	64-QAM	H	109	322	1 / 135	10.19	9.55	19.74	0.094	33.01	-13.27
2593.02	100	256-QAM	H	109	322	1 / 135	9.71	9.55	19.26	0.084	33.01	-13.75
2644.98	90	QPSK	V	121	59	1 / 123	7.53	9.66	17.19	0.052	33.01	-15.82
2644.98	90 (WCP)	QPSK	H	138	321	1 / 244	6.72	9.87	16.59	0.046	33.01	-16.42
2644.98	90 (CP-OFDM)	QPSK	H	118	320	1 / 244	8.69	9.87	18.56	0.072	33.01	-14.45
2644.98	90 (PC3)	QPSK	H	102	314	1 / 1	10.86	9.87	20.73	0.118	33.01	-12.28

Table 7-63. EIRP (n41 (PC2) – Continued)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 475 of 488	


Radiated Spurious Emissions Measurements

All SCS's and Waveforms (CP-OFDM vs DFT-s OFDM) were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Per FCC Guidance, KDB 328880, Radiated Spurious Measurements were made based of the worst case modulation and RBW configuraton as determined by EIRP measurement, and grouping the available combinations by Low Band, Mid Band, and High Band.

Spurious emissions shown in this section are measured while operating in EN-DC mode with Sub 6GHz NR carrier as well as an LTE carrier (anchor). Per KDB 968740, spurious emissions from the NR carrier device, is subject to the rules under which the NR carrier operates. Spurious emission caused by the LTE carrier must meet the requirements of the rules under which the LTE carrier operates. If the spurious emission is caused by the simultaneous operation of both devices, the limit is the highest level allowed by either rule part.

NR Band n71

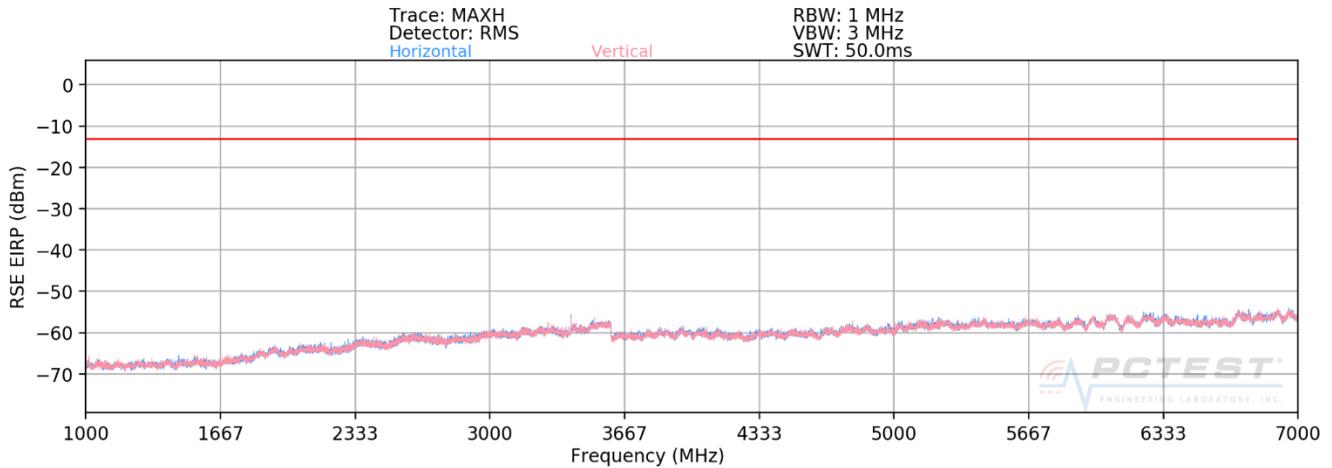


Plot 7-769. Radiated Spurious Plot above 1GHz (n71 Standalone)

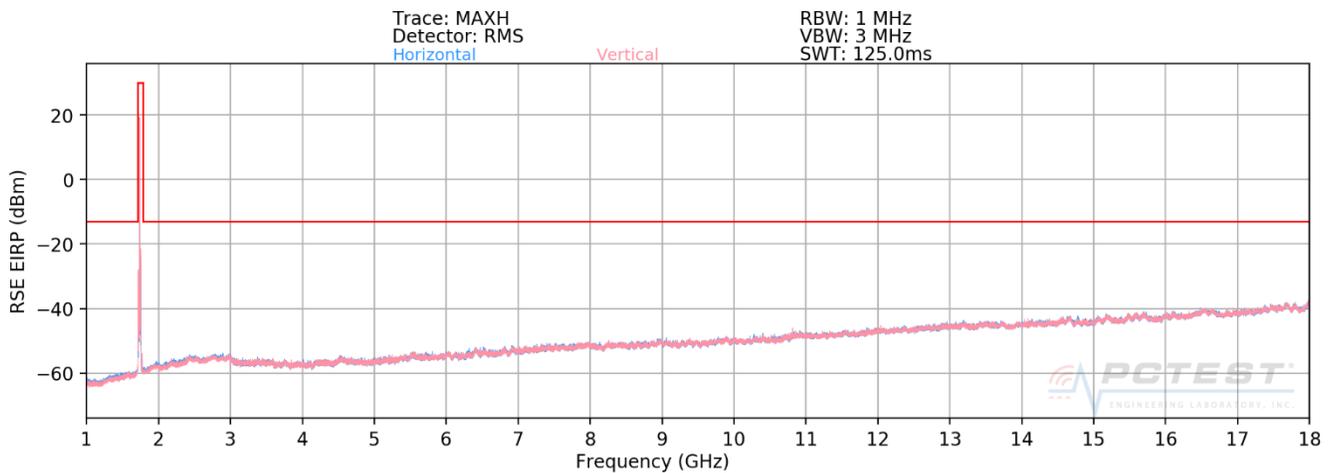

Plot 7-770. Radiated Spurious Plot above 1GHz (n71 ENDC - ANCHOR B66)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 476 of 488

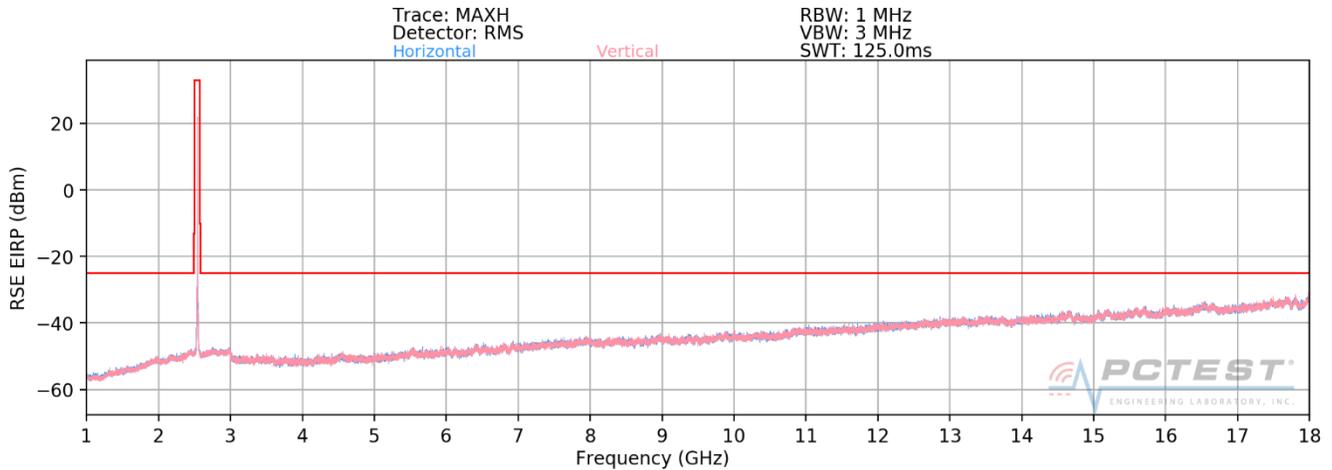

Plot 7-771. Radiated Spurious Plot above 1GHz (n71 ENDC – ANCHOR B7)

OPERATING FREQUENCY: 670.50 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1341.00	H	214	192	-80.04	7.44	-72.60	-59.6
2011.50	H	200	312	-75.45	8.66	-66.79	-53.8
2682.00	H	176	193	-71.89	9.96	-61.93	-48.9
3352.50	H	179	49	-62.69	9.62	-53.08	-40.1
4023.00	H	-	-	-76.03	9.76	-66.27	-53.3
4693.50	H	-	-	-76.94	10.93	-66.01	-53.0

Table 7-64. Radiated Spurious Data (n71 – Low Channel)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 477 of 488

OPERATING FREQUENCY: 680.50 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1361.00	H	208	141	-76.42	7.48	-68.93	-55.9
2041.50	H	181	309	-76.47	8.76	-67.70	-54.7
2722.00	H	111	47	-71.03	10.08	-60.95	-48.0
3402.50	H	117	48	-70.82	9.80	-61.02	-48.0
4083.00	H	-	-	-76.99	10.05	-66.94	-53.9
4763.50	H	-	-	-77.13	10.98	-66.15	-53.1

Table 7-65. Radiated Spurious Data (n71 – Mid Channel)


OPERATING FREQUENCY: 690.50 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 20.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1381.00	H	210	145	-78.59	7.46	-71.14	-58.1
2071.50	H	233	313	-78.62	8.81	-69.81	-56.8
2762.00	H	186	197	-72.00	10.16	-61.83	-48.8
3452.50	H	111	42	-67.79	9.86	-57.93	-44.9
4143.00	H	-	-	-76.83	10.21	-66.62	-53.6
4833.50	H	-	-	-77.26	10.85	-66.41	-53.4


Table 7-66. Radiated Spurious Data (n71 – High Channel)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 478 of 488	


NR Band n66

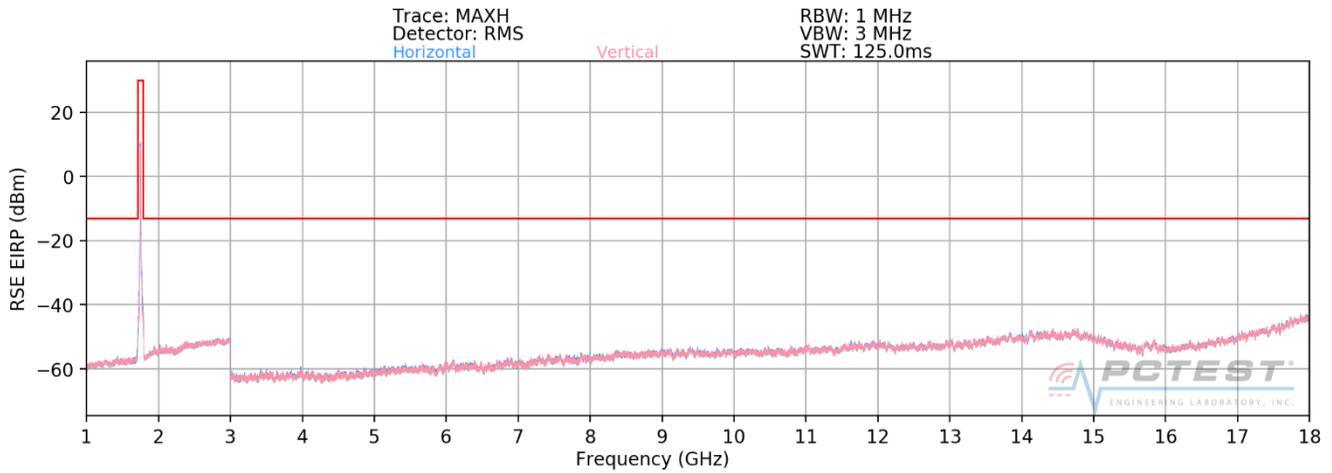

Plot 7-772. Radiated Spurious Plot above 1GHz (n66 Standalone)

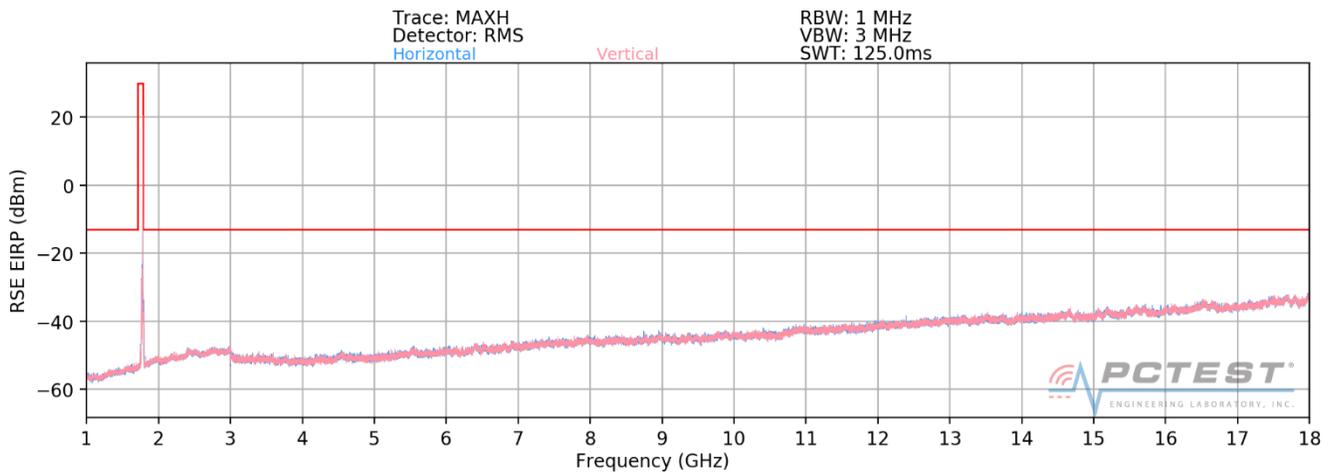

Plot 7-773. Radiated Spurious Plot above 1GHz (n66 ENDC – ANCHOR B12)

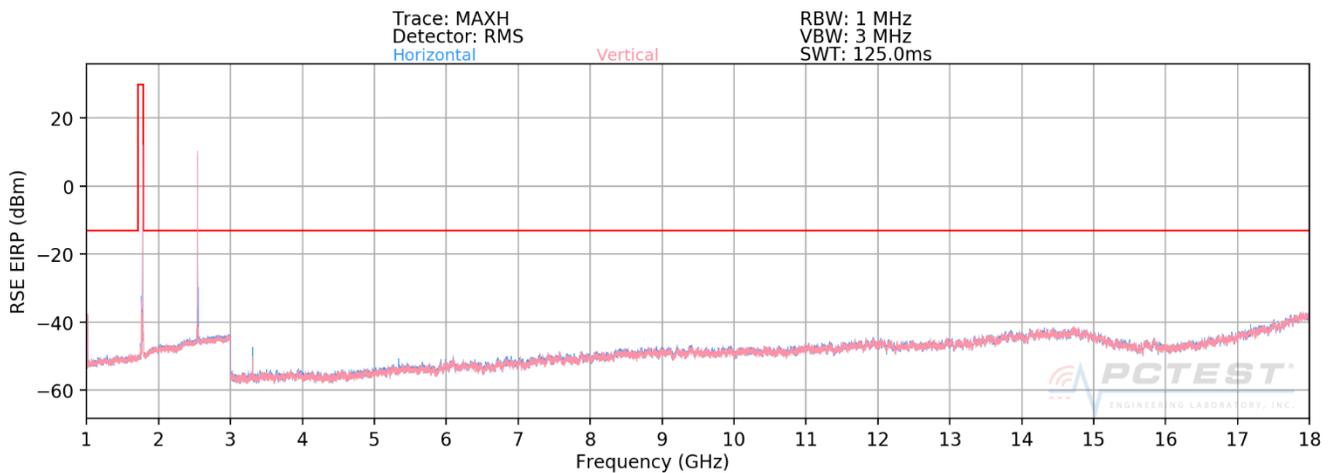

Plot 7-774. Radiated Spurious Plot above 1GHz (n66 ENDC – ANCHOR B7)

FCC ID: ZNFV600TM			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 479 of 488		

OPERATING FREQUENCY	1720.00	MHz
MODULATION SIGNAL	QPSK (DFT-s-OFDM)	
BANDWIDTH	20.0	MHz
DISTANCE	3	meters
LIMIT	-25	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3440.00	H	162	174	-72.36	9.84	-62.51	-37.5
5160.00	H	112	256	-74.13	10.71	-63.42	-38.4
6880.00	H	-	-	-73.94	11.68	-62.26	-37.3
8600.00	H	-	-	-71.07	11.08	-59.99	-35.0

Table 7-67. Radiated Spurious Data (n66 – ENDC – ANCHOR B7– Low Channel)

OPERATING FREQUENCY	1745.00	MHz
MODULATION SIGNAL	QPSK (DFT-s-OFDM)	
BANDWIDTH	20.0	MHz
DISTANCE	3	meters
LIMIT	-25	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3490.00	H	299	227	-73.72	9.91	-63.80	-38.8
5235.00	H	162	128	-74.51	10.73	-63.78	-38.8
6980.00	H	-	-	-74.66	11.82	-62.84	-37.8
8725.00	H	-	-	-70.43	11.00	-59.43	-34.4

Table 7-68. Radiated Spurious Data (n66 – ENDC – ANCHOR B7 – Mid Channel)


OPERATING FREQUENCY	1770.00	MHz
MODULATION SIGNAL	QPSK (DFT-s-OFDM)	
BANDWIDTH	20.0	MHz
DISTANCE	3	meters
LIMIT	-25	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3540.00	H	400	207	-74.58	9.89	-64.69	-39.7
5310.00	H	111	19	-67.64	10.69	-56.96	-32.0
7080.00	H	-	-	-74.89	11.79	-63.11	-38.1
8850.00	H	-	-	-70.78	11.00	-59.78	-34.8


Table 7-69. Radiated Spurious Data (n66 – ENDC – ANCHOR B7 – High Channel)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 480 of 488	

NR Band n25/n2

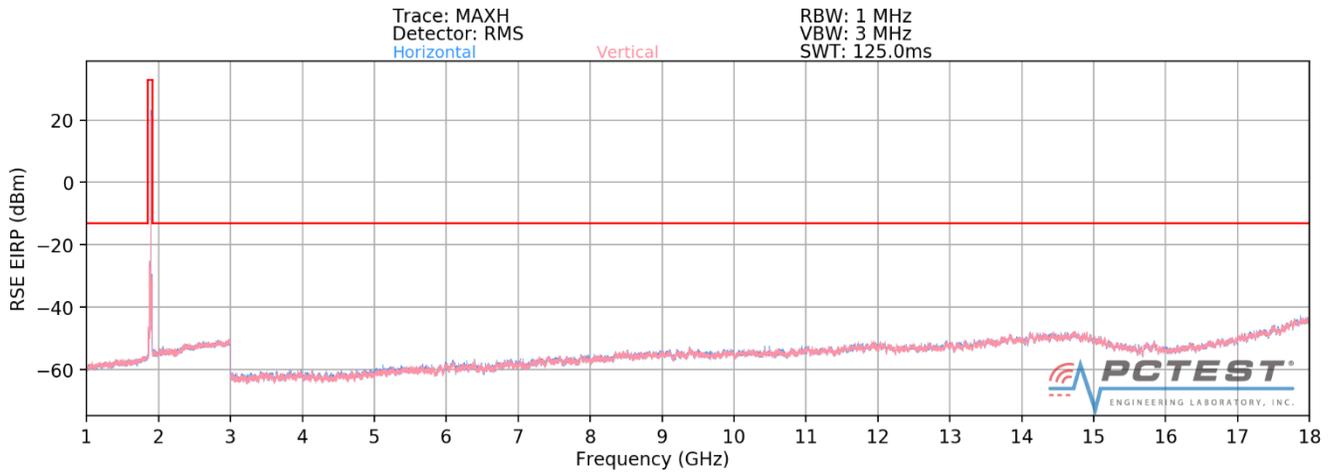

Plot 7-775. Radiated Spurious Plot above 1GHz (n25 Standalone)

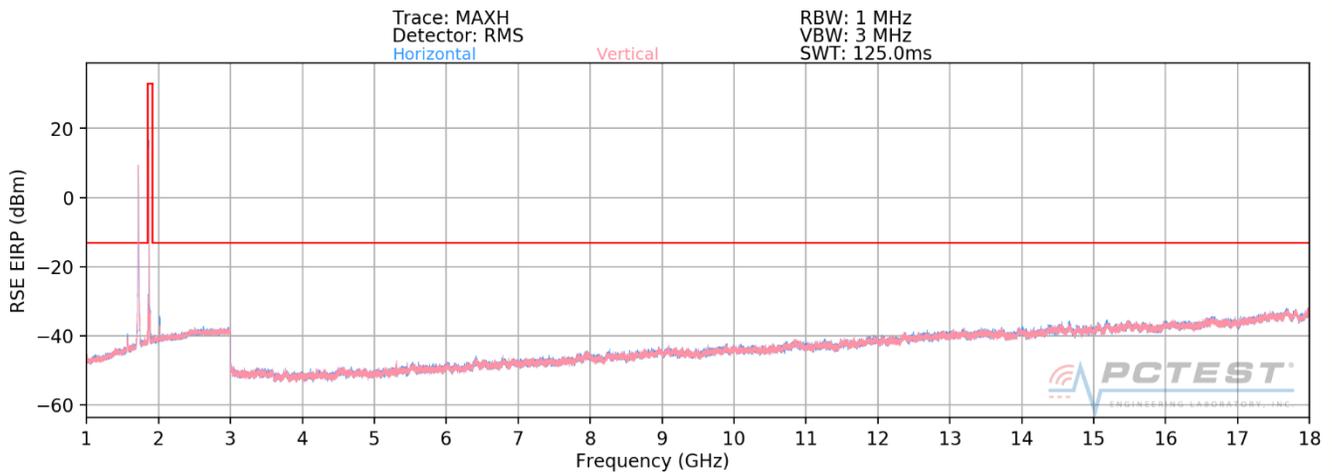

Plot 7-776. Radiated Spurious Plot above 1GHz (n25 ENDC - ANCHOR B66)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 481 of 488

OPERATING FREQUENCY: 1855.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3710.00	H	151	250	-69.56	6.57	-62.98	-50.0
5565.00	H	118	130	-52.92	8.73	-44.19	-31.2
7420.00	H	-	-	-68.17	8.41	-59.76	-46.8
9275.00	H	-	-	-67.97	9.40	-58.57	-45.6

Table 7-70. Radiated Spurious Data (n25/n2 – Low Channel)

OPERATING FREQUENCY: 1882.50 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3765.00	H	359	214	-70.44	6.70	-63.75	-50.7
5647.50	H	109	132	-48.23	8.83	-39.40	-26.4
7530.00	H	-	-	-68.04	8.46	-59.59	-46.6
9412.50	H	-	-	-67.88	9.32	-58.56	-45.6

Table 7-71. Radiated Spurious Data (n25/n2 – Mid Channel)

FCC ID: ZNFV600TM			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 482 of 488	


OPERATING FREQUENCY: 1910.00 MHz
 MODULATION SIGNAL: QPSK (DFT-s-OFDM)
 BANDWIDTH: 10.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
3820.00	H	-	-	-71.70	7.00	-64.70	-51.7
5730.00	H	107	269	-67.00	8.77	-58.23	-45.2
7640.00	H	-	-	-68.12	8.54	-59.58	-46.6
9550.00	H	-	-	-68.63	9.43	-59.20	-46.2


Table 7-72. Radiated Spurious Data (n25/n2 – High Channel)

FCC ID: ZNFV600TM	 MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 483 of 488


NR Band n41

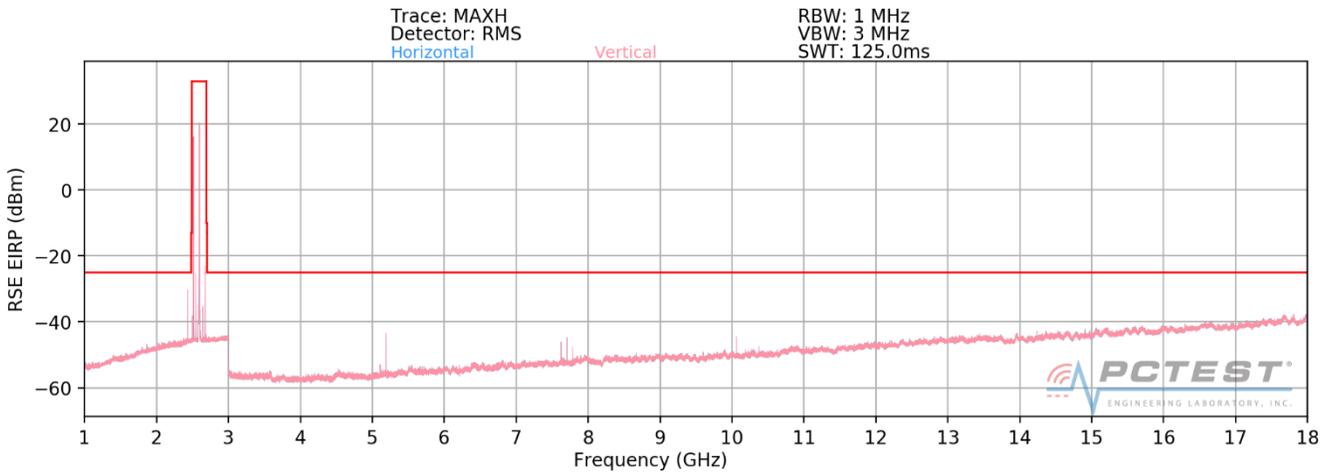

Plot 7-777. Radiated Spurious Plot above 1GHz (Intra-Band Contiguous (B41+n41))

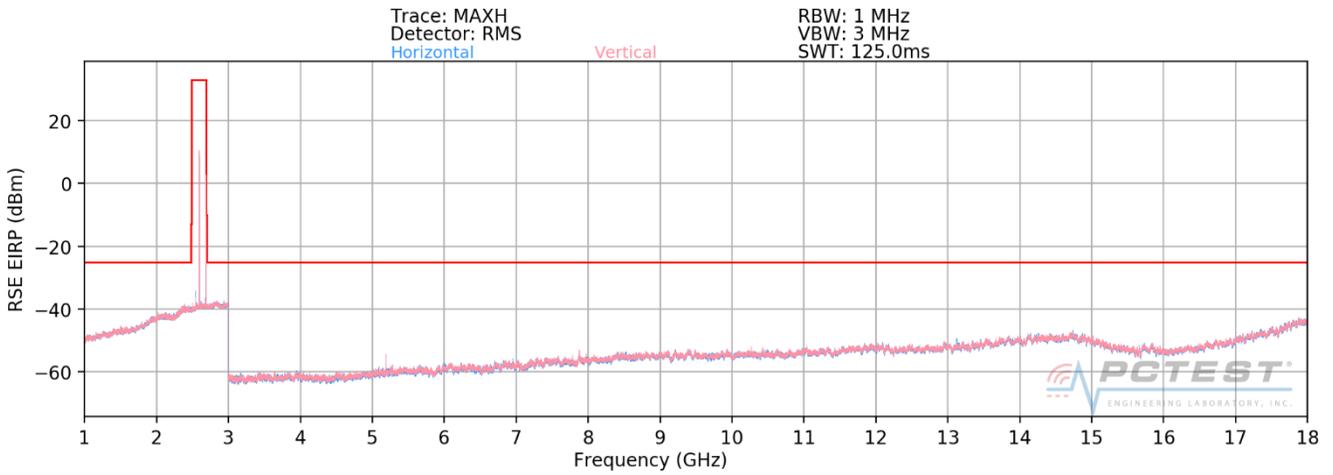

Plot 7-778. Radiated Spurious Plot above 1GHz (Intra-Band Non-Contiguous (B41+n41))

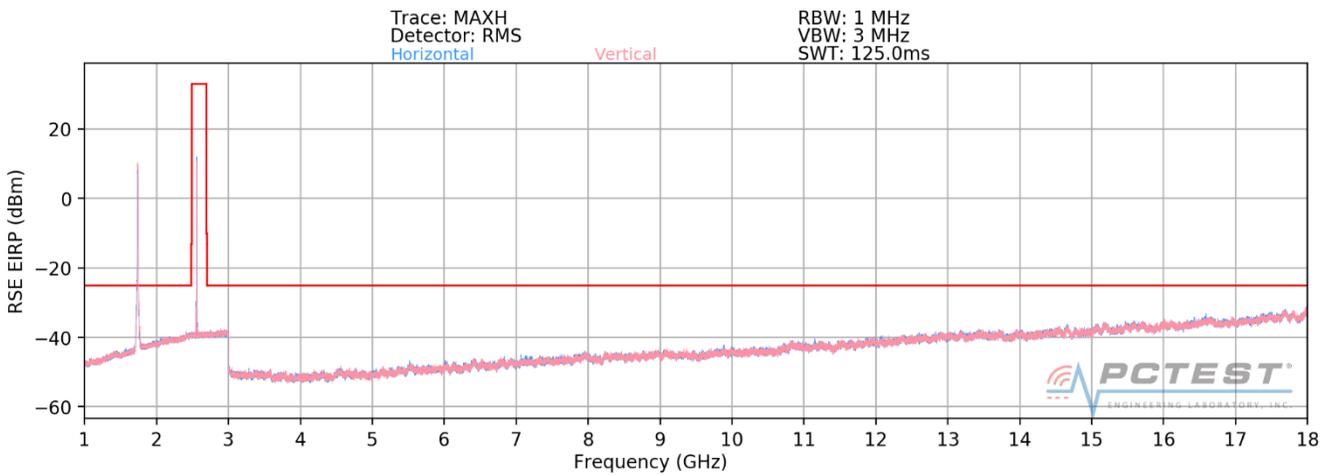

Plot 7-779. Radiated Spurious Plot above 1GHz (n41 ENDC - ANCHOR B66)

FCC ID: ZNFV600TM	MEASUREMENT REPORT (CERTIFICATION)		LG	Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 484 of 488	

OPERATING FREQUENCY	2546.01	MHz
MODULATION SIGNAL	QPSK (DFT-s-OFDM)	
BANDWIDTH	100.0	MHz
DISTANCE	3	meters
LIMIT	-25	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5092.02	H	202	296	-58.40	10.69	-47.71	-22.7
7638.03	H	252	290	-58.56	11.33	-47.23	-22.2
10184.04	H	182	287	-60.16	12.09	-48.06	-23.1
12730.05	H	-	-	-61.02	13.64	-47.38	-22.4
15276.06	H	-	-	-60.64	14.89	-45.75	-20.8

Table 7-73. Radiated Spurious Data (Intra-Band Contiguous (B41+n41) – Low Channel)

OPERATING FREQUENCY	2592.99	MHz
MODULATION SIGNAL	QPSK (DFT-s-OFDM)	
BANDWIDTH	100.0	MHz
DISTANCE	3	meters
LIMIT	-25	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5185.98	H	253	38	-59.06	10.74	-48.32	-23.3
7778.97	H	267	357	-59.48	11.44	-48.04	-23.0
10371.96	H	193	42	-59.01	12.42	-46.58	-21.6
12964.95	H	-	-	-61.21	13.29	-47.92	-22.9
15557.94	H	-	-	-61.26	16.32	-44.94	-19.9

Table 7-74. Radiated Spurious Data (Intra-Band Contiguous (B41+n41) – Mid Channel)

FCC ID: ZNFV600TM			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 485 of 488	

OPERATING FREQUENCY	2640.00	MHz
MODULATION SIGNAL	QPSK (DFT-s-OFDM)	
BANDWIDTH	100.0	MHz
DISTANCE	3	meters
LIMIT	-25	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5280.00	H	228	38	-57.72	10.70	-47.02	-22.0
7920.00	H	181	300	-53.54	11.26	-42.28	-17.3
10560.00	H	181	289	-60.80	12.59	-48.21	-23.2
13200.00	H	-	-	-59.32	13.03	-46.29	-21.3
15840.00	H	-	-	-61.77	16.62	-45.15	-20.2

Table 7-75. Radiated Spurious Data (Intra-Band Contiguous (B41+n41) – High Channel)

OPERATING FREQUENCY	2546.01	MHz
MODULATION SIGNAL	QPSK (DFT-s-OFDM)	
BANDWIDTH	100.0	MHz
DISTANCE	3	meters
LIMIT	-25	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5092.02	V	379	16	-67.70	10.69	-57.01	-32.0
7638.03	V	-	-	-70.31	11.33	-58.98	-34.0
10184.04	V	-	-	-68.97	12.09	-56.88	-31.9

Table 7-76. Radiated Spurious Data (Intra-Band Non-Contiguous (B41+n41) – Low Channel)

OPERATING FREQUENCY	2592.99	MHz
MODULATION SIGNAL	QPSK (DFT-s-OFDM)	
BANDWIDTH	100.0	MHz
DISTANCE	3	meters
LIMIT	-25	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5185.98	V	130	24	-70.65	10.74	-59.91	-34.9
7778.97	V	-	-	-71.34	11.44	-59.90	-34.9
10371.96	V	123	20	-69.65	12.42	-57.23	-32.2
12964.95	V	-	-	-67.90	13.29	-54.61	-29.6
15557.94	V	-	-	-72.19	16.32	-55.86	-30.9

Table 7-77. Radiated Spurious Data (Intra-Band Non-Contiguous (B41+n41) – Mid Channel)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 486 of 488	

OPERATING FREQUENCY	2640.00	MHz
MODULATION SIGNAL	QPSK (DFT-s-OFDM)	
BANDWIDTH	100.0	MHz
DISTANCE	3	meters
LIMIT	-25	dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
5280.00	V	137	364	-69.80	10.70	-59.10	-34.1
7920.00	V	-	-	-70.25	11.26	-58.99	-34.0
10560.00	V	-	-	-69.97	12.59	-57.38	-32.4

Table 7-78. Radiated Spurious Data (Intra-Band Non-Contiguous (B41+n41) – High Channel)

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset	Page 487 of 488	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFV600TM** complies with all the requirements of Part 22, 24, & 27 of the FCC Rules for LTE operation and Sub 6GHz NR operation only.

FCC ID: ZNFV600TM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1911250198-03-R3.ZNF	Test Dates: 11/26/2019 - 1/19/2020	EUT Type: Portable Handset		Page 488 of 488