

EMI CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Receipt: October 02, 2014**Date of Issue: October 10, 2014****Test Report No. HCT-E-1410-F001****HCT FRN: 0005866421****FCC ID:****ZNFVK700**

Rule Part(s) / Standard(s): FCC CFR 47 PART 15 Subpart B Class B
FCC Classification: JBP (Part 15 B – Class B Computing Device Peripheral)
EUT Type: Tablet Computer with LTE, Bluetooth and WLAN
Model Name: LG-VK700
Additional Model Name: LGVK700, VK700
Test Port: USB / Earphone Port
Date of Test: October 06, 2014 - October 07, 2014

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By

Doo-Hwan Ryu
Test Engineer
EMC Team
Certification Division

Reviewed By

Jin-Pyo Hong
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCT-E-1410-F001	October 10, 2014	Initial Release



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Test Facility	5
1.4 Tested System Details.....	6
1.5 Cable Description	7
1.6 Noise Suppression Parts on Cable. (I/O Cable)	7
2. DESCRIPTION OF TEST	8
3. PRELIMINARY TEST	11
3.1 Conducted Emission Test	11
3. 2 Radiated Emission Test	11
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	12
4.1 Conducted Emission Test	12
4.2 Radiated Emission Test	19
5. LIST OF TEST EQUIPMENT	21
6. CONCLUSION	22

ATTACHMENT: **TEST SETUP PHOTOGRAPHS**



1. GENERAL INFORMATION

1.1 Description of EUT

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**
Its basic purpose is used for communications.

Model	LG-VK700
FCC ID	ZNFVK700
Additional Model	LGVK700, VK700
EUT Type	Tablet Computer with LTE, Bluetooth and WLAN
TX Frequency	1 710 MHz to 1 755 MHz (LTE B4) 777 MHz to 787 MHz (LTE B13)
RX Frequency	2 110 MHz to 2 155 MHz (LTE B4) 746 MHz to 756 MHz (LTE B13)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.



1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2003.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3 m)	90661 (February 28, 2014)
Radiated Field strength measurement facility (10 m)	90661 (February 28, 2014)



1.4 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	LG-VK700	LG	ZNFVK700	Notebook PC, Earphone
USB cable	EAD62767901	Ningbo Broad	-	EUT, Notebook PC
USB cable	EAD62767902	KSD	-	EUT, Notebook PC
USB cable	EAD62767903	CRESYN	-	EUT, Notebook PC
Earphone	SGEY0003720	I-SOUND	-	EUT
Notebook PC	ProBook6560b	HP	DoC	EUT, Notebook PC adaptor
Notebook PC adaptor	PPP012L-E	LITE-ON Technology(Ghangzhou) Co., LTD	-	Notebook PC
Gateway	MV440	Axesstel	PH7MV440	Notebook PC, Adaptor
Serial mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
Adaptor	DA-60M12	Yang Ming Industrial	-	Gateway
RJ45 cable	-	-	-	Notebook PC, Gateway
Micro SD card	8 GB	SanDisk	-	EUT



1.5 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.2
	Earphone	N/A	Y	(D)1.1
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.6 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Earphone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End

※NOTE: This tablet device does not contain the minimum number of ports required for personal computer testing per ANSI C63.4, but the EUT is attached to a computer through its only available port, which represents worst case emissions. All other aspects of ANSI C63.4 testing requirements were maintained.



2. DESCRIPTION OF TEST

2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 7

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth	Quasi-Peak (dB(μ V))	Average (dB(μ V))
0.15 to 0.5	9 kHz	66 to 56*	56 to 46*
0.5 to 5	9 kHz	56	46
5 to 30	9 kHz	60	50

**Decreases with the logarithm of the frequency.*



2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2003, Clause 8

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a 3 m shield room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. The antenna height scans apply for both horizontal and vertical polarizations, except that for vertical polarization, the minimum height of the center of the antenna shall be increased so that the lowest point of the bottom of the lowest antenna element clears the site reference ground plane by at least 25 cm. (below 1 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak (dB($\mu\text{V}/\text{m}$))
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak (dB $\mu\text{V}/\text{m}$)	Average (dB($\mu\text{V}/\text{m}$))
Above 1 000	3	74	54




2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2.3 Configuration of Tested System

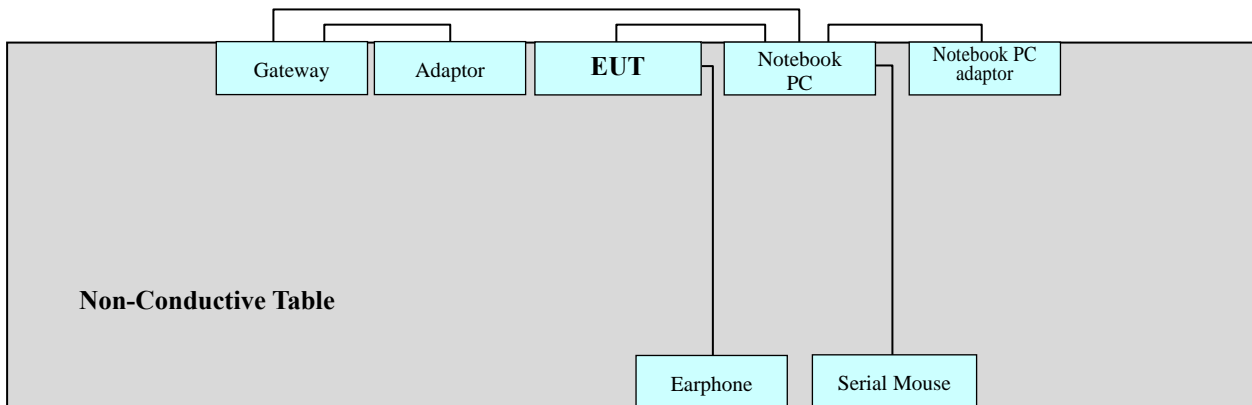

Power Line: 120 VAC, 60 Hz



3. PRELIMINARY TEST

3.1 Conducted Emission Test

It was tested Data Link mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode

3.2 Radiated Emission Test

It was tested Data Link mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode



4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test


The test results of conducted emission at mains ports provide the following information:

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Operation Mode	Data Communication mode
USB Cable Manufacturer	CRESYN (EAD62767903) ※ The worst-case emissions are reported.
Kind of Test Site	Shielded Room
Temperature	24.8 °C
Relative Humidity	39.0 %
Test Date	October 06, 2014

※ NOTE: Refer to page 13 to page 18 for details.



Figure 1: Spectral Diagrams, Conducted Emission, AC Mains (0.15 - 30)MHz, Line (L1)

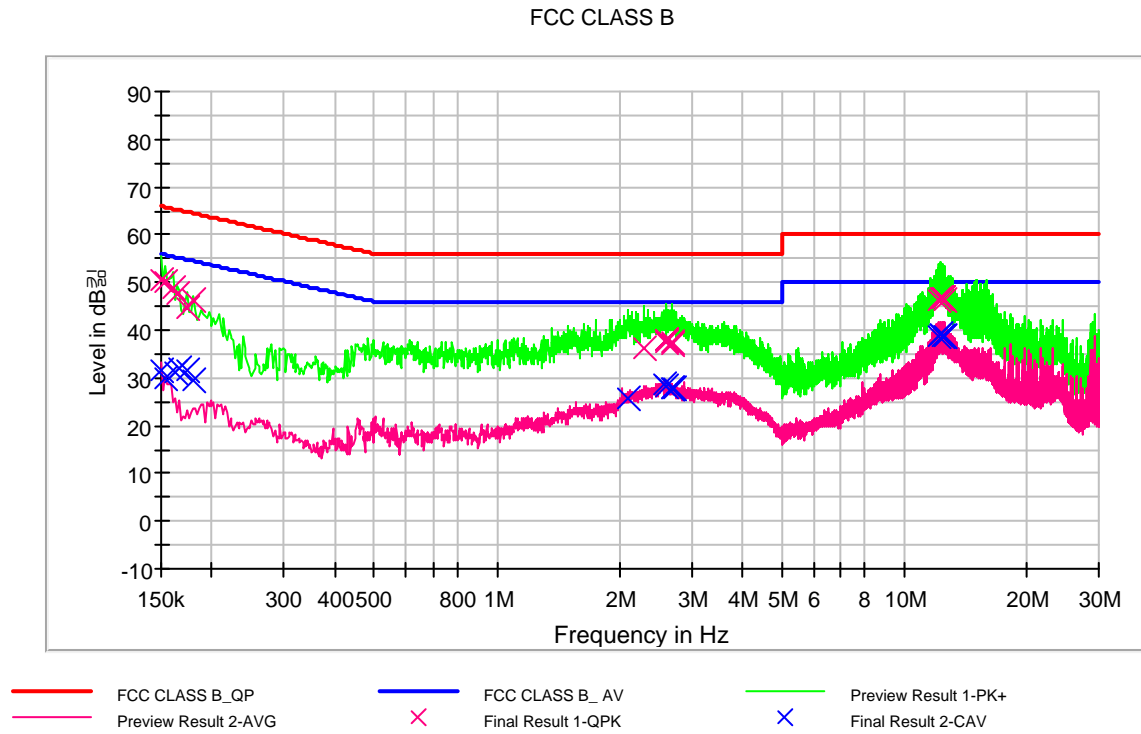

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage



QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	50.7	9.000	L1	9.6	15.3	66.0
0.154000	49.9	9.000	L1	9.6	15.9	65.8
0.160000	49.0	9.000	L1	9.6	16.5	65.5
0.164000	47.6	9.000	L1	9.6	17.7	65.3
0.174000	44.7	9.000	L1	9.6	20.1	64.8
0.180000	46.3	9.000	L1	9.6	18.2	64.5
2.292000	36.3	9.000	L1	9.8	19.7	56.0
2.596000	37.7	9.000	L1	9.8	18.3	56.0
2.608000	38.0	9.000	L1	9.8	18.0	56.0
2.612000	37.7	9.000	L1	9.8	18.3	56.0
2.690000	37.3	9.000	L1	9.8	18.7	56.0
2.694000	37.2	9.000	L1	9.8	18.8	56.0
12.088000	46.3	9.000	L1	10.1	13.7	60.0
12.222000	46.9	9.000	L1	10.1	13.1	60.0
12.352000	46.7	9.000	L1	10.2	13.3	60.0
12.358000	46.8	9.000	L1	10.2	13.2	60.0
12.366000	46.7	9.000	L1	10.2	13.3	60.0
12.490000	46.1	9.000	L1	10.2	13.9	60.0




CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	31.5	9.000	L1	9.6	24.5	56.0
0.154000	29.8	9.000	L1	9.6	26.0	55.8
0.162000	31.1	9.000	L1	9.6	24.3	55.4
0.166000	32.1	9.000	L1	9.6	23.1	55.2
0.174000	31.5	9.000	L1	9.6	23.3	54.8
0.180000	29.4	9.000	L1	9.6	25.1	54.5
2.090000	25.8	9.000	L1	9.8	20.2	46.0
2.586000	28.5	9.000	L1	9.8	17.5	46.0
2.594000	28.4	9.000	L1	9.8	17.6	46.0
2.690000	27.6	9.000	L1	9.8	18.4	46.0
2.694000	27.8	9.000	L1	9.8	18.2	46.0
2.706000	27.9	9.000	L1	9.8	18.1	46.0
12.064000	38.7	9.000	L1	10.1	11.3	50.0
12.222000	39.0	9.000	L1	10.1	11.0	50.0
12.290000	39.0	9.000	L1	10.2	11.0	50.0
12.358000	38.9	9.000	L1	10.2	11.1	50.0
12.490000	38.7	9.000	L1	10.2	11.3	50.0
12.512000	38.7	9.000	L1	10.2	11.3	50.0



Figure 2: Spectral Diagrams, Conducted Emission, AC Mains (0.15 - 30)MHz, Line (N)

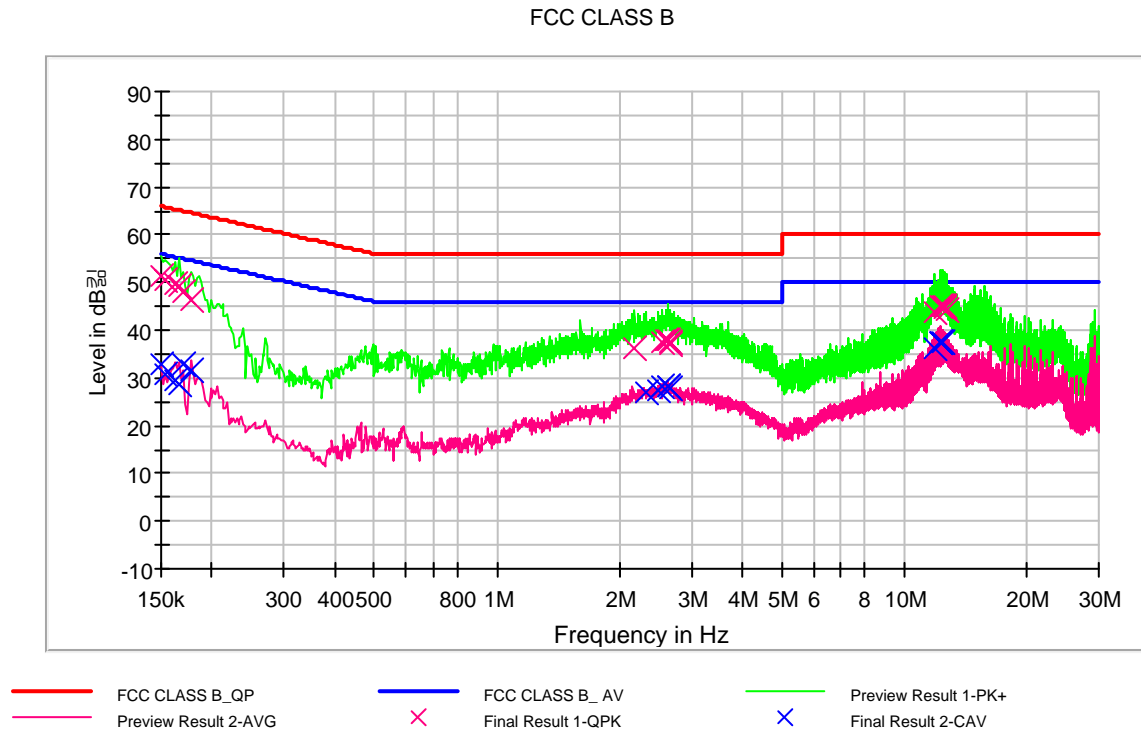

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	51.4	9.000	N	9.6	14.6	66.0
0.154000	50.3	9.000	N	9.6	15.5	65.8
0.162000	49.6	9.000	N	9.6	15.8	65.4
0.166000	49.2	9.000	N	9.6	16.0	65.2
0.170000	48.2	9.000	N	9.7	16.8	65.0
0.178000	46.4	9.000	N	9.7	18.2	64.6
2.182000	36.2	9.000	N	9.8	19.8	56.0
2.544000	37.5	9.000	N	9.8	18.5	56.0
2.598000	37.8	9.000	N	9.8	18.2	56.0
2.618000	38.0	9.000	N	9.8	18.0	56.0
2.654000	36.9	9.000	N	9.8	19.1	56.0
2.660000	37.5	9.000	N	9.8	18.5	56.0
11.910000	43.7	9.000	N	10.1	16.3	60.0
12.216000	45.2	9.000	N	10.1	14.8	60.0
12.346000	45.2	9.000	N	10.1	14.8	60.0
12.540000	44.9	9.000	N	10.1	15.1	60.0
12.574000	44.6	9.000	N	10.1	15.4	60.0
12.744000	44.2	9.000	N	10.1	15.8	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	32.7	9.000	N	9.6	23.3	56.0
0.154000	31.0	9.000	N	9.6	24.8	55.8
0.162000	29.7	9.000	N	9.6	25.7	55.4
0.166000	28.7	9.000	N	9.6	26.5	55.2
0.170000	32.9	9.000	N	9.7	22.1	55.0
0.178000	31.5	9.000	N	9.7	23.1	54.6
2.314000	27.1	9.000	N	9.8	18.9	46.0
2.480000	27.5	9.000	N	9.8	18.5	46.0
2.544000	28.3	9.000	N	9.8	17.7	46.0
2.618000	28.0	9.000	N	9.8	18.0	46.0
2.628000	28.3	9.000	N	9.8	17.7	46.0
2.660000	27.8	9.000	N	9.8	18.2	46.0
11.910000	36.1	9.000	N	10.1	13.9	50.0
12.216000	37.4	9.000	N	10.1	12.6	50.0
12.232000	37.4	9.000	N	10.1	12.6	50.0
12.312000	37.3	9.000	N	10.1	12.7	50.0
12.328000	37.3	9.000	N	10.1	12.7	50.0
12.346000	37.4	9.000	N	10.1	12.6	50.0



4.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Operation Mode	Data Communication mode
USB Cable Manufacturer	Ningbo Broad (EAD62767901) ※The worst-case emissions are reported.
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.9 °C
Relative Humidity	41.0 %
Test Date	October 06, 2014

Frequency (MHz)	Quasi Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
77.213307	34.9	250.0	H	268.0	12.4	5.1	40.0
125.010501	33.9	100.0	V	94.0	15.9	9.6	43.5
375.012024	39.6	115.0	V	143.0	19.9	6.4	46.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



-For Measurement Above 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	1.2 GHz
Testing Frequency Range	1 GHz to 6 GHz
Operation Mode	Data Communication mode
USB Cable Manufacturer	KSD (EAD62767902) ※The worst-case emissions are reported.
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.9 °C
Relative Humidity	41.0 %
Test Date	October 07, 2014

Frequency (MHz)	Peak (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1328.306614	48.3	100.0	V	27.0	-10.2	25.7	74.0
1997.845692	56.4	100.0	V	27.0	-9.0	17.6	74.0
2663.877755	50.1	100.0	V	340.0	-7.1	23.9	74.0

Frequency (MHz)	CAverage (dBuV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1328.306614	30.6	100.0	V	27.0	-10.2	23.4	54.0
1997.845692	38.2	100.0	V	27.0	-9.0	15.8	54.0
2663.877755	32.1	100.0	V	340.0	-7.1	21.9	54.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



5. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>CAL Date</u>
<u>Conducted Emission</u>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	01.24. 2014
<input checked="" type="checkbox"/> LISN	EMCO	3816/2SH	9706-1070	1 year	04.07. 2014
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	01.29. 2014
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.07. 2014
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	12.17. 2012
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060-2M	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.18.2014
<input type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9168	185	2 year	04.16. 2013
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-
-For measurement above 1 GHz					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	04.07. 2014
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060-2M	-	N/A	-
<input checked="" type="checkbox"/> Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/> Power Amplifier	CERNEX	CBLU1183540	21691	1 year	07.11.2014
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBLU5183530	24348	1 year	06.11. 2014
<input type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	12.13. 2012
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	1151	2 year	07.05.2013
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	06.18. 2014
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170124	2 year	10.30. 2013
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBL18265035	22966	1 year	07.23. 2014
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBL26405040	19660	1 year	04.04. 2014
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-



6. CONCLUSION

The data collected shows that the **EUT Type: Tablet Computer with LTE, Bluetooth and WLAN, FCC ID: ZNFVK700, Model: LG-VK700** complies with §15.107 and §15.109 of the FCC rules.