




PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.pctestlab.com>



MEASUREMENT REPORT FCC Part 27 LTE

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States


Date of Testing:
January 17 - 22, 2013
Test Site/Location:
PCTEST Lab., Columbia, MD, USA
Test Report Serial No.:
0Y1301150081.ZNF

FCC ID:	ZNFVS870
APPLICANT:	LG ELECTRONICS MOBILECOMM U.S.A



Application Type: Class II Permissive Change
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s): §2; §27
EUT Type: Portable Handset
Model(s): VS870, LG-VS870, LGVS870, LG-AS870, LGAS870, AS870
Tx Frequency Range: 782MHz (LTE - Band 13)
Max. RF Output Power: 0.082W ERP (19.15 dBm) (QPSK)
0.062W ERP (17.93 dBm) (16-QAM)
Test Device Serial No.: *identical prototype* [S/N: N/A]
Class II Permissive Change: Please FCC change document.
Original Grant Date: January 22, 2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




Randy Ortanez
President




FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset	Page 1 of 14	

T A B L E O F C O N T E N T S

FCC PART 27 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION		4
1.1 SCOPE		4
1.2 TESTING FACILITY		4
2.0 PRODUCT INFORMATION.....		5
2.1 EQUIPMENT DESCRIPTION		5
2.2 DEVICE CAPABILITIES.....		5
2.3 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS		5
2.4 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TESTS		6
3.1 MEASUREMENT PROCEDURE		6
3.2 BLOCK C FREQUENCY RANGE		6
3.3 RADIATED POWER AND RADIATED SPURIOUS EMISSIONS		6
4.0 TEST EQUIPMENT CALIBRATION DATA		7
5.0 SAMPLE CALCULATIONS		8
6.0 TEST RESULTS.....		9
6.1 SUMMARY.....		9
6.2 TRANSMITTER CONDUCTED OUTPUT POWER		10
6.3 EFFECTIVE RADIATED POWER OUTPUT DATA		11
6.4 LTE RADIATED MEASUREMENTS		12
6.5 LTE RADIATED MEASUREMENTS IN 1559 – 1610MHZ BAND		13
7.0 CONCLUSION.....		14

FCC ID: ZNFVS870	 <small>ENGINEERING LABORATORY, INC.</small>	FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset	Page 2 of 14	



MEASUREMENT REPORT

FCC Part 27





§2.1033 General Information



APPLICANT: LG Electronics MobileComm U.S.A
APPLICANT ADDRESS: 1000 Sylvan Avenue
 Englewood Cliffs, NJ 07632
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): §2; §27
BASE MODEL: VS870
FCC ID: ZNFVS870
FCC CLASSIFICATION: PCS Licensed Transmitter Held to Ear (PCE)
MODULATIONS: QPSK, 16-QAM (Uplink)
FREQUENCY TOLERANCE: Emission must remain in band
Test Device Serial No.: N/A Production Pre-Production Engineering
DATE(S) OF TEST: January 17 - 22, 2013
TEST REPORT S/N: 0Y1301150081.ZNF

Test Facility / Accreditations

Measurements were performed at **PCTEST Engineering Lab. located in Columbia, MD 21045, U.S.A.**



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: ZNFVS870	 ENGINEERING LABORATORY, INC.	FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset	Page 3 of 14	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EME) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Testing Facility

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Internt'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 28, 2009.

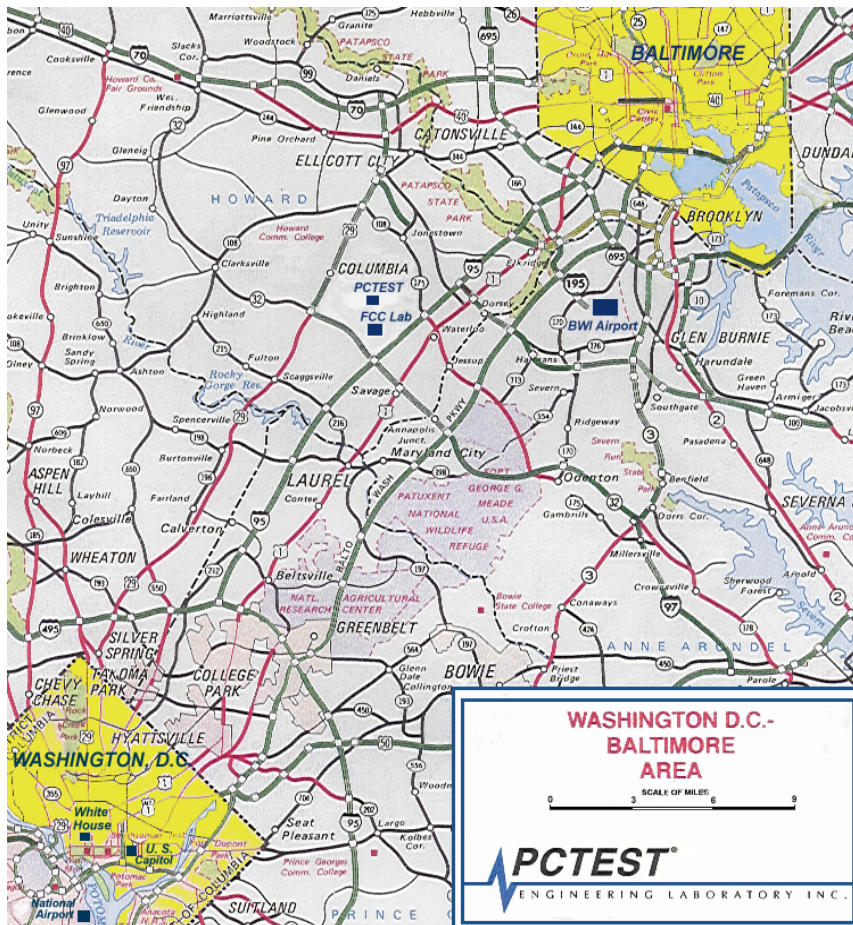




Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset		Page 4 of 14

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFVS870**. The test data contained in this report pertains only to the emissions due to the EUT's LTE function. The EUT consisted of the following component(s):

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A (BC0, BC1), Band 13 LTE, 802.11a/b/g/n WLAN (DTS/NIII), Bluetooth (1x,EDR,LE)

2.3 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.4 Labeling Requirements

Per 2.925

The FCC identifier shall be permanently affixed to the equipment and shall be readily visible to the purchaser at the time of purchase.



Per 15.19; Docket 95-19

In addition to this requirement, a device subject to certification shall be labeled as follows:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5).

Please see attachment for FCC ID label and label location.

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset		Page 5 of 14

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The radiated spurious measurements were made outdoors at a 3-meter test range (see Figure 3-1). The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This power level was recorded using a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This level is recorded with the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.

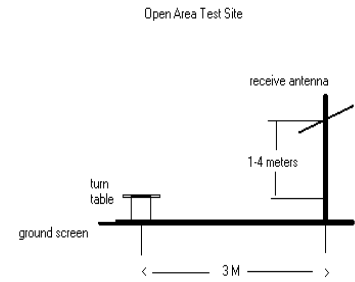


Figure 3-1. Diagram of 3-meter outdoor test range

Deviation from Measurement Procedure.....None

3.2 Block C Frequency Range



§27.5(b)(3)

Two paired channels of 11 megahertz each are available for assignment in Block C in the 746-757 MHz and 776-787 MHz bands. In the event that no licenses for two channels in this Block C are assigned based on the results of the first auction in which such licenses were offered because the auction results do not satisfy the applicable reserve price, the spectrum in the 746-757 MHz and 776-787 MHz bands will instead be made available for assignment at a subsequent auction as follows: (i) Two paired channels of 6 megahertz each available for assignment in Block C1 in the 746-752 MHz and 776-782 MHz bands. (ii) Two paired channels of 5 megahertz each available for assignment in Block C2 in the 752-757 MHz and 782-787 MHz bands.

3.3 Radiated Power and Radiated Spurious Emissions

§2.1053, §27.53(c)

Spurious and harmonic radiated emissions are measured outdoors at our 3-meter test range. The equipment under test is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer. This level is then measured with a broadband average power meter. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive average power meter reading. This spurious level is recorded with the power meter. For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration. This device was tested under all configurations and the worst case radiated power is reported while transmitting with 25 resource blocks with an offset of 12 using QPSK modulation.



FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset	Page 6 of 14	

4.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	2/13/2012	Annual	2/13/2013	N/A
-	LTx2	Licensed Transmitter Cable Set	2/17/2012	Annual	2/17/2013	N/A
Agilent	8447D	Broadband Amplifier	5/8/2012	Annual	5/8/2013	1937A03348
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	2/15/2012	Annual	2/15/2013	3008A00985
Agilent	8648D	(9kHz-4GHz) Signal Generator	10/10/2012	Annual	10/10/2013	3613A00315
Agilent	E4432B	ESG-D Series Signal Generator	3/15/2012	Annual	3/15/2013	US40053896
Agilent	E8257D	(250kHz-20GHz) Signal Generator	4/5/2012	Annual	4/5/2013	MY45470194
Agilent	E8267C	Vector Signal Generator	10/10/2011	Biennial	10/10/2013	US42340152
Agilent	N9038A	MXE EMI Receiver	8/5/2012	Annual	8/5/2013	MY51210133
Agilent	N9030A	PXA Signal Analyzer	2/23/2012	Annual	2/23/2013	MY49432391
Anritsu	MA2411B	Power Sensor	3/5/2012	Annual	3/5/2013	846215
Anritsu	ML2495A	Power Meter	10/13/2012	Annual	10/13/2013	1039008
Emco	3115	Horn Antenna (1-18GHz)	4/8/2010	Biennial	4/8/2012	9205-3874
Espec	ESX-2CA	Environmental Chamber	4/4/2012	Annual	4/4/2013	17620
Mini-Circuits	VHF-3100+	High Pass Filter	2/7/2012	Annual	2/7/2013	31144
Rohde & Schwarz	CMW500	LTE Radio Communication Tester	N/A		N/A	100976
Schwarzbeck	VULB-9161SE	Trilog Super Broadband Test Antenna	11/8/2011	Biennial	11/8/2013	9161-4075
Seekonk	NC-100	Torque Wrench (8" lb)	3/5/2012	Triennial	3/5/2015	N/A
Sunol	DRH-118	Horn Antenna (1 - 18GHz)	7/5/2011	Biennial	7/5/2013	A050307
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/17/2011	Biennial	6/17/2013	A042511

Table 4-1. Test Equipment

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset		Page 7 of 14

5.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Amplitude/Angle Modulated

16QAM Modulation



Emission Designator = 8M45W7D

LTE BW = 8.45 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Combination (Audio/Data)

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average receive power meter reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the power meter. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm - (-24.80).

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset		Page 8 of 14

6.0 TEST RESULTS

6.1 Summary



Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFVS870
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): LTE

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (Tx)					
27.50(b)(10)	Effective Radiated Power	< 3 Watts max. ERP	RADIATED	PASS	Section 6.3
2.1053, 27.53(c)(2) 27.53(c)(4)	Undesirable Out-of-Band Emissions	< 43 + 10log ₁₀ (P[Watts]) for all out-of-band emissions		PASS	Section 6.3
2.1053, 27.53(f)	Undesirable Emissions in the 1559 – 1610MHz band	< -40dBm/MHz EIRP (wideband) < -50dBm EIRP (narrowband)		PASS	Section 6.5

Table 6-1. Summary of Test Results

Notes:

* - For out of band conducted spurious emissions (including those at the band edges), the emissions of both QPSK and 16-QAM modulations were investigated. The worst case transmitter emissions are shown in Section 7.0.

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset	Page 9 of 14	

6.2 Transmitter Conducted Output Power

§2.1046

The **LG Portable Handset FCC ID: ZNFVS870** was connected to a Rohde and Schwarz CMW500 LTE Radio Communication Tester (Model: CMW500). Conducted powers for the EUT were measured for different combinations of resource block sizes, resource block offsets, and MCS indices and the worst case is reported.

Frequency	BW	Modulation	RB Size	RB Offset	Maximum Average Power [dBm]
782 MHz	10 MHz	QPSK	1	0	23.50
		16QAM	1	0	22.41
		QPSK	1	49	23.41
		16QAM	1	49	22.49
		QPSK	25	12	22.40
		16QAM	25	12	21.57
		QPSK	50	0	22.37
		16QAM	50	0	21.37

Table 6-2. Maximum Average Conducted Output Power

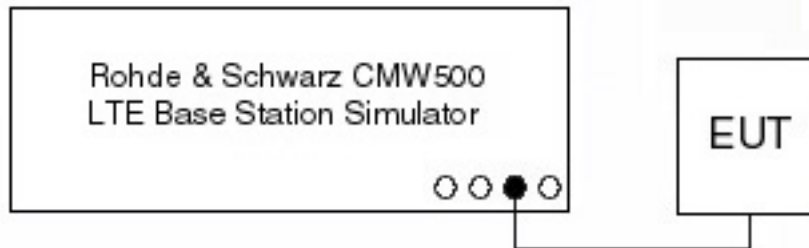




Figure 6-1. Conducted Output Power Test Setup Diagram

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset		Page 10 of 14

6.3 Effective Radiated Power Output Data §27.50(b)(10)

Frequency [MHz]	Channel Bandwidth (MHz)	Modulation	RB Size/Offset	Substitute Level [dBm]	Antenna Gain [dBd]	Pol [H/V]	ERP [dBm]	ERP [Watts]	Power Source
782.00	10	QPSK	1/0	20.00	-0.85	H	19.15	0.082	Battery
782.00	10	16-QAM	1/0	18.78	-0.85	H	17.93	0.062	Battery



Table 6-3. Effective Radiated Power Output Data

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This level is recorded using the power meter. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the worst case radiated power is reported while transmitting with 25 resource blocks with an offset of 12 using QPSK modulation. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found with the EUT in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset	Page 11 of 14	

6.4 LTE Radiated Measurements

§2.1053, §27.53(c)(2)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY: 782.00 MHz
 MEASURED OUTPUT POWER: 20.000 dBm = 0.100 W
 MODULATION SIGNAL: QPSK
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10} (W) =$ 33.00 dBc

FREQUENCY (MHz)	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	(dBc)
2346.00	-44.21	6.26	-37.95	H	58.0
3128.00	-93.78	6.55	-87.23	H	107.2
3910.00	-90.89	6.60	-84.29	H	104.3
4692.00	-88.22	6.77	-81.45	H	101.5



Table 6-4. Radiated Spurious Data (QPSK Modulation)

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the worst case radiated spurious emissions are reported while transmitting with 25 resource blocks with an offset of 12 using QPSK modulation. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found with the EUT in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset	Page 12 of 14	

6.5 LTE Radiated Measurements in 1559 – 1610MHz Band §2.1053, §27.53(f)

Field Strength of SPURIOUS Radiation

OPERATING FREQUENCY:	<u>782.00</u>	MHz
MODULATION SIGNAL:	<u>QPSK</u>	
DISTANCE:	<u>3</u>	meters
NARROWBAND EMISSION LIMIT:	<u>-50</u>	dBm
WIDEBAND EMISSION LIMIT:	<u>-40</u>	dBm/MHz

FREQUENCY (MHz)	EMISSION TYPE	LEVEL @ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	SPURIOUS EMISSION LEVEL (dBm)	POL (H/V)	MARGIN (dB)
1555.69	WIDEBAND	-61.84	8.53	-53.31	H	-13.31
1572.68	WIDEBAND	-62.46	8.54	-53.92	H	-13.92



Table 6-5. Radiated Spurious Data

NOTES:

Radiated Spurious Emission Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:



The EUT was placed on a wooden turn table 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. Final power measurements are made with a broadband average power meter. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. This spurious level is recorded using the power meter. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the worst case radiated spurious emissions are reported while transmitting with 25 resource blocks with an offset of 12 using QPSK modulation. This unit was tested with its standard battery. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case test configuration was found with the EUT in the horizontal setup. The data reported in the table above was measured in this test setup.

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset	Page 13 of 14	

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFVS870** complies with all the requirements of Parts 2 and 27 of the FCC rules.

FCC ID: ZNFVS870		FCC Pt. 27 LTE MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1301150081.ZNF	Test Dates: January 17 - 22, 2013	EUT Type: Portable Handset		Page 14 of 14