



FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

FOR

CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC

MODEL NUMBER: LG-VS876, LGVS876, VS876, LG-AS876, AS876 and LGAS876

FCC ID: ZNFVS876

REPORT NUMBER: 13U16594-5, Revision C

ISSUE DATE: January 28, 2014

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC
100 SYLVAN AVENUE
ENGEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A.**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	1/13/14	Initial Issue	P. Kim
A	1/21/14	Add Models LG-AS876, AS876 and LGAS876	P. Kim
B	1/27/14	Add HT40 Data	P. Kim
C	1/28/14	Remove a repeated sentence	C. Cheung

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>SAMPLE CALCULATION</i>	7
4.3. <i>MEASUREMENT UNCERTAINTY</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>MAXIMUM OUTPUT POWER</i>	8
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	8
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	9
5.5. <i>DESCRIPTION OF TEST SETUP</i>	10
6. TEST AND MEASUREMENT EQUIPMENT	12
7. SUMMARY TABLE	13
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	14
8.1. <i>ON TIME AND DUTY CYCLE RESULTS</i>	14
8.2. <i>DUTY CYCLE PLOTS</i>	15
9. MEASUREMENT METHOD	17
10. ANTENNA PORT TEST RESULTS	18
10.1. <i>26 dB BANDWIDTH</i>	18
10.1.1. 802.11a MODE IN THE 5.2 GHz BAND.....	18
10.1.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	18
10.1.1. 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	18
10.1.1. 802.11a MODE IN THE 5.3 GHz BAND.....	18
10.1.1. 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	19
10.1.1. 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	19
10.1.2. 802.11a MODE IN THE 5.5 GHz BAND.....	20
10.1.3. 802.11n HT20 MODE IN THE 5.5 GHz BAND.....	20
10.1.1. 802.11n HT40 MODE IN THE 5.5 GHz BAND.....	20
10.2. <i>99% BANDWIDTH</i>	26
10.2.1. 802.11a MODE IN THE 5.2 GHz BAND.....	26
10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	26
10.2.1. 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	26
10.2.2. 802.11a MODE IN THE 5.3 GHz BAND.....	26
10.2.3. 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	27
10.2.4. 11n HT40 MODE IN THE 5.2 GHz BAND.....	27

10.2.5.	802.11a MODE IN THE 5.5 GHz BAND.....	28
10.2.6.	802.11n HT20 MODE IN THE 5.5 GHz BAND.....	28
10.2.1.	802.11n HT40 MODE IN THE 5.5 GHz BAND.....	28
10.3.	<i>AVERAGE POWER</i>	34
10.3.1.	802.11a MODE IN THE 5.2 GHz BAND.....	34
10.3.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND.....	34
10.3.1.	802.11n HT40 MODE IN THE 5.2 GHz BAND.....	34
10.3.2.	802.11a MODE IN THE 5.3 GHz BAND.....	34
10.3.3.	802.11n HT20 MODE IN THE 5.3 GHz BAND.....	36
10.3.1.	802.11n HT40 MODE IN THE 5.3 GHz BAND.....	36
10.3.2.	802.11a MODE IN THE 5.5 GHz BAND.....	36
10.3.3.	802.11n HT20 MODE IN THE 5.5 GHz BAND.....	36
10.3.1.	802.11n HT40 MODE IN THE 5.5 GHz BAND.....	36
10.4.	<i>OUTPUT POWER AND PPSD</i>	37
10.4.1.	802.11a MODE IN THE 5.2 GHz BAND.....	38
10.4.2.	802.11n HT20 MODE IN THE 5.2 GHz BAND.....	39
10.4.1.	802.11n HT40 MODE IN THE 5.2 GHz BAND.....	40
10.4.2.	802.11a MODE IN THE 5.3 GHz BAND.....	41
10.4.3.	802.11n HT20 MODE IN THE 5.3 GHz BAND.....	42
10.4.1.	802.11n HT40 MODE IN THE 5.3 GHz BAND.....	43
10.4.2.	802.11a MODE IN THE 5.5 GHz BAND.....	44
10.4.3.	802.11n HT20 MODE IN THE 5.5 GHz BAND.....	45
10.4.1.	802.11n HT40 MODE IN THE 5.5 GHz BAND.....	46
10.5.	<i>PEAK EXCURSION</i>	52
10.5.1.	802.11a MODE IN THE 5.2 GHz BAND.....	52
10.5.1.	802.11n HT20 MODE IN THE 5.2 GHz BAND.....	53
10.5.1.	802.11n HT40 MODE IN THE 5.2 GHz BAND.....	54
10.5.1.	802.11a HT20 MODE IN THE 5.3 GHz BAND.....	55
10.5.1.	802.11n HT20 MODE IN THE 5.3 GHz BAND.....	56
10.5.1.	802.11n HT40 MODE IN THE 5.3 GHz BAND.....	57
10.5.2.	802.11a HT20 MODE IN THE 5.5 GHz BAND.....	58
10.5.3.	802.11n HT20 MODE IN THE 5.5 GHz BAND.....	59
10.5.1.	802.11n HT40 MODE IN THE 5.5 GHz BAND.....	60
11.	TRANSMITTER ABOVE 1 GHz	61
11.1.	<i>5.2 GHz</i>	62
11.1.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND.....	62
11.1.2.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND.....	73
11.1.1.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND.....	84
11.2.	<i>5.3 GHz</i>	92
11.2.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND.....	92
11.2.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND.....	103
11.2.5.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND.....	114
11.3.	<i>5.5-5.6 GHz</i>	122
11.3.1.	TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND.....	122
11.3.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.5 GHz BAND.....	134
11.3.5.	TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.5 GHz BAND.....	146
12.	WORST-CASE BELOW 1 GHz (in the 5.3 GHz Band)	159

13. AC POWER LINE CONDUCTED EMISSIONS.....	162
14. DYNAMIC FREQUENCY SELECTION.....	167
14.1. OVERVIEW.....	167
14.1.1. LIMITS.....	167
14.1.2. TEST AND MEASUREMENT SYSTEM.....	170
14.1.3. SETUP OF EUT.....	173
14.1.4. DESCRIPTION OF EUT.....	174
14.2. RESULTS FOR 20 MHz BANDWIDTH.....	176
14.2.1. TEST CHANNEL.....	176
14.2.2. RADAR WAVEFORM AND TRAFFIC.....	176
14.2.3. OVERLAPPING CHANNEL TESTS.....	178
14.2.4. MOVE AND CLOSING TIME.....	178
14.3. RESULTS FOR 40 MHz BANDWIDTH.....	182
14.3.1. TEST CHANNEL.....	182
14.3.2. RADAR WAVEFORM AND TRAFFIC.....	182
14.3.3. OVERLAPPING CHANNEL TESTS.....	184
14.3.4. MOVE AND CLOSING TIME.....	184
14.3.5. NON-OCCUPANCY PERIOD.....	188
15. SETUP PHOTOS.....	189

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC
EUT DESCRIPTION: CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC
MODEL: LG-VS876, LGVS876, VS876, LG-AS876, AS876 and LGAS876
SERIAL NUMBER: 1792206-VS
DATE TESTED: DECEMBER 13, 2013 – JANUARY 27, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart E	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PHILIP KIM
WISE PROGRAM MANAGER
UL Verification Services Inc.

CHARLES VERGONIO
Wise LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, FCC 06-96, ANSI C63.10-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5180-5240	802.11a	14.16	26.06
5180-5240	802.11n HT20	13.39	21.83
5180-5240	802.11n HT40	11.6	14.45
5260-5320	802.11a	14.44	27.80
5260-5320	802.11n HT20	13.5	22.39
5260-5320	802.11n HT40	11.46	14.00
5500-5700	802.11a	14.08	25.59
5500-5700	802.11n HT20	13.1	20.42
5500-5700	802.11n HT40	11.57	14.35

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -0.7 dBi for 5.2GHz;0.27 for 5.3GHz; 1.95 for 5.5GHz

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that the X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in the X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11a mode: 6 Mbps
802.11n HT20mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WD	DA3Y0035121	N/A
Earphone	LG	EAB62209201	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is setup as a stand-alone device.

SETUP DIAGRAM FOR TESTS

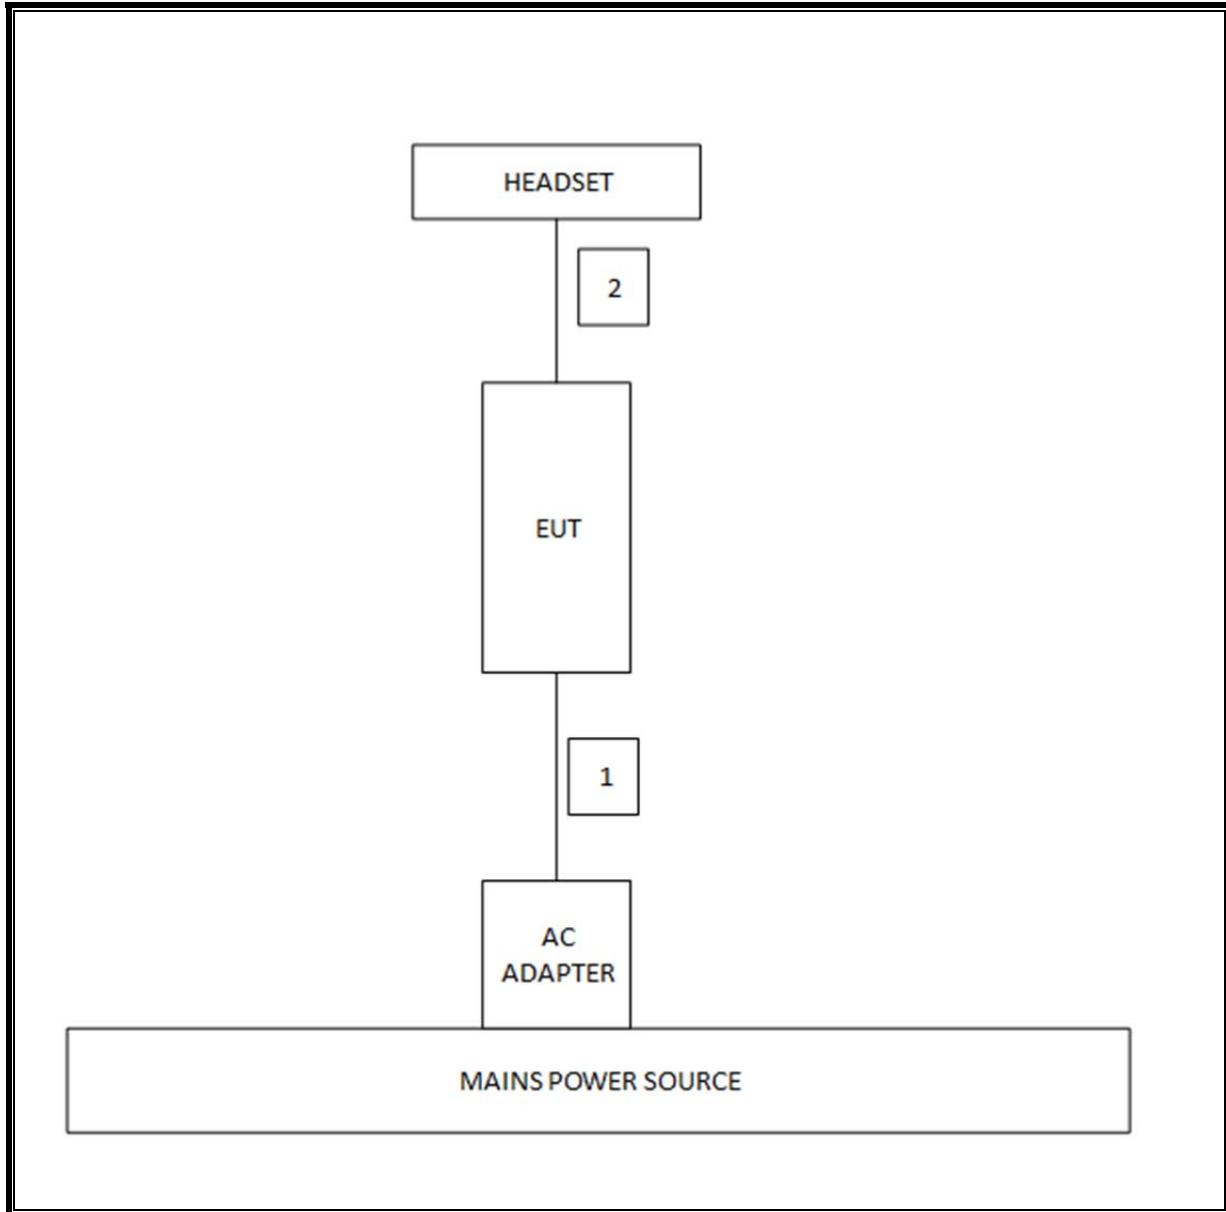

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	4/1/2014
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	2/26/2014
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	8/8/2013
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	1/28/2014
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/2014
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	8/2/2013
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	N/A	3/6/2014
Antenna, Horn, 18 GHz	ETS	3117	C01022	2/21/2014
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/2014
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/2014
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/2014
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)	Occupied Band width (26dB)	N/A	Conducted	Pass	46.6MHz
15.407 (a)(1)	TX Cond. Power 5.15-5.25	<17dBm or 4+10Log(OBW)		Pass	14.16dBm
15.407 (a)(2)	TX Cond. Power 5.25-5.35 & 5.47-5.725	<24dBm or 11+10Log(OBW)		Pass	14.44dBm
15.407 (a)(5)	PSD	<8dBm		Pass	0.50dBm
15.407 (a)(6)	Peak Excursion Ratio	13dB		Pass	10.45dBm
15.207 (a)	AC Power Line conducted emissions	Section 10	Radiated	Pass	24.80dBuV(AV)
15.407 (b) & 15.209	Radiated Spurious Emission	< 54dBuV/m		Pass	47.2dBuV
15.407 (h)(2)	Dynamic Frequency Selection	N/A	Radiated / Condcuted	Pass	N/A

8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.



PROCEDURE


KDB 789033 Zero-Span Spectrum Analyzer Method.

8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)
802.11a	2.03	2.13	0.955	95.5%	0.20	0.493
802.11n HT20	1.88	1.98	0.948	94.8%	0.23	0.532
802.11n HT40	0.63	0.74	0.850	85.0%	0.71	1.595

8.2. DUTY CYCLE PLOTS

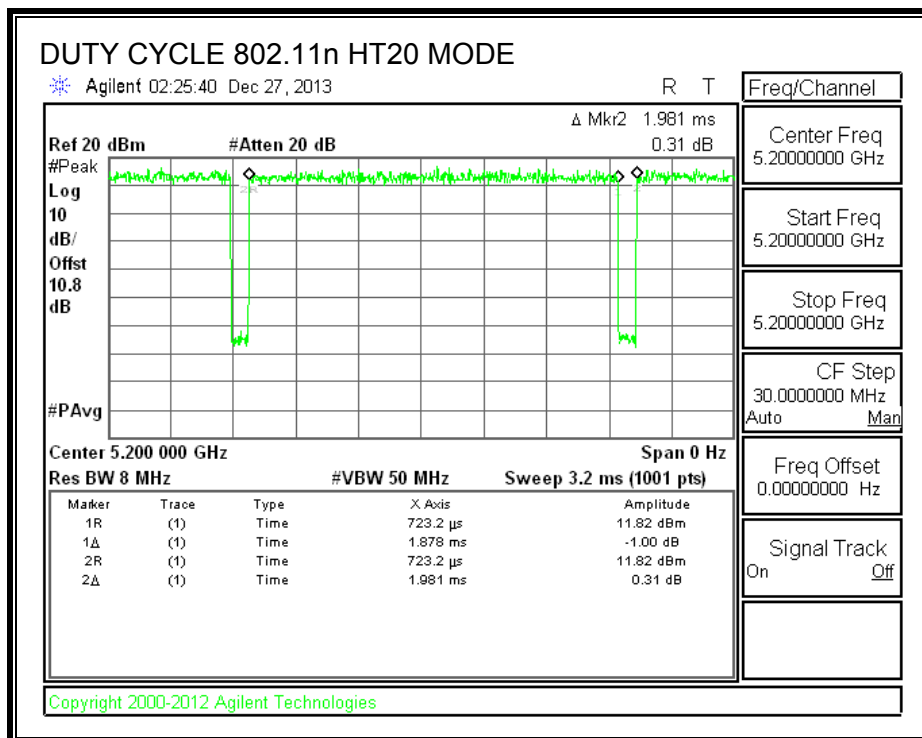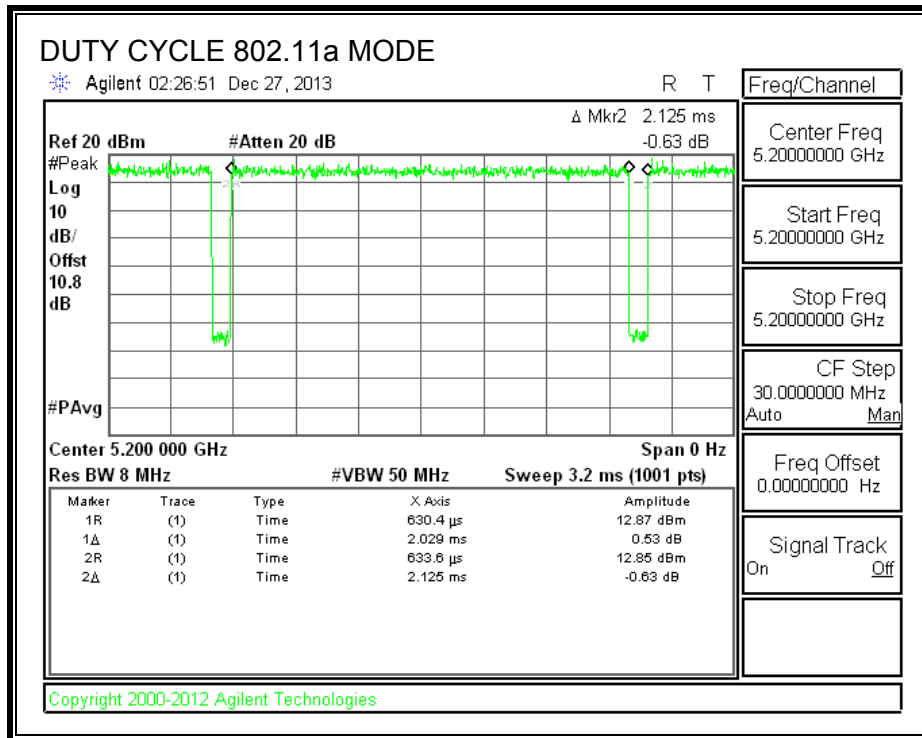

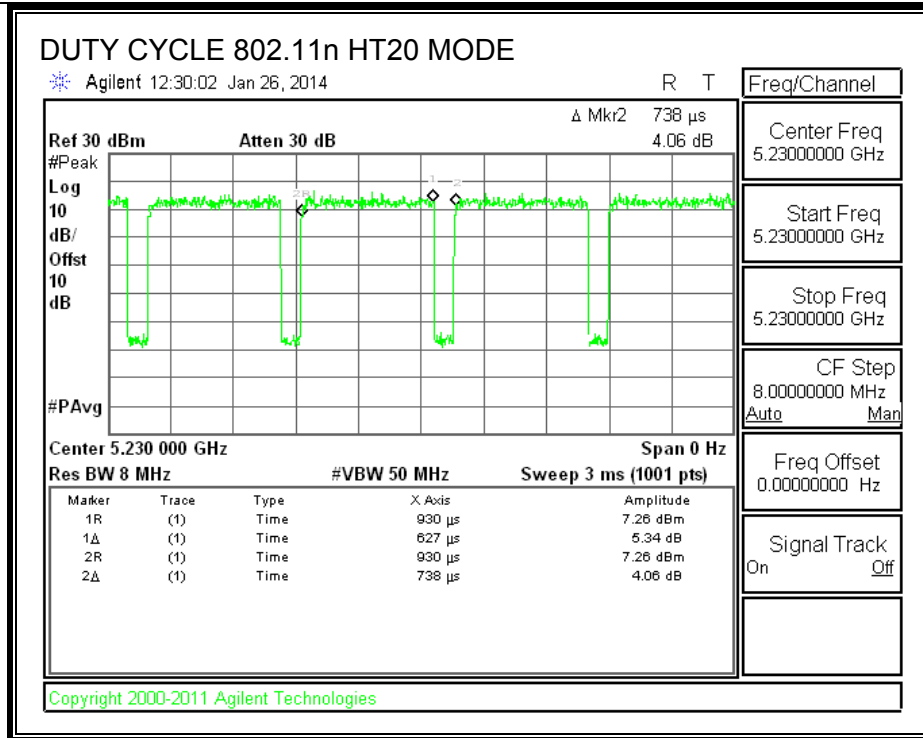

9. MEASUREMENT METHOD

The Duty Cycle is less than 98% and consistent therefore KDB 789033 Method SA-2 is used for power and PPSD

The Duty Cycle is less than 98% and consistent, KDB 789033 Method AD with Power RMS Averaging and duty cycle correction is used.

10. ANTENNA PORT TEST RESULTS

10.1. 26 dB BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

10.1.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.20
Mid	5200	22.15
High	5240	22.15
Worst		22.20

10.1.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5180	22.35
Mid	5200	22.55
High	5240	22.55
Worst		22.55

10.1.1. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	26dB Bandwidth (MHz)
Low	5190	46.300
Mid	5230	46.200
Worst		46.200

10.1.1. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	22.15
Mid	5300	21.90
High	5320	22.15
Worst		22.15

10.1.1. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5260	22.45
Mid	5300	22.40
High	5320	22.65
Worst		22.65

10.1.1. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5270	46.6
High	5310	46.3
Worst		46.6

10.1.2. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	22.250
Mid	5580	22.350
High	5700	22.800
Worst		22.800


10.1.3. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5500	22.700
Mid	5580	22.500
High	5700	22.400
Worst		22.700


10.1.1. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
Low	5510	46.4
Mid	5550	46.2
High	5670	46.2
Worst		46.4


802.11a 5.2G 26 dB BANDWIDTH

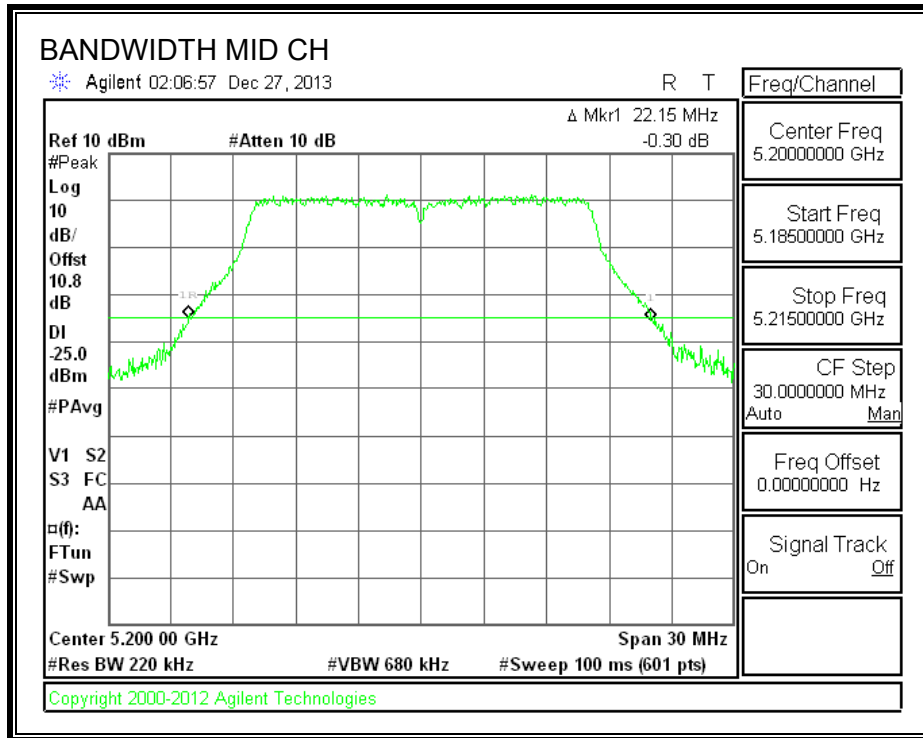


802.11n HT20 5.2G 26 dB BANDWIDTH

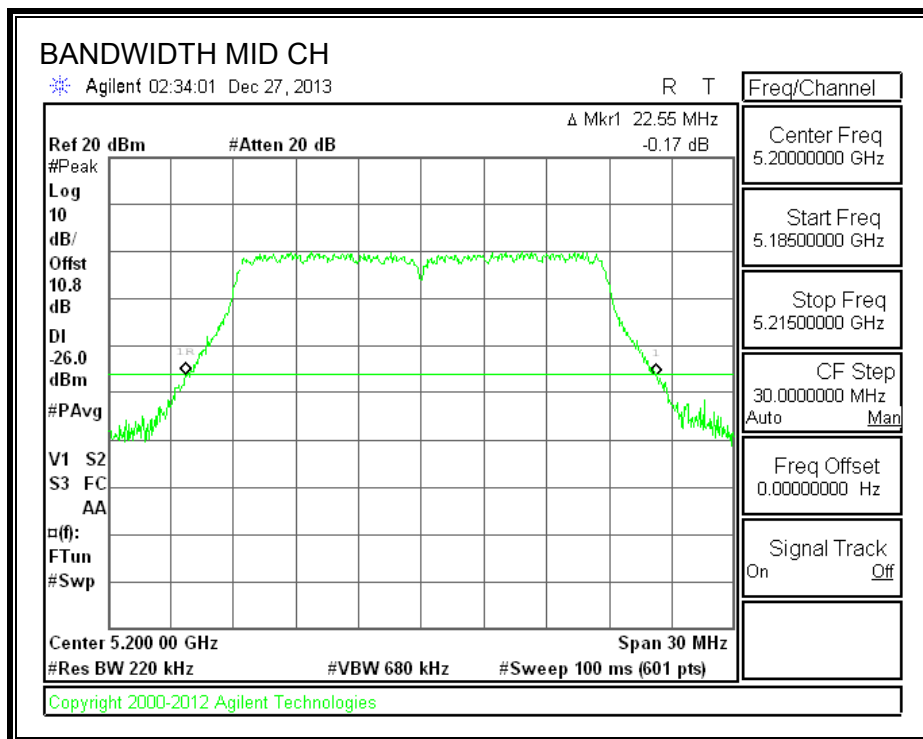


802.11n HT40 5.2G 26 dB BANDWIDTH

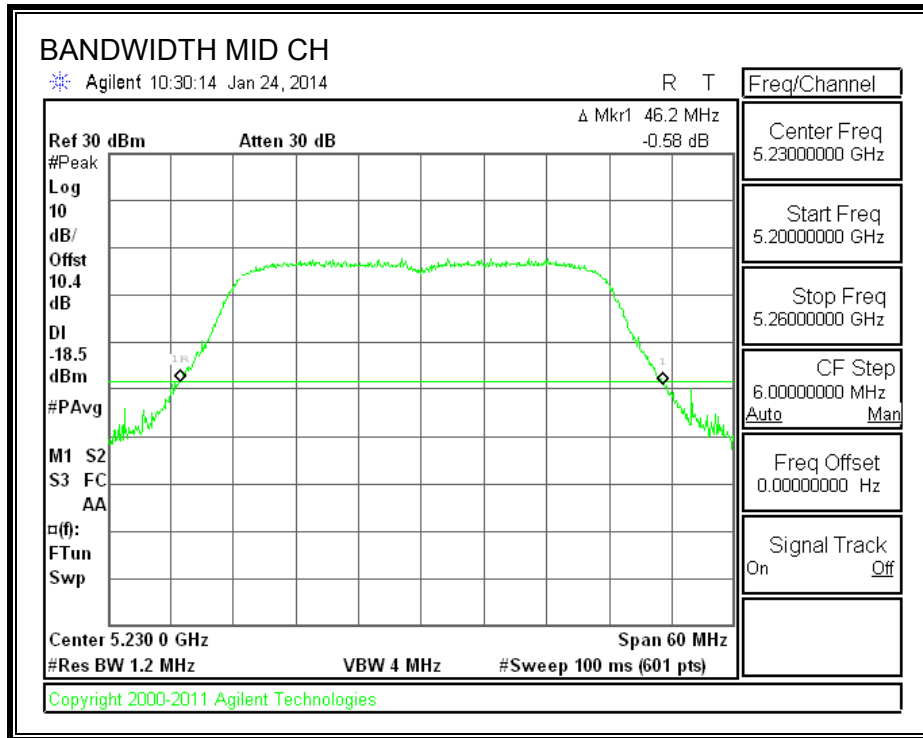


802.11a 5.3G 26 dB BANDWIDTH

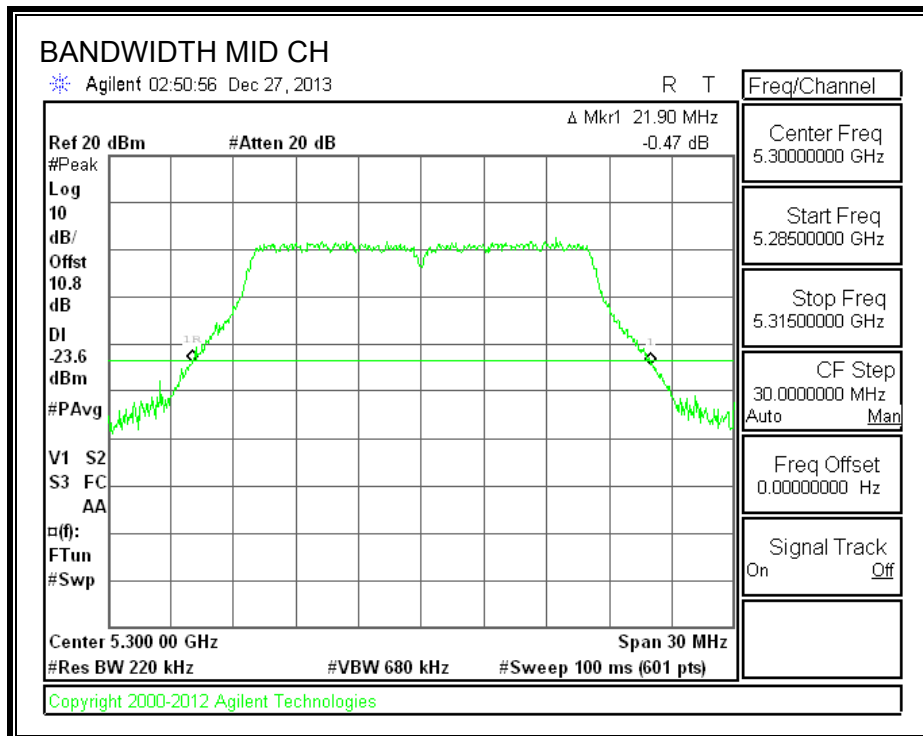


802.11n HT20 5.3G 26 dB BANDWIDTH

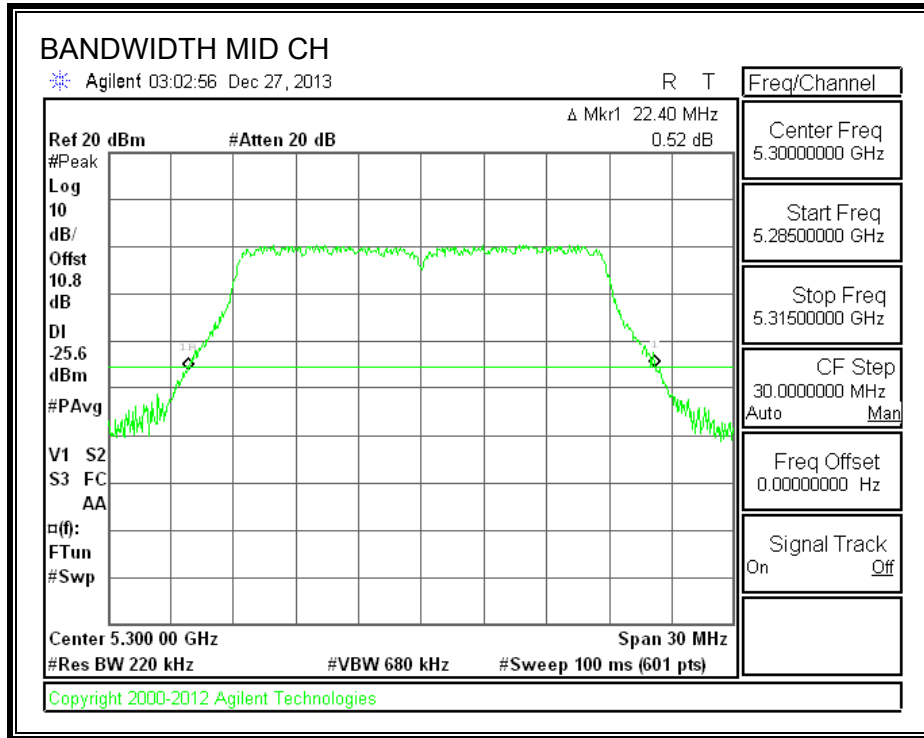


802.11n HT40 5.3G 26 dB BANDWIDTH

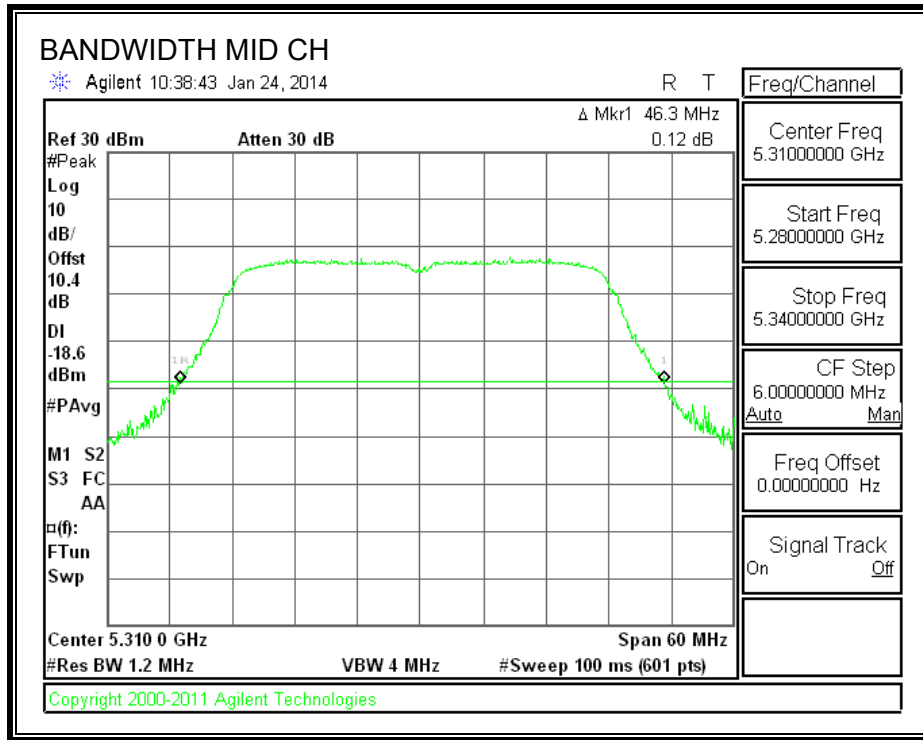


802.11a 5.5G 26 dB BANDWIDTH

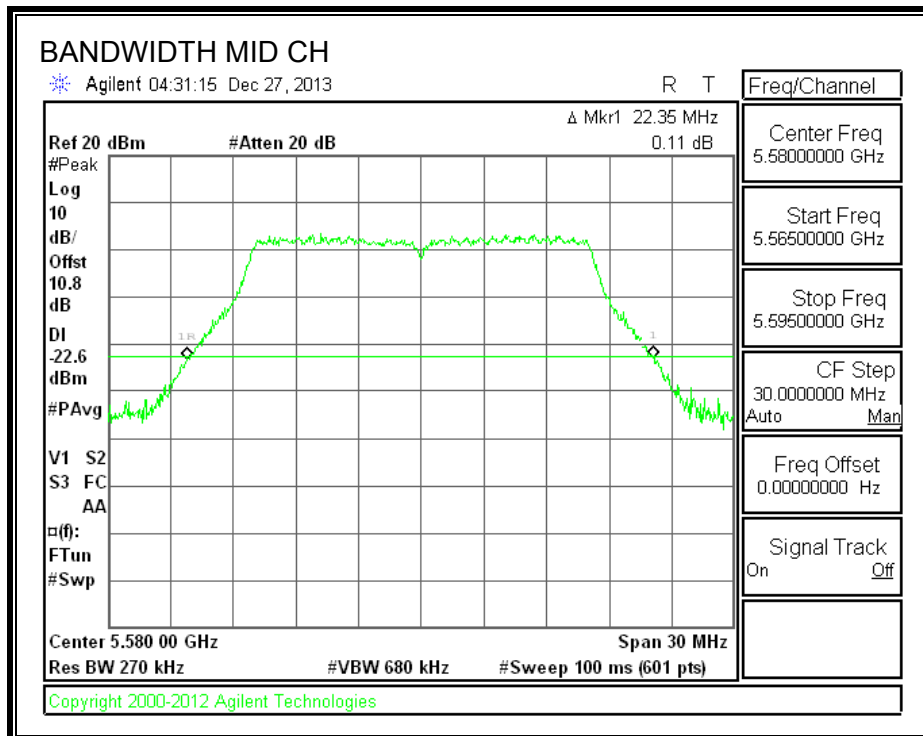

802.11n HT20 5.5G 26 dB BANDWIDTH

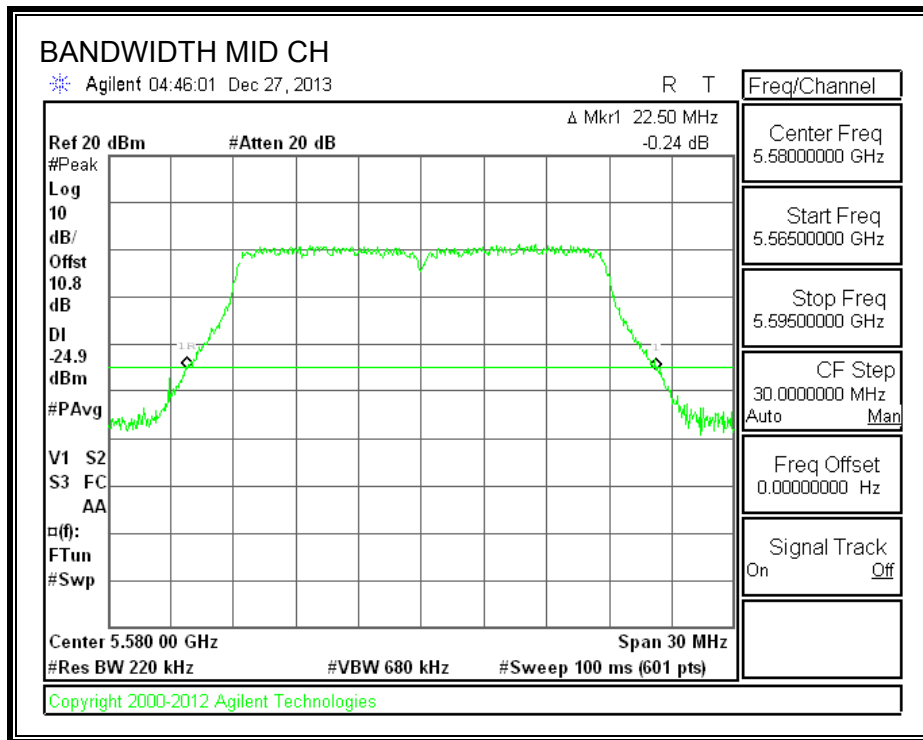

802.11n HT40 5.5G 26 dB BANDWIDTH

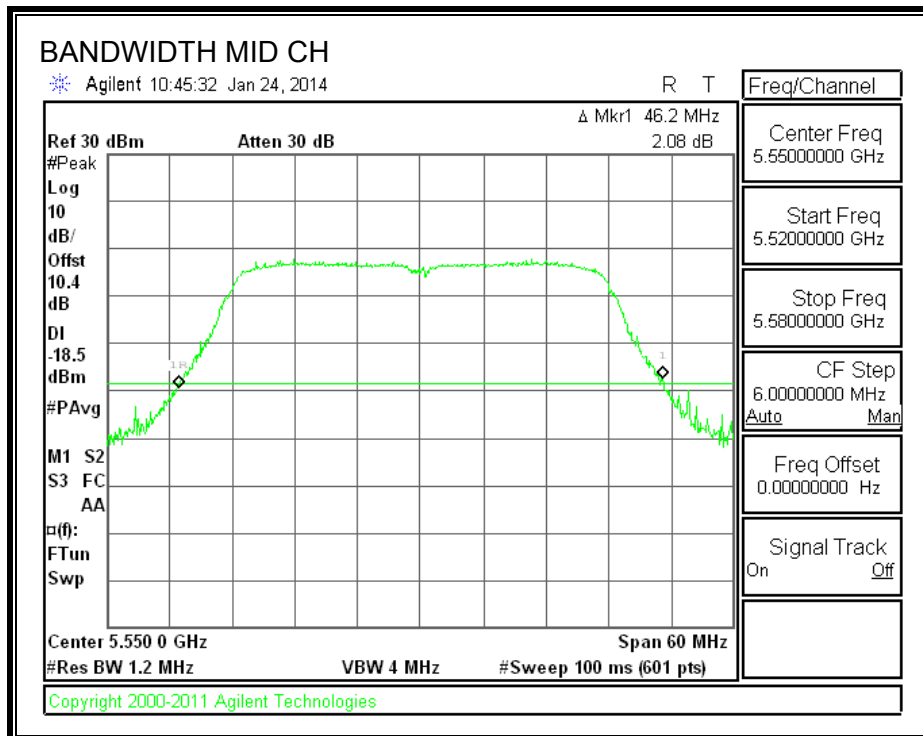

10.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

10.2.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	17.07
Mid	5200	17.08
High	5240	17.07
Worst		17.08

10.2.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5180	18.11
Mid	5200	18.06
High	5240	18.06
Worst		18.11

10.2.1. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.898
Mid	5230	36.874
Worst		36.898

10.2.2. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	17.08
Mid	5300	17.09
High	5320	17.11
Worst		17.11

10.2.3. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5260	18.06
Mid	5300	18.07
High	5320	18.02
Worst		18.07

10.2.4. 11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5190	36.898
Mid	5230	36.874
Worst		36.898

10.2.5. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	17.060
Mid	5580	17.070
High	5700	17.090
Worst		17.090


10.2.6. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5500	18.040
Mid	5580	18.050
High	5700	18.070
Worst		18.070


10.2.1. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5510	36.820
Mid	5550	36.880
High	5670	36.870
Worst		36.880


802.11a 5.2G 99% BANDWIDTH

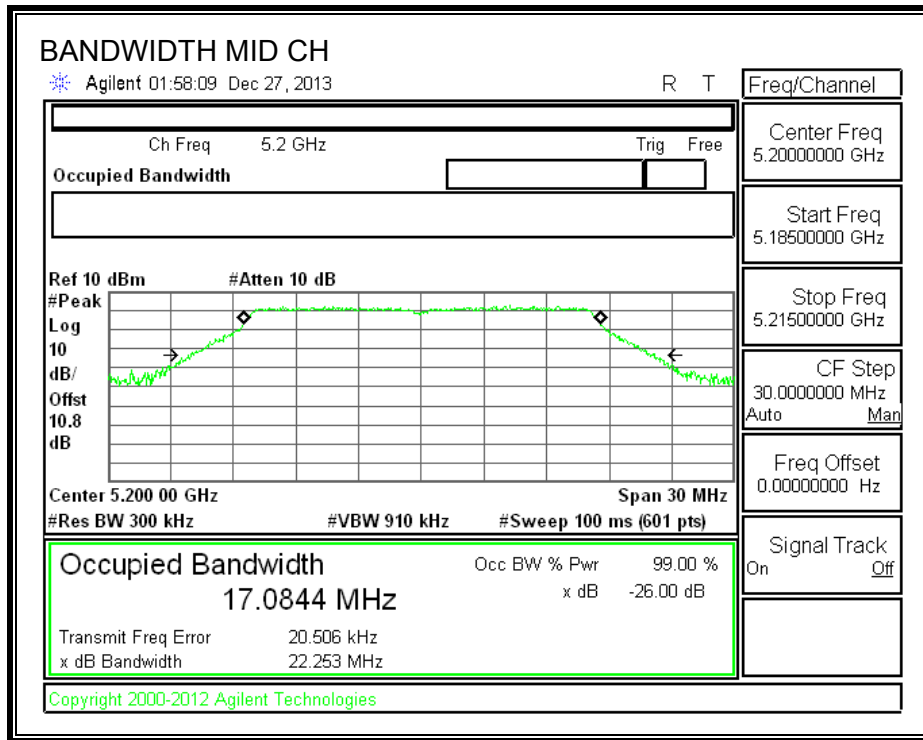


802.11n HT20 5.2G 99% BANDWIDTH

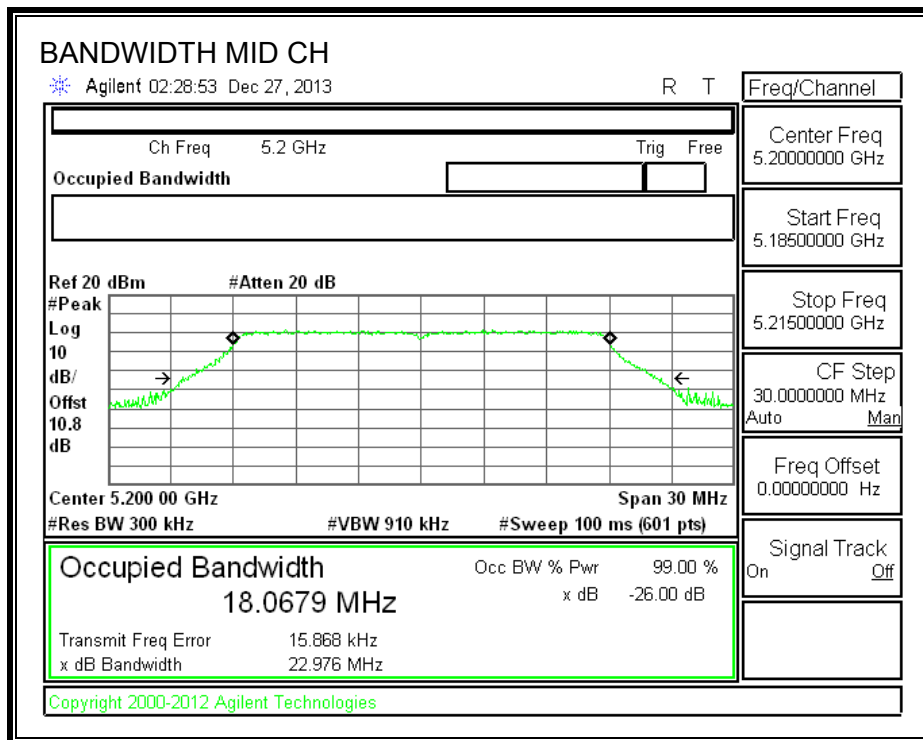


802.11n HT40 5.2G 99% BANDWIDTH

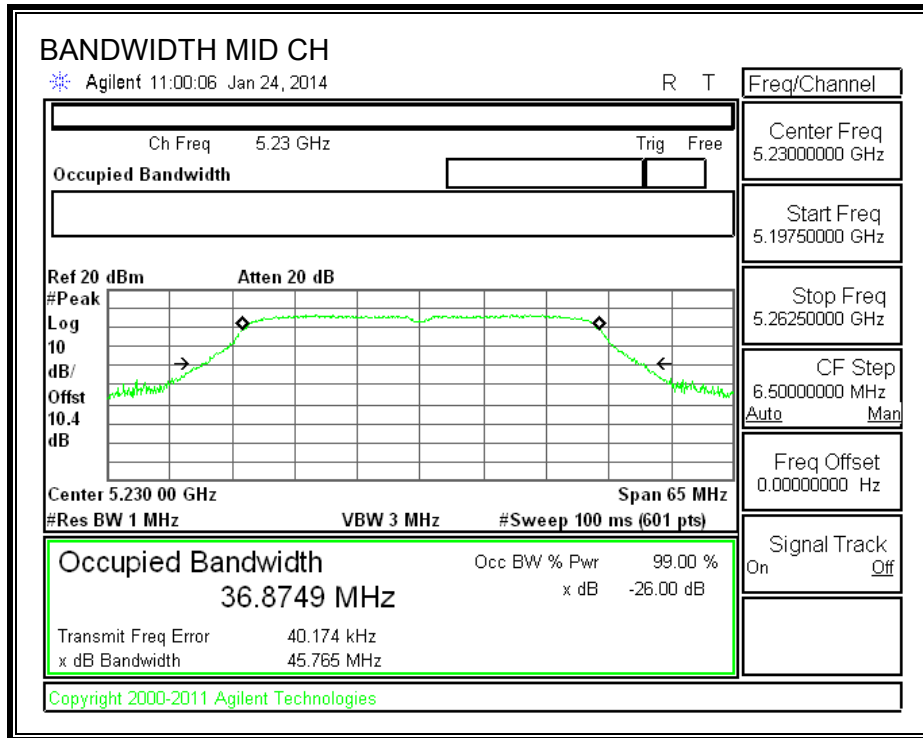


802.11a 5.3G 99% BANDWIDTH

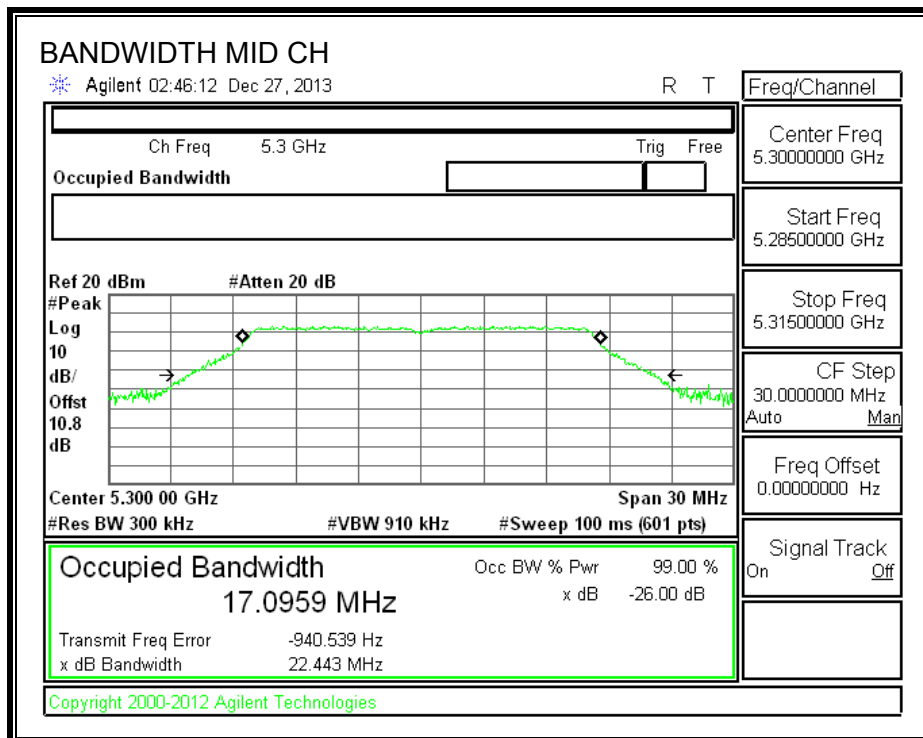


802.11n HT20 5.3G 99% BANDWIDTH

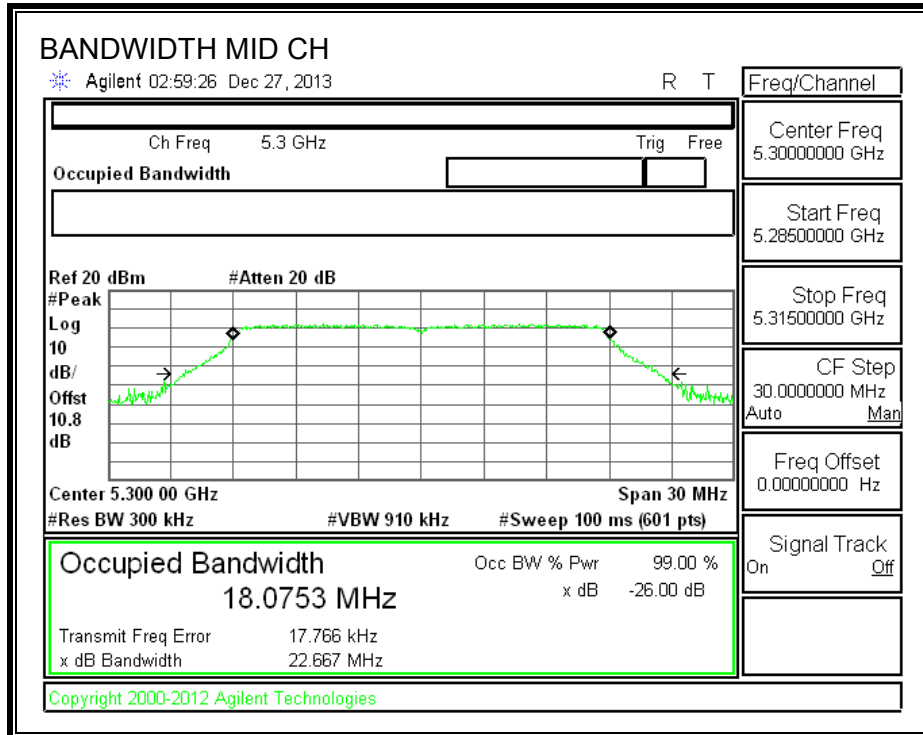


802.11n HT40 5.3G 99% BANDWIDTH

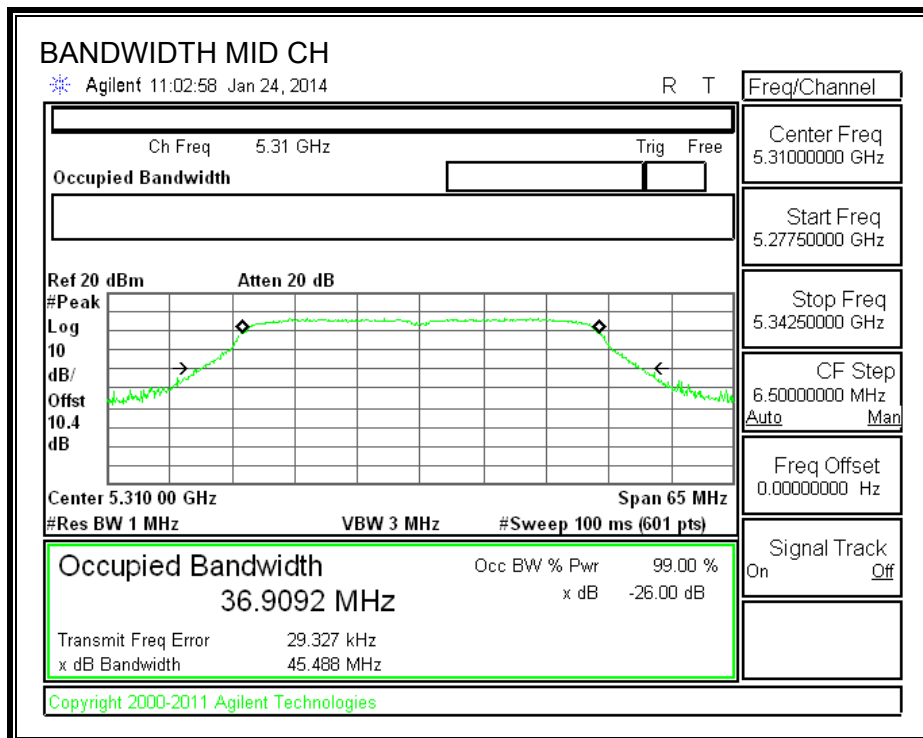


802.11a 5.5G 99% BANDWIDTH

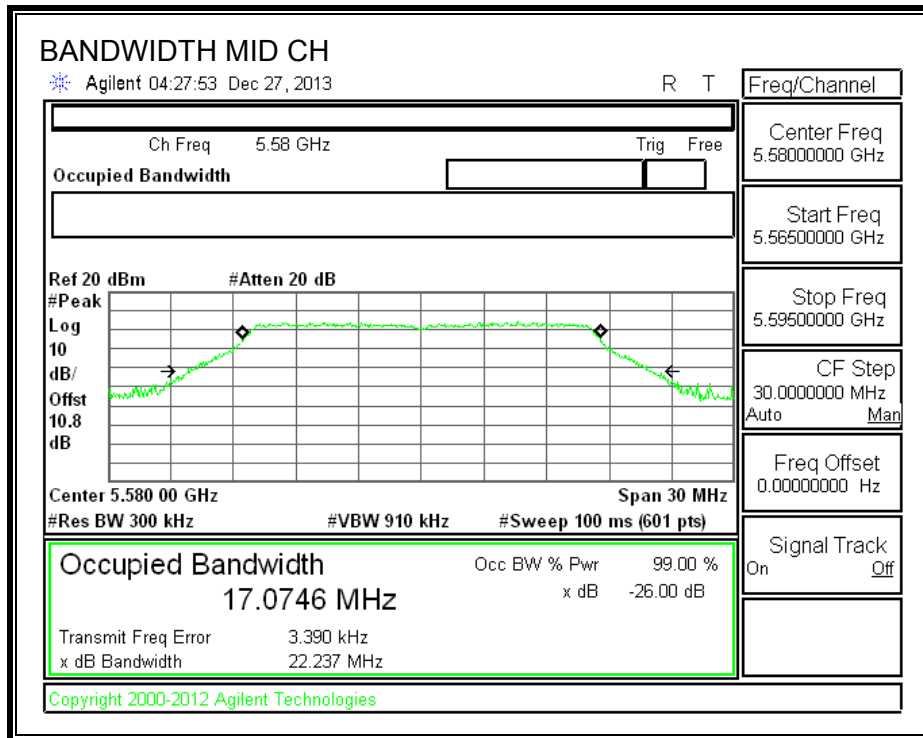

802.11n HT20 5.5G 99% BANDWIDTH

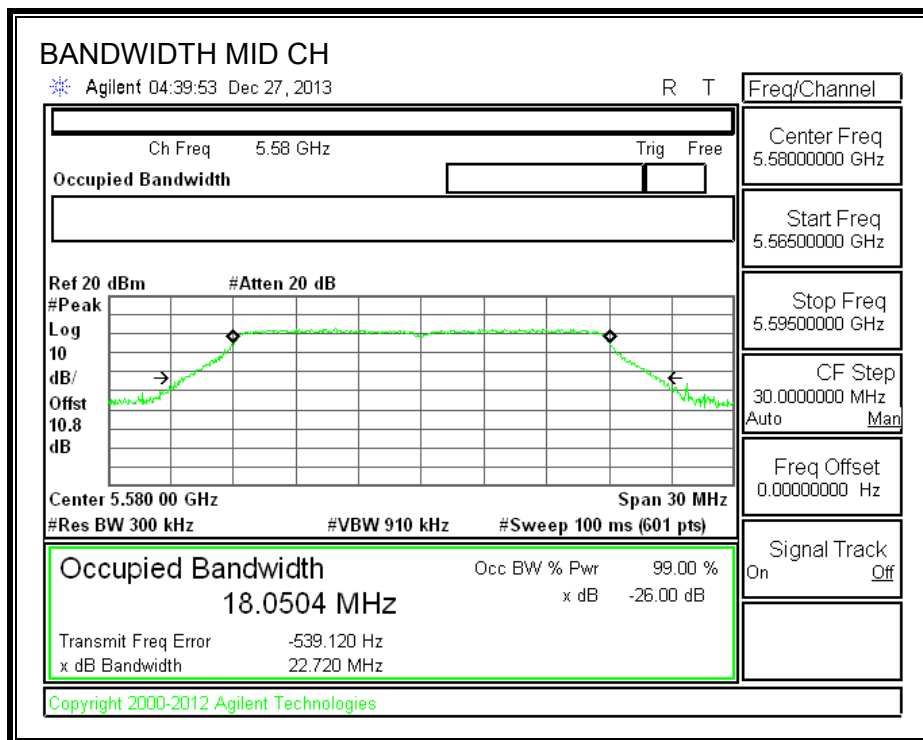

802.11n HT40 5.5G 99% BANDWIDTH

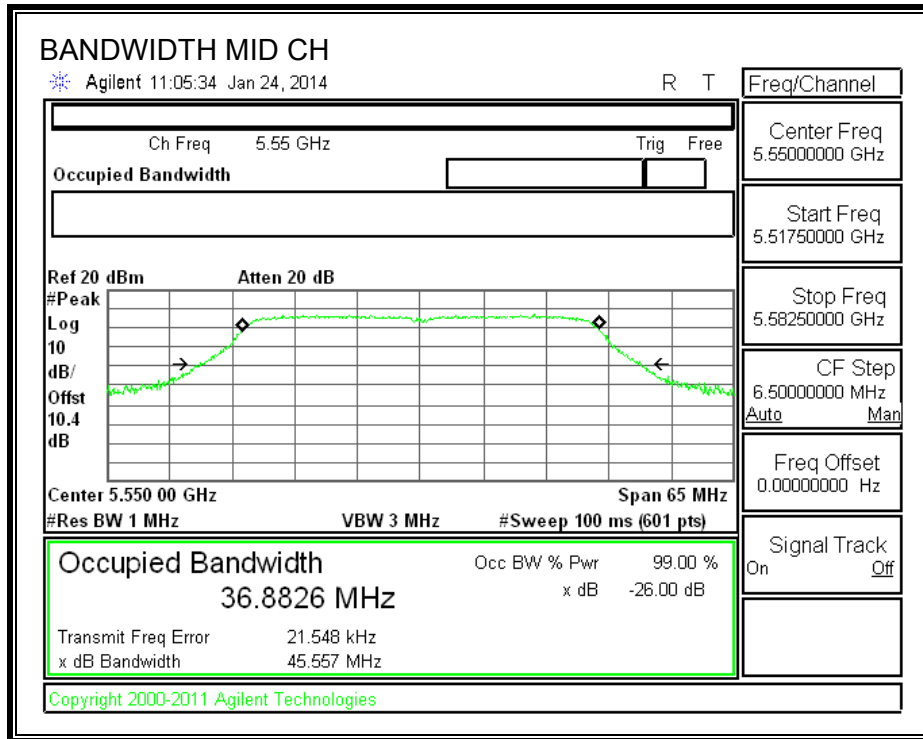

10.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

10.3.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5180	10.70
Mid	5200	11.11
High	5240	11.40
Worst		11.40

10.3.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5180	9.94
Mid	5200	10.23
High	5240	10.44
Worst		10.44

10.3.1. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5190	10.000
Mid	5230	10.700
Worst		10.700

10.3.2. 802.11a MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5260	10.96
Mid	5300	11.23
High	5320	11.23
Worst		11.23

10.3.3. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5260	10.25
Mid	5300	10.52
High	5320	11.80
Worst		11.80

10.3.1. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5270	10.2
High	5310	10.2
Worst		10.2

10.3.2. 802.11a MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5500	12.700
Mid	5580	12.800
High	5700	12.500
Worst		12.800

10.3.3. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5500	11.900
Mid	5580	11.500
High	5700	11.600
Worst		11.900

10.3.1. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	5510	10.5
High	5670	10.0
Worst		10.5

10.4. OUTPUT POWER AND PPSD

LIMITS

FCC §15.407 (a) (1)

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26–dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1–MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

IC RSS-210 A9.2 (1)

The maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

Test Methodology

RESULTS

10.4.1. 802.11a MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5180	22.200	17.070	-0.70
Mid	5200	22.150	17.080	-0.70
High	5240	22.150	17.070	-0.70

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5180	17.00	22.32	23.02	17.00	4.00	10.00	4.00
Mid	5200	17.00	22.32	23.02	17.00	4.00	10.00	4.00
High	5240	17.00	22.32	23.02	17.00	4.00	10.00	4.00

Duty Cycle CF (dB)	0.20	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	13.325	13.53	17.00	-3.48
Mid	5200	13.794	13.99	17.00	-3.01
High	5240	13.956	14.16	17.00	-2.84

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	2.110	2.31	4.00	-1.69
Mid	5200	2.720	2.92	4.00	-1.08
High	5240	2.660	2.86	4.00	-1.14

10.4.2. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5180	22.350	18.110	-0.70
Mid	5200	22.550	18.060	-0.70
High	5240	22.550	18.060	-0.70

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5180	17.00	22.58	23.28	17.00	4.00	10.00	4.00
Mid	5200	17.00	22.57	23.27	17.00	4.00	10.00	4.00
High	5240	17.00	22.57	23.27	17.00	4.00	10.00	4.00

Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5180	12.703	12.93	17.00	-4.07
Mid	5200	13.056	13.29	17.00	-3.71
High	5240	13.161	13.39	17.00	-3.61

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5180	1.250	1.48	4.00	-2.52
Mid	5200	1.480	1.71	4.00	-2.29
High	5240	1.540	1.77	4.00	-2.23

10.4.1. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5190	46.2	36.874	-0.70
Mid	5230	46.2	36.874	-0.70

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5190	17.00	23.00	23.70	17.00	4.00	10.00	4.00
Mid	5230	17.00	23.00	23.70	17.00	4.00	10.00	4.00
Duty Cycle CF (dB)		0.71	Included in Calculations of Corr'd Power & PPSD					

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5190	10.399	11.11	17.00	-5.89
Mid	5230	10.894	11.60	17.00	-5.40

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5190	-4.470	-3.76	4.00	-7.76
Mid	5230	-3.970	-3.26	4.00	-7.26

10.4.2. 802.11a MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5260	22.15	17.080	0.27
Mid	5300	21.90	17.090	0.27
High	5320	22.15	17.110	0.27

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5260	24.00	23.32	29.32	23.32	11.00	11.00	11.00
Mid	5300	24.00	23.33	29.33	23.33	11.00	11.00	11.00
High	5320	24.00	23.33	29.33	23.33	11.00	11.00	11.00

Duty Cycle CF (dB)	0.20	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	13.814	14.01	23.32	-9.31
Mid	5300	14.239	14.44	23.33	-8.89
High	5320	13.991	14.19	23.33	-9.14

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	2.520	2.72	11.00	-8.28
Mid	5300	2.940	3.14	11.00	-7.86
High	5320	2.700	2.90	11.00	-8.10

10.4.3. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5260	22.45	18.060	0.27
Mid	5300	22.40	18.070	0.27
High	5320	22.65	18.020	0.27

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5260	24.00	23.57	29.57	23.57	11.00	11.00	11.00
Mid	5300	24.00	23.57	29.57	23.57	11.00	11.00	11.00
High	5320	24.00	23.56	29.56	23.56	11.00	11.00	11.00

Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5260	13.112	13.34	23.57	-10.23
Mid	5300	13.270	13.50	23.57	-10.07
High	5320	13.150	13.38	23.56	-10.18

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5260	1.550	1.78	11.00	-9.22
Mid	5300	1.750	1.98	11.00	-9.02
High	5320	1.600	1.83	11.00	-9.17

10.4.1. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5270	46.3	36.874	0.27
High	5310	46.3	36.874	0.27

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC EIRP Limit (dBm)	Max IC Power (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC eirp PSD Limit (dBm)	PPSD Limit (dBm)
Low	5270	17.00	23.00	22.73	17.00	4.00	10.00	4.00
High	5310	17.00	23.00	22.73	17.00	4.00	10.00	4.00
Duty Cycle CF (dB)		0.71	Included in Calculations of Corr'd Power & PSD					

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5270	10.753	11.46	17.00	-5.54
High	5310	10.653	11.36	17.00	-5.64

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5270	-4.240	-3.53	4.00	-7.53
High	5310	-4.130	-3.42	4.00	-7.42

10.4.2. 802.11a MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	22.25	17.060	1.95
Mid	5580	22.35	17.070	1.95
High	5700	22.80	17.090	1.95

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5500	24.00	23.32	29.32	23.32	11.00	11.00	11.00
Mid	5580	24.00	23.32	29.32	23.32	11.00	11.00	11.00
High	5700	24.00	23.33	29.33	23.33	11.00	11.00	11.00

Duty Cycle CF (dB)	0.20	Included in Calculations of Corr'd Power & PPSD
---------------------------	------	--

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	13.666	13.87	23.32	-9.45
Mid	5580	13.882	14.08	23.32	-9.24
High	5700	13.777	13.98	23.33	-9.35

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	2.340	2.54	11.00	-8.46
Mid	5580	2.590	2.79	11.00	-8.21
High	5700	2.490	2.69	11.00	-8.31

10.4.3. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5500	22.70	18.040	1.95
Mid	5580	22.50	18.050	1.95
High	5700	22.40	18.070	1.95

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5500	24.00	23.56	29.56	23.56	11.00	11.00	11.00
Mid	5580	24.00	23.56	29.56	23.56	11.00	11.00	11.00
High	5700	24.00	23.57	29.57	23.57	11.00	11.00	11.00

Duty Cycle CF (dB)	0.23	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---

Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5500	12.866	13.10	23.56	-10.47
Mid	5580	12.800	13.03	23.56	-10.53
High	5700	12.734	12.96	23.57	-10.61

PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5500	1.280	1.51	11.00	-9.49
Mid	5580	1.170	1.40	11.00	-9.60
High	5700	1.150	1.38	11.00	-9.62

10.4.1. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Bandwidth and Antenna Gain

Channel	Frequency (MHz)	Min 26 dB BW (MHz)	Min 99% BW (MHz)	Directional Gain (dBi)
Low	5510	46.2	36.820	1.95
Mid	5550	46.2	36.820	1.95
High	5670	46.2	36.820	1.95

Limits

Channel	Frequency (MHz)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Power Limit (dBm)	FCC PPSD Limit (dBm)	IC PSD Limit (dBm)	PPSD Limit (dBm)
Low	5510	24.00	24.00	30.00	24.00	11.00	11.00	11.00
Mid	5550	24.00	24.00	30.00	24.00	11.00	11.00	11.00
High	5670	24.00	24.00	30.00	24.00	11.00	11.00	11.00

Duty Cycle CF (dB)	0.71	Included in Calculations of Corr'd Power & PSD
---------------------------	------	---


Output Power Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Power Margin (dB)
Low	5510	10.670	11.38	24.00	-12.62
Mid	5550	10.857	11.57	24.00	-12.43
High	5670	10.566	11.28	24.00	-12.72


PPSD Results

Channel	Frequency (MHz)	Chain 0 Meas PPSD (dBm)	Total Corr'd PPSD (dBm)	PPSD Limit (dBm)	PPSD Margin (dB)
Low	5510	-4.270	-3.56	11.00	-14.56
Mid	5550	-3.980	-3.27	11.00	-14.27
High	5670	-4.170	-3.46	11.00	-14.46


802.11a 5.2G OUTPUT POWER AND PPSD, Chain 0

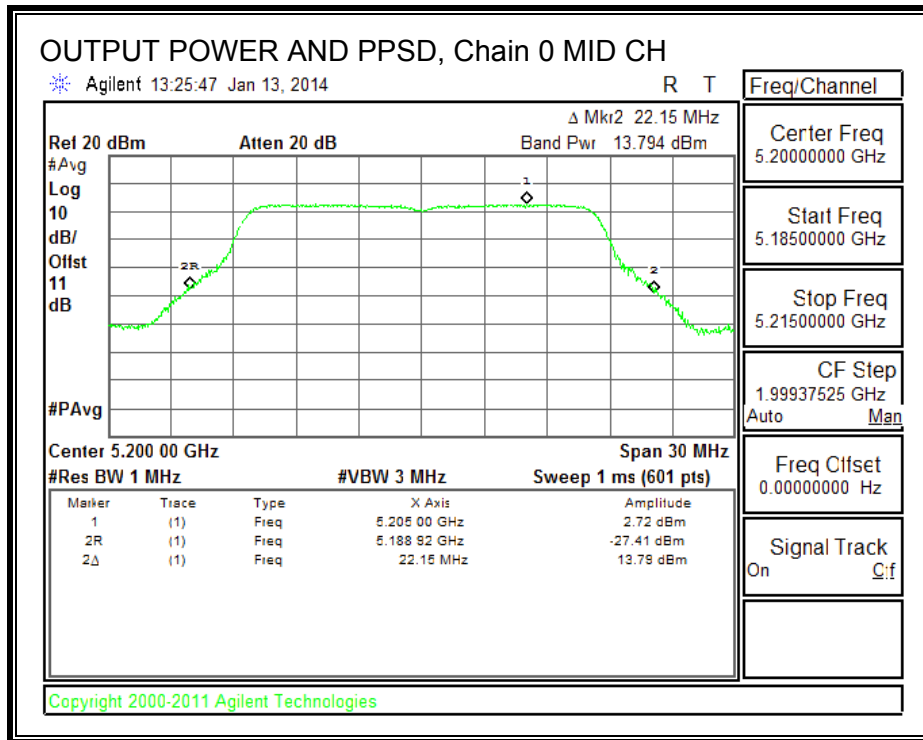


802.11n HT20 5.2G OUTPUT POWER AND PPSD, Chain 0

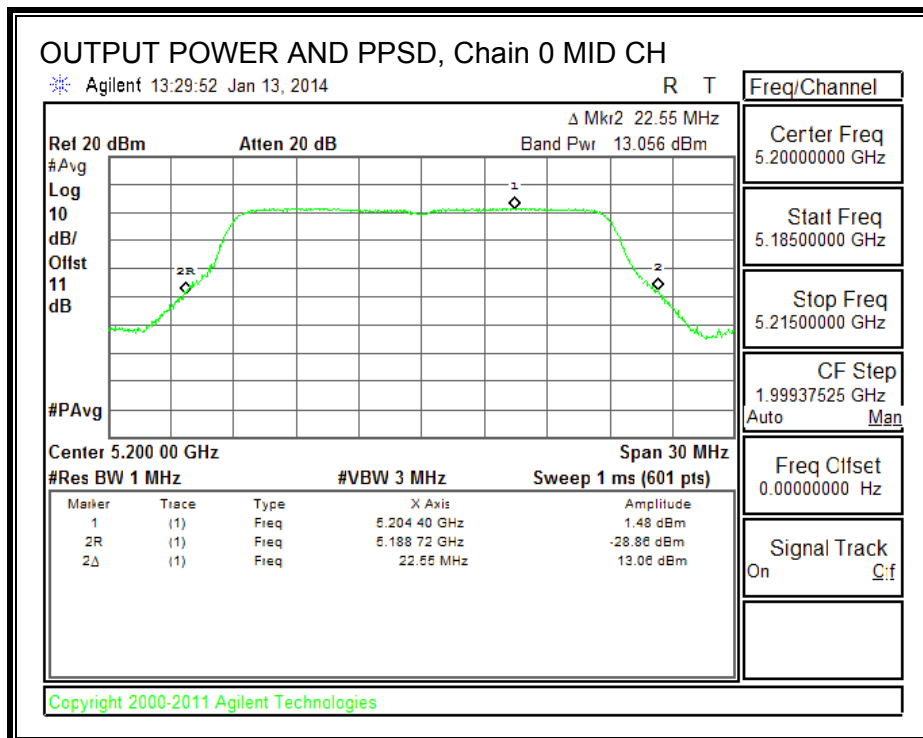


802.11n HT40 5.2G OUTPUT POWER AND PPSD, Chain 0

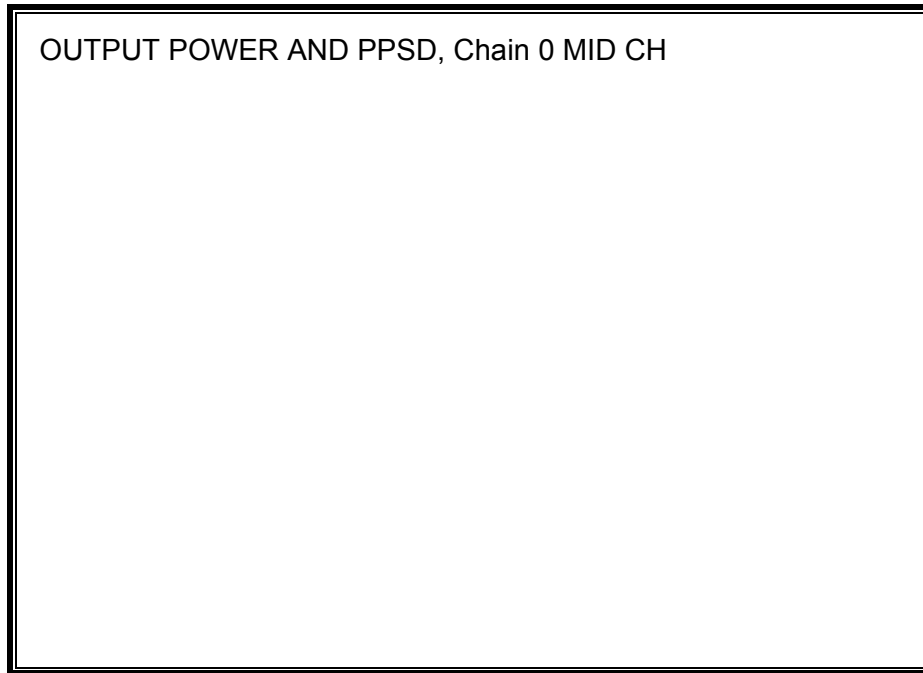


802.11a 5.3G OUTPUT POWER AND PPSD, Chain 0

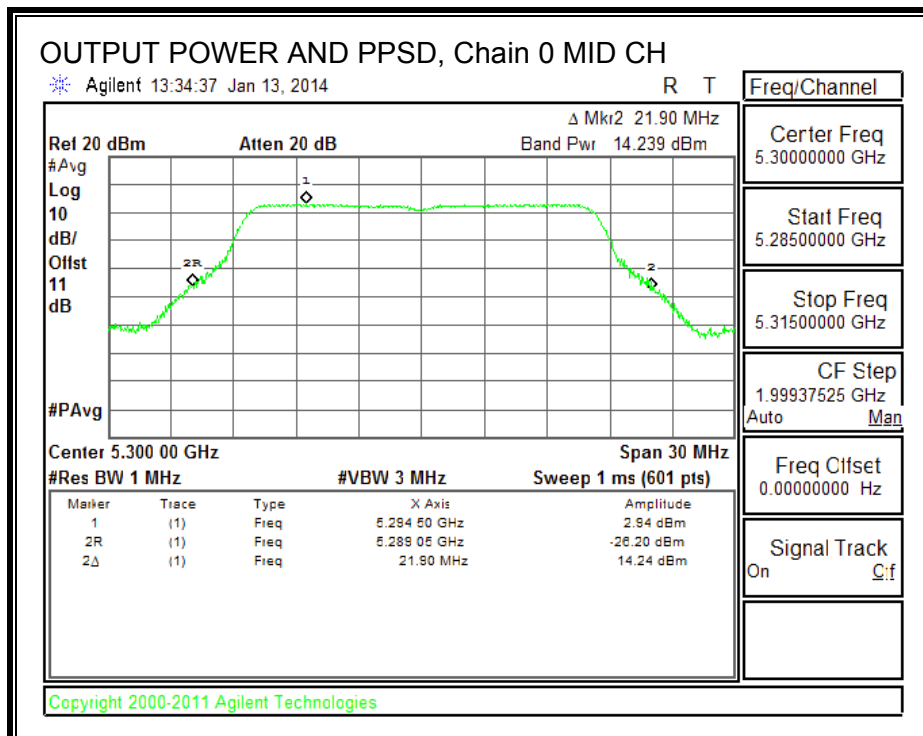


802.11n HT20 5.3G OUTPUT POWER AND PPSD, Chain 0

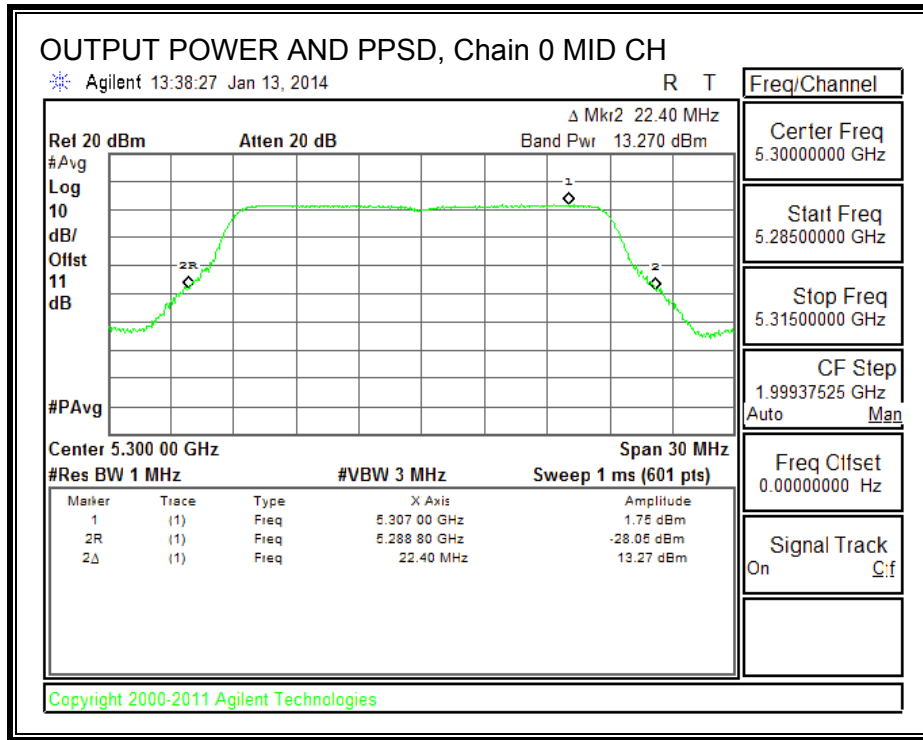


802.11n HT40 5.3G OUTPUT POWER AND PPSD, Chain 0

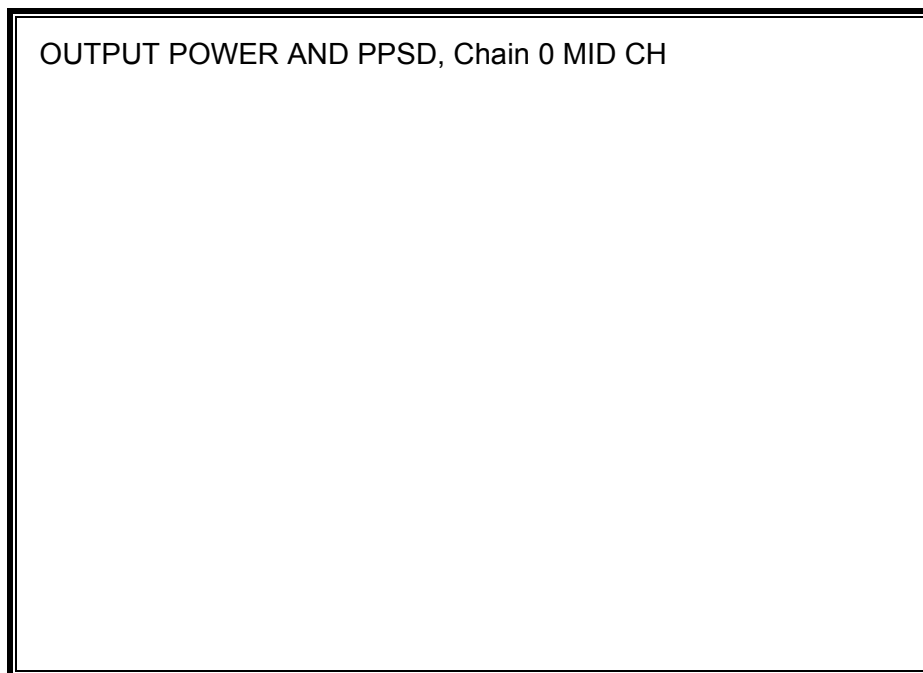


802.11a 5.5G OUTPUT POWER AND PPSD, Chain 0

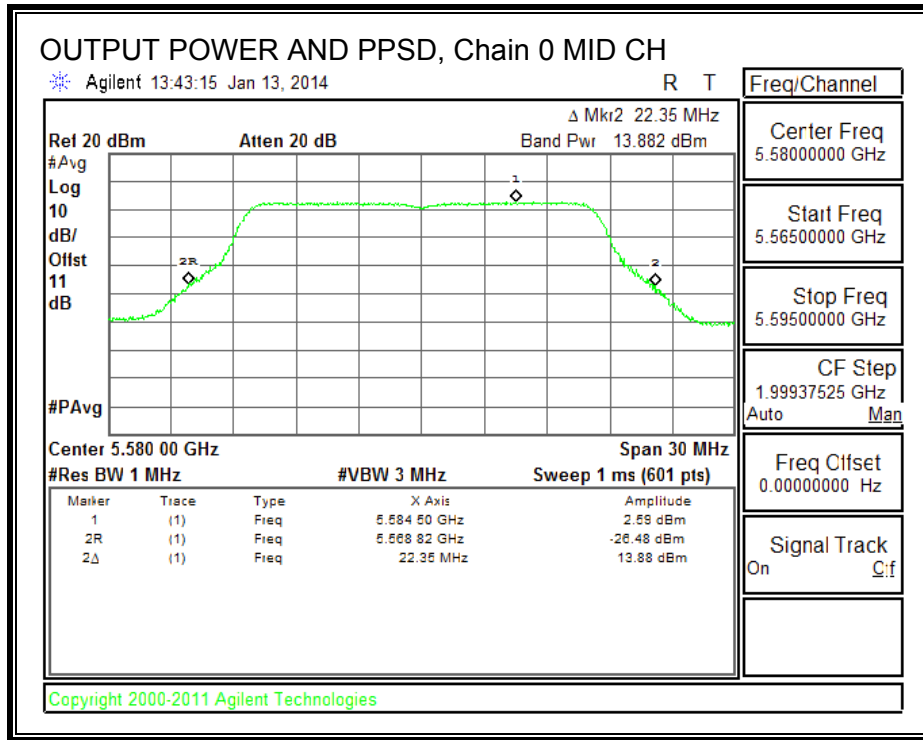

802.11n HT20 5.5G OUTPUT POWER AND PPSD, Chain 0

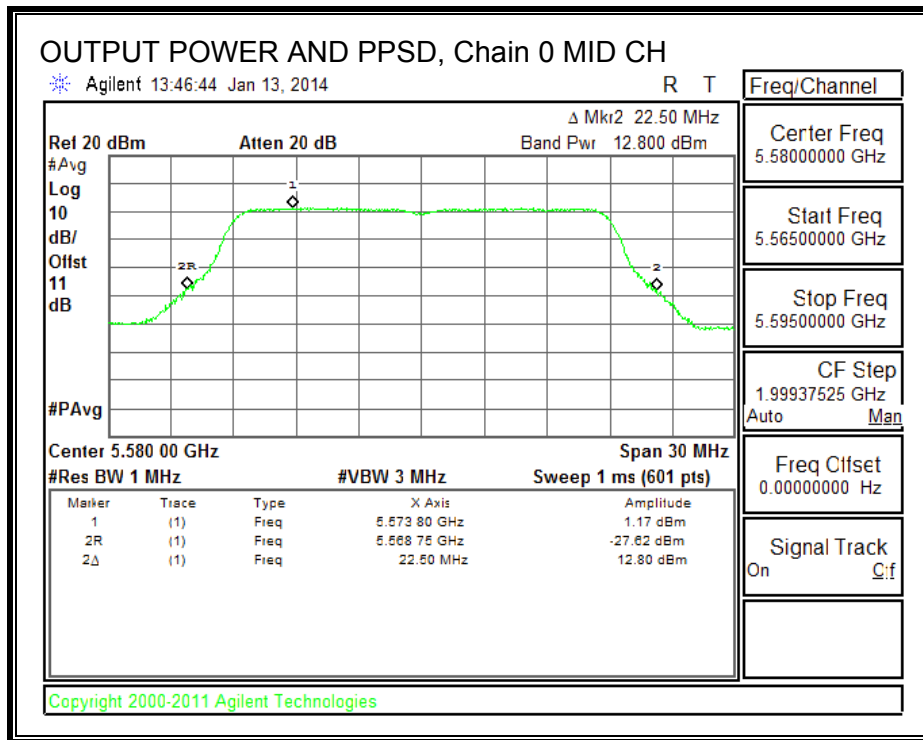

802.11n HT40 5.5G OUTPUT POWER AND PPSD, Chain 0

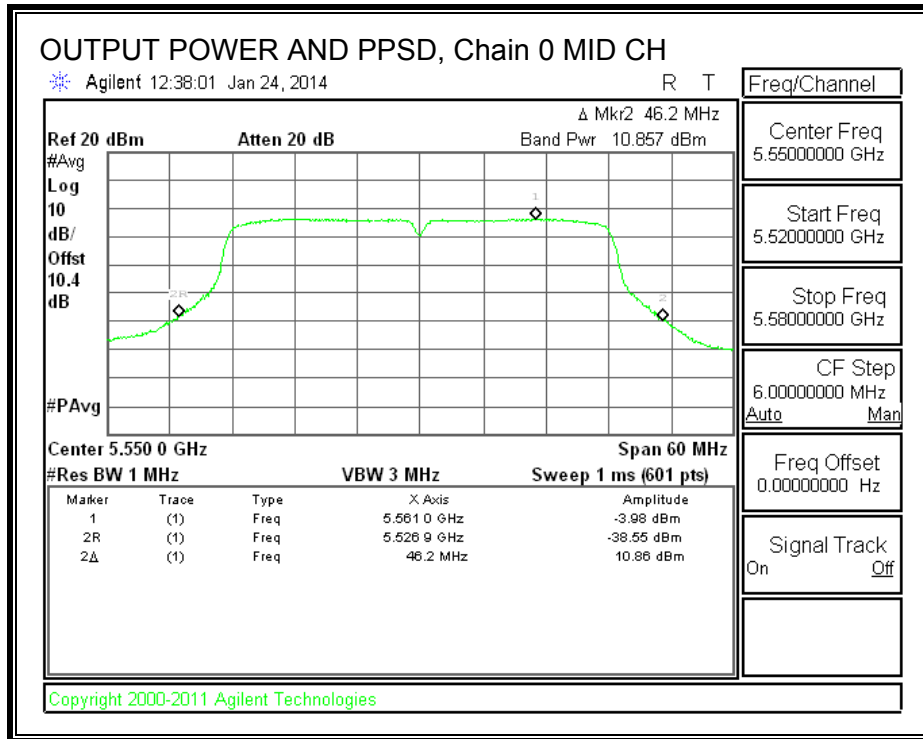

10.5. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)


The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

RESULTS

10.5.1. 802.11a MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5200	8.000	2.72	0.20	5.08	13	-7.92


PEAK EXCURSION

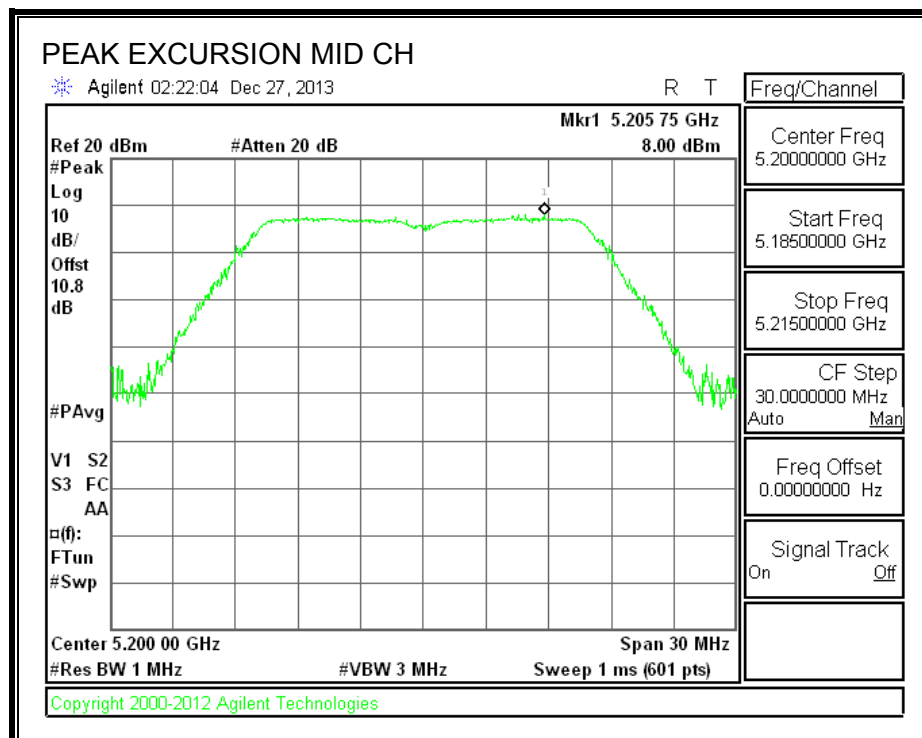

10.5.1. 802.11n HT20 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5200	7.030	1.54	0.23	5.26	13	-7.74


PEAK EXCURSION

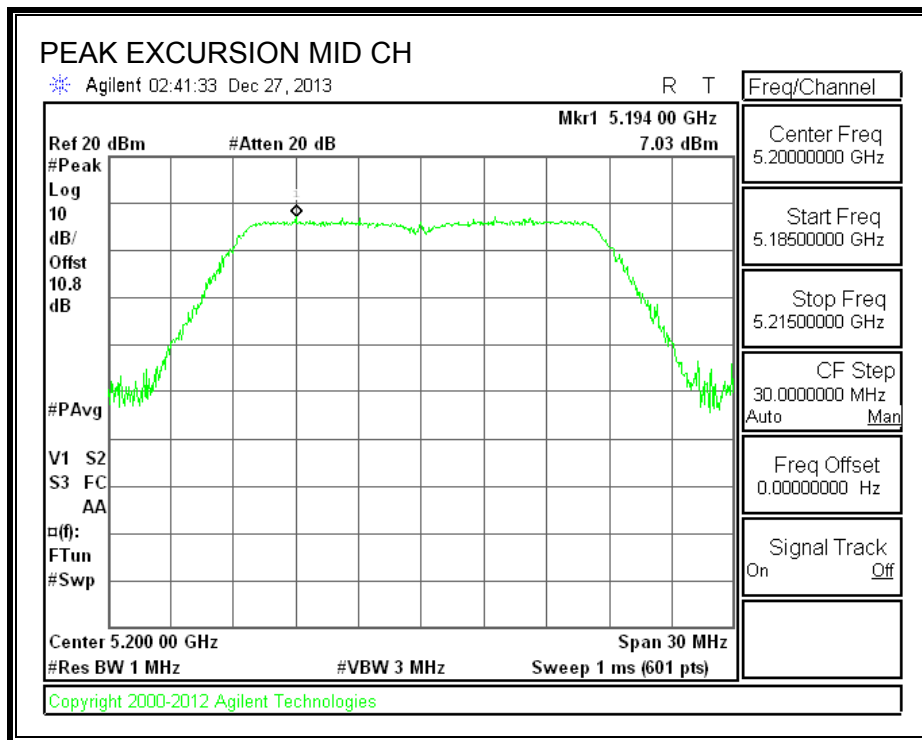

10.5.1. 802.11n HT40 MODE IN THE 5.2 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5230	7.030	-3.97	0.71	10.29	13	-2.71


PEAK EXCURSION

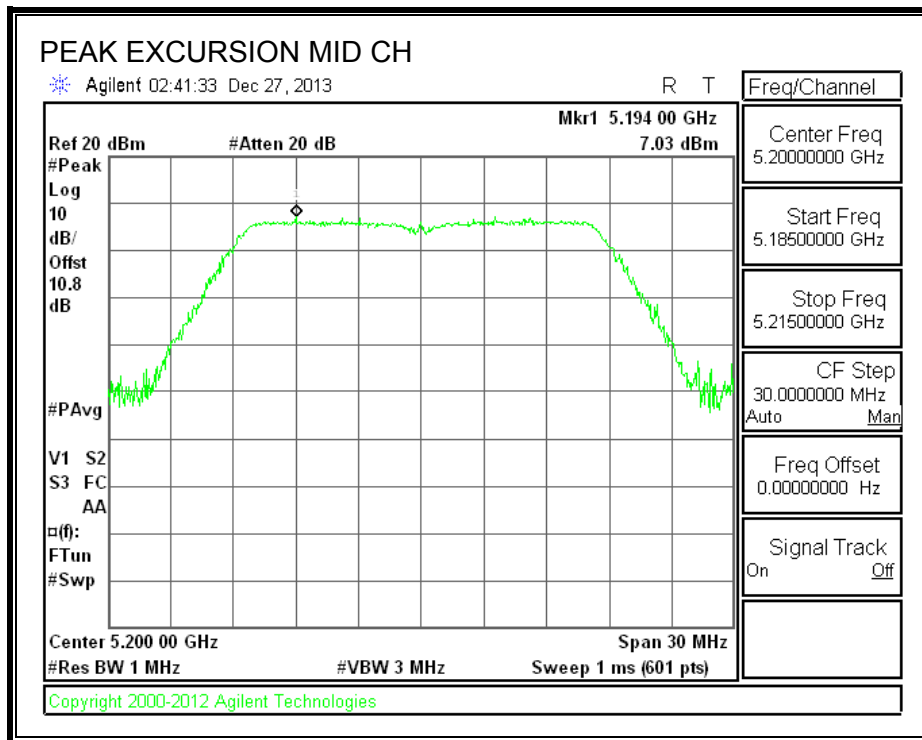

10.5.1. 802.11a HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5300	9.180	2.94	0.20	6.04	13	-6.96


PEAK EXCURSION

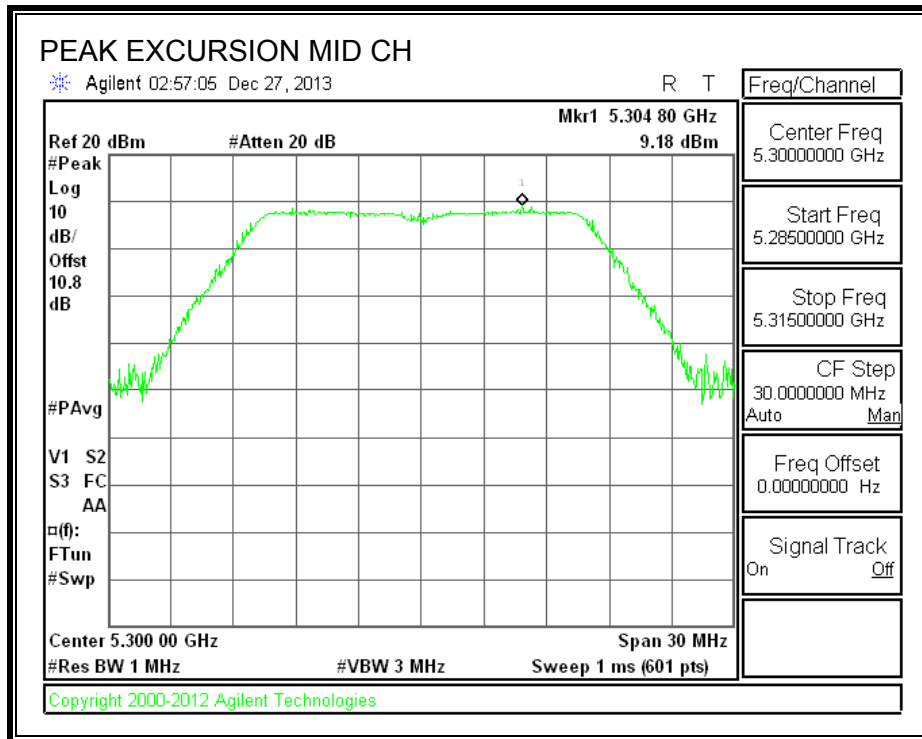

10.5.1. 802.11n HT20 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5300	8.300	1.75	0.23	6.32	13	-6.68


PEAK EXCURSION

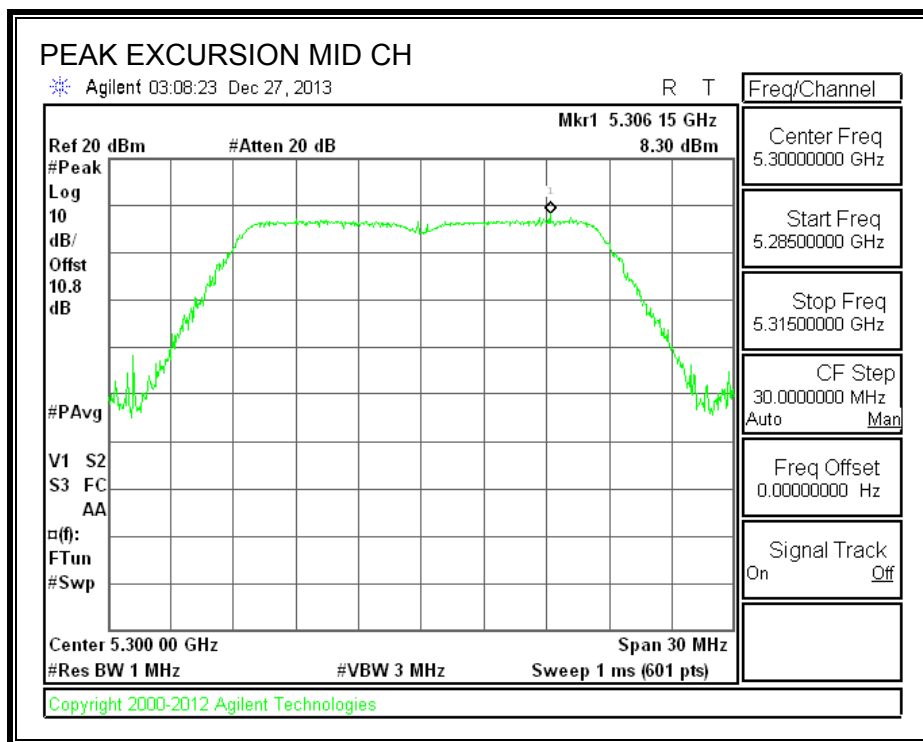

10.5.1. 802.11n HT40 MODE IN THE 5.3 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5300	7.030	-4.13	0.71	10.45	13	-2.55


PEAK EXCURSION

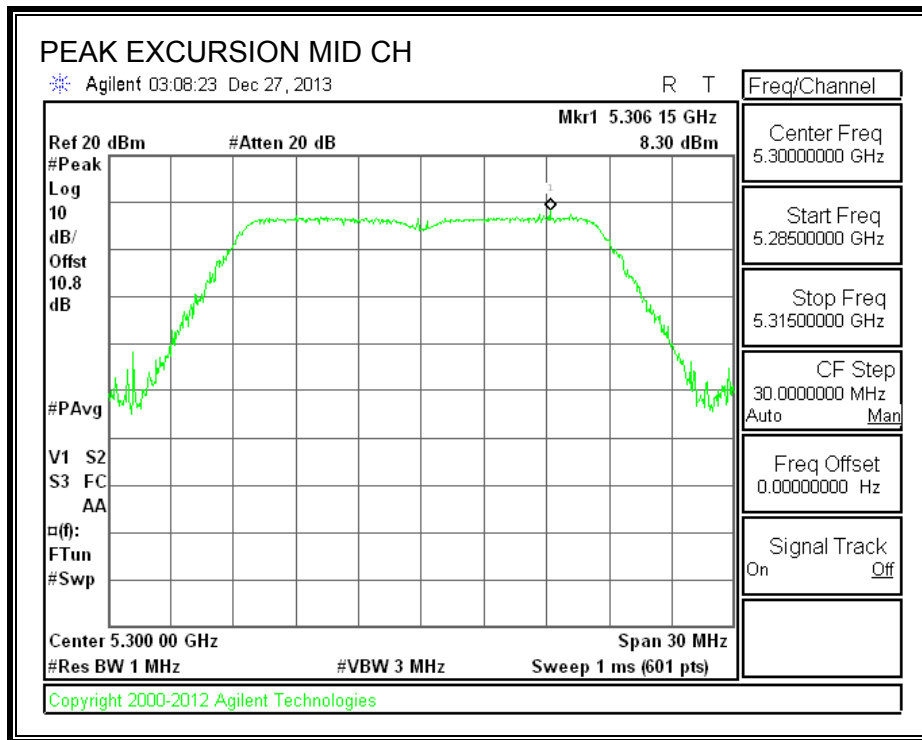

10.5.2. 802.11a HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5580	9.100	2.59	0.20	6.31	13	-6.69


PEAK EXCURSION

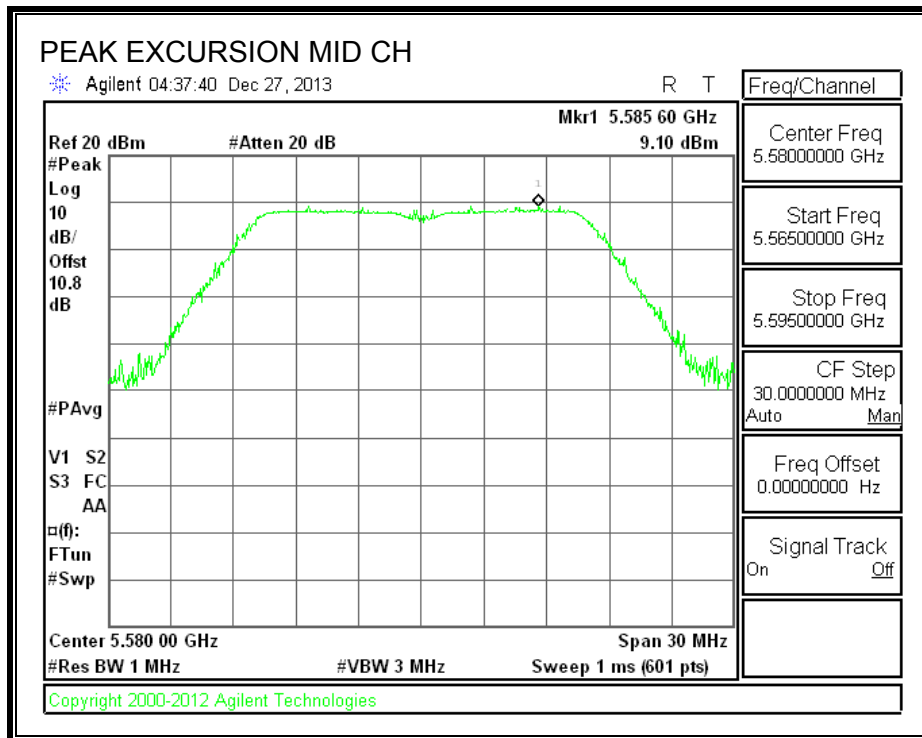

10.5.3. 802.11n HT20 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5580	7.880	1.28	0.23	6.37	13	-6.63


PEAK EXCURSION

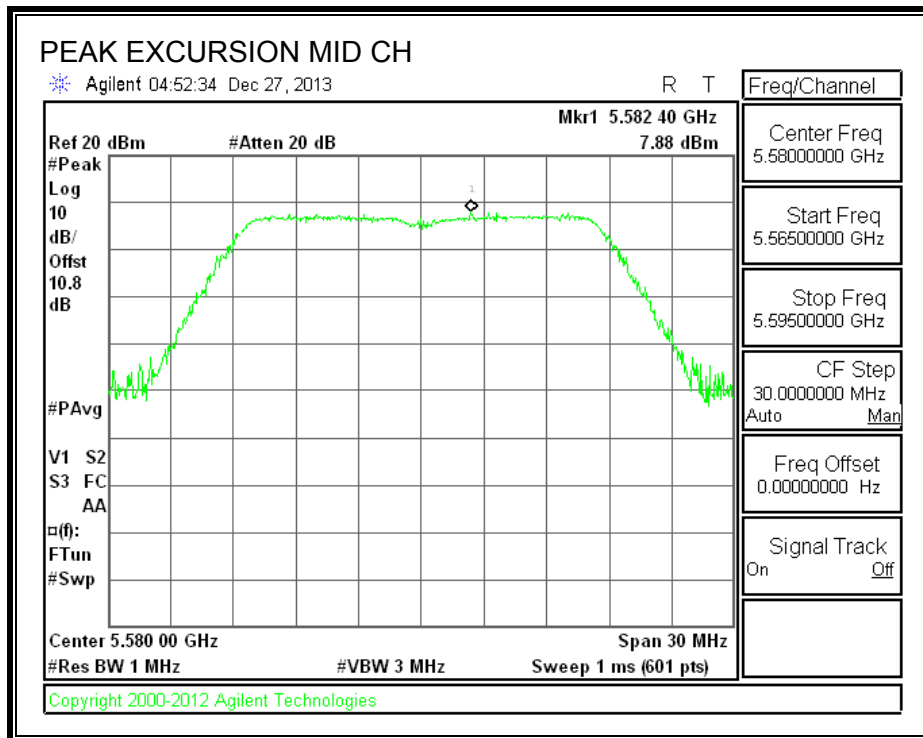

10.5.1. 802.11n HT40 MODE IN THE 5.5 GHz BAND

Channel	Frequency (MHz)	PK Level (dBm)	PSD (dBm)	DCCF (dB)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Mid	5550	5.509	-3.98	0.71	8.78	13	-4.22

PEAK EXCURSION

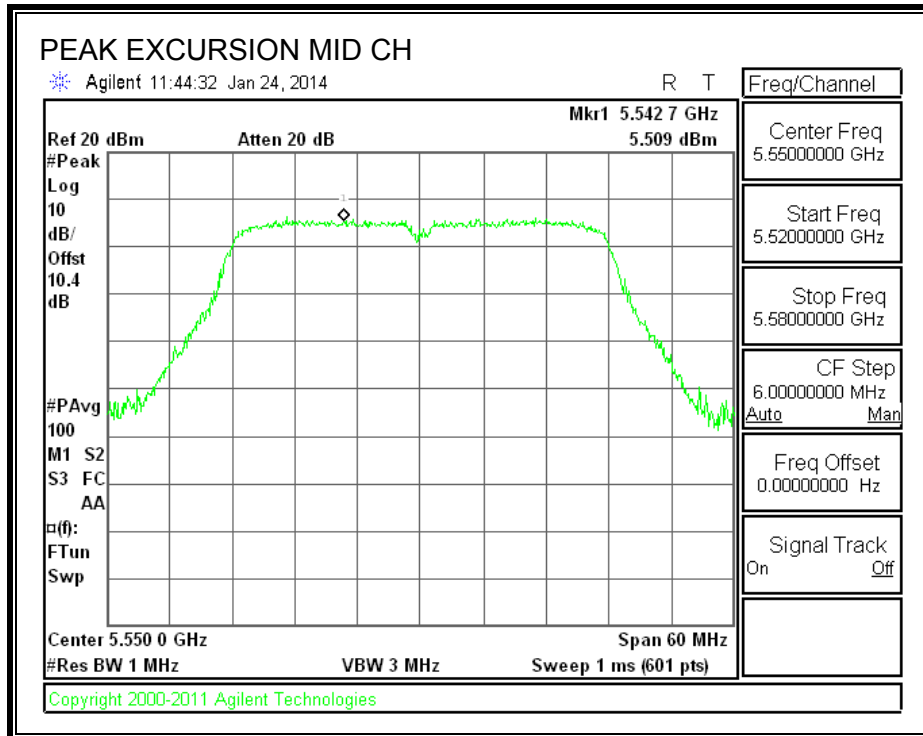

11. TRANSMITTER ABOVE 1 GHz

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Reference to KDB 789033 UNII part H) 6) d) Method VB:



For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor to the reading offset for average measurements.



The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

11.1. 5.2 GHz


**11.1.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.2 GHz BAND
 RESTRICTED BANDEDGE (LOW CHANNEL)**

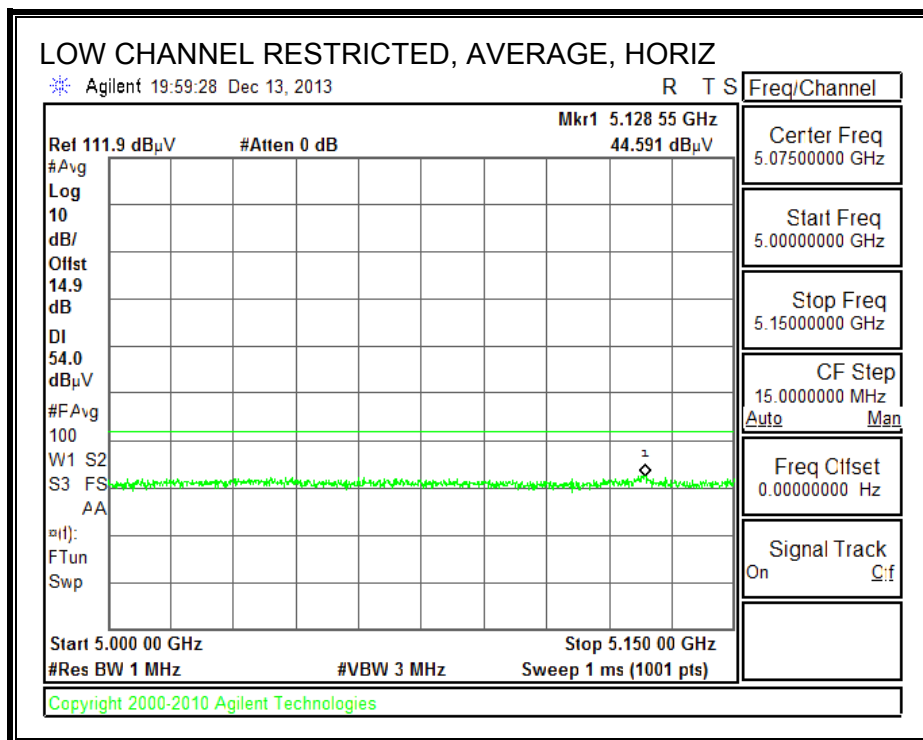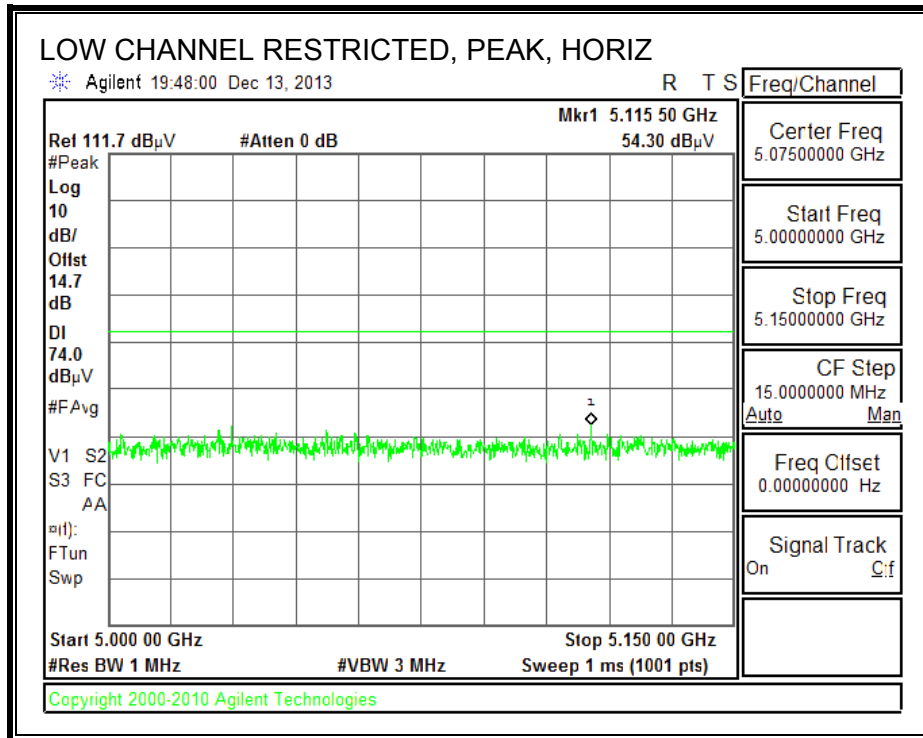

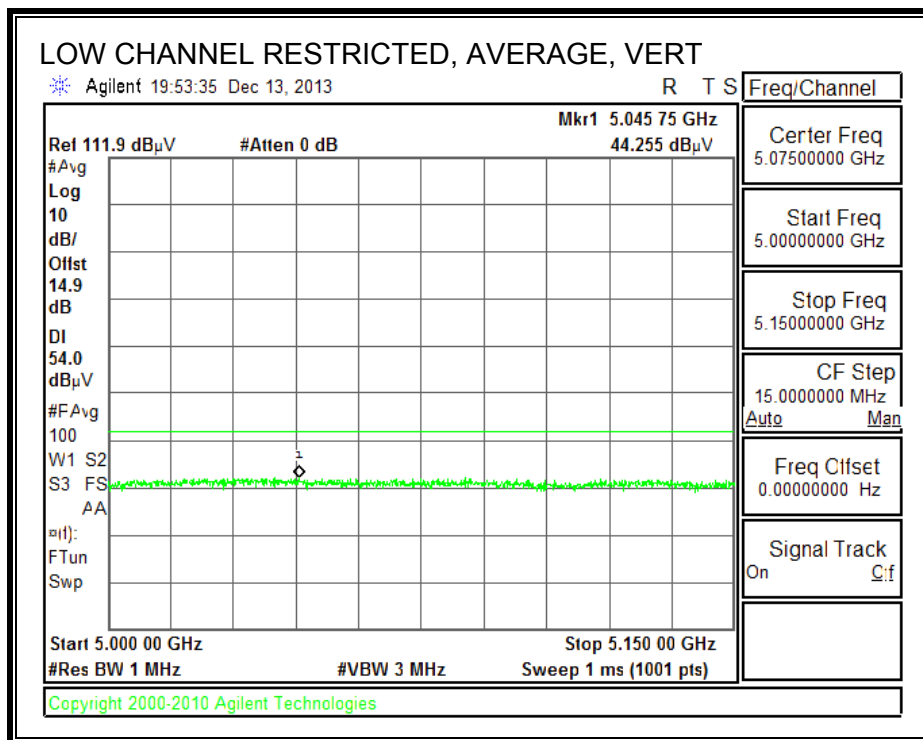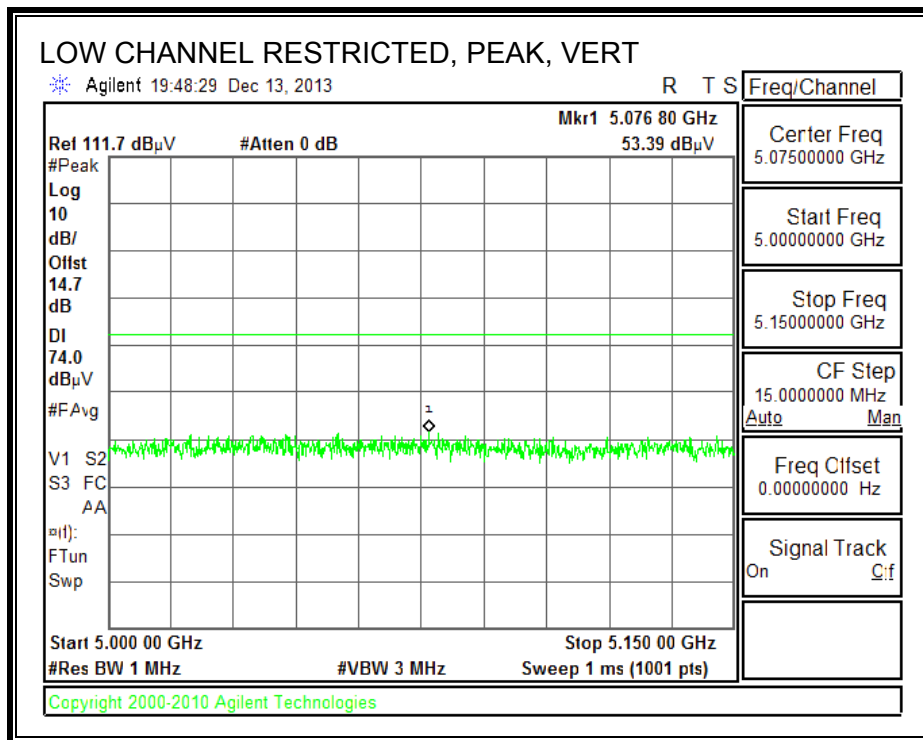


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

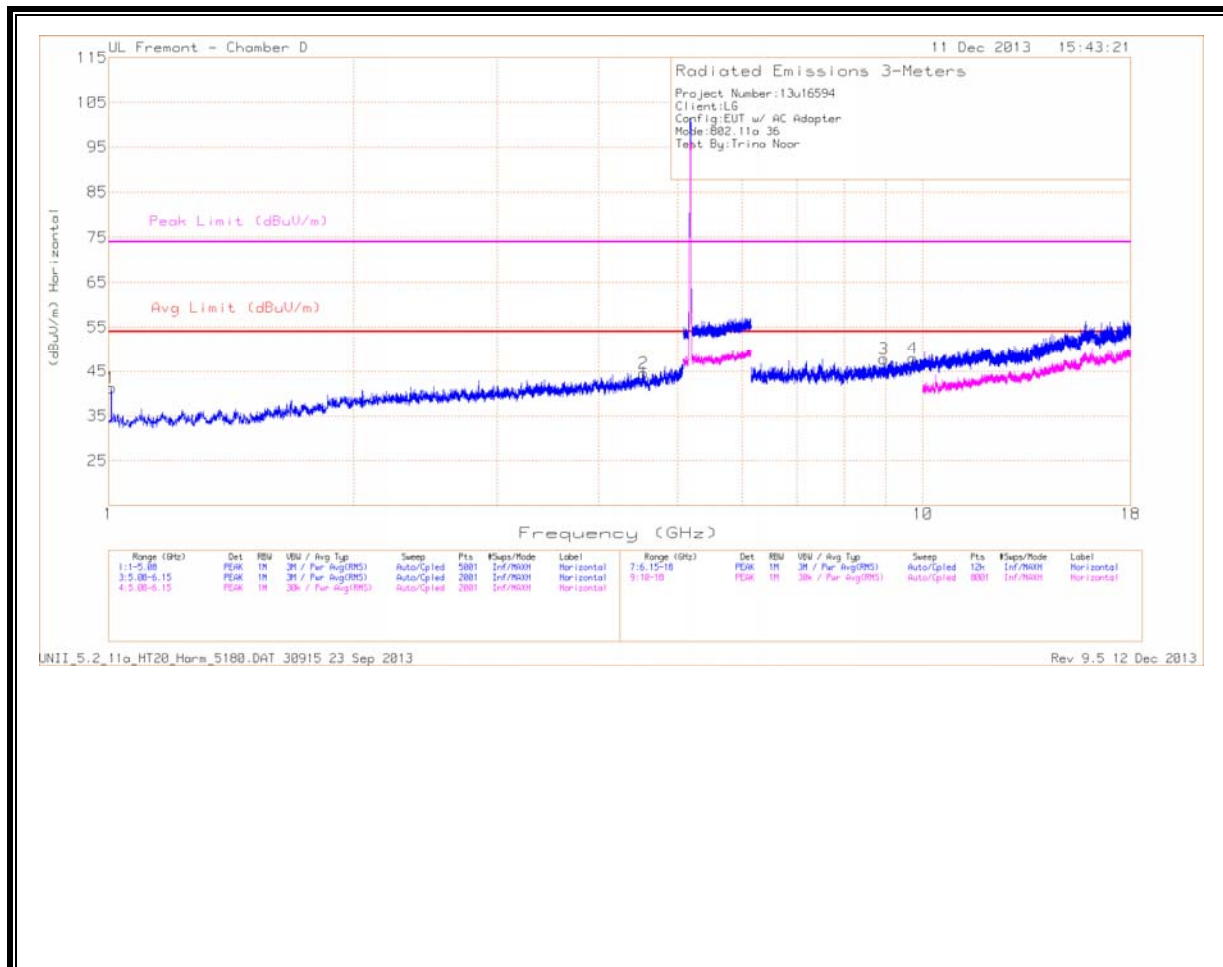

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

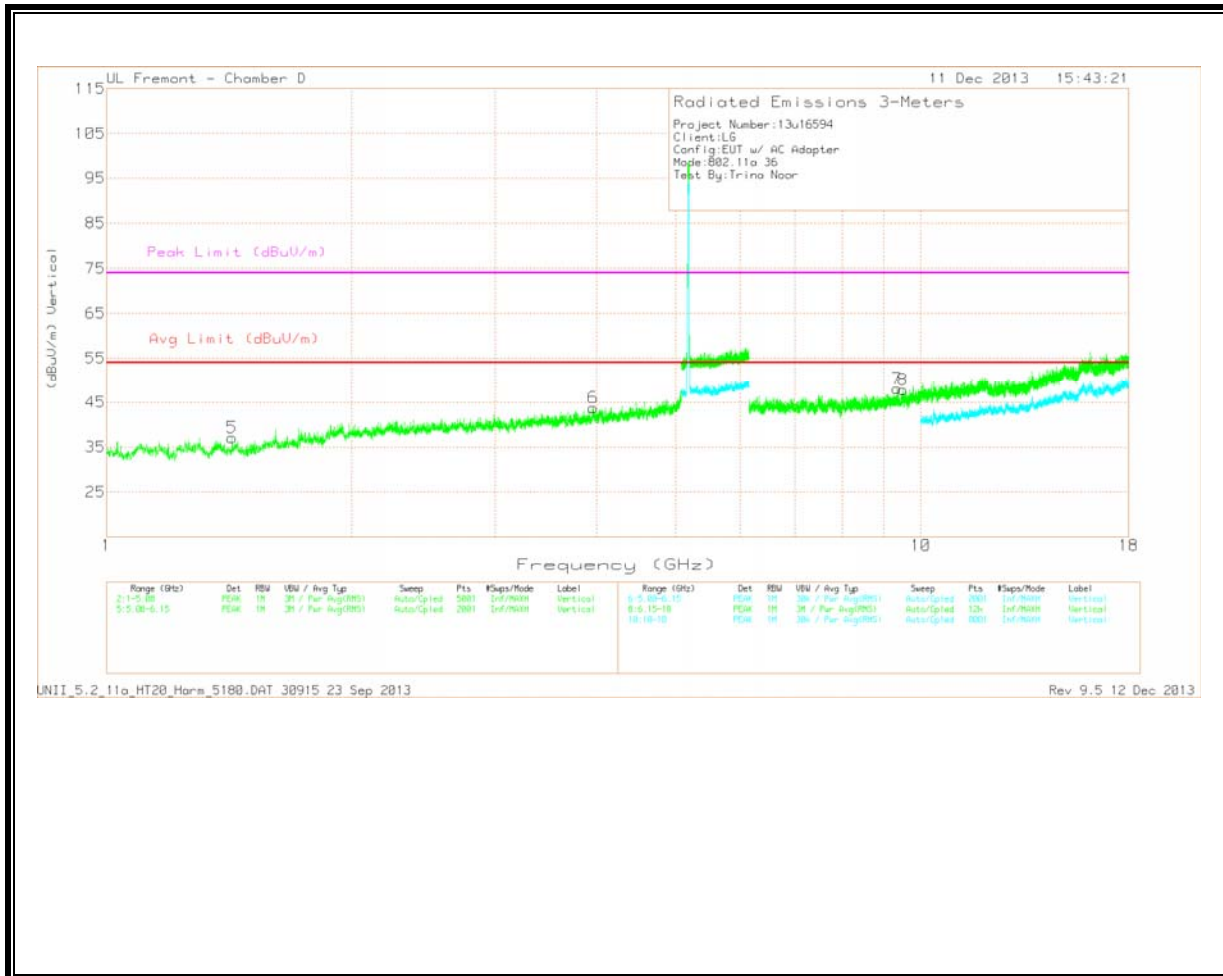


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.007	48.37	PK	27.4	-34.5	41.27	53.97	-12.7	74	-32.73	0-360	99	H
5	1.426	42.85	PK	28.3	-34	37.15	53.97	-16.82	74	-36.85	0-360	201	V
6	3.96	39.92	PK	33.9	-30	43.82	53.97	-10.15	74	-30.18	0-360	201	V
2	4.542	40.52	PK	34.5	-30.5	44.52	53.97	-9.45	74	-29.48	0-360	201	H
3	8.951	36.58	PK	36.7	-25.5	47.78	53.97	-6.19	74	-26.22	0-360	201	H
7	9.345	36.32	PK	37	-25.2	48.12	53.97	-5.85	74	-25.88	0-360	99	V
8	9.507	35.15	PK	37.2	-24.5	47.85	53.97	-6.12	74	-26.15	0-360	201	V
4	9.721	34.16	PK	37.5	-23.7	47.96	53.97	-6.01	74	-26.04	0-360	99	H

MID CHANNEL
HORIZONTAL

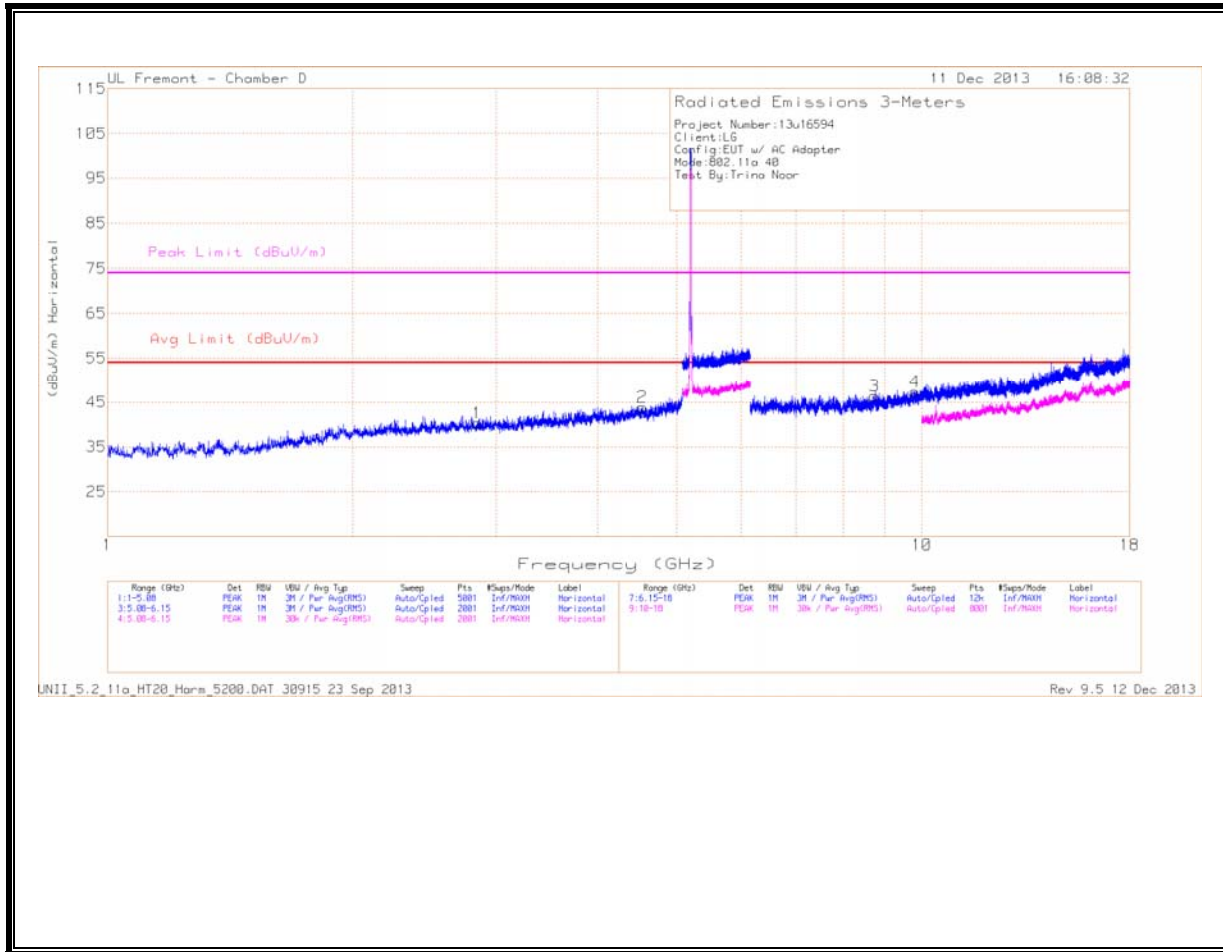

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

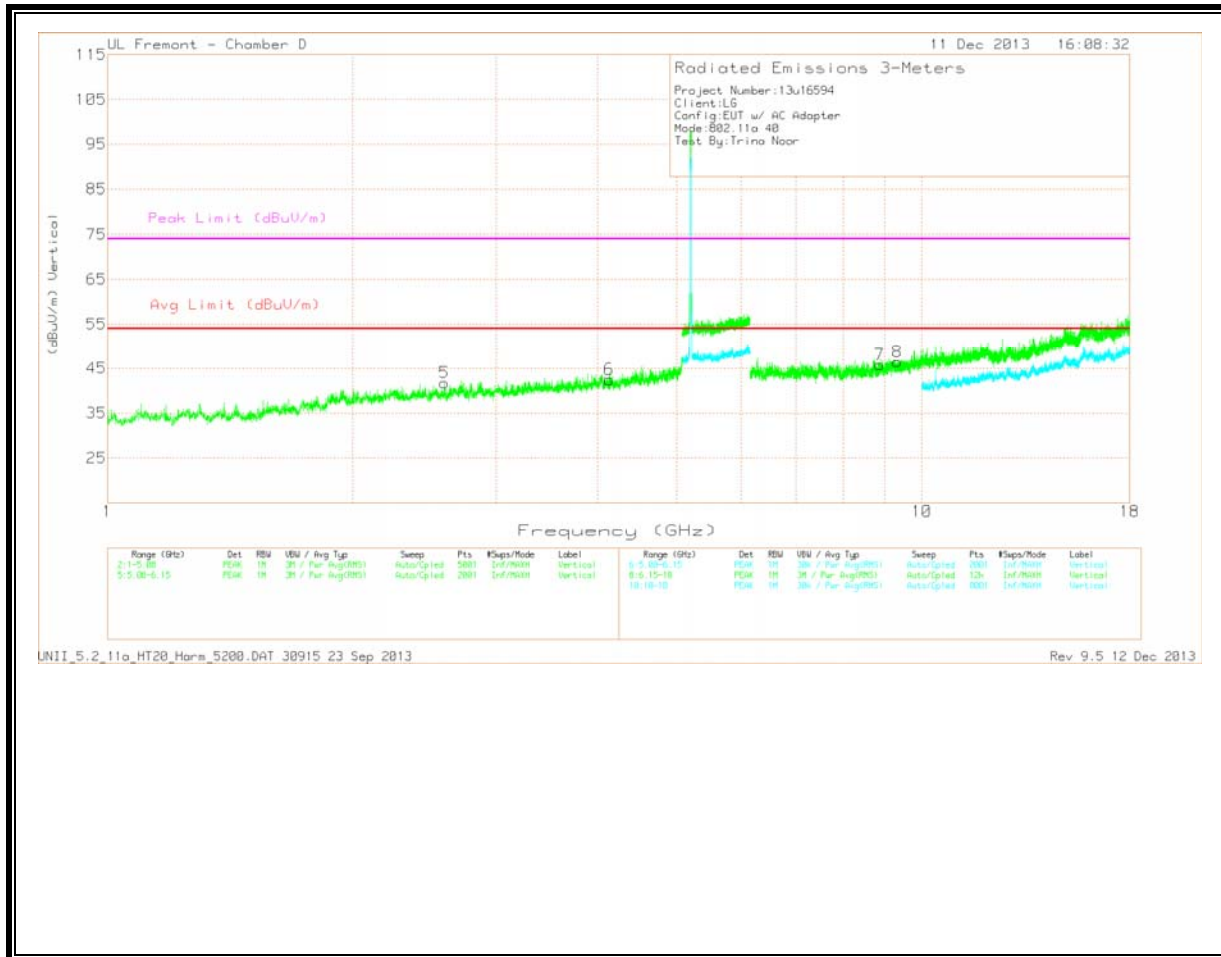


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.593	41.98	PK	32.6	-32.8	41.78	53.97	-12.19	74	-32.22	0-360	202	V
1	2.846	39.82	PK	32.9	-32.4	40.32	53.97	-13.65	74	-33.68	0-360	99	H
6	4.13	39.59	PK	34	-31.1	42.49	53.97	-11.48	74	-31.51	0-360	202	V
2	4.537	39.9	PK	34.5	-30.5	43.9	53.97	-10.07	74	-30.1	0-360	99	H
3	8.746	35.74	PK	36.4	-25.7	46.44	53.97	-7.53	74	-27.56	0-360	99	H
7	8.874	35	PK	36.6	-25.8	45.8	53.97	-8.17	74	-28.2	0-360	201	V
8	9.333	34.55	PK	37	-25.1	46.45	53.97	-7.52	74	-27.55	0-360	99	V
4	9.804	34	PK	37.6	-24.2	47.4	53.97	-6.57	74	-26.6	0-360	201	H

HIGH CHANNEL
HORIZONTAL

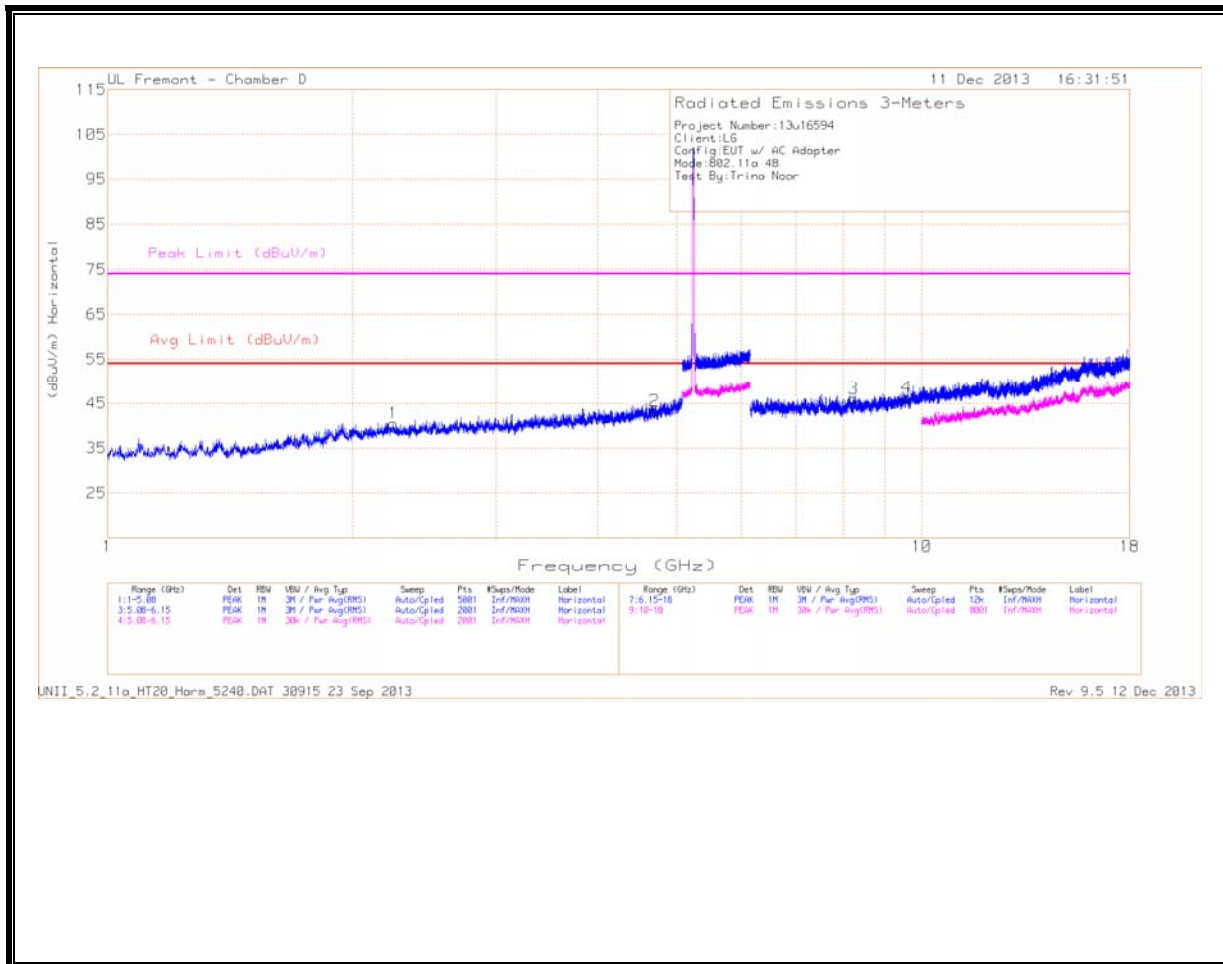

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL


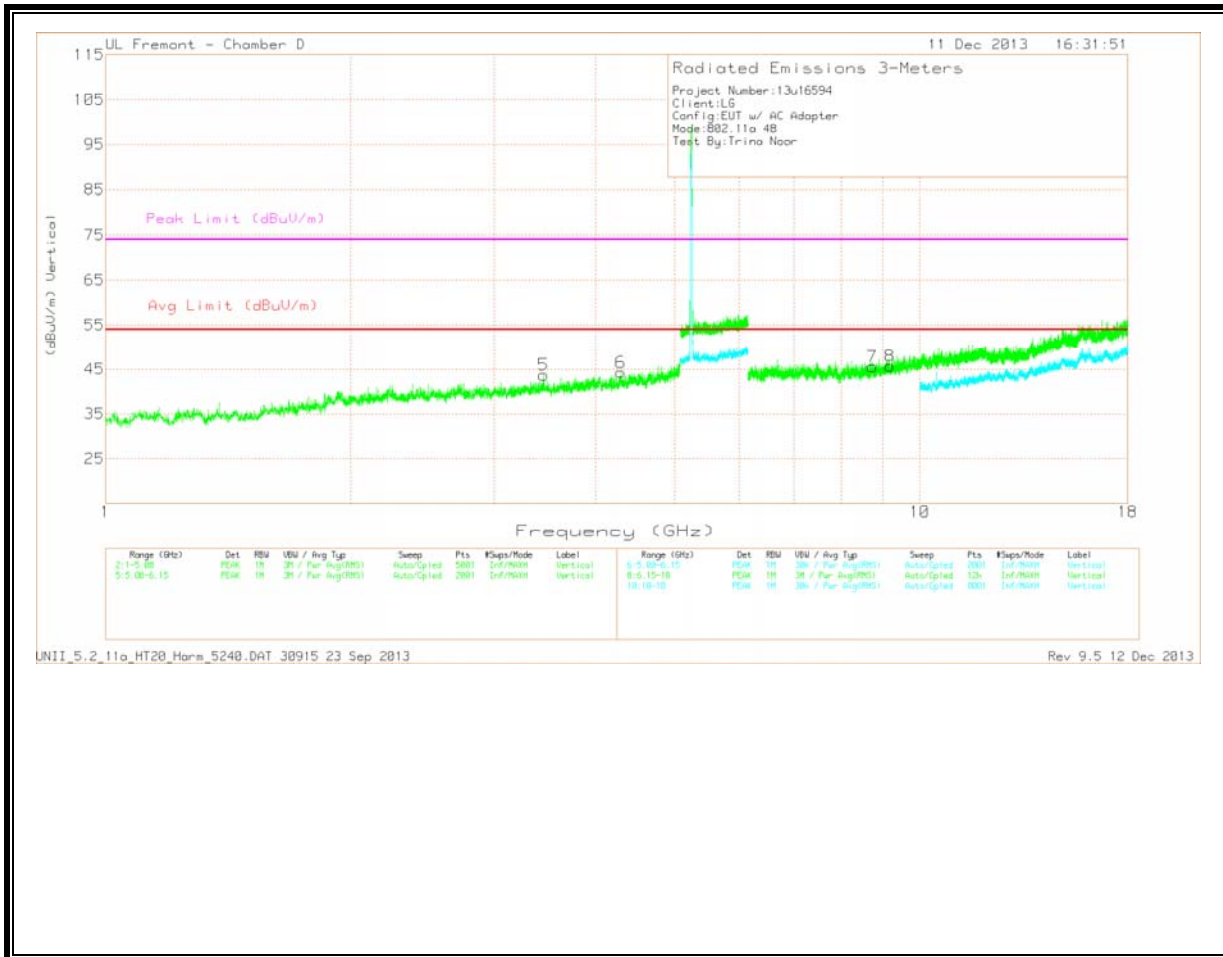




Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.243	40.84	PK	32.1	-32.4	40.54	53.97	-13.43	74	-33.46	0-360	99	H
5	3.45	41.81	PK	33.2	-31.3	43.71	53.97	-10.26	74	-30.29	0-360	99	V
6	4.294	40.18	PK	34.2	-30.1	44.28	53.97	-9.69	74	-29.72	0-360	202	V
2	4.694	38.52	PK	34.7	-29.9	43.32	53.97	-10.65	74	-30.68	0-360	201	H
3	8.246	36.89	PK	36.1	-26.9	46.09	53.97	-7.88	74	-27.91	0-360	99	H
7	8.747	34.89	PK	36.4	-25.7	45.59	53.97	-8.38	74	-28.41	0-360	202	V
8	9.191	33.92	PK	36.9	-25.1	45.72	53.97	-8.25	74	-28.28	0-360	202	V
4	9.584	33.88	PK	37.3	-24.8	46.38	53.97	-7.59	74	-27.62	0-360	201	H


**11.1.2. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.2 GHz BAND
 RESTRICTED BANDEDGE (LOW CHANNEL)**

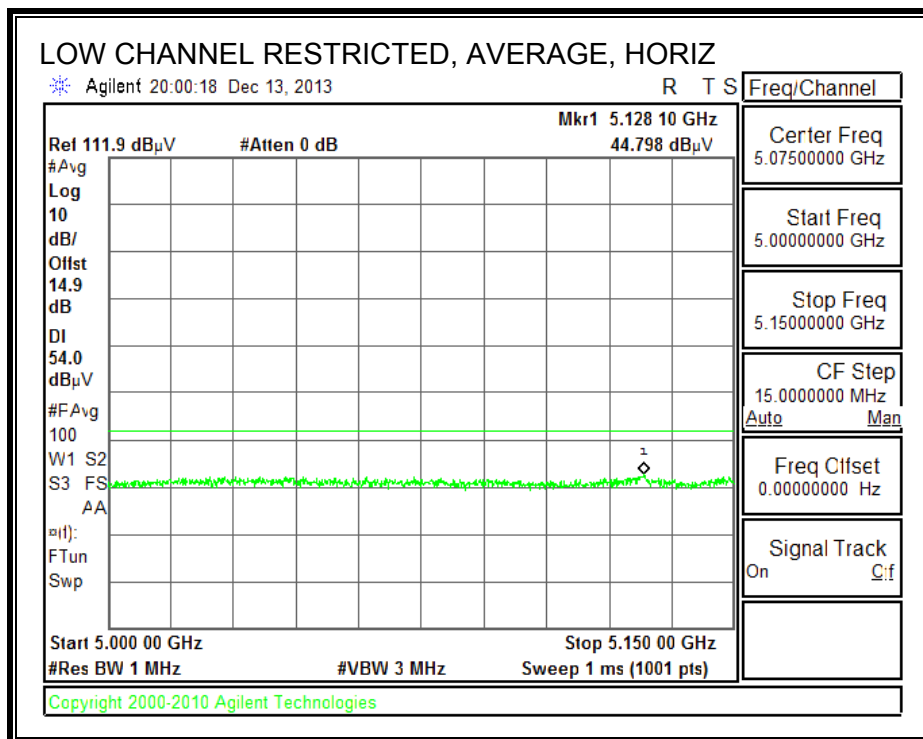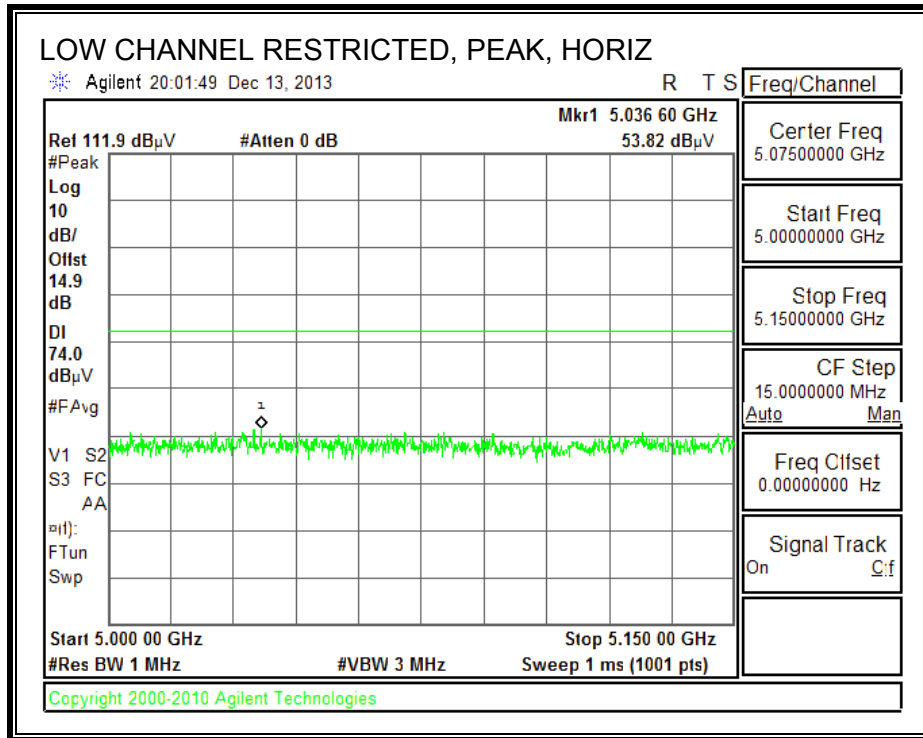

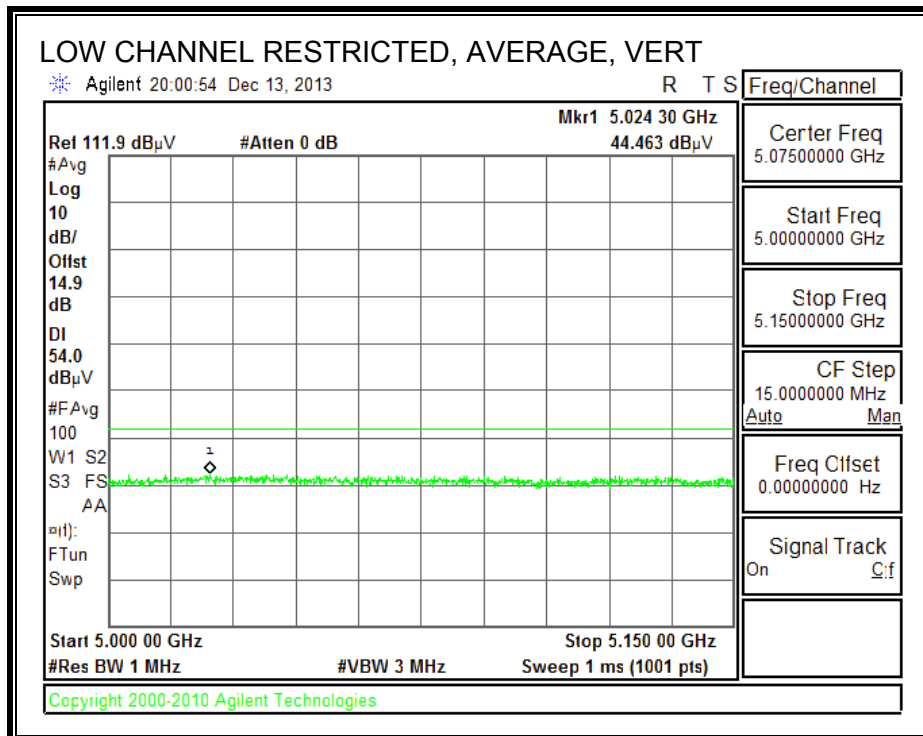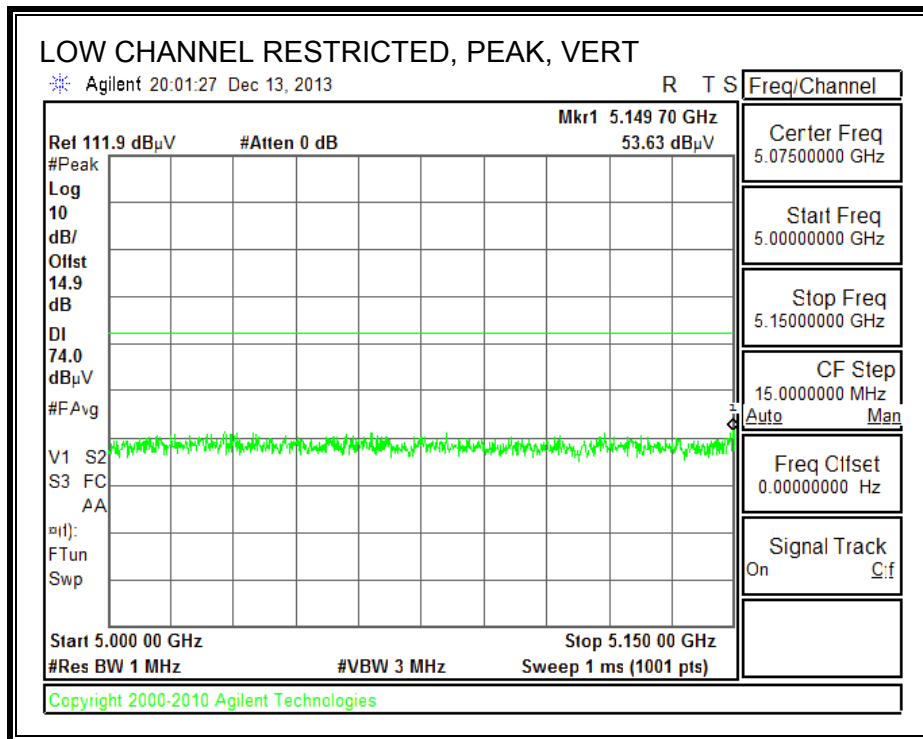


HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

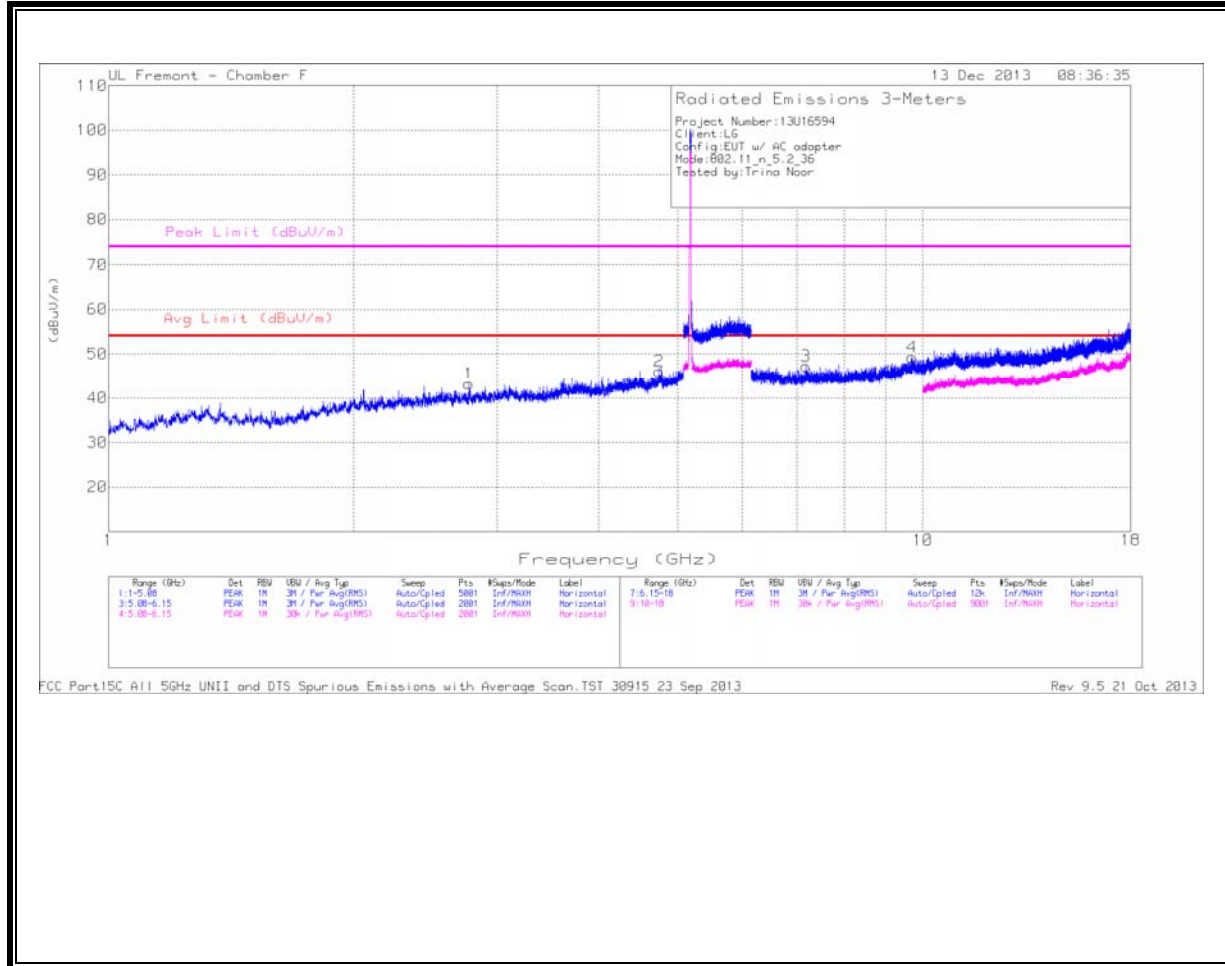

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

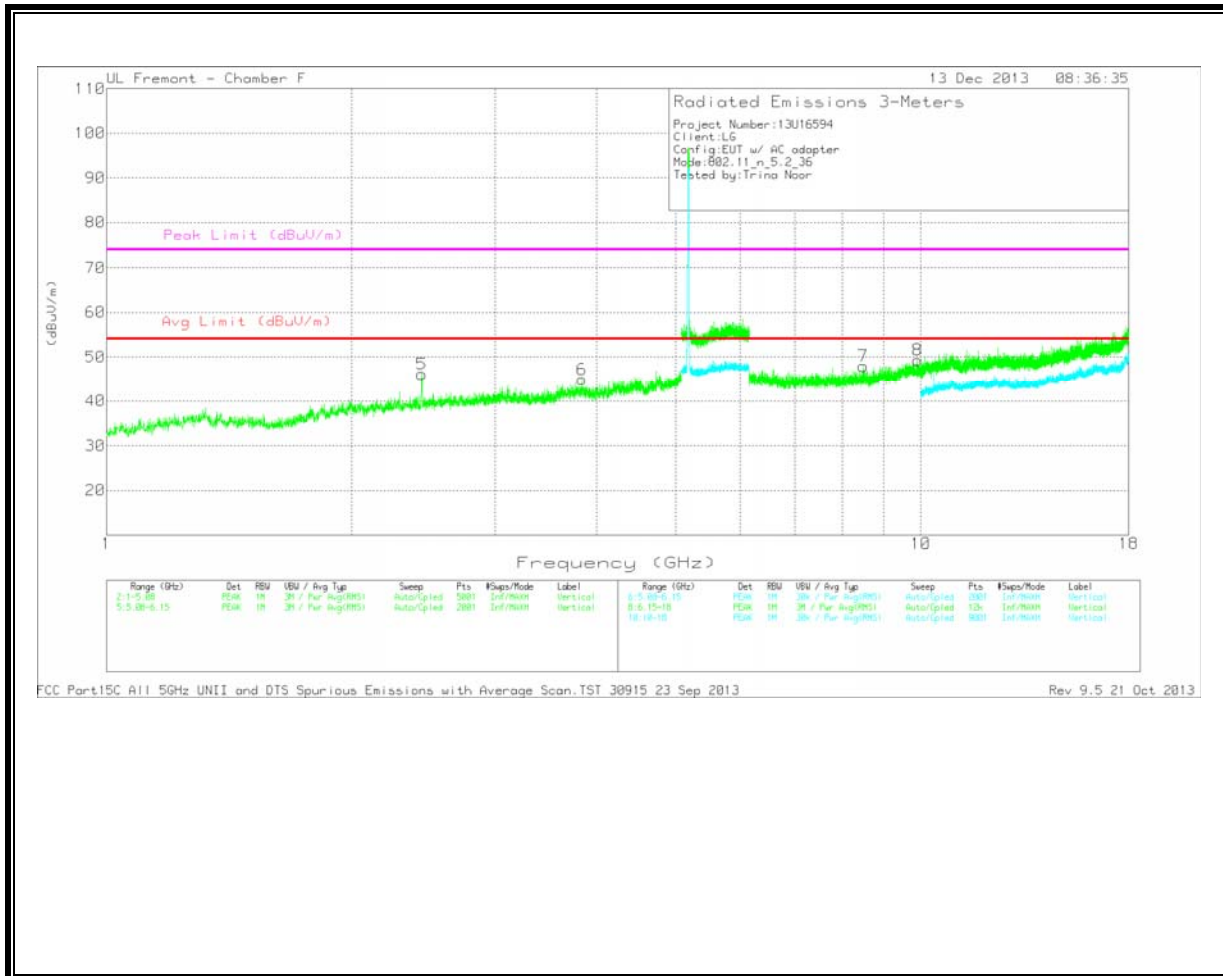

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.438	44.56	PK	32.3	-30.7	46.16	53.97	-7.81	74	-27.84	0-360	201	V
1	2.77	40.97	PK	32.7	-30.4	43.27	53.97	-10.7	74	-30.73	0-360	100	H
6	3.835	40.53	PK	33.5	-29.1	44.93	53.97	-9.04	74	-29.07	0-360	201	V
2	4.743	39.72	PK	34.1	-27.7	46.12	53.97	-7.85	74	-27.88	0-360	199	H

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	7.183	37.75	PK	35.7	-26.2	47.25	53.97	-6.72	74	-26.75	0-360	100	H
7	8.499	37.14	PK	36	-25.2	47.94	53.97	-6.03	74	-26.06	0-360	101	V
4	9.701	35.49	PK	37.4	-23.6	49.29	53.97	-4.68	74	-24.71	0-360	199	H
8	9.911	34.52	PK	37.6	-22.8	49.32	53.97	-4.65	74	-24.68	0-360	201	V


PK - Peak detector

MID CHANNEL
HORIZONTAL

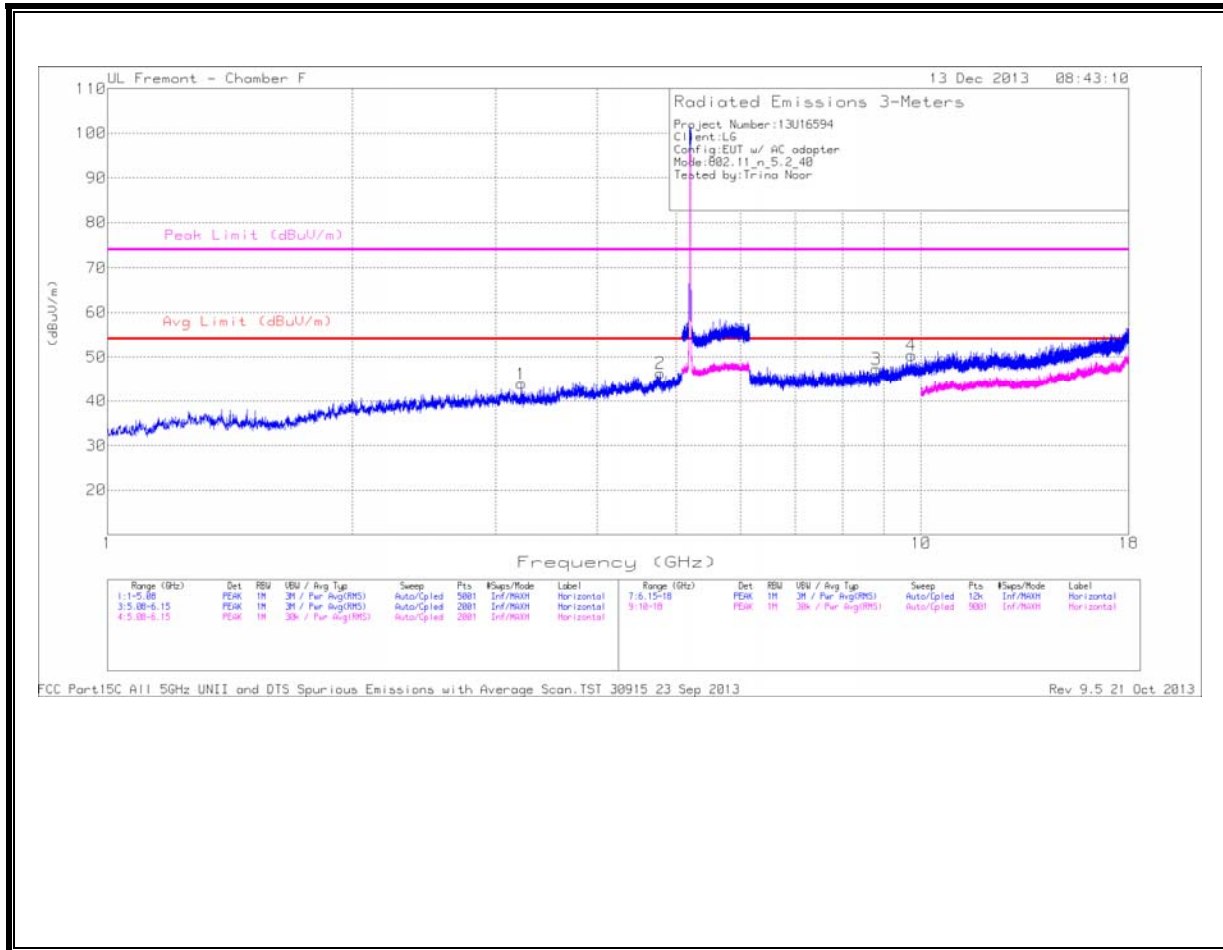

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

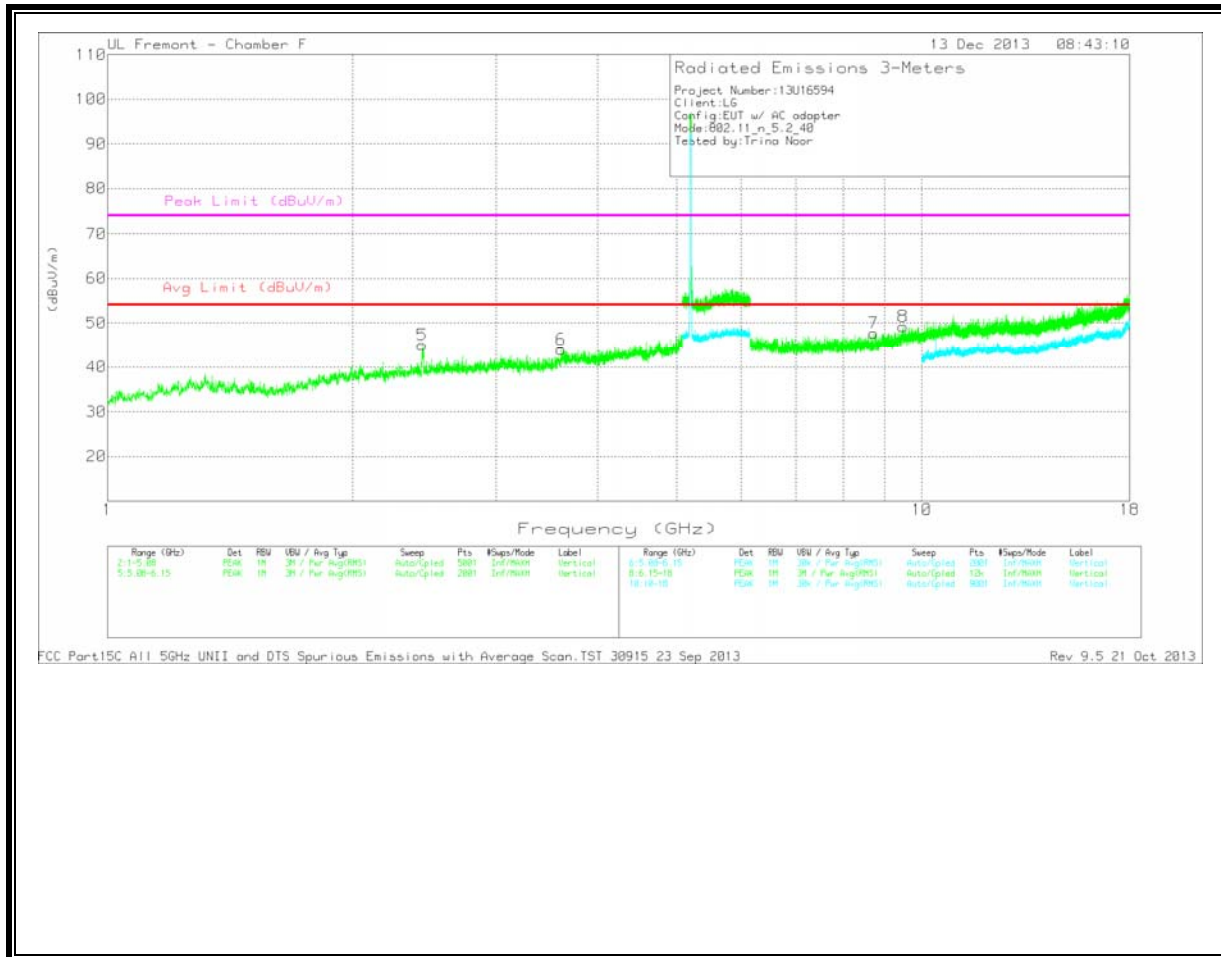


Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.435	43.44	PK	32.3	-30.7	45.04	53.97	-8.93	74	-28.96	0-360	201	V
1	3.227	40.79	PK	33.2	-30.1	43.89	53.97	-10.08	74	-30.11	0-360	199	H
6	3.605	39.69	PK	33.7	-29.4	43.99	53.97	-9.98	74	-30.01	0-360	101	V
2	4.781	40.08	PK	34.1	-27.8	46.38	53.97	-7.59	74	-27.62	0-360	199	H


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	8.727	36.15	PK	36.2	-24.6	47.75	53.97	-6.22	74	-26.25	0-360	201	V
3	8.808	35.82	PK	36.2	-24.7	47.32	53.97	-6.65	74	-26.68	0-360	199	H
8	9.485	34.51	PK	37.1	-22.4	49.21	53.97	-4.76	74	-24.79	0-360	101	V
4	9.729	35.8	PK	37.4	-22.8	50.4	53.97	-3.57	74	-23.6	0-360	199	H

HIGH CHANNEL
HORIZONTAL

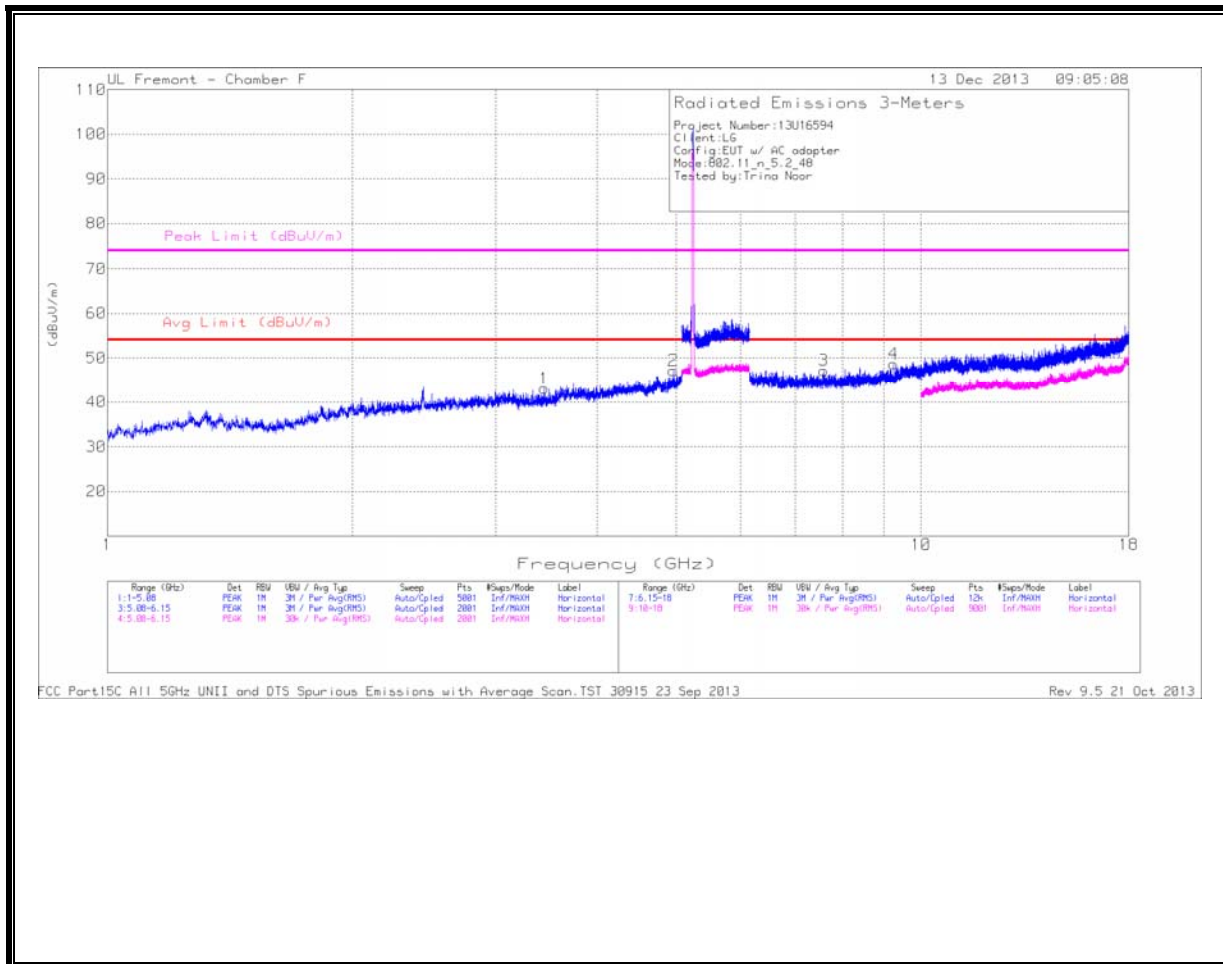

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

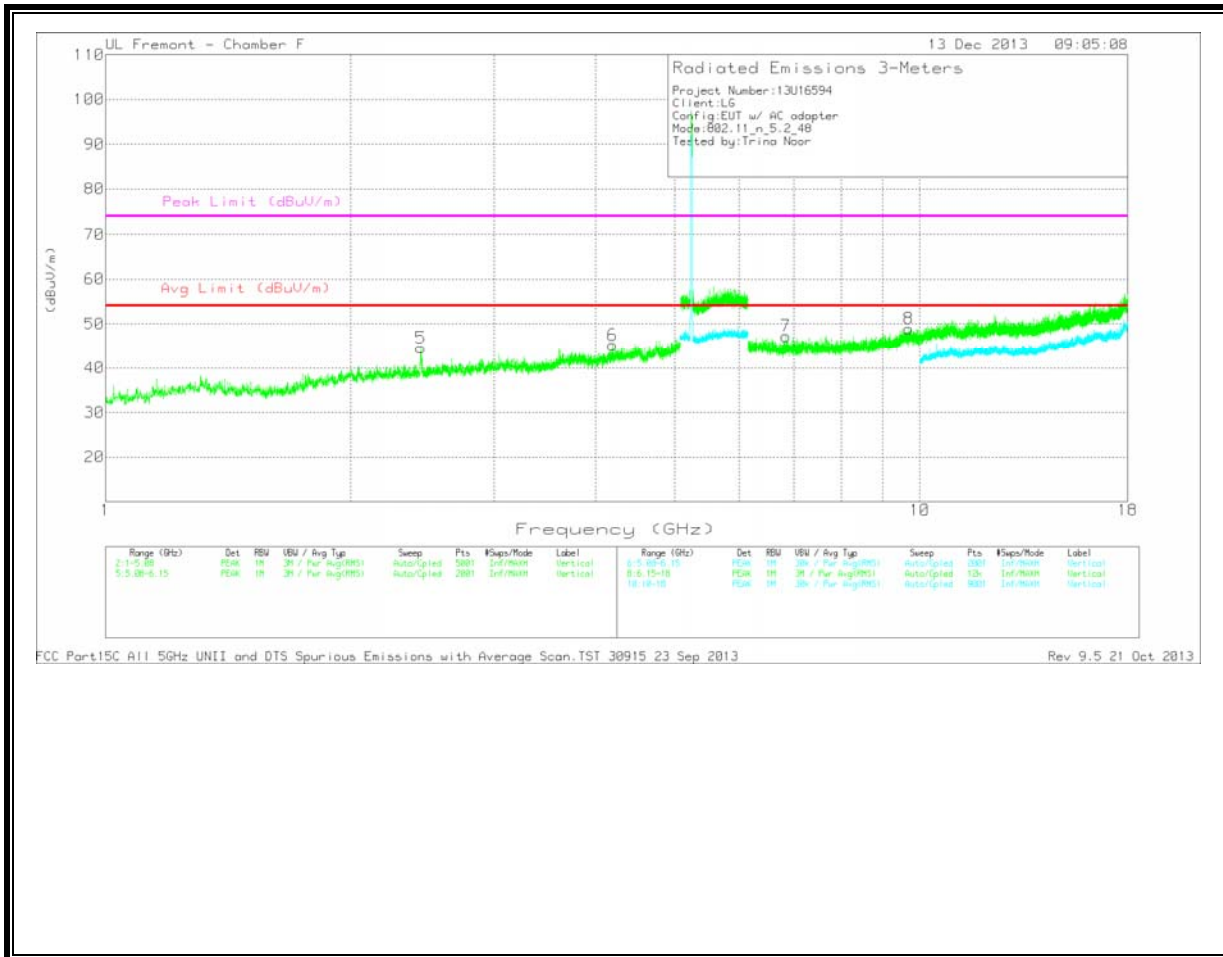

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



HIGH CHANNEL DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.439	42.98	PK	32.3	-30.7	44.58	53.97	-9.39	74	-29.42	0-360	201	V
1	3.441	39.62	PK	33.1	-29.6	43.12	53.97	-10.85	74	-30.88	0-360	199	H
6	4.195	40.21	PK	33.4	-28.4	45.21	53.97	-8.76	74	-28.79	0-360	201	V
2	4.961	40.27	PK	34	-27.1	47.17	53.97	-6.8	74	-26.83	0-360	100	H

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	6.845	37.95	PK	35.7	-26.4	47.25	53.97	-6.72	74	-26.75	0-360	101	V
3	7.595	36.63	PK	35.9	-25.3	47.23	53.97	-6.74	74	-26.77	0-360	199	H
4	9.254	35.9	PK	36.6	-23.8	48.7	53.97	-5.27	74	-25.3	0-360	199	H
8	9.696	35.17	PK	37.4	-23.6	48.97	53.97	-5	74	-25.03	0-360	101	V

PK - Peak detector


**11.1.1. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.2 GHz BAND
 RESTRICTED BANDEGE (LOW CHANNEL)**

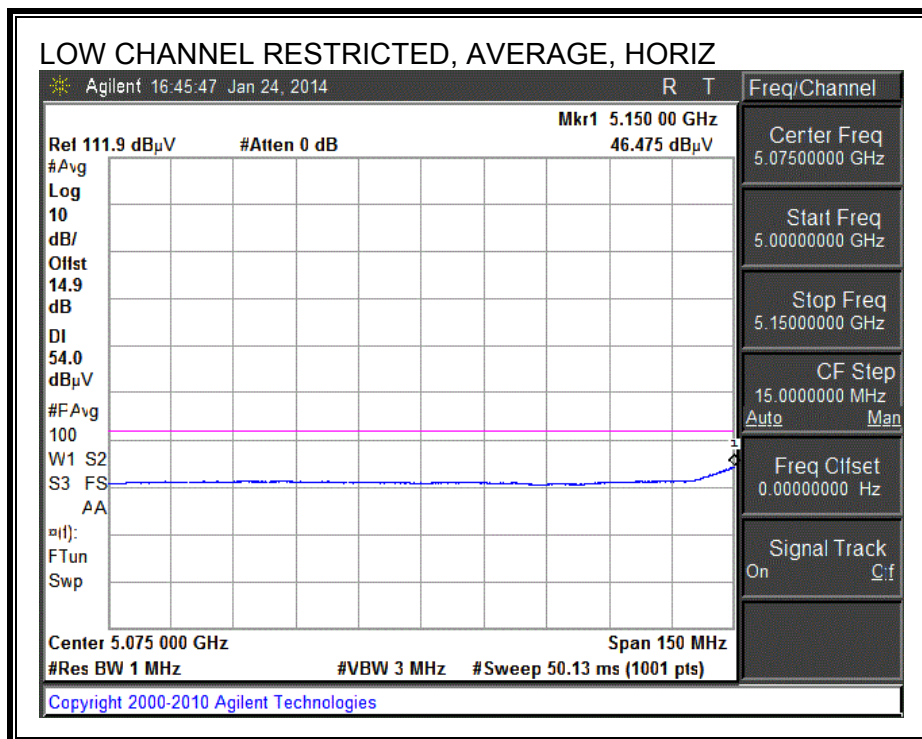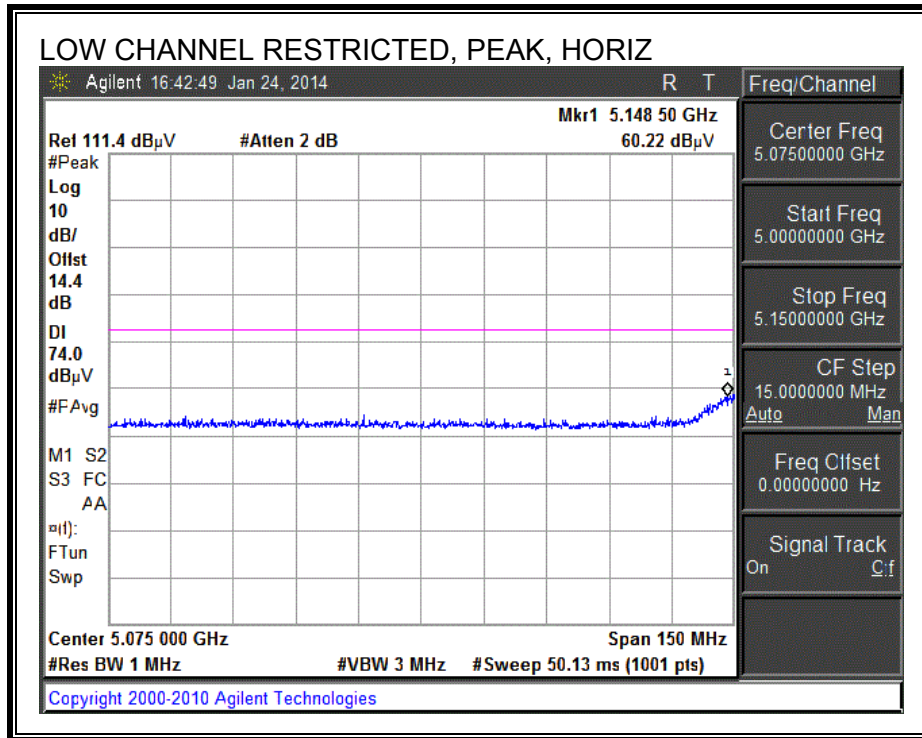


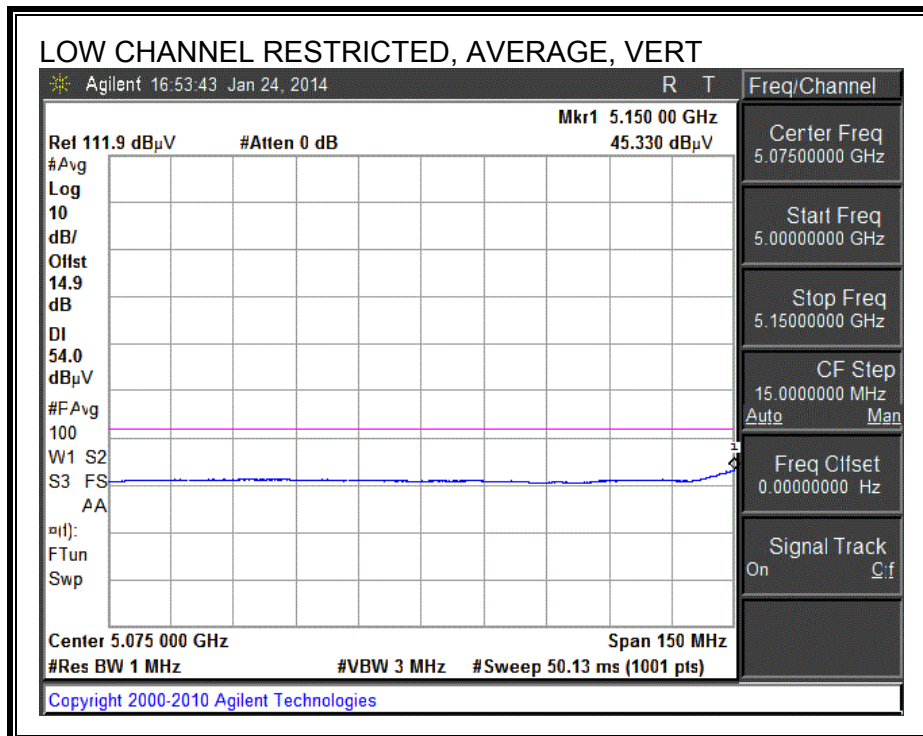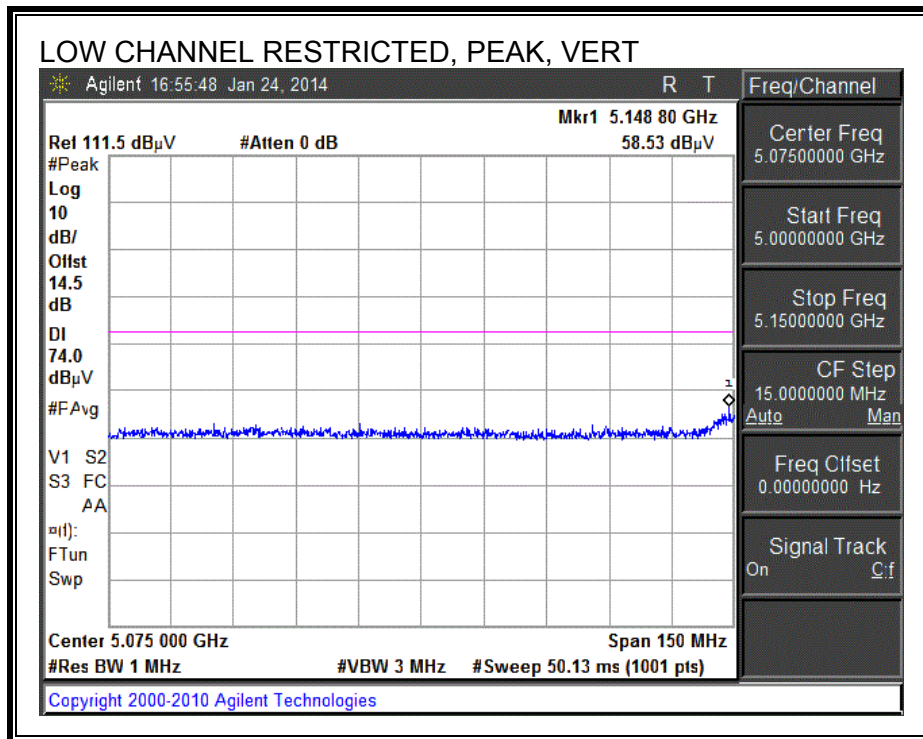

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

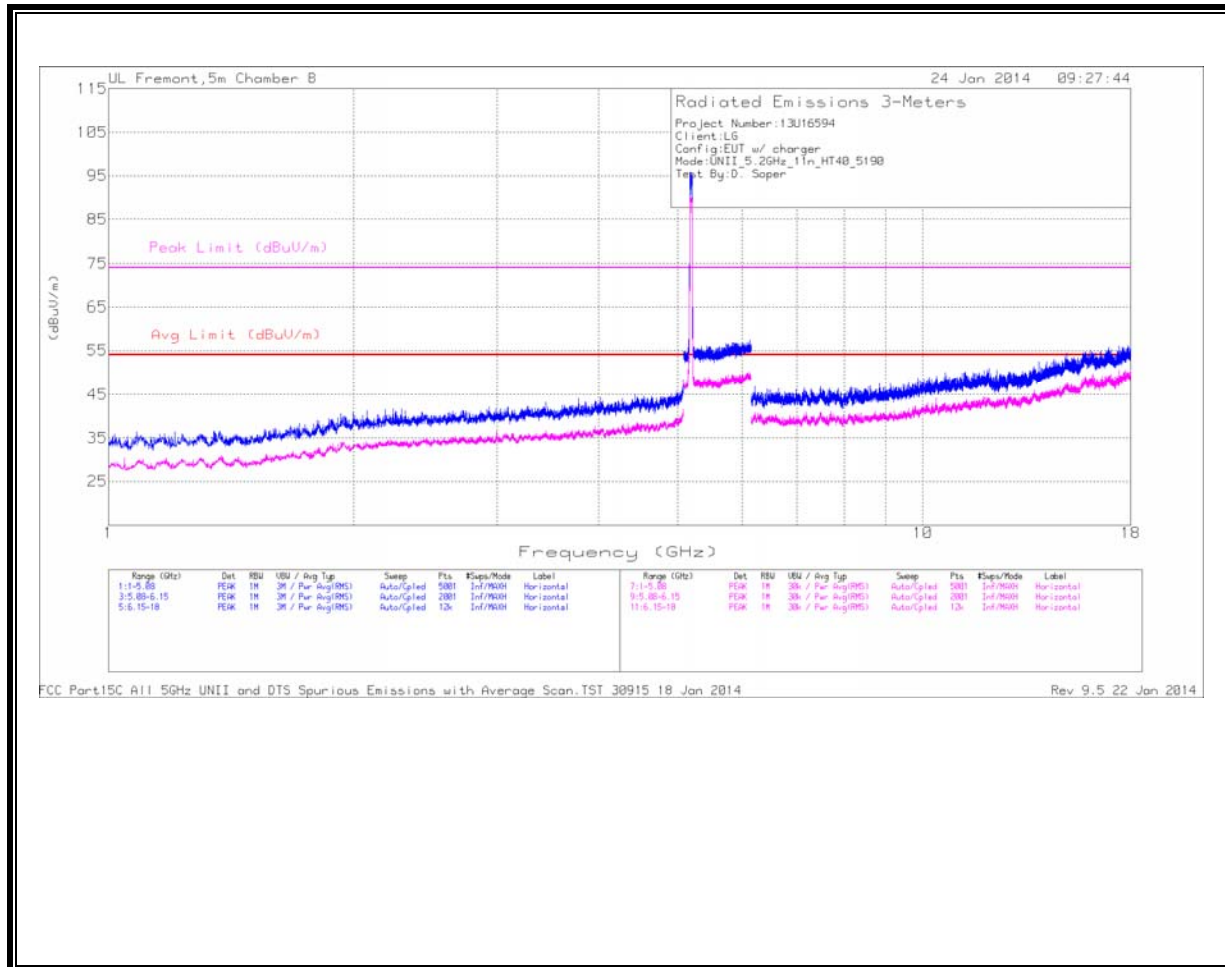

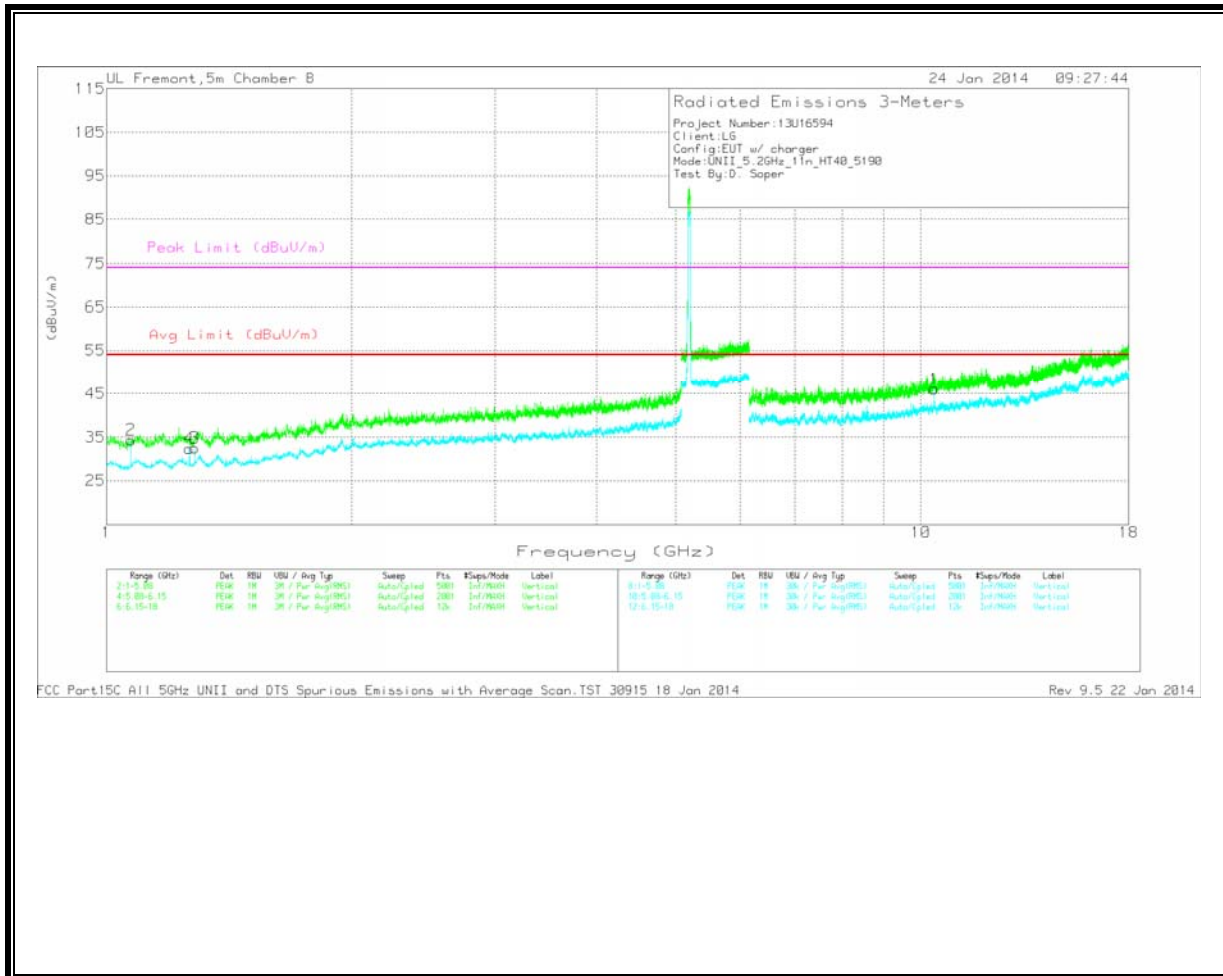


LOW CHANNEL DATA
 Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	1.071	41.11	Avg	27.7	-34.5	34.31	54	-19.69	-	-	0-360	202	V
4	1.264	38.32	Avg	28.6	-34.5	32.42	54	-21.58	-	-	0-360	202	V
3	1.283	38.43	Avg	28.5	-34.4	32.53	54	-21.47	-	-	0-360	202	V
1	10.38	31	Avg	38.1	-23	46.1	54	-7.9	-	-	0-360	202	V

Avg - Video bandwidth < Resolution bandwidth

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 18
 Jan 2014 Rev 9.5 22 Jan 2014

MID CHANNEL
HORIZONTAL

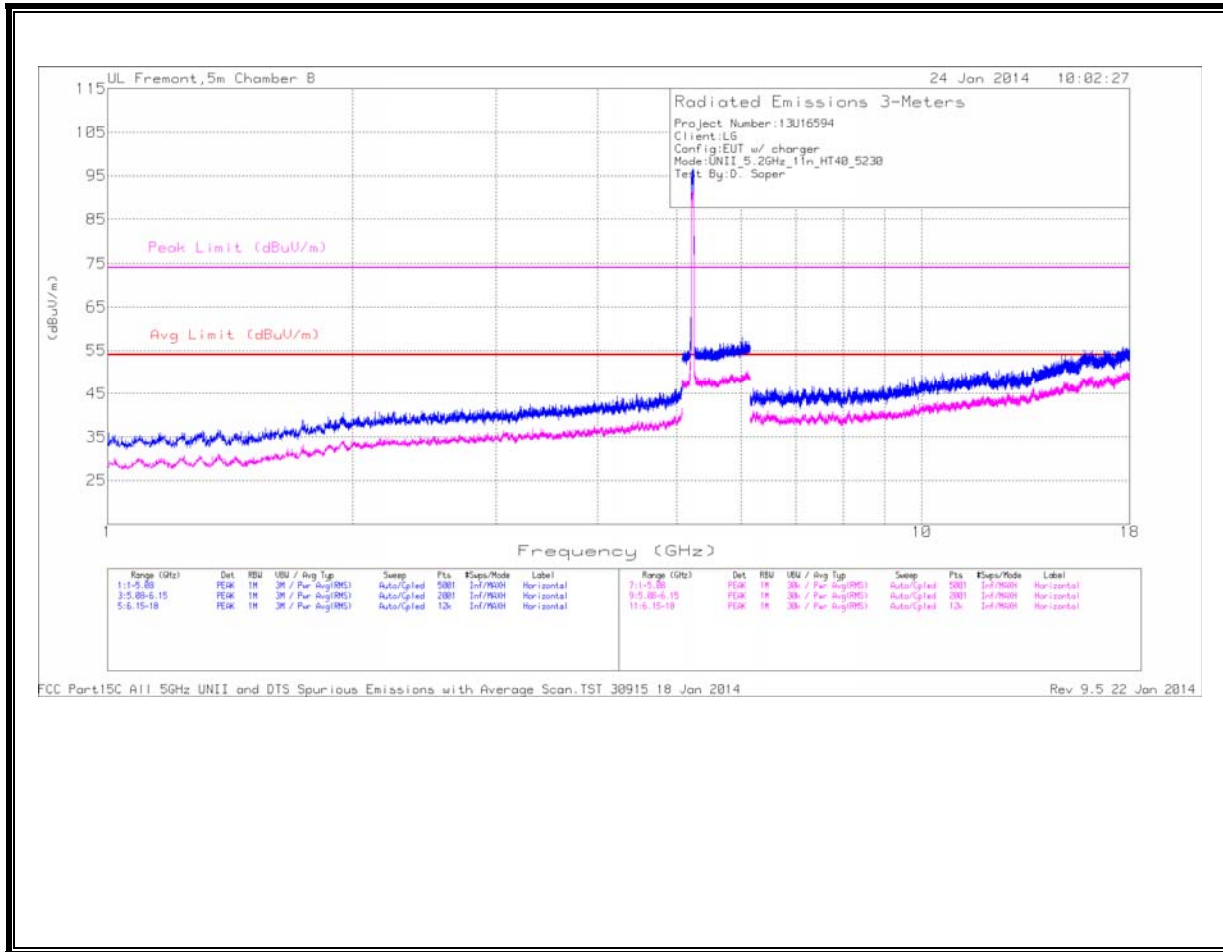

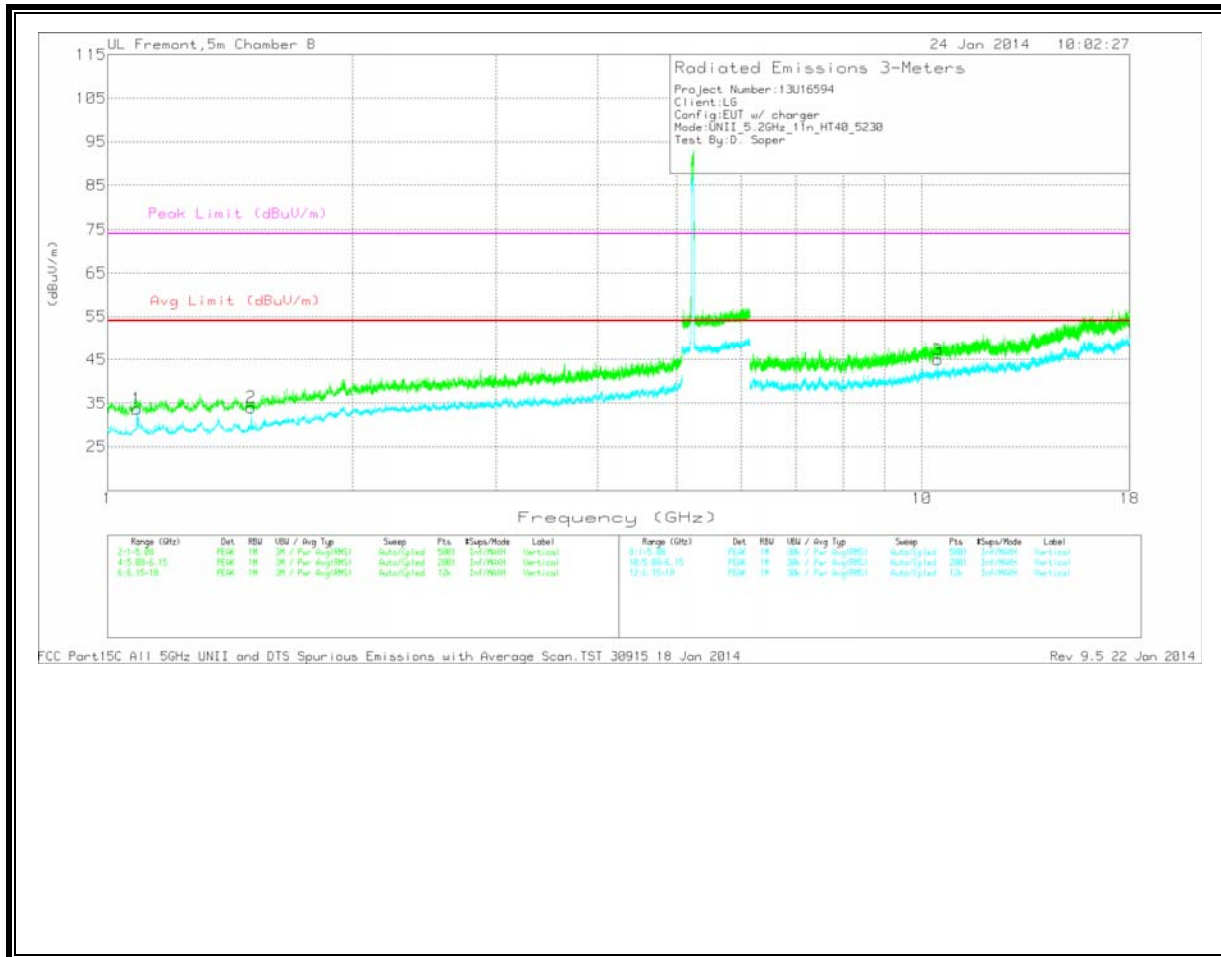

MID CHANNEL DATA
 Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.086	40.3	Avg	27.8	-34.4	33.7	54	-20.3	-	-	0-360	202	V
2	1.501	40.28	Avg	28.2	-34.5	33.98	54	-20.02	-	-	0-360	202	V
3	10.459	30.59	Avg	38.2	-23.8	44.99	54	-9.01	-	-	0-360	202	V



Avg - Video bandwidth < Resolution bandwidth

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 18
 Jan 2014 Rev 9.5 22 Jan 2014

11.2. 5.3 GHz


11.2.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.3 GHz BAND AUTHORIZED BANDEDGE (HIGH CHANNEL)

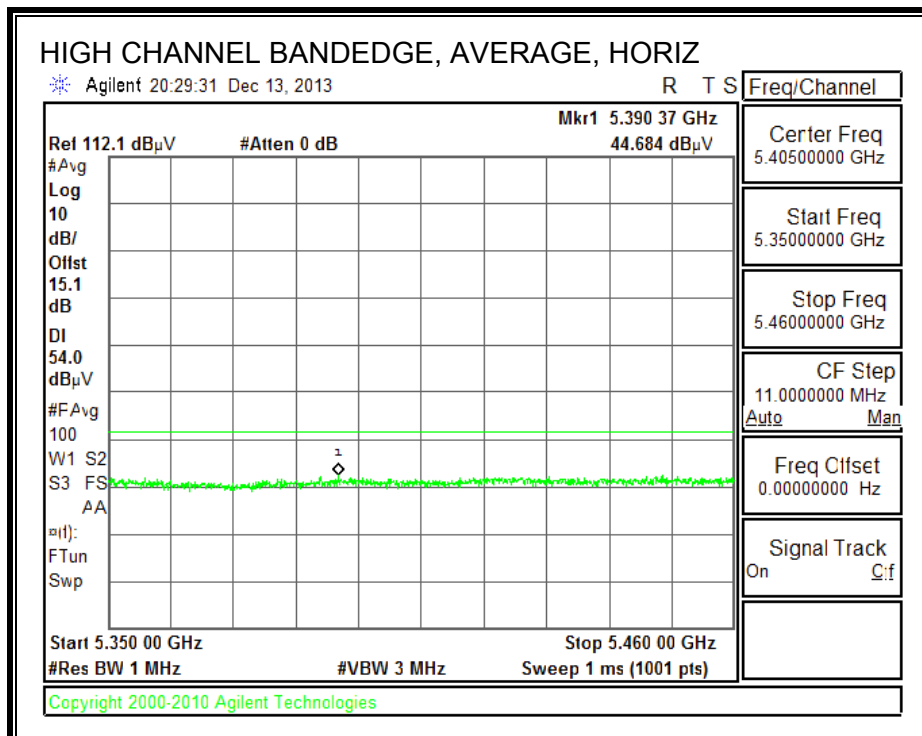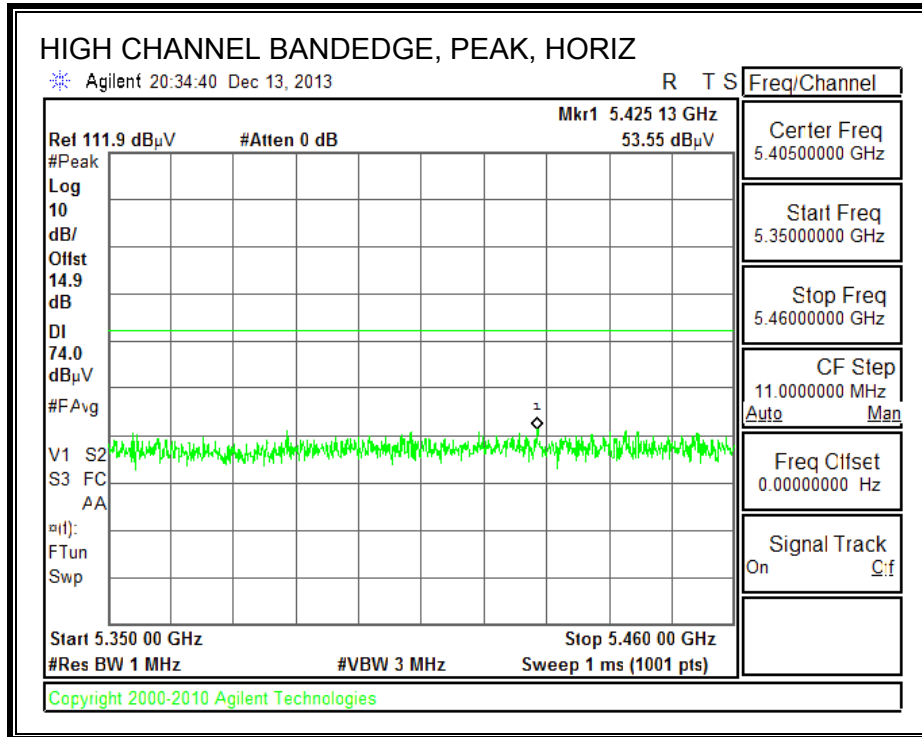

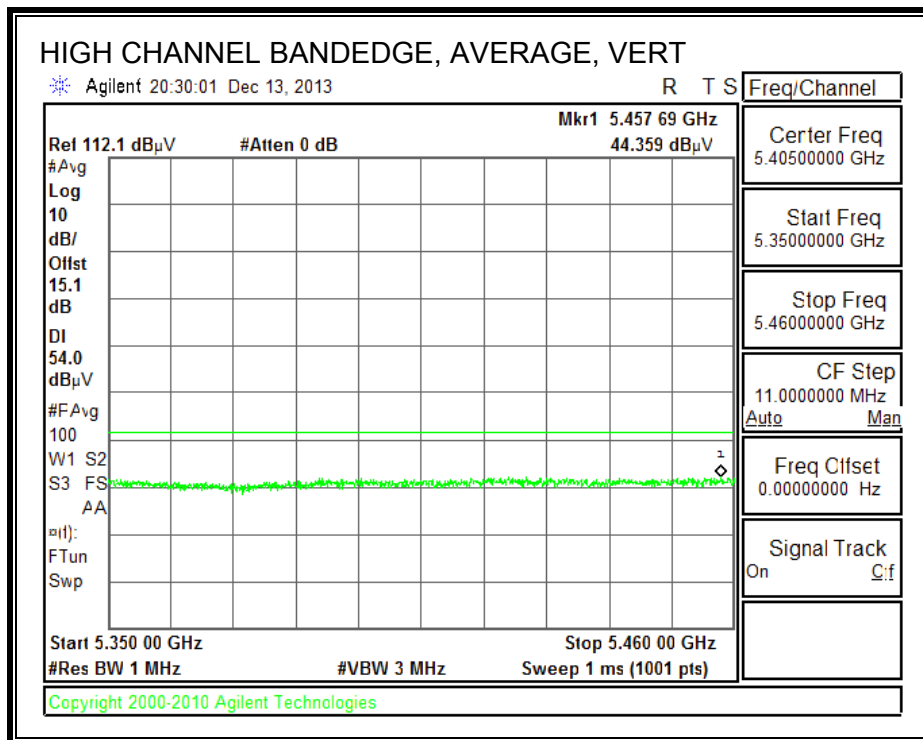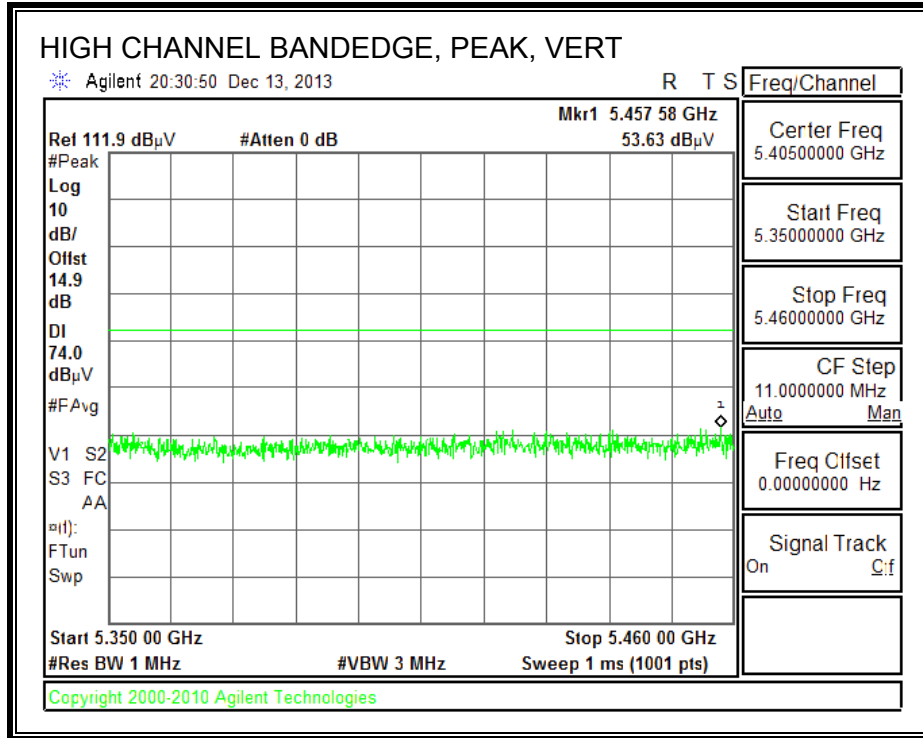


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

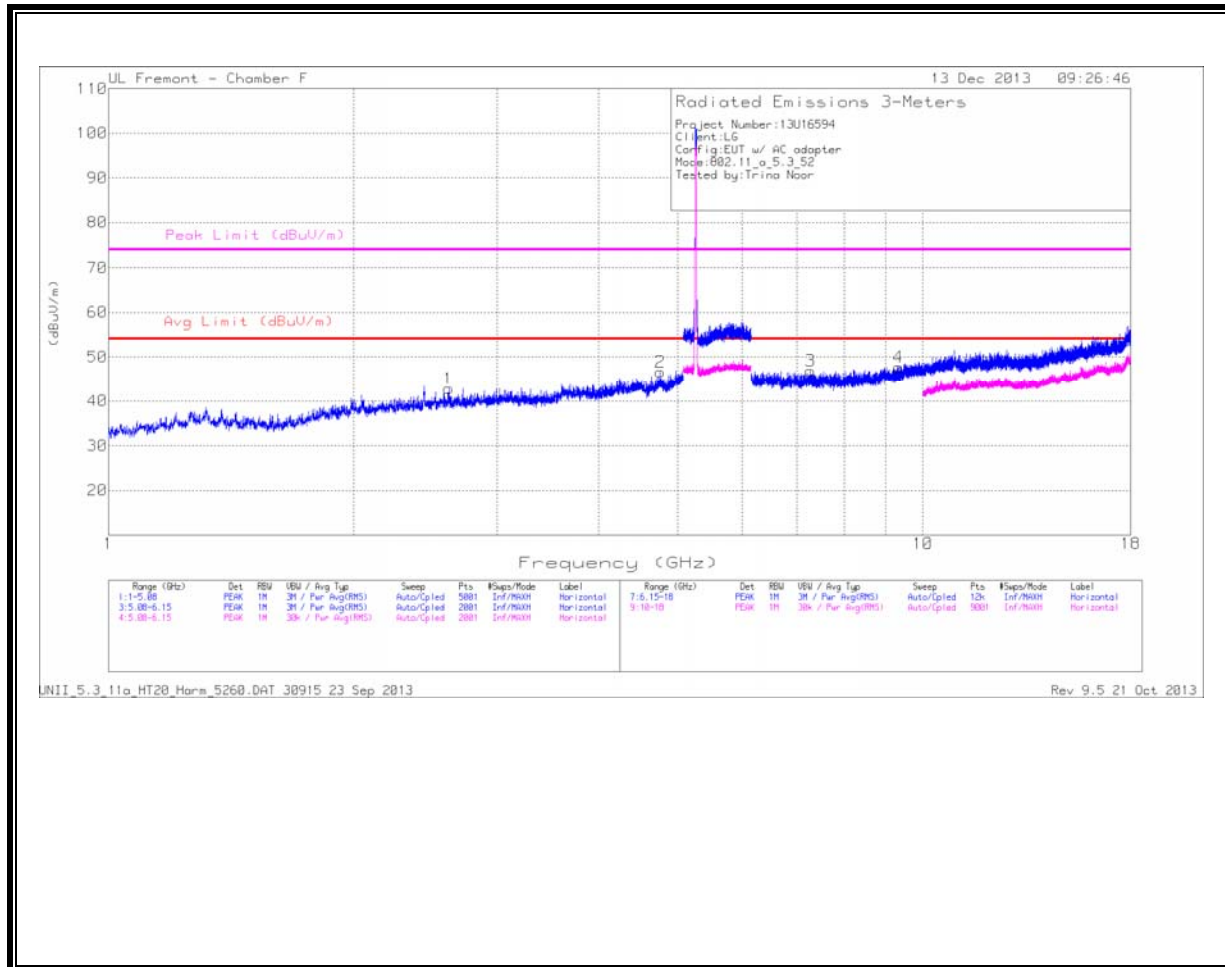

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

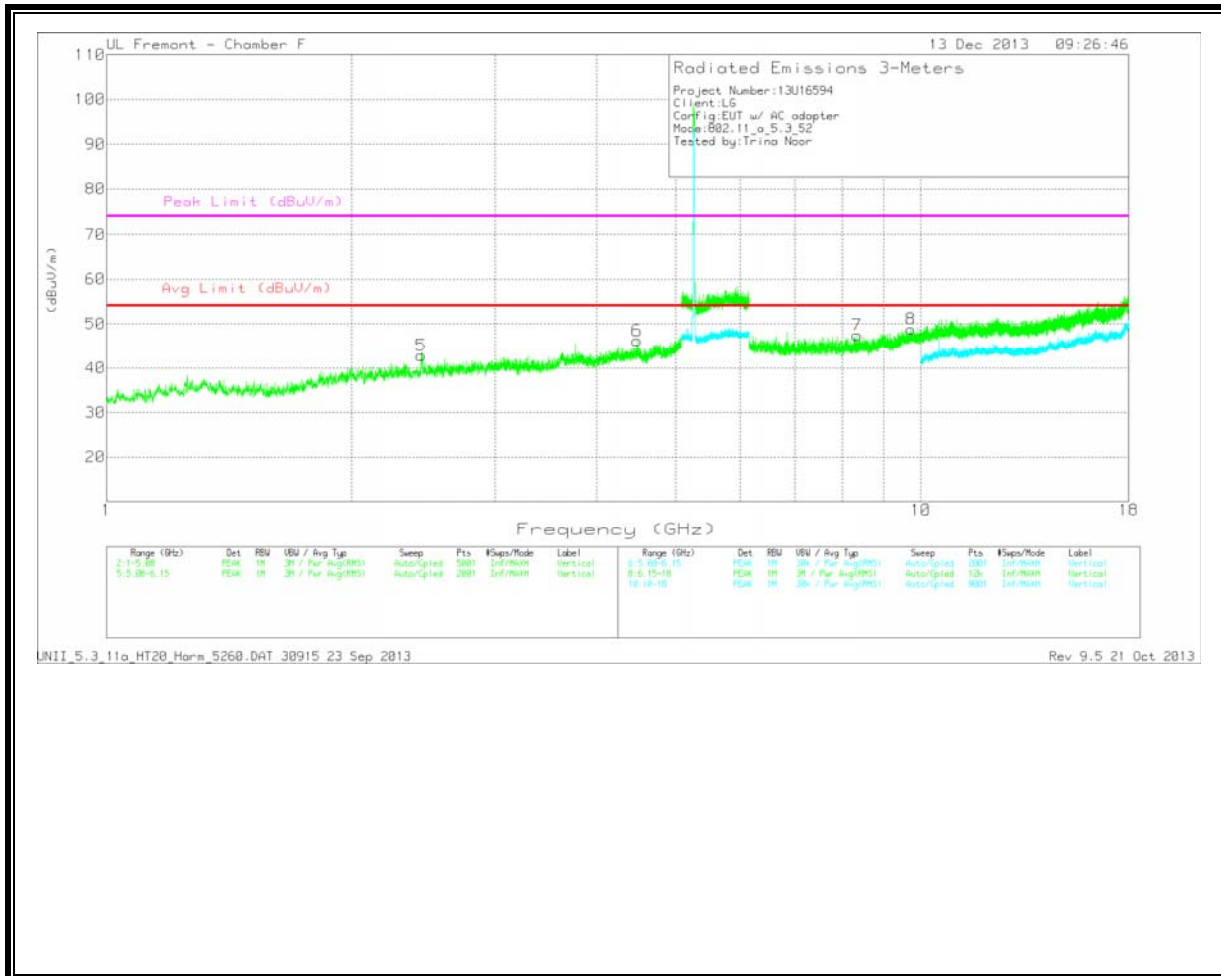

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.435	41.25	PK	32.3	-30.7	42.85	53.97	-11.12	74	-31.15	0-360	101	V
1	2.616	40.25	PK	32.6	-30	42.85	53.97	-11.12	74	-31.15	0-360	199	H
6	4.482	39.73	PK	33.9	-27.4	46.23	53.97	-7.74	74	-27.77	0-360	201	V
2	4.759	40.22	PK	34.1	-27.7	46.62	53.97	-7.35	74	-27.38	0-360	100	H

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	7.277	37.2	PK	35.7	-26	46.9	53.97	-7.07	74	-27.1	0-360	100	H
7	8.349	36.39	PK	36	-24.9	47.49	53.97	-6.48	74	-26.51	0-360	200	V
4	9.333	34.66	PK	36.8	-23.8	47.66	53.97	-6.31	74	-26.34	0-360	199	H
8	9.727	34.36	PK	37.4	-22.9	48.86	53.97	-5.11	74	-25.14	0-360	200	V


PK - Peak detector

MID CHANNEL
HORIZONTAL

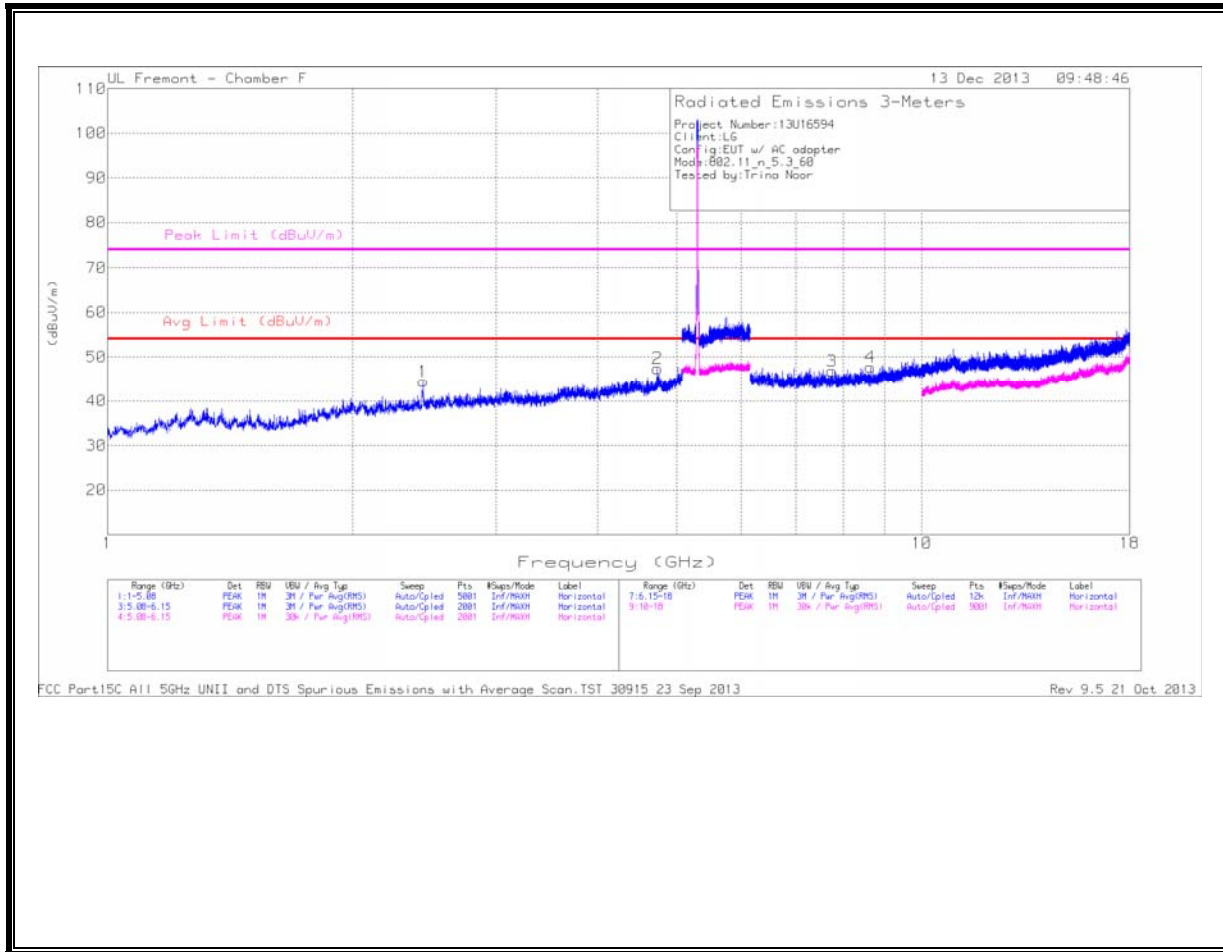

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

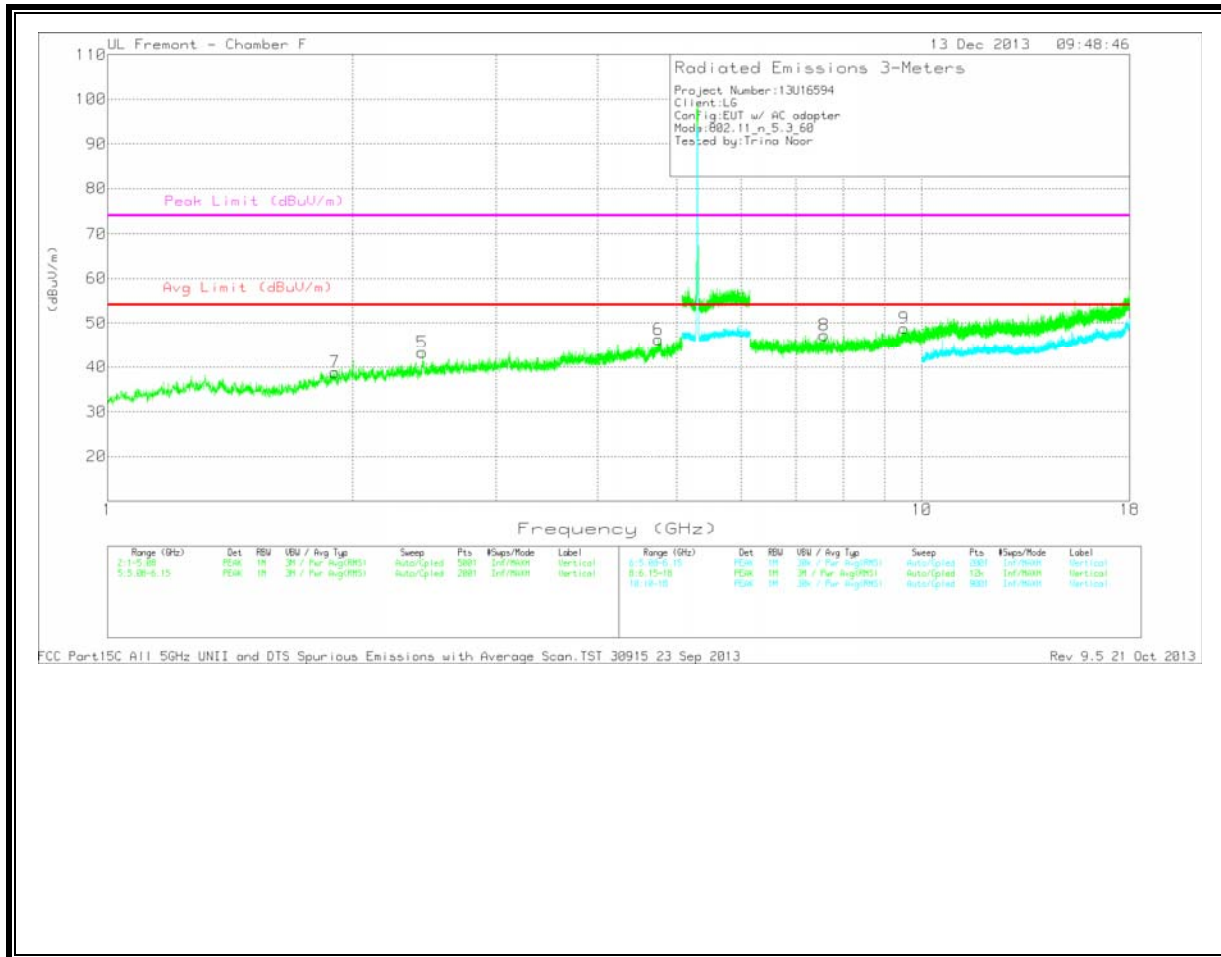

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	1.902	39.02	PK	31.1	-31.3	38.82	53.97	-15.15	74	-35.18	0-360	200	V
5	2.435	41.72	PK	32.3	-30.7	43.32	53.97	-10.65	74	-30.68	0-360	101	V
1	2.442	42.86	PK	32.3	-30.7	44.46	53.97	-9.51	74	-29.54	0-360	199	H
2	4.735	41.2	PK	34.1	-27.9	47.4	53.97	-6.57	74	-26.6	0-360	100	H
6	4.747	39.92	PK	34.1	-27.7	46.32	53.97	-7.65	74	-27.68	0-360	101	V

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
8	7.588	36.57	PK	35.9	-25.2	47.27	53.97	-6.7	74	-26.73	0-360	200	V
3	7.757	36.84	PK	35.9	-25.9	46.84	53.97	-7.13	74	-27.16	0-360	100	H
4	8.644	36.34	PK	36.1	-24.7	47.74	53.97	-6.23	74	-26.26	0-360	100	H
9	9.513	34.16	PK	37.2	-22.5	48.86	53.97	-5.11	74	-25.14	0-360	101	V


PK - Peak detector

HIGH CHANNEL
HORIZONTAL

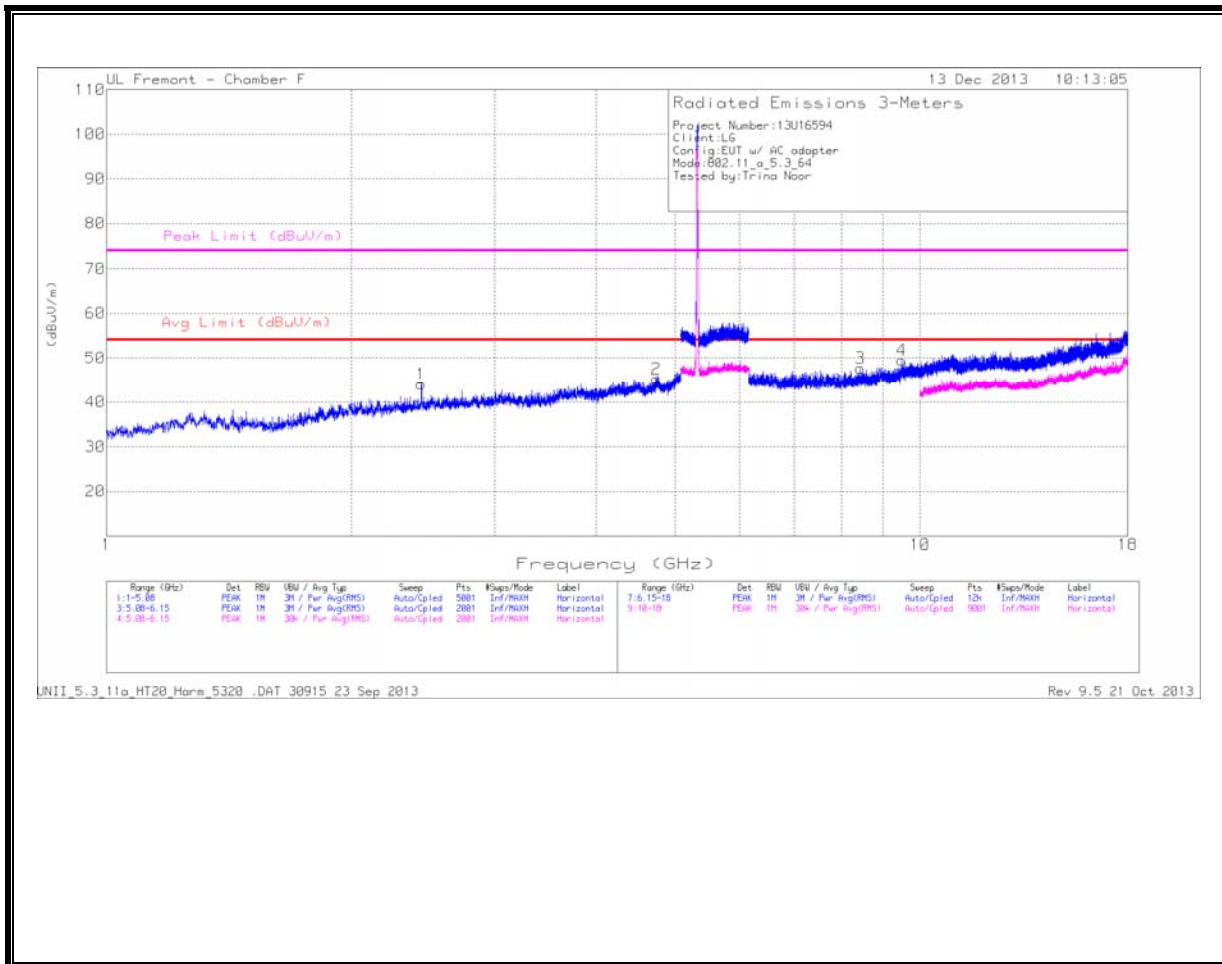

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

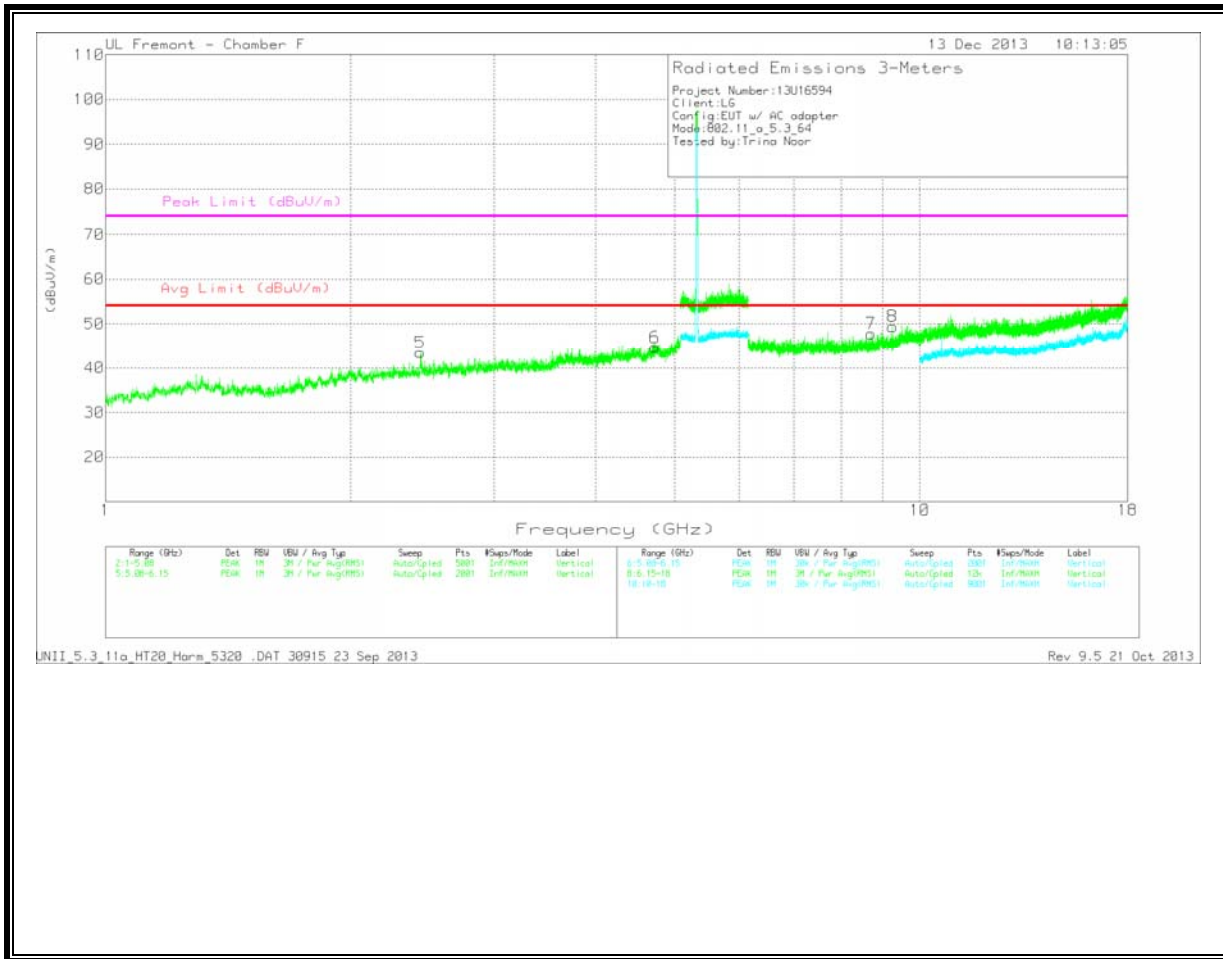

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



HIGH CHANNEL DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.435	41.93	PK	32.3	-30.7	43.53	53.97	-10.44	74	-30.47	0-360	200	V
1	2.437	42.5	PK	32.3	-30.7	44.1	53.97	-9.87	74	-29.9	0-360	199	H
6	4.728	38.61	PK	34.1	-28	44.71	53.97	-9.26	74	-29.29	0-360	101	V
2	4.74	38.97	PK	34.1	-27.8	45.27	53.97	-8.7	74	-28.73	0-360	199	H

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.443	36.92	PK	36	-25.2	47.72	53.97	-6.25	74	-26.28	0-360	199	H
7	8.708	36.31	PK	36.1	-24.6	47.81	53.97	-6.16	74	-26.19	0-360	200	V
8	9.257	36.65	PK	36.6	-23.8	49.45	53.97	-4.52	74	-24.55	0-360	200	V
4	9.497	34.57	PK	37.1	-22.2	49.47	53.97	-4.5	74	-24.53	0-360	199	H

PK - Peak detector


**11.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.3 GHz BAND
 AUTHORIZED BANDEDGE (HIGH CHANNEL)**

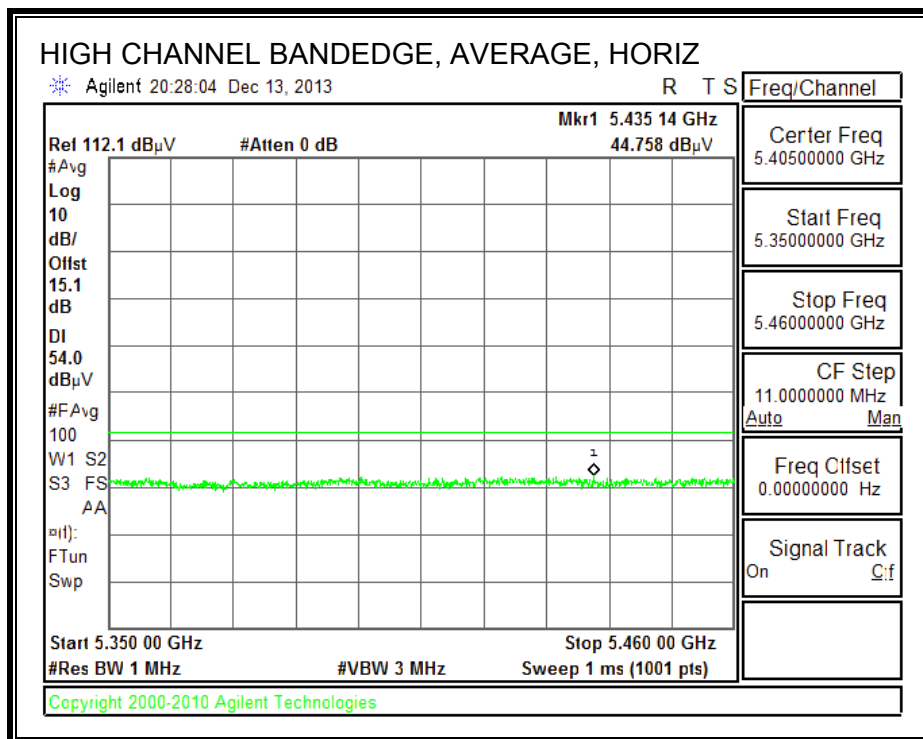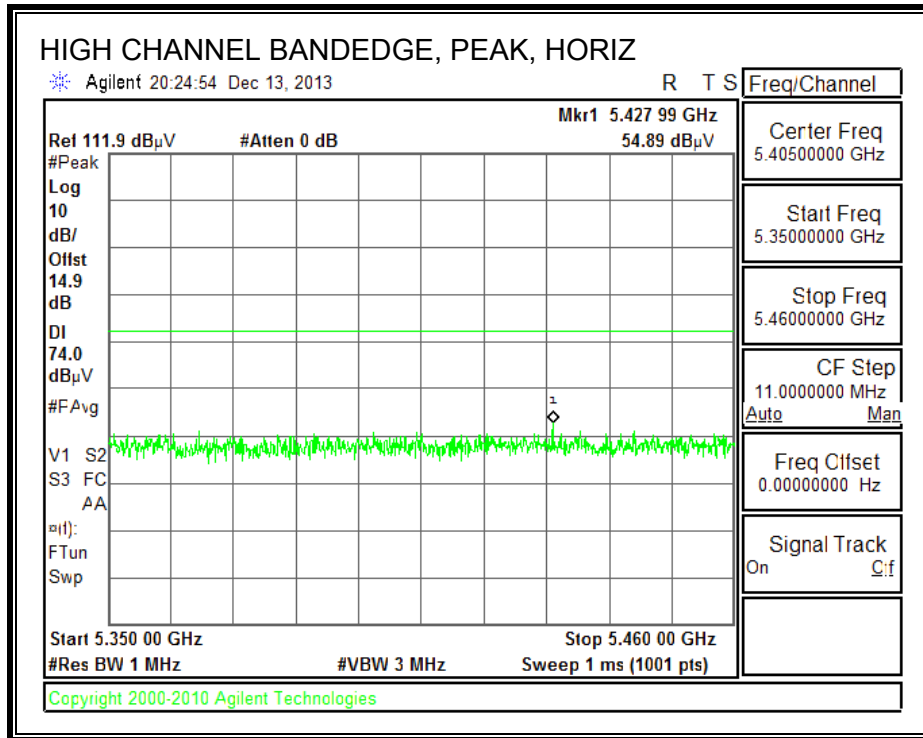

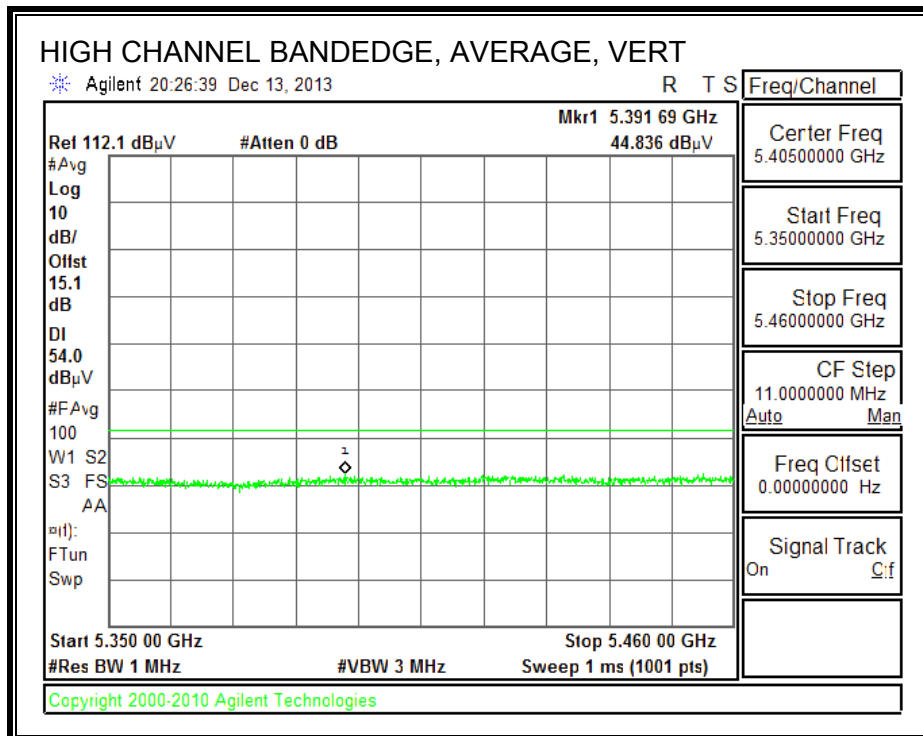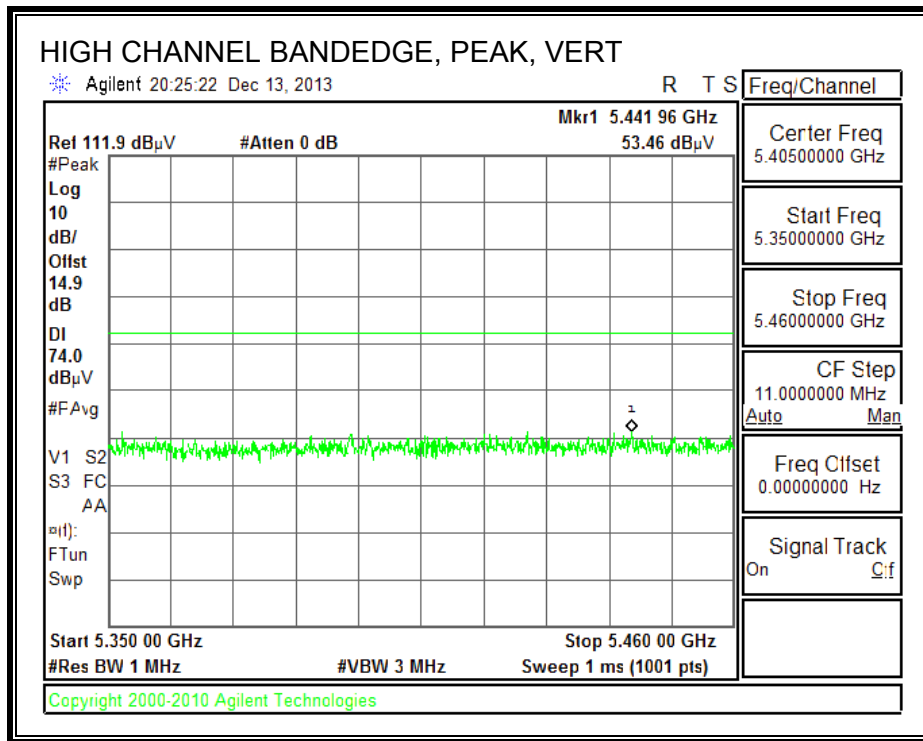


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

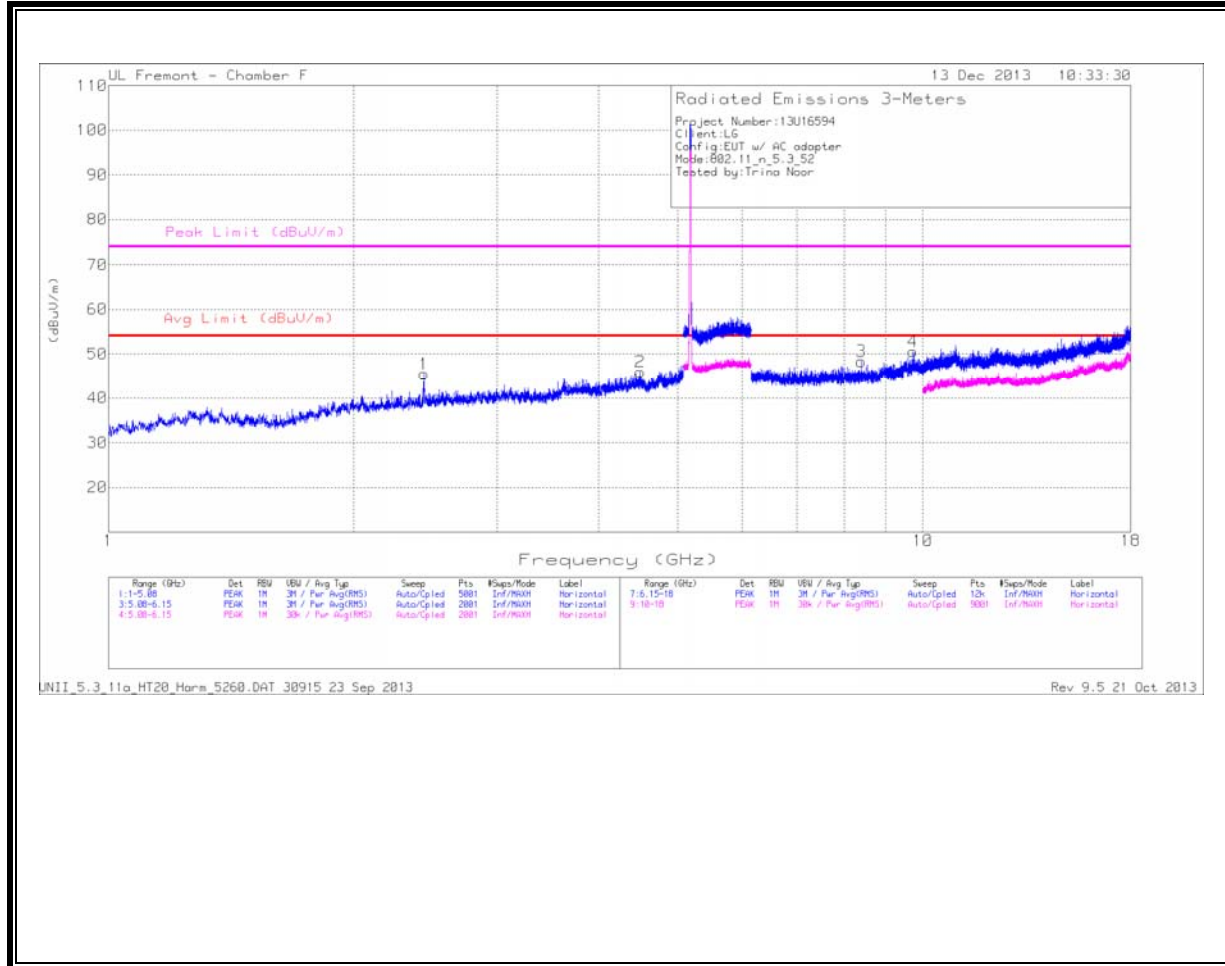

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

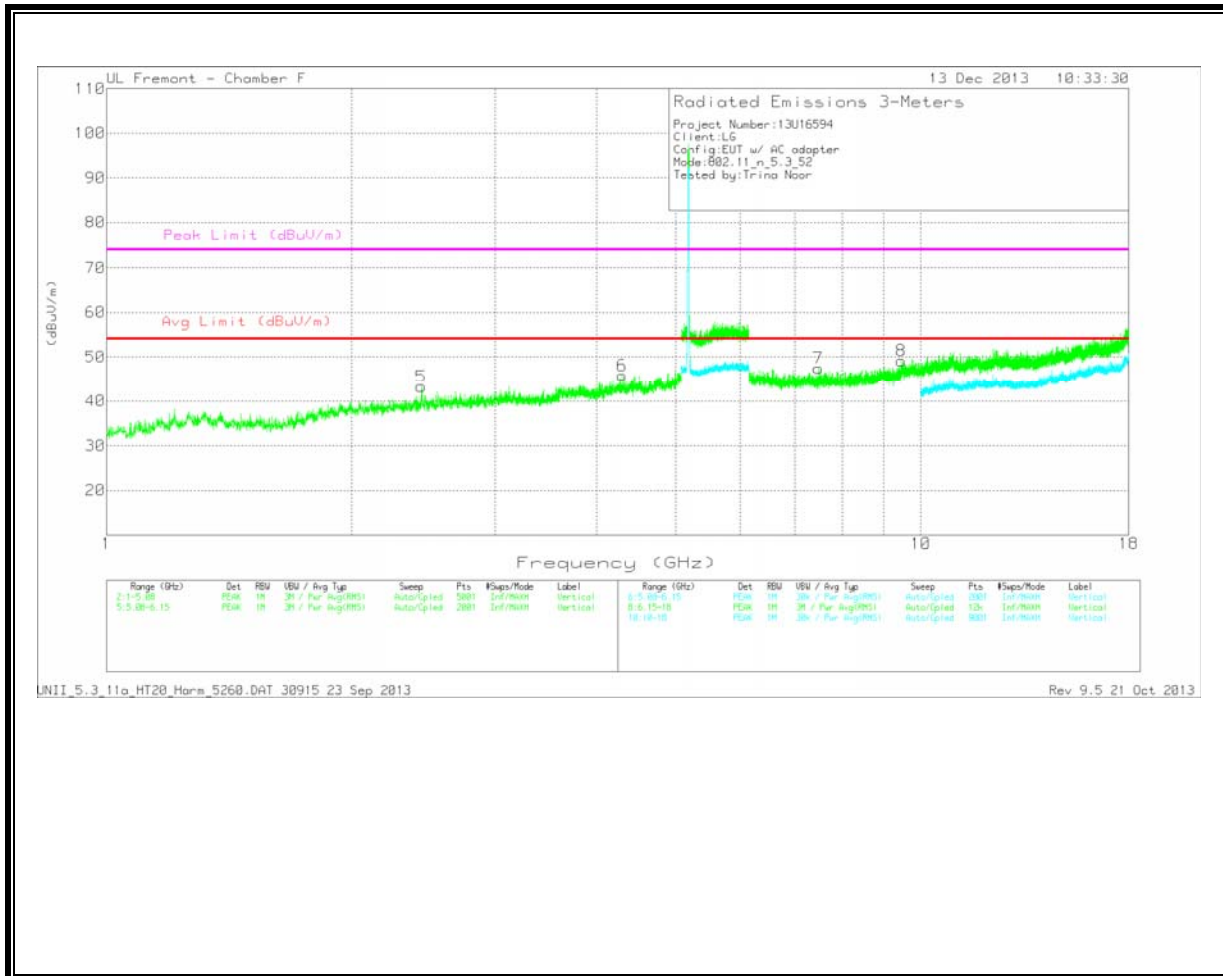

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.435	41.7	PK	32.3	-30.7	43.3	53.97	-10.67	74	-30.7	0-360	201	V
1	2.44	43.9	PK	32.3	-30.7	45.5	53.97	-8.47	74	-28.5	0-360	199	H
6	4.296	40.3	PK	33.5	-28	45.8	53.97	-8.17	74	-28.2	0-360	201	V
2	4.497	39.58	PK	33.9	-27.5	45.98	53.97	-7.99	74	-28.02	0-360	100	H


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	7.484	37.79	PK	35.8	-26.1	47.49	53.97	-6.48	74	-26.51	0-360	200	V
3	8.4	37.36	PK	36	-25	48.36	53.97	-5.61	74	-25.64	0-360	199	H
8	9.459	35.36	PK	37	-23.2	49.16	53.97	-4.81	74	-24.84	0-360	101	V
4	9.721	36.25	PK	37.4	-23.1	50.55	53.97	-3.42	74	-23.45	0-360	100	H

PK - Peak detector

MID CHANNEL
HORIZONTAL

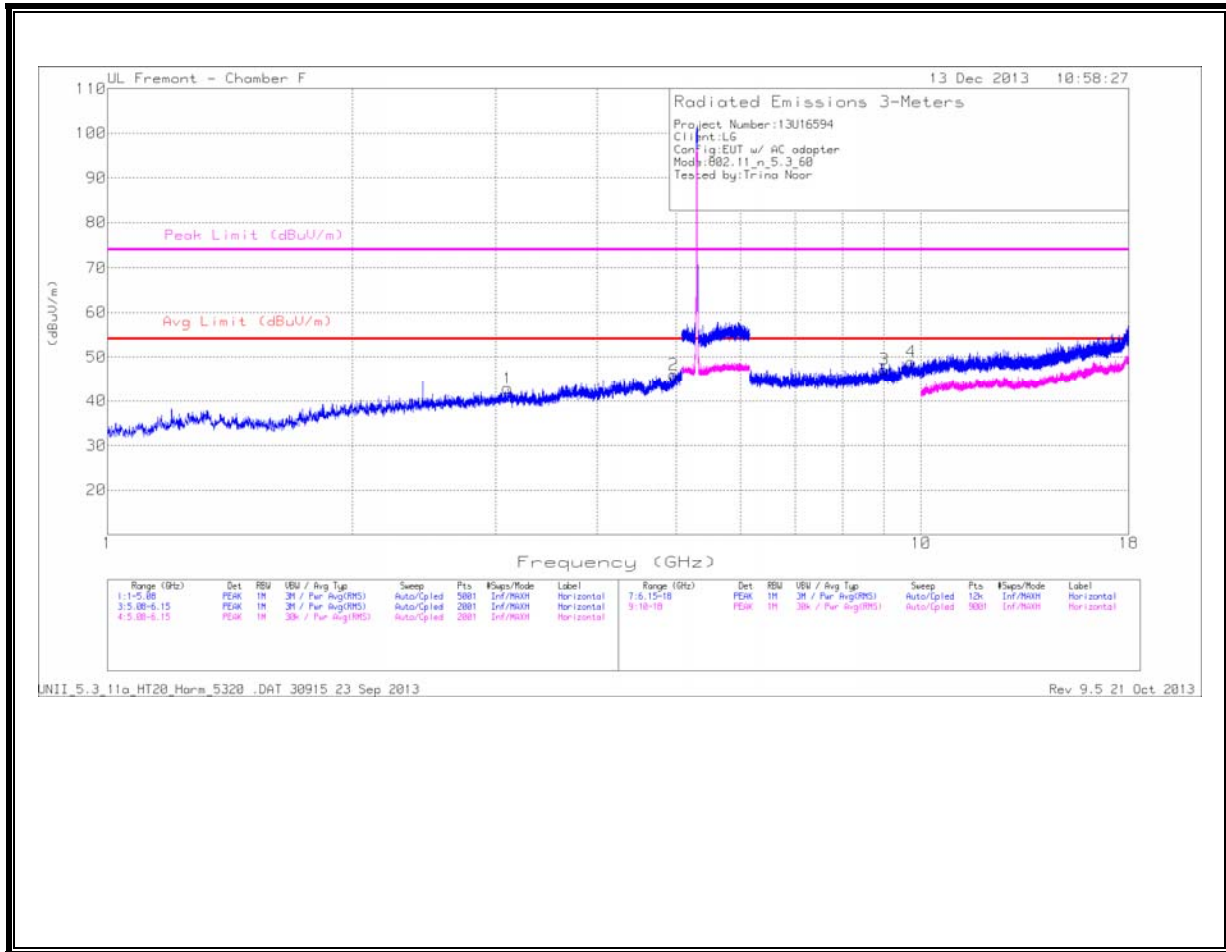

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

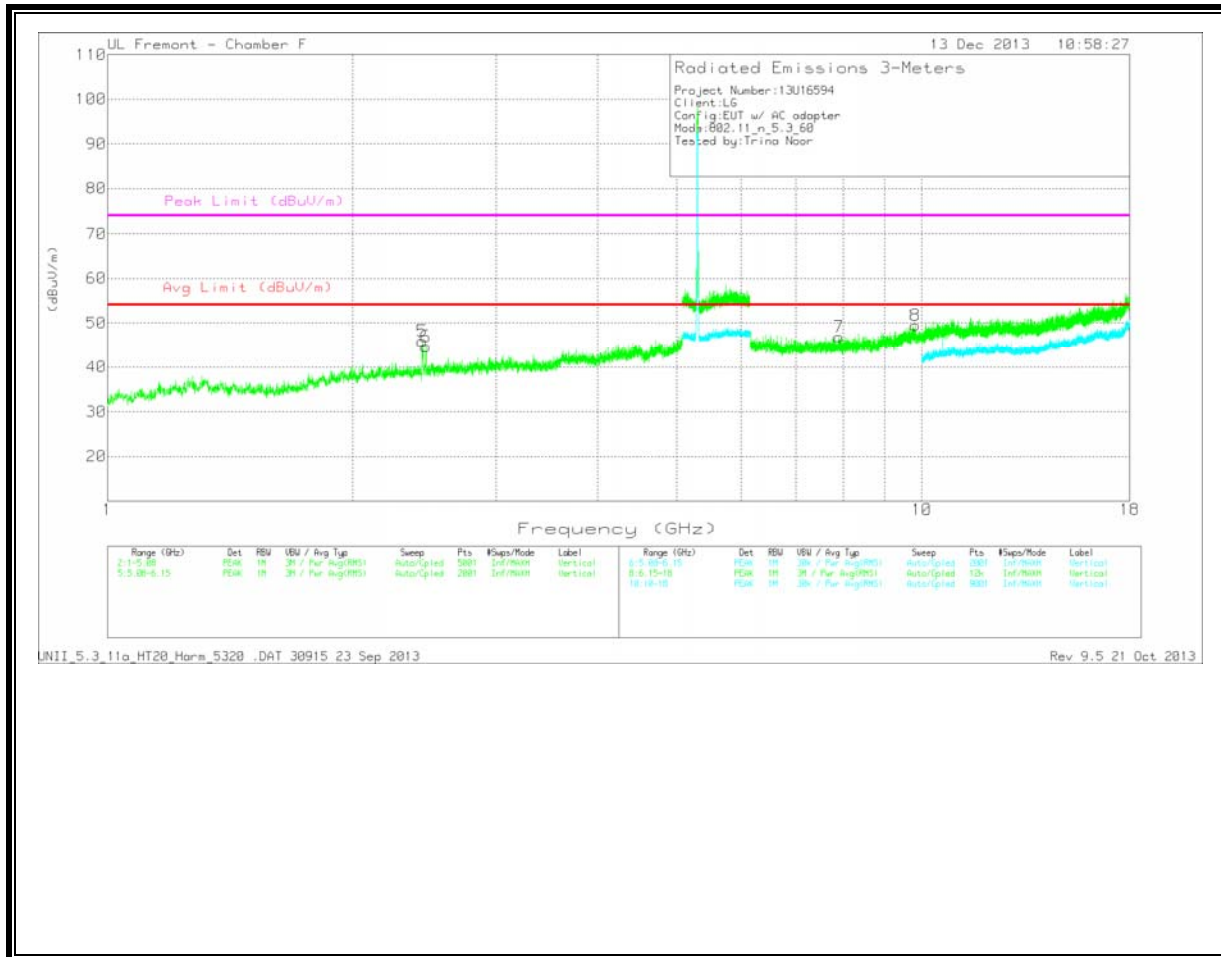

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


MID CHANNEL DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.435	44.31	PK	32.3	-30.7	45.91	53.97	-8.06	74	-28.09	0-360	200	V
6	2.46	42.97	PK	32.3	-30.6	44.67	53.97	-9.3	74	-29.33	0-360	200	V
1	3.103	38.98	PK	33.3	-29.4	42.88	53.97	-11.09	74	-31.12	0-360	100	H
2	4.965	39.15	PK	34	-27.1	46.05	53.97	-7.92	74	-27.95	0-360	199	H


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	7.912	37.12	PK	35.9	-26.1	46.92	53.97	-7.05	74	-27.08	0-360	101	V
3	9.006	34.63	PK	36.4	-23.8	47.23	53.97	-6.74	74	-26.77	0-360	199	H
4	9.721	34.63	PK	37.4	-23.1	48.93	53.97	-5.04	74	-25.07	0-360	100	H
8	9.82	35.28	PK	37.5	-23.3	49.48	53.97	-4.49	74	-24.52	0-360	200	V

PK - Peak detector

HIGH CHANNEL
HORIZONTAL

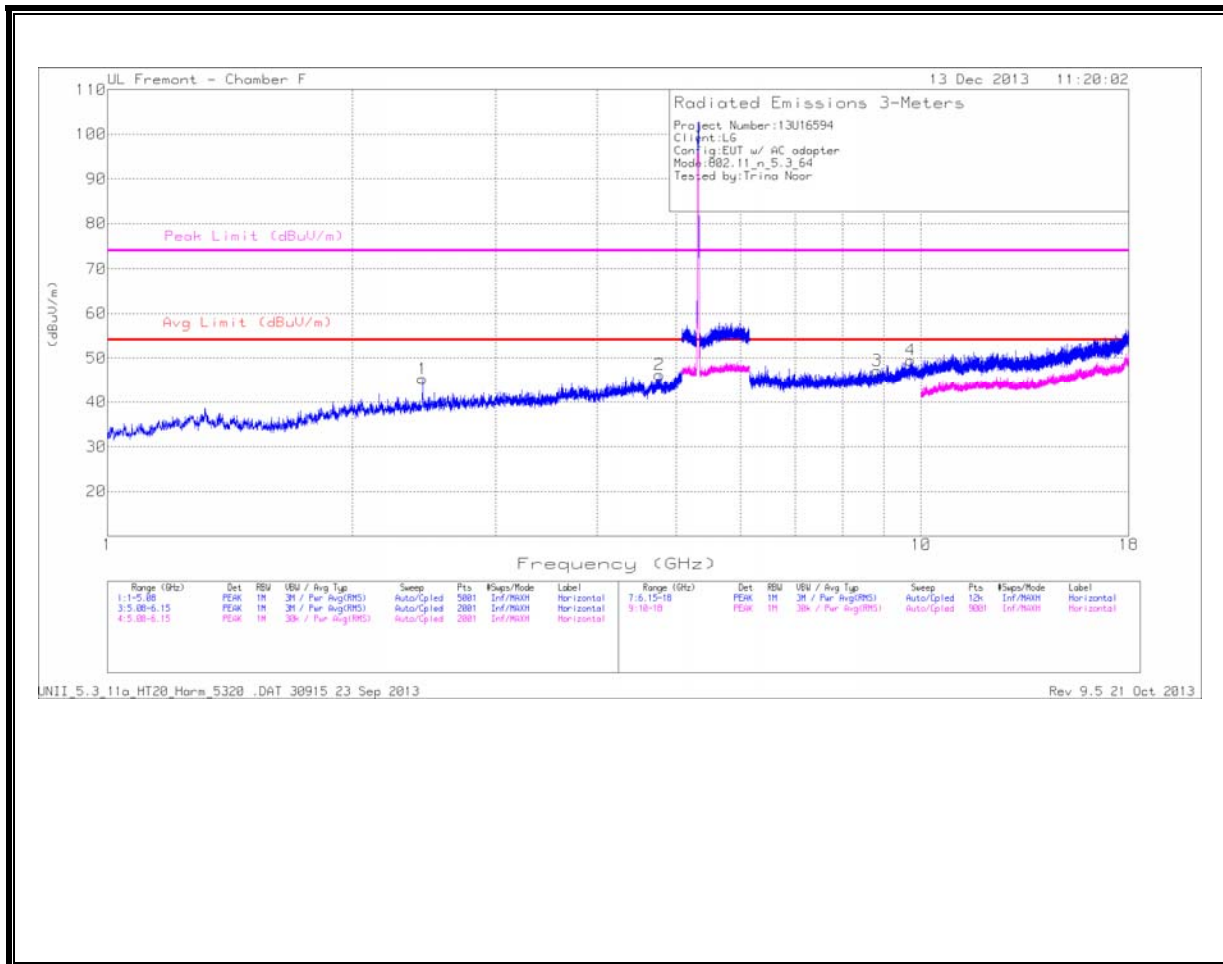

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

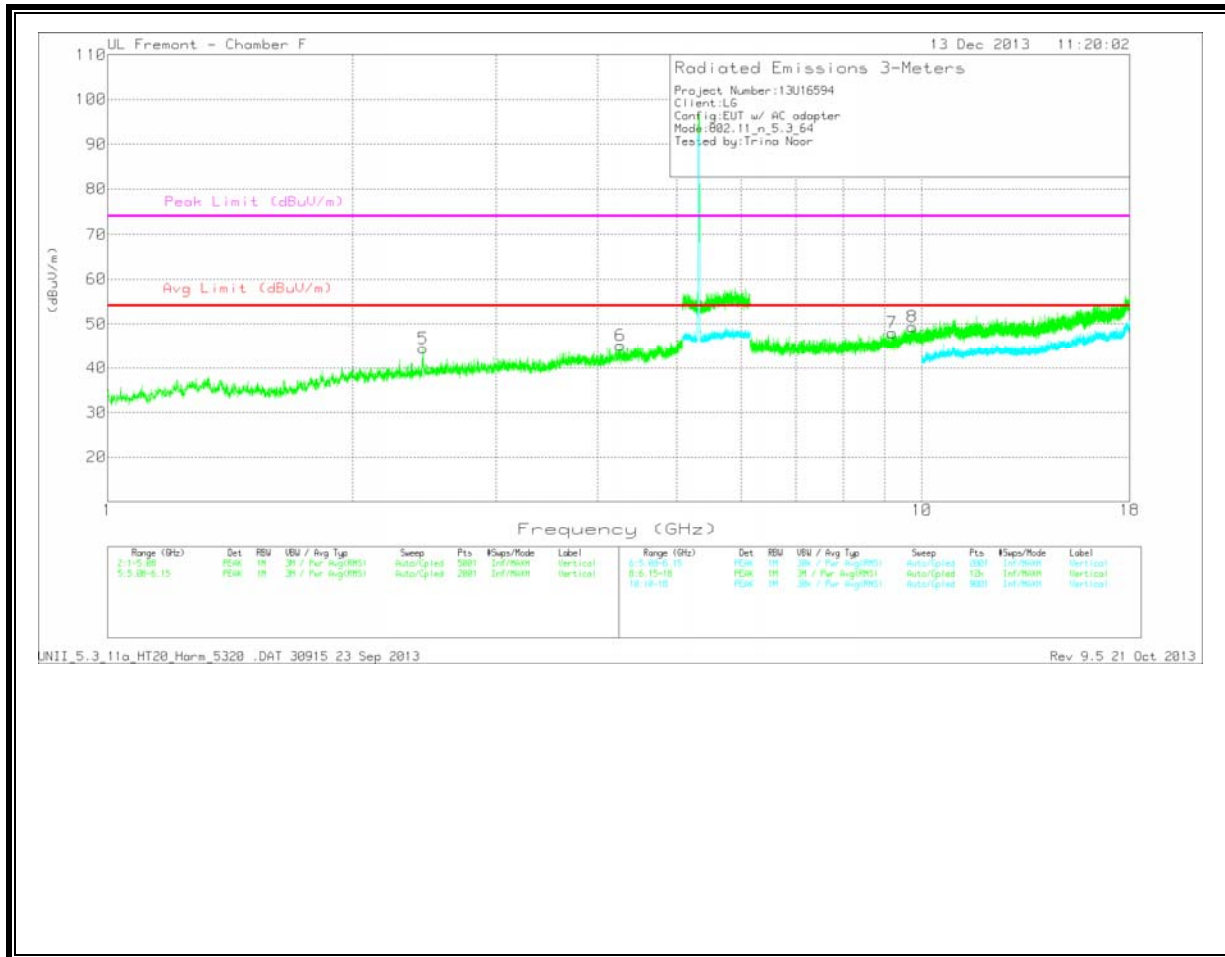

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



HIGH CHANNEL DATA



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.439	43.7	PK	32.3	-30.7	45.3	53.97	-8.67	74	-28.7	0-360	199	H
5	2.44	42.86	PK	32.3	-30.7	44.46	53.97	-9.51	74	-29.54	0-360	201	V
6	4.264	39.59	PK	33.5	-27.9	45.19	53.97	-8.78	74	-28.81	0-360	201	V
2	4.768	39.88	PK	34.1	-27.7	46.28	53.97	-7.69	74	-27.72	0-360	199	H

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.833	35.6	PK	36.2	-24.6	47.2	53.97	-6.77	74	-26.8	0-360	100	H
7	9.195	35.24	PK	36.6	-23.8	48.04	53.97	-5.93	74	-25.96	0-360	101	V
4	9.713	35.52	PK	37.4	-23.4	49.52	53.97	-4.45	74	-24.48	0-360	100	H
8	9.735	34.68	PK	37.4	-22.7	49.38	53.97	-4.59	74	-24.62	0-360	101	V

PK - Peak detector


**11.2.5. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.3 GHz BAND
 AUTHORIZED BANDEDGE (HIGH CHANNEL)**

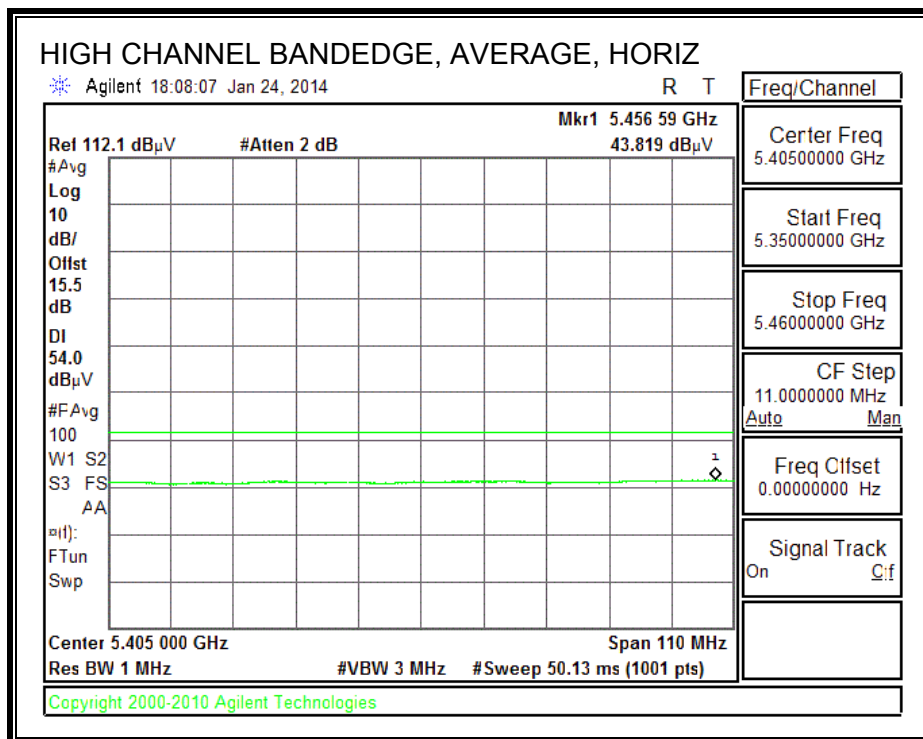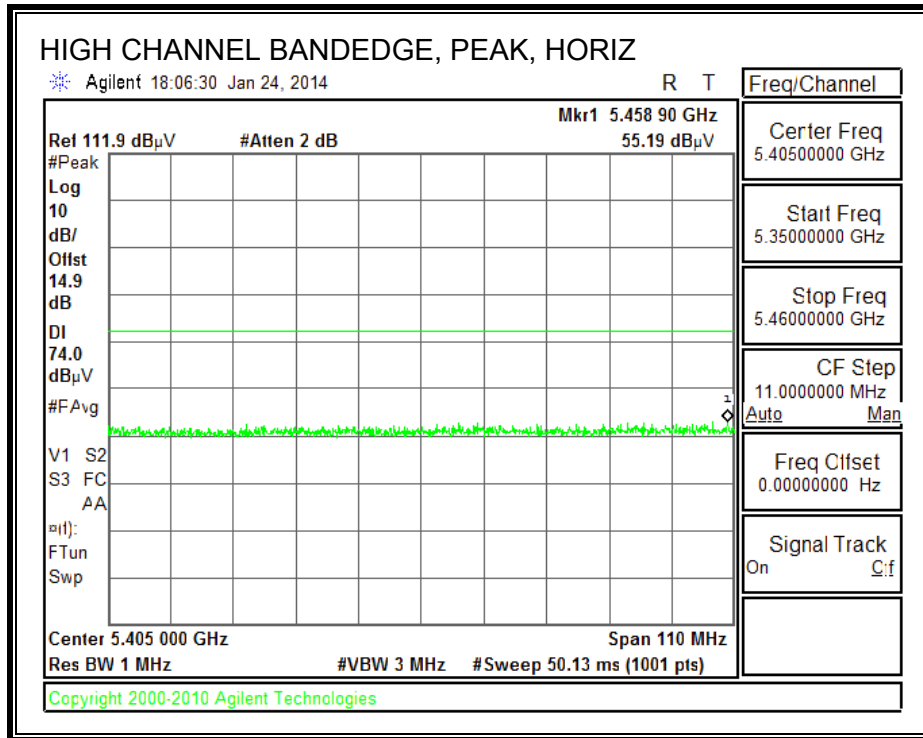


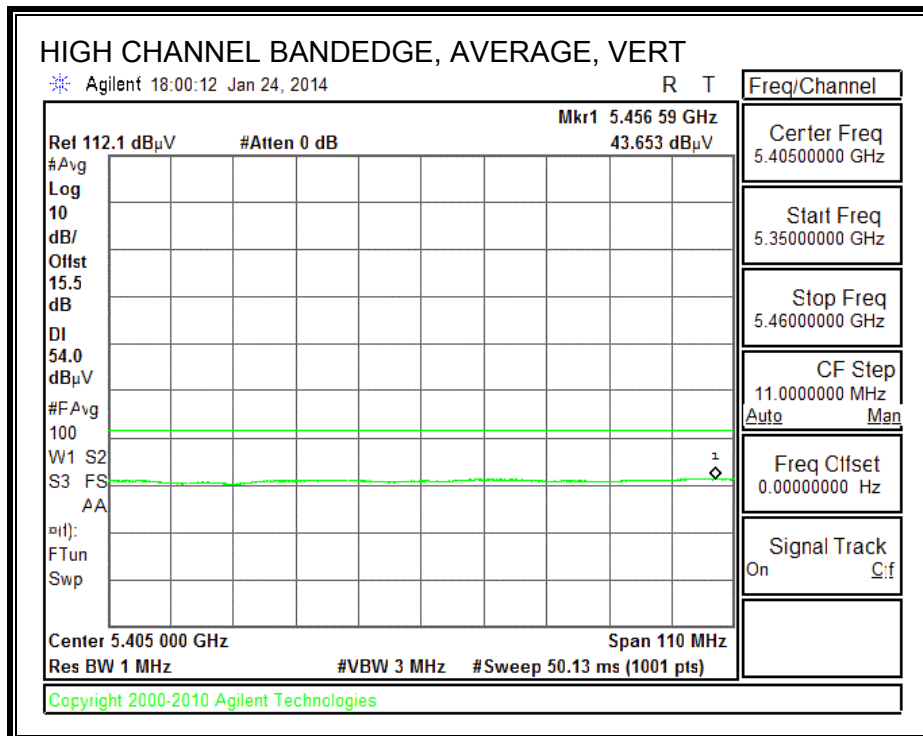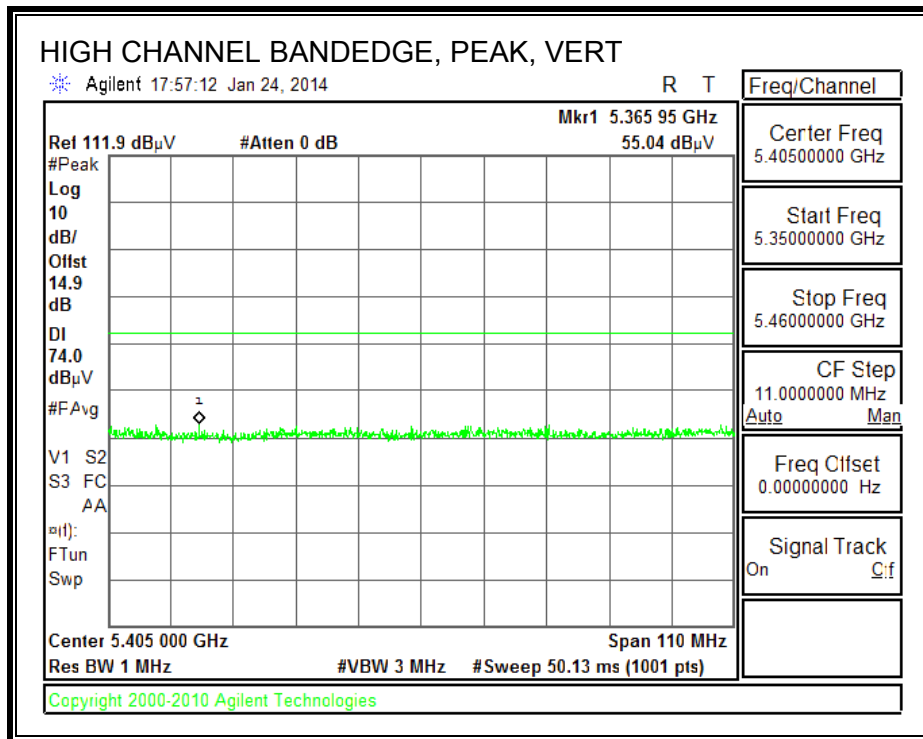

HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

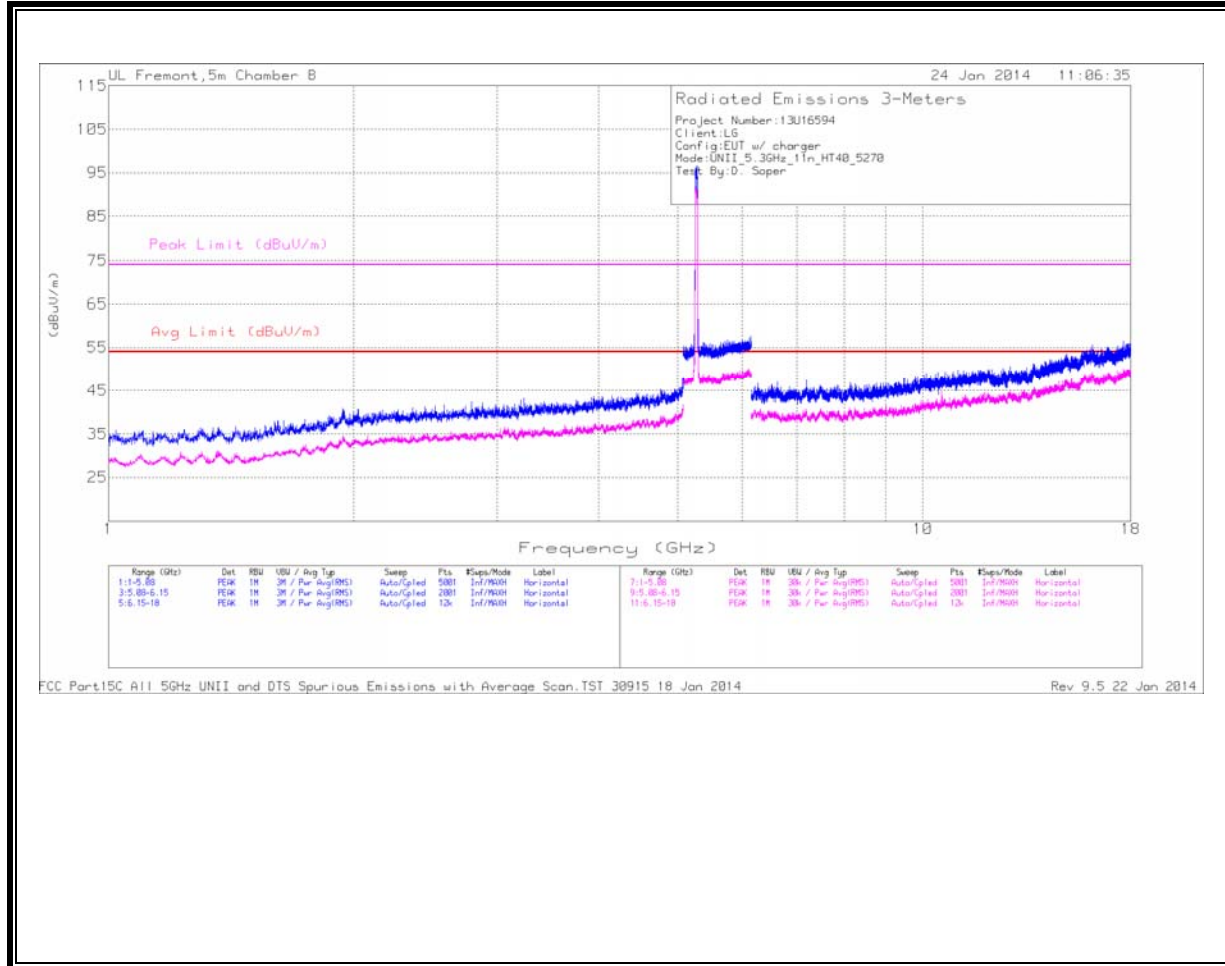

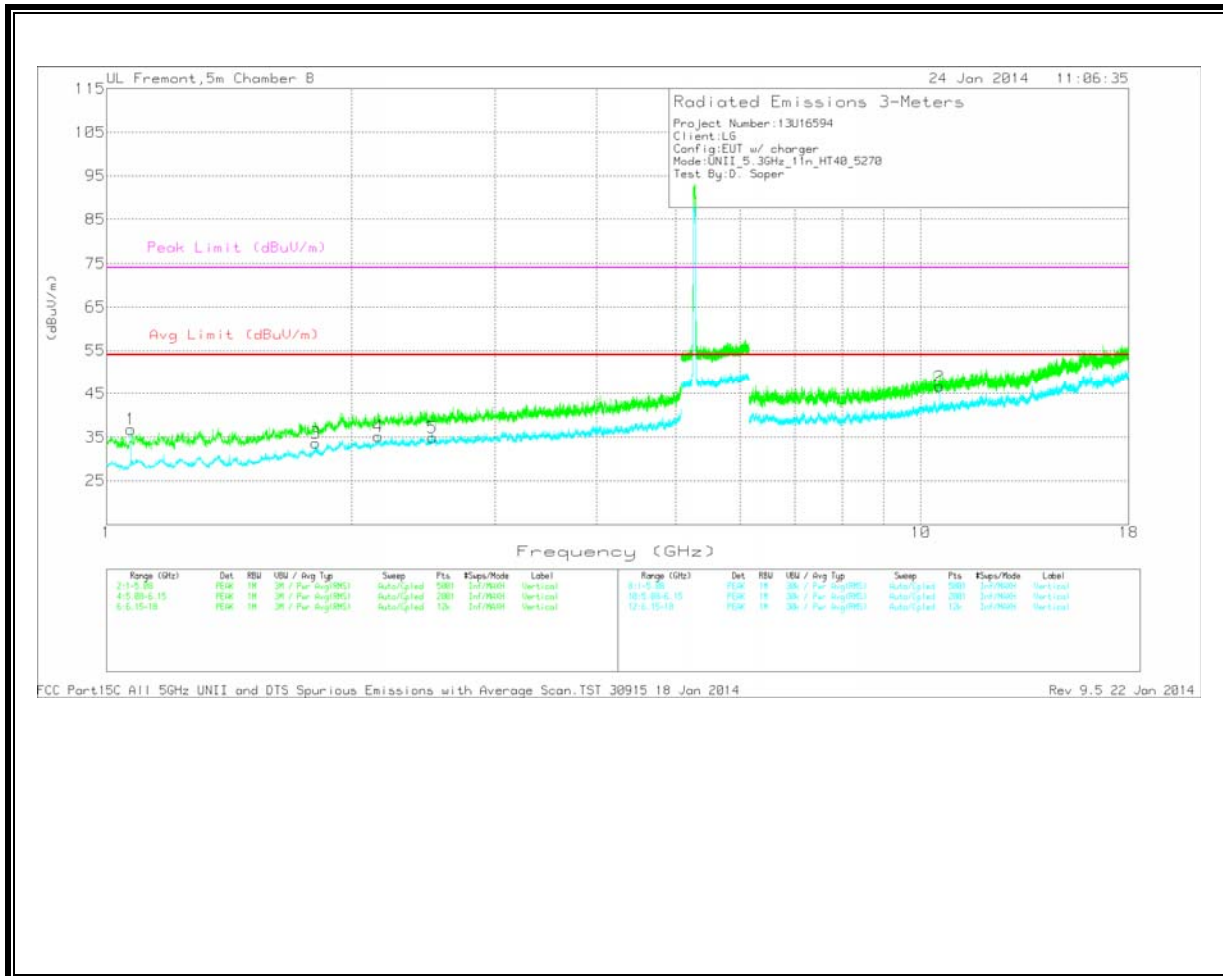

LOW CHANNEL DATA


Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.071	43.58	Avg	27.7	-34.5	36.78	54	-17.22	-	-	0-360	99	V
3	1.806	37.02	Avg	30.5	-33.9	33.62	54	-20.38	-	-	0-360	201	V
4	2.156	35.65	Avg	32	-32.5	35.15	54	-18.85	-	-	0-360	99	V
5	2.514	34.78	Avg	32.5	-32.4	34.88	54	-19.12	-	-	0-360	99	V
2	10.54	32.26	Avg	38.2	-23.8	46.66	54	-7.34	-	-	0-360	202	V

Avg - Video bandwidth < Resolution bandwidth

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 18
 Jan 2014 Rev 9.5 22 Jan 2014

MID CHANNEL
HORIZONTAL

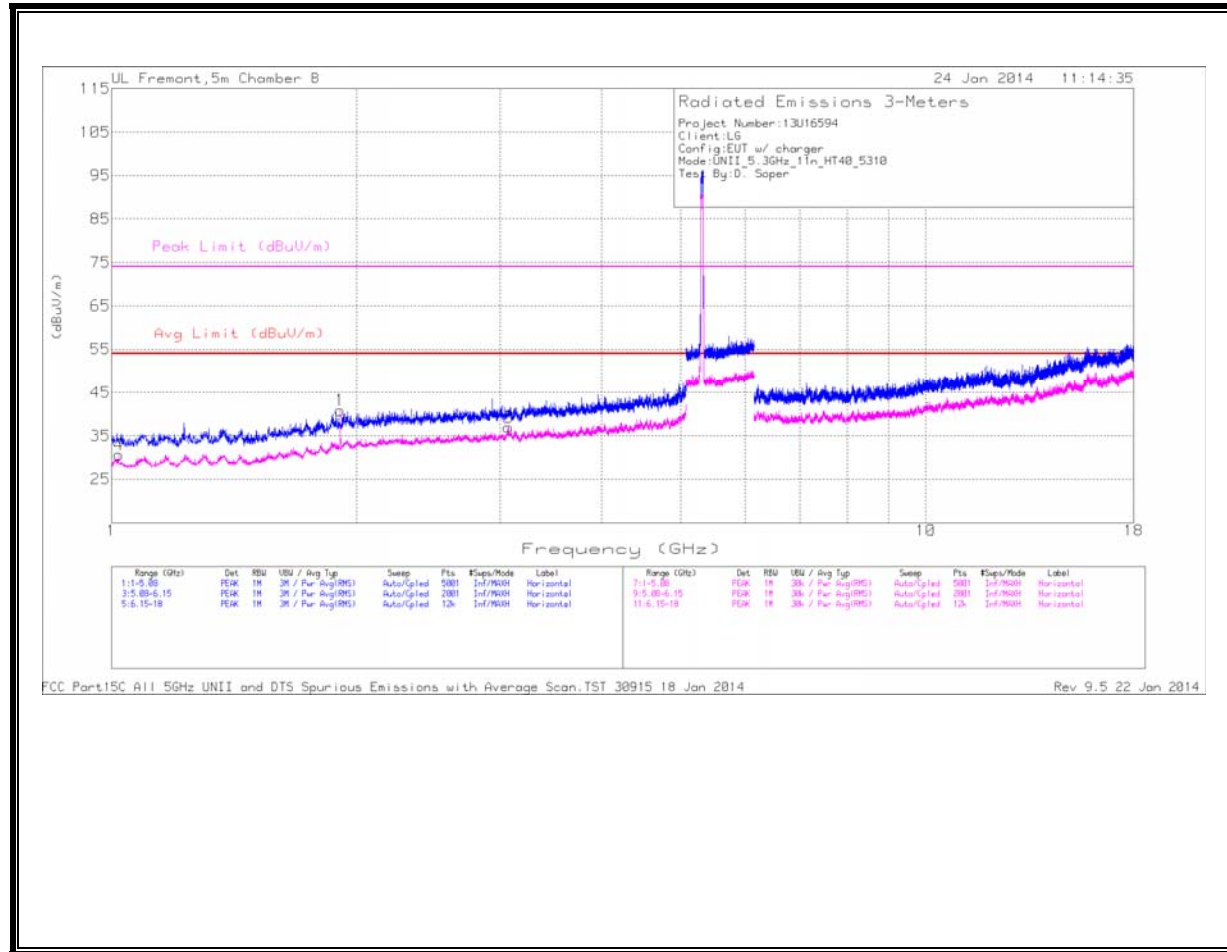

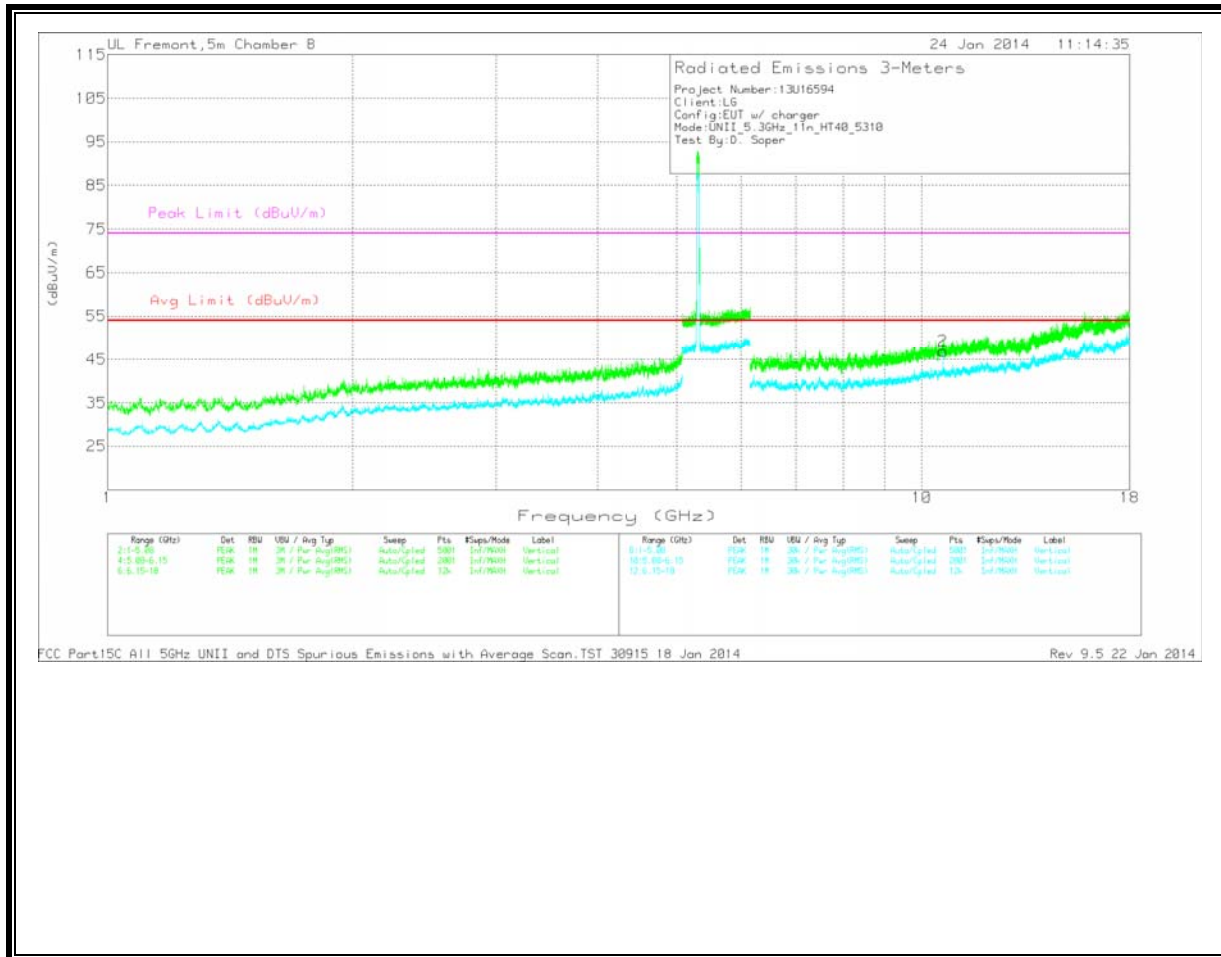

MID CHANNEL DATA
 Trace Markers



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	1.02	37.76	Avg	27.5	-34.6	30.66	54	-23.34	-	-	0-360	99	H
1	1.909	42.34	Avg	31.2	-32.7	40.84	54	-13.16	-	-	0-360	202	H
3	3.07	35.88	Avg	33.2	-32.1	36.98	54	-17.02	-	-	0-360	202	H
2	10.62	31.83	Avg	38.2	-23.1	46.93	54	-7.07	-	-	0-360	202	V



Avg - Video bandwidth < Resolution bandwidth

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 18
 Jan 2014 Rev 9.5 22 Jan 2014



11.3. 5.5-5.6 GHz

11.3.1. TX ABOVE 1 GHz 802.11a MODE IN THE 5.5 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

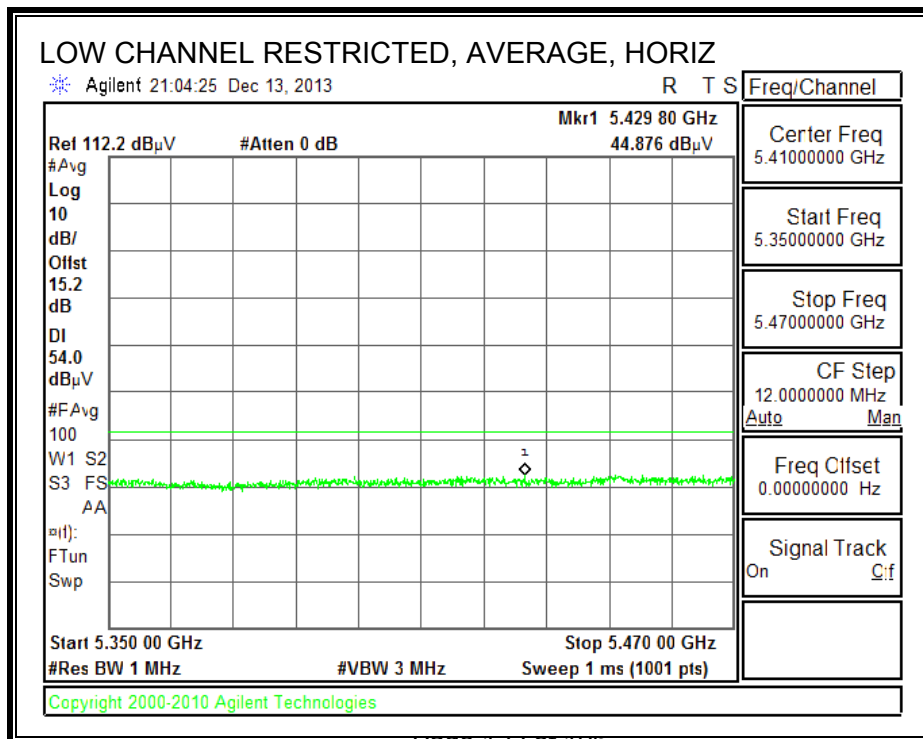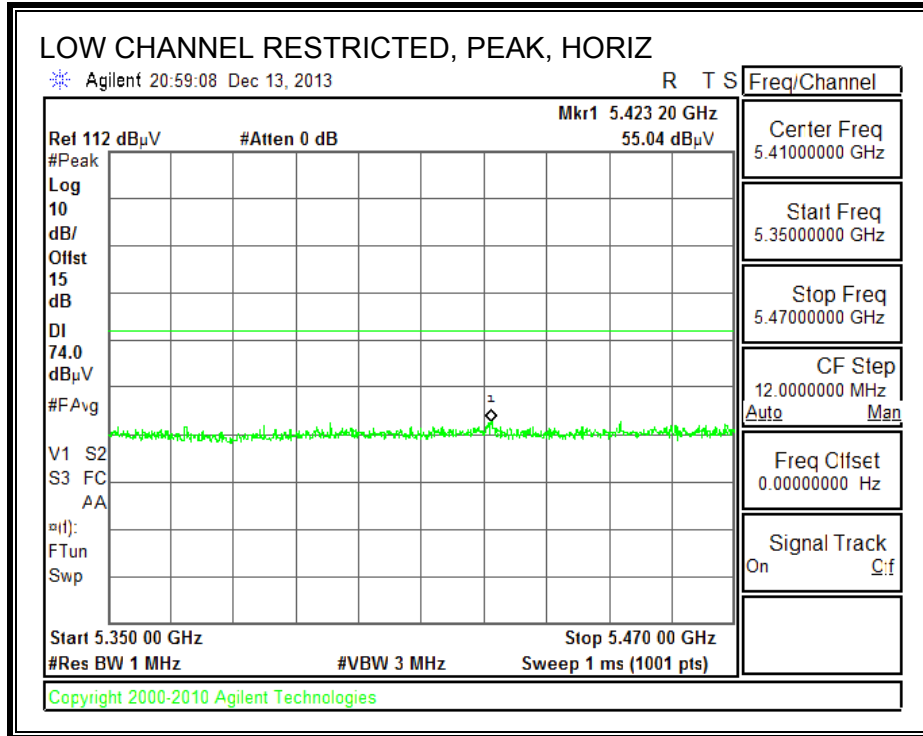

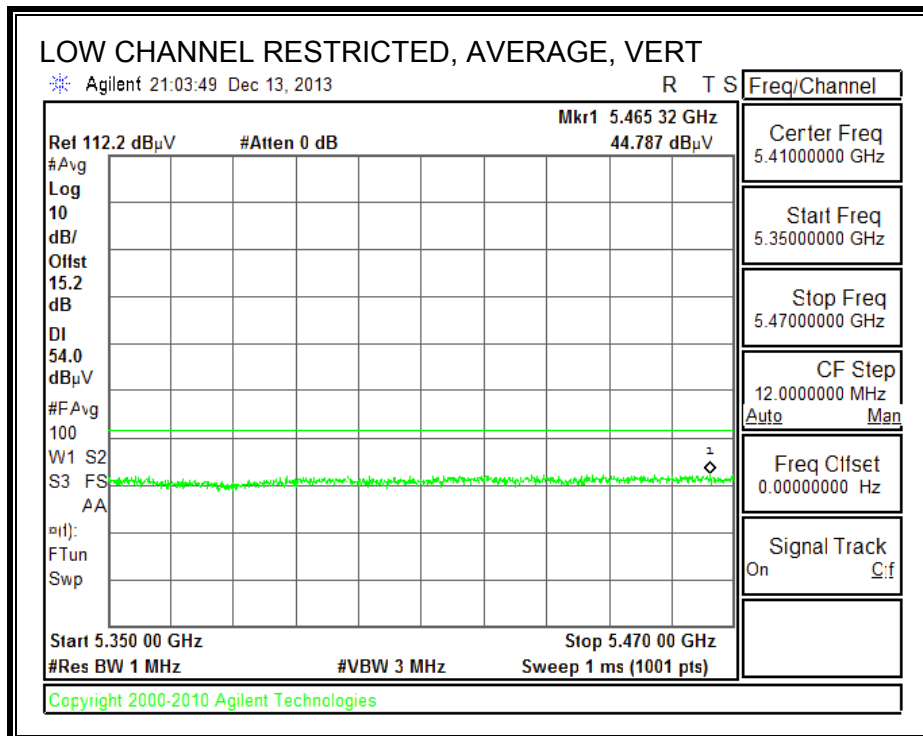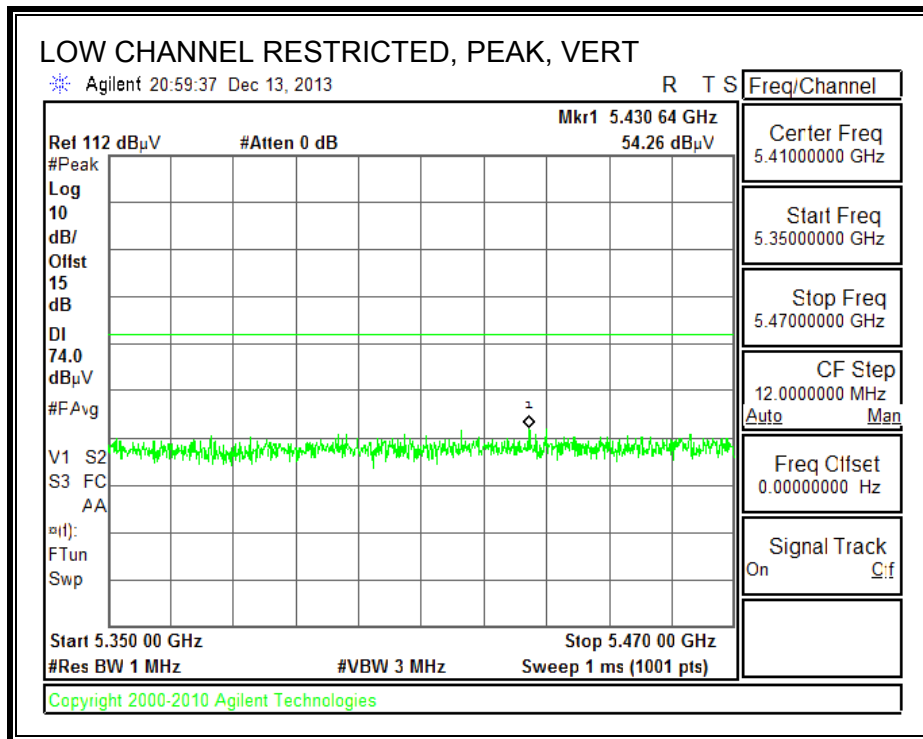


AUTHORIZED BANDEDGE (HIGH CHANNEL)

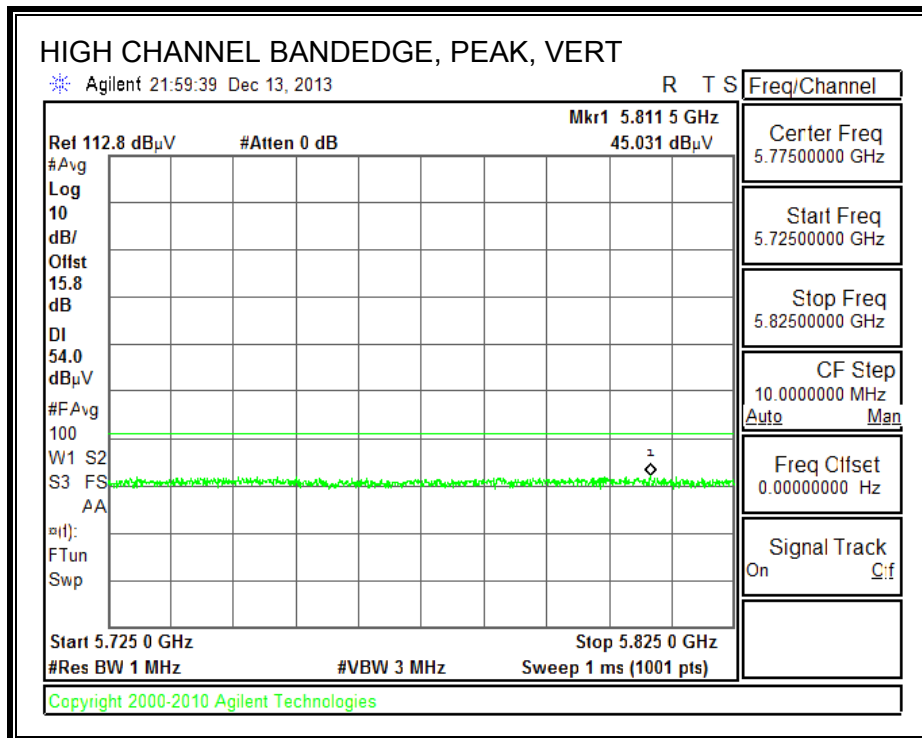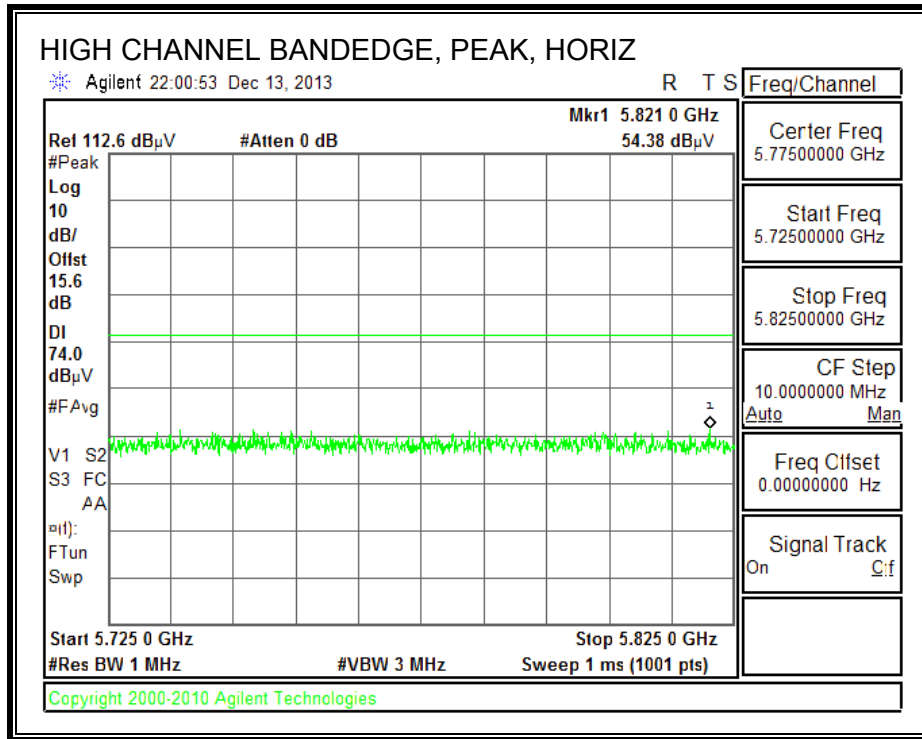


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

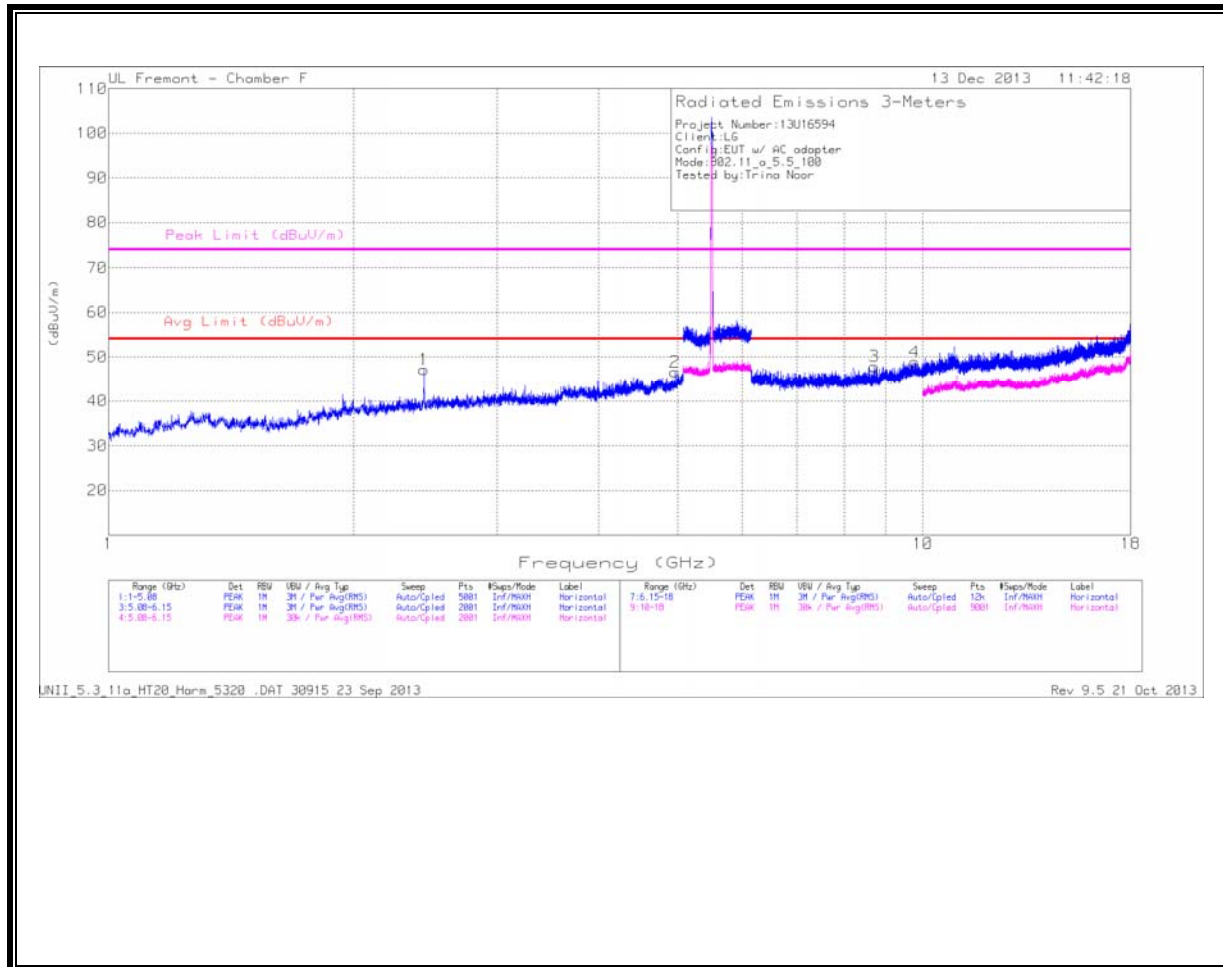

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

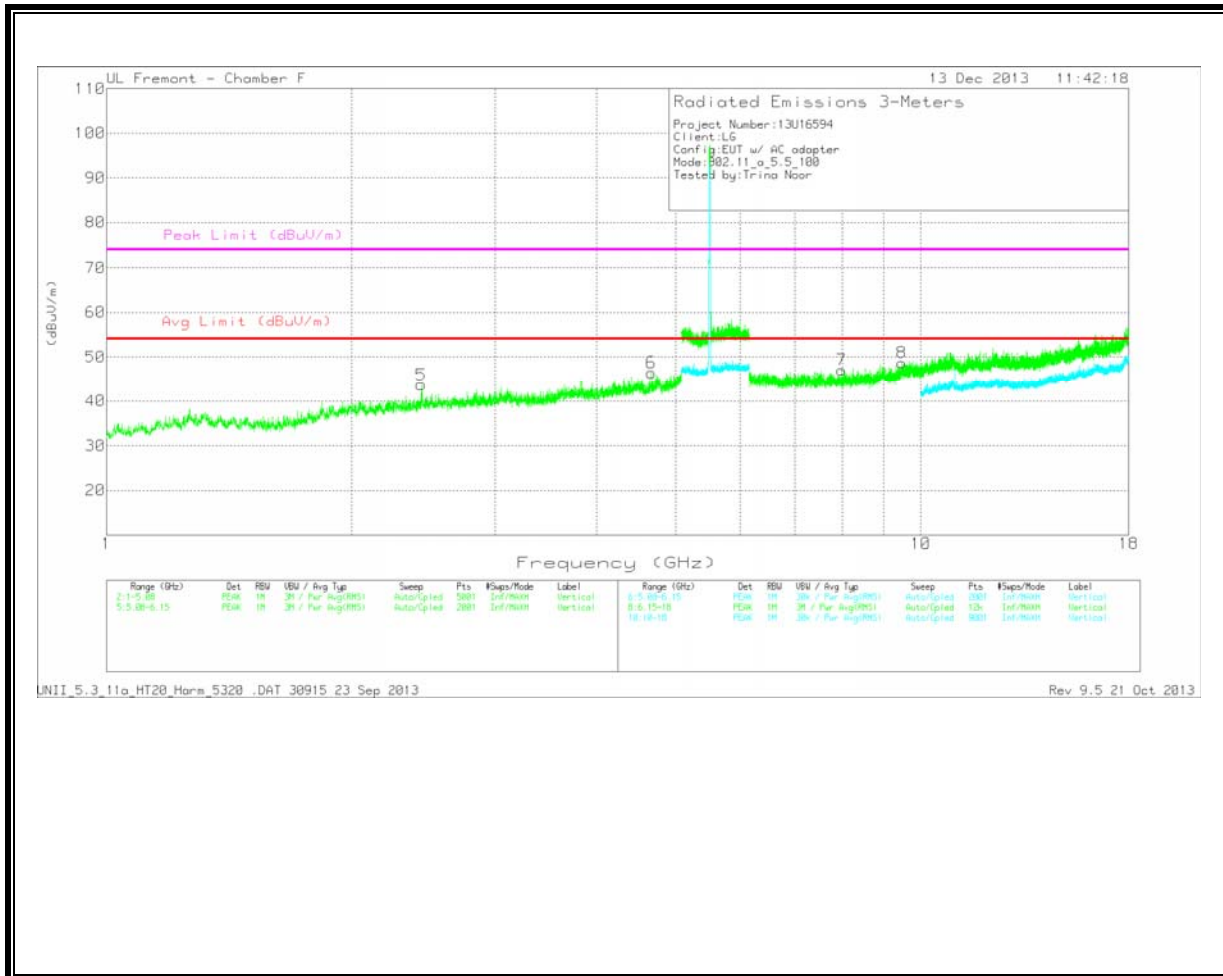

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.435	42.1	PK	32.3	-30.7	43.7	53.97	-10.27	74	-30.3	0-360	101	V
1	2.439	45.55	PK	32.3	-30.7	47.15	53.97	-6.82	74	-26.85	0-360	199	H
6	4.668	39.36	PK	34.1	-27	46.46	53.97	-7.51	74	-27.54	0-360	101	V
2	4.962	39.75	PK	34	-27.1	46.65	53.97	-7.32	74	-27.35	0-360	199	H


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	7.993	37.18	PK	36	-26.1	47.08	53.97	-6.89	74	-26.92	0-360	201	V
3	8.717	36.2	PK	36.2	-24.5	47.9	53.97	-6.07	74	-26.1	0-360	199	H
8	9.474	34.32	PK	37.1	-22.7	48.72	53.97	-5.25	74	-25.28	0-360	201	V
4	9.77	34.47	PK	37.5	-23.1	48.87	53.97	-5.1	74	-25.13	0-360	100	H

PK - Peak detector

MID CHANNEL
HORIZONTAL

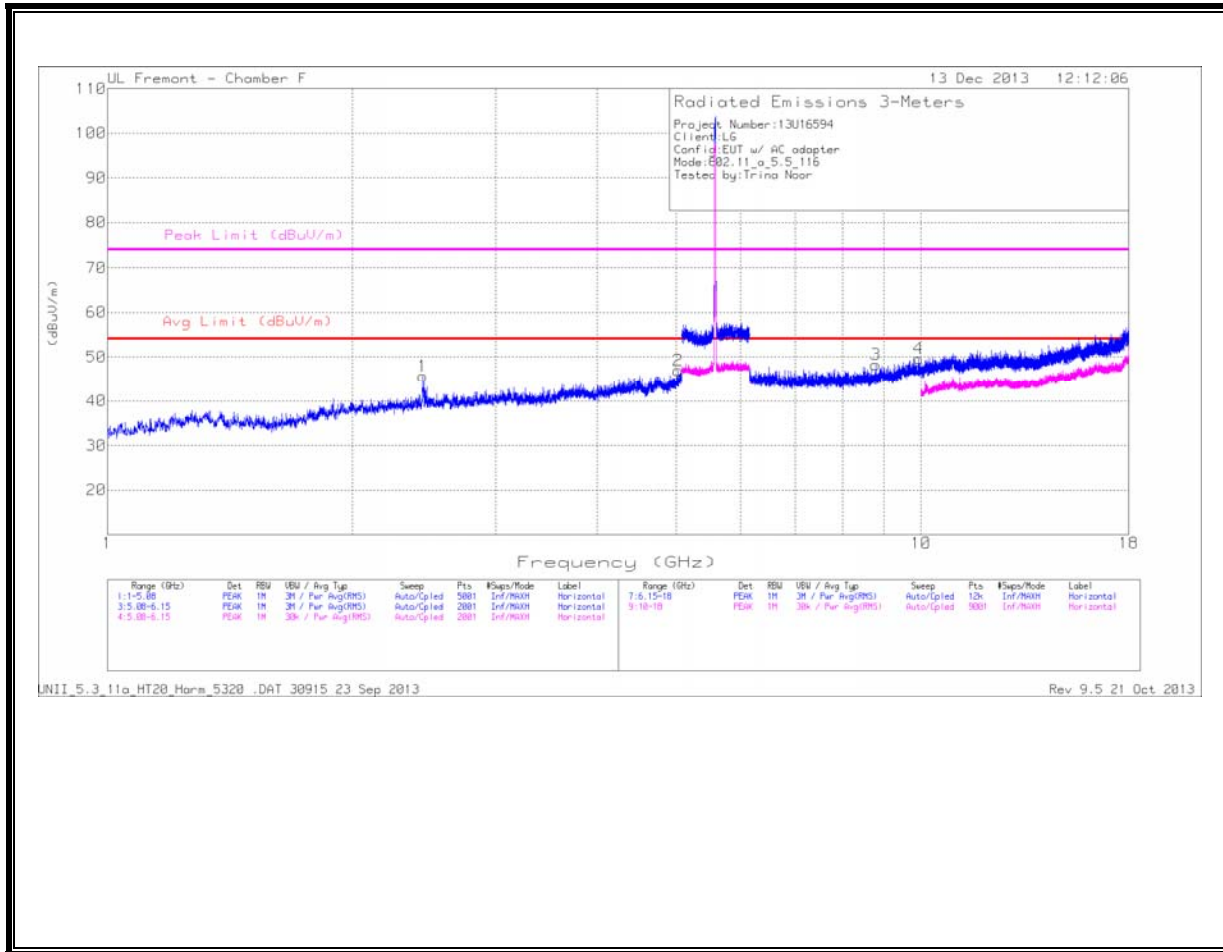

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

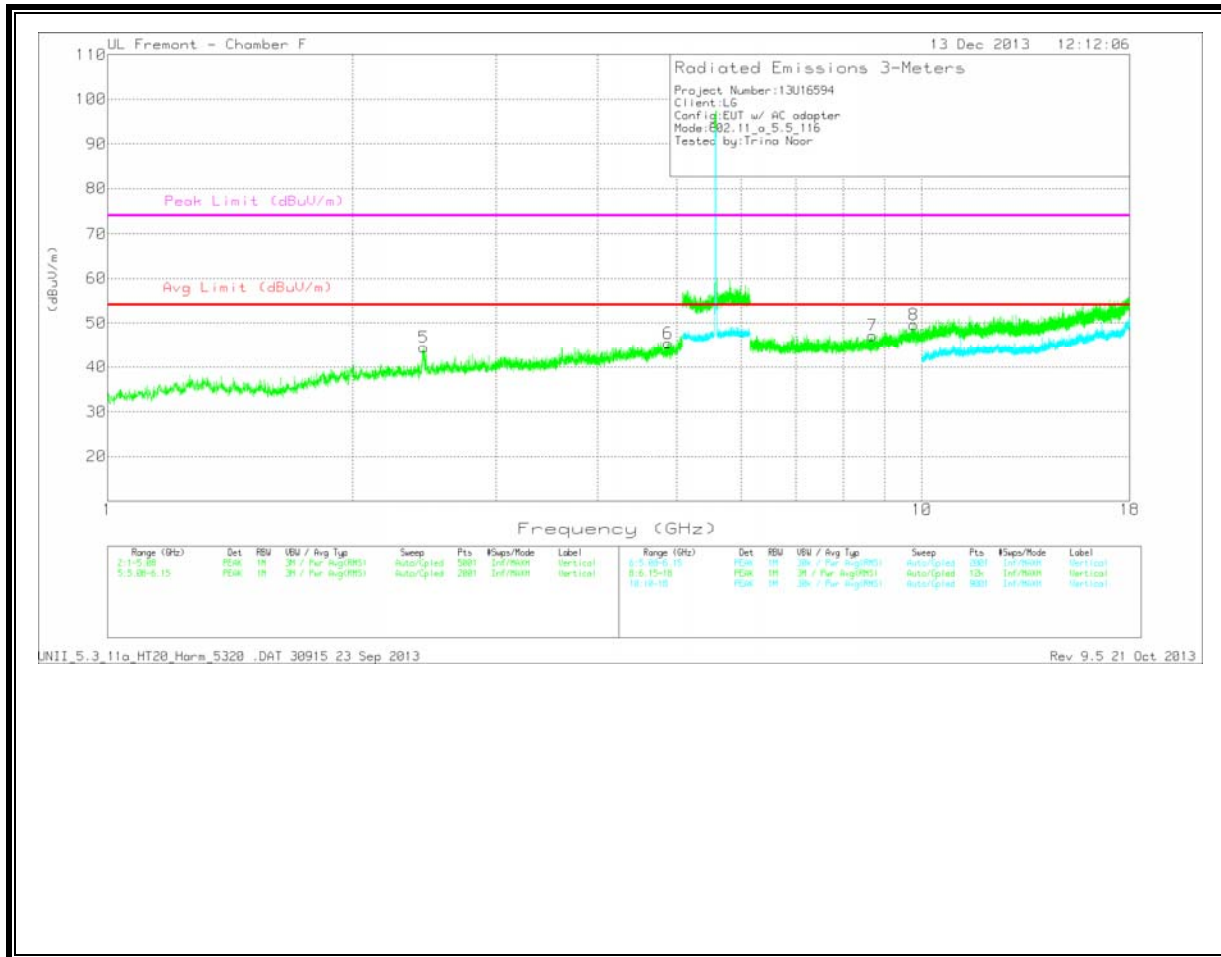

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


MID CHANNEL DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.44	44.05	PK	32.3	-30.7	45.65	53.97	-8.32	74	-28.35	0-360	199	H
5	2.444	42.79	PK	32.3	-30.6	44.49	53.97	-9.48	74	-29.51	0-360	201	V
6	4.883	39.13	PK	34	-27.7	45.43	53.97	-8.54	74	-28.57	0-360	101	V
2	5.028	39.17	PK	34.1	-26.3	46.97	53.97	-7	74	-27.03	0-360	199	H


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	8.693	35.93	PK	36.1	-24.8	47.23	53.97	-6.74	74	-26.77	0-360	101	V
3	8.797	36.92	PK	36.2	-24.8	48.32	53.97	-5.65	74	-25.68	0-360	100	H
8	9.775	35.1	PK	37.5	-23	49.6	53.97	-4.37	74	-24.4	0-360	201	V
4	9.928	34.94	PK	37.6	-22.9	49.64	53.97	-4.33	74	-24.36	0-360	100	H

PK - Peak detector

HIGH CHANNEL
HORIZONTAL

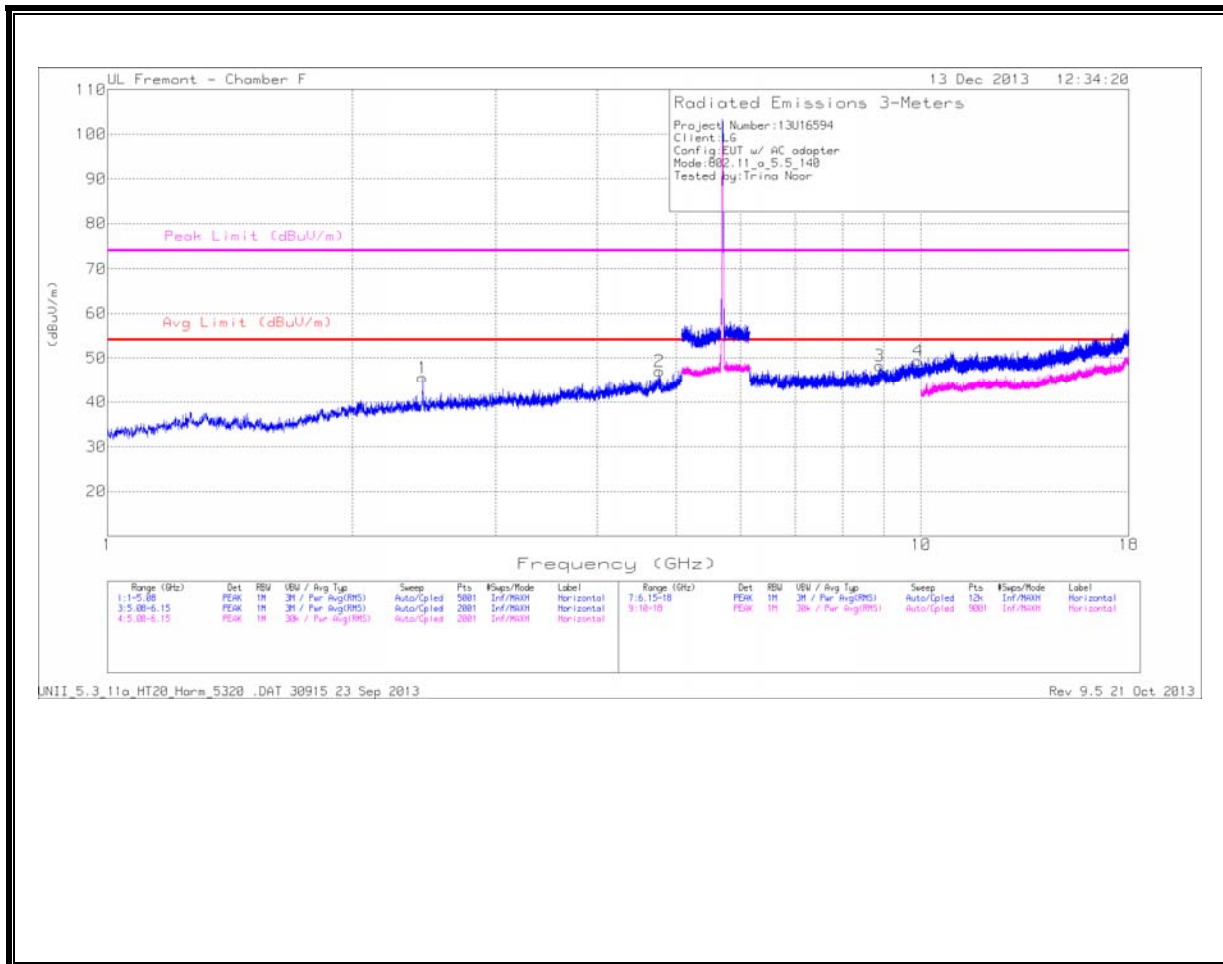

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

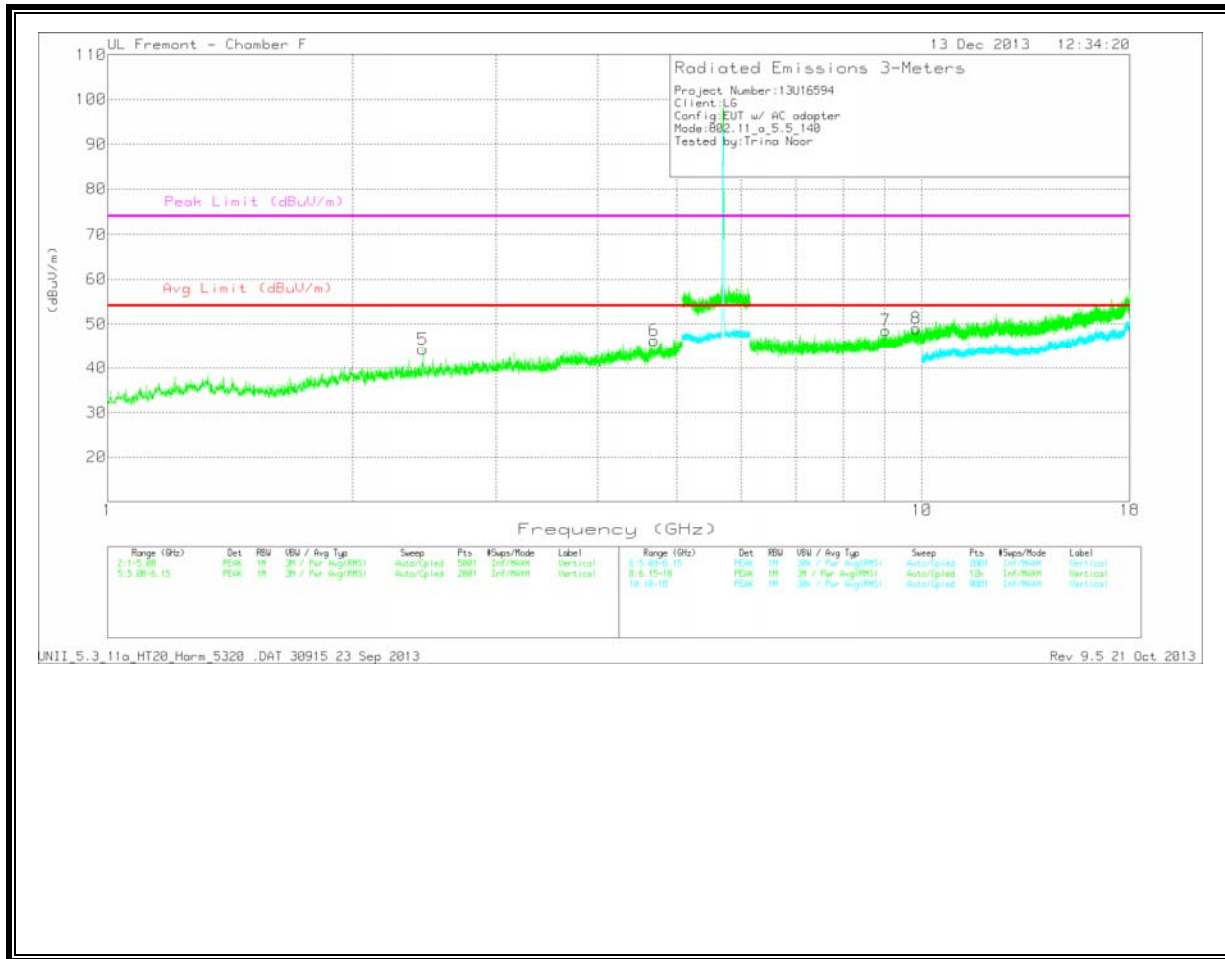

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



HIGH CHANNEL DATA



Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.439	43.96	PK	32.3	-30.7	45.56	53.97	-8.41	74	-28.44	0-360	199	H
5	2.439	42.66	PK	32.3	-30.7	44.26	53.97	-9.71	74	-29.74	0-360	101	V
6	4.693	39.72	PK	34.1	-27.5	46.32	53.97	-7.65	74	-27.68	0-360	101	V
2	4.767	40.62	PK	34.1	-27.7	47.02	53.97	-6.95	74	-26.98	0-360	100	H

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.892	35.95	PK	36.3	-24	48.25	53.97	-5.72	74	-25.75	0-360	100	H
7	9.032	36.41	PK	36.4	-24.3	48.51	53.97	-5.46	74	-25.49	0-360	101	V
8	9.838	34.82	PK	37.5	-23.3	49.02	53.97	-4.95	74	-24.98	0-360	201	V
4	9.92	34.57	PK	37.6	-22.8	49.37	53.97	-4.6	74	-24.63	0-360	100	H



PK - Peak detector

**11.3.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 5.5 GHz BAND
 RESTRICTED BANDEDGE (LOW CHANNEL)**

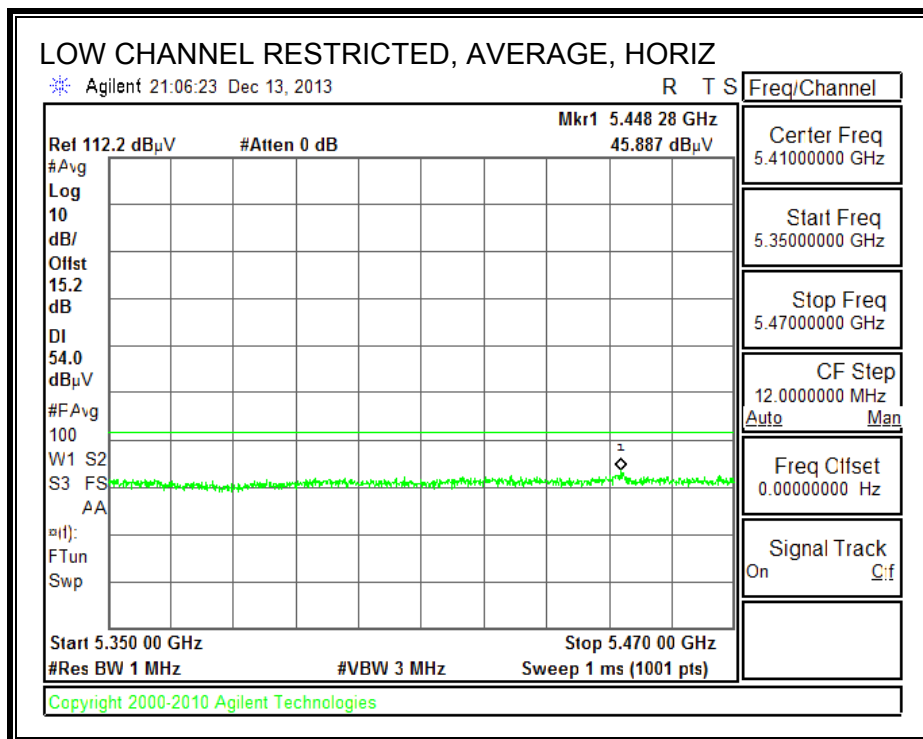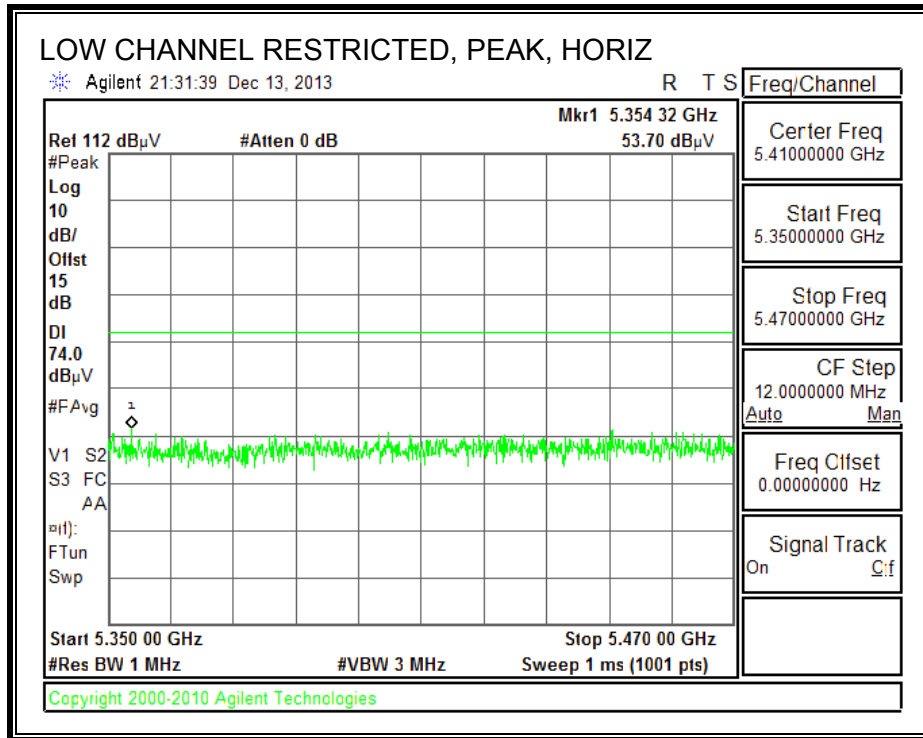

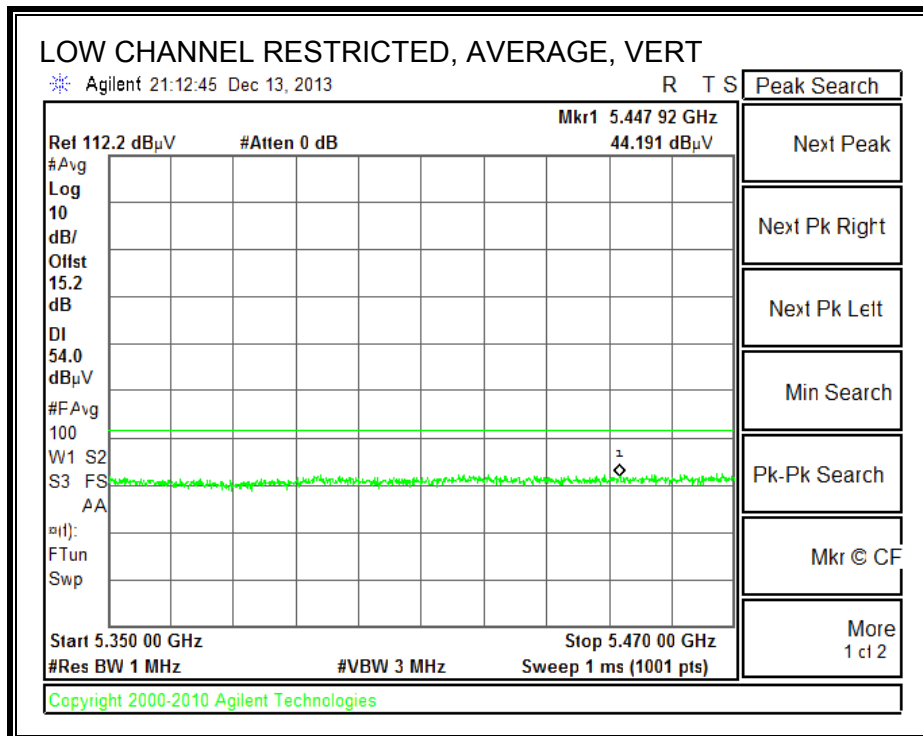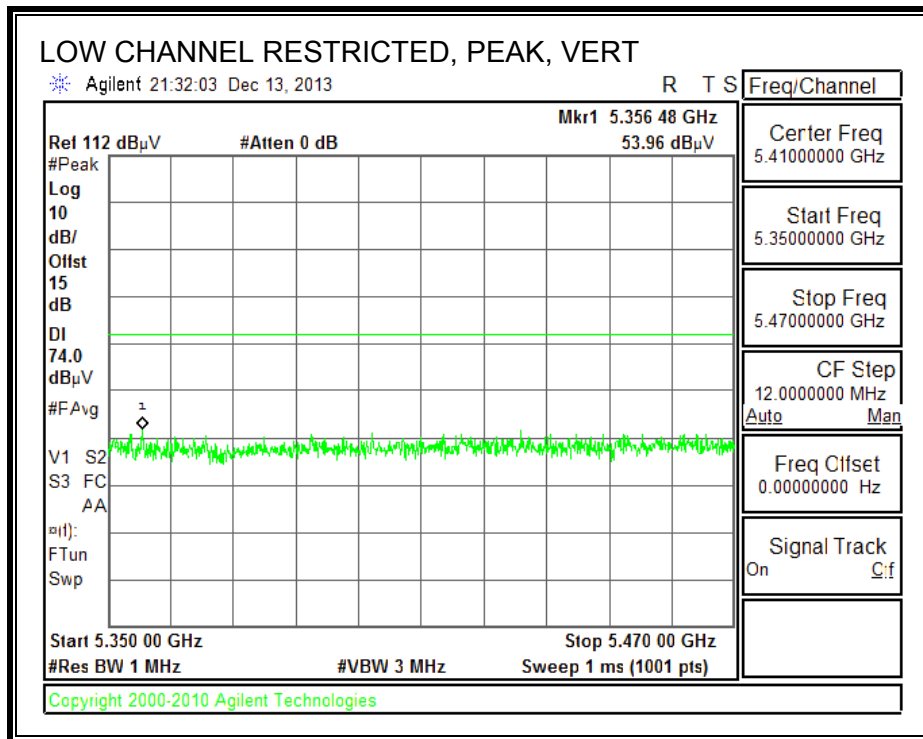


AUTHORIZED BANDEDGE (HIGH CHANNEL)

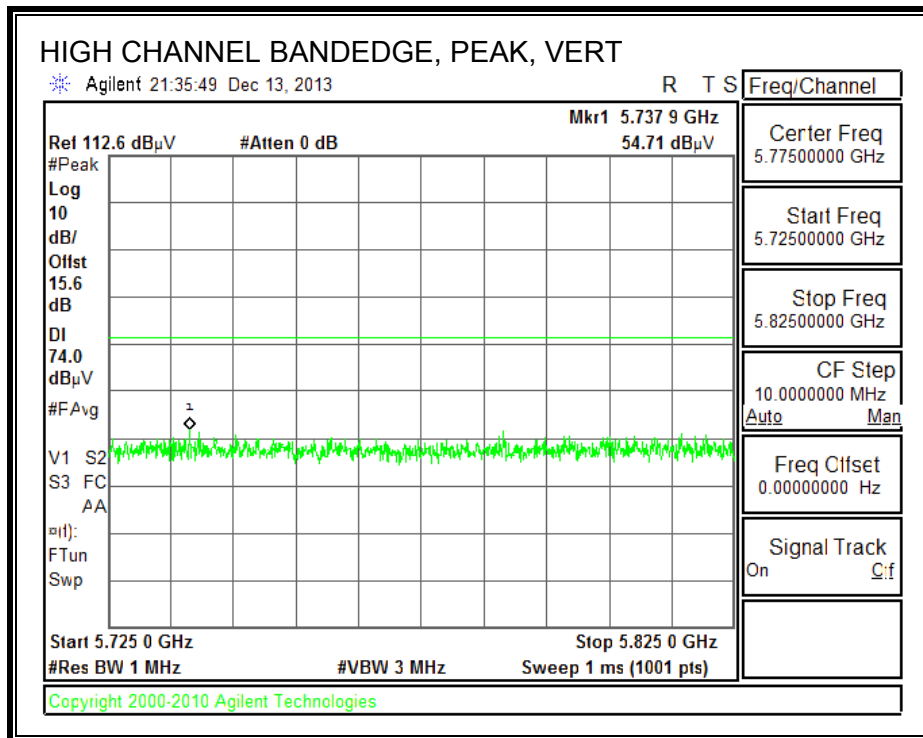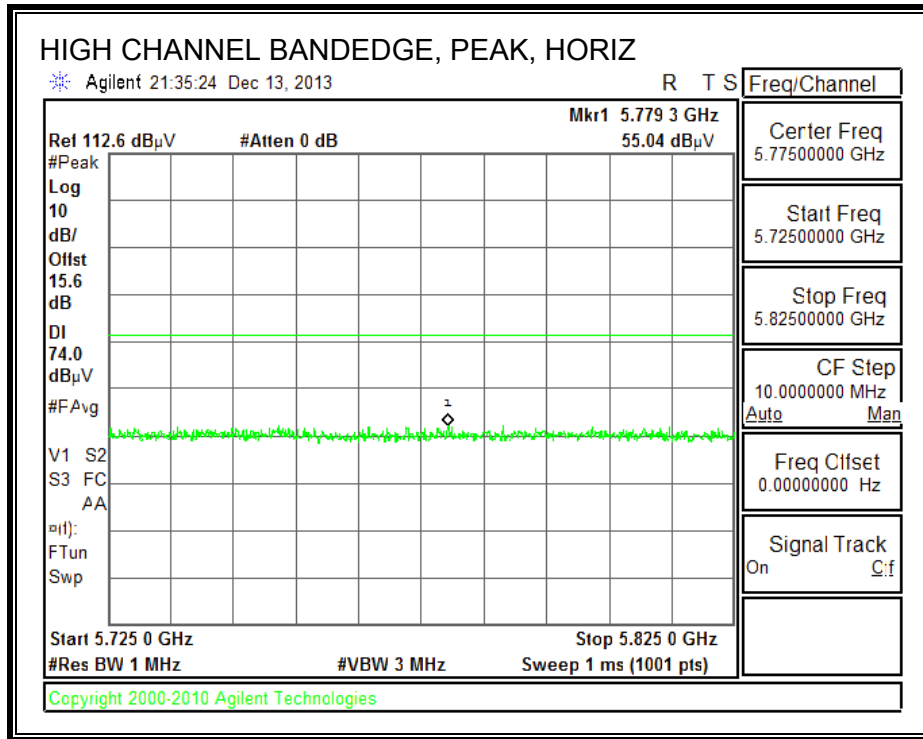


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

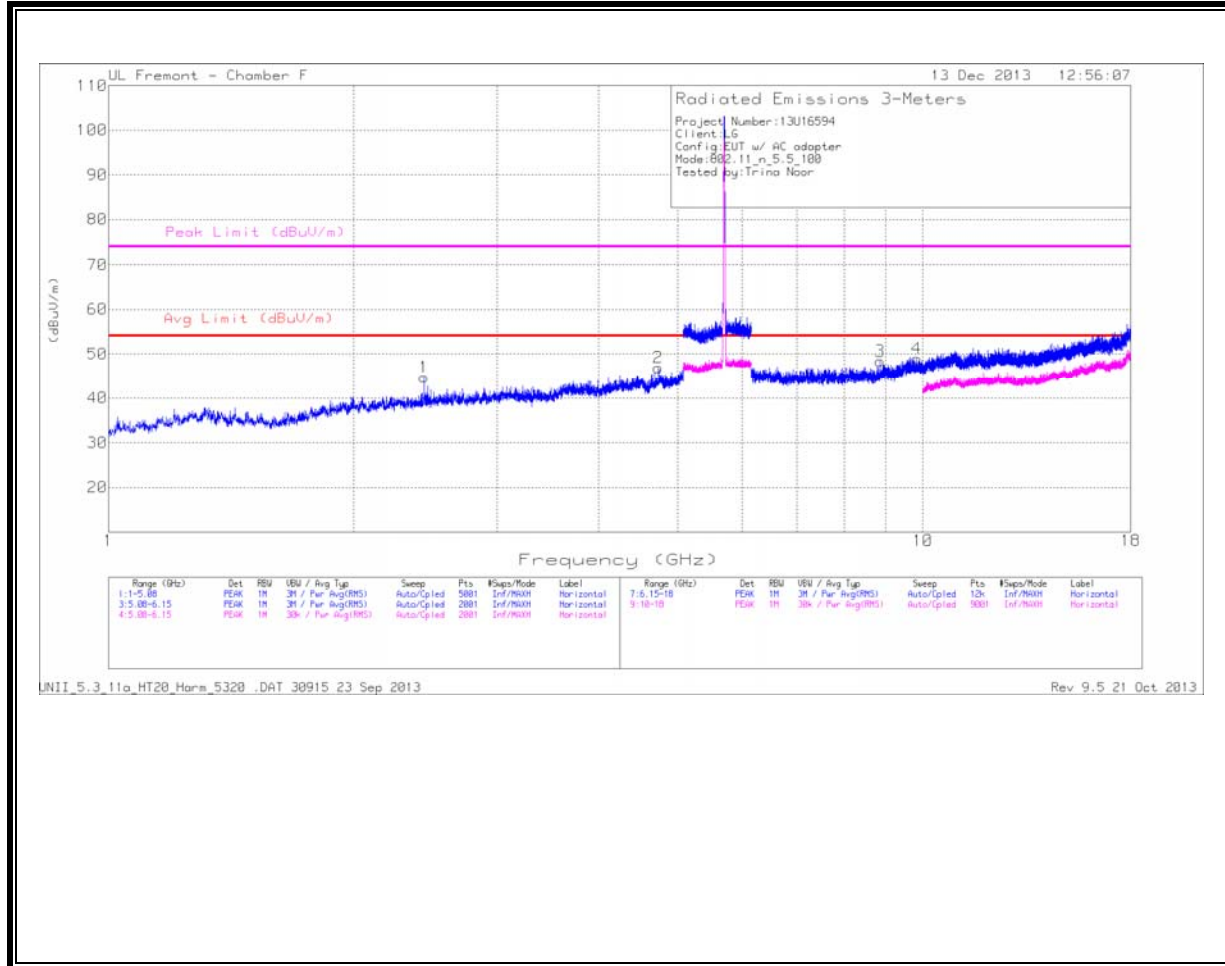

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

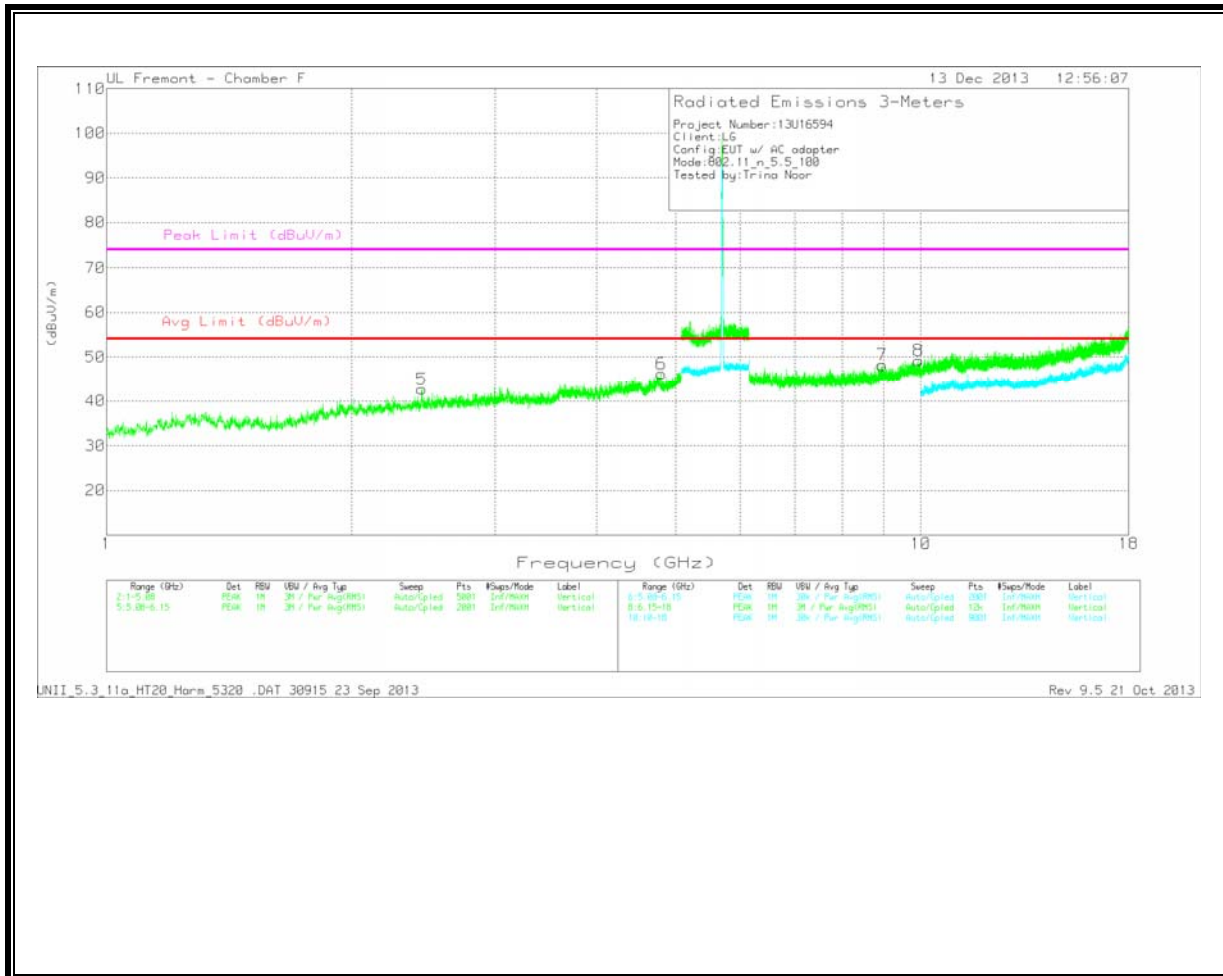

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


LOW CHANNEL DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.439	41.1	PK	32.3	-30.7	42.7	53.97	-11.27	74	-31.3	0-360	101	V
1	2.44	43.18	PK	32.3	-30.7	44.78	53.97	-9.19	74	-29.22	0-360	199	H
2	4.731	40.84	PK	34.1	-28	46.94	53.97	-7.03	74	-27.06	0-360	100	H
6	4.8	40.44	PK	34.1	-28.3	46.24	53.97	-7.73	74	-27.76	0-360	101	V

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.863	36.48	PK	36.3	-24.4	48.38	53.97	-5.59	74	-25.62	0-360	100	H
7	8.965	35.52	PK	36.3	-23.6	48.22	53.97	-5.75	74	-25.78	0-360	101	V
4	9.831	34.89	PK	37.5	-23.4	48.99	53.97	-4.98	74	-25.01	0-360	100	H
8	9.933	34.51	PK	37.6	-22.9	49.21	53.97	-4.76	74	-24.79	0-360	201	V


PK - Peak detector

MID CHANNEL
HORIZONTAL

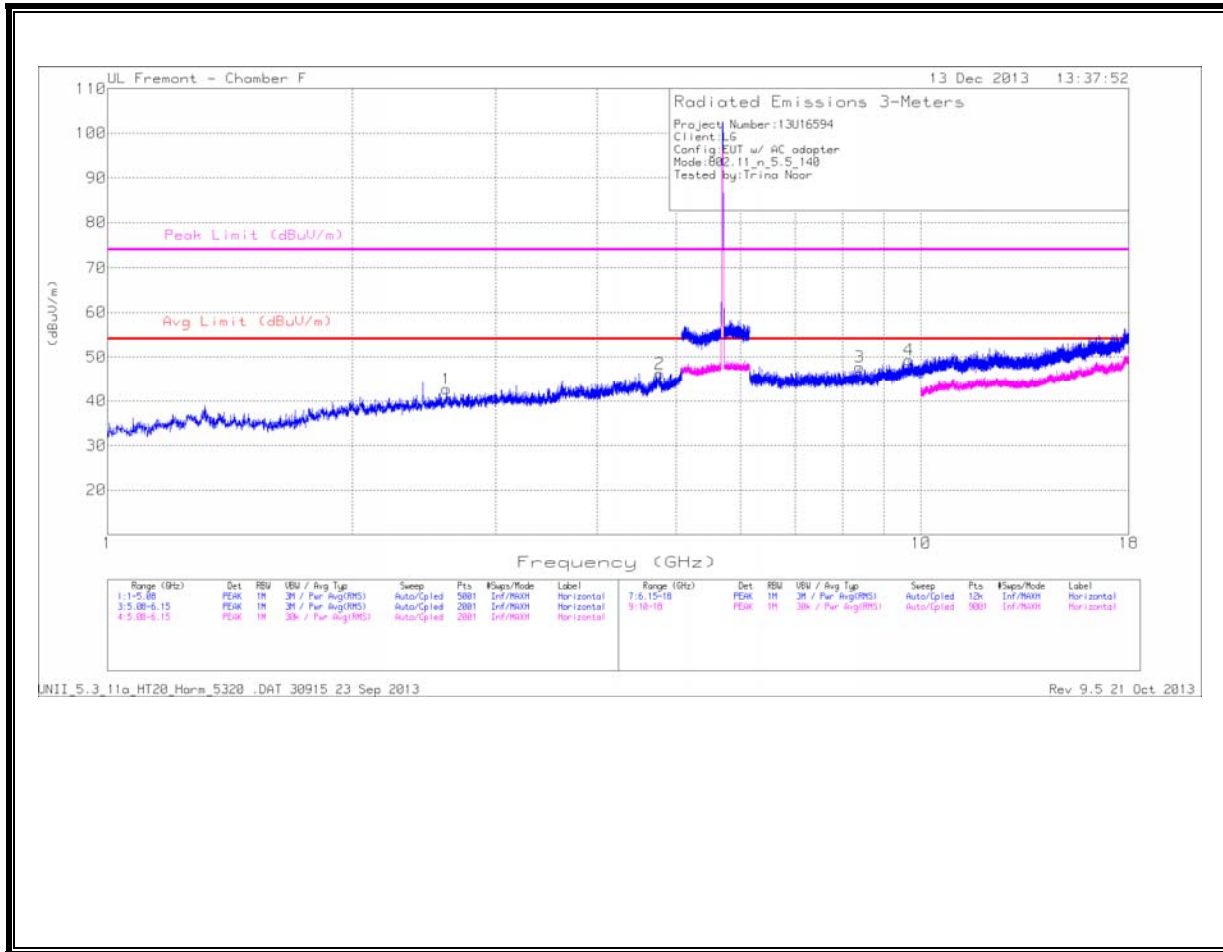

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

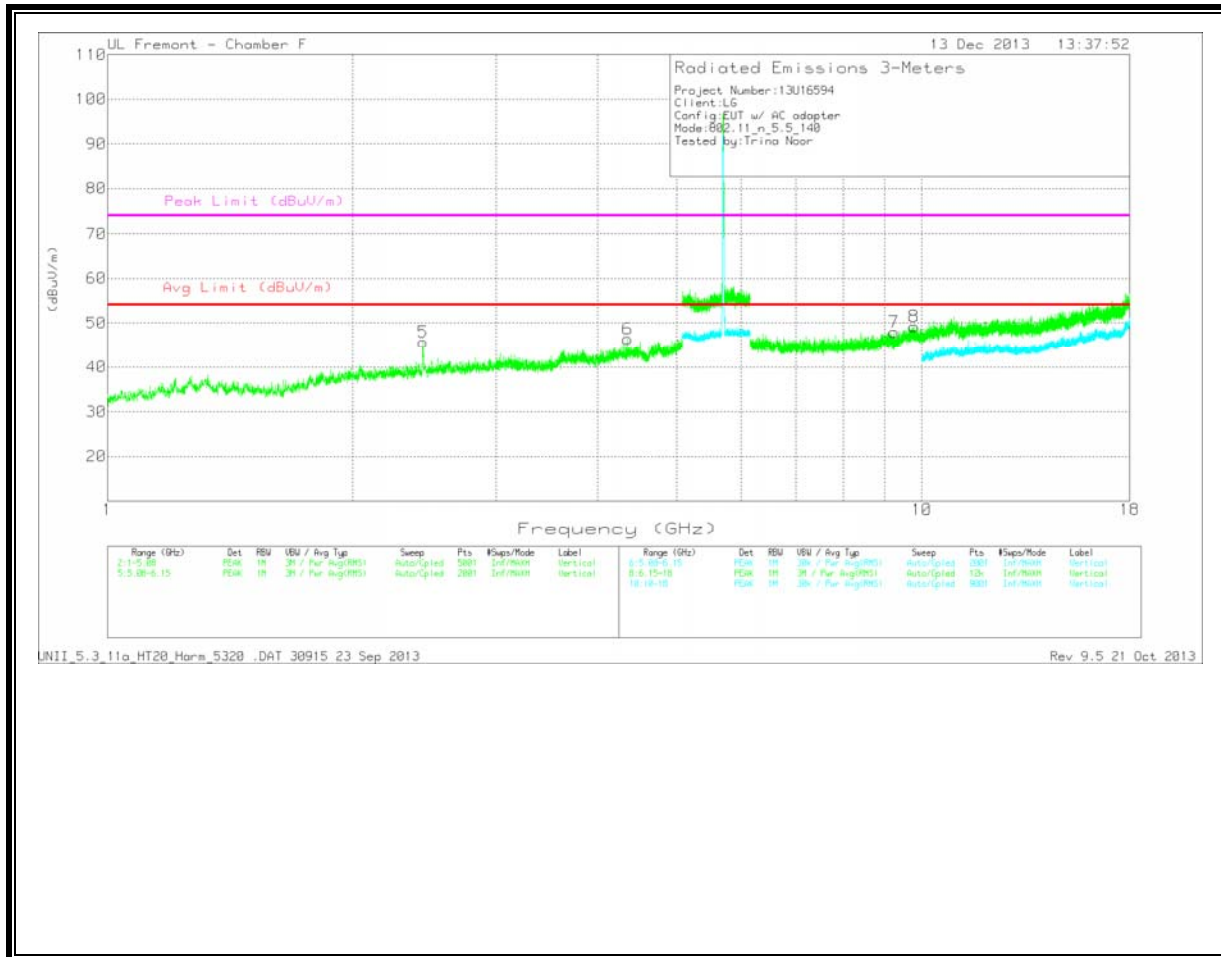

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


MID CHANNEL DATA

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	2.441	44.1	PK	32.3	-30.7	45.7	53.97	-8.27	74	-28.3	0-360	201	V
1	2.61	40.02	PK	32.6	-29.9	42.72	53.97	-11.25	74	-31.28	0-360	199	H
6	4.351	41.92	PK	33.6	-29.1	46.42	53.97	-7.55	74	-27.58	0-360	201	V
2	4.771	39.84	PK	34.1	-27.7	46.24	53.97	-7.73	74	-27.76	0-360	100	H


Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.403	36.76	PK	36	-25	47.76	53.97	-6.21	74	-26.24	0-360	100	H
7	9.247	35.24	PK	36.6	-23.9	47.94	53.97	-6.03	74	-26.06	0-360	100	V
4	9.663	35.75	PK	37.3	-23.7	49.35	53.97	-4.62	74	-24.65	0-360	100	H
8	9.785	34.82	PK	37.5	-23.1	49.22	53.97	-4.75	74	-24.78	0-360	200	V

PK - Peak detector

HIGH CHANNEL
HORIZONTAL

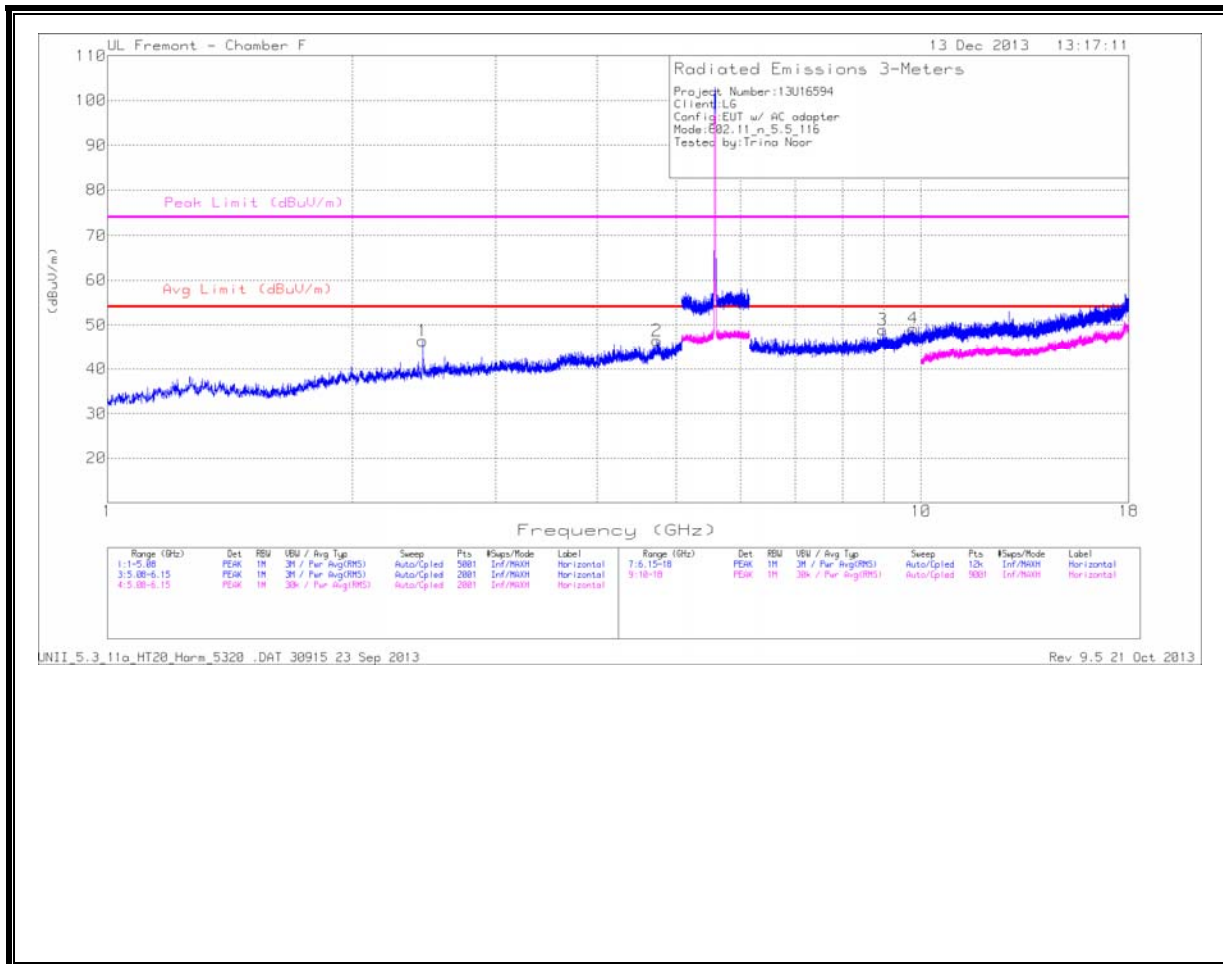

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

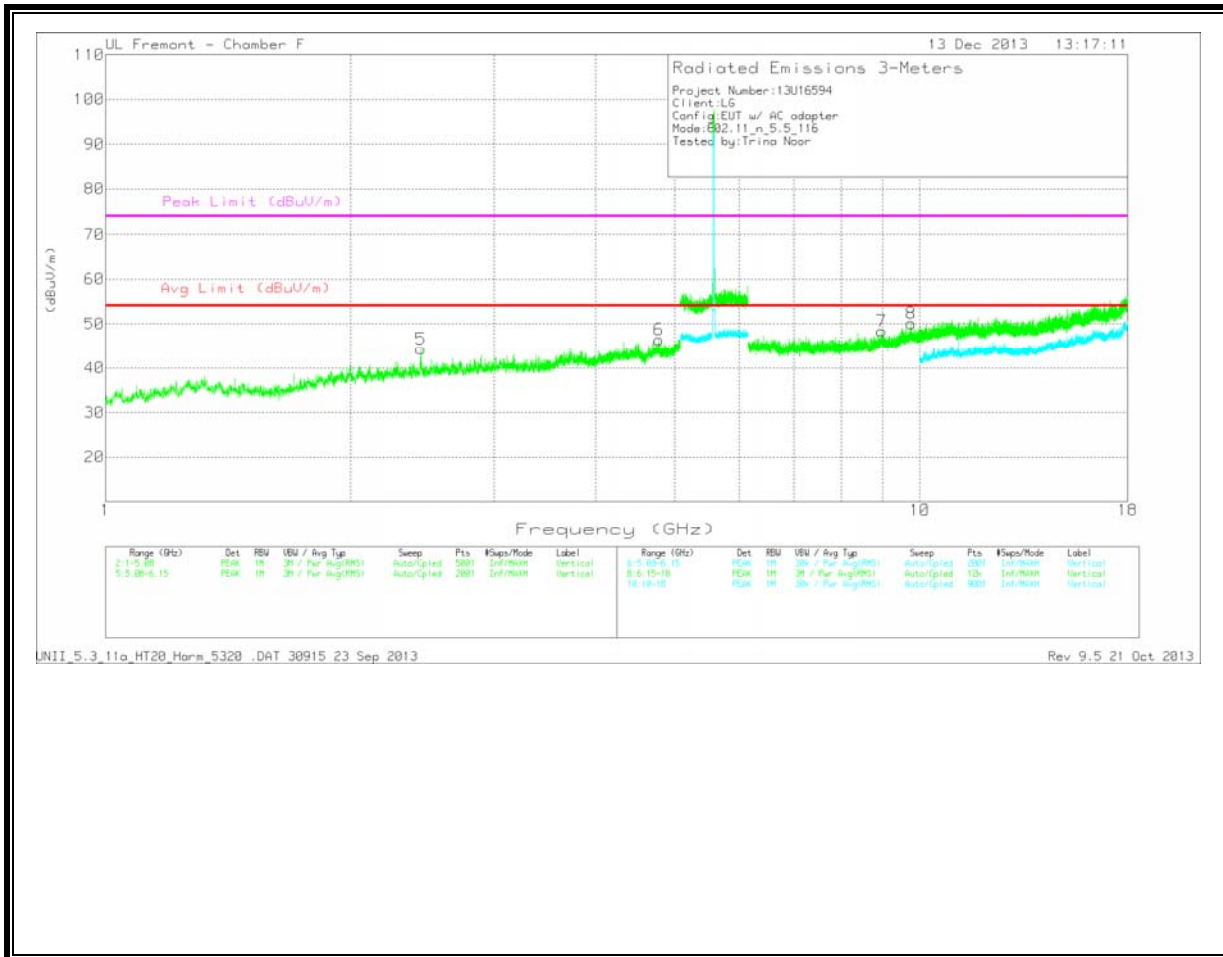

Note: Emission was scanned up to 40GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



HIGH CHANNEL DATA



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /5GHz LPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.439	44.86	PK	32.3	-30.7	46.46	53.97	-7.51	74	-27.54	0-360	199	H
5	2.439	42.71	PK	32.3	-30.7	44.31	53.97	-9.66	74	-29.69	0-360	200	V
2	4.734	40.28	PK	34.1	-27.9	46.48	53.97	-7.49	74	-27.52	0-360	100	H
6	4.781	40.14	PK	34.1	-27.8	46.44	53.97	-7.53	74	-27.56	0-360	101	V

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl /6GHz HPF	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	8.966	36.22	PK	36.3	-23.6	48.92	53.97	-5.05	74	-25.08	0-360	100	H
7	8.979	35.91	PK	36.3	-23.8	48.41	53.97	-5.56	74	-25.59	0-360	201	V
8	9.755	35.61	PK	37.5	-23	50.11	53.97	-3.86	74	-23.89	0-360	201	V
4	9.78	34.86	PK	37.5	-23.1	49.26	53.97	-4.71	74	-24.74	0-360	199	H


PK - Peak detector


**11.3.5. TX ABOVE 1 GHz 802.11n HT40 MODE IN THE 5.5 GHz BAND
 RESTRICTED BANDEDGE (LOW CHANNEL)**

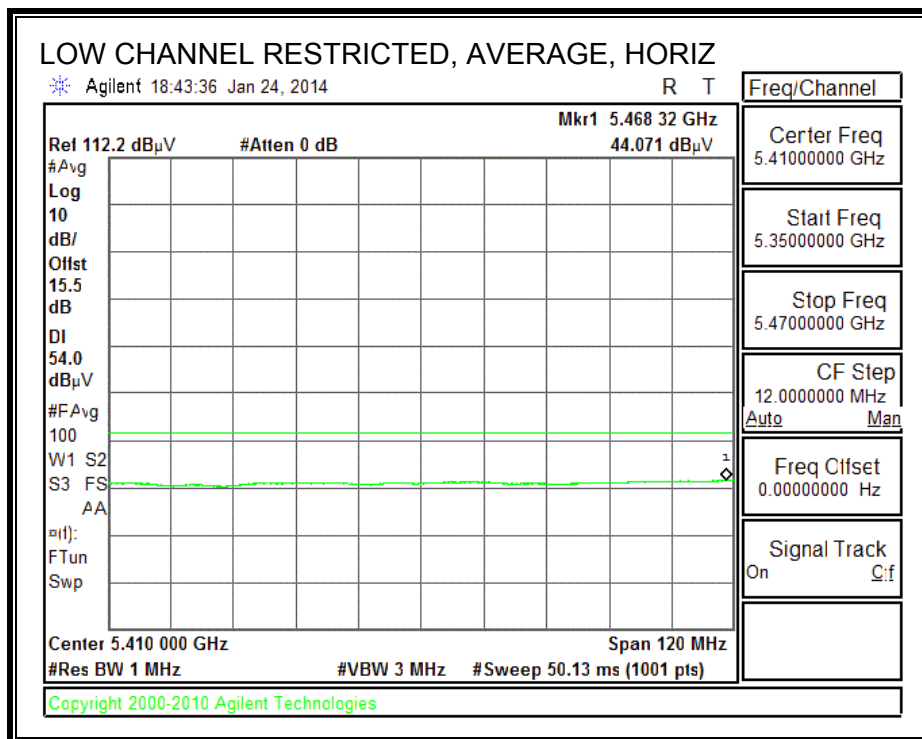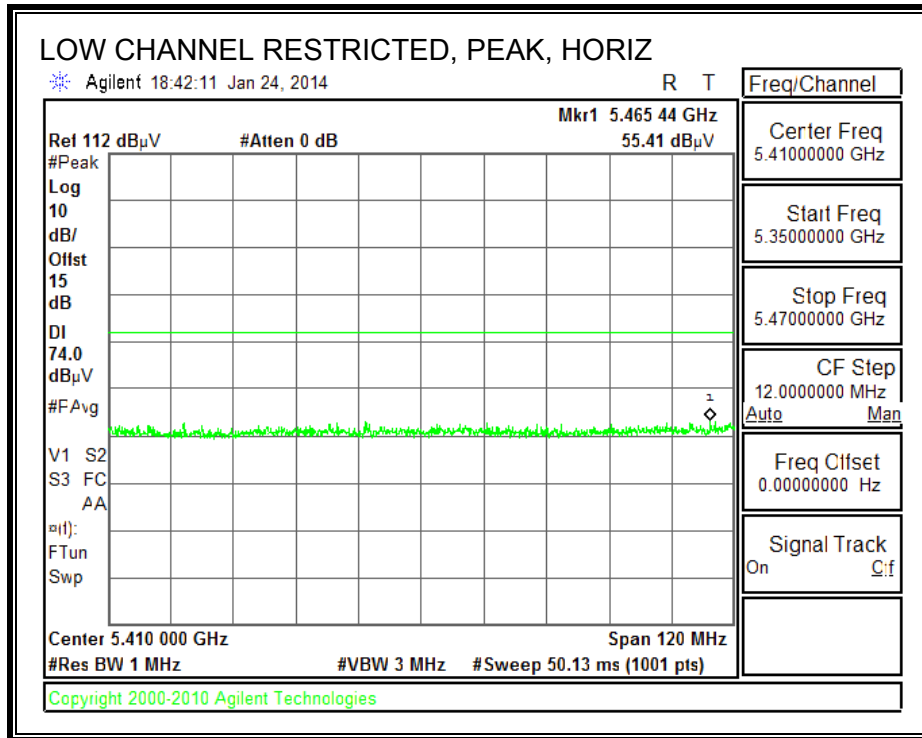

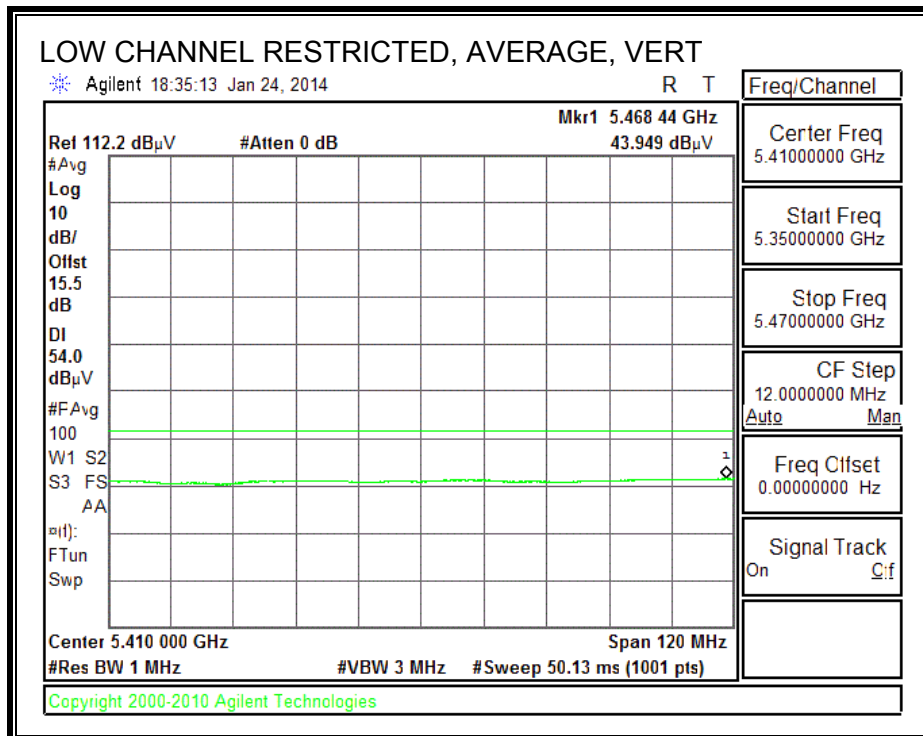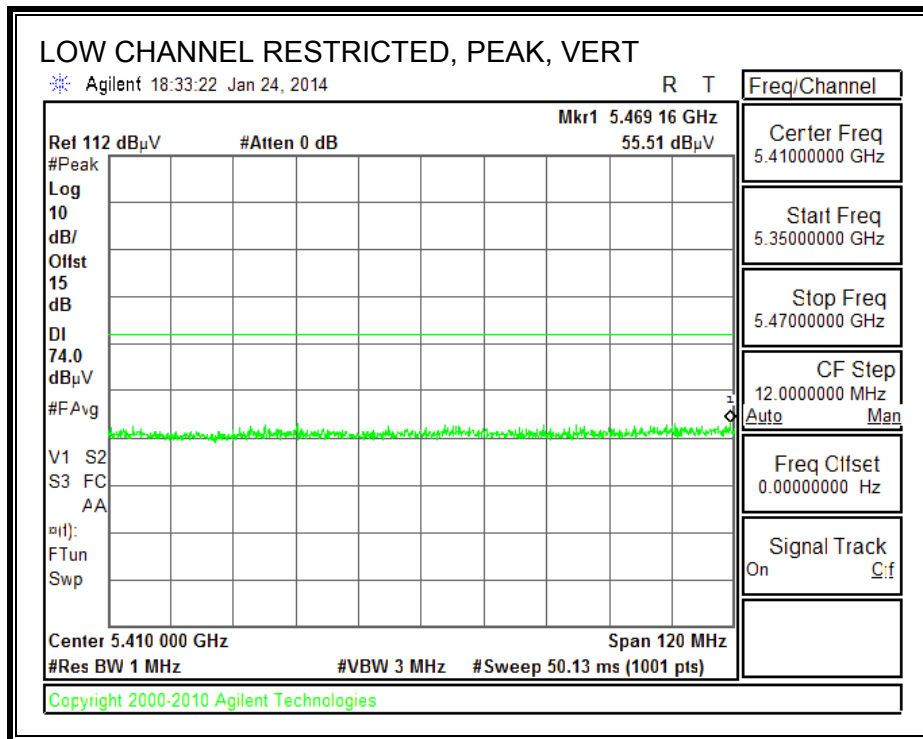


AUTHORIZED BANDEDGE (HIGH CHANNEL)

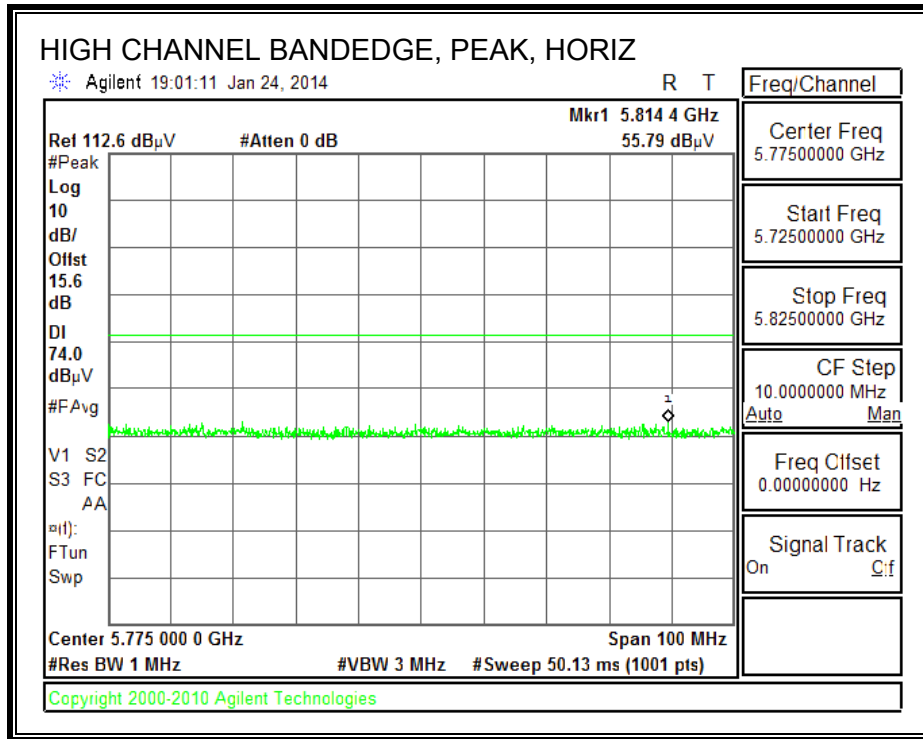


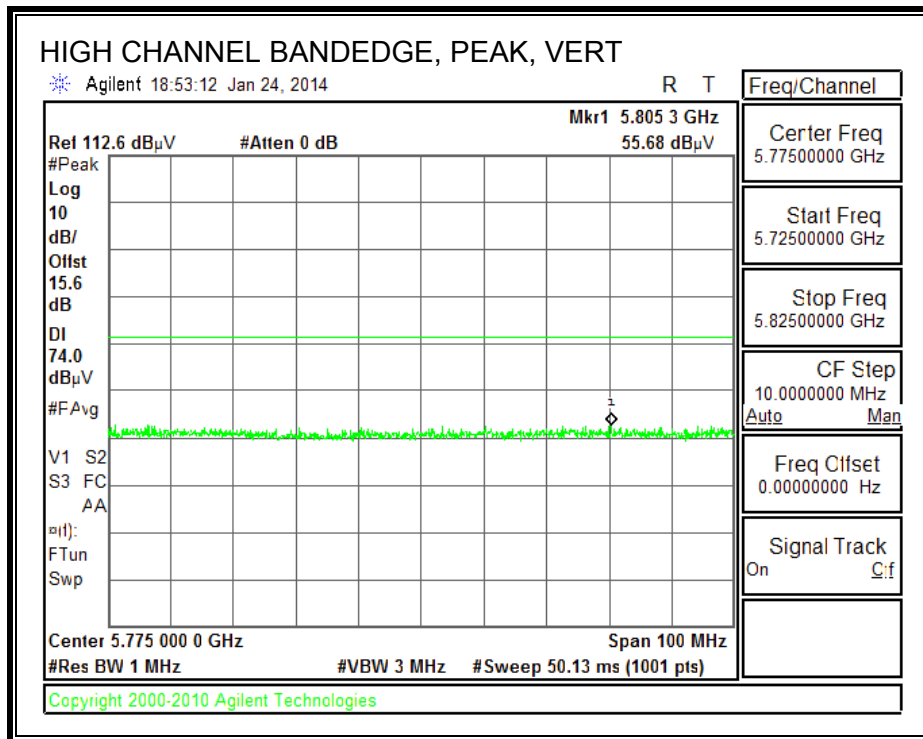

HARMONICS AND SPURIOUS EMISSIONS

**LOW CHANNEL
 HORIZONTAL**

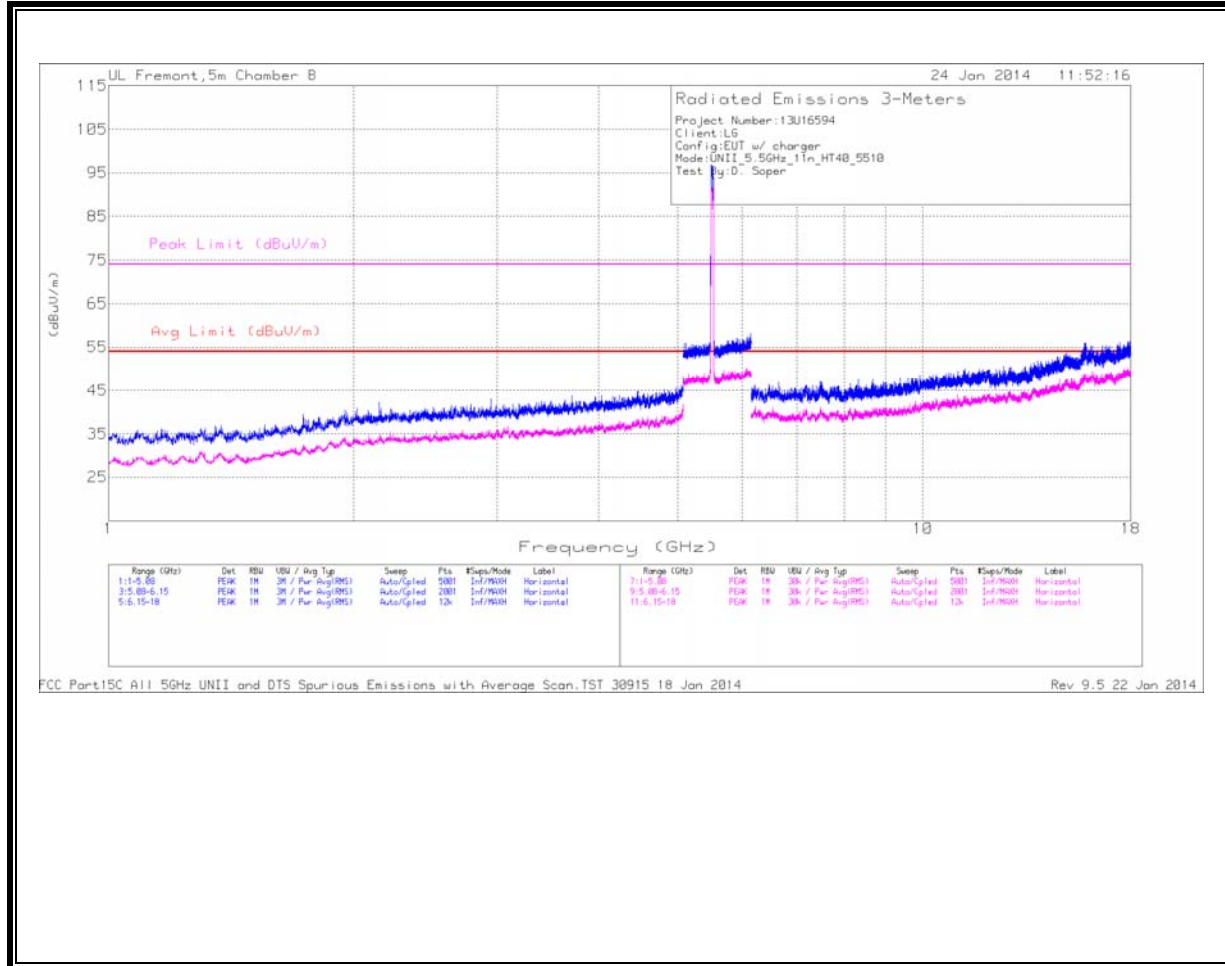

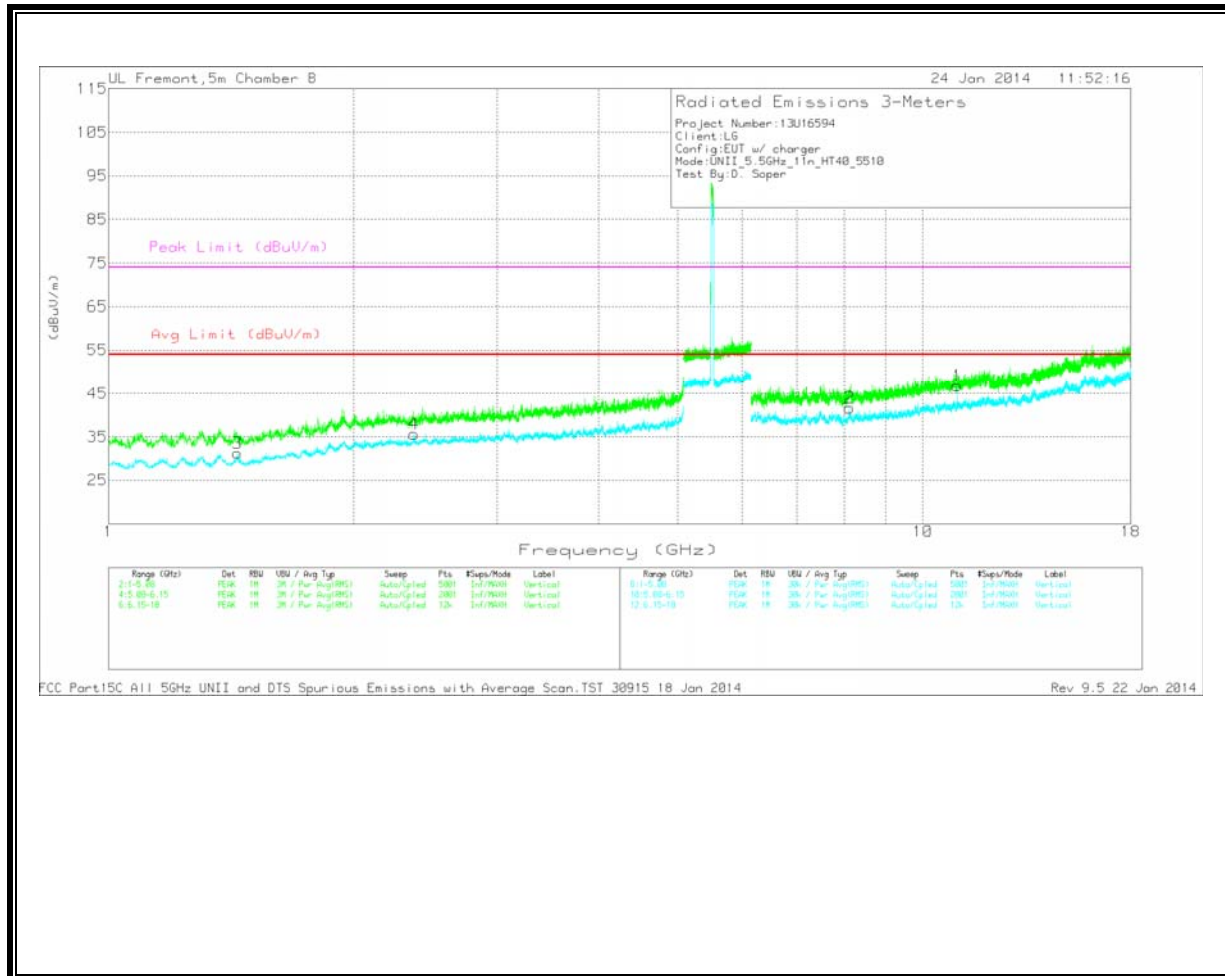


LOW CHANNEL DATA
 Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	1.44	37.03	Avg	28.3	-34.1	0	31.23	54	-22.77	-	-	0-360	202	V
4	2.372	36.04	Avg	32.3	-32.7	0	35.64	54	-18.36	-	-	0-360	202	V
2	8.124	32.35	Avg	36.1	-26.8	0	41.65	54	-12.35	-	-	0-360	99	V
1	11.02	31.81	Avg	38.3	-23.3	0	46.81	54	-7.19	-	-	0-360	202	V

Avg - Video bandwidth < Resolution bandwidth

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 18
 Jan 2014 Rev 9.5 22 Jan 2014

MID CHANNEL
HORIZONTAL

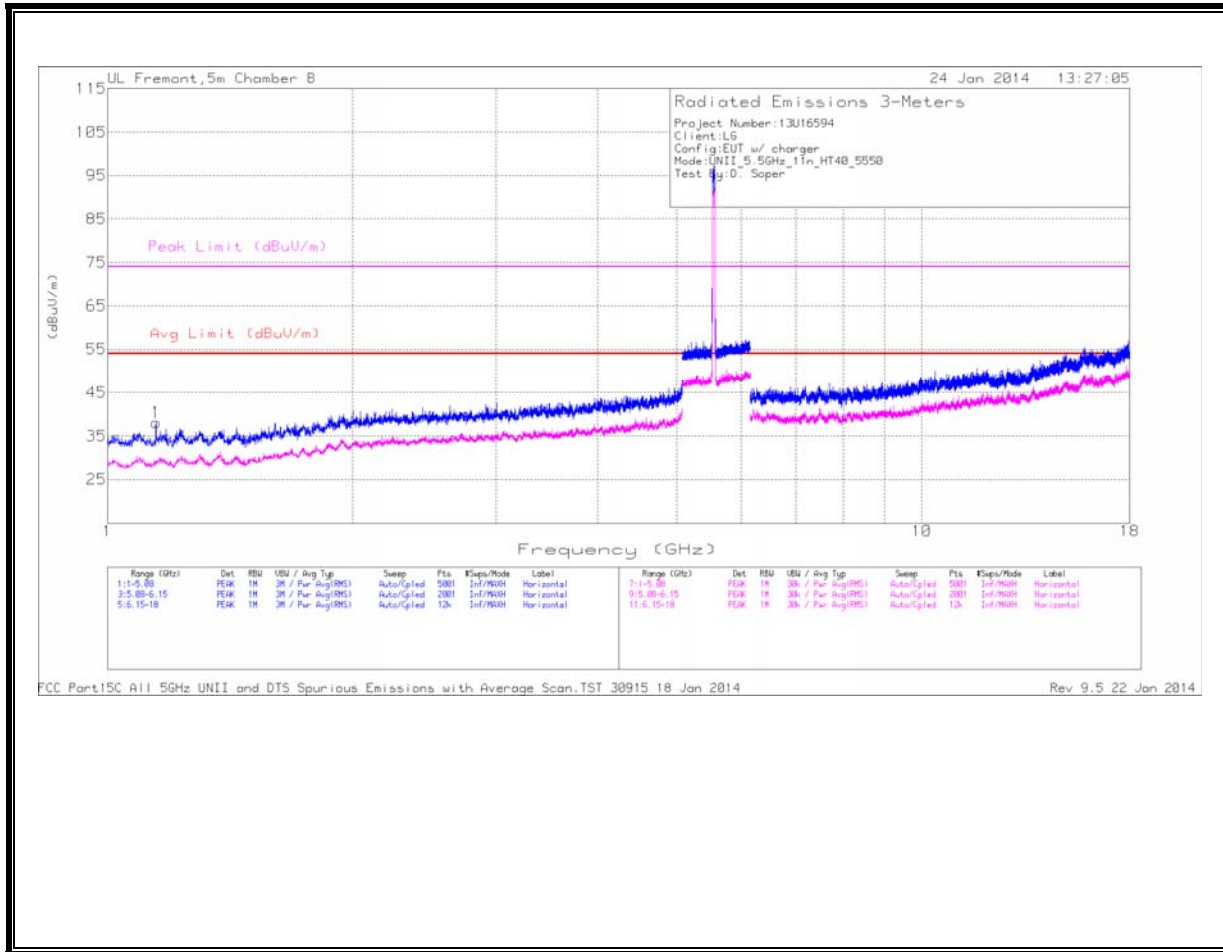

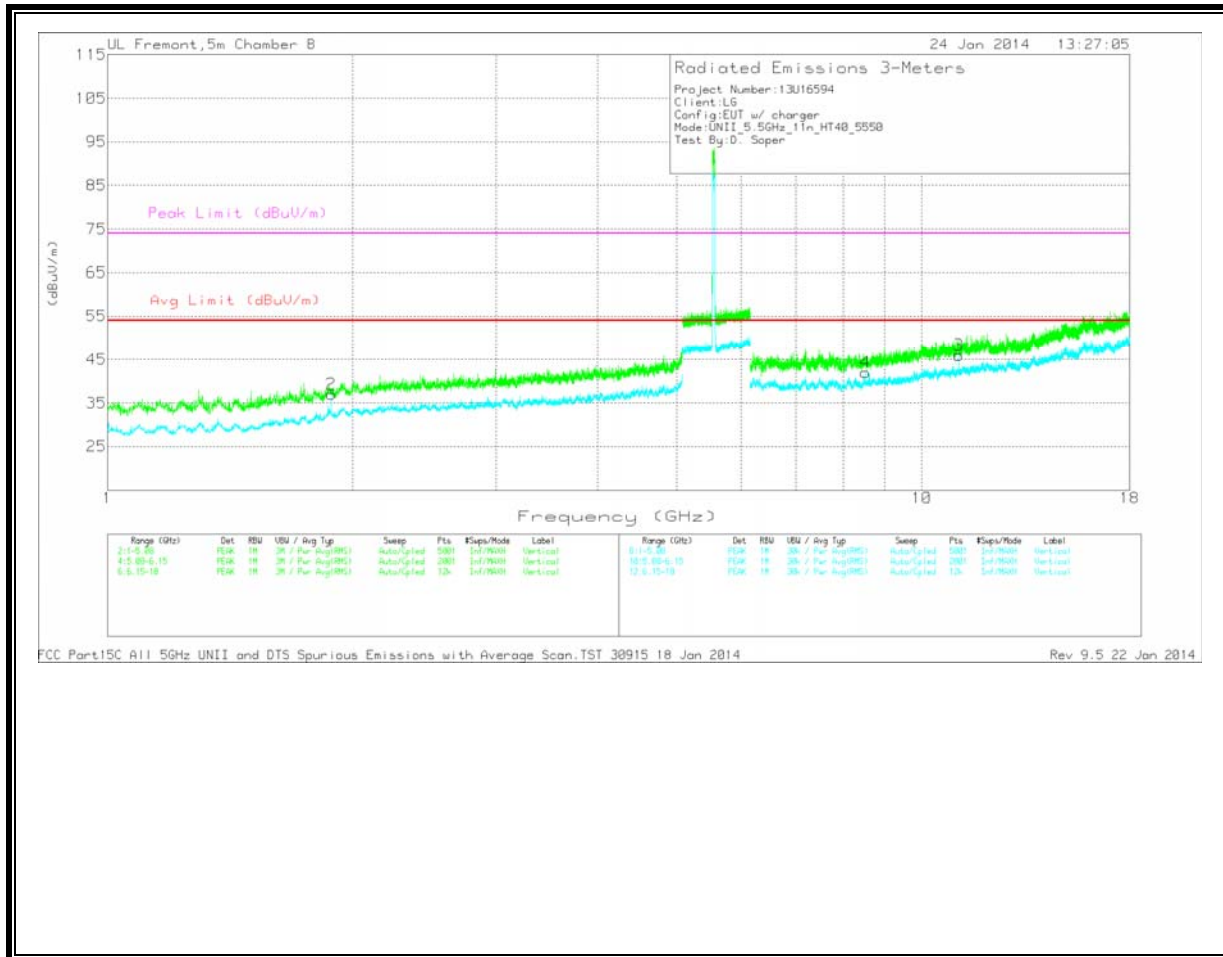

MID CHANNEL DATA
 Trace Markers

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fit r/Pad (dB)	DC Corr (dB)	Correcte d Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.147	44.36	PK	28.1	-34.4	0	38.06	54	-15.94	74	-35.94	0-360	99	H
3	* 11.1	31.19	Avg	38.4	-23.6	0	45.99	54	-8.01	-	-	0-360	202	V
2	1.883	38.98	Avg	31	-33	0	36.98	54	-17.02	-	-	0-360	202	V
4	8.529	32.12	Avg	36.2	-26.3	0	42.02	54	-11.98	-	-	0-360	99	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Avg - Video bandwidth < Resolution bandwidth

FCC Part15C All 5GHz UNII and DTS Spurious Emissions with Average Scan.TST 30915 18
 Jan 2014 Rev 9.5 22 Jan 2014

HIGH CHANNEL
HORIZONTAL

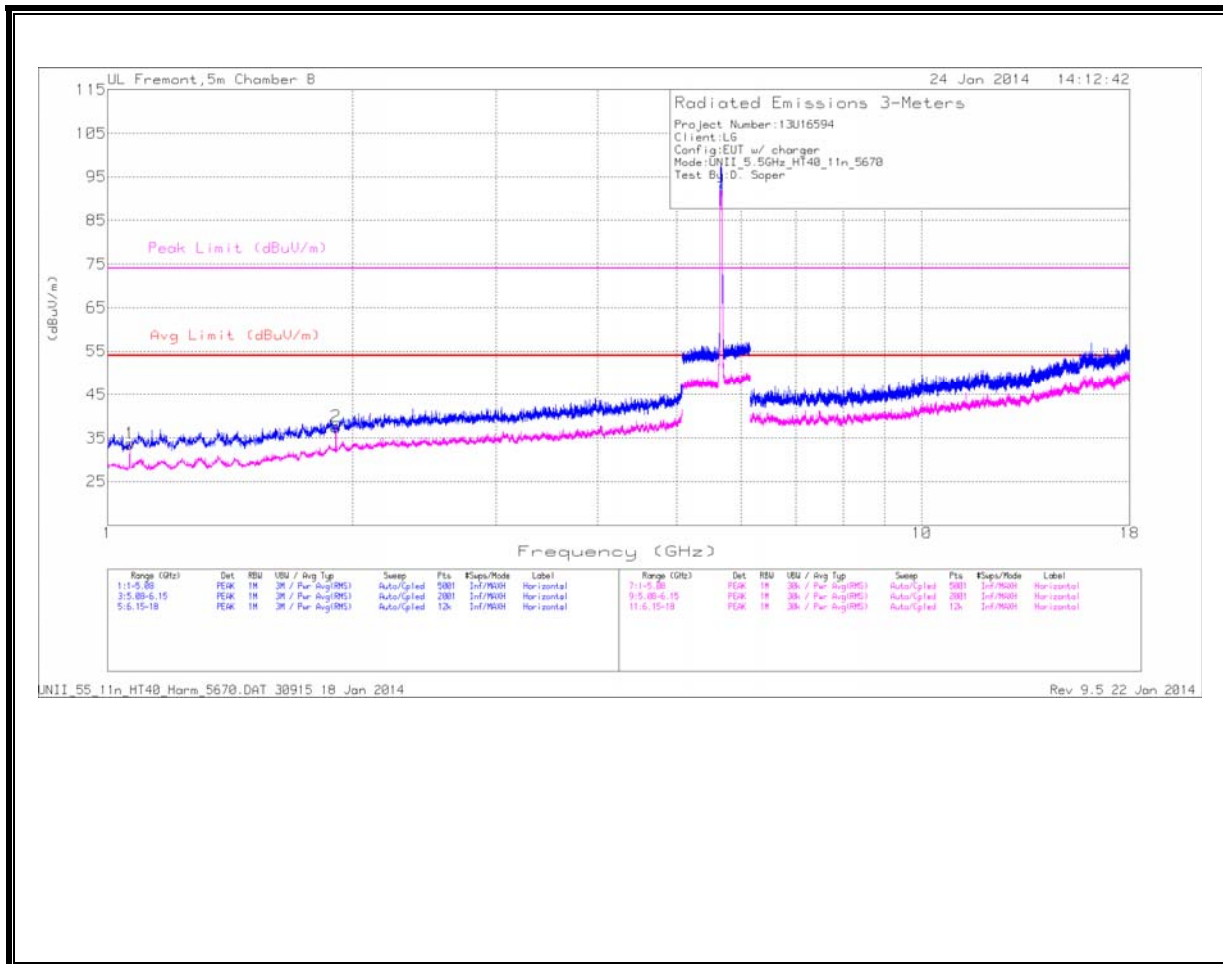

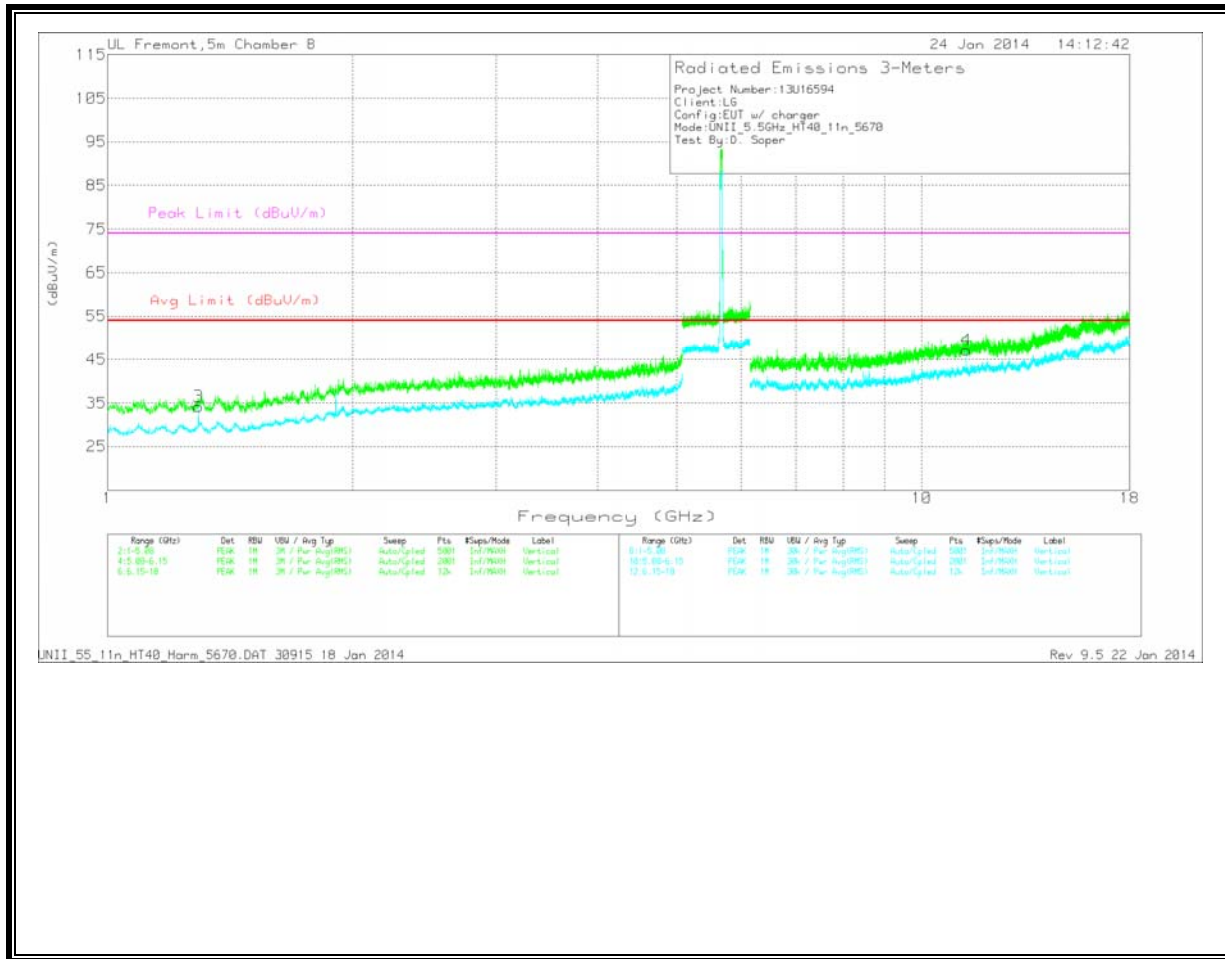

HIGH CHANNEL DATA
 Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.065	40.51	Avg	27.7	-34.5	0	33.71	54	-20.29	-	-	0-360	202	H
3	1.293	39.97	Avg	28.5	-34.3	0	34.17	54	-19.83	-	-	0-360	202	V
2	1.907	39.12	Avg	31.2	-32.7	0	37.62	54	-16.38	-	-	0-360	202	H
4	11.34	31.8	Avg	38.6	-23.2	0	47.2	54	-6.8	-	-	0-360	99	V

Avg - Video bandwidth < Resolution bandwidth


UNII_55_11n_HT40_Harm_5670.DAT 30915 18 Jan 2014 Rev 9.5 22 Jan 2014

12. WORST-CASE BELOW 1 GHz (in the 5.3 GHz Band)

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

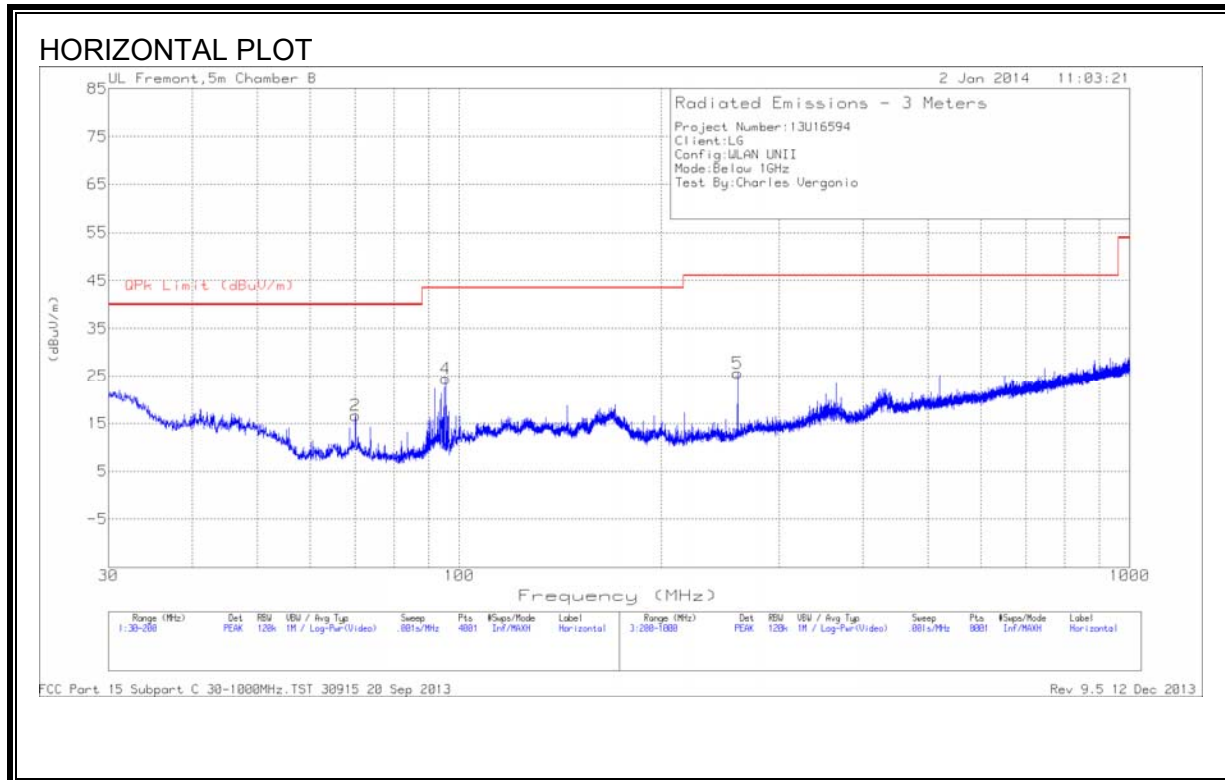

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

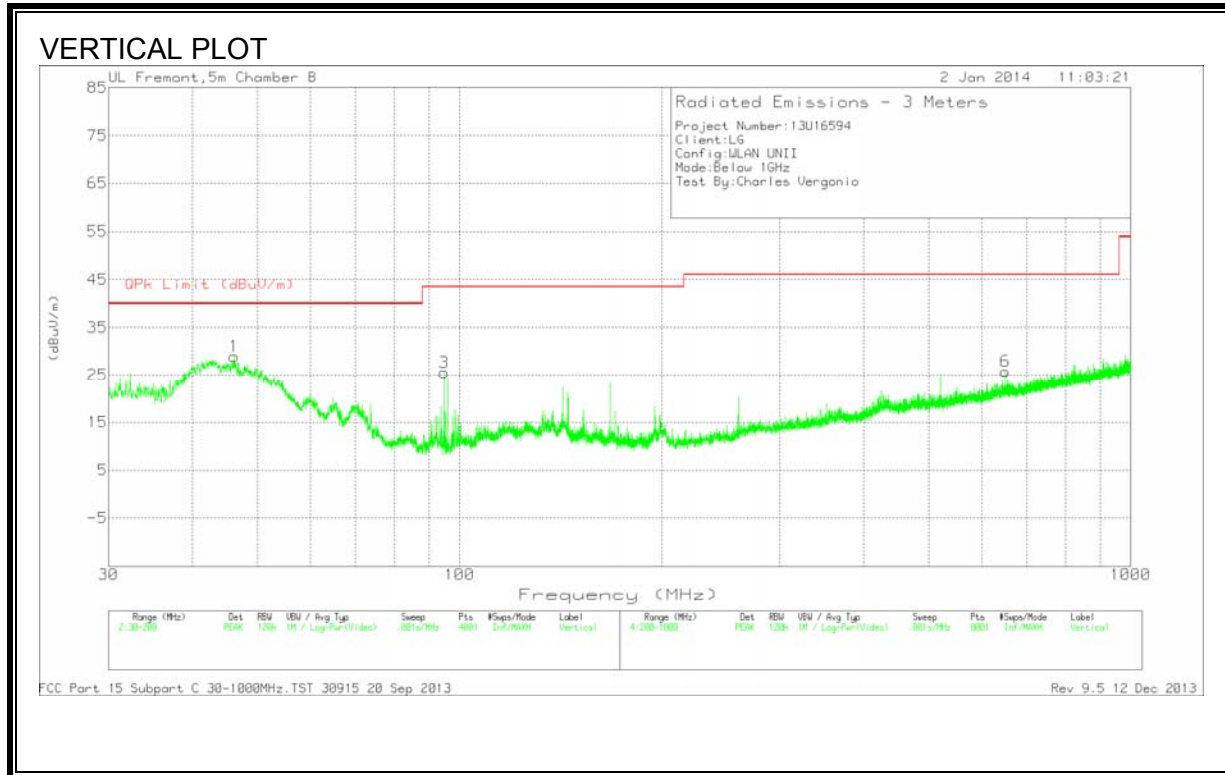

Worst Case Data

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	46.15	48.24	PK	9.4	-28.7	28.94	40	-11.06	0-360	101	V
2	70.035	37.15	PK	7.9	-28.4	16.65	40	-23.35	0-360	100	H
3	94.8975	44.97	PK	8.7	-28.1	25.57	43.52	-17.95	0-360	101	V
4	95.45	43.65	PK	8.8	-28	24.45	43.52	-19.07	0-360	300	H
5	260.2	39.91	PK	12.1	-26.4	25.61	46.02	-20.41	0-360	101	H
6	650.4	31.01	PK	19.9	-25.1	25.81	46.02	-20.21	0-360	101	V

PK - Peak detector

13. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

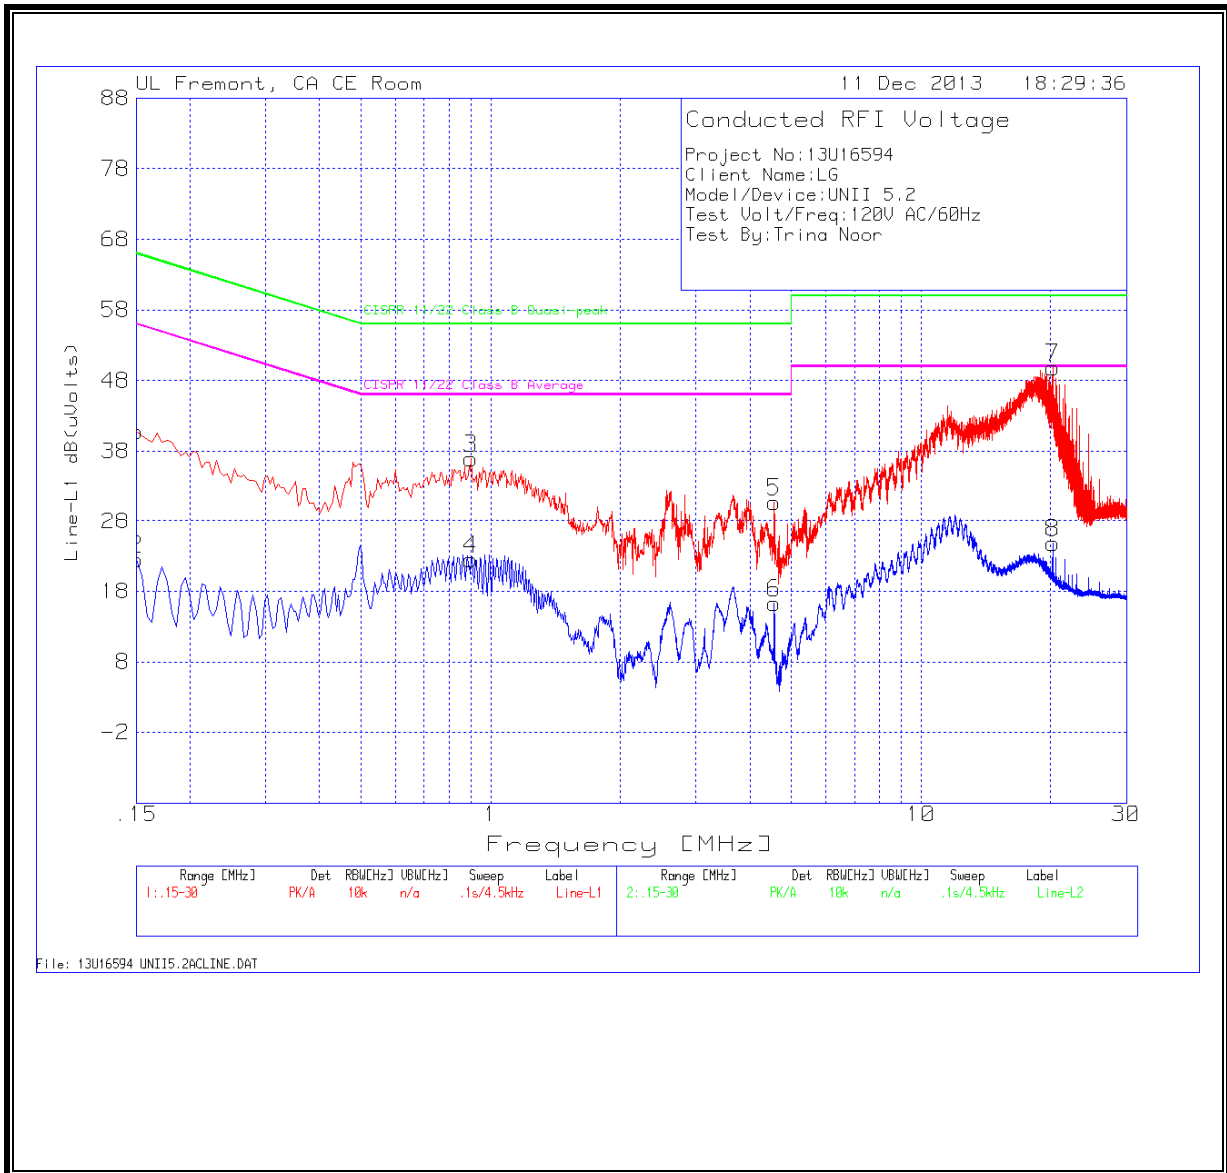


LINE 1 RESULTS

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
1	.15	40.76	PK	.1	0	40.86	66	-25.14	-	-
2	.15	22.36	Av	.1	0	22.46	-	-	56	-33.54
3	.9015	36.81	PK	.1	0	36.91	56	-19.09	-	-
4	.9015	22.46	Av	.1	0	22.56	-	-	46	-23.44
5	4.56	30.53	PK	.1	.1	30.73	56	-25.27	-	-
6	4.56	16.11	Av	.1	.1	16.31	-	-	46	-29.69
7	20.274	49.38	PK	.3	.2	49.88	60	-10.12	-	-
8	20.274	24.3	Av	.3	.2	24.8	-	-	50	-25.2

LINE 2 RESULTS

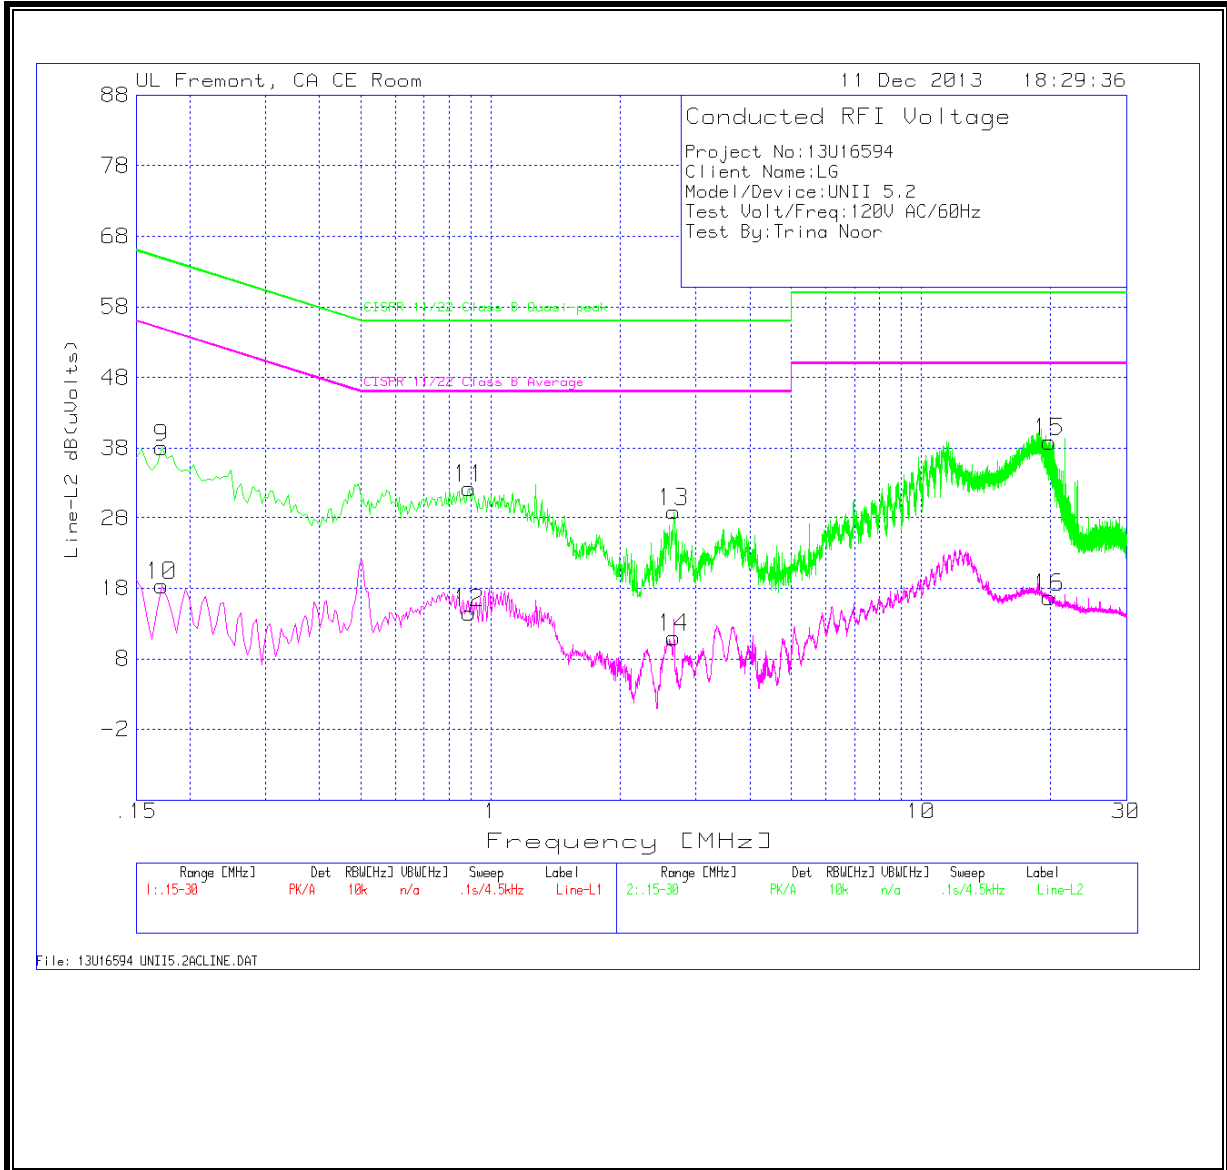

LINE 2 RESULTS

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBUV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin to Limit (dB)	CISPR 11/22 Class B Average	Margin to Limit (dB)
9	.1725	37.94	PK	.1	0	38.04	64.8	-26.76	-	-
10	.1725	18.28	Av	.1	0	18.38	-	-	54.8	-36.42
11	.8925	32.22	PK	.1	0	32.32	56	-23.68	-	-
12	.8925	14.43	Av	.1	0	14.53	-	-	46	-31.47
13	2.661	28.77	PK	.1	.1	28.97	56	-27.03	-	-
14	2.661	10.87	Av	.1	.1	11.07	-	-	46	-34.93
15	19.9005	38.41	PK	.3	.2	38.91	60	-21.09	-	-
16	19.9005	16.22	Av	.3	.2	16.72	-	-	50	-33.28

PK - Peak detector

Av - average detection

14. DYNAMIC FREQUENCY SELECTION

14.1. OVERVIEW

14.1.1. LIMITS

INDUSTRY CANADA

IC RSS-210 is closely harmonized with FCC Part 15 DFS rules. The deviations are as follows:

RSS-210 Issue 7 A9.4 (b) (ii) **Channel Availability Check Time:** ...

Additional requirements for the band 5600-5650 MHz: Until further notice, devices subject to this Section shall not be capable of transmitting in the band 5600-5650 MHz, so that Environment Canada weather radars operating in this band are protected.

FCC

§15.407 (h) and FCC 06-96 APPENDIX "COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVCIES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION".

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period
<p>The instant that the <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> begins is as follows: For the Short pulse radar Test Signals this instant is the end of the <i>Burst</i>. For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated. For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission. The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p>	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Table 6 – Long Pulse Radar Test Signal


Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	.333	70%	30

14.1.2. TEST AND MEASUREMENT SYSTEM

RADIATED METHOD SYSTEM BLOCK DIAGRAM

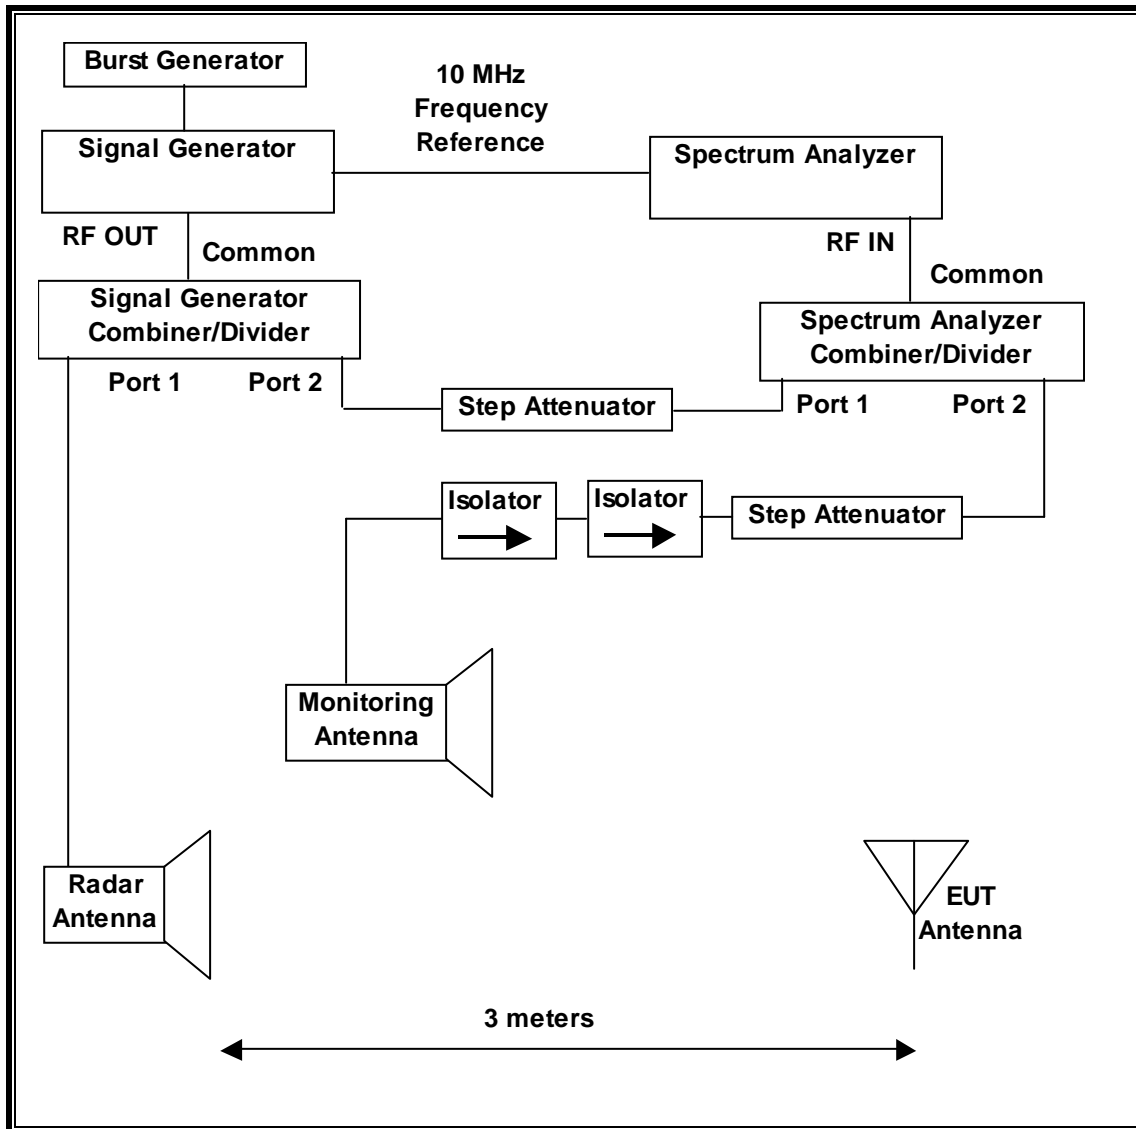

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset Number	Cal Due
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01178	09/10/14
Vector Signal Generator, 20GHz	Agilent / HP	E8267C	C01066	09/12/14

14.1.3. SETUP OF EUT

RADIATED METHOD EUT TEST SETUP

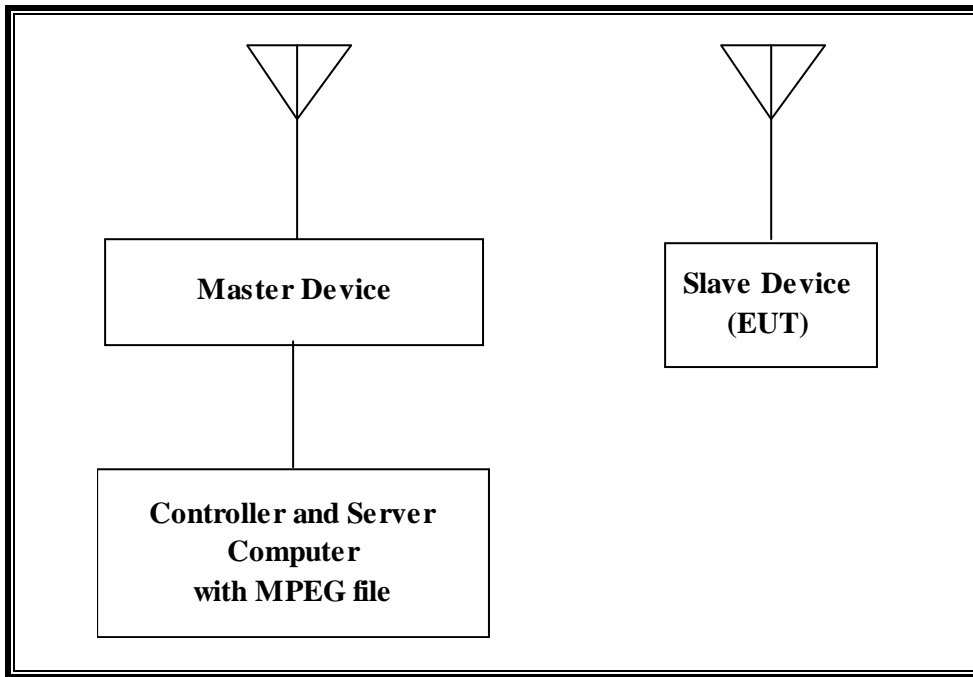

SUPPORT EQUIPMENT

The following support equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point	Cisco	AIR-AP1252AG-A-K9	FTX120690N2	LDK102061
AC Adapter (AP)	Delta Electronics	EADP-45BB B	DTH112490BD	DoC
Notebook PC (Controller/Server)	Dell	PP18L	10657517725	DoC
AC Adapter (Controller/Server PC)	Dell	LA65SN0-00	CN-ODF263-71615-6AU-1019	DoC

14.1.4. DESCRIPTION OF EUT

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges excluding the 5600-5650 MHz range.

The EUT is a Slave Device without radar detection capability.

The highest power level within these bands is 14.509 dBm EIRP in the 5250-5350 MHz band and 16.03 dBm EIRP in the 5470-5725 MHz band.

The only antenna assembly utilized with the EUT has a gain of 0.27dBi in the 5250-5350 MHz band and 1.95 dBi in the 5470-5725 MHz band.

The rated output power of the Master unit is $> 23\text{dBm}$ (EIRP). Therefore the required interference threshold level is -64 dBm . After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63\text{ dBm}$.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm . The tested level is lower than the required level hence it provides margin to the limit.

The EUT uses one receive only chain, each connected to an antenna to perform radiated tests.

WLAN traffic is generated by streaming the video file TestFile.mp2 "6 ½ Magic Hours" from the Master to the Slave in full motion video mode using the MXPlayer media player.

TPC is not required since the maximum EIRP is less than 500 mW (27 dBm).

The EUT utilizes the 802.11a/n architecture. Two nominal channel bandwidths are implemented: 20 MHz and 40 MHz.

UNIFORM CHANNEL SPREADING

This requirement is not applicable to Slave radio devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Cisco Access Point, FCC ID: LDK102061. The minimum antenna gain for the Master Device is 3.5 dBi.

The rated output power of the Master unit is $> 23\text{dBm}$ (EIRP). Therefore the required interference threshold level is -64 dBm . After correction for procedural adjustments, the required radiated threshold at the antenna port is $-64 + 1 = -63\text{ dBm}$.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm . The tested level is lower than the required level hence it provides margin to the limit.


14.2. RESULTS FOR 20 MHz BANDWIDTH

14.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5500 MHz.

14.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

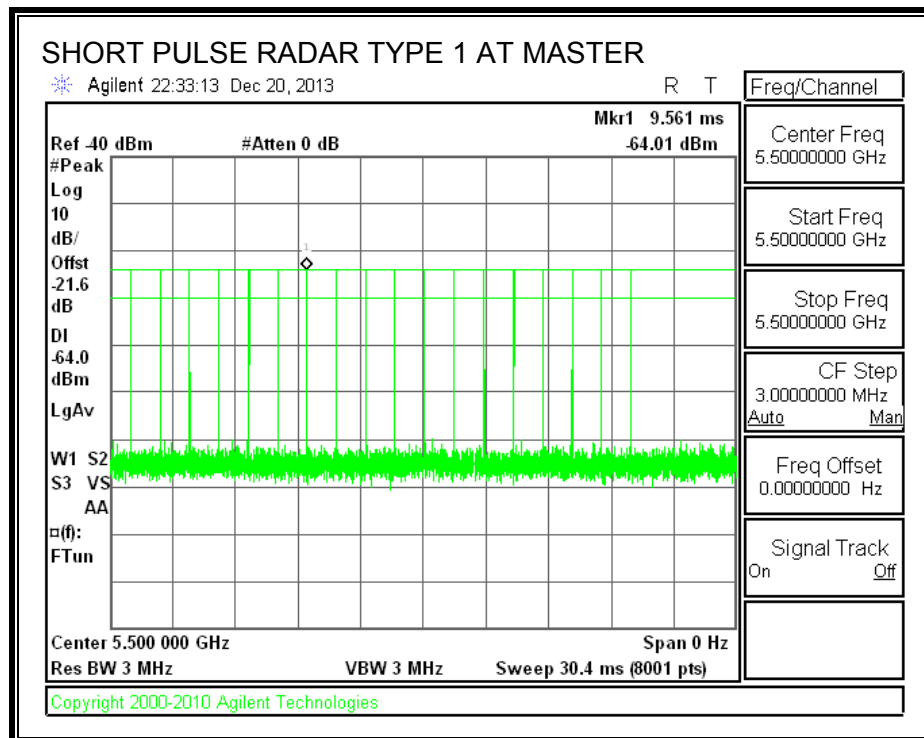

TRAFFIC

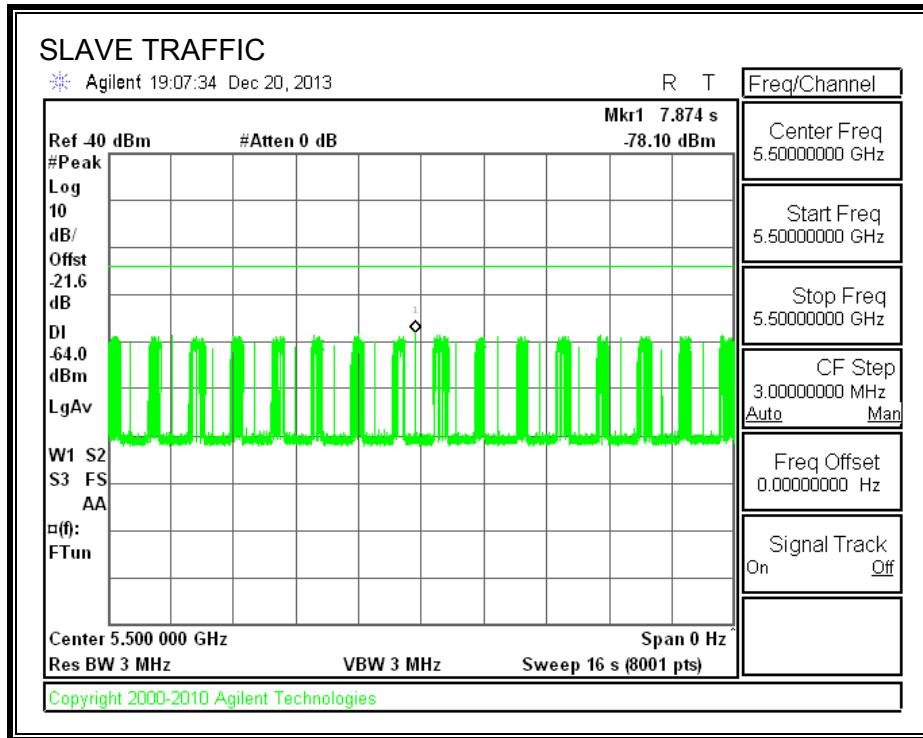

14.2.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.2.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Channel Move Time (sec)	Limit (sec)
0.0	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

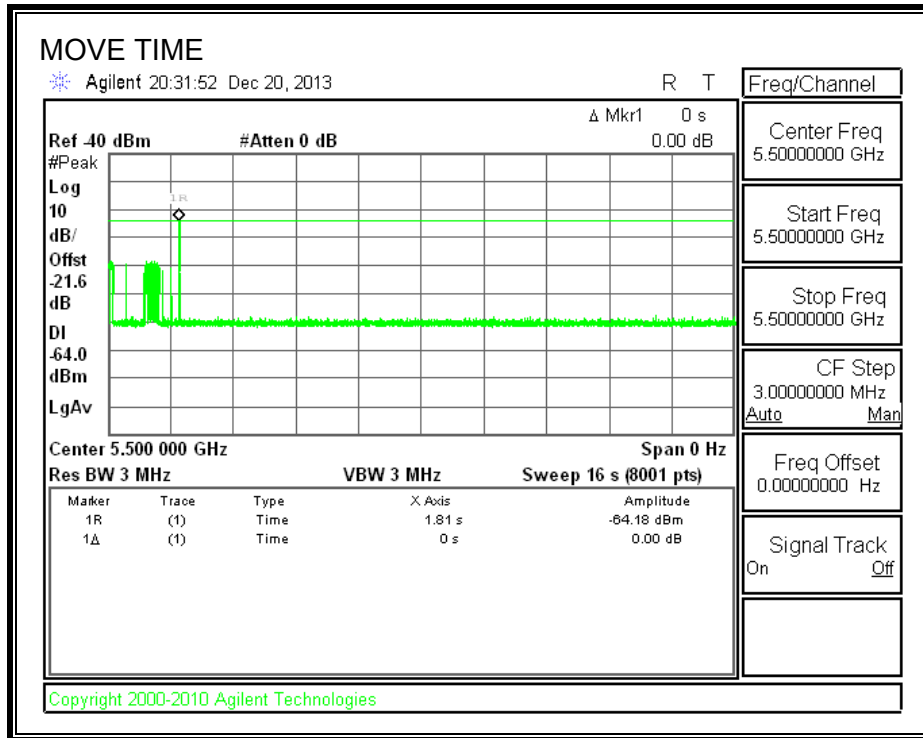


CHANNEL CLOSING TIME

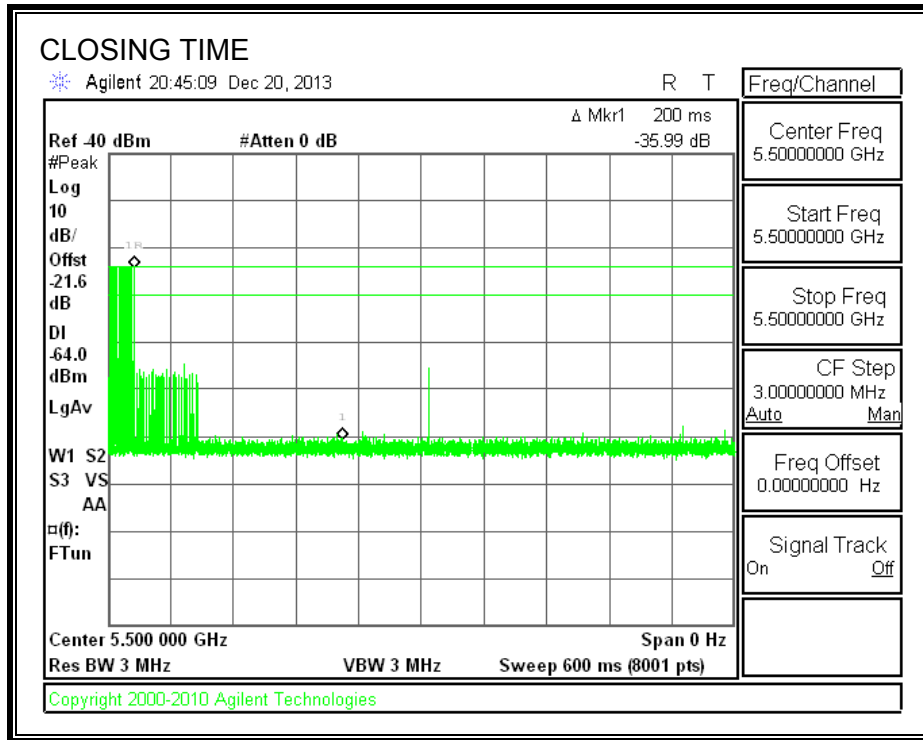

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

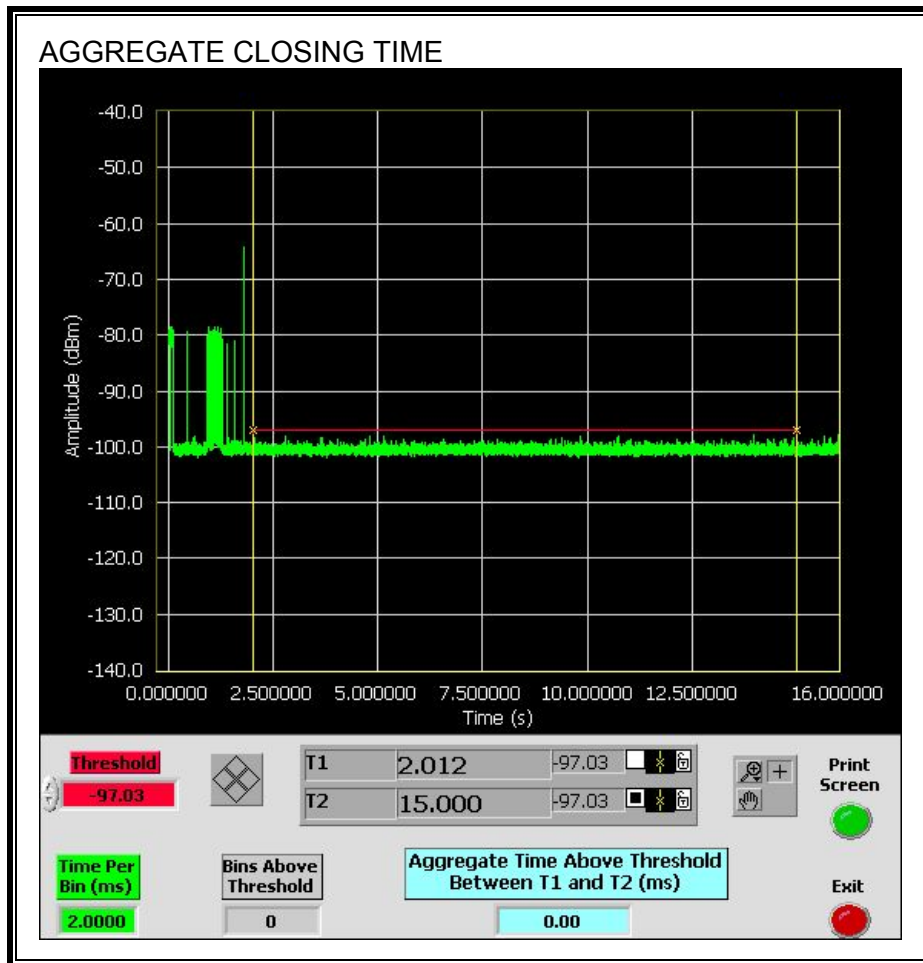


14.3. RESULTS FOR 40 MHz BANDWIDTH

14.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

14.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

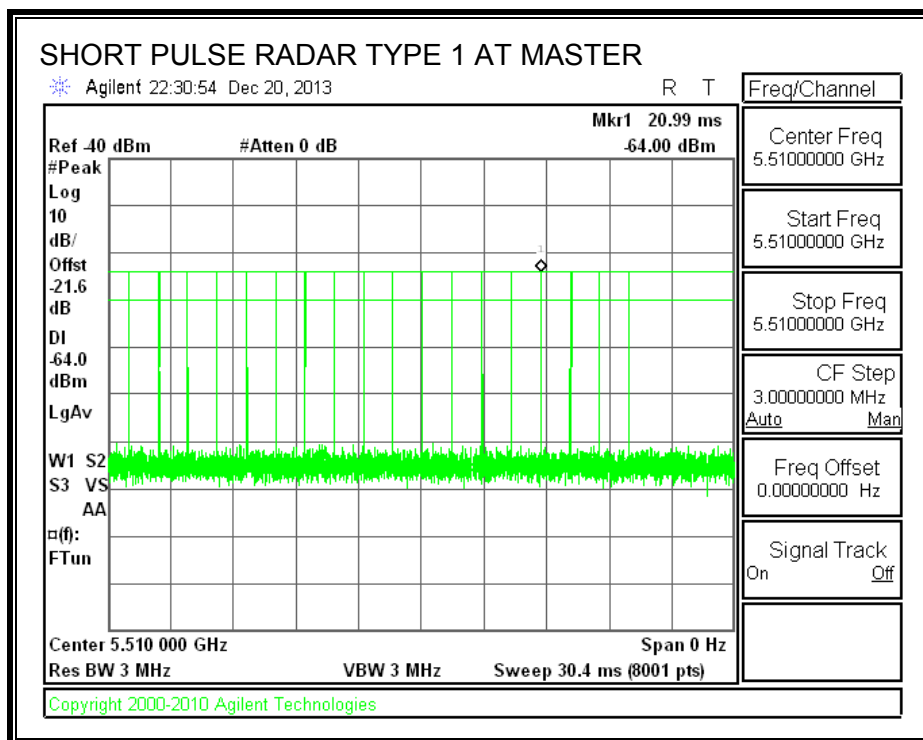

TRAFFIC

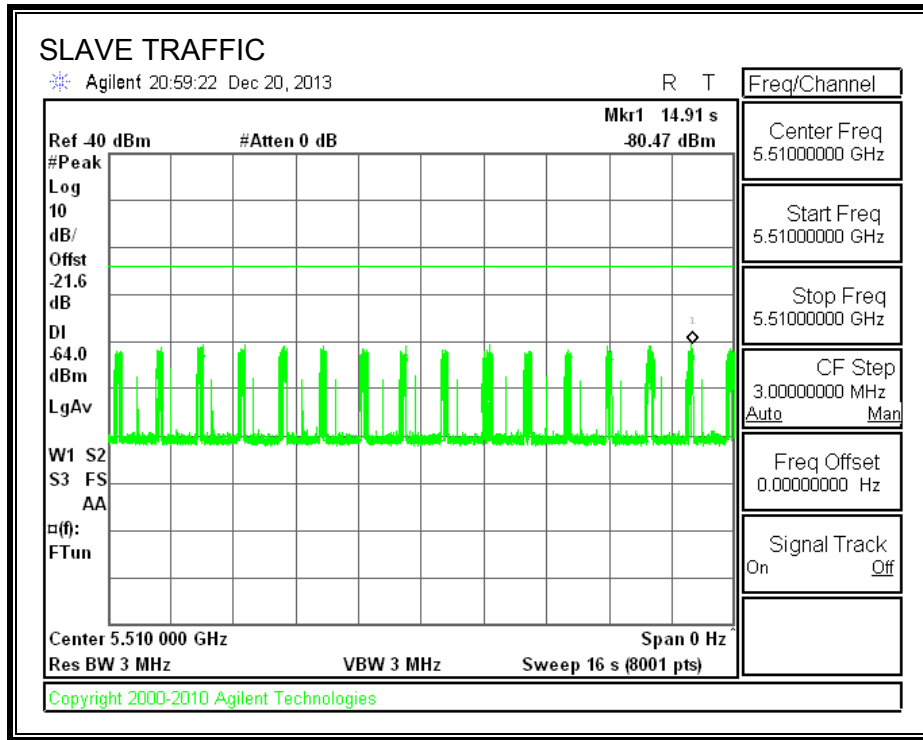

14.3.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

14.3.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)


The observation period over which the aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Channel Move Time (sec)	Limit (sec)
0.0	10

Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
0.0	60

MOVE TIME

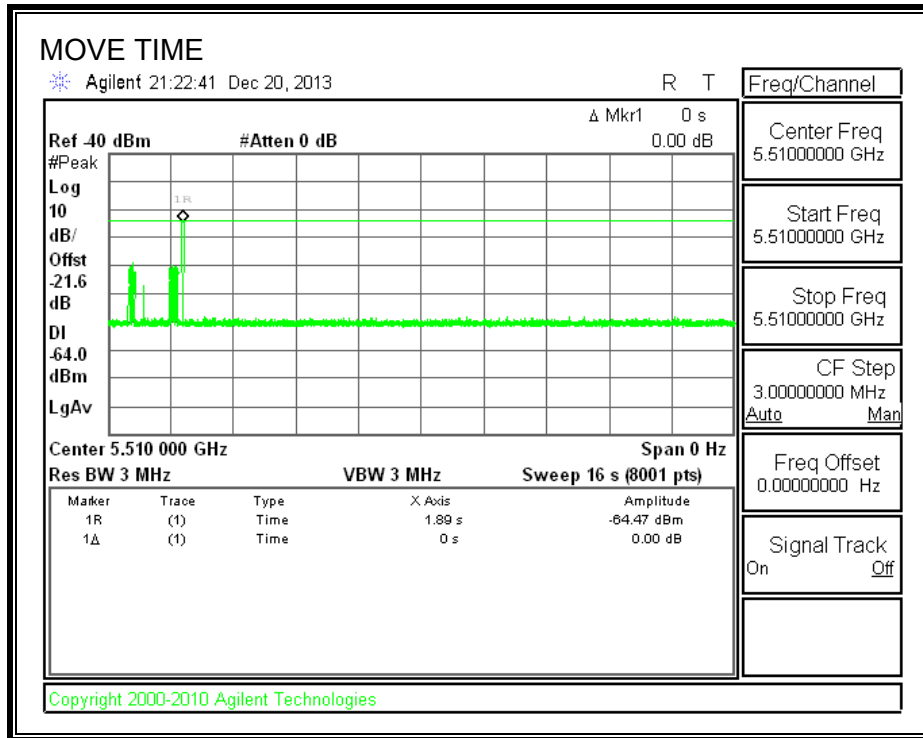


CHANNEL CLOSING TIME

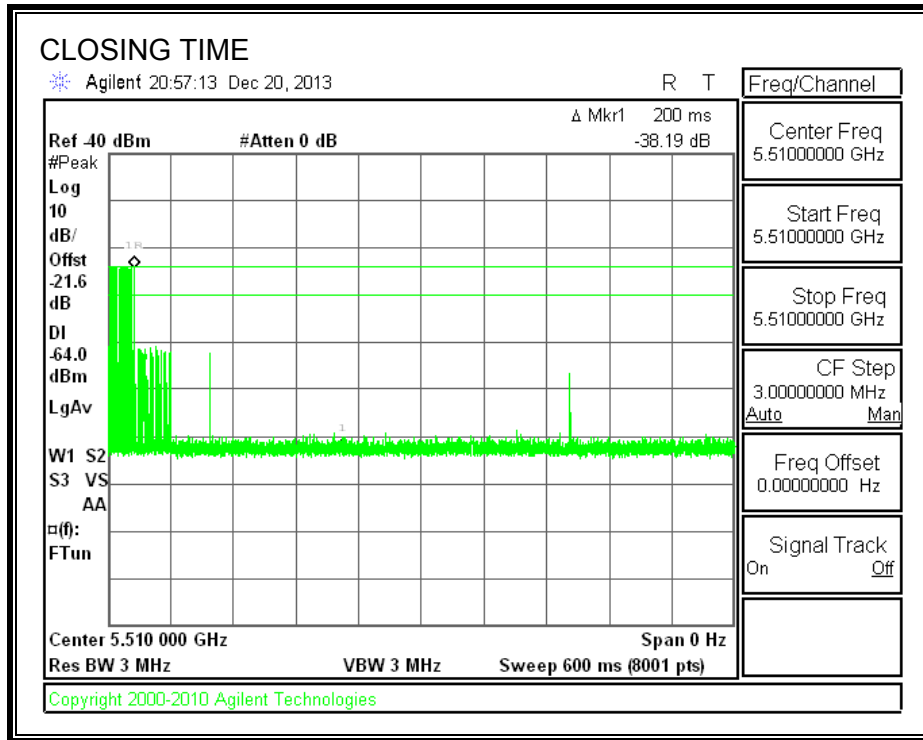

AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

No transmissions are observed during the aggregate monitoring period.

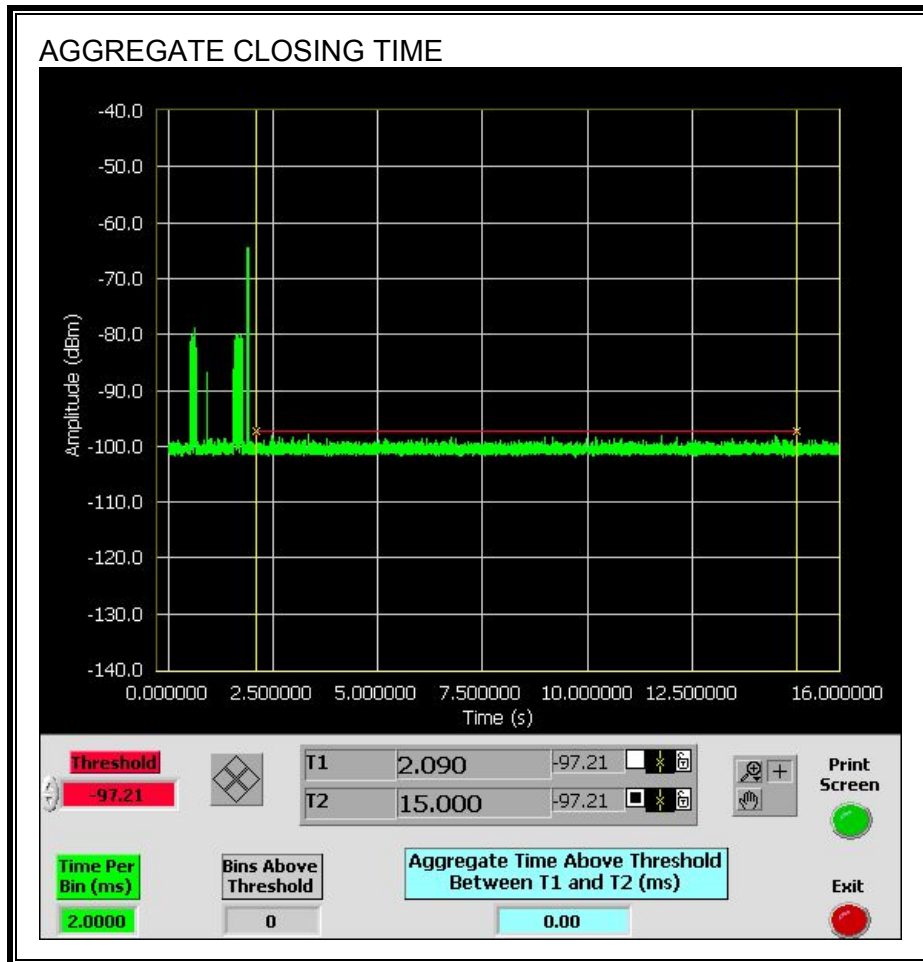

14.3.5. NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

