



**FCC CFR47 PART 15 SUBPART C**

**BLUETOOTH LOW ENERGY  
C2PC CERTIFICATION TEST REPORT**

**FOR**

**CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC**

**MODEL NUMBER: LG-VS880, VS880, LGVS880**

**FCC ID: ZNFVS880**

**REPORT NUMBER: 14U17461-3**

**ISSUE DATE: June 12, 2014**

*Prepared for*

**LG ELECTRONICS MOBILECOMM U.S.A., INC  
1000 SYLVAN AVENUE  
ENGLEWOOD CLIFFS, NEW JERSEY, 07632, U.S.A.**

*Prepared by*

**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	6/12/14	Initial Issue	P. Kim

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>6</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>6</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>6</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>6</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>6</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>7</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. SUMMARY .....</b>	<b>10</b>
<b>8. ....</b>	<b>10</b>
<b>9. RADIATED TEST RESULTS.....</b>	<b>11</b>
9.1. <i>LIMITS AND PROCEDURE .....</i>	<i>11</i>
9.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>12</i>
9.3. <i>WORST-CASE BELOW 1 GHz.....</i>	<i>25</i>
<b>10. SETUP PHOTOS .....</b>	<b>28</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** LG ELECTRONICS MOBILECOMM U.S.A., INC  
**EUT DESCRIPTION:** CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC  
**MODEL:** LG-VS880, VS880, LGVS880  
**SERIAL NUMBER:** 1879444  
**DATE TESTED:** MAY 20- JUNE 12, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



PHILIP KIM  
CONSUMER TECHNOLOGY DIVISION  
PROGRAM MANAGER  
UL Verification Services Inc.

CHARLES VERGONIO  
CONSUMER TECHNOLOGY DIVISION  
TEST TECHNICIAN  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a CDMA/LTE Phone + Bluetooth & DTS/UNII a/b/g/n + NFC.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402-2480	BLE	8.13	6.50

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -6.9 dBi.

### 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG Electronics	MCS-01WD	DB3Y0094683	N/A
Earphone	LG Electronics	N/A	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

### TEST SETUP

EUT was set in the Hidden menu mode to enable BLE communications.

**SETUP DIAGRAM FOR TESTS**

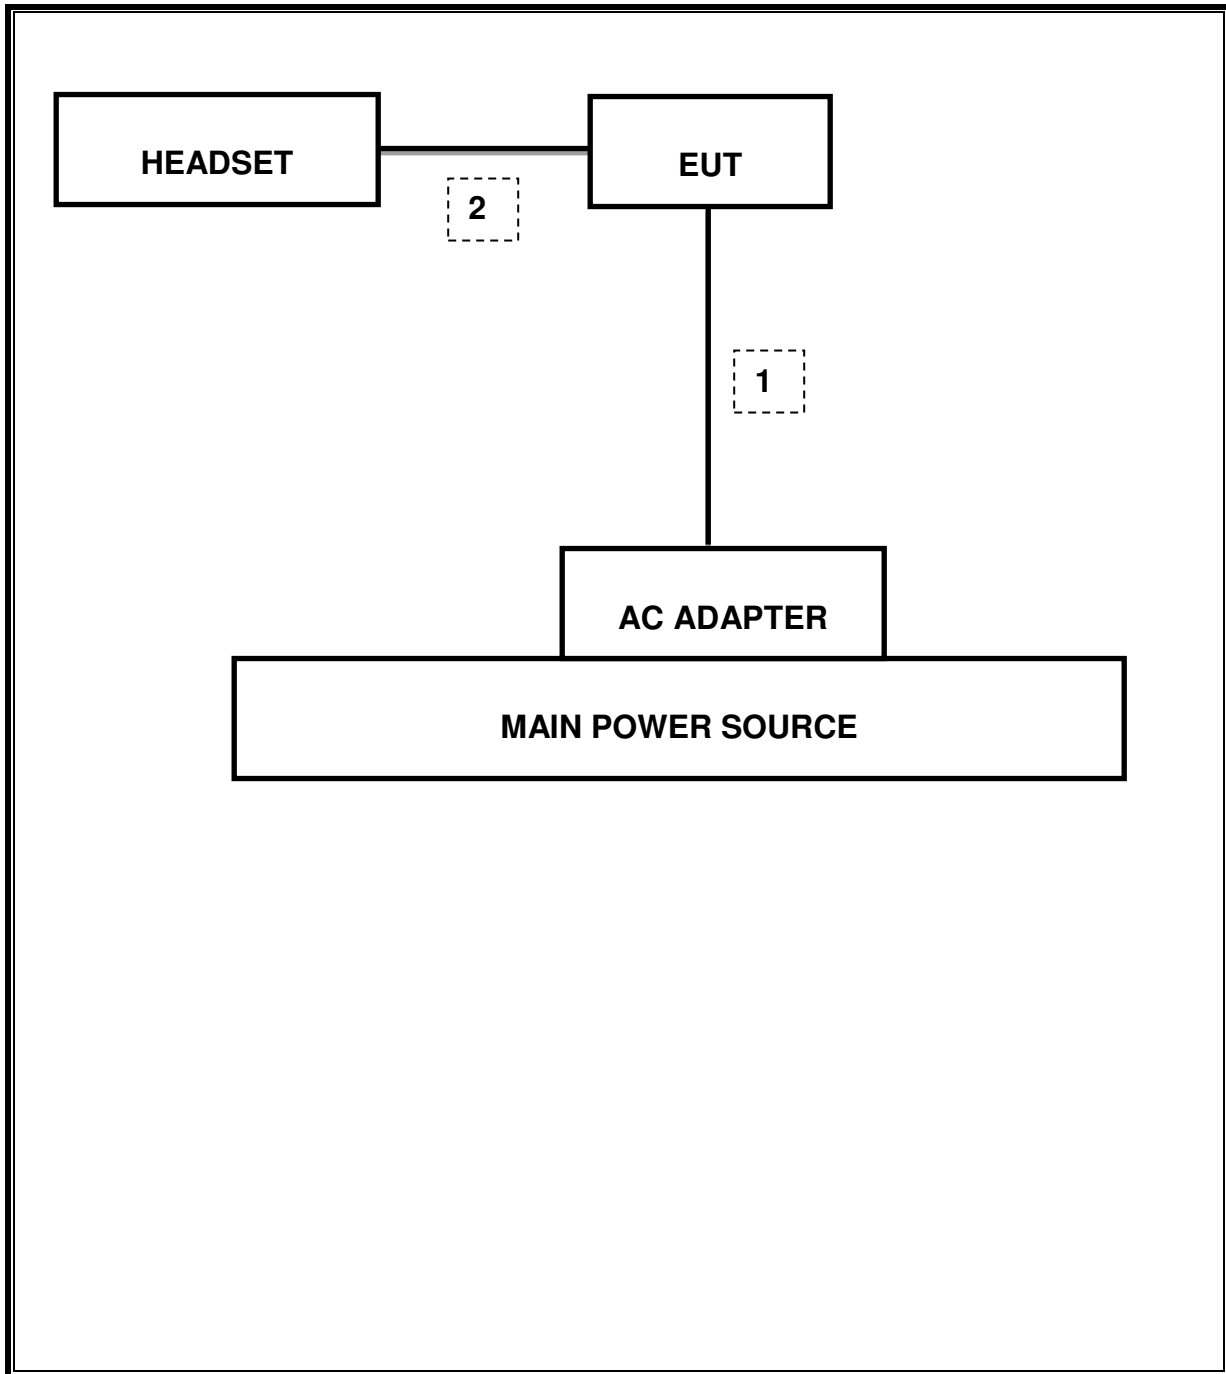



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	4/1/2015
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	2/26/2015
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	8/8/2014
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	5/8/2015
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/2014
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	N/A	3/6/2015
Antenna, Horn, 18 GHz	ETS	3117	C01022	2/21/2015
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/2014
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/2014
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/2014
LISN, 30 MHz	FCC	50/250-25-2	C00626	1/14/2015

## 7. SUMMARY

### 8.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	see original
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	see original
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	see original
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	see original
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	see original
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	41.11dBuV/m

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor =  $10 \log(1/x)$ . For this sample:  $DCF = 10 \log(1/0.619) = 2.08 \text{ dB}$  (Spectrum Analyzer round it up to 2.1 dB)


For spurious emission measurement refer to MAV1 - KDB558074 Option 1 Maximum RMS Average

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 9.2. TRANSMITTER ABOVE 1 GHz


### RESTRICTED BANDEGE (LOW CHANNEL, HORIZONTAL)

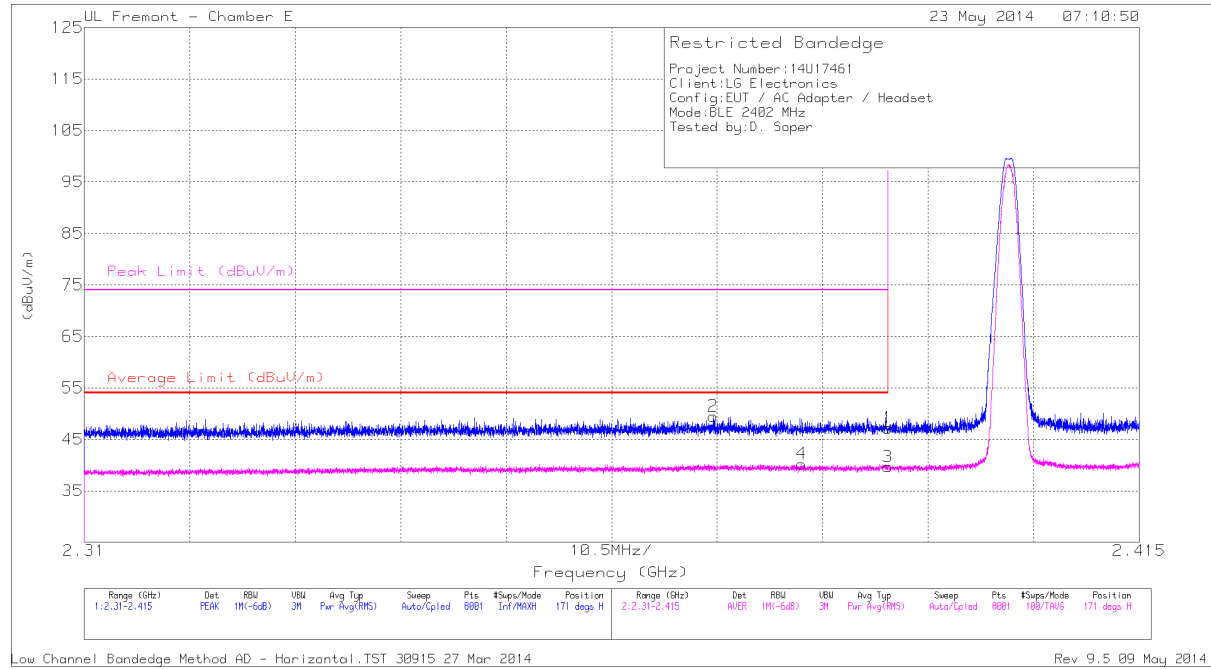

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.92	PK	32	-24.7	0	47.22	-	-	74	-26.78	171	283	H
2	* 2.373	42.19	PK	31.9	-24.6	0	49.49	-	-	74	-24.51	171	283	H
3	* 2.39	30.41	RMS	32	-24.7	2.1	39.71	54	-14.29	-	-	171	283	H
4	* 2.381	30.93	RMS	31.9	-24.6	2.1	40.23	54	-13.77	-	-	171	283	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK - Peak detector  
 RMS - RMS detection


**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

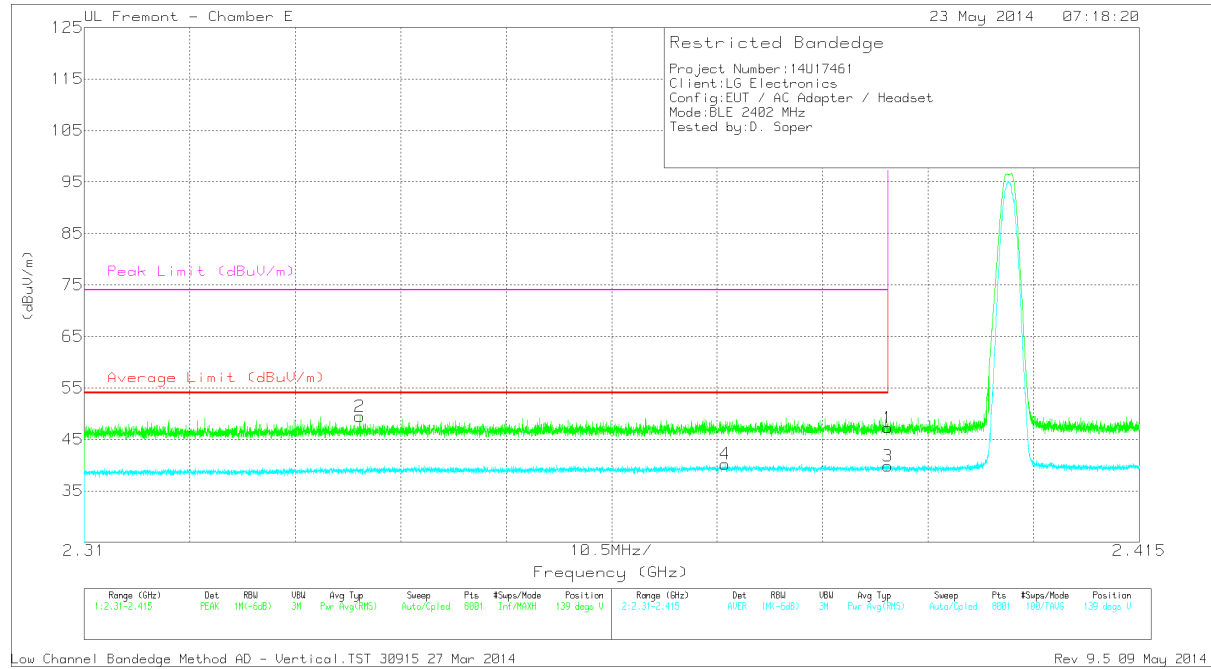

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.95	PK	32	-24.7	0	47.25	-	-	74	-26.75	139	283	V
2	* 2.337	42.46	PK	31.7	-24.7	0	49.46	-	-	74	-24.54	139	283	V
3	* 2.39	30.49	RMS	32	-24.7	2.1	39.79	54	-14.21	-	-	139	283	V
4	* 2.374	30.9	RMS	31.9	-24.6	2.1	40.2	54	-13.8	-	-	139	283	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK - Peak detector  
 RMS - RMS detection


**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

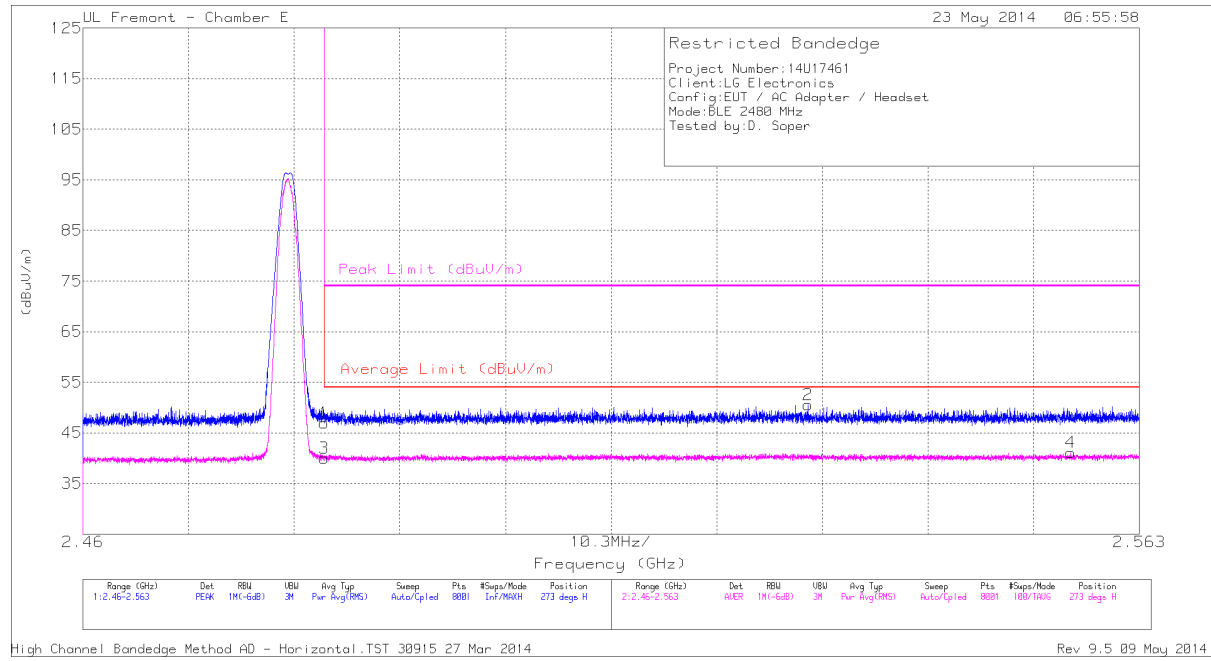

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.89	PK	32.3	-24.3	0	-46.89	-	-	74	-27.11	273	210	H
3	* 2.484	29.94	RMS	32.3	-24.3	2.1	39.94	54	-14.06	-	-	273	210	H
2	2.531	42.19	PK	32.4	-24.1	0	50.49	-	-	74	-23.51	273	210	H
4	2.556	30.71	RMS	32.5	-24.1	2.1	41.11	54	-12.89	-	-	273	210	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK - Peak detector  
 RMS - RMS detection

**RESTRICTED BANDEGE (HIGH CHANNEL, VERTICAL)**

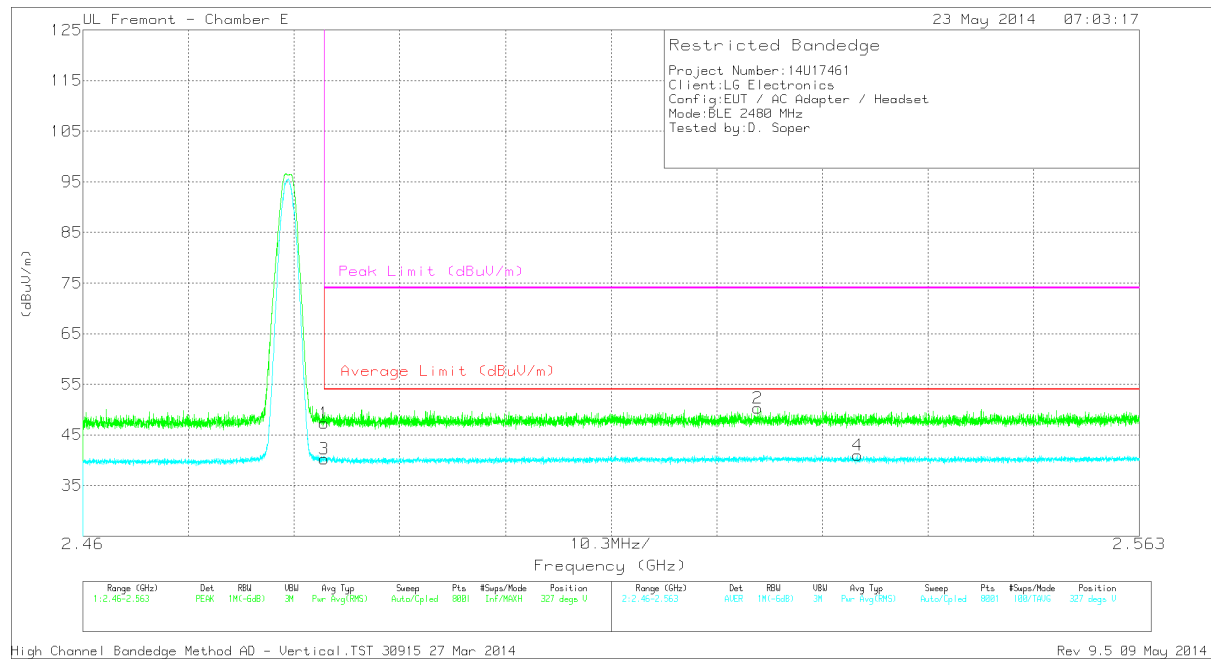


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.33	PK	32.3	-24.3	0	47.33	-	-	74	-26.67	327	296	V
3	* 2.484	30.21	RMS	32.3	-24.3	2.1	40.21	54	-13.79	-	-	327	296	V
2	2.526	42.04	PK	32.4	-24.1	0	50.34	-	-	74	-23.66	327	296	V
4	2.536	30.73	RMS	32.4	-24.1	2.1	41.03	54	-12.97	-	-	327	296	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK - Peak detector  
 RMS - RMS detection

**HARMONICS AND SPURIOUS EMISSIONS**


**LOW CHANNEL  
 HORIZONTAL**

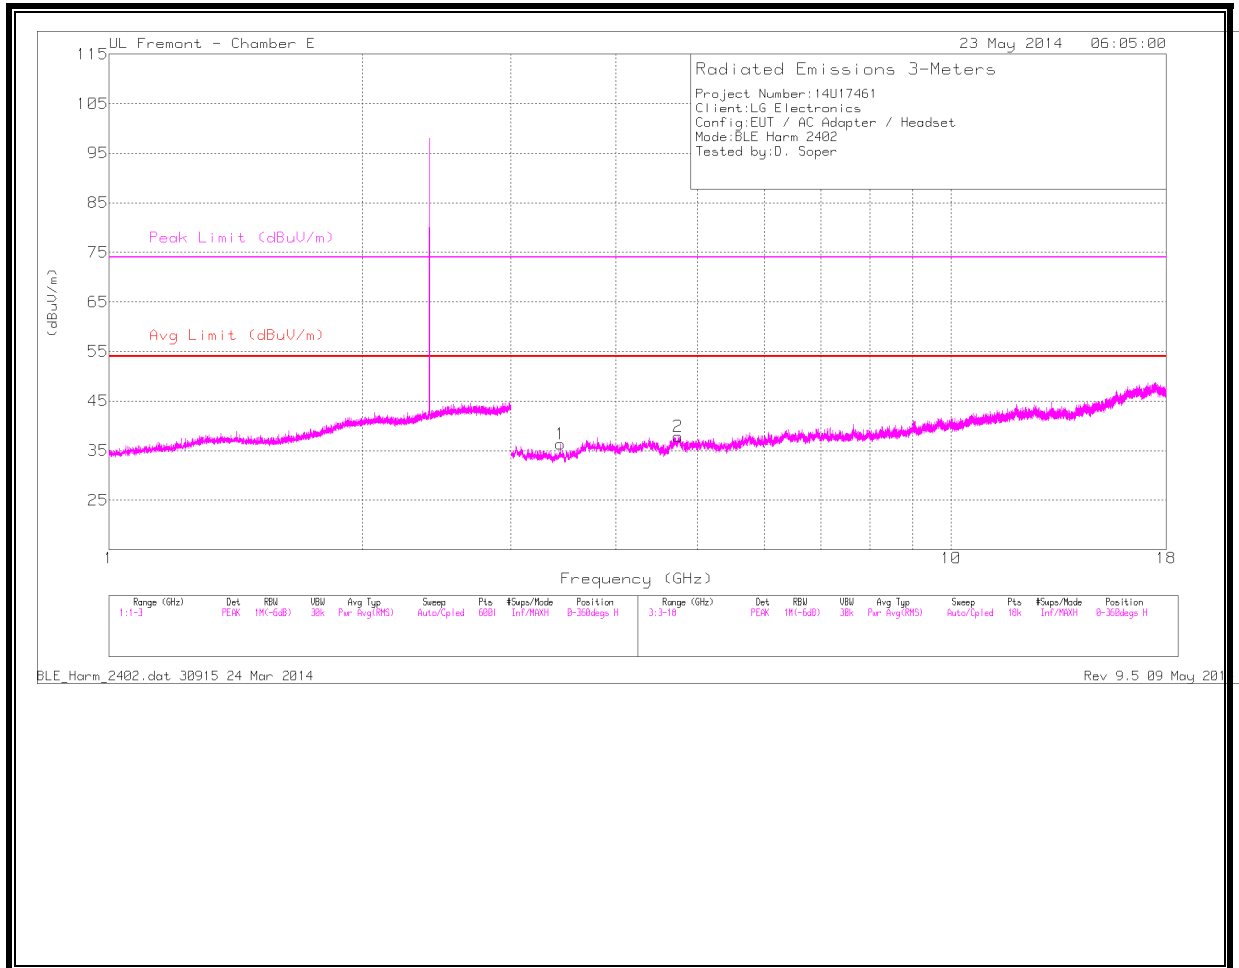

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



VERTICAL

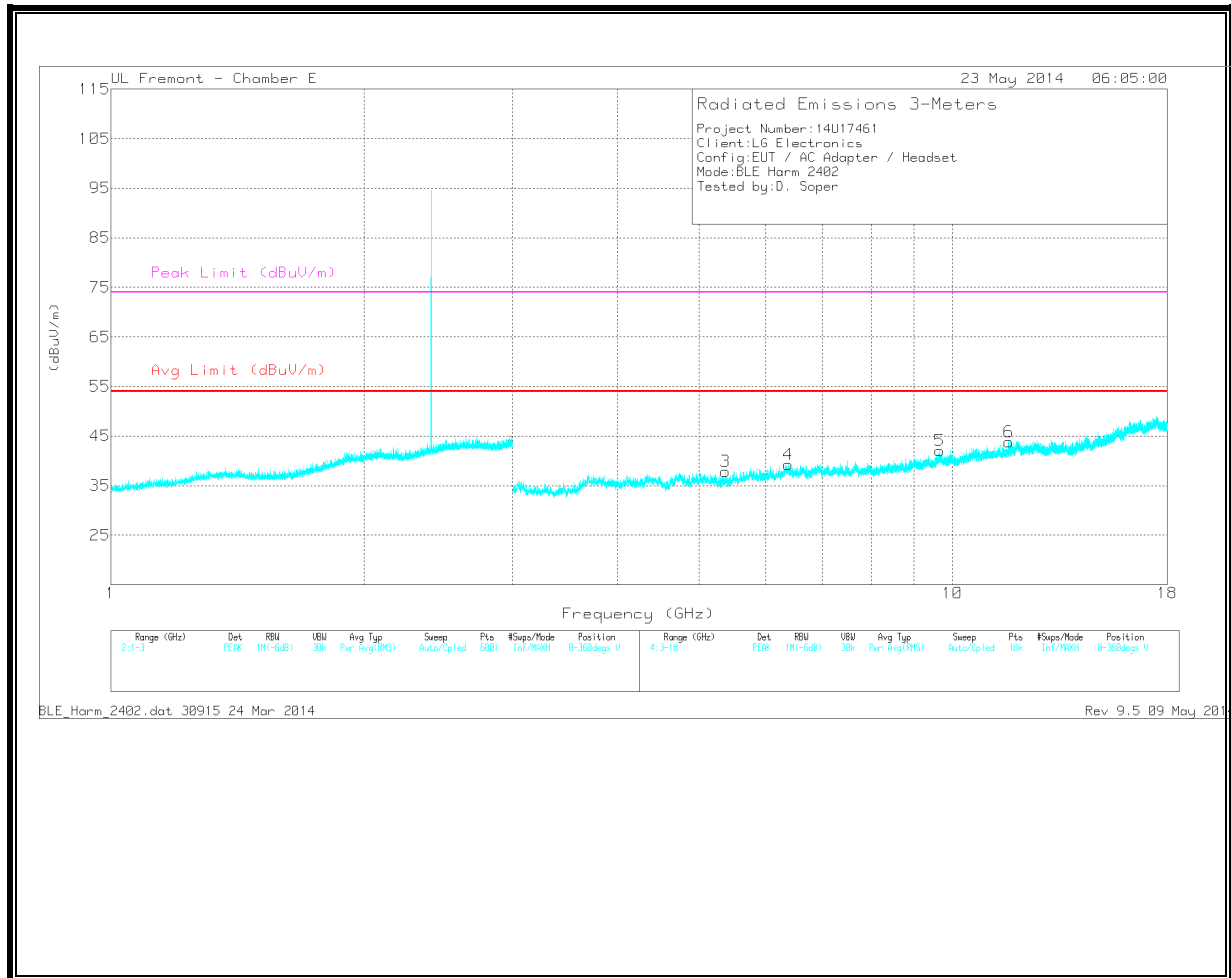

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA  
 Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.742	34.5	PK	34.1	-30.8	37.8	-	-	74	-36.2	0-360	200	H
3	* 5.376	33.32	PK	34.5	-30	37.82	-	-	74	-36.18	0-360	101	V
6	* 11.672	29.19	PK	38.3	-23.7	43.79	-	-	74	-30.21	0-360	101	V
1	3.436	34.43	PK	32.7	-30.8	36.33	-	-	-	-	0-360	101	H
4	6.376	31.45	PK	35.6	-27.8	39.25	-	-	-	-	0-360	200	V
5	9.657	28.98	PK	37.1	-24	42.08	-	-	-	-	0-360	101	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 5.376	40.68	PK2	34.5	-30	45.18	-	-	74	-28.82	360	101	V
* 5.377	29.8	MAv1	34.5	-30	34.3	54	-19.7	-	-	360	101	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average


MID CHANNEL

HORIZONTAL

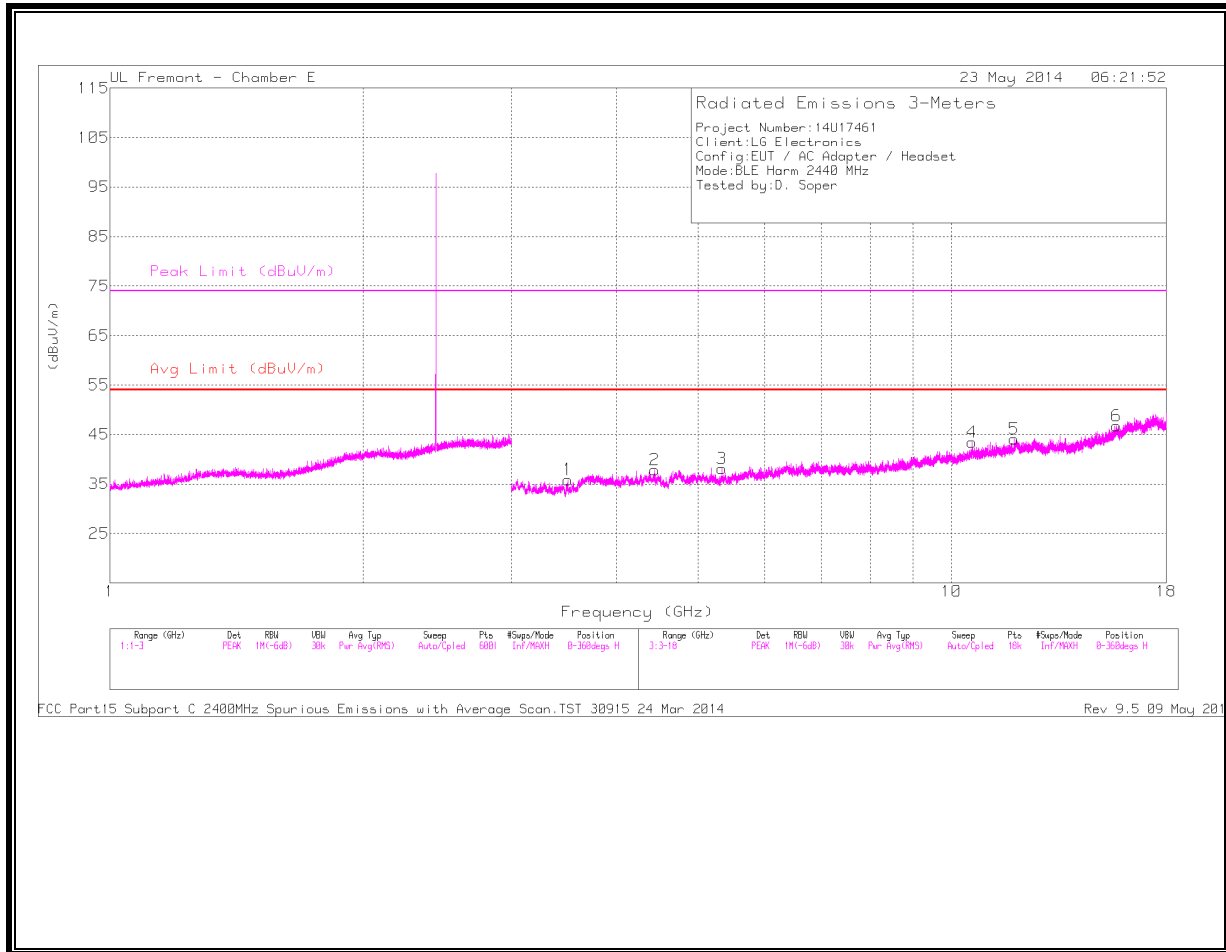

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

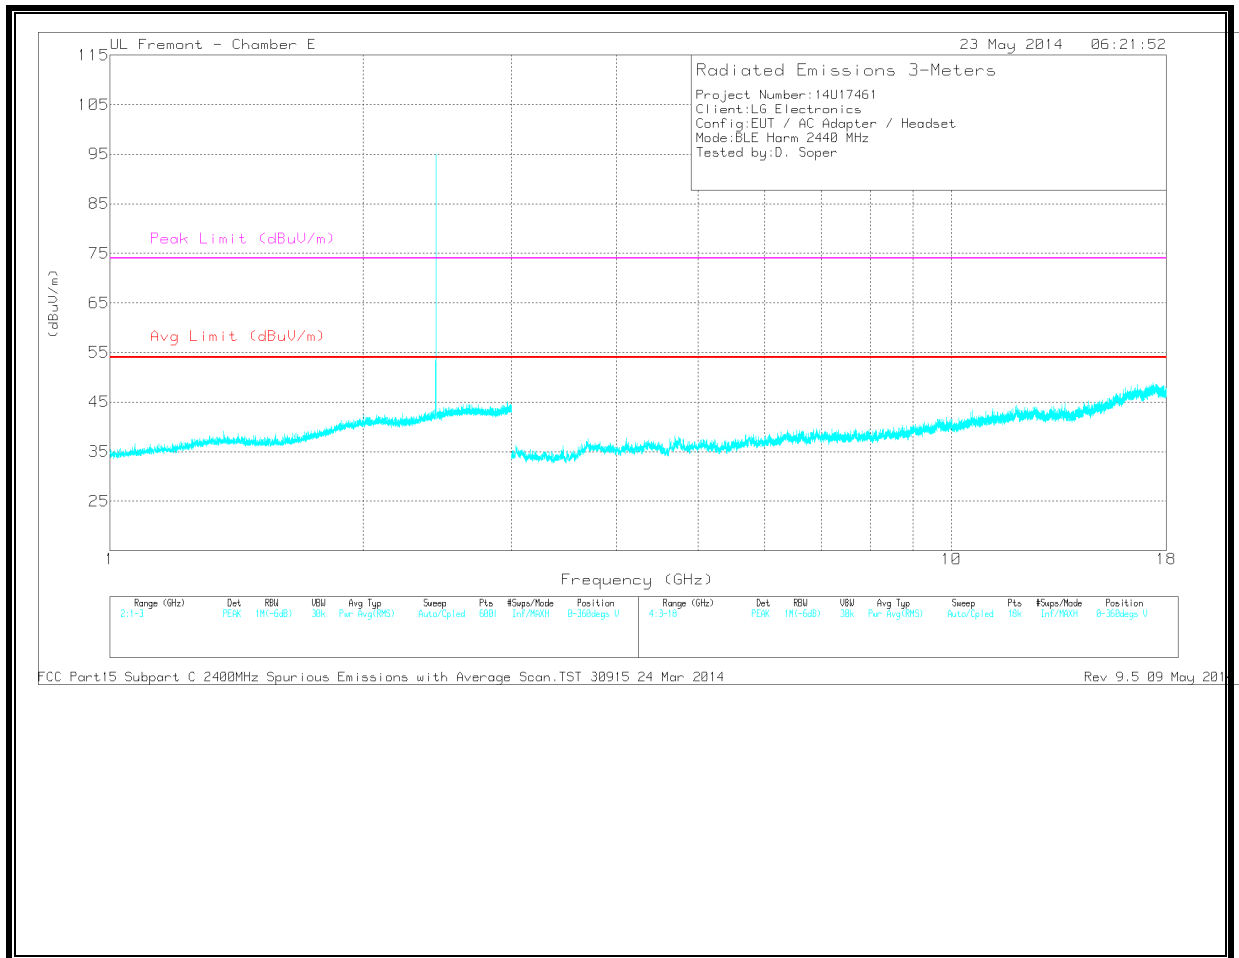

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.501	34.59	PK	33	-31.7	0	35.89	-	-	74	-38.11	0-360	101	H
5	* 11.869	29.42	PK	38.5	-23.8	0	44.12	-	-	74	-29.88	0-360	101	H
6	* 15.72	28.85	PK	40.4	-22.5	0	46.75	-	-	74	-27.25	0-360	200	H
2	4.441	34.93	PK	33.8	-30.9	0	37.83	-	-	-	-	0-360	101	H
3	5.336	33.72	PK	34.4	-30	0	38.12	-	-	-	-	0-360	101	H
4	10.585	28.89	PK	37.7	-23.1	0	43.49	-	-	-	-	0-360	101	H


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.501	42.24	PK2	33	-31.7	43.54	-	-	74	-30.46	360	101	H
* 3.501	30.94	MAV1	33	-31.7	34.24	54	-19.76	-	-	360	101	H


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK2 - KDB558074 Method: Maximum Peak  
 MAV1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL  
 HORIZONTAL

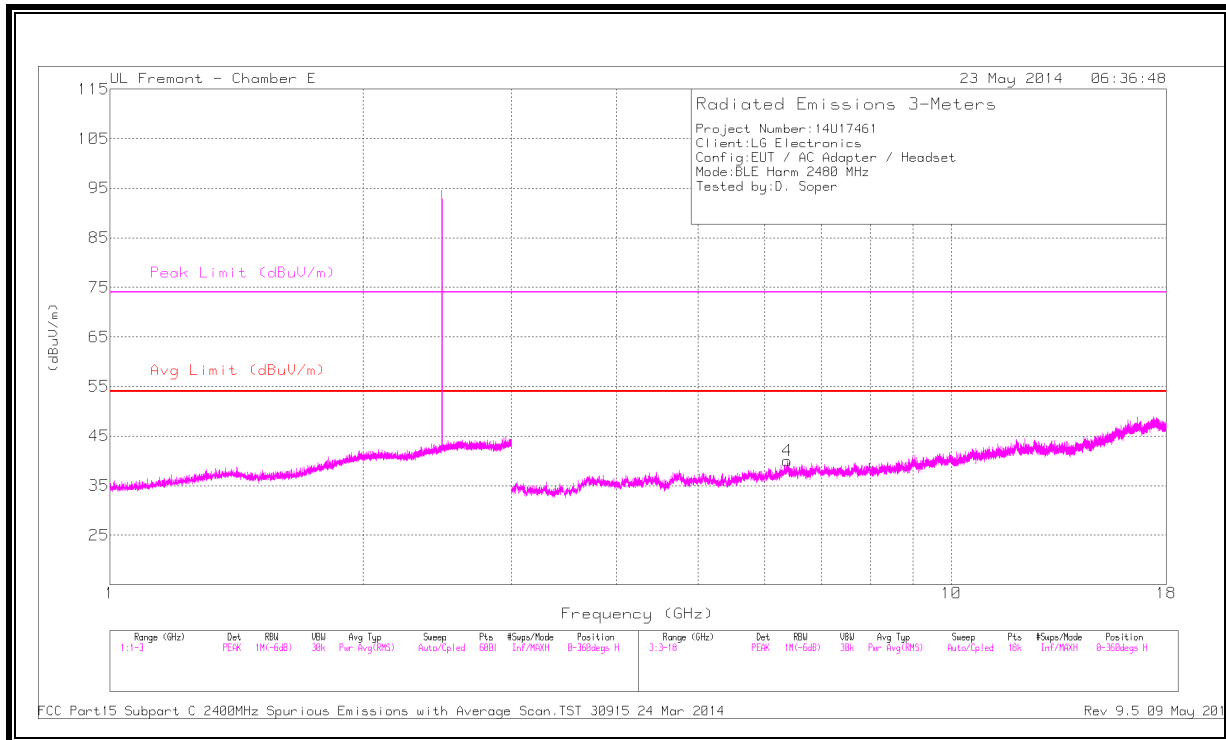

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

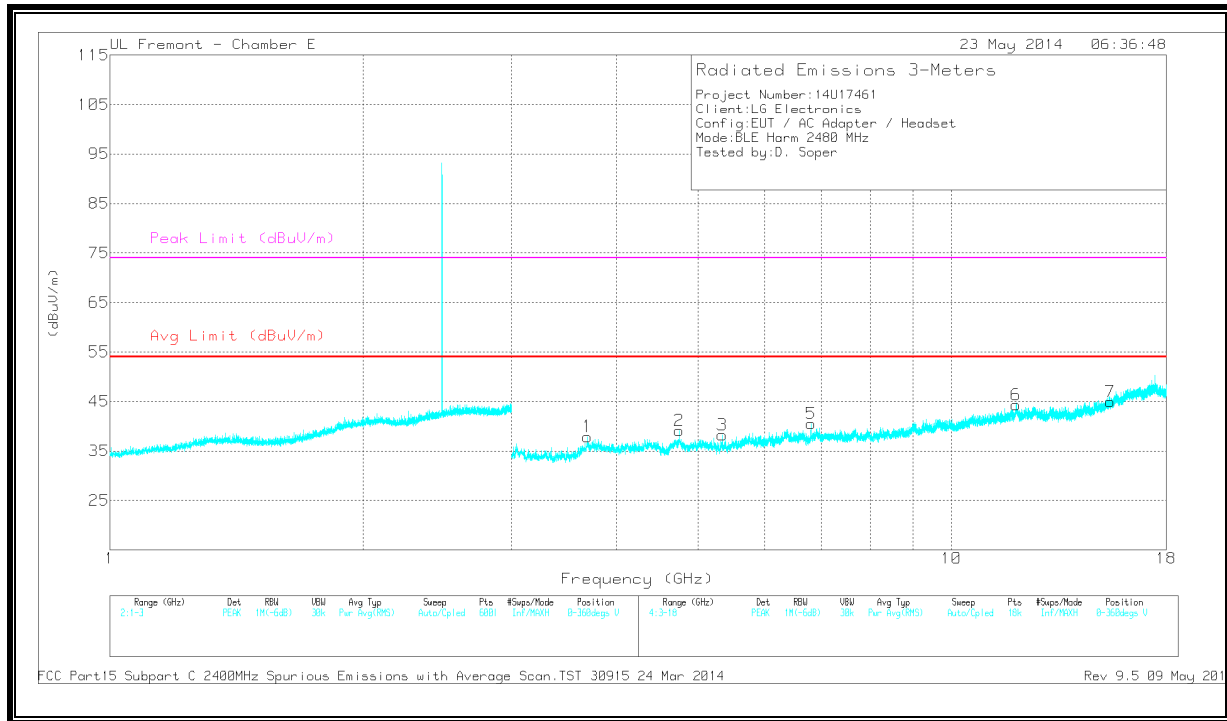

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.693	35.32	PK	33.3	-30.7	0	37.92	-	-	74	-36.08	0-360	101	V
2	* 4.746	35.8	PK	34.1	-30.8	0	39.1	-	-	74	-34.9	0-360	200	V
6	* 11.925	28.2	PK	38.6	-22.5	0	44.3	-	-	74	-29.7	0-360	200	V
7	* 15.441	28.11	PK	40.1	-23.2	0	45.01	-	-	74	-28.99	0-360	200	V
3	5.341	33.98	PK	34.4	-30.1	0	38.28	-	-	-	-	0-360	200	V
4	6.384	32.51	PK	35.6	-28.1	0	40.01	-	-	-	-	0-360	101	H
5	6.806	33.37	PK	35.9	-28.7	0	40.57	-	-	-	-	0-360	200	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T346 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.746	41.57	PK2	34.1	-30.8	44.87	-	-	74	-29.13	360	200	V
* 4.747	30.84	MAv1	34.1	-30.8	36.14	54	-17.86	-	-	360	200	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK2 - KDB558074 Method: Maximum Peak  
 MAv1 - KDB558074 Option 1 Maximum RMS Average



### 9.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

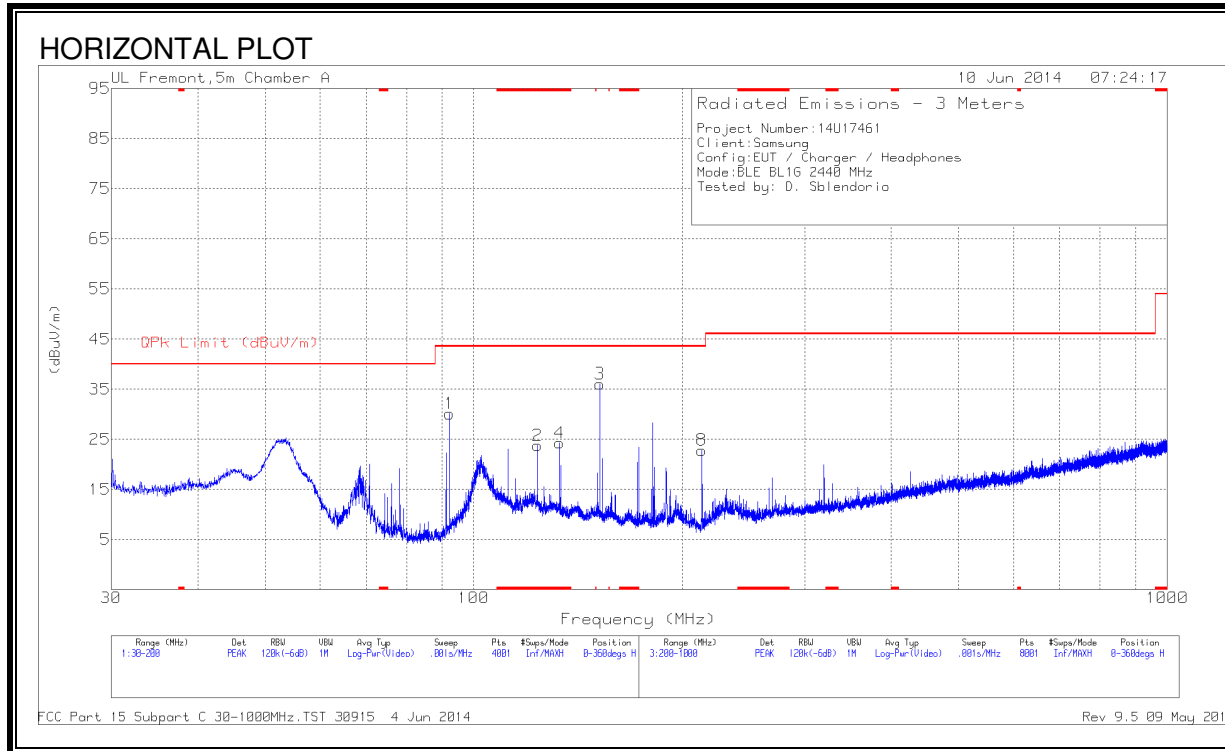

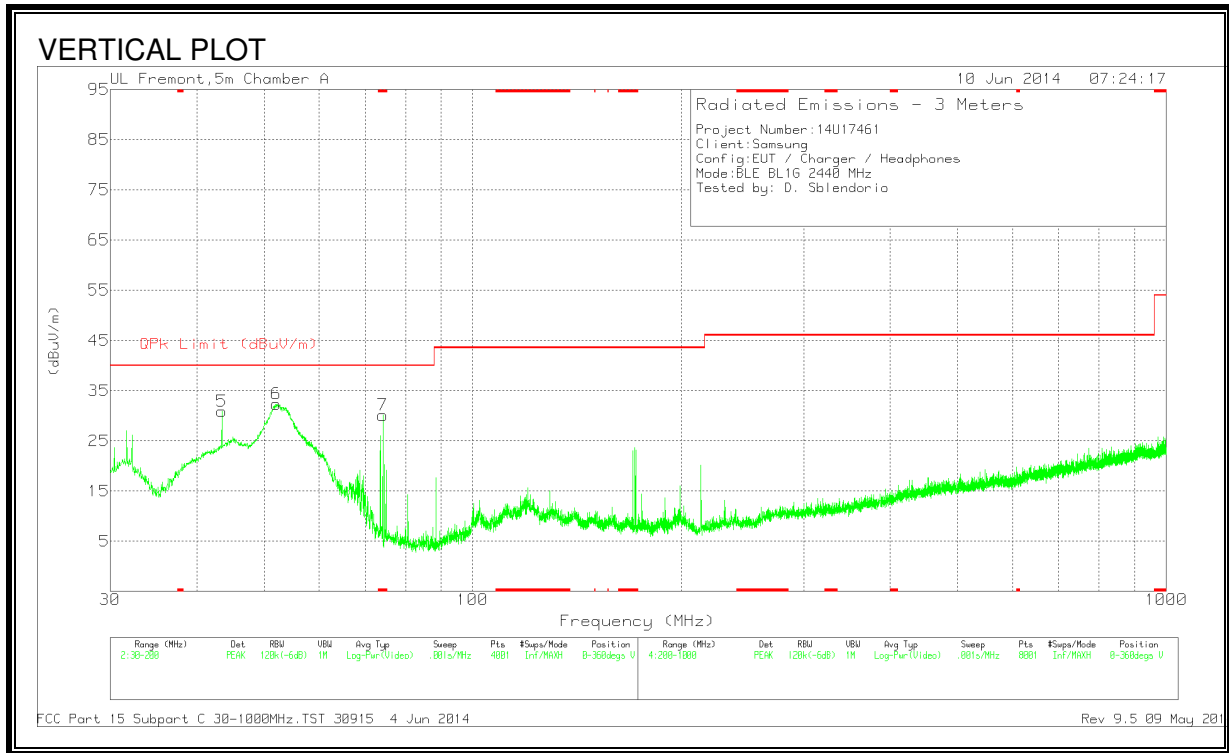

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T130 (dB/m)	Amp/Cbl (dB/m)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 123.67	39.96	PK	14	-30.2	23.76	43.52	-19.76	0-360	200	H
4	* 132.9775	40.88	PK	13.8	-30.4	24.28	43.52	-19.24	0-360	300	H
7	* 74.2	52.9	PK	8.1	-30.9	30.1	40	-9.9	0-360	101	V
5	43.4725	50.21	PK	11.7	-31	30.91	40	-9.09	0-360	101	V
6	52.1	55.64	PK	7.4	-30.7	32.34	40	-7.66	0-360	101	V
1	92.305	52.51	PK	8.2	-30.6	30.11	43.52	-13.41	0-360	400	H
3	151.9325	53.74	PK	12.5	-30.2	36.04	43.52	-7.48	0-360	400	H
8	213.3	42.03	PK	10.6	-29.8	22.83	43.52	-20.69	0-360	101	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band  
 PK - Peak detector