

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.407$ mho/m; $\epsilon_r = 40.381$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Left/Touch_1xRTT_RC3 SO55_ch 600/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.477 mW/g


Left/Touch_1xRTT_RC3 SO55_ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.735 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.6100

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.268 mW/g.

Maximum value of SAR (measured) = 0.484 mW/g

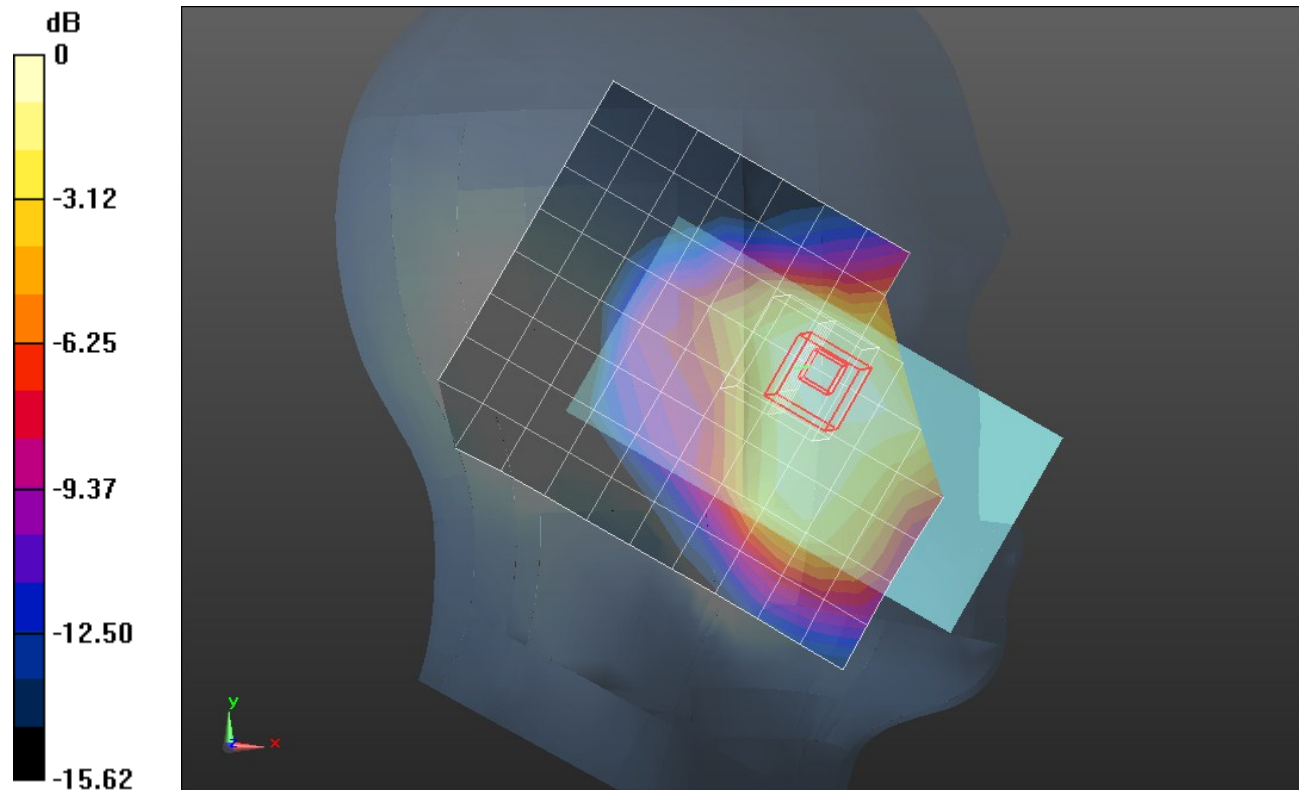

0 dB = 0.480mW/g = -6.38 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.407 \text{ mho/m}$; $\epsilon_r = 40.381$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Left/Tilt_1xRTT_RC3 SO55_ch 600/Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.187 mW/g


Left/Tilt_1xRTT_RC3 SO55_ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.539 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.2560

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.100 mW/g

Maximum value of SAR (measured) = 0.203 mW/g

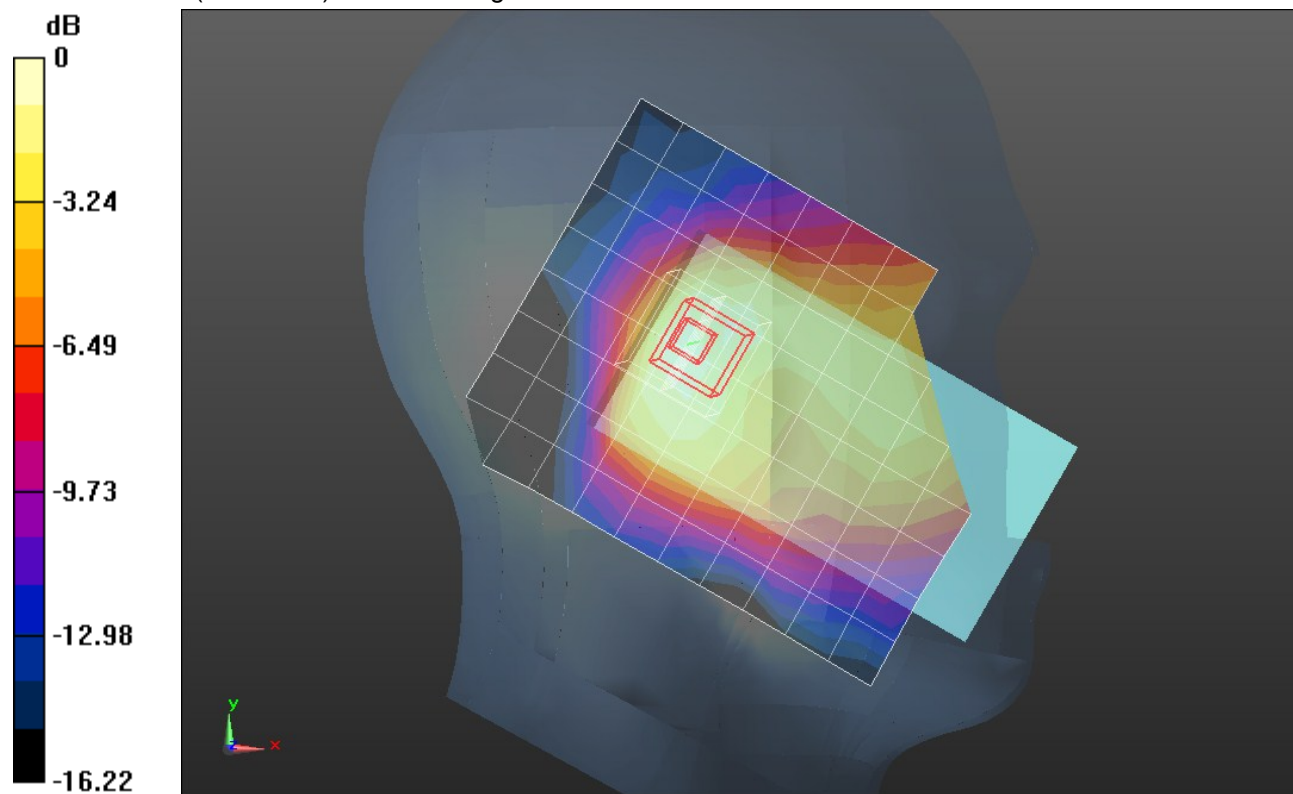

0 dB = 0.200mW/g = -13.98 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.378$ mho/m; $\epsilon_r = 40.482$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Right/Touch_1xRTT_RC3 SO55_ch 25/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.852 mW/g

Right/Touch_1xRTT_RC3 SO55_ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.031 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.1750

SAR(1 g) = 0.758 mW/g; SAR(10 g) = 0.471 mW/g

SAR(1 g) = 0.758 mW/g; SAR(10 g) = 0.471 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.925 mW/g

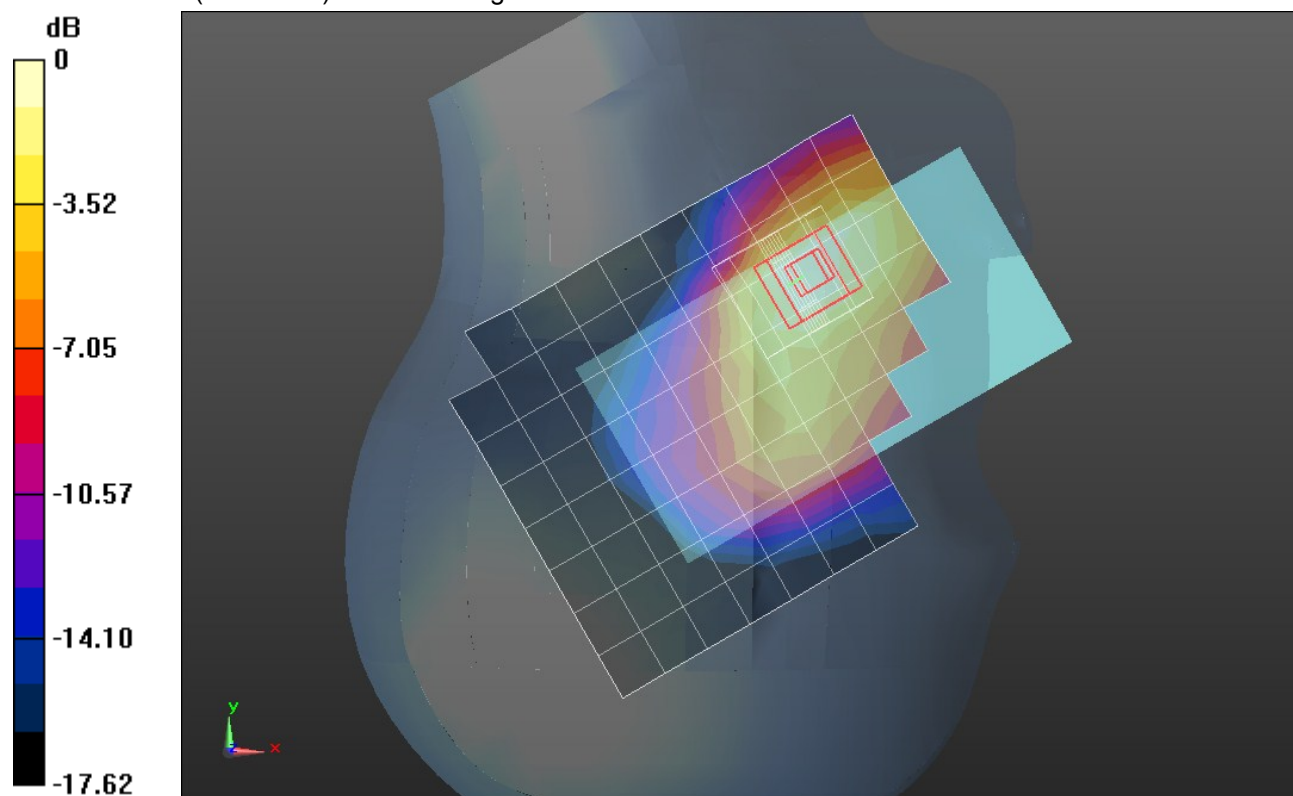

0 dB = 0.930mW/g = -0.63 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.407 \text{ mho/m}$; $\epsilon_r = 40.381$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Right/Touch_1xRTT_RC3 SO55_ch 600/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.848 mW/g


Right/Touch_1xRTT_RC3 SO55_ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.850 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.2750

SAR(1 g) = 0.813 mW/g; SAR(10 g) = 0.499 mW/g

Maximum value of SAR (measured) = 1.001 mW/g

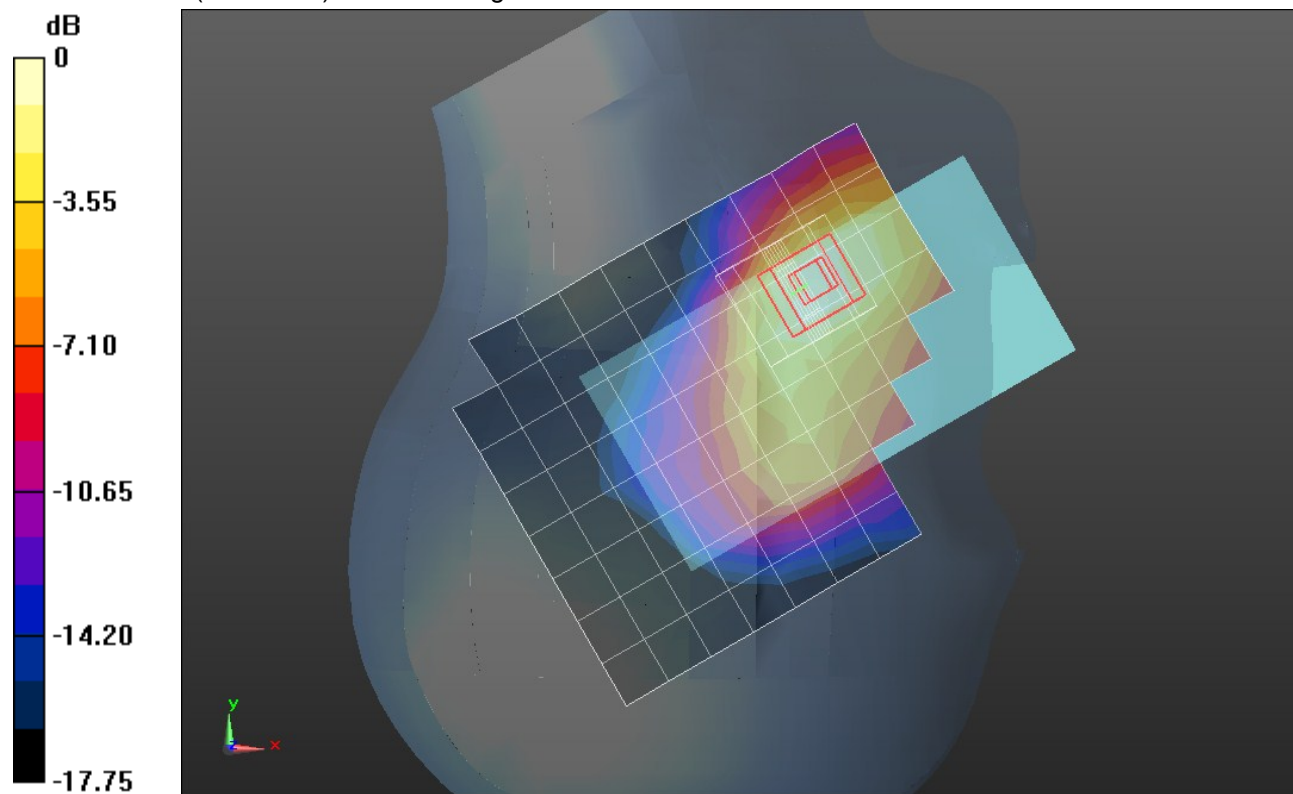


0 dB = 1.000mW/g = 0 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

Right/Touch_1xRTT_RC3 SO55_ch 600/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.907 mW/g

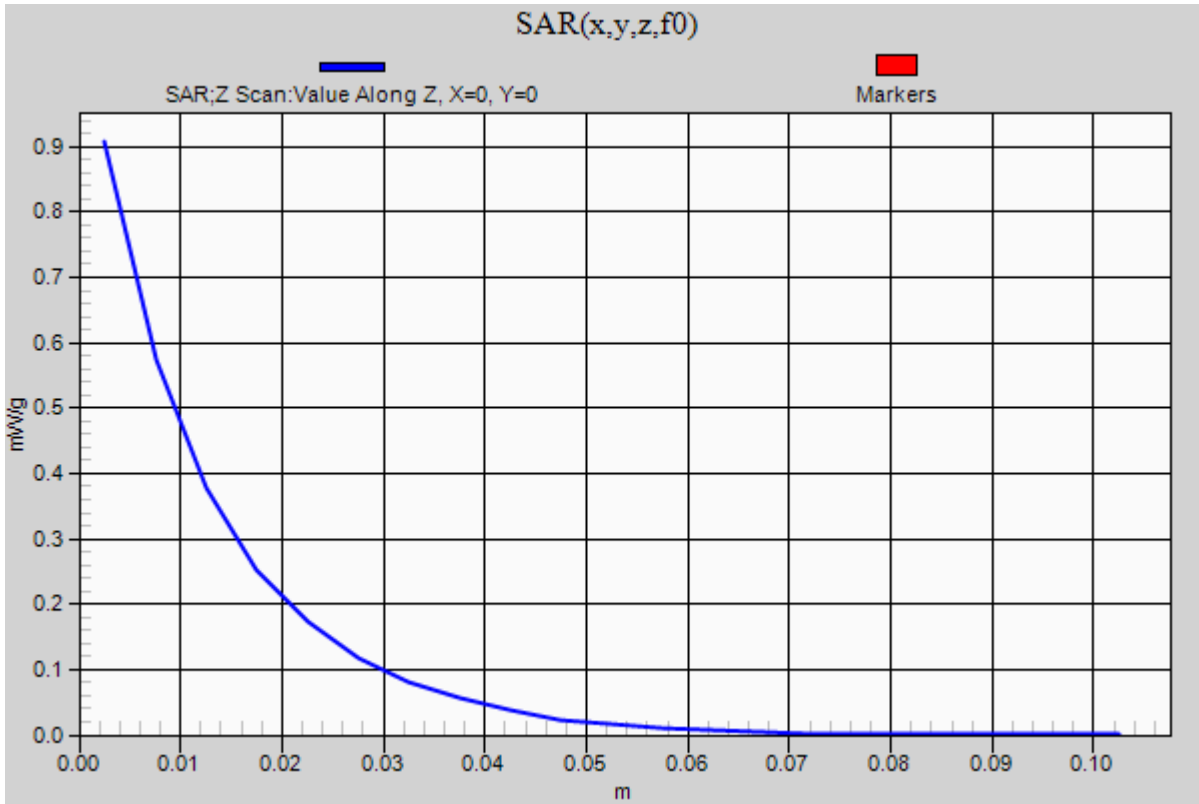

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.407$ mho/m; $\epsilon_r = 40.381$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Right/Touch_1xRTT_RC3 SO55_ch 600_w/Wireless Charging Cover/Area Scan (9x11x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.920 mW/g

Right/Touch_1xRTT_RC3 SO55_ch 600_w/Wireless Charging Cover/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.205 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.2100

SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.478 mW/g

Maximum value of SAR (measured) = 0.951 mW/g

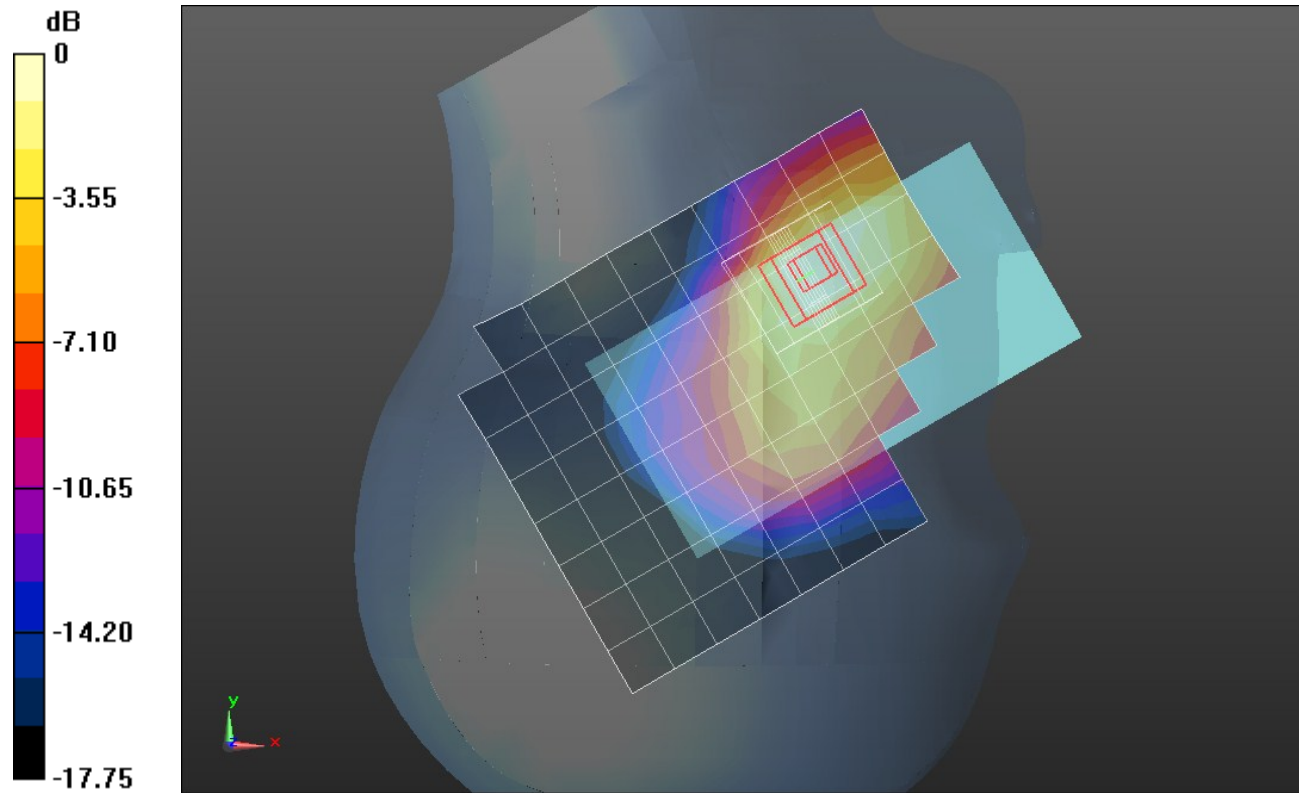

0 dB = 0.950mW/g = -0.45 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.436$ mho/m; $\epsilon_r = 40.283$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Right/Touch_1xRTT_RC3 SO55_ch 1175/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.784 mW/g

Right/Touch_1xRTT_RC3 SO55_ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.447 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.1210

SAR(1 g) = 0.702 mW/g; SAR(10 g) = 0.427 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.874 mW/g

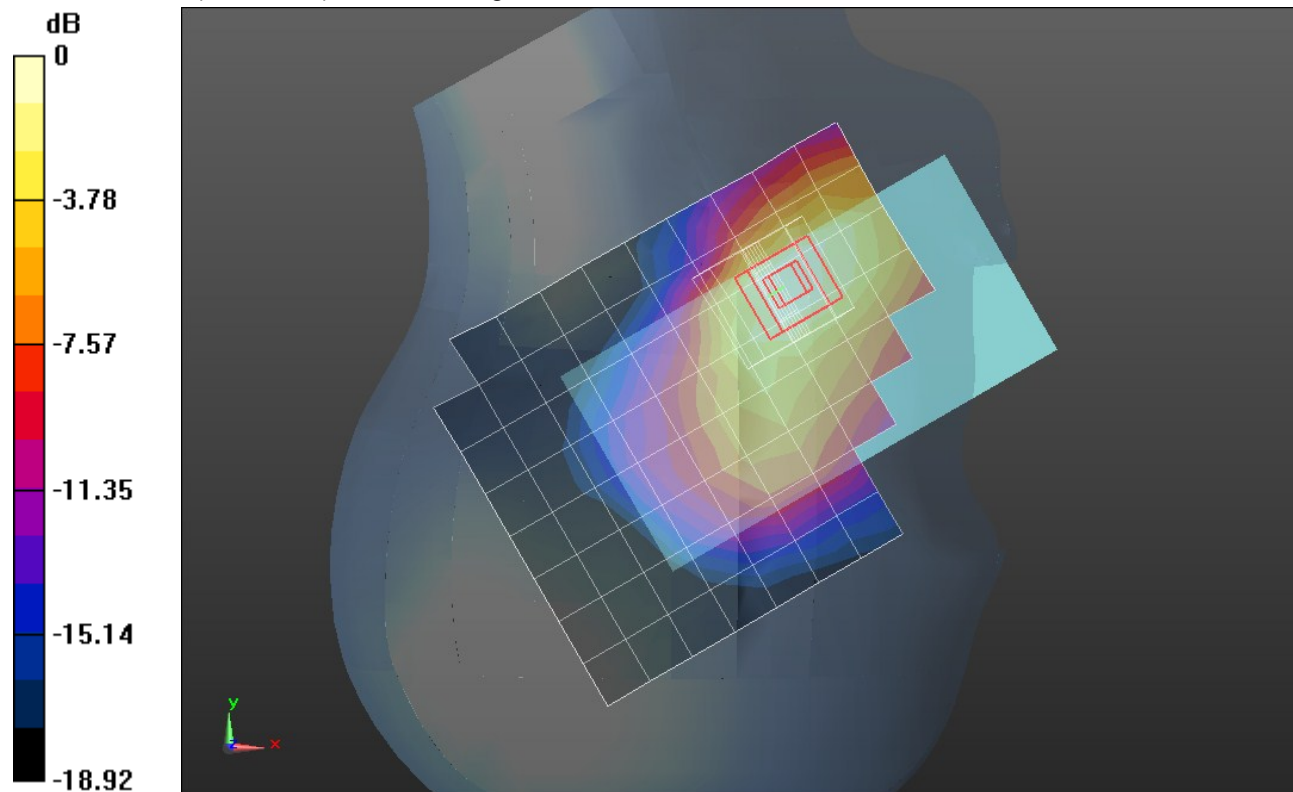

0 dB = 0.870mW/g = -1.21 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.407$ mho/m; $\epsilon_r = 40.381$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Right/Tilt_1xRTT_RC3 SO55_ch 600/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.262 mW/g


Right/Tilt_1xRTT_RC3 SO55_ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.914 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.3330

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.143 mW/g

Maximum value of SAR (measured) = 0.260 mW/g

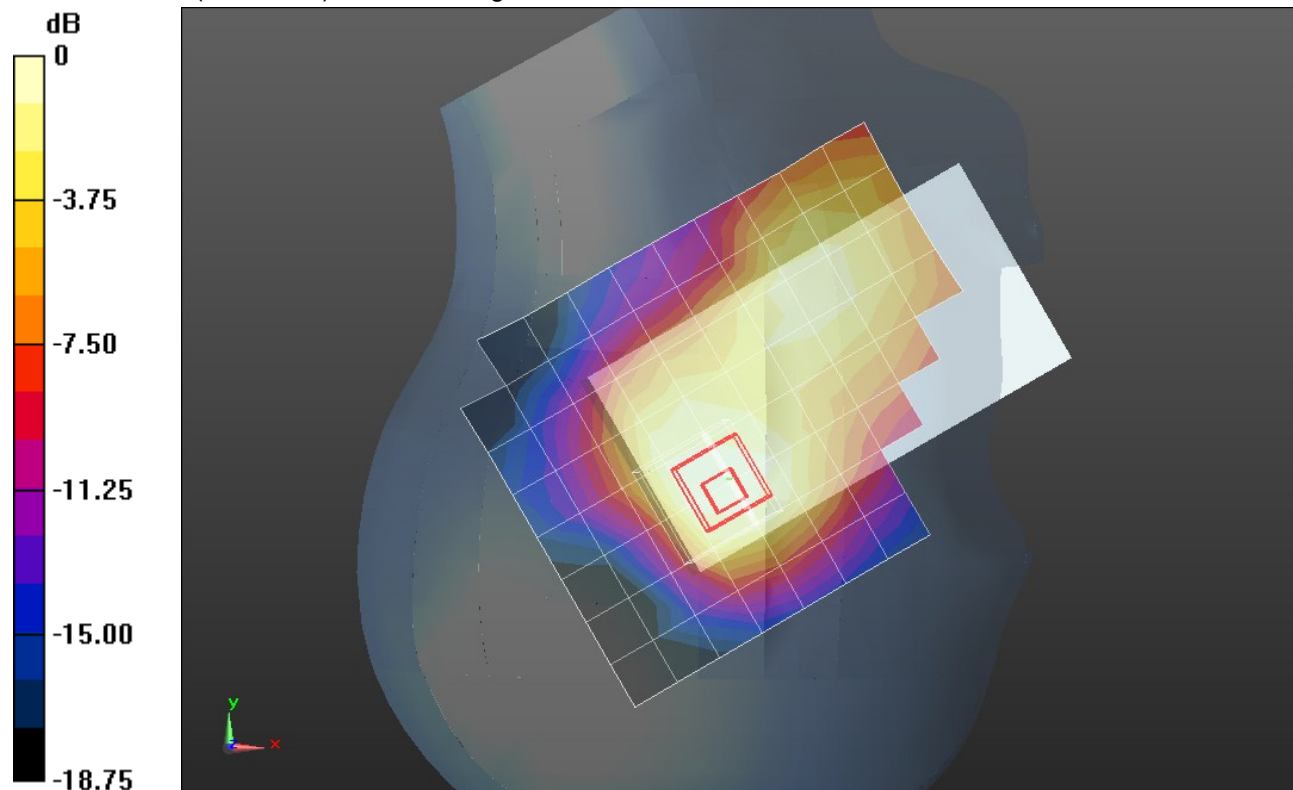

0 dB = 0.260mW/g = -11.70 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.407 \text{ mho/m}$; $\epsilon_r = 40.381$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Left/Touch_1xEVDO_Rel. 0_ch 600/Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 0.608 mW/g


Left/Touch_1xEVDO_Rel. 0_ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$,
 $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.914 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.8860

SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.350 mW/g

Maximum value of SAR (measured) = 0.682 mW/g

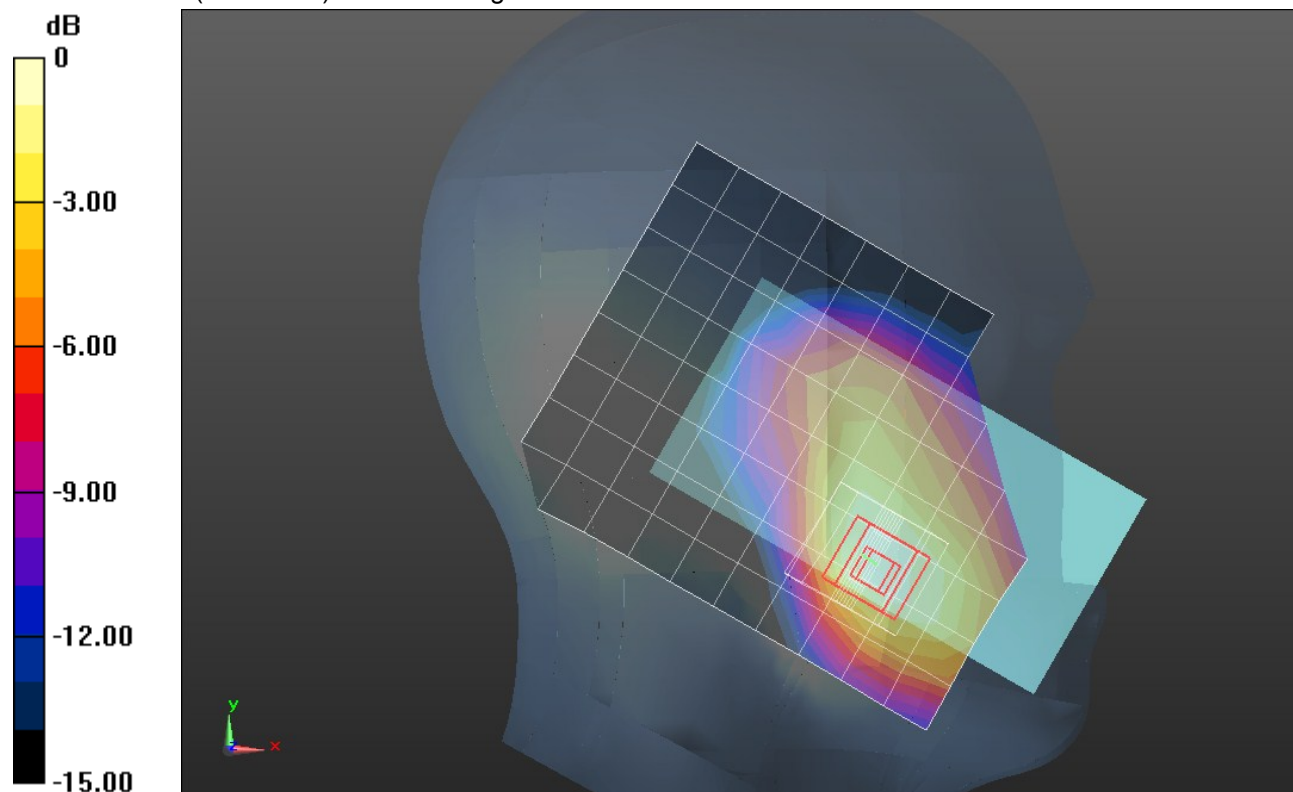


0 dB = 0.680mW/g = -3.35 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

Left/Touch_1xEVDO_Rel. 0_ch 600/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.662 mW/g

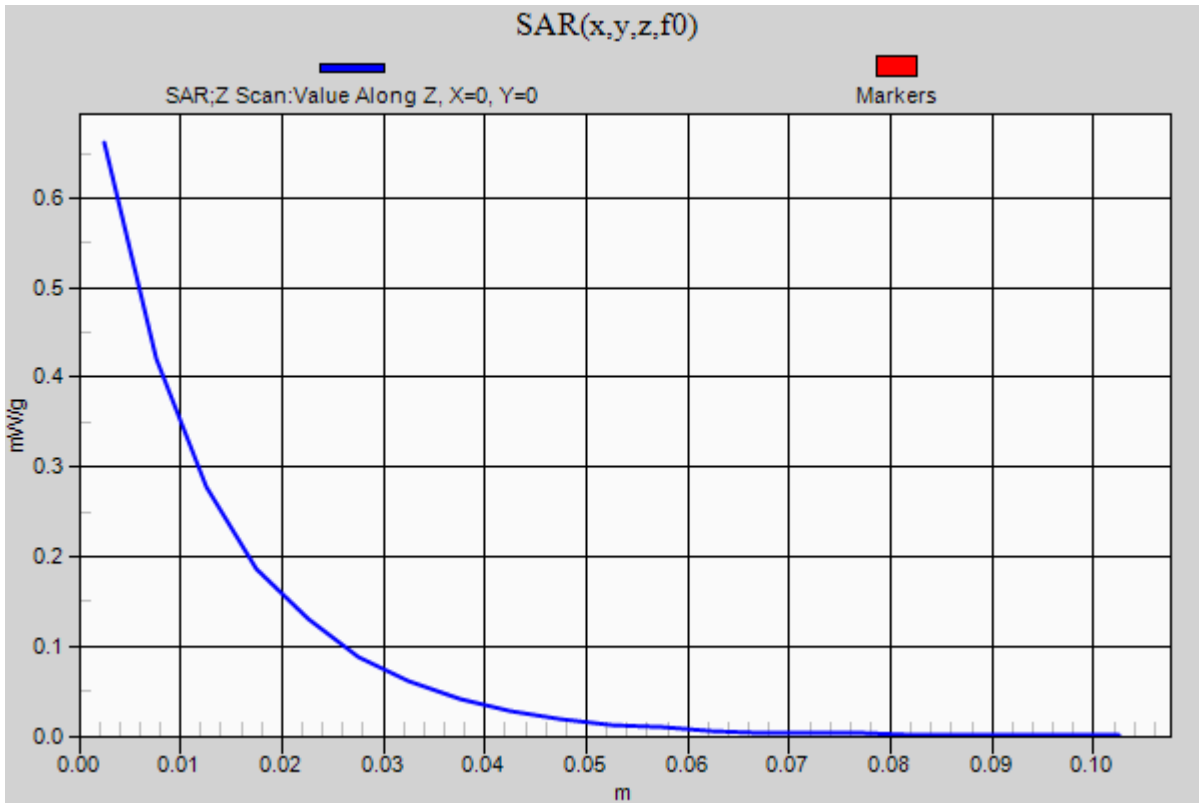

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.407 \text{ mho/m}$; $\epsilon_r = 40.381$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Left/Touch_1xEVDO_Rel. 0_ch 600_w/Wireless Charging Cover/Area Scan (9x11x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.568 mW/g

Left/Touch_1xEVDO_Rel. 0_ch 600_w/Wireless Charging Cover/Zoom Scan


(5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.024 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.7180

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.293 mW/g

Maximum value of SAR (measured) = 0.564 mW/g

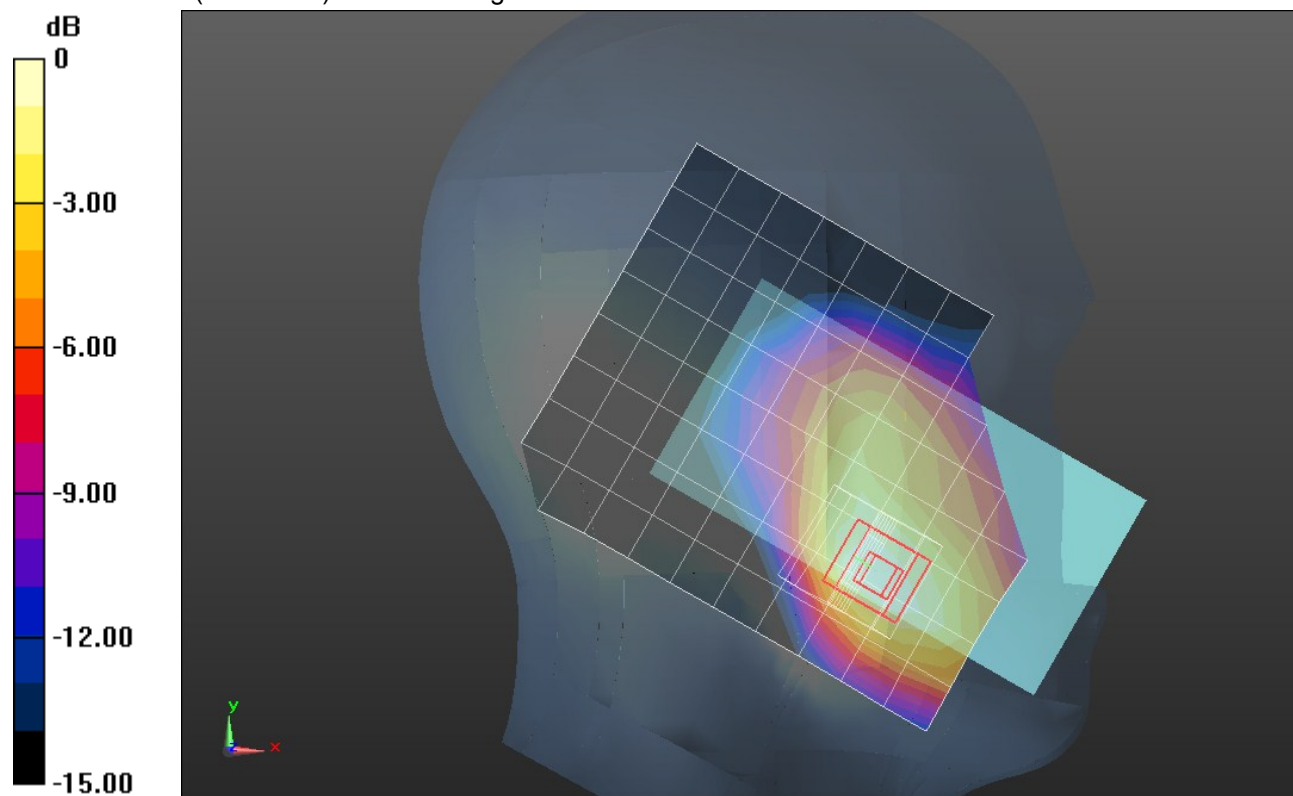

0 dB = 0.560mW/g = -5.04 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.407$ mho/m; $\epsilon_r = 40.381$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011

- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Left/Tilt_1xEVDO_Rel. 0_ch 600/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.216 mW/g


Left/Tilt_1xEVDO_Rel. 0_ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.305 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.2930

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.116 mW/g

Maximum value of SAR (measured) = 0.213 mW/g

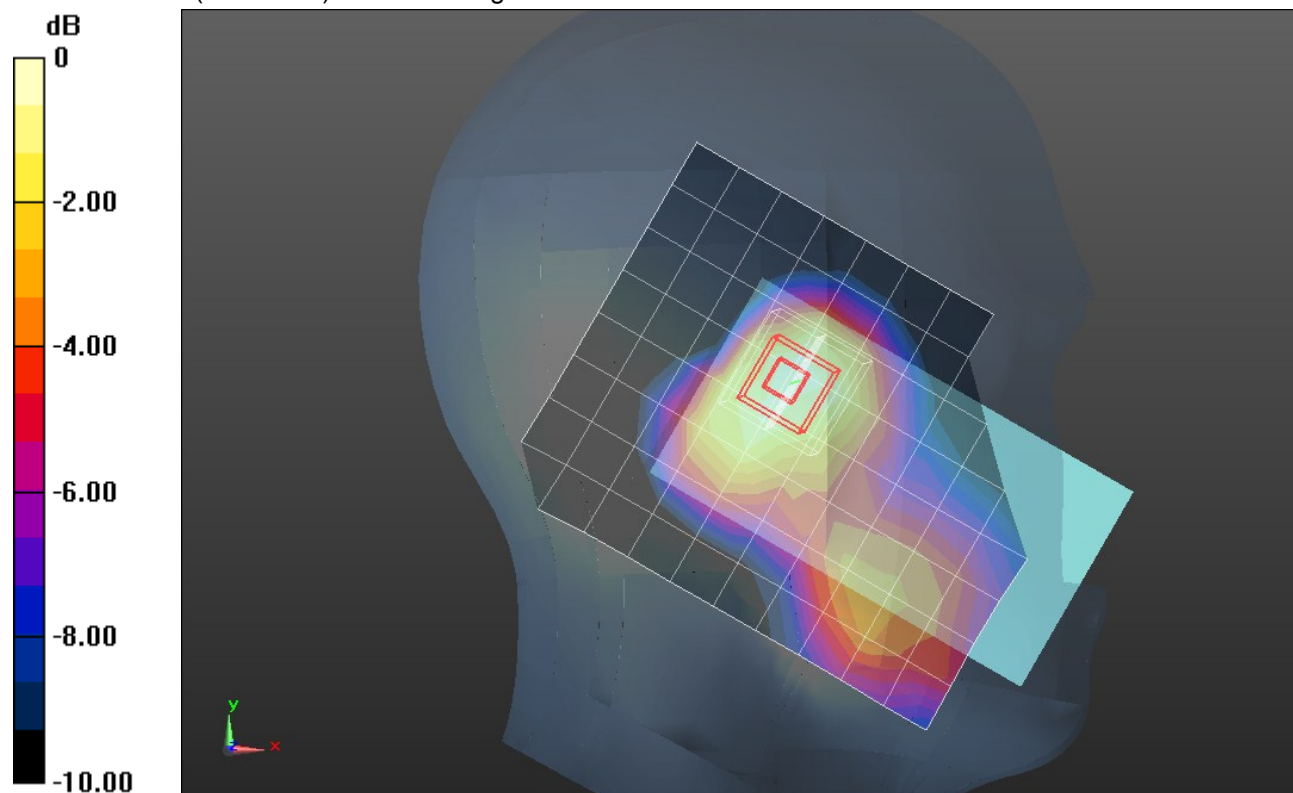

0 dB = 0.210mW/g = -13.56 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.407$ mho/m; $\epsilon_r = 40.381$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Right/Touch_1xEVDO_Rel. 0_ch 600/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.264 mW/g


Right/Touch_1xEVDO_Rel. 0_ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.001 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.3580

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.155 mW/g

Maximum value of SAR (measured) = 0.285 mW/g

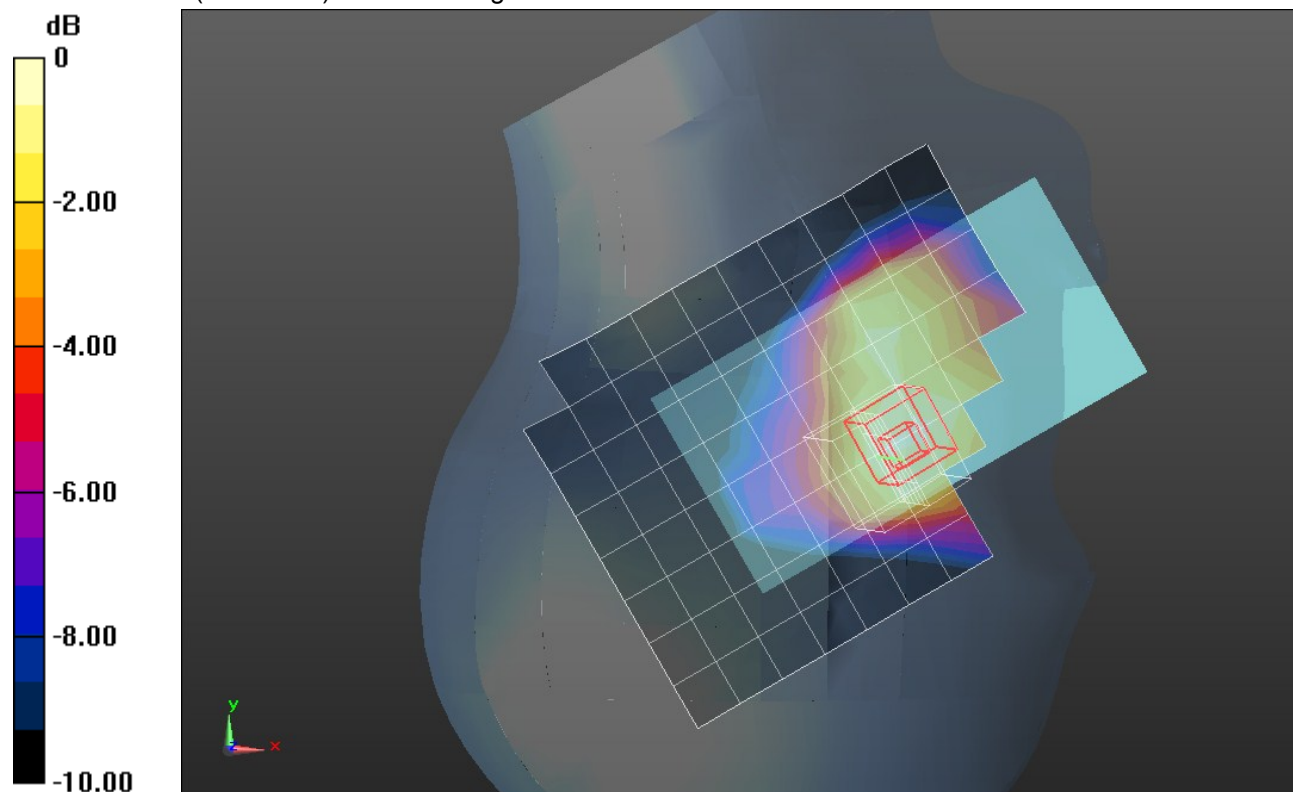

0 dB = 0.290mW/g = -10.75 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.407$ mho/m; $\epsilon_r = 40.381$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(7.33, 7.33, 7.33); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM; Type: QD000P40CD; Serial: 1632

Right/Tilt_1xEVDO_Rel. 0_ch 600/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.135 mW/g


Right/Tilt_1xEVDO_Rel. 0_ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.845 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.1870

SAR(1 g) = 0.119 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.148 mW/g

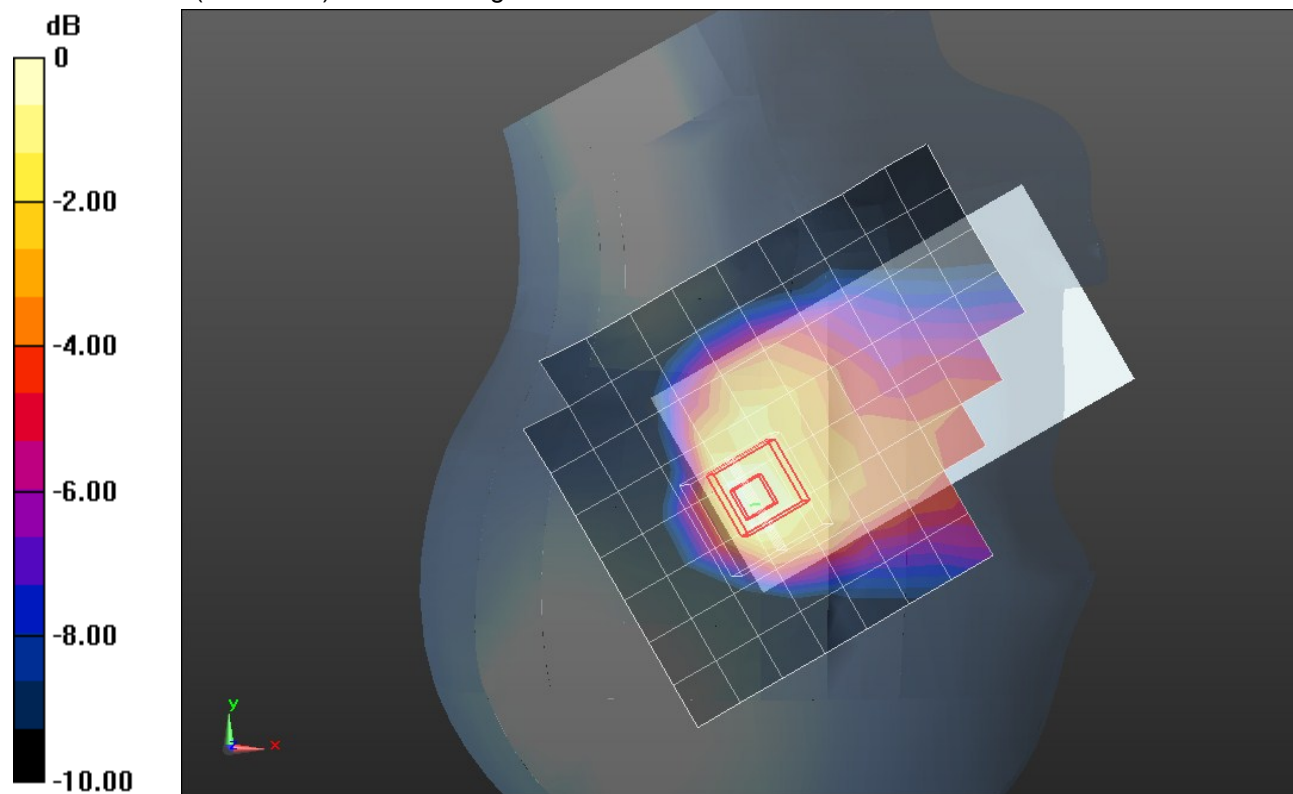

0 dB = 0.150mW/g = -16.48 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.134$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xRTT_RC3_SO32_Ch 25/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.185 mW/g

Rear/1xRTT_RC3_SO32_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.981 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.6170

SAR(1 g) = 0.976 mW/g; SAR(10 g) = 0.576 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.237 mW/g

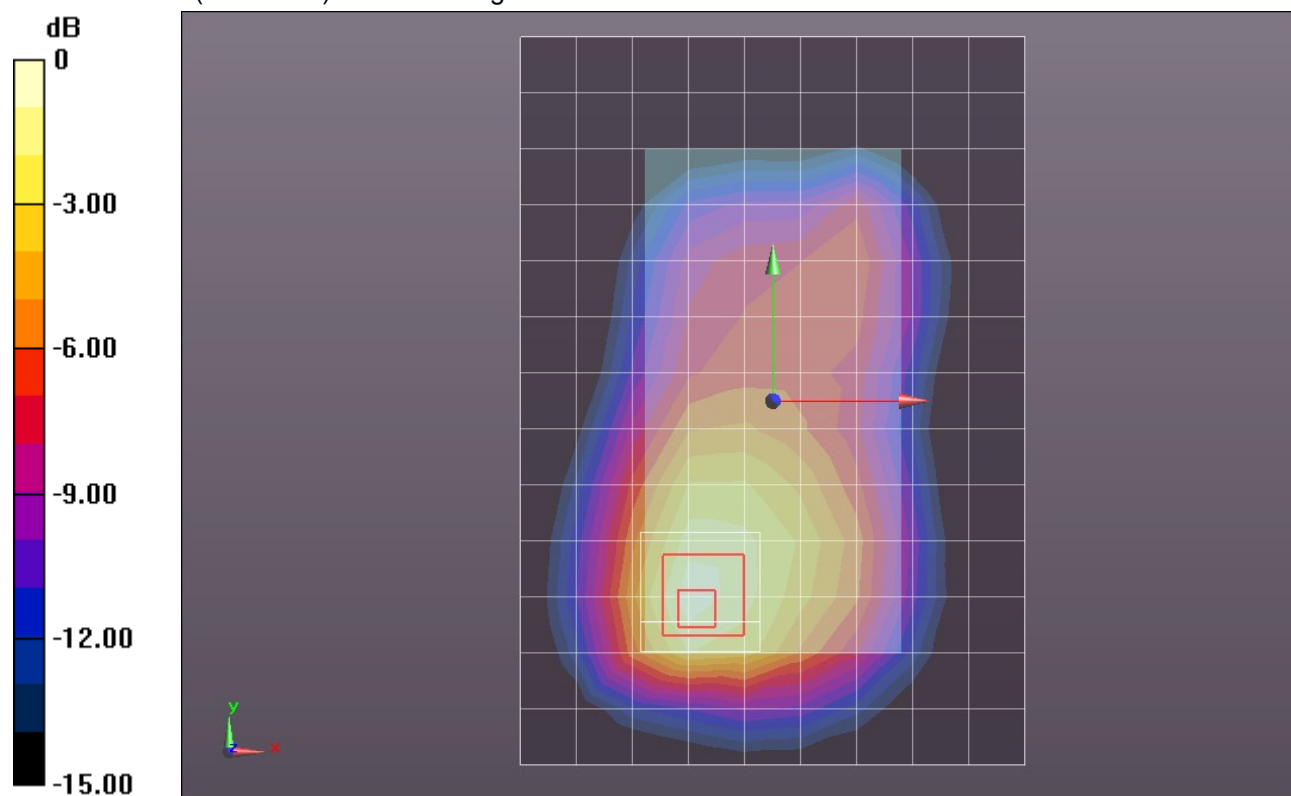

0 dB = 1.240mW/g = 1.87 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1851.25 \text{ MHz}$; $\sigma = 1.45 \text{ mho/m}$; $\epsilon_r = 51.134$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xRTT_RC3_SO32_Ch 25_w/Headset/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.251 mW/g

Rear/1xRTT_RC3_SO32_Ch 25_w/Headset/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=8mm, dy=8mm, dz=5mm


Reference Value = 29.794 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.7520

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.602 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.315 mW/g

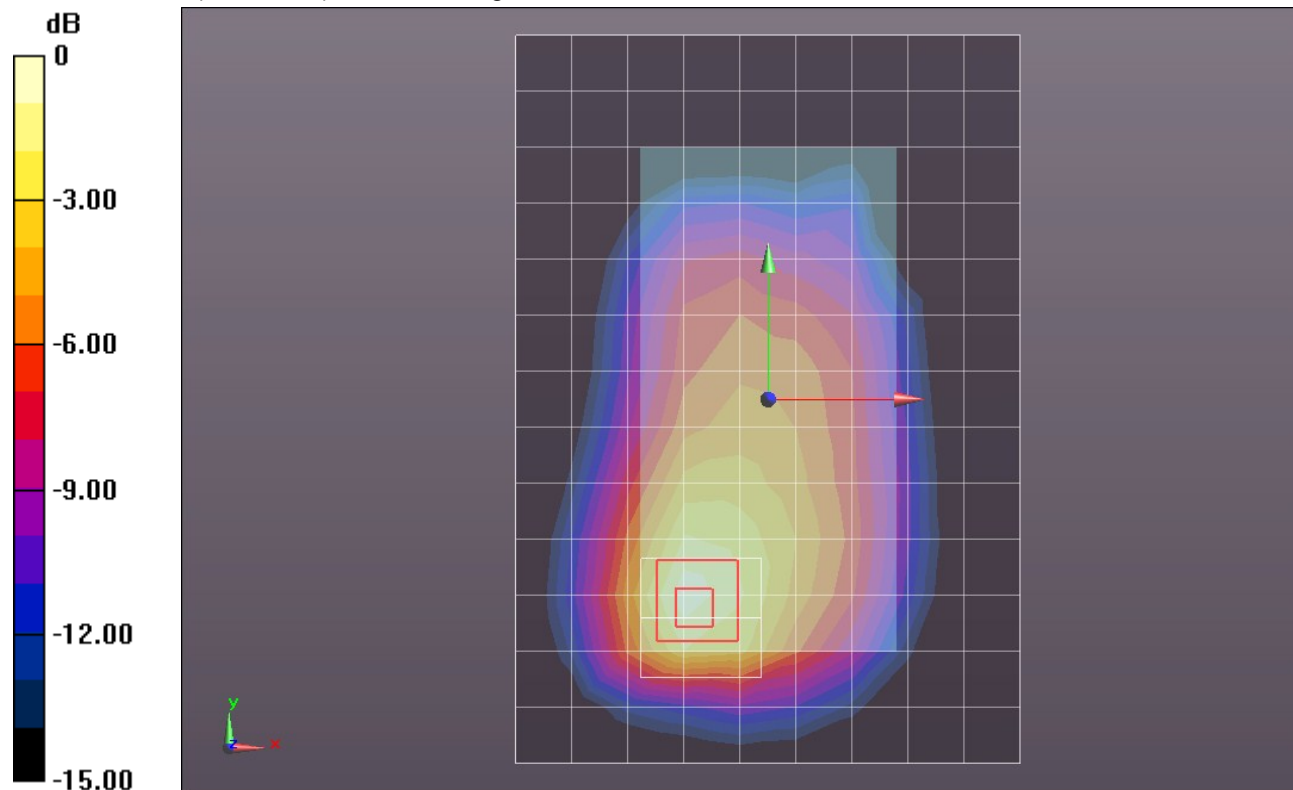

0 dB = 1.320mW/g = 2.41 dB mW/g


CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1

Rear/1xRTT_RC3_SO32_Ch 25_w/Headset/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.263 mW/g

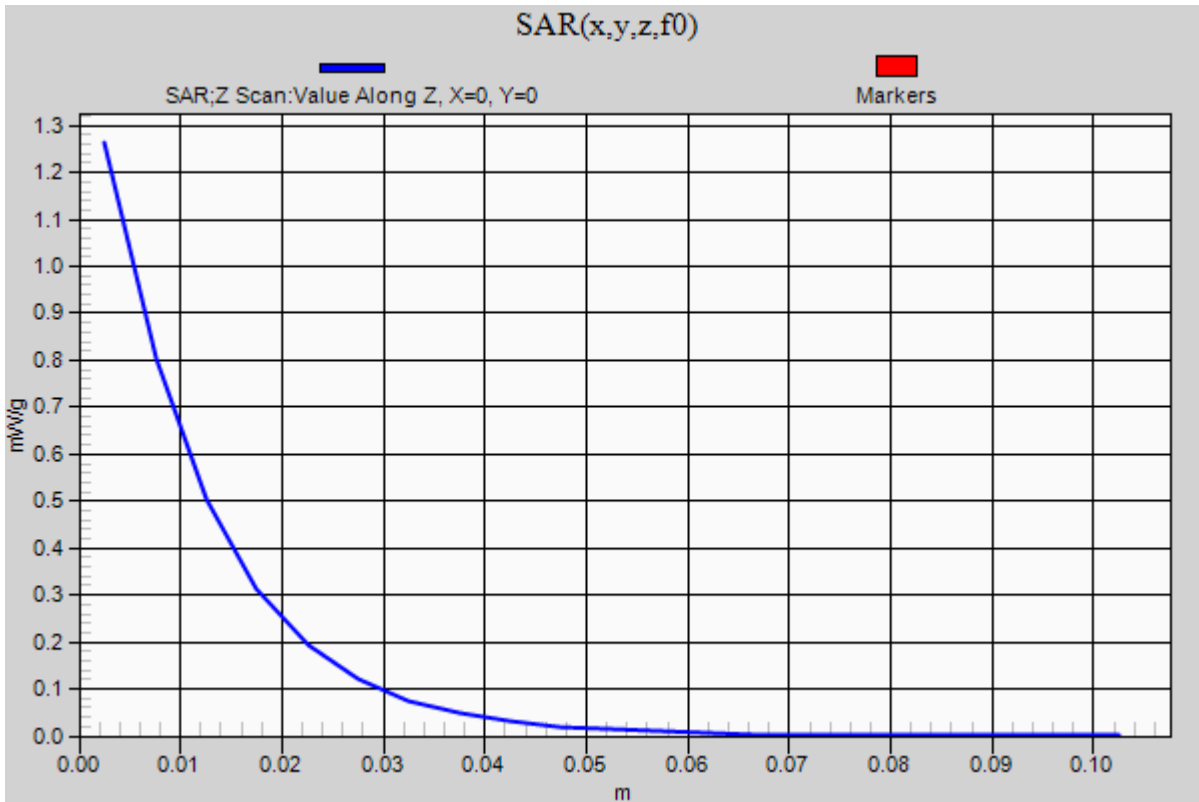

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.134$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xRTT_RC3_SO32_Ch 25_w/Wireless Charging Cover/Area Scan (10x14x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.115 mW/g

Rear/1xRTT_RC3_SO32_Ch 25_w/Wireless Charging Cover/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 28.304 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.5710

SAR(1 g) = 0.938 mW/g; SAR(10 g) = 0.554 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.185 mW/g

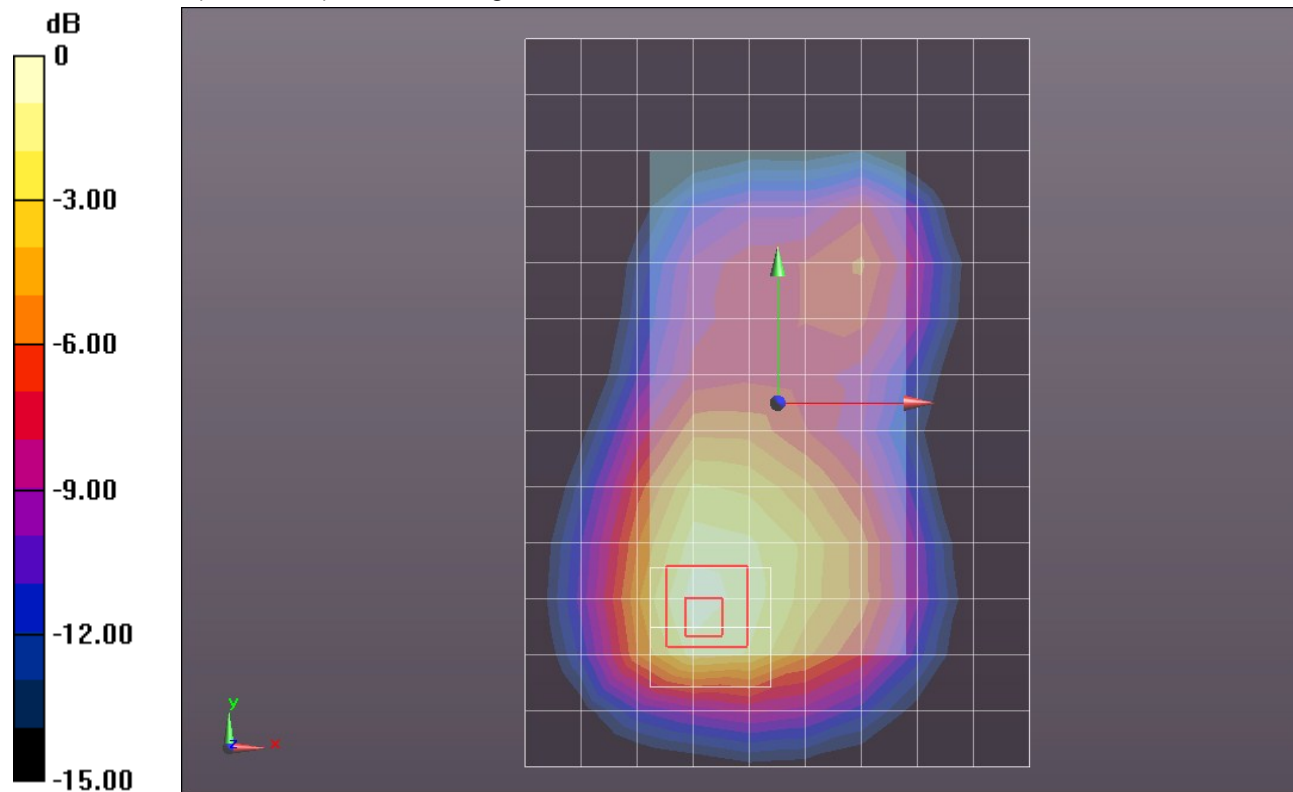

0 dB = 1.190mW/g = 1.51 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.482$ mho/m; $\epsilon_r = 51.046$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xRTT_RC3_SO32_Ch 600/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.169 mW/g


Rear/1xRTT_RC3_SO32_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.526 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.6290

SAR(1 g) = 0.968 mW/g; SAR(10 g) = 0.571 mW/g

Maximum value of SAR (measured) = 1.235 mW/g

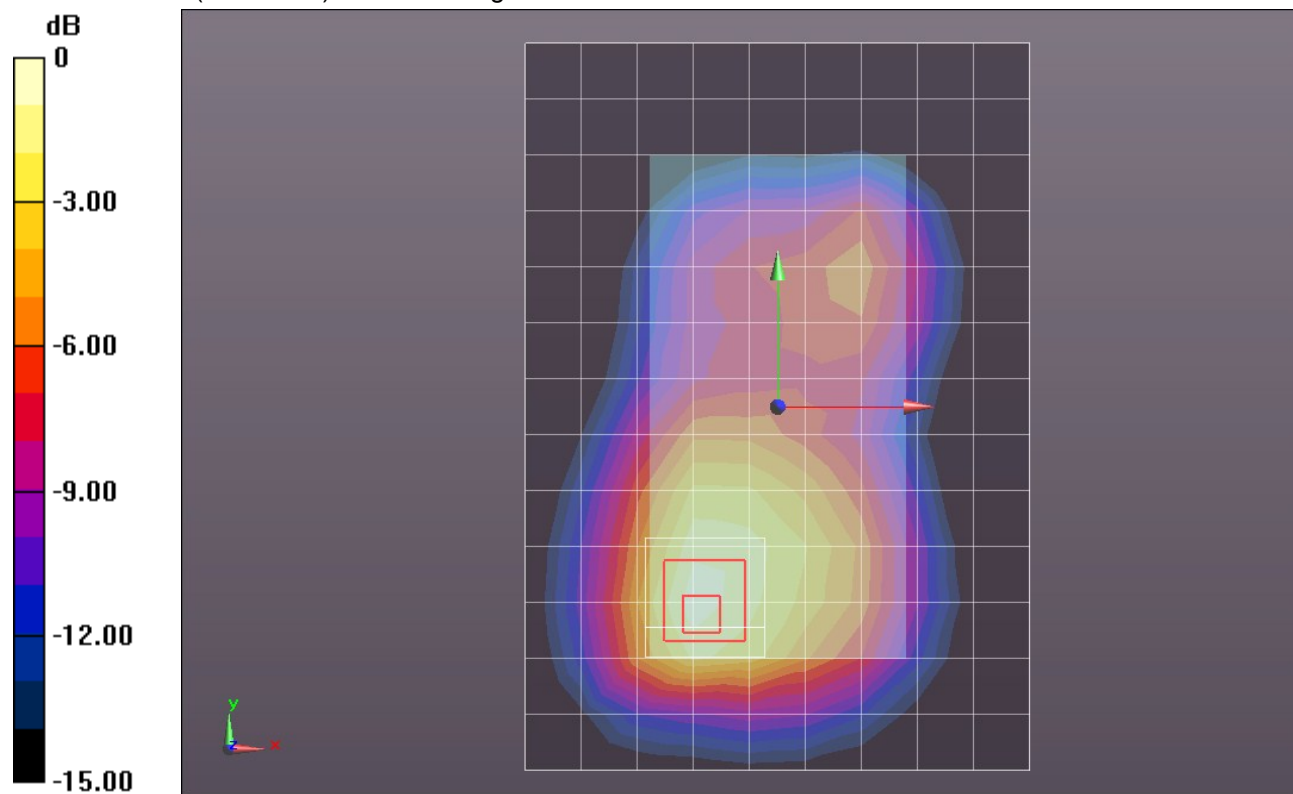

0 dB = 1.240mW/g = 1.87 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.515$ mho/m; $\epsilon_r = 50.951$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xRTT_RC3_SO32_Ch 1175/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.964 mW/g

Rear/1xRTT_RC3_SO32_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.696 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.3550

SAR(1 g) = 0.796 mW/g; SAR(10 g) = 0.467 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.010 mW/g

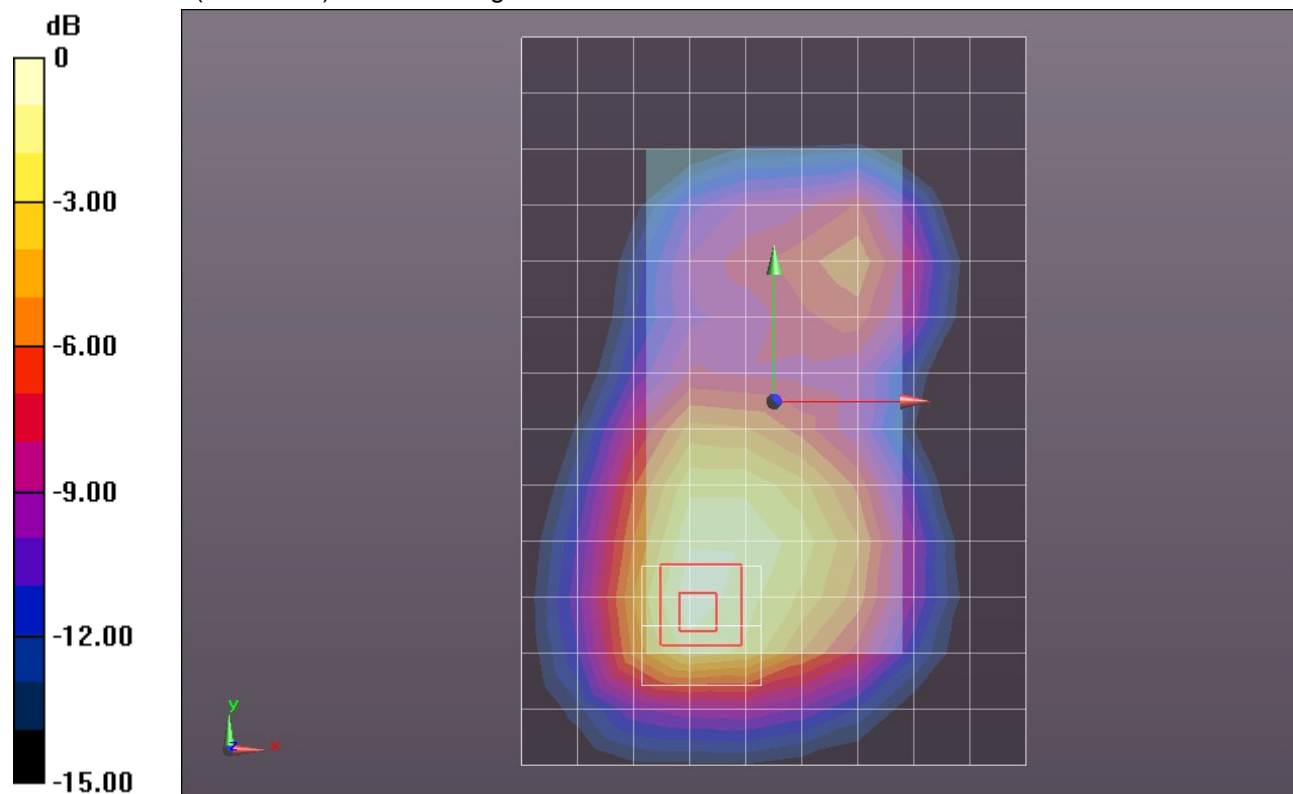

0 dB = 1.010mW/g = 0.09 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.482$ mho/m; $\epsilon_r = 53.023$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Front/1xRTT_RC3_SO32_Ch 25/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.972 mW/g

Front/1xRTT_RC3_SO32_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.973 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.4220

SAR(1 g) = 0.831 mW/g; SAR(10 g) = 0.482 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.087 mW/g

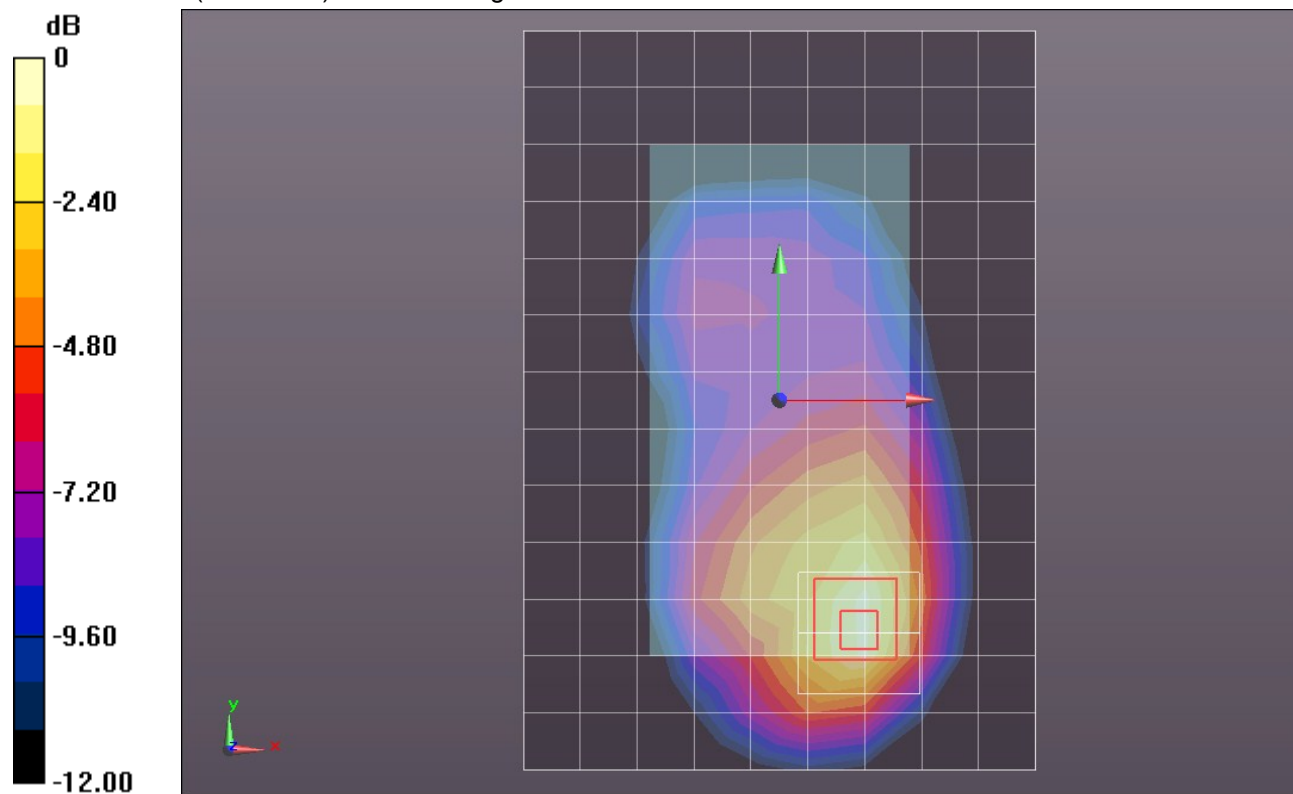

0 dB = 1.090mW/g = 0.75 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.513 \text{ mho/m}$; $\epsilon_r = 52.927$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Front/1xRTT_RC3_SO32_Ch 600/Area Scan (10x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.970 mW/g

Front/1xRTT_RC3_SO32_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$,


$dz=5\text{mm}$

Reference Value = 25.717 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.3990

SAR(1 g) = 0.818 mW/g; SAR(10 g) = 0.475 mW/g

Maximum value of SAR (measured) = 1.065 mW/g

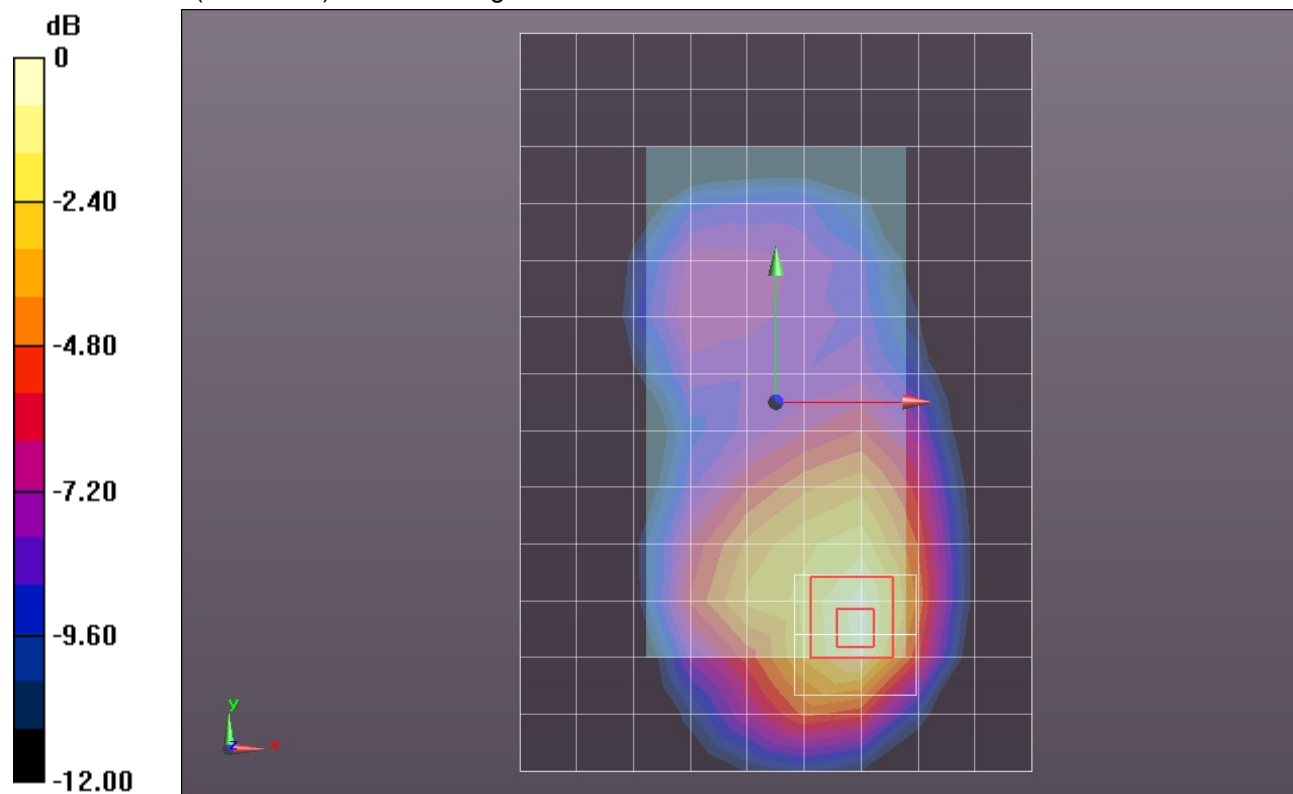

0 dB = 1.060mW/g = 0.51 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.545$ mho/m; $\epsilon_r = 52.847$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Front/1xRTT_RC3_SO32_Ch 1175/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.891 mW/g

Front/1xRTT_RC3_SO32_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.318 V/m; Power Drift = -0.0037 dB

Peak SAR (extrapolated) = 1.2950

SAR(1 g) = 0.741 mW/g; SAR(10 g) = 0.429 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.977 mW/g

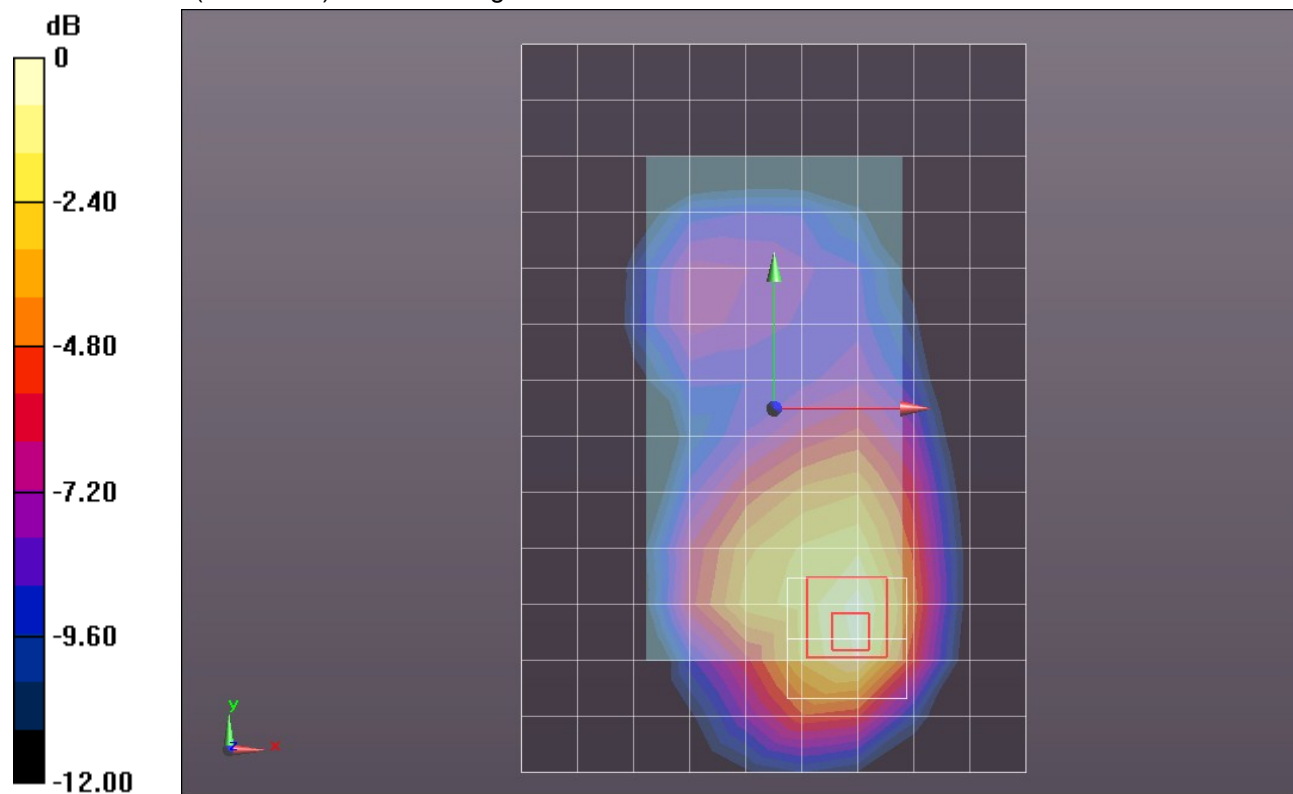

0 dB = 0.980mW/g = -0.18 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ mho/m; $\epsilon_r = 52.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011

- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011

- Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Edge 2/1xRTT_RC3_SO32_Ch 600/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.540 mW/g


Edge 2/1xRTT_RC3_SO32_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.093 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.7880

SAR(1 g) = 0.494 mW/g; SAR(10 g) = 0.299 mW/g

Maximum value of SAR (measured) = 0.621 mW/g

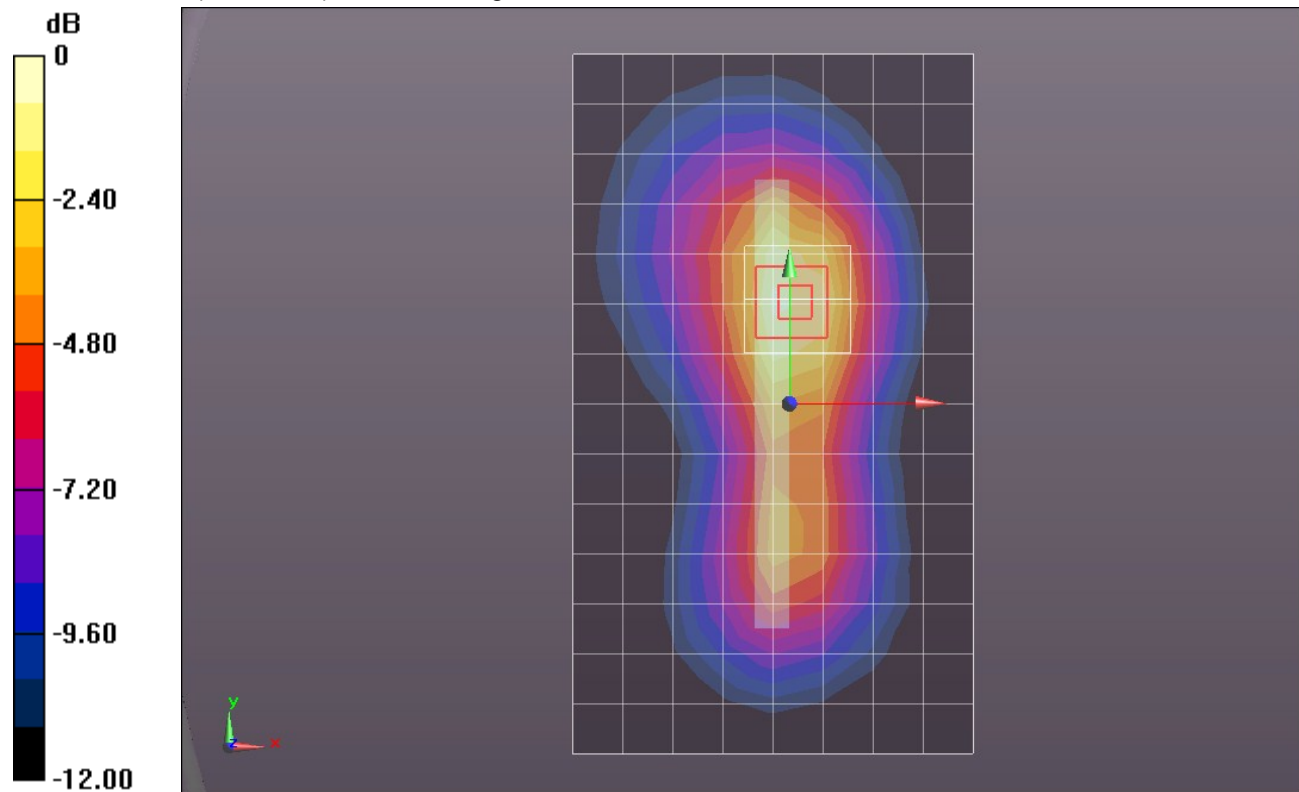

0 dB = 0.620mW/g = -4.15 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ mho/m; $\epsilon_r = 52.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Edge 3/1xRTT_RC3_SO32_Ch 600/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.442 mW/g


Edge 3/1xRTT_RC3_SO32_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.277 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.5720

SAR(1 g) = 0.348 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.443 mW/g

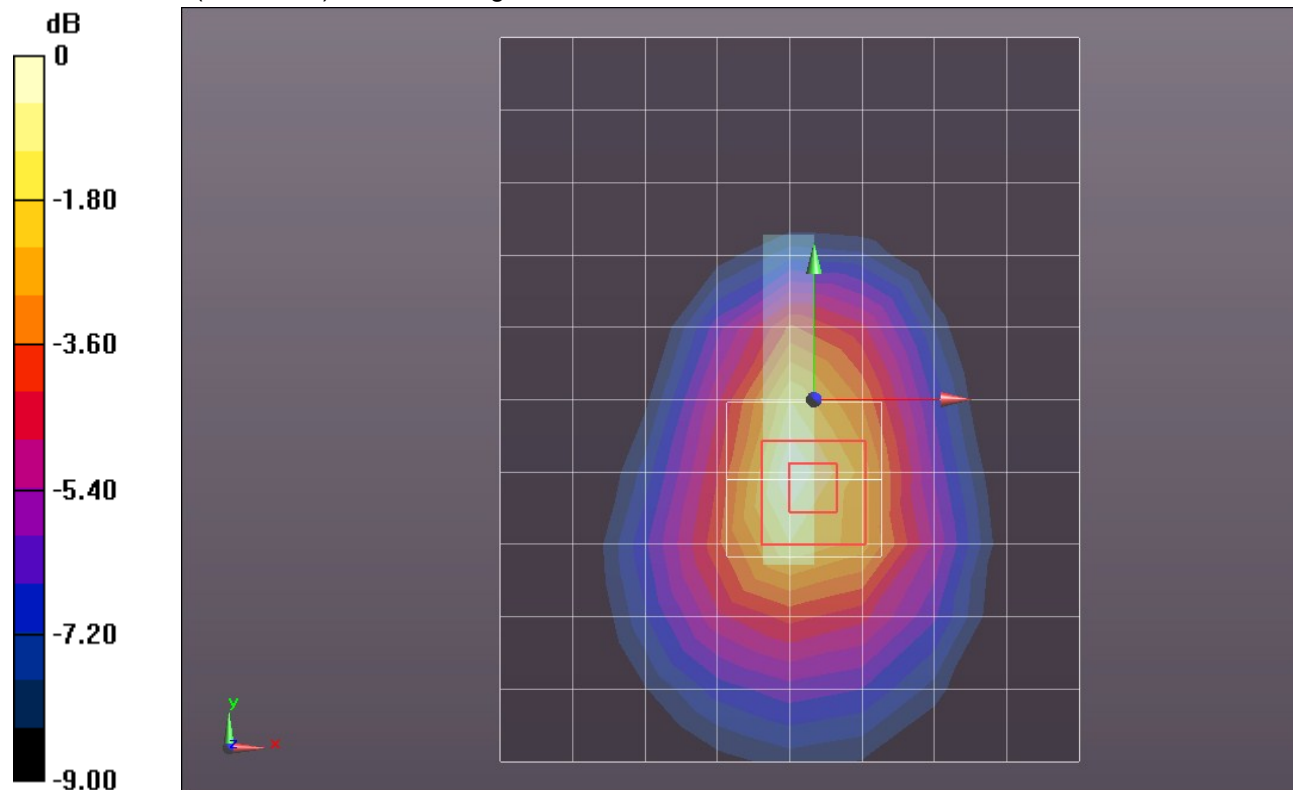

0 dB = 0.440mW/g = -7.13 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 51.134$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xEVDO_Rel. 0_Ch 25/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.755 mW/g

Rear/1xEVDO_Rel. 0_Ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 23.015 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.0820

SAR(1 g) = 0.656 mW/g; SAR(10 g) = 0.394 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.825 mW/g

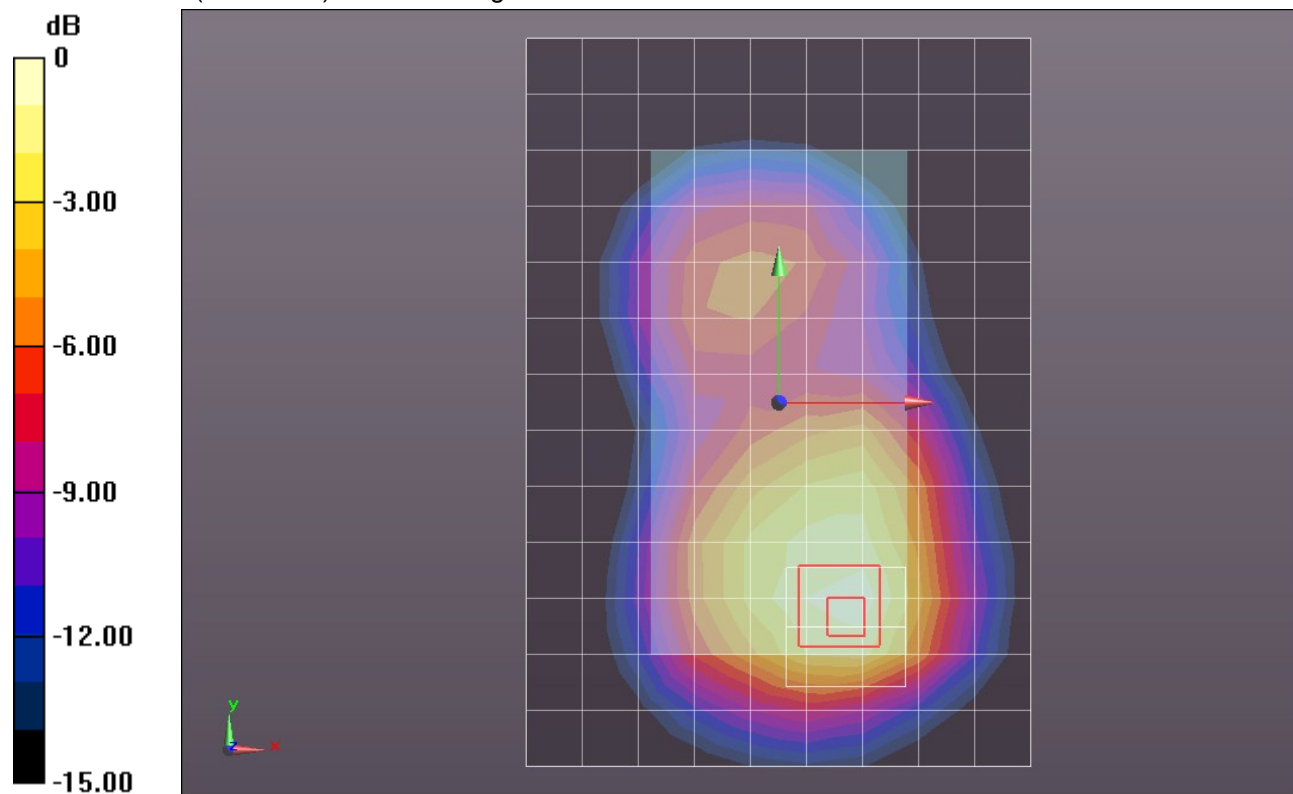

0 dB = 0.820mW/g = -1.72 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.482 \text{ mho/m}$; $\epsilon_r = 51.046$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xEVDO_Rel. 0_Ch 600/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.768 mW/g


Rear/1xEVDO_Rel. 0_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.080 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.1390

SAR(1 g) = 0.667 mW/g; SAR(10 g) = 0.388 mW/g

Maximum value of SAR (measured) = 0.869 mW/g

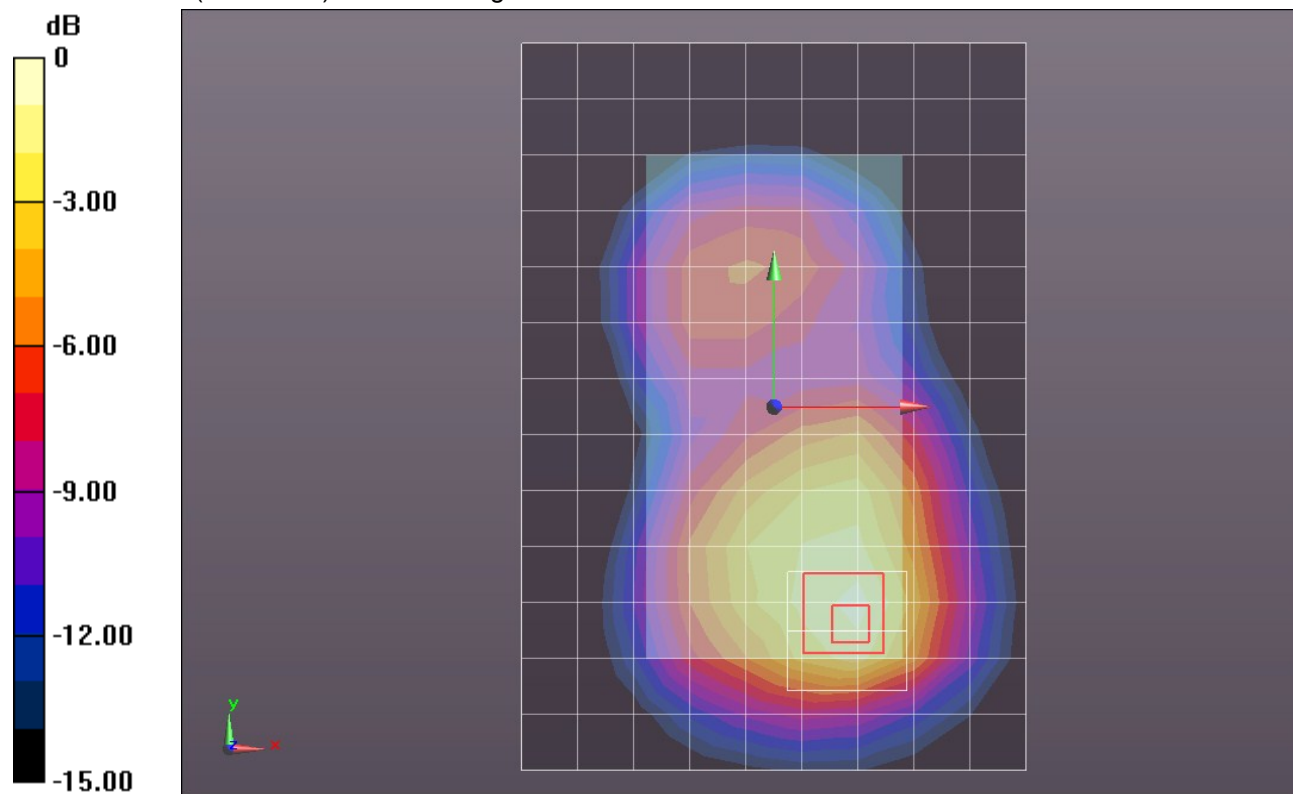

0 dB = 0.870mW/g = -1.21 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.515$ mho/m; $\epsilon_r = 50.951$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xEVDO_Rel. 0_Ch 1175/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.028 mW/g

Rear/1xEVDO_Rel. 0_Ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.224 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.5770

SAR(1 g) = 0.906 mW/g; SAR(10 g) = 0.521 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.180 mW/g

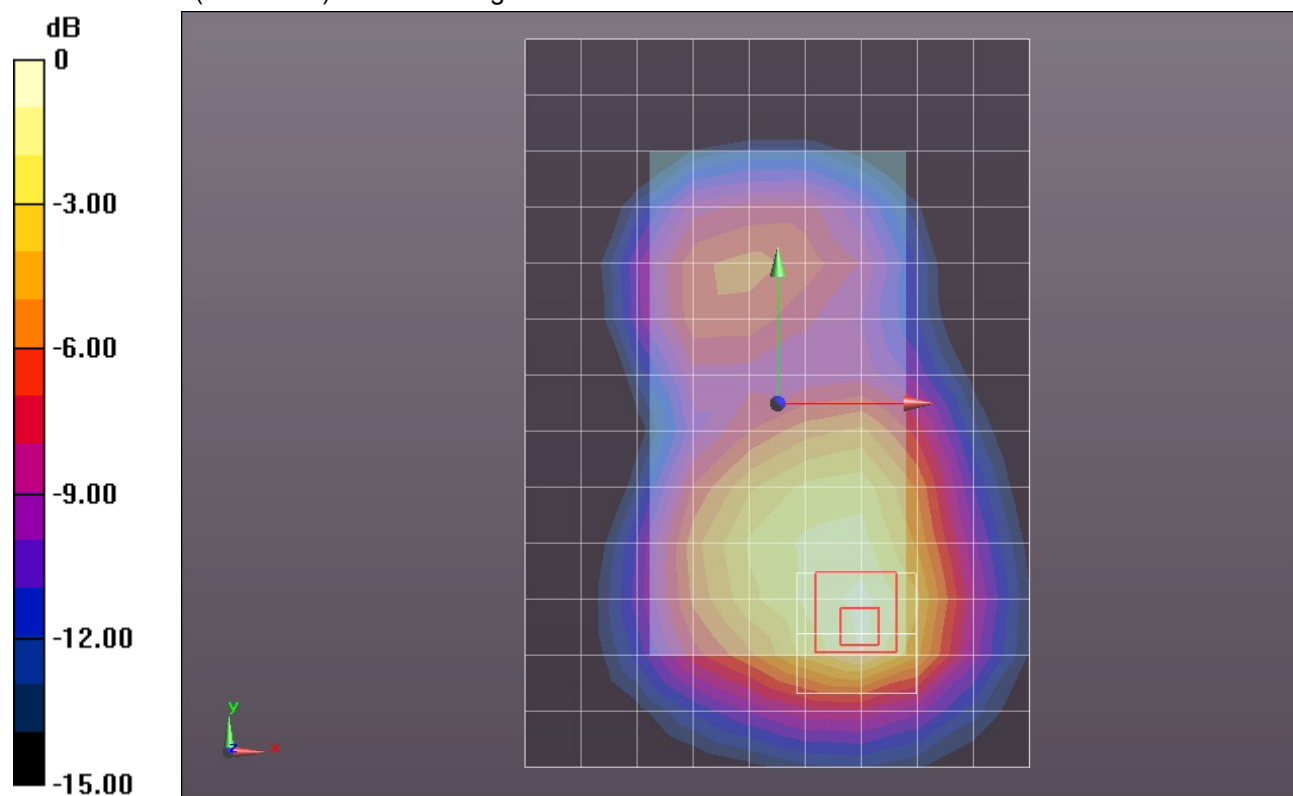

0 dB = 1.180mW/g = 1.44 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.515$ mho/m; $\epsilon_r = 50.951$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xEVDO_Rel. 0_Ch 1175_w/Headset/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.037 mW/g

Rear/1xEVDO_Rel. 0_Ch 1175_w/Headset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.586 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.6200

SAR(1 g) = 0.918 mW/g; SAR(10 g) = 0.524 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.206 mW/g

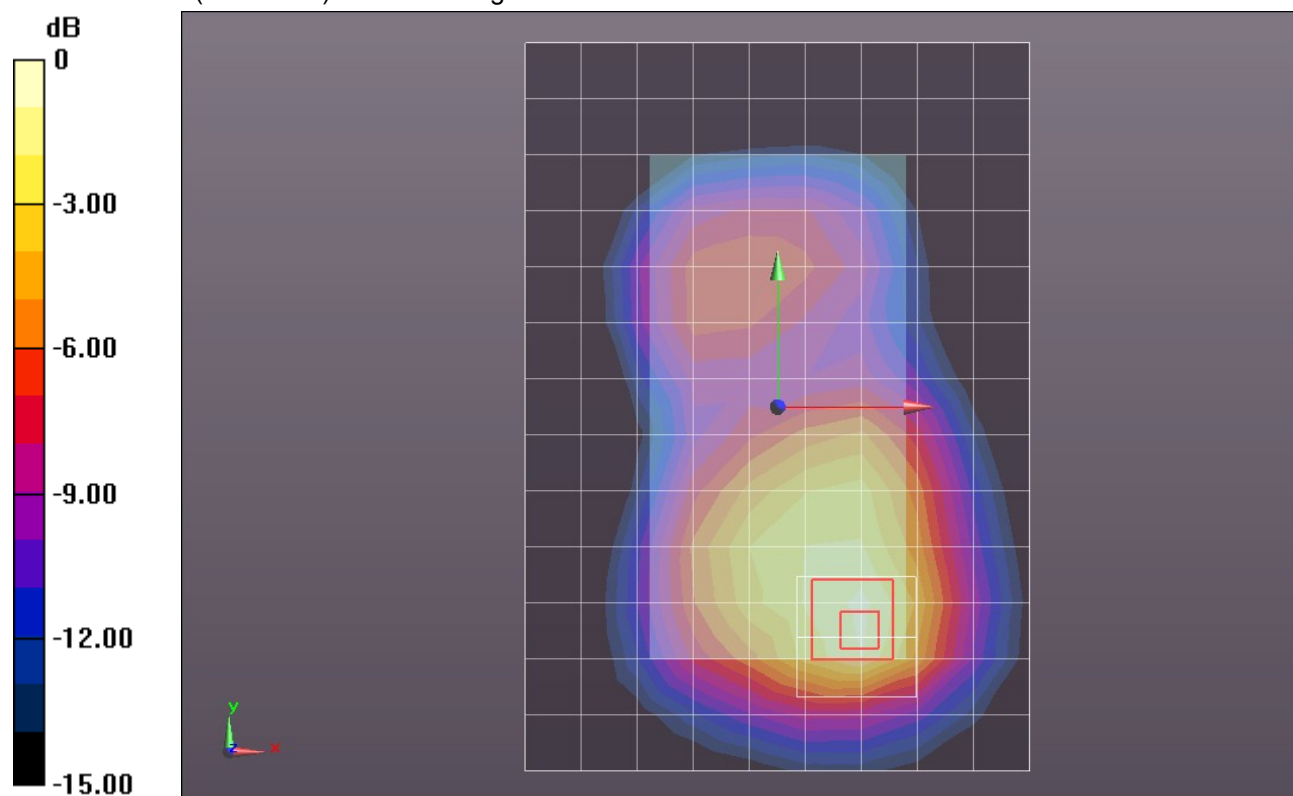

0 dB = 1.210mW/g = 1.66 dB mW/g


CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1

Rear/1xEVDO_Rel. 0_Ch 1175_w/Headset/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Info: [Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.026 mW/g

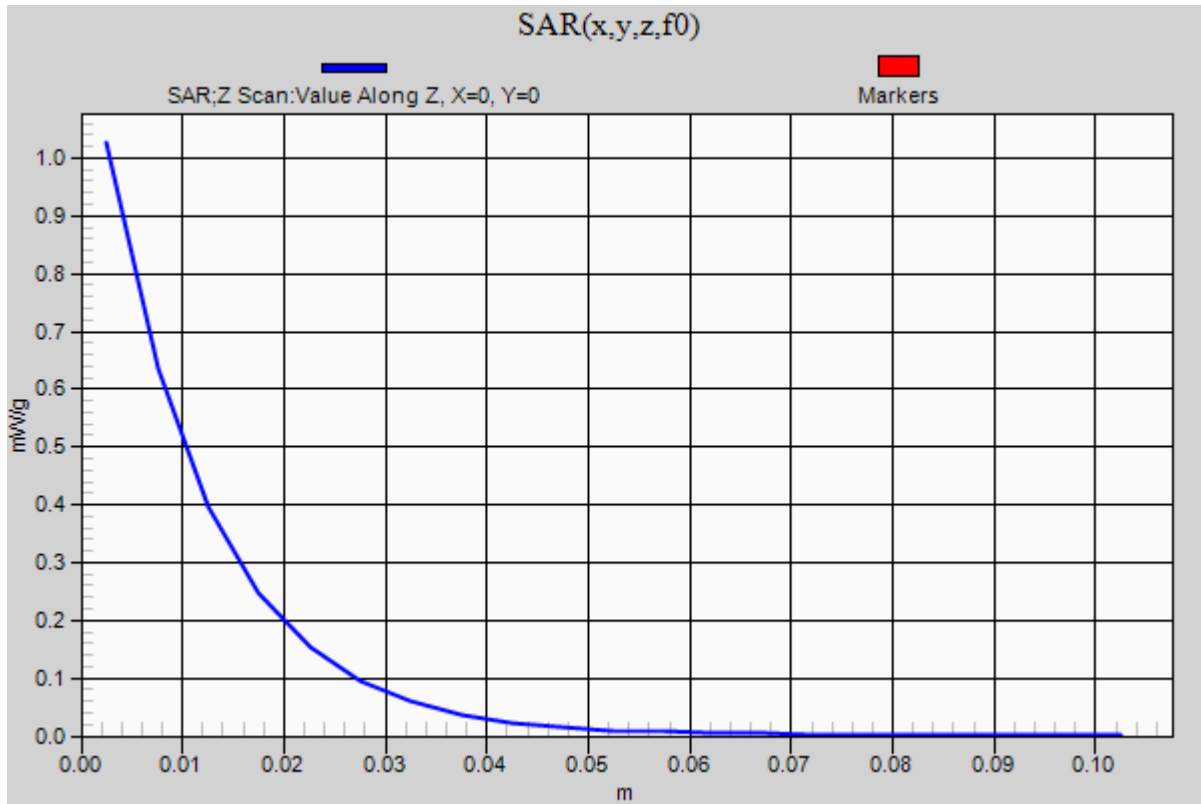

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.515$ mho/m; $\epsilon_r = 50.951$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Rear/1xEVDO_Rel. 0_Ch 1175_w/Wireless Charging Cover/Area Scan (10x14x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.027 mW/g

Rear/1xEVDO_Rel. 0_Ch 1175_w/Wireless Charging Cover/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 26.238 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.5600

SAR(1 g) = 0.891 mW/g; SAR(10 g) = 0.507 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.169 mW/g

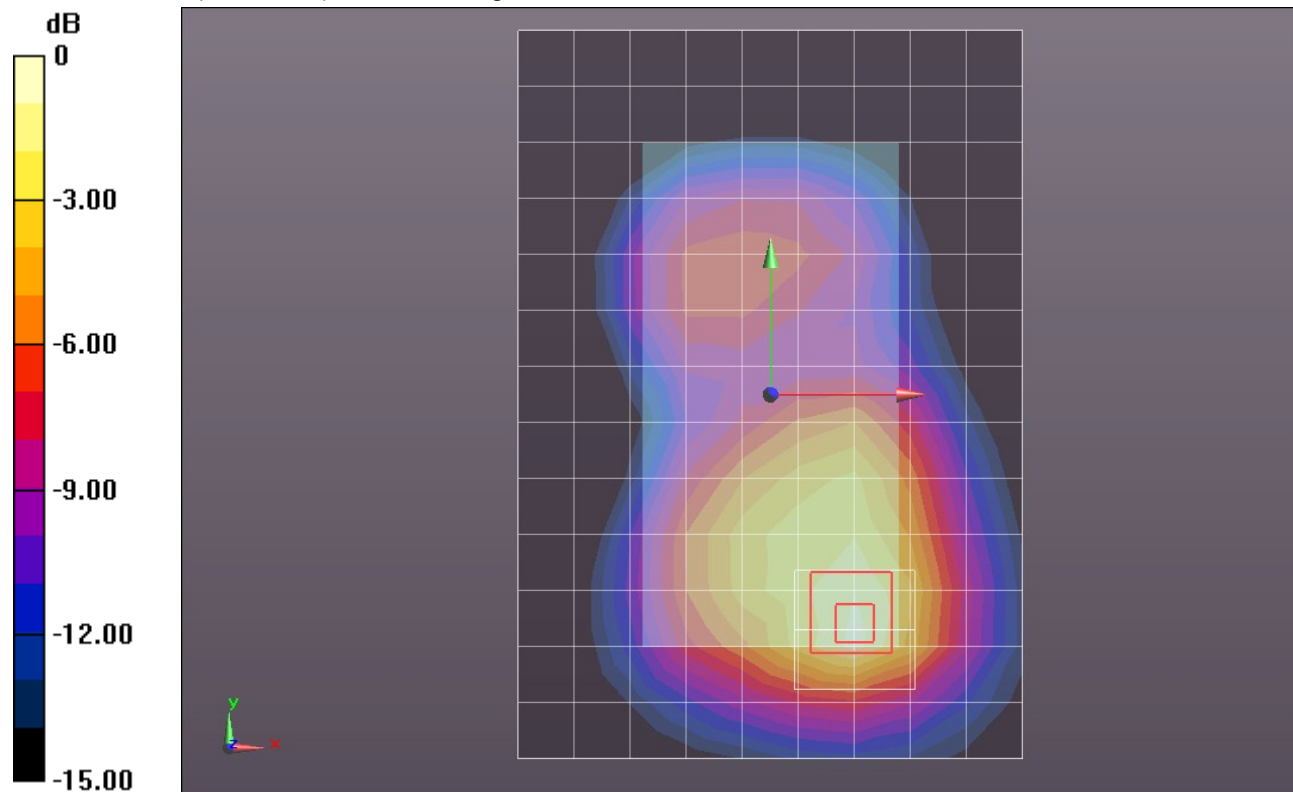

0 dB = 1.170mW/g = 1.36 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ mho/m; $\epsilon_r = 52.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Front/1xEVDO_Rel. 0_Ch 600/Area Scan (10x14x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.647 mW/g

Front/1xEVDO_Rel. 0_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.883 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.9570

SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.325 mW/g

Maximum value of SAR (measured) = 0.717 mW/g



0 dB = 0.720mW/g = -2.85 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ mho/m; $\epsilon_r = 52.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Edge 3/1xEVDO_Rel. 0_Ch 600/Area Scan (9x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.316 mW/g


Edge 3/1xEVDO_Rel. 0_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.669 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.5000

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.386 mW/g

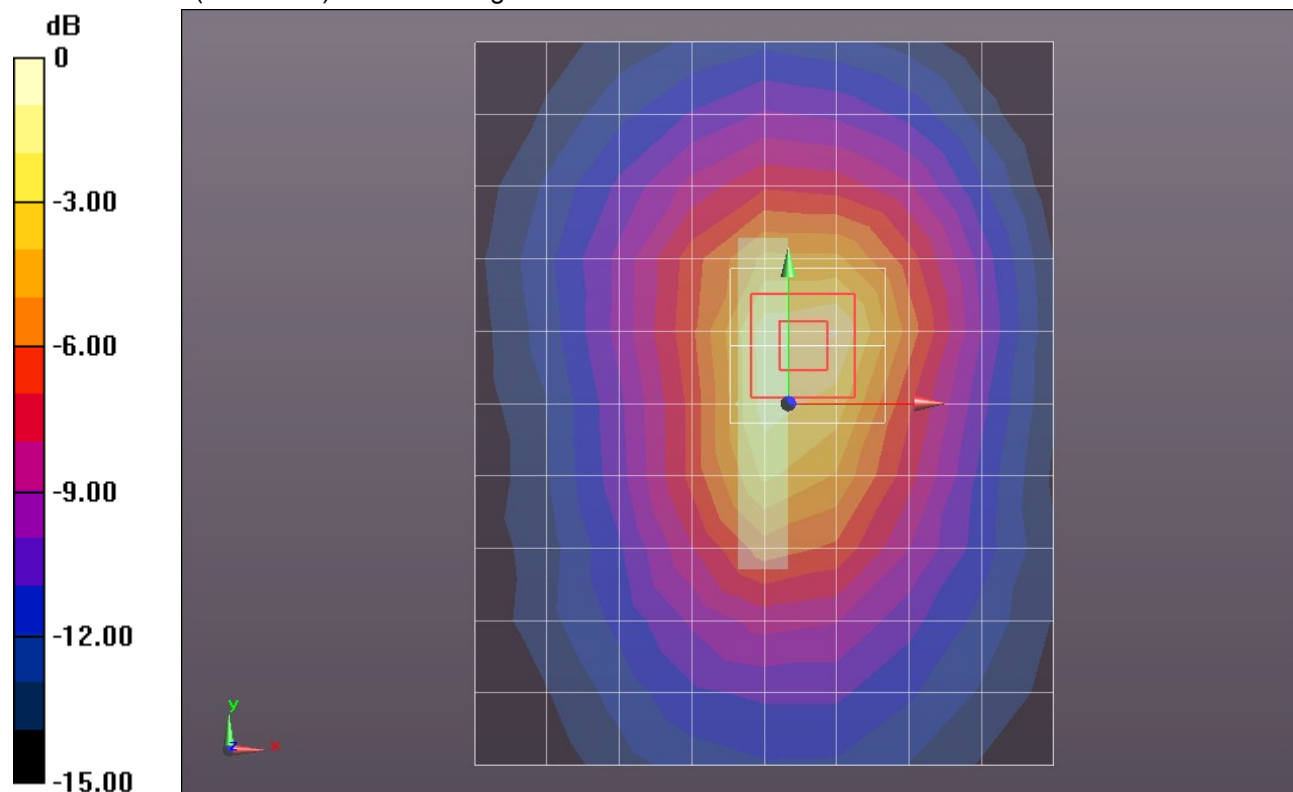

0 dB = 0.390mW/g = -8.18 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.513$ mho/m; $\epsilon_r = 52.927$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Probe: EX3DV4 - SN3751; ConvF(6.83, 6.83, 6.83); Calibrated: 12/19/2011
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1121

Edge 4/1xEVDO_Rel. 0_Ch 600/Area Scan (9x15x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.392 mW/g


Edge 4/1xEVDO_Rel. 0_Ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.206 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.5150

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 0.407 mW/g

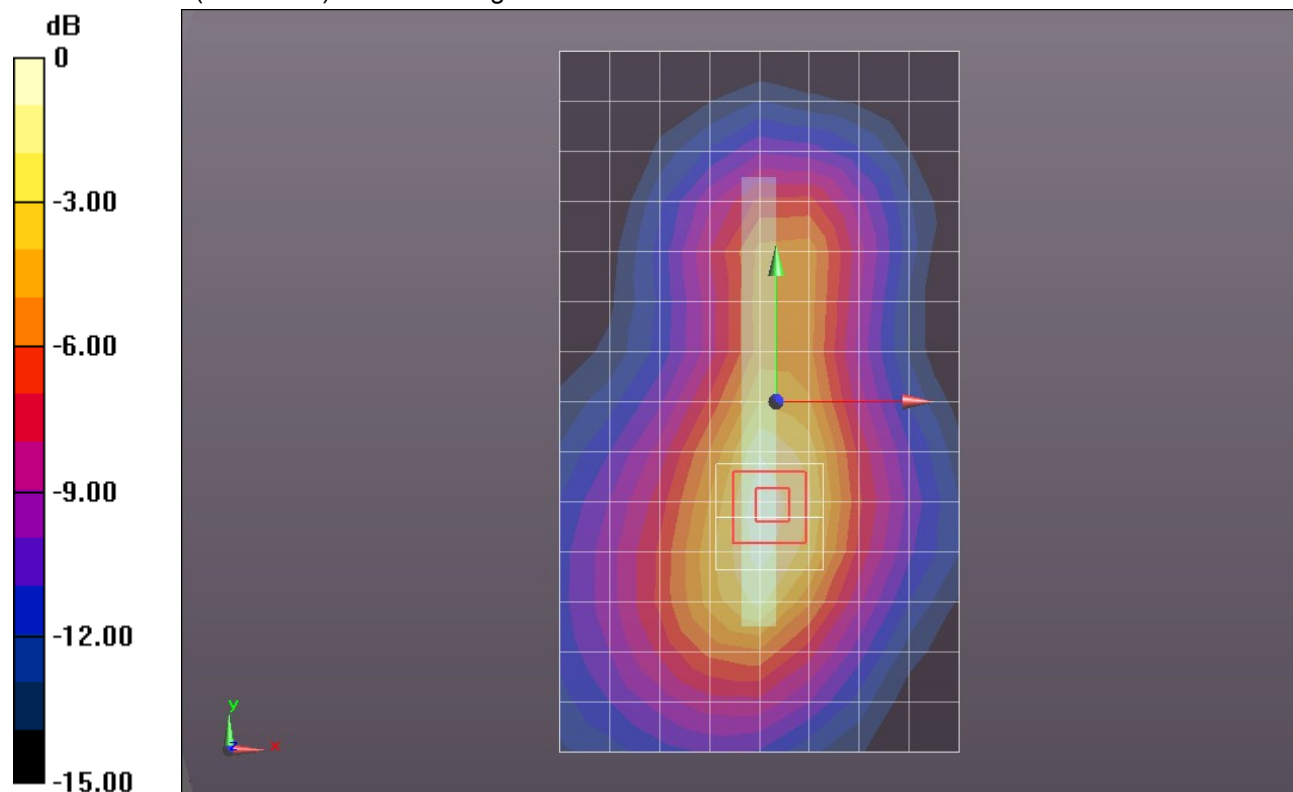

0 dB = 0.410mW/g = -7.74 dB mW/g