

Test Laboratory: UL CCS SAR Lab C

System Validation

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 1/20/2012

- Sensor-Surface: (Fix Surface)

- Electronics: DAE3 Sn500; Calibrated: 7/14/2011

- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB

- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

CD835V3, E-Field/Measurement distance from the probe sensor center to Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 118.7 V/m; Power Drift = -0.00 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 158.2 V/m

Near-field category: **M4 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M4 153.1 V/m	Grid 2 M4 158.2 V/m	Grid 3 M4 154.7 V/m
Grid 4 M4 83.69 V/m	Grid 5 M4 86.65 V/m	Grid 6 M4 85.36 V/m
Grid 7 M4 148.2 V/m	Grid 8 M4 153.5 V/m	Grid 9 M4 151.0 V/m

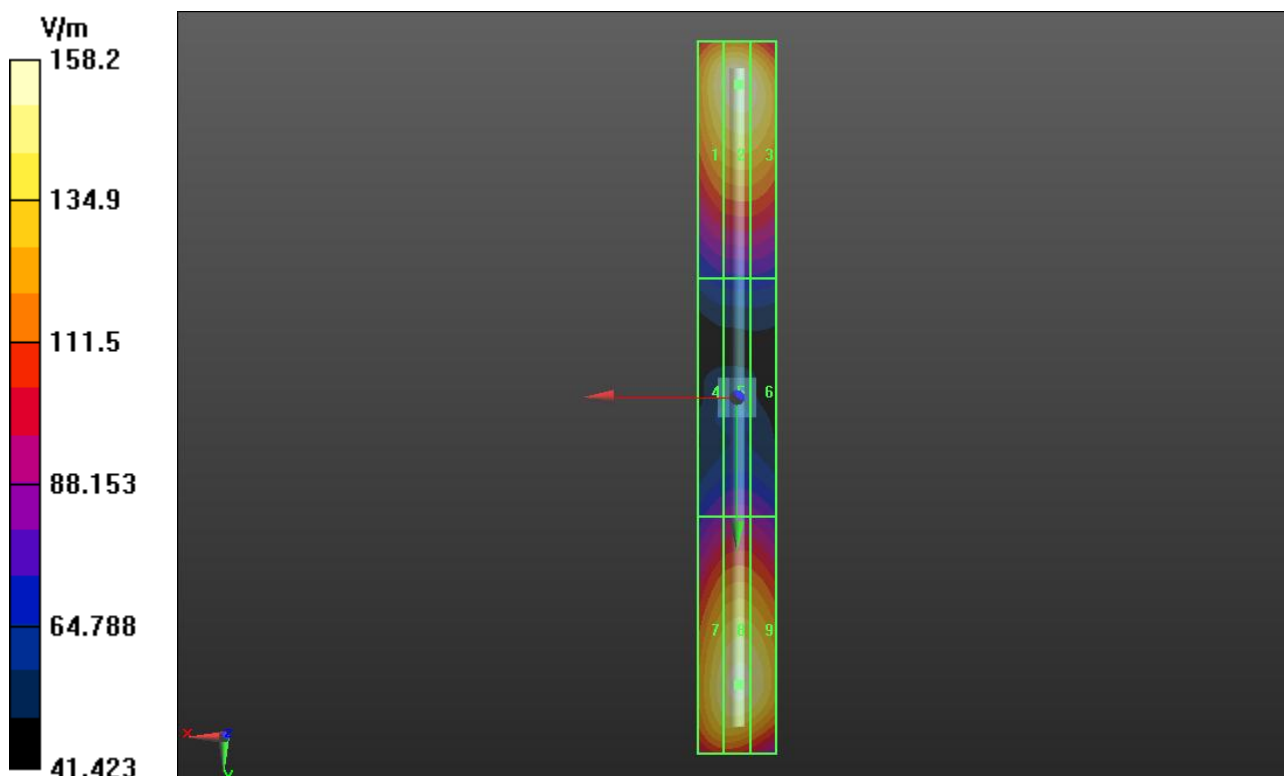

Test Laboratory: UL CCS SAR Lab C

System Validation

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2339; ConvF(1, 1, 1); Calibrated: 1/20/2012
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

CD1880V3, E-Field/Measurement distance from the probe sensor center to Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 134.2 V/m; Power Drift = 0.00 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 138.8 V/m

Near-field category: **M2 (AWF 0 dB)**

PMF scaled E-field

Grid 1 M2 132.8 V/m	Grid 2 M2 138.8 V/m	Grid 3 M2 135.1 V/m
Grid 4 M3 88.49 V/m	Grid 5 M3 93.12 V/m	Grid 6 M3 92.33 V/m
Grid 7 M2 129.3 V/m	Grid 8 M2 133.5 V/m	Grid 9 M2 131.1 V/m

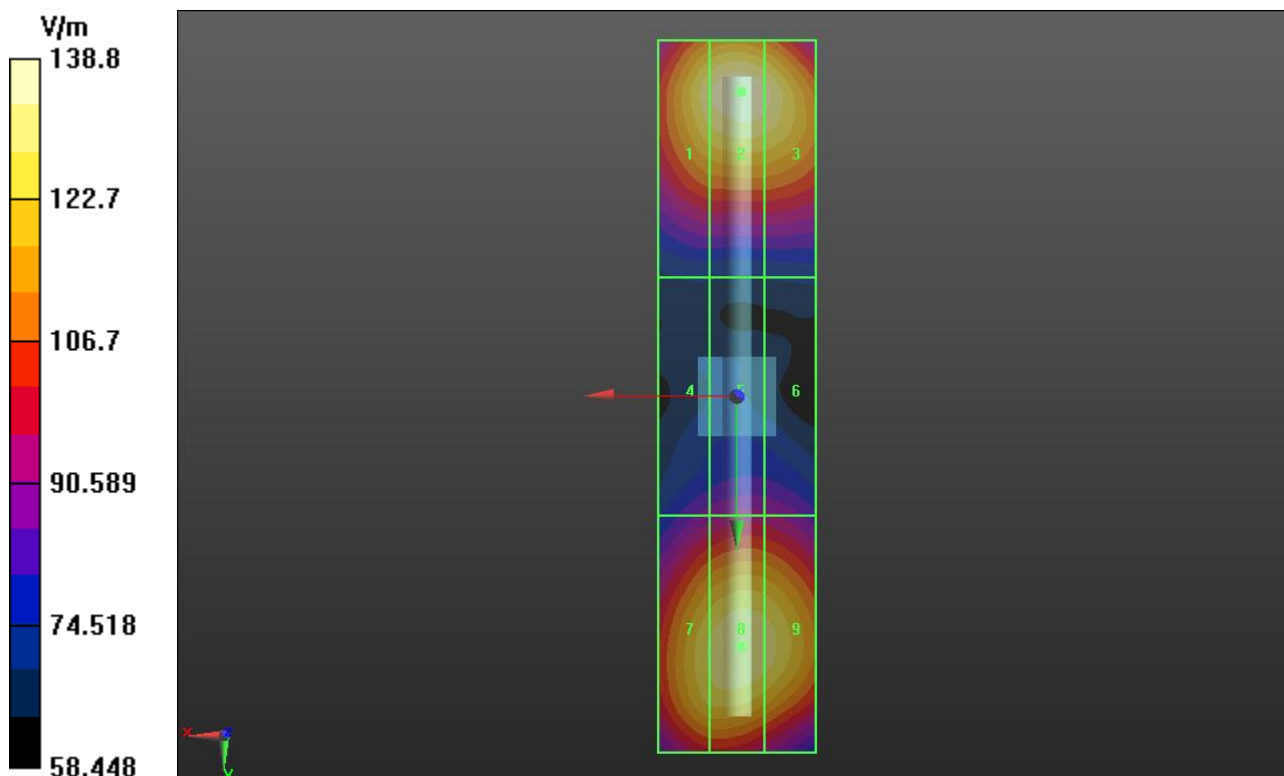

Test Laboratory: UL CCS SAR Lab C

System Validation

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 1/30/2012
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

CD835V3, H-Field/Measurement distance from the probe sensor center to Dipole = 10mm/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.50 V/m; Power Drift = -0.01 dB


PMR not calibrated. PMF = 1.000 is applied.

H-field emissions = 0.47 A/m

Near-field category: **M4 (AWF 0 dB)**

PMF scaled H-field

Grid 1 M4 0.40 A/m	Grid 2 M4 0.42 A/m	Grid 3 M4 0.41 A/m
Grid 4 M4 0.44 A/m	Grid 5 M4 0.47 A/m	Grid 6 M4 0.46 A/m
Grid 7 M4 0.39 A/m	Grid 8 M4 0.42 A/m	Grid 9 M4 0.40 A/m

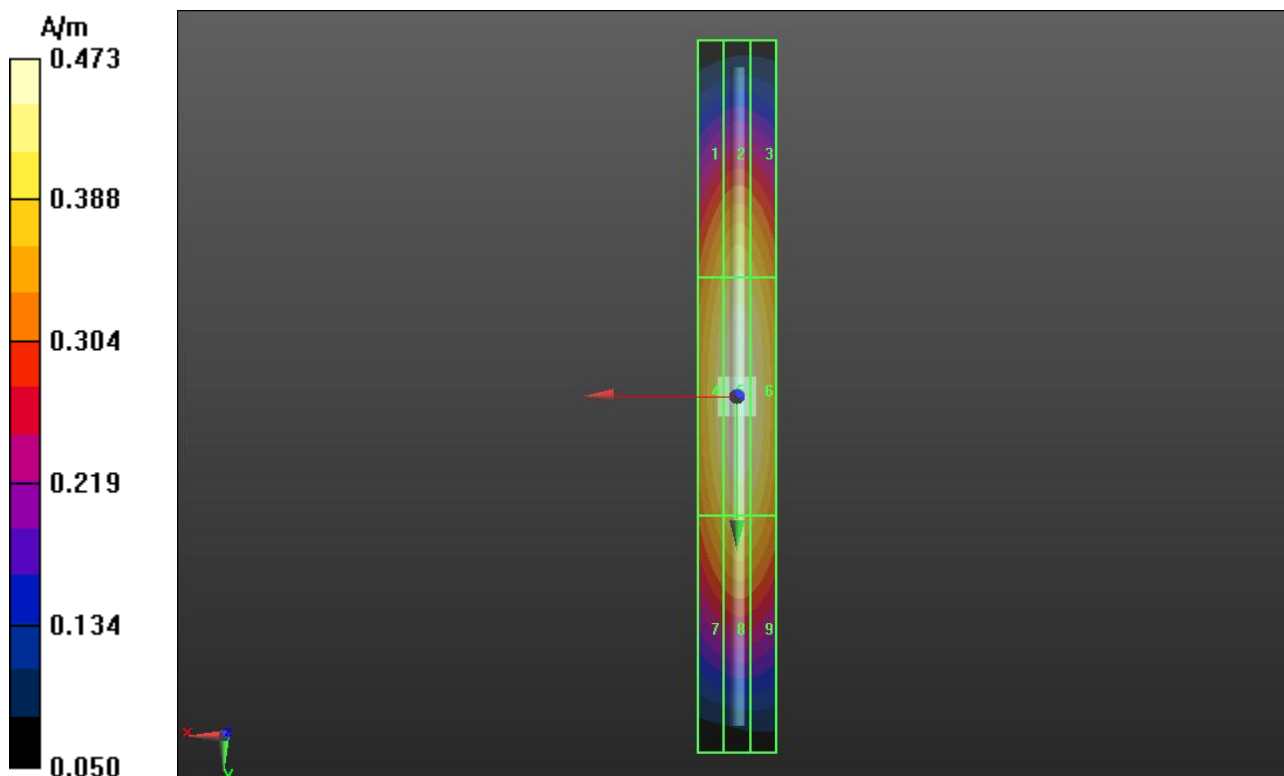

Test Laboratory: UL CCS SAR Lab C

System Validation

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Phantom section: RF Section

DASY4 Configuration:

- Probe: H3DV6 - SN6157; ; Calibrated: 1/30/2012
- Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn500; Calibrated: 7/14/2011
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BB
- Measurement SW: DASY52, Version 52.8 (0); SEMCAD X Version 14.6.4 (4989)

CD1880V3, H-Field/Measurement distance from the probe sensor center to Dipole = 10mm/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 0.50 V/m; Power Drift = -0.00 dB

PMR not calibrated. PMF = 1.000 is applied.

H-field emissions = 0.47 A/m

Near-field category: **M2 (AWF 0 dB)**

PMF scaled H-field

Grid 1 M2 0.40 A/m	Grid 2 M2 0.43 A/m	Grid 3 M2 0.42 A/m
Grid 4 M2 0.44 A/m	Grid 5 M2 0.47 A/m	Grid 6 M2 0.46 A/m
Grid 7 M2 0.40 A/m	Grid 8 M2 0.42 A/m	Grid 9 M2 0.41 A/m

