

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.377$ mho/m; $\epsilon_r = 39.772$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (B); Type: QD000P40CD; Serial: 1628

LHS/Touch_1xRTT RC3 SO55, ch 600/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.248 mW/g


LHS/Touch_1xRTT RC3 SO55, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.339 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.3090

SAR(1 g) = 0.206 mW/g; SAR(10 g) = 0.131 mW/g

Maximum value of SAR (measured) = 0.242 mW/g

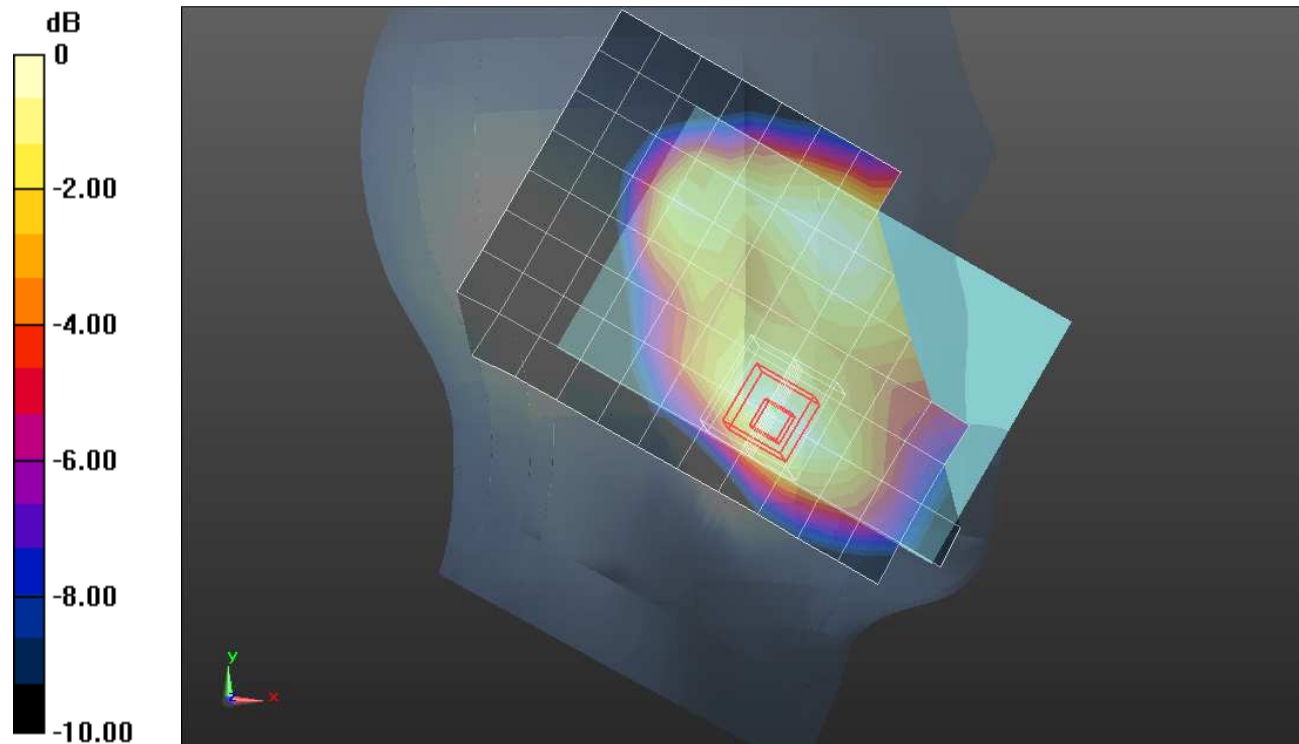

0 dB = 0.240mW/g = -12.40 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.377$ mho/m; $\epsilon_r = 39.772$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012

- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Phantom: SAM v5.0 (B); Type: QD000P40CD; Serial: 1628

LHS/Tilt_1xRTT RC3 SO55, ch 600/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.295 mW/g

LHS/Tilt_1xRTT RC3 SO55, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,


dy=8mm, dz=5mm

Reference Value = 14.822 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.4020

SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.307 mW/g

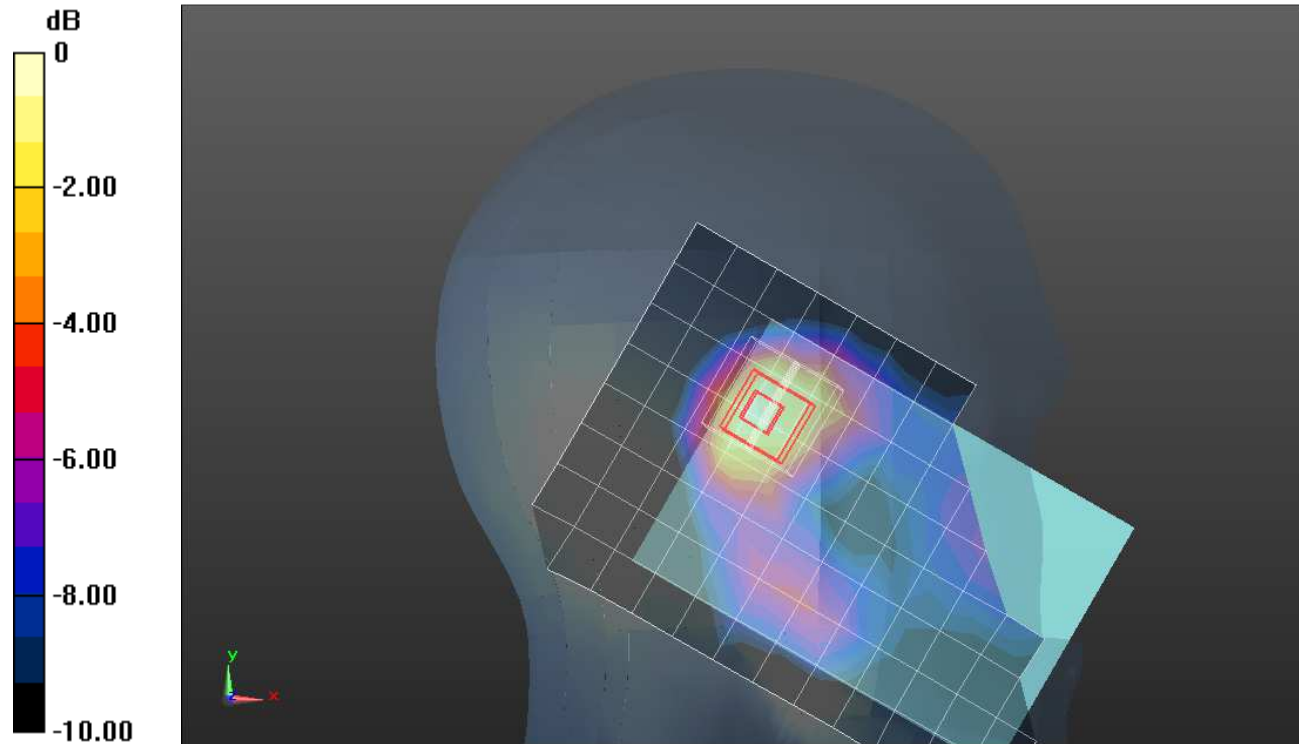

0 dB = 0.310mW/g = -10.17 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.377$ mho/m; $\epsilon_r = 39.772$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (B); Type: QD000P40CD; Serial: 1628

RHS/Touch_1xRTT RC3 SO55, ch 600/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.613 mW/g


RHS/Touch_1xRTT RC3 SO55, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.935 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.7620

SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.318 mW/g

Maximum value of SAR (measured) = 0.595 mW/g

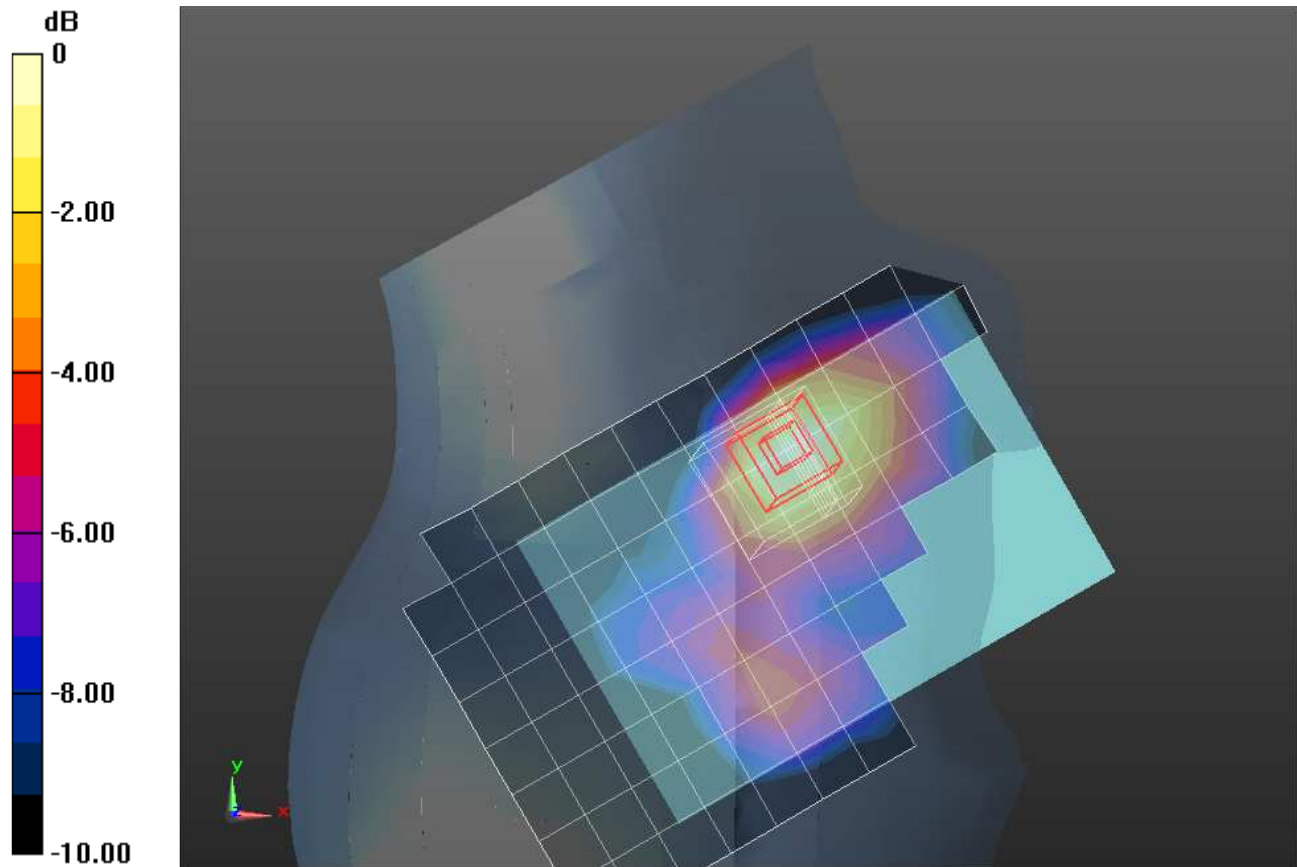


0 dB = 0.600mW/g = -4.44 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

RHS/Touch_1xRTT RC3 SO55, ch 600/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.595 mW/g

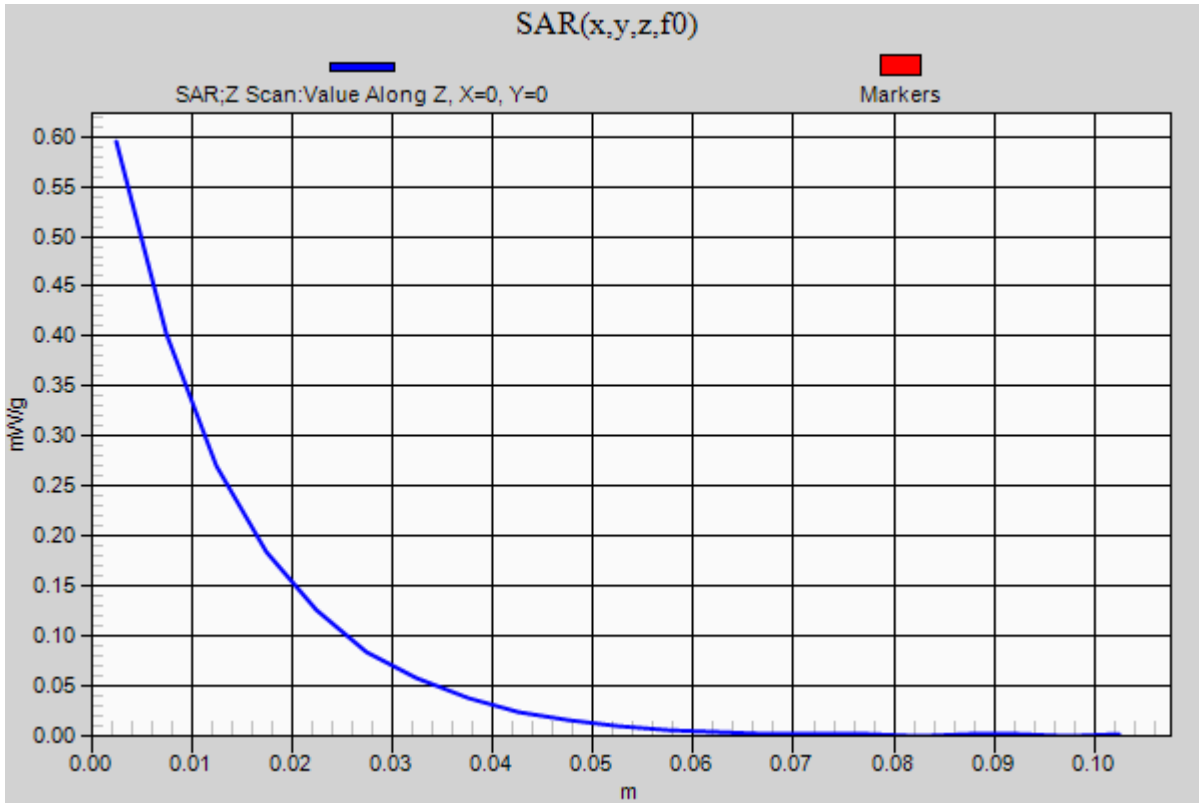

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.377$ mho/m; $\epsilon_r = 39.772$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (B); Type: QD000P40CD; Serial: 1628

RHS/Tilt_1xRTT RC3 SO55, ch 600/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.215 mW/g


RHS/Tilt_1xRTT RC3 SO55, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.492 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.2900

SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.228 mW/g

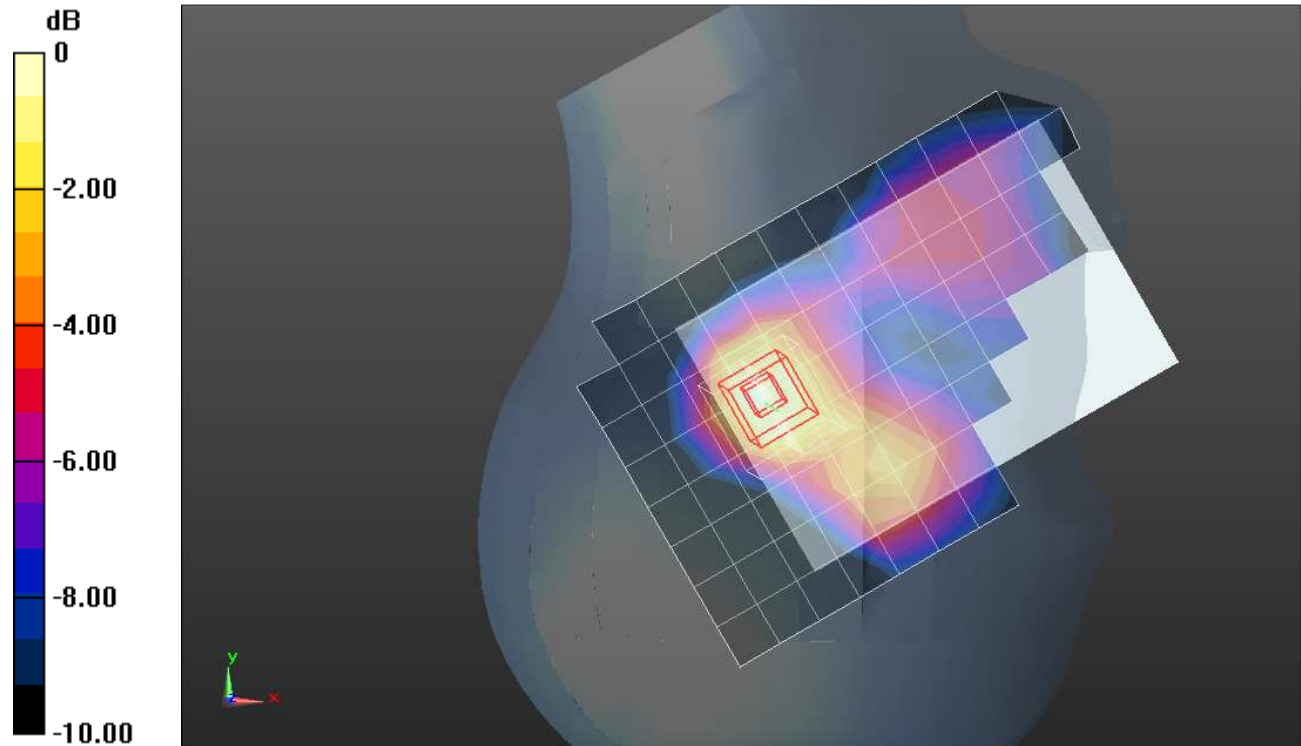

0 dB = 0.230mW/g = -12.77 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.377$ mho/m; $\epsilon_r = 39.772$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (B); Type: QD000P40CD; Serial: 1628

LHS/Touch_1xEVDO Rel 0, ch 600/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.775 mW/g


LHS/Touch_1xEVDO Rel 0, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.930 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.0150

SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.741 mW/g

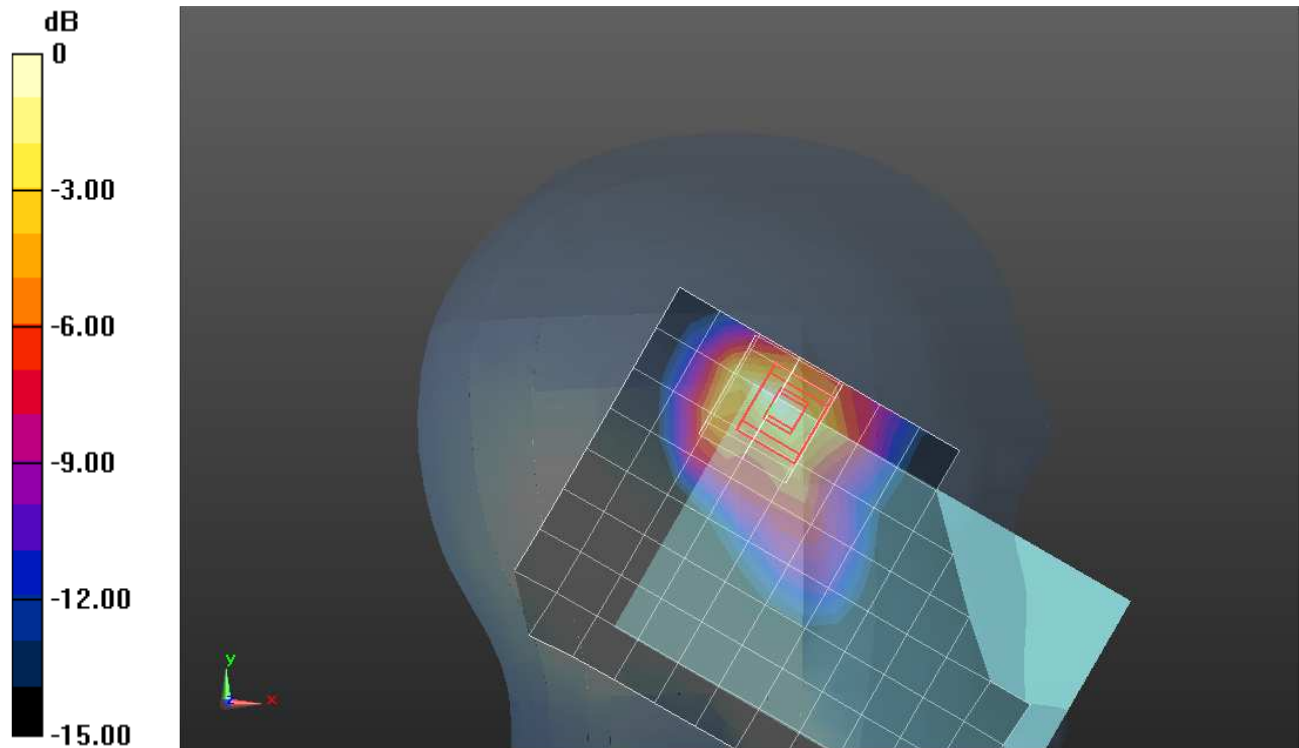


0 dB = 0.740mW/g = -2.62 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

LHS/Touch_1xEVDO Rel 0, ch 600/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.717 mW/g

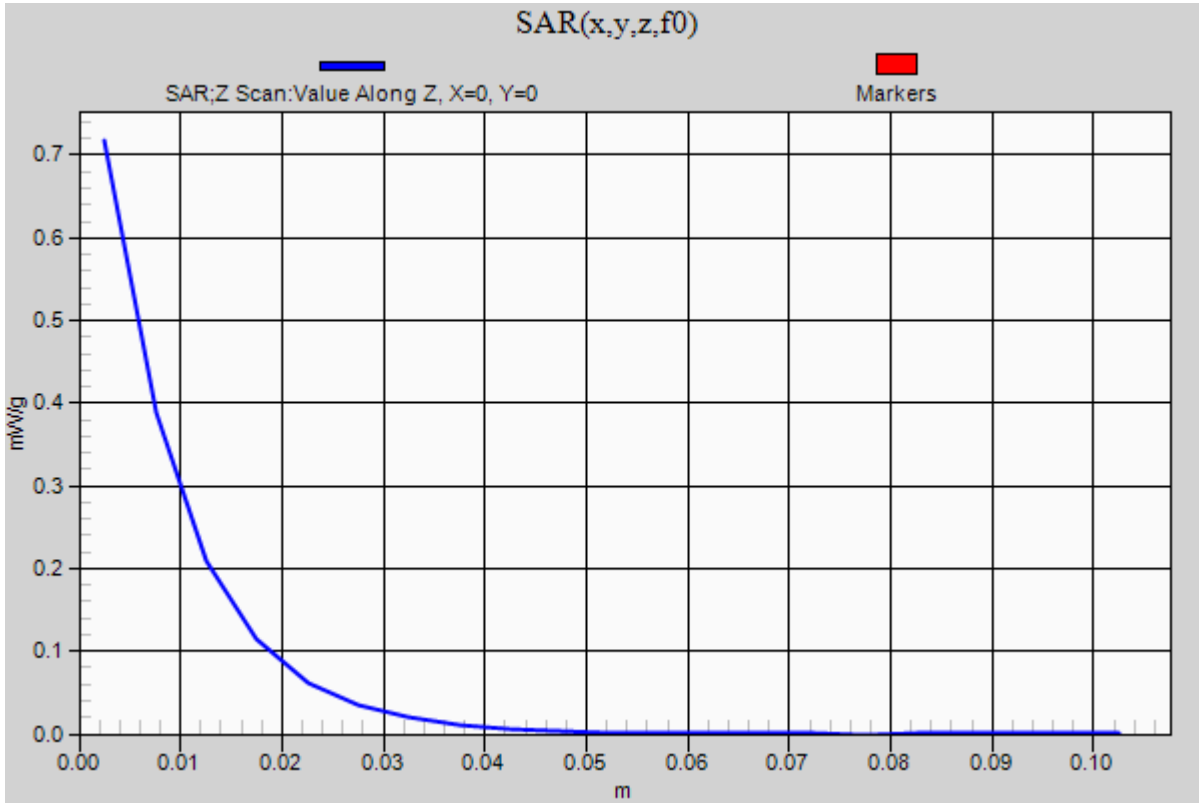

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.377$ mho/m; $\epsilon_r = 39.772$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012

- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Phantom: SAM v5.0 (B); Type: QD000P40CD; Serial: 1628

LHS/Tilt_1xEVDO Rel 0, ch 600/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.403 mW/g


LHS/Tilt_1xEVDO Rel 0, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.039 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.5590

SAR(1 g) = 0.292 mW/g; SAR(10 g) = 0.149 mW/g

Maximum value of SAR (measured) = 0.417 mW/g

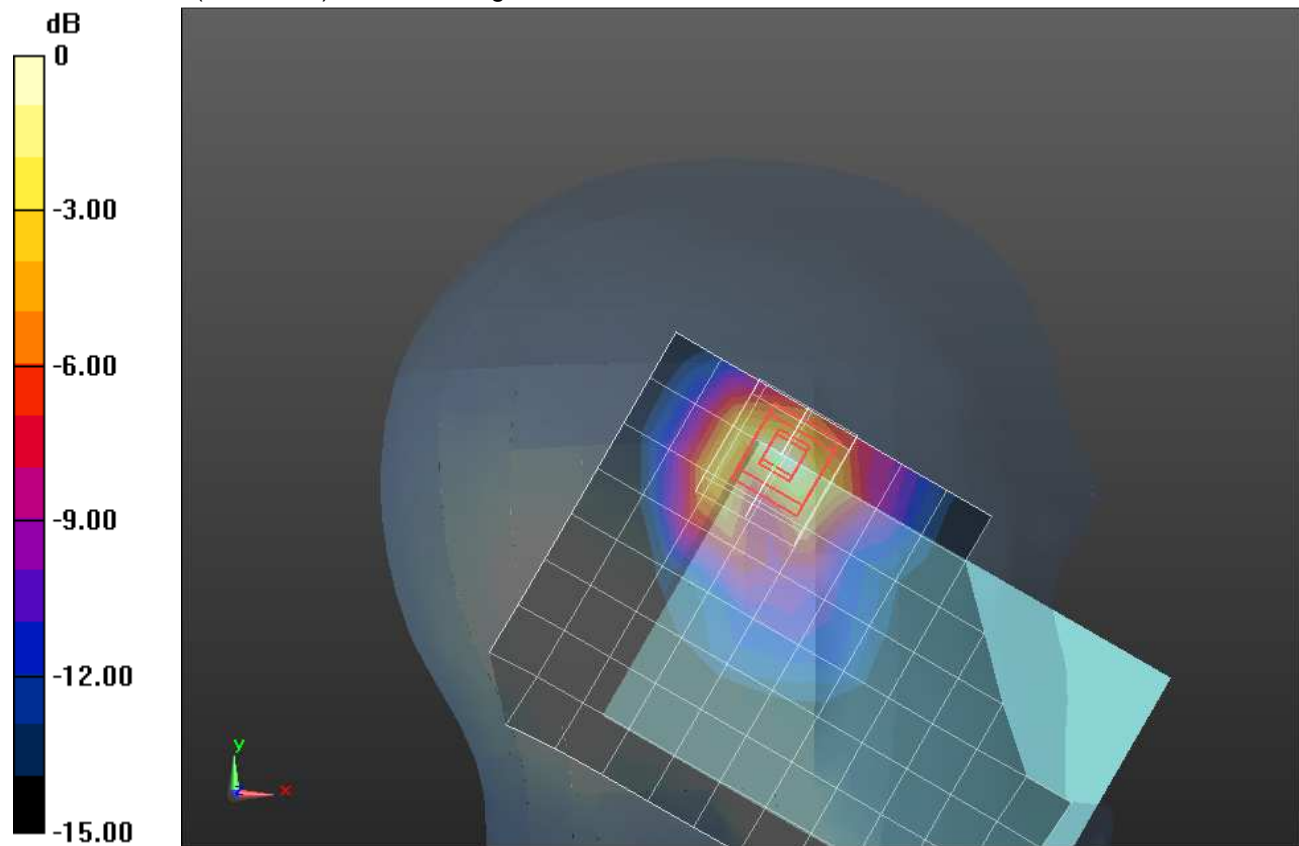

0 dB = 0.420mW/g = -7.54 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.377$ mho/m; $\epsilon_r = 39.772$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (B); Type: QD000P40CD; Serial: 1628

RHS/Touch_1xEVDO Rel 0, ch 600/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.213 mW/g


RHS/Touch_1xEVDO Rel 0, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.419 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.2870

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.219 mW/g

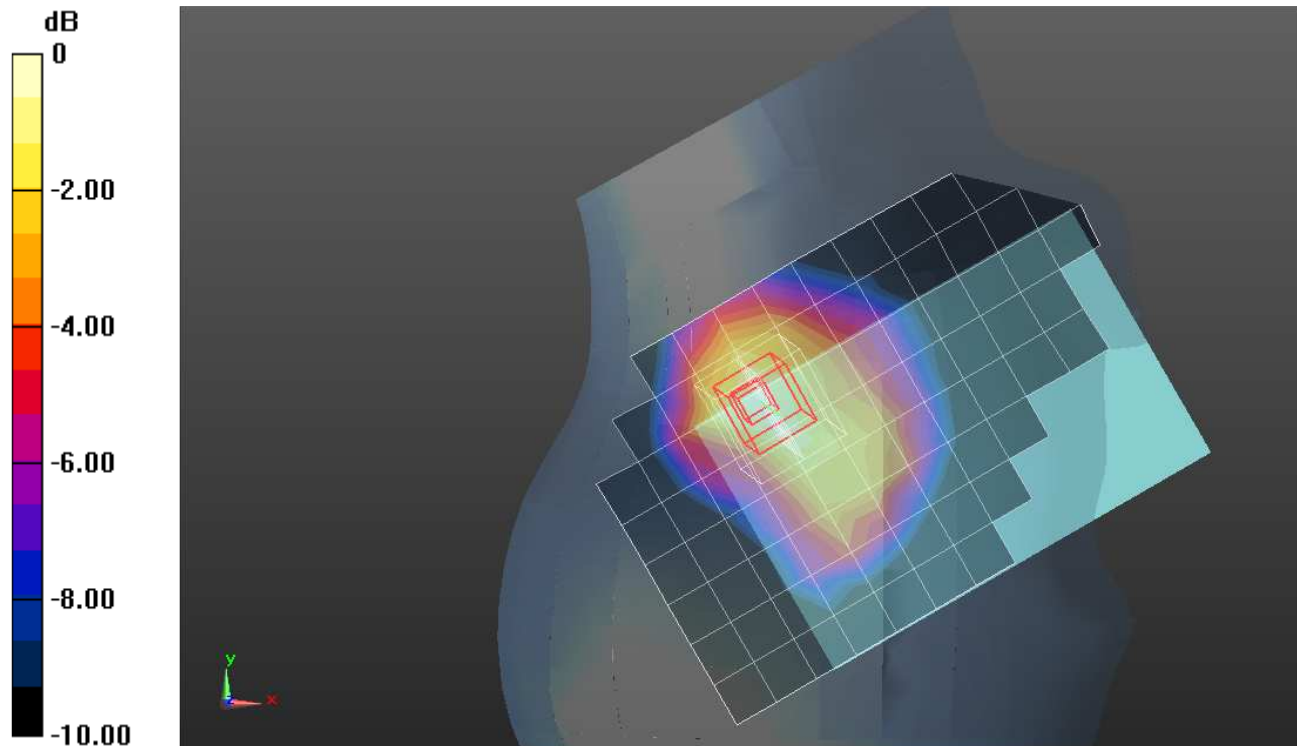

0 dB = 0.220mW/g = -13.15 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.377$ mho/m; $\epsilon_r = 39.772$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.59, 7.59, 7.59); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: SAM v5.0 (B); Type: QD000P40CD; Serial: 1628

RHS/Tilt_1xEVDO Rel 0, ch 600/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.096 mW/g


RHS/Tilt_1xEVDO Rel 0, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.494 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.1400

SAR(1 g) = 0.085 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.106 mW/g

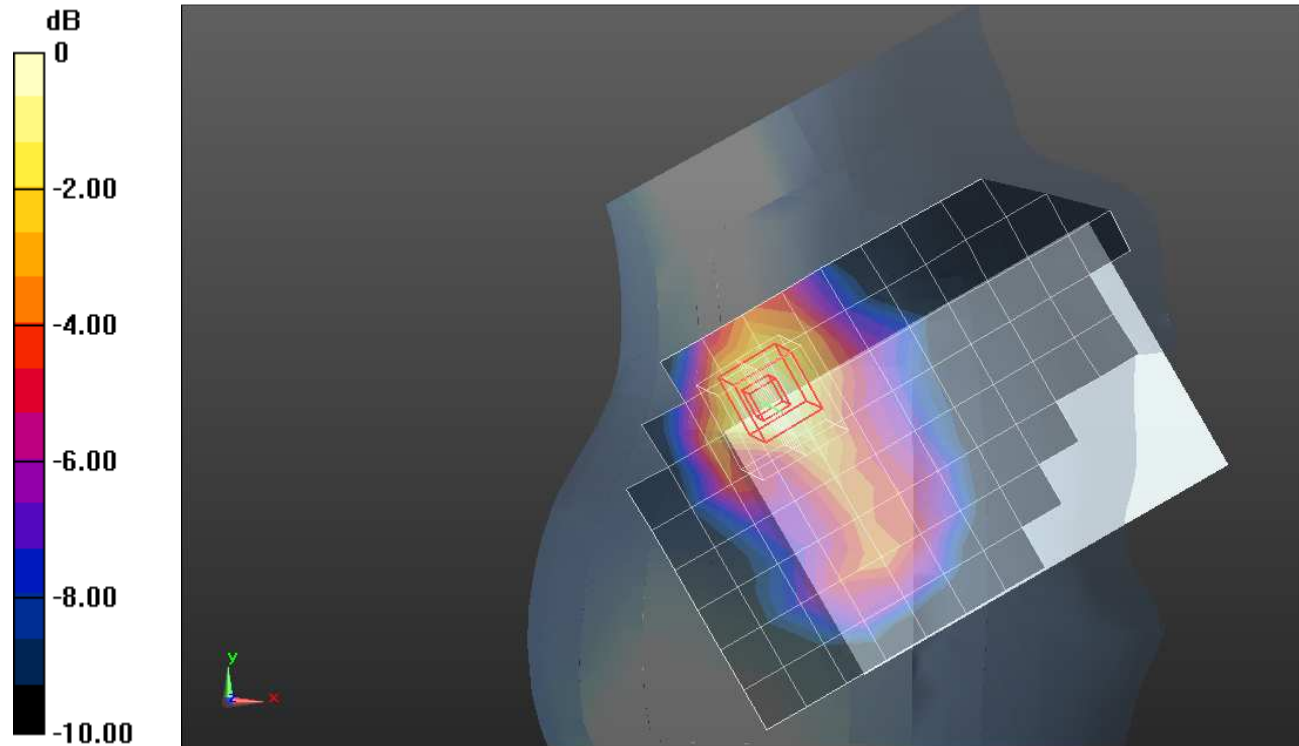

0 dB = 0.110mW/g = -19.17 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.473$ mho/m; $\epsilon_r = 51.304$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xRTT RC3 SO32, ch 25/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.002 mW/g

Rear/1xRTT RC3 SO32, ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.613 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 1.7500

SAR(1 g) = 0.970 mW/g; SAR(10 g) = 0.524 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.340 mW/g

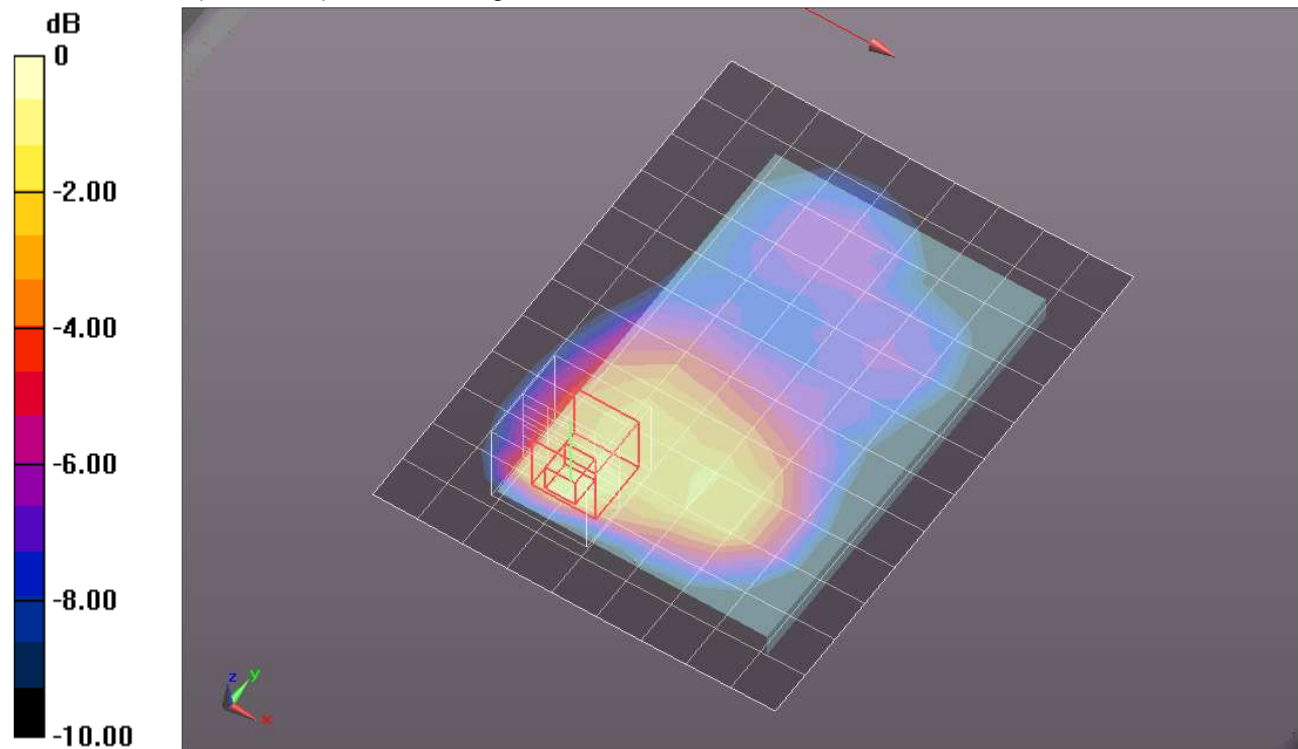

0 dB = 1.340mW/g = 2.54 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.505$ mho/m; $\epsilon_r = 51.177$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xRTT RC3 SO32, ch 600/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.978 mW/g


Rear/1xRTT RC3 SO32, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.630 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 1.7900

SAR(1 g) = 0.984 mW/g; SAR(10 g) = 0.520 mW/g

Maximum value of SAR (measured) = 1.370 mW/g

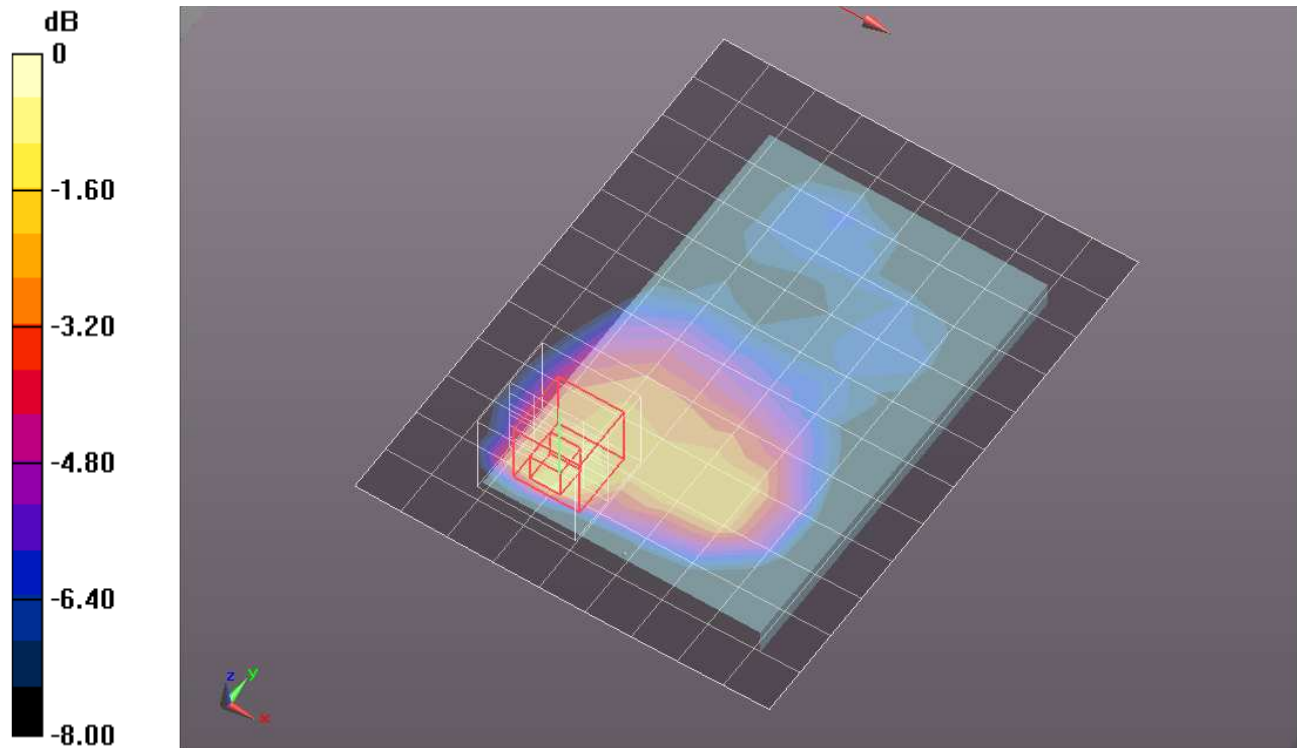


0 dB = 1.370mW/g = 2.73 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/1xRTT RC3 SO32, ch 600/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.938 mW/g

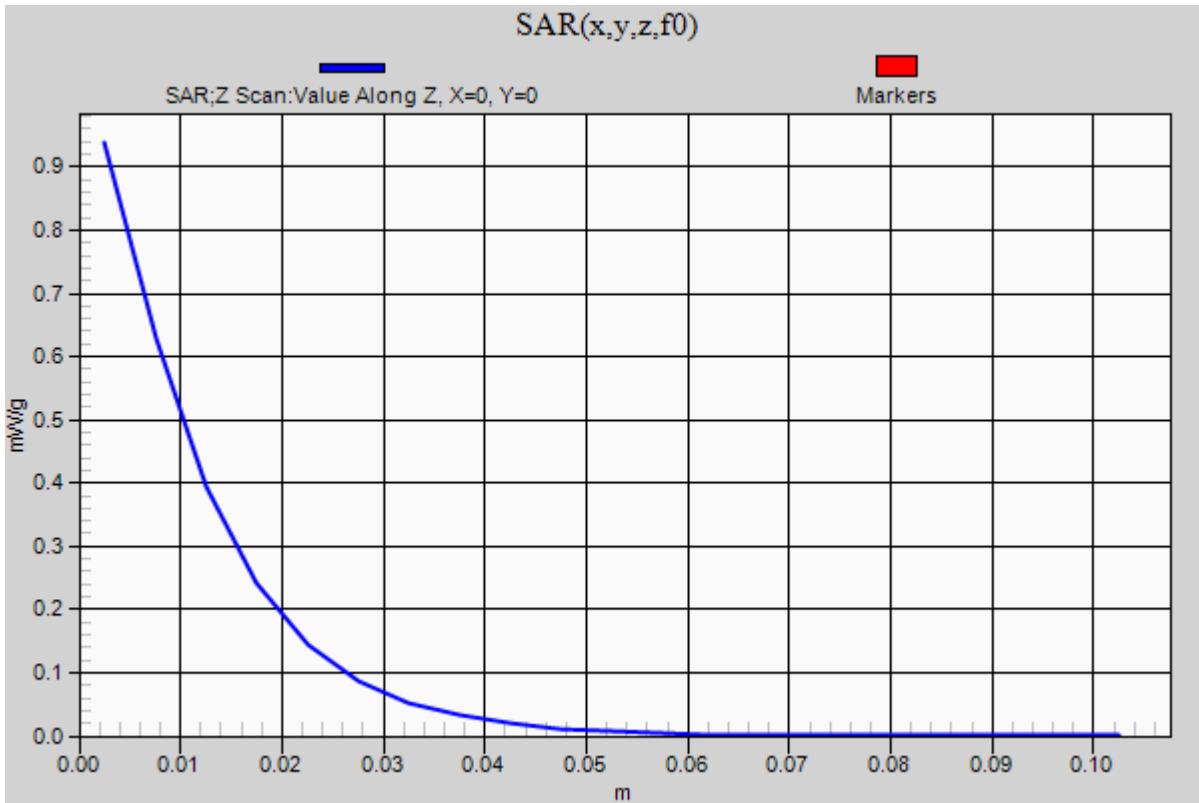

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.505$ mho/m; $\epsilon_r = 51.177$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012

- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012

- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)

- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xRTT RC3 SO32, ch 600 w/handset/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.030 mW/g

Rear/1xRTT RC3 SO32, ch 600 w/handset/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.840 V/m; Power Drift = 0.25 dB

Peak SAR (extrapolated) = 1.6940

SAR(1 g) = 0.936 mW/g; SAR(10 g) = 0.495 mW/g

Maximum value of SAR (measured) = 1.309 mW/g

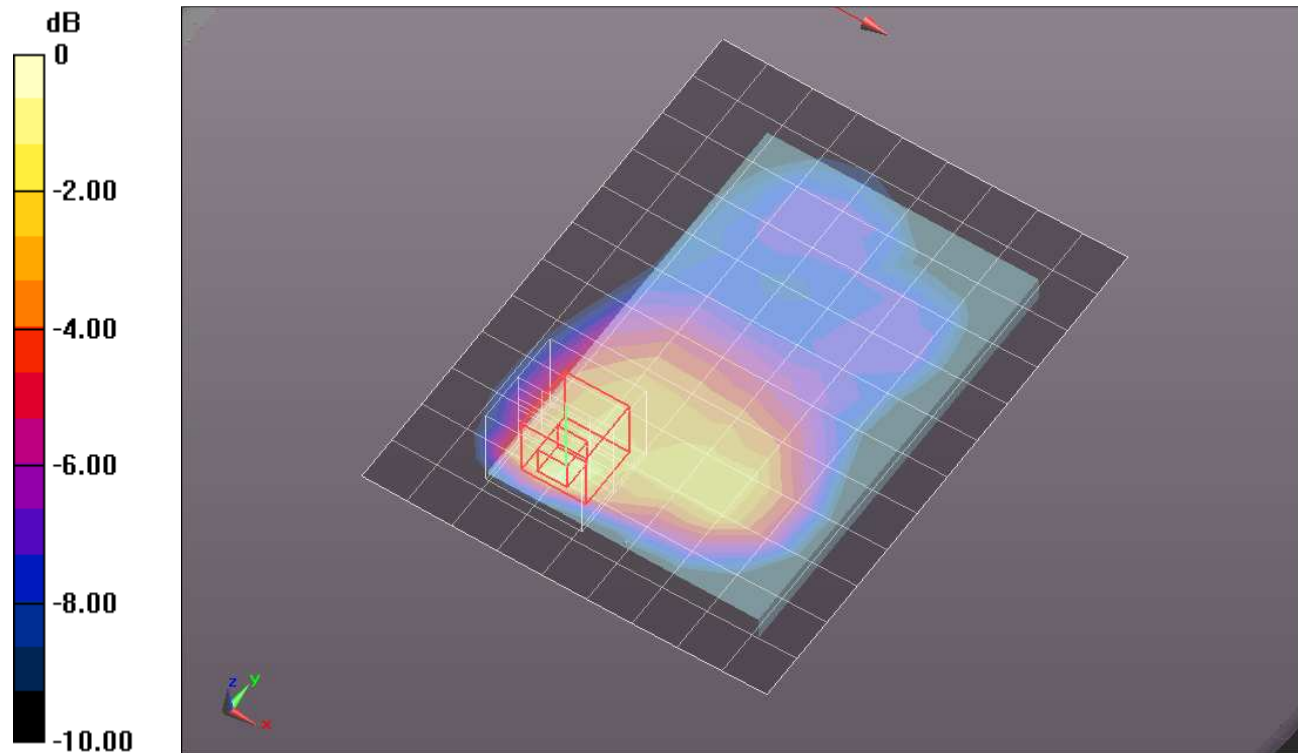

0 dB = 1.310mW/g = 2.35 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.539$ mho/m; $\epsilon_r = 51.107$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xRTT RC3 SO32, ch 1175/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.940 mW/g

Rear/1xRTT RC3 SO32, ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.162 V/m; Power Drift = 0.26 dB

Peak SAR (extrapolated) = 1.6800

SAR(1 g) = 0.921 mW/g; SAR(10 g) = 0.485 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 1.275 mW/g

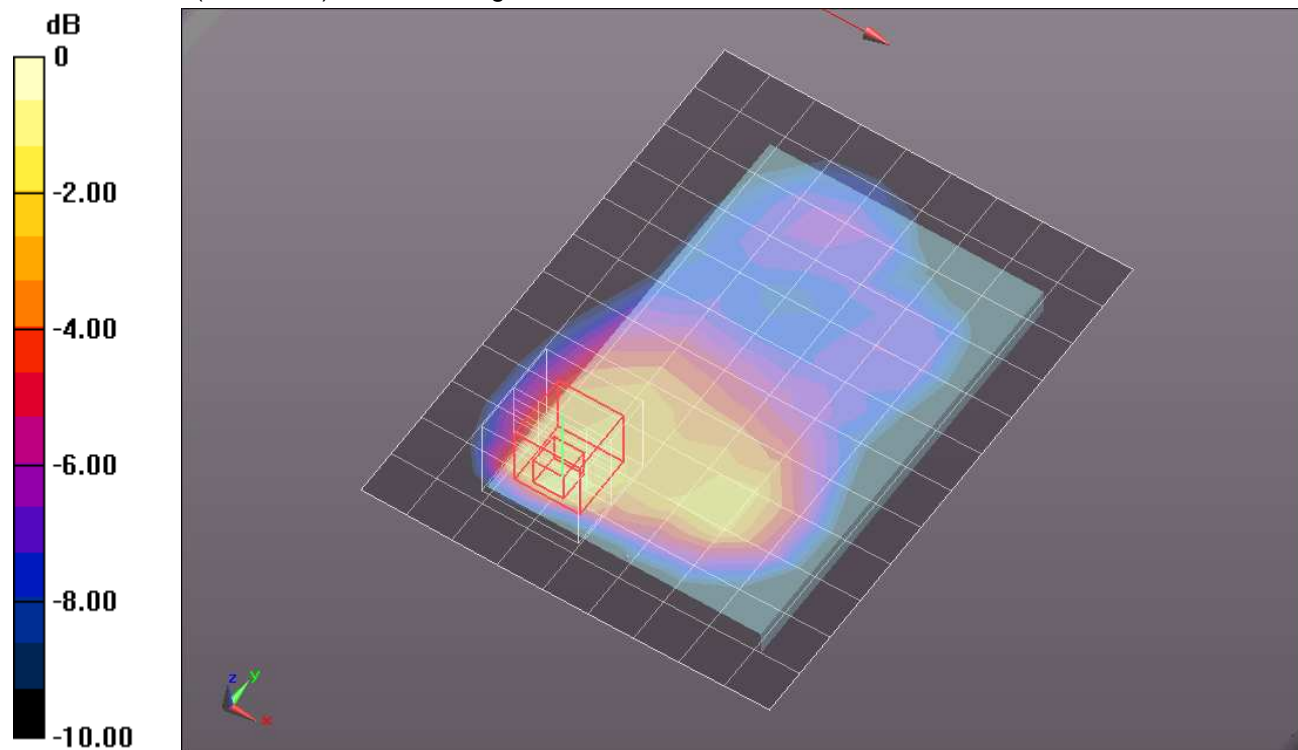

0 dB = 1.270mW/g = 2.08 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.505$ mho/m; $\epsilon_r = 51.177$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Front/1xRTT RC3 SO32, ch 600/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.487 mW/g


Front/1xRTT RC3 SO32, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.251 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.6420

SAR(1 g) = 0.419 mW/g; SAR(10 g) = 0.265 mW/g

Maximum value of SAR (measured) = 0.514 mW/g

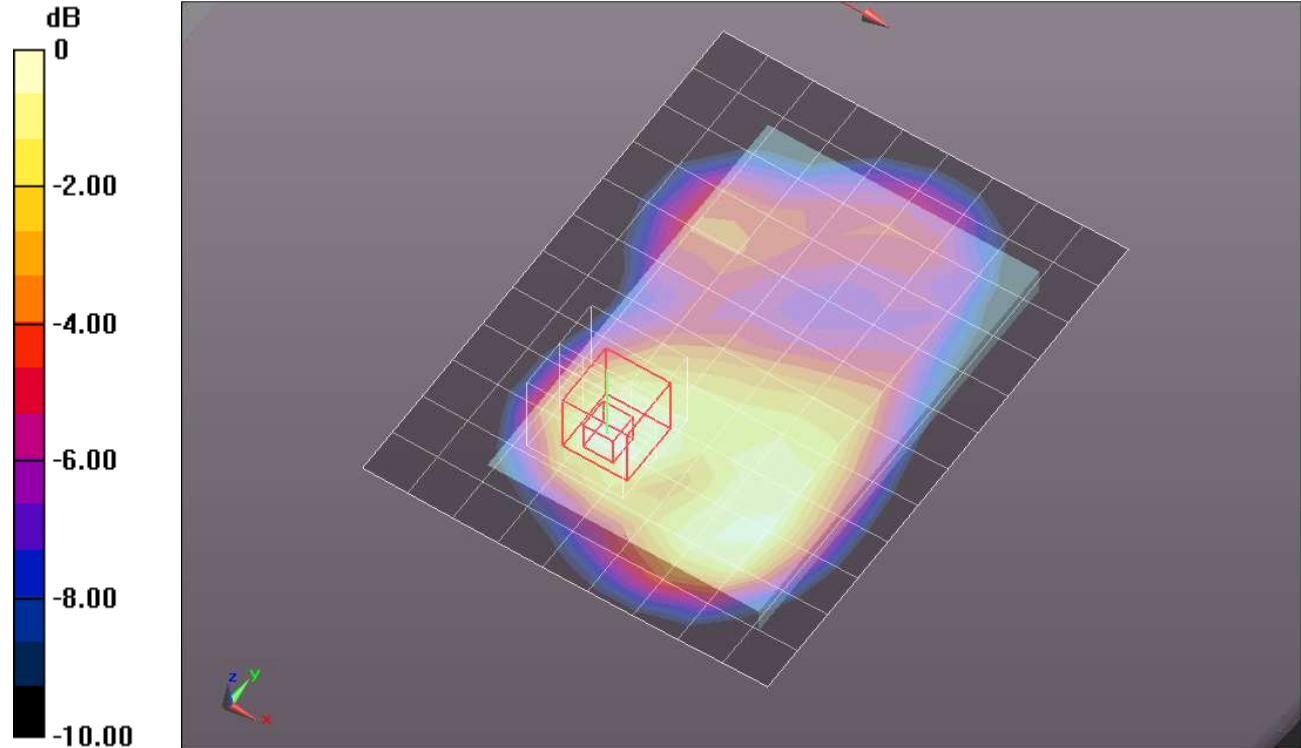

0 dB = 0.510mW/g = -5.85 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.505$ mho/m; $\epsilon_r = 51.177$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 2/1xRTT RC3 SO32, ch 600/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.365 mW/g


Edge 2/1xRTT RC3 SO32, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.691 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.5390

SAR(1 g) = 0.344 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.432 mW/g

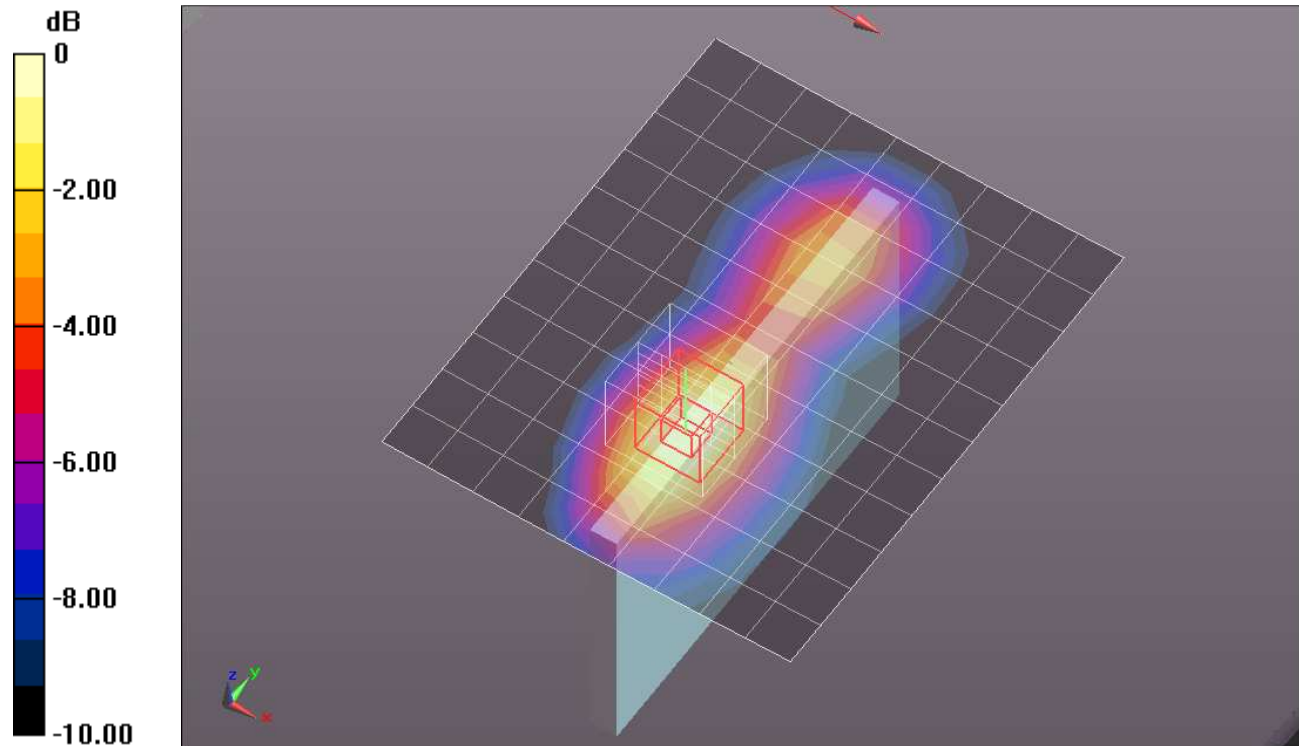

0 dB = 0.430mW/g = -7.33 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.505$ mho/m; $\epsilon_r = 51.177$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 3/1xRTT RC3 SO32 ch 600/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.421 mW/g


Edge 3/1xRTT RC3 SO32, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.769 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.5910

SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.465 mW/g

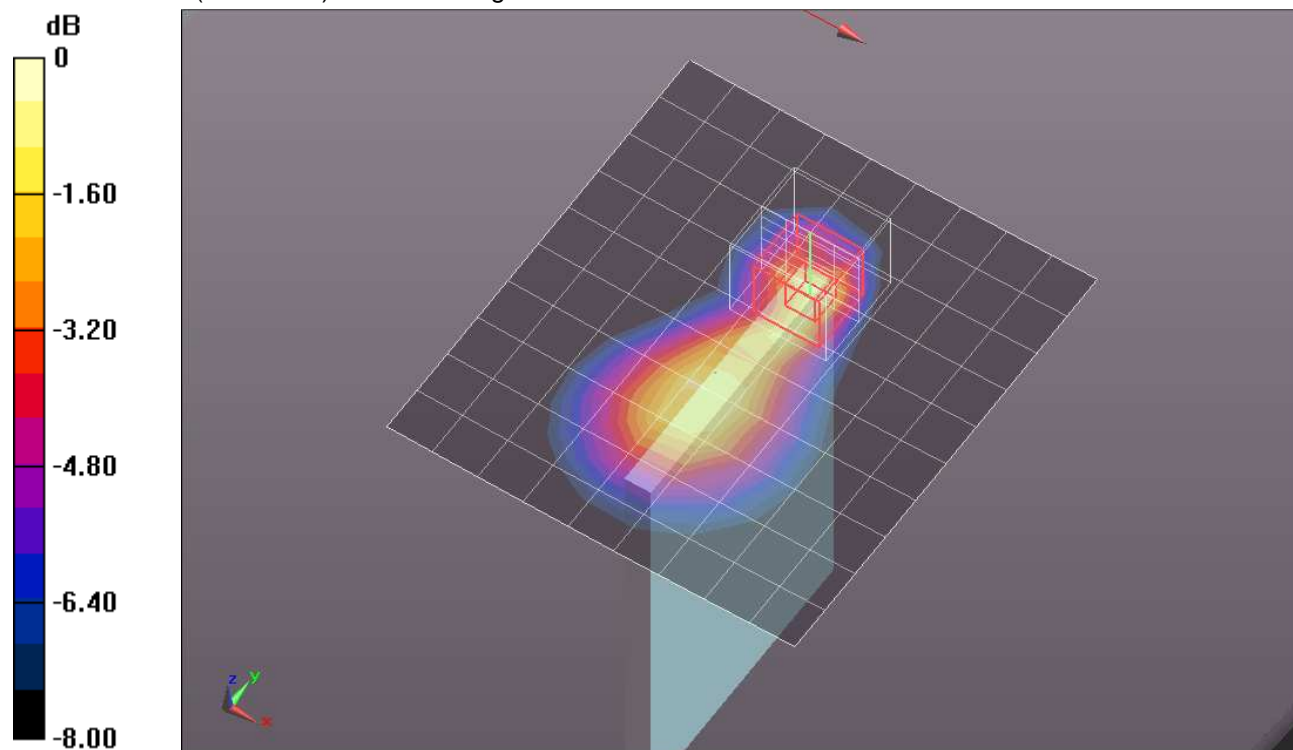

0 dB = 0.470mW/g = -6.56 dB mW/g

CDMA BC1

Frequency: 1851.25 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used (interpolated): $f = 1851.25$ MHz; $\sigma = 1.456$ mho/m; $\epsilon_r = 53.123$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xEVDO Rel 0, ch 25/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.883 mW/g

Rear/1xEVDO Rel 0, ch 25/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.858 V/m; Power Drift = -0.0071 dB

Peak SAR (extrapolated) = 1.1420

SAR(1 g) = 0.697 mW/g; SAR(10 g) = 0.374 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.890 mW/g

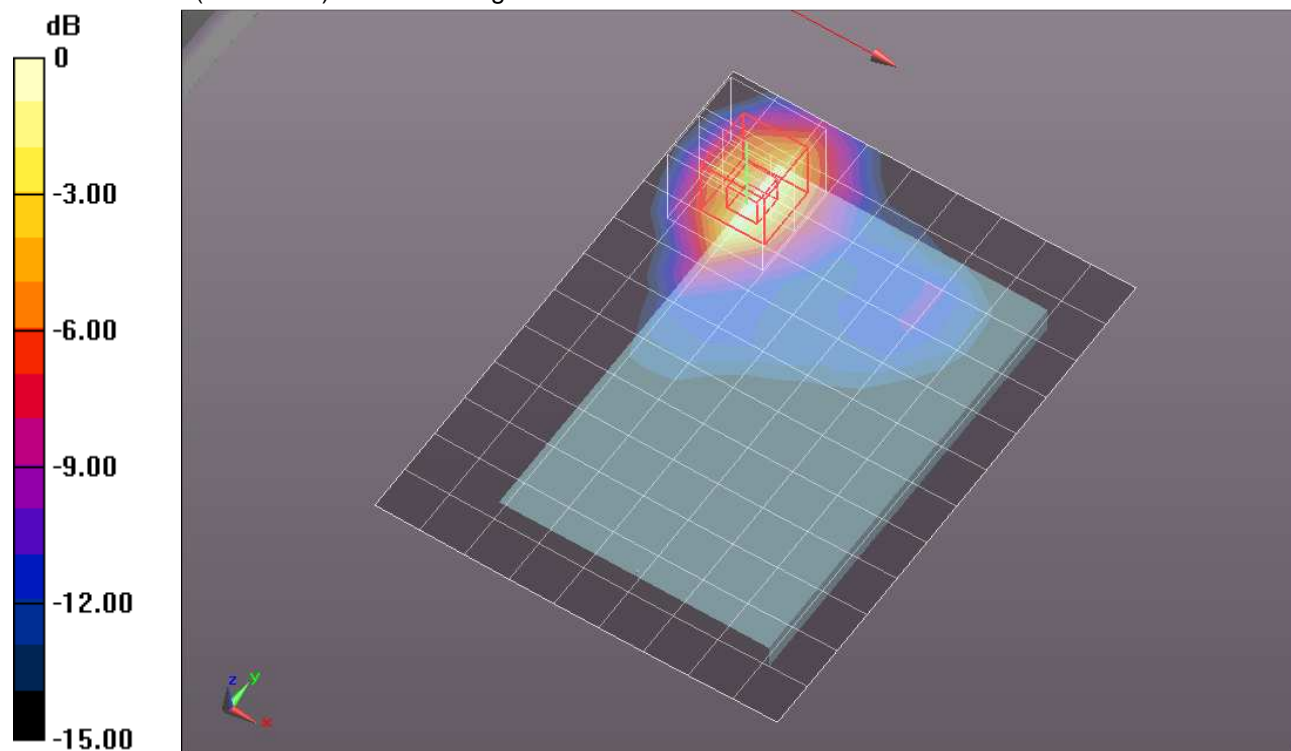

0 dB = 0.890mW/g = -1.01 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 53.013$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xEVDO Rel 0, ch 600/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.033 mW/g


Rear/1xEVDO Rel 0, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.239 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.3500

SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.439 mW/g

Maximum value of SAR (measured) = 1.056 mW/g

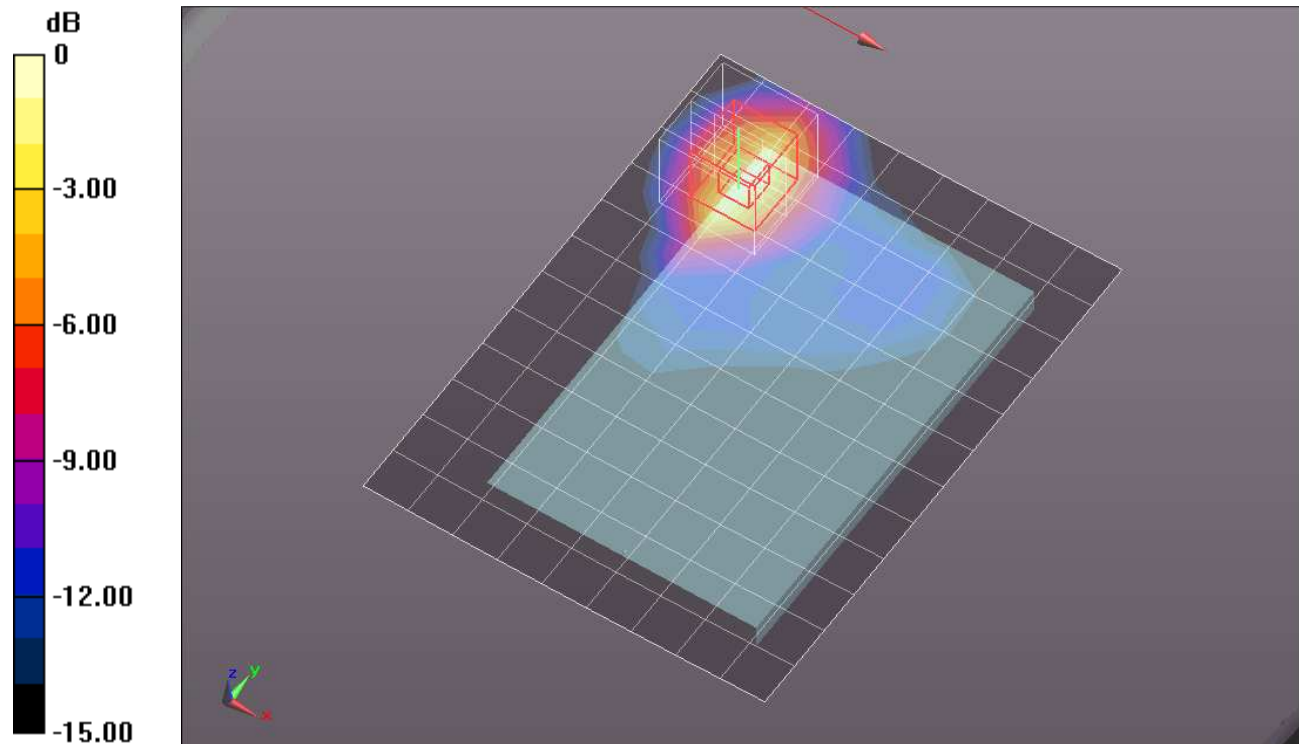


0 dB = 1.060mW/g = 0.51 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1

Rear/1xEVDO Rel 0, ch 600/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 1.045 mW/g

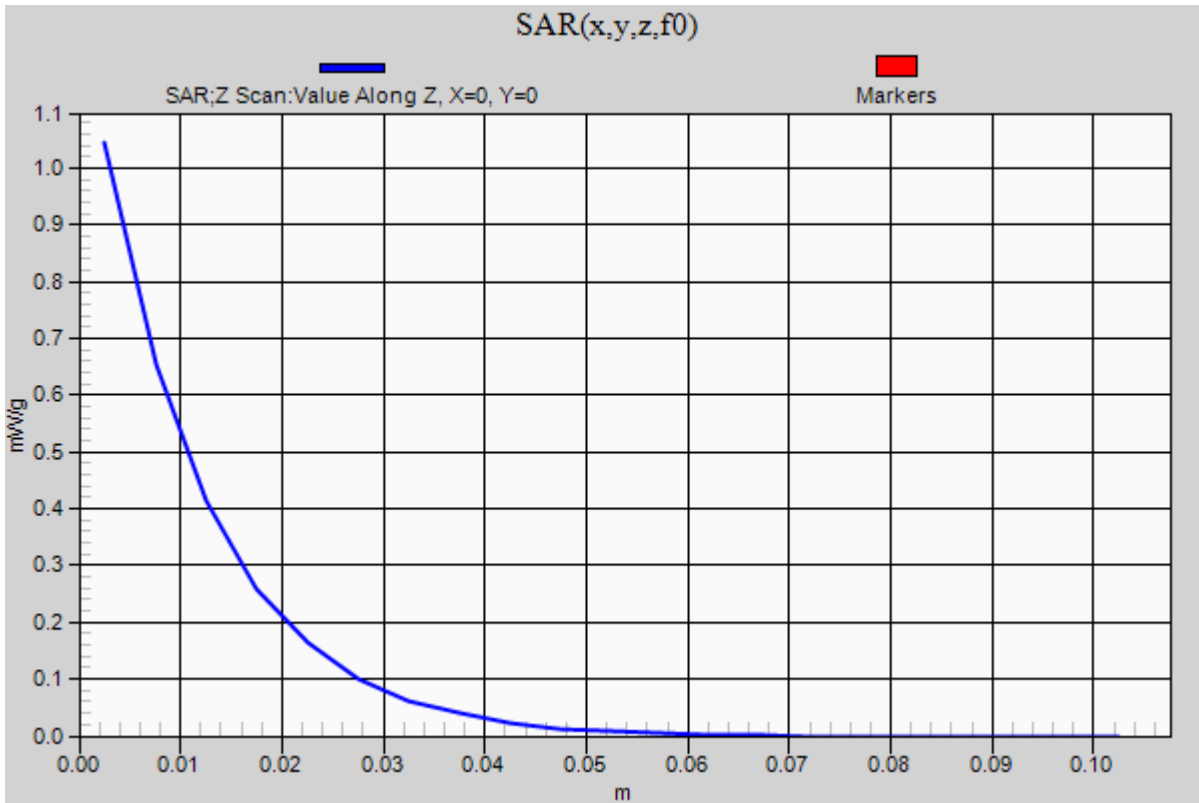

CDMA BC1


Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.489 \text{ mho/m}$; $\epsilon_r = 53.013$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xEVDO Rel 0, ch 600 w/headset/Area Scan (10x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (measured) = 1.022 mW/g

Rear/1xEVDO Rel 0, ch 600 w/headset/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 26.506 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 1.3480
SAR(1 g) = 0.819 mW/g; SAR(10 g) = 0.437 mW/g
 Maximum value of SAR (measured) = 1.054 mW/g

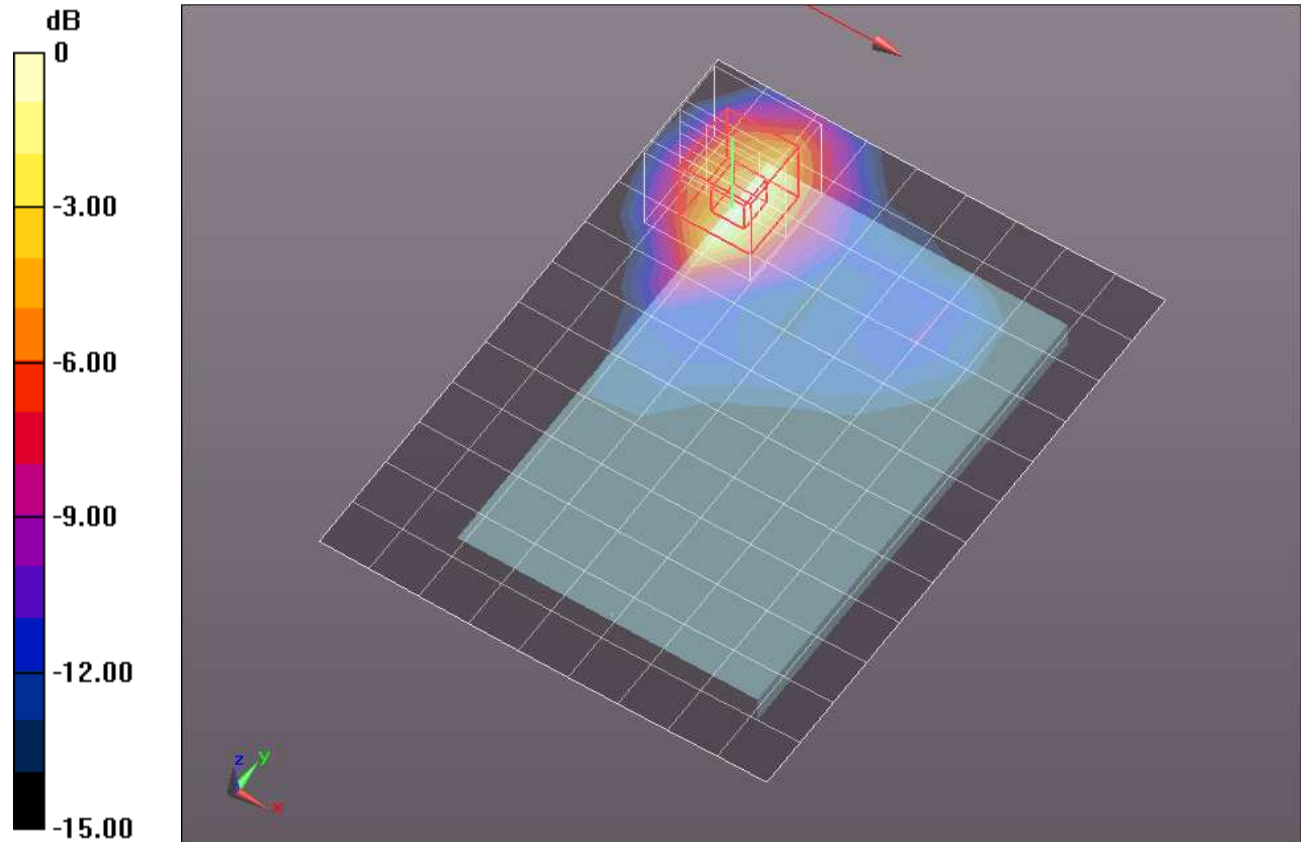

0 dB = 1.050mW/g = 0.42 dB mW/g

CDMA BC1

Frequency: 1908.75 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
Medium parameters used (interpolated): $f = 1908.75$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 52.914$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Rear/1xEVDO Rel 0, ch 1175/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.908 mW/g

Rear/1xEVDO Rel 0, ch 1175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 24.534 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.1820

SAR(1 g) = 0.710 mW/g; SAR(10 g) = 0.377 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.926 mW/g

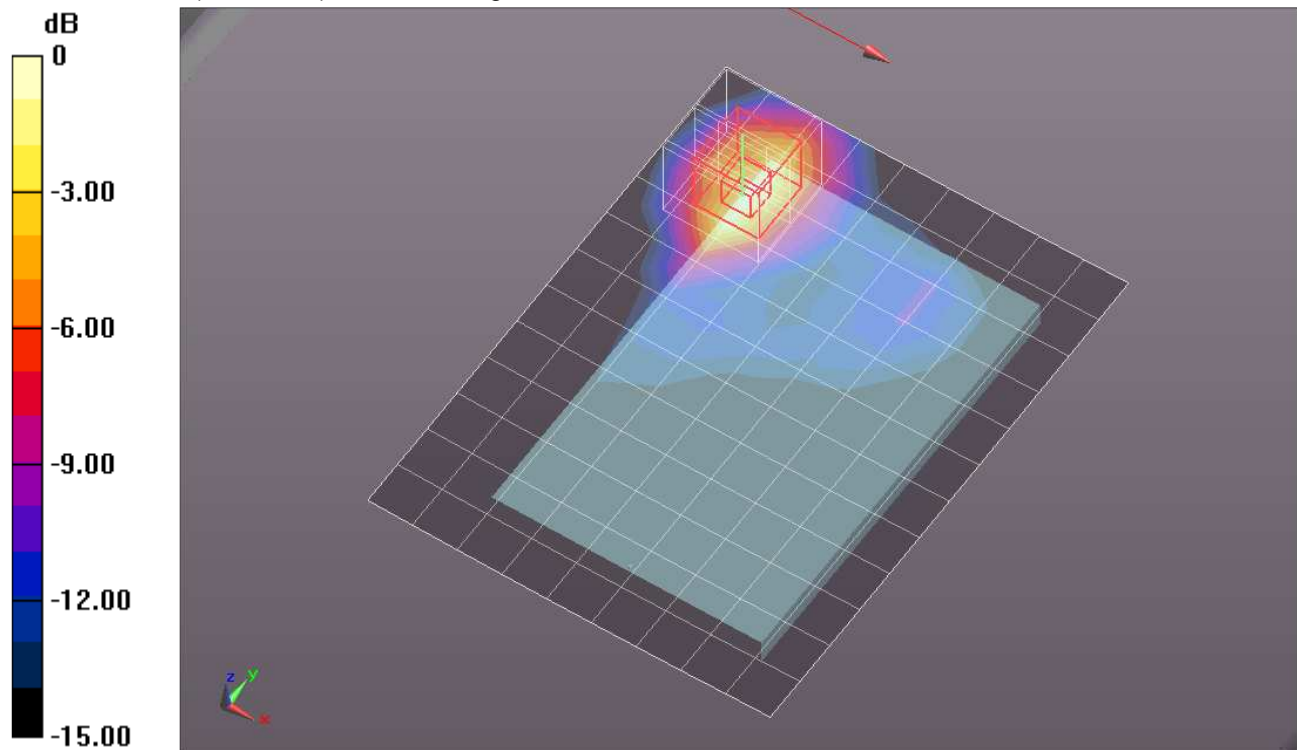

0 dB = 0.930mW/g = -0.63 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 53.013$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Front/1xEVDO Rel 0, ch 600/Area Scan (10x13x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.183 mW/g


Front/1xEVDO Rel 0, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.227 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.2750

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.097 mW/g

Maximum value of SAR (measured) = 0.217 mW/g

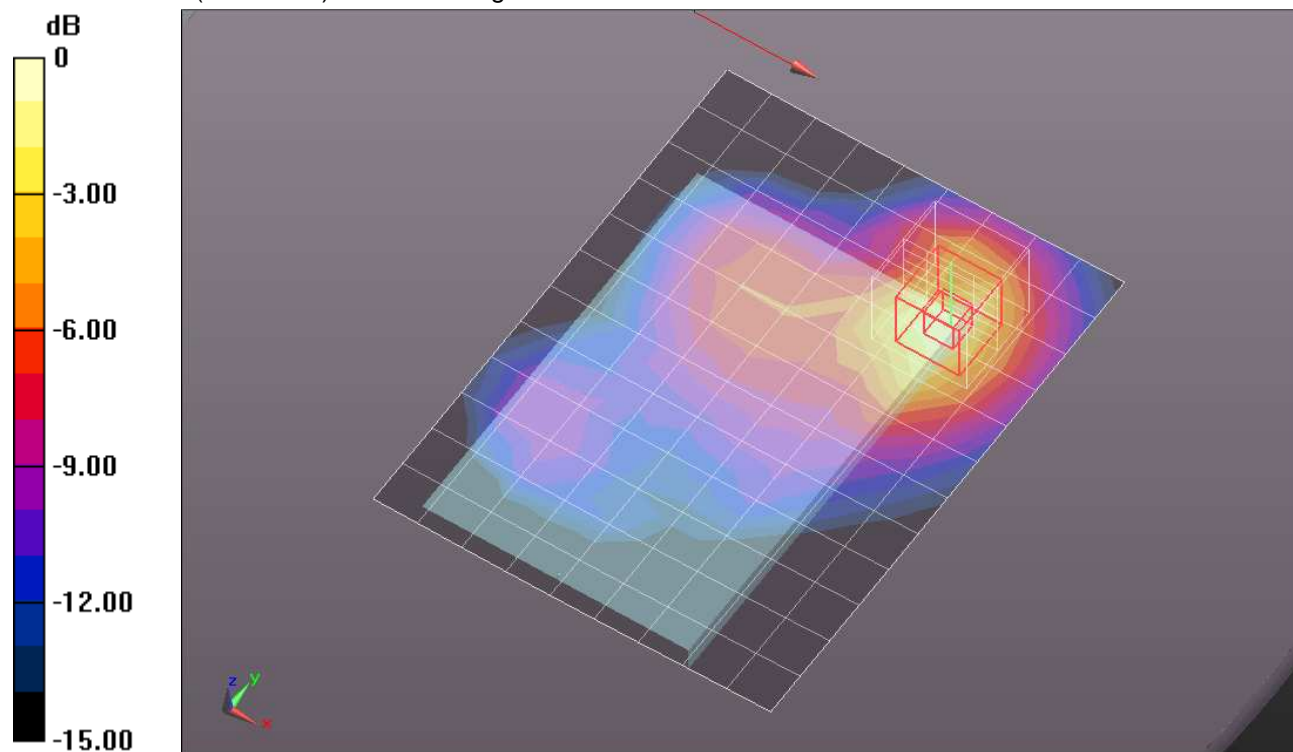

0 dB = 0.220mW/g = -13.15 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 53.013$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 1/1xEVDO Rel 0, ch 600/Area Scan (10x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.084 mW/g


Edge 1/1xEVDO Rel 0, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.589 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.1080

SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.037 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

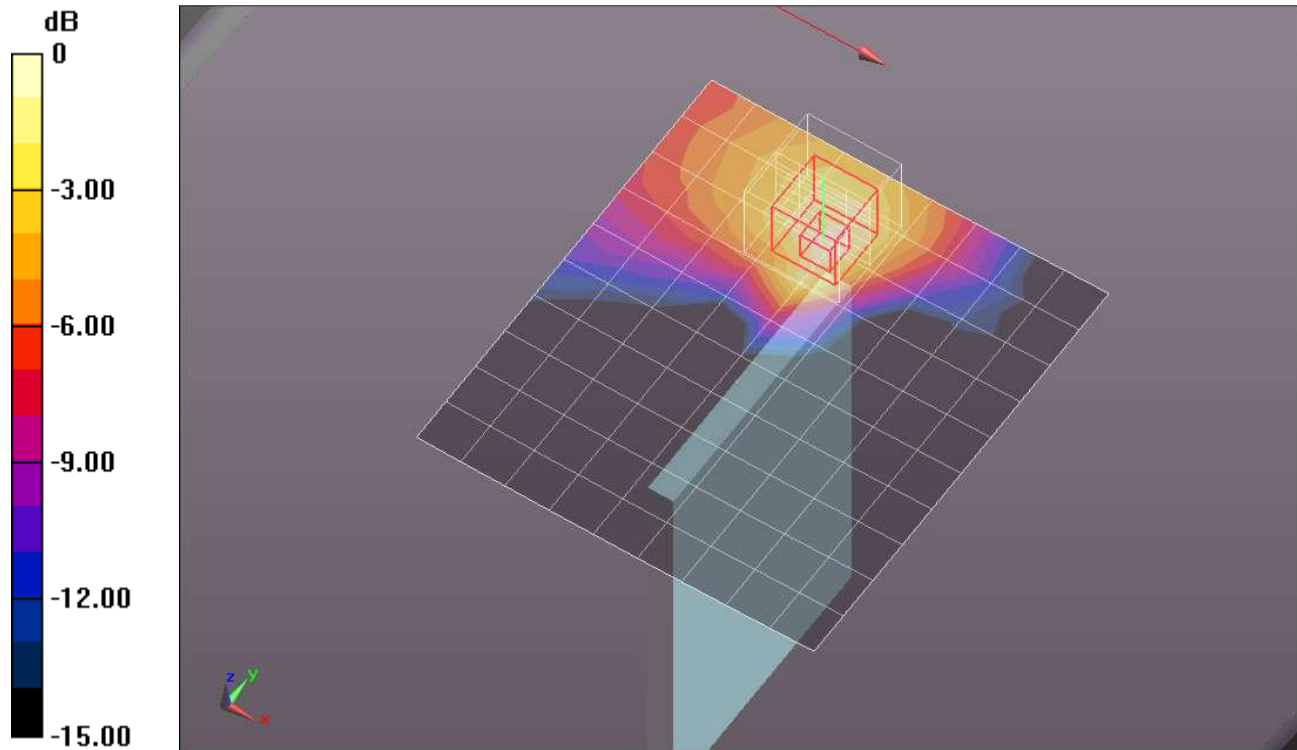

0 dB = 0.080mW/g = -21.94 dB mW/g

CDMA BC1

Frequency: 1880 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.0°C
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.489$ mho/m; $\epsilon_r = 53.013$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Electronics: DAE4 Sn1258; Calibrated: 3/8/2012
- Probe: EX3DV4 - SN3772; ConvF(7.23, 7.23, 7.23); Calibrated: 2/16/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Phantom: ELI v5.0 (B); Type: QDOVA001BB; Serial: 1099

Edge 2/1xEVDO Rel 0, ch 600/Area Scan (10x12x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.574 mW/g


Edge 2/1xEVDO Rel 0, ch 600/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.737 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.7440

SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.253 mW/g

Maximum value of SAR (measured) = 0.589 mW/g

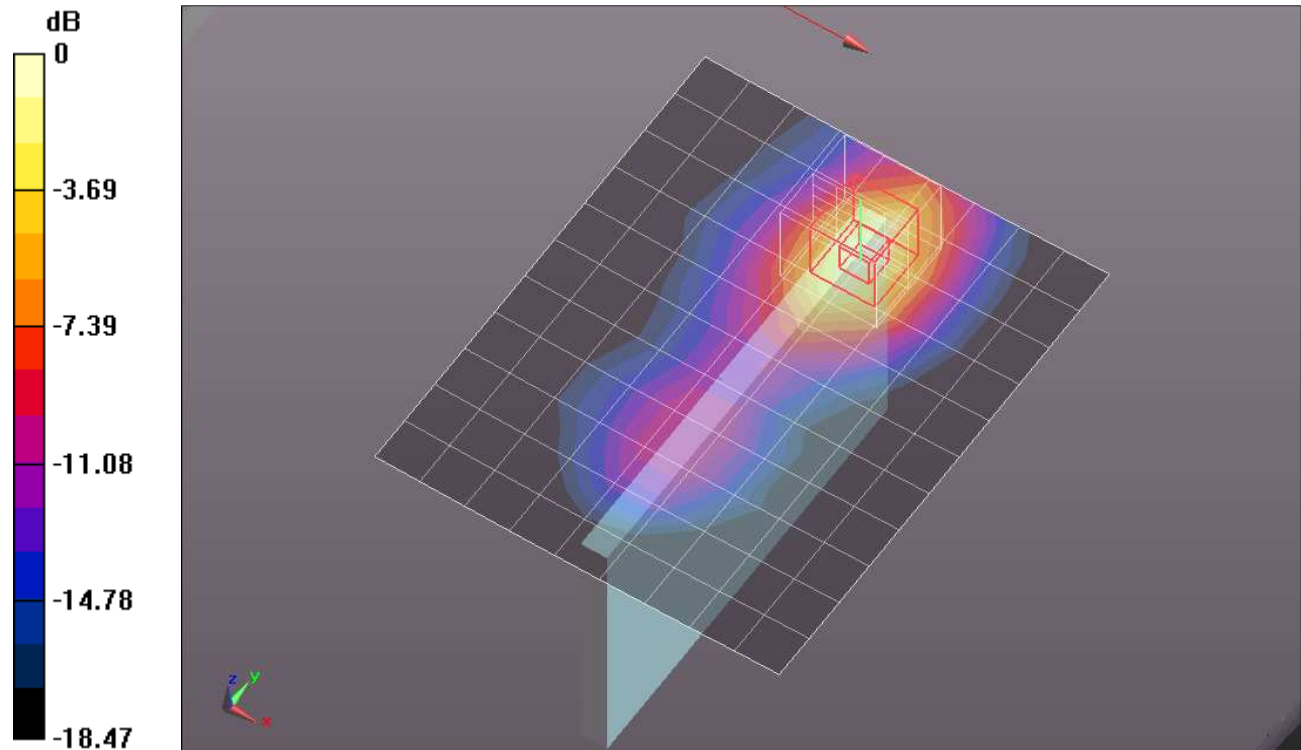

0 dB = 0.590mW/g = -4.58 dB mW/g