



**FCC CFR 47 §2.1093
IEEE Std 1528-2003 and IEEE Std 1528a-2005**

(Class II Permissive Change)

For
GSM/CDMA/WCDMA + LTE Phone Bluetooth, WLAN (2.4GHz & 5GHz) and NFC

Model: VS980, LGVS980 and LG-VS980

FCC ID: ZNFVS980

**Report Number: 13U15600-6A
Issue Date: 8/9/2013**

Prepared for
**LG ELECTRONICS MOBILECOMM U.S.A., INC.
1000 SYLVAN AVE.
ENGLEWOOD CLIFFS, NJ 07632**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	8/2/2013	Initial Issue	--
A	8/9/2013	Sec. 12.7. & 12.8.: Added justification for not testing HSPA	Kenneth Mak

Table of Contents

1.	Attestation of Test Results	8
2.	Test Methodology.....	9
3.	Facilities and Accreditation	9
4.	Calibration and Uncertainty	10
4.1.	Measuring Instrument Calibration	10
4.2.	Measurement Uncertainty	12
5.	Measurement System Description and Setup	13
6.	SAR Measurement Procedure	14
6.1.	Normal SAR Measurement Procedure	14
6.2.	Volume Scan Procedures	16
7.	Device Under Test	17
7.1.	General Information	17
7.2.	Wireless Technologies.....	18
7.3.	Simultaneous Transmission Conditions	19
7.4.	General LTE SAR Test and Reporting Considerations.....	20
8.	RF Exposure Conditions.....	21
8.1.	Head Exposure Conditions	21
8.2.	Body-worn Accessory Exposure Conditions.....	21
8.3.	Hotspot Exposure Conditions.....	22
8.4.	WiFi Direct Exposure Conditions	23
9.	RF Output Power Measurement	24
9.1.	GSM850	24
9.2.	GSM1900	25
9.3.	CDMA BC0	26
9.4.	CDMA BC1	27
9.5.	W-CDMA Band II	28
9.6.	W-CDMA Band V.....	32
9.7.	LTE Band 4.....	36
9.8.	LTE Band 13.....	46
9.9.	SV-LTE.....	49
9.9.1.	SV-LTE (CDMA BC0 + LTE B4).....	49
9.9.2.	SV-LTE (CDMA BC1 + LTE B4).....	50



9.9.3.	SV-LTE (CDMA BC0 + LTE B13).....	51
9.9.4.	SV-LTE (CDMA BC1 + LTE B13).....	52
9.10.	WiFi (2.4 GHz Band)	53
9.11.	WiFi (5 GHz Bands)	54
9.12.	Bluetooth.....	57
10.	Tissue Dielectric Properties	58
10.1.	Composition of Ingredients for the Tissue Material Used in the SAR Tests	59
10.2.	Tissue Dielectric Parameter Check Results.....	60
11.	System Performance Check	63
11.1.	System Performance Check Measurement Conditions.....	63
11.2.	Reference SAR Values for System Performance Check.....	64
11.3.	System Performance Check Results	65
12.	SAR Test Results	66
12.1.	GSM850.....	66
12.1.1.	Head Exposure Conditions.....	66
12.1.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	67
12.2.	GSM1900.....	68
12.2.1.	Head Exposure Conditions.....	68
12.2.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	69
12.3.	CDMA BC0.....	70
12.3.1.	Head Exposure Conditions.....	70
12.3.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	71
12.4.	CDMA BC0 Power Reduction.....	73
12.4.1.	Head Exposure Conditions.....	73
12.4.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	73
12.5.	CDMA BC1.....	74
12.5.1.	Head Exposure Conditions.....	74
12.5.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	75
12.6.	CDMA BC1 Power Reduction.....	77
12.6.1.	Head Exposure Conditions.....	77
12.6.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	77
12.7.	W-CDMA Band II.....	78
12.7.1.	Head Exposure Conditions.....	78
12.7.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	79
12.8.	W-CDMA Band V	80

12.8.1.	Head Exposure Conditions.....	80
12.8.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	81
12.9.	<i>LTE Band 4 (20MHz Bandwidth)</i>	82
12.9.1.	Head Exposure Conditions.....	82
12.9.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	82
12.10.	<i>LTE Band 4 (20MHz Bandwidth) Power Reduction</i>	83
12.10.1.	Head Exposure Conditions.....	83
12.10.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	83
12.11.	<i>LTE Band 13 (10MHz Bandwidth)</i>	84
12.11.1.	Head Exposure Conditions.....	84
12.11.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	84
12.12.	<i>LTE Band 13 (10MHz Bandwidth) Power Reduction</i>	85
12.12.1.	Head Exposure Conditions.....	85
12.12.2.	Body-worn Accessory & Hotspot Exposure Conditions.....	85
12.13.	<i>Wi-Fi (2.4 GHz Band)</i>	86
12.13.1.	Head Exposure Conditions.....	86
12.13.2.	Additional Testing in 802.11ac Mode for Head Exposure Conditions.....	86
12.13.3.	Body-worn Accessory & Hotspot Exposure Conditions.....	87
12.13.4.	Additional Testing in 802.11ac Mode for Body-worn Accessory & Hotspot Exposure Conditions	87
12.14.	<i>Wi-Fi (5 GHz Bands)</i>	88
12.14.1.	Head Exposure Conditions.....	88
12.14.2.	Additional Testing in 802.11ac Mode for Head Exposure Conditions.....	89
12.14.3.	Body-worn Accessory Exposure Conditions	90
12.14.4.	WiFi Direct (Group Owner) Exposure Conditions	90
12.14.5.	Additional Testing in 802.11ac Mode for Body-worn & WiFi Direct	91
12.15.	<i>Bluetooth</i>	92
12.15.1.	Body-worn Accessory & Hotspot Exposure Conditions.....	92
13.	SAR Measurement Variability	93
13.1.	<i>The Highest Measured SAR Configuration in Each Frequency Band</i>	93
13.2.	<i>Repeated Measurement Results</i>	93
13.2.1.	Head Exposure Condition	93
13.2.2.	Body-worn Accessory Exposure Condition.....	93
13.2.3.	Hotspot Mode Exposure Conditions	93
14.	Simultaneous Transmission SAR Analysis	94
14.1.	<i>Head Exposure Conditions</i>	95

14.1.1.	Sum of the SAR for GSM (Voice) & WiFi.....	95
14.1.2.	Sum of the SAR for GSM (VoIP) & WiFi.....	96
14.1.3.	Sum of the SAR for CDMA (Voice) & WiFi	97
14.1.4.	Sum of the SAR for CDMA (VoIP) & WiFi.....	98
14.1.5.	Sum of the SAR for WCDMA & WiFi	99
14.1.6.	Sum of the SAR for LTE & WiFi	100
14.1.7.	Sum of the SAR for SV-LTE & WiFi.....	101
14.2.	<i>Body-worn Accessory Exposure Conditions</i>	<i>105</i>
14.2.1.	Sum of the SAR for GSM (Voice), WiFi & BT	105
14.2.2.	Sum of the SAR for GSM (VoIP), WiFi & BT	106
14.2.3.	Sum of the SAR for CDMA (Voice), WiFi & BT	107
14.2.4.	Sum of the SAR for CDMA (VoIP), WiFi & BT	108
14.2.5.	Sum of the SAR for WCDMA, WiFi & BT	109
14.2.6.	Sum of the SAR for LTE, WiFi & BT	110
14.2.7.	Sum of the SAR for SV-LTE, WiFi & BT	111
14.3.	<i>Hotspot Mode Exposure Conditions</i>	<i>115</i>
14.3.1.	Sum of the SAR for GSM (VoIP) & WiFi.....	115
14.3.2.	Sum of the SAR for CDMA (EV-DO) & WiFi.....	115
14.3.3.	Sum of the SAR for WCDMA & WiFi	116
14.3.4.	Sum of the SAR for LTE & WiFi	116
14.3.5.	Sum of the SAR for SV-LTE & WiFi 2.4 GHz.....	117
14.4.	<i>WiFi Direct Exposure Conditions</i>	<i>119</i>
14.4.1.	Sum of the SAR for GSM (VoIP) & WiFi 5.8 GHz	119
14.4.2.	Sum of the SAR for CDMA (EV-DO) & WiFi 5.8 GHz	119
14.4.3.	Sum of the SAR for WCDMA & WiFi 5.8 GHz	120
14.4.4.	Sum of the SAR for LTE & WiFi 5.8 GHz.....	120
14.4.5.	Sum of the SAR for SV-LTE & WiFi 5.8 GHz.....	121
15.	Appendixes.....	123
15.1.	<i>System Performance Check Plots</i>	<i>123</i>
15.2.	<i>Highest SAR Test Plots for GSM.....</i>	<i>123</i>
15.3.	<i>Highest SAR Test Plots for CDMA</i>	<i>123</i>
15.4.	<i>Highest SAR Test Plots for W-CDMA.....</i>	<i>123</i>
15.5.	<i>Highest SAR Test Plots for LTE</i>	<i>123</i>
15.6.	<i>Highest SAR Test Plots for WiFi.....</i>	<i>123</i>
15.7.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3686.....</i>	<i>123</i>
15.8.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3929.....</i>	<i>123</i>

15.9.	Calibration Certificate for D750V3 - SN 1071	123
15.10.	Calibration Certificate for D835V2 - SN 4d002	123
15.11.	Calibration Certificate for D1750V2 - SN 1050	123
15.12.	Calibration Certificate for D1900V2- SN 5d043	123
15.13.	Calibration Certificate for D2450V2 - SN 899	123
15.14.	Calibration Certificate for D5GHzV2 - SN 1138	123
16.	External Photos	124
17.	Antenna Locations & Separation Distances.....	126
18.	Setup Photos	127
18.1.	Head RF Exposure Conditions	128
18.2.	Body-worn Accessory & Hotspot mode RF Exposure Conditions	130
18.3.	Hotspot RF Exposure Conditions	131

1. Attestation of Test Results

Applicant	LG ELECTRONICS MOBILECOMM U.S.A., INC.			
DUT description	GSM/CDMA/WCDMA + LTE Phone Bluetooth, WLAN (2.4GHz & 5GHz) and NFC			
Model	VS980, LGVS980 and LG-VS980			
Test device is	An identical prototype			
Device category	Portable			
Exposure category	General Population/Uncontrolled Exposure			
Date tested	7/18/2013 – 7/31/2013			
The highest reported SAR values	RF exposure conditions	Licensed	DTS	UNII
	Head	0.527 W/kg	0.491 W/kg	0.115 W/kg
	Body-worn Accessory	0.998 W/kg	0.177 W/kg	0.054 W/kg
	Wireless Router (Hotspot)	0.998 W/kg	0.177 W/kg	n/a W/kg
	WiFi Direct (5.8 GHz)	n/a W/kg	0.071 W/kg	n/a W/kg
	Simultaneous Transmission	1.439 W/kg	1.439 W/kg	1.333 W/kg
Applicable Standards	FCC CFR 47 §2.1093 IEEE Std 1528-2003 and IEEE Std 1528a-2005 FCC Published RF exposure KDB procedures, and TCB workshop updates			
Test Results	Pass			
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>				
Approved & Released By:		Prepared By:		
				
Sunny Shih WiSE Operations Manager UL Verification Services Inc.		Kenneth Mak WiSE Laboratory Engineer UL Verification Services Inc.		

2. Test Methodology

The tests documented in this report were performed in accordance with FCC CFR 47 §2.1093, IEEE STD 1528-2003, IEEE Std 1528a-2005, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r01
- 648474 D04 Handset SAR v01r01
- 648474 D03 Wireless Chargers Battery Cover v01r02
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D05 SAR for LTE Devices v02r02
- 941225 D06 Hot Spot SAR v01r01
- 248227 D01 SAR Meas for 802.11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r02
- April 2013 TCB Workshop Updates – include 802.11ac SAR for highest 802.11a configuration in each 5 GHz band and each exposure condition.

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Tissue Dielectric Properties

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
S-Parameter Network Analyzer	Agilent	8753ES	MY40000980	2/20/2014
Dielectronic Probe kit	SPEAG	SM DAK 040 CA	1082	9/18/2013
ENA Series Network Analyzer	Agilent	E5071B	MY42100131	2/21/2014
Dielectronic Probe kit	HP	85070E	594	N/A
Thermometer	TRACEABLE	4242	122529162	9/19/2013

System Performance Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	HP	8665B	3546A00784	3/26/2014
Power Meter	HP	438A	3513U04320	9/24/2013
Power Sensor	HP	8481A	2237A31744	9/24/2013
Power Sensor	HP	8481A	2702A76223	8/21/2013
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Directional coupler	Werlatone	C8060-102	2711	N/A
DC Power Supply	Sorensen	XT20-3	1318A00529	N/A
Synthesized Signal Generator	HP	8665B	3744A01084	5/7/2014
Power Meter	HP	437B	3125U15418	8/9/2013
Power Meter	HP	437B	3125U09248	9/24/2013
Power Sensor A	HP	8481A	1926A16917	8/21/2013
Power Sensor B	HP	8481A	3318A95392	9/24/2013
Amplifier	MITEQ	4D00400600-50-30P	1620606	N/A
Directional coupler	Werlatone	C8060-102	2141	N/A
DC Power Supply	Sorensen	XT 20-3	1318A00530	N/A
Thermometer	TRACEABLE	4242	122529162	9/19/2013
System Validation Dipole	SPEAG	D750V3	1071	10/5/2013
System Validation Dipole	SPEAG	D835V2	4d002	10/24/2013
System Validation Dipole	SPEAG	D1750V2	1050	4/20/2014
System Validation Dipole	SPEAG	D1900V2	5d043	11/6/2013
System Validation Dipole	SPEAG	D2450V2	899	10/5/2013
System Validation Dipole	SPEAG	D5GHzV2	1138	10/9/2013

DASY System

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date
E-Field Probe (SAR D)	SPEAG	EX3DV4	3686	3/11/2014
Data Acquisition Electronics (SAR D)	SPEAG	DAE4	1360	2/7/2014
E-Field Probe (SAR 1)	SPEAG	EX3DV4	3929	6/24/2014
Data Acquisition Electronics (SAR 1)	SPEAG	DAE4	1259	2/7/2014

Others

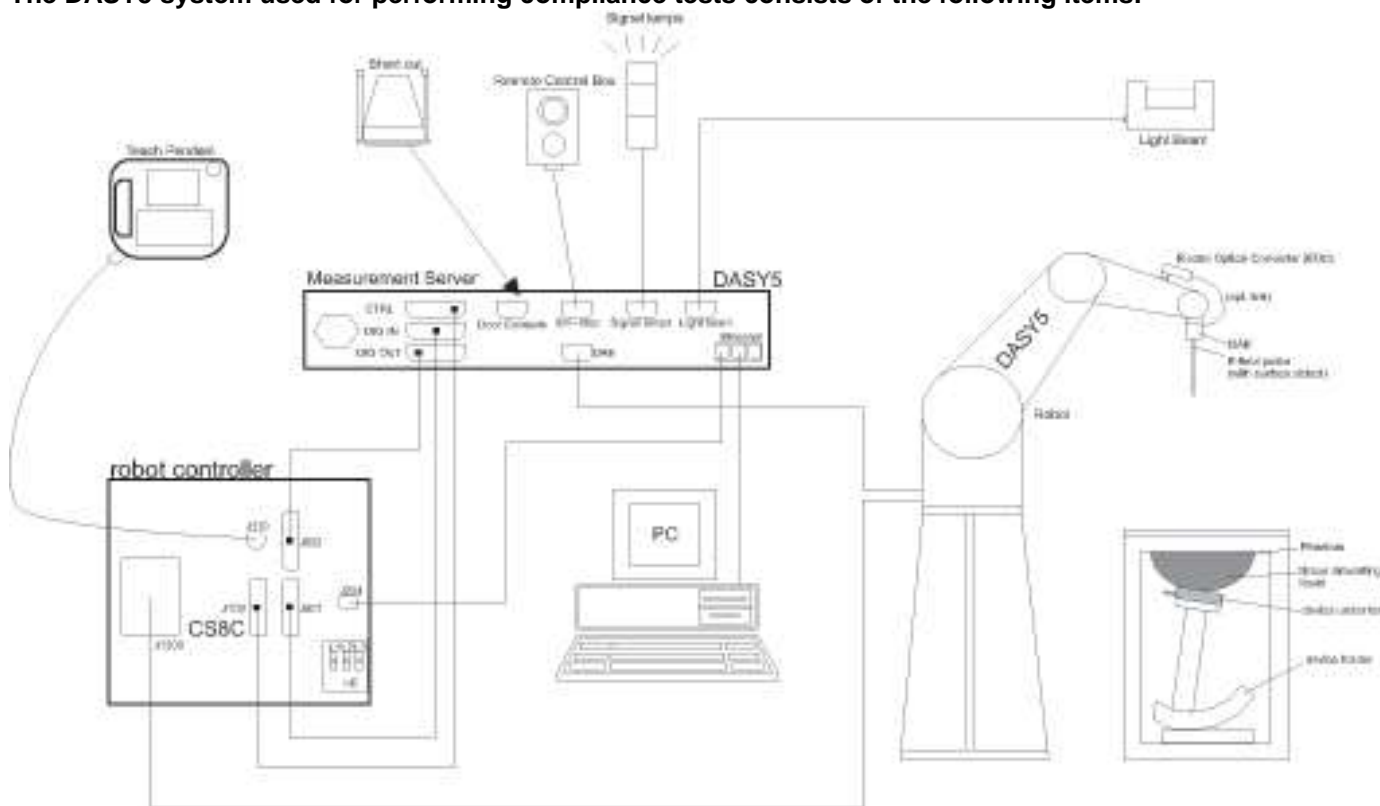
Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due date
Base Station Simulator	Agilent	8960	GB46160222	11/10/2013
Base Station Simulator	Agilent	8960	GB47050526	9/20/2013
Base Station Simulator	R & S	CMU200	106291	8/8/2013
Base Station Simulator	R & S	CMW500	124594-HX	7/2/2014

4.2. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r01 Section 2.8.1., when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2003 is not required in SAR reports submitted for equipment approval.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:



- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01 (Draft)

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

7.1. General Information

GSM/CDMA/WCDMA + LTE Phone Bluetooth, WLAN (2.4GHz & 5GHz) and NFC Model: VS980, LGVS980 and LG-VS980	
Operating Configuration(s)	Held to head, Body-worn (Voice call)
Mobile Hotspot	WiFi Hotspot mode permits the device to share its cellular data connection with other WiFi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (WiFi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (WiFi 5 GHz)
WiFi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> WiFi Direct (WiFi 2.4 GHz) <input checked="" type="checkbox"/> WiFi Direct (WiFi 5 GHz) – GO (Group Owner) only for UNII Band 4 5.8GHz band
Device dimension	Overall (Length x Width): 138.5 mm x 70.9 mm Overall Diagonal: 147.8 mm Display Diagonal: 132.9mm
Back Cover	<input type="checkbox"/> Normal Battery Cover <input checked="" type="checkbox"/> NFC/Wireless Charger Battery Cover <input type="checkbox"/> NFC
Accessory	N/A
Battery Options	<input checked="" type="checkbox"/> Standard –embedded to device <input type="checkbox"/> Extended (large capacity)

7.2. Wireless Technologies

Wireless Technology and Frequency Bands	<p>GSM: 850 / 1900 W-CDMA Band: II / V CDMA BC0 / 1 LTE Band 4 / 13 WiFi: 2.4 / 5 GHz Bluetooth: 2.4 GHz.</p>
Mode	<p>GSM <input checked="" type="checkbox"/> Voice (GMSK) - <input checked="" type="checkbox"/> GPRS (GMSK) - <input checked="" type="checkbox"/> EGPRS (8PSK) W-CDMA - <input checked="" type="checkbox"/> UMTS Rel. 99 (Voice & Data) - <input checked="" type="checkbox"/> HSDPA (Rel. 7, CAT 14) - <input checked="" type="checkbox"/> HSUPA (Rel. 6, CAT 6) CDMA2000 - <input checked="" type="checkbox"/> 1xRTT (Voice & Data) - <input checked="" type="checkbox"/> 1xEVDO Rel. 0 - <input checked="" type="checkbox"/> 1xEVDO Rev. A - <input type="checkbox"/> 1xAdvanced - <input type="checkbox"/> 1xEVDO Rev. B LTE - <input checked="" type="checkbox"/> QPSK - <input checked="" type="checkbox"/> 16QAM WiFi 2.4GHz (802.11b/g/n/ac) - <input checked="" type="checkbox"/> 802.11b - <input checked="" type="checkbox"/> 802.11g - <input checked="" type="checkbox"/> 802.11n (20MHz) - <input type="checkbox"/> 802.11n (40MHz) - <input checked="" type="checkbox"/> 802.11ac (20MHz) WiFi 5GHz - <input checked="" type="checkbox"/> 802.11a - <input checked="" type="checkbox"/> 802.11n (20MHz) - <input checked="" type="checkbox"/> 802.11n (40MHz) - <input checked="" type="checkbox"/> 802.11ac (20MHz) - <input checked="" type="checkbox"/> 802.11ac (40MHz) - <input checked="" type="checkbox"/> 802.11ac (80MHz) Bluetooth Ver. 4.0 (LE)</p>
Duty Cycle	<p>GSM Voice: 12.5%; GPRS 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%, W-CDMA/CDMA/LTE/WiFi: 100% Bluetooth: 76%</p>
GPRS Multi-Slot Class	<p><input type="checkbox"/> Class 8 - One Up; <input checked="" type="checkbox"/> Class 10 - Two Up; <input type="checkbox"/> Class 12 - Four Up</p>
Mobile Phone Capability	<p><input type="checkbox"/> Class A - Mobile phones can be connected to both (E)GPRS and GSM services simultaneously. <input checked="" type="checkbox"/> Class B - Mobile phones can be attached to both (E)GPRS and GSM services, using one service at a time. <input type="checkbox"/> Class C - Mobile phones are attached to either (E)GPRS or GSM voice service. You need to switch manually between services</p>
DTM (Dual Transfer Mode)	<p><input type="checkbox"/> Supported <input checked="" type="checkbox"/> Not Supported</p>
VoIP (GPRS)	<p><input checked="" type="checkbox"/> Supported</p>
SV-LTE & SV-DO	<p><input checked="" type="checkbox"/> Supported (SV-LTE only) Note: • SAR testing for CDMA_1xRTT (SV) for both minimum power and maximum power • SAR testing for LTE for both minimum power and maximum power</p>

7.3. Simultaneous Transmission Conditions

RF Exposure Condition	Capable Transmit Configurations
Head	<ol style="list-style-type: none"> 1. GSM 850/1900 Voice + WiFi 2.4/5GHz 2. GSM 850/1900 (GPRS/EDGE) + WiFi 2.4/5GHz (VoIP) 3. CDMA DO BC0/BC1 + WiFi 2.4/5GHz (VoIP) 4. WCDMA Band V/II (850/1900) + WiFi 2.4/5GHz 5. LTE B4/B13 + WiFi 2.4/5GHz 6. CDMA 1x BC0/BC1 + LTE B4/B13 + WiFi 2.4/5GHz (SV-LTE + WiFi)
Body-worn Accessory	<ol style="list-style-type: none"> 1. GSM 850/1900 Voice + WiFi 2.4/5GHz 2. GSM 850/1900 Voice + BT 3. GSM 850/1900 (GPRS/EDGE) + WiFi 2.4/5GHz (VoIP) 4. GSM 850/1900 (GPRS/EDGE) + BT 5. CDMA 1xRTT BC0/BC1 + WiFi 2.4/5GHz 6. CDMA 1xRTT BC0/BC1 + BT 7. CDMA 1xEVDO BC0/BC1 + WiFi 2.4/5GHz (VoIP) 8. CDMA 1xEVDO BC0/BC1 + BT 9. WCDMA Band V/II (850/1900) + WiFi 2.4/5GHz 10. WCDMA Band V/II (850/1900) + BT 11. LTE B4/B13 + WiFi 2.4/5GHz 12. LTE B4/B13 + BT 13. CDMA 1x BC0/BC1 + LTE B4/B13 + WiFi 2.4/5GHz (SV-LTE + WiFi) 14. CDMA 1x BC0/BC1 + LTE B4/B13 + BT (SV-LTE + BT)
Wireless Router (Hotspot)	<ol style="list-style-type: none"> 1. GSM 850/1900 (GPRS/EDGE) + WiFi 2.4GHz 2. CDMA 1xEVDO BC0/BC1 + WiFi 2.4GHz 3. WCDMA Band V/II (850/1900) + WiFi 2.4GHz 4. LTE B4/B13 + WiFi 2.4GHz 5. CDMA 1x BC0/BC1 + LTE B4/B13 + WiFi 2.4GHz (SV-LTE + WiFi)
WiFi Direct	<ol style="list-style-type: none"> 1. GSM 850/1900 (GPRS/EDGE) + WiFi 2.4GHz (GO/GC) 2. GSM 850/1900 (GPRS/EDGE) + WiFi 5.8GHz (GO only) 3. CDMA 1xEVDO BC0/BC1 + WiFi 2.4GHz (GO/GC) 4. CDMA 1xEVDO BC0/BC1 + WiFi 5.8GHz (GO only) 5. WCDMA Band V/II (850/1900) + WiFi 2.4GHz (GO/GC) 6. WCDMA Band V/II (850/1900) + WiFi 5.8GHz (GO only) 7. LTE B4/B13 + WiFi 2.4GHz (GO/GC) 8. LTE B4/B13 + WiFi 5.8GHz (GO only) 9. CDMA 1x BC0/BC1 + LTE B4/B13 + WiFi 2.4GHz (SV-LTE + WiFi) (GO/GC) 10. CDMA 1x BC0/BC1 + LTE B4/B13 + WiFi 5.8GHz (SV-LTE + WiFi) (GO only)
<ol style="list-style-type: none"> 1. WiFi 2.4GHz supports Hotspot and WiFi-Direct (GO/GC). 2. WiFi 5GHz does not support Hotspot but supports WiFi-Direct. UNII 1 (5.2GHz) = WiFi direct supports GC only, UNII 2 (5.3GHz) = WiFi direct not supported, UNII 3 (5.5GHz) = WiFi direct not supported, UNII 4 (5.8GHz) = WiFi direct supports GO only 3. CDMA, LTE, WCDMA, GPRS/EDGE supports Hotspot. 4. VoIP is supported in CDMA, LTE, WCDMA, GSM (e.g. 3rd part VoIP and VoLTE) 5. Bluetooth and WiFi cannot transmit simultaneously since they share the same chip. <p>Notes: GO = Group Owner (requires SAR), GC = Group Client (SAR excluded)</p>	

7.4. General LTE SAR Test and Reporting Considerations

Item	Description																																												
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 4																																												
	Tx: 1710 – 1755 MHz				Rx: 2110 – 2155 MHz																																								
	Band 13																																												
	Tx: 777 – 787 MHz				Rx: 746 – 756 MHz																																								
	Band 4	Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low	20050/1720	20025/1717.5	20000/1715	19975/1712.5																																								
	Mid	20175/1732.5	20175/1732.5	20175/1732.5	20175/1732.5																																								
	High	20300/1745	20325/1747.5	20350/1750	20375/1752.5																																								
	Band 13	Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low				23205/779.5																																								
	Mid			23230/782	23230/782.0																																								
High				23255/784.5																																									
LTE transmitter and antenna implementation	LTE has two TX/RX antennas and two Rx only antennas. Refer to Section 17 for antenna locations																																												
Maximum power reduction (MPR)	<div>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</div> <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table> <div>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</div>							Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																						
Power reduction	<div>Power Reduction Operation Table for SV-LTE</div> <table><tr><th>Mode</th><th>CDMA Current Voice Power for BC0 & BC1</th><th>LTE B13 & B4 Max Power</th></tr><tr><td rowspan="2">SV-LTE</td><td>P ≤ 18.5 dBm</td><td>23.2 dBm (limited)</td></tr><tr><td>P > 18.5 dBm</td><td>19.2 dBm (limited)</td></tr></table>							Mode	CDMA Current Voice Power for BC0 & BC1	LTE B13 & B4 Max Power	SV-LTE	P ≤ 18.5 dBm	23.2 dBm (limited)	P > 18.5 dBm	19.2 dBm (limited)																														
Mode	CDMA Current Voice Power for BC0 & BC1	LTE B13 & B4 Max Power																																											
SV-LTE	P ≤ 18.5 dBm	23.2 dBm (limited)																																											
	P > 18.5 dBm	19.2 dBm (limited)																																											
Spectrum plots for RB configurations	A properly configured basestation simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																												

8. RF Exposure Conditions

Refer to Section 17 “Antenna Dimensions and Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Head Exposure Conditions

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Conditions

For GSM, CDMA, W-CDMA & LTE Band 4 (①, ②)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	8.23 mm	Yes	

For LTE Band 13, BT & WiFi (③, ⑤)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1.15 mm	Yes	
Front	8.07 mm	Yes	

8.3. Hotspot Exposure Conditions

For CDMA, GSM, & WCDMA (①)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	8.23 mm	Yes	
Edge 1 (Top)	118.9 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 2 (Right)	1.5 mm	Yes	
Edge 3 (Bottom)	1.5 mm	Yes	
Edge 4 (Left)	25 mm	Yes	

For LTE Band B4 (②)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1 mm	Yes	
Front	8.23 mm	Yes	
Edge 1 (Top)	112 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 2 (Right)	49 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 3 (Bottom)	1.5 mm	Yes	
Edge 4 (Left)	1.5 mm	Yes	

For LTE Band B13 (③)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1.15 mm	Yes	
Front	8.07 mm	Yes	
Edge 1 (Top)	1.5 mm	Yes	
Edge 2 (Right)	1.5 mm	Yes	
Edge 3 (Bottom)	110 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 4 (Left)	53.5 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01

For WiFi & BT (④)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1.15 mm	Yes	
Front	8.07 mm	Yes	
Edge 1 (Top)	1.5 mm	Yes	
Edge 2 (Right)	20 mm	Yes	
Edge 3 (Bottom)	126.5 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 4 (Left)	38 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01

8.4. WiFi Direct Exposure Conditions

For WiFi (●)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	1.15 mm	Yes	
Front	8.07 mm	Yes	
Edge 1 (Top)	1.5 mm	Yes	
Edge 2 (Right)	20 mm	Yes	
Edge 3 (Bottom)	126.5 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01
Edge 4 (Left)	38 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR v01r01

9. RF Output Power Measurement

9.1. GSM850

Output Power Tolerance	Voice (dBm)	GPRS 1 slot	GPRS 2 slots	EGPRS 1 slot	EGPRS 2 slots
Max	33.2	33.2	31.2	27.2	27.2
Target	32.7	32.7	30.7	26.7	26.7

MEASURED RESULTS

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
850	128	824.2	33.1
	190	836.6	33.0
	251	848.8	33.2

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)			
			1 time slot		2 time slots	
			Burst	Frame	Burst	Frame
850	128	824.2	33.1	24.1	31.2	25.2
	190	836.6	33.1	24.1	30.8	24.8
	251	848.8	33.0	24.0	30.8	24.8

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Power (dBm)			
			1 time slot		2 time slots	
			Burst	Frame	Burst	Frame
850	128	824.2	27.0	18.0	27.0	21.0
	190	836.6	26.9	17.9	26.9	20.9
	251	848.8	26.8	17.8	26.7	20.7

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS mode

9.2. GSM1900

Output Power Tolerance	Voice (dBm)	GPRS 1 slot	GPRS 2 slots	EGPRS 1 slot	EGPRS 2 slots
Max	30.7	30.7	28.7	26.7	26.7
Target	30.2	30.2	28.2	26.2	26.2

MEASURED RESULTS

GSM (GMSK) - Voice Mode

Band	Ch No.	Freq. (MHz)	Avg burst Pwr (dBm)
1900	512	1850.2	30.7
	661	1880.0	30.7
	810	1909.8	30.7

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Avg Power (dBm)			
			1 time slot		2 time slots	
			Burst	Frame	Burst	Frame
1900	512	1850.2	30.7	21.7	28.7	22.7
	661	1880.0	30.7	21.7	28.6	22.6
	810	1909.8	30.7	21.7	28.7	22.7

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Power (dBm)			
			1 time slot		2 time slots	
			Burst	Frame	Burst	Frame
1900	512	1850.2	26.5	17.5	26.5	20.5
	661	1880.0	26.3	17.3	26.3	20.3
	810	1909.8	26.4	17.4	26.3	20.3

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS mode

9.3. CDMA BC0

Output Power Tolerance	1xRTT (dBm)	1xEVDO Rel. 0 (dBm)	1xEVDO Rev. A (dBm)
Max	25.2	25.2	25.2
Target	24.7	24.7	24.7

MEASURED RESULTS

1xRTT

Band	Mode	Ch	Freq. (MHz)	Max Power Avg Pwr (dBm)	Power Reduction
BC 0	RC1 SO55 (Loopback)	1013	824.7	25.0	18.3
		384	836.52	25.1	18.4
		777	848.31	25.1	18.4
	RC3 SO55 (Loopback)	1013	824.7	25.0	18.4
		384	836.52	25.1	18.4
		777	848.31	25.1	18.4
	RC3 SO32 (+F-SCH)	1013	824.7	25.1	18.4
		384	836.52	25.2	18.4
		777	848.31	25.1	18.4

1xEVDO Rel. 0

Band	FTAP Rate	RTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)
BC0	307.2 kbps (2 slot, QPSK)	153.6 kbps	1013	824.7	25.1
			384	836.52	25.2
			777	848.31	25.1

1xEv-Do Rev. A

Band	FETAP Traffic Format	RETAP Data Payload	Channel	f (MHz)	Avg Pwr (dBm)
BC0	307.2k, QPSK/ ACK channel is transmitted at all the slots	4096	1013	824.7	25.2
			384	836.52	25.2
			777	848.31	25.2

9.4. CDMA BC1

Output Power Tolerance	1xRTT (dBm)	1xEVDO Rel. 0 (dBm)	1xEVDO Rev. A (dBm)
Max	24.7	24.7	24.7
Target	24.2	24.2	24.2

MEASURED RESULTS

1xRTT

Band	Mode	Ch	Freq. (MHz)	Max Power Avg Pwr (dBm)	Power Reduction
BC 1	RC1 SO55 (Loopback)	25	1851.25	24.6	18.4
		600	1880.00	24.7	18.2
		1175	1908.75	24.7	18.3
	RC3 SO55 (Loopback)	25	1851.25	24.7	18.5
		600	1880.00	24.7	18.3
		1175	1908.75	24.7	18.4
	RC3 SO32 (+F-SCH)	25	1851.25	24.6	18.4
		600	1880.00	24.7	18.3
		1175	1908.75	24.7	18.4

1xEVDO Rel. 0

Band	FTAP Rate	RTAP Rate	Channel	f (MHz)	Avg Pwr (dBm)
BC1	307.2 kbps (2 slot, QPSK)	153.6 kbps	25	1851.25	24.7
			600	1880.00	24.7
			1175	1908.75	24.7

1xEVDO Rev. A

Band	FETAP Traffic Format	RETAP Data Payload	Channel	f (MHz)	Avg Pwr (dBm)
BC1	307.2k, QPSK/ ACK channel is transmitted at all the slots	4096	25	1851.25	24.7
			600	1880.00	24.7
			1175	1908.75	24.7

9.5. W-CDMA Band II

Output Power Tolerance	Release 99 (dBm)
Max	23.7
Target	23.2

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

MEASURED RESULTS

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	23.6
		9400	1880.0	23.6
		9538	1907.6	23.5

HSDPA

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D _{ACK}	8			
	D _{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	A _{hs} = β_{hs}/β_c	30/15			

Output Power Tolerance	HSDPA (dBm)			
	Subtest 1	Subtest 2	Subtest 3	Subtest 4
Max	23.7	23.7	23.2	23.2
Target	23.2	23.2	22.7	22.7

MEASURED RESULTS

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	23.6
		9400	1880.0	23.7
		9538	1907.6	23.6
	Subtest 2	9262	1852.4	23.5
		9400	1880.0	23.6
		9538	1907.6	23.5
	Subtest 3	9262	1852.4	23.0
		9400	1880.0	23.1
		9538	1907.6	23.2
	Subtest 4	9262	1852.4	23.1
		9400	1880.0	23.1
		9538	1907.6	23.1

Maximum output power levels that are possible for all subtests reported.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA		HSPA	HSPA	HSPA	
	Subtest	1	2	3	4	5	
WCDMA General Settings	Loopback Mode	Test Mode 1					
	Rel99 RMC	12.2kbps RMC					
	HSDPA FRC	H-Set1					
	HSUPA Test	HSUPA Loopback					
	Power Control Algorithm	Algorithm2					
	β_c	11/15	6/15	15/15	2/15	15/15	
	β_d	15/15	15/15	9/15	15/15	15/15	
	β_{ec}	209/225	12/15	30/15	2/15	24/15	
	β_c/β_d	11/15	6/15	15/9	2/15	15/15	
	β_{hs}	22/15	12/15	30/15	4/15	30/15	
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	134/15	
CM (dB)	1.0	3.0	2.0	3.0	1.0		
MPR (dB)	0	2	1	2	0		
HSDPA Specific Settings	DACK	8					
	DNAK	8					
	DCQI	8					
	Ack-Nack repetition factor	3					
	CQI Feedback (Table 5.2B.4)	4ms					
	CQI Repetition Factor (Table 5.2B.4)	2					
	Ahs = β_{hs}/β_c	30/15					
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7	
	DHARQ	0	0	0	0	0	
	AG Index	20	12	15	17	21	
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81	
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9	
	Reference E_TFCIs	E-TFCI 11			E-TFCI 11		
		E-TFCI PO 4			E-TFCI PO 4		
		E-TFCI 67			E-TFCI 67		
		E-TFCI PO 18			E-TFCI PO 18		
		E-TFCI 71			E-TFCI 71		
E-TFCI PO 23		E-TFCI PO 23					
	E-TFCI 75	E-TFCI 11	E-TFCI 75				
	E-TFCI PO 26	E-TFCI PO 4	E-TFCI PO 26				
	E-TFCI 81	E-TFCI 92	E-TFCI 81				
	E-TFCI PO 27	E-TFCI PO 18	E-TFCI PO 27				

Output Power Tolerance	HSUPA (dBm)				
	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5
Max	23.7	21.7	22.7	21.7	23.7
Target	23.2	21.2	22.2	21.2	23.2

MEASURED RESULTS

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	22.8
		9400	1880.0	23.0
		9538	1907.6	22.3
	Subtest 2	9262	1852.4	21.4
		9400	1880.0	21.6
		9538	1907.6	21.7
	Subtest 3	9262	1852.4	22.4
		9400	1880.0	22.5
		9538	1907.6	23.0
	Subtest 4	9262	1852.4	22.0
		9400	1880.0	22.2
		9538	1907.6	22.0
	Subtest 5	9262	1852.4	23.4
		9400	1880.0	23.5
		9538	1907.6	23.7

9.6. W-CDMA Band V

Output Power Tolerance	Release 99 (dBm)
Max	23.7
Target	23.2

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

MEASURED RESULTS

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	23.5
		4183	836.6	23.5
		4233	846.6	23.5

HSDPA

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

Output Power Tolerance	HSDPA (dBm)			
	Subtest 1	Subtest 2	Subtest 3	Subtest 4
Max	23.7	23.7	23.2	23.2
Target	23.2	23.2	22.7	22.7

MEASURED RESULTS

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	23.6
		4183	836.6	23.6
		4233	846.6	23.6
	Subtest 2	4132	826.4	23.5
		4183	836.6	23.5
		4233	846.6	23.5
	Subtest 3	4132	826.4	23.0
		4183	836.6	23.0
		4233	846.6	23.0
	Subtest 4	4132	826.4	22.9
		4183	836.6	23.0
		4233	846.6	23.0

Maximum output power levels that are possible for all subtests reported.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA	HSPA	HSPA	HSPA	HSPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	15/15
	β_{ec}	209/225	12/15	30/15	2/15	24/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	β_{hs}	22/15	12/15	30/15	4/15	30/15
	β_{ed}	1309/225	94/75	47/15	56/75	134/15
	CM (dB)	1.0	3.0	2.0	3.0	1.0
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = β_{hs}/β_c	30/15				
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Output Power Tolerance	HSUPA (dBm)				
	Subtest 1	Subtest 2	Subtest 3	Subtest 4	Subtest 5
Max	23.7	21.7	22.7	21.7	23.7
Target	23.2	21.2	22.2	21.2	23.2

MEASURED RESULTS

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	22.7
		4183	836.6	22.5
		4233	846.6	23.5
	Subtest 2	4132	826.4	21.5
		4183	836.6	21.7
		4233	846.6	21.7
	Subtest 3	4132	826.4	22.7
		4183	836.6	22.5
		4233	846.6	22.6
	Subtest 4	4132	826.4	22.1
		4183	836.6	22.1
		4233	846.6	22.2
	Subtest 5	4132	826.4	23.5
		4183	836.6	23.5
		4233	846.6	23.6

9.7. LTE Band 4

Output Power Tolerance	QPSK (dBm)
Max	23.7
Target	23.2

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

MEASURED RESULTS (MAX. POWER)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Avg Pwr (dBm)
20	20050	1720.0	QPSK	1	0	0	0	23.4
				1	49	0	0	23.5
				1	99	0	0	23.4
				50	0	1	1	22.3
				50	24	1	1	22.2
				50	49	1	1	22.2
				100	0	1	1	22.3
			16QAM	1	0	1	2	22.1
				1	49	1	2	22.1
				1	99	1	2	22.0
				50	0	2	2	21.3
				50	24	2	2	21.3
				50	49	2	2	21.3
				100	0	2	2	21.3
	20175	1732.5	QPSK	1	0	0	0	23.5
				1	49	0	0	23.5
				1	99	0	0	23.6
				50	0	1	1	22.3
				50	24	1	1	22.3
				50	49	1	1	22.2
				100	0	1	1	22.2
			16QAM	1	0	1	2	22.1
				1	49	1	2	22.1
				1	99	1	2	22.1
				50	0	2	2	21.4
				50	24	2	2	21.4
				50	49	2	2	21.3
				100	0	2	2	21.4
	20300	1745.0	QPSK	1	0	0	0	23.4
				1	49	0	0	23.4
				1	99	0	0	23.4
				50	0	1	1	22.2
				50	24	1	1	22.2
				50	49	1	1	22.2
				100	0	1	1	22.3
			16QAM	1	0	1	1	22.4
				1	49	1	1	22.4
				1	99	1	1	22.4
				50	0	2	2	21.3
				50	24	2	2	21.3
				50	49	2	2	21.3
				100	0	2	2	21.3

MEASURED RESULTS (POWER REDUCTION)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Avg Pwr (dBm)
20	20050	1720.0	QPSK	1	0	MPR is disabled when power reduction is enabled		19.5
				1	49			19.5
				1	99			19.5
				50	0			19.4
				50	24			19.4
				50	49			19.4
				100	0			19.3
			16QAM	1	0			19.2
				1	49			19.3
				1	99			19.3
				50	0			19.4
				50	24			19.4
				50	49			19.4
				100	0			19.4
	20175	1732.5	QPSK	1	0			19.4
				1	49			19.4
				1	99			19.4
				50	0			19.4
				50	24			19.4
				50	49			19.4
				100	0			19.4
			16QAM	1	0			19.6
				1	49			19.7
				1	99			19.6
				50	0			19.4
				50	24			19.4
				50	49			19.4
				100	0			19.4
	20300	1745.0	QPSK	1	0			19.5
				1	49			19.6
				1	99			19.6
				50	0			19.4
				50	24			19.4
				50	49			19.4
				100	0			19.4
			16QAM	1	0			19.3
				1	49			19.4
				1	99			19.3
				50	0			19.4
				50	24			19.4
				50	49			19.4
				100	0			19.4

MEASURED RESULTS (MAX. POWER)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Avg Pwr (dBm)
15	20025	1717.5	QPSK	1	0	0	0	23.5
				1	37	0	0	23.4
				1	74	0	0	23.4
				36	0	1	1	22.2
				36	16	1	1	22.3
				36	35	1	1	22.3
				75	0	1	1	22.2
			16QAM	1	0	1	1	22.2
				1	37	1	1	22.2
				1	74	1	1	22.2
				36	0	2	2	21.4
				36	16	2	2	21.5
				36	35	2	2	21.5
				75	0	2	2	21.3
	20175	1732.5	QPSK	1	0	0	0	23.5
				1	37	0	0	23.5
				1	74	0	0	23.5
				36	0	1	1	22.3
				36	16	1	1	22.2
				36	35	1	1	22.2
				75	0	1	1	22.2
			16QAM	1	0	1	1	22.2
				1	37	1	1	22.2
				1	74	1	1	22.2
				36	0	2	2	21.4
				36	16	2	2	21.3
				36	35	2	2	21.3
				75	0	2	2	21.3
	20325	1747.5	QPSK	1	0	0	0	23.5
				1	37	0	0	23.5
				1	74	0	0	23.5
				36	0	1	1	22.3
				36	16	1	1	22.2
				36	35	1	1	22.2
				75	0	1	1	22.1
			16QAM	1	0	1	2	21.9
				1	37	1	2	21.9
				1	74	1	2	21.9
				36	0	2	2	21.4
				36	16	2	2	21.4
				36	35	2	2	21.3
				75	0	2	2	21.2

MEASURED RESULTS (POWER REDUCTION)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Avg Pwr (dBm)
15	20025	1717.5	QPSK	1	0	MPR is disabled when power reduction is enabled		19.5
				1	37			19.5
				1	74			19.4
				36	0			19.5
				36	16			19.5
				36	35			19.5
				75	0			19.5
			16QAM	1	0			19.4
				1	37			19.4
				1	74			19.4
				36	0			19.5
				36	16			19.4
				36	35			19.6
				75	0			19.4
	20175	1732.5	QPSK	1	0			19.6
				1	37			19.5
				1	74			19.5
				36	0			19.5
				36	16			19.4
				36	35			19.4
				75	0			19.4
			16QAM	1	0			19.4
				1	37			19.4
				1	74			19.4
				36	0			19.4
				36	16			19.4
				36	35			19.4
				75	0			19.4
	20325	1747.5	QPSK	1	0			19.6
				1	37			19.6
				1	74			19.5
				36	0			19.5
				36	16			19.4
				36	35			19.4
				75	0			19.4
			16QAM	1	0			19.2
				1	37			19.2
				1	74			19.2
				36	0			19.5
				36	16			19.4
				36	35			19.4
				75	0			19.3

MEASURED RESULTS (MAX. POWER)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Avg Pwr (dBm)
10	20000	1715.0	QPSK	1	0	0	0	23.4
				1	24	0	0	23.4
				1	49	0	0	23.4
				25	0	1	1	22.2
				25	12	1	1	22.3
				25	24	1	1	22.3
				50	0	1	1	22.2
			16QAM	1	0	1	1	22.1
				1	24	1	1	22.1
				1	49	1	1	22.1
				25	0	2	2	21.3
				25	12	2	2	21.4
				25	24	2	2	21.4
				50	0	2	2	21.3
	20175	1732.5	QPSK	1	0	0	0	23.4
				1	24	0	0	23.4
				1	49	0	0	23.5
				25	0	1	1	22.3
				25	12	1	1	22.3
				25	24	1	1	22.3
				50	0	1	1	22.2
			16QAM	1	0	1	1	22.2
				1	24	1	1	22.1
				1	49	1	1	22.1
				25	0	2	2	21.4
				25	12	2	2	21.4
				25	24	2	2	21.3
				50	0	2	2	21.3
	20350	1750.0	QPSK	1	0	0	0	23.4
				1	24	0	0	23.3
				1	49	0	0	23.4
				25	0	1	1	22.2
				25	12	1	1	22.1
				25	24	1	1	22.2
				50	0	1	1	22.2
			16QAM	1	0	1	1	22.1
				1	24	1	1	22.1
				1	49	1	1	22.0
				25	0	2	2	21.5
				25	12	2	2	21.4
				25	24	2	2	21.3
				50	0	2	2	21.3

MEASURED RESULTS (POWER REDUCTION)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Avg Pwr (dBm)
10	20000	1715.0	QPSK	1	0	MPR is disabled when power reduction is enabled		19.4
				1	24			19.4
				1	49			19.4
				25	0			19.4
				25	12			19.4
				25	24			19.4
				50	0			19.4
			16QAM	1	0			19.3
				1	24			19.4
				1	49			19.3
				25	0			19.3
				25	12			19.4
				25	24			19.4
				50	0			19.4
	20175	1732.5	QPSK	1	0			19.4
				1	24			19.5
				1	49			19.4
				25	0			19.4
				25	12			19.4
				25	24			19.4
				50	0			19.3
			16QAM	1	0			19.3
				1	24			19.3
				1	49			19.3
				25	0			19.4
				25	12			19.4
				25	24			19.4
				50	0			19.3
	20350	1750.0	QPSK	1	0			19.5
				1	24			19.4
				1	49			19.3
				25	0			19.4
				25	12			19.4
				25	24			19.3
				50	0			19.4
			16QAM	1	0			19.4
				1	24			19.4
				1	49			19.3
				25	0			19.4
				25	12			19.4
				25	24			19.4
				50	0			19.4

MEASURED RESULTS (MAX. POWER)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Avg Pwr (dBm)
5	19975	1712.5	QPSK	1	0	0	0	23.4
				1	12	0	0	23.3
				1	24	0	0	23.4
				12	0	1	1	22.2
				12	6	1	1	22.2
				12	11	1	1	22.2
				25	0	1	1	22.2
			16QAM	1	0	1	2	22.1
				1	12	1	2	22.0
				1	24	1	2	22.1
				12	0	2	2	21.4
				12	6	2	2	21.4
				12	11	2	2	21.4
				25	0	2	2	21.4
	20175	1732.5	QPSK	1	0	0	0	23.5
				1	12	0	0	23.5
				1	24	0	0	23.6
				12	0	1	1	22.3
				12	6	1	1	22.3
				12	11	1	1	22.3
				25	0	1	1	22.2
			16QAM	1	0	1	1	22.2
				1	12	1	1	22.2
				1	24	1	1	22.3
				12	0	2	2	21.5
				12	6	2	2	21.5
				12	11	2	2	21.5
				25	0	2	2	21.3
	20375	1752.5	QPSK	1	0	0	0	23.5
				1	12	0	0	23.5
				1	24	0	0	23.5
				12	0	1	1	22.3
				12	6	1	1	22.3
				12	11	1	1	22.3
				25	0	1	1	22.2
			16QAM	1	0	1	1	22.3
				1	12	1	1	22.3
				1	24	1	1	22.3
				12	0	2	2	21.5
				12	6	2	2	21.4
				12	11	2	2	21.5
				25	0	2	2	21.3

MEASURED RESULTS (POWER REDUCTION)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Avg Pwr (dBm)
5	19975	1712.5	QPSK	1	0	MPR is disabled when power reduction is enabled		19.4
				1	12			19.4
				1	24			19.4
				12	0			19.4
				12	6			19.4
				12	11			19.4
				25	0			19.4
			16QAM	1	0			19.4
				1	12			19.3
				1	24			19.4
				12	0			19.4
				12	6			19.5
				12	11			19.5
				25	0			19.4
	20175	1732.5	QPSK	1	0			19.5
				1	12			19.5
				1	24			19.6
				12	0			19.5
				12	6			19.5
				12	11			19.5
				25	0			19.4
			16QAM	1	0			19.5
				1	12			19.4
				1	24			19.5
				12	0			19.5
				12	6			19.5
				12	11			19.5
				25	0			19.4
	20375	1752.5	QPSK	1	0			19.5
				1	12			19.5
				1	24			19.5
				12	0			19.5
				12	6			19.4
				12	11			19.5
				25	0			19.4
			16QAM	1	0			19.6
				1	12			19.6
				1	24			19.6
				12	0			19.5
				12	6			19.5
				12	11			19.5
				25	0			19.4

9.8. LTE Band 13

Output Power Tolerance	QPSK (dBm)
Max	23.7
Target	23.2

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

MEASURED RESULTS (MAX. POWER)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Avg Pwr (dBm)
10	23230	782.0	QPSK	1	0	0	0	23.6
				1	24	0	0	23.6
				1	49	0	0	23.6
				25	0	1	1	22.3
				25	12	1	1	22.3
				25	24	1	1	22.3
				50	0	1	1	22.2
			16QAM	1	0	1	1	22.5
				1	24	1	1	22.5
				1	49	1	1	22.5
				25	0	2	2	21.4
				25	12	2	2	21.4
				25	24	2	2	21.4
				50	0	2	2	21.2

MEASURED RESULTS (POWER REDUCTION)

BW (MHz)	Ch	Freq. (MHz)	Mode	UL RB Allocation	UL RB Start	Target MPR	Meas. MPR	Power Reduction
10	23230	782.0	QPSK	1	0	MPR is disabled when power reduction is enabled		19.6
				1	24			19.7
				1	49			19.7
				25	0			19.6
				25	12			19.6
				25	24			19.6
				50	0			19.6
			16QAM	1	0			19.6
				1	24			19.7
				1	49			19.7
				25	0			19.7
				25	12			19.7
				25	24			19.7
				50	0			19.5

9.9. SV-LTE

9.9.1. SV-LTE (CDMA BC0 + LTE B4)

Agilent 8960		R&S CMW 500					Agilent 8960		R&S CMW 500				
CDMA BC0 (1xRTT)		LTE Band 4 (20MHz)					CDMA BC0 (1xRTT)		LTE Band 4 (20MHz)				
P = 18 dBm		Limited = 19.7 dBm					P = 19 dBm		Limited = 19.7 dBm				
Ch. #	Avg Pwr (dBm)	Ch. #	Mod	UL RB Setting		Avg Pwr (dBm)	Ch. #	Avg Pwr (dBm)	Ch. #	Mod	UL RB Setting		Avg Pwr (dBm)
1013		20175	QPSK	1	0	23.7	1013		20175	QPSK	1	0	19.6
				1	24	23.5					1	24	19.5
				1	49	23.5					1	49	19.5
				25	0	22.4					25	0	19.5
				25	12	22.4					25	12	19.4
				25	24	22.4					25	24	19.4
			16QAM	50	0	22.4				16QAM	50	0	19.5
				1	0	22.1					1	0	19.3
				1	24	22.1					1	24	19.2
				1	49	22.0					1	49	19.2
				25	0	21.6					25	0	19.5
				25	12	21.5					25	12	19.4
384		20175	QPSK	25	24	21.5	384		20175	QPSK	25	24	19.5
				50	0	21.5					50	0	19.4
			16QAM	1	0	23.6				16QAM	1	0	19.6
				1	24	23.5					1	24	19.5
				1	49	23.5					1	49	19.5
				25	0	22.5					25	0	19.4
777		20175	QPSK	25	12	22.3	777		20175	QPSK	25	12	19.4
				25	24	22.4					25	24	19.4
				50	0	22.3					50	0	19.5
			16QAM	1	0	22.1				16QAM	1	0	19.3
				1	24	22.0					1	24	19.3
				1	49	22.0					1	49	19.2
				25	0	21.6					25	0	19.4
				25	12	21.5					25	12	19.4
				25	24	21.5					25	24	19.4
				50	0	21.4					50	0	19.4

9.9.2. SV-LTE (CDMA BC1 + LTE B4)

Agilent 8960		R&S CMW 500					Agilent 8960		R&S CMW 500				
CDMA BC1 (1xRTT)		LTE Band 4 (20MHz)					CDMA BC1 (1xRTT)		LTE Band 4 (20MHz)				
P = 18 dBm		Limited = 19.7 dBm					P = 19 dBm		Limited = 19.7 dBm				
Ch. #	Avg Pwr (dBm)	Ch. #	Mod	UL RB Setting		Avg Pwr (dBm)	Ch. #	Avg Pwr (dBm)	Ch. #	Mod	UL RB Setting		Avg Pwr (dBm)
25		20175	QPSK	1	0	23.5	25		20175	QPSK	1	0	19.7
				1	24	23.4					1	24	19.7
				1	49	23.4					1	49	19.6
				25	0	22.4					25	0	19.5
				25	12	22.3					25	12	19.5
				25	24	22.3					25	24	19.5
			50	0	22.3	50				0	19.6		
			16QAM	1	0	22.4				1	0	19.4	
				1	24	22.2				1	24	19.3	
				1	49	22.3				1	49	19.3	
				25	0	21.5				25	0	19.6	
				25	12	21.4				25	12	19.5	
25	24	21.4		25	24	19.5							
600		20175	QPSK	50	0	21.4	50	0	19.5				
				1	0	23.6	1	0	19.7				
				1	24	23.5	1	24	19.6				
				1	49	23.5	1	49	19.6				
				25	0	22.4	25	0	19.6				
				25	12	22.3	25	12	19.5				
			25	24	22.4	25	24	19.5					
			50	0	22.3	50	0	19.5					
			16QAM	1	0	22.4	1	0	19.4				
				1	24	22.3	1	24	19.3				
				1	49	22.3	1	49	19.3				
				25	0	21.5	25	0	19.5				
25	12	21.4		25	12	19.6							
25	24	21.4		25	24	19.5							
1175		20175	QPSK	50	0	21.4	50	0	19.5				
				1	0	23.6	1	0	19.7				
				1	24	23.5	1	24	19.7				
				1	49	23.5	1	49	19.6				
				25	0	22.4	25	0	19.6				
				25	12	22.3	25	12	19.5				
			25	24	22.4	25	24	19.5					
			50	0	22.4	50	0	19.5					
			16QAM	1	0	22.4	1	0	19.4				
				1	24	22.4	1	24	19.3				
				1	49	22.2	1	49	19.3				
				25	0	21.5	25	0	19.6				
25	12	21.4		25	12	19.5							
25	24	21.4		25	24	19.6							
		20175	QPSK	50	0	21.4	50	0	19.6				
				1	0	23.6	1	0	19.7				
				1	24	23.5	1	24	19.7				
				1	49	23.5	1	49	19.6				
				25	0	22.4	25	0	19.6				
				25	12	22.3	25	12	19.5				
			25	24	22.4	25	24	19.5					
			50	0	22.4	50	0	19.5					
			16QAM	1	0	22.4	1	0	19.4				
				1	24	22.4	1	24	19.3				
				1	49	22.2	1	49	19.3				
				25	0	21.5	25	0	19.6				
25	12	21.4		25	12	19.5							
25	24	21.4		25	24	19.6							

9.9.3. SV-LTE (CDMA BC0 + LTE B13)

Agilent 8960		R&S CMW 500					Agilent 8960		R&S CMW 500				
CDMA BC0 (1xRTT)		LTE Band 13					CDMA BC0 (1xRTT)		LTE Band 13				
P = 18 dBm		Limited = 19.7 dBm					P = 19 dBm		Limited = 19.7 dBm				
Ch. #	Avg Pwr (dBm)	Ch. #	Mod	UL RB Setting	Avg Pwr (dBm)		Ch. #	Avg Pwr (dBm)	Ch. #	Mod	UL RB Setting	Avg Pwr (dBm)	
1013		23230	QPSK	1 0	23.6		1013		23230	QPSK	1 0	19.5	
				1 24	23.5						1 24	19.5	
				1 49	23.5						1 49	19.5	
				25 0	22.2						25 0	19.5	
				25 12	22.2						25 12	19.5	
				25 24	22.2						25 24	19.5	
			16QAM	50 0	22.1					16QAM	50 0	19.4	
				1 0	22.5						1 0	19.5	
				1 24	22.4						1 24	19.5	
				1 49	22.4						1 49	19.5	
				25 0	21.3						25 0	19.4	
				25 12	21.3						25 12	19.5	
384		23230	QPSK	25 24	21.2		384		23230	QPSK	25 24	19.5	
				50 0	21.1					16QAM	50 0	19.3	
			16QAM	1 0	22.4						1 0	19.6	
				1 24	22.4						1 24	19.6	
				1 49	22.3						1 49	19.5	
				25 0	21.2						25 0	19.5	
777		23230	QPSK	25 12	21.2		777		23230	QPSK	25 12	19.6	
				25 24	21.2						25 24	19.5	
			16QAM	25 24	21.2					16QAM	25 24	19.5	
				50 0	21.1						50 0	19.4	
			QPSK	1 0	23.5					QPSK	1 0	19.4	
				1 24	23.4						1 24	19.6	
		23230	QPSK	1 49	23.6				23230	QPSK	1 49	19.5	
				25 0	22.2						25 0	19.5	
				25 12	22.2						25 12	19.5	
				25 24	22.2						25 24	19.5	
			16QAM	50 0	22.2					16QAM	50 0	19.4	
				1 0	22.5						1 0	19.5	
				1 24	22.4						1 24	19.5	
				1 49	22.4						1 49	19.5	
				25 0	21.3						25 0	19.5	
				25 12	21.3						25 12	19.5	
				25 24	21.3						25 24	19.5	
				50 0	21.1						50 0	19.4	

9.9.4. SV-LTE (CDMA BC1 + LTE B13)

Agilent 8960		R&S CMW 500			
CDMA BC1 (1xRTT)		LTE Band 13			
P = 18 dBm		Limited = 19.7 dBm			
Ch. #	Avg Pwr (dBm)	Ch. #	Mod	UL RB Setting	Avg Pwr (dBm)
25		23230	QPSK	1 0	23.6
				1 24	23.6
				1 49	23.5
				25 0	22.2
				25 12	22.3
				25 24	22.3
			16QAM	50 0	22.1
				1 0	22.5
				1 24	22.5
				1 49	22.4
				25 0	21.3
				25 12	21.3
600		23230	QPSK	25 24	21.3
				50 0	21.1
			16QAM	1 0	23.6
				1 24	23.5
				1 49	23.5
				25 0	22.3
1175		23230	QPSK	25 12	22.3
				25 24	22.2
				50 0	22.1
			16QAM	1 0	22.5
				1 24	22.4
				1 49	22.4
		23230	QPSK	25 0	21.3
				25 12	21.3
				25 24	21.3
			16QAM	50 0	21.1
				1 0	23.6
				1 24	23.5
				1 49	23.5
				25 0	22.3
				25 12	22.3
				25 24	22.2
				50 0	22.1

9.10. WiFi (2.4 GHz Band)

Output Power Tolerance	IEEE 802.11 (dBm)			
	b	g	n (HT20)	ac (HT20)
Max	16.0	13.0	12.0	12.0
Target	15.0	12.0	11.0	11.0

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	▽
		2.437	6	√	▽
		2.462	11 [#]	√	▽

Notes:

√ = "default test channels"

▽ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

MEASURED RESULTS

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)
2.4 (DTS)	802.11b	1	2412	15.9
		6	2437	15.4
		11	2462	15.6
	802.11g	1	2412	11.8
		6	2437	11.4
		11	2462	11.7
	802.11n (HT20)	1	2412	11.7
		6	2437	11.5
		11	2462	11.7
	802.11ac (HT20)	1	2412	12.0
		6	2437	11.7
		11	2462	11.4

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

9.11. WiFi (5 GHz Bands)

Output Power Tolerance	IEEE 802.11 (dBm)					
	a	n (HT20)	n (HT40)	ac (HT20)	ac (HT40)	ac (HT80)
Max	13.0	13.0	12.0	11.0	11.0	11.0
Target	12.0	12.0	11.0	10.0	10.0	10.0

Required Test Channels per KDB 248227 D01

Mode		Band	GHz	Channel	"Default Test Channels"	
					802.11a	
802.11a	UNII (15.407)	5.2 GHz	5.180	36	√	
			5.200	40		*
			2.220	44		*
			5.240	48	√	
		5.3 GHz	5.260	52	√	
			5.280	56		*
			5.300	60		*
			5.320	64	√	
		5.5 GHz	5.500	100		
			5.520	104	√	
			5.540	108		*
			5.560	112		*
			5.580	116	√	
			5.600	120		*
			5.620	124	√	
			5.640	128		*
			5.660	132		*
			5.680	136	√	
			5.700	140		*
	DTS (15.247)	5.8 GHz	5.745	149	√	
			5.765	153		*
			5.785	157	√	
			5.805	161		*
			5.825	165	√	

√ = "default test channels"

* = possible 802.11a channels with maximum average output > the "default test channels"

= when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

MEASURED RESULTS

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)
5.2 (UNII)	802.11a	36	5180	12.4
		40	5200	12.3
		44	5220	12.1
		48	5240	12.3
	802.11n (HT20)	36	5180	11.7
		40	5200	11.4
		48	5240	11.8
	802.11n (HT40)	38	5190	11.6
		46	5230	11.5
	802.11ac (HT20)	36	5180	10.3
		40	5200	10.4
		48	5240	10.1
	802.11ac (HT40)	38	5190	10.7
		46	5230	10.0
	802.11ac (HT80)	42	5210	10.5
5.3 (UNII)	802.11a	52	5260	12.5
		56	5280	12.5
		60	5300	12.5
		64	5320	12.3
	802.11n (HT20)	52	5260	11.6
		60	5300	11.6
		64	5320	11.5
	802.11n (HT40)	54	5270	12.0
		62	5310	11.4
	802.11ac (HT20)	52	5260	10.7
		60	5300	10.5
		64	5320	10.4
	802.11ac (HT40)	54	5270	10.8
		62	5310	10.9
	802.11ac (HT80)	58	5290	10.6

MEASURED RESULTS (CONTINUED)

Band (GHz)	Mode	Ch #	Freq. (MHz)	Avg Pwr (dBm)
5.5 (UNII)	802.11a	100	5500	12.2
		104	5520	12.0
		108	5540	11.8
		112	5560	11.8
		116	5580	11.9
		120	5600	not supported
		124	5620	not supported
		128	5640	not supported
		132	5660	11.6
		136	5680	11.4
		140	5700	11.4
	802.11n (HT20)	100	5500	11.4
		116	5580	11.1
		140	5700	10.6
	802.11n (HT40)	102	5510	11.3
		110	5550	11.7
		134	5670	10.9
		142	5710	10.9
	802.11ac (HT20)	100	5500	10.6
		116	5580	10.2
		140	5700	9.5
	802.11ac (HT40)	102	5510	10.6
		110	5550	10.9
		134	5670	10.2
		142	5710	10.2
	802.11ac (HT80)	106	5530	10.8
		138	5690	10.2
5.8 (DTS)	802.11a	149	5745	11.5
		153	5765	11.4
		157	5785	11.3
		161	5805	11.4
		165	5825	11.1
	802.11n (HT20)	149	5745	10.5
		157	5785	10.4
		161	5805	11.4
	802.11n (HT40)	151	5755	10.4
		159	5795	10.1
	802.11ac (HT20)	149	5745	9.8
		157	5785	9.7
		165	5825	9.5
	802.11ac (HT40)	151	5755	9.7
		159	5795	9.3
	802.11ac (HT80)	155	5775	9.9

9.12. Bluetooth

Output Power Tolerance	IEEE 802.15 (dBm)		
	GFSK	8-DPSK	LE
Max	10.0	10.0	6.0
Target	8.5	8.5	5.0

Band (GHz)	Mode	Ch #	Freq. (MHz)	Conducted Avg Power	
				(dBm)	(mW)
2.4	GFSK	0	2402	8.2	6.6
		39	2441	7.3	5.4
		78	2480	7.3	5.4
	8-DPSK	0	2402	5.6	3.6
		39	2441	4.8	3.0
		78	2480	5.5	3.5
	LE	0	2402	4.9	3.1
		19	2441	4.3	2.7
		39	2480	4.6	2.9

10. Tissue Dielectric Properties

IEEE Std 1528-2003 Table 2

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1800 – 2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40

FCC OET Bulletin 65 Supplement C 01-01

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.1. Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

Simulating Liquids for 5 GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Room D

	Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit \pm (%)
7/22/2013	Head 835	e'	41.5500	Relative Permittivity (ϵ_r):	41.55	41.50	0.12	5
		e"	19.5500	Conductivity (σ):	0.91	0.90	0.85	5
	Head 820	e'	41.6900	Relative Permittivity (ϵ_r):	41.69	41.60	0.21	5
		e"	19.6000	Conductivity (σ):	0.89	0.90	-0.54	5
	Head 850	e'	41.3800	Relative Permittivity (ϵ_r):	41.38	41.50	-0.29	5
		e"	19.5100	Conductivity (σ):	0.92	0.92	0.78	5
7/22/2013	Body 835	e'	55.3300	Relative Permittivity (ϵ_r):	55.33	55.20	0.24	5
		e"	21.8200	Conductivity (σ):	1.01	0.97	4.44	5
	Body 820	e'	55.4300	Relative Permittivity (ϵ_r):	55.43	55.28	0.28	5
		e"	21.9300	Conductivity (σ):	1.00	0.97	3.25	5
	Body 850	e'	55.1800	Relative Permittivity (ϵ_r):	55.18	55.16	0.04	5
		e"	21.7300	Conductivity (σ):	1.03	0.99	4.04	5
7/24/2013	Head 750	e'	40.3100	Relative Permittivity (ϵ_r):	40.31	41.96	-3.94	5
		e"	21.3500	Conductivity (σ):	0.89	0.89	-0.31	5
	Head 700	e'	40.9900	Relative Permittivity (ϵ_r):	40.99	42.22	-2.91	5
		e"	21.7300	Conductivity (σ):	0.85	0.89	-4.89	5
	Head 790	e'	39.8100	Relative Permittivity (ϵ_r):	39.81	41.76	-4.66	5
		e"	21.1000	Conductivity (σ):	0.93	0.90	3.43	5
7/24/2013	Body 750	e'	54.6600	Relative Permittivity (ϵ_r):	54.66	55.55	-1.60	5
		e"	23.6400	Conductivity (σ):	0.99	0.96	2.36	5
	Body 700	e'	54.7200	Relative Permittivity (ϵ_r):	54.72	55.74	-1.83	5
		e"	23.8400	Conductivity (σ):	0.93	0.96	-3.27	5
	Body 790	e'	54.2700	Relative Permittivity (ϵ_r):	54.27	55.39	-2.03	5
		e"	23.0600	Conductivity (σ):	1.01	0.97	4.84	5

SAR Room 1

	Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)
7/18/2013	Body 1900	e'	54.3600	Relative Permittivity (ε _r):	54.36	53.30	1.99	5
		e"	14.2500	Conductivity (σ):	1.51	1.52	-0.96	5
	Body 1850	e'	54.5500	Relative Permittivity (ε _r):	54.55	53.30	2.35	5
		e"	14.1700	Conductivity (σ):	1.46	1.52	-4.10	5
	Body 1910	e'	54.3300	Relative Permittivity (ε _r):	54.33	53.30	1.93	5
		e"	14.2600	Conductivity (σ):	1.51	1.52	-0.37	5
7/19/2013	Body 1750	e'	52.1900	Relative Permittivity (ε _r):	52.19	53.44	-2.34	5
		e"	14.7700	Conductivity (σ):	1.44	1.49	-3.29	5
	Body 1710	e'	52.2800	Relative Permittivity (ε _r):	52.28	53.54	-2.36	5
		e"	14.7000	Conductivity (σ):	1.40	1.46	-4.37	5
	Body 1755	e'	52.1900	Relative Permittivity (ε _r):	52.19	53.43	-2.32	5
		e"	14.8000	Conductivity (σ):	1.44	1.49	-3.02	5
7/22/2013	Head 1900	e'	39.2200	Relative Permittivity (ε _r):	39.22	40.00	-1.95	5
		e"	13.2400	Conductivity (σ):	1.40	1.40	-0.09	5
	Head 1850	e'	39.4000	Relative Permittivity (ε _r):	39.40	40.00	-1.50	5
		e"	13.0900	Conductivity (σ):	1.35	1.40	-3.82	5
	Head 1910	e'	39.1600	Relative Permittivity (ε _r):	39.16	40.00	-2.10	5
		e"	13.2700	Conductivity (σ):	1.41	1.40	0.66	5
7/24/2013	Head 1750	e'	40.5800	Relative Permittivity (ε _r):	40.58	40.08	1.24	5
		e"	13.7900	Conductivity (σ):	1.34	1.37	-1.98	5
	Head 1710	e'	40.7300	Relative Permittivity (ε _r):	40.73	40.15	1.45	5
		e"	13.7500	Conductivity (σ):	1.31	1.35	-2.90	5
	Head 1755	e'	40.5500	Relative Permittivity (ε _r):	40.55	40.08	1.18	5
		e"	13.8000	Conductivity (σ):	1.35	1.37	-1.83	5
7/24/2013	Head 5180	e'	36.8200	Relative Permittivity (ε _r):	36.82	36.01	2.24	5
		e"	16.4700	Conductivity (σ):	4.74	4.63	2.45	5
	Head 5200	e'	36.7400	Relative Permittivity (ε _r):	36.74	35.99	2.08	5
		e"	16.4600	Conductivity (σ):	4.76	4.65	2.33	5
	Head 5600	e'	35.8200	Relative Permittivity (ε _r):	35.82	35.53	0.81	5
		e"	16.5800	Conductivity (σ):	5.16	5.06	2.02	5
	Head 5800	e'	35.3900	Relative Permittivity (ε _r):	35.39	35.30	0.25	5
		e"	16.5800	Conductivity (σ):	5.35	5.27	1.46	5
	Head 5825	e'	35.3300	Relative Permittivity (ε _r):	35.33	35.30	0.08	5
		e"	16.6900	Conductivity (σ):	5.41	5.27	2.57	5
7/24/2013	Body 5180	e'	48.3400	Relative Permittivity (ε _r):	48.34	49.05	-1.44	5
		e"	17.7300	Conductivity (σ):	5.11	5.27	-3.12	5
	Body 5200	e'	48.2800	Relative Permittivity (ε _r):	48.28	49.02	-1.51	5
		e"	17.7100	Conductivity (σ):	5.12	5.29	-3.29	5
	Body 5600	e'	47.6200	Relative Permittivity (ε _r):	47.62	48.48	-1.77	5
		e"	18.0700	Conductivity (σ):	5.63	5.76	-2.33	5
	Body 5800	e'	47.2300	Relative Permittivity (ε _r):	47.23	48.20	-2.01	5
		e"	18.1500	Conductivity (σ):	5.85	6.00	-2.44	5
	Body 5825	e'	47.1900	Relative Permittivity (ε _r):	47.19	48.20	-2.10	5
		e"	18.3300	Conductivity (σ):	5.94	6.00	-1.05	5
7/29/2013	Body 5180	e'	47.9500	Relative Permittivity (ε _r):	47.95	49.05	-2.24	5
		e"	18.1500	Conductivity (σ):	5.23	5.27	-0.83	5
	Body 5200	e'	47.9400	Relative Permittivity (ε _r):	47.94	49.02	-2.20	5
		e"	18.2000	Conductivity (σ):	5.26	5.29	-0.61	5
	Body 5600	e'	47.2900	Relative Permittivity (ε _r):	47.29	48.48	-2.45	5
		e"	18.5500	Conductivity (σ):	5.78	5.76	0.26	5
	Body 5800	e'	46.9900	Relative Permittivity (ε _r):	46.99	48.20	-2.51	5
		e"	18.7400	Conductivity (σ):	6.04	6.00	0.73	5
	Body 5825	e'	46.9300	Relative Permittivity (ε _r):	46.93	48.20	-2.63	5
		e"	18.7500	Conductivity (σ):	6.07	6.00	1.22	5

	Freq. (MHz)	Liquid Parameters			Measured	Target	Delta (%)	Limit ±(%)
7/30/2013	Head 2450	e'	37.7800	Relative Permittivity (ϵ_r):	37.78	39.20	-3.62	5
		e"	13.5800	Conductivity (σ):	1.85	1.80	2.78	5
	Head 2410	e'	37.9400	Relative Permittivity (ϵ_r):	37.94	39.28	-3.41	5
		e"	13.4800	Conductivity (σ):	1.81	1.76	2.61	5
	Head 2475	e'	37.6900	Relative Permittivity (ϵ_r):	37.69	39.17	-3.77	5
		e"	13.6300	Conductivity (σ):	1.88	1.83	2.67	5
7/30/2013	Body 2450	e'	50.6900	Relative Permittivity (ϵ_r):	50.69	52.70	-3.81	5
		e"	13.9800	Conductivity (σ):	1.90	1.95	-2.34	5
	Body 2410	e'	50.8200	Relative Permittivity (ϵ_r):	50.82	52.76	-3.68	5
		e"	13.8300	Conductivity (σ):	1.85	1.91	-2.84	5
	Body 2475	e'	50.6100	Relative Permittivity (ϵ_r):	50.61	52.67	-3.91	5
		e"	14.0700	Conductivity (σ):	1.94	1.99	-2.46	5

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D750V3	1071	10/05/2012	750	1g	8.29	8.79
				10g	5.49	5.82
D835V2	4d002	10/24/2012	835	1g	9.58	9.48
				10g	6.28	6.26
D1750V2	1050	4/20/2013	1750	1g	36.5	37.1
				10g	19.4	20.1
D1900V2	5d043	11/06/2012	1900	1g	39.9	40.9
				10g	20.9	21.6
D2450V2	899	10/05/2012	2450	1g	53.6	51.7
				10g	25.0	24.3
D5GHzV2	1138	10/09/2012	5.2GHz	1g	79.5	73.2
				10g	22.8	20.4
			5.5GHz	1g	83.6	77.9
				10g	23.8	21.7
			5.8GHz	1g	78.7	72.8
				10g	22.4	20.1

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Room D

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
7/22/2013	D835V2	4d002	Head	1g	0.97	0.96	9.57	9.58	-0.10	1.54
				10g	0.65	0.63	6.27	6.28	-0.16	
7/22/2013	D835V2	4d002	Body	1g	1.00	0.98	9.84	9.48	3.80	1.60
				10g	0.68	0.65	6.48	6.26	3.51	
7/24/2013	D750V3	1071	Head	1g	0.83	0.80	7.98	8.29	-3.74	3.74
				10g	0.57	0.52	5.24	5.49	-4.55	
7/24/2013	D750V3	1071	Body	1g	0.89	0.84	8.39	8.79	-4.55	6.15
				10g	0.61	0.54	5.42	5.82	-6.87	

SAR Room 1

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta $\pm 10\%$	Est./Zoom Ratio	Plot No.
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W				
7/18/2013	D1900V2	5d043	Body	1g	3.72	3.76	37.6	40.9	-8.07	-1.08
				10g	1.90	1.99	19.9	21.6	-7.87	
7/19/2013	D1750V2	1050	Body	1g	3.58	3.51	35.1	37.1	-5.39	1.96
				10g	1.86	1.89	18.9	20.1	-5.97	
7/22/2013	D1900V2	5d043	Head	1g	4.09	3.97	39.7	39.9	-0.50	2.93
				10g	2.09	2.06	20.6	20.9	-1.44	
7/24/2013	D1750V2	1050	Head	1g	3.57	3.42	34.2	36.5	-6.30	4.20
				10g	1.91	1.81	18.1	19.4	-6.70	
7/24/2013	D5GHzV2 (5.2GHz)	1138	Head	1g	8.09	8.33	83.3	79.5	4.78	-2.97
				10g	2.23	2.40	24.0	22.8	5.26	
	D5GHzV2 (5.5GHz)	1138	Head	1g	8.77	9.10	91.0	83.6	8.85	-3.76
				10g	2.36	2.58	25.8	23.8	8.40	
	D5GHzV2 (5.6GHz)	1138	Head	1g	8.42	8.92	89.2	83.6	6.70	-5.94
				10g	2.29	2.54	25.4	23.8	6.72	
	D5GHzV2 (5.8GHz)	1138	Head	1g	7.79	8.37	83.7	78.7	6.35	-7.45
				10g	2.11	2.38	23.8	22.4	6.25	
7/24/2013	D5GHzV2 (5.2GHz)	1138	Body	1g	6.67	7.23	72.3	73.2	-1.23	-8.40
				10g	1.88	2.06	20.6	20.4	0.98	
	D5GHzV2 (5.5GHz)	1138	Body	1g	6.94	7.68	76.8	77.9	-1.41	-10.66
				10g	1.98	2.19	21.9	21.7	0.92	
	D5GHzV2 (5.6GHz)	1138	Body	1g	7.19	7.91	79.1	77.9	1.54	-10.01
				10g	2.02	2.20	22.0	21.7	1.38	
	D5GHzV2 (5.8GHz)	1138	Body	1g	6.18	6.85	68.5	72.8	-5.91	-10.84
				10g	1.75	1.92	19.2	20.1	-4.48	
7/29/2013	D5GHzV2 (5.2GHz)	1138	Body	1g	7.10	7.76	77.6	73.2	6.01	-9.30
				10g	2.01	2.21	22.1	20.4	8.33	
	D5GHzV2 (5.5GHz)	1138	Body	1g	7.37	8.06	80.6	77.9	3.47	-9.36
				10g	2.10	2.28	22.8	21.7	5.07	
	D5GHzV2 (5.6GHz)	1138	Body	1g	7.40	8.07	80.7	77.9	3.59	-9.05
				10g	2.06	2.25	22.5	21.7	3.69	
	D5GHzV2 (5.8GHz)	1138	Body	1g	6.37	7.05	70.5	72.8	-3.16	-10.68
				10g	1.79	1.98	19.8	20.1	-1.49	
7/30/2013	D2450V2	899	Body	1g	5.33	5.43	54.3	51.7	5.03	-1.88
				10g	2.30	2.54	25.4	24.3	4.53	
7/30/2013	D2450V2	899	Head	1g	5.37	5.32	53.2	53.6	-0.75	0.93
				10g	2.35	2.42	24.2	25.0	-3.20	

12. SAR Test Results

12.1. GSM850

12.1.1. Head Exposure Conditions

Head Exposure Conditions (Voice mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Voice	128	824.2	33.2	33.1				1
		190	836.6	33.2	33.0	0.225	0.236		
		251	848.8	33.2	33.2				1
Left Tilt (15°)	Voice	128	824.2	33.2	33.1				1
		190	836.6	33.2	33.0	0.150	0.157		
		251	848.8	33.2	33.2				1
Right Touch	Voice	128	824.2	33.2	33.1				1
		190	836.6	33.2	33.0	0.276	0.289	1	
		251	848.8	33.2	33.2				1
Right Tilt (15°)	Voice	128	824.2	33.2	33.1				1
		190	836.6	33.2	33.0	0.161	0.169		
		251	848.8	33.2	33.2				1

Head Exposure Conditions (VoIP mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	GPRS 2 slots	128	824.2	31.2	31.2				1
		190	836.6	31.2	30.8	0.318	0.349		
		251	848.8	31.2	30.8				1
Left Tilt (15°)	GPRS 2 slots	128	824.2	31.2	31.2				1
		190	836.6	31.2	30.8	0.206	0.226		
		251	848.8	31.2	30.8				1
Right Touch	GPRS 2 slots	128	824.2	31.2	31.2				1
		190	836.6	31.2	30.8	0.421	0.462	2	
		251	848.8	31.2	30.8				1
Right Tilt (15°)	GPRS 2 slots	128	824.2	31.2	31.2				1
		190	836.6	31.2	30.8	0.243	0.266		
		251	848.8	31.2	30.8				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.1.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory (Voice mode)

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Voice	10	128	824.2	33.2	33.1				1
			190	836.6	33.2	33.0	0.365	0.382	3	
			251	848.8	33.2	33.2				1
Front	Voice	10	128	824.2	33.2	33.1				1
			190	836.6	33.2	33.0	0.298	0.312		
			251	848.8	33.2	33.2				1

Body-worn Accessory (VoIP mode) & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	GPRS 2 slots	10	128	824.2	31.2	31.2				1
			190	836.6	31.2	30.8	0.511	0.560	4	
			251	848.8	31.2	30.8				1
Front	GPRS 2 slots	10	128	824.2	31.2	31.2				1
			190	836.6	31.2	30.8	0.421	0.462		
			251	848.8	31.2	30.8				1

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	GPRS 2 slots	10	128	824.2	31.2	31.2				1
			190	836.6	31.2	30.8	0.408	0.447		
			251	848.8	31.2	30.8				1
Edge 3	GPRS 2 slots	10	128	824.2	31.2	31.2				1
			190	836.6	31.2	30.8	0.318	0.349		
			251	848.8	31.2	30.8				1
Edge 4	GPRS 2 slots	10	128	824.2	31.2	31.2				1
			190	836.6	31.2	30.8	0.214	0.235		
			251	848.8	31.2	30.8				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.2. GSM1900

12.2.1. Head Exposure Conditions

Head Exposure Conditions (Voice mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Voice	512	1850.2	30.7	30.7				1
		661	1880.0	30.7	30.7	0.139	0.139		
		810	1909.8	30.7	30.7				1
Left Tilt (15°)	Voice	512	1850.2	30.7	30.7				1
		661	1880.0	30.7	30.7	0.087	0.087		
		810	1909.8	30.7	30.7				1
Right Touch	Voice	512	1850.2	30.7	30.7				1
		661	1880.0	30.7	30.7	0.194	0.194	5	
		810	1909.8	30.7	30.7				1
Right Tilt (15°)	Voice	512	1850.2	30.7	30.7				1
		661	1880.0	30.7	30.7	0.070	0.070		
		810	1909.8	30.7	30.7				1

Head Exposure Conditions (VoIP mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	GPRS 2 Slots	512	1850.2	28.7	28.7				1
		661	1880.0	28.7	28.6	0.175	0.179		
		810	1909.8	28.7	28.7				1
Left Tilt (15°)	GPRS 2 Slots	512	1850.2	28.7	28.7				1
		661	1880.0	28.7	28.6	0.105	0.107		
		810	1909.8	28.7	28.7				1
Right Touch	GPRS 2 Slots	512	1850.2	28.7	28.7				1
		661	1880.0	28.7	28.6	0.243	0.249	6	
		810	1909.8	28.7	28.7				1
Right Tilt (15°)	GPRS 2 Slots	512	1850.2	28.7	28.7				1
		661	1880.0	28.7	28.6	0.084	0.086		
		810	1909.8	28.7	28.7				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.2.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory (Voice mode)

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Voice	10	512	1850.2	30.7	30.7				1
			661	1880.0	30.7	30.7	0.406	0.406	7	
			810	1909.8	30.7	30.7				1
Front	Voice	10	512	1850.2	30.7	30.7				1
			661	1880.0	30.7	30.7	0.214	0.214		
			810	1909.8	30.7	30.7				1

Body-worn Accessory (VoIP mode) & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	GPRS 2 slots	10	512	1850.2	28.7	28.7				1
			661	1880.0	28.7	28.6	0.512	0.524	8	
			810	1909.8	28.7	28.7				1
Front	GPRS 2 slots	10	512	1850.2	28.7	28.7				1
			661	1880.0	28.7	28.6	0.267	0.273		
			810	1909.8	28.7	28.7				1

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	GPRS 2 slots	10	512	1850.2	28.7	28.7				1
			661	1880.0	28.7	28.6	0.143	0.146		
			810	1909.8	28.7	28.7				1
Edge 3	GPRS 2 slots	10	512	1850.2	28.7	28.7				1
			661	1880.0	28.7	28.6	0.270	0.276		
			810	1909.8	28.7	28.7				1
Edge 4	GPRS 2 slots	10	512	1850.2	28.7	28.7				1
			661	1880.0	28.7	28.6	0.080	0.082		
			810	1909.8	28.7	28.7				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.3. CDMA BC0

12.3.1. Head Exposure Conditions

Head Exposure Conditions (Voice mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xRTT (RC3 SO55)	1013	824.70	25.2	25.0				1
		384	836.52	25.2	25.1	0.301	0.308		
		777	848.31	25.2	25.1				1
Left Tilt (15°)	1xRTT (RC3 SO55)	1013	824.70	25.2	25.0				1
		384	836.52	25.2	25.1	0.174	0.178		
		777	848.31	25.2	25.1				1
Right Touch	1xRTT (RC3 SO55)	1013	824.70	25.2	25.0				1
		384	836.52	25.2	25.1	0.392	0.401	1	
		777	848.31	25.2	25.1				1
Right Tilt (15°)	1xRTT (RC3 SO55)	1013	824.70	25.2	25.0				1
		384	836.52	25.2	25.1	0.190	0.194		
		777	848.31	25.2	25.1				1

Head Exposure Conditions (VoIP mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xEVDO (Rel. 0)	1013	824.70	25.2	25.1				1
		384	836.52	25.2	25.2	0.291	0.291		
		777	848.31	25.2	25.1				1
Left Tilt (15°)	1xEVDO (Rel. 0)	1013	824.70	25.2	25.1				1
		384	836.52	25.2	25.2	0.172	0.172		
		777	848.31	25.2	25.1				1
Right Touch	1xEVDO (Rel. 0)	1013	824.70	25.2	25.1				1
		384	836.52	25.2	25.2	0.336	0.336	2	
		777	848.31	25.2	25.1				1
Right Tilt (15°)	1xEVDO (Rel. 0)	1013	824.70	25.2	25.1				1
		384	836.52	25.2	25.2	0.179	0.179		
		777	848.31	25.2	25.1				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.3.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory (Voice mode) & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xRTT (RC3 SO32)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.503	0.503	3	
			777	848.31	25.2	25.1				1
Front	1xRTT (RC3 SO32)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.369	0.369		
			777	848.31	25.2	25.1				1

Body-worn Accessory (VoIP mode) & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xEVDO (Rel. 0)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.551	0.551	4	
			777	848.31	25.2	25.1				1
Front	1xEVDO (Rel. 0)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.410	0.410		
			777	848.31	25.2	25.1				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	1xRTT (RC3 SO32)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.407	0.407		
			777	848.31	25.2	25.1				1
Edge 3	1xRTT (RC3 SO32)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.288	0.288		
			777	848.31	25.2	25.1				1
Edge 4	1xRTT (RC3 SO32)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.219	0.219		
			777	848.31	25.2	25.1				1
Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	1xEVDO (Rel. 0)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.399	0.399		
			777	848.31	25.2	25.1				1
Edge 3	1xEVDO (Rel. 0)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.321	0.321		
			777	848.31	25.2	25.1				1
Edge 4	1xEVDO (Rel. 0)	10	1013	824.70	25.2	25.1				1
			384	836.52	25.2	25.2	0.220	0.220		
			777	848.31	25.2	25.1				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.4. CDMA BC0 Power Reduction

12.4.1. Head Exposure Conditions

Head Exposure Conditions (Voice mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xRTT (RC3 SO55)	1013	824.70	18.5	18.4				1
		384	836.52	18.5	18.4	0.101	0.103		
		777	848.31	18.5	18.4				1
Left Tilt (15°)	1xRTT (RC3 SO55)	1013	824.70	18.5	18.4				1
		384	836.52	18.5	18.4	0.065	0.067		
		777	848.31	18.5	18.4				1
Right Touch	1xRTT (RC3 SO55)	1013	824.70	18.5	18.4				1
		384	836.52	18.5	18.4	0.129	0.132		
		777	848.31	18.5	18.4				1
Right Tilt (15°)	1xRTT (RC3 SO55)	1013	824.70	18.5	18.4				1
		384	836.52	18.5	18.4	0.069	0.071		
		777	848.31	18.5	18.4				1

12.4.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory (Voice mode) & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xRTT (RC3 SO32)	10	1013	824.70	18.5	18.4				1
			384	836.52	18.5	18.4	0.163	0.167		
			777	848.31	18.5	18.4				1
Front	1xRTT (RC3 SO32)	10	1013	824.70	18.5	18.4				1
			384	836.52	18.5	18.4	0.138	0.141		
			777	848.31	18.5	18.4				1

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	1xRTT (RC3 SO32)	10	1013	824.70	18.5	18.4				1
			384	836.52	18.5	18.4	0.134	0.137		
			777	848.31	18.5	18.4				1
Edge 3	1xRTT (RC3 SO32)	10	1013	824.70	18.5	18.4				1
			384	836.52	18.5	18.4	0.111	0.114		
			777	848.31	18.5	18.4				1
Edge 4	1xRTT (RC3 SO32)	10	1013	824.70	18.5	18.4				1
			384	836.52	18.5	18.4	0.071	0.073		
			777	848.31	18.5	18.4				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.5. CDMA BC1

12.5.1. Head Exposure Conditions

Head Exposure Conditions (Voice mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xRTT (RC3 SO55)	25	1851.25	24.7	24.7				1
		600	1880.00	24.7	24.7	0.264	0.264		
		1175	1908.75	24.7	24.7				1
Left Tilt (15°)	1xRTT (RC3 SO55)	25	1851.25	24.7	24.7				1
		600	1880.00	24.7	24.7	0.179	0.179		
		1175	1908.75	24.7	24.7				1
Right Touch	1xRTT (RC3 SO55)	25	1851.25	24.7	24.7				1
		600	1880.00	24.7	24.7	0.419	0.419	5	
		1175	1908.75	24.7	24.7				1
Right Tilt (15°)	1xRTT (RC3 SO55)	25	1851.25	24.7	24.7				1
		600	1880.00	24.7	24.7	0.156	0.156		
		1175	1908.75	24.7	24.7				1

Head Exposure Conditions (VoIP mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xEVDO (Rel. 0)	25	1851.25	24.7	24.7				1
		600	1880.00	24.7	24.7	0.289	0.289		
		1175	1908.75	24.7	24.7				1
Left Tilt (15°)	1xEVDO (Rel. 0)	25	1851.25	24.7	24.7				1
		600	1880.00	24.7	24.7	0.175	0.175		
		1175	1908.75	24.7	24.7				1
Right Touch	1xEVDO (Rel. 0)	25	1851.25	24.7	24.7				1
		600	1880.00	24.7	24.7	0.416	0.416	6	
		1175	1908.75	24.7	24.7				1
Right Tilt (15°)	1xEVDO (Rel. 0)	25	1851.25	24.7	24.7				1
		600	1880.00	24.7	24.7	0.156	0.156		
		1175	1908.75	24.7	24.7				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.5.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory (Voice mode) & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xRTT (RC3 SO32)	10	25	1851.25	24.7	24.6	0.776	0.794		
			600	1880.00	24.7	24.7	0.817	0.817		
			1175	1908.75	24.7	24.7	0.896	0.896	7	
Front	1xRTT (RC3 SO32)	10	25	1851.25	24.7	24.6				1
			600	1880.00	24.7	24.7	0.417	0.417		
			1175	1908.75	24.7	24.7				1

Body-worn Accessory (VoIP mode) & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xEVDO (Rel. 0)	10	25	1851.25	24.7	24.7	0.812	0.812		
			600	1880.00	24.7	24.7	0.900	0.900		
			1175	1908.75	24.7	24.7	0.998	0.998	8	
Front	1xEVDO (Rel. 0)	10	25	1851.25	24.7	24.7				1
			600	1880.00	24.7	24.7	0.471	0.471		
			1175	1908.75	24.7	24.7				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	1xRTT (RC3 SO32)	10	25	1851.25	24.7	24.6				1
			600	1880.00	24.7	24.7	0.240	0.240		
			1175	1908.75	24.7	24.7				1
Edge 3	1xRTT (RC3 SO32)	10	25	1851.25	24.7	24.6				1
			600	1880.00	24.7	24.7	0.514	0.514		
			1175	1908.75	24.7	24.7				1
Edge 4	1xRTT (RC3 SO32)	10	25	1851.25	24.7	24.6				1
			600	1880.00	24.7	24.7	0.128	0.128		
			1175	1908.75	24.7	24.7				1
Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	1xEVDO (Rel. 0)	10	25	1851.25	24.7	24.7				1
			600	1880.00	24.7	24.7	0.239	0.239		
			1175	1908.75	24.7	24.7				1
Edge 3	1xEVDO (Rel. 0)	10	25	1851.25	24.7	24.7				1
			600	1880.00	24.7	24.7	0.493	0.493		
			1175	1908.75	24.7	24.7				1
Edge 4	1xEVDO (Rel. 0)	10	25	1851.25	24.7	24.7				1
			600	1880.00	24.7	24.7	0.128	0.128		
			1175	1908.75	24.7	24.7				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.6. CDMA BC1 Power Reduction

12.6.1. Head Exposure Conditions

Head Exposure Conditions (Voice mode)

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	1xRTT (RC3 SO55)	25	1851.25	18.5	18.5				1
		600	1880.00	18.5	18.3	0.079	0.083		
		1175	1908.75	18.5	18.4				1
Left Tilt (15°)	1xRTT (RC3 SO55)	25	1851.25	18.5	18.5				1
		600	1880.00	18.5	18.3	0.050	0.052		
		1175	1908.75	18.5	18.4				1
Right Touch	1xRTT (RC3 SO55)	25	1851.25	18.5	18.5				1
		600	1880.00	18.5	18.3	0.129	0.135		
		1175	1908.75	18.5	18.4				1
Right Tilt (15°)	1xRTT (RC3 SO55)	25	1851.25	18.5	18.5				1
		600	1880.00	18.5	18.3	0.042	0.044		
		1175	1908.75	18.5	18.4				1

12.6.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory (Voice mode)

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	1xRTT (RC3 SO32)	10	25	1851.25	18.5	18.4				1
			600	1880.00	18.5	18.3	0.285	0.298		
			1175	1908.75	18.5	18.4				1
Front	1xRTT (RC3 SO32)	10	25	1851.25	18.5	18.4				1
			600	1880.00	18.5	18.3	0.141	0.148		
			1175	1908.75	18.5	18.4				1

Body-worn Accessory (VoIP mode) & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	1xRTT (RC3 SO32)	10	25	1851.25	18.5	18.4				1
			600	1880.00	18.5	18.3	0.073	0.076		
			1175	1908.75	18.5	18.4				1
Edge 3	1xRTT (RC3 SO32)	10	25	1851.25	18.5	18.4				1
			600	1880.00	18.5	18.3	0.148	0.155		
			1175	1908.75	18.5	18.4				1
Edge 4	1xRTT (RC3 SO32)	10	25	1851.25	18.5	18.4				1
			600	1880.00	18.5	18.3	0.037	0.039		
			1175	1908.75	18.5	18.4				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.7. W-CDMA Band II

12.7.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Rel 99 RMC 12.2kbps	9262	1852.4	23.7	23.6				1
		9400	1880.0	23.7	23.6	0.234	0.239		
		9538	1907.6	23.7	23.5				1
Left Tilt (15°)	Rel 99 RMC 12.2kbps	9262	1852.4	23.7	23.6				1
		9400	1880.0	23.7	23.6	0.156	0.160		
		9538	1907.6	23.7	23.5				1
Right Touch	Rel 99 RMC 12.2kbps	9262	1852.4	23.7	23.6				1
		9400	1880.0	23.7	23.6	0.364	0.372	1	
		9538	1907.6	23.7	23.5				1
Right Tilt (15°)	Rel 99 RMC 12.2kbps	9262	1852.4	23.7	23.6				1
		9400	1880.0	23.7	23.6	0.133	0.136		
		9538	1907.6	23.7	23.5				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.7.2. Body-worn Accessory & Hotspot Exposure Conditions

KDB 941225 D01 – Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit. (pg.12)

Body-worn Accessory & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Rel 99 RMC 12.2kbps	10	9262	1852.4	23.7	23.6				1
			9400	1880.0	23.7	23.6	0.733	0.750	2	
			9538	1907.6	23.7	23.5				1
Front	Rel 99 RMC 12.2kbps	10	9262	1852.4	23.7	23.6				1
			9400	1880.0	23.7	23.6	0.409	0.419		
			9538	1907.6	23.7	23.5				1

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	Rel 99 RMC 12.2kbps	10	9262	1852.4	23.7	23.6				1
			9400	1880.0	23.7	23.6	0.215	0.220		
			9538	1907.6	23.7	23.5				1
Edge 3	Rel 99 RMC 12.2kbps	10	9262	1852.4	23.7	23.6				1
			9400	1880.0	23.7	23.6	0.419	0.429		
			9538	1907.6	23.7	23.5				1
Edge 4	Rel 99 RMC 12.2kbps	10	9262	1852.4	23.7	23.6				1
			9400	1880.0	23.7	23.6	0.112	0.115		
			9538	1907.6	23.7	23.5				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.8. W-CDMA Band V

12.8.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	Rel 99 RMC 12.2kbps	4132	826.4	23.7	23.5				1
		4183	836.6	23.7	23.5	0.233	0.244		
		4233	846.6	23.7	23.5				1
Left Tilt (15°)	Rel 99 RMC 12.2kbps	4132	826.4	23.7	23.5				1
		4183	836.6	23.7	23.5	0.153	0.160		
		4233	846.6	23.7	23.5				1
Right Touch	Rel 99 RMC 12.2kbps	4132	826.4	23.7	23.5				1
		4183	836.6	23.7	23.5	0.296	0.310	3	
		4233	846.6	23.7	23.5				1
Right Tilt (15°)	Rel 99 RMC 12.2kbps	4132	826.4	23.7	23.5				1
		4183	836.6	23.7	23.5	0.171	0.179		
		4233	846.6	23.7	23.5				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.8.2. Body-worn Accessory & Hotspot Exposure Conditions

KDB 941225 D01 – Body SAR is not required for handsets with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than ¼ dB higher than that measured without HSUPA/HSDPA using 12.2 kbps RMC and the maximum SAR for 12.2kbps RMC is ≤ 75% of the SAR limit. (pg.12)

Body-worn Accessory & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	Rel 99 RMC 12.2kbps	10	4132	826.4	23.7	23.5				1
			4183	836.6	23.7	23.5	0.411	0.430	4	
			4233	846.6	23.7	23.5				1
Front	Rel 99 RMC 12.2kbps	10	4132	826.4	23.7	23.5				1
			4183	836.6	23.7	23.5	0.339	0.355		
			4233	846.6	23.7	23.5				1

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 2	Rel 99 RMC 12.2kbps	10	4132	826.4	23.7	23.5				1
			4183	836.6	23.7	23.5	0.333	0.349		
			4233	846.6	23.7	23.5				1
Edge 3	Rel 99 RMC 12.2kbps	10	4132	826.4	23.7	23.5				1
			4183	836.6	23.7	23.5	0.229	0.240		
			4233	846.6	23.7	23.5				1
Edge 4	Rel 99 RMC 12.2kbps	10	4132	826.4	23.7	23.5				1
			4183	836.6	23.7	23.5	0.189	0.198		
			4233	846.6	23.7	23.5				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.9. LTE Band 4 (20MHz Bandwidth)

12.9.1. Head Exposure Conditions

Test Position	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
						Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	QPSK	20175	1732.5	1	99	23.7	23.6	0.349	0.357	1	
				50	0	22.7	22.3	0.204	0.224		
Left Tilt (15°)	QPSK	20175	1732.5	1	99	23.7	23.6	0.078	0.080		
				50	0	22.7	22.3	0.071	0.078		
Right Touch	QPSK	20175	1732.5	1	99	23.7	23.6	0.348	0.356		
				50	0	22.7	22.3	0.208	0.228		
Right Tilt (15°)	QPSK	20175	1732.5	1	99	23.7	23.6	0.108	0.111		
				50	0	22.7	22.3	0.059	0.065		

12.9.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Rear	QPSK	10	20050	1720.0	1	49	23.7	23.5	0.748	0.783		
			20175	1732.5	1	99	23.7	23.6	0.873	0.893		
					50	0	22.7	22.3	0.544	0.596		
			20300	1745.0	1	99	23.7	23.4	0.888	0.952		
Front	QPSK	10	20175	1732.5	1	99	23.7	23.6	0.621	0.635		
					50	0	22.7	22.3	0.333	0.365		

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Edge 3	QPSK	10	20175	1732.5	1	99	23.7	23.6	0.473	0.484		
					50	0	22.7	22.3	0.289	0.317		
Edge 4	QPSK	10	20175	1732.5	1	99	23.7	23.6	0.490	0.501		
					50	0	22.7	22.3	0.267	0.293		

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02r02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.10. LTE Band 4 (20MHz Bandwidth) Power Reduction

12.10.1. Head Exposure Conditions

Test Position	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
						Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	QPSK	20175	1732.5	1	99	19.7	19.4	0.147	0.158		
				50	0	19.7	19.4	0.108	0.116		
Left Tilt (15°)	QPSK	20175	1732.5	1	99	19.7	19.4	0.033	0.035		
				50	0	19.7	19.4	0.024	0.026		
Right Touch	QPSK	20175	1732.5	1	99	19.7	19.4	0.163	0.175		
				50	0	19.7	19.4	0.111	0.119		
Right Tilt (15°)	QPSK	20175	1732.5	1	99	19.7	19.4	0.037	0.040		
				50	0	19.7	19.4	0.028	0.030		

12.10.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Rear	QPSK	10	20175	1732.5	1	99	19.7	19.4	0.342	0.366		
					50	0	19.7	19.4	0.282	0.302		
Front	QPSK	10	20175	1732.5	1	99	19.7	19.4	0.215	0.230		
					50	0	19.7	19.4	0.154	0.165		

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Edge 3	QPSK	10	20175	1732.5	1	99	19.7	19.4	0.193	0.207		
					50	0	19.7	19.4	0.147	0.158		
Edge 4	QPSK	10	20175	1732.5	1	99	19.7	19.4	0.208	0.223		
					50	0	19.7	19.4	0.146	0.156		

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02r02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.11. LTE Band 13 (10MHz Bandwidth)

12.11.1. Head Exposure Conditions

Test Position	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
						Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	QPSK	23230	782.0	1	0	23.7	23.6	0.408	0.418		
				25	0	22.7	22.3	0.295	0.323		
Left Tilt (15°)	QPSK	23230	782.0	1	0	23.7	23.6	0.341	0.349		
				25	0	22.7	22.3	0.247	0.271		
Right Touch	QPSK	23230	782.0	1	0	23.7	23.6	0.515	0.527	3	
				25	0	22.7	22.3	0.367	0.402		
Right Tilt (15°)	QPSK	23230	782.0	1	0	23.7	23.6	0.465	0.476		
				25	0	22.7	22.3	0.337	0.370		

12.11.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Rear	QPSK	10	23230	782.0	1	0	23.7	23.6	0.499	0.511	4	
					25	0	22.7	22.3	0.362	0.397		
Front	QPSK	10	23230	782.0	1	0	23.7	23.6	0.317	0.324		
					25	0	22.7	22.3	0.226	0.248		

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	QPSK	10	23230	782.0	1	0	23.7	23.6	0.257	0.263		
					25	0	22.7	22.3	0.188	0.206		
Edge 2	QPSK	10	23230	782.0	1	0	23.7	23.6	0.304	0.311		
					25	0	22.7	22.3	0.223	0.245		

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02r02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.12. LTE Band 13 (10MHz Bandwidth) Power Reduction

12.12.1. Head Exposure Conditions

Test Position	Mode	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
						Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	QPSK	23230	782.0	1	0	19.7	19.7	0.154	0.154		
				25	0	19.7	19.6	0.150	0.153		
Left Tilt (15°)	QPSK	23230	782.0	1	0	19.7	19.7	0.134	0.134		
				25	0	19.7	19.6	0.129	0.132		
Right Touch	QPSK	23230	782.0	1	0	19.7	19.7	0.199	0.199		
				25	0	19.7	19.6	0.188	0.192		
Right Tilt (15°)	QPSK	23230	782.0	1	0	19.7	19.7	0.185	0.185		
				25	0	19.7	19.6	0.174	0.178		

12.12.2. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Rear	QPSK	10	23230	782.0	1	0	19.7	19.7	0.185	0.185		
					25	0	19.7	19.6	0.176	0.180		
Front	QPSK	10	23230	782.0	1	0	19.7	19.7	0.118	0.118		
					25	0	19.7	19.6	0.116	0.119		

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	UL Ch #.	Freq. (MHz)	UL RB Allocation	UL RB Start	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
							Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	QPSK	10	23230	782.0	1	0	19.7	19.7	0.091	0.091		
					25	0	19.7	19.6	0.087	0.089		
Edge 2	QPSK	10	23230	782.0	1	0	19.7	19.7	0.121	0.121		
					25	0	19.7	19.6	0.120	0.123		

Note(s):

- Per KDB 941225 D05 SAR for LTE Devices v02r02, SAR test reduction is applied using the following criteria:
 - Testing for Low and High Channel is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
 - Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are ≥ 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
 - Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
 - Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.13. Wi-Fi (2.4 GHz Band)

12.13.1. Head Exposure Conditions

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Touch	802.11b	1	2412	16.0	15.9				1
		6	2437	16.0	15.4	0.395	0.458		
		11	2462	16.0	15.6				1
Left Tilt (15°)	802.11b	1	2412	16.0	15.9				1
		6	2437	16.0	15.4	0.424	0.491	1	
		11	2462	16.0	15.6				1
Right Touch	802.11b	1	2412	16.0	15.9				1
		6	2437	16.0	15.4	0.238	0.276		
		11	2462	16.0	15.6				1
Right Tilt (15°)	802.11b	1	2412	16.0	15.9				1
		6	2437	16.0	15.4	0.244	0.283		
		11	2462	16.0	15.6				1

12.13.2. Additional Testing in 802.11ac Mode for Head Exposure Conditions

Test exclusion considerations for 802.11ac mode:

Apply usual 802.11 test exclusion considerations, but include 802.11ac SAR for highest 802.11a configuration in each frequency band and each exposure condition according to April 2013 TCB Workshop Updates.

Additional testing in 802.11ac mode was performed in HT20 mode so that the same channels from the 802.11a mode could be tested.

Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
				Tune-up limit	Meas.	Meas.	Scaled		
Left Tilt (15°)	802.11ac (HT 20)	1	2412						1
		6	2437	12.0	11.7	0.160	0.170	2	
		11	2462						1

12.13.3. Body-worn Accessory & Hotspot Exposure Conditions

Body-worn Accessory & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	802.11b	10	1	2412	16.0	15.9				1
			6	2437	16.0	15.4	0.153	0.177	3	
			11	2462	16.0	15.6				1
Front	802.11b	10	1	2412	16.0	15.9				1
			6	2437	16.0	15.4	0.092	0.107		
			11	2462	16.0	15.6				1

Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Edge 1	802.11b	10	1	2412	16.0	15.9				1
			6	2437	16.0	15.4	0.076	0.088		
			11	2462	16.0	15.6				1
Edge 2	802.11b	10	1	2412	16.0	15.9				1
			6	2437	16.0	15.4	0.040	0.046		
			11	2462	16.0	15.6				1

12.13.4. Additional Testing in 802.11ac Mode for Body-worn Accessory & Hotspot Exposure Conditions

Test exclusion considerations for 802.11ac mode:

Apply usual 802.11 test exclusion considerations, but include 802.11ac SAR for highest 802.11a configuration in each frequency band and each exposure condition according to April 2013 TCB Workshop Updates.

Additional testing in 802.11ac mode was performed in HT20 mode so that the same channels from the 802.11a mode could be tested.

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	802.11ac (HT 20)	10	1	2412						1
			6	2437	12.0	11.7	0.083	0.088	4	
			11	2462						1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.14. Wi-Fi (5 GHz Bands)

12.14.1. Head Exposure Conditions

Band (GHz)	Test Position	Mode	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
					Tune-up limit	Meas.	Meas.	Scaled	
5.2GHz	Left Touch	802.11a	36	5180	13.0	12.4	0.093	0.107	
			48	5240	13.0	12.3			
	Left Tilt (15°)	802.11a	36	5180	13.0	12.4	0.100	0.115	5
			48	5240	13.0	12.3			
	Right Touch	802.11a	36	5180	13.0	12.4	0.060	0.069	
			48	5240	13.0	12.3			
	Right Tilt (15°)	802.11a	36	5180	13.0	12.4	0.068	0.078	
			48	5240	13.0	12.3			
5.3GHz	Left Touch	802.11a	52	5260	13.0	12.5	0.069	0.077	
			60	5320	13.0	12.5			
	Left Tilt (15°)	802.11a	52	5260	13.0	12.5	0.083	0.093	
			60	5320	13.0	12.5			
	Right Touch	802.11a	52	5260	13.0	12.5	0.063	0.071	
			60	5320	13.0	12.5			
	Right Tilt (15°)	802.11a	52	5260	13.0	12.5	0.102	0.114	6
			60	5320	13.0	12.5			
5.5GHz	Left Touch	802.11a	100	5520	13.0	12.2	0.053	0.064	
			116	5580	13.0	11.9			
			124		not supported				
			132	5620	13.0	11.6			
	Left Tilt (15°)	802.11a	100	5520	13.0	12.2	0.046	0.056	
			116	5580	13.0	11.9			
			124		not supported				
			132	5620	13.0	11.6			
	Right Touch	802.11a	100	5520	13.0	12.2	0.053	0.064	
			116	5580	13.0	11.9			
			124		not supported				
			132	5620	13.0	11.6			
	Right Tilt (15°)	802.11a	100	5520	13.0	12.2	0.057	0.069	7
			116	5580	13.0	11.9			
			124		not supported				
			132	5620	13.0	11.6			
5.8GHz	Left Touch	802.11a	149	5745	13.0	11.5	0.047	0.067	
			157	5785	13.0	11.3			
			161	5805	13.0	11.4			
	Left Tilt (15°)	802.11a	149	5745	13.0	11.5	0.050	0.071	
			157	5785	13.0	11.3			
			161	5805	13.0	11.4			
	Right Touch	802.11a	149	5745	13.0	11.5	0.052	0.074	8
			157	5785	13.0	11.3			
			161	5805	13.0	11.4			
	Right Tilt (15°)	802.11a	149	5745	13.0	11.5	0.041	0.058	
			157	5785	13.0	11.3			
			161	5805	13.0	11.4			

12.14.2. Additional Testing in 802.11ac Mode for Head Exposure Conditions

Test exclusion considerations for 802.11ac mode:

Apply usual 802.11 test exclusion considerations, but include 802.11ac SAR for highest 802.11a configuration in each frequency band and each exposure condition according to April 2013 TCB Workshop Updates.

Additional testing in 802.11ac mode was performed in HT20 mode so that the same channels from the 802.11a mode could be tested.

Band (GHz)	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
5.2	Left Tilt (15°)	802.11ac (HT 20)	0	36	5180	11.0	10.3	0.057	0.068	9
5.3	Right Tilt (15°)	802.11ac (HT 20)	0	52	5260	11.0	10.7	0.040	0.043	
5.5	Right Tilt (15°)	802.11ac (HT 20)	0	100	5500	11.0	10.6	0.029	0.032	
5.8	Right Touch	802.11ac (HT 20)	0	149	5745	11.0	9.8	0.042	0.055	

12.14.3. Body-worn Accessory Exposure Conditions

Band (GHz)	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
5.2	Rear	802.11a	10	36	5180	13.0	12.4	0.045	0.052	10
				48	5240	13.0	12.3			
	Front	802.11a	10	36	5180	13.0	12.4	<0.001	<0.001	
				48	5240	13.0	12.3			
5.3	Rear	802.11a	10	52	5260	13.0	12.5			
				60	5300	13.0	12.5	0.048	0.054	11
	Front	802.11a	10	52	5260	13.0	12.5			
				60	5300	13.0	12.5	<0.001	<0.001	
5.5	Rear	802.11a	10	100	5500	13.0	12.2	0.026	0.032	12
				116	5580	13.0	11.9			
				124	not supported					
				132	5660	13.0	11.6			
	Front	802.11a	10	100	5500	13.0	12.2	<0.001	<0.001	
				116	5580	13.0	11.9			
				124	not supported					
				132	5660	13.0	11.6			
5.8	Rear	802.11a	10	149	5745	13.0	11.5	0.050	0.071	13
				157	5785	13.0	11.3			
				161	5825	13.0	11.4			
	Front	802.11a	10	149	5745	13.0	11.5	<0.001	<0.001	
				157	5785	13.0	11.3			
				161	5825	13.0	11.4			

12.14.4. WiFi Direct (Group Owner) Exposure Conditions

Band (GHz)	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
5.8	Rear	802.11a	10	149	5745	13.0	11.5	0.050	0.071	13
				157	5785	13.0	11.3			
				161	5825	13.0	11.4			
	Front	802.11a	10	149	5745	13.0	11.5	<0.001	<0.001	
				157	5785	13.0	11.3			
				161	5825	13.0	11.4			
	Edge 1	802.11a	10	149	5745	13.0	11.5	0.029	0.041	
				157	5785	13.0	11.3			
				161	5825	13.0	11.4			
	Edge 2	802.11a	10	149	5745	13.0	11.5	0.013	0.019	
				157	5785	13.0	11.3			
				161	5825	13.0	11.4			

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

12.14.5. Additional Testing in 802.11ac Mode for Body-worn & WiFi Direct

Test exclusion considerations for 802.11ac mode:

Apply usual 802.11 test exclusion considerations, but include 802.11ac SAR for highest 802.11a configuration in each frequency band and each exposure condition according to April 2013 TCB Workshop Updates.

Additional testing in 802.11ac mode was performed in HT20 mode so that the same channels from the 802.11a mode could be tested.

Band (GHz)	Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
5.2	Rear	802.11ac (HT 20)	10	36	5180	11.0	10.3	0.028	0.033	14
5.3	Rear	802.11ac (HT 20)	10	60	5300	11.0	10.5	0.020	0.022	
5.5	Rear	802.11ac (HT 20)	10	100	5500	11.0	10.6	0.014	0.015	
5.8	Rear	802.11ac (HT 20)	10	149	5745	11.0	9.8	0.011	0.015	

12.15. Bluetooth

12.15.1. Body-worn Accessory & Hotspot Exposure Conditions

Test Position	Mode	Dist. (mm)	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	Note
					Tune-up limit	Meas.	Meas.	Scaled		
Rear	GFSK	10	0	2402	10.0	8.2	0.013	0.020		
			39	2441	10.0	7.3				1
			78	2480	10.0	7.3				1
Front	GFSK	10	0	2402	10.0	8.2	0.006	0.009		
			39	2441	10.0	7.3				1
			78	2480	10.0	7.3				1

Note(s):

- Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01r01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Hotspot/WiFi Direct (W/kg)
850	GSM 850	0.421	0.511	0.511
	CDMA BC0	0.392	0.551	0.551
	WCDMA Band V	0.296	0.411	0.411
1900	GSM 1900	0.243	0.512	0.512
	CDMA BC1	0.419	0.998	0.998
	WCDMA Band II	0.364	0.733	0.733
1750	LTE Band 4	0.349	0.888	0.888
750	LTE Band 13	0.515	0.499	0.499
2400	WiFi 802.11b/g/n/ac	0.424	0.153	0.153
5000	WiFi 802.11a/n/ac	0.102	0.050	0.050

13.2. Repeated Measurement Results

13.2.1. Head Exposure Condition

Not Applicable.

13.2.2. Body-worn Accessory Exposure Condition

Frequency band	Test Position	Mode	Ch #.	Freq. (MHz)	Meas. SAR (W/kg)		Largest to Smallest SAR Ratio	Note
					Original	Repeated		
CDMA BC1	Rear	1xEVDO (Rel. 0)	1175	1908.75	0.998	0.972	1.03	1
LTE Band 4	Rear	QPSK	20300	1745.0	0.888	0.888	1.00	1

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

13.2.3. Hotspot Mode Exposure Conditions

Not Applicable.

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance v05, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$

A new threshold of 0.04 is also introduced in the draft KDB. Thus, in order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

14.1. Head Exposure Conditions

14.1.1. Sum of the SAR for GSM (Voice) & WiFi

Test Position	GSM		WiFi					Σ 1-g SAR (mW/g)
	850	1900	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.236		0.458					0.694
	0.236			0.107				0.343
	0.236				0.077			0.313
	0.236					0.064		0.300
	0.236						0.067	0.303
		0.139	0.458					0.597
		0.139		0.107				0.246
		0.139			0.077			0.216
		0.139				0.064		0.203
		0.139					0.067	0.206
Left Tilt (15°)	0.157		0.491					0.648
	0.157			0.115				0.272
	0.157				0.093			0.250
	0.157					0.056		0.213
	0.157						0.071	0.228
		0.087	0.491					0.578
		0.087		0.115				0.202
		0.087			0.093			0.180
		0.087				0.056		0.143
		0.087					0.071	0.158
Right Touch	0.289		0.276					0.565
	0.289			0.069				0.358
	0.289				0.071			0.360
	0.289					0.064		0.353
	0.289						0.074	0.363
		0.194	0.276					0.470
		0.194		0.069				0.263
		0.194			0.071			0.265
		0.194				0.064		0.258
		0.194					0.074	0.268
Right Tilt (15°)	0.169		0.283					0.452
	0.169			0.078				0.247
	0.169				0.114			0.283
	0.169					0.069		0.238
	0.169						0.058	0.227
		0.070	0.283					0.353
		0.070		0.078				0.148
		0.070			0.114			0.184
		0.070				0.069		0.139
		0.070					0.058	0.128

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.1.2. Sum of the SAR for GSM (VoIP) & WiFi

Test Position	GSM (GPRS)		WiFi					Σ 1-g SAR (mW/g)
	850	1900	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.349		0.458					0.807
	0.349			0.107				0.456
	0.349				0.077			0.426
	0.349					0.064		0.413
	0.349						0.067	0.416
		0.179	0.458					0.637
		0.179		0.107				0.286
		0.179			0.077			0.256
		0.179				0.064		0.243
		0.179					0.067	0.246
Left Tilt (15°)	0.226		0.491					0.717
	0.226			0.115				0.341
	0.226				0.093			0.319
	0.226					0.056		0.282
	0.226						0.071	0.297
		0.107	0.491					0.598
		0.107		0.115				0.222
		0.107			0.093			0.200
		0.107				0.056		0.163
		0.107					0.071	0.178
Right Touch	0.462		0.276					0.738
	0.462			0.069				0.531
	0.462				0.071			0.533
	0.462					0.064		0.526
	0.462						0.074	0.536
		0.249	0.276					0.525
		0.249		0.069				0.318
		0.249			0.071			0.320
		0.249				0.064		0.313
		0.249					0.074	0.323
Right Tilt (15°)	0.266		0.283					0.549
	0.266			0.078				0.344
	0.266				0.114			0.380
	0.266					0.069		0.335
	0.266						0.058	0.324
		0.086	0.283					0.369
		0.086		0.078				0.164
		0.086			0.114			0.200
		0.086				0.069		0.155
		0.086					0.058	0.144

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.1.3. Sum of the SAR for CDMA (Voice) & WiFi

Test Position	CDMA (1xRTT)		WiFi					Σ 1-g SAR (mW/g)
	BC0	BC1	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.308		0.458					0.766
	0.308			0.107				0.415
	0.308				0.077			0.385
	0.308					0.064		0.372
	0.308						0.067	0.375
		0.264	0.458					0.722
		0.264		0.107				0.371
		0.264			0.077			0.341
		0.264				0.064		0.328
		0.264					0.067	0.331
Left Tilt (15°)	0.178		0.491					0.669
	0.178			0.115				0.293
	0.178				0.093			0.271
	0.178					0.056		0.234
	0.178						0.071	0.249
		0.179	0.491					0.670
		0.179		0.115				0.294
		0.179			0.093			0.272
		0.179				0.056		0.235
		0.179					0.071	0.250
Right Touch	0.401		0.276					0.677
	0.401			0.069				0.470
	0.401				0.071			0.472
	0.401					0.064		0.465
	0.401						0.074	0.475
		0.419	0.276					0.695
		0.419		0.069				0.488
		0.419			0.071			0.490
		0.419				0.064		0.483
		0.419					0.074	0.493
Right Tilt (15°)	0.194		0.283					0.477
	0.194			0.078				0.272
	0.194				0.114			0.308
	0.194					0.069		0.263
	0.194						0.058	0.252
		0.156	0.283					0.439
		0.156		0.078				0.234
		0.156			0.114			0.270
		0.156				0.069		0.225
		0.156					0.058	0.214

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.1.4. Sum of the SAR for CDMA (VoIP) & WiFi

Test Position	CDMA (EV-DO)		WiFi					Σ 1-g SAR (mW/g)
	BC0	BC1	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.291		0.458					0.749
	0.291			0.107				0.398
	0.291				0.077			0.368
	0.291					0.064		0.355
	0.291						0.067	0.358
		0.289	0.458					0.747
		0.289		0.107				0.396
		0.289			0.077			0.366
		0.289				0.064		0.353
		0.289					0.067	0.356
Left Tilt (15°)	0.172		0.491					0.663
	0.172			0.115				0.287
	0.172				0.093			0.265
	0.172					0.056		0.228
	0.172						0.071	0.243
		0.175	0.491					0.666
		0.175		0.115				0.290
		0.175			0.093			0.268
		0.175				0.056		0.231
		0.175					0.071	0.246
Right Touch	0.336		0.276					0.612
	0.336			0.069				0.405
	0.336				0.071			0.407
	0.336					0.064		0.400
	0.336						0.074	0.410
		0.416	0.276					0.692
		0.416		0.069				0.485
		0.416			0.071			0.487
		0.416				0.064		0.480
		0.416					0.074	0.490
Right Tilt (15°)	0.179		0.283					0.462
	0.179			0.078				0.257
	0.179				0.114			0.293
	0.179					0.069		0.248
	0.179						0.058	0.237
		0.156	0.283					0.439
		0.156		0.078				0.234
		0.156			0.114			0.270
		0.156				0.069		0.225
		0.156					0.058	0.214

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.1.5. Sum of the SAR for WCDMA & WiFi

Test Position	WCDMA		WiFi					Σ 1-g SAR (mW/g)
	Band V	Band II	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.244		0.458					0.702
	0.244			0.107				0.351
	0.244				0.077			0.321
	0.244					0.064		0.308
	0.244						0.067	0.311
		0.239	0.458					0.697
		0.239		0.107				0.346
		0.239			0.077			0.316
		0.239				0.064		0.303
		0.239					0.067	0.306
Left Tilt (15°)	0.160		0.491					0.651
	0.160			0.115				0.275
	0.160				0.093			0.253
	0.160					0.056		0.216
	0.160						0.071	0.231
		0.160	0.491					0.651
		0.160		0.115				0.275
		0.160			0.093			0.253
		0.160				0.056		0.216
		0.160					0.071	0.231
Right Touch	0.310		0.276					0.586
	0.310			0.069				0.379
	0.310				0.071			0.381
	0.310					0.064		0.374
	0.310						0.074	0.384
		0.372	0.276					0.648
		0.372		0.069				0.441
		0.372			0.071			0.443
		0.372				0.064		0.436
		0.372					0.074	0.446
Right Tilt (15°)	0.179		0.283					0.462
	0.179			0.078				0.257
	0.179				0.114			0.293
	0.179					0.069		0.248
	0.179						0.058	0.237
		0.136	0.283					0.419
		0.136		0.078				0.214
		0.136			0.114			0.250
		0.136				0.069		0.205
		0.136					0.058	0.194

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.1.6. Sum of the SAR for LTE & WiFi

Test Position	LTE		WiFi					Σ 1-g SAR (mW/g)
	Band 4	Band 13	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.357		0.458					0.815
	0.357			0.107				0.464
	0.357				0.077			0.434
	0.357					0.064		0.421
	0.357						0.067	0.424
		0.418	0.458					0.876
		0.418		0.107				0.525
		0.418			0.077			0.495
		0.418				0.064		0.482
		0.418					0.067	0.485
Left Tilt (15°)	0.080		0.491					0.571
	0.080			0.115				0.195
	0.080				0.093			0.173
	0.080					0.056		0.136
	0.080						0.071	0.151
		0.349	0.491					0.840
		0.349		0.115				0.464
		0.349			0.093			0.442
		0.349				0.056		0.405
		0.349					0.071	0.420
Right Touch	0.356		0.276					0.632
	0.356			0.069				0.425
	0.356				0.071			0.427
	0.356					0.064		0.420
	0.356						0.074	0.430
		0.527	0.276					0.803
		0.527		0.069				0.596
		0.527			0.071			0.598
		0.527				0.064		0.591
		0.527					0.074	0.601
Right Tilt (15°)	0.111		0.283					0.394
	0.111			0.078				0.189
	0.111				0.114			0.225
	0.111					0.069		0.180
	0.111						0.058	0.169
		0.476	0.283					0.759
		0.476		0.078				0.554
		0.476			0.114			0.590
		0.476				0.069		0.545
		0.476					0.058	0.534

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.1.7. Sum of the SAR for SV-LTE & WiFi

Test Position	CDMA BC0	LTE Band 4	WiFi					Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.308	0.158	0.458					0.924
	0.308	0.158		0.107				0.573
	0.308	0.158			0.077			0.543
	0.308	0.158				0.064		0.530
	0.308	0.158					0.067	0.533
Left Tilt (15°)	0.178	0.035	0.491					0.704
	0.178	0.035		0.115				0.328
	0.178	0.035			0.093			0.306
	0.178	0.035				0.056		0.269
	0.178	0.035					0.071	0.284
Right Touch	0.401	0.175	0.276					0.852
	0.401	0.175		0.069				0.645
	0.401	0.175			0.071			0.647
	0.401	0.175				0.064		0.640
	0.401	0.175					0.074	0.650
Right Tilt (15°)	0.194	0.040	0.283					0.517
	0.194	0.040		0.078				0.312
	0.194	0.040			0.114			0.348
	0.194	0.040				0.069		0.303
	0.194	0.040					0.058	0.292

Test Position	CDMA BC0	LTE Band 4	WiFi					Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.103	0.357	0.458					0.918
	0.103	0.357		0.107				0.567
	0.103	0.357			0.077			0.537
	0.103	0.357				0.064		0.524
	0.103	0.357					0.067	0.527
Left Tilt (15°)	0.067	0.080	0.491					0.638
	0.067	0.080		0.115				0.262
	0.067	0.080			0.093			0.240
	0.067	0.080				0.056		0.203
	0.067	0.080					0.071	0.218
Right Touch	0.132	0.356	0.276					0.764
	0.132	0.356		0.069				0.557
	0.132	0.356			0.071			0.559
	0.132	0.356				0.064		0.552
	0.132	0.356					0.074	0.562
Right Tilt (15°)	0.071	0.111	0.283					0.465
	0.071	0.111		0.078				0.260
	0.071	0.111			0.114			0.296
	0.071	0.111				0.069		0.251
	0.071	0.111					0.058	0.240

Sum of the SAR for SV-LTE & WiFi (Continued)

Test Position	CDMA BC1	LTE Band 4	WiFi					Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.264	0.158	0.458					0.880
	0.264	0.158		0.107				0.529
	0.264	0.158			0.077			0.499
	0.264	0.158				0.064		0.486
	0.264	0.158					0.067	0.489
Left Tilt (15°)	0.179	0.035	0.491					0.705
	0.179	0.035		0.115				0.329
	0.179	0.035			0.093			0.307
	0.179	0.035				0.056		0.270
	0.179	0.035					0.071	0.285
Right Touch	0.419	0.175	0.276					0.870
	0.419	0.175		0.069				0.663
	0.419	0.175			0.071			0.665
	0.419	0.175				0.064		0.658
	0.419	0.175					0.074	0.668
Right Tilt (15°)	0.156	0.040	0.283					0.479
	0.156	0.040		0.078				0.274
	0.156	0.040			0.114			0.310
	0.156	0.040				0.069		0.265
	0.156	0.040					0.058	0.254

Test Position	CDMA BC1	LTE Band 4	WiFi					Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.083	0.357	0.458					0.898
	0.083	0.357		0.107				0.547
	0.083	0.357			0.077			0.517
	0.083	0.357				0.064		0.504
	0.083	0.357					0.067	0.507
Left Tilt (15°)	0.052	0.080	0.491					0.623
	0.052	0.080		0.115				0.247
	0.052	0.080			0.093			0.225
	0.052	0.080				0.056		0.188
	0.052	0.080					0.071	0.203
Right Touch	0.135	0.356	0.276					0.767
	0.135	0.356		0.069				0.560
	0.135	0.356			0.071			0.562
	0.135	0.356				0.064		0.555
	0.135	0.356					0.074	0.565
Right Tilt (15°)	0.044	0.111	0.283					0.438
	0.044	0.111		0.078				0.233
	0.044	0.111			0.114			0.269
	0.044	0.111				0.069		0.224
	0.044	0.111					0.058	0.213

Sum of the SAR for SV-LTE & WiFi (Continued)

Test Position	CDMA BC0	LTE Band 13	WiFi					Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.308	0.154	0.458					0.920
	0.308	0.154		0.107				0.569
	0.308	0.154			0.077			0.539
	0.308	0.154				0.064		0.526
	0.308	0.154					0.067	0.529
Left Tilt (15°)	0.178	0.134	0.491					0.803
	0.178	0.134		0.115				0.427
	0.178	0.134			0.093			0.405
	0.178	0.134				0.056		0.368
	0.178	0.134					0.071	0.383
Right Touch	0.401	0.199	0.276					0.876
	0.401	0.199		0.069				0.669
	0.401	0.199			0.071			0.671
	0.401	0.199				0.064		0.664
	0.401	0.199					0.074	0.674
Right Tilt (15°)	0.194	0.185	0.283					0.662
	0.194	0.185		0.078				0.457
	0.194	0.185			0.114			0.493
	0.194	0.185				0.069		0.448
	0.194	0.185					0.058	0.437

Test Position	CDMA BC0	LTE Band 13	WiFi					Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.103	0.418	0.458					0.979
	0.103	0.418		0.107				0.628
	0.103	0.418			0.077			0.598
	0.103	0.418				0.064		0.585
	0.103	0.418					0.067	0.588
Left Tilt (15°)	0.067	0.349	0.491					0.907
	0.067	0.349		0.115				0.531
	0.067	0.349			0.093			0.509
	0.067	0.349				0.056		0.472
	0.067	0.349					0.071	0.487
Right Touch	0.132	0.527	0.276					0.935
	0.132	0.527		0.069				0.728
	0.132	0.527			0.071			0.730
	0.132	0.527				0.064		0.723
	0.132	0.527					0.074	0.733
Right Tilt (15°)	0.071	0.476	0.283					0.830
	0.071	0.476		0.078				0.625
	0.071	0.476			0.114			0.661
	0.071	0.476				0.069		0.616
	0.071	0.476					0.058	0.605

Sum of the SAR for SV-LTE & WiFi (Continued)

Test Position	CDMA BC1	LTE Band 13	WiFi					Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.264	0.154	0.458					0.876
	0.264	0.154		0.107				0.525
	0.264	0.154			0.077			0.495
	0.264	0.154				0.064		0.482
	0.264	0.154					0.067	0.485
Left Tilt (15°)	0.179	0.134	0.491					0.804
	0.179	0.134		0.115				0.428
	0.179	0.134			0.093			0.406
	0.179	0.134				0.056		0.369
	0.179	0.134					0.071	0.384
Right Touch	0.419	0.199	0.276					0.894
	0.419	0.199		0.069				0.687
	0.419	0.199			0.071			0.689
	0.419	0.199				0.064		0.682
	0.419	0.199					0.074	0.692
Right Tilt (15°)	0.156	0.185	0.283					0.624
	0.156	0.185		0.078				0.419
	0.156	0.185			0.114			0.455
	0.156	0.185				0.069		0.410
	0.156	0.185					0.058	0.399

Test Position	CDMA BC1	LTE Band 13	WiFi					Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz	
Left Touch	0.083	0.418	0.458					0.959
	0.083	0.418		0.107				0.608
	0.083	0.418			0.077			0.578
	0.083	0.418				0.064		0.565
	0.083	0.418					0.067	0.568
Left Tilt (15°)	0.052	0.349	0.491					0.892
	0.052	0.349		0.115				0.516
	0.052	0.349			0.093			0.494
	0.052	0.349				0.056		0.457
	0.052	0.349					0.071	0.472
Right Touch	0.135	0.527	0.276					0.938
	0.135	0.527		0.069				0.731
	0.135	0.527			0.071			0.733
	0.135	0.527				0.064		0.726
	0.135	0.527					0.074	0.736
Right Tilt (15°)	0.044	0.476	0.283					0.803
	0.044	0.476		0.078				0.598
	0.044	0.476			0.114			0.634
	0.044	0.476				0.069		0.589
	0.044	0.476					0.058	0.578

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.2. Body-worn Accessory Exposure Conditions

14.2.1. Sum of the SAR for GSM (Voice), WiFi & BT

Test Position	GSM		WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	850	1900	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.382		0.177						0.559
	0.382			0.052					0.434
	0.382				0.054				0.436
	0.382					0.032			0.414
	0.382						0.071		0.453
	0.382							0.020	0.402
		0.406	0.177						0.583
		0.406		0.052					0.458
		0.406			0.054				0.460
		0.406				0.032			0.438
		0.406					0.071		0.477
		0.406						0.020	0.426
Front	0.312		0.107						0.419
	0.312			0.000					0.312
	0.312				0.000				0.312
	0.312					0.000			0.312
	0.312						0.000		0.312
	0.312							0.009	0.321
		0.214	0.107						0.321
		0.214		0.000					0.214
		0.214			0.000				0.214
		0.214				0.000			0.214
		0.214					0.000		0.214
		0.214						0.009	0.223

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.2.2. Sum of the SAR for GSM (VoIP), WiFi & BT

Test Position	GSM (GPRS)		WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	850	1900	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.560		0.177						0.737
	0.560			0.052					0.612
	0.560				0.054				0.614
	0.560					0.032			0.592
	0.560						0.071		0.631
	0.560							0.020	0.580
		0.524	0.177						0.701
		0.524		0.052					0.576
		0.524			0.054				0.578
		0.524				0.032			0.556
		0.524					0.071		0.595
		0.524						0.020	0.544
Front	0.462		0.107						0.569
	0.462			0.000					0.462
	0.462				0.000				0.462
	0.462					0.000			0.462
	0.462						0.000		0.462
	0.462							0.009	0.471
		0.273	0.107						0.380
		0.273		0.000					0.273
		0.273			0.000				0.273
		0.273				0.000			0.273
		0.273					0.000		0.273
		0.273						0.009	0.282

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.2.3. Sum of the SAR for CDMA (Voice), WiFi & BT

Test Position	CDMA (1xRTT)		WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	BC0	BC1	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.503		0.177						0.680
	0.503			0.052					0.555
	0.503				0.054				0.557
	0.503					0.032			0.535
	0.503						0.071		0.574
	0.503							0.020	0.523
		0.896	0.177						1.073
		0.896		0.052					0.948
		0.896			0.054				0.950
		0.896				0.032			0.928
		0.896					0.071		0.967
		0.896						0.020	0.916
Front	0.369		0.107						0.476
	0.369			0.000					0.369
	0.369				0.000				0.369
	0.369					0.000			0.369
	0.369						0.000		0.369
	0.369							0.009	0.378
		0.417	0.107						0.524
		0.417		0.000					0.417
		0.417			0.000				0.417
		0.417				0.000			0.417
		0.417					0.000		0.417
		0.417						0.009	0.426

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.2.4. Sum of the SAR for CDMA (VoIP), WiFi & BT

Test Position	CDMA (EV-DO)		WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	BC0	BC1	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.551		0.177						0.728
	0.551			0.052					0.603
	0.551				0.054				0.605
	0.551					0.032			0.583
	0.551						0.071		0.622
	0.551							0.020	0.571
		0.998	0.177						1.175
		0.998		0.052					1.050
		0.998			0.054				1.052
		0.998				0.032			1.030
		0.998					0.071		1.069
		0.998						0.020	1.018
Front	0.410		0.107						0.517
	0.410			0.000					0.410
	0.410				0.000				0.410
	0.410					0.000			0.410
	0.410						0.000		0.410
	0.410							0.009	0.419
		0.471	0.107						0.578
		0.471		0.000					0.471
		0.471			0.000				0.471
		0.471				0.000			0.471
		0.471					0.000		0.471
		0.471						0.009	0.480

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.2.5. Sum of the SAR for WCDMA, WiFi & BT

Test Position	WCDMA		WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Band V	Band II	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.430		0.177						0.607
	0.430			0.052					0.482
	0.430				0.054				0.484
	0.430					0.032			0.462
	0.430						0.071		0.501
	0.430							0.020	0.450
		0.750	0.177						0.927
		0.750		0.052					0.802
		0.750			0.054				0.804
		0.750				0.032			0.782
		0.750					0.071		0.821
		0.750						0.020	0.770
Front	0.339		0.107						0.446
	0.339			0.000					0.339
	0.339				0.000				0.339
	0.339					0.000			0.339
	0.339						0.000		0.339
	0.339							0.009	0.348
		0.419	0.107						0.526
		0.419		0.000					0.419
		0.419			0.000				0.419
		0.419				0.000			0.419
		0.419					0.000		0.419
		0.419						0.009	0.428

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.2.6. Sum of the SAR for LTE, WiFi & BT

Test Position	LTE		WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Band 4	Band 13	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.952		0.177						1.129
	0.952			0.052					1.004
	0.952				0.054				1.006
	0.952					0.032			0.984
	0.952						0.071		1.023
	0.952							0.020	0.972
		0.511	0.177						0.688
		0.511		0.052					0.563
		0.511			0.054				0.565
		0.511				0.032			0.543
		0.511					0.071		0.582
		0.511						0.020	0.531
Front	0.635		0.107						0.742
	0.635			0.000					0.635
	0.635				0.000				0.635
	0.635					0.000			0.635
	0.635						0.000		0.635
	0.635							0.009	0.644
		0.438	0.107						0.545
		0.438		0.000					0.438
		0.438			0.000				0.438
		0.438				0.000			0.438
		0.438					0.000		0.438
		0.438						0.009	0.447

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.2.7. Sum of the SAR for SV-LTE, WiFi & BT

Test Position	CDMA BC0	LTE Band 4	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.503	0.366	0.177						1.046
	0.503	0.366		0.052					0.921
	0.503	0.366			0.054				0.923
	0.503	0.366				0.032			0.901
	0.503	0.366					0.071		0.940
	0.503	0.366						0.020	0.889
Test Position	CDMA BC0	LTE Band 4	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.167	0.952	0.177						1.296
	0.167	0.952		0.052					1.171
	0.167	0.952			0.054				1.173
	0.167	0.952				0.032			1.151
	0.167	0.952					0.071		1.190
	0.167	0.952						0.020	1.139
Test Position	CDMA BC1	LTE Band 4	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.896	0.366	0.177						1.439
	0.896	0.366		0.052					1.314
	0.896	0.366			0.054				1.316
	0.896	0.366				0.032			1.294
	0.896	0.366					0.071		1.333
	0.896	0.366						0.020	1.282
Test Position	CDMA BC1	LTE Band 4	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.298	0.952	0.177						1.427
	0.298	0.952		0.052					1.302
	0.298	0.952			0.054				1.304
	0.298	0.952				0.032			1.282
	0.298	0.952					0.071		1.321
	0.298	0.952						0.020	1.270

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

Sum of the SAR for SV-LTE, WiFi & BT (Continued)

Test Position	CDMA BC0	LTE Band 13	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.503	0.185	0.177						0.865
	0.503	0.185		0.052					0.740
	0.503	0.185			0.054				0.742
	0.503	0.185				0.032			0.720
	0.503	0.185					0.071		0.759
	0.503	0.185						0.020	0.708
Test Position	CDMA BC0	LTE Band 13	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.167	0.511	0.177						0.855
	0.167	0.511		0.052					0.730
	0.167	0.511			0.054				0.732
	0.167	0.511				0.032			0.710
	0.167	0.511					0.071		0.749
	0.167	0.511						0.020	0.698
Test Position	CDMA BC1	LTE Band 13	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.896	0.185	0.177						1.258
	0.896	0.185		0.052					1.133
	0.896	0.185			0.054				1.135
	0.896	0.185				0.032			1.113
	0.896	0.185					0.071		1.152
	0.896	0.185						0.020	1.101
Test Position	CDMA BC1	LTE Band 13	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Rear	0.298	0.511	0.177						0.986
	0.298	0.511		0.052					0.861
	0.298	0.511			0.054				0.863
	0.298	0.511				0.032			0.841
	0.298	0.511					0.071		0.880
	0.298	0.511						0.020	0.829

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

Sum of the SAR for SV-LTE, WiFi & BT (Continued)

Test Position	CDMA BC0	LTE Band 4	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Front	0.369	0.230	0.107						0.706
	0.369	0.230		0.000					0.599
	0.369	0.230			0.000				0.599
	0.369	0.230				0.000			0.599
	0.369	0.230					0.000		0.599
	0.369	0.230						0.009	0.608
Test Position	CDMA BC0	LTE Band 4	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Front	0.141	0.635	0.107						0.883
	0.141	0.635		0.000					0.776
	0.141	0.635			0.000				0.776
	0.141	0.635				0.000			0.776
	0.141	0.635					0.000		0.776
	0.141	0.635						0.009	0.785
Test Position	CDMA BC1	LTE Band 4	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Front	0.471	0.230	0.107						0.808
	0.471	0.230		0.000					0.701
	0.471	0.230			0.000				0.701
	0.471	0.230				0.000			0.701
	0.471	0.230					0.000		0.701
	0.471	0.230						0.009	0.710
Test Position	CDMA BC1	LTE Band 4	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Front	0.148	0.635	0.107						0.890
	0.148	0.635		0.000					0.783
	0.148	0.635			0.000				0.783
	0.148	0.635				0.000			0.783
	0.148	0.635					0.000		0.783
	0.148	0.635						0.009	0.792

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

Sum of the SAR for SV-LTE, WiFi & BT (Continued)

Test Position	CDMA BC0	LTE Band 13	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Front	0.369	0.119	0.107						0.595
	0.369	0.119		0.000					0.488
	0.369	0.119			0.000				0.488
	0.369	0.119				0.000			0.488
	0.369	0.119					0.000		0.488
	0.369	0.119						0.009	0.497
Test Position	CDMA BC0	LTE Band 13	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Front	0.141	0.438	0.107						0.686
	0.141	0.438		0.000					0.579
	0.141	0.438			0.000				0.579
	0.141	0.438				0.000			0.579
	0.141	0.438					0.000		0.579
	0.141	0.438						0.009	0.588
Test Position	CDMA BC1	LTE Band 13	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Front	0.471	0.119	0.107						0.697
	0.471	0.119		0.000					0.590
	0.471	0.119			0.000				0.590
	0.471	0.119				0.000			0.590
	0.471	0.119					0.000		0.590
	0.471	0.119						0.009	0.599
Test Position	CDMA BC1	LTE Band 13	WiFi					Bluetooth	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	5.2 GHz	5.3 GHz	5.5 GHz	5.8 GHz		
Front	0.148	0.438	0.107						0.693
	0.148	0.438		0.000					0.586
	0.148	0.438			0.000				0.586
	0.148	0.438				0.000			0.586
	0.148	0.438					0.000		0.586
	0.148	0.438						0.009	0.595

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.3. Hotspot Mode Exposure Conditions

14.3.1. Sum of the SAR for GSM (VoIP) & WiFi

Test Position	GSM (GPRS)		WiFi	Σ 1-g SAR (mW/g)
	850	1900	2.4 GHz	
Rear	0.560		0.177	0.737
		0.524	0.177	0.701
Front	0.462		0.107	0.569
		0.273	0.107	0.380
Edge 1	N/A		0.088	0.088
		N/A	0.088	0.088
Edge 2	0.447		0.046	0.493
		0.146	0.046	0.192
Edge 3	0.349		N/A	0.349
		0.276	N/A	0.276
Edge 4	0.235		N/A	0.235
		0.082	N/A	0.082

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.3.2. Sum of the SAR for CDMA (EV-DO) & WiFi

Test Position	CDMA (EV-DO)		WiFi	Σ 1-g SAR (mW/g)
	BC0	BC1	2.4 GHz	
Rear	0.551		0.177	0.728
		0.998	0.177	1.175
Front	0.410		0.107	0.517
		0.471	0.107	0.578
Edge 1	N/A		0.088	0.088
		N/A	0.088	0.088
Edge 2	0.399		0.046	0.445
		0.239	0.046	0.285
Edge 3	0.321		N/A	0.321
		0.493	N/A	0.493
Edge 4	0.220		N/A	0.220
		0.128	N/A	0.128

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.3.3. Sum of the SAR for WCDMA & WiFi

Test Position	WCDMA		WiFi	Σ 1-g SAR (mW/g)
	Band V	Band II	2.4 GHz	
Rear	0.430		0.177	0.607
		0.750	0.177	0.927
Front	0.355		0.107	0.462
		0.419	0.107	0.526
Edge 1	N/A		0.088	0.088
		N/A	0.088	0.088
Edge 2	0.349		0.046	0.395
		0.220	0.046	0.266
Edge 3	0.240		N/A	0.240
		0.429	N/A	0.429
Edge 4	0.198		N/A	0.198
		0.115	N/A	0.115

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.3.4. Sum of the SAR for LTE & WiFi

Test Position	LTE		WiFi	Σ 1-g SAR (mW/g)
	Band 4	Band 13	2.4 GHz	
Rear	0.952		0.177	1.129
		0.511	0.177	0.688
Front	0.635		0.107	0.742
		0.438	0.107	0.545
Edge 1	N/A		0.088	0.088
		0.263	0.088	0.351
Edge 2	N/A		0.046	0.046
		0.311	0.046	0.357
Edge 3	0.484		N/A	0.484
		N/A	N/A	N/A
Edge 4	0.501		N/A	0.501
		N/A	N/A	N/A

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.3.5. Sum of the SAR for SV-LTE & WiFi 2.4 GHz

Test Position	CDMA BC0	LTE Band 4	WiFi	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	
Rear	0.503	0.366	0.177	1.046
Front	0.369	0.230	0.107	0.706
Edge 1	N/A	N/A	0.088	0.088
Edge 2	0.407	N/A	0.046	0.453
Edge 3	0.288	0.207	N/A	0.495
Edge 4	0.219	0.223	N/A	0.442
Test Position	CDMA BC0	LTE Band 4	WiFi	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	
Rear	0.167	0.952	0.177	1.296
Front	0.141	0.635	0.107	0.883
Edge 1	N/A	N/A	0.088	0.088
Edge 2	0.137	N/A	0.046	0.183
Edge 3	0.114	0.484	N/A	0.598
Edge 4	0.073	0.501	N/A	0.574

Test Position	CDMA BC1	LTE Band 4	WiFi	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	
Rear	0.896	0.366	0.177	1.439
Front	0.417	0.230	0.107	0.754
Edge 1	N/A	N/A	0.088	0.088
Edge 2	0.240	N/A	0.046	0.286
Edge 3	0.514	0.207	N/A	0.721
Edge 4	0.128	0.223	N/A	0.351
Test Position	CDMA BC1	LTE Band 4	WiFi	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	
Rear	0.298	0.952	0.177	1.427
Front	0.148	0.635	0.107	0.890
Edge 1	N/A	N/A	0.088	0.088
Edge 2	0.076	N/A	0.046	0.122
Edge 3	0.155	0.484	N/A	0.639
Edge 4	0.039	0.501	N/A	0.540

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Sum of the SAR for SV-LTE & WiFi 2.4 GHz (Continued)

Test Position	CDMA BC0	LTE Band 13	WiFi	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	
Rear	0.503	0.185	0.177	0.865
Front	0.369	0.119	0.107	0.595
Edge 1	N/A	0.091	0.088	0.179
Edge 2	0.407	0.123	0.046	0.576
Edge 3	0.288	N/A	N/A	0.288
Edge 4	0.219	N/A	N/A	0.219
Test Position	CDMA BC0	LTE Band 13	WiFi	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	
Rear	0.167	0.511	0.177	0.855
Front	0.141	0.438	0.107	0.686
Edge 1	N/A	0.263	0.088	0.351
Edge 2	0.137	0.311	0.046	0.494
Edge 3	0.114	N/A	N/A	0.114
Edge 4	0.073	N/A	N/A	0.073

Test Position	CDMA BC1	LTE Band 13	WiFi	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	2.4 GHz	
Rear	0.896	0.185	0.177	1.258
Front	0.417	0.119	0.107	0.643
Edge 1	N/A	0.091	0.088	0.179
Edge 2	0.240	0.123	0.046	0.409
Edge 3	0.514	N/A	N/A	0.514
Edge 4	0.128	N/A	N/A	0.128
Test Position	CDMA BC1	LTE Band 13	WiFi	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	2.4 GHz	
Rear	0.298	0.511	0.177	0.986
Front	0.148	0.438	0.107	0.693
Edge 1	N/A	0.263	0.088	0.351
Edge 2	0.076	0.311	0.046	0.433
Edge 3	0.155	N/A	N/A	0.155
Edge 4	0.039	N/A	N/A	0.039

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

14.4. WiFi Direct Exposure Conditions

The 2.4 GHz band is covered by body worn accessory and hotspot exposure conditions.

The 5.8 GHz band only operates in Group Owner (GO) mode.

14.4.1. Sum of the SAR for GSM (VoIP) & WiFi 5.8 GHz

Test Position	GSM (GPRS)		WiFi	Σ 1-g SAR (mW/g)
	850	1900	5.8 GHz	
Rear	0.560		0.071	0.631
		0.524	0.071	0.595
Front	0.462		0.000	0.462
		0.273	0.000	0.273
Edge 1	N/A		0.041	0.041
		N/A	0.041	0.041
Edge 2	0.447		0.019	0.466
		0.146	0.019	0.165
Edge 3	0.349		N/A	0.349
		0.276	N/A	0.276
Edge 4	0.235		N/A	0.235
		0.082	N/A	0.082

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.4.2. Sum of the SAR for CDMA (EV-DO) & WiFi 5.8 GHz

Test Position	CDMA (EV-DO)		WiFi	Σ 1-g SAR (mW/g)
	BC0	BC1	5.8 GHz	
Rear	0.551		0.071	0.622
		0.998	0.071	1.069
Front	0.410		0.000	0.410
		0.471	0.000	0.471
Edge 1	N/A		0.041	0.041
		N/A	0.041	0.041
Edge 2	0.399		0.019	0.418
		0.239	0.019	0.258
Edge 3	0.321		N/A	0.321
		0.493	N/A	0.493
Edge 4	0.220		N/A	0.220
		0.128	N/A	0.128

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.4.3. Sum of the SAR for WCDMA & WiFi 5.8 GHz

Test Position	WCDMA		WiFi	Σ 1-g SAR (mW/g)
	Band V	Band II	5.8 GHz	
Rear	0.430		0.071	0.501
		0.750	0.071	0.821
Front	0.355		0.000	0.355
		0.419	0.000	0.419
Edge 1	N/A		0.041	0.041
		N/A	0.041	0.041
Edge 2	0.349		0.019	0.368
		0.220	0.019	0.239
Edge 3	0.240		N/A	0.240
		0.429	N/A	0.429
Edge 4	0.198		N/A	0.198
		0.115	N/A	0.115

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.4.4. Sum of the SAR for LTE & WiFi 5.8 GHz

Test Position	LTE		WiFi	Σ 1-g SAR (mW/g)
	Band 4	Band 13	5.8 GHz	
Rear	0.952		0.071	1.023
		0.511	0.071	0.582
Front	0.635		0.000	0.635
		0.438	0.000	0.438
Edge 1	N/A		0.041	0.041
		0.263	0.041	0.304
Edge 2	N/A		0.019	0.019
		0.311	0.019	0.330
Edge 3	0.484		N/A	0.484
		N/A	N/A	N/A
Edge 4	0.501		N/A	0.501
		N/A	N/A	N/A

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

14.4.5. Sum of the SAR for SV-LTE & WiFi 5.8 GHz

Test Position	CDMA BC0	LTE Band 4	WiFi	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	5.8 GHz	
Rear	0.503	0.366	0.071	0.940
Front	0.369	0.230	0.000	0.599
Edge 1	N/A	N/A	0.041	0.041
Edge 2	0.407	N/A	0.019	0.426
Edge 3	0.288	0.207	N/A	0.495
Edge 4	0.219	0.223	N/A	0.442
Test Position	CDMA BC0	LTE Band 4	WiFi	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	5.8 GHz	
Rear	0.167	0.952	0.071	1.190
Front	0.141	0.635	0.000	0.776
Edge 1	N/A	N/A	0.041	0.041
Edge 2	0.137	N/A	0.019	0.156
Edge 3	0.114	0.484	N/A	0.598
Edge 4	0.073	0.501	N/A	0.574

Test Position	CDMA BC1	LTE Band 4	WiFi	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	5.8 GHz	
Rear	0.896	0.366	0.071	1.333
Front	0.417	0.230	0.000	0.647
Edge 1	N/A	N/A	0.041	0.041
Edge 2	0.240	N/A	0.019	0.259
Edge 3	0.514	0.207	N/A	0.721
Edge 4	0.128	0.223	N/A	0.351
Test Position	CDMA BC1	LTE Band 4	WiFi	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	5.8 GHz	
Rear	0.298	0.952	0.071	1.321
Front	0.148	0.635	0.000	0.783
Edge 1	N/A	N/A	0.041	0.041
Edge 2	0.076	N/A	0.019	0.095
Edge 3	0.155	0.484	N/A	0.639
Edge 4	0.039	0.501	N/A	0.540

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

Sum of the SAR for SV-LTE & WiFi 5.8 GHz Band (Continued)

Test Position	CDMA BC0	LTE Band 13	WiFi	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	5.8 GHz	
Rear	0.503	0.185	0.071	0.759
Front	0.369	0.119	0.000	0.488
Edge 1	N/A	0.091	0.041	0.132
Edge 2	0.407	0.123	0.019	0.549
Edge 3	0.288	N/A	N/A	0.288
Edge 4	0.219	N/A	N/A	0.219
Test Position	CDMA BC0	LTE Band 13	WiFi	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	5.8 GHz	
Rear	0.167	0.511	0.071	0.749
Front	0.141	0.438	0.000	0.579
Edge 1	N/A	0.263	0.041	0.304
Edge 2	0.137	0.311	0.019	0.467
Edge 3	0.114	N/A	N/A	0.114
Edge 4	0.073	N/A	N/A	0.073

Test Position	CDMA BC1	LTE Band 13	WiFi	Σ 1-g SAR (mW/g)
	Voice (Max. Pwr)	(Pwr Reduction)	5.8 GHz	
Rear	0.896	0.185	0.071	1.152
Front	0.417	0.119	0.000	0.536
Edge 1	N/A	0.091	0.041	0.132
Edge 2	0.240	0.123	0.019	0.382
Edge 3	0.514	N/A	N/A	0.514
Edge 4	0.128	N/A	N/A	0.128
Test Position	CDMA BC1	LTE Band 13	WiFi	Σ 1-g SAR (mW/g)
	Voice (Pwr Reduction)	(Max. Pwr)	5.8 GHz	
Rear	0.298	0.511	0.071	0.880
Front	0.148	0.438	0.000	0.586
Edge 1	N/A	0.263	0.041	0.304
Edge 2	0.076	0.311	0.019	0.406
Edge 3	0.155	N/A	N/A	0.155
Edge 4	0.039	N/A	N/A	0.039

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the either sum of the 1-g SAR is < 1.6 W/kg.

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. System Performance Check Plots**
- 15.2. Highest SAR Test Plots for GSM**
- 15.3. Highest SAR Test Plots for CDMA**
- 15.4. Highest SAR Test Plots for W-CDMA**
- 15.5. Highest SAR Test Plots for LTE**
- 15.6. Highest SAR Test Plots for WiFi**
- 15.7. Calibration Certificate for E-Field Probe EX3DV4 - SN 3686**
- 15.8. Calibration Certificate for E-Field Probe EX3DV4 - SN 3929**
- 15.9. Calibration Certificate for D750V3 - SN 1071**
- 15.10. Calibration Certificate for D835V2 - SN 4d002**
- 15.11. Calibration Certificate for D1750V2 - SN 1050**
- 15.12. Calibration Certificate for D1900V2- SN 5d043**
- 15.13. Calibration Certificate for D2450V2 - SN 899**
- 15.14. Calibration Certificate for D5GHzV2 - SN 1138**