



**FCC CFR47 PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**FOR**

**CDMA/LTE PHONE + BLUETOOTH, & 2.4GHz DTS b/g/n**

**MODEL NUMBER: LG-VW820, VW820, LGVW820**

**FCC ID: ZNFVW820**

**REPORT NUMBER: 15I19783-E4**

**ISSUE DATE: JANUARY 19, 2015**

*Prepared for*

**LG ELECTRONICS MOBILECOMM U.S.A., INC**

**1000 SYLVAN AVENUE**

**ENGLEWOOD CLIFFS,**

**NEW JERSEY, 07632, U.S.A**

*Prepared by*

**UL VERIFICATION SERVICES INC.**

**47173 BENICIA STREET**

**FREMONT, CA 94538, U.S.A.**

**TEL: (510) 771-1000**

**FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

Rev.	Date	Revisions	Revised By
--	01/19/15	Initial Issue	D. Corona

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>8</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>9</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>10</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>12</b>
<b>7. MEASUREMENT METHODS .....</b>	<b>13</b>
<b>8. SUMMARY TABLE .....</b>	<b>14</b>
<b>9. ANTENNA PORT TEST RESULTS .....</b>	<b>15</b>
9.1. <i>6 dB BANDWIDTH.....</i>	<i>15</i>
9.1.1. <i>802.11b MODE IN THE 2.4 GHz BAND.....</i>	<i>16</i>
9.1.2. <i>802.11g MODE IN THE 2.4 GHz BAND.....</i>	<i>16</i>
9.1.3. <i>802.11n HT20 MODE IN THE 2.4 GHz BAND .....</i>	<i>16</i>
9.1.4. <i>6 dB BANDWIDTH MID CH PLOTS.....</i>	<i>17</i>
9.2. <i>99% BANDWIDTH.....</i>	<i>18</i>
9.2.1. <i>802.11b MODE IN THE 2.4 GHz BAND.....</i>	<i>19</i>
9.2.2. <i>802.11g MODE IN THE 2.4 GHz BAND.....</i>	<i>19</i>
9.2.3. <i>802.11n HT20 MODE IN THE 2.4 GHz BAND .....</i>	<i>19</i>
9.2.4. <i>99% BANDWIDTH MID CH PLOTS.....</i>	<i>20</i>
9.3. <i>OUTPUT POWER.....</i>	<i>21</i>
9.3.1. <i>802.11b MODE IN THE 2.4 GHz BAND.....</i>	<i>22</i>
9.3.2. <i>802.11g MODE IN THE 2.4 GHz BAND.....</i>	<i>23</i>
9.3.3. <i>802.11n HT20 MODE IN THE 2.4 GHz BAND .....</i>	<i>24</i>
9.4. <i>PSD.....</i>	<i>25</i>
9.4.1. <i>802.11b MODE IN THE 2.4 GHz BAND.....</i>	<i>26</i>

9.4.2. 802.11g MODE IN THE 2.4 GHz BAND.....26  
9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....26  
9.4.4. PSD Chain 0 MID CH PLOTS.....27  
9.5. OUT-OF-BAND EMISSIONS.....28  
9.5.1. 802.11b MODE IN THE 2.4 GHz BAND.....29  
9.5.2. 802.11g MODE IN THE 2.4 GHz BAND.....35  
10.1.1. 802.11n HT20 MODE IN THE 2.4 GHz BAND.....41  
**12. RADIATED TEST RESULTS .....47**  
12.1. LIMITS AND PROCEDURE.....47  
12.2. TRANSMITTER ABOVE 1 GHz.....48  
12.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND.....48  
12.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND.....61  
12.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND .....74  
12.3. WORST-CASE BELOW 1 GHz.....87  
**13. AC POWER LINE CONDUCTED EMISSIONS .....90**  
**14. SETUP PHOTOS .....93**

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** LG ELECTRONICS MOBILECOMM U.S.A., INC  
**EUT DESCRIPTION:** CDMA/LTE PHONE + BLUETOOTH, & 2.4GHz DTS b/g/n  
**MODEL:** LG-VW820, VW820, LGVW820  
**SERIAL NUMBER:** 1MFX8 (Radiated) 1MLB5 (Conducted)  
**DATE TESTED:** January 12-16, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
WISE PROJECT LEAD  
UL VERIFICATION SERVICES INC

Tested By:



STEVEN TRAN  
CONSUMER TECHNOLOGY DIVISION  
WISE LAB ENGINEER  
UL VERIFICATION SERVICES INC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15C.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a CDMA/LTE PHONE + BLUETOOTH, & 2.4GHz DTS b/g/n

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	13.90	24.55
2412 - 2462	802.11g	9.67	9.27
2412 - 2462	802.11n HT20	8.75	7.50

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -2.14dBi.



#### **5.4. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20mode: MCS0

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WR	RA4Y1031433	N/A
Earphone	LG	N/A	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

### TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

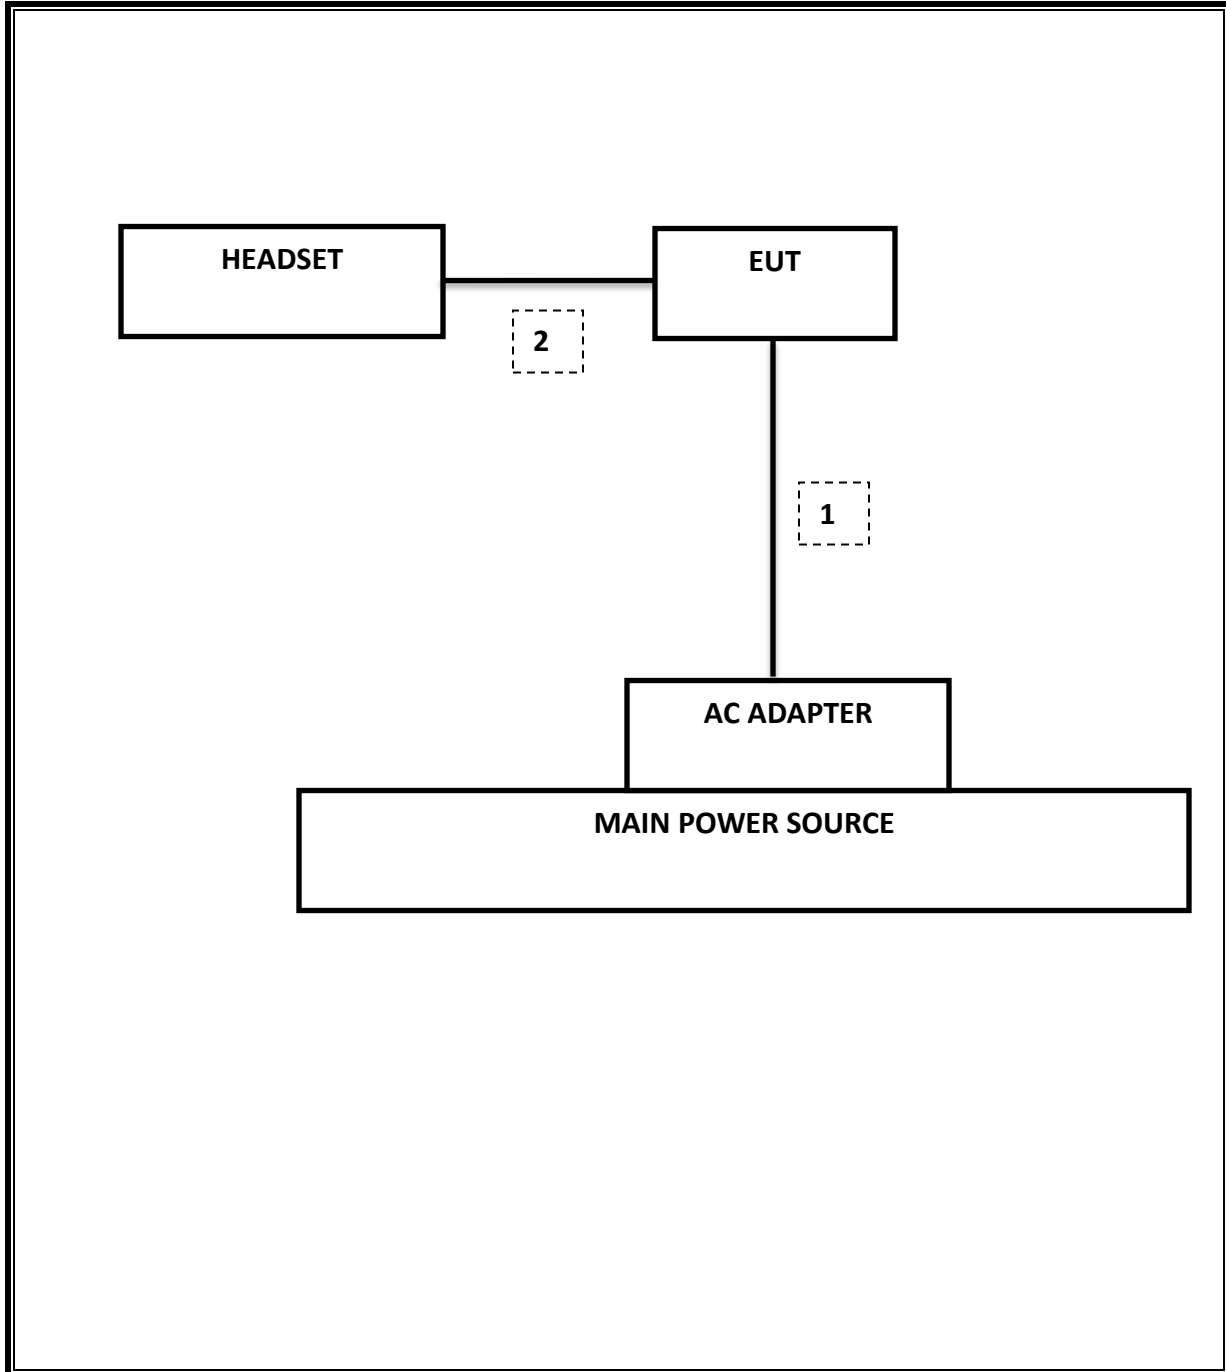

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
Spectrum Analyzer, 9KHz-40GHz	HP	8564E	C00986	04/01/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	08/13/15
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/18/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
Antenna, Horn, 1-18 GHz	ETS	3117	C01022	02/21/15
Antenna, Horn, 18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/15
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/15
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	03/06/15
RF Preamp, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/15
RF Preamp, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	03/23/15
RF Preamp, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/15
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamp, 1GHz - 40GHz	Miteq	NSP4000-SP2	C00990	08/20/15
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

## 7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r02: Measurement Procedure AVGPM-G is used for power and AVGPSD-3 is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.

## 8. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	8.08 MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-38.41 dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	13.9 dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-15.99 dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	46.6 dBuV(AV)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	48.45 dBuV/m

## 9. ANTENNA PORT TEST RESULTS

### 9.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r02: The transmitter output is connected to a spectrum analyzer with the RBW set to 100kHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

#### RESULTS

### 9.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.10	0.5
Mid	2437	8.55	0.5
High	2462	8.08	0.5
Worst		8.08	

### 9.1.2. 802.11g MODE IN THE 2.4 GHz BAND


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	16.57	0.5
Mid	2437	16.53	0.5
High	2462	16.57	0.5
Worst		16.53	

### 9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	17.71	0.5
Mid	2437	17.75	0.5
High	2462	17.75	0.5
Worst		17.71	



### 9.1.4. 6 dB BANDWIDTH MID CH PLOTS

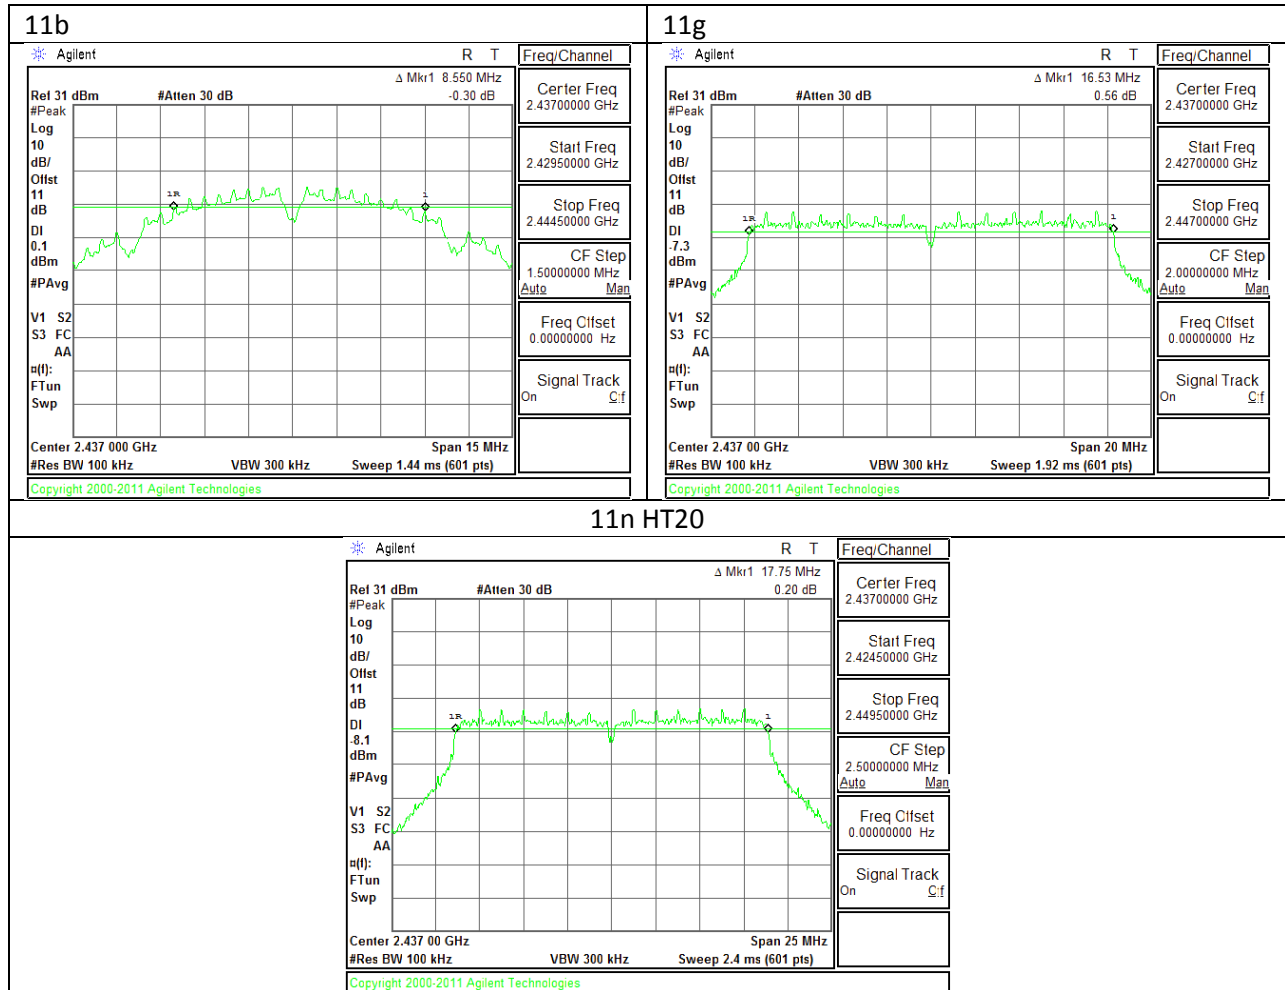

## **9.2. 99% BANDWIDTH**

### **LIMITS**

None; for reporting purposes only.

### **RESULTS**

### 9.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.39
Mid	2437	12.36
High	2462	12.40
Worst		12.40


### 9.2.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.81
Mid	2437	15.69
High	2462	15.81
Worst		15.81

### 9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.99
Mid	2437	16.79
High	2462	17.03
Worst		17.03

### 9.2.4. 99% BANDWIDTH MID CH PLOTS

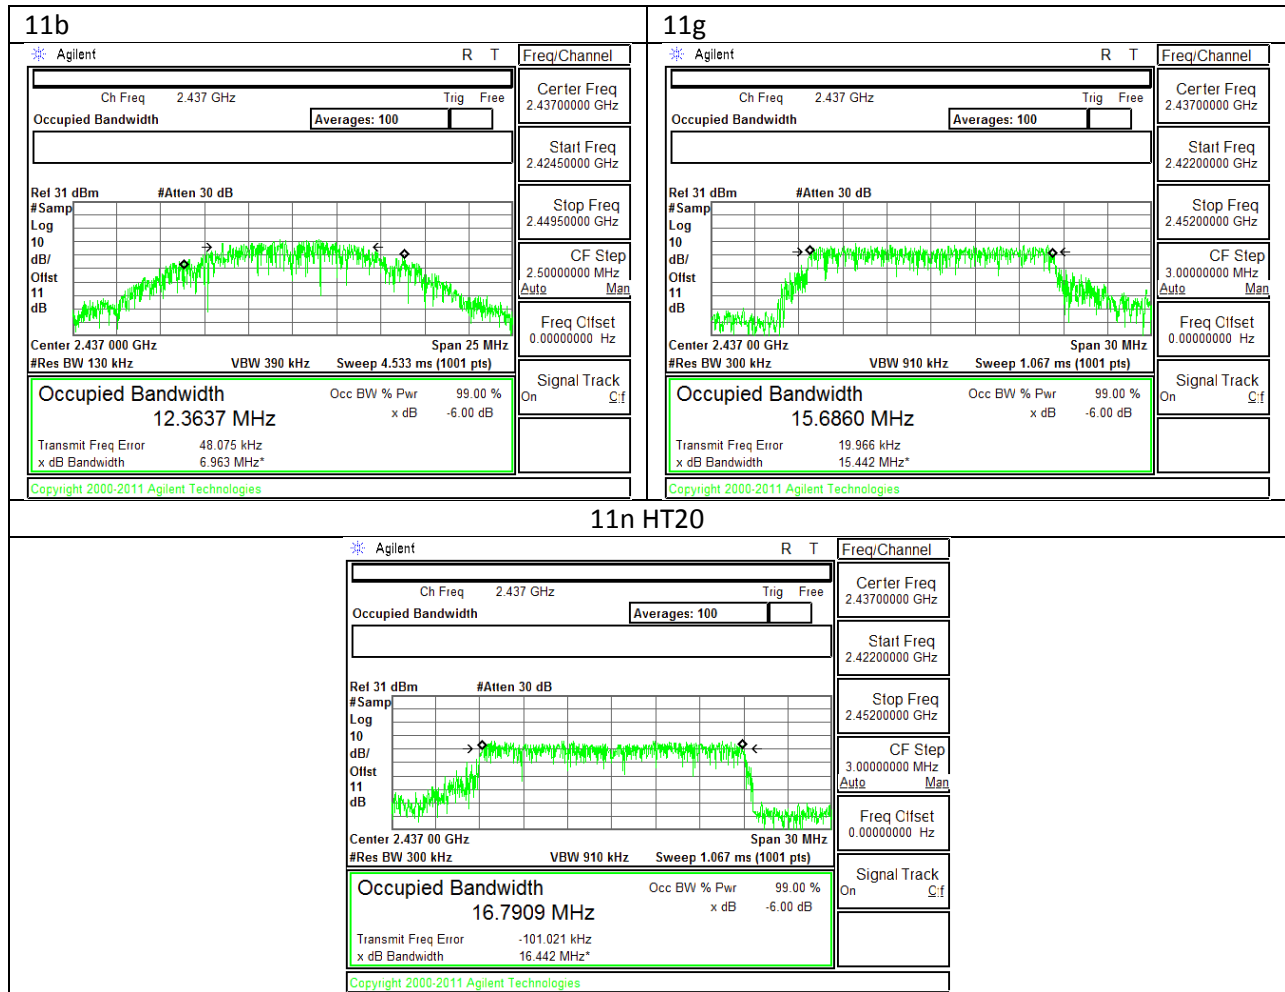

### **9.3. OUTPUT POWER**

#### **LIMITS**

FCC §15.247

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

#### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

#### **RESULTS**

### 9.3.1. 802.11b MODE IN THE 2.4 GHz BAND

#### Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-2.14	30.00	30	36	30.00
Mid	2437	-2.14	30.00	30	36	30.00
High	2462	-2.14	30.00	30	36	30.00

#### Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	13.44	13.44	30.00	-16.56
Mid	2437	13.89	13.89	30.00	-16.11
High	2462	13.90	13.90	30.00	-16.10
Worst			13.90		

### 9.3.2. 802.11g MODE IN THE 2.4 GHz BAND

#### Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-2.14	30.00	30	36	30.00
Mid	2437	-2.14	30.00	30	36	30.00
High	2462	-2.14	30.00	30	36	30.00

#### Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	9.39	9.39	30.00	-20.61
Mid	2437	9.64	9.64	30.00	-20.36
High	2462	9.67	9.67	30.00	-20.33
Worst			9.67		

### 9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

#### Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-2.14	30.00	30	36	30.00
Mid	2437	-2.14	30.00	30	36	30.00
High	2462	-2.14	30.00	30	36	30.00

#### Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	8.50	8.50	30.00	-21.50
Mid	2437	8.68	8.68	30.00	-21.32
High	2462	8.75	8.75	30.00	-21.25
Worst			8.75		



## **9.4. PSD**

### **LIMITS**

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### **RESULTS**

### 9.4.1. 802.11b MODE IN THE 2.4 GHz BAND

#### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-16.53	8.0	-24.5
Mid	2437	-16.24	8.0	-24.2
High	2462	-15.99	8.0	-24.0

### 9.4.2. 802.11g MODE IN THE 2.4 GHz BAND

#### PSD Results



Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-24.36	8.0	-32.4
Mid	2437	-23.36	8.0	-31.4
High	2462	-23.76	8.0	-31.8

### 9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

#### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-25.03	8.0	-33.0
Mid	2437	-25.35	8.0	-33.4
High	2462	-25.28	8.0	-33.3

### 9.4.4. PSD Chain 0 MID CH PLOTS

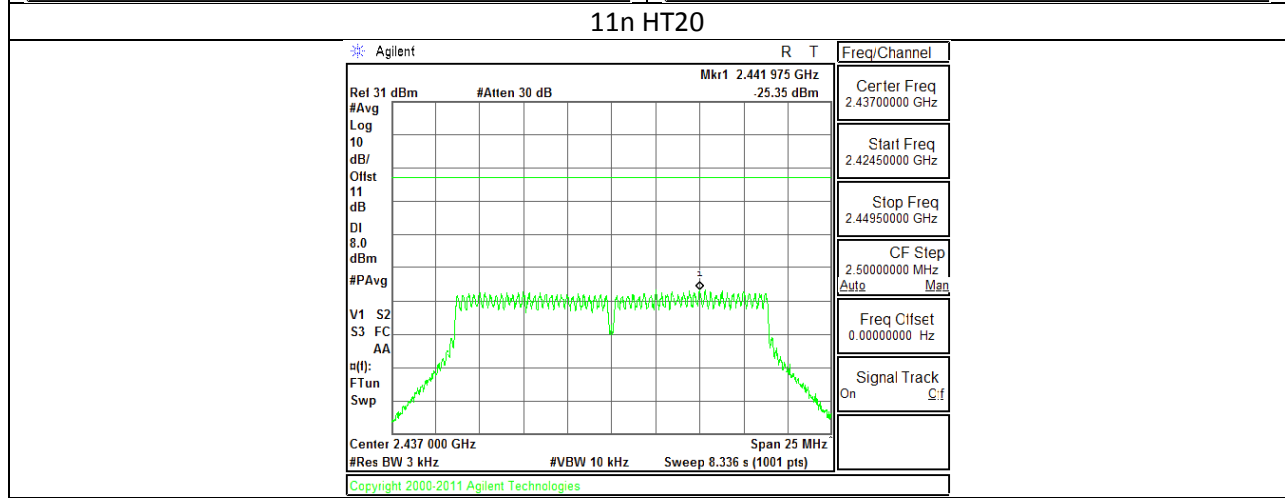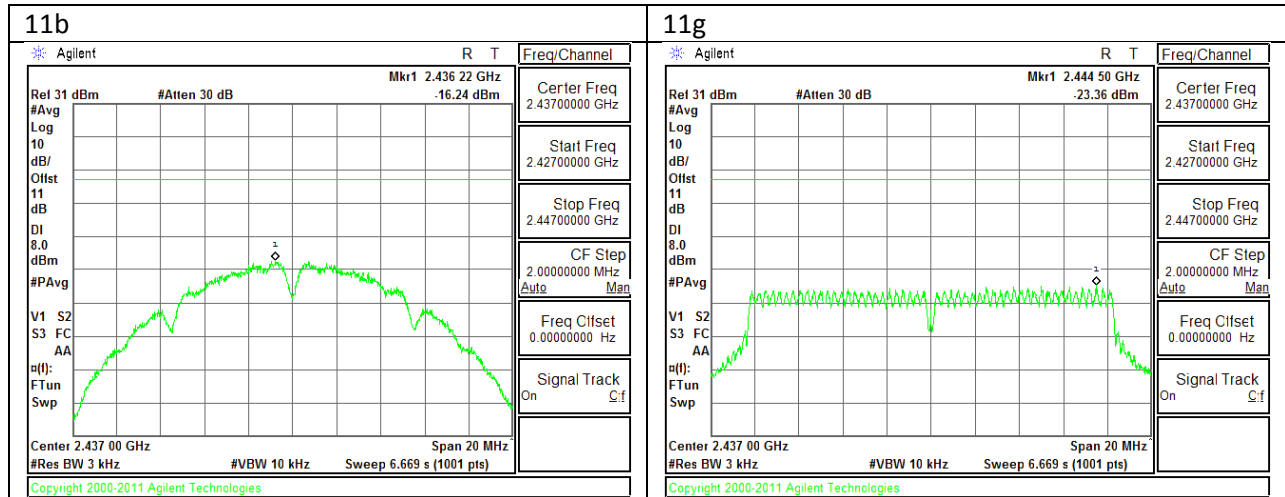

## **9.5. OUT-OF-BAND EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


### **RESULTS**

### 9.5.1. 802.11b MODE IN THE 2.4 GHz BAND


#### IN-BAND REFERENCE LEVEL

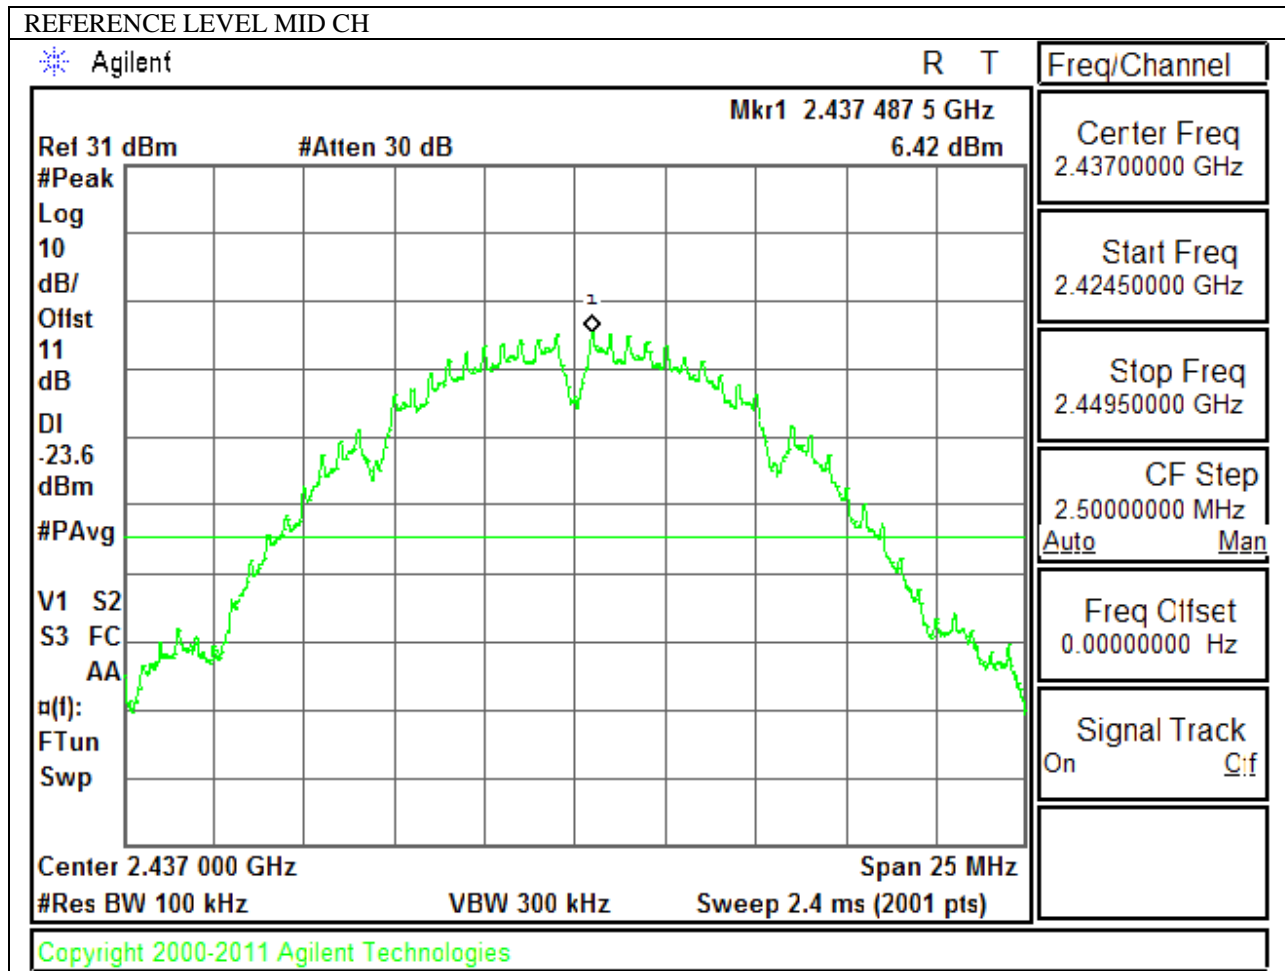


**LOW CHANNEL BANDEDGE**

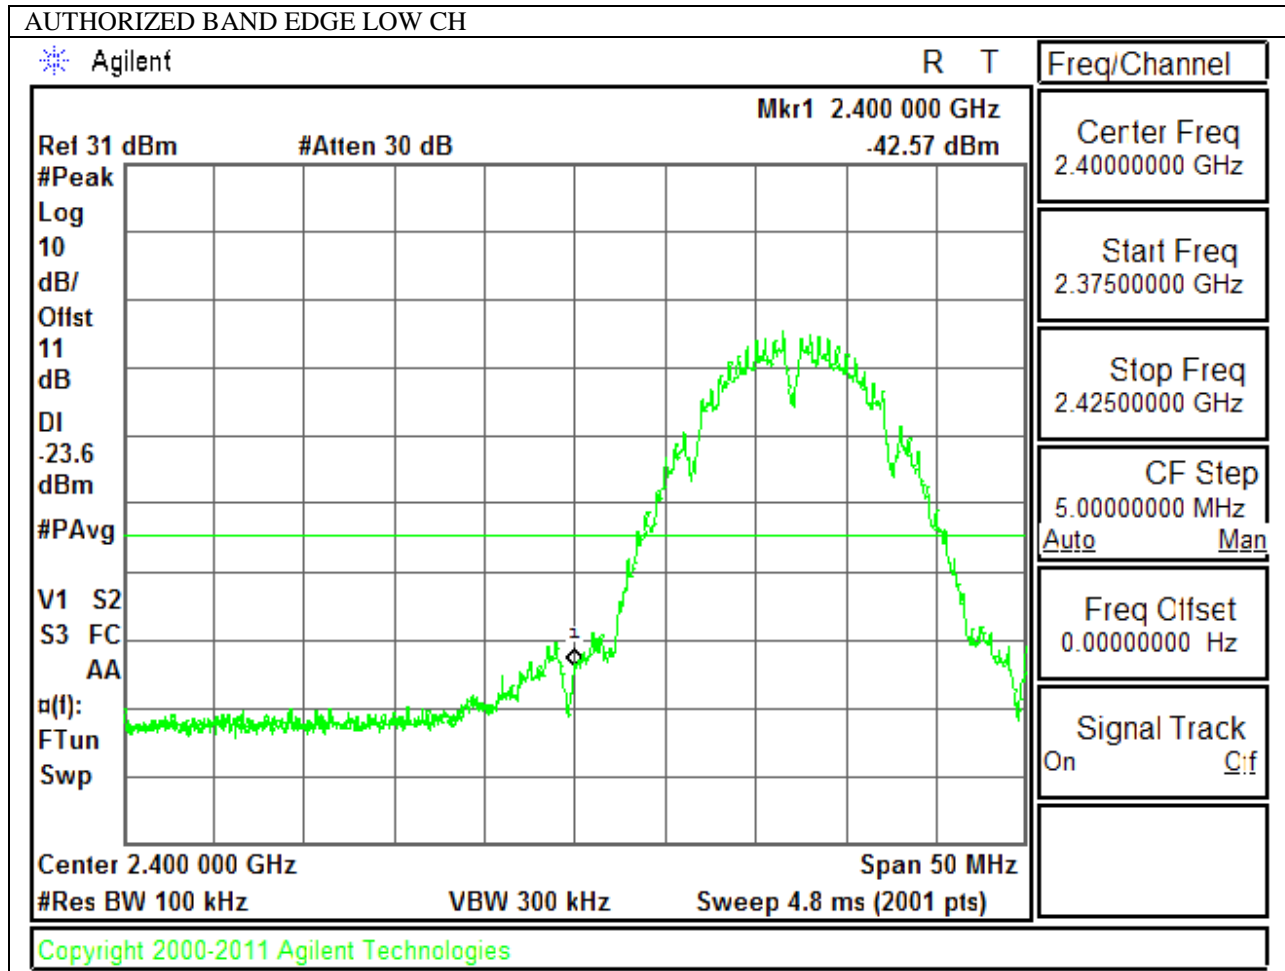


**HIGH CHANNEL BANDEDGE**

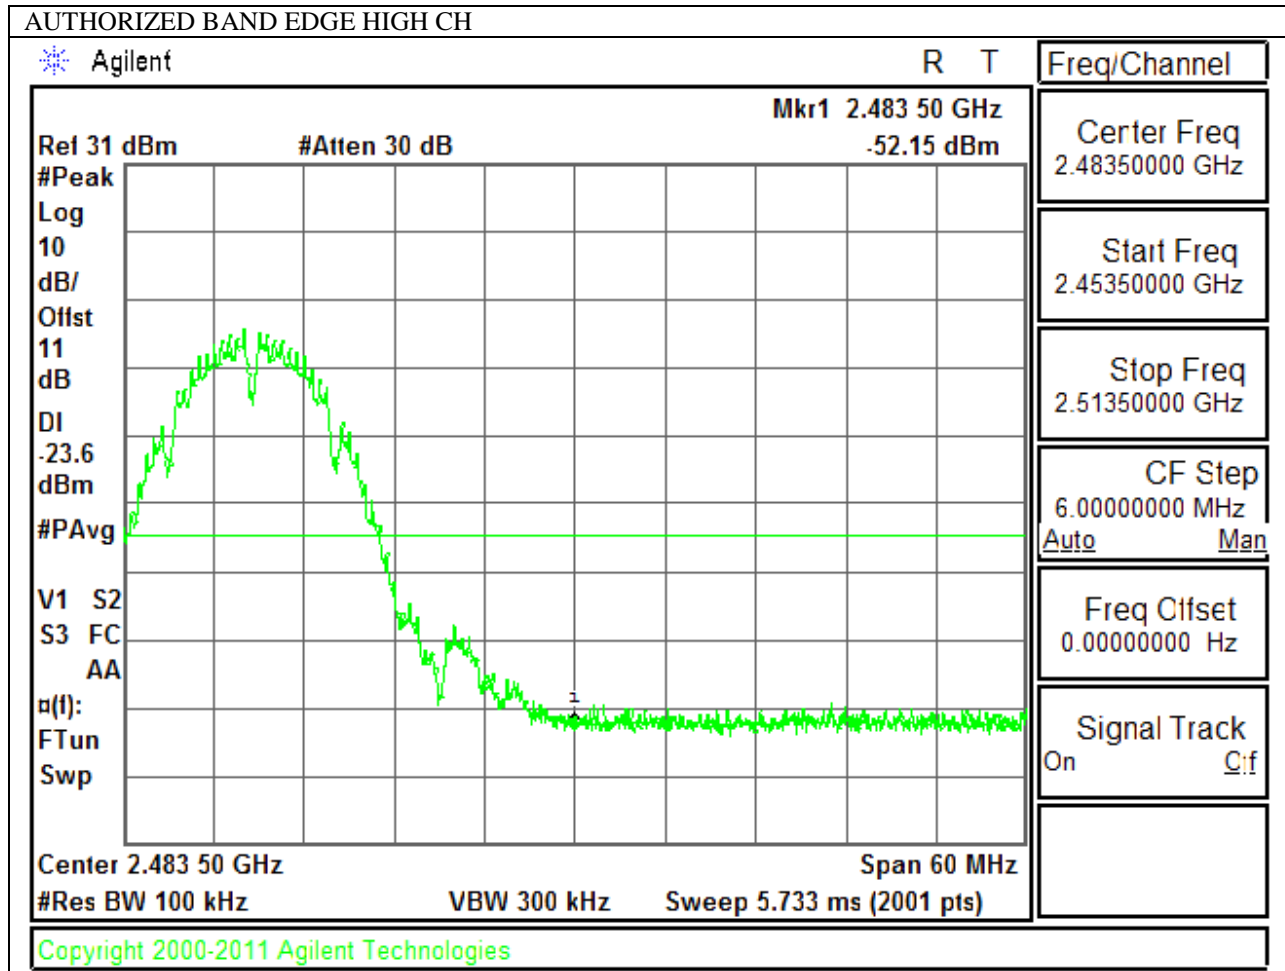


**OUT-OF-BAND EMISSIONS**

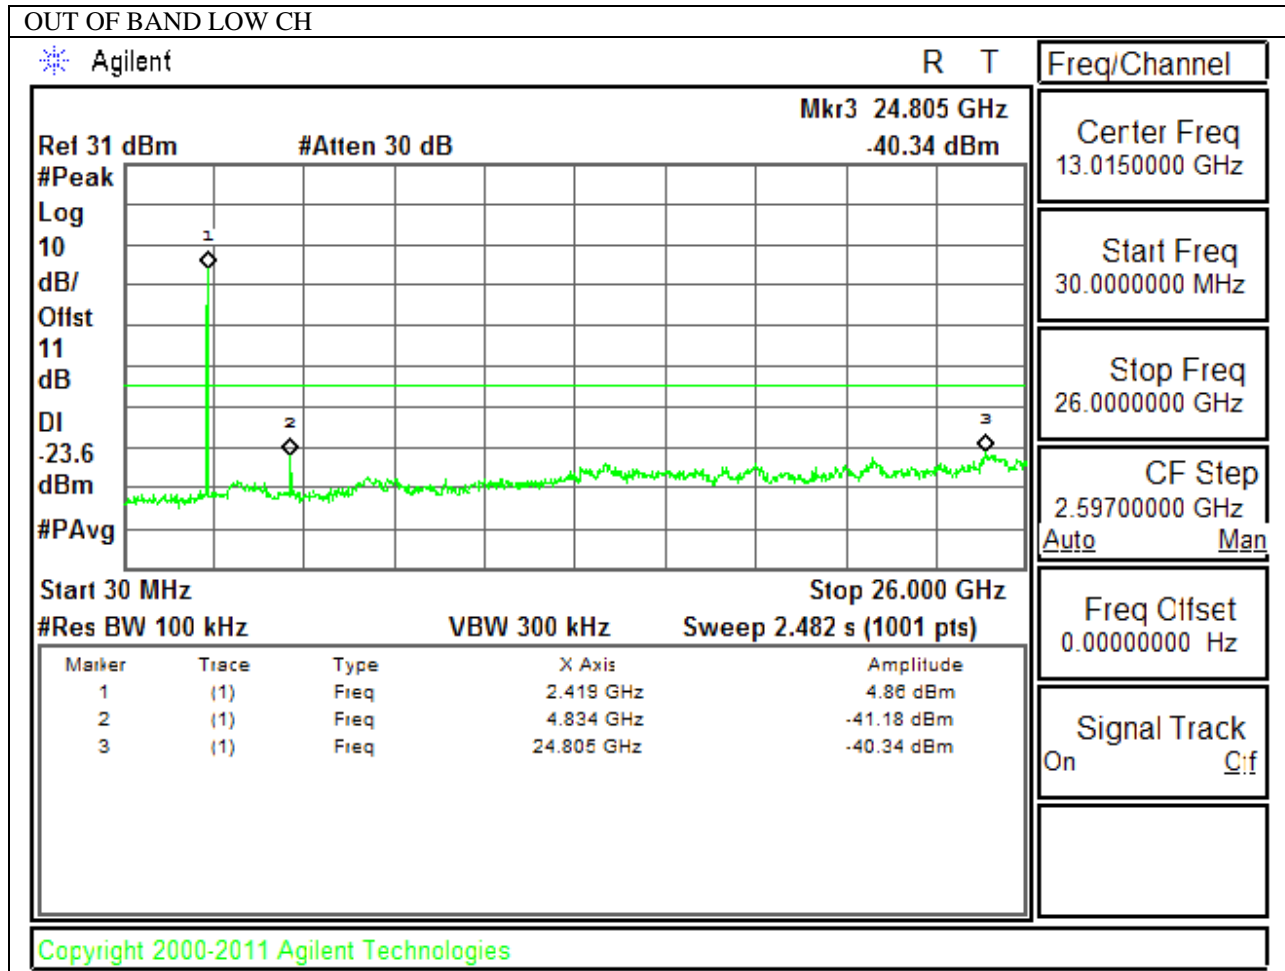




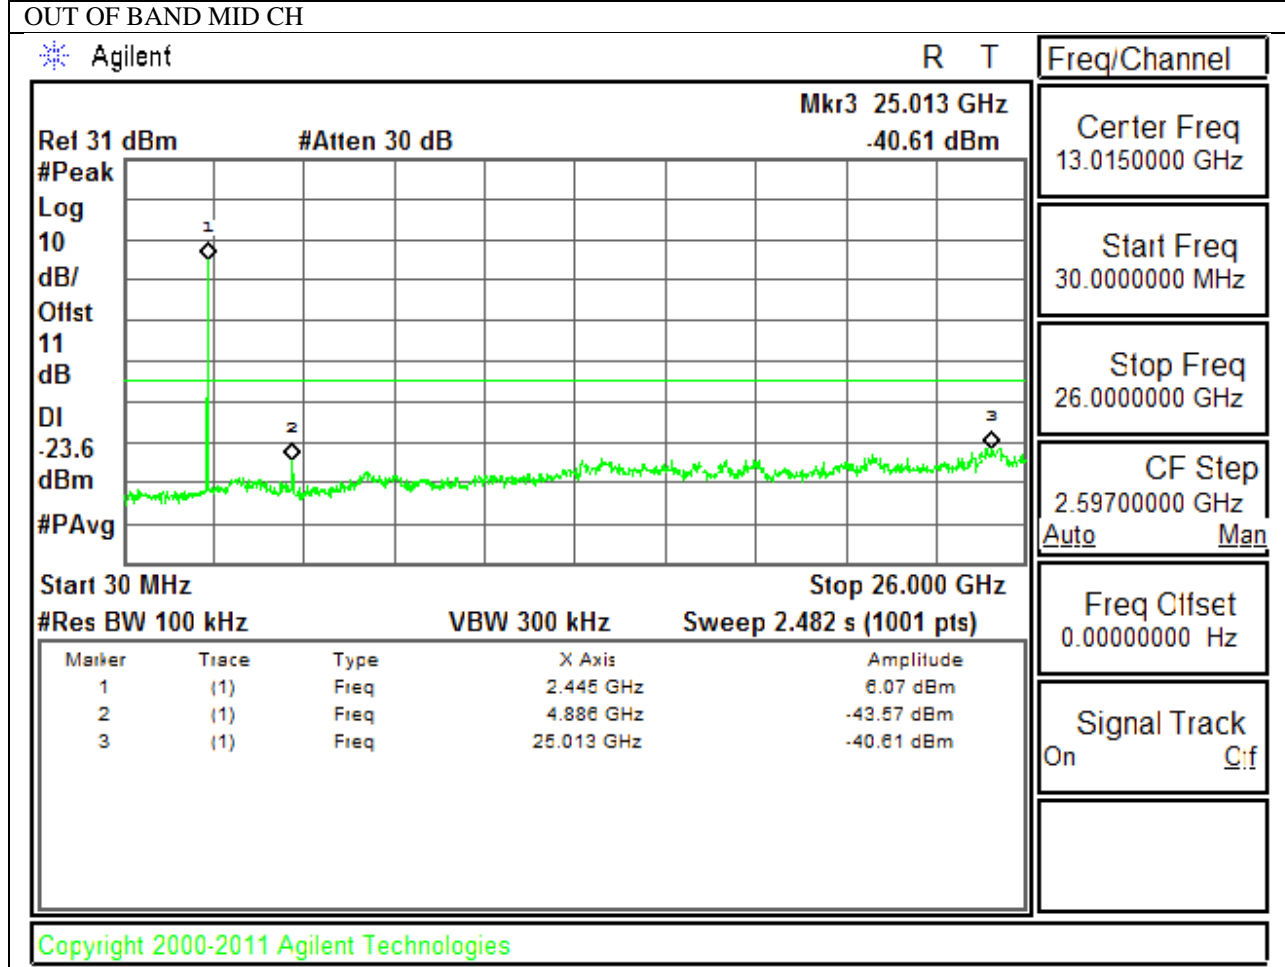

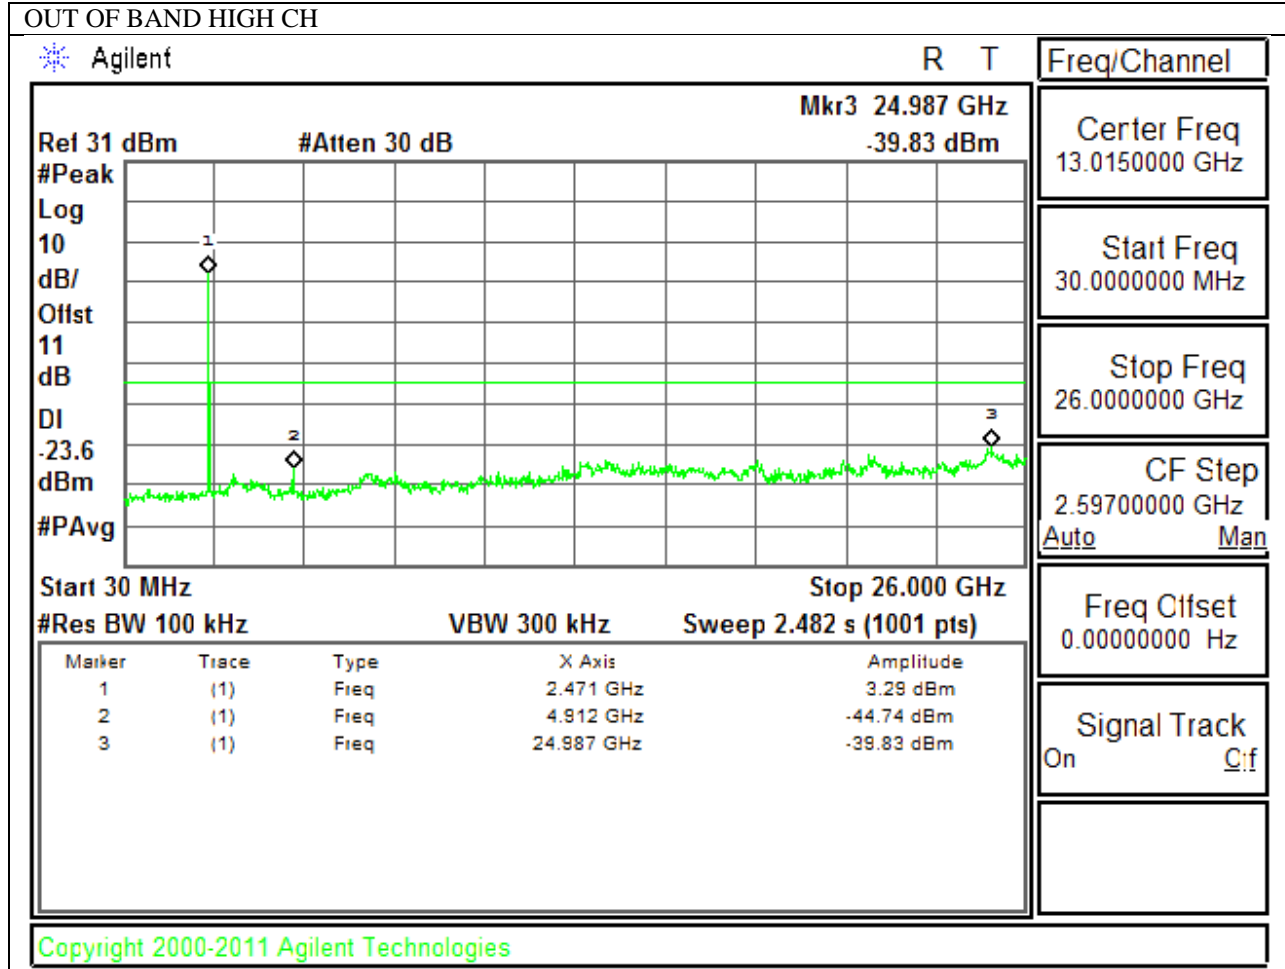


### 9.5.2. 802.11g MODE IN THE 2.4 GHz BAND


#### IN-BAND REFERENCE LEVEL

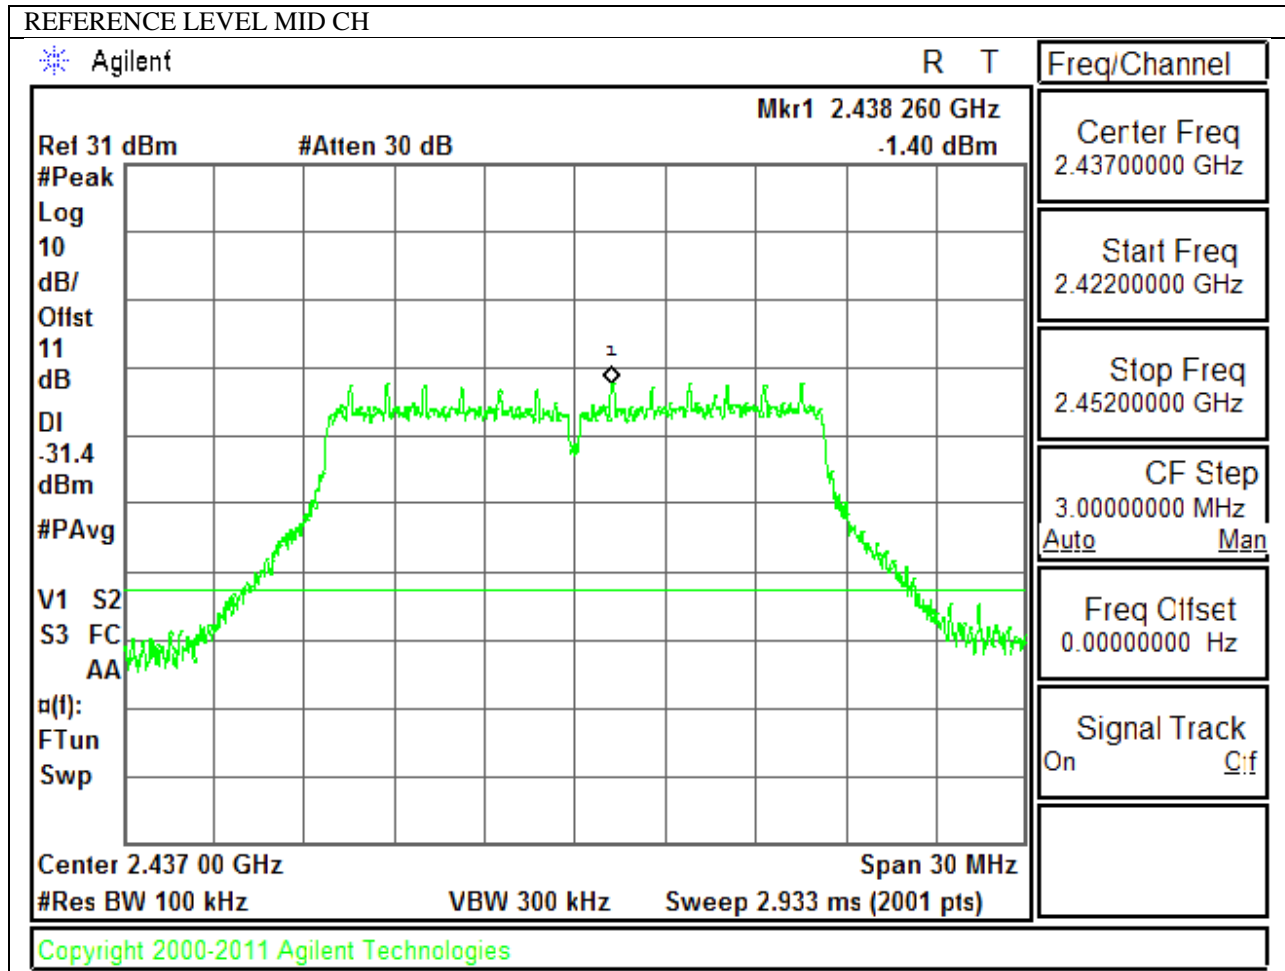


**LOW CHANNEL BANDEDGE**

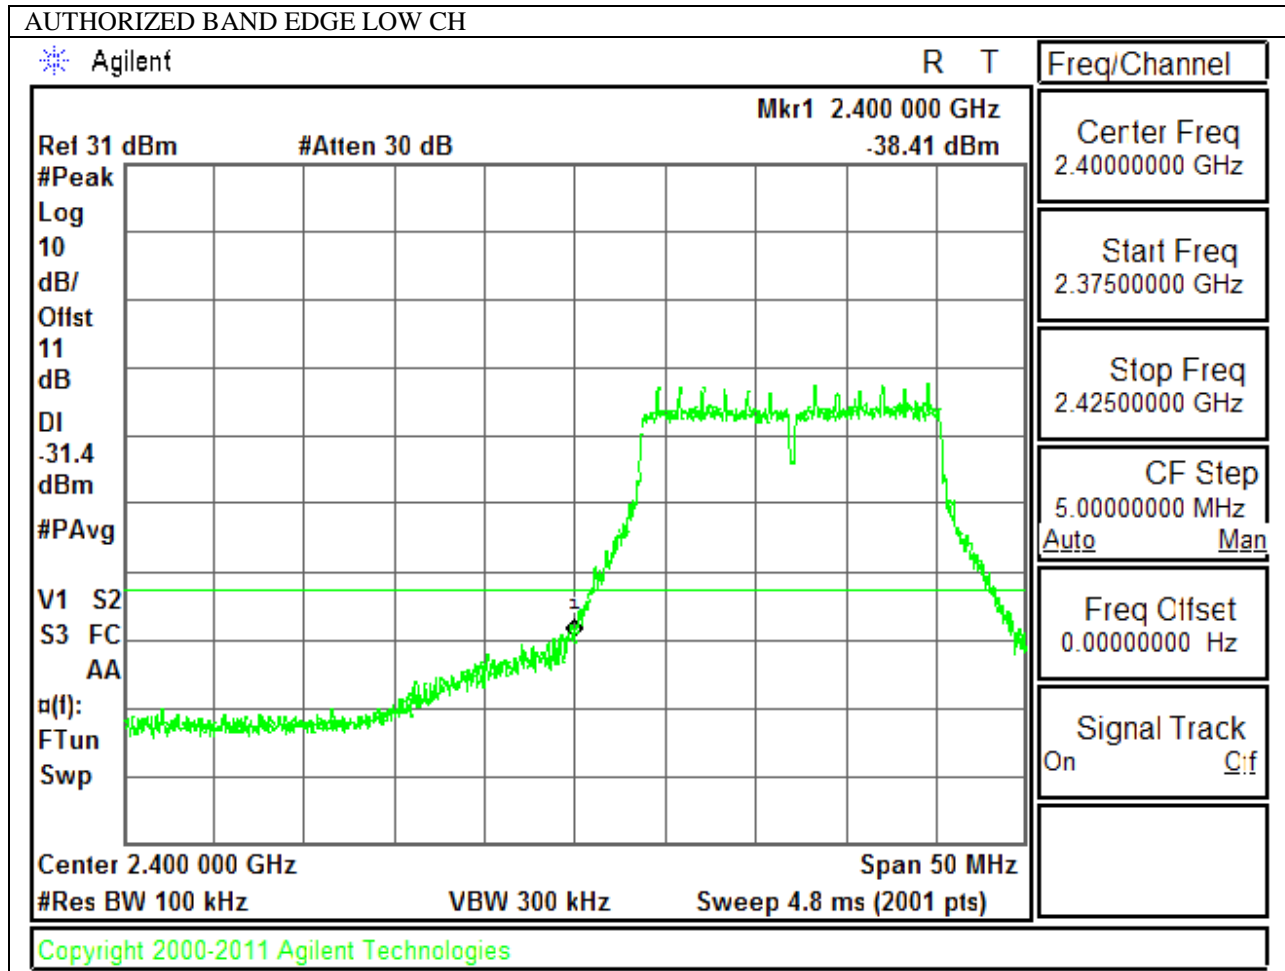



**HIGH CHANNEL BANDEDGE**

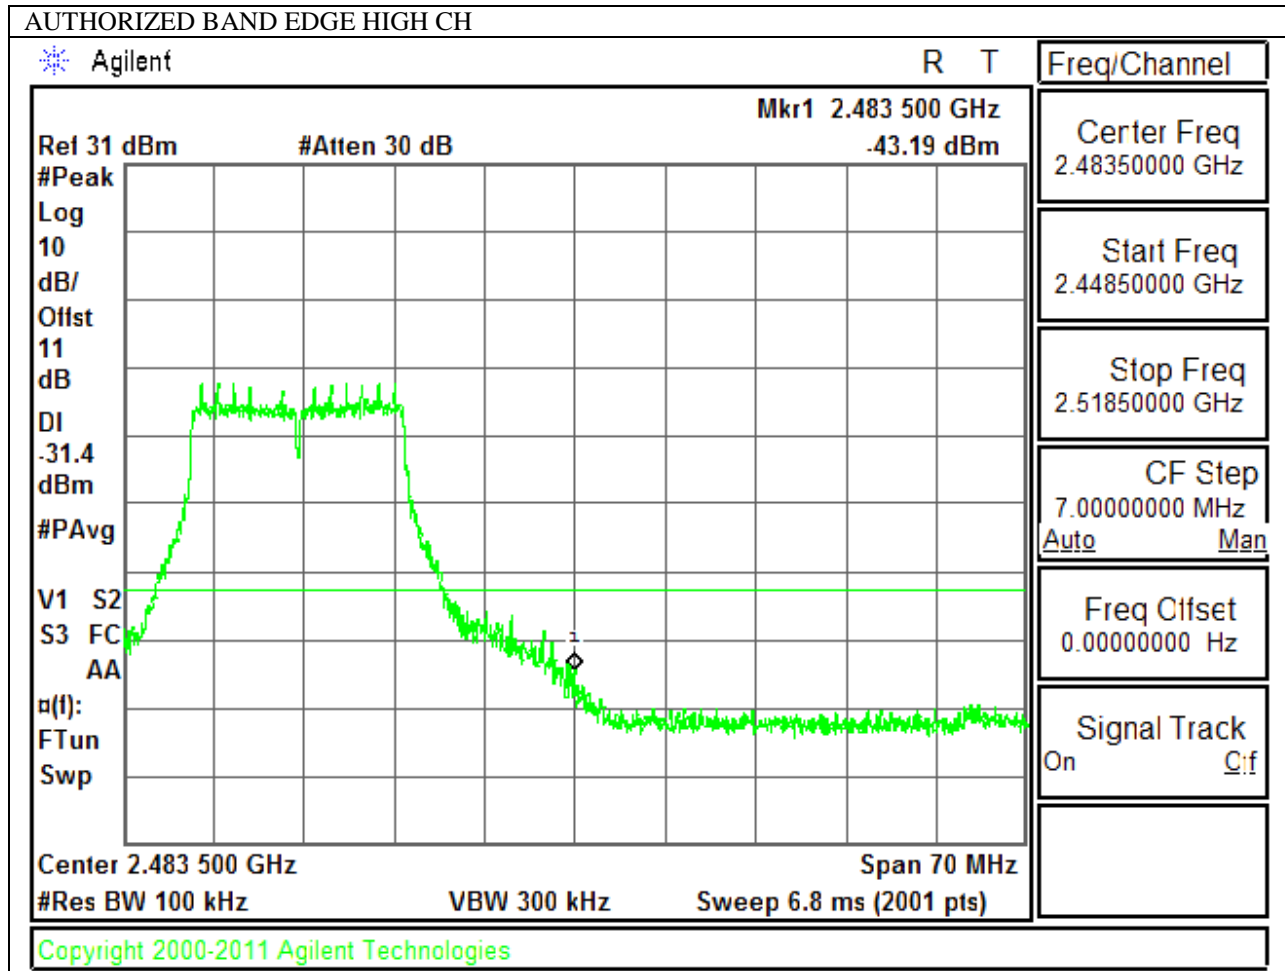

**OUT-OF-BAND EMISSIONS**

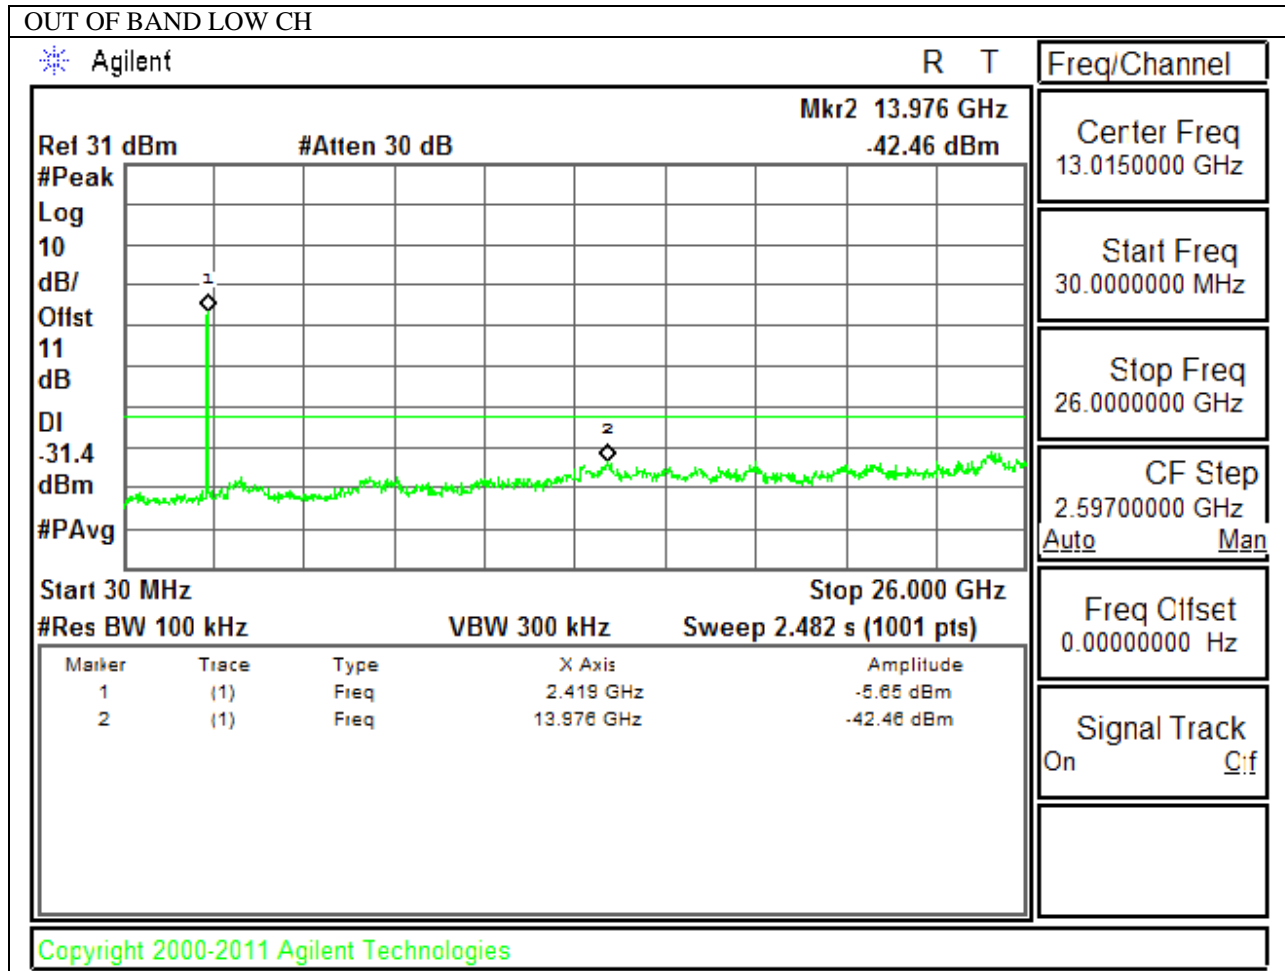

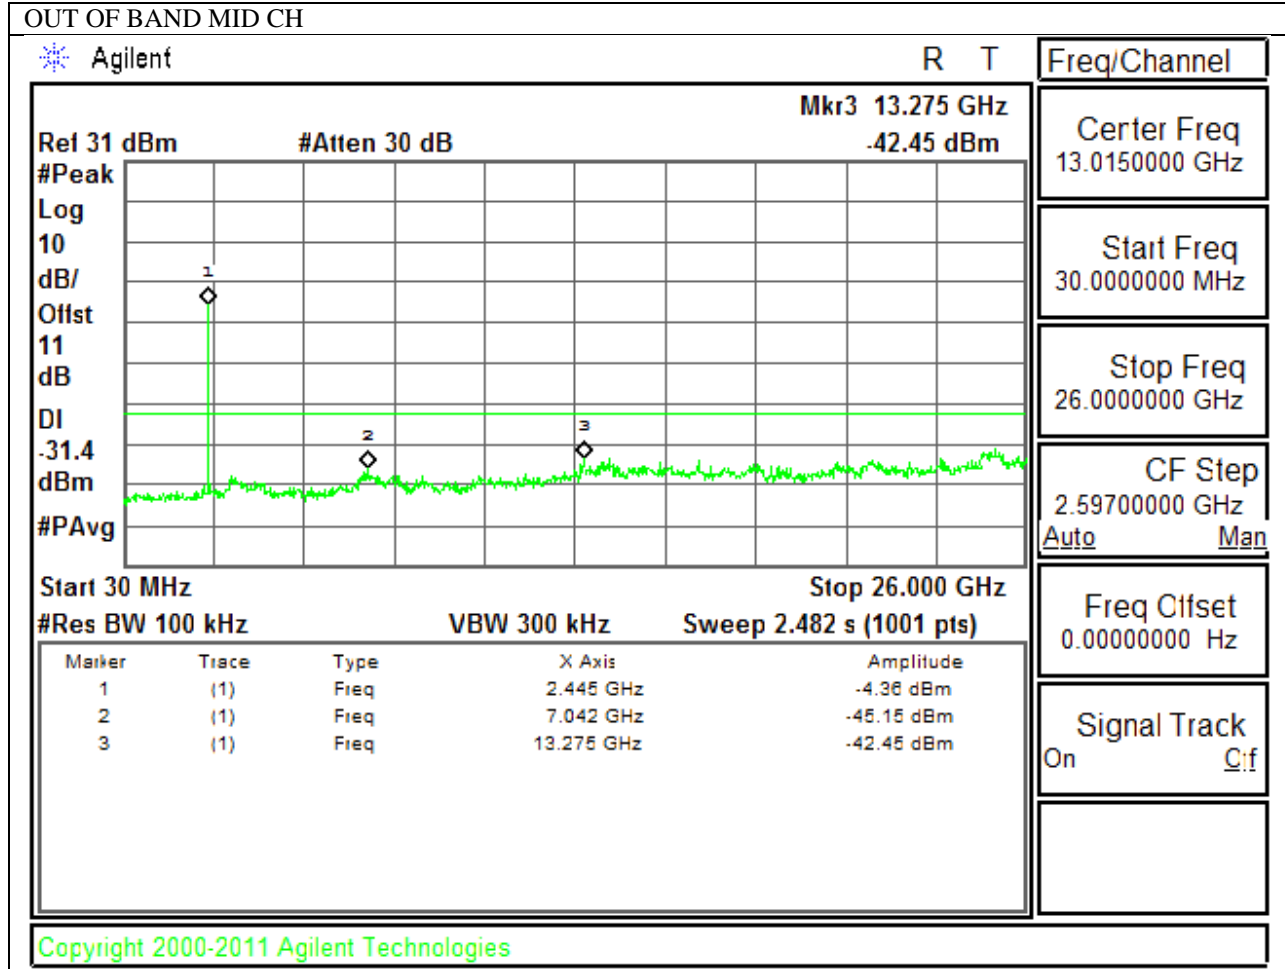


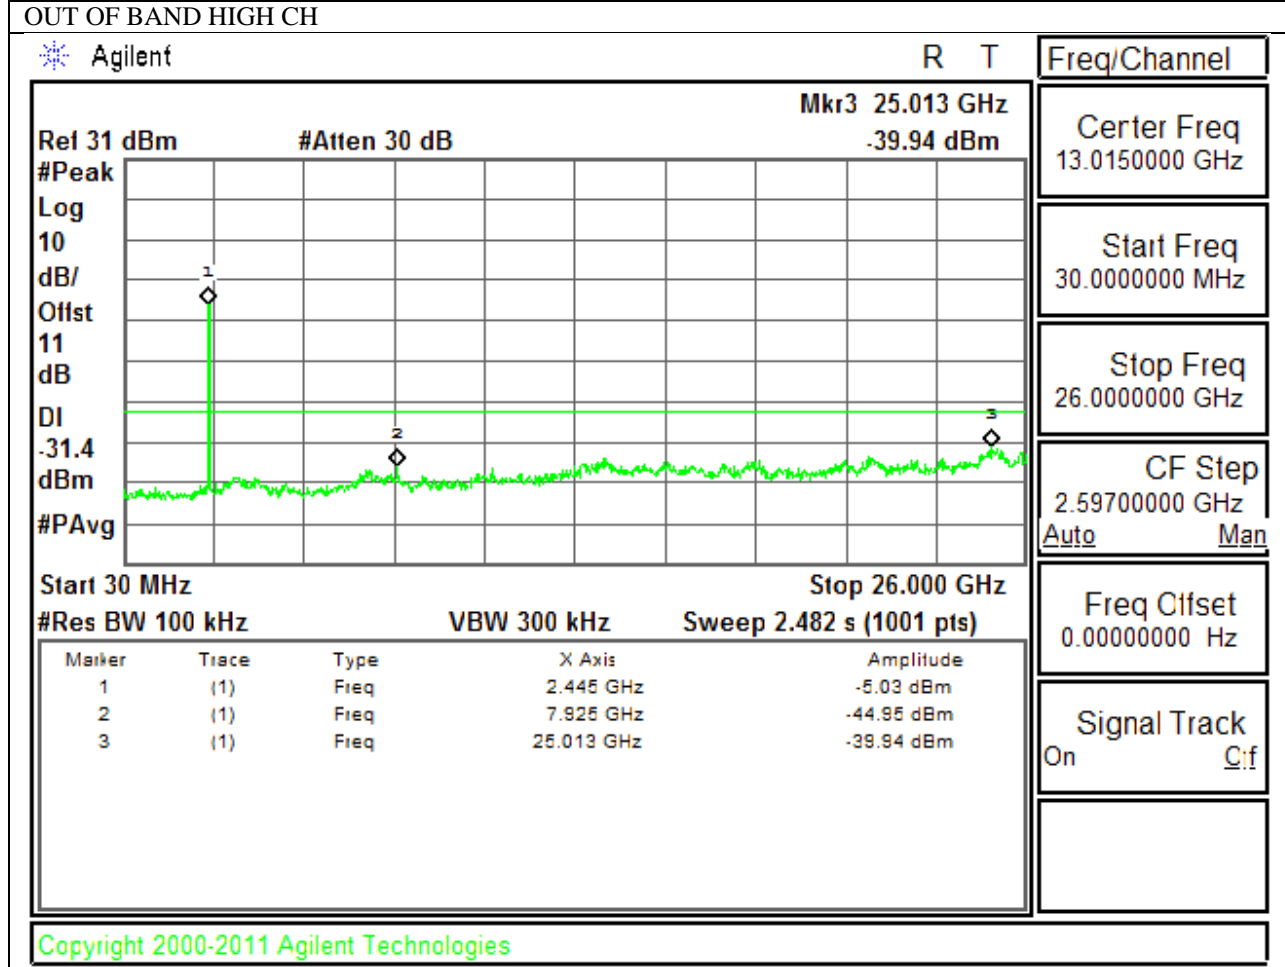




**10.1.1. 802.11n HT20 MODE IN THE 2.4 GHz BAND**


**IN-BAND REFERENCE LEVEL**

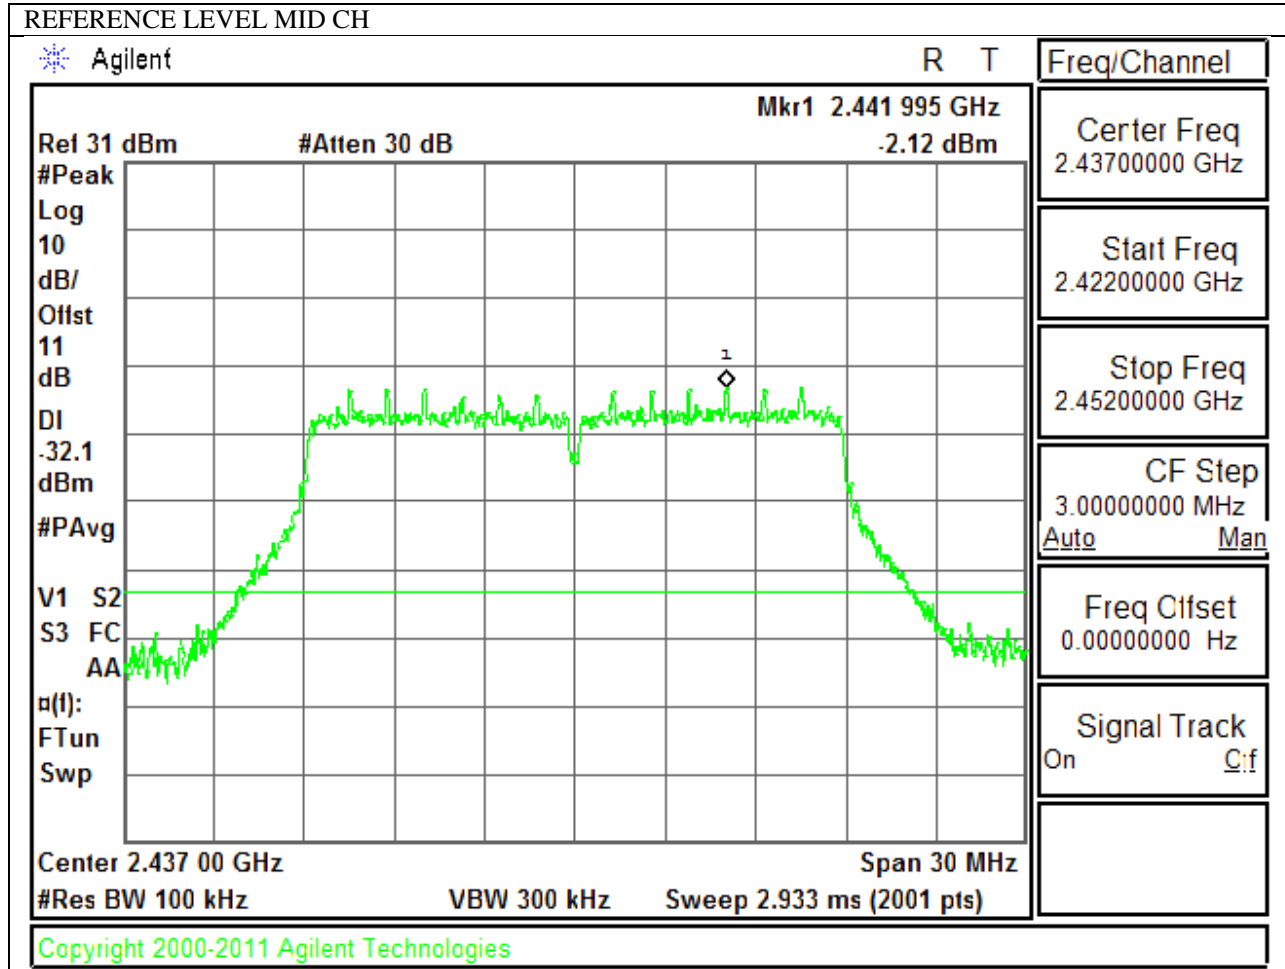


**LOW CHANNEL BANDEDGE**

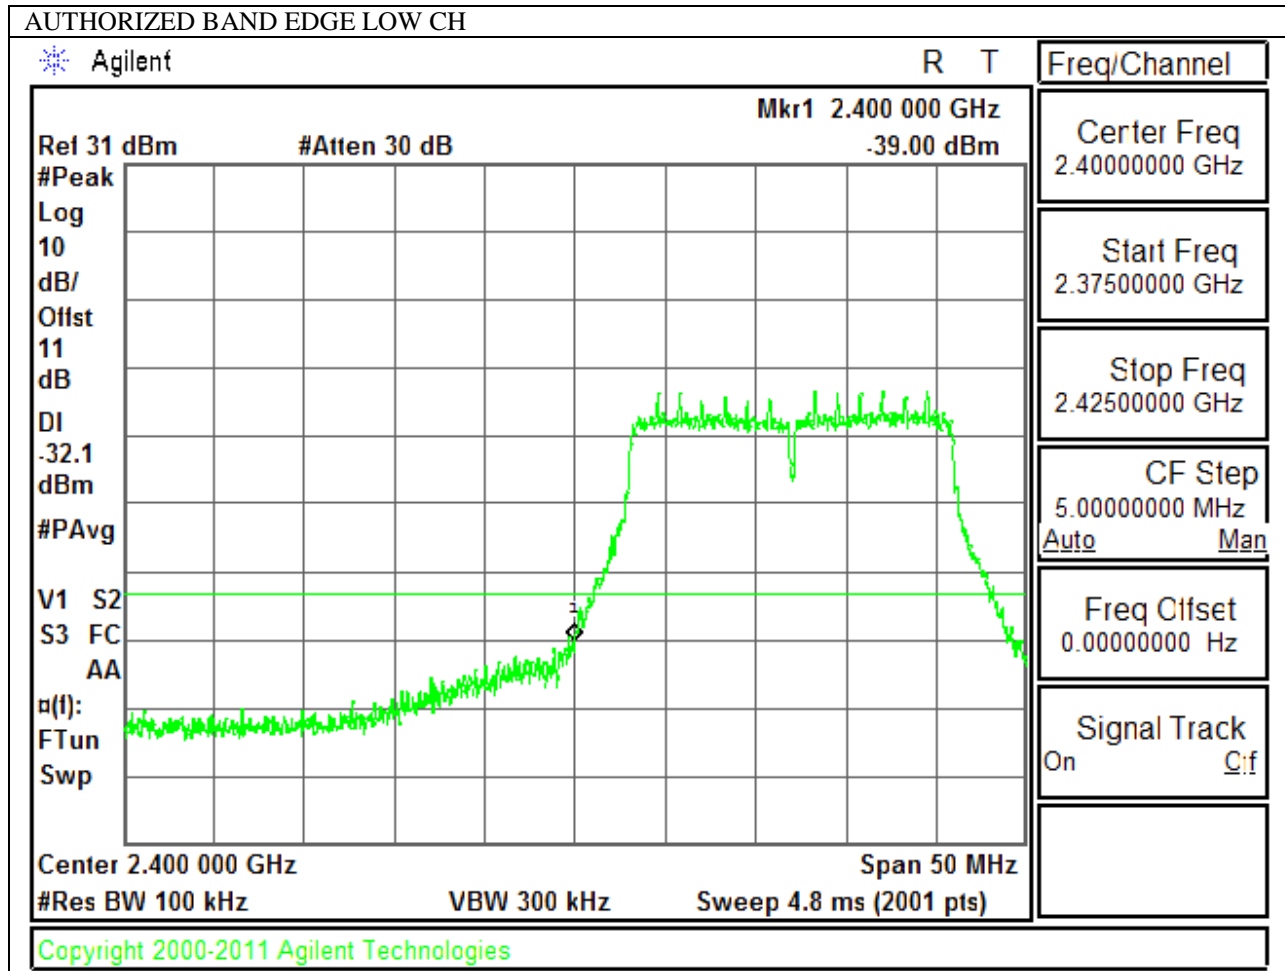



**HIGH CHANNEL BANDEDGE**

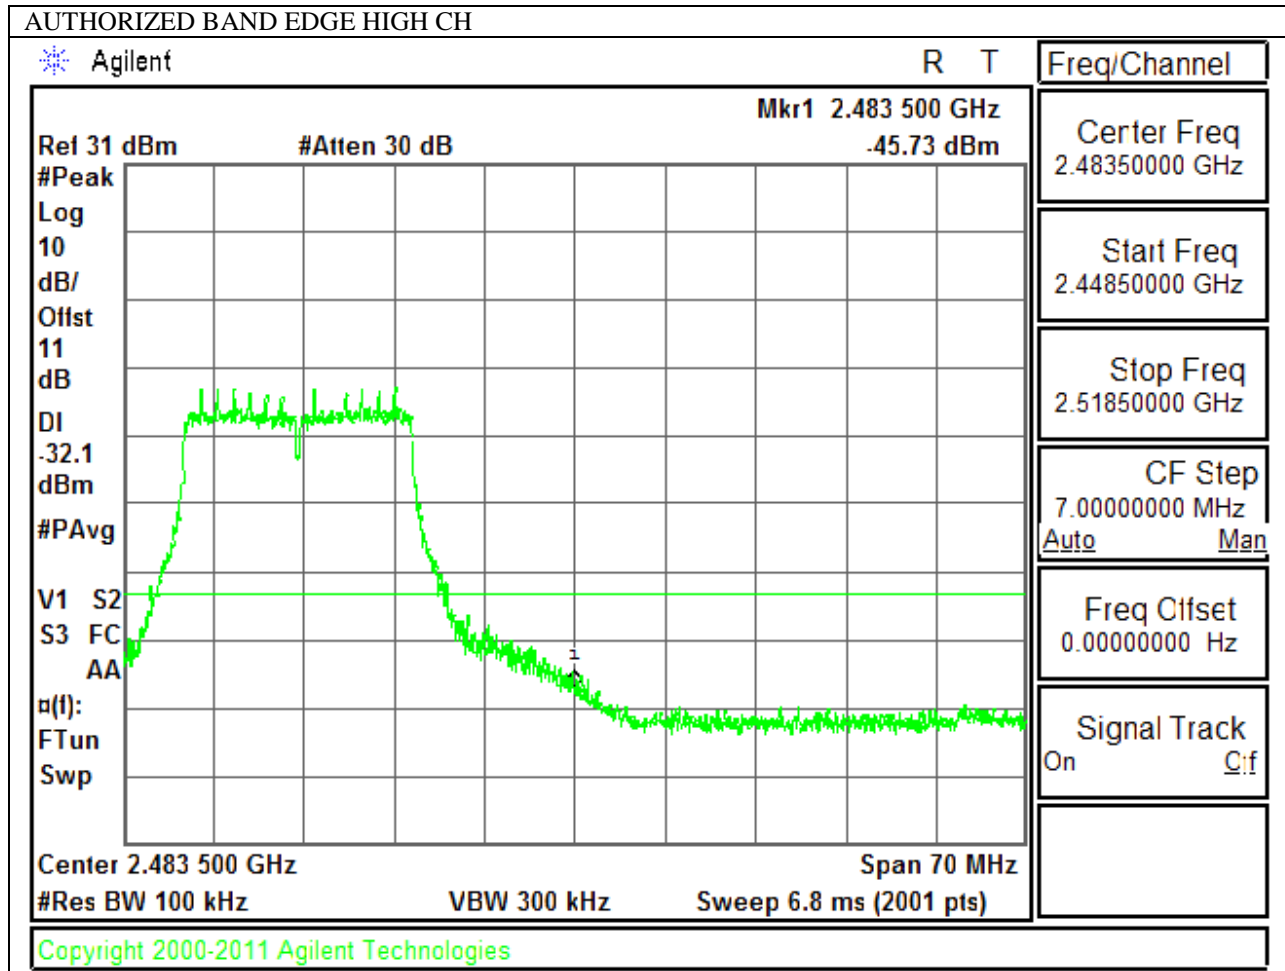

**OUT-OF-BAND EMISSIONS**

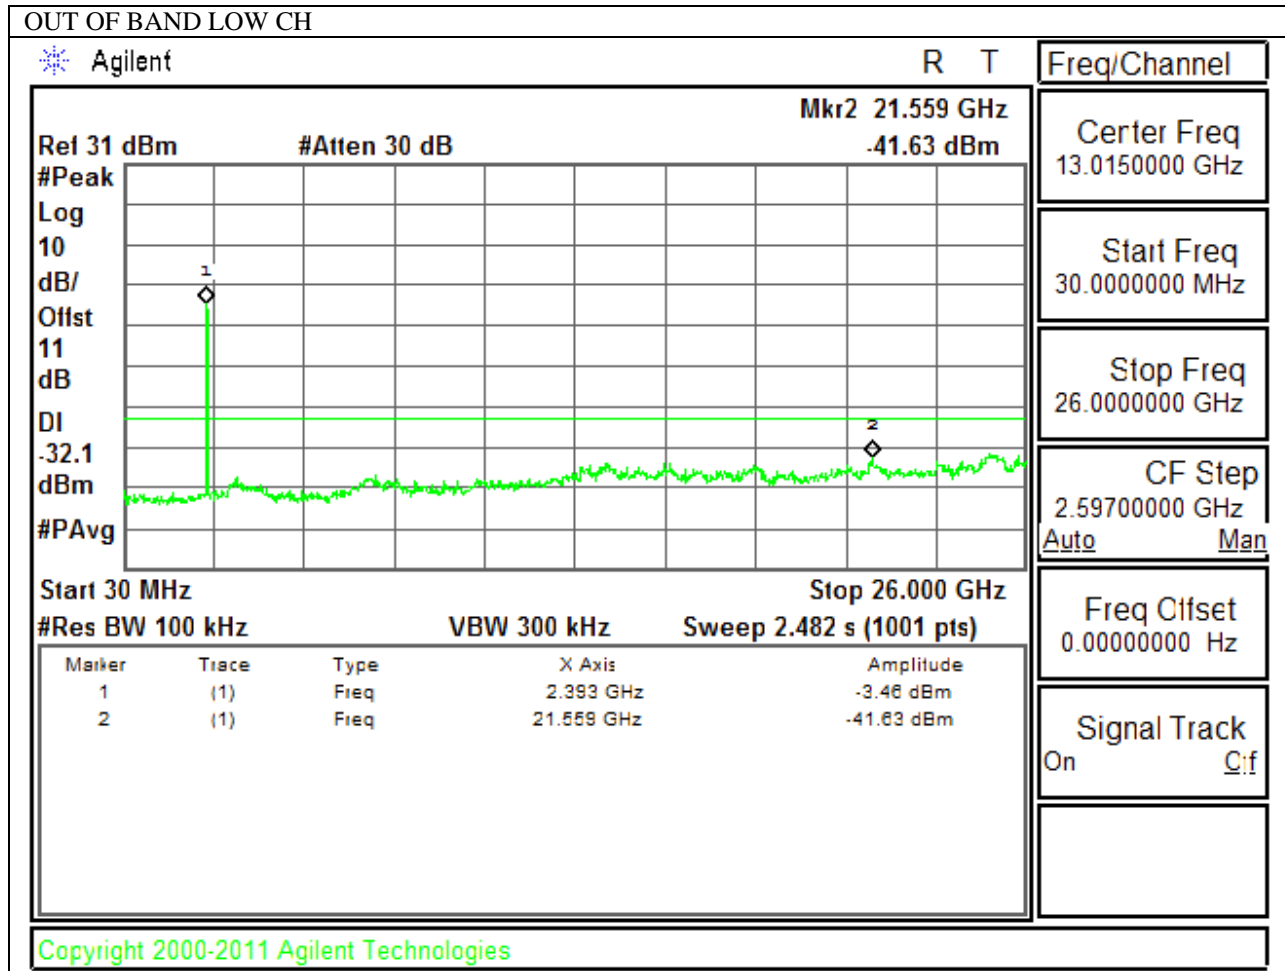

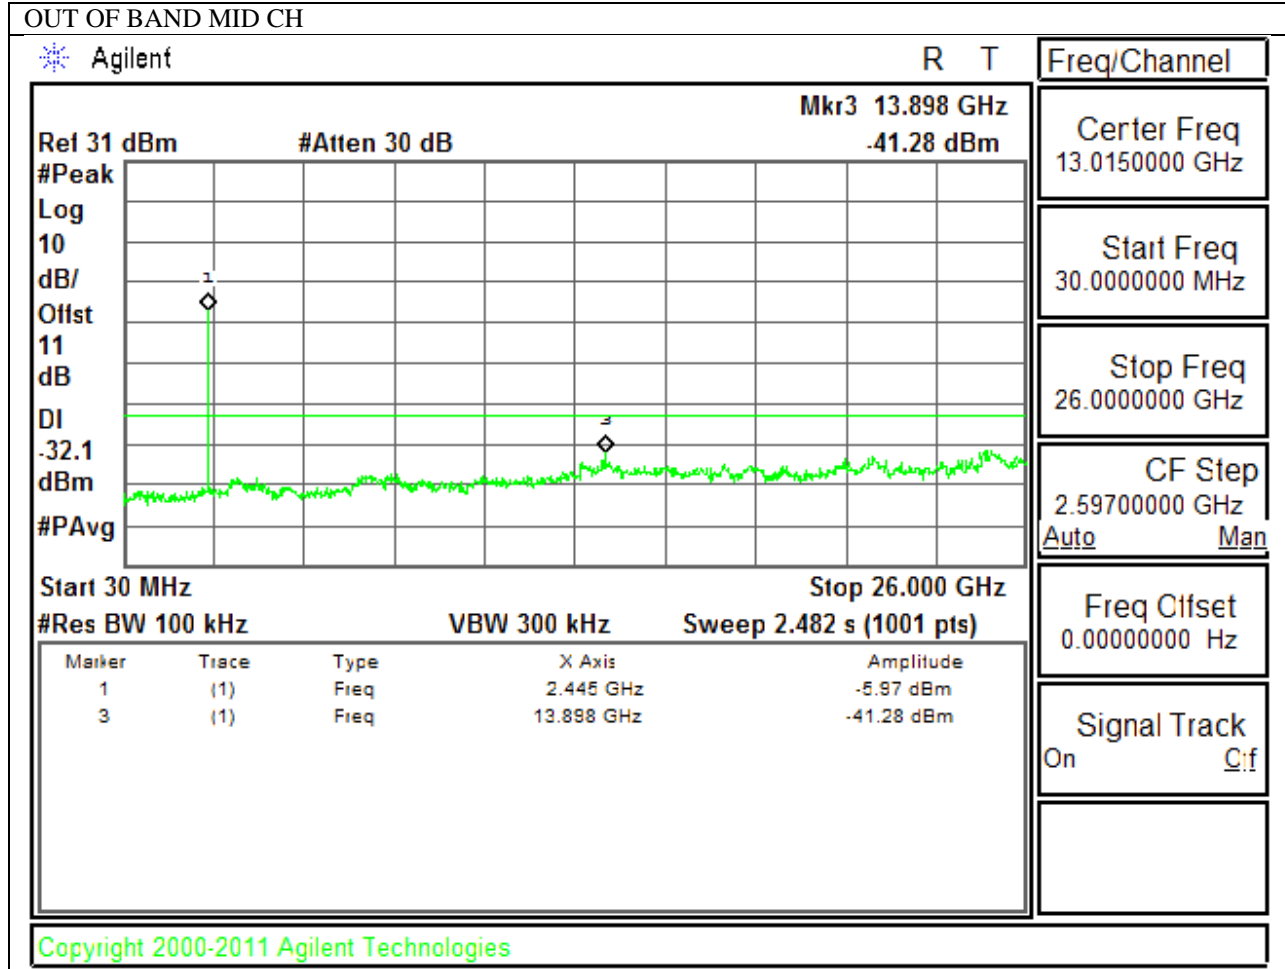

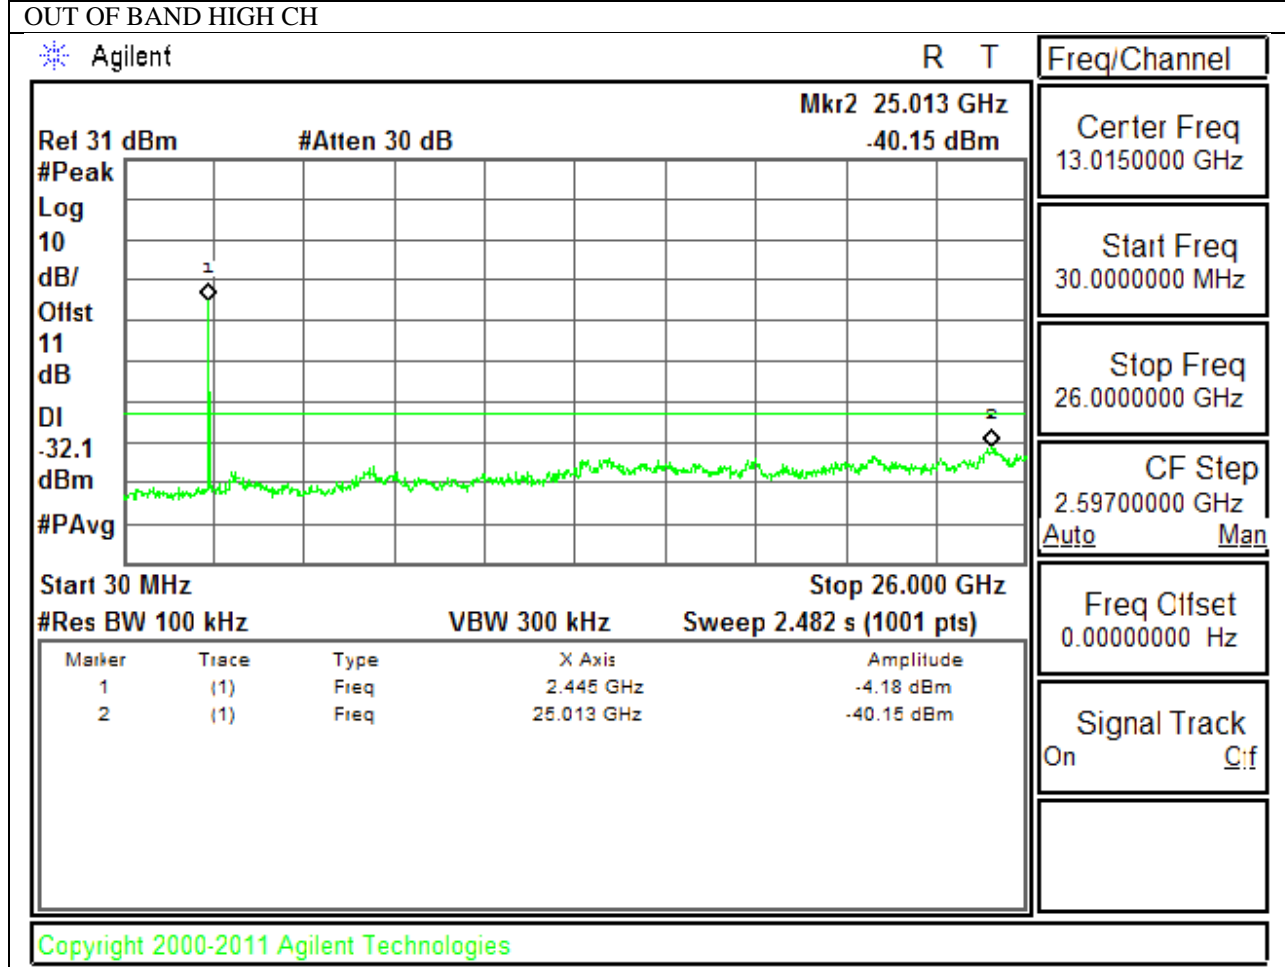

## 12. RADIATED TEST RESULTS

### 12.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor =  $10\log(1/x)$  For this sample B mode = 0dB (duty cycle >98%); G mode = 0.3dB; N mode = 0.32dB.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 12.2. TRANSMITTER ABOVE 1 GHz

### 12.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL)

##### HORIZONTAL PEAK AND AVERAGE PLOT

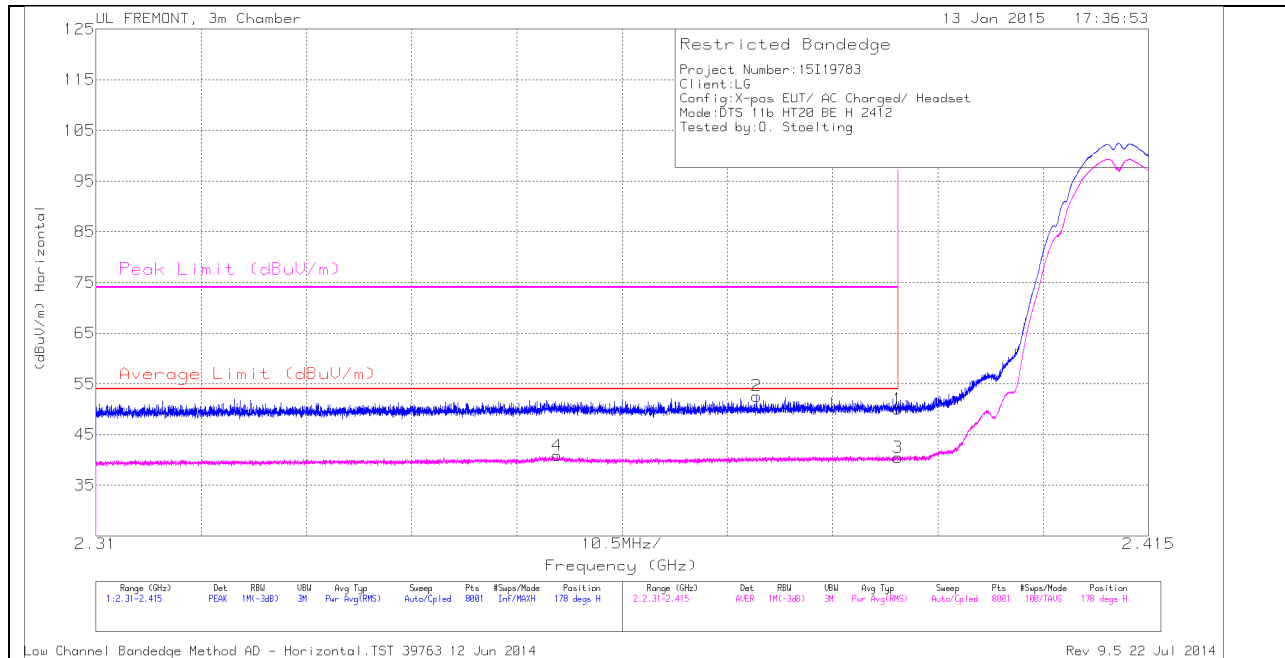


##### HORIZONTAL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	2.356	31.96	RMS	32	-23.1	40.86	54	-13.14	-	-	178	122	H
2	2.376	43.69	PK	32	-23.1	52.59	-	-	74	-21.41	178	122	H
1	2.39	41.05	PK	32.1	-23.1	50.05	-	-	74	-23.95	178	122	H
3	2.39	31.45	RMS	32.1	-23.1	40.45	54	-13.55	-	-	178	122	H



**VERTICAL PEAK AND AVERAGE PLOT**

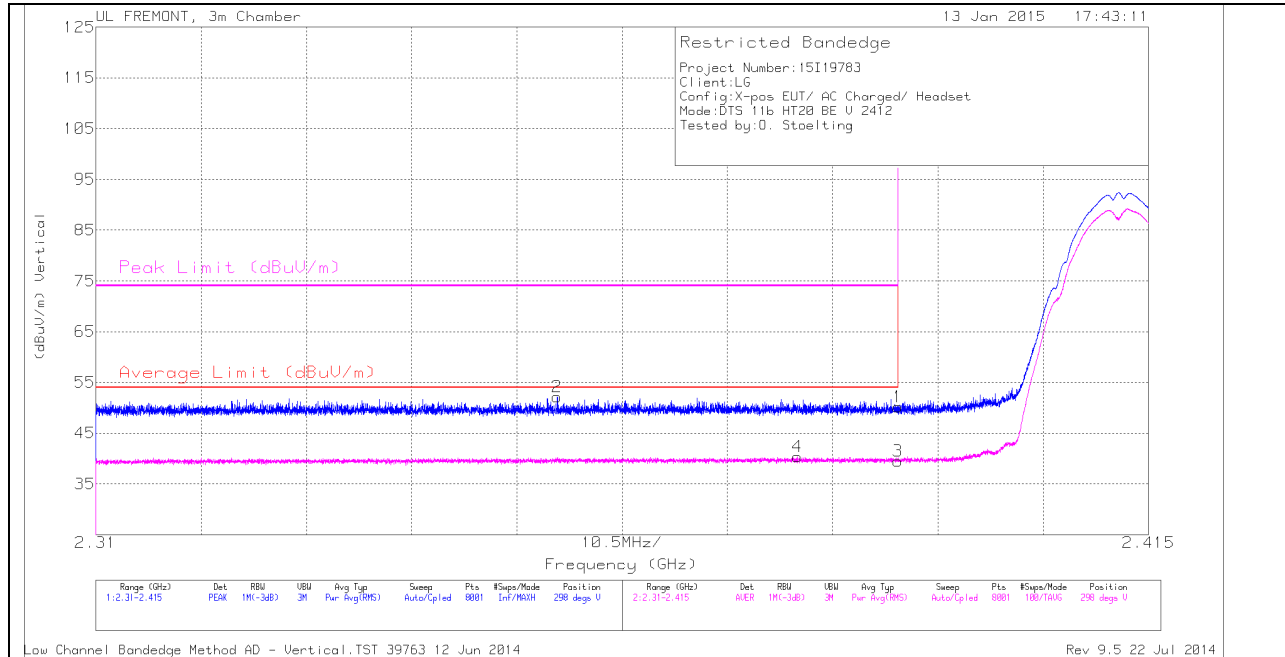


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	2.356	43.22	PK	32	-23.1	52.12	-	-	74	-21.88	298	118	V
4	2.38	31.32	RMS	32.1	-23.1	40.32	54	-13.68	-	-	298	118	V
1	2.39	41.13	PK	32.1	-23.1	50.13	-	-	74	-23.87	298	118	V
3	2.39	30.49	RMS	32.1	-23.1	39.49	54	-14.51	-	-	298	118	V

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

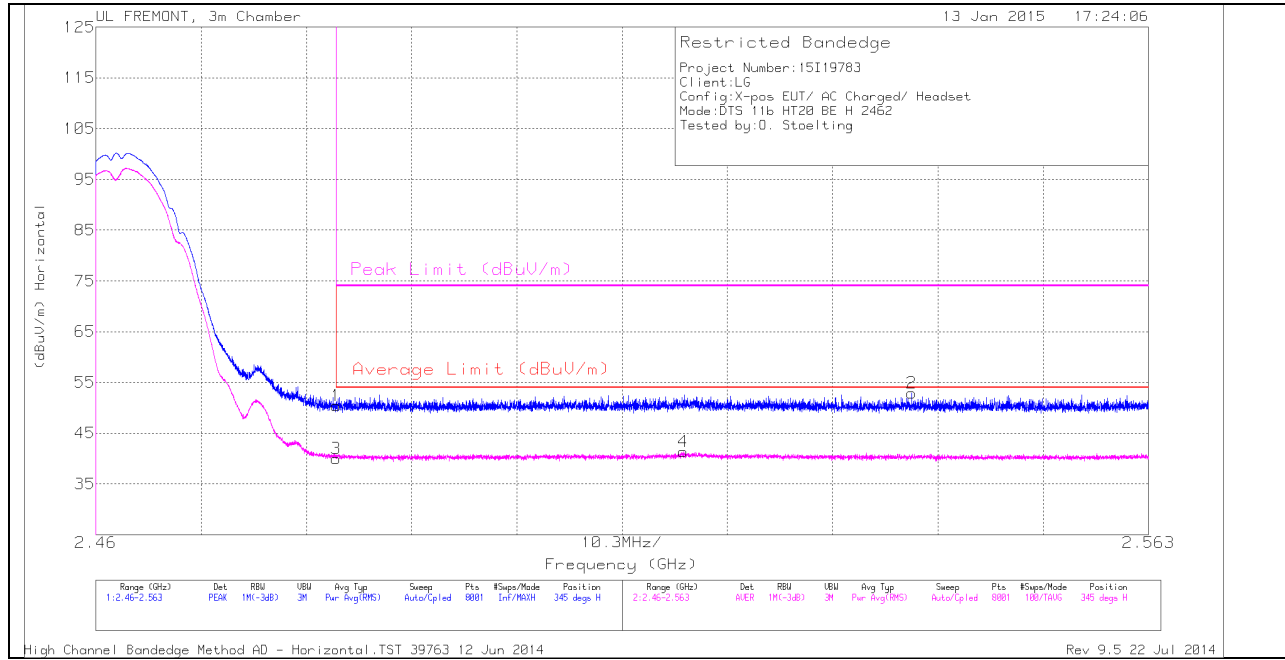

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	40.88	PK	32.3	-22.8	50.38	-	-	74	-23.62	345	231	H
3	2.484	30.54	RMS	32.3	-22.8	40.04	54	-13.96	-	-	345	231	H
4	2.518	31.78	RMS	32.4	-22.8	41.38	54	-12.62	-	-	345	231	H
2	2.54	43.05	PK	32.4	-22.6	52.85	-	-	74	-21.15	345	231	H

**VERTICAL PEAK AND AVERAGE PLOT**

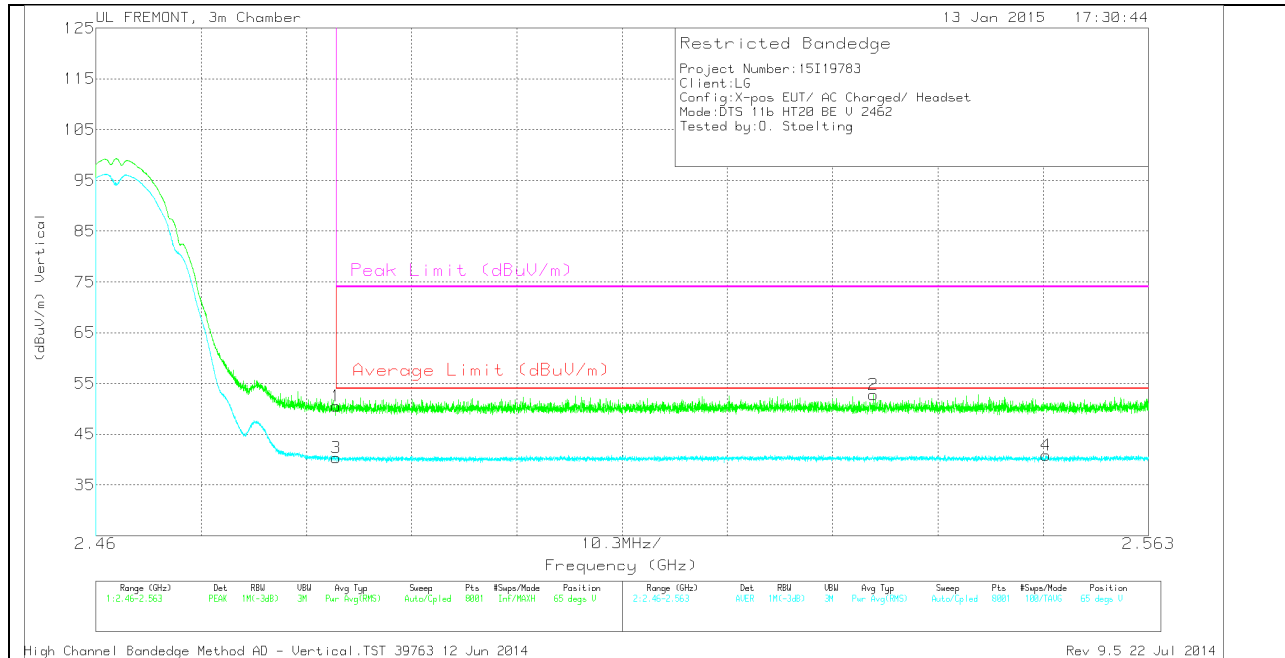


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.484	41.03	PK	32.3	-22.8	50.53	-	-	74	-23.47	65	119	V
3	2.484	30.82	RMS	32.3	-22.8	40.32	54	-13.68	-	-	65	119	V
2	2.536	43.13	PK	32.4	-22.7	52.83	-	-	74	-21.17	65	119	V
4	2.553	31.19	RMS	32.4	-22.7	40.89	54	-13.11	-	-	65	119	V


### HARMONICS AND SPURIOUS EMISSIONS

#### LOW CHANNEL HORIZONTAL

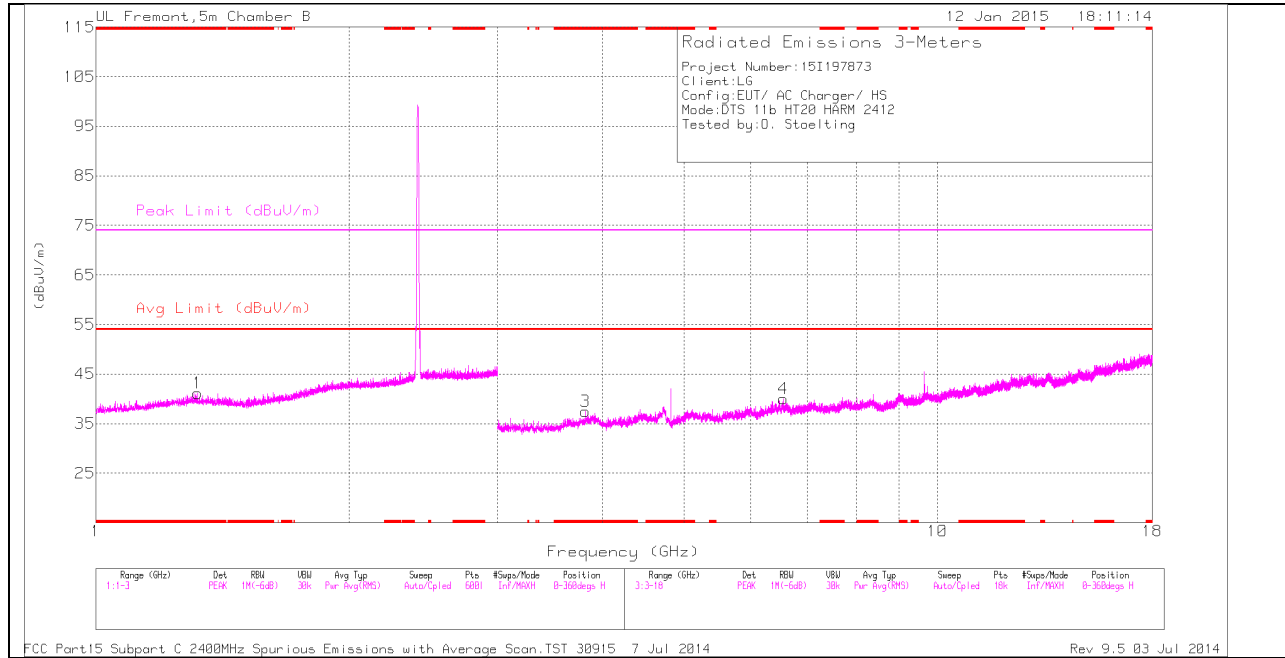

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

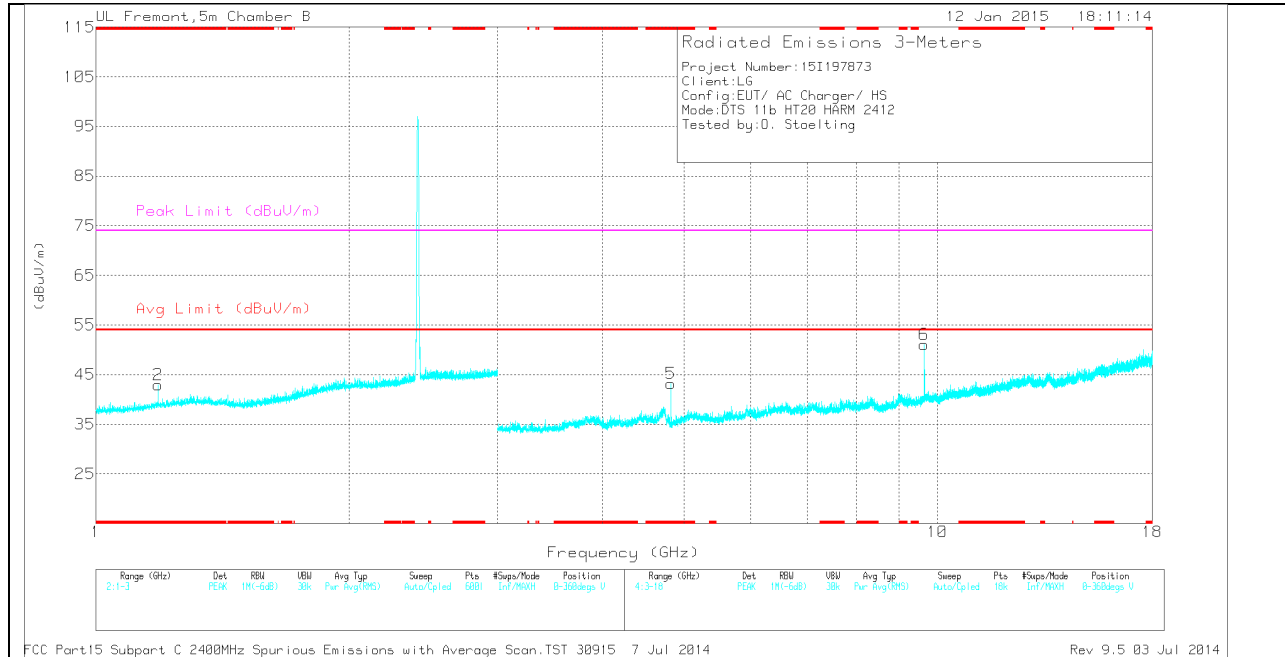

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.321	36.6	PK	28.8	-24.3	41.1	-	-	74	-32.9	0-360	101	H
2	* 1.186	39.36	PK	28.1	-24.5	42.96	-	-	74	-31.04	0-360	101	V
3	* 3.815	34.52	PK	33.7	-30.7	37.52	-	-	74	-36.48	0-360	101	H
5	* 4.824	39.01	PK	34.2	-30	43.21	-	-	74	-30.79	0-360	199	V
4	6.554	32.76	PK	35.7	-28.4	40.06	-	-	-	-	0-360	199	H
6	9.648	38.41	PK	36.8	-24.2	51.01	-	-	-	-	0-360	199	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.187	44.4	PK2	28.1	-24.5	48	-	-	74	-26	93	134	V
* 1.186	32.03	MAV1	28.1	-24.5	35.63	54	-18.37	-	-	93	134	V
* 1.187	44.84	PK2	28.1	-24.5	48.44	-	-	74	-25.56	93	134	V
* 1.187	32.07	MAV1	28.1	-24.5	35.67	54	-18.33	-	-	93	134	V
* 4.824	45.49	PK2	34.2	-30	49.69	-	-	74	-24.31	139	241	V
* 4.824	40.54	MAV1	34.2	-30	44.74	54	-9.26	-	-	139	241	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**MID CHANNEL HORIZONTAL**

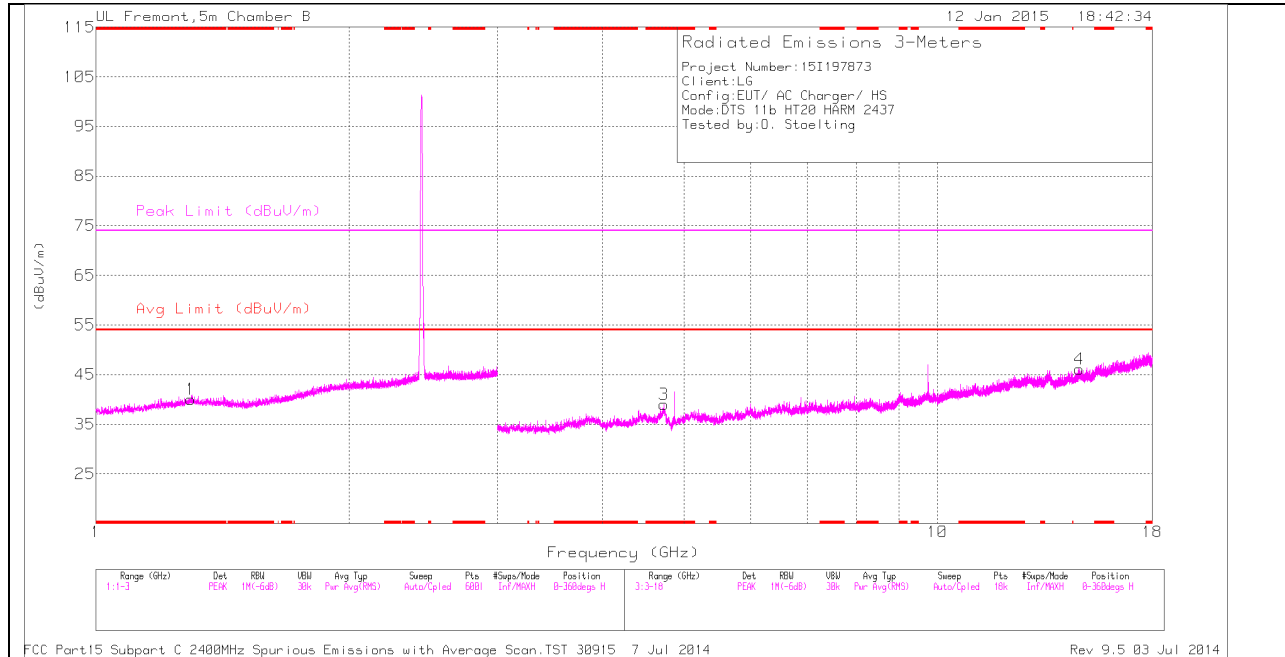

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL VERTICAL**

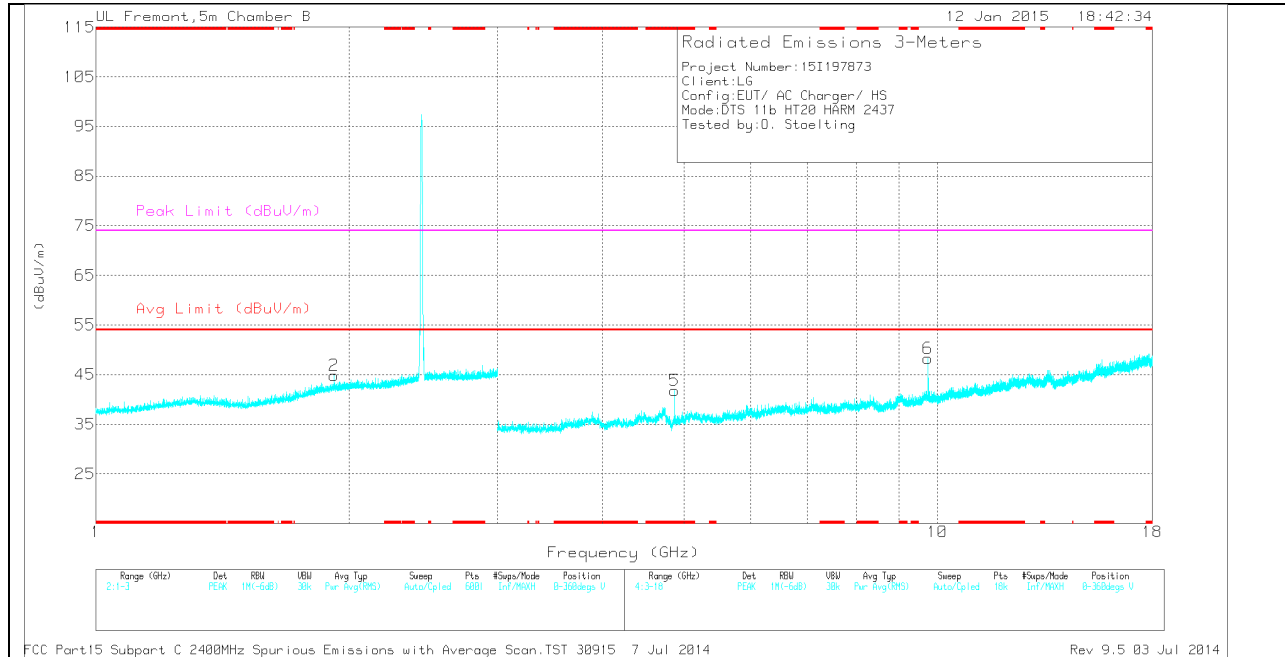

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



**MID CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.296	35.67	PK	28.8	-24.4	40.07	-	-	74	-33.93	0-360	101	H
3	* 4.729	34.06	PK	34.2	-29.3	38.96	-	-	74	-35.04	0-360	200	H
5	* 4.874	38.22	PK	34.2	-30.6	41.82	-	-	74	-32.18	0-360	200	V
2	1.918	37.11	PK	31.1	-23.4	44.81	-	-	-	-	0-360	101	V
6	9.748	35.53	PK	36.9	-24.2	48.23	-	-	-	-	0-360	200	V
4	14.742	26.51	PK	39.4	-19.8	46.11	-	-	-	-	0-360	200	H


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.874	44.87	PK2	34.2	-30.6	48.47	-	-	74	-25.53	128	239	V
* 4.874	40.23	MAV1	34.2	-30.6	43.83	54	-10.17	-	-	128	239	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**HIGH CHANNEL HORIZONTAL**

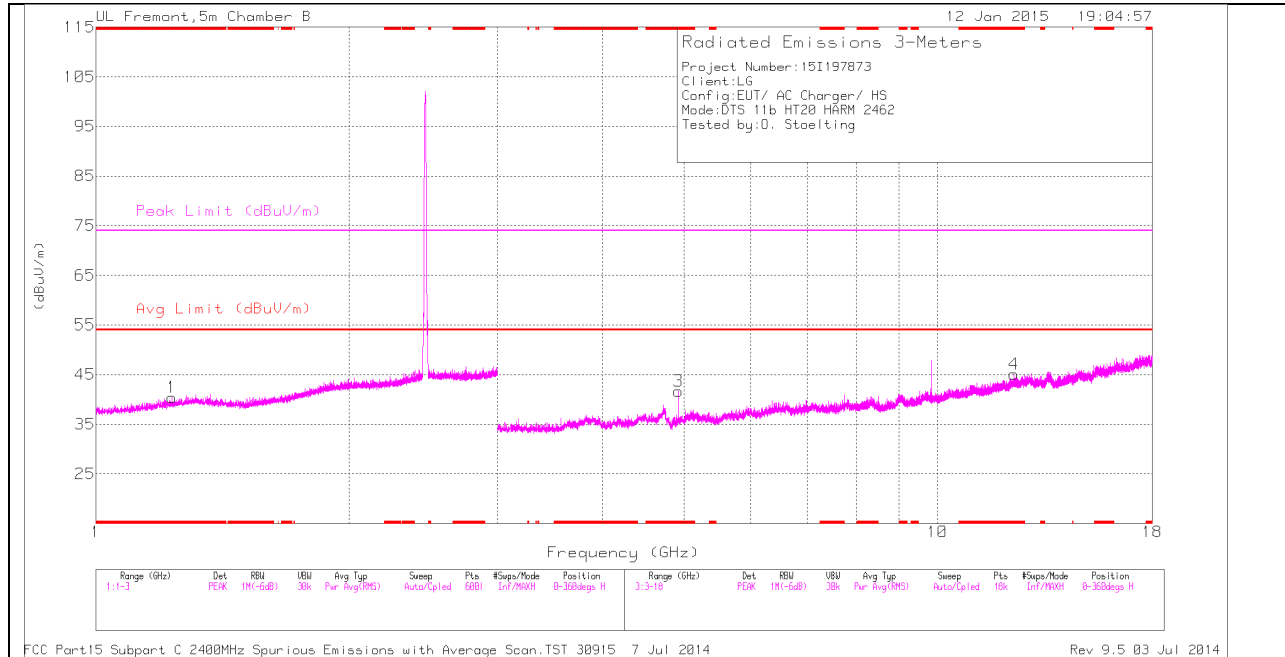

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL VERTICAL**

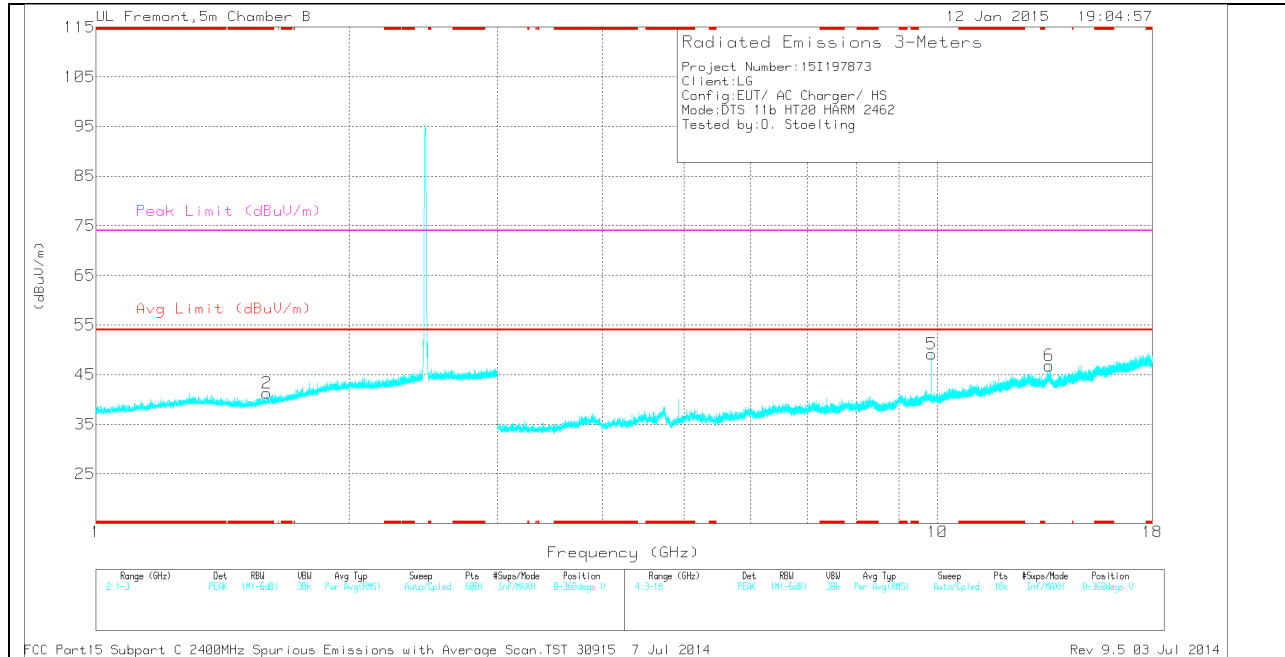

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.232	36.35	PK	28.4	-24.4	40.35	-	-	74	-33.65	0-360	101	H
2	* 1.597	36.64	PK	28.5	-23.8	41.34	-	-	74	-32.66	0-360	101	V
3	* 4.924	38.42	PK	34.2	-30.9	41.72	-	-	74	-32.28	0-360	199	H
4	* 12.319	28.25	PK	39	-22.1	45.15	-	-	74	-28.85	0-360	101	H
5	9.848	36.67	PK	37	-24.5	49.17	-	-	-	-	0-360	199	V
6	13.58	28.41	PK	38.8	-20.4	46.81	-	-	-	-	0-360	101	V

PK - Peak detector


*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.924	45.94	PK2	34.2	-30.9	49.24	-	-	74	-24.76	78	277	H
* 4.924	39.52	MAV1	34.2	-30.9	42.82	54	-11.18	-	-	78	277	H
9.848	41.71	PK2	37	-24.5	54.21	-	-	-	-	22	214	V
9.848	37.41	MAV1	37	-24.5	49.91	-	-	-	-	22	214	V

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**12.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND**  
**RESTRICTED BANDEDGE (LOW CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

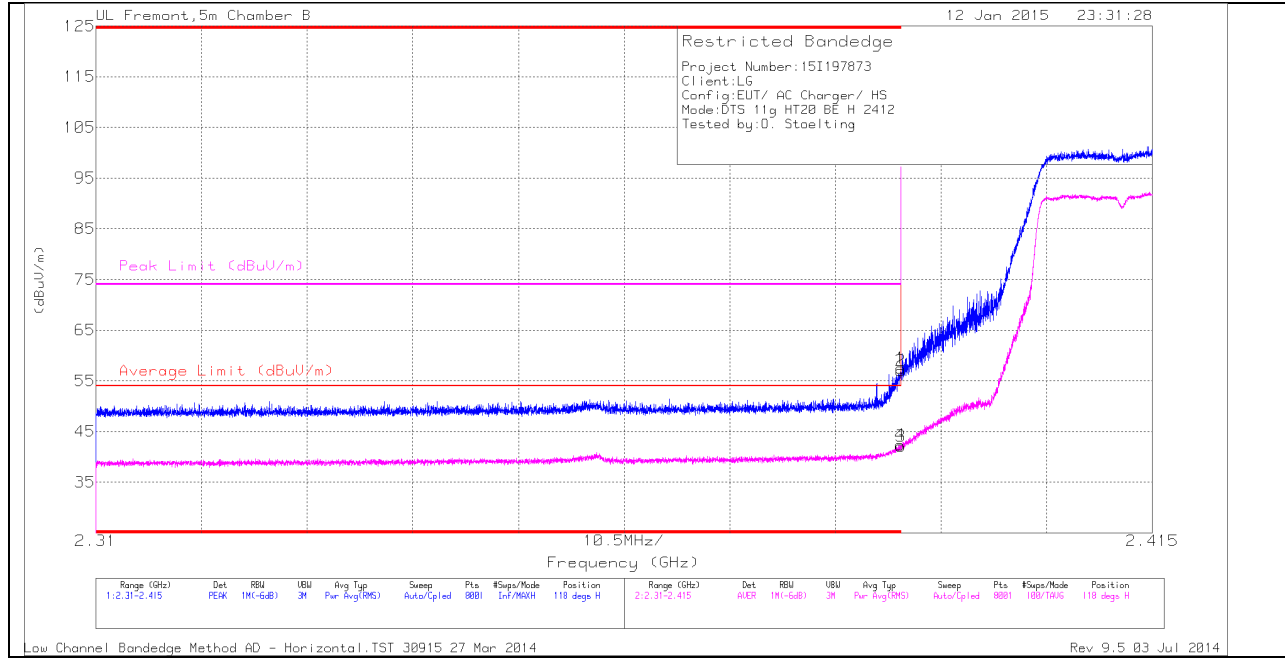

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.07	PK	32.1	-22.7	0	57.47	-	-	74	-16.53	118	281	H
2	* 2.39	47.65	PK	32.1	-22.7	0	57.05	-	-	74	-16.95	118	281	H
3	* 2.39	32.1	RMS	32.1	-22.7	.62	42.12	54	-11.88	-	-	118	281	H
4	* 2.39	32.38	RMS	32.1	-22.7	.62	42.4	54	-11.6	-	-	118	281	H

**VERTICAL PEAK AND AVERAGE PLOT**

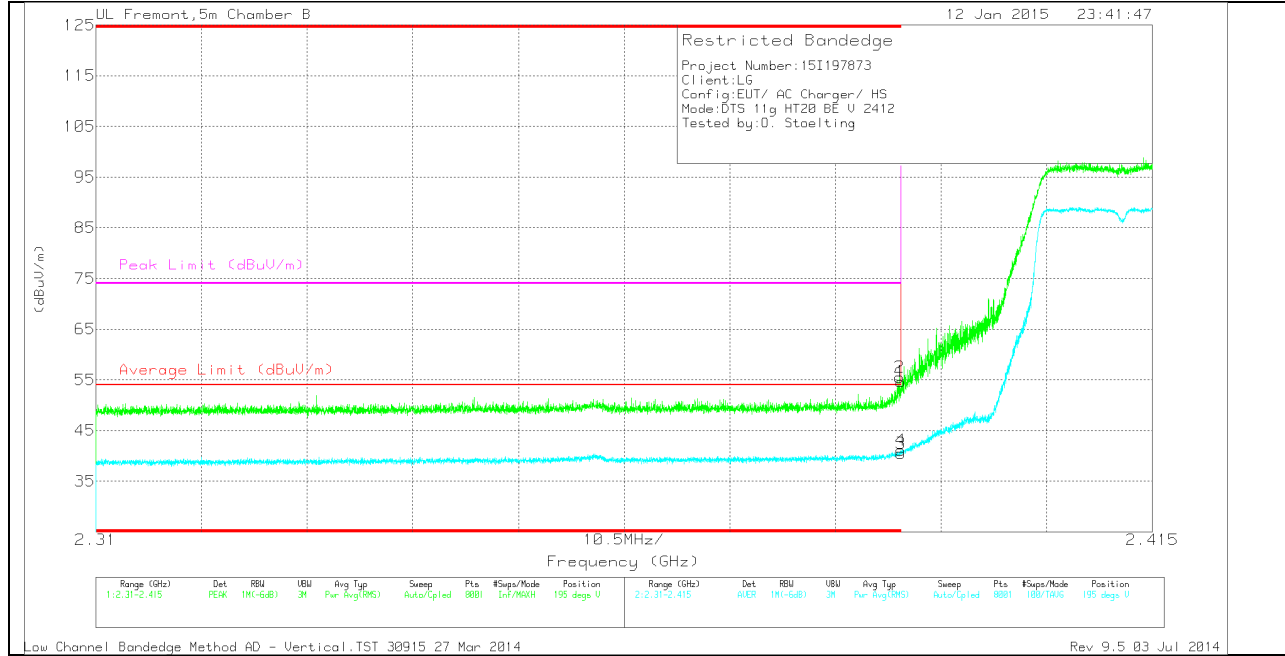


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.28	PK	32.1	-22.7	0	54.68	-	-	74	-19.32	195	285	V
2	* 2.39	46.15	PK	32.1	-22.7	0	55.55	-	-	74	-18.45	195	285	V
3	* 2.39	30.41	RMS	32.1	-22.7	.62	40.43	54	-13.57	-	-	195	285	V
4	* 2.39	31.08	RMS	32.1	-22.7	.62	41.1	54	-12.9	-	-	195	285	V

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

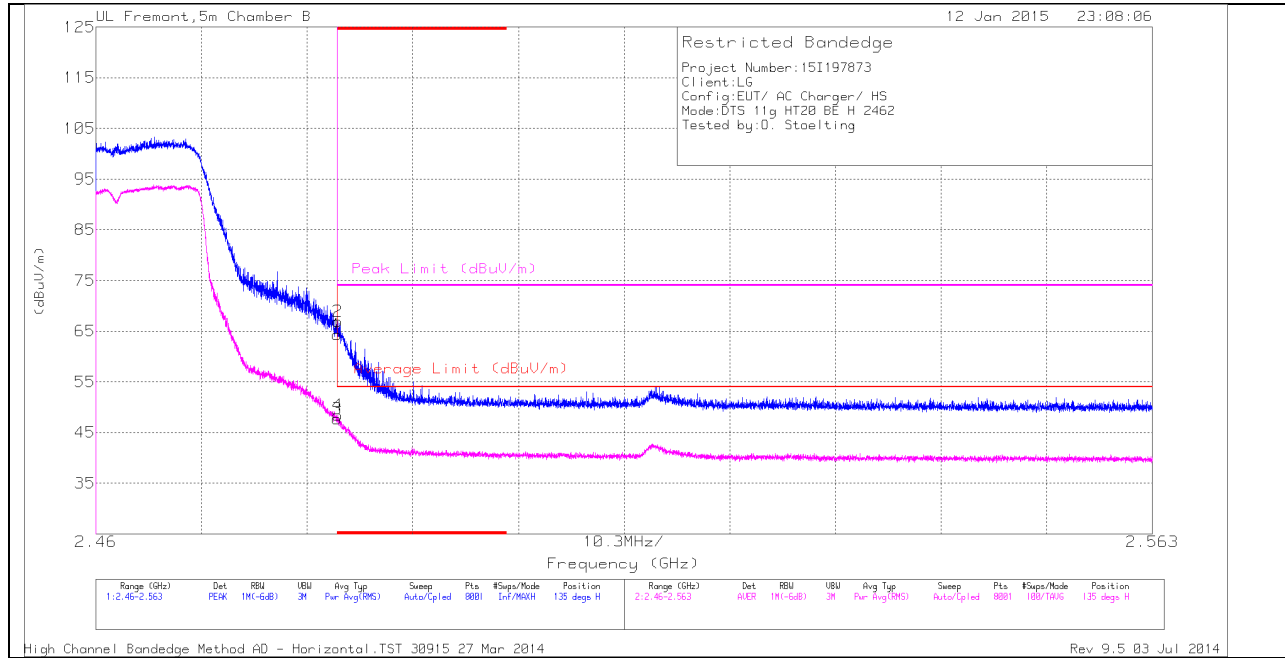

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.55	PK	32.4	-22.6	0	64.35	-	-	74	-9.65	135	273	H
2	* 2.484	57.12	PK	32.4	-22.6	0	66.92	-	-	74	-7.08	135	273	H
3	* 2.484	37.3	RMS	32.4	-22.6	.62	47.72	54	-6.28	-	-	135	273	H
4	* 2.484	38.03	RMS	32.4	-22.6	.62	48.45	54	-5.55	-	-	135	273	H

**VERTICAL PEAK AND AVERAGE PLOT**

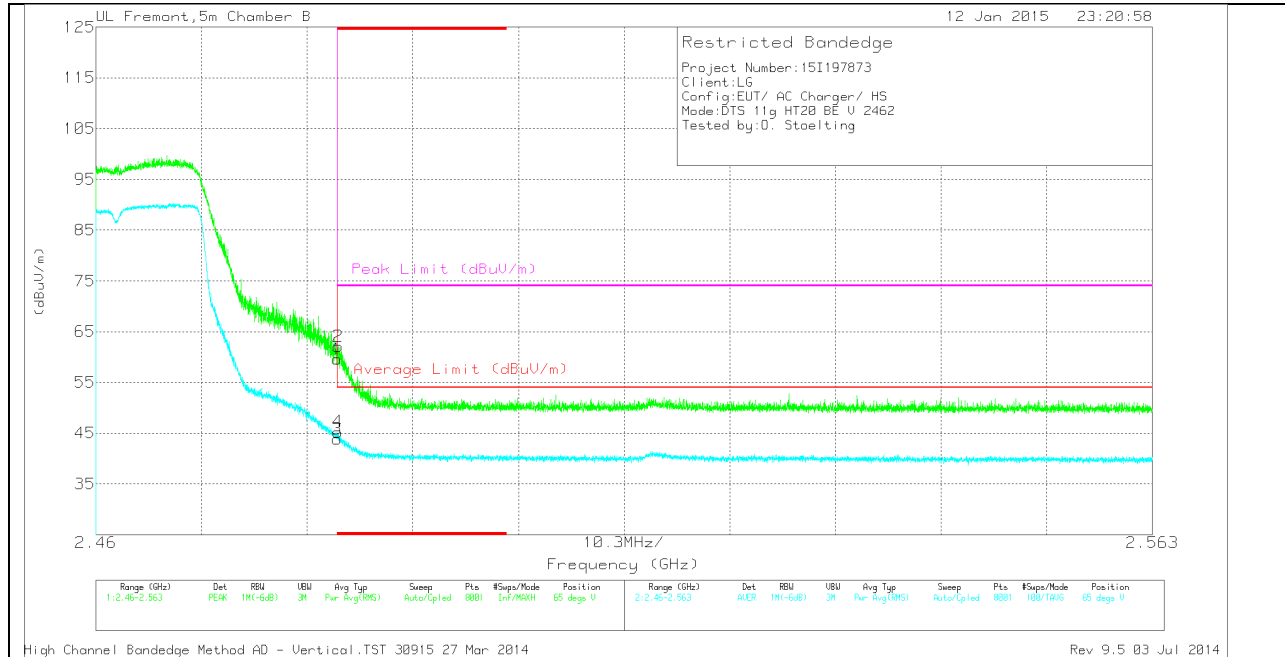


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.84	PK	32.4	-22.6	0	59.64	-	-	74	-14.36	65	274	V
2	* 2.484	52.26	PK	32.4	-22.6	0	62.06	-	-	74	-11.94	65	274	V
3	* 2.484	33.45	RMS	32.4	-22.6	.62	43.87	54	-10.13	-	-	65	274	V
4	* 2.484	34.84	RMS	32.4	-22.6	.62	45.26	54	-8.74	-	-	65	274	V




### HARMONICS AND SPURIOUS EMISSIONS

#### LOW CHANNEL HORIZONTAL

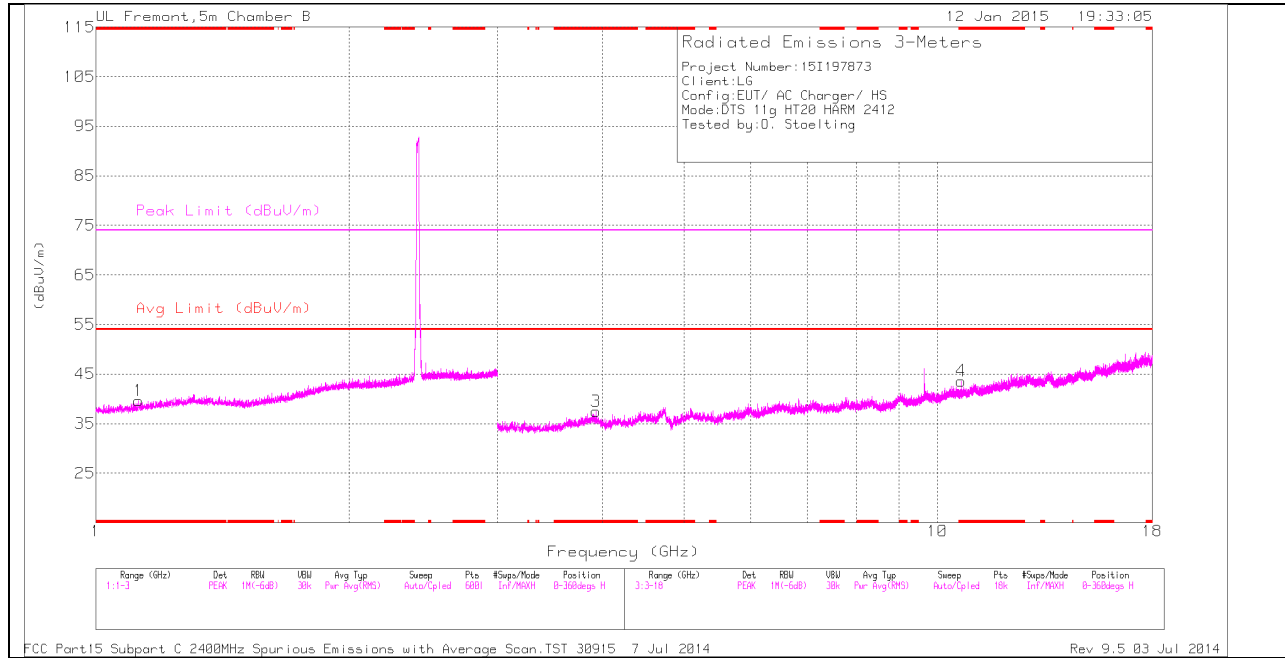

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

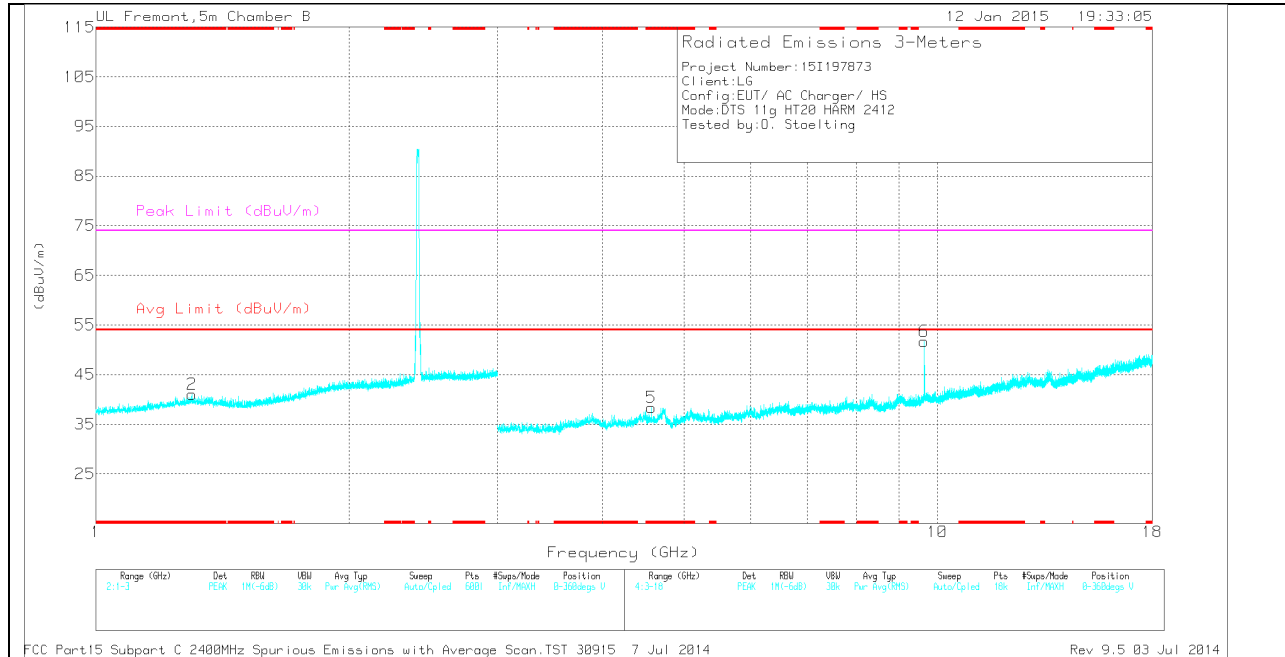

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.123	36.49	PK	27.6	-24.5	0	39.59	-	-	74	-34.41	0-360	199	H
2	* 1.3	36.43	PK	28.9	-24.3	0	41.03	-	-	74	-32.97	0-360	199	V
3	* 3.93	34.12	PK	33.7	-30.4	0	37.42	-	-	74	-36.58	0-360	199	H
4	* 10.661	29.13	PK	37.7	-23.2	0	43.63	-	-	74	-30.37	0-360	101	H
5	* 4.57	35.2	PK	34.1	-30.9	0	38.4	-	-	74	-35.6	0-360	199	V
6	9.648	39.1	PK	36.8	-24.2	0	51.7	-	-	-	-	0-360	199	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 10.659	34.87	PK2	37.7	-23.3	0	49.27	-	-	74	-24.73	265	222	H
* 10.66	23.54	MAV1	37.7	-23.3	.62	38.56	54	-15.44	-	-	265	222	H
9.648	43.21	PK2	36.8	-24.2	0	55.81	-	-	-	-	44	179	V
9.648	39.22	MAV1	36.8	-24.2	.62	52.44	-	-	-	-	44	179	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**MID CHANNEL HORIZONTAL**

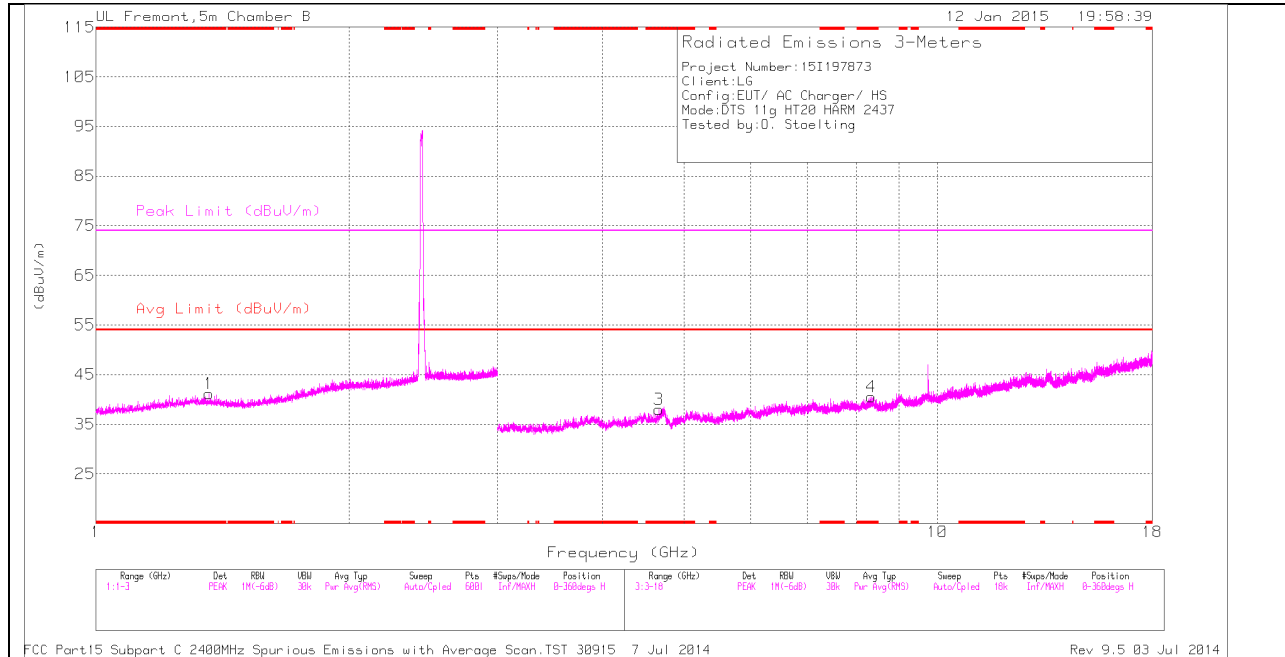

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL VERTICAL**

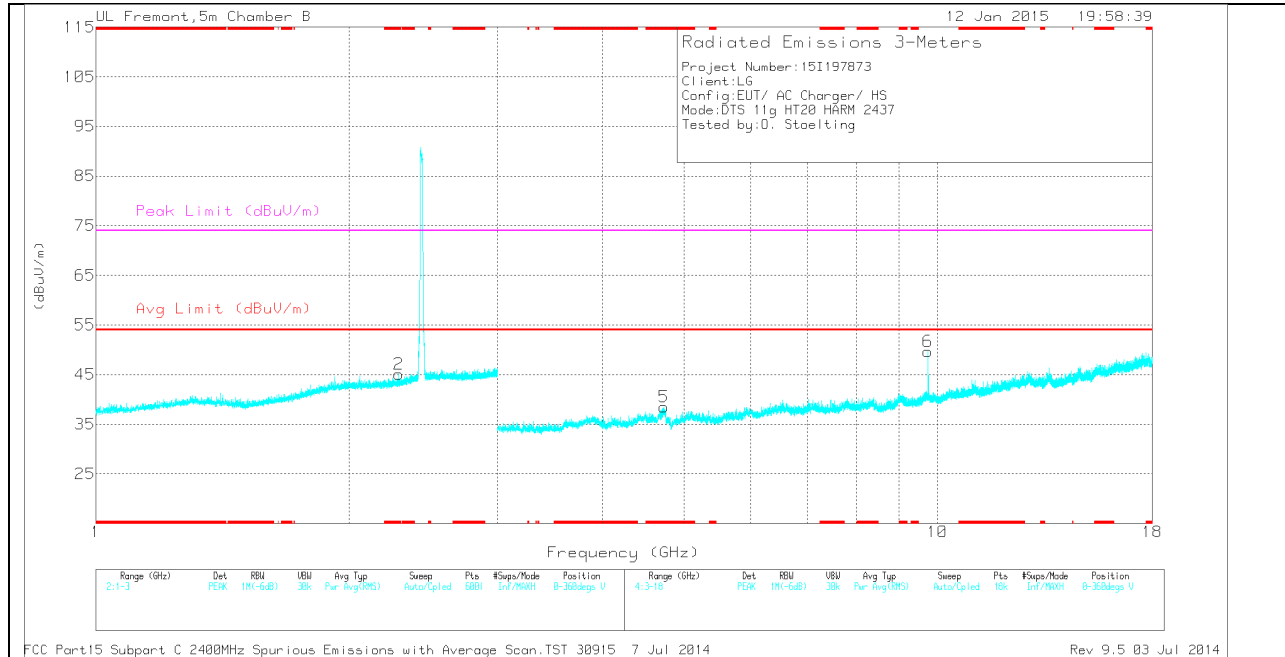

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.362	36.85	PK	28.6	-24.3	0	41.15	-	-	74	-32.85	0-360	101	H
2	* 2.292	36.42	PK	31.6	-22.9	0	45.12	-	-	74	-28.88	0-360	199	V
3	* 4.669	34.1	PK	34.2	-30.3	0	38	-	-	74	-36	0-360	199	H
4	* 8.339	30.42	PK	35.7	-25.6	0	40.52	-	-	74	-33.48	0-360	199	H
5	* 4.728	33.64	PK	34.2	-29.3	0	38.54	-	-	74	-35.46	0-360	101	V
6	9.748	36.91	PK	36.9	-24.2	0	49.61	-	-	-	-	0-360	199	V


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.728	40.92	PK2	34.2	-29.3	0	45.82	-	-	74	-28.18	18	200	V
* 4.728	29.86	MAV1	34.2	-29.3	.62	35.38	54	-18.62	-	-	18	200	V
9.748	41.07	PK2	36.9	-24.3	0	53.67	-	-	-	-	145	202	V
9.748	35.69	MAV1	36.9	-24.2	.62	49.01	-	-	-	-	145	202	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**HIGH CHANNEL HORIZONTAL**

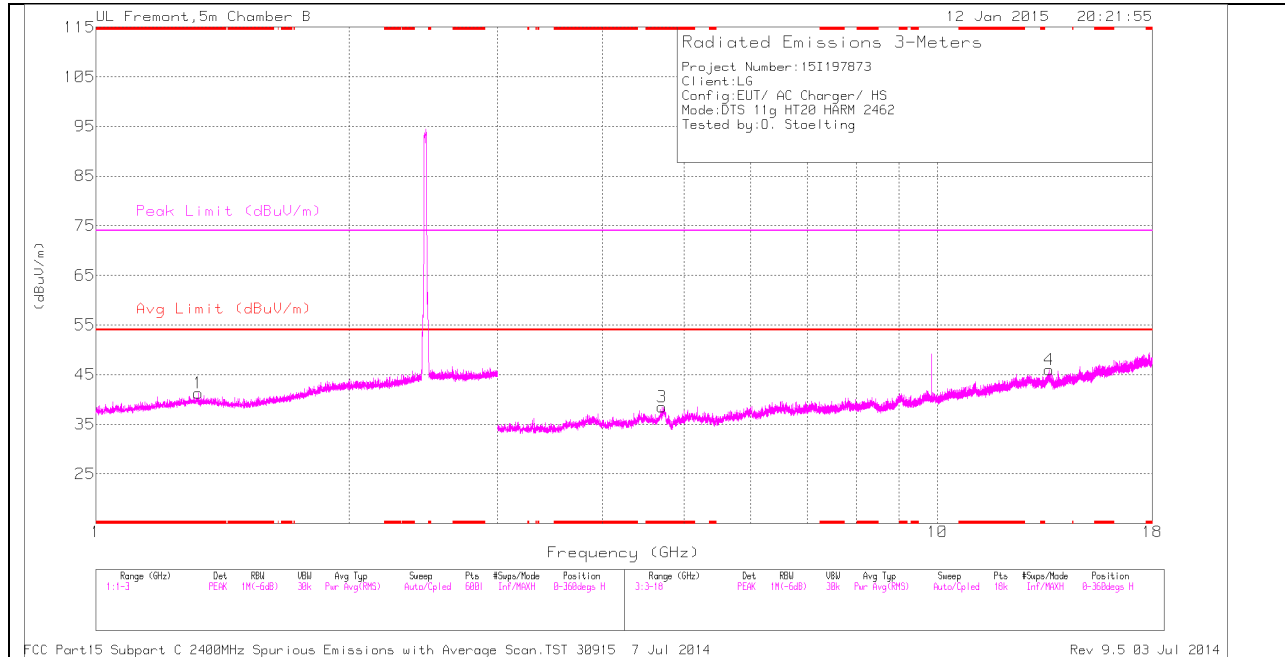

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL VERTICAL**

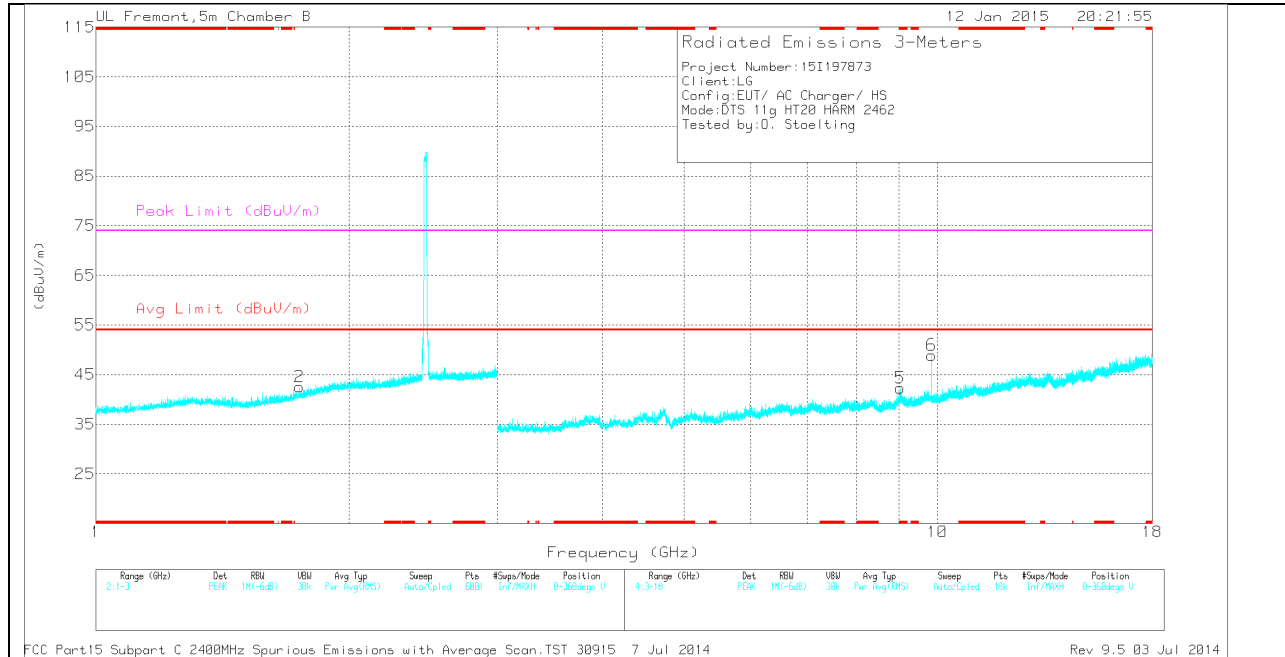

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.



**HIGH CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.323	36.81	PK	28.8	-24.3	0	41.31	-	-	74	-32.69	0-360	199	H
3	* 4.708	34.01	PK	34.2	-29.7	0	38.51	-	-	74	-35.49	0-360	199	H
5	* 9.035	30.47	PK	36.2	-24.4	0	42.27	-	-	74	-31.73	0-360	101	V
2	1.746	36.47	PK	29.6	-23.5	0	42.57	-	-	-	-	0-360	199	V
6	9.848	36.46	PK	37	-24.5	0	48.96	-	-	-	-	0-360	199	V
4	13.582	27.6	PK	38.8	-20.4	0	46	-	-	-	-	0-360	199	H

PK - Peak detector

*RADIATED EMISSIONS*


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 9.037	37.02	PK2	36.2	-24.4	0	48.82	-	-	74	-25.18	128	240	V
* 9.034	25.29	MAV1	36.2	-24.4	.62	37.71	54	-16.29	-	-	128	240	V
9.848	42.15	PK2	37	-24.5	0	54.65	-	-	-	-	15	201	V
9.848	38.08	MAV1	37	-24.5	.62	51.2	-	-	-	-	15	201	V

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**12.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND**

**RESTRICTED BANDEDGE (LOW CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

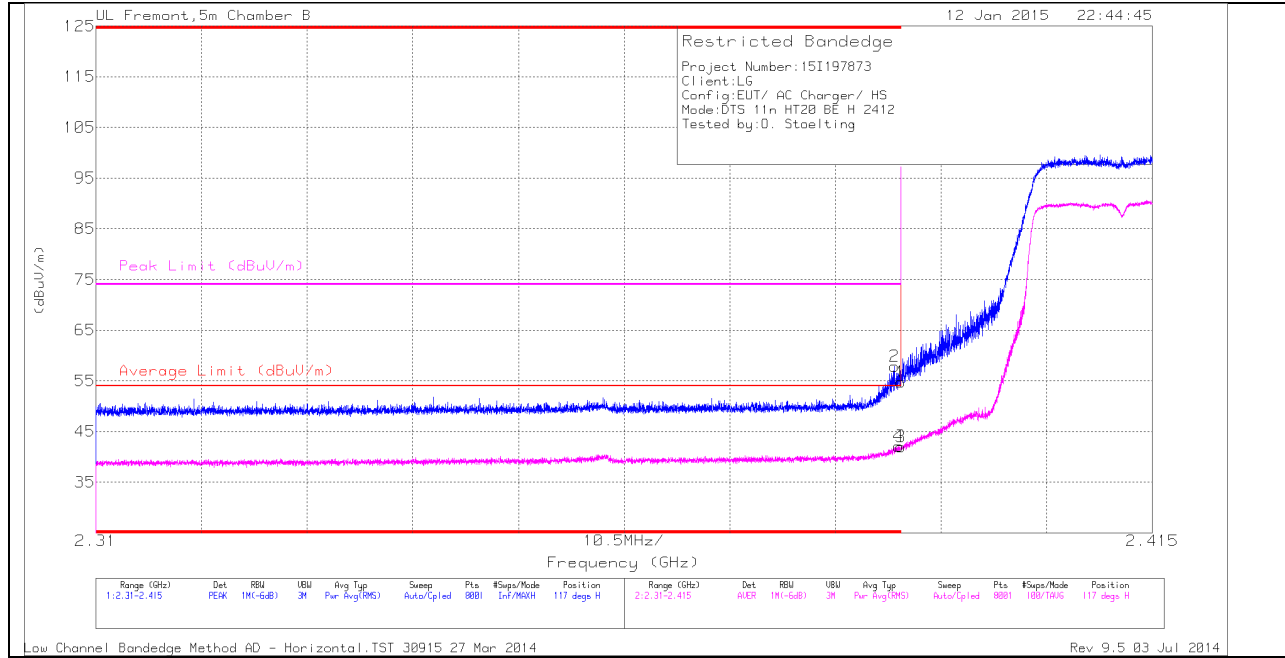

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	45.36	PK	32.1	-22.7	0	54.76	-	-	74	-19.24	117	278	H
2	* 2.389	48.52	PK	32.1	-22.7	0	57.92	-	-	74	-16.08	117	278	H
3	* 2.39	31.99	RMS	32.1	-22.7	.64	42.03	54	-11.97	-	-	117	278	H
4	* 2.39	32.05	RMS	32.1	-22.7	.64	42.09	54	-11.91	-	-	117	278	H

**VERTICAL PEAK AND AVERAGE PLOT**

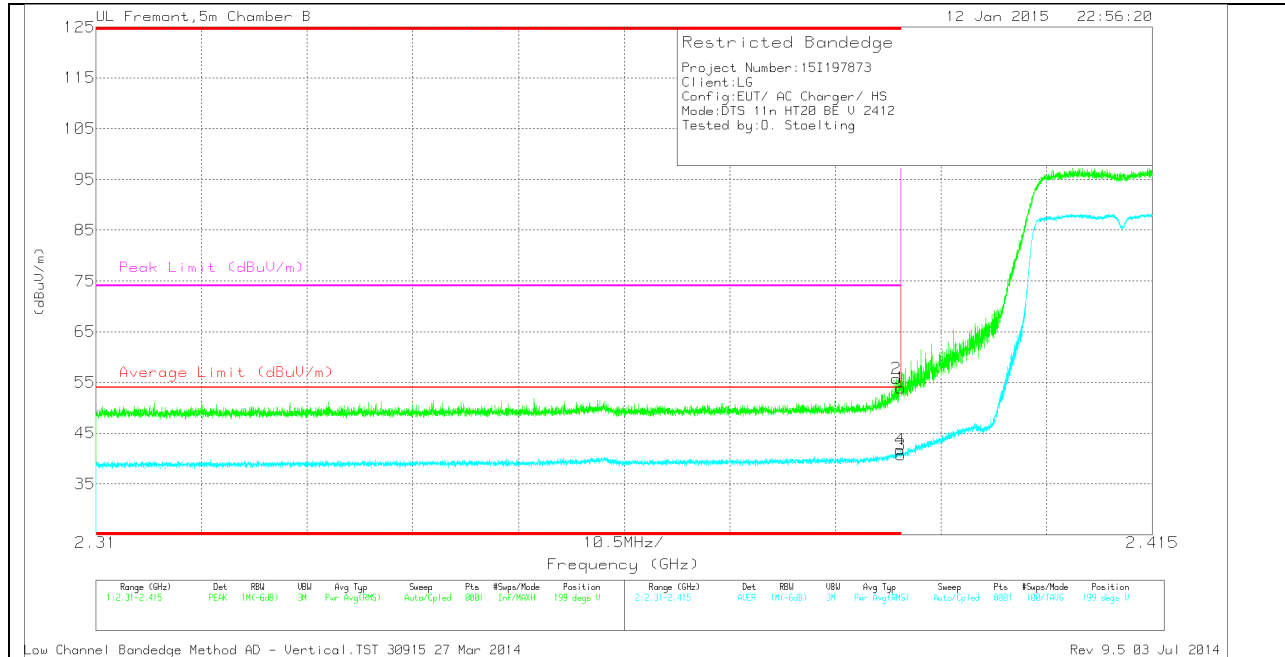


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	44.54	PK	32.1	-22.7	0	53.94	-	-	74	-20.06	199	281	V
2	* 2.39	46.33	PK	32.1	-22.7	0	55.73	-	-	74	-18.27	199	281	V
3	* 2.39	30.65	RMS	32.1	-22.7	.64	40.69	54	-13.31	-	-	199	281	V
4	* 2.39	31.65	RMS	32.1	-22.7	.64	41.69	54	-12.31	-	-	199	281	V

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**


**HORIZONTAL PEAK AND AVERAGE PLOT**

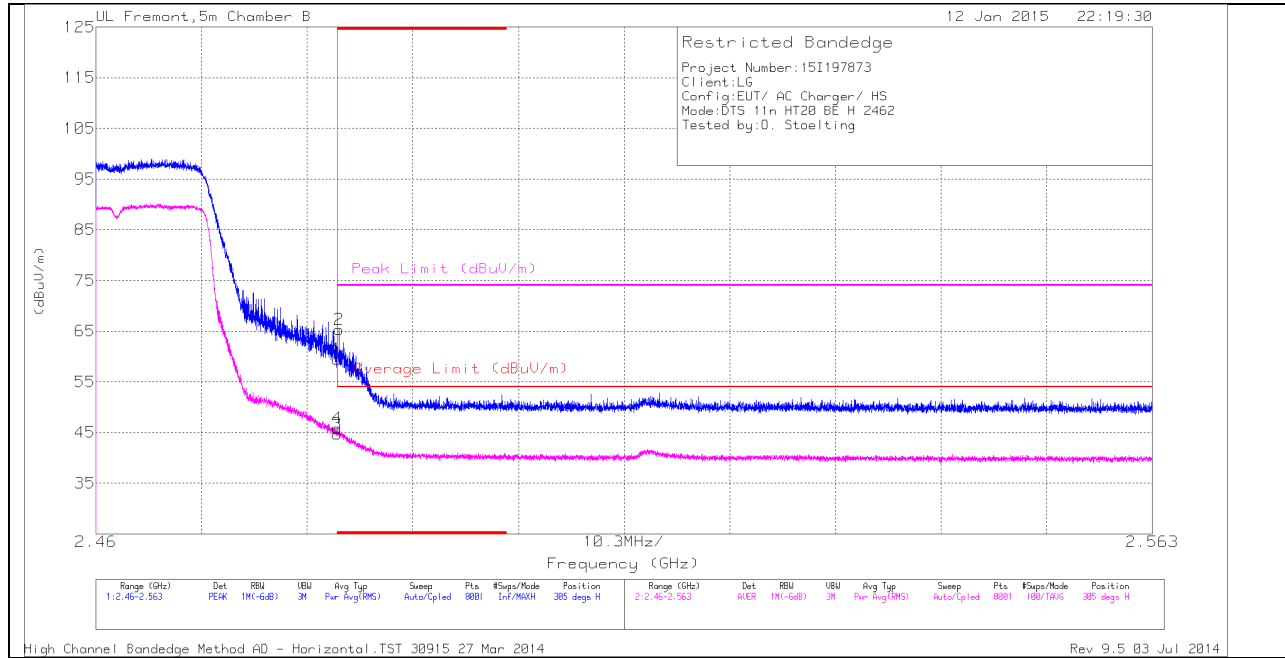

**HORIZONTAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.65	PK	32.4	-22.6	0	59.45	-	-	74	-14.55	305	271	H
2	* 2.484	55.53	PK	32.4	-22.6	0	65.33	-	-	74	-8.67	305	271	H
3	* 2.484	34.32	RMS	32.4	-22.6	.64	44.76	54	-9.24	-	-	305	271	H
4	* 2.484	35.41	RMS	32.4	-22.6	.64	45.85	54	-8.15	-	-	305	271	H

**VERTICAL PEAK AND AVERAGE PLOT**

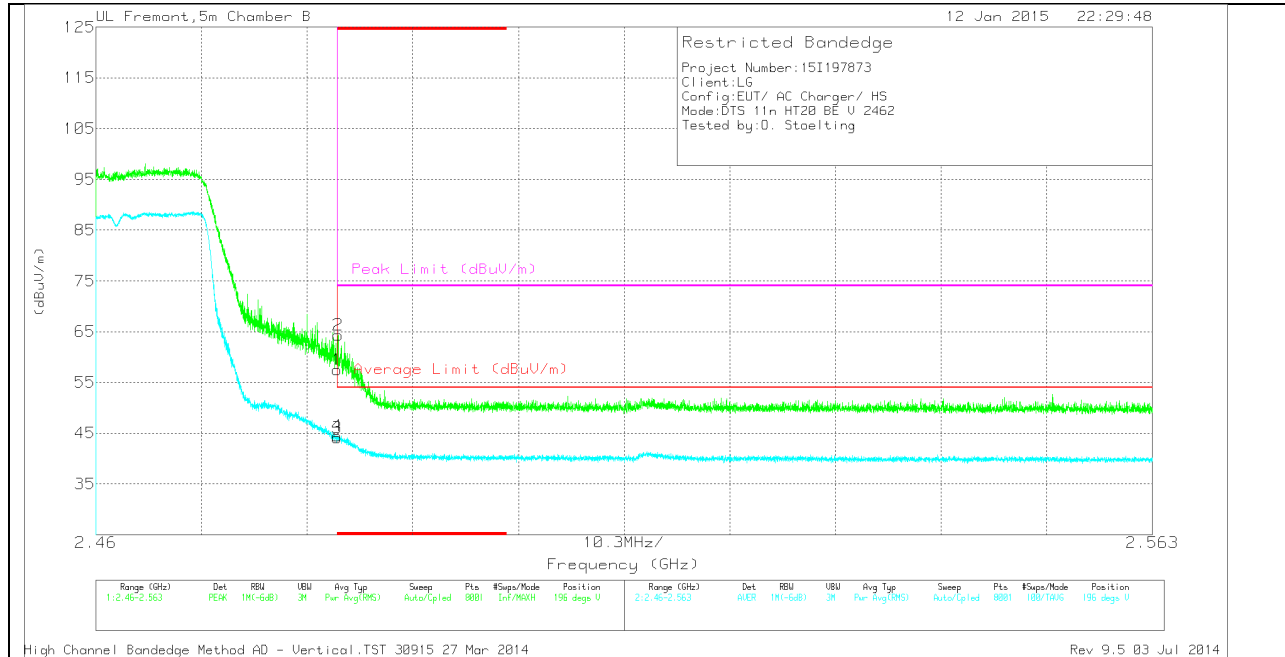


**VERTICAL DATA**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fit r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	47.7	PK	32.4	-22.6	0	57.5	-	-	74	-16.5	196	270	V
2	* 2.484	54.5	PK	32.4	-22.6	0	64.3	-	-	74	-9.7	196	270	V
3	* 2.484	33.7	RMS	32.4	-22.6	.64	44.14	54	-9.86	-	-	196	270	V
4	* 2.484	34.04	RMS	32.4	-22.6	.64	44.48	54	-9.52	-	-	196	270	V


### HARMONICS AND SPURIOUS EMISSIONS

#### LOW CHANNEL HORIZONTAL

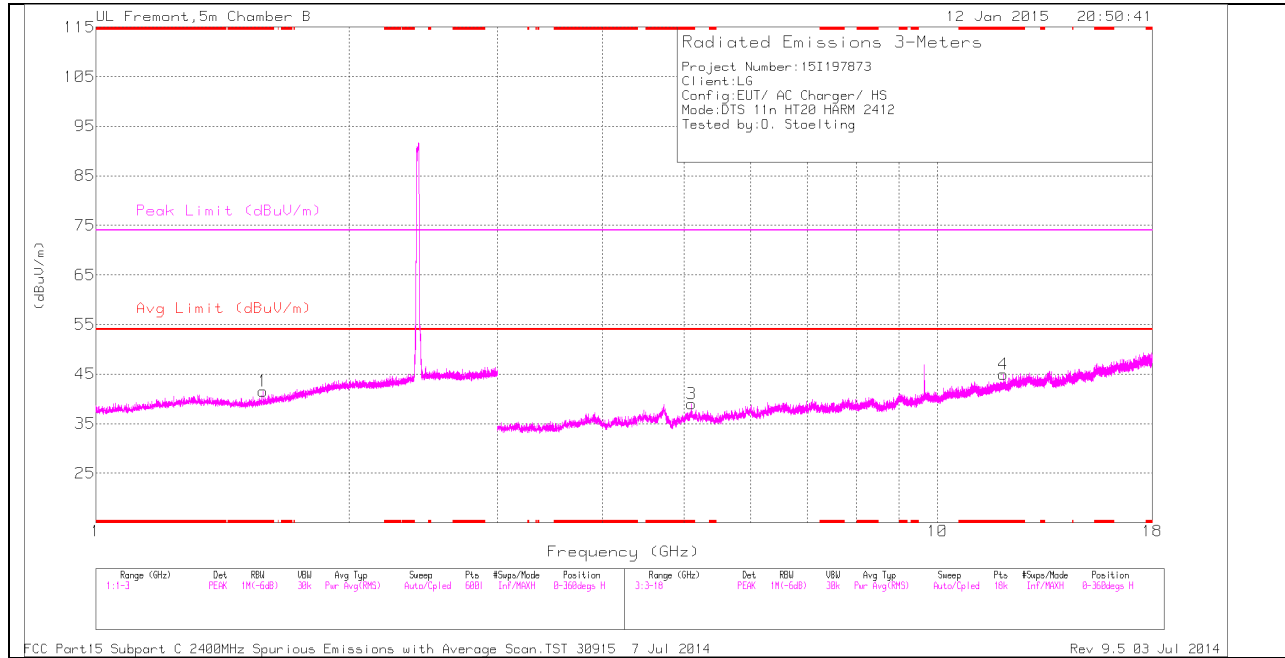

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL VERTICAL**

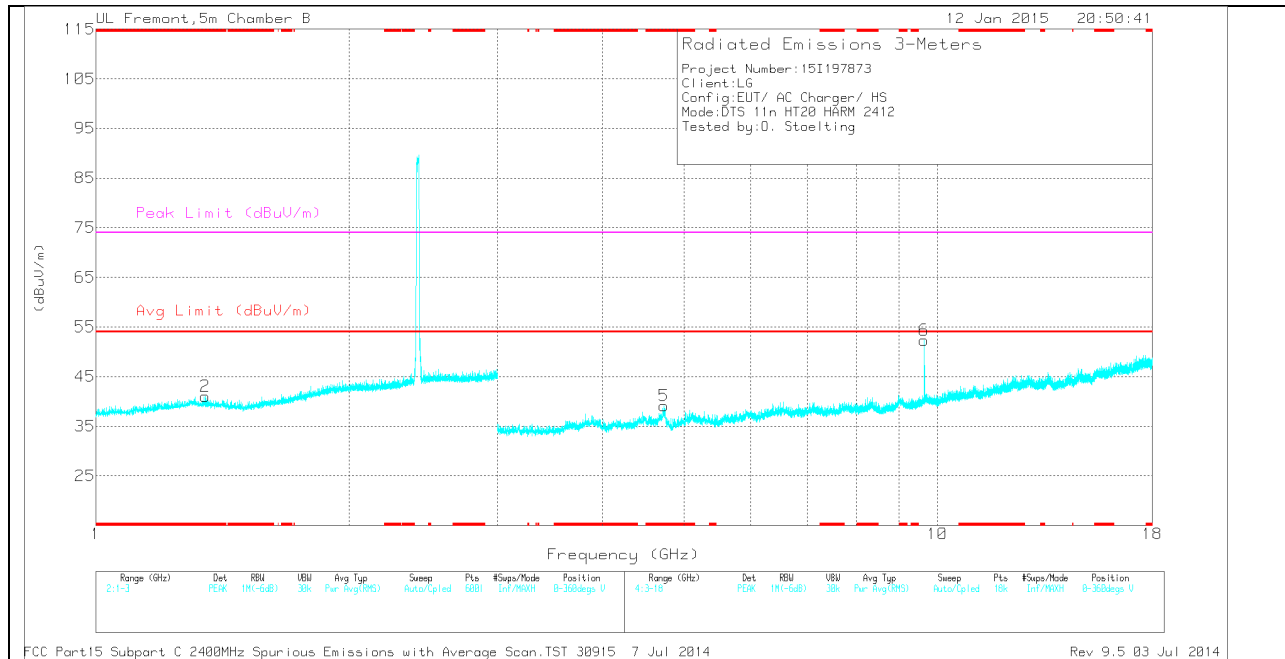

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.579	36.97	PK	28.4	-23.8	0	41.57	-	-	74	-32.43	0-360	101	H
2	* 1.349	36.59	PK	28.7	-24.3	0	40.99	-	-	74	-33.01	0-360	101	V
3	* 5.1	33.59	PK	34.2	-28.8	0	38.99	-	-	74	-35.01	0-360	199	H
4	* 11.971	28.18	PK	38.7	-21.9	0	44.98	-	-	74	-29.02	0-360	199	H
5	* 4.731	34.28	PK	34.2	-29.3	0	39.18	-	-	74	-34.82	0-360	101	V
6	9.648	39.73	PK	36.8	-24.2	0	52.33	-	-	-	-	0-360	199	V

PK - Peak detector


*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.73	40.91	PK2	34.2	-29.3	0	45.81	-	-	74	-28.19	78	310	V
* 4.733	29.71	MAV1	34.2	-29.3	.64	35.25	54	-18.75	-	-	78	310	V
9.648	43.11	PK2	36.8	-24.2	0	55.71	-	-	-	-	44	179	V
9.648	39.31	MAV1	36.8	-24.2	.64	52.55	-	-	-	-	44	179	V

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013




**MID CHANNEL HORIZONTAL**

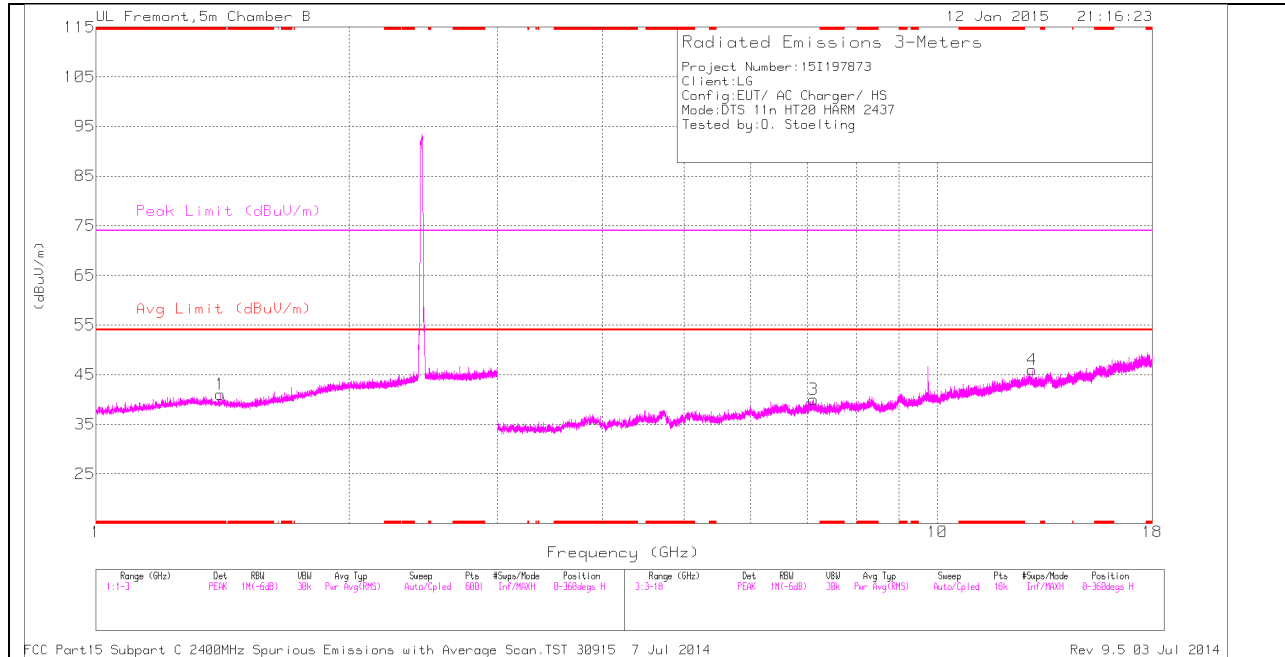

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL VERTICAL**

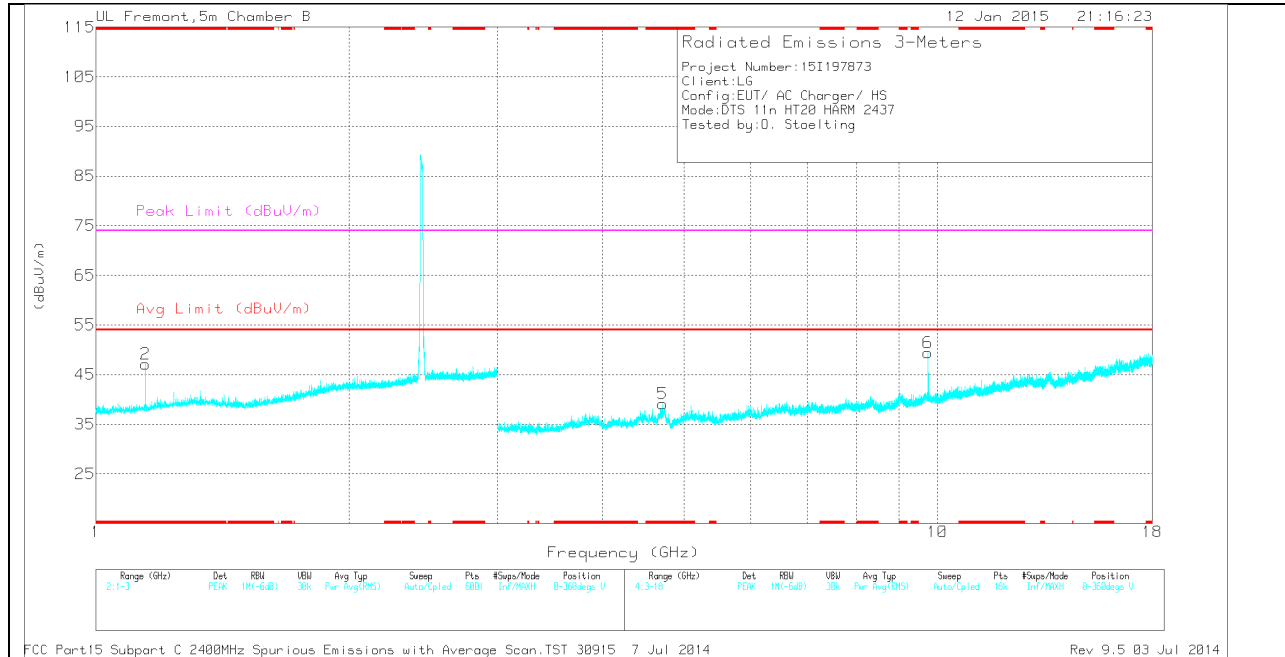

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**MID CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.405	36.78	PK	28.5	-24.2	0	41.08	-	-	74	-32.92	0-360	199	H
2	* 1.145	43.87	PK	27.7	-24.5	0	47.07	-	-	74	-26.93	0-360	199	V
5	* 4.717	34.38	PK	34.2	-29.5	0	39.08	-	-	74	-34.92	0-360	101	V
3	7.122	31.46	PK	35.6	-27.1	0	39.96	-	-	-	-	0-360	200	H
6	9.748	36.75	PK	36.9	-24.2	0	49.45	-	-	-	-	0-360	200	V
4	12.959	28.26	PK	39.2	-21.5	0	45.96	-	-	-	-	0-360	200	H


PK - Peak detector

*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.144	44.09	PK2	27.7	-24.5	0	47.29	-	-	74	-26.71	23	159	V
* 1.144	31.94	MAV1	27.7	-24.5	.64	35.78	54	-18.22	-	-	23	159	V
* 4.716	41.37	PK2	34.2	-29.5	0	46.07	-	-	74	-27.93	200	337	V
* 4.718	29.93	MAV1	34.2	-29.4	.64	35.37	54	-18.63	-	-	200	337	V
9.748	41.34	PK2	36.9	-24.2	0	54.04	-	-	-	-	142	224	V
9.748	35.78	MAV1	36.9	-24.2	.64	49.12	-	-	-	-	142	224	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

**HIGH CHANNEL HORIZONTAL**

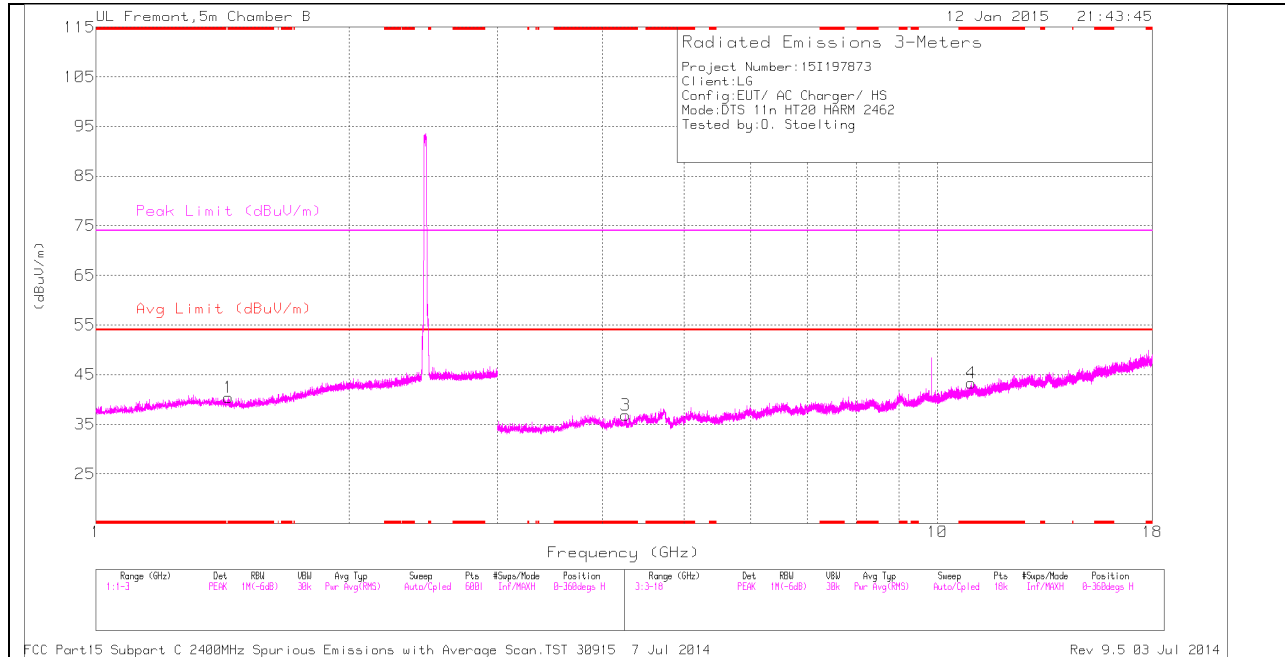

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL VERTICAL**

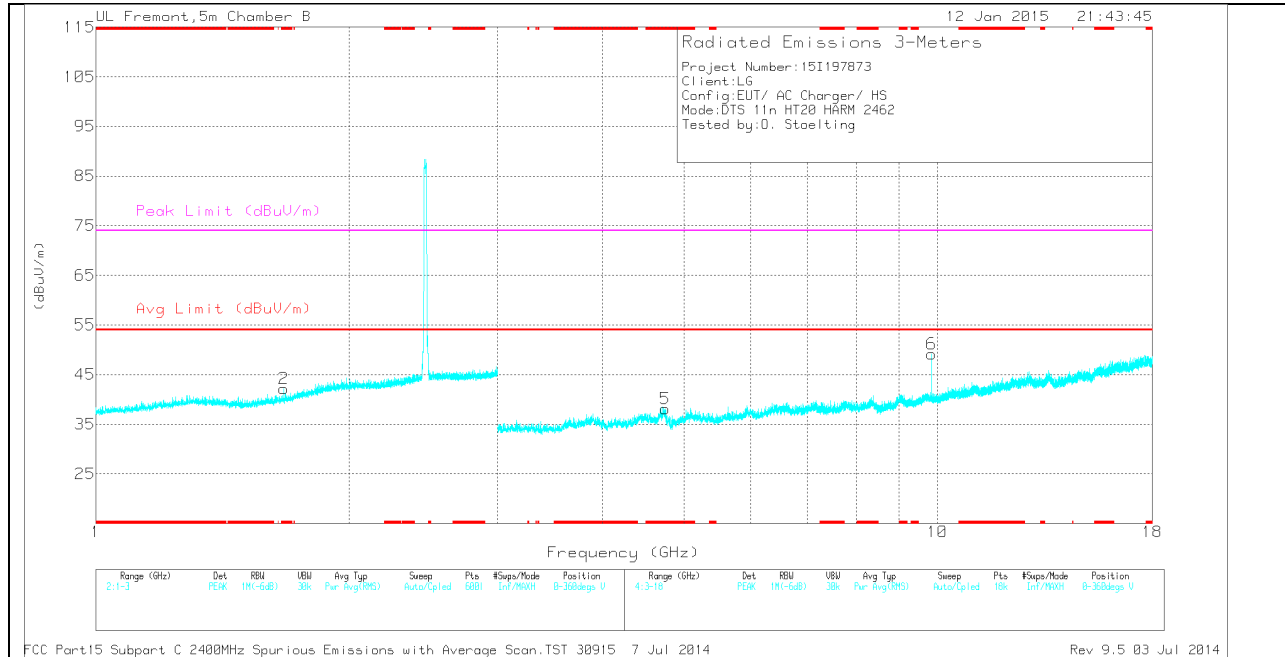

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL DATA**

*TRACE MARKERS*

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.436	36.14	PK	28.3	-24.1	0	40.34	-	-	74	-33.66	0-360	101	H
2	* 1.672	36.82	PK	28.9	-23.6	0	42.12	-	-	74	-31.88	0-360	101	V
3	* 4.262	33.94	PK	33.6	-30.7	0	36.84	-	-	74	-37.16	0-360	200	H
4	* 10.961	28.75	PK	37.8	-23.2	0	43.35	-	-	74	-30.65	0-360	200	H
5	* 4.745	33.16	PK	34.2	-29.2	0	38.16	-	-	74	-35.84	0-360	200	V
6	9.848	36.63	PK	37	-24.5	0	49.13	-	-	-	-	0-360	200	V

PK - Peak detector


*RADIATED EMISSIONS*

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.672	43.06	PK2	28.9	-23.6	0	48.36	-	-	74	-25.64	48	230	V
* 1.674	31.53	MAV1	28.9	-23.6	.64	37.47	54	-16.53	-	-	48	230	V
* 4.743	42.37	PK2	34.2	-29.2	0	47.37	-	-	74	-26.63	200	350	V
* 4.745	29.6	MAV1	34.2	-29.2	.64	35.24	54	-18.76	-	-	200	350	V
9.848	42.27	PK2	37	-24.5	0	54.77	-	-	-	-	19	201	V
9.848	38.05	MAV1	37	-24.5	.64	51.19	-	-	-	-	19	201	V


FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

### 12.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

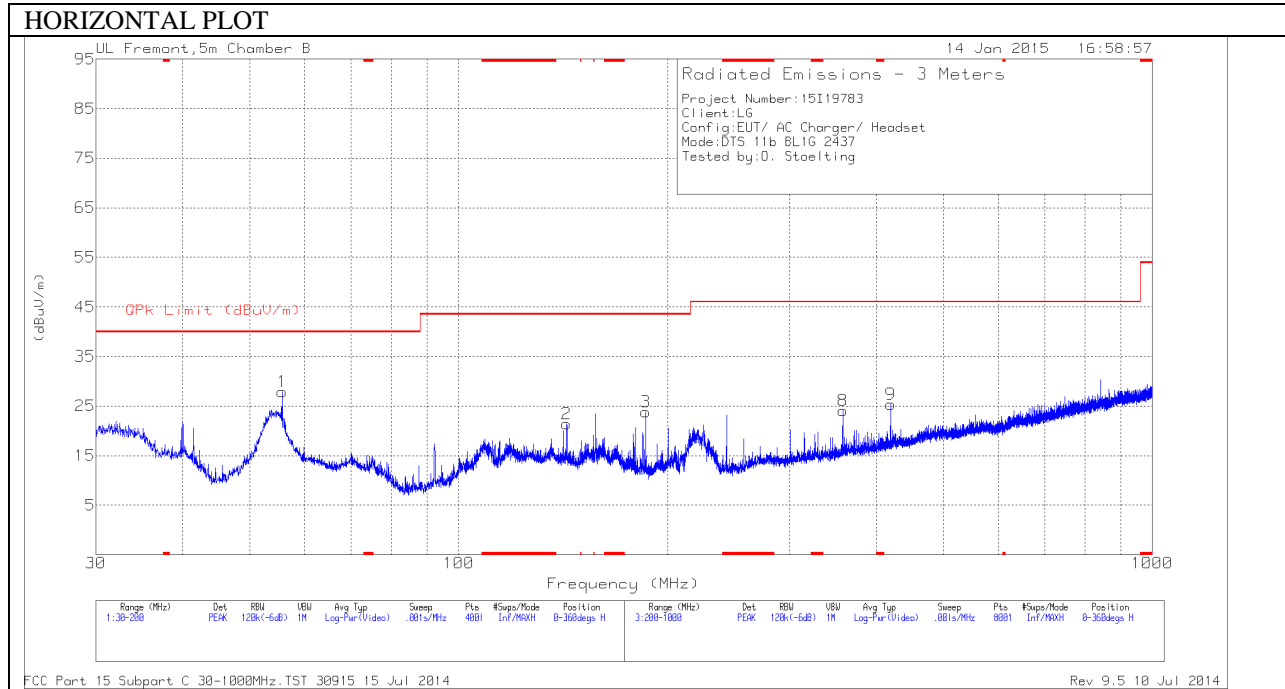

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

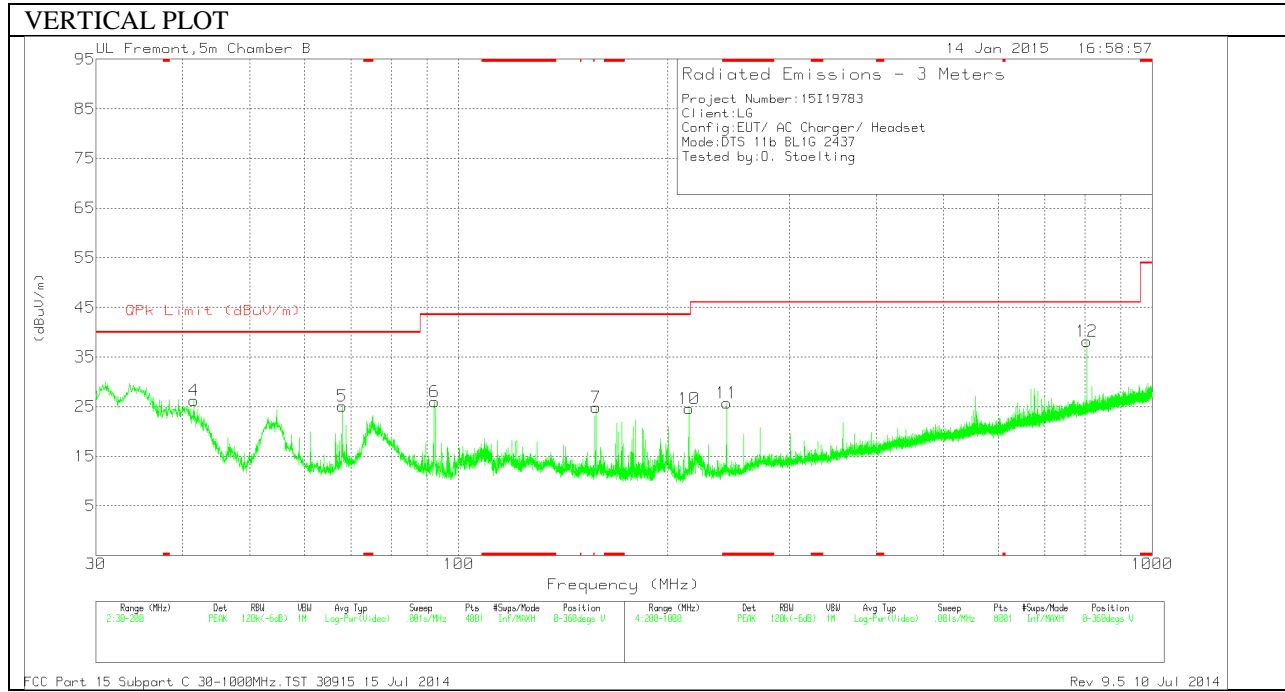



**Below 1G Data**

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
11	* 243.4	40.49	PK	11.6	-26.4	25.69	46.02	-20.33	0-360	200	V
4	41.5175	41.81	PK	13	-28.6	26.21	40	-13.79	0-360	101	V
1	55.67	49.13	PK	7.3	-28.5	27.93	40	-12.07	0-360	400	H
5	67.9525	45.55	PK	8	-28.4	25.15	40	-14.85	0-360	101	V
6	92.305	45.87	PK	8.2	-28.1	25.97	43.52	-17.55	0-360	101	V
2	143.1775	36.03	PK	12.9	-27.5	21.43	43.52	-22.09	0-360	200	H
7	157.8825	39.97	PK	12.3	-27.4	24.87	43.52	-18.65	0-360	101	V
3	186.145	39.51	PK	11.3	-27	23.81	43.52	-19.71	0-360	400	H
10	214.8	40.84	PK	10.6	-26.8	24.64	43.52	-18.88	0-360	200	V
8	357.9	35.03	PK	14.8	-25.8	24.03	46.02	-21.99	0-360	300	H
9	419.4	35.03	PK	16.2	-25.9	25.33	46.02	-20.69	0-360	200	H
12	804.1	40.31	PK	21.5	-23.7	38.11	46.02	-7.91	0-360	101	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

### 13. AC POWER LINE CONDUCTED EMISSIONS

#### LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### TEST PROCEDURE


The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4 2009.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

#### RESULTS

**6 WORST EMISSIONS**

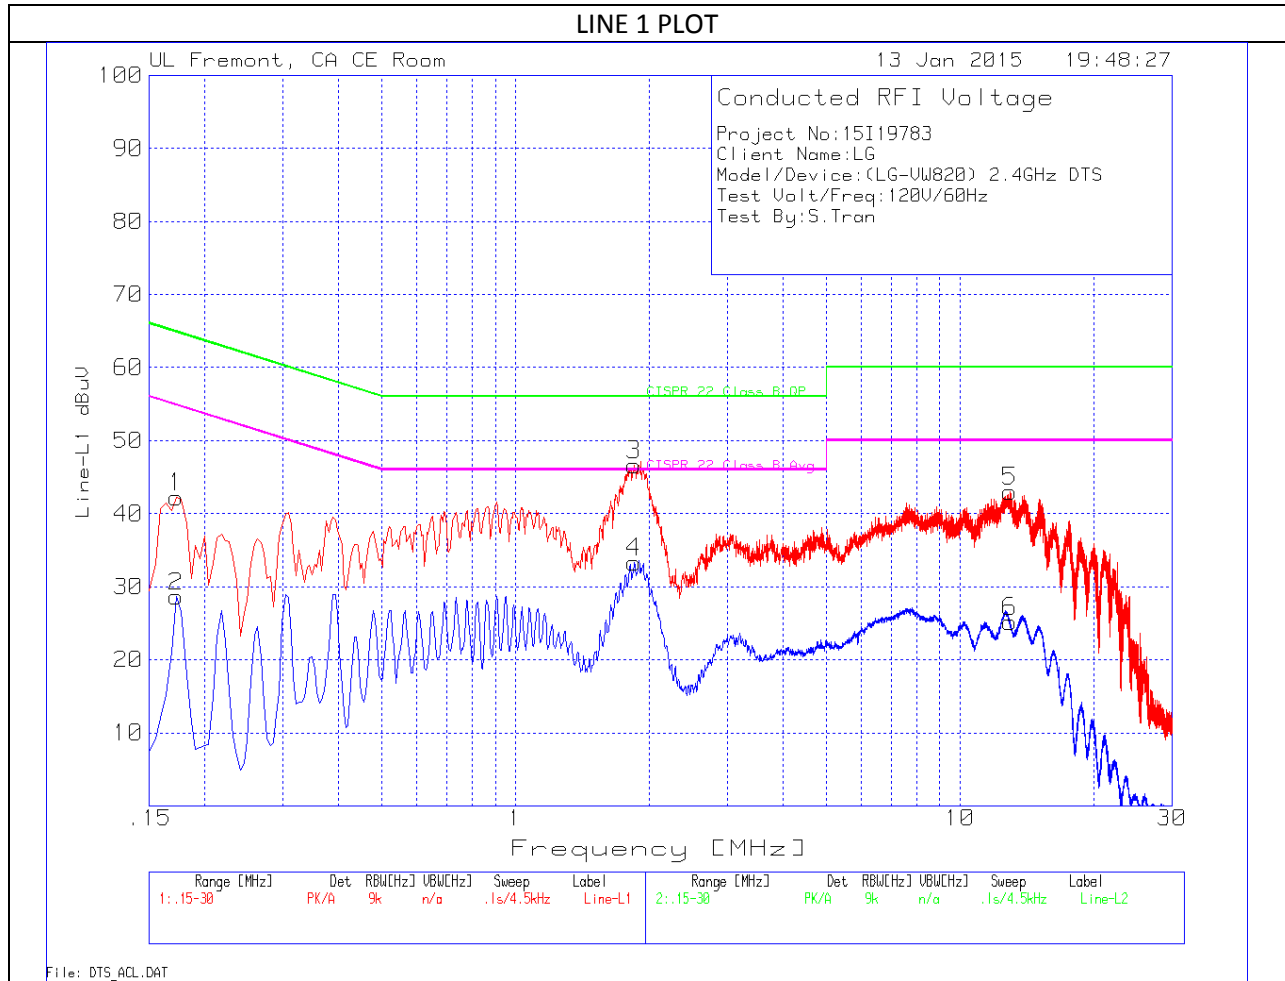


**LINE 1 DATA**

**Trace Markers**

Line-L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1725	41.04	PK	1.2	0	42.24	64.8	-22.56	-	-
2	.1725	27.42	Av	1.2	0	28.62	-	-	54.8	-26.18
3	1.851	46.3	PK	.2	.1	46.6	56	-9.4	-	-
4	1.851	33.01	Av	.2	.1	33.31	-	-	46	-12.69
5	12.9435	42.66	PK	.2	.2	43.06	60	-16.94	-	-
6	12.9435	24.82	Av	.2	.2	25.22	-	-	50	-24.78

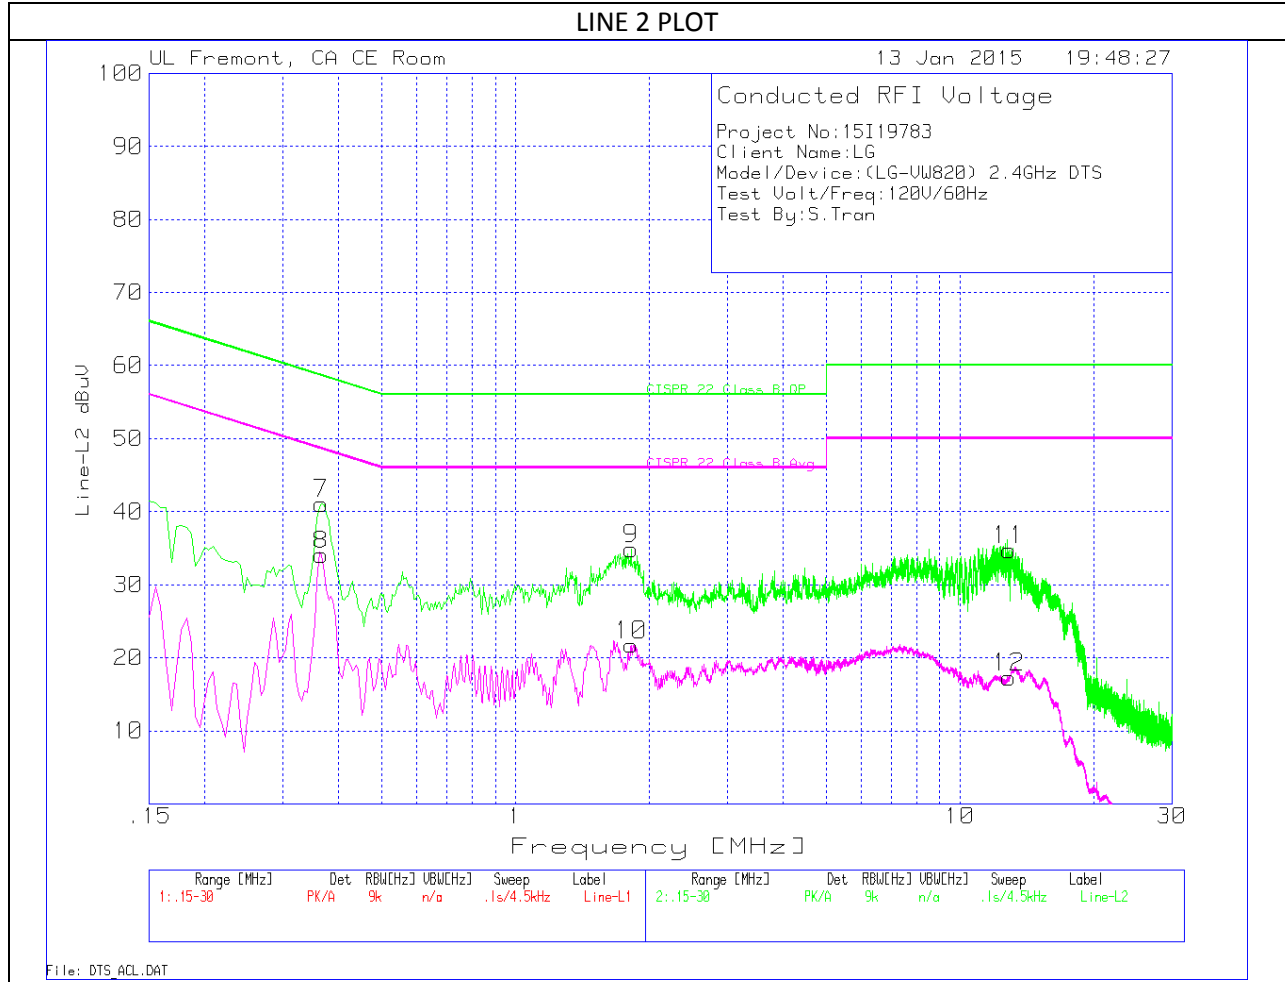

**LINE 2 DATA**

**Trace Markers**

Line-L2 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
7	.366	40.57	PK	.5	0	41.07	58.6	-17.53	-	-
8	.366	33.54	Av	.5	0	34.04	-	-	48.6	-14.56
9	1.8195	34.63	PK	.2	.1	34.93	56	-21.07	-	-
10	1.8195	21.46	Av	.2	.1	21.76	-	-	46	-24.24
11	12.8805	34.21	PK	.3	.2	34.71	60	-25.29	-	-
12	12.8805	16.8	Av	.3	.2	17.3	-	-	50	-32.7