



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

CDMA/LTE PHONE + BLUETOOTH, & 2.4GHz DTS b/g/n

MODEL NUMBER: LG-VW820, VW820, LGVW820

FCC ID: ZNFVW820

REPORT NUMBER: 15I19783-E2

ISSUE DATE: JANUARY 19, 2015

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	01/19/15	Initial Issue	D. Corona

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	<i>8</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>8</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>8</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>9</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>10</i>
6. TEST AND MEASUREMENT EQUIPMENT	12
7. SUMMARY TABLE	13
8. ANTENNA PORT TEST RESULTS	14
8.1. <i>20 dB AND 99% BANDWIDTH</i>	<i>14</i>
8.2. <i>HOPPING FREQUENCY SEPARATION</i>	<i>19</i>
8.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>20</i>
8.4. <i>AVERAGE TIME OF OCCUPANCY.....</i>	<i>22</i>
8.5. <i>OUTPUT POWER.....</i>	<i>25</i>
8.6. <i>AVERAGE POWER.....</i>	<i>28</i>
8.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>29</i>
9. RADIATED TEST RESULTS.....	34
9.1. <i>LIMITS AND PROCEDURE</i>	<i>34</i>
9.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>35</i>
9.2.1. <i>BASIC DATA RATE GFSK MODULATION</i>	<i>35</i>
9.1. <i>TRANSMITTER BELOW 1 GHz.....</i>	<i>55</i>
10. AC POWER LINE CONDUCTED EMISSIONS	57

11. SETUP PHOTOS60

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC
EUT DESCRIPTION: CDMA/LTE PHONE + BLUETOOTH, & 2.4GHz DTS b/g/n
MODEL: LG-VW820, VW820, LGVW820
SERIAL NUMBER: 1MFX8 (Radiated), 1MLB5 (Conducted)
DATE TESTED: January 12-16, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
WISE LAB ENGINEER
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, and FCC CFR 47 Part 15C.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable} \\ &\text{Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a CDMA/LTE PHONE + BLUETOOTH & 2.4GHz DTS b/g/n.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	7.89	6.15
2402 - 2480	Enhanced 8PSK	8.14	6.52

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -2.14dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WR	RA4Y1031433	N/A
Earphone	LG	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
EUT was set in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

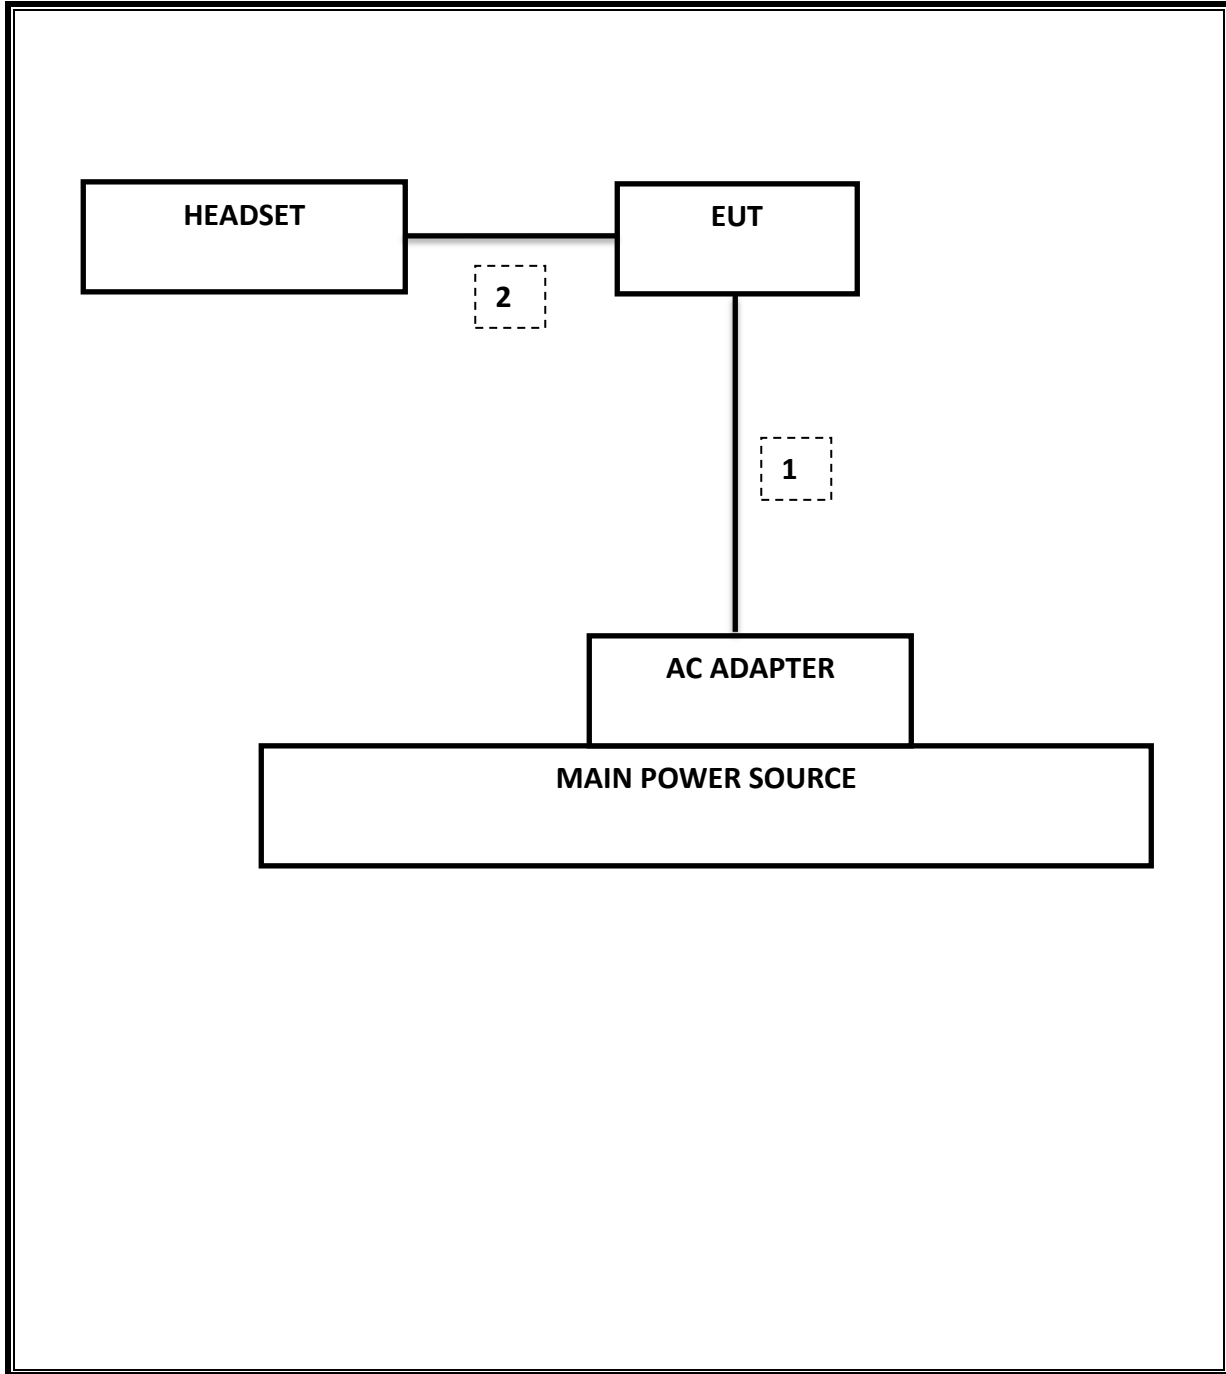

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	11/14/15
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/15
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/15
CBT Bluetooth Tester	R & S	CBT	None	07/12/15
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/15
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.22 MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-31 dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	8.14 dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79 channels
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.288 s
15.207 (a)	RSS-GEN 8.0	AC Power Line conducted emissions	Section 10		Radiated	Pass
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m	Pass		40.31 dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

GFSK 20dB BANDWIDTH PLOTS AND TABLE

BASIC DATA RATE GFSK TEST RESULT TABLE			LOW CHANNEL																						
Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	<table border="1"> <tr> <td>Agilent</td> <td>R T</td> <td>Freq/Channel</td> </tr> <tr> <td>Ch Freq 2.402 GHz</td> <td>Trig Free</td> <td>Center Freq 2.4020000 GHz</td> </tr> <tr> <td>Occupied Bandwidth</td> <td></td> <td>Start Freq 2.40082331 GHz</td> </tr> <tr> <td></td> <td></td> <td>Stop Freq 2.40317669 GHz</td> </tr> <tr> <td></td> <td></td> <td>CF Step 235.338000 kHz</td> </tr> <tr> <td></td> <td></td> <td>Freq Clfset 0.00000000 Hz</td> </tr> <tr> <td></td> <td></td> <td>Signal Track On Cf</td> </tr> </table>		Agilent	R T	Freq/Channel	Ch Freq 2.402 GHz	Trig Free	Center Freq 2.4020000 GHz	Occupied Bandwidth		Start Freq 2.40082331 GHz			Stop Freq 2.40317669 GHz			CF Step 235.338000 kHz			Freq Clfset 0.00000000 Hz			Signal Track On Cf
Agilent	R T	Freq/Channel																							
Ch Freq 2.402 GHz	Trig Free	Center Freq 2.4020000 GHz																							
Occupied Bandwidth		Start Freq 2.40082331 GHz																							
		Stop Freq 2.40317669 GHz																							
		CF Step 235.338000 kHz																							
		Freq Clfset 0.00000000 Hz																							
		Signal Track On Cf																							
Low	2402	0.9578	<table border="1"> <tr> <td>Center 2.402 000 GHz</td> <td>Span 2.353 MHz</td> </tr> <tr> <td>#Res BW 30 kHz</td> <td>VBW 91 kHz #Sweep 100 ms (601 pts)</td> </tr> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr 99.00 %</td> </tr> <tr> <td>903.7931 kHz</td> <td>x dB -20.00 dB</td> </tr> <tr> <td>Transmit Freq Error 393.741 Hz</td> <td></td> </tr> <tr> <td>x dB Bandwidth 957.770 kHz</td> <td></td> </tr> </table>		Center 2.402 000 GHz	Span 2.353 MHz	#Res BW 30 kHz	VBW 91 kHz #Sweep 100 ms (601 pts)	Occupied Bandwidth	Occ BW % Pwr 99.00 %	903.7931 kHz	x dB -20.00 dB	Transmit Freq Error 393.741 Hz		x dB Bandwidth 957.770 kHz										
Center 2.402 000 GHz	Span 2.353 MHz																								
#Res BW 30 kHz	VBW 91 kHz #Sweep 100 ms (601 pts)																								
Occupied Bandwidth	Occ BW % Pwr 99.00 %																								
903.7931 kHz	x dB -20.00 dB																								
Transmit Freq Error 393.741 Hz																									
x dB Bandwidth 957.770 kHz																									
Middle	2441	0.9593																							
High	2480	0.9615																							
Worst		0.9615																							
			Copyright 2000-2011 Agilent Technologies																						
MID CHANNEL			HIGH CHANNEL																						
			<table border="1"> <tr> <td>Agilent</td> <td>R T</td> <td>Freq/Channel</td> </tr> <tr> <td>Ch Freq 2.441 GHz</td> <td>Trig Free</td> <td>Center Freq 2.4410000 GHz</td> </tr> <tr> <td>Occupied Bandwidth</td> <td></td> <td>Start Freq 2.43982331 GHz</td> </tr> <tr> <td></td> <td></td> <td>Stop Freq 2.44217669 GHz</td> </tr> <tr> <td></td> <td></td> <td>CF Step 235.338000 kHz</td> </tr> <tr> <td></td> <td></td> <td>Freq Clfset 0.00000000 Hz</td> </tr> <tr> <td></td> <td></td> <td>Signal Track On Cf</td> </tr> </table>		Agilent	R T	Freq/Channel	Ch Freq 2.441 GHz	Trig Free	Center Freq 2.4410000 GHz	Occupied Bandwidth		Start Freq 2.43982331 GHz			Stop Freq 2.44217669 GHz			CF Step 235.338000 kHz			Freq Clfset 0.00000000 Hz			Signal Track On Cf
Agilent	R T	Freq/Channel																							
Ch Freq 2.441 GHz	Trig Free	Center Freq 2.4410000 GHz																							
Occupied Bandwidth		Start Freq 2.43982331 GHz																							
		Stop Freq 2.44217669 GHz																							
		CF Step 235.338000 kHz																							
		Freq Clfset 0.00000000 Hz																							
		Signal Track On Cf																							
			<table border="1"> <tr> <td>Center 2.441 000 GHz</td> <td>Span 2.353 MHz</td> </tr> <tr> <td>#Res BW 30 kHz</td> <td>VBW 91 kHz #Sweep 100 ms (601 pts)</td> </tr> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr 99.00 %</td> </tr> <tr> <td>898.2446 kHz</td> <td>x dB -20.00 dB</td> </tr> <tr> <td>Transmit Freq Error -555.421 Hz</td> <td></td> </tr> <tr> <td>x dB Bandwidth 959.285 kHz</td> <td></td> </tr> </table>		Center 2.441 000 GHz	Span 2.353 MHz	#Res BW 30 kHz	VBW 91 kHz #Sweep 100 ms (601 pts)	Occupied Bandwidth	Occ BW % Pwr 99.00 %	898.2446 kHz	x dB -20.00 dB	Transmit Freq Error -555.421 Hz		x dB Bandwidth 959.285 kHz										
Center 2.441 000 GHz	Span 2.353 MHz																								
#Res BW 30 kHz	VBW 91 kHz #Sweep 100 ms (601 pts)																								
Occupied Bandwidth	Occ BW % Pwr 99.00 %																								
898.2446 kHz	x dB -20.00 dB																								
Transmit Freq Error -555.421 Hz																									
x dB Bandwidth 959.285 kHz																									
			Copyright 2000-2011 Agilent Technologies																						
			<table border="1"> <tr> <td>Agilent</td> <td>R T</td> <td>Freq/Channel</td> </tr> <tr> <td>Ch Freq 2.48 GHz</td> <td>Trig Free</td> <td>Center Freq 2.4800000 GHz</td> </tr> <tr> <td>Occupied Bandwidth</td> <td></td> <td>Start Freq 2.47882331 GHz</td> </tr> <tr> <td></td> <td></td> <td>Stop Freq 2.48117669 GHz</td> </tr> <tr> <td></td> <td></td> <td>CF Step 235.338000 kHz</td> </tr> <tr> <td></td> <td></td> <td>Freq Clfset 0.00000000 Hz</td> </tr> <tr> <td></td> <td></td> <td>Signal Track On Cf</td> </tr> </table>		Agilent	R T	Freq/Channel	Ch Freq 2.48 GHz	Trig Free	Center Freq 2.4800000 GHz	Occupied Bandwidth		Start Freq 2.47882331 GHz			Stop Freq 2.48117669 GHz			CF Step 235.338000 kHz			Freq Clfset 0.00000000 Hz			Signal Track On Cf
Agilent	R T	Freq/Channel																							
Ch Freq 2.48 GHz	Trig Free	Center Freq 2.4800000 GHz																							
Occupied Bandwidth		Start Freq 2.47882331 GHz																							
		Stop Freq 2.48117669 GHz																							
		CF Step 235.338000 kHz																							
		Freq Clfset 0.00000000 Hz																							
		Signal Track On Cf																							
			<table border="1"> <tr> <td>Center 2.480 000 GHz</td> <td>Span 2.353 MHz</td> </tr> <tr> <td>#Res BW 30 kHz</td> <td>VBW 91 kHz #Sweep 100 ms (601 pts)</td> </tr> <tr> <td>Occupied Bandwidth</td> <td>Occ BW % Pwr 99.00 %</td> </tr> <tr> <td>900.7865 kHz</td> <td>x dB -20.00 dB</td> </tr> <tr> <td>Transmit Freq Error 1.517 kHz</td> <td></td> </tr> <tr> <td>x dB Bandwidth 961.487 kHz</td> <td></td> </tr> </table>		Center 2.480 000 GHz	Span 2.353 MHz	#Res BW 30 kHz	VBW 91 kHz #Sweep 100 ms (601 pts)	Occupied Bandwidth	Occ BW % Pwr 99.00 %	900.7865 kHz	x dB -20.00 dB	Transmit Freq Error 1.517 kHz		x dB Bandwidth 961.487 kHz										
Center 2.480 000 GHz	Span 2.353 MHz																								
#Res BW 30 kHz	VBW 91 kHz #Sweep 100 ms (601 pts)																								
Occupied Bandwidth	Occ BW % Pwr 99.00 %																								
900.7865 kHz	x dB -20.00 dB																								
Transmit Freq Error 1.517 kHz																									
x dB Bandwidth 961.487 kHz																									
			Copyright 2000-2011 Agilent Technologies																						

NOTE: --

GFSK 99% BANDWIDTH PLOTS AND TABLE

BASIC DATA RATE GFSK TEST RESULT TABLE			LOW CHANNEL	
Channel	Frequency (MHz)	99% Bandwidth (MHz)		
Low	2402	0.8939		
Middle	2441	0.8824		
High	2480	0.9909		
Worst		0.9909		
			MID CHANNEL	
			HIGH CHANNEL	
NOTE: --				

8PSK 20dB BANDWIDTH PLOTS AND TABLE

ENHANCED DATA RATE 8PSK TEST RESULT TABLE			LOW CHANNEL	
Channel	Frequency (MHz)	20 dB Bandwidth (MHz)		
Low	2402	1.265		
Middle	2441	1.265		
High	2480	1.267		
Worst		1.267		
			MID CHANNEL	
			HIGH CHANNEL	

	Agilent	R	T	Freq/Channel
Ch Freq 2.402 GHz Trig Free Occupied Bandwidth			Center Freq 2.4020000 GHz Start Freq 2.40082331 GHz Stop Freq 2.40317669 GHz CF Step 235.338000 kHz Freq Clfset 0.00000000 Hz	
Ref 21 dBm #Atten 20 dB #Peak Log 10 dB/Offst 11 dB			Center 2.402 000 GHz Span 2.353 MHz #Res BW 30 kHz VBW 91 kHz #Sweep 100 ms (601 pts)	
Occupied Bandwidth 1.1619 MHz Transmit Freq Error -488.692 Hz x dB Bandwidth 1.265 MHz	Occ BW % Pwr 99.00 % x dB -20.00 dB	Signal Track On Cf		
Copyright 2000-2011 Agilent Technologies				

	Agilent	R	T	Freq/Channel
Ch Freq 2.441 GHz Trig Free Occupied Bandwidth			Center Freq 2.4410000 GHz Start Freq 2.43982331 GHz Stop Freq 2.44217669 GHz CF Step 235.338000 kHz Freq Clfset 0.00000000 Hz	
Ref 21 dBm #Atten 20 dB #Peak Log 10 dB/Offst 11 dB			Center 2.441 000 GHz Span 2.353 MHz #Res BW 30 kHz VBW 91 kHz #Sweep 100 ms (601 pts)	
Occupied Bandwidth 1.1623 MHz Transmit Freq Error -551.907 Hz x dB Bandwidth 1.265 MHz	Occ BW % Pwr 99.00 % x dB -20.00 dB	Signal Track On Cf		
Copyright 2000-2011 Agilent Technologies				

	Agilent	R	T	Freq/Channel
Ch Freq 2.48 GHz Trig Free Occupied Bandwidth			Center Freq 2.4800000 GHz Start Freq 2.47882331 GHz Stop Freq 2.48117669 GHz CF Step 235.338000 kHz Freq Clfset 0.00000000 Hz	
Ref 21 dBm #Atten 20 dB #Peak Log 10 dB/Offst 11 dB			Center 2.480 000 GHz Span 2.353 MHz #Res BW 30 kHz VBW 91 kHz #Sweep 100 ms (601 pts)	
Occupied Bandwidth 1.1633 MHz Transmit Freq Error 701.371 Hz x dB Bandwidth 1.267 MHz	Occ BW % Pwr 99.00 % x dB -20.00 dB	Signal Track On Cf		
Copyright 2000-2011 Agilent Technologies				

NOTE: --

8PSK 99% BANDWIDTH PLOTS AND TABLE

ENHANCED DATA RATE 8PSK TEST RESULT TABLE			LOW CHANNEL															
				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2">Freq/Channel</td></tr> <tr><td>Center Freq</td><td>2.40200000 GHz</td></tr> <tr><td>Start Freq</td><td>2.40050000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.40350000 GHz</td></tr> <tr><td>CF Step</td><td>300.000000 kHz</td></tr> <tr><td>Freq Clfset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> </table>	Freq/Channel		Center Freq	2.40200000 GHz	Start Freq	2.40050000 GHz	Stop Freq	2.40350000 GHz	CF Step	300.000000 kHz	Freq Clfset	0.00000000 Hz	Signal Track	On
Freq/Channel																		
Center Freq	2.40200000 GHz																	
Start Freq	2.40050000 GHz																	
Stop Freq	2.40350000 GHz																	
CF Step	300.000000 kHz																	
Freq Clfset	0.00000000 Hz																	
Signal Track	On																	
Channel	Frequency (MHz)	99% Bandwidth (MHz)																
Low	2402	1.302																
Middle	2441	1.319																
High	2480	1.296																
Worst		1.319																
			MID CHANNEL															
				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2">Freq/Channel</td></tr> <tr><td>Center Freq</td><td>2.44100000 GHz</td></tr> <tr><td>Start Freq</td><td>2.43950000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.44250000 GHz</td></tr> <tr><td>CF Step</td><td>300.000000 kHz</td></tr> <tr><td>Freq Clfset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> </table>	Freq/Channel		Center Freq	2.44100000 GHz	Start Freq	2.43950000 GHz	Stop Freq	2.44250000 GHz	CF Step	300.000000 kHz	Freq Clfset	0.00000000 Hz	Signal Track	On
Freq/Channel																		
Center Freq	2.44100000 GHz																	
Start Freq	2.43950000 GHz																	
Stop Freq	2.44250000 GHz																	
CF Step	300.000000 kHz																	
Freq Clfset	0.00000000 Hz																	
Signal Track	On																	
Channel	Frequency (MHz)	99% Bandwidth (MHz)																
Low	2402	1.302																
Middle	2441	1.319																
High	2480	1.296																
Worst		1.319																
			HIGH CHANNEL															
				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2">Freq/Channel</td></tr> <tr><td>Center Freq</td><td>2.48000000 GHz</td></tr> <tr><td>Start Freq</td><td>2.47850000 GHz</td></tr> <tr><td>Stop Freq</td><td>2.48150000 GHz</td></tr> <tr><td>CF Step</td><td>300.000000 kHz</td></tr> <tr><td>Freq Clfset</td><td>0.00000000 Hz</td></tr> <tr><td>Signal Track</td><td>On</td></tr> </table>	Freq/Channel		Center Freq	2.48000000 GHz	Start Freq	2.47850000 GHz	Stop Freq	2.48150000 GHz	CF Step	300.000000 kHz	Freq Clfset	0.00000000 Hz	Signal Track	On
Freq/Channel																		
Center Freq	2.48000000 GHz																	
Start Freq	2.47850000 GHz																	
Stop Freq	2.48150000 GHz																	
CF Step	300.000000 kHz																	
Freq Clfset	0.00000000 Hz																	
Signal Track	On																	
Channel	Frequency (MHz)	99% Bandwidth (MHz)																
Low	2402	1.302																
Middle	2441	1.319																
High	2480	1.296																
Worst		1.319																

NOTE: --

8.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

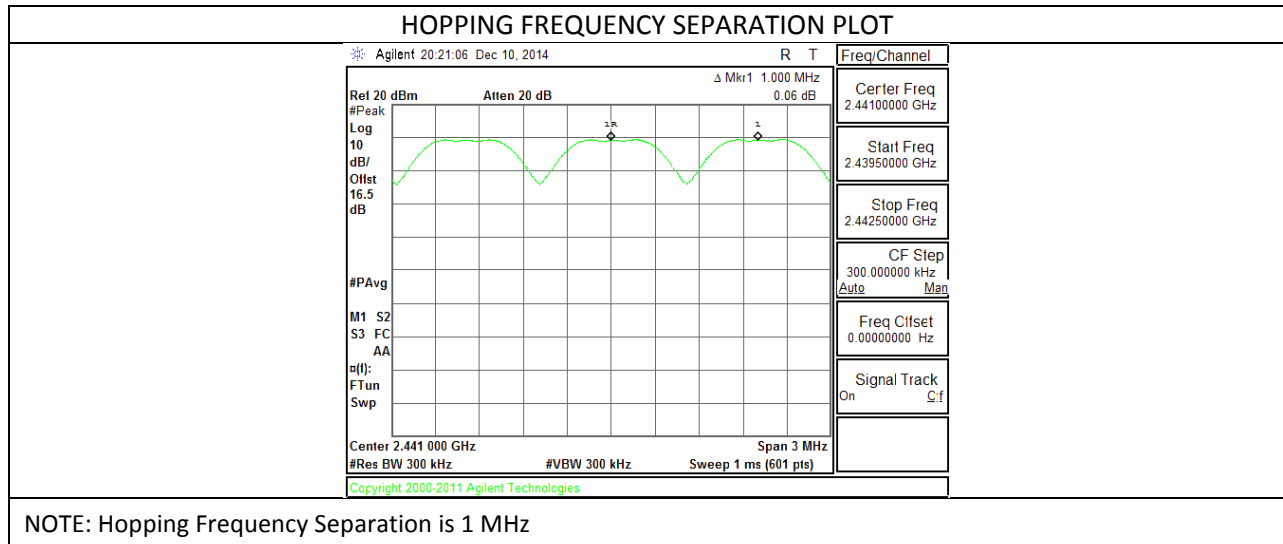

8.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS PLOTS

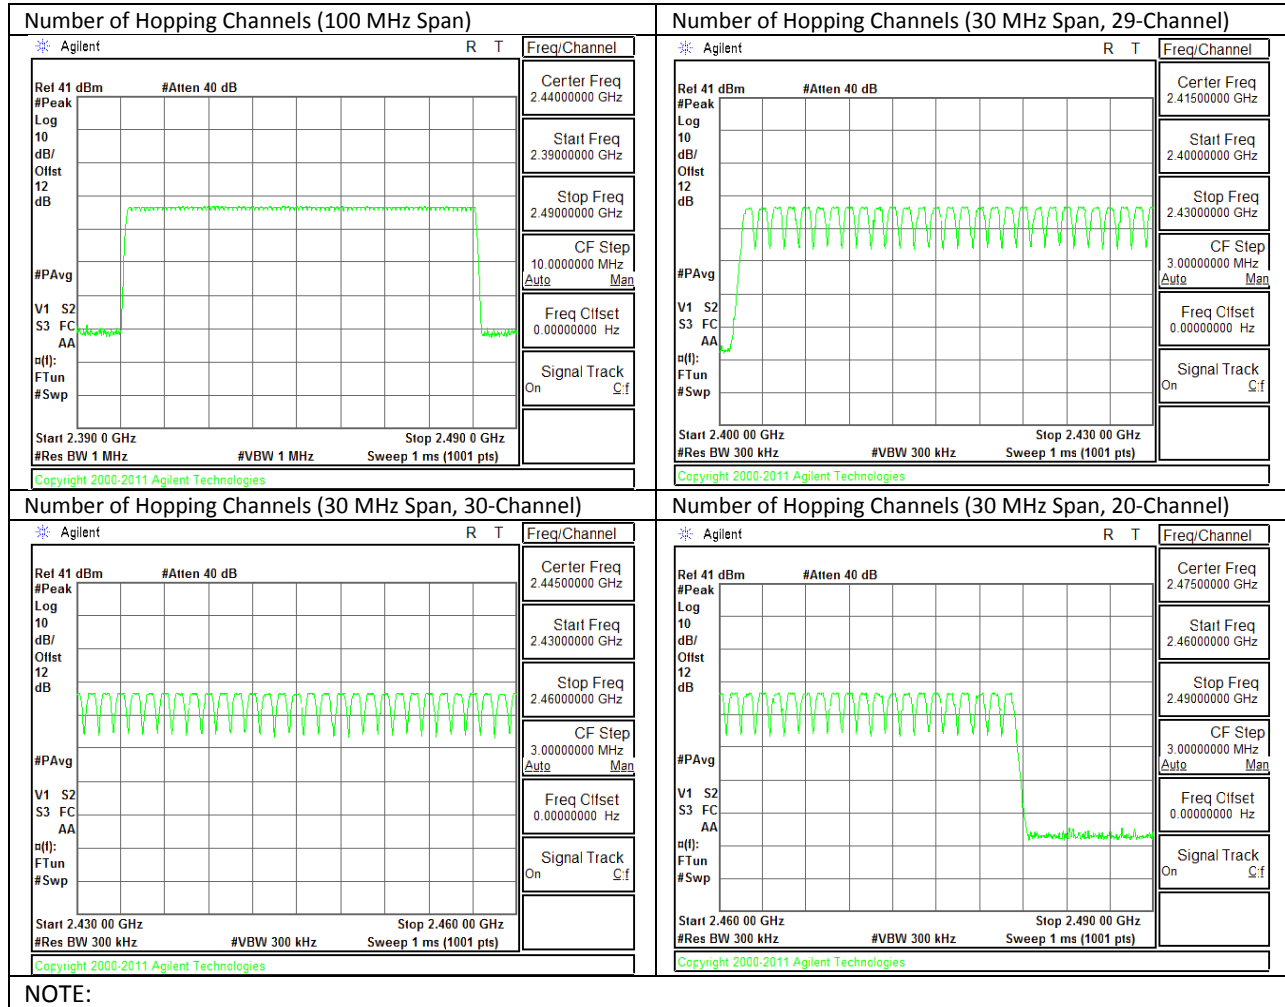

8.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to 10 * (# of pulses in 3.16 s) * pulse width.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to 10 * (# of pulses in 0.8 s) * pulse width.

RESULTS

AVERAGE TIME OF OCCUPANCY						
DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)	
GFSK Normal Mode						
DH1	0.375	32.0	0.120	0.4	-0.280	
DH3	1.635	15.0	0.245	0.4	-0.155	
DH5	2.880	10.0	0.288	0.4	-0.112	
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)	
GFSK AFH Mode						
DH1	0.000	0.0	0.000	0.4	-0.400	
DH3	0.375	8.0	0.030	0.4	-0.370	
DH5	1.635	3.8	0.061	0.4	-0.339	
NOTE: --						

PULSE WIDTH AND NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD PLOTS

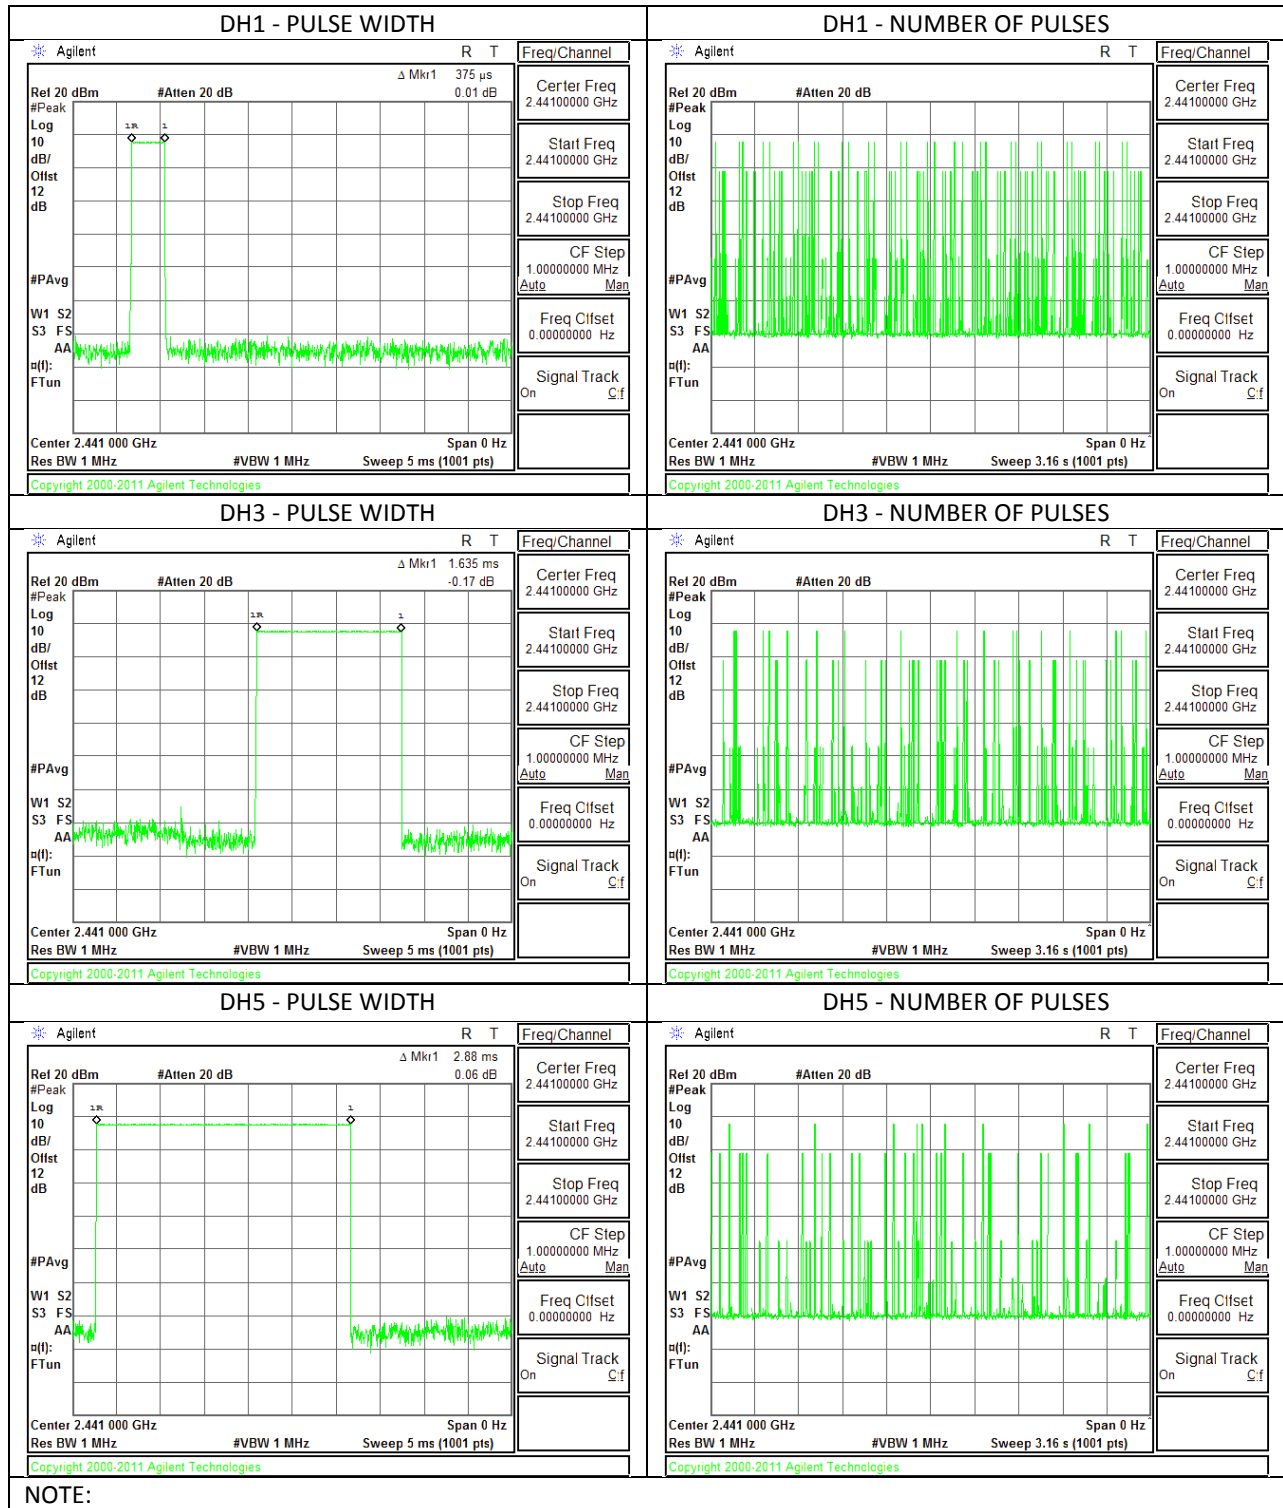

NOTE:

8.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)


The maximum antenna gain is less than 6dBi, therefore the limit is 21 dBm.

TEST PROCEDURE


DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

GFSK OUTPUT POWER PLOTS AND TABLE

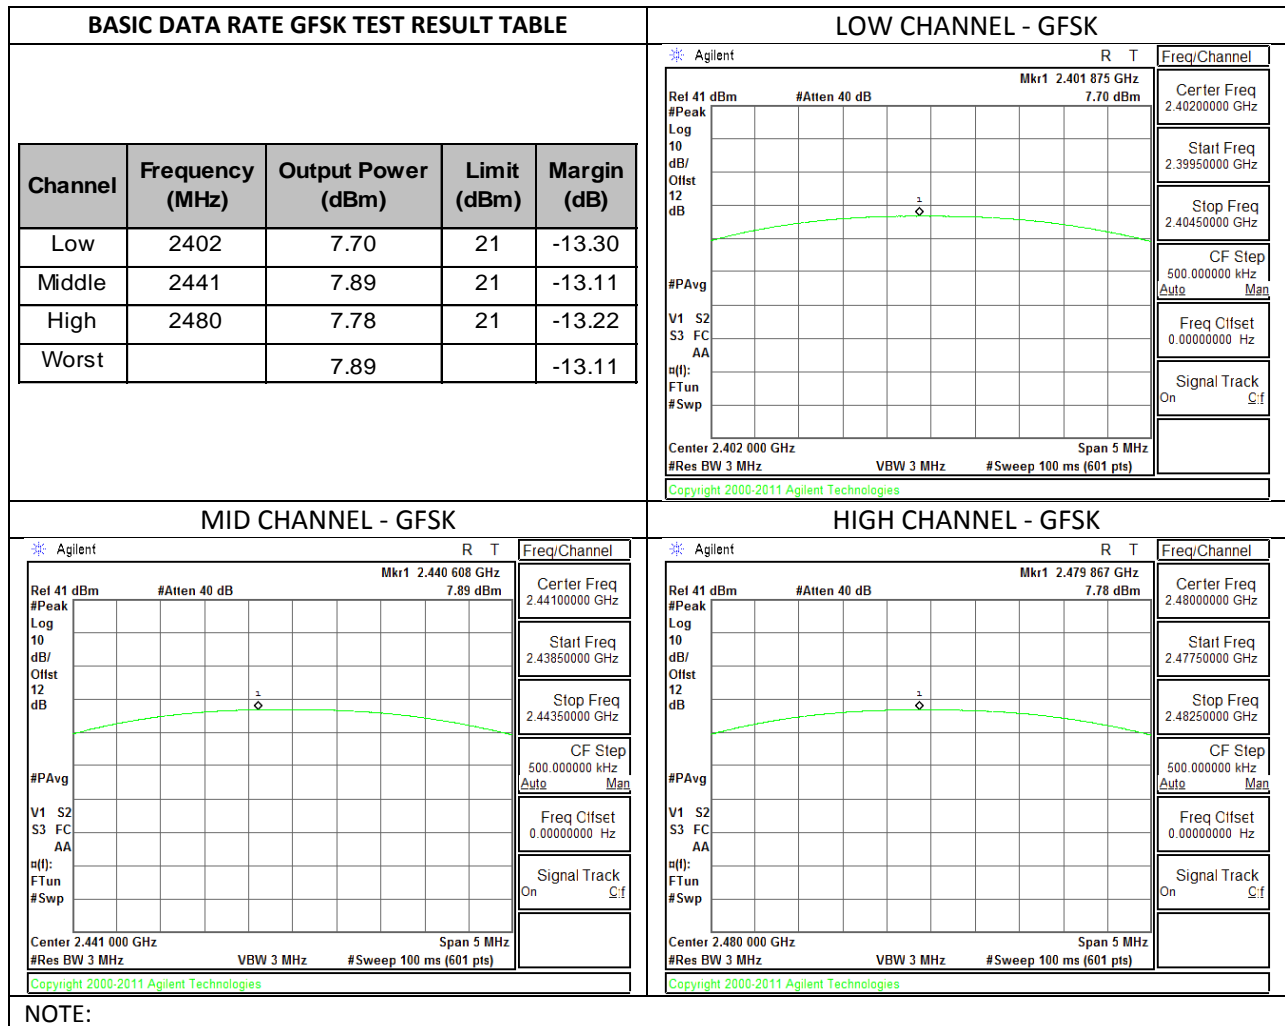

8DPSK OUTPUT POWER PLOTS AND TABLE

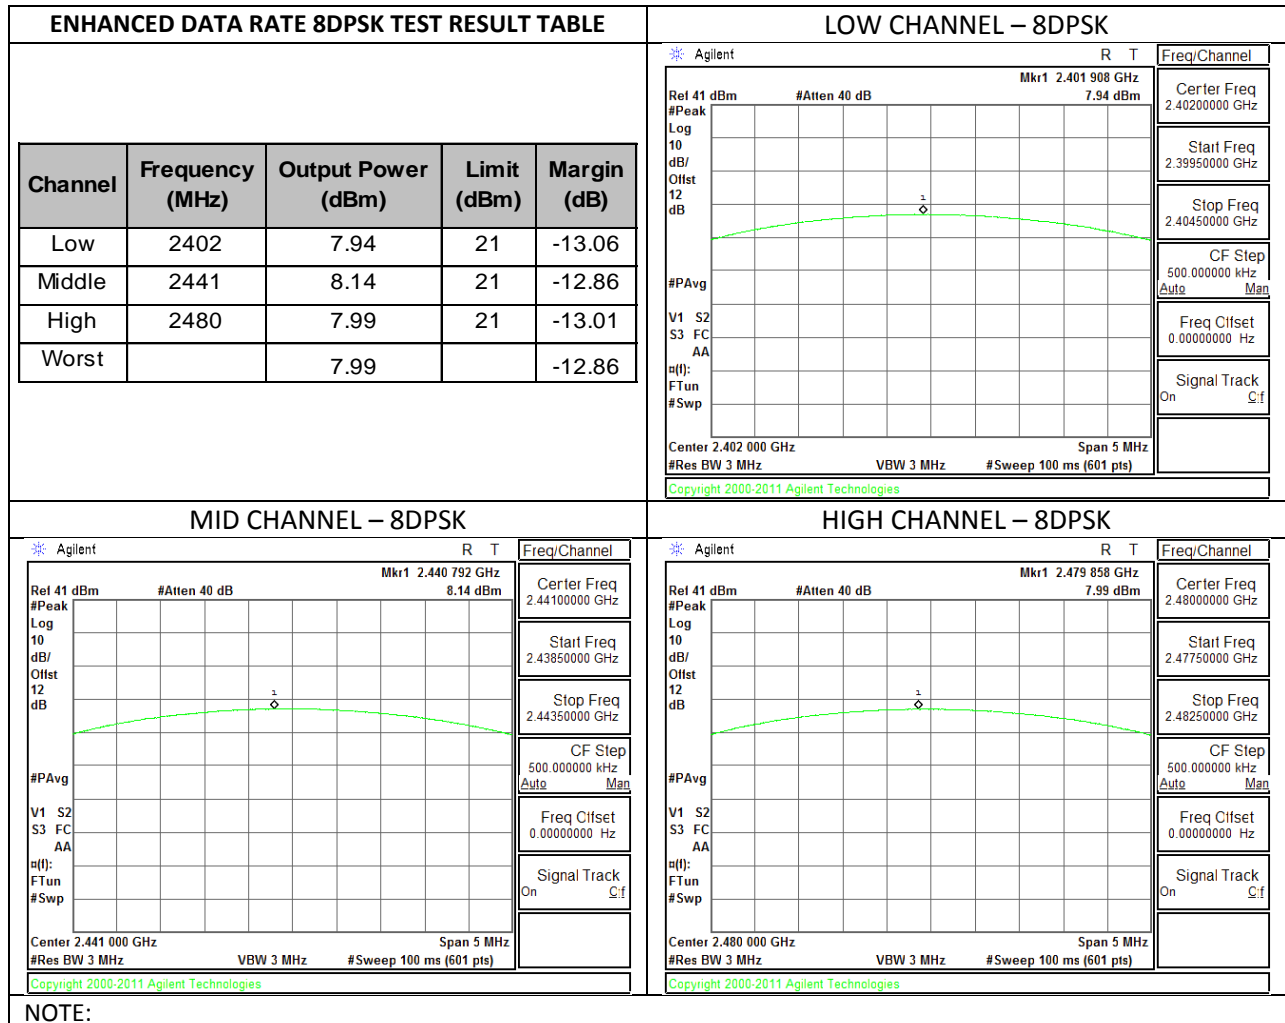

8.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

BASIC DATA RATE GFSK		
Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	7.20
Middle	2441	7.50
High	2480	7.50
Worst		7.50

ENHANCED DATA RATE 8DPSK		
Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	4.60
Middle	2441	4.90
High	2480	4.90
Worst		4.90

NOTE: --

8.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

RESULTS

BASIC DATA RATE GFSK MODULATION NON-HOPPING MODE


GFSK - BANDEDGE AND SPURIOUS EMISSIONS PLOTS

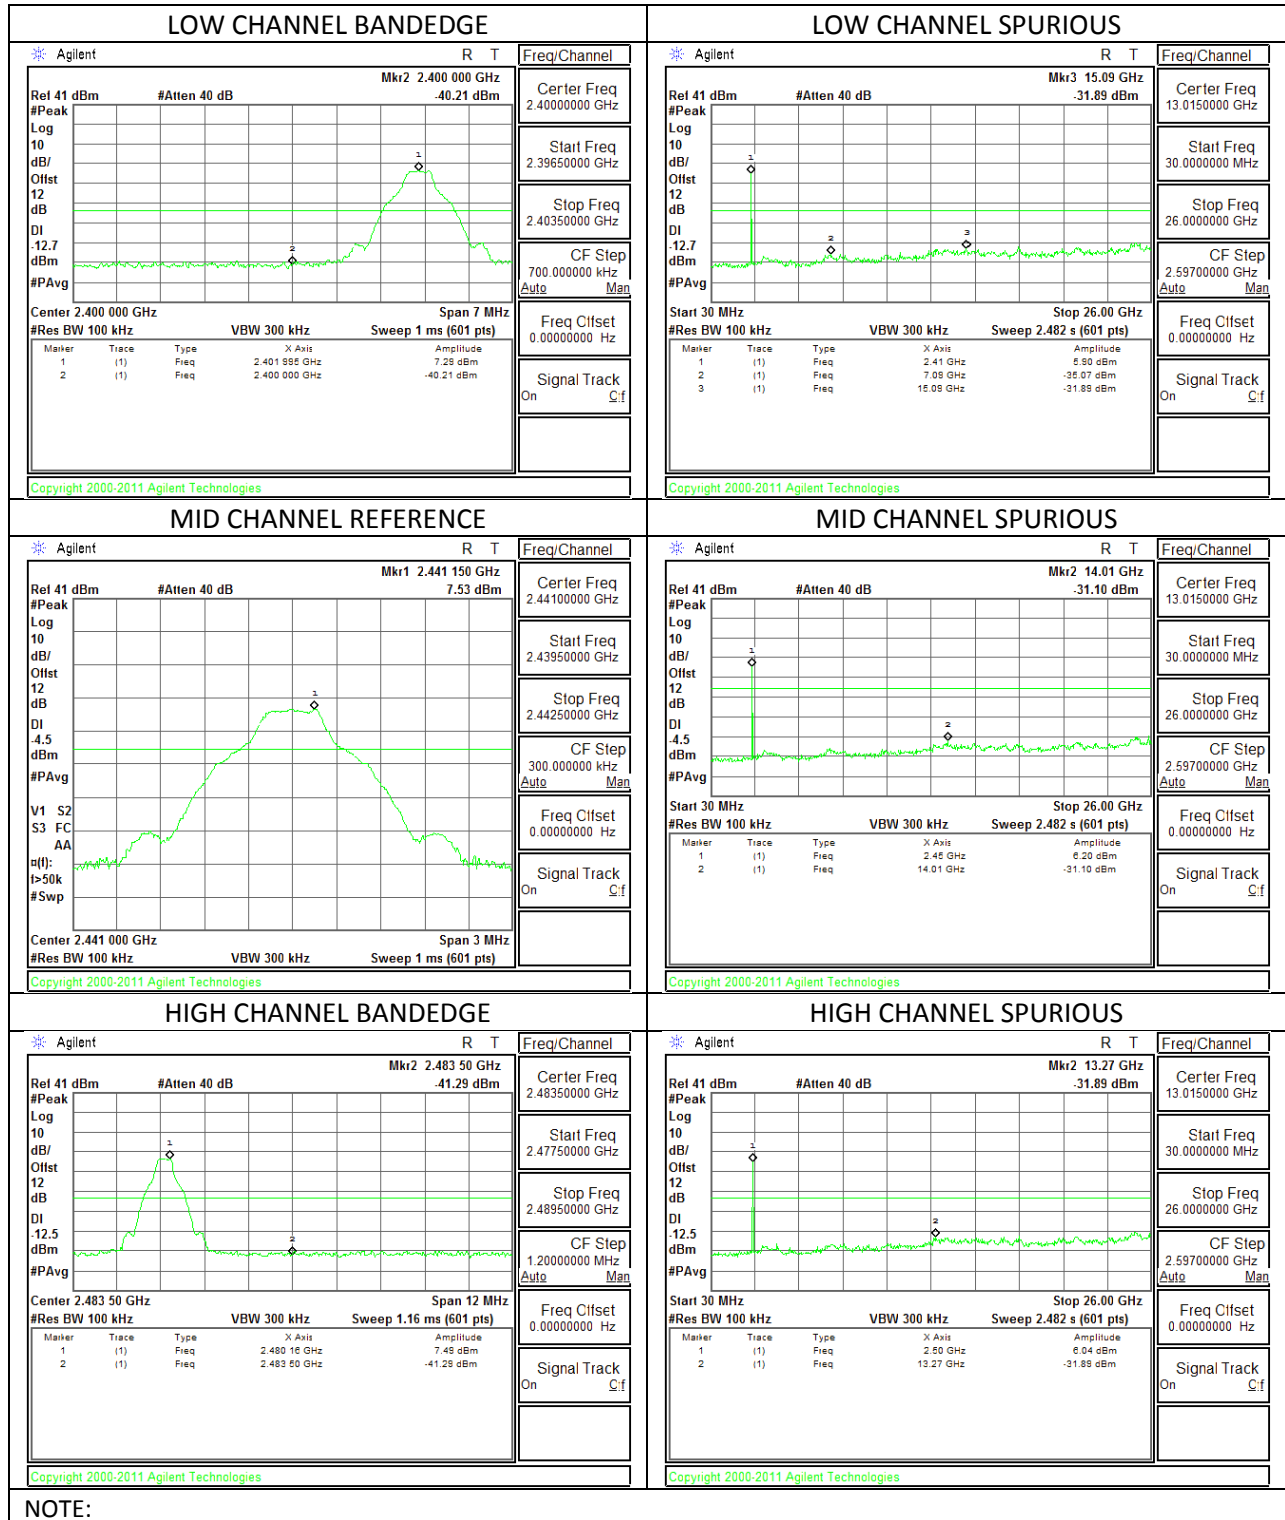

NOTE:


BASIC DATA RATE WITH GFSK HOPPING MODE

GFSK – BANDEDGE PLOTS

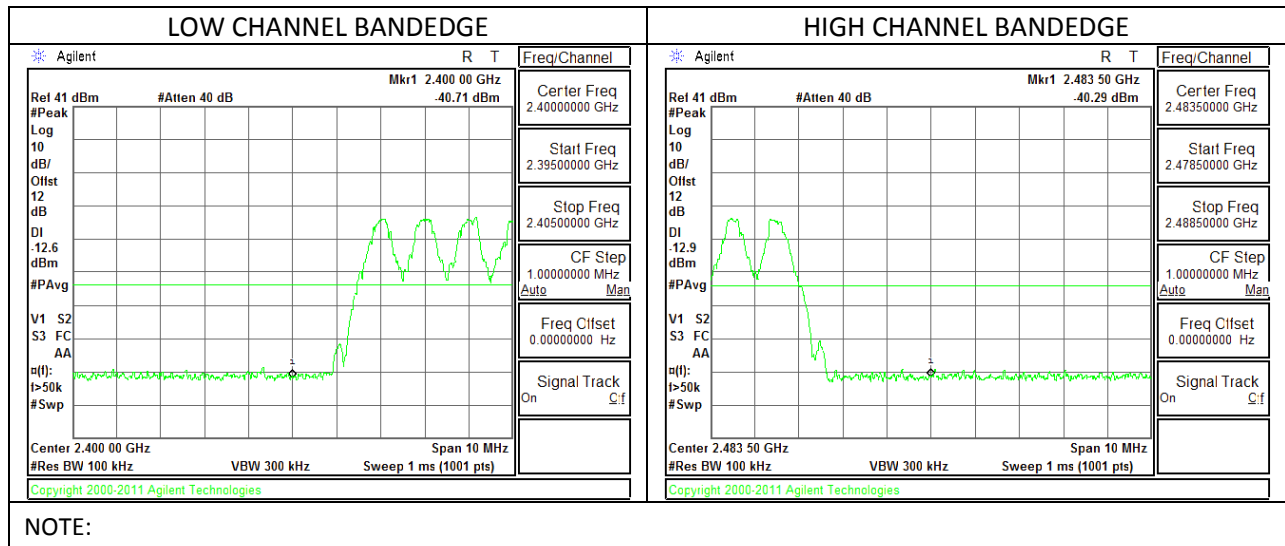

ENHANCED DATA RATE 8DPSK MODULATION NON-HOPPING MODE


8DPSK - BANDEDGE AND SPURIOUS EMISSIONS PLOTS

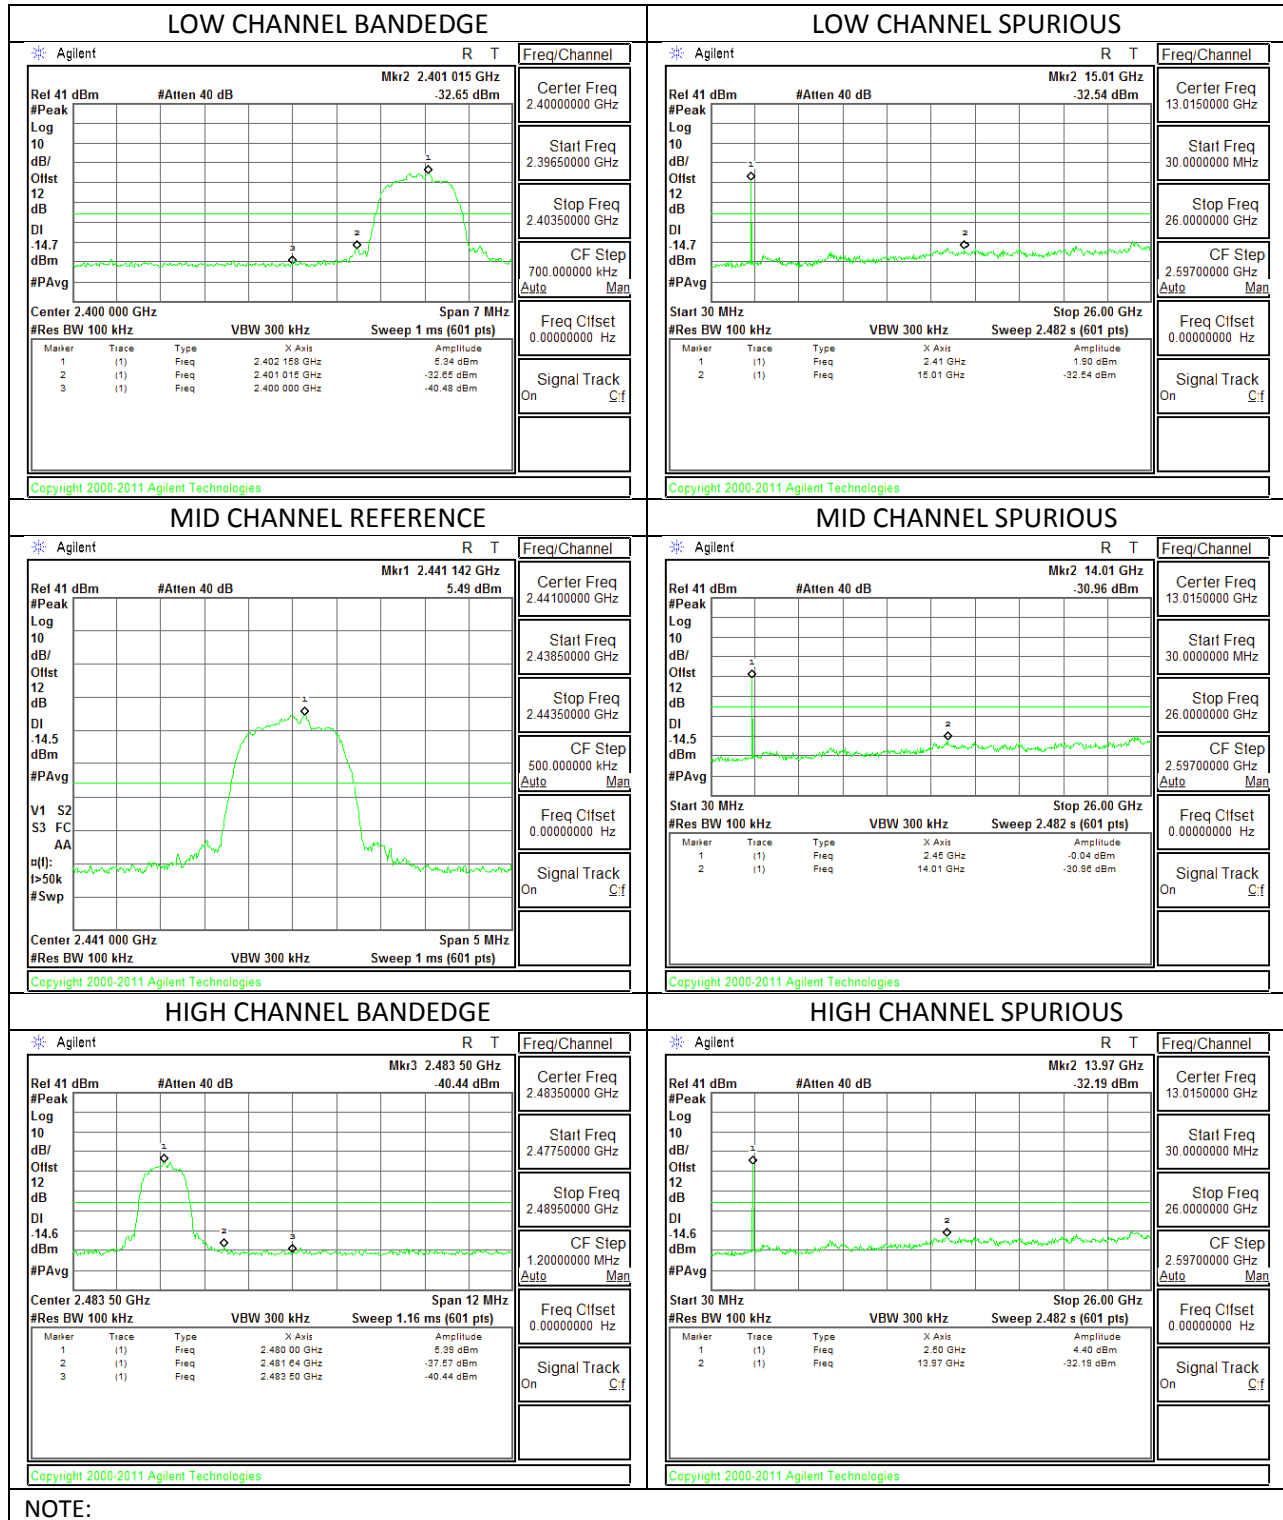

NOTE:

ENHANCED DATA RATE WITH 8DPSK HOPPING MODE

8DPSK – BANDEDGE PLOTS

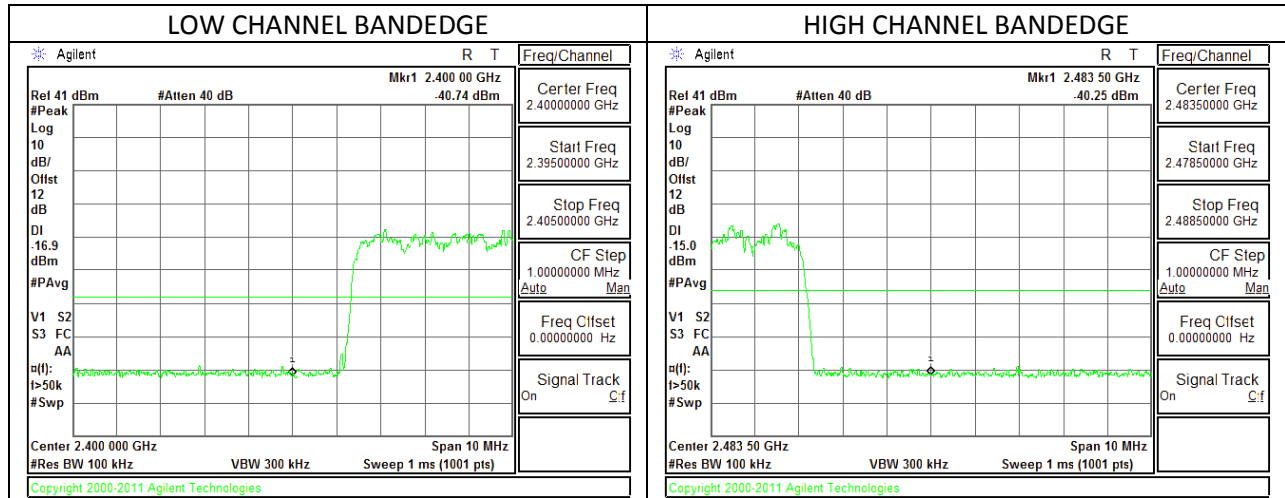

NOTE:

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.
 $GFSK = 1/T = 1 / 0.0038S = 260Hz.$

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


RESULTS

9.2. TRANSMITTER ABOVE 1 GHz

9.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

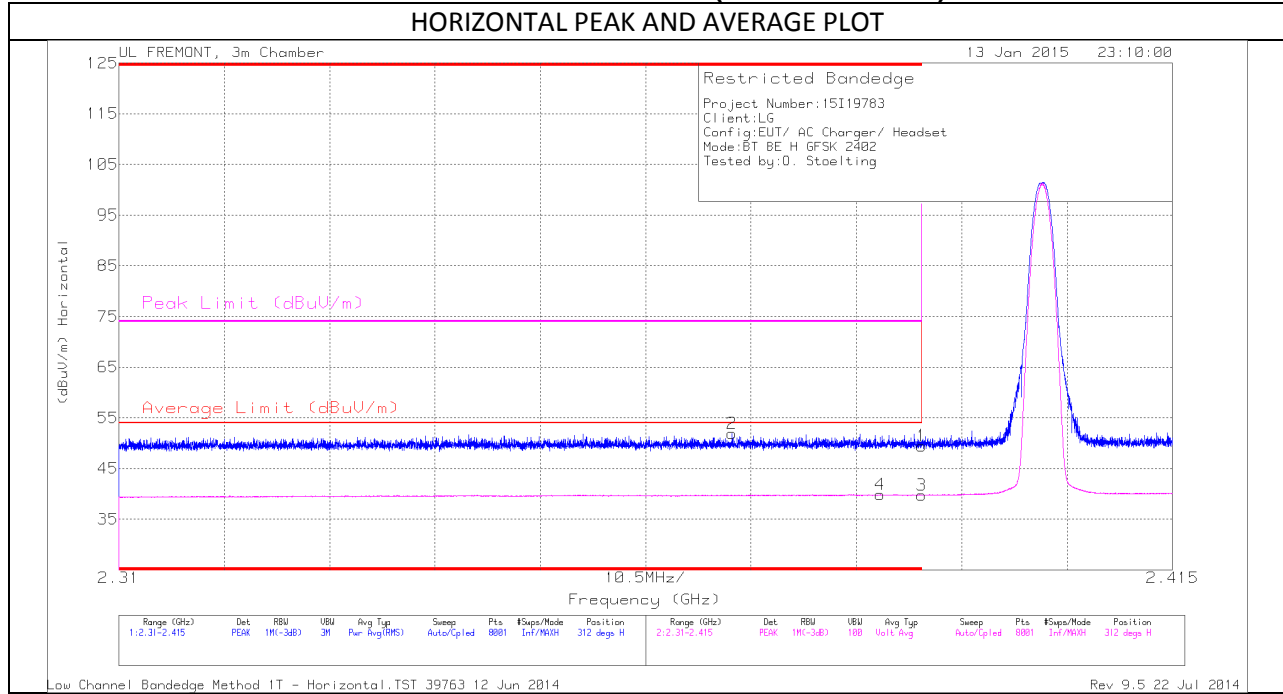

HORIZONTAL VERTICAL PEAK AND AVERAGE DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.371	42.89	PK	32	-23	0	51.89	-	-	74	-22.11	312	398	H
4	* 2.386	30.87	VB1T	32.1	-23.1	0	39.87	54	-14.13	-	-	312	398	H
1	* 2.39	40.48	PK	32.1	-23.1	0	49.48	-	-	74	-24.52	312	398	H
3	* 2.39	30.73	VB1T	32.1	-23.1	0	39.73	54	-14.27	-	-	312	398	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (LOW CHANNEL)

VERTICAL PEAK AND AVERAGE PLOT

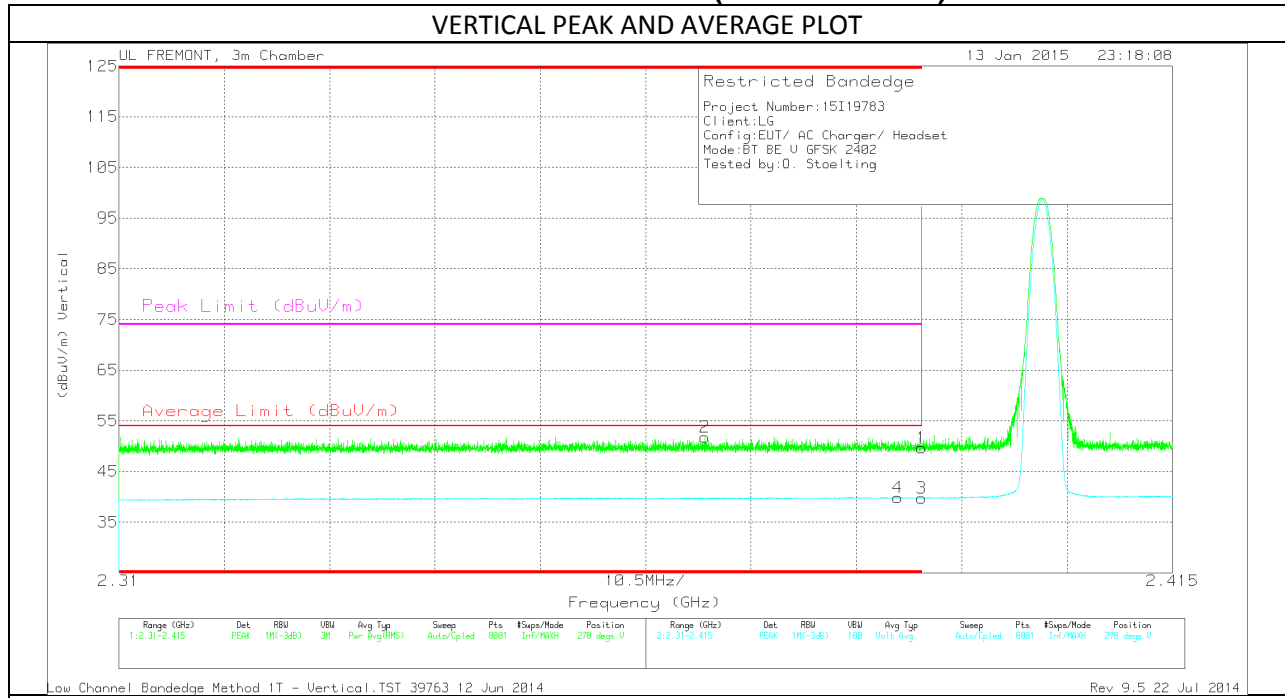

VERTICAL PEAK AND AVERAGE DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.368	42.93	PK	32	-23.1	0	51.83	-	-	74	-22.17	278	400	V
4	* 2.388	30.89	VB1T	32.1	-23.1	0	39.89	54	-14.11	-	-	278	400	V
1	* 2.39	40.68	PK	32.1	-23.1	0	49.68	-	-	74	-24.32	278	400	V
3	* 2.39	30.75	VB1T	32.1	-23.1	0	39.75	54	-14.25	-	-	278	400	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

AUTHORIZED BANDEGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

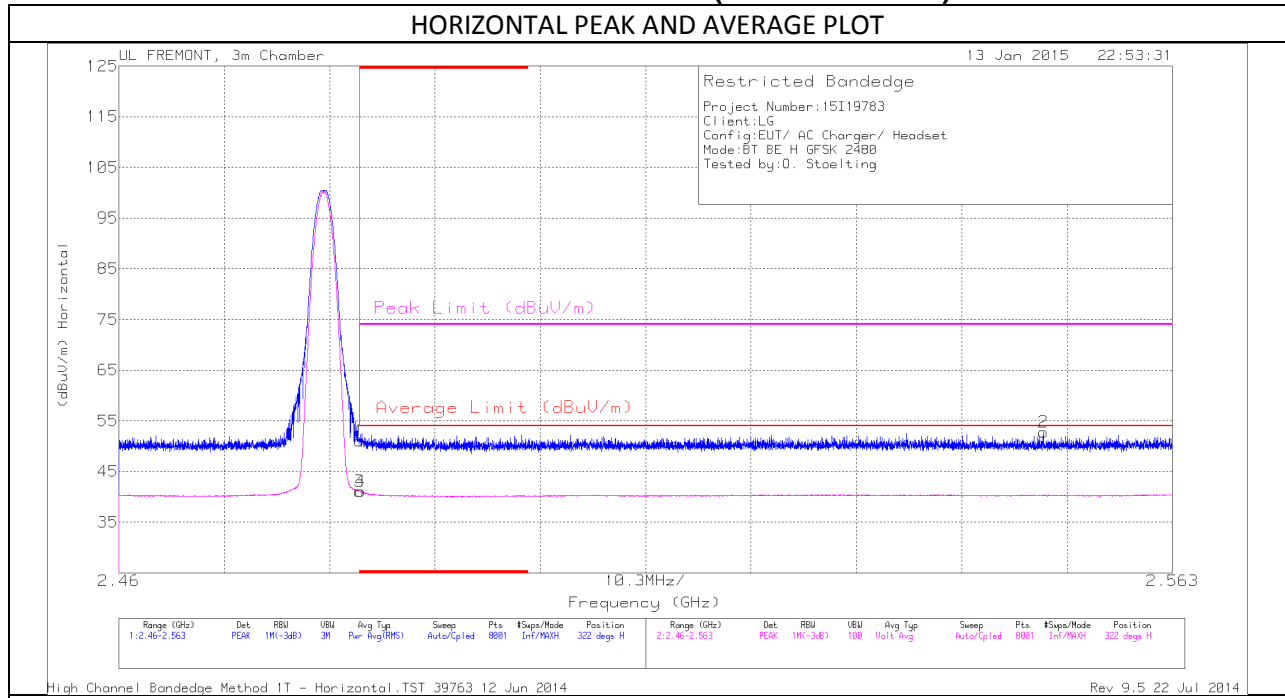

HORIZONTAL PEAK AND AVERAGE DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.49	PK	32.3	-22.8	0	50.99	-	-	74	-23.01	322	300	H
3	* 2.484	31.58	VB1T	32.3	-22.8	0	41.08	54	-12.92	-	-	322	300	H
4	* 2.484	31.64	VB1T	32.3	-22.8	0	41.14	54	-12.86	-	-	322	300	H
2	2.55	43.09	PK	32.4	-22.7	0	52.79	-	-	74	-21.21	322	300	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

AUTHORIZED BANDEGE (HIGH CHANNEL)

VERTICAL PEAK AND AVERAGE PLOT

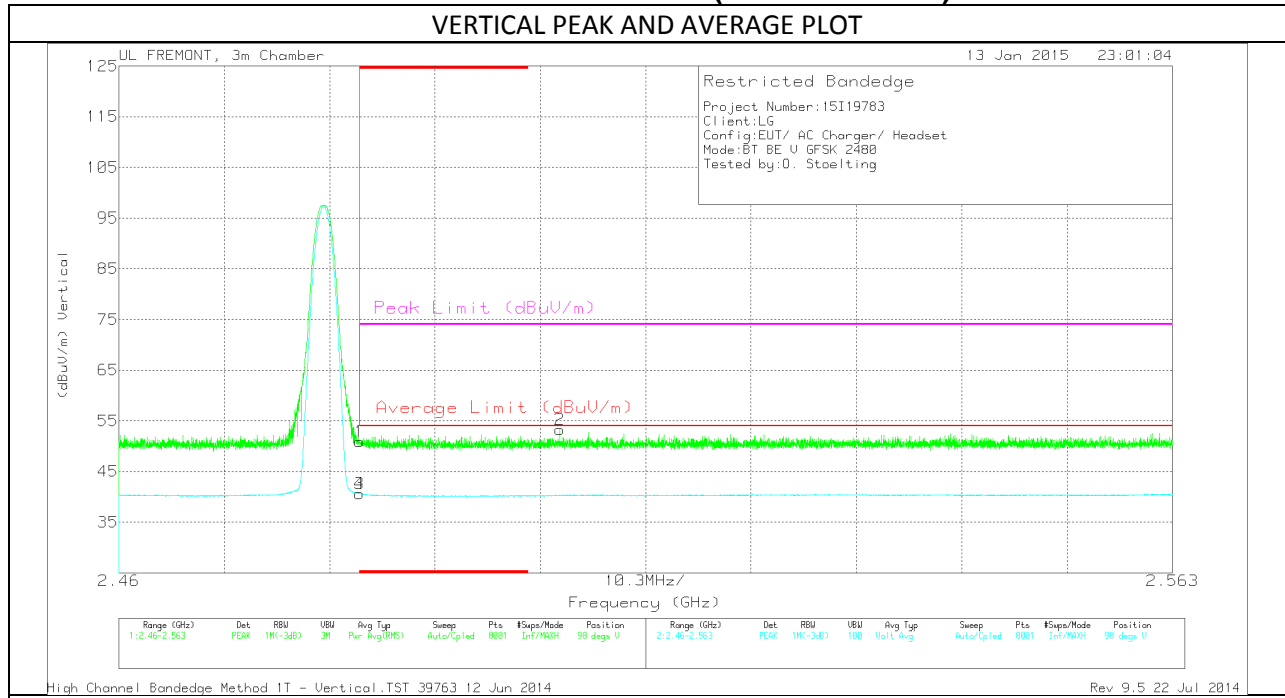

VERTICAL PEAK AND AVERAGE DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.38	PK	32.3	-22.8	0	50.88	-	-	74	-23.12	98	386	V
3	* 2.484	31.15	VB1T	32.3	-22.8	0	40.65	54	-13.35	-	-	98	386	V
4	* 2.484	31.16	VB1T	32.3	-22.8	0	40.66	54	-13.34	-	-	98	386	V
2	2.503	43.79	PK	32.3	-22.8	0	53.29	-	-	74	-20.71	98	386	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

SPURIOUS (LOW CHANNEL)

HORIZONTAL PLOT

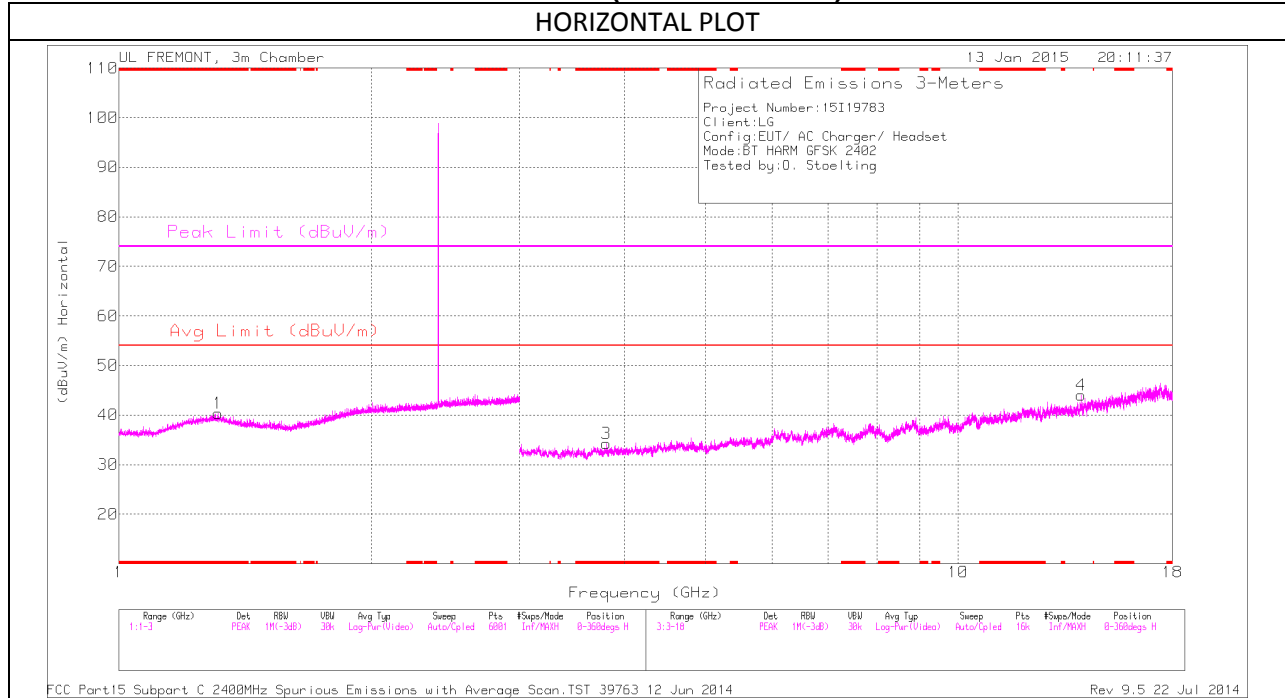

VERTICAL PLOT

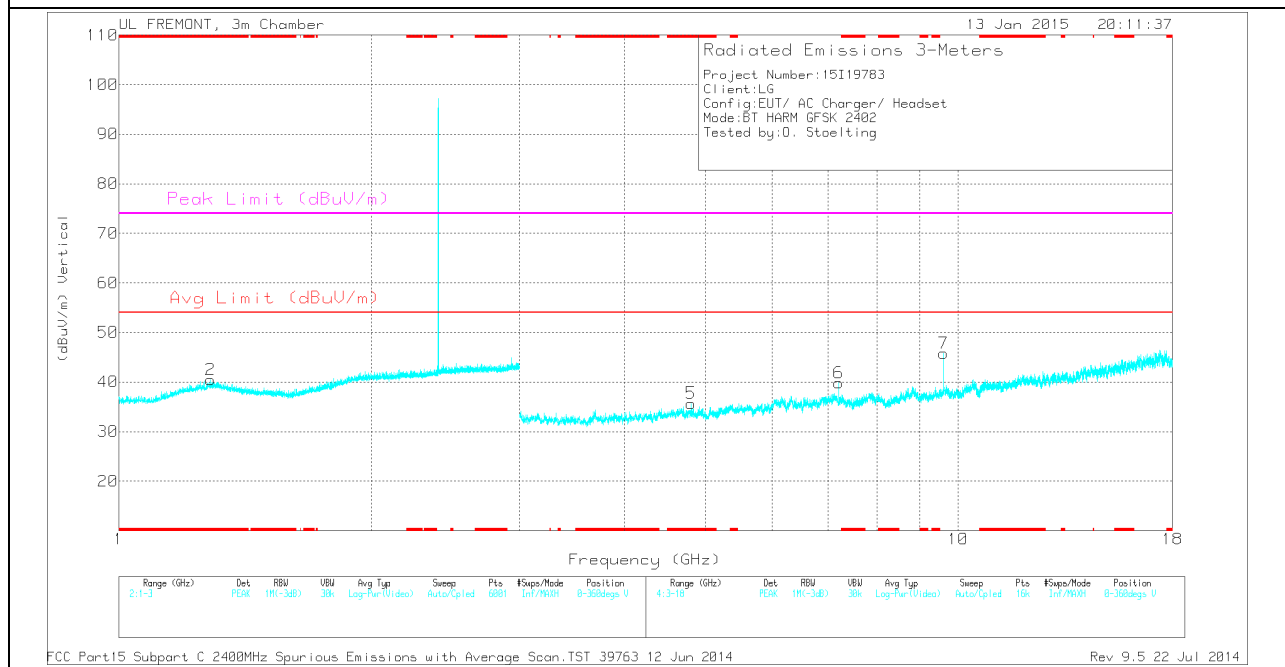

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.286	34.12	PK	30.1	-23.7	0	40.52	-	-	74	-33.48	0-360	100	V
1	* 1.313	34.07	PK	30.1	-23.8	0	40.37	-	-	74	-33.63	0-360	100	H
3	* 3.809	32.23	PK	33.2	-31.2	0	34.23	-	-	74	-39.77	0-360	100	H
5	* 4.804	31.91	PK	34.1	-30.3	0	35.71	-	-	74	-38.29	0-360	100	V
4	14.013	32.59	PK	38.8	-27.4	0	43.99	-	-	-	-	0-360	200	H
6	7.205	33.49	PK	35.6	-29.2	0	39.89	-	-	-	-	0-360	100	V
7	9.608	34.42	PK	36.7	-25.3	0	45.82	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.81	41.37	PK3	33.2	-31.2	0	43.37	-	-	74	-30.63	259	196	H
* 3.809	27.99	VB1T	33.2	-31.2	0	29.99	54	-24.01	-	-	259	196	H
* 4.804	42.49	PK3	34.1	-30.3	0	46.29	-	-	74	-27.71	251	399	V
* 4.804	30.94	VB1T	34.1	-30.3	0	34.74	54	-19.26	-	-	251	399	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

SPURIOUS (MID CHANNEL)

HORIZONTAL PLOT

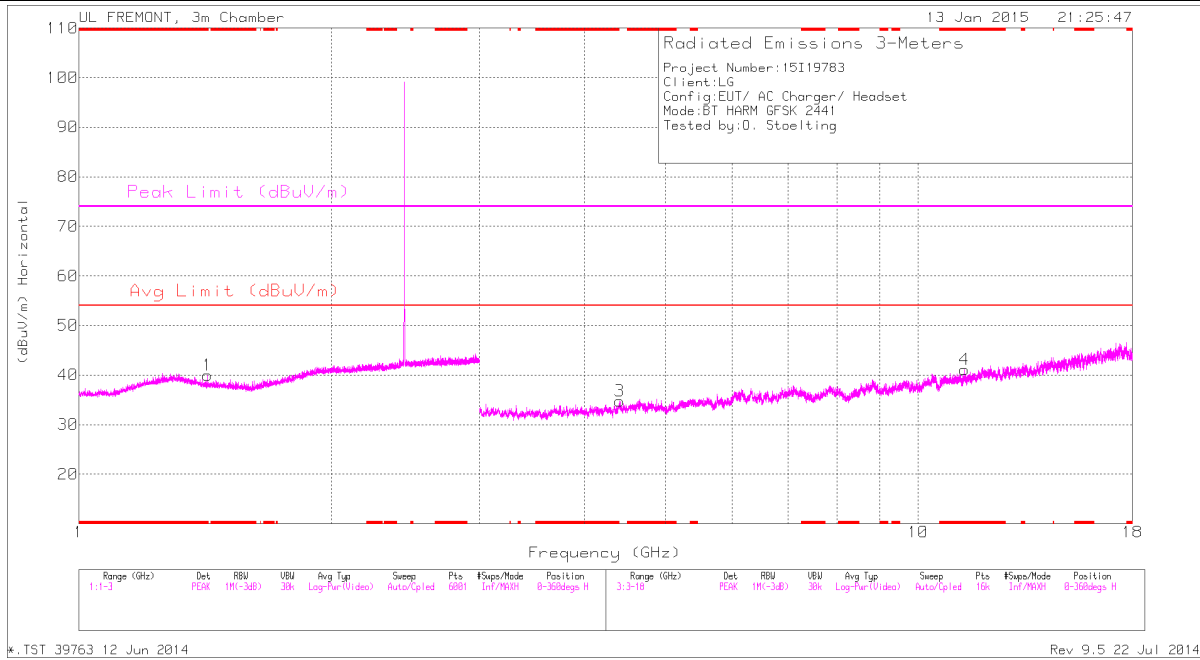

VERTICAL PLOT

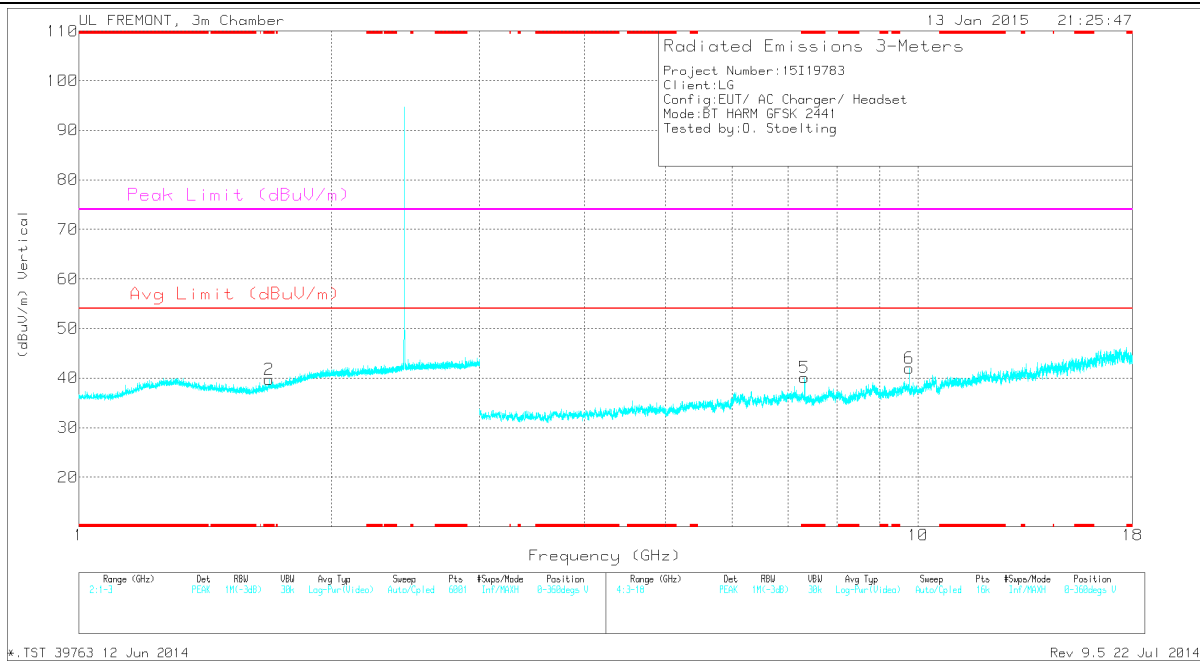

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.423	34.69	PK	29	-23.7	0	39.99	-	-	74	-34.01	0-360	200	H
2	* 1.686	34.17	PK	28.9	-23.4	0	39.67	-	-	74	-34.33	0-360	200	V
4	* 11.351	29.07	PK	38	-26	0	41.07	-	-	74	-32.93	0-360	100	H
5	* 7.323	32.93	PK	35.6	-28.4	0	40.13	-	-	74	-33.87	0-360	100	V
3	4.412	31.24	PK	33.7	-30.2	0	34.74	-	-	-	-	0-360	100	H
6	9.764	31.08	PK	36.9	-26	0	41.98	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.351	37.55	PK3	38	-26	0	49.55	-	-	74	-24.45	251	400	H
* 11.353	24.73	VB1T	38	-26	0	36.73	54	-17.27	-	-	251	400	H
* 7.323	40.98	PK3	35.6	-28.4	0	48.18	-	-	74	-25.82	263	106	V
* 7.323	30.02	VB1T	35.6	-28.4	0	37.22	54	-16.78	-	-	263	106	V
9.764	37.83	PK3	36.9	-26	0	48.73	-	-	-	-	322	223	V
9.764	27.69	VB1T	36.9	-26	0	38.59	-	-	-	-	322	223	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

SPURIOUS (HIGH CHANNEL)

HORIZONTAL PLOT

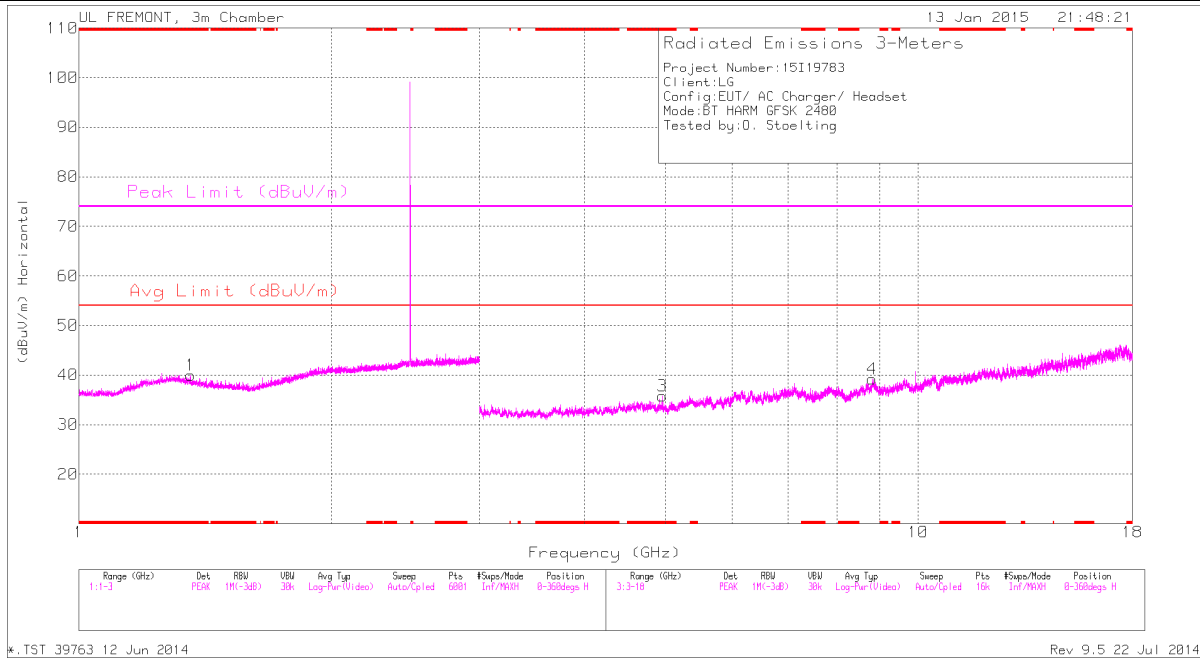

VERTICAL PLOT

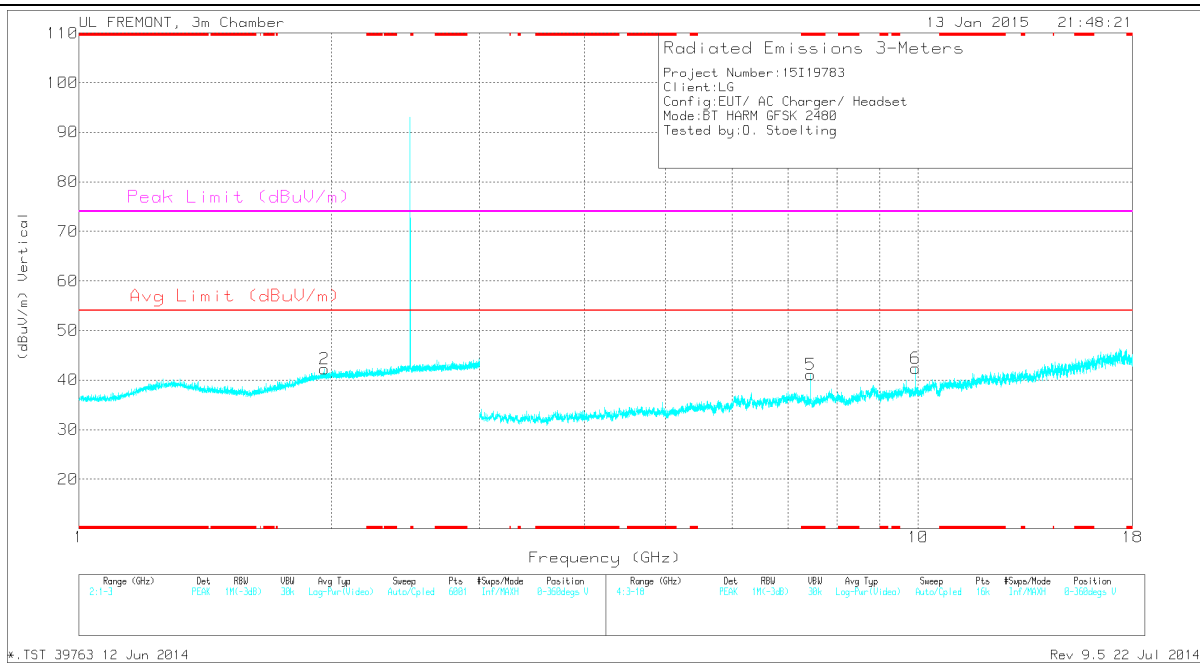

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.358	34.2	PK	29.6	-23.8	0	40	-	-	74	-34	0-360	200	H
3	* 4.959	32.73	PK	34	-31	0	35.73	-	-	74	-38.27	0-360	100	H
5	* 7.44	34.36	PK	35.7	-28.9	0	41.16	-	-	74	-32.84	0-360	100	V
2	1.962	34.07	PK	31.5	-23.3	0	42.27	-	-	-	-	0-360	100	V
4	8.819	29.82	PK	36	-26.6	0	39.22	-	-	-	-	0-360	100	H
6	9.919	31.07	PK	36.9	-25.6	0	42.37	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 7.44	42.89	PK3	35.7	-28.9	0	49.69	-	-	74	-24.31	231	118	V
* 7.44	33.51	VB1T	35.7	-28.9	0	40.31	54	-13.69	-	-	231	118	V
9.918	37.02	PK3	36.9	-25.6	0	48.32	-	-	-	-	222	400	V
9.92	23.78	VB1T	36.9	-25.6	0	35.08	-	-	-	-	222	400	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

ENHANCED DATA RATE 8DPSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

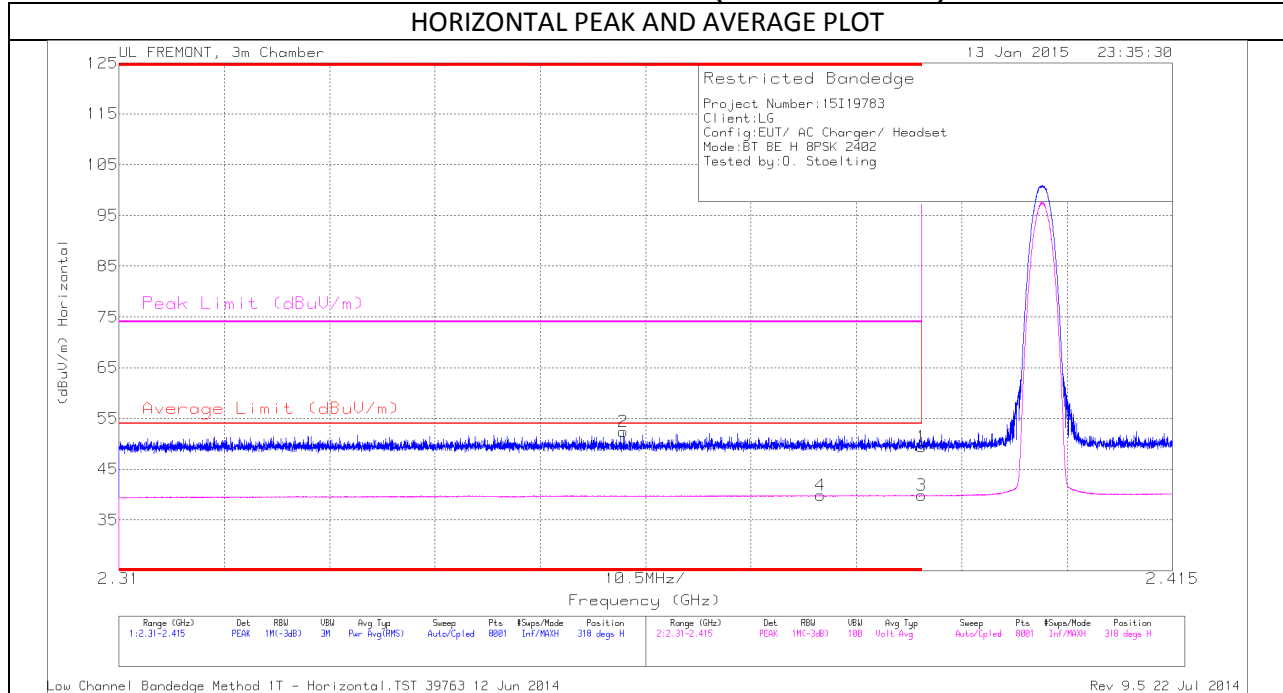

HORIZONTAL VERTICAL PEAK AND AVERAGE DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.36	43.53	PK	32	-23.1	0	52.43	-	-	74	-21.57	318	396	H
4	* 2.38	30.87	VB1T	32.1	-23.1	0	39.87	54	-14.13	-	-	318	396	H
1	* 2.39	40.47	PK	32.1	-23.1	0	49.47	-	-	74	-24.53	318	396	H
3	* 2.39	30.84	VB1T	32.1	-23.1	0	39.84	54	-14.16	-	-	318	396	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (LOW CHANNEL)

VERTICAL PEAK AND AVERAGE PLOT

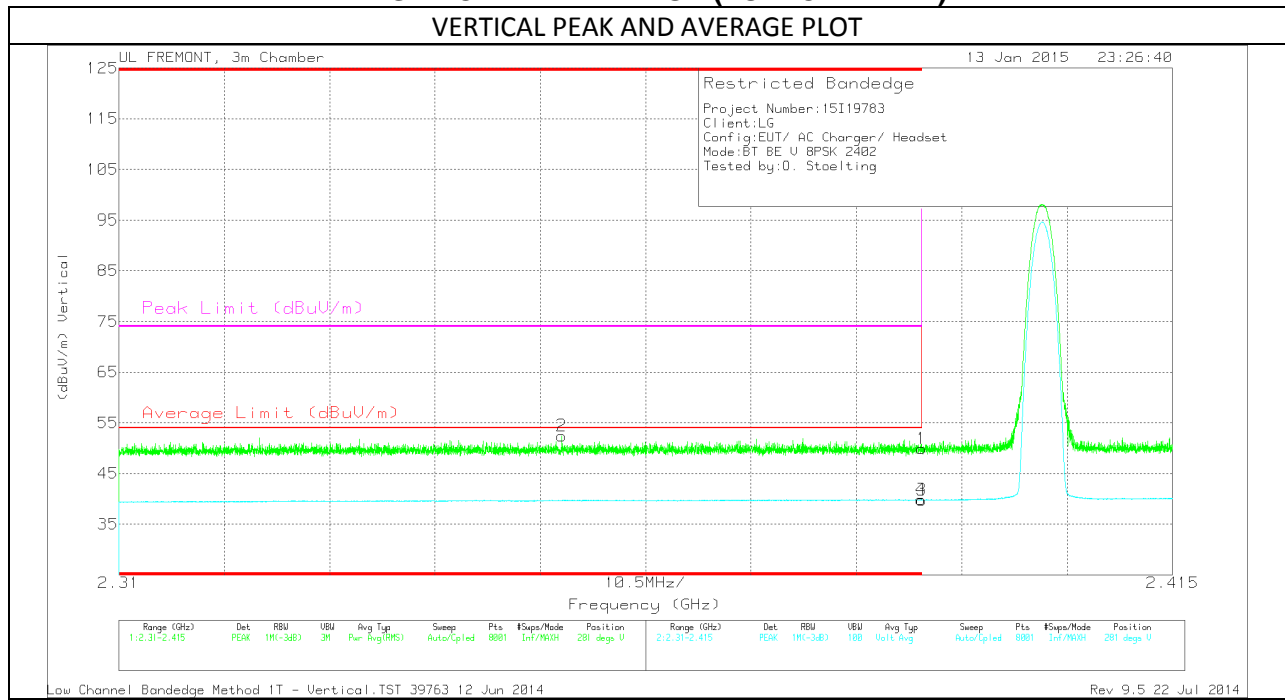

VERTICAL PEAK AND AVERAGE DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cb/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.354	43.56	PK	32	-23.1	0	52.46	-	-	74	-21.54	281	397	V
1	* 2.39	40.87	PK	32.1	-23.1	0	49.87	-	-	74	-24.13	281	397	V
3	* 2.39	30.8	VB1T	32.1	-23.1	0	39.8	54	-14.2	-	-	281	397	V
4	* 2.39	30.87	VB1T	32.1	-23.1	0	39.87	54	-14.13	-	-	281	397	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

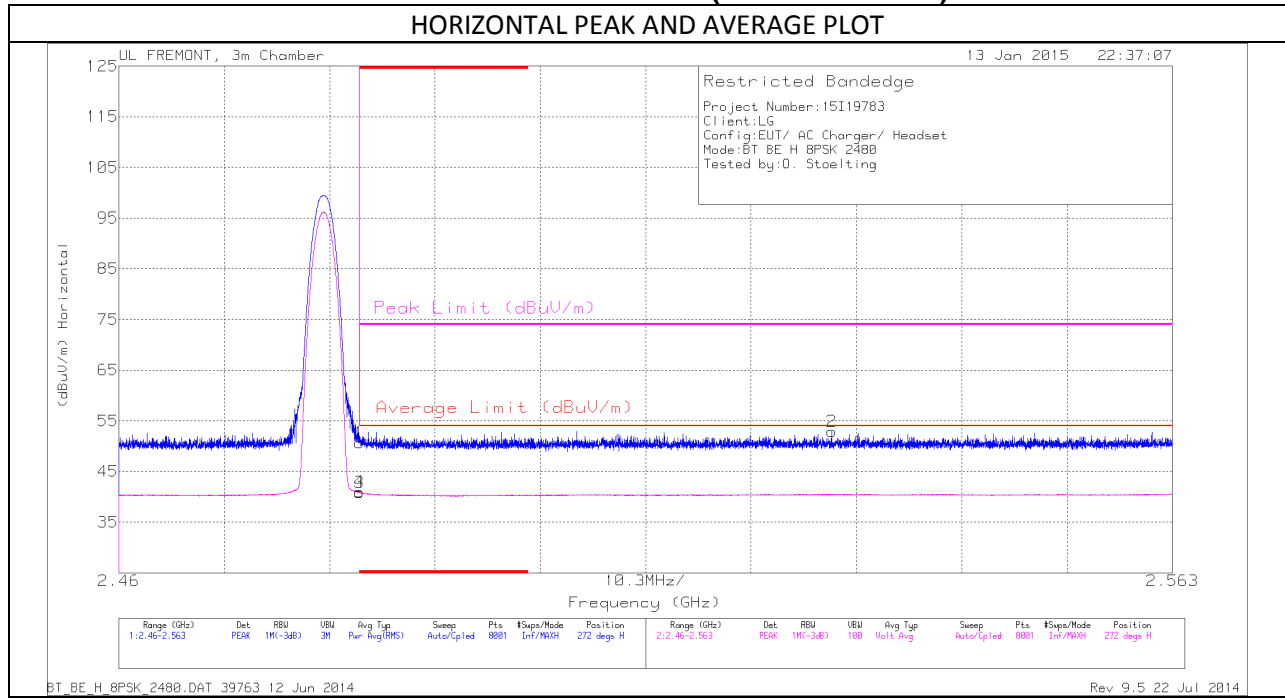

HORIZONTAL PEAK AND AVERAGE DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cb/Flt r/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.21	PK	32.3	-22.8	0	50.71	-	-	74	-23.29	272	103	H
3	* 2.484	31.38	VB1T	32.3	-22.8	0	40.88	54	-13.12	-	-	272	103	H
4	* 2.484	31.43	VB1T	32.3	-22.8	0	40.93	54	-13.07	-	-	272	103	H
2	2.53	43.11	PK	32.4	-22.6	0	52.91	-	-	74	-21.09	272	103	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL)

VERTICAL PEAK AND AVERAGE PLOT

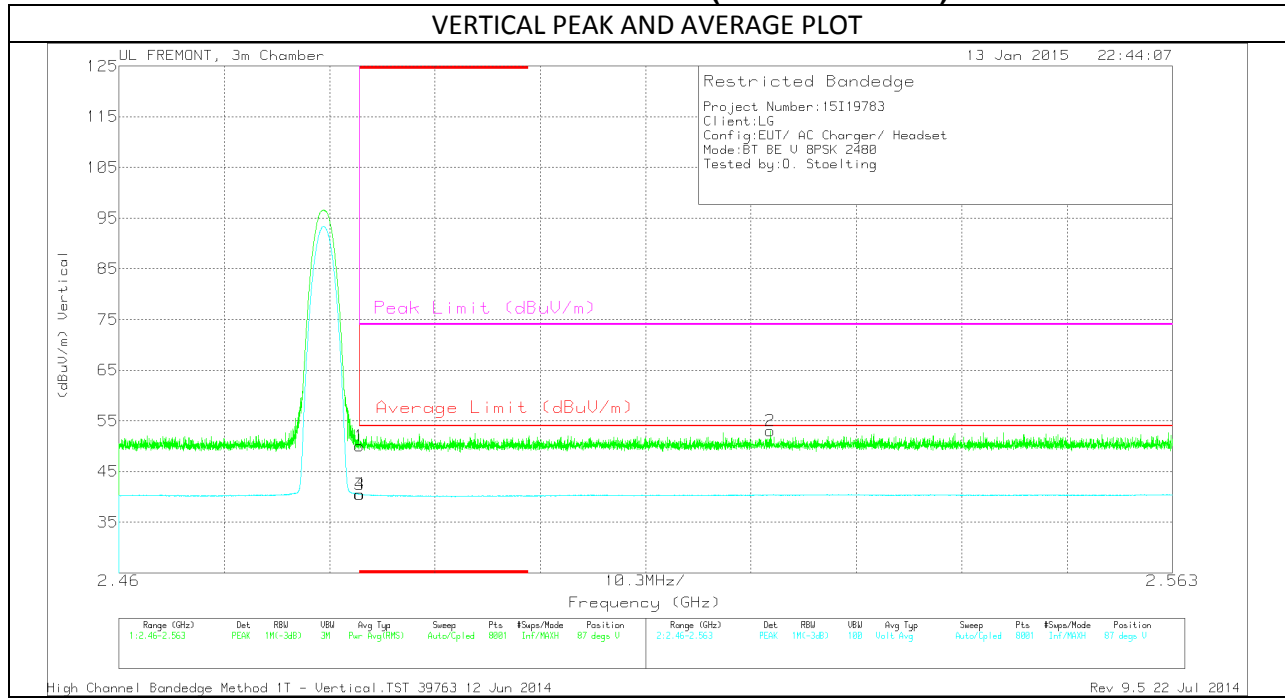

VERTICAL PEAK AND AVERAGE DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AFT119 (dB/m)	Amp/Cbl/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.57	PK	32.3	-22.8	0	50.07	-	-	74	-23.93	87	290	V
3	* 2.484	31.01	VB1T	32.3	-22.8	0	40.51	54	-13.49	-	-	87	290	V
4	* 2.484	31.04	VB1T	32.3	-22.8	0	40.54	54	-13.46	-	-	87	290	V
2	2.524	43.32	PK	32.4	-22.7	0	53.02	-	-	74	-20.98	87	290	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


HARMONICS AND SPURIOUS EMISSIONS

SPURIOUS (LOW CHANNEL)

HORIZONTAL PLOT

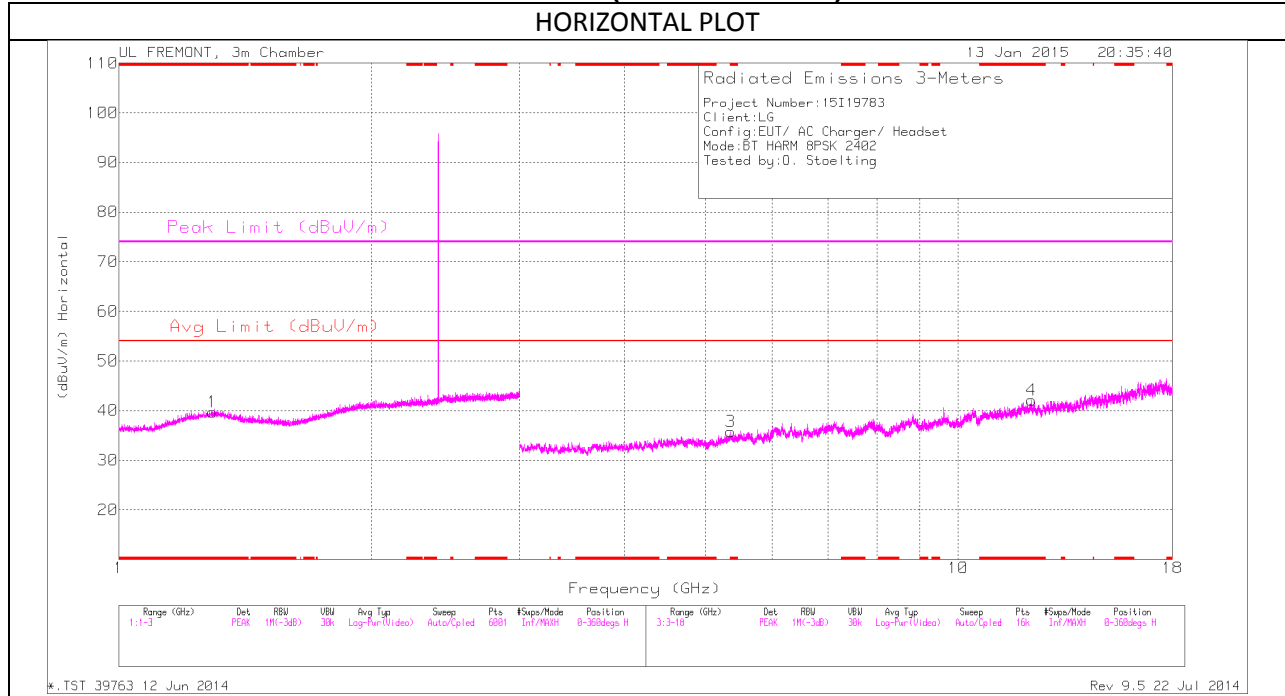

VERTICAL PLOT

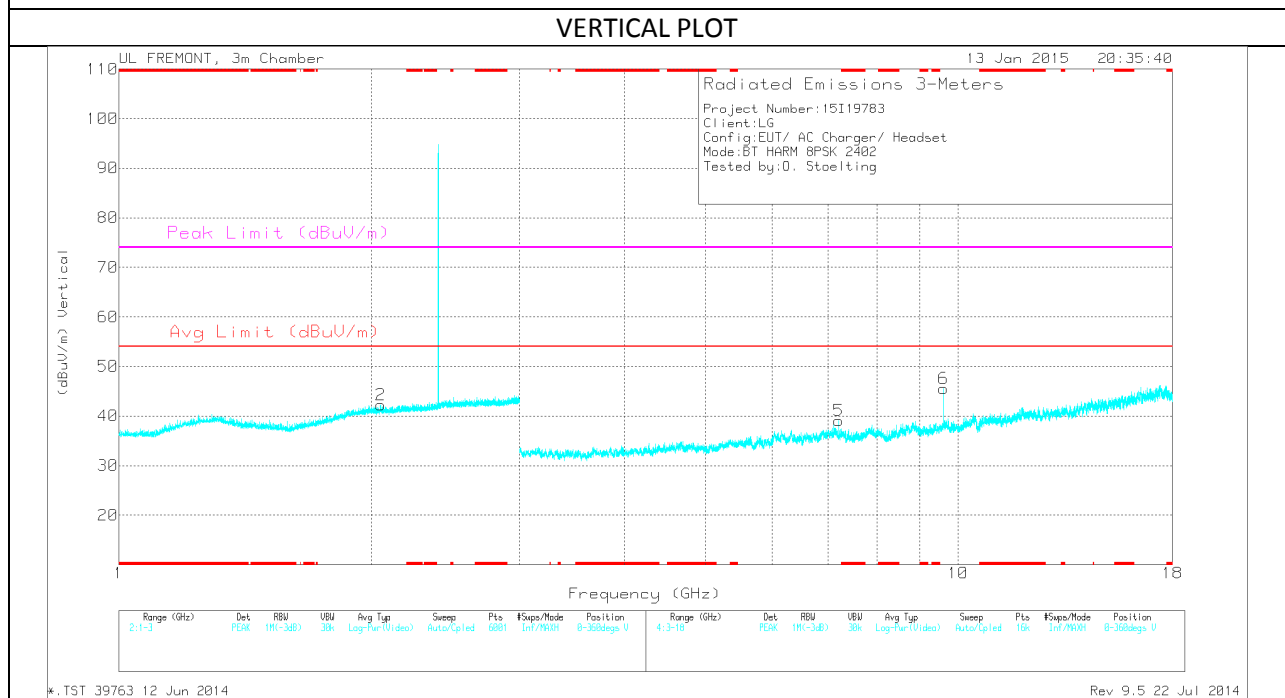

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.293	33.26	PK	30.2	-23.8	0	39.66	-	-	74	-34.34	0-360	100	H
3	* 5.355	31.31	PK	34.5	-30	0	35.81	-	-	74	-38.19	0-360	200	H
4	* 12.231	29.21	PK	39	-26.1	0	42.11	-	-	74	-31.89	0-360	200	H
2	2.051	33.7	PK	31.6	-23.1	0	42.2	-	-	-	-	0-360	200	V
5	7.206	32.65	PK	35.6	-29.2	0	39.05	-	-	-	-	0-360	100	V
6	9.608	34.19	PK	36.7	-25.3	0	45.59	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 12.231	37.1	PK3	39	-26.1	0	50	-	-	74	-24	49	197	H
* 12.233	23.92	VB1T	39	-26.1	0	36.82	54	-17.18	-	-	49	197	H
7.206	40.49	PK3	35.6	-29.2	0	46.89	-	-	-	-	265	101	V
7.206	28.54	VB1T	35.6	-29.2	0	34.94	-	-	-	-	265	101	V
9.608	40.2	PK3	36.7	-25.3	0	51.6	-	-	-	-	123	291	V
9.608	33.25	VB1T	36.7	-25.3	0	44.65	-	-	-	-	123	291	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

SPURIOUS (MID CHANNEL)

HORIZONTAL PLOT

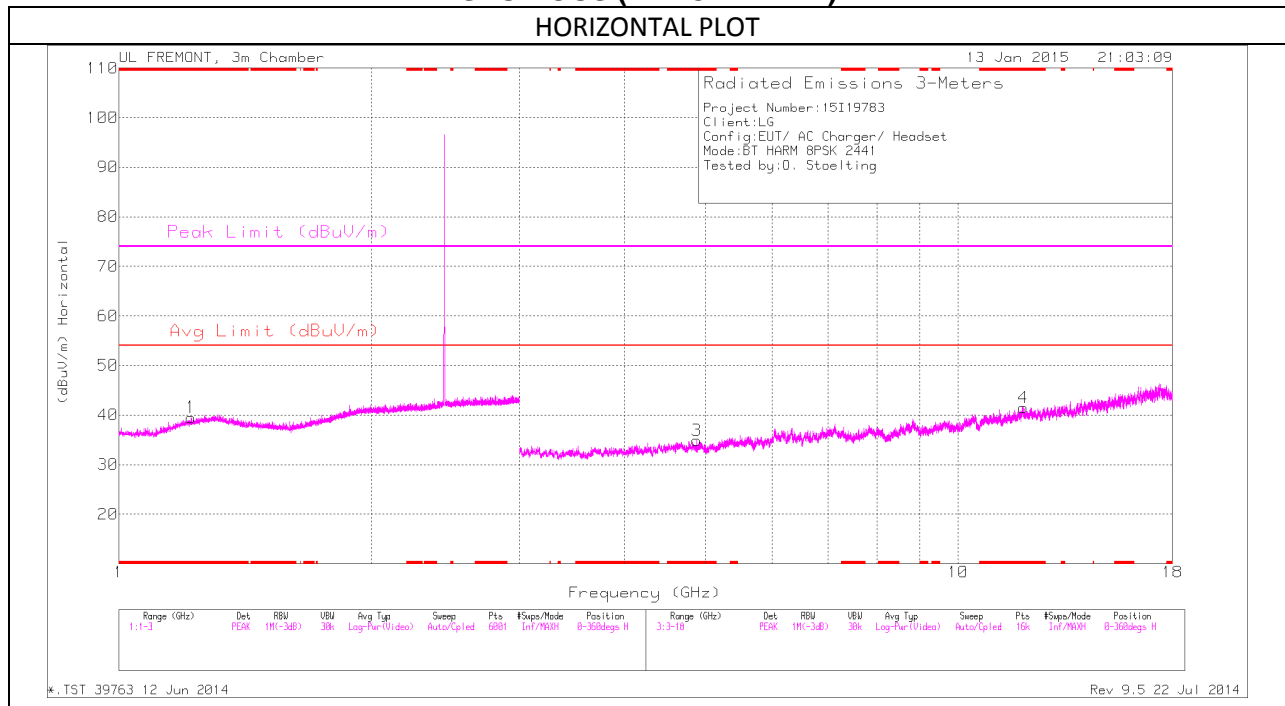

VERTICAL PLOT

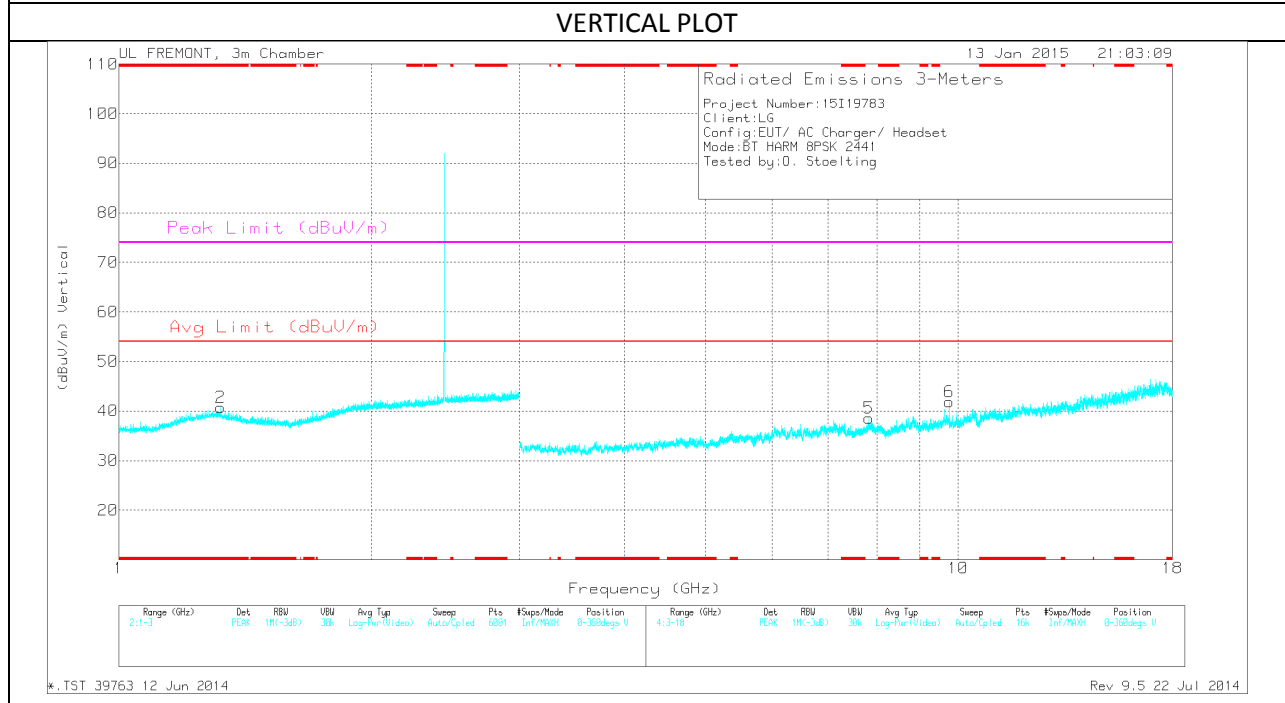

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.218	33.92	PK	29.4	-23.8	0	39.52	-	-	74	-34.48	0-360	200	H
2	* 1.322	34.53	PK	30	-23.8	0	40.73	-	-	74	-33.27	0-360	100	V
3	* 4.882	30.97	PK	34	-30.1	0	34.87	-	-	74	-39.13	0-360	200	H
4	* 11.956	28.45	PK	39	-26	0	41.45	-	-	74	-32.55	0-360	200	H
5	7.825	30.56	PK	35.8	-27.8	0	38.56	-	-	-	-	0-360	100	V
6	9.764	30.92	PK	36.9	-26	0	41.82	-	-	-	-	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cbl/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.955	38.13	PK3	39	-26.1	0	51.03	-	-	74	-22.97	260	180	H
* 11.954	24.58	VB1T	39	-26.1	0	37.48	54	-16.52	-	-	260	180	H
7.824	38.44	PK3	35.8	-27.9	0	46.34	-	-	-	-	11	188	V
7.826	26	VB1T	35.8	-27.8	0	34	-	-	-	-	11	188	V
9.764	38.53	PK3	36.9	-26	0	49.43	-	-	-	-	314	188	V
9.764	29.01	VB1T	36.9	-26	0	39.91	-	-	-	-	314	188	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

SPURIOUS (HIGH CHANNEL)

HORIZONTAL PLOT

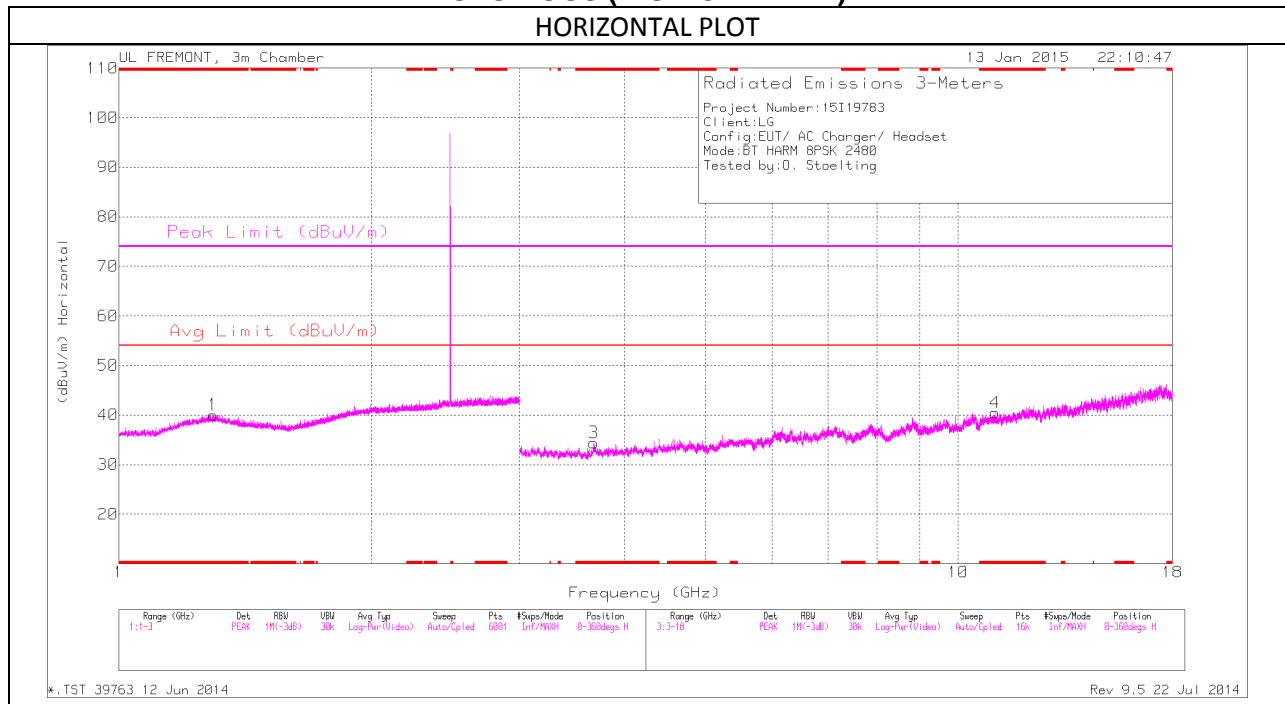

VERTICAL PLOT

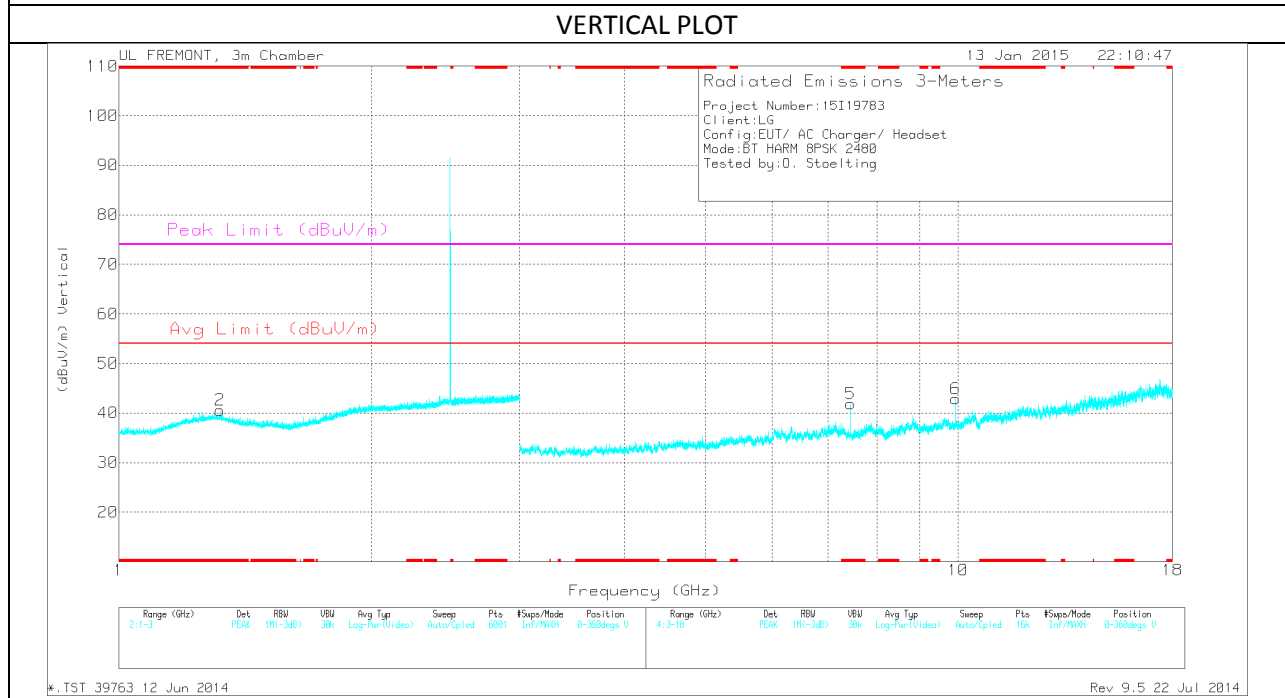

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

TRACE MARKERS

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/Ftr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.295	33.63	PK	30.2	-23.8	0	40.03	-	-	74	-33.97	0-360	100	H
2	* 1.319	34.34	PK	30	-23.8	0	40.54	-	-	74	-33.46	0-360	100	V
3	* 3.682	31.94	PK	33.2	-30.7	0	34.44	-	-	74	-39.56	0-360	200	H
4	* 11.057	28.04	PK	37.9	-25.5	0	40.44	-	-	74	-33.56	0-360	100	H
5	* 7.44	35.03	PK	35.7	-28.9	0	41.83	-	-	74	-32.17	0-360	100	V
6	9.919	31.63	PK	36.9	-25.6	0	42.93	-	-	-	-	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T119 (dB/m)	Amp/Cb/ Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 11.057	37.23	PK3	37.9	-25.5	0	49.63	-	-	74	-24.37	100	177	H
* 11.055	24.1	VB1T	37.9	-25.4	0	36.6	54	-17.4	-	-	100	177	H
* 7.44	42.11	PK3	35.7	-28.9	0	48.91	-	-	74	-25.09	223	104	V
* 7.44	31.14	VB1T	35.7	-28.9	0	37.94	54	-16.06	-	-	223	104	V
9.92	39.14	PK3	36.9	-25.6	0	50.44	-	-	-	-	211	108	V
9.92	30.34	VB1T	36.9	-25.6	0	41.64	-	-	-	-	211	108	V



* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

9.1. TRANSMITTER BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

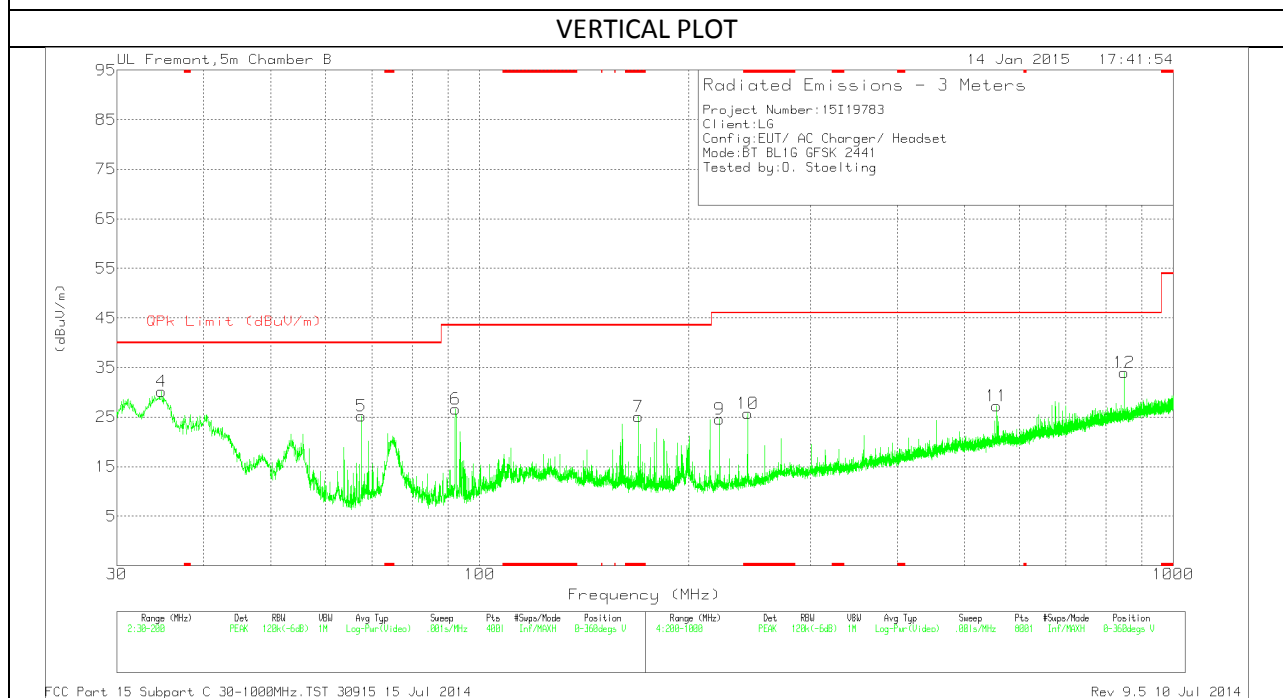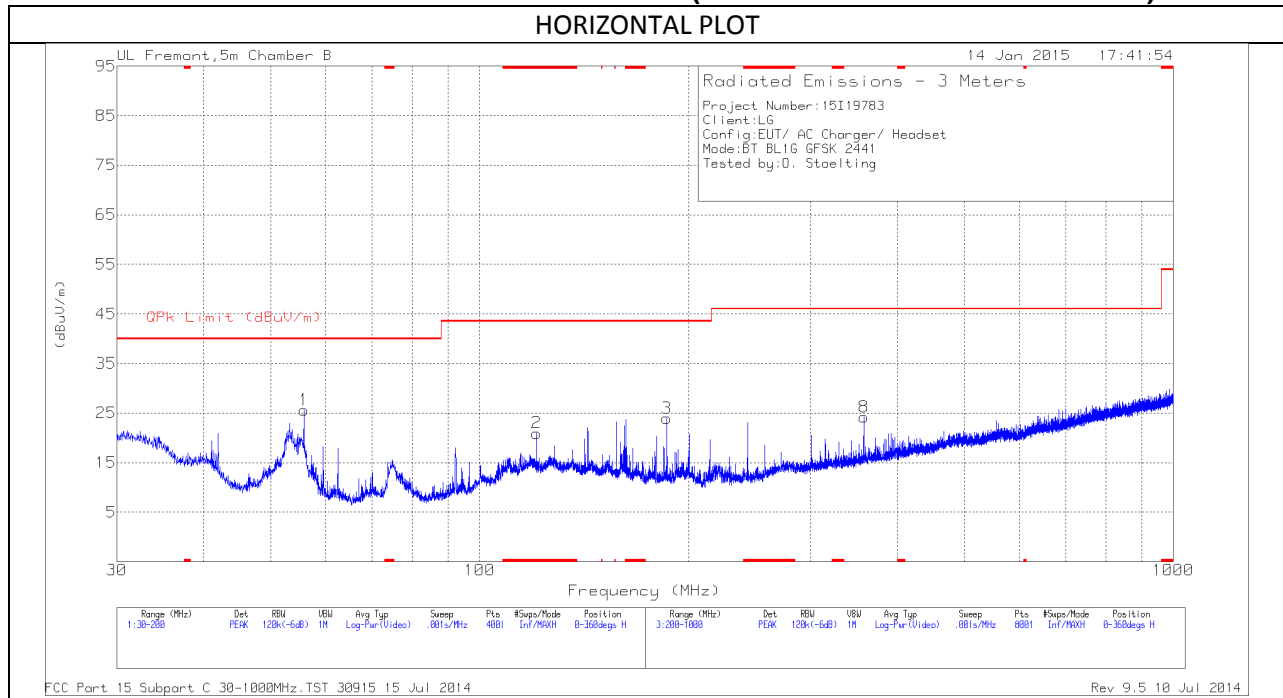

Note: --

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 120.8225	34.67	PK	14.1	-27.8	20.97	43.52	-22.55	0-360	300	H
7	* 169.485	40.6	PK	11.7	-27.2	25.1	43.52	-18.42	0-360	101	V
10	* 243.4	40.54	PK	11.6	-26.4	25.74	46.02	-20.28	0-360	200	V
4	34.8025	41.27	PK	17.6	-28.7	30.17	40	-9.83	0-360	101	V
1	55.7975	46.86	PK	7.3	-28.5	25.66	40	-14.34	0-360	400	H
5	67.5275	45.6	PK	8	-28.4	25.2	40	-14.8	0-360	101	V
6	92.3688	46.52	PK	8.2	-28.1	26.62	43.52	-16.9	0-360	101	V
3	186.145	39.69	PK	11.3	-27	23.99	43.52	-19.53	0-360	400	H
9	221.6	40.49	PK	10.8	-26.7	24.59	46.02	-21.43	0-360	200	V
8	357.9	35.19	PK	14.8	-25.8	24.19	46.02	-21.83	0-360	300	H
11	556	34.15	PK	18.6	-25.5	27.25	46.02	-18.77	0-360	101	V
12	848.9	35.42	PK	22	-23.4	34.02	46.02	-12	0-360	101	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Note: --

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS AND PROCEDURE

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


*Decreases with the logarithm of the frequency.


TEST PROCEDURE

ANSI C63.4 - 2009

RESULTS

6 WORST EMISSIONS

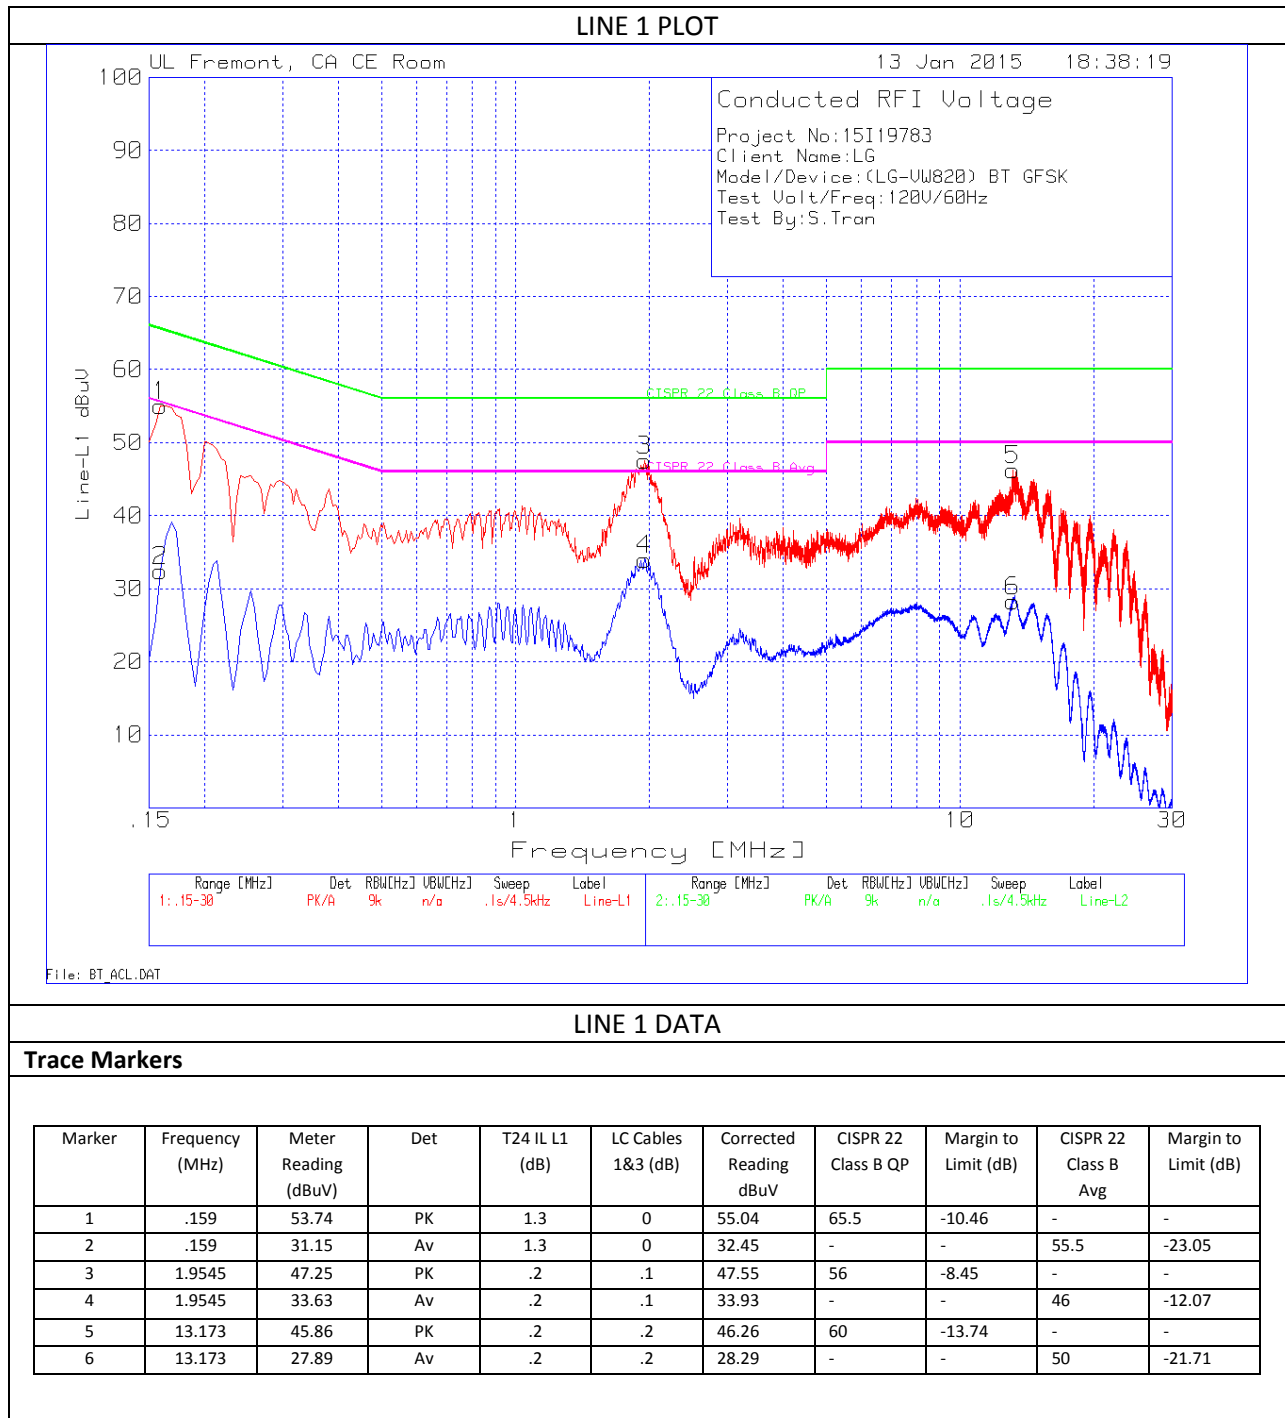

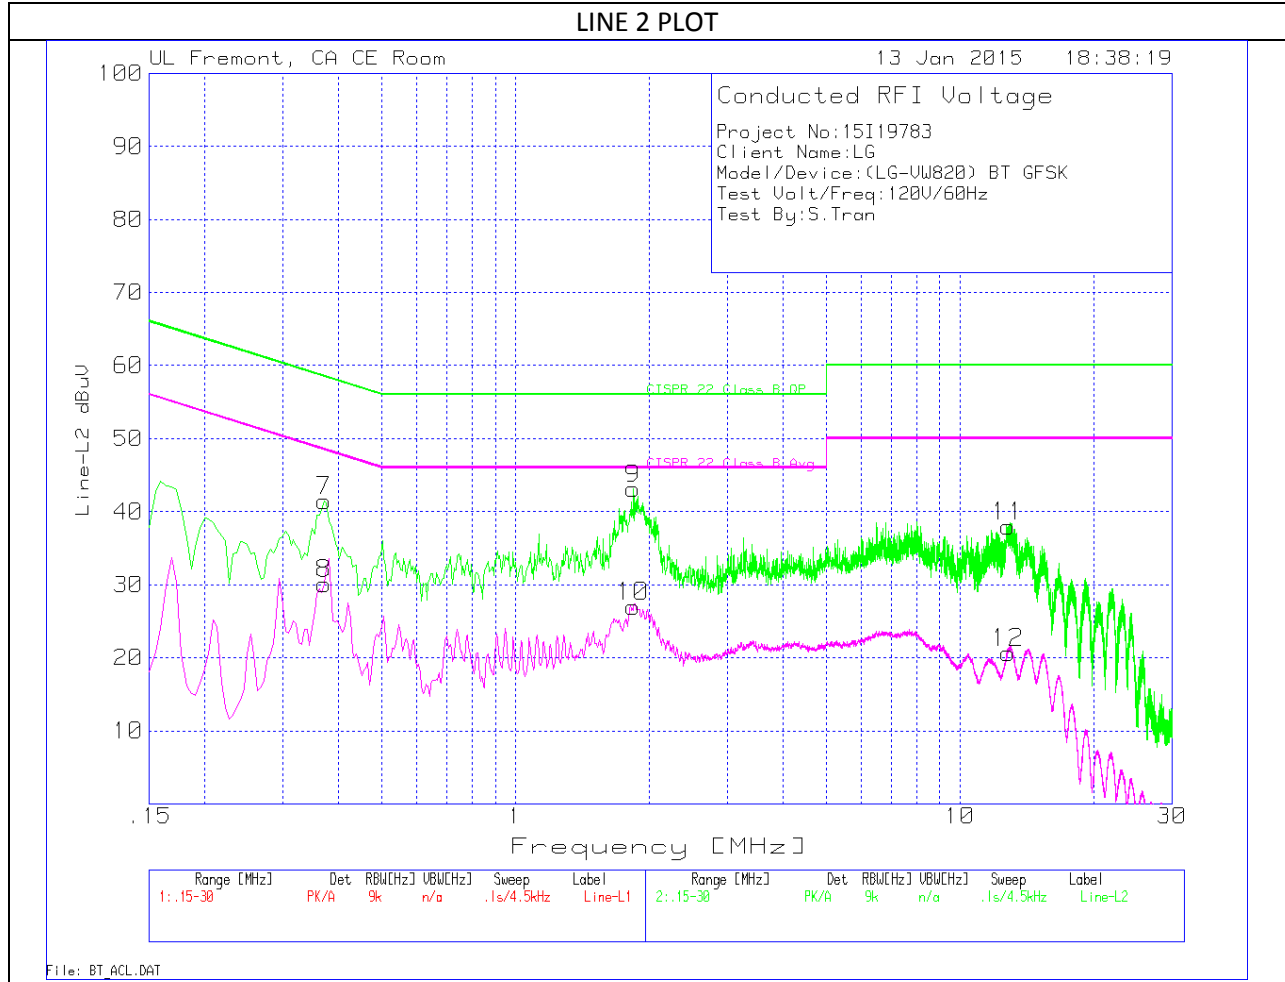

LINE 2 DATA

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
7	.3705	40.99	PK	.5	0	41.49	58.5	-17.01	-	-
8	.3705	29.57	Av	.5	0	30.07	-	-	48.5	-18.43
9	1.842	42.79	PK	.2	.1	43.09	56	-12.91	-	-
10	1.842	26.71	Av	.2	.1	27.01	-	-	46	-18.99
11	12.831	37.45	PK	.3	.2	37.95	60	-22.05	-	-
12	12.831	20.22	Av	.3	.2	20.72	-	-	50	-29.28