



# TEST REPORT

## No. I19Z60740-EMC01

**LG Electronics USA, Inc.**

**Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN**

**Model Name: LM-X120BMW, LMX120BMW, X120BMW, LM-X120HM,**

**LMX120HM, X120HM**

**FCC ID: ZNFX120HM**

**Issued Date: 2019-06-25**



**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I19Z60740-EMC01	Rev.0	1 <sup>st</sup> edition	2019-06-18
I19Z60740-EMC01	Rev.1	Modify Client Information	2019-06-25

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION .....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT .....</b>	<b>4</b>
<b>1.4. PROJECT DATA .....</b>	<b>4</b>
<b>1.5. SIGNATURE.....</b>	<b>4</b>
<b>2. CLIENT INFORMATION .....</b>	<b>5</b>
<b>2.1. APPLICANT INFORMATION.....</b>	<b>5</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>5</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>6</b>
<b>3.1. ABOUT EUT.....</b>	<b>6</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>6</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....</b>	<b>6</b>
<b>3.4. EUT SET-UPS .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>10</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>11</b>
<b>ANNEX A: MEASUREMENT RESULTS .....</b>	<b>12</b>
<b>ANNEX B: PERSONS INVOLVED IN THIS TESTING .....</b>	<b>22</b>

## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2005 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0, and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

#### **CTTL (BDA)**

Address: No.18A, Kangding Street, Beijing Economic-Technology Development Area, Beijing, P. R. China 100176

### **1.3. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### **1.4. Project data**

Testing Start Date: 2019-05-17  
Testing End Date: 2019-06-17

### **1.5. Signature**



---

Li Yan


**(Prepared this test report)**



---

Zhang Ying

**(Reviewed this test report)**



---

Liu Baodian

Deputy Director of the laboratory  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: LG Electronics USA, Inc.  
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632  
City: /  
Postal Code: /  
Country: /  
Contact: /  
Email: /  
Telephone: /

### **2.2. Manufacturer Information**

Company Name: Jiaxing Youngrui Electron Technology Co., Ltd  
Address: NO.777 Yazhong Road, Daqiao Town, Nanhu District, Jiaxing  
City,Zhejiang  
City: /  
Postal Code: /  
Country: /  
Contact: /  
Email: /  
Telephone: /

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN  
 Model Name LM-X120BMW, LMX120BMW, X120BMW, LM-X120HM, LMX120HM, X120HM  
 FCC ID ZNFX120HM  
 Extreme vol. Limits 3.4VDC to 4.4VDC (nominal: 3.85VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

#### **3.2. Internal Identification of EUT used during the test**

EUT ID*	SN or IMEI	Remarks
EUT2	356250100011577/ 356250100011585	/

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

AE ID*	Description	SN	Remarks
AE1	Battery	/	/
AE2	Charger	/	/
AE3	USB cable	/	/
AE4	Headset	/	/
AE1			
	Model	BL-O1	
	Manufacturer	Jiade Energy Technology(Zhuhai)Co.,Ltd	
	Capacitance	3000mAh	
	Nominal voltage	3.85V	
AE2			
	Model	MCS-V01WR	
	Manufacturer	Sunlin	
	Length of cable	/	
AE3			
	Model	DC03WB-G	
	Manufacturer	Ningbo	
	Length of cable	/	
AE4			
	Model	EAB64468444	
	Manufacturer	Cresyn	
	Length of cable	/	

Note: The USB cables are shielded.



### 3.4. EUT set-ups

<b>EUT set-up No.</b>	<b>Combination of EUT and AE</b>	<b>Remarks</b>
Set.1	EUT2+ AE1 + AE2+ AE3+ AE4	Charger mode + FM
Set.2	EUT2+ AE1 + AE3	USB mode+MP3+GNSS

## **4. Reference Documents**

### **4.1. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2016
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.



## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber SAC-1** (23 meters×17 meters×10 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Semi-anechoic chamber SAC-2** (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Shielded room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω



## 6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail
	BR	Re-use test data from basic model report.

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	A.1	P	CTTL(BDA)
2	Conducted Emission	15.107(a)	A.2	P	CTTL(BDA)



## 7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESU26	100376	R&S	2019-11-27	1 year
2	Test Receiver	ESCI	100766	R&S	2020-03-20	1 year
3	Universal Radio Communication Tester	CMW500	159408	R&S	2020-03-03	1 year
4	LISN	ESH3-Z5	825562/028	R&S	2019-08-22	1 year
5	EMI Antenna	VULB9163	9163-482	Schwarzbeck	2019-09-21	1 year
6	EMI Antenna	3117	00139065	ETS-Lindgren	2019-10-15	1 year
7	Signal Generator	SMF100A	101295	R&S	2019-11-27	1 year
8	Printer	P1606dn	VNC3L52122	HP	N/A	N/A
9	Keyboard	KU-1601	2048361	Lenovo	N/A	N/A
10	Mouse	EMS-537A	8021S3MC	Lenovo	N/A	N/A

Test Item	Test Software and Version	Software Vendor
Radiated Continuous Emission	EMC32 V9.01	R&S
Conducted Emission	EMC32 V8.52.0	R&S

## **ANNEX A: MEASUREMENT RESULTS**

### **A.1 Radiated Emission**

#### **Reference**

FCC: CFR Part 15.109(a).

#### **A.1.1 Method of measurement**

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters(for 30MHz-1GHz) and 3 meters (for above 1GHz) is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

#### **A.1.2 EUT Operating Mode**

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. During the charging mode the FM application is started up. During the USB mode The EUT is keeping on playing MP3 and the GNSS application is started up. The model of the PC is Lenovo M4000e-17, and the serial number of the PC is M706RMW2. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

#### **A.1.3 Measurement Limit**

Frequency range (MHz)	Field strength limit ( $\mu\text{V}/\text{m}$ )		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

#### **A.1.4 Test Condition**

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/1MHz	15	Peak, Average

### A.1.5 Measurement Results

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

$G_A$ : Antenna factor of receive antenna

$G_{\text{PL}}$ : Path Loss

$P_{\text{Mea}}$ : Measurement result on receiver.

Measurement uncertainty (worst case): 30MHz-1GHz: 5.40dB, 1GHz-18GHz: 4.32dB,  $k=2$ .

#### Measurement results for Set.1:

##### Charging Mode+ FM /Average detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17090.500	38.85	-26.1	41.6	23.36	54.0	15.2	H
17090.000	38.84	-26.1	41.6	23.36	54.0	15.2	V
17984.500	38.83	-25.8	41.3	23.36	54.0	15.2	V
17105.500	38.83	-26.0	41.6	23.26	54.0	15.2	V
17097.000	38.82	-26.1	41.6	23.30	54.0	15.2	H
17051.500	38.81	-26.4	41.6	23.54	54.0	15.2	V

##### Charging Mode+ FM /Peak detector

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17914.500	51.8	-26.1	41.3	36.65	74.0	22.2	V
17072.000	51.5	-26.2	41.6	36.11	74.0	22.5	H
16677.000	51.1	-26.6	41.4	36.27	74.0	22.9	H
17085.000	50.8	-26.2	41.6	35.35	74.0	23.2	V
17999.500	50.8	-25.9	41.3	35.38	74.0	23.2	V
17989.000	50.8	-25.8	41.3	35.32	74.0	23.2	V

**Measurement results for Set.2:**

**USB Mode +MP3+GNSS /Average detector**


Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
17107.000	39.08	-26.0	41.6	23.51	54.0	14.9	V
17090.500	38.91	-26.1	41.6	23.42	54.0	15.1	V
17101.000	38.86	-26.1	41.6	23.32	54.0	15.1	H
17108.500	38.85	-26.0	41.6	23.27	54.0	15.1	V
17093.500	38.85	-26.1	41.6	23.35	54.0	15.1	H
17106.000	38.85	-26.0	41.6	23.28	54.0	15.2	H

**USB Mode +MP3+GNSS /Peak detector**

Frequency (MHz)	Measurement Result (dBμV/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBμV)	Limit (dBμV/m)	Margin (dB)	Antenna Pol. (H/V)
3595.500	56.98	-35.3	33.2	59.07	74.0	17.0	H
3590.500	53.81	-35.2	33.2	55.86	74.0	20.2	H
17045.500	52.24	-26.4	41.7	37.00	74.0	21.8	H
3591.000	51.73	-35.2	33.2	53.78	74.0	22.3	H
17130.500	51.70	-26.1	41.6	36.19	74.0	22.3	V
17858.500	51.60	-26.4	41.3	36.68	74.0	22.4	H

**Charging Mode + FM, Set.1**

15B RE 30MHz-1GHz

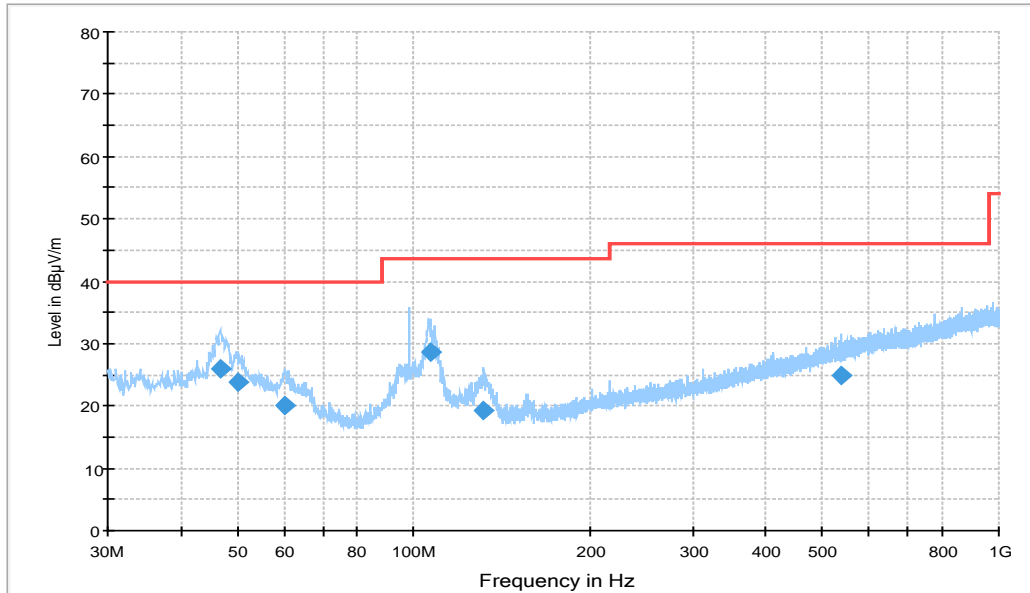


Note: the spike (98MHz) is coming from FM signal source.

**Figure A.1 Radiated Emission from 30MHz to 1GHz**

**Final Result 1**


Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
46.684000	25.9	100.0	V	66.0	0.1	14.1	40.0
49.982000	23.9	100.0	V	252.0	0.1	16.1	40.0
60.167000	20.2	125.0	V	62.0	-0.9	19.8	40.0
106.63000	28.5	100.0	V	246.0	-1.4	15.0	43.5
131.94700	19.2	100.0	V	173.0	-4.3	24.3	43.5
539.54100	24.8	100.0	V	297.0	6.6	21.2	46.0

15B RE - 1GHz-3GHz

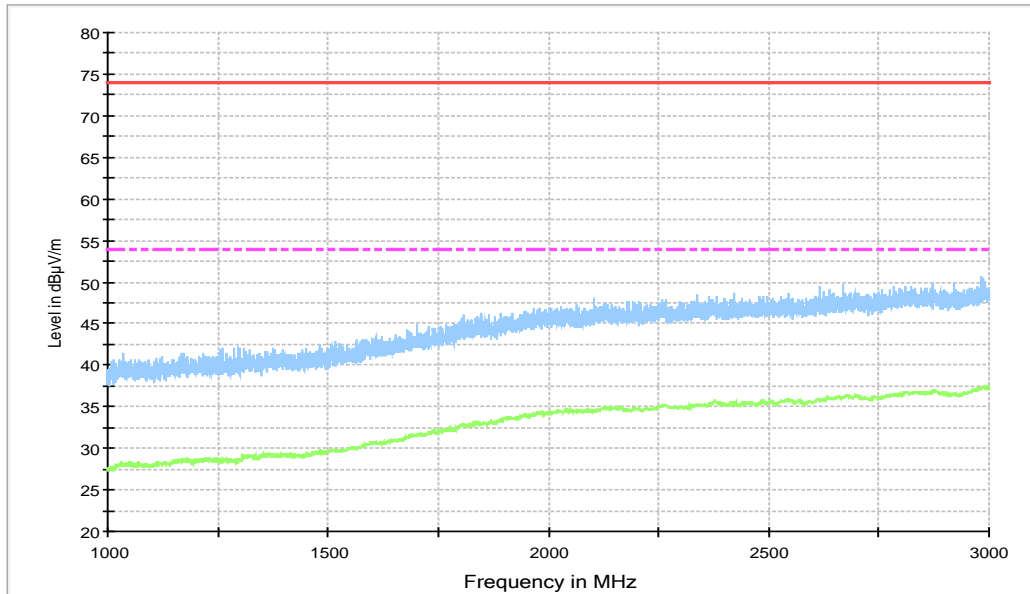

**Figure A.2 Radiated Emission from 1GHz to 3GHz**

15b RE - 3GHz-18GHz

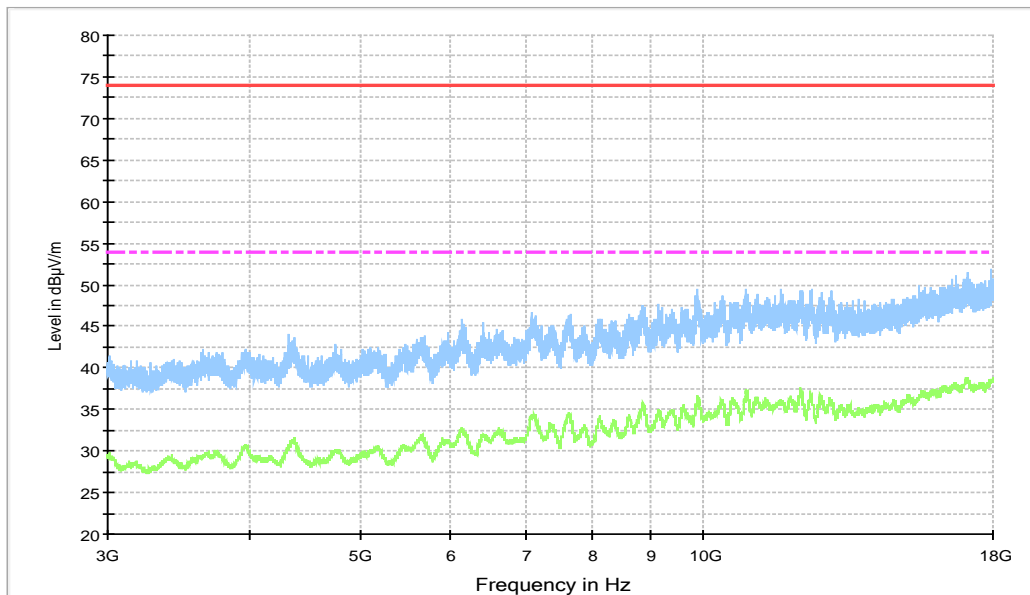

**Figure A.3 Radiated Emission from 3GHz to 18GHz**



USB Mode +MP3+GNSS, Set.2

15B RE 30MHz-1GHz

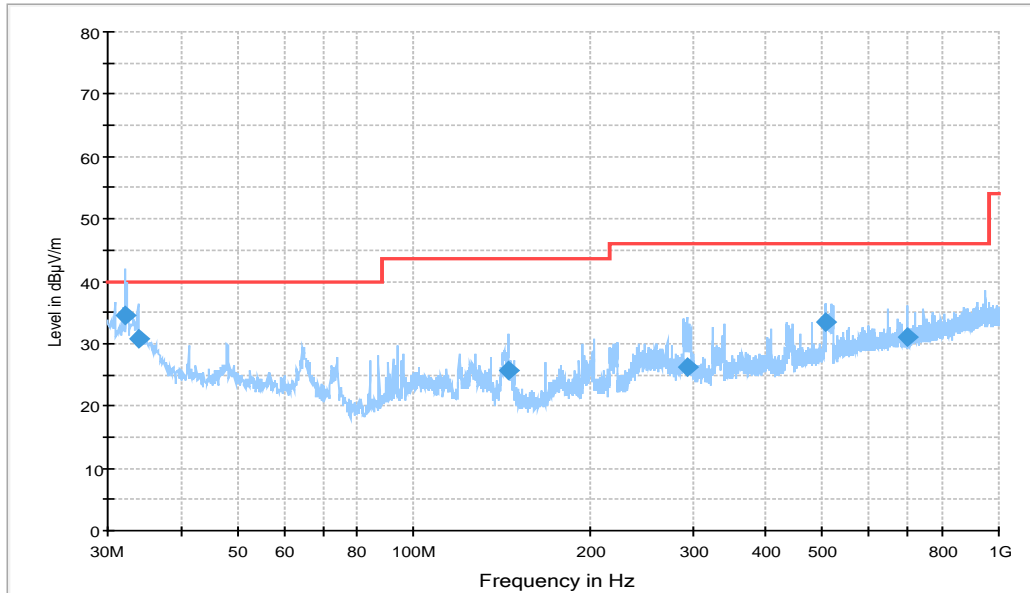


Figure A.4 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
32.134000	34.4	100.0	V	45.0	-1.9	5.6	40.0
33.783000	30.8	100.0	V	119.0	-1.4	9.2	40.0
144.84800	25.7	100.0	V	149.0	-5.0	17.8	43.5
292.67600	26.3	110.0	H	-18.0	0.0	19.7	46.0
506.65800	33.3	100.0	V	228.0	5.9	12.7	46.0
696.68100	31.1	100.0	V	13.0	8.4	14.9	46.0

15B RE - 1GHz-3GHz

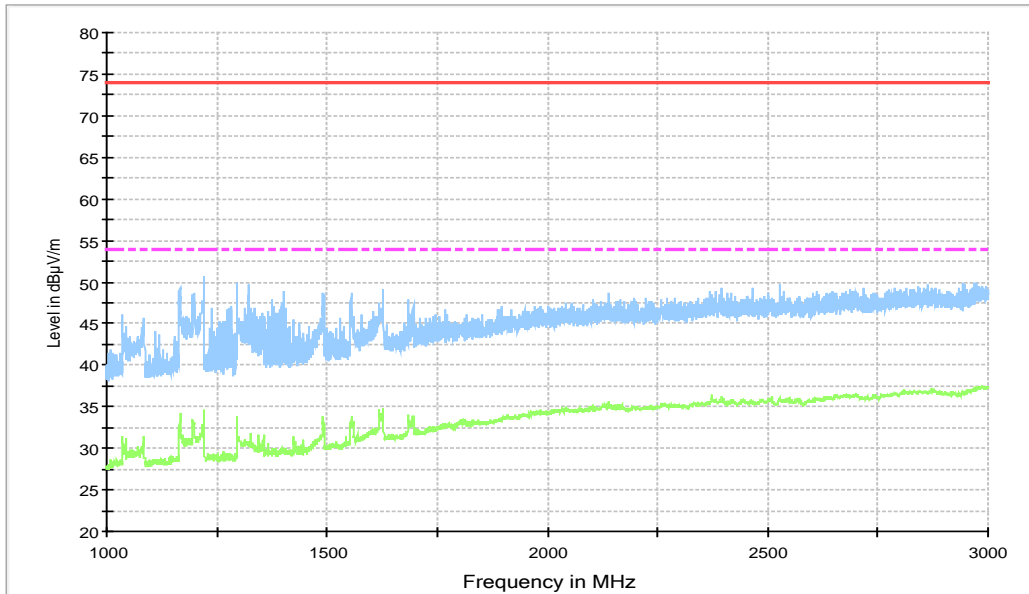


Figure A.5 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-18GHz

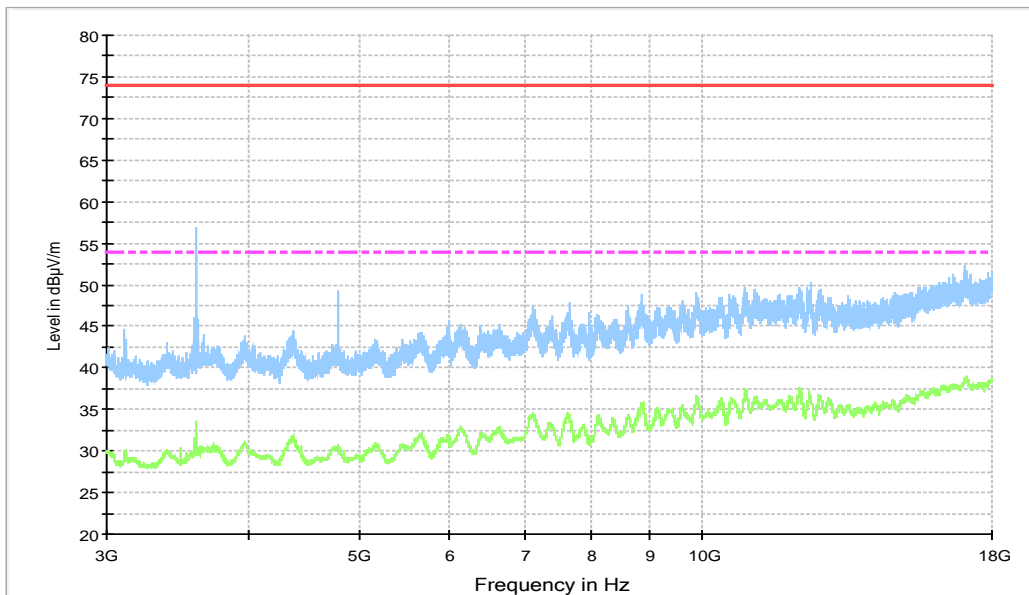


Figure A.6 Radiated Emission from 3GHz to 18GHz

## A.2 Conducted Emission

### Reference

FCC: CFR Part 15.107(a).

### A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

### A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. During the charging mode the FM application is started up. During the USB mode the EUT is keeping on playing MP3 and the GNSS application is started up. The model of the PC is Lenovo M4000e-17, and the serial number of the PC is M706RMW2. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note: I/O information: Printer – USB, Mouse – PS/2, Keyboard – USB.

### A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency

### A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

### A.2.5 Measurement Results

Measurement uncertainty:  $U= 3.10$  dB,  $k=2$ .

#### Charging Mode + FM, Set.1

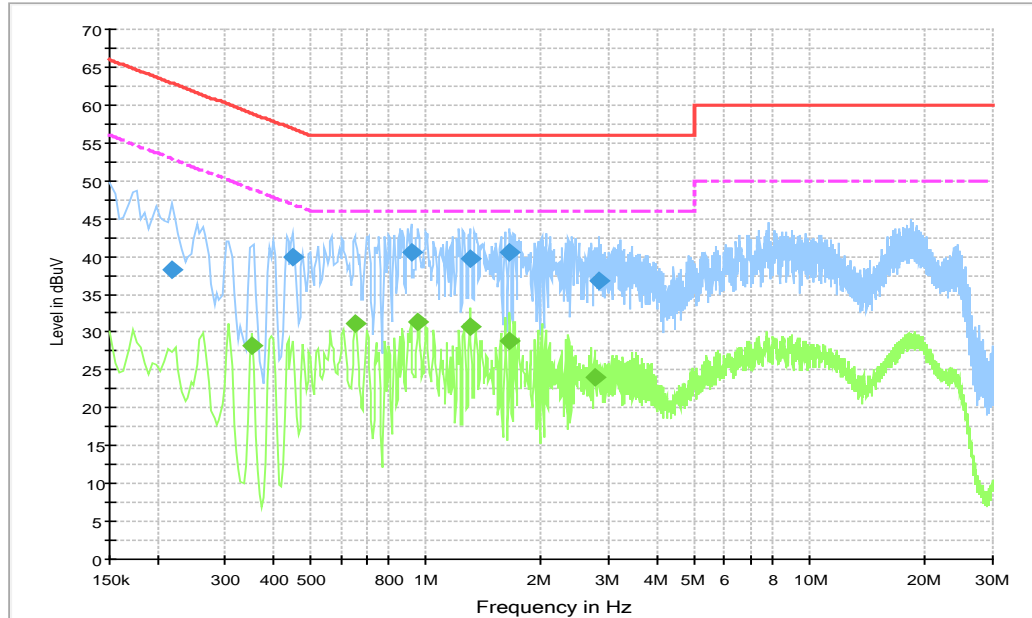


Figure A.7 Conducted Emission


#### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.217500	38.2	10000.0	9.000	GND	L1	10.3	24.8	62.9
0.451500	39.9	10000.0	9.000	GND	L1	10.3	16.9	56.8
0.915000	40.6	10000.0	9.000	GND	L1	10.4	15.4	56.0
1.306500	39.7	10000.0	9.000	GND	L1	10.4	16.3	56.0
1.653000	40.5	10000.0	9.000	GND	L1	10.4	15.5	56.0
2.823000	36.8	10000.0	9.000	GND	L1	10.5	19.2	56.0

#### Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.352500	28.1	10000.0	9.000	GND	L1	10.3	20.8	48.9
0.658500	31.1	10000.0	9.000	GND	L1	10.3	14.9	46.0
0.955500	31.4	10000.0	9.000	GND	L1	10.4	14.6	46.0
1.306500	30.6	10000.0	9.000	GND	L1	10.4	15.4	46.0
1.657500	28.8	10000.0	9.000	GND	L1	10.4	17.2	46.0
2.751000	24.0	10000.0	9.000	GND	L1	10.5	22.0	46.0

**.USB Mode +MP3+GNSS, Set.2**

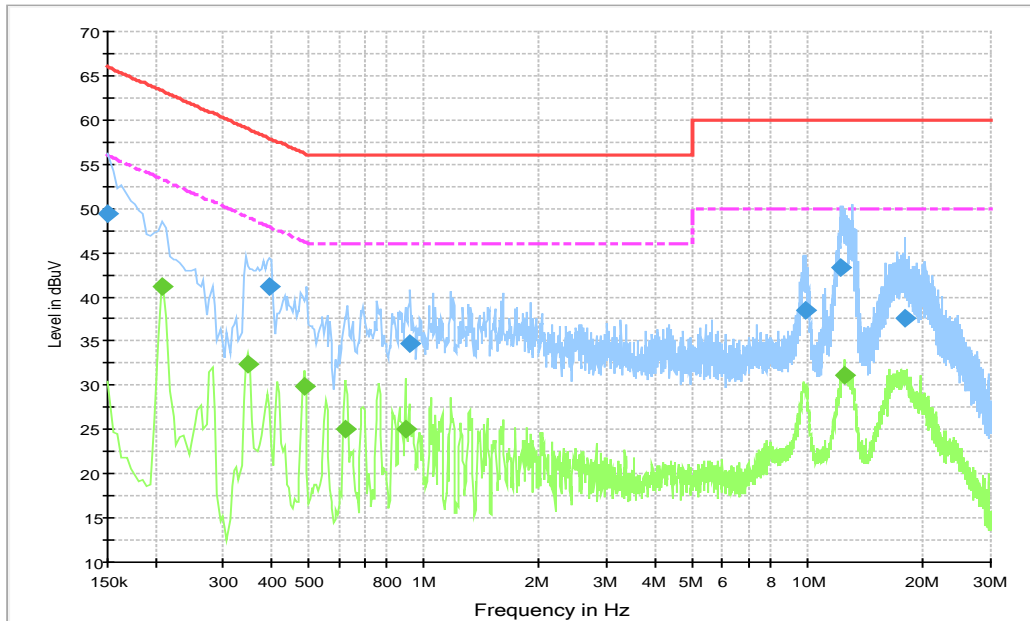

**Figure A.8 Conducted Emission**

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	49.4	10000.0	9.000	GND	N	10.3	16.6	66.0
0.397500	41.2	10000.0	9.000	GND	L1	10.3	16.7	57.9
0.924000	34.7	10000.0	9.000	GND	N	10.4	21.3	56.0
9.820500	38.5	10000.0	9.000	GND	L1	10.8	21.5	60.0
12.255000	43.3	10000.0	9.000	GND	N	10.9	16.7	60.0
17.862000	37.7	10000.0	9.000	GND	L1	11.3	22.3	60.0

**Final Result 2**

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.208500	41.1	10000.0	9.000	GND	N	10.3	12.1	53.3
0.348000	32.3	10000.0	9.000	GND	N	10.3	16.7	49.0
0.487500	29.8	10000.0	9.000	GND	N	10.3	16.4	46.2
0.622500	25.0	10000.0	9.000	GND	N	10.3	21.0	46.0
0.897000	25.0	10000.0	9.000	GND	N	10.4	21.0	46.0
12.489000	31.0	10000.0	9.000	GND	N	10.9	19.0	50.0



**ANNEX B: Persons involved in this testing**

Test Item	Tester
Radiated Emission	Li Zongliang
Conducted Emission	Guo Qian

**\*\*\*END OF REPORT\*\*\***