



The Photos of SAR test No. I18Z60008-SEM01

For

LG Electronics MobileComm USA, Inc.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model Name:

LM-X210HM, LMX210HM, X210HM ; LM-X210RM, LMX210RM, X210RM

With

Hardware Version: Rev.1.0

Software Version: V09c

FCC ID: ZNFX210HM



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture - 1 Constituents of the sample

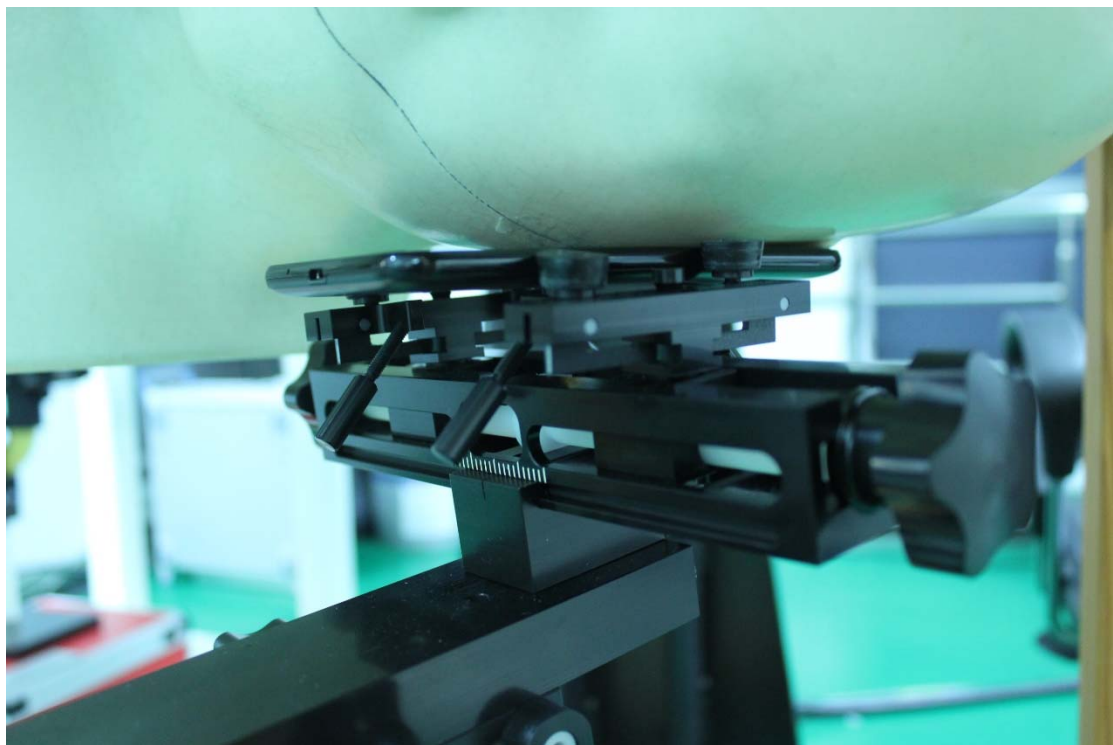


Picture - 2 Left Hand Touch Cheek Position



Picture - 3 Left Hand Tilt 15° Position

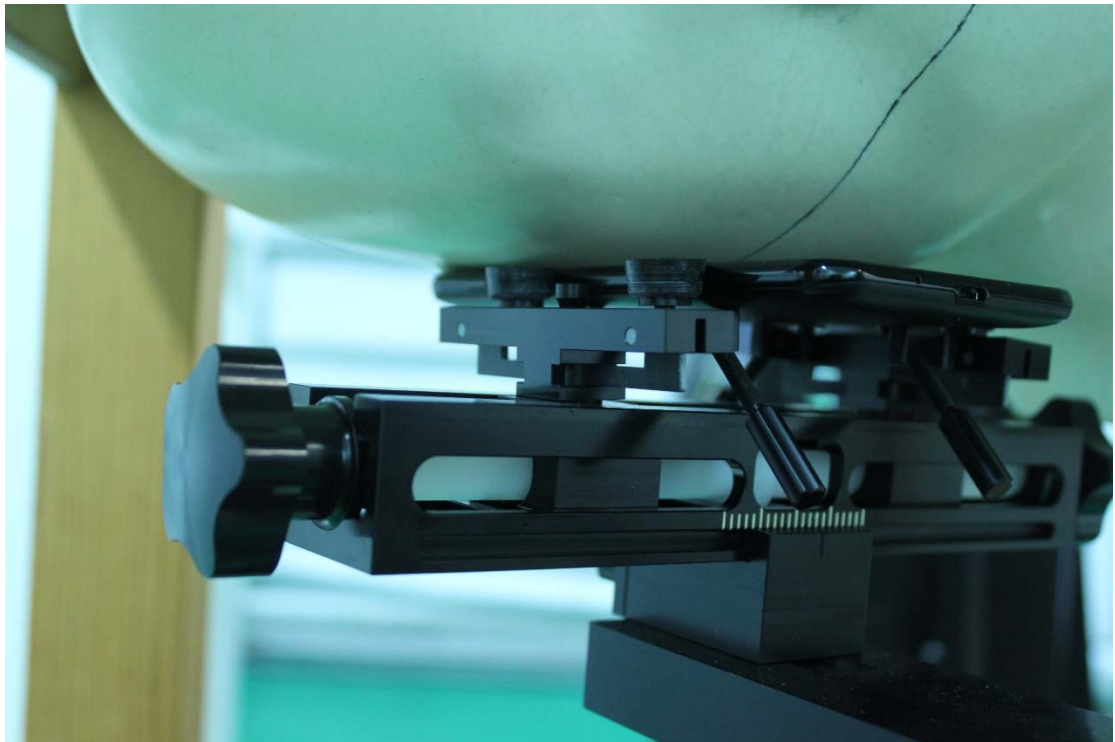


Picture - 4 Right Hand Touch Cheek Position

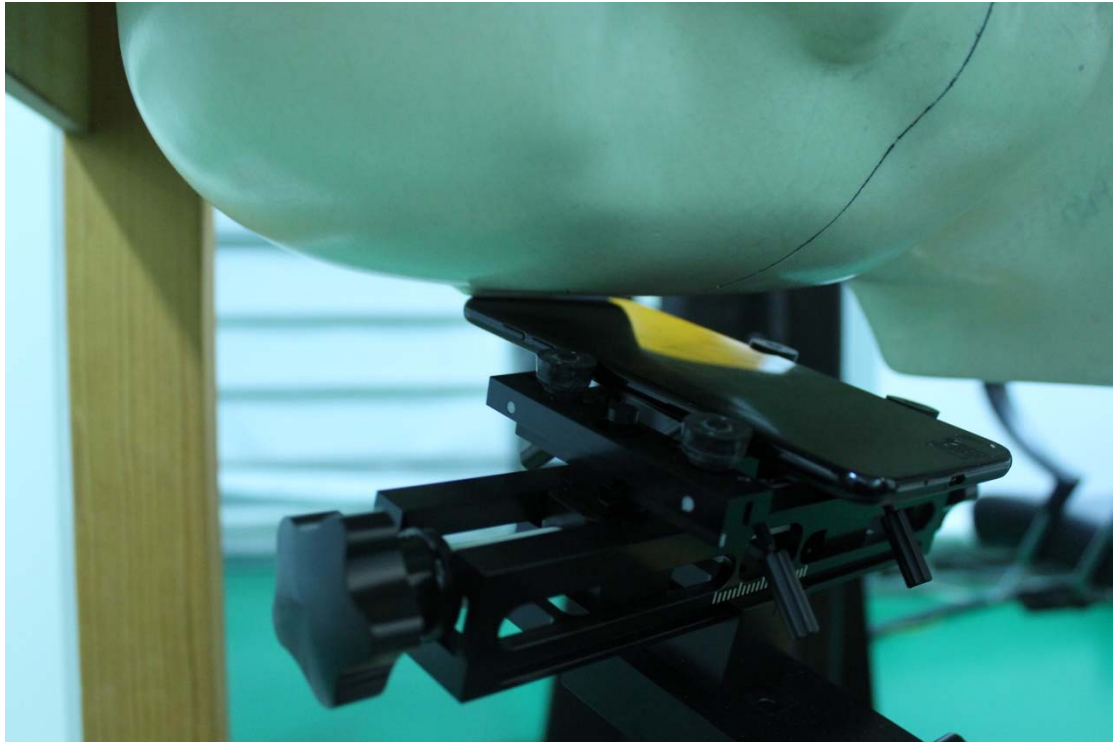


Picture - 5 Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

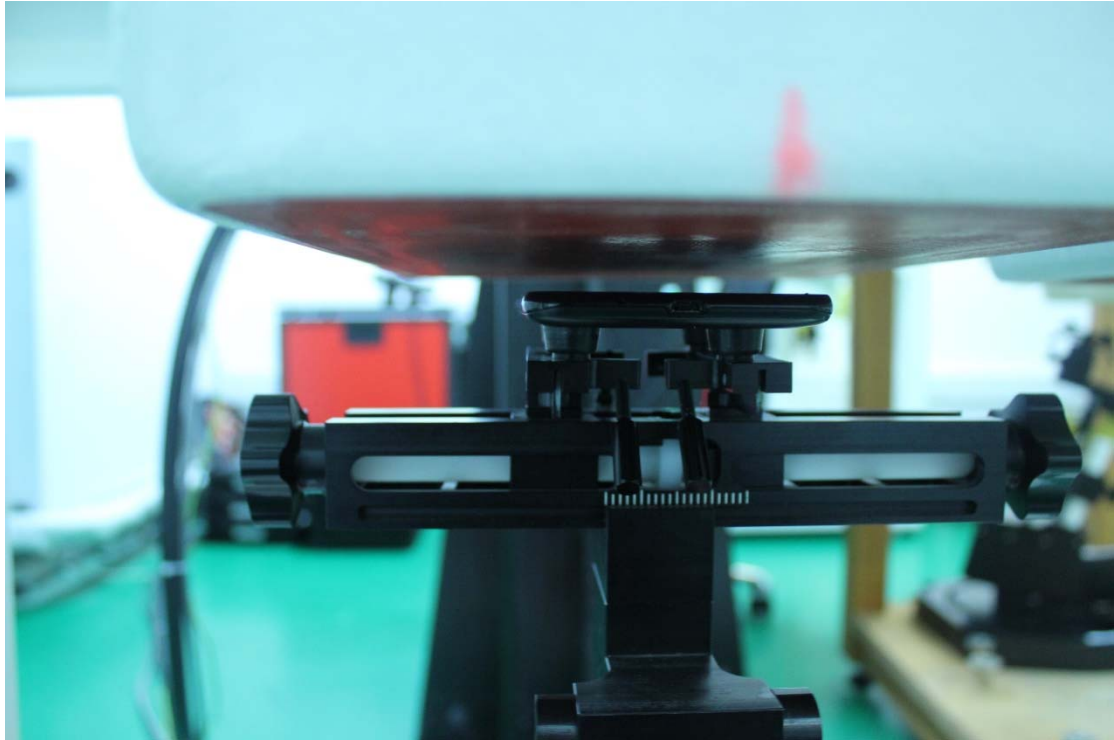


Picture - 6 Front

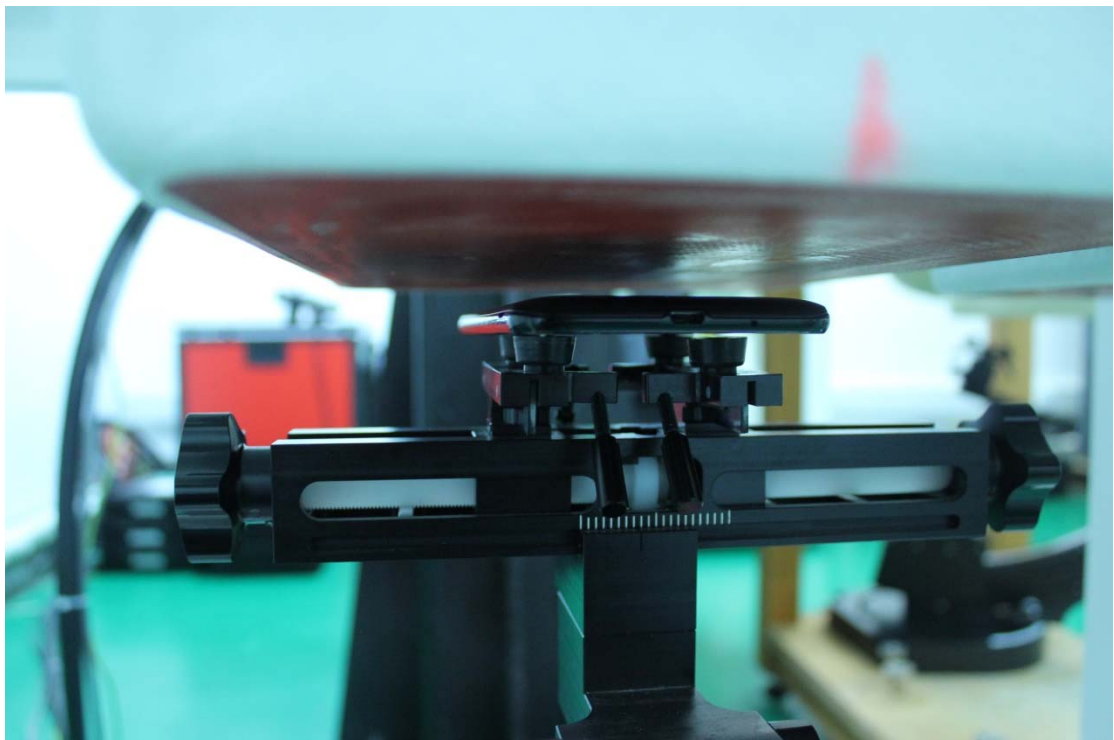

Picture - 7 Rear

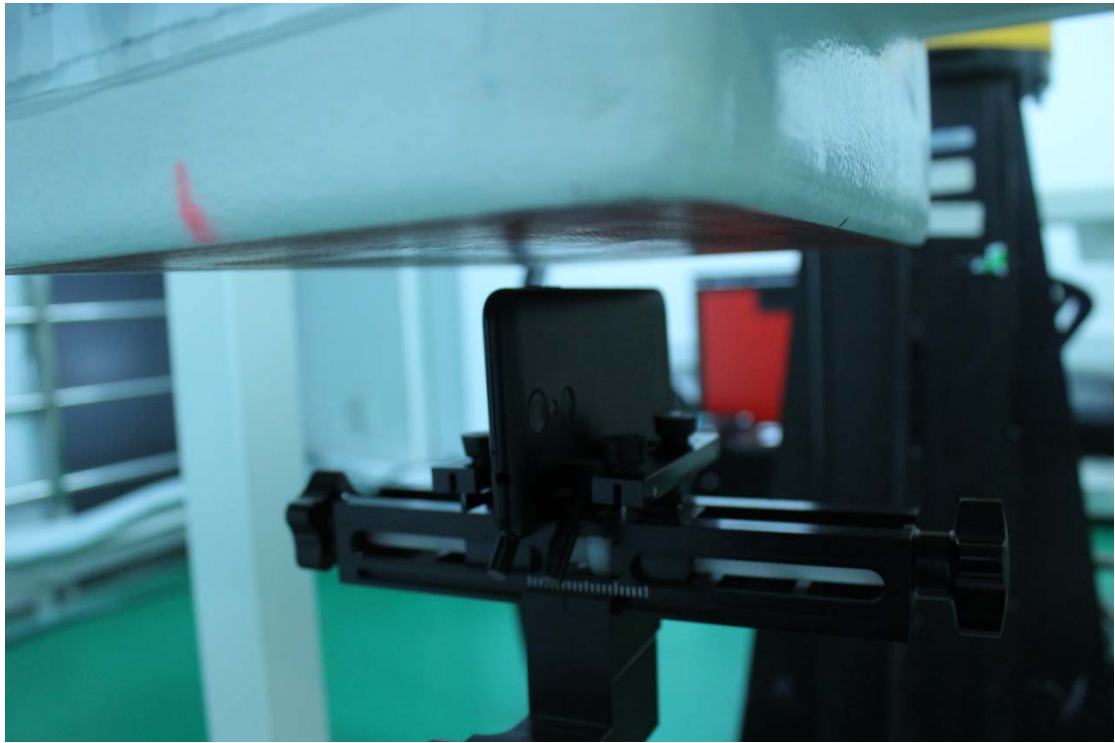


Picture - 8 Left edge

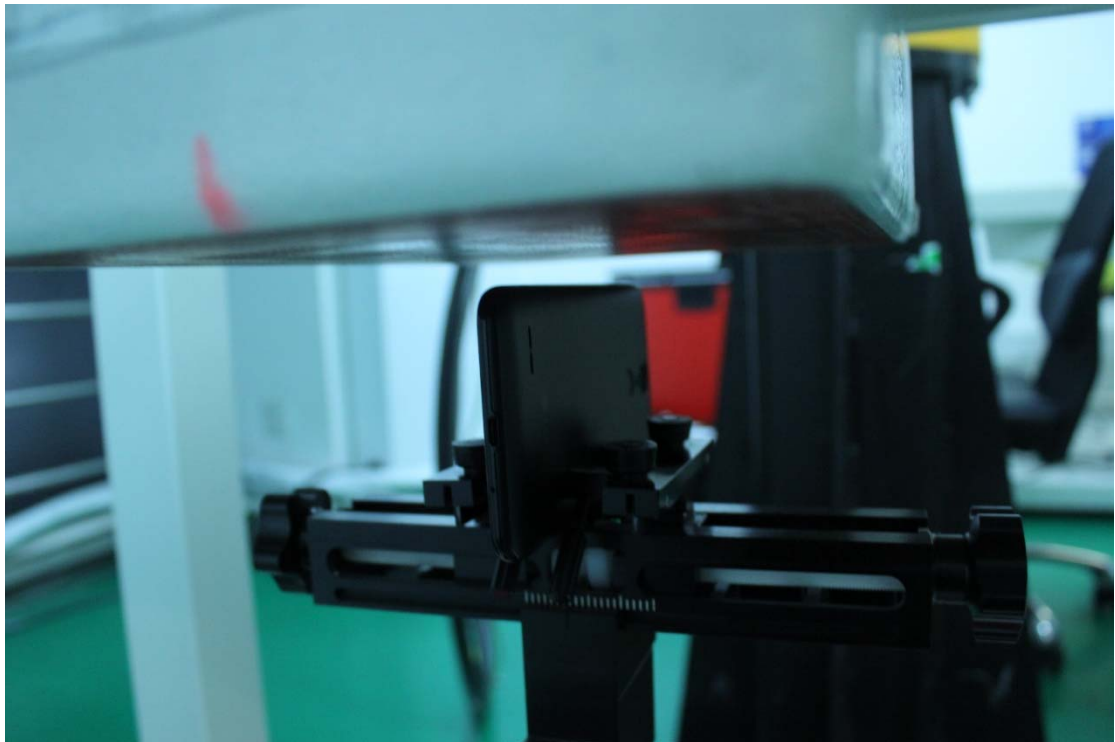

Picture - 9 Right edge



Picture - 10 Bottom edge

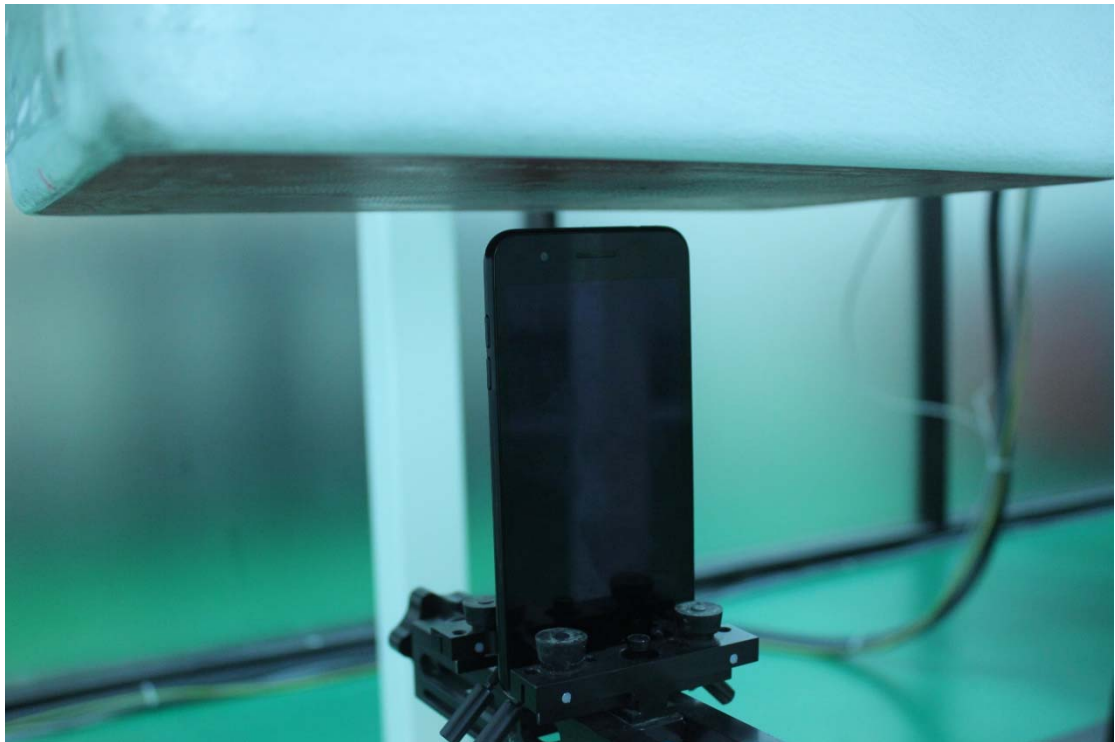

Picture - 11 Top edge