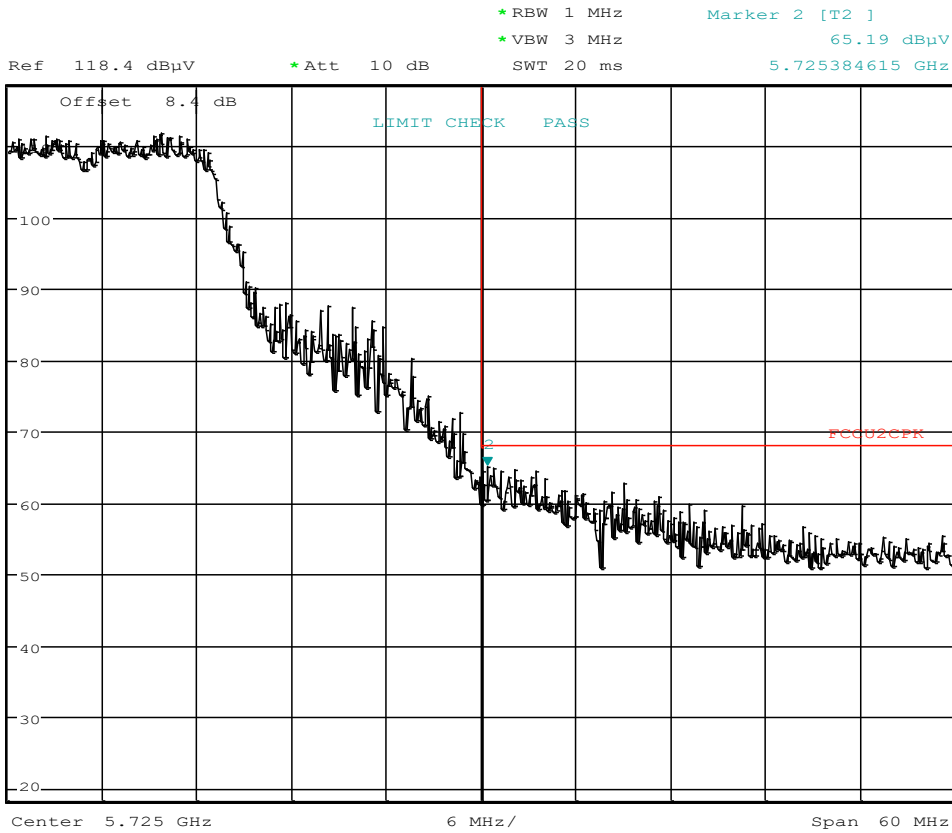


Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5700MHz
 Channel: 140




Date: 12.SEP.2017 20:00:00

Plot 7-82. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFX212TA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 77 of 96

Radiated Band Edge Measurements (20MHz BW)
§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

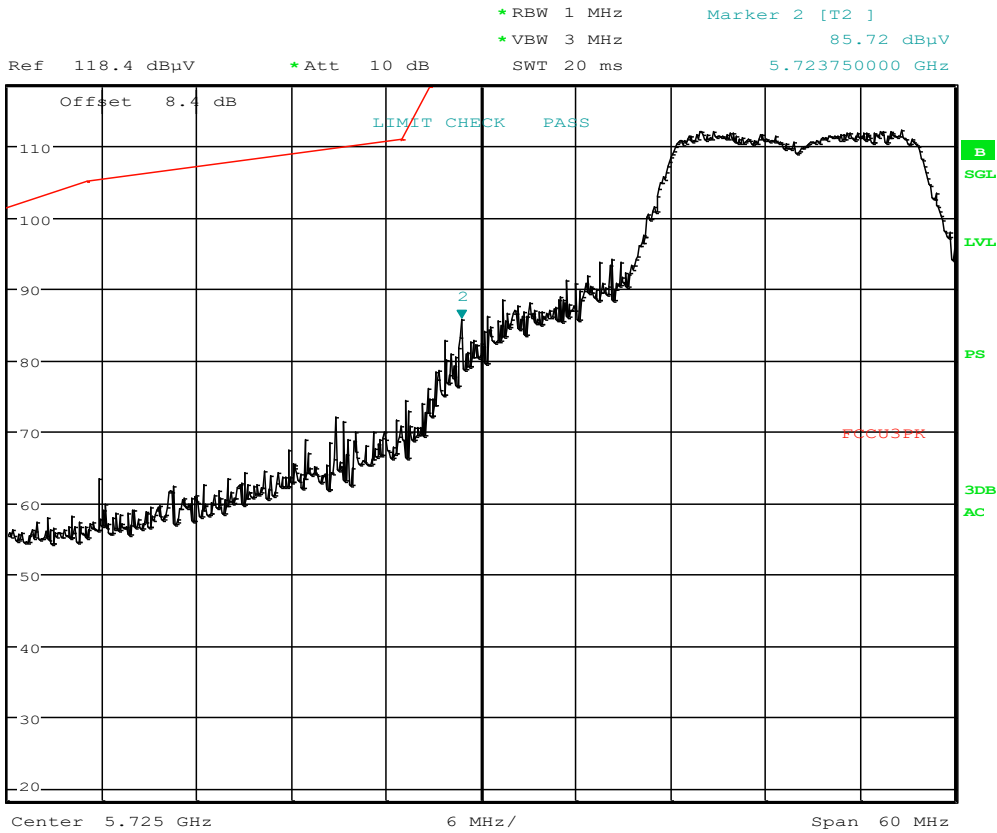Worst Case Mode: 802.11a
 Worst Case Transfer Rate: 6 Mbps
 Distance of Measurements: 3 Meters
 Operating Frequency: 5745MHz
 Channel: 149



Date: 12.SEP.2017 20:03:42

Plot 7-83. Radiated Lower Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 78 of 96

Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

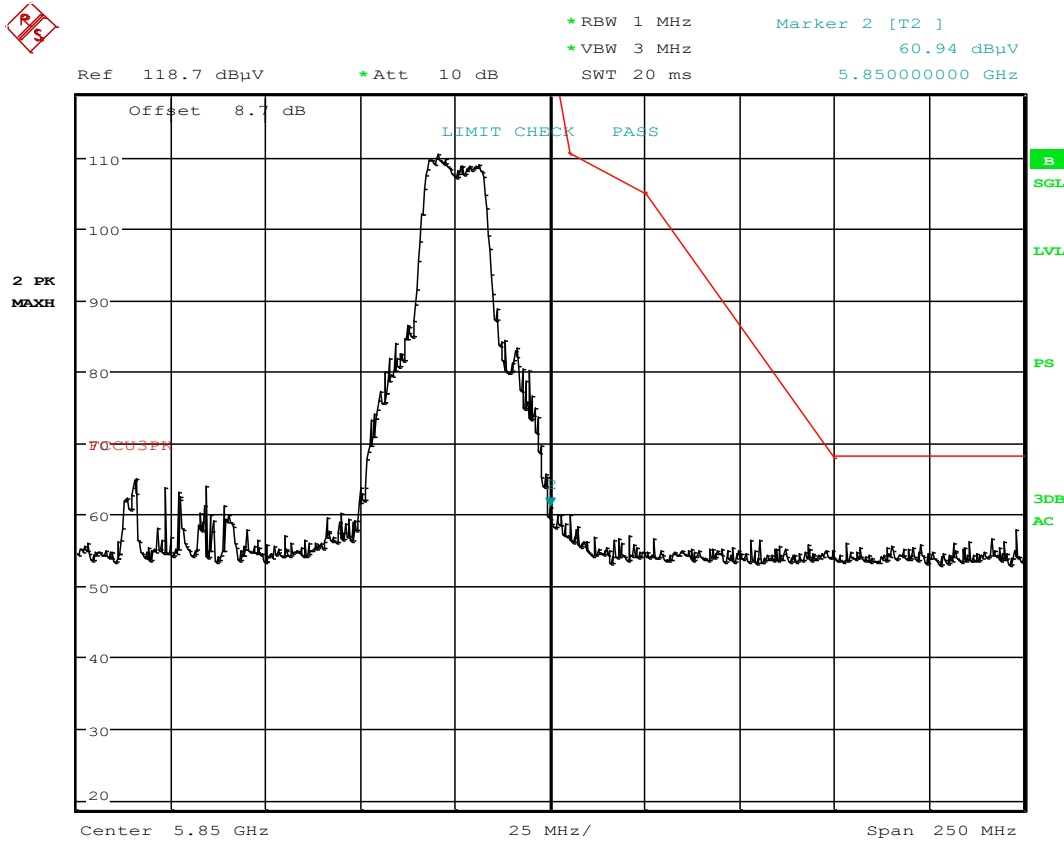
Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5825MHz

Channel: 165




Date: 12.SEP.2017 20:07:50

Plot 7-84. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 79 of 96

7.7.3 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

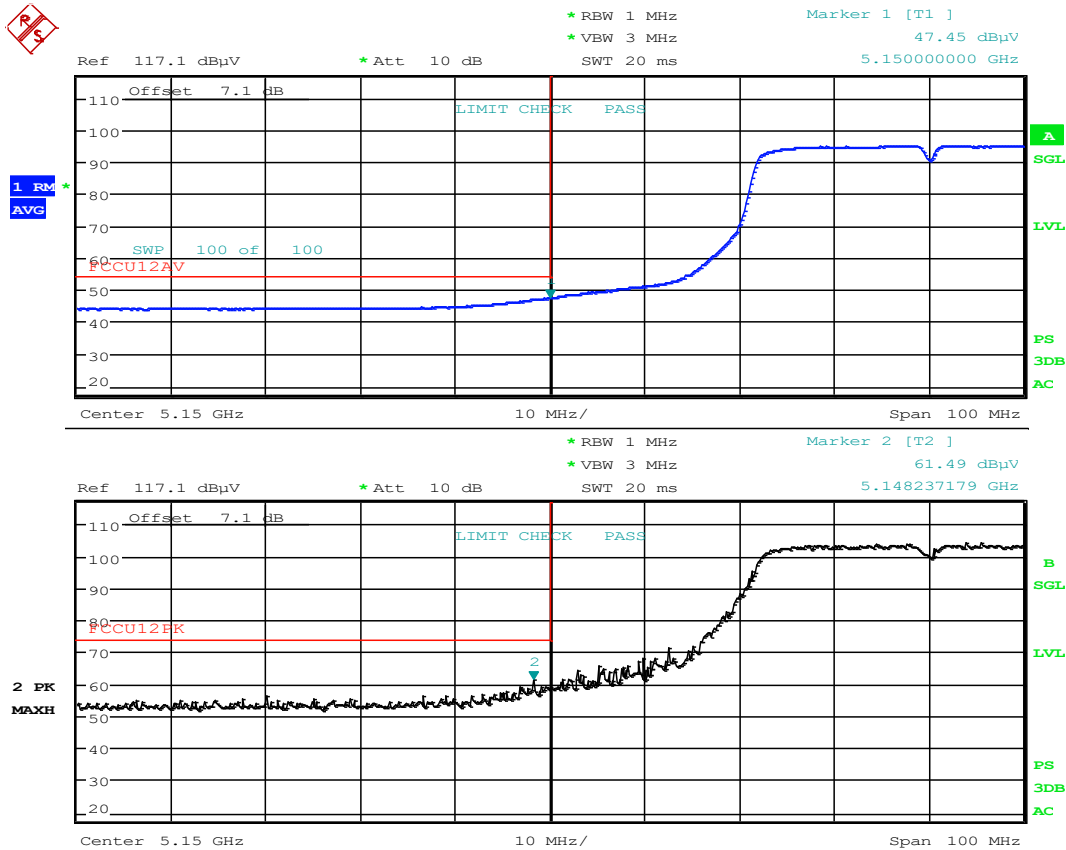Worst Case Mode: 802.11n
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 3 Meters
 Operating Frequency: 5190MHz
 Channel: 38



Date: 12.SEP.2017 20:34:32

Plot 7-85. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 1)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 80 of 96

Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

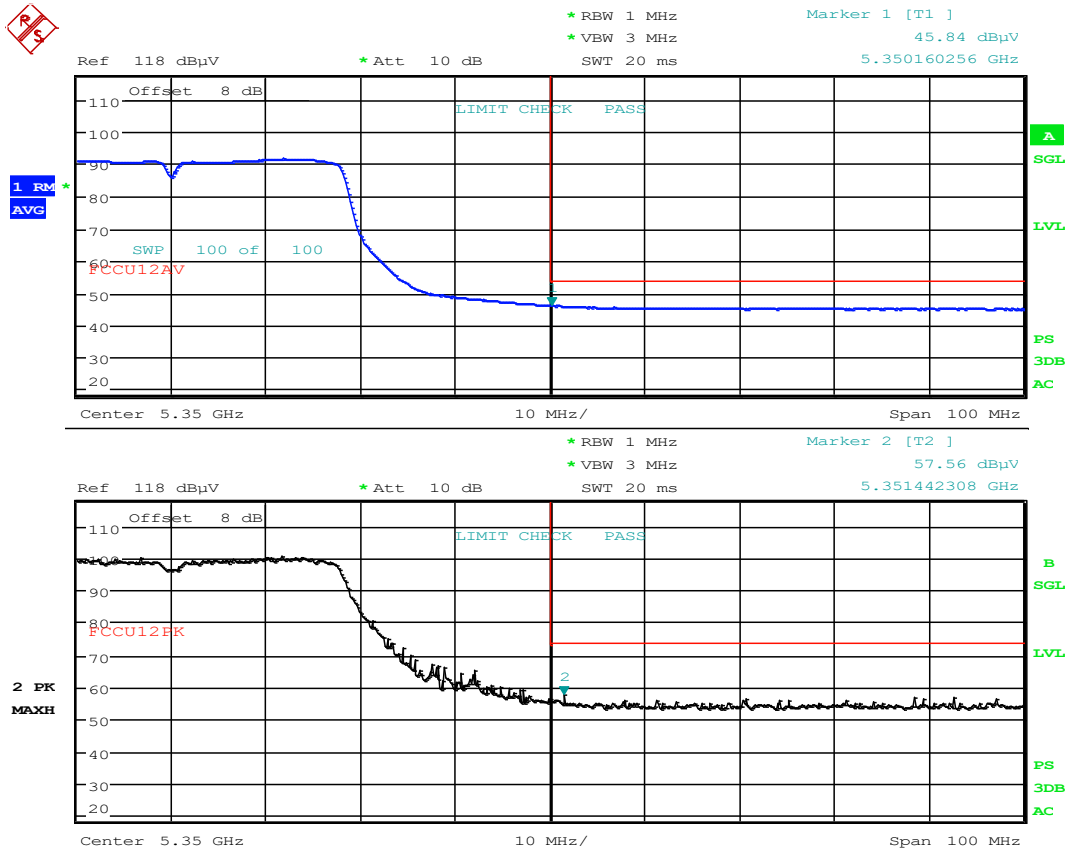
Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62



Date: 12.SEP.2017 20:38:21

Plot 7-86. Radiated Restricted Upper Band Edge Plot (Average & Peak – UNII Band 2A)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 81 of 96

Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

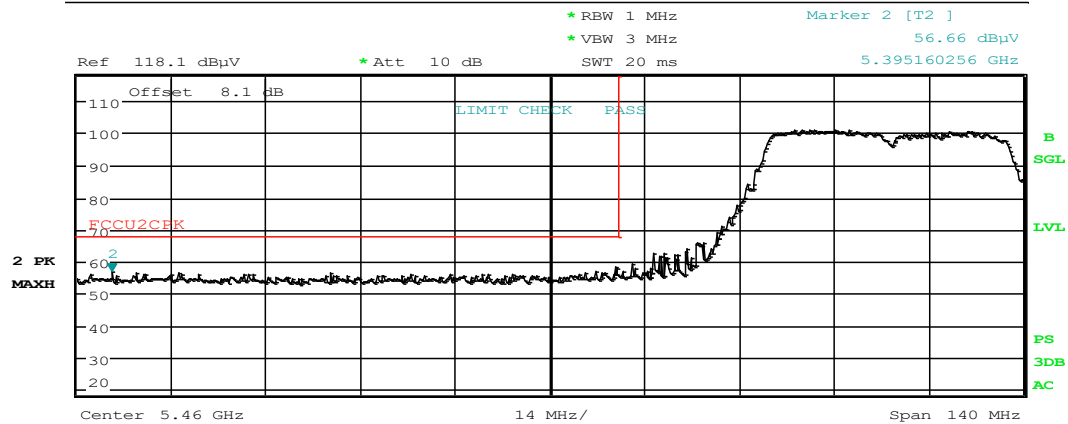
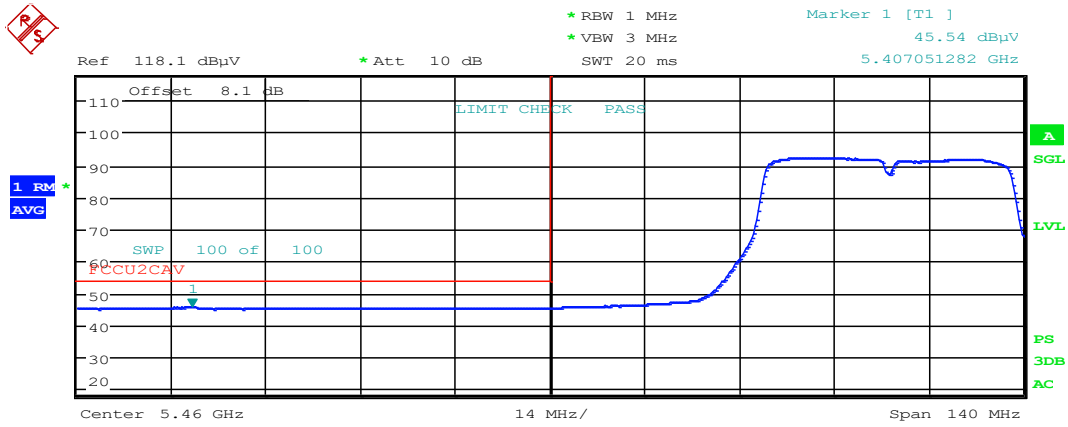
Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102



Date: 12.SEP.2017 20:44:14

Plot 7-87. Radiated Restricted Lower Band Edge Plot (Average & Peak – UNII Band 2C)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 82 of 96

Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

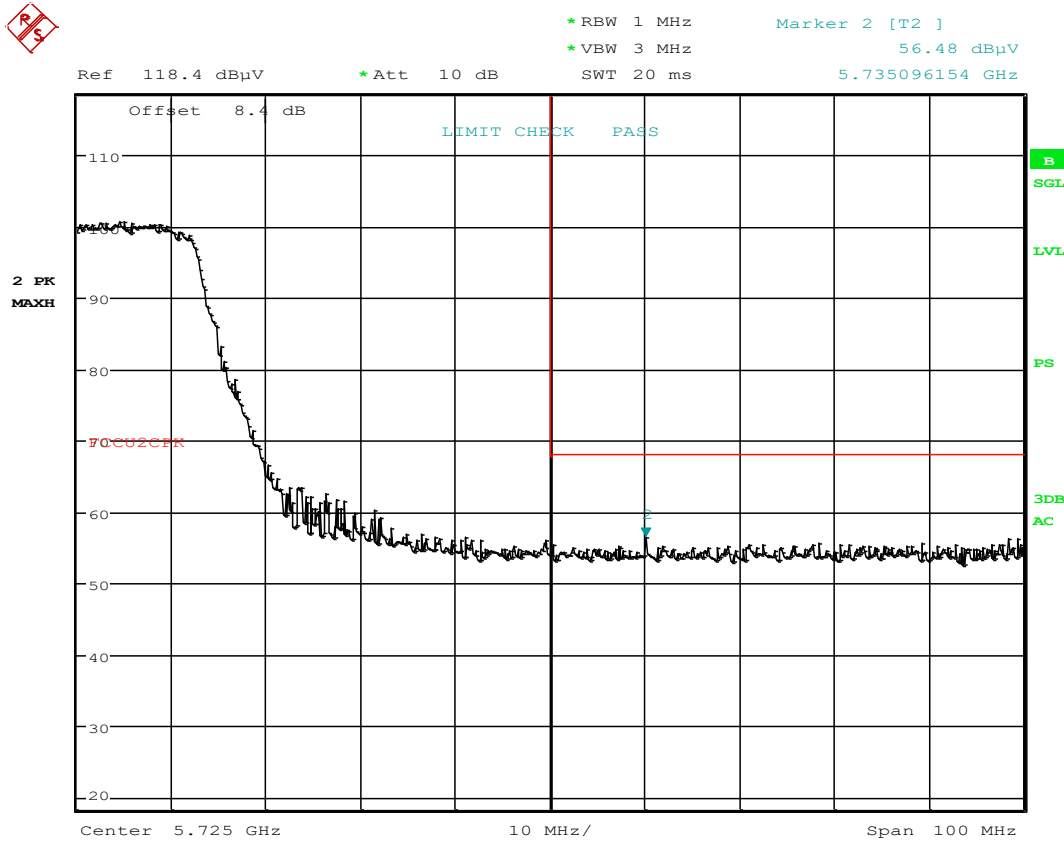
Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5670MHz

Channel: 134



Date: 12.SEP.2017 20:48:37

Plot 7-88. Radiated Upper Band Edge Plot (Peak – UNII Band 2C)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 83 of 96

Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

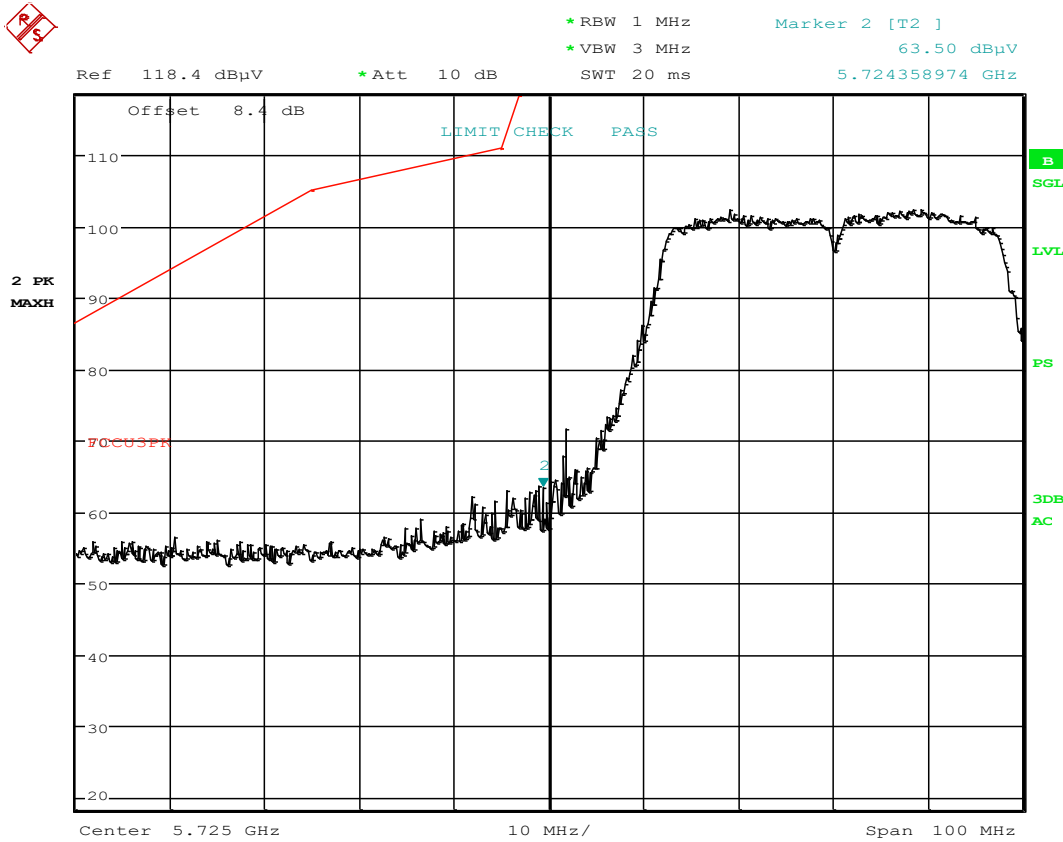
Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5755MHz

Channel: 151



Date: 12.SEP.2017 20:53:57

Plot 7-89. Radiated Lower Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 84 of 96

Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209; RSS-Gen [8.9]

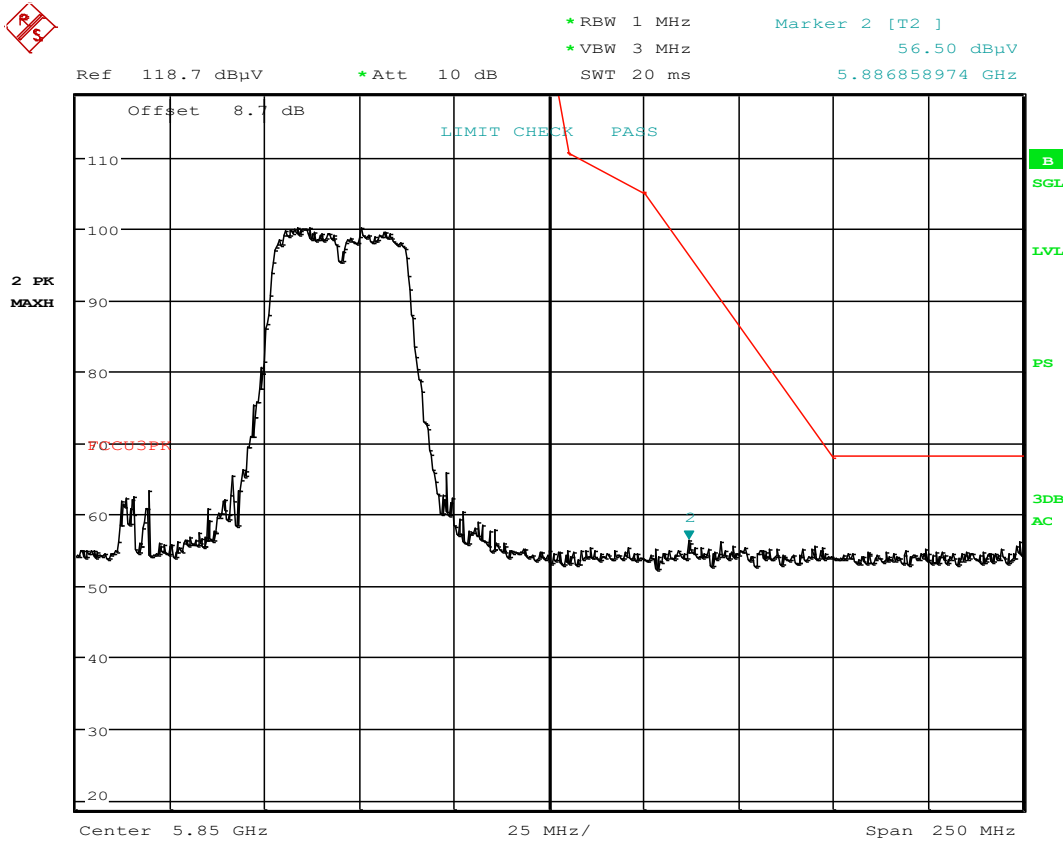
Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5795MHz

Channel: 159



Date: 12.SEP.2017 20:59:12

Plot 7-90. Radiated Upper Band Edge Plot (Peak – UNII Band 3)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 85 of 96

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-25 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-25. Radiated Limits



Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset	Page 86 of 96	

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

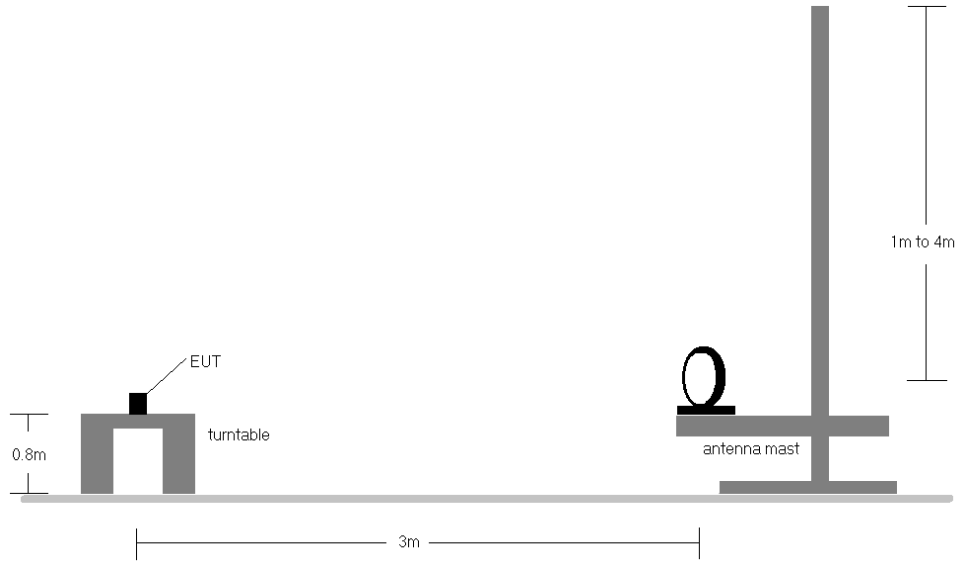


Figure 7-6. Radiated Test Setup < 30MHz

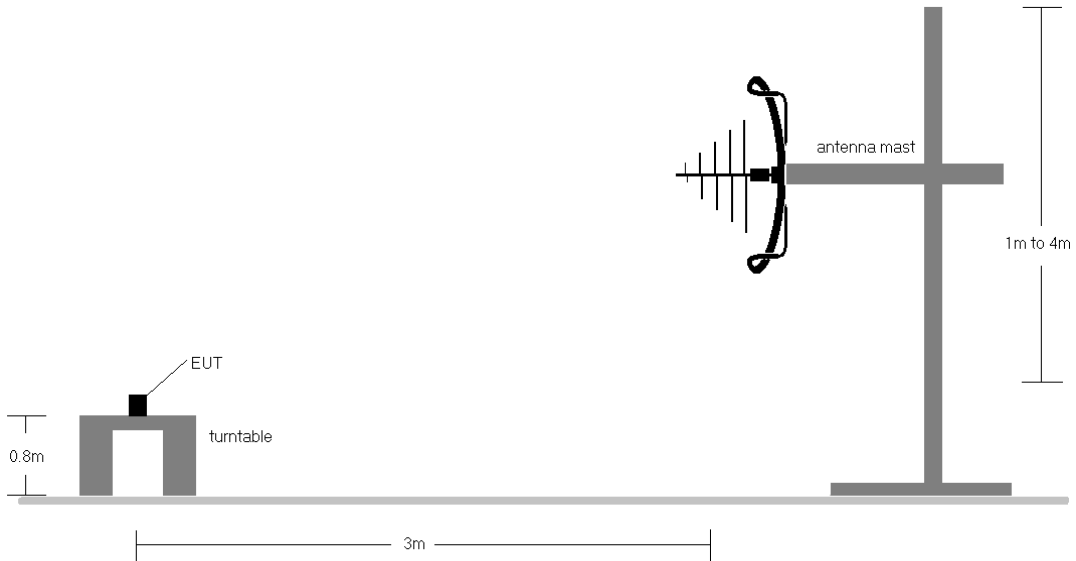





Figure 7-7. Radiated Test Setup < 1GHz

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset	Page 87 of 96


Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen (8.10) are below the limit shown in Table 7-25.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.


FCC ID: ZNFX212TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset	Page 88 of 96

Radiated Spurious Emissions Measurements (Below 1GHz)

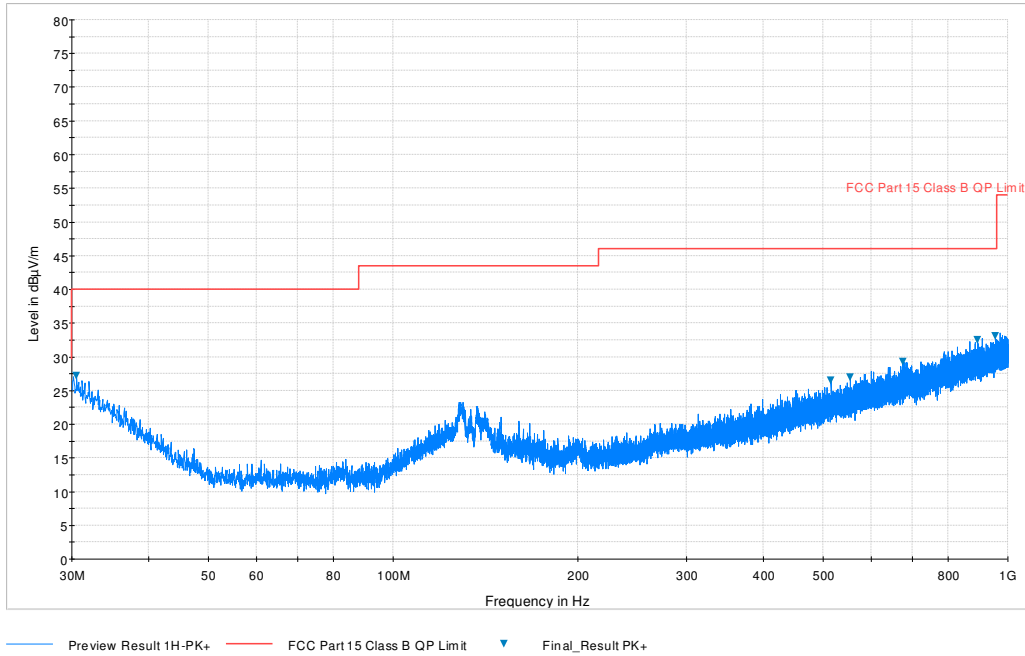§15.209; RSS-Gen [8.9]



Plot 7-91. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. H)

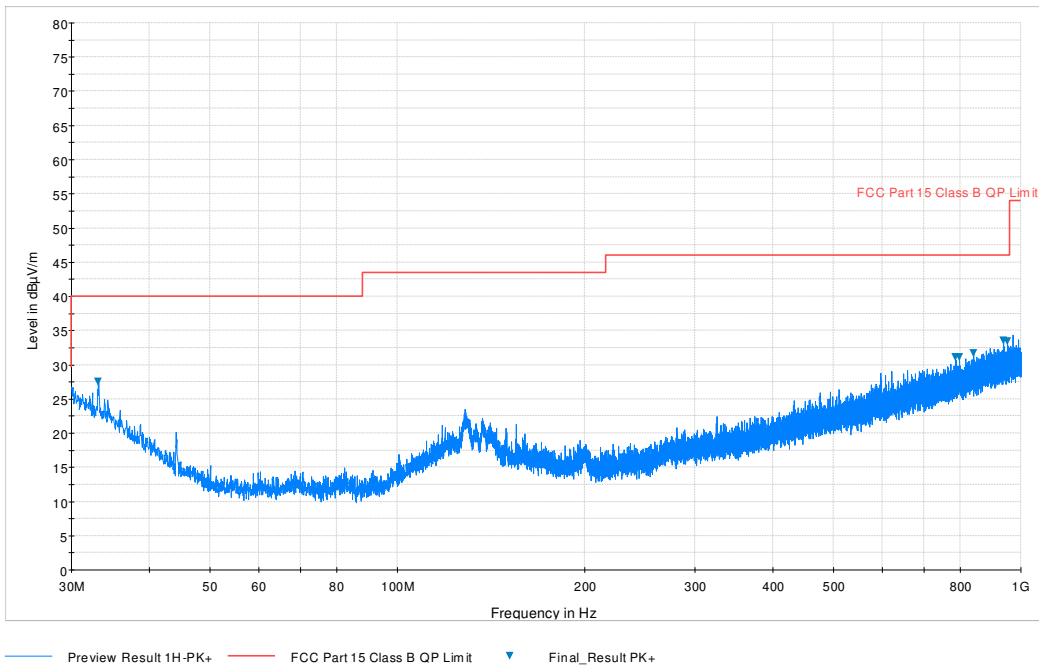

Plot 7-92. Radiated Spurious Plot below 1GHz (802.11a – U3 Ch. 157, Ant. Pol. V)

FCC ID: ZNFX212TA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 89 of 96

7.9 Line-Conducted Test Data

§15.407; RSS-Gen [8.8]

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below, per Section 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-26. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2



Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 90 of 96

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

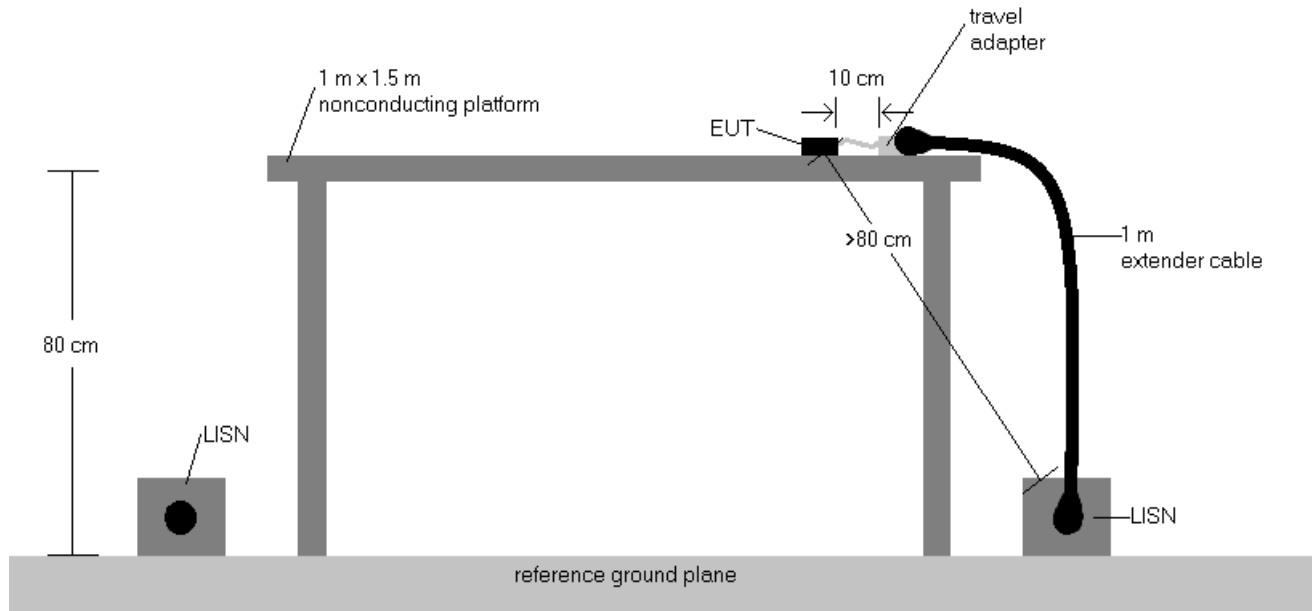


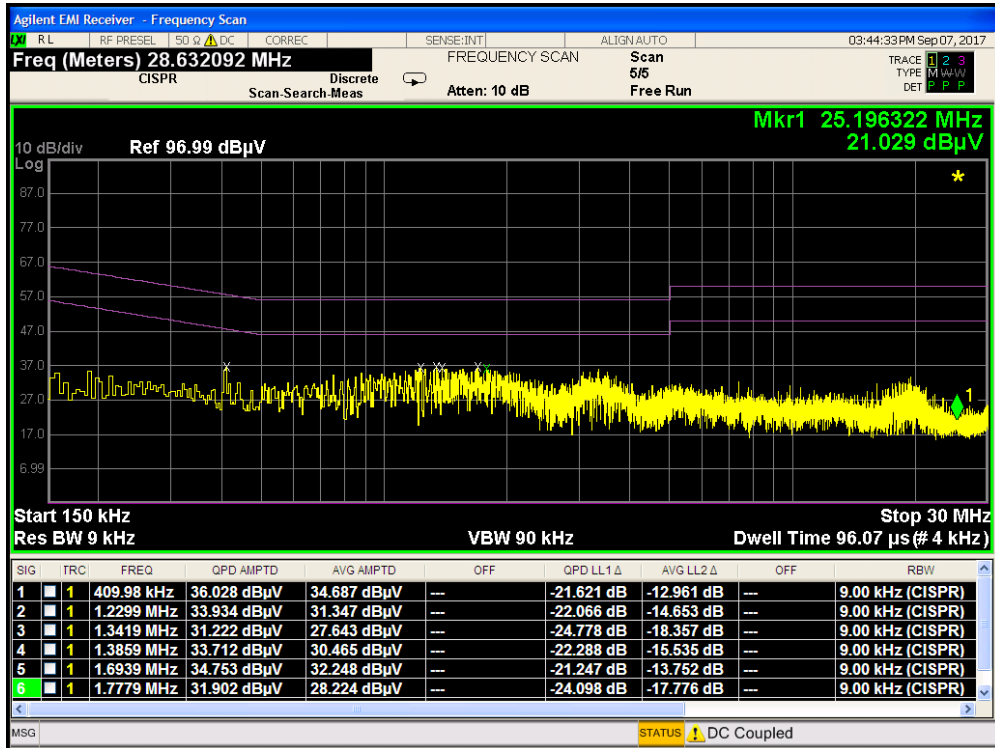


Figure 7-8. Test Instrument & Measurement Setup


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $Corr. (dB) = Cable\ loss (dB) + LISN\ insertion\ factor (dB)$
4. $QP/AV\ Level (dB_{\mu V}) = QP/AV\ Analyzer/Receiver\ Level (dB_{\mu V}) + Corr. (dB)$
5. $Margin (dB) = QP/AV\ Limit (dB_{\mu V}) - QP/AV\ Level (dB_{\mu V})$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 91 of 96




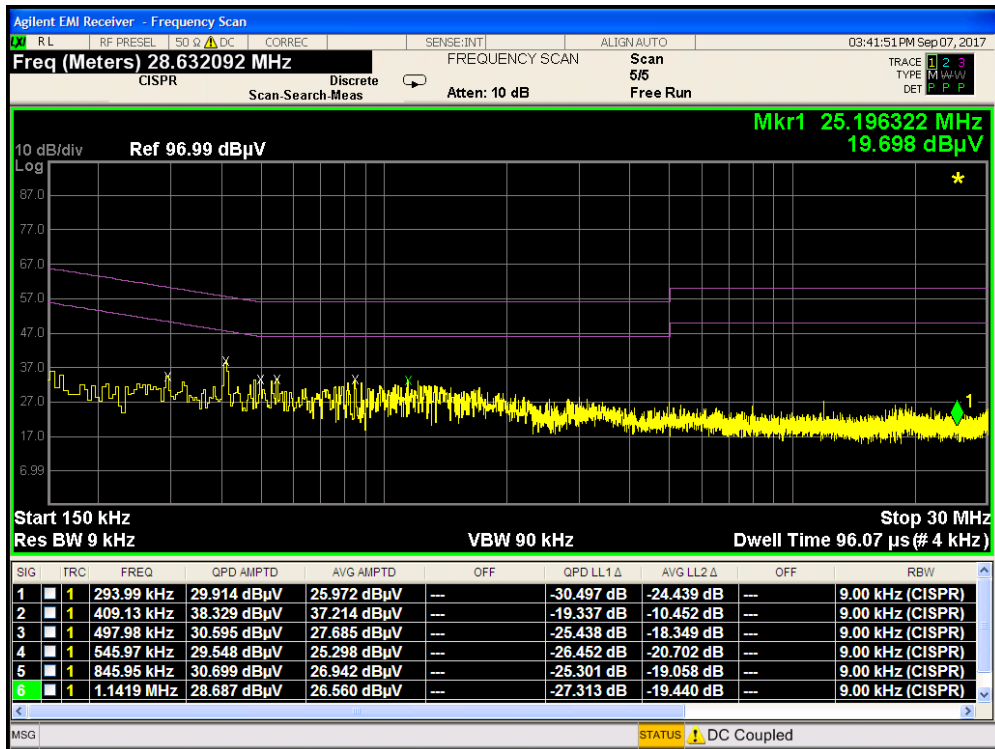Plot 7-93. Line Conducted Plot with 802.11a UNII Band 1 (L1)




Plot 7-94. Line Conducted Plot with 802.11a UNII Band 1 (N)

FCC ID: ZNFX212TA	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 92 of 96

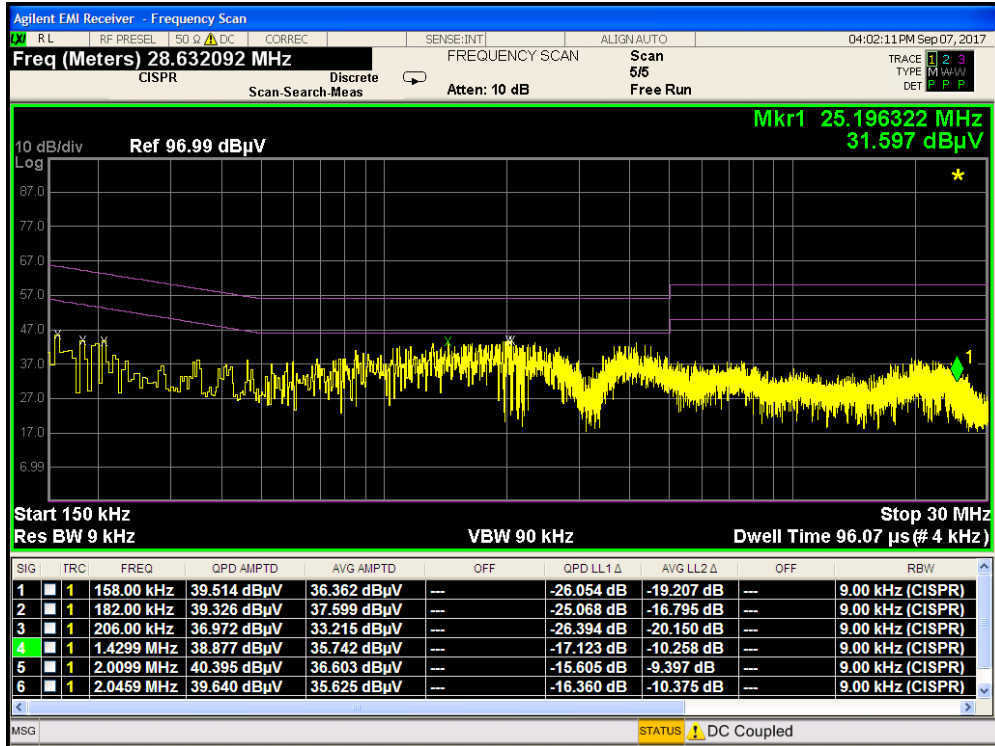


Plot 7-95. Line Conducted Plot with 802.11a UNII Band 2A (L1)

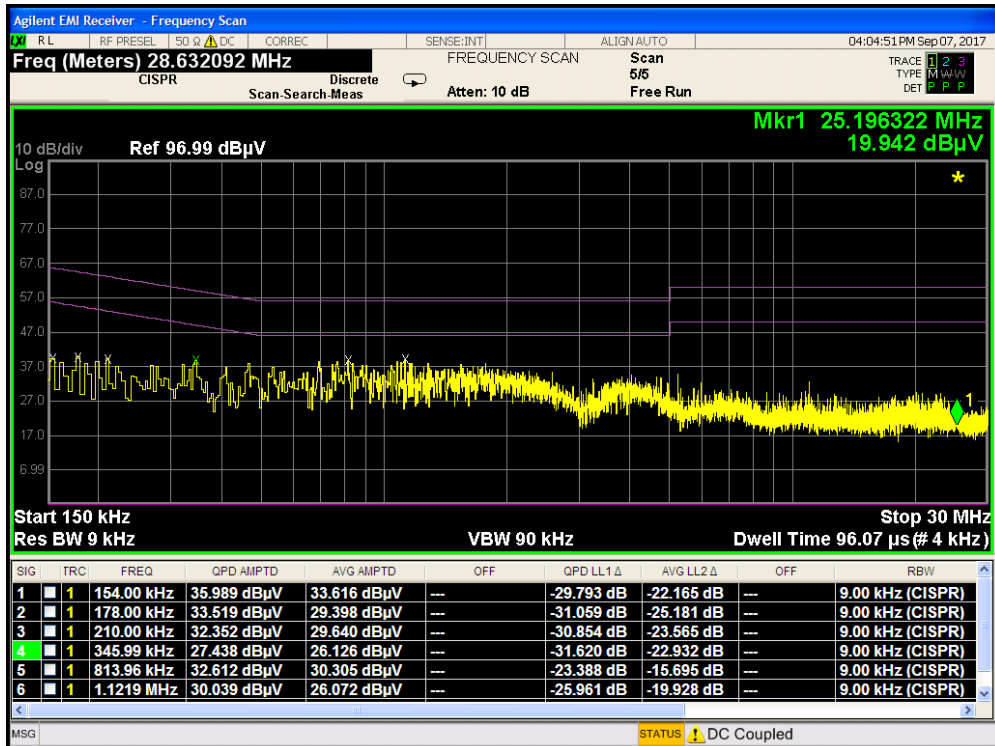


Plot 7-96. Line Conducted Plot with 802.11a UNII Band 2A (N)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 93 of 96

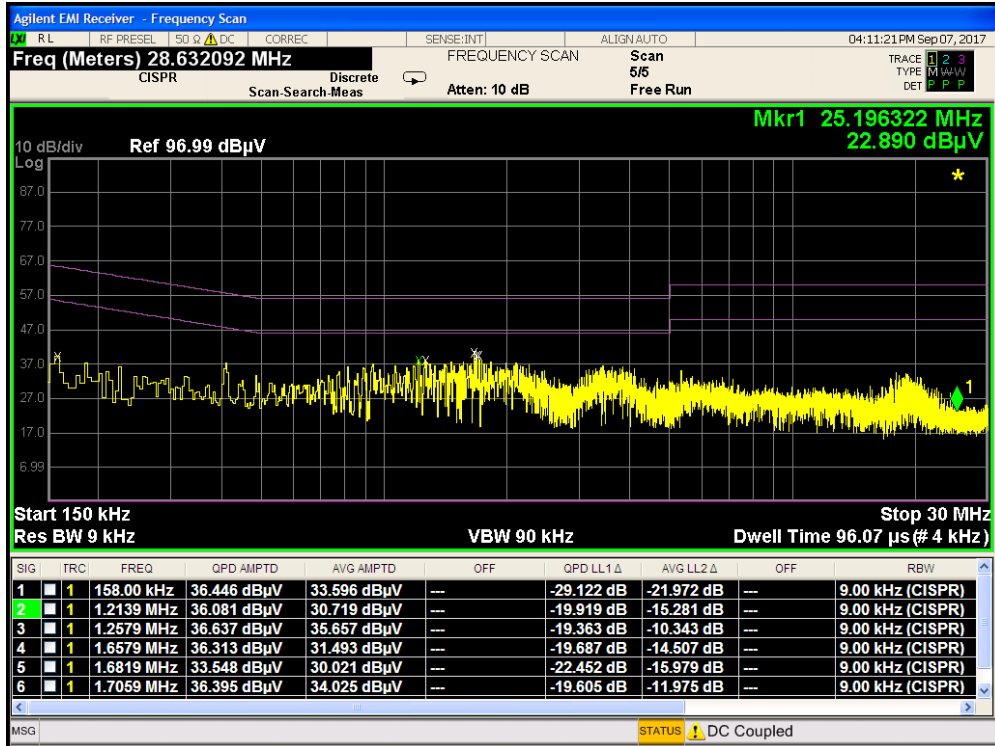


Plot 7-97. Line Conducted Plot with 802.11a UNII Band 2C (L1)

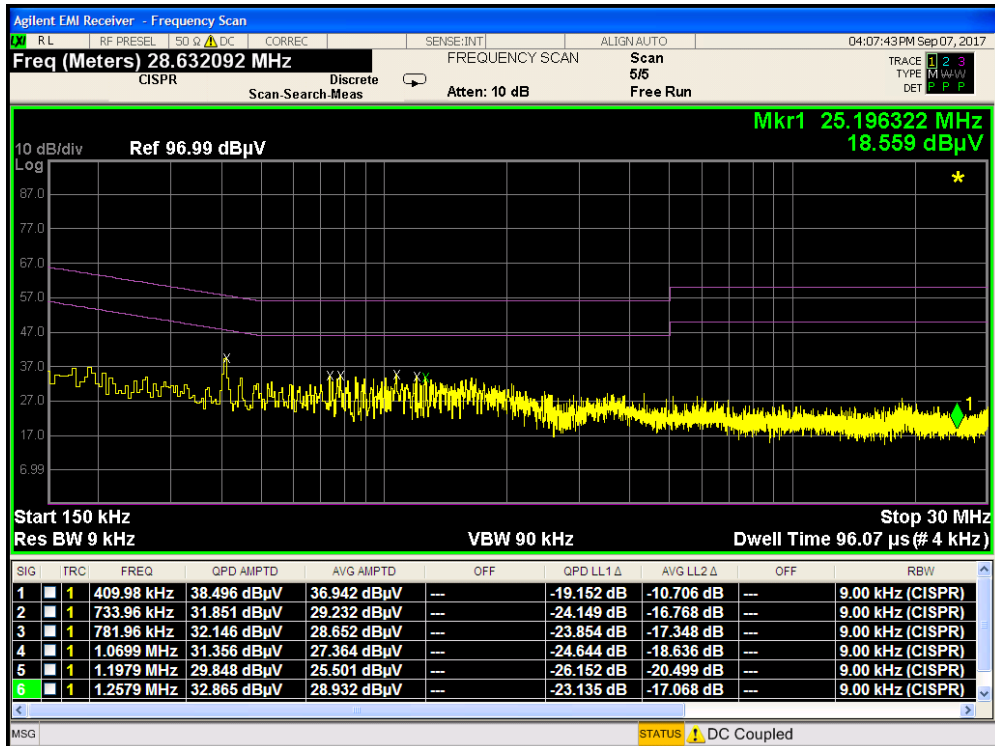


Plot 7-98. Line Conducted Plot with 802.11a UNII Band 2C (N)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 94 of 96

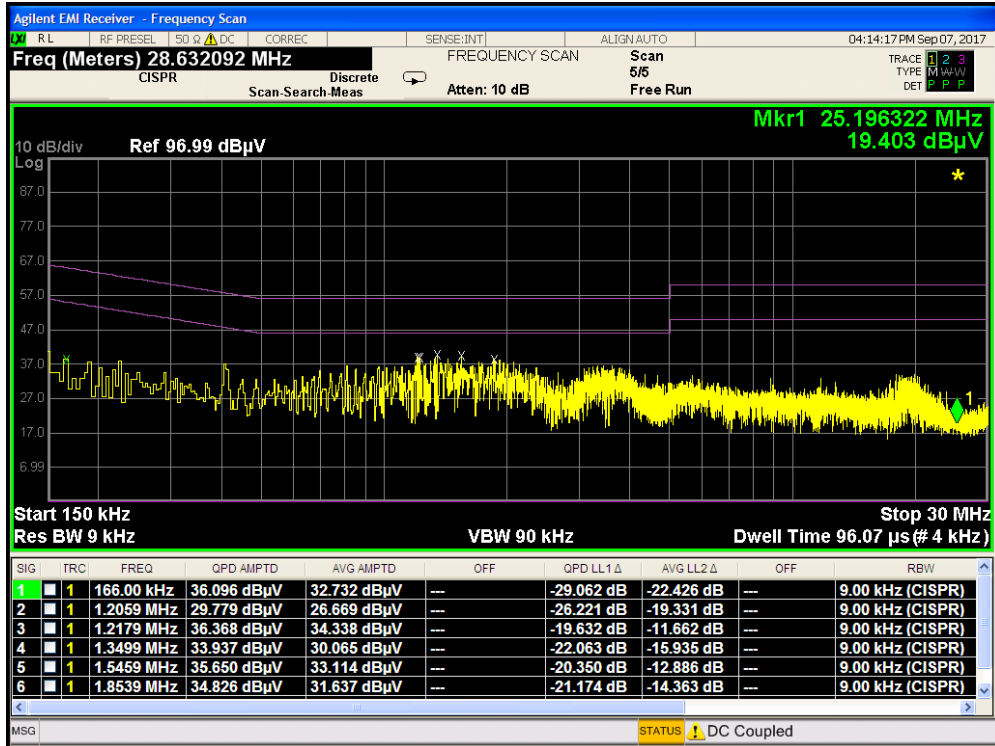

Plot 7-99. Line Conducted Plot with 802.11a UNII Band 3 (L1)

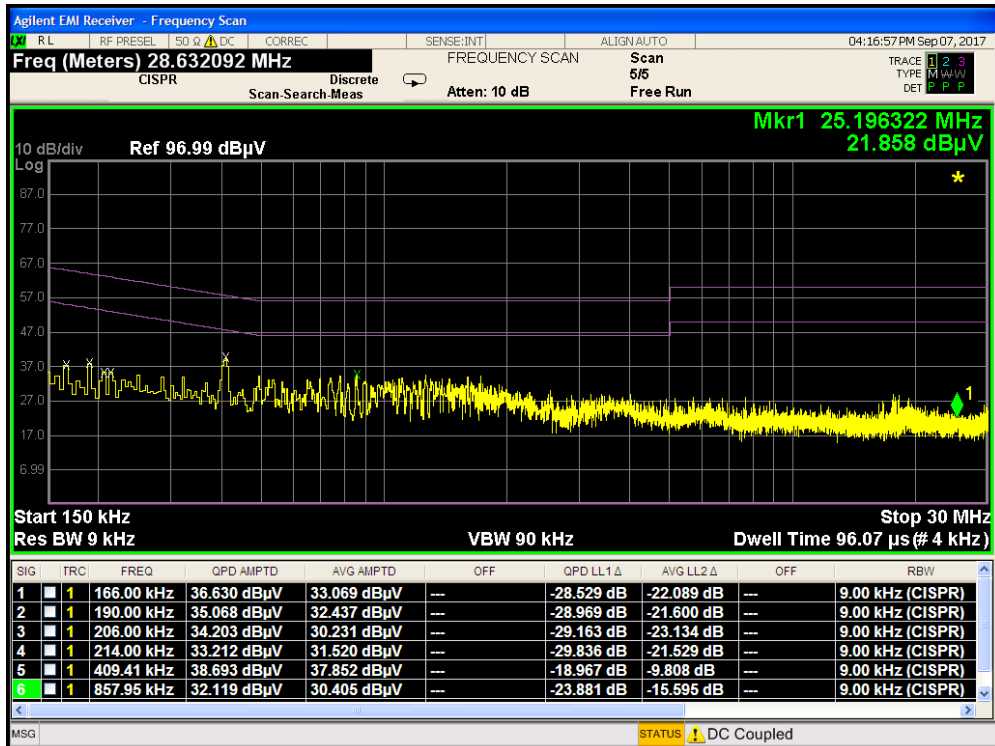



Plot 7-100. Line Conducted Plot with 802.11a UNII Band 3 (N)

FCC ID: ZNFX212TA		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset		Page 95 of 96

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LGE Portable Handset FCC ID: ZNFX212TA** is in compliance with Part 15 Subpart C (15.247) of the FCC Rules.

FCC ID: ZNFX212TA	 MEASUREMENT REPORT (CERTIFICATION) 		Approved by: Quality Manager
Test Report S/N: 1M1802060016-05.ZNF	Test Dates: 9/5 - 9/21/2017, 2/5-2/21/2018	EUT Type: Portable Handset	Page 96 of 96