Certificate No: ES3-3347_Mar18

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3347

Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) ^C | Relative Permittivity ^F | Conductivity (S/m) F | ConvF X | ConvF Y | ConvF Z | Alpha ^G | Depth ^G (mm) | Unc (k=2) |
|----------------------|---------------------------------------|----------------------|---------|---------|---------|--------------------|----------------------------|--------------|
| 750 | 55.5 | 0.96 | 6.59 | 6.59 | 6.59 | 0.77 | 1.22 | ± 12.0 % |
| 835 | 55.2 | 0.97 | 6.37 | 6.37 | 6.37 | 0.80 | 1.17 | ± 12.0 % |
| 1750 | 53.4 | 1.49 | 5.17 | 5.17 | 5.17 | 0.49 | 1.59 | ± 12.0 % |
| 1900 | 53.3 | 1.52 | 4.94 | 4.94 | 4.94 | 0.52 | 1.49 | ± 12.0 % |
| 2300 | 52.9 | 1.81 | 4.74 | 4.74 | 4.74 | 0.80 | 1.25 | ± 12.0 % |
| 2450 | 52.7 | 1.95 | 4.64 | 4.64 | 4.64 | 0.75 | 1.20 | ± 12.0 % |
| 2600 | 52.5 | 2.16 | 4.49 | 4.49 | 4.49 | 0.80 | 1.20 | ± 12.0 % |

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


validity can be extended to ± 110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of

the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

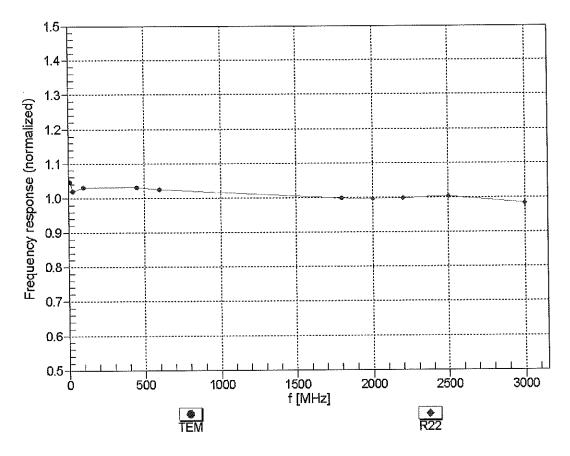



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


Receiving Pattern (ϕ), $9 = 0^{\circ}$



f=1800 MHz,R22

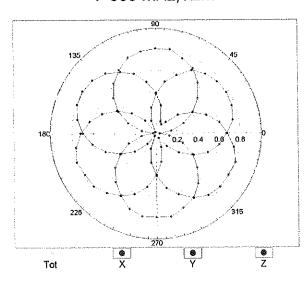


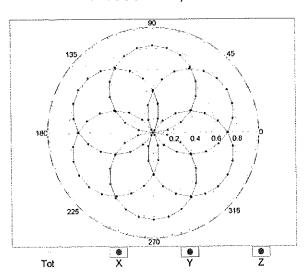


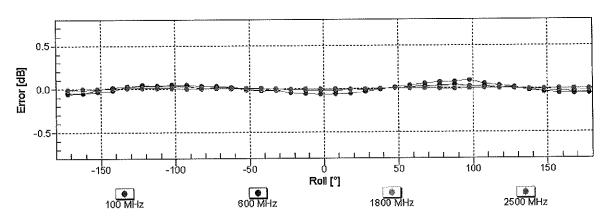

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

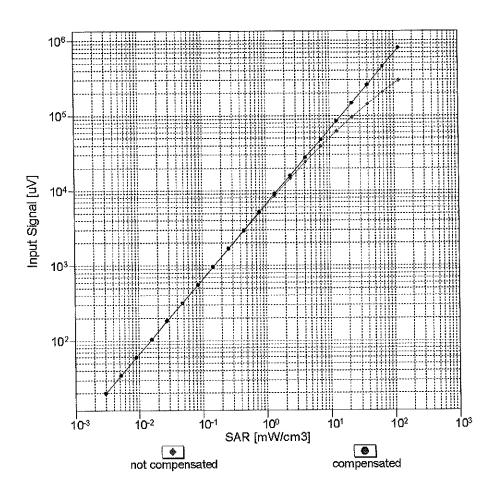

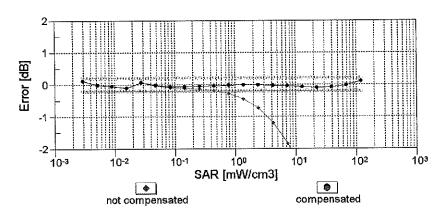


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

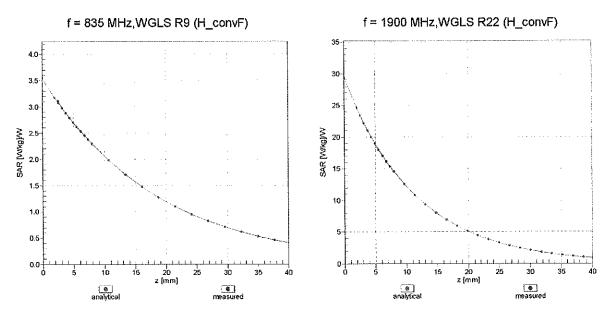

Deviation from Isotropy in Liquid Error (ϕ , θ), f = 900 MHz

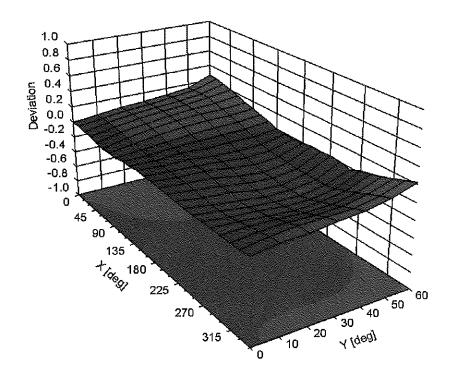

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3347

Other Probe Parameters

Certificate No: ES3-3347_Mar18

| Sensor Arrangement | Triangular |
|---|------------|
| Connector Angle (°) | -16.5 |
| Mechanical Surface Detection Mode | enabled |
| Optical Surface Detection Mode | disabled |
| Probe Overall Length | 337 mm |
| Probe Body Diameter | 10 mm |
| Tip Length | 10 mm |
| Tip Diameter | 4 mm |
| Probe Tip to Sensor X Calibration Point | 2 mm |
| Probe Tip to Sensor Y Calibration Point | 2 mm |
| Probe Tip to Sensor Z Calibration Point | 2 mm |
| Recommended Measurement Distance from Surface | 3 mm |

Appendix: Modulation Calibration Parameters

| UID | lix: Modulation Calibration Paral Communication System Name | | A dB | B dBõV | С | dB | VR mV | Max Unc ^E (k=2) |
|---------------|---|--------------|------------------|------------------|----------------|---------|---------------|----------------------------------|
| 0 | CW | X | 0.00 | 0.00 | 1.00 | 0.00 | 201.8 | ± 3.3 % |
| | | Υ | 0.00 | 0.00 | 1.00 | | 203.9 | 1 0.0 /0 |
| | | Z | 0.00 | 0.00 | 1.00 | | 204.8 | |
| 10010- CAA | SAR Validation (Square, 100ms, 10ms) | Х | 7.57 | 78.06 | 17.49 | 10.00 | 25.0 | ± 9.6 % |
| | | Υ | 9.85 | 82.39 | 18.69 | | 25.0 | |
| 45541 | | Z | 7.35 | 77.81 | 17.08 | | 25.0 | |
| 10011- CAB | UMTS-FDD (WCDMA) | X | 0.93 | 66.02 | 14.08 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.97 | 66.67 | 14.52 | | 150.0 | |
| 40040 | IEEE 000 441 MEELO 4 OU (DOOG) | Z | 0.93 | 66.21 | 14.17 | | 150.0 | |
| 10012- CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps) | × | 1.22 | 64.40 | 15.16 | 0.41 | 150.0 | ± 9.6 % |
| | *************************************** | <u>Y</u> | 1.24 | 64.68 | 15.35 | | 150.0 | |
| 40040 | IFFE 000 dd MIEI C . C | Z | 1.21 | 64.49 | 15.23 | | 150.0 | |
| 10013- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps) | X | 5.02 | 67.09 | 17.26 | 1.46 | 150.0 | ± 9.6 % |
| ***** | | Υ | 4.93 | 67.32 | 17.31 | | 150.0 | |
| 40004 | COM FRR (TEXA) | Z | 4.97 | 67.16 | 17.27 | | 150.0 | |
| 10021- DAC | GSM-FDD (TDMA, GMSK) | X | 91.36 | 118.07 | 31.34 | 9.39 | 50.0 | ± 9.6 % |
| | | Υ | 100.00 | 119.30 | 31.14 | | 50.0 | |
| 10000 | | Z | 100.00 | 118.75 | 31.10 | | 50.0 | |
| 10023- DAC | GPRS-FDD (TDMA, GMSK, TN 0) | X | 58.54 | 111.16 | 29.65 | 9.57 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 119.20 | 31.14 | | 50.0 | |
| | | Z | 100.00 | 118.71 | 31.13 | | 50.0 | |
| 10024- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1) | X | 100.00 | 115.85 | 28.82 | 6.56 | 60.0 | ± 9.6 % |
| | | Υ | 100.00 | 116.32 | 28.70 | | 60.0 | |
| | | Z | 100.00 | 115.26 | 28.36 | | 60.0 | |
| 10025- DAC | EDGE-FDD (TDMA, 8PSK, TN 0) | Х | 19.84 | 109.66 | 41.73 | 12.57 | 50.0 | ± 9.6 % |
| | | Y | 49.03 | 143.08 | 53.86 | | 50.0 | |
| | | Z | 21.37 | 113.26 | 43.24 | | 50.0 | |
| 10026- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1) | X | 21.22 | 106.46 | 36.65 | 9.56 | 60.0 | ± 9.6 % |
| | | Υ | 31.58 | 119.85 | 41.69 | | 60.0 | |
| | | Z | 22.56 | 108.96 | 37.62 | | 60.0 | |
| 10027- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2) | Х | 100.00 | 114.36 | 27.28 | 4.80 | 80.0 | ± 9.6 % |
| | | Υ | 100.00 | 115.58 | 27.56 | | 80.0 | |
| 10000 | | Z | 100.00 | 113.91 | 26.92 | | 80.0 | |
| 10028- DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3) | X | 100.00 | 113.86 | 26.30 | 3.55 | 100.0 | ± 9.6 % |
| | | Υ | 100.00 | 115.98 | 27.02 | | 100.0 | |
| 185 | | Z | 100.00 | 113.53 | 26.01 | | 100.0 | |
| 10029- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2) | X | 12.94 | 95.02 | 31.64 | 7.80 | 80.0 | ± 9.6 % |
| | | Y | 14.07 | 99.40 | 33.81 | | 80.0 | |
| 10030- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1) | X | 12.89 100.00 | 95.72 113.99 | 32.02 27.43 | 5.30 | 80.0 70.0 | ± 9.6 % |
| UMM | | | 400.00 | 444.00 | 27.44 | | 70.0 | |
| | | Y 7 | 100.00 100.00 | 114.60 | 27.41 | | 70.0 | |
| 10031- CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3) | X | 100.00 | 113.38 111.77 | 26.98 23.93 | 1.88 | 70.0 100.0 | ± 9.6 % |
| 27.57 | | Y | 100.00 | 115.39 | 25.33 | | 100.0 | |
| · | | Z | 100.00 | 111.26 | | | | |
| | | | 100.00 | 111.20 | 23.59 | l . | 100.0 | l |

| 10032- | IEEE 802.15.1 Bluetooth (GFSK, DH5) | Х | 100.00 | 111.85 | 22.94 | 1.17 | 100.0 | ± 9.6 % |
|---------------|---|--------------------|----------------|------------------|---------------|---------|----------------|---|
| CAA | | Υ | 100.00 | 118.40 | 25.59 | | 100.0 | |
| | | Z | 100.00 | 111.34 | 22.62 | | 100.0 | |
| 10033- CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1) | X | 23.91 | 101.19 | 27.41 | 5.30 | 70.0 | ± 9.6 % |
| | | Υ | 36.18 | 107.81 | 28.88 | | 70.0 | |
| | | Ζ | 30.63 | 104.89 | 28.18 | | 70.0 | |
| 10034- CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3) | Х | 6.24 | 84.08 | 20.44 | 1.88 | 100.0 | ± 9.6 % |
| | | Υ | 7.24 | 85.92 | 20.55 | | 100.0 | |
| | | Z | 6.85 | 85.19 | 20.50 | | 100.0 | |
| 10035- CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5) | Х | 3.29 | 76.95 | 17.63 | 1.17 | 100.0 | ± 9.6 % |
| | | Υ | 3.58 | 78.09 | 17.57 | | 100.0 | |
| 10000 | | Z | 3.42 | 77.43 | 17.51 | = 00 | 100.0 | |
| 10036- CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1) | Х | 32.79 | 106.39 | 28.91 | 5.30 | 70.0 | ± 9.6 % |
| | | Υ | 55.24 | 114.58 | 30.68 | | 70.0 | |
| 40007 | IEEE 000 45 4 Division III (2 DDOM DIVIS) | Z | 45.73 | 111.34 | 29.95 | 4.00 | 70.0 | . 0 0 0/ |
| 10037- CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3) | X | 5.86 | 83.28 | 20.13 | 1.88 | 100.0 | ± 9.6 % |
| | | Y | 6.54 | 84.66 | 20.12 | | 100.0 | |
| 40000 | LEEE 000 45 4 Phys./ 12 (2 PPO// PMP) | Z | 6.31 | 84.13 | 20.12 | 4 4 *** | 100.0 | 1000 |
| 10038- CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5) | X | 3.39 | 77.59 | 17.96 | 1.17 | 100.0 | ± 9.6 % |
| | | Y | 3.66 | 78.64 | 17.87 | | 100.0 | *************************************** |
| 40000 | ODMASSOS (AUDIT DOA) | Z | 3.53 | 78.11 | 17.85 | 0.00 | 100.0 | 1069/ |
| 10039- CAB | CDMA2000 (1xRTT, RC1) | X | 1.52 | 69.16 | 14.18 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.40 | 68.90 | 13.55 | | 150.0 | |
| 40040 | 10.54.110.400.5DD./TDMM/5DM.DW4 | Z | 1.46 | 69.03 | 13.83 | 7.70 | 150.0 | 1000 |
| 10042- CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4- DQPSK, Halfrate) | X | 100.00 | 114.62 | 28.47 | 7.78 | 50.0 | ± 9.6 % |
| | | Y | 100.00 | 114.70 | 28.14 | | 50.0 | |
| 10044- | IS-91/EIA/TIA-553 FDD (FDMA, FM) | Z X | 100.00 0.01 | 113.88 121.88 | 27.92 0.68 | 0.00 | 50.0 150.0 | ± 9.6 % |
| CAA | | ,,- - | 0.00 | 07.00 | | | 4500 | |
| | | Y | 0.00 0.01 | 97.83 122.55 | 1.91 0.35 | | 150.0 150.0 | |
| 10048- CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24) | Z X | 17.94 | 92.17 | 26.06 | 13.80 | 25.0 | ± 9.6 % |
| 0, 1, | 0.00, 2.17 | Y | 42.19 | 107.21 | 29.95 | | 25.0 | |
| | | Ż | 24.74 | 97.63 | 27.36 | | 25.0 | |
| 10049- CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12) | X | 22.69 | 96.29 | 25.94 | 10.79 | 40.0 | ± 9.6 % |
| | | Υ | 68.20 | 113.74 | 30.23 | | 40.0 | |
| | | Z | 32.65 | 101.85 | 27.19 | | 40.0 | |
| 10056- CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps) | X | 16.99 | 92.79 | 25.84 | 9.03 | 50.0 | ± 9.6 % |
| | | Υ | 27.63 | 101.84 | 28.34 | | 50.0 | |
| | | Z | 20.13 | 95.81 | 26.57 | | 50.0 | |
| 10058- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3) | X | 9.12 | 87.95 | 28.36 | 6.55 | 100.0 | ± 9.6 % |
| | | Υ | 8.98 | 89.45 | 29.43 | | 100.0 | |
| | | Z | 8.90 | 88.06 | 28.51 | | 100.0 | |
| 10059- CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps) | X | 1.37 | 66.39 | 16.16 | 0.61 | 110.0 | ± 9.6 % |
| | | Y | 1.38 | 66.59 | 16.33 | | 110.0 | |
| | | Z | 1.36 | 66.49 | 16.23 | | 110.0 | |
| 10060- CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps) | X | 100.00 | 128.08 | 31.98 | 1.30 | 110.0 | ± 9.6 % |
| | | Υ | 100.00 | 131.22 | 33.31 | | 110.0 | |
| | | Z | 100.00 | 128.65 | 32.15 | | 110.0 | |

| 10061- CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps) | X | 9.25 | 94.71 | 26.12 | 2.04 | 110.0 | ± 9.6 % |
|---------------|--|---|-------|-------|-------|----------|-------|----------|
| | | Y | 9.59 | 96.73 | 27.06 | | 110.0 | |
| 10062- | IEEE 900 446/h WIELE OUT (OFFICE | Z | 10.28 | 96.95 | 26.85 | | 110.0 | |
| CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps) | Х | 4.74 | 66.85 | 16.53 | 0.49 | 100.0 | ±9.6 % |
| | | Υ | 4.66 | 67.04 | 16.57 | | 100.0 | |
| 40000 | IEEE 000 44 To the second seco | Z | 4.70 | 66.90 | 16.54 | | 100.0 | |
| 10063- CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps) | Х | 4.78 | 67.00 | 16.67 | 0.72 | 100.0 | ± 9.6 % |
| | | Υ | 4.69 | 67.19 | 16.70 | | 100.0 | |
| | | Z | 4.73 | 67.05 | 16.68 | | 100.0 | |
| 10064- CAC | IEEE 802.11a/n WiFi 5 GHz (OFDM, 12 Mbps) | Х | 5.09 | 67.32 | 16.93 | 0.86 | 100.0 | ± 9.6 % |
| | | Υ | 4.97 | 67.46 | 16.94 | | 100.0 | |
| | | Z | 5.03 | 67.35 | 16.93 | | 100.0 | |
| 10065- CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps) | Х | 4.99 | 67.34 | 17.10 | 1.21 | 100.0 | ±9.6 % |
| | | Y | 4.88 | 67.46 | 17.11 | | 100.0 | |
| | | Z | 4.93 | 67.36 | 17.10 | | 100.0 | |
| 10066- CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps) | X | 5.05 | 67.46 | 17.33 | 1.46 | 100.0 | ± 9.6 % |
| · | | Υ | 4.92 | 67.57 | 17.33 | | 100.0 | |
| | | Ζ | 4.98 | 67.48 | 17.32 | <u> </u> | 100.0 | |
| 10067- CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps) | Х | 5.36 | 67.67 | 17.81 | 2.04 | 100.0 | ± 9.6 % |
| | | Y | 5.25 | 67.92 | 17.88 | | 100.0 | |
| | | Z | 5.30 | 67.73 | 17.82 | | 100.0 | |
| 10068- CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps) | X | 5.48 | 67.95 | 18.15 | 2.55 | 100.0 | ± 9.6 % |
| | | Y | 5.33 | 68.04 | 18.16 | | 100.0 | |
| | | Z | 5.40 | 67.94 | 18.13 | | 100.0 | |
| 10069- CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps) | X | 5.56 | 67.94 | 18.35 | 2.67 | 100.0 | ± 9.6 % |
| | | Y | 5.42 | 68.11 | 18.40 | | 100.0 | |
| | | Z | 5.49 | 67.96 | 18.34 | | 100.0 | |
| 10071- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps) | X | 5.16 | 67.32 | 17.64 | 1.99 | 100.0 | ± 9.6 % |
| | | Y | 5.07 | 67.53 | 17.70 | | 100.0 | |
| | | Z | 5.11 | 67.37 | 17.65 | | 100.0 | |
| 10072- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | Х | 5.20 | 67.83 | 17.95 | 2.30 | 100.0 | ± 9.6 % |
| | | Y | 5.09 | 67.99 | 18.00 | | 100.0 | |
| | | Z | 5.14 | 67.86 | 17.96 | | 100.0 | |
| 10073- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 5.32 | 68.17 | 18.37 | 2.83 | 100.0 | ± 9.6 % |
| | | Y | 5.22 | 68.36 | 18.44 | ···· | 100.0 | <u> </u> |
| | | Z | 5.26 | 68.20 | 18.38 | | 100.0 | |
| 10074- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | Х | 5.35 | 68.22 | 18.60 | 3.30 | 100.0 | ± 9.6 % |
| | | Y | 5.26 | 68.43 | 18.68 | | 100.0 | |
| | | Z | 5.29 | 68.25 | 18.61 | - | 100.0 | |
| 10075- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | Х | 5.48 | 68.62 | 19.07 | 3.82 | 90.0 | ± 9.6 % |
| | | Y | 5.35 | 68.73 | 19.11 | | 90.0 | |
| | | Z | 5.40 | 68.60 | 19.05 | | 90.0 | |
| 10076- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | Х | 5.50 | 68.45 | 19.21 | 4.15 | 90.0 | ± 9.6 % |
| | | Y | 5.40 | 68.64 | 19.31 | | 90.0 | |
| | | Z | 5.44 | 68.46 | 19.21 | | 90.0 | |
| 10077- CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 5.54 | 68.54 | 19.31 | 4.30 | 90.0 | ± 9.6 % |
| | | Υ | 5,44 | 68.76 | 19.43 | | 90.0 | |
| | | Z | 5.48 | 68.56 | 19.32 | | 90.0 | |
| | <u> </u> | | U.TU | 00.00 | 10.02 | | JU.U | |

| 10081- CAB | CDMA2000 (1xRTT, RC3) | Х | 0.74 | 64.32 | 11.31 | 0.00 | 150.0 | ± 9.6 % |
|---|---|--------|--------------|----------------|----------------|------|---------------|--|
| VAD | | Υ | 0.70 | 64.20 | 10.81 | | 150.0 | |
| ***** | | Ż | 0.71 | 64.15 | 10.92 | | 150.0 | |
| 10082- CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4- DQPSK, Fullrate) | X | 1.69 | 62.26 | 7.32 | 4.77 | 80.0 | ± 9.6 % |
| 0,10 | Dat Ort, Famoto) | Υ | 1.49 | 62.02 | 6.99 | | 80.0 | |
| | | Z | 1.55 | 61.83 | 6.90 | | 80.0 | |
| 10090- DAC | GPRS-FDD (TDMA, GMSK, TN 0-4) | Х | 100.00 | 115.94 | 28.89 | 6.56 | 60.0 | ± 9.6 % |
| | | Υ | 100.00 | 116.39 | 28.75 | | 60.0 | |
| | | Z | 100.00 | 115.35 | 28.42 | | 60.0 | |
| 10097- CAB | UMTS-FDD (HSDPA) | Х | 1.73 | 66.76 | 14.97 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.76 | 67.41 | 15.16 | | 150.0 | |
| | | Z | 1.72 | 67.00 | 15.02 | 0.00 | 150.0 | .000 |
| 10098- CAB | UMTS-FDD (HSUPA, Subtest 2) | X | 1.69 | 66.71 | 14.93 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.72 | 67.36 | 15.13 14.98 | | 150.0 | |
| 40000 | EDOLEDO (TOMA ODOK TALOA) | Z | 1.69 | 66.94 | 36.62 | 9.56 | 150.0 60.0 | ± 9.6 % |
| 10099- DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4) | X | 21.17 | 106.37 | 41.66 | 9.00 | 60.0 | ± 3,U 70 |
| | | Y Z | 22.53 | 119.75 | 37.59 | | 60.0 | |
| 10100 | 1 TE EDD (00 EDMA 4000) DD 00 | | | 69.66 | 16.13 | 0.00 | 150.0 | ±9.6 % |
| 10100- CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 3.02 2.98 | 69.86 | 16.13 | 0.00 | 150.0 | 2 3.0 76 |
| | | Z | 2.98 | 69.71 | 16.19 | | 150.0 | |
| 10101- CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | X | 3.20 | 67.30 | 15.63 | 0.00 | 150.0 | ± 9.6 % |
| CAD | WHIZ, TO-QAWI) | Y | 3.15 | 67.42 | 15.72 | | 150.0 | |
| | | Z | 3.17 | 67.31 | 15.65 | | 150.0 | |
| 10102- CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 3.31 | 67.28 | 15.74 | 0.00 | 150.0 | ± 9.6 % |
| <u> </u> | Witz, or saturi | Y | 3.26 | 67.39 | 15,81 | | 150.0 | |
| *************************************** | | Z | 3.27 | 67.30 | 15.76 | | 150.0 | |
| 10103- CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK) | X | 8.39 | 78.42 | 21.27 | 3.98 | 65.0 | ±9.6 % |
| | | Y | 8.55 | 79.75 | 21.92 | | 65.0 | |
| | | Z | 8.43 | 78.92 | 21.50 | | 65.0 | |
| 10104- CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM) | Х | 8.28 | 76.92 | 21.52 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 8.11 | 77.48 | 21.85 | | 65.0 | |
| | | Z | 8.18 | 77.09 | 21.61 | | 65.0 | |
| 10105- CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM) | X | 7.63 | 75.31 | 21.13 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 7.72 | 76.48 | 21.73 | | 65.0 | <u> </u> |
| 10108- CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | X | 7.57 2.65 | 75.55 68.92 | 21.26 15.95 | 0.00 | 65.0 150.0 | ± 9.6 % |
| OME | WHE, QUOIN | Y | 2.59 | 69.14 | 16.15 | 1 | 150.0 | + |
| | | Z | 2.61 | 68.99 | 16.01 | | 150.0 | |
| 10109- CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | X | 2.86 | 67.08 | 15.50 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.80 | 67.24 | 15.55 | | 150.0 | |
| | | Z | 2.82 | 67.11 | 15.51 | | 150.0 | |
| 10110- CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | X | 2.15 | 67.97 | 15.52 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.09 | 68.27 | 15.68 | | 150.0 | |
| | | Z | 2.11 | 68.06 | 15.56 | | 150.0 | |
| 10111- CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | X | 2.54 | 67.60 | 15.65 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.49 | 67.90 | 15.64 | | 150.0 | |
| | | Z | 2.51 | 67.74 | 15.66 | | 150.0 | |

| 10112- CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | X | 2.98 | 67.08 | 15.57 | 0.00 | 150.0 | ± 9.6 % |
|---|--|--------|------|-------|--------|------|-------|---|
| | | Y | 2.92 | 67.27 | 15.62 | | 150.0 | |
| | | Ż | 2.94 | 67.13 | 15.58 | | 150.0 | *************************************** |
| 10113- CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | X | 2.70 | 67.76 | 15.81 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.63 | 68.07 | 15.78 | | 150.0 | |
| | | Z | 2.66 | 67.92 | 15.82 | | 150.0 | |
| 10114- CAC | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK) | X | 5.13 | 67.22 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.06 | 67.35 | 16.39 | | 150.0 | |
| | | Z | 5.10 | 67.28 | 16.37 | | 150.0 | |
| 10115- CAC | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM) | Х | 5.46 | 67.47 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
| ********* | | Υ | 5.32 | 67.42 | 16.43 | | 150.0 | |
| | | Ζ | 5.39 | 67.43 | 16.46 | | 150.0 | |
| 10116- CAC | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | Х | 5.25 | 67.46 | 16.39 | 0.00 | 150.0 | ±9.6 % |
| | | Υ | 5.15 | 67.53 | 16.41 | | 150.0 | |
| | | Z | 5,20 | 67.47 | 16.40 | | 150.0 | |
| 10117- CAC | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK) | Х | 5.10 | 67.11 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.03 | 67.22 | 16.34 | | 150.0 | |
| | | Ζ | 5.06 | 67.11 | 16.31 | | 150.0 | |
| 10118- CAC | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM) | Х | 5.56 | 67.71 | 16.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.40 | 67.63 | 16.55 | | 150.0 | |
| | | Z | 5.48 | 67.67 | 16.59 | | 150.0 | |
| 10119- CAC | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM) | Х | 5.22 | 67.39 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| CAC | | Y | 5.13 | 67.49 | 16.40 | | 150.0 | |
| | | Z | 5.18 | 67.42 | 16.38 | | 150.0 | |
| 10140- CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | Х | 3.35 | 67.28 | 15.66 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 3.29 | 67.41 | 15.73 | | 150.0 | |
| | | Z | 3.31 | 67.30 | 15.68 | | 150.0 | |
| 10141- CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | Х | 3.47 | 67.38 | 15.84 | 0.00 | 150,0 | ± 9.6 % |
| | | Υ | 3.41 | 67.52 | 15.90 | | 150.0 | |
| | | Z | 3.43 | 67.42 | 15.86 | | 150.0 | |
| 10142- CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | Х | 1.91 | 67.75 | 15.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.84 | 68.07 | 15.11 | | 150.0 | |
| | | Z | 1.87 | 67.86 | 15.08 | | 150.0 | |
| 10143- CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | Х | 2.37 | 68.04 | 15.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 2.29 | 68.28 | 15.02 | | 150.0 | |
| | | Z | 2.33 | 68.17 | 15.16 | | 150.0 | |
| 10144- CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | Х | 2.20 | 66.14 | 13.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 2.08 | 66.17 | 13.48 | | 150.0 | |
| | | Z | 2.13 | 66,11 | 13.65 | | 150.0 | |
| 10145- CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | Х | 1.17 | 64.40 | 11.32 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 0.99 | 63.23 | 9.93 | | 150.0 | |
| | | Z | 1.08 | 63.80 | 10.61 | | 150.0 | |
| 10146- CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | Х | 2.07 | 66.79 | 12.08 | 0.00 | 150.0 | ±9.6% |
| *************************************** | | Υ | 1.74 | 65.46 | 10.58 | | 150.0 | |
| | | Z | 1.93 | 66.25 | 11.43 | | 150.0 | |
| 10147- CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | Х | 2.41 | 68.68 | 13.11 | 0.00 | 150.0 | ± 9.6 % |
| | | 1 1/ | 0.00 | 07.40 | 144.50 | | 450.0 | |
| | | Y Z | 2.02 | 67.13 | 11.50 | | 150.0 | |

| 10149- CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | Х | 2.87 | 67.13 | 15.54 | 0.00 | 150.0 | ± 9.6 % |
|---------------|--|---|------|-------|-------|----------|-------|---------|
| | | Υ | 2.81 | 67.29 | 15.59 | | 150.0 | |
| | *************************************** | Ζ | 2.83 | 67.17 | 15.55 | | 150.0 | |
| 10150- CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | Х | 2.99 | 67.13 | 15.61 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 2.93 | 67.31 | 15.66 | | 150.0 | - |
| | | Z | 2,95 | 67.18 | 15.62 | | 150.0 | |
| 10151- CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | Х | 9.21 | 81.33 | 22.45 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 9.55 | 83.12 | 23.24 | | 65.0 | |
| | | Ζ | 9.38 | 82.15 | 22.79 | | 65.0 | |
| 10152- CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM) | Х | 7.89 | 77.12 | 21.32 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 7.75 | 77.78 | 21.62 | | 65.0 | |
| | | Z | 7.80 | 77.32 | 21.39 | | 65.0 | |
| 10153- CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM) | X | 8.33 | 78.05 | 22.06 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 8.20 | 78.76 | 22.36 | | 65.0 | |
| | | Z | 8.27 | 78.34 | 22.17 | | 65.0 | |
| 10154- CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | X | 2.19 | 68.34 | 15.77 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 2.13 | 68.58 | 15.88 | | 150.0 | |
| 1815- | | Z | 2.15 | 68.43 | 15.80 | | 150.0 | |
| 10155- CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 2.54 | 67.61 | 15.66 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 2.49 | 67.93 | 15.66 | <u> </u> | 150.0 | |
| | | Z | 2.51 | 67.76 | 15.67 | | 150.0 | |
| 10156- CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | Х | 1.75 | 67.70 | 14.83 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 1.67 | 67.86 | 14.67 | | 150.0 | |
| | | Z | 1.70 | 67.75 | 14.73 | | 150.0 | |
| 10157- CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | Х | 2.01 | 66.49 | 13.77 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 1.89 | 66.41 | 13.28 | | 150.0 | |
| | | Ζ | 1.95 | 66.44 | 13.53 | | 150.0 | |
| 10158- CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | Х | 2.70 | 67.82 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 2.64 | 68.13 | 15.83 | | 150.0 | |
| | | Z | 2.67 | 67.98 | 15.86 | | 150.0 | |
| 10159- CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | Х | 2.11 | 66.90 | 14.04 | 0.00 | 150.0 | ±9.6% |
| | | Υ | 1.98 | 66.74 | 13.50 | | 150.0 | |
| | | Z | 2.04 | 66.83 | 13.79 | | 150.0 | |
| 10160- CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | Х | 2.69 | 68.21 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 2.64 | 68.50 | 16.02 | | 150.0 | |
| 10101 | | Z | 2.66 | 68.34 | 15.93 | | 150.0 | |
| 10161- CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | X | 2.88 | 67.04 | 15.53 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 2.82 | 67.25 | 15.56 | | 150.0 | |
| 1016- | | Z | 2.84 | 67.11 | 15.53 | | 150.0 | |
| 10162- CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | X | 2.99 | 67.17 | 15.64 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.93 | 67.43 | 15.68 | | 150.0 | |
| | | Z | 2.96 | 67.27 | 15.66 | | 150.0 | |
| 10166- CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | × | 3.67 | 69.76 | 19.07 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 3.59 | 70.61 | 19.72 | | 150.0 | |
| | | Z | 3.64 | 70.17 | 19.36 | | 150,0 | |
| 10167- CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | Х | 4.60 | 72.78 | 19.56 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 4.59 | 74.59 | 20.58 | | 150.0 | |
| | | Z | 4.60 | 73.54 | 19.97 | | 150.0 | 1 |

| 10168- CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, | Х | 5.10 | 75.00 | 20.86 | 3.01 | 150.0 | ± 9.6 % |
|---|--|----------|---------------|-----------------|----------------|------|----------------|---------|
| CAE | 64-QAM) | Υ | 5.17 | 77.15 | 00.00 | | 450.0 | |
| | | Z | 5.17 | 76.08 | 22.00 21.41 | | 150.0 150.0 | |
| 10169- CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 3.14 | 69.82 | 19.09 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 2.99 | 70.11 | 19.57 | | 150.0 | |
| 40470 | I TE CDD (OO HELD) | Z | 3.08 | 69.99 | 19.30 | | 150.0 | |
| 10170- CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | X | 4.48 | 76.11 | 21.47 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 4.42 | 77.92 | 22.61 | | 150.0 | |
| 10171- | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, | Z X | 4.51 3.64 | 77.09 | 22.03 | 0.04 | 150.0 | |
| AAD | 64-QAM) | Y | 3.56 | 71.74 | 18.65 | 3.01 | 150.0 | ± 9.6 % |
| | | Z | 3.59 | 73.31 72.29 | 19.70 19.01 | | 150.0 150.0 | |
| 10172- CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) | X | 21.10 | 104.74 | 32.18 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 44.31 | 124.23 | 38.59 | | 65.0 | |
| | | Z | 24.87 | 109.58 | 33.89 | | 65.0 | |
| 10173- CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM) | Х | 37.36 | 109.91 | 31.76 | 6.02 | 65.0 | ± 9.6 % |
| · | | <u>Y</u> | 100.00 | 131.53 | 37.83 | | 65.0 | |
| 10174- | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, | Z | 66,45 | 121.49 | 34.95 | | 65.0 | |
| CAD | 64-QAM) | X | 28.71 | 103.81 | 29.50 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 93.12 | 128.22 | 36.43 | | 65.0 | |
| 10175- CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | X | 36.57 3.10 | 109.34 69.50 | 31.20 18.83 | 3.01 | 65.0 150.0 | ± 9.6 % |
| | | Υ | 2.96 | 69.84 | 19.35 | | 150.0 | |
| | | Z | 3.04 | 69.66 | 19.04 | | 150.0 | |
| 10176- CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | Х | 4.49 | 76.13 | 21.48 | 3.01 | 150.0 | ± 9.6 % |
| M-M | | Υ | 4.43 | 77.95 | 22.63 | | 150.0 | |
| 40477 | | Z | 4.52 | 77.11 | 22.04 | | 150.0 | |
| 10177- CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | X | 3.13 | 69.65 | 18.93 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.98 | 69.97 | 19.42 | | 150.0 | ···· |
| 10178- | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16- | Z X | 3.07 | 69.81 | 19.14 | | 150.0 | |
| CAE | QAM) | | 4,43 | 75.88 | 21.35 | 3.01 | 150.0 | ± 9.6 % |
| | | Y Z | 4.39 4.47 | 77.75 76.86 | 22.52 | | 150.0 | |
| 10179- CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | X | 4.01 | 73.75 | 21.91 19.90 | 3.01 | 150.0 150.0 | ± 9.6 % |
| | | Υ | 3.96 | 75.54 | 21.04 | | 150.0 | |
| | | Z | 4.01 | 74.52 | 20.37 | | 150.0 | |
| 10180- CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | Х | 3.63 | 71.66 | 18.60 | 3.01 | 150.0 | ± 9.6 % |
| *************************************** | | Υ | 3.55 | 73.25 | 19.66 | | 150.0 | |
| 10181- | LTE EDD (CC CDMA 4 DD 45 ML) | Z | 3.59 | 72.21 | 18.96 | | 150.0 | |
| CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | X | 3.13 | 69,64 | 18.92 | 3.01 | 150.0 | ± 9.6 % |
| | | Y | 2.98 3.06 | 69.95 | 19.42 | | 150.0 | |
| 10182- CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | X | 4.42 | 69.80 75.86 | 19.13 21.34 | 3.01 | 150.0 150.0 | ± 9.6 % |
| | | Υ | 4.38 | 77.72 | 22.51 | | 150.0 | |
| | | Z | 4.46 | 76.83 | 21.90 | | 150.0 | |
| 10183- AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | X | 3.62 | 71.63 | 18.59 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 3.55 | 73.22 | 19.65 | | 150.0 | |
| | | Ζ | 3.58 | 72.19 | 18.94 | | 150.0 | |

| | | 1 | | 00.00 | 10.05 | 0.04 | 450.0 | 1000 |
|---------------|---|---|------|-------|-------|------|-------|----------|
| 10184- CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | Х | 3.14 | 69.68 | 18.95 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 2.99 | 69.99 | 19.44 | | 150.0 | |
| | | Z | 3.07 | 69.84 | 19.16 | | 150.0 | |
| 10185- CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | × | 4.45 | 75.93 | 21.38 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 4.40 | 77.80 | 22.55 | | 150.0 | |
| | | Ζ | 4.48 | 76.92 | 21.94 | | 150.0 | |
| 10186- AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | Х | 3.64 | 71.70 | 18.62 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 3.56 | 73.30 | 19.69 | | 150.0 | |
| | | Z | 3.60 | 72.26 | 18.98 | | 150.0 | |
| 10187- CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | × | 3,15 | 69.73 | 19.01 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 3.00 | 70.06 | 19.51 | | 150.0 | |
| | | Ζ | 3.08 | 69.90 | 19.22 | | 150.0 | |
| 10188- CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | Х | 4.60 | 76.65 | 21.77 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 4.55 | 78.49 | 22.93 | | 150.0 | |
| | | Z | 4.65 | 77.69 | 22.36 | | 150.0 | |
| 10189- AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | Х | 3.72 | 72.15 | 18.90 | 3.01 | 150.0 | ± 9.6 % |
| | | Υ | 3.65 | 73.76 | 19.97 | | 150.0 | |
| | | Ζ | 3.69 | 72.74 | 19.28 | | 150.0 | |
| 10193- CAC | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK) | Х | 4.52 | 66.58 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.45 | 66.79 | 16.05 | | 150.0 | |
| | | Z | 4.48 | 66.63 | 16.03 | | 150.0 | |
| 10194- CAC | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | Х | 4.70 | 66.91 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | , | Υ | 4.60 | 67.08 | 16.18 | | 150.0 | |
| | | Z | 4.65 | 66.95 | 16.16 | | 150.0 | |
| 10195- CAC | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | Х | 4.74 | 66.94 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.65 | 67.11 | 16.20 | | 150.0 | |
| | | Z | 4.69 | 66.98 | 16.18 | | 150.0 | |
| 10196- CAC | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK) | Х | 4.53 | 66.65 | 16.05 | 0.00 | 150.0 | ±9.6% |
| | | Υ | 4.44 | 66.83 | 16.06 | | 150.0 | |
| | | Z | 4.48 | 66.69 | 16.05 | | 150.0 | |
| 10197- CAC | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM) | Х | 4.72 | 66.93 | 16.16 | 0.00 | 150.0 | ±9.6 % |
| | | Υ | 4.62 | 67.10 | 16.19 | | 150.0 | |
| | | Z | 4.66 | 66.97 | 16.17 | | 150.0 | |
| 10198- CAC | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM) | X | 4.75 | 66.96 | 16.18 | 0.00 | 150.0 | ±9.6% |
| | | Υ | 4.64 | 67.13 | 16.21 | | 150.0 | |
| | | Z | 4.69 | 67.00 | 16.19 | | 150.0 | |
| 10219- CAC | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK) | Х | 4.48 | 66.66 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.39 | 66.84 | 16.01 | | 150.0 | |
| | | Z | 4.43 | 66.70 | 16.00 | | 150.0 | |
| 10220- CAC | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM) | Х | 4.71 | 66.91 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.61 | 67.06 | 16.18 | | 150.0 | |
| | | Z | 4.66 | 66.94 | 16.16 | | 150.0 | |
| 10221- CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM) | Х | 4.76 | 66.89 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.65 | 67.06 | 16.20 | | 150.0 | |
| | | Z | 4.70 | 66.93 | 16.18 | | 150.0 | |
| 10222- CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK) | X | 5.08 | 67.11 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.00 | 67.21 | 16.33 | | 150.0 | |
| <u> </u> | ··· | Z | 5.03 | 67.12 | 16.30 | 1 | 150.0 | — |

| 10223- CAC | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM) | X | 5.40 | 67.34 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
|---------------|---|---|----------|--------|-------|---|----------|---|
| | | Υ | 5.30 | 67.47 | 16,48 | | 150.0 | ····· |
| ··· | | Z | 5.35 | 67.37 | 16.45 | | 150.0 | |
| 10224- CAC | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.12 | 67.22 | 16.27 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.04 | 67.32 | 16.31 | | 150.0 | |
| | | Z | 5.08 | 67.23 | 16.28 | | 150.0 | |
| 10225- CAB | UMTS-FDD (HSPA+) | Х | 2.77 | 65.87 | 15.07 | 0.00 | 150.0 | ± 9.6 % |
| ····· | | Y | 2.71 | 66.11 | 14.95 | | 150.0 | |
| | | Z | 2.73 | 65.95 | 15.01 | | 150.0 | |
| 10226- CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) | Х | 40.90 | 111.69 | 32.33 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 100.00 | 131.74 | 37.97 | | 65.0 | |
| | | Z | 76.08 | 124.13 | 35.71 | | 65.0 | |
| 10227- CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) | Х | 32.04 | 105.79 | 30.14 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 100.00 | 129.20 | 36.63 | | 65.0 | |
| | | Z | 56.03 | 116.66 | 33.17 | | 65.0 | <u>V</u> |
| 10228- CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) | Х | 32.49 | 113.40 | 34.73 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 63.93 | 131.79 | 40.55 | | 65.0 | |
| | | Ζ | 42.68 | 120.45 | 36.94 | | 65.0 | |
| 10229- CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) | Х | 37.48 | 109.96 | 31.78 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 100.00 | 131.51 | 37.84 | *************************************** | 65.0 | |
| | | Z | 66.68 | 121.54 | 34.97 | *************************************** | 65.0 | *************************************** |
| 10230- CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) | Х | 29.78 | 104.42 | 29.68 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 100.00 | 129.07 | 36.54 | | 65.0 | |
| | | Z | 50.21 | 114.61 | 32.57 | *************************************** | 65.0 | *************************************** |
| 10231- CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK) | Х | 30.12 | 111.79 | 34.20 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 57.30 | 129.38 | 39.87 | | 65.0 | |
| | | Z | 38.78 | 118.39 | 36.30 | | 65.0 | |
| 10232- CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM) | Х | 37.48 | 109.97 | 31.78 | 6.02 | 65.0 | ± 9.6 % |
| | | Y | 100.00 | 131.53 | 37.84 | | 65.0 | |
| | | Z | 66.72 | 121.56 | 34.98 | | 65.0 | |
| 10233- CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM) | Х | 29.77 | 104.42 | 29.68 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 100.00 | 129.09 | 36.55 | | 65.0 | |
| | | Ζ | 50.19 | 114.62 | 32.57 | ****** | 65.0 | |
| 10234- CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK) | Х | 28.05 | 110.17 | 33.63 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 51.99 | 127.09 | 39.16 | | 65.0 | |
| | | Z | 35.54 | 116.41 | 35.65 | | 65.0 | |
| 10235- CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM) | Х | 37.64 | 110,05 | 31.80 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 100.00 | 131,54 | 37.84 | | 65.0 | |
| | | Z | 67.18 | 121.70 | 35.01 | | 65.0 | |
| 10236- CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM) | Х | 30.09 | 104.58 | 29.72 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 100.00 | 129.03 | 36.52 | | 65.0 | |
| | | Z | 50.96 | 114.84 | 32.62 | | 65.0 | |
| 10237- CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK) | Х | 30.42 | 112.00 | 34.26 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 58.39 | 129.80 | 39.98 | | 65.0 | |
| | | Z | 39.25 | 118.66 | 36.38 | | 65.0 | |
| 10238- CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM) | Х | 37.48 | 109.98 | 31.78 | 6.02 | 65.0 | ± 9.6 % |
| UND | | Υ | 100.00 | 131.54 | 37.84 | | 65.0 | |
| | | Z | . 100.00 | 101.04 | 01,04 | | [05.0] | |

| 10239- CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM) | Х | 29.75 | 104.43 | 29.68 | 6.02 | 65.0 | ± 9.6 % |
|---------------|--|---|--------|--------|-------|------|------|---------|
| | | Υ | 100.00 | 129.11 | 36.55 | | 65.0 | |
| | | Z | 50.17 | 114.63 | 32.57 | | 65.0 | |
| 10240- CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK) | Х | 30.30 | 111.94 | 34.24 | 6.02 | 65.0 | ± 9.6 % |
| | | Υ | 58.14 | 129.72 | 39.96 | | 65.0 | |
| | | Z | 39.09 | 118.59 | 36.36 | | 65.0 | |
| 10241- CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | Х | 11.80 | 86.80 | 27.35 | 6.98 | 65.0 | ± 9.6 % |
| | | Y | 13.67 | 92.53 | 29.81 | | 65.0 | |
| | | Z | 12.27 | 88.56 | 28.08 | | 65.0 | |
| 10242- CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | × | 10.15 | 83.59 | 26.03 | 6.98 | 65.0 | ±9.6% |
| | | Y | 12.26 | 90.20 | 28.90 | **** | 65.0 | |
| | | Z | 10.49 | 85.23 | 26.75 | | 65.0 | |
| 10243- CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK) | X | 8.15 | 80.45 | 25.67 | 6.98 | 65.0 | ±9.6 % |
| | | Υ | 9.07 | 85.16 | 28.03 | | 65.0 | |
| | | Z | 8.20 | 81.43 | 26.18 | | 65.0 | 1000 |
| 10244- CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | × | 8.77 | 79.58 | 20.12 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.68 | 79.98 | 19.73 | | 65.0 | |
| | | Z | 8.93 | 80.10 | 20.07 | | 65.0 | 1000 |
| 10245- CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | X | 8.56 | 78.94 | 19.83 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 8.27 | 79.00 | 19.30 | | 65.0 | |
| | | Z | 8.60 | 79.28 | 19.71 | | 65.0 | |
| 10246- CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | X | 9.05 | 82.96 | 21.42 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 8.67 | 82.79 | 20.89 | | 65.0 | |
| | | Z | 9.07 | 83.18 | 21.25 | | 65.0 | |
| 10247- CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM) | × | 7.31 | 77.47 | 20.01 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 6,88 | 77.10 | 19.42 | | 65.0 | |
| | | Z | 7.16 | 77.42 | 19.78 | | 65.0 | |
| 10248- CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM) | X | 7.23 | 76.85 | 19.75 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 6.75 | 76.40 | 19.13 | | 65.0 | |
| | | Z | 7.04 | 76.72 | 19.48 | | 65.0 | |
| 10249- CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK) | Х | 10.55 | 85.88 | 23.24 | 3.98 | 65.0 | ±9.6 % |
| | | Υ | 11.23 | 87.71 | 23.62 | | 65.0 | |
| | | Z | 11.08 | 87.02 | 23.49 | | 65.0 | |
| 10250- CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM) | X | 8.37 | 79.97 | 22.44 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 8.25 | 80.64 | 22.58 | | 65.0 | |
| | | Z | 8.37 | 80.40 | 22.54 | | 65.0 | 1 |
| 10251- CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM) | Х | 7.79 | 77.55 | 21.17 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 7.62 | 78.12 | 21.26 | | 65.0 | |
| | | Z | 7.71 | 77.78 | 21.18 | | 65.0 | |
| 10252- CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK) | × | 10.26 | 85.03 | 23.77 | 3.98 | 65.0 | ±9.6 % |
| | | Υ | 11.07 | 87.53 | 24.67 | | 65.0 | |
| | | Z | 10.72 | 86.30 | 24.20 | | 65.0 | |
| 10253- CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM) | Х | 7.69 | 76.53 | 21.09 | 3.98 | 65.0 | ±9.6 % |
| | | Υ | 7.57 | 77.22 | 21.35 | | 65.0 | |
| | | Z | 7.61 | 76.75 | 21.15 | | 65.0 | |
| 10254- CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM) | Х | 8.11 | 77.42 | 21.76 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 7.99 | 78.11 | 22.01 | | 65.0 | |
| | | Z | 8.04 | 77.70 | 21.84 | | 65.0 | |

| 10255- CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK) | Х | 8.87 | 80.90 | 22.51 | 3.98 | 65.0 | ± 9.6 % |
|---|--|-----|-------|-------|---------|-------|------|---|
| | | Υ | 9.18 | 82.66 | 23.26 | | 65.0 | 1 |
| | | Z | 9.01 | 81.69 | 22.82 | | 65.0 | |
| 10256- CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | Х | 7.19 | 76.04 | 17.83 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.37 | 74.72 | 16.60 | | 65.0 | |
| | | Z | 6.91 | 75.63 | 17.34 | | 65.0 | |
| 10257- CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | Х | 6.95 | 75.20 | 17.41 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 6.01 | 73.59 | 16.03 | | 65.0 | |
| 40050 | | Z | 6.60 | 74.62 | 16.84 | | 65.0 | |
| 10258- CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK) | X | 7.08 | 78.57 | 19.08 | 3.98 | 65.0 | ±9.6% |
| · · · · · · · · · · · · · · · · · · · | | Υ | 5.96 | 76.36 | 17.58 | | 65.0 | |
| 10050 | <u> </u> | Z | 6.63 | 77.70 | 18.41 | | 65.0 | |
| 10259- CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM) | X | 7.72 | 78.37 | 20.87 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 7.43 | 78.48 | 20.58 | | 65.0 | |
| 40000 | | Z | 7.64 | 78.54 | 20.77 | | 65.0 | |
| 10260- CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM) | Х | 7.71 | 78.04 | 20.75 | 3.98 | 65.0 | ±9.6% |
| | | Υ | 7.37 | 78.04 | 20.41 | | 65.0 | |
| | | Z | 7.60 | 78.14 | 20.63 | | 65.0 | |
| 10261- CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK) | Х | 9.91 | 84.71 | 23.20 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 10.51 | 86.66 | 23.72 | | 65.0 | *************************************** |
| *************************************** | | Z | 10.31 | 85.78 | 23.47 | | 65.0 | |
| 10262- CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM) | Х | 8.35 | 79.91 | 22.40 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 8.23 | 80.57 | 22.53 | | 65.0 | |
| | | Z | 8.35 | 80.33 | 22.49 | | 65.0 | |
| 10263- CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM) | Х | 7.78 | 77.53 | 21.17 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 7.61 | 78.09 | 21.25 | | 65.0 | 1 |
| | | Z | 7.70 | 77.76 | 21.18 | | 65.0 | |
| 10264- CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK) | Х | 10.16 | 84.83 | 23.68 | 3.98 | 65.0 | ± 9.6 % |
| | | Y | 10.94 | 87.30 | 24.57 | | 65.0 | |
| | | Z | 10.60 | 86.08 | 24.10 | | 65.0 | |
| 10265- CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM) | Х | 7.89 | 77.12 | 21.33 | 3.98 | 65.0 | ±9.6% |
| | | Υ | 7.75 | 77.78 | 21.62 | | 65.0 | |
| | | Z | 7.80 | 77.33 | 21.40 | | 65.0 | |
| 10266- CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM) | Х | 8.32 | 78.04 | 22.05 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 8.20 | 78.75 | 22.36 | | 65.0 | |
| | | Z | 8.26 | 78.33 | 22.16 | | 65.0 | |
| 10267- CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK) | Х | 9.19 | 81.29 | 22.44 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 9.53 | 83.07 | 23.22 | | 65.0 | |
| | | Z | 9.36 | 82.10 | 22.77 | ***** | 65.0 | |
| 10268- CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM) | X | 8.37 | 76.65 | 21.54 | 3.98 | 65.0 | ± 9.6 % |
| | | Υ | 8.20 | 77.22 | 21.85 | | 65.0 | |
| | | Z | 8.27 | 76.83 | 21.63 | | 65.0 | |
| 10269- CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM) | Х | 8.29 | 76.22 | 21.43 | 3.98 | 65.0 | ±9.6 % |
| | | Υ | 8.13 | 76.76 | 21.72 | | 65.0 | |
| | | Ζ | 8.20 | 76.38 | 21.51 | | 65.0 | |
| | | 1 7 | 8.55 | 78.25 | 21.44 | 3.98 | 65.0 | ±9.6 % |
| 10270- CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | X | 0.00 | 70.20 | ******* | | 00.0 | |
| | | YZ | 8.58 | 79.32 | 21.98 | | 65.0 | |

| | UMTS-FDD (HSUPA, Subtest 5, 3GPP | Х | 2.53 | 66.08 | 14.88 | 0.00 | 150.0 | ± 9.6 % |
|---------------|--|----|-------|-------|-------|------|-------|----------|
| CAD | Rel8.10) | Y | 2.52 | 66.54 | 14.91 | | 150.0 | |
| | | Z | 2.52 | 66.24 | 14.87 | | 150.0 | |
| 10275- CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4) | X | 1.51 | 66.90 | 14.72 | 0.00 | 150.0 | ± 9.6 % |
| O/162 | 100.17 | Y | 1.52 | 67.44 | 14.98 | | 150.0 | |
| | | Z | 1.50 | 67.06 | 14.77 | | 150.0 | |
| 10277- CAA | PHS (QPSK) | X | 4.49 | 67.07 | 11.86 | 9.03 | 50.0 | ± 9.6 % |
| | | Υ | 3.76 | 65.67 | 10.51 | | 50.0 | |
| | | Z | 4.09 | 66.15 | 11.03 | | 50.0 | |
| 10278- CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5) | Х | 8.37 | 78.55 | 19.37 | 9.03 | 50.0 | ± 9.6 % |
| | | Υ | 7.19 | 76.56 | 17.89 | | 50.0 | |
| | | Z. | 7.75 | 77.39 | 18.52 | | 50.0 | |
| 10279- CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38) | X | 8.51 | 78.75 | 19.47 | 9.03 | 50.0 | ± 9.6 % |
| | | Υ | 7.31 | 76.76 | 18.01 | | 50.0 | |
| | | Z | 7.88 | 77.58 | 18.63 | 0.00 | 50.0 | 1000 |
| 10290- AAB | CDMA2000, RC1, SO55, Full Rate | X | 1.28 | 66.85 | 12.83 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 1.15 | 66.36 | 12.07 | | 150.0 | |
| | 001110000 0000 0000 0000 | Z | 1.21 | 66.57 | 12.40 | 0.00 | 150.0 | 1000 |
| 10291- AAB | CDMA2000, RC3, SO55, Full Rate | X | 0.73 | 64.15 | 11.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 0.69 | 64.04 | 10.71 | | 150.0 | |
| | | Z | 0.69 | 63.98 | 10.82 | | 150.0 | |
| 10292- AAB | CDMA2000, RC3, SO32, Full Rate | Х | 0.85 | 66.79 | 12.92 | 0.00 | 150.0 | ±9.6 % |
| | | Υ | 0.83 | 67.15 | 12.67 | | 150.0 | |
| | | Ζ | 0.82 | 66.81 | 12.63 | | 150.0 | |
| 10293- AAB | CDMA2000, RC3, SO3, Full Rate | Х | 1.14 | 70.77 | 15.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 1.22 | 72.07 | 15.35 | | 150.0 | |
| | | Z | 1.16 | 71.38 | 15.20 | | 150.0 | |
| 10295- AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr. | Х | 11.92 | 86.64 | 24.71 | 9.03 | 50.0 | ± 9.6 % |
| | | Υ | 15.63 | 91.98 | 26.09 | | 50.0 | |
| | | Ζ | 13.21 | 88.61 | 25,13 | | 50.0 | |
| 10297- AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) | Х | 2.66 | 69.01 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 2.60 | 69.22 | 16.21 | | 150.0 | |
| | | Z | 2.62 | 69.08 | 16.08 | | 150.0 | |
| 10298- AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK) | Х | 1.46 | 66.51 | 13.33 | 0.00 | 150.0 | ±9.6 % |
| | | Υ | 1.32 | 65.99 | 12.56 | | 150.0 | |
| | | Z | 1.39 | 66.26 | 12.94 | ļ | 150.0 | <u> </u> |
| 10299- AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM) | Х | 2.70 | 69.70 | 14.37 | 0.00 | 150.0 | ±9.6 % |
| | | Υ | 2.67 | 70.31 | 14.00 | ļ | 150.0 | |
| | | Z | 2.72 | 70.11 | 14.27 | ļ | 150.0 | |
| 10300- AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM) | Х | 2.09 | 65.56 | 11.69 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 1.84 | 65.02 | 10.77 | | 150.0 | |
| | | Z | 1.98 | 65.35 | 11.29 | \ = | 150.0 | 1000 |
| 10301- AAA | IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC) | Х | 5.46 | 67.87 | 18.50 | 4.17 | 80.0 | ± 9.6 % |
| | | Υ | 5.32 | 68.03 | 18.43 | | 80.0 | |
| | | Z | 5.39 | 67.94 | 18.48 | | 80.0 | |
| 10302- AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.85 | 67.98 | 18.95 | 4.96 | 80.0 | ± 9.6 % |
| | | Υ | 5.80 | 68.69 | 19.24 | | 80.0 | |
| | | Z | 5.75 | 67.96 | 18.88 | | 80.0 | 1 |

| 10303- | IEEE 802.16e WIMAX (31:15, 5ms, | 1 2 | | , <u></u> | 1 | | T | |
|---------------|---|-----|-------|-----------|-------|---|-------|---|
| AAA | 10MHz, 64QAM, PUSC) | X | 5.66 | 67.92 | 18.92 | 4.96 | 80.0 | ± 9.6 % |
| | | Υ | 5.61 | 68.61 | 19.19 | | 80.0 | |
| 10304- | IEEE 900 460 Milhay (00 48 5 | Z | 5.56 | 67.86 | 18.83 | | 80.0 | |
| AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC) | X | 5.35 | 67.35 | 18.18 | 4.17 | 80.0 | ± 9.6 % |
| | | Υ | 5.30 | 68.04 | 18.43 | | 80.0 | |
| | | Z | 5.26 | 67.36 | 18.12 | | 80.0 | |
| 10305- AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols) | Х | 7.05 | 76.99 | 23.82 | 6.02 | 50.0 | ± 9.6 % |
| | | Υ | 7.19 | 78.32 | 24.16 | | 50.0 | |
| ··· | | Z | 6.80 | 76.50 | 23.43 | ******* | 50.0 | |
| 10306- AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols) | Х | 5.82 | 69.84 | 20.44 | 6.02 | 50.0 | ± 9.6 % |
| | | Y | 5.84 | 70.99 | 20.86 | | 50.0 | |
| | | Z | 6.02 | 71.90 | 21.62 | | 50.0 | |
| 10307- AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols) | X | 6.31 | 73.07 | 22.13 | 6.02 | 50.0 | ± 9.6 % |
| | | Υ | 5.83 | 71.38 | 20.88 | | 50.0 | |
| | | Z | 6.11 | 72.72 | 21.84 | | 50.0 | |
| 10308- AAA | IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, 16QAM, PUSC) | Х | 6.39 | 73.64 | 22.41 | 6.02 | 50.0 | ±9.6% |
| **** | | Υ | 5.90 | 71.88 | 21.13 | | 50.0 | |
| | | Ζ | 6.20 | 73.31 | 22.13 | | 50.0 | |
| 10309- AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | Х | 5.91 | 70.12 | 20.60 | 6.02 | 50.0 | ± 9.6 % |
| | | Y | 5.91 | 71.23 | 21.02 | | 50.0 | |
| | | Z | 6.11 | 72.19 | 21.79 | | 50.0 | |
| 10310- AAA | IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols) | Х | 6.22 | 72.50 | 21.95 | 6.02 | 50.0 | ± 9.6 % |
| | | Y | 5.84 | 71.19 | 20.88 | | 50.0 | |
| | | Z | 6.05 | 72.25 | 21.70 | | 50.0 | |
| 10311- AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK) | Х | 3.00 | 68.33 | 15.71 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 2.96 | 68.52 | 15.89 | | 150.0 | |
| | | Z | 2.97 | 68.38 | 15.77 | | 150.0 | |
| 10313- AAA | IDEN 1:3 | X | 6.99 | 77.76 | 18.02 | 6.99 | 70.0 | ± 9.6 % |
| | | Y | 8.29 | 81.34 | 19.42 | | 70.0 | |
| | | Z | 7.24 | 78.54 | 18.23 | | 70.0 | |
| 10314- AAA | iDEN 1:6 | X | 10.49 | 86.54 | 23.63 | 10.00 | 30.0 | ± 9.6 % |
| | | Y | 12.83 | 91.81 | 25.63 | | 30.0 | |
| · · | | Z | 11.85 | 89.04 | 24.41 | | 30.0 | |
| 10315- AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle) | X | 1.08 | 63.85 | 14.84 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 1.11 | 64.19 | 15.04 | | 150.0 | |
| | | Z | 1.08 | 63.97 | 14.91 | | 150.0 | |
| 10316- AAB | IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle) | Х | 4.62 | 66.77 | 16.25 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.54 | 66.97 | 16.29 | | 150.0 | ,,,,,, |
| | | Z | 4.57 | 66.82 | 16.26 | | 150.0 | |
| 10317- AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle) | Х | 4.62 | 66.77 | 16.25 | 0.17 | 150.0 | ± 9.6 % |
| | | Y | 4.54 | 66.97 | 16.29 | | 150.0 | |
| | | Z | 4.57 | 66.82 | 16.26 | | 150.0 | ····· |
| 10400- AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle) | Х | 4.70 | 66,97 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.59 | 67.15 | 16.19 | | 150.0 | |
| | | Z | 4.64 | 67.01 | 16.16 | *************************************** | 150.0 | *************************************** |
| 10401- AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle) | Х | 5.41 | 67.24 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
| +v+U | | 1 | | | | | | |
| | | Υ | 5.32 | 67.38 | 16.42 | | 150.0 | |

| 10402- AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle) | Х | 5.66 | 67.55 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|---------------|--|----------|--------|--------|-------|------|-------|----------|
| . 17 11-2 | Sopo daty 0,010, | Υ | 5.56 | 67.58 | 16.37 | | 150.0 | |
| | | Z | 5.60 | 67.52 | 16.36 | | 150.0 | |
| 10403- AAB | CDMA2000 (1xEV-DO, Rev. 0) | X | 1.28 | 66.85 | 12.83 | 0.00 | 115.0 | ± 9.6 % |
| | | Υ | 1.15 | 66.36 | 12.07 | | 115.0 | |
| | | Ζ | 1.21 | 66.57 | 12.40 | | 115.0 | |
| 10404- AAB | CDMA2000 (1xEV-DO, Rev. A) | Х | 1.28 | 66.85 | 12.83 | 0.00 | 115.0 | ± 9.6 % |
| | | Y | 1.15 | 66.36 | 12.07 | | 115.0 | |
| | | Z | 1.21 | 66.57 | 12.40 | | 115.0 | |
| 10406- AAB | CDMA2000, RC3, SO32, SCH0, Full Rate | X | 31.97 | 105.65 | 26.52 | 0.00 | 100.0 | ± 9.6 % |
| | | Υ | 100.00 | 119.11 | 28.78 | | 100.0 | |
| | | Z | 100.00 | 120.25 | 29.60 | | 100.0 | |
| 10410- AAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4) | Х | 100.00 | 119.16 | 29.68 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 100.00 | 122.81 | 30.98 | | 80.0 | |
| | | Z | 100.00 | 120.19 | 29.97 | | 80.0 | |
| 10415- AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle) | × | 0.96 | 62.46 | 13.98 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 0.99 | 62.90 | 14.23 | | 150.0 | |
| | | <u>Z</u> | 0.95 | 62.59 | 14.06 | | 150.0 | |
| 10416- AAA | IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle) | X | 4.53 | 66.62 | 16.09 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.45 | 66.83 | 16.13 | | 150.0 | |
| | | Z | 4.48 | 66.68 | 16.10 | | 150.0 | |
| 10417- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle) | Х | 4.53 | 66.62 | 16.09 | 0.00 | 150.0 | ±9.6% |
| | | Y | 4.45 | 66.83 | 16.13 | | 150.0 | |
| | | Z | 4.48 | 66.68 | 16.10 | | 150.0 | |
| 10418- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Long preambule) | Х | 4.51 | 66.76 | 16.09 | 0.00 | 150.0 | ±9.6 % |
| | | Υ | 4.44 | 67.00 | 16.16 | | 150.0 | |
| | | Z | 4.47 | 66.83 | 16.12 | | 150.0 | |
| 10419- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Short preambule) | X | 4.54 | 66.72 | 16.10 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.46 | 66.94 | 16.15 | | 150.0 | |
| | | Z | 4.49 | 66.78 | 16.12 | | 150.0 | |
| 10422- AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK) | X | 4.66 | 66.73 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.57 | 66.94 | 16.17 | | 150.0 | <u> </u> |
| | | Z | 4.61 | 66.79 | 16.14 | 1 | 150.0 | |
| 10423- AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM) | Х | 4.83 | 67.07 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.72 | 67.22 | 16.28 | | 150.0 | |
| | | Z | 4.77 | 67.10 | 16.25 | | 150.0 | |
| 10424- AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM) | Х | 4.75 | 67.01 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.64 | 67.18 | 16.25 | | 150.0 | <u> </u> |
| | | Z | 4.69 | 67.05 | 16.23 | | 150.0 | |
| 10425- AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) | Х | 5.37 | 67.43 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.26 | 67.46 | 16.45 | | 150.0 | |
| | | Z | 5.32 | 67.43 | 16.46 | | 150.0 | |
| 10426- AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM) | × | 5.37 | 67.44 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.28 | 67.55 | 16.49 | | 150.0 | |
| | | Z | 5.33 | 67.49 | 16.49 | | 150.0 | 1 |

| Y 4.03 70.48 17.58 150.0 10431- 17.57 17.86 150.0 150.0 2.9.6 % 160.0 160.0 150.0 | 10427- AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM) | X | 5.38 | 67.41 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
|--|---|--|---|--------|--------|----------------|--|-------|--------------|
| TE-FDD (OFDMA, 5 MHz, E-TM 3.1) | | | Y | 5.27 | 67.46 | 16 44 | | 150.0 | |
| 10430- TE-FDD (OFDMA, 5 MHz, E-TM 3.1) X 4.17 70.27 17.81 0.00 150.0 ± 9.6 % | | | | | | · } | | | |
| Tempo | | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1) | | | | | 0.00 | | ± 9.6 % |
| 10431- | | | Y | 4.03 | 70.48 | 17.58 | | 150.0 | |
| 10431- LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) X 4.21 67.11 16.05 0.00 150.0 ±9.6 % | | | Z | 4.14 | | | | | |
| Total | | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1) | | | | | 0.00 | | ± 9.6 % |
| Total | | | Y | 4.09 | 67.33 | 16.03 | | 150.0 | |
| 10432- AAA LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) X 4.51 67.03 16.15 0.00 150.0 ±9.6 % Y 4.40 67.23 16.17 150.0 LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) X 4.76 67.08 16.15 150.0 150.0 ±9.6 % AAB LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) X 4.76 67.04 16.24 0.00 150.0 ±9.6 % Y 4.66 67.21 16.27 150.0 150.0 ±9.6 % Y 4.66 67.21 16.27 150.0 150.0 ±9.6 % Y 4.67 67.08 16.24 150.0 150.0 ±9.6 % Y 4.07 71.14 17.40 150.0 150.0 ±9.6 % Y 4.07 71.14 17.40 150.0 150.0 ±9.6 % AAA LTE-FDD (SC-FDMA, 1 RB, 20 MHz, Z 4.21 71.31 17.74 150.0 10.0 10.0 50.0 ±9.6 % Y 4.00 119.99 29.80 3.23 80.0 ±9.6 % AAB LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, X 3.49 66.99 15.32 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, X 4.04 86.88 15.90 0.00 150.0 ±9.6 % Clipping 44%) Y 3.34 67.04 15.22 150.0 150.0 10.48- AB Clippin 44%) Y 3.94 67.12 15.89 150.0 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.04 86.88 15.90 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.04 86.88 15.90 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.04 86.88 15.90 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.22 66.84 16.03 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.32 66.84 16.03 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.32 66.84 16.03 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.32 66.84 16.03 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 16 MHz, E-TM 3.1, X 4.32 66.84 16.03 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.31 66.97 16.04 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 16 MHz, E-TM 3.1, X 4.51 66.97 16.04 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.99 16.04 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.99 16.04 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.99 16.04 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.99 16.04 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.99 16.03 16.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.99 16.03 16.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.99 | | | | | | | | | |
| 10433- | | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1) | X | | | | 0.00 | | ± 9.6 % |
| Total | | | | 4.40 | 67.23 | 16.17 | | 150.0 | |
| AAB Y 4.66 67.21 16.27 150.0 10434-AAA W-CDMA (BS Test Model 1, 64 DPCH) X 4.23 70.97 17.72 0.00 150.0 ±9.6 % Y 4.07 71.14 17.40 150.0 LTE-TDD (SC-FDMA, 1 RB, 20 MHz, CPSK, UL Subframe=2.3.4,7,8,9) Y 100.00 118.98 29.60 3.23 80.0 ±9.6 % LTE-TDD (SC-FDMA, 5 MHz, E-TM 3.1, Clipping 44%) Y 3.34 67.16 15.09 150.0 ±9.6 % LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, X 4.04 66.88 15.90 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.32 67.04 16.06 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.32 66.64 16.03 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.32 66.69 16.04 16.06 150.0 10449-AAB Clipping 44%) Y 3.94 67.12 15.89 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.32 66.69 16.04 16.06 150.0 10450-AAB Clipping 44%) Y 3.94 67.12 15.89 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.32 66.69 16.04 16.06 150.0 10450-AAB Clipping 44%) Y 4.23 67.04 16.06 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.32 67.04 16.06 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.67 16.04 16.06 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.67 16.04 16.06 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.67 16.04 16.06 150.0 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % LTE-FDD (OFDMA, 20 | | | | 4.46 | 67.08 | 16.15 | | | |
| 10434- | | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1) | | 4.76 | 67.04 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
| 10434- AAA W-CDMA (BS Test Model 1, 64 DPCH) X | | | | 4.66 | | 16.27 | | 150.0 | |
| 10447- AAB LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, ABB LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, AAB LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, ABB LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, ABB LTE-FDD (O | 10424 | N/ SSN - SSN | | | | | | | |
| TE-TDD (SC-FDMA, 1 RB, 20 MHz, AC CPSK, UL Subframe=2,3,4,7,8,9) | | W-CDMA (BS Test Model 1, 64 DPCH) | | | | | 0.00 | | ± 9.6 % |
| 10435- AAC | | | | | | | | 150.0 | |
| AAC QPSK, UL Subframe=2,3,4,7,8,9) Y 100.00 122.59 30.87 80.0 LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) Y 3.349 66.99 15.32 0.00 150.0 ±9.6 % AB Clipping 44%) Y 3.34 67.16 15.09 150.0 Z 3.41 67.16 15.09 150.0 LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, X 4.04 66.88 15.90 0.00 150.0 ±9.6 % Clippin 44%) Y 3.94 67.12 15.89 150.0 LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, X 4.32 66.84 16.03 0.00 150.0 ±9.6 % Cliping 44%) Y 4.23 67.04 16.06 150.0 LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % Clipping 44%) Y 4.44 66.97 16.10 150.0 LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % Clipping 44%) Y 3.19 67.12 14.92 0.00 150.0 ±9.6 % W-CDMA (BS Test Model 1, 64 DPCH, X 3.37 67.12 14.92 0.00 150.0 ±9.6 % AAB Substitute (Clipping 44%) Y 3.19 67.13 14.54 150.0 LTE-EDD (OFDMA, 20 MHz, E-TM 3.1, X 4.32 66.33 16.09 150.0 150.0 ±9.6 % AAB Clipping 44%) Y 3.19 67.13 14.54 150.0 LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.63 150.0 150.0 ±9.6 % AAB Clipping 44%) Y 3.19 67.13 14.54 150.0 LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.39 16.09 150.0 ±9.6 % AAB Clipping 44%) Y 3.19 67.13 14.54 150.0 150.0 ±9.6 % AAB Glipping 44%) Y 3.19 67.13 14.54 150.0 150.0 ±9.6 % AAB Glipping 44%) Y 3.19 67.13 14.54 150.0 150.0 ±9.6 % AAB Glipping 44%) Y 3.19 67.13 14.54 150.0 150.0 ±9.6 % AAB Glipping 44%) Y 3.75 65.25 15.79 0.00 150.0 ±9.6 % AAA Clipping 44% 15.00 150.0 ±9.6 % AAA Clipping 44% 15.00 150.0 150.0 ±9.6 % AAA Clipping 44% 150.0 150.0 150.0 150.0 ±9.6 % AAA Clipping 44% 150.0 150.0 150.0 150.0 ±9.6 % AAA Clipping 44% 150.0 | 4040= | | | | | | | 150.0 | |
| 10447- AAB | | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | | | | | 3.23 | 80.0 | ± 9.6 % |
| 10447- AAB | | | | | | 30.87 | | 80.0 | |
| AAB Clipping 44%) Y 3.34 67.16 15.09 150.0 Z 3.41 67.04 15.22 150.0 Z 3.48 67.12 15.89 150.0 Y 3.94 67.12 15.89 150.0 Z 3.99 66.95 15.89 150.0 I I I I I I I I I I | 1011- | | | 100.00 | 119.99 | 29.88 | | 80.0 | |
| 10448- | | | | | | 15.32 | 0.00 | 150.0 | ± 9.6 % |
| 10448- AB | | | | 3.34 | 67.16 | 15.09 | | 150.0 | |
| AAB Clippin 44%) Y 3.94 67.12 15.89 150.0 10449- | *************************************** | | | 3.41 | 67.04 | 15.22 | | 150.0 | |
| 10449- AAB | | | X | | 66.88 | 15.90 | 0.00 | | ± 9.6 % |
| LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, ABB) | | | Υ | 3.94 | 67.12 | 15.89 | | 150.0 | |
| AAB Cliping 44%) Y 4.23 67.04 16.06 150.0 Z 4.27 66.90 16.04 150.0 LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, X 4.51 66.79 16.08 0.00 150.0 ±9.6 % ABB Clipping 44%) Y 4.44 66.97 16.11 150.0 Z 4.47 66.83 16.09 150.0 VY 4.44 66.97 16.11 150.0 Z 4.47 66.83 16.09 150.0 VY 3.37 67.12 14.92 0.00 150.0 ±9.6 % Y 3.19 67.13 14.54 150.0 Z 3.28 67.11 14.76 150.0 LEEE 802.11ac WiFi (160MHz, 64-QAM, ABB) 99pc duty cycle) Y 6.17 68.10 16.67 150.0 Z 6.19 67.99 16.63 150.0 LO457- AAA UMTS-FDD (DC-HSDPA) X 3.77 65.25 15.79 0.00 150.0 ±9.6 % Y 3.75 65.50 15.83 150.0 LO458- AAA CDMA2000 (1xEV-DO, Rev. B, 2 X 3.87 70.16 17.10 0.00 150.0 ±9.6 % ABB CDMA2000 (1xEV-DO, Rev. B, 2 X 3.84 70.49 17.05 150.0 LO459- AAA CARRIERS ARA CARRIERS | | | | 3.99 | 66.95 | 15.89 | | 150.0 | |
| Tourish | | | Х | 4.32 | 66.84 | 16.03 | 0.00 | 150.0 | ± 9.6 % |
| 10450- AAB | | | | 4.23 | 67.04 | 16.06 | | 150.0 | |
| AAB Clipping 44%) Y 4.44 66.97 16.11 150.0 10451- AAA Clipping 44%) Y 3.19 67.13 14.54 150.0 Z 3.28 67.11 14.76 150.0 10456- AAB 99pc duty cycle) Y 6.17 68.10 16.67 150.0 Z 6.19 67.99 16.63 150.0 10457- AAA UMTS-FDD (DC-HSDPA) X 3.75 65.50 15.83 150.0 10458- AAA CDMA2000 (1xEV-DO, Rev. B, 2 carriers) Y 4.81 68.13 17.56 150.0 Y 4.81 68.13 17.56 150.0 104.50 150.0 104.51 150.0 104.52 150.0 104.53 150.0 104.54 150.0 104.55 150.0 104.56 150.0 104.57 150.0 104.58 150.0 104.58 150.0 104.59 150.0 104.59 150.0 104.59 150.0 104.59 150.0 104.59 150.0 104.59 150.0 104.59 150.0 104.59 150.0 104.59 150.0 104.50 150.0 | | | Ζ | 4.27 | 66.90 | 16.04 | | 150.0 | |
| Tourish | | | | 4.51 | 66.79 | 16.08 | 0.00 | | ± 9.6 % |
| Tourish | | | Υ | 4.44 | 66.97 | 16.11 | | 150.0 | |
| AAA Clipping 44%) Y 3.19 67.13 14.54 150.0 10456- AAB 99pc duty cycle) Y 6.17 68.10 16.67 150.0 Z 6.19 67.99 16.63 150.0 10457- AAA UMTS-FDD (DC-HSDPA) X 3.77 65.25 15.79 0.00 150.0 ± 9.6 % Y 3.75 65.50 15.83 150.0 Z 3.75 65.32 15.80 150.0 10458- AAA CDMA2000 (1xEV-DO, Rev. B, 2 X 3.87 70.16 17.10 0.00 150.0 ± 9.6 % Y 3.71 70.34 16.66 150.0 Z 3.84 70.49 17.05 150.0 10459- AAA CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % | | | Ζ | 4.47 | 66.83 | 16.09 | | | |
| Touriers | | | | | | | 0.00 | 150.0 | ±9.6 % |
| 10456- AAB 99pc duty cycle) Y 6.17 68.10 16.67 150.0 Z 6.19 67.99 16.63 150.0 10457- AAA UMTS-FDD (DC-HSDPA) Y 3.75 65.50 15.83 150.0 Z 3.75 65.32 15.80 150.0 Z 3.75 65.32 15.80 150.0 CDMA2000 (1xEV-DO, Rev. B, 2 X 3.87 70.16 17.10 0.00 150.0 ± 9.6 % Y 3.71 70.34 16.66 150.0 Z 3.84 70.49 17.05 150.0 10459- AAA CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % Y 4.81 68.13 17.56 150.0 | | | | | | | | | |
| AAB 99pc duty cycle) Y 6.17 68.10 16.67 150.0 Z 6.19 67.99 16.63 150.0 10457- AAA UMTS-FDD (DC-HSDPA) X 3.77 65.25 15.79 0.00 150.0 ± 9.6 % Y 3.75 65.50 15.83 150.0 Z 3.75 65.32 15.80 150.0 Z 3.75 65.32 15.80 150.0 CDMA2000 (1xEV-DO, Rev. B, 2 X 3.87 70.16 17.10 0.00 150.0 ± 9.6 % Y 3.71 70.34 16.66 150.0 Z 3.84 70.49 17.05 150.0 10459- AAA CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % Y 4.81 68.13 17.56 150.0 | 40450 | IEEE 000 44 | _ | | | | | | |
| Total Color | | | | | | | 0.00 | | ± 9.6 % |
| 10457-AAA UMTS-FDD (DC-HSDPA) X 3.77 65.25 15.79 0.00 150.0 ± 9.6 % Y 3.75 65.50 15.83 150.0 Z 3.75 65.32 15.80 150.0 10458-AAA CDMA2000 (1xEV-DO, Rev. B, 2 carriers) X 3.87 70.16 17.10 0.00 150.0 ± 9.6 % Y 3.71 70.34 16.66 150.0 Z 3.84 70.49 17.05 150.0 10459-AAA CDMA2000 (1xEV-DO, Rev. B, 3 carriers) X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % Y 4.81 68.13 17.56 150.0 | ····· | | | | | | | | |
| AAA | 40457 | LIMTO FDD /FG 1107-12 | | | | | | | |
| CDMA2000 (1xEV-DO, Rev. B, 2 | | UNITS-FUD (DC-HSDPA) | | | | | 0.00 | | ± 9.6 % |
| 10458- AAA CDMA2000 (1xEV-DO, Rev. B, 2 carriers) X 3.87 70.16 17.10 0.00 150.0 ± 9.6 % Y 3.71 70.34 16.66 150.0 Z 3.84 70.49 17.05 150.0 10459- AAA CDMA2000 (1xEV-DO, Rev. B, 3 carriers) X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % Y 4.81 68.13 17.56 150.0 | | | | | | | | | |
| Y 3.71 70.34 16.66 150.0 Z 3.84 70.49 17.05 150.0 10459- AAA CDMA2000 (1xEV-DO, Rev. B, 3 carriers) X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % Y 4.81 68.13 17.56 150.0 | | | X | | | | 0.00 | | ± 9.6 % |
| 10459- CDMA2000 (1xEV-DO, Rev. B, 3 X 5.00 67.94 17.87 0.00 150.0 ± 9.6 % | | | | 2 74 | 70.24 | 16.60 | | 450.0 | |
| 10459- AAA | | | | | | | | | |
| Y 4.81 68.13 17.56 150.0 | | | | | | | 0.00 | | ± 9.6 % |
| | | | | / Ω1 | 69.40 | 17 50 | | 450.0 | |
| | | | Z | 4.96 | 68.23 | 17.89 | | 150.0 | |

| 10460- | UMTS-FDD (WCDMA, AMR) | хТ | 0.79 | 66.34 | 14.61 | 0.00 | 150.0 | ± 9.6 % |
|---------------|--|----|--------|--------|-------|------|-------|---------|
| AAA | OWITS-FOD (WCDIVIA, AWIT) | | | | | 0.00 | | |
| | | Υ | 0.84 | 67.16 | 15.15 | | 150.0 | |
| | | Z | 0.79 | 66.65 | 14.76 | | 150.0 | |
| 10461- AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | Х | 100.00 | 122.59 | 31.33 | 3.29 | 80.0 | ± 9.6 % |
| | | Υ | 100.00 | 128.70 | 33.71 | | 80.0 | |
| | | Z | 100.00 | 124.88 | 32.17 | | 80.0 | |
| 10462- AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | Х | 21.46 | 90.49 | 19.92 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 100.00 | 107.87 | 23.85 | | 80.0 | |
| | | Z | 100.00 | 106.49 | 23.49 | | 80.0 | |
| 10463- AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | Х | 5.25 | 74.65 | 14.70 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 19.71 | 88.51 | 18.38 | | 80.0 | |
| | | Z | 7.19 | 78.06 | 15.56 | | 80.0 | |
| 10464- AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | Х | 100.00 | 120.34 | 30.14 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 100.00 | 126.35 | 32.46 | | 80.0 | |
| | | Z | 100.00 | 122.50 | 30.92 | | 80.0 | |
| 10465- AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9) | Х | 11.73 | 83.97 | 18.05 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 100.00 | 107.24 | 23.55 | · | 80.0 | |
| | | Z | 41.80 | 97.17 | 21.26 | | 80.0 | |
| 10466- AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9) | X | 4.09 | 72.04 | 13.74 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 8.97 | 80.87 | 16.24 | | 80.0 | |
| | | Z | 4.77 | 73.97 | 14.19 | | 80.0 | |
| 10467- AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | Х | 100.00 | 120.57 | 30.24 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 126.64 | 32.58 | | 80.0 | |
| | | Ζ | 100.00 | 122.76 | 31.03 | | 80.0 | |
| 10468- AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | Х | 13.52 | 85.52 | 18.51 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 107.47 | 23.65 | | 80.0 | |
| | | Z | 60.78 | 101.09 | 22.20 | | 80.0 | |
| 10469- AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | Х | 4.11 | 72.11 | 13.77 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 9.29 | 81.22 | 16.33 | | 80.0 | |
| | | Z | .4.83 | 74.11 | 14.24 | | 80.0 | |
| 10470- AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | Х | 100.00 | 120.59 | 30.24 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 100.00 | 126.67 | 32.59 | | 80.0 | |
| | | Z | 100.00 | 122.78 | 31.03 | | 80.0 | |
| 10471- AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | Х | 13.37 | 85.38 | 18.46 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 100.00 | 107.40 | 23.62 | | 80.0 | |
| | | Z | 59.33 | 100.79 | 22.11 | 1 | 80.0 | |
| 10472- AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | Х | 4.08 | 72.03 | 13.72 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 9.15 | 81.05 | 16.27 | | 80.0 | |
| | | Z | 4.78 | 73.98 | 14.18 | | 80.0 | |
| 10473- AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | Х | 100.00 | 120.56 | 30.23 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 100.00 | 126.64 | 32.58 | | 80.0 | |
| | | Z | 100.00 | 122.75 | 31.02 | | 80.0 | |
| 10474- AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 13.19 | 85.24 | 18.42 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 100.00 | 107.40 | 23.61 | | 80.0 | |
| | | Z | 57.55 | 100.49 | 22.04 | | 80.0 | |
| 10475- AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9) | Х | 4.06 | 71.97 | 13.71 | 3.23 | 80.0 | ± 9.6 % |
| | ======================================= | Y | 8.99 | 80.90 | 16.23 | | 80.0 | |
| | | Z | 4.73 | 73.90 | 14.15 | | 80.0 | |

| 10477- AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | Х | 11.86 | 84.06 | 18.05 | 3.23 | 80.0 | ± 9.6 % |
|---|---|--------|--------------|----------------|----------------|------|--------------|---------|
| | | Y | 100.00 | 107.19 | 23.51 | | 80.0 | |
| 40.00 | | Z | 43.65 | 97.56 | 21.32 | | 80.0 | |
| 10478- AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.02 | 71.87 | 13.66 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 8.76 | 80.61 | 16.13 | | 80.0 | |
| 40.170 | | Z | 4.66 | 73.74 | 14.09 | | 80.0 | |
| 10479- AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | Х | 14.17 | 93.60 | 25.28 | 3.23 | 80.0 | ± 9.6 % |
| | | Υ | 63.86 | 118.32 | 31.85 | | 80.0 | |
| 10480- | LTE TOD (CC CDM), FOO(DD 4 AND) | Z | 30.71 | 105.97 | 28.68 | | 80.0 | |
| AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 12,48 | 86.47 | 21.39 | 3.23 | 80.0 | ± 9.6 % |
| *************************************** | | Y | 53.06 | 106.13 | 26.31 | | 0.08 | |
| 10481- | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, | Z | 23.73 | 95.20 | 23.69 | | 80.0 | |
| AAA | 64-QAM, UL Subframe=2,3,4,7,8,9) | Х | 9.79 | 82.49 | 19.78 | 3.23 | 80.0 | ± 9.6 % |
| | | Y | 26.62 | 95.88 | 23.20 | | 80.0 | |
| 10482- | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, | Z | 15.46 | 88.60 | 21.40 | | 80.0 | |
| AAA | QPSK, UL Subframe=2,3,4,7,8,9) | X | 4.76 | 76.35 | 18.33 | 2.23 | 80.0 | ±9.6% |
| | | Y | 4.38 | 75.77 | 17.66 | | 80.0 | |
| 10483- | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, | Z | 4.74 | 76.54 | 18.16 | | 80.0 | |
| AAA | 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.86 | 78.09 | 18.71 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 7.58 | 79.80 | 18.72 | | 80.0 | |
| 10484- | LTC TDD (CC CDMA COV DD CAN) | Z | 7.91 | 80.19 | 19.17 | | 80.0 | |
| AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.29 | 76.73 | 18.22 | 2.23 | 80.0 | ±9.6% |
| | | Υ | 6.51 | 77.64 | 17.97 | | 80.0 | |
| 40405 | | Ζ | 6.95 | 78.27 | 18.51 | | 80.0 | |
| 10485- AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | Х | 5.21 | 77.92 | 19.79 | 2.23 | 80.0 | ± 9.6 % |
| | | Υ | 5.14 | 78.56 | 19.82 | | 80.0 | |
| 40400 | | Z | 5.34 | 78.68 | 19.95 | | 80.0 | |
| 10486- AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | Х | 4.30 | 72.12 | 17.19 | 2.23 | 80.0 | ± 9.6 % |
| | | Υ | 4.02 | 71.85 | 16.65 | | 80.0 | |
| | | Ζ | 4.23 | 72.22 | 17.03 | | 80.0 | |
| 10487- AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | Х | 4.25 | 71.63 | 16.98 | 2.23 | 80.0 | ± 9.6 % |
| | | Υ | 3.95 | 71.26 | 16.39 | | 80.0 | |
| 40.400 | | Ζ | 4.16 | 71.66 | 16.79 | | 0.08 | |
| 10488- AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | Х | 5.17 | 76.41 | 19.90 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.01 | 76.93 | 20.15 | | 80.0 | |
| 40400 | LITE TOD (OO STAN SOO) TO | Z | 5.17 | 76.91 | 20.10 | | 80.0 | |
| 10489- AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | Х | 4.47 | 71.61 | 18.14 | 2.23 | 80.0 | ± 9.6 % |
| ····· | | Y | 4.30 | 71.84 | 18.12 | | 80.0 | |
| 10400 | LTE TOD (OO FOM) 500/ 50 10 10 | Z | 4.42 | 71.84 | 18.19 | | 80.0 | |
| 10490- AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.53 | 71.33 | 18.05 | 2.23 | 80.0 | ± 9.6 % |
| *************************************** | | Y | 4.36 | 71.56 | 18.01 | | 80.0 | |
| 10491- AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | Z X | 4.48 5.06 | 71.55 74.04 | 18.09 19.16 | 2.23 | 80.0 80.0 | ± 9.6 % |
| 7170 | <u> </u> | Υ | 4 00 | 74.07 | 40.07 | | 60.0 | |
| | | | 4.88 | 74.37 | 19.37 | | 80.0 | |
| 10492- | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, | Z X | 5.01 4.71 | 74.33 | 19.30 | 0.00 | 80.0 | |
| AAC | 16-QAM, UL Subframe=2,3,4,7,8,9) | | | 70.55 | 18.02 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.54 | 70.71 | 18.05 | | 80.0 | |
| | | Z | 4.64 | 70.68 | 18.06 | | 80.0 | |

| 10493- AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | Х | 4.76 | 70.36 | 17.96 | 2.23 | 0.08 | ± 9.6 % |
|---|--|---------------|------|-------|-------|------|--------|----------|
| , ,,,,, | 5. So twi, OL Oubituino Lio, Ti, 1, 10,0) | Y | 4.58 | 70,52 | 17.98 | | 80.0 | |
| *************************************** | | Z | 4.69 | 70.49 | 18.00 | | 80.0 | |
| 40404 | LTE TOD (CC CDMA FOR DD 20 MHz | $\frac{2}{x}$ | 5.60 | 75.75 | 19.64 | 2.23 | 80.0 | ± 9.6 % |
| 10494- AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | | | | | 2.20 | | 2 0.0 70 |
| | | Y | 5.37 | 76.02 | 19.87 | | 80.0 | |
| | | Ζ | 5.56 | 76.06 | 19.81 | | 80.0 | |
| 10495- AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.78 | 71.03 | 18.23 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.59 | 71.11 | 18.27 | | 0.08 | |
| | | Ζ | 4.71 | 71.14 | 18,28 | | 80.0 | |
| 10496- AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.83 | 70.65 | 18.12 | 2.23 | 80.0 | ± 9.6 % |
| | | Υ | 4.64 | 70.74 | 18.15 | | 80.0 | |
| | | Z | 4.75 | 70.76 | 18.17 | | 80.0 | |
| 10497- | LTE-TDD (SC-FDMA, 100% RB, 1.4 | X | 3,37 | 71.45 | 15.57 | 2,23 | 80.0 | ±9.6% |
| AAA | MHz, QPSK, UL Subframe=2,3,4,7,8,9) | | | | | 2,20 | 80.0 | 2 0.0 70 |
| | | Y | 2.72 | 69.17 | 13.95 | | | |
| | | Z. | 3.09 | 70.50 | 14.83 | | 80.0 | 1000 |
| 10498- AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | × | 2.40 | 64.81 | 11.76 | 2.23 | 80.0 | ± 9.6 % |
| · | | Y | 1.75 | 62.03 | 9.60 | | 80.0 | |
| | | Z | 2.07 | 63.39 | 10.68 | | 80.0 | |
| 10499- AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.32 | 64.18 | 11.33 | 2.23 | 80.0 | ±9.6 % |
| | Oubiliante-2,0,4,1,0,0) | Y | 1.68 | 61.41 | 9.14 | | 80.0 | |
| | | Z | 1.99 | 62.76 | 10.23 | | 80.0 | - |
| 10500- AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.05 | 76.85 | 19.69 | 2.23 | 80.0 | ± 9.6 % |
| 7001 | Q ON, OE Cabilante 2,0,1,1,1,1,1,1 | Υ | 4.98 | 77.59 | 19.85 | | 80.0 | |
| | | Z | 5.12 | 77,53 | 19.88 | | 80.0 | |
| 10501- AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.38 | 71.91 | 17.55 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.19 | 72.01 | 17.27 | 1 | 80.0 | |
| | | Z | 4.33 | 72.13 | 17.50 | | 80.0 | |
| 10502- AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.41 | 71.66 | 17.40 | 2.23 | 80.0 | ±9.6% |
| | | Y | 4.21 | 71,71 | 17.09 | | 80.0 | |
| | | Z | 4.36 | 71.85 | 17.33 | | 80.0 | |
| 10503- AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.10 | 76.19 | 19.80 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.94 | 76.71 | 20.05 | | 80.0 | |
| | | Z | 5.10 | 76.67 | 19.99 | | 80.0 | |
| 10504- AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.44 | 71.51 | 18.08 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.28 | 71.74 | 18.06 | | 80.0 | |
| | | Z | 4.39 | 71.73 | 18.13 | | 80.0 | |
| 10505- AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | Х | 4.51 | 71.23 | 18.00 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.34 | 71.46 | 17.96 | | 80.0 | |
| <u> </u> | | Z | 4.45 | 71.44 | 18.03 | | 80.0 | 1 |
| 10506- AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.55 | 75.59 | 19.57 | 2.23 | 80.0 | ± 9.6 % |
| | | Υ | 5.33 | 75.87 | 19.80 | | 80.0 | |
| | | Z | 5.51 | 75.90 | 19.73 | | 80.0 | |
| 10507- AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.76 | 70.96 | 18.19 | 2,23 | 80.0 | ± 9.6 % |
| | Outriante-2,0,4,7,0,3/ | Y | 4.57 | 71.05 | 18.23 | 1 | 80.0 | |
| | | | | | | | 80.0 | |
| | | Z | 4.69 | 71.07 | 18.24 | | 1 00.0 | |

| 10508- AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.81 | 70.58 | 18.08 | 2.23 | 80.0 | ± 9.6 % |
|---|---|--------|--------------|----------------|----------------|--------|----------------|-------------|
| | | Y | 4.62 | 70.68 | 18.11 | | 80.0 | |
| | | Z | 4.73 | 70.68 | 18.12 | | 80.0 | |
| 10509- AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 5.59 | 73.58 | 18.84 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.39 | 73.76 | 19.02 | | 80.0 | |
| | | Z | 5.53 | 73.76 | 18.95 | | 80.0 | <u> </u> |
| 10510- AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | Х | 5.20 | 70.42 | 18.08 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 4.99 | 70.43 | 18.12 | | 80.0 | |
| 40544 | | Z | 5.11 | 70.45 | 18.12 | | 80.0 | |
| 10511- AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.22 | 70.10 | 18.00 | 2.23 | 80.0 | ±9.6 % |
| | | Υ | 5.03 | 70.13 | 18.04 | | 80.0 | |
| | | Ζ | 5.14 | 70.14 | 18.03 | | 80.0 | 1 |
| 10512- AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 6.02 | 75.44 | 19.39 | 2.23 | 80.0 | ± 9.6 % |
| | | Y | 5.78 | 75.56 | 19.57 | | 80.0 | |
| 10513- | LTC TDD (00 EDMA 1000) CT 05 | Z | 5.97 | 75.65 | 19.51 | | 80.0 | |
| AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | Х | 5.12 | 70.82 | 18.23 | 2.23 | 80.0 | ±9.6 % |
| | | Y | 4.91 | 70.75 | 18.25 | ****** | 80.0 | |
| 10514- AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.03 5.09 | 70.83 | 18.26 18.08 | 2.23 | 80.0 80.0 | ± 9.6 % |
| | - Gabitanto-2,0,4,7,0,0) | Y | 4.90 | 70.27 | 18.11 | | 00.0 | |
| *************************************** | | Z | 5.01 | 70.27 | 18.11 | | 80.0 80.0 | |
| 10515- AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle) | X | 0.92 | 62.60 | 13.99 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.95 | 63.05 | 14.27 | | 150.0 | |
| | | Z | 0.91 | 62.72 | 14.07 | | 150.0 | |
| 10516- AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle) | Х | 0.48 | 67.26 | 14.71 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.54 | 68.48 | 15.75 | | 150.0 | |
| 40547 | IFFE 000 441 M/FI 0 4 011 /FI 0 0 0 | Z | 0.49 | 67.82 | 15.05 | | 150.0 | |
| 10517- AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle) | X | 0.75 | 64.05 | 14.24 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 0.79 | 64.60 | 14.65 | | 150.0 | |
| 10518- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle) | Z X | 0.75 4.52 | 64.23 66.69 | 14.37 16.06 | 0.00 | 150.0 150.0 | ± 9.6 % |
| | 1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 | Y | 4.44 | 66.90 | 16.10 | | 150.0 | |
| | | Ż | 4.47 | 66.75 | 16.07 | | 150.0 | |
| 10519- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle) | X | 4.71 | 66.95 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.60 | 67.11 | 16.21 | | 150.0 | |
| | | Z | 4.65 | 66.98 | 16.20 | | 150.0 | |
| 10520- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle) | Х | 4.56 | 66.90 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.46 | 67.05 | 16.12 | | 150.0 | |
| 10521- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle) | Z X | 4.50 4.49 | 66.93 66.89 | 16.11 16.09 | 0.00 | 150.0 150.0 | ± 9.6 % |
| | | Y | 4.39 | 67.03 | 16.11 | | 150.0 | |
| | | Z | 4.44 | 66.91 | 16.09 | | 150.0 | |
| 10522- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle) | Х | 4.55 | 66.96 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.45 | 67.16 | 16.21 | | 150.0 | |
| | | Z | 4.50 | 67.02 | 16.19 | | 150.0 | |

| | | | | | | | 450.0 | |
|---------------|---|----|------|-------|-------|----------|-------|----------|
| 10523- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.43 | 66.81 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
| | 1 | Y | 4.35 | 67.05 | 16.07 | | 150.0 | |
| | | Z | 4.38 | 66.88 | 16.02 | | 150.0 | |
| 10524- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | Х | 4.50 | 66.89 | 16,14 | 0.00 | 150.0 | ± 9.6 % |
| | 1 | Υ | 4.39 | 67.08 | 16.18 | | 150.0 | |
| | | Z | 4.44 | 66.94 | 16.15 | | 150.0 | |
| 10525- AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle) | Х | 4.47 | 65.92 | 15.72 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.40 | 66.15 | 15.78 | | 150.0 | |
| | | Z | 4.43 | 65.98 | 15.74 | | 150.0 | |
| 10526- AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle) | Х | 4.65 | 66.29 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.55 | 66.47 | 15.91 | | 150.0 | |
| | | Z. | 4.59 | 66.34 | 15.88 | | 150.0 | |
| 10527- AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle) | X | 4.57 | 66.25 | 15.81 | 0.00 | 150.0 | ± 9.6 % |
| • | | Y | 4.47 | 66.43 | 15.85 | | 150.0 | |
| | | Z | 4.52 | 66.29 | 15.82 | | 150.0 | |
| 10528- AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle) | Х | 4.58 | 66.27 | 15.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.49 | 66.45 | 15.88 | | 150.0 | |
| | | Z. | 4.53 | 66.31 | 15.85 | | 150.0 | |
| 10529- AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle) | Х | 4.58 | 66.27 | 15.84 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.49 | 66.45 | 15.88 | | 150.0 | |
| | | Z | 4.53 | 66.31 | 15.85 | | 150.0 | |
| 10531- AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle) | Х | 4.58 | 66.38 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.46 | 66.51 | 15.87 | | 150.0 | |
| | | Z | 4.52 | 66.40 | 15.86 | | 150.0 | |
| 10532- AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle) | Х | 4.44 | 66.22 | 15.78 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 4.33 | 66.36 | 15.80 | | 150.0 | |
| | | Z | 4.38 | 66.25 | 15.78 | | 150.0 | |
| 10533- AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle) | X | 4.59 | 66.30 | 15.83 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 4.49 | 66.51 | 15.88 | | 150.0 | |
| | | Z | 4.54 | 66.36 | 15.84 | | 150.0 | |
| 10534- AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle) | Х | 5.13 | 66.43 | 15.94 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.04 | 66.54 | 15.97 | | 150.0 | <u> </u> |
| | | Z | 5.08 | 66.45 | 15.95 | | 150.0 | |
| 10535- AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle) | Х | 5.20 | 66.61 | 16.01 | 0.00 | 150.0 | ±9.6% |
| | | Υ | 5.10 | 66.71 | 16.05 | | 150.0 | ļ |
| | | Z | 5.15 | 66.64 | 16.04 | | 150.0 | |
| 10536- AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle) | Х | 5.06 | 66.54 | 15.96 | 0.00 | 150.0 | ±9.6 % |
| | | Υ | 4.98 | 66.67 | 16.01 | | 150.0 | |
| | | Z | 5.01 | 66.57 | 15.98 | | 150.0 | |
| 10537- AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle) | X | 5.12 | 66.52 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.03 | 66.63 | 15.99 | | 150.0 | |
| | | Z | 5.07 | 66.54 | 15.97 | 200 | 150.0 | 1,000 |
| 10538- AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle) | Х | 5.22 | 66.56 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.11 | 66.64 | 16.04 | 1 | 150.0 | |
| | | Z | 5.16 | 66.56 | 16.02 | <u> </u> | 150.0 | |
| 10540- AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle) | X | 5.14 | 66.57 | 16.03 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.04 | 66.62 | 16.05 | | 150.0 | |
| | | Z | 5.10 | 66.60 | 16.05 | | 150.0 | |

| 10541- | IEEE 802.11ac WiFi (40MHz, MCS7, | X | 5,11 | 66,43 | 15.96 | 0.00 | 450.0 | 1000 |
|---------------|--|----|------|-------|-------|------|-------|---------|
| AAB | 99pc duty cycle) | | | | | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.02 | 66.51 | 15.98 | | 150.0 | |
| 10542- | IEEE 902 1100 WIFE (40MH- MOOR | Z | 5.07 | 66.45 | 15.97 | | 150.0 | |
| AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle) | X | 5.27 | 66.51 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.18 | 66.61 | 16.04 | | 150.0 | |
| 40540 | | Z | 5.22 | 66.53 | 16.03 | | 150.0 | |
| 10543- AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle) | Х | 5.36 | 66.57 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.24 | 66.63 | 16.08 | | 150.0 | |
| 40544 | | Z. | 5.30 | 66.57 | 16.07 | | 150.0 | |
| 10544- AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle) | Х | 5.43 | 66.55 | 15.94 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.37 | 66.65 | 15.97 | | 150.0 | |
| 4 | | Z | 5.40 | 66.56 | 15.95 | | 150.0 | |
| 10545- AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle) | Х | 5.64 | 67.00 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.55 | 67.08 | 16.15 | | 150.0 | |
| | | Z | 5.60 | 67.02 | 16.13 | | 150.0 | |
| 10546- AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle) | X | 5.50 | 66.78 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.41 | 66.80 | 16.02 | | 150.0 | |
| | | Z | 5.46 | 66.76 | 16.01 | | 150.0 | |
| 10547- AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle) | Х | 5.58 | 66.83 | 16.03 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.49 | 66.87 | 16.05 | | 150.0 | |
| | | Z | 5.53 | 66.81 | 16.03 | | 150.0 | |
| 10548- AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle) | X | 5.89 | 67.94 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.69 | 67.68 | 16.43 | | 150.0 | |
| | | Z | 5.80 | 67.83 | 16.51 | | 150.0 | |
| 10550- AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle) | Х | 5.53 | 66.79 | 16.03 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.46 | 66.91 | 16.08 | | 150.0 | |
| | | Z | 5.49 | 66,81 | 16.05 | | 150.0 | |
| 10551- AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle) | X | 5.53 | 66.82 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.44 | 66.85 | 16.02 | | 150.0 | |
| | | Z | 5.49 | 66.83 | 16.02 | | 150.0 | |
| 10552- AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle) | X | 5.44 | 66.61 | 15.91 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.38 | 66.72 | 15.95 | **** | 150.0 | |
| | | Ż | 5.40 | 66.62 | 15.92 | | 150.0 | |
| 10553- AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle) | X | 5.53 | 66.66 | 15.96 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.45 | 66.72 | 15.99 | | 150.0 | |
| | | Z | 5.48 | 66.65 | 15.97 | | 150.0 | |
| 10554- AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | Х | 5.84 | 66.93 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.78 | 67.01 | 16.06 | | 150.0 | |
| | | Z | 5.81 | 66.94 | 16.05 | | 150.0 | |
| 10555- AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | Х | 5.98 | 67.25 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.90 | 67.29 | 16.19 | | 150.0 | |
| 40=== | | Z | 5.94 | 67.25 | 16.18 | | 150.0 | |
| 10556- AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.00 | 67.29 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.93 | 67.35 | 16.21 | | 150.0 | |
| | | Z | 5.96 | 67.30 | 16.20 | | 150.0 | |
| 10557- AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | × | 5.96 | 67.20 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.88 | 67.23 | 16.17 | | 150.0 | |
| | | Z | 5.92 | 67.18 | 16.16 | | 150,0 | I |

| 40550 | IEEE 000 44 WIEL (400MIL- MOC4 | T | 6.04 | 67.37 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
|---|---|---|------|-------|-------|---|-------|----------|
| 10558- AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle) | X | 6.01 | 61.31 | 10.20 | 0.00 | 150.0 | 1 3.0 70 |
| | | Υ | 5.92 | 67.38 | 16.26 | | 150.0 | |
| | | Z | 5.97 | 67.35 | 16.26 | | 150.0 | |
| 10560- AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle) | Х | 6.01 | 67.21 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.92 | 67.24 | 16.23 | | 150.0 | |
| | | Z | 5.96 | 67.19 | 16.22 | | 150.0 | |
| 10561- AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle) | Х | 5.93 | 67.18 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
| | | Y | 5.85 | 67.23 | 16.26 | | 150.0 | |
| | | Z | 5.89 | 67.18 | 16.25 | *************************************** | 150.0 | |
| 10562- AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle) | X | 6.07 | 67.61 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 5.94 | 67.50 | 16.40 | | 150.0 | |
| | | Z | 6.01 | 67.54 | 16.43 | | 150.0 | |
| 10563- AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle) | Х | 6.39 | 68.16 | 16.69 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 6.02 | 67.41 | 16.31 | | 150.0 | |
| *************************************** | | Z | 6.19 | 67.71 | 16.48 | | 150.0 | |
| 10564- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 99pc duty cycle) | Х | 4.86 | 66.83 | 16.26 | 0.46 | 150.0 | ± 9.6 % |
| | | Υ | 4.78 | 67.03 | 16.31 | | 150.0 | |
| | | Z | 4.81 | 66.87 | 16.27 | | 150.0 | |
| 10565- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 99pc duty cycle) | Х | 5.09 | 67.28 | 16.58 | 0.46 | 150.0 | ±9.6 % |
| | | Υ | 4.98 | 67.43 | 16.60 | | 150.0 | |
| | | Z | 5.03 | 67.31 | 16.59 | | 150.0 | |
| 10566- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 99pc duty cycle) | Х | 4.93 | 67.13 | 16.40 | 0.46 | 150.0 | ±9.6 % |
| | | Y | 4.82 | 67.27 | 16.42 | | 150.0 | |
| | | Z | 4.87 | 67.15 | 16.40 | | 150.0 | |
| 10567- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 99pc duty cycle) | X | 4.95 | 67.50 | 16.74 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.84 | 67.61 | 16.74 | | 150.0 | |
| | | Z | 4.90 | 67.52 | 16.74 | | 150.0 | |
| 10568- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 99pc duty cycle) | X | 4.85 | 66.93 | 16.19 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.74 | 67.12 | 16.24 | | 150.0 | |
| | | Z | 4.79 | 66.97 | 16.19 | | 150.0 | |
| 10569- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 99pc duty cycle) | X | 4.91 | 67.57 | 16.79 | 0.46 | 150.0 | ± 9.6 % |
| | | Y | 4.82 | 67.76 | 16.84 | | 150.0 | |
| *************************************** | | Z | 4.86 | 67.64 | 16.82 | | 150.0 | |
| 10570- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 99pc duty cycle) | Х | 4.94 | 67.43 | 16.73 | 0.46 | 150.0 | ±9.6 % |
| *** | | Υ | 4.84 | 67.60 | 16.77 | | 150.0 | |
| | | Z | 4.89 | 67.48 | 16.75 | | 150.0 | |
| 10571- AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle) | Х | 1.25 | 65.19 | 15.53 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 1.27 | 65.45 | 15.71 | | 130.0 | |
| | | Z | 1.24 | 65.29 | 15.60 | | 130.0 | |
| 10572- AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle) | Х | 1.27 | 65.79 | 15.87 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 1.28 | 66.03 | 16.05 | | 130.0 | |
| | | Z | 1.26 | 65.90 | 15.96 | | 130.0 | |
| 10573- AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle) | Х | 2.61 | 85.52 | 21.81 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 2.97 | 88.51 | 23.34 | | 130.0 | |
| | | Ż | 3.01 | 88.05 | 22.71 | | 130.0 | |
| 10574- AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle) | X | 1.44 | 71.64 | 18.59 | 0.46 | 130.0 | ± 9.6 % |
| | Integration and Golds | Y | 1.44 | 71.68 | 18.74 | - | 130.0 | 1 |
| | | | | | | | | |

| 10575- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 90pc duty cycle) | X | 4.68 | 66.71 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
|---------------|---|--------------|------|-------|-------|---|-------|---|
| 7001 | Or Divi, 6 Mops, 90pc duty cycle) | | | | | | | |
| | | Y | 4.59 | 66.91 | 16.41 | | 130.0 | |
| 10576- | IEEE 802.11g WiFi 2.4 GHz (DSSS- | Z | 4.63 | 66.76 | 16.38 | ļ | 130.0 | |
| AAA | OFDM, 9 Mbps, 90pc duty cycle) | X | 4.70 | 66.86 | 16.43 | 0.46 | 130.0 | ±9.6% |
| | | Y | 4.61 | 67.07 | 16.47 | | 130.0 | |
| 10577- | VEET 200 44 - WEET 0.4 O.L. WEET | Z | 4.65 | 66.92 | 16,44 | | 130.0 | |
| AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 90pc duty cycle) | Х | 4.91 | 67.16 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.79 | 67.31 | 16.62 | | 130.0 | |
| 10578- | IFFE 000 44 - W/F: 0 4 011 / 000 | Z | 4.85 | 67.20 | 16.60 | | 130.0 | |
| AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 90pc duty cycle) | X | 4.81 | 67.32 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.69 | 67.44 | 16.70 | | 130.0 | |
| 10579- | IFFE 000 44 MIELO A DOMESTICA | Z | 4.75 | 67.35 | 16.70 | | 130.0 | |
| AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 90pc duty cycle) | X | 4.58 | 66.65 | 16.03 | 0.46 | 130.0 | ± 9.6 % |
| VI | | Y | 4.47 | 66.80 | 16.06 | | 130.0 | |
| 10500 | IEEE 000 44 - WEE 0 4 5 1 | Z | 4.52 | 66.66 | 16.02 | | 130.0 | |
| 10580- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 90pc duty cycle) | X | 4.63 | 66.68 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 4.52 | 66.87 | 16.11 | | 130.0 | |
| 40504 | | Z | 4.57 | 66.71 | 16.05 | | 130.0 | |
| 10581- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 90pc duty cycle) | Х | 4.71 | 67.36 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 4.60 | 67.52 | 16.66 | | 130.0 | |
| 40500 | | Z | 4.65 | 67.41 | 16.65 | | 130.0 | |
| 10582- AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 90pc duty cycle) | Х | 4.53 | 66.42 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 4.41 | 66.60 | 15.88 | | 130.0 | |
| | | Z | 4.46 | 66.43 | 15.82 | | 130.0 | |
| 10583- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle) | Х | 4.68 | 66.71 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.59 | 66.91 | 16.41 | | 130.0 | |
| | | Z | 4.63 | 66.76 | 16.38 | | 130.0 | |
| 10584- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle) | Х | 4.70 | 66.86 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.61 | 67.07 | 16.47 | | 130.0 | |
| | | Ζ | 4.65 | 66.92 | 16.44 | *************************************** | 130.0 | |
| 10585- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle) | Х | 4.91 | 67.16 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.79 | 67.31 | 16.62 | | 130.0 | *************************************** |
| ······ | | Z | 4.85 | 67.20 | 16.60 | | 130.0 | |
| 10586- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle) | X | 4.81 | 67.32 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 4.69 | 67.44 | 16.70 | | 130.0 | |
| | | Ζ | 4.75 | 67.35 | 16.70 | | 130.0 | |
| 10587- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle) | X | 4.58 | 66.65 | 16.03 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 4.47 | 66.80 | 16.06 | | 130.0 | |
| | | Ζ | 4.52 | 66.66 | 16.02 | | 130.0 | |
| 10588- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle) | Х | 4.63 | 66.68 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 4.52 | 66.87 | 16.11 | | 130.0 | |
| 40000 | | Z | 4.57 | 66.71 | 16.05 | | 130.0 | |
| 10589- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle) | Х | 4.71 | 67.36 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 4.60 | 67.52 | 16.66 | | 130.0 | |
| 10555 | | Z | 4.65 | 67.41 | 16.65 | | 130.0 | |
| 10590- AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle) | Х | 4.53 | 66.42 | 15.83 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 4.41 | 66.60 | 15.88 | | 130.0 | |
| | | Z | 4.46 | 66.43 | 15.82 | | 130.0 | |

| 10591- AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.83 | 66.77 | 16.47 | 0.46 | 130.0 | ± 9.6 % |
|--|---|------------------|------|-------|-------|------|-------|----------|
| | | Y | 4.74 | 66.96 | 16.50 | | 130.0 | |
| | | Z | 4.78 | 66.82 | 16.48 | | 130.0 | |
| 10592- AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 4.98 | 67.10 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
| AVAD | WOOT, sope daty cycle) | TY | 4.87 | 67.27 | 16.63 | | 130.0 | |
| | | Z | 4.93 | 67.14 | 16.61 | | 130.0 | |
| 40500 | IEEE 000 44- /UT Mixed 20MHz | X | 4.91 | 67.02 | 16,48 | 0.46 | 130.0 | ± 9.6 % |
| 10593- AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | | | | | 0.40 | 130.0 | 2 0.0 70 |
| | | Y | 4.80 | 67.17 | 16.51 | | | |
| | | Z | 4.85 | 67.05 | 16.49 | | 130.0 | |
| 10594- AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.96 | 67,18 | 16.63 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.85 | 67.33 | 16.66 | | 130.0 | |
| | | Z | 4.90 | 67.22 | 16.64 | | 130.0 | |
| 10595- AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.93 | 67.14 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
| 1 V 1D | 11001,0000000 | Y | 4.82 | 67.31 | 16.57 | | 130.0 | |
| | | Ż | 4.87 | 67.18 | 16.54 | | 130.0 | |
| 40506 | IEEE 802.11n (HT Mixed, 20MHz, | X | 4.87 | 67.14 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
| 10596- AAB | MCS5, 90pc duty cycle) | | | 67.30 | 16.57 | | 130.0 | |
| | | Y | 4.76 | | 16.54 | | 130.0 | |
| | | Z | 4.81 | 67.18 | | 0.40 | 130.0 | ± 9.6 % |
| 10597- AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | Х | 4.82 | 67.05 | 16.42 | 0.46 | | I 9.0 % |
| | | Υ | 4.71 | 67.19 | 16.44 | | 130.0 | |
| | | Z | 4.76 | 67.07 | 16.42 | | 130.0 | |
| 10598- AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.80 | 67.28 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
| ,,,,,, | Micori cope day of sich | Y | 4.69 | 67.37 | 16.67 | | 130.0 | |
| | | Z | 4.74 | 67.29 | 16.67 | | 130.0 | |
| 10599- | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.50 | 67.33 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
| AAB | WC30, 90pc daty cycle) | Y | 5.40 | 67.43 | 16.72 | | 130.0 | |
| | | Ż | 5.46 | 67.38 | 16.72 | | 130.0 | |
| 10600- | IEEE 802.11n (HT Mixed, 40MHz, | X | 5.67 | 67.87 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
| AAB | MCS1, 90pc duty cycle) | -+ | 5.52 | 67.86 | 16.92 | | 130.0 | |
| , coperation of the control of the c | | Y | 5.53 | | | · | 130.0 | |
| | | Z | 5.61 | 67.87 | 16.94 | 0.40 | | 1069 |
| 10601- AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.54 | 67.56 | 16.79 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.42 | 67.61 | 16.80 | | 130.0 | |
| ······································ | | Z | 5.48 | 67.56 | 16.80 | | 130.0 | |
| 10602- AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | Х | 5.63 | 67.58 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.55 | 67.79 | 16.82 | | 130.0 | |
| | | Z | 5.59 | 67.64 | 16.76 | | 130.0 | |
| 10603- AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.71 | 67.86 | 16,99 | 0.46 | 130.0 | ± 9.6 % |
| . 14 15.07 | | Y | 5.61 | 68.00 | 17.05 | | 130.0 | |
| *************************************** | | Ż | 5.65 | 67.89 | 17.01 | | 130.0 | |
| 10604- AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.50 | 67.29 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
| 7/10 | inoco, oopo daty oyoto/ | Y | 5.49 | 67.68 | 16.88 | | 130.0 | |
| | | Z | 5.47 | 67.39 | 16.75 | | 130.0 | |
| 10605- | IEEE 802.11n (HT Mixed, 40MHz, | X | 5.63 | 67.69 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
| AAB | MCS6, 90pc duty cycle) | - \ | 5.50 | 67.80 | 16.94 | 1 | 130.0 | + |
| | | Y 7 | 5.53 | | | | 130.0 | - |
| | | Z | 5.59 | 67.74 | 16.92 | 0.40 | | 1000 |
| 10606- AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.39 | 67.07 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.27 | 67.10 | 16.45 | | 130.0 | |
| · | · } · · · · · · · · · · · · · · · · · · | Z | 5.31 | 66.99 | 16.41 | \$ | 130.0 | 1 |

| 10607- | IEEE 802.11ac WiFi (20MHz, MCS0, | X | 4.65 | 66.04 | 16.07 | 0.46 | 130.0 | ± 9.6 % |
|---------------|---|---------------|--------------|----------------|----------------|-------|----------------|---|
| AAB | 90pc duty cycle) | - V | 4.50 | 00.00 | 40.10 | | | |
| | | Y | 4.58 4.61 | 66.26 66.10 | 16.12 | | 130.0 | |
| 10608- | IEEE 802.11ac WiFi (20MHz, MCS1, | $\frac{1}{x}$ | 4.85 | 66.45 | 16.08 16.23 | 0.46 | 130.0 130.0 | +0.00 |
| AAB | 90pc duty cycle) | ^ | 4.00 | 00.43 | 10.23 | 0.46 | 130.0 | ±9.6% |
| | | Υ | 4.74 | 66.63 | 16.28 | | 130.0 | |
| | | Z | 4.79 | 66.50 | 16.25 | | 130.0 | |
| 10609- AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.74 | 66.30 | 16.07 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.63 | 66.48 | 16.11 | | 130.0 | |
| 10610- | IEEE 802.11ac WiFi (20MHz, MCS3, | Z | 4.68 | 66.35 | 16.08 | | 130.0 | |
| AAB | 90pc duty cycle) | X | 4.79 | 66,46 | 16.23 | 0.46 | 130.0 | ± 9.6 % |
| | | Y Z | 4.68 | 66.63 | 16.27 | | 130.0 | |
| 10611- | IEEE 802.11ac WiFi (20MHz, MCS4, | X | 4.73 4.70 | 66.50 66.28 | 16.25 16.09 | 0.46 | 130.0 | |
| AAB | 90pc duty cycle) | Y | 4.60 | 66.45 | | 0.46 | 130.0 | ± 9.6 % |
| | | Z | 4.65 | 66.31 | 16.12 | | 130.0 | |
| 10612- | IEEE 802.11ac WiFi (20MHz, MCS5, | $\frac{1}{x}$ | 4.00 | 66.43 | 16.10 16.13 | 0.46 | 130.0 130.0 | +060/ |
| AAB | 90pc duty cycle) | | | 00.43 | | U.40 | 130.0 | ± 9.6 % |
| | | Y | 4.60 | 66.61 | 16.18 | | 130.0 | |
| 40040 | IEEE 000 44 WEEL (001 III) | Z | 4.66 | 66.47 | 16.14 | | 130.0 | |
| 10613- AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.72 | 66.33 | 16.02 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.60 | 66.47 | 16.05 | | 130.0 | |
| 10614- | IEEE 802.11ac WiFi (20MHz, MCS7, | Z | 4.66 | 66.35 | 16.02 | | 130.0 | |
| AAB | 90pc duty cycle) | X | 4.66 | 66.50 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.55 | 66.62 | 16.25 | | 130.0 | |
| 10615- | ICCE 902 11cc WiEi /20MH - MCCO | Z | 4.60 | 66.53 | 16.25 | 2 / 2 | 130.0 | |
| AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.71 | 66.12 | 15.87 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 4.60 | 66.33 | 15.93 | | 130.0 | |
| 10616- | IEEE 802.11ac WiFi (40MHz, MCS0, | Z | 4.65 | 66.16 | 15.88 | | 130.0 | |
| AAB | 90pc duty cycle) | Х | 5.31 | 66.56 | 16.28 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.21 | 66.65 | 16.31 | | 130.0 | |
| 10617- | IEEE 902 44 co WIEI (40MH- MOC4 | Z | 5.26 | 66.57 | 16.29 | | 130.0 | |
| AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.38 | 66.74 | 16.35 | 0.46 | 130.0 | ± 9.6 % |
| · | | Y | 5.29 | 66.86 | 16.39 | | 130.0 | |
| 10618- | IEEE 802.11ac WiFi (40MHz, MCS2, | Z | 5.34 | 66.79 | 16.37 | 0.40 | 130.0 | |
| AAB | 90pc duty cycle) | ^ Y | 5.26 | 66.74 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
| | | Z | 5.18 5.22 | 66.87 66.77 | 16.40 16.38 | | 130.0 130.0 | |
| 10619- AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.29 | 66.59 | 16.22 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.19 | 66.67 | 16.25 | | 130.0 | *************************************** |
| | | Z | 5.23 | 66.58 | 16.22 | | 130.0 | |
| 10620- AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.38 | 66.62 | 16.29 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.27 | 66.70 | 16.31 | | 130.0 | |
| | | Z | 5.32 | 66.62 | 16.29 | | 130.0 | |
| 10621- AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | Х | 5.37 | 66.71 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
| · | | Υ | 5.27 | 66.80 | 16.47 | | 130.0 | |
| 100+- | | Z | 5.32 | 66.74 | 16.47 | | 130.0 | |
| 10622- AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | × | 5,39 | 66.89 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.29 | 66.97 | 16.55 | | 130.0 | |
| | | Z | 5.34 | 66.92 | 16.55 | | 130.0 | |

| 10623- | IEEE 802.11ac WiFi (40MHz, MCS7, | X | 5.26 | 66.41 | 16.17 | 0.46 | 130.0 | ± 9.6 % |
|---|--|---|--------------|----------------|----------------|------|----------------|---------------------------------------|
| AAB | 90pc duty cycle) | ^ | 0.20 | 00.41 | 10.71 | 00 | 0.00, | |
| | | Y | 5.16 | 66.51 | 16.20 | | 130.0 | |
| | | Z | 5.21 | 66.44 | 16.19 | | 130.0 | |
| 10624- AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) | X | 5.45 | 66.63 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.35 | 66.71 | 16.36 | | 130.0 | |
| | | Z | 5.40 | 66.64 | 16.35 | | 130.0 | |
| 10625- AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) | X | 5.87 | 67.75 | 16.95 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.59 | 67.32 | 16.72 | | 130.0 | |
| *************************************** | | Z | 5.77 | 67.62 | 16.89 | | 130.0 | |
| 10626- AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) | Х | 5,59 | 66.61 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.53 | 66.71 | 16.27 | | 130.0 | |
| | | Z | 5.56 | 66.63 | 16.25 | 0.40 | 130.0 | . 0 0 0/ |
| 10627- AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) | X | 5.86 | 67.23 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.77 | 67.31 | 16.54 | | 130.0 | · · · · · · · · · · · · · · · · · · · |
| | | Z | 5.82 | 67.26 | 16.53 | 0.40 | 130.0 | |
| 10628- AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) | X | 5.64 | 66.75 | 16.20 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.54 | 66.76 | 16.20 | | 130.0 | |
| | | Z | 5.59 | 66.73 | 16.20 | 0.40 | 130.0 | 1000 |
| 10629- AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle) | Х | 5.74 | 66.86 | 16.25 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.63 | 66.85 | 16.25 | | 130.0 | |
| 10630- | IEEE 802.11ac WiFi (80MHz, MCS4, | Z | 5.67 6.27 | 66.78 68.62 | 16.22 17.13 | 0.46 | 130.0 130.0 | ± 9.6 % |
| AAB | 90pc duty cycle) | Y | 5.98 | 68.12 | 16.89 | | 130.0 | |
| | | Z | 6.16 | 68.44 | 17.05 | | 130.0 | |
| 10631- AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle) | Х | 6.08 | 68.18 | 17.10 | 0.46 | 130.0 | ±9.6 % |
| | | Y | 5.89 | 67.92 | 16.96 | | 130.0 | |
| | | Z | 6.00 | 68.07 | 17.05 | | 130.0 | |
| 10632- AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle) | X | 5.81 | 67.25 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.73 | 67.36 | 16.70 | | 130.0 | |
| | | Z | 5.78 | 67.29 | 16.68 | | 130.0 | |
| 10633- AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle) | Х | 5.70 | 66.88 | 16.30 | 0.46 | 130.0 | ±9.6 % |
| | | Y | 5.61 | 66.94 | 16.32 | | 130.0 | |
| | | Z | 5.64 | 66.86 | 16.29 | | 130.0 | |
| 10634- AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle) | Х | 5.68 | 66.90 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.59 | 66.94 | 16.37 | | 130.0 | |
| | | Z | 5.63 | 66.89 | 16.36 | | 130.0 | |
| 10635- AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle) | X | 5.57 | 66.28 | 15.80 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 5.47 | 66.33 | 15.83 | | 130.0 | |
| | | Z | 5.52 | 66.25 | 15.79 | | 130.0 | |
| 10636- AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | Х | 6.01 | 67.00 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 5.95 | 67.08 | 16.37 | ļ | 130.0 | |
| | | Z | 5.98 | 67.00 | 16.35 | | 130.0 | |
| 10637- AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | Х | 6.18 | 67.41 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 6.10 | 67.45 | 16.54 | | 130.0 | |
| | | Z | 6.14 | 67.41 | 16.54 | | 130.0 | |
| 10638- AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | Х | 6.18 | 67.38 | 16.49 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 6.10 | 67.42 | 16.51 | | 130.0 | |
| | | Z | 6.14 | 67.38 | 16.50 | | 130.0 | 1 |

| 10639- AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle) | X | 6.15 | 67.32 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
|---------------|--|----|--------|--------|-------|-------|-------|---------------------------------------|
| | | Y | 6.07 | 67.34 | 16.50 | | 130.0 | |
| 10640- | IEEE 802 1100 WIE: (100MU - NOC) | Z | 6.11 | 67.30 | 16.50 | | 130.0 | |
| AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle) | X | 6.17 | 67.36 | 16.47 | 0.46 | 130.0 | ±9.6 % |
| | | Y | 6.07 | 67.36 | 16.47 | | 130.0 | |
| 40044 | FEE 000 11 | Z | 6.11 | 67.32 | 16.45 | | 130.0 | |
| 10641- AAC | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle) | Х | 6.20 | 67.22 | 16.42 | 0.46 | 130.0 | ± 9.6 % |
| | | Υ | 6.14 | 67.34 | 16.48 | | 130.0 | |
| 40040 | | Z | 6.17 | 67.26 | 16.44 | | 130.0 | |
| 10642- AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle) | X | 6.24 | 67.47 | 16.71 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.15 | 67.50 | 16.71 | | 130.0 | |
| 40045 | | Z | 6.19 | 67.46 | 16.71 | | 130.0 | |
| 10643- AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle) | X | 6.08 | 67.18 | 16.46 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.01 | 67.25 | 16.50 | | 130.0 | 7 |
| | | Z. | 6.04 | 67.18 | 16.47 | | 130.0 | · · · · · · · · · · · · · · · · · · · |
| 10644- AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle) | X | 6.27 | 67.76 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
| ,- | | Υ | 6.11 | 67.57 | 16.67 | | 130.0 | |
| | | Z | 6.19 | 67.64 | 16.72 | | 130.0 | |
| 10645- AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle) | X | 6.75 | 68.75 | 17.22 | 0.46 | 130.0 | ± 9.6 % |
| | | Y | 6.24 | 67.62 | 16.66 | | 130.0 | |
| ********* | | Z | 6.47 | 68.11 | 16.92 | | 130.0 | |
| 10646- AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7) | Х | 46.96 | 124.69 | 40.77 | 9.30 | 60.0 | ± 9.6 % |
| | | Υ | 100.00 | 148.37 | 48.20 | | 60.0 | |
| | | Z | 67.01 | 134.85 | 43.85 | | 60.0 | |
| 10647- AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | Х | 46.42 | 125.36 | 41.11 | 9.30 | 60.0 | ± 9.6 % |
| | | Υ | 100.00 | 149.72 | 48.78 | | 60.0 | |
| | | Z | 63.71 | 134.73 | 44.00 | | 60.0 | |
| 10648- AAA | CDMA2000 (1x Advanced) | Х | 0.63 | 62.54 | 9.79 | 0.00 | 150.0 | ± 9.6 % |
| | | Υ | 0.58 | 62.24 | 9.19 | | 150.0 | |
| | | Z | 0.59 | 62.30 | 9.35 | | 150.0 | |
| 10652- AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%) | Х | 4.19 | 68.34 | 17.06 | 2.23 | 80.0 | ± 9.6 % |
| | | Υ | 4.08 | 68.62 | 17.03 | | 80.0 | |
| | | Z | 4.14 | 68.48 | 17.06 | | 80.0 | |
| 10653- AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%) | Х | 4.68 | 67.61 | 17.18 | 2.23 | 80.0 | ± 9.6 % |
| | | Υ | 4.56 | 67.77 | 17.19 | | 80.0 | |
| | | Z | 4.62 | 67.66 | 17.19 | | 80.0 | |
| 10654- AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%) | X | 4.63 | 67.27 | 17.19 | 2.23 | 80.0 | ± 9.6 % |
| | | Υ | 4.54 | 67.39 | 17.21 | | 80.0 | |
| | | Z | 4.58 | 67.31 | 17.20 | | 80.0 | |
| 10655- AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%) | X | 4.69 | 67.27 | 17.23 | 2.23 | 80.0 | ± 9.6 % |
| | | Υ | 4.60 | 67.35 | 17.25 | | 80.0 | |
| | | Z | 4.64 | 67.28 | 17.23 | | 80.0 | ••• |
| 10658- AAA | Pulse Waveform (200Hz, 10%) | Х | 19.17 | 92.59 | 24.24 | 10.00 | 50.0 | ± 9.6 % |
| | | Υ | 41.94 | 104.68 | 27.26 | | 50.0 | |
| | | Z | 24.50 | 96.17 | 24.98 | | 50.0 | |
| 10659- | Pulse Waveform (200Hz, 20%) | X | 100.00 | 114.36 | 28.32 | 6.99 | 60.0 | ± 9.6 % |
| AAA | | | | | | | 1 | |
| AAA | | Y | 100.00 | 114.20 | 27.89 | | 60.0 | |

| 10660- AAA | Pulse Waveform (200Hz, 40%) | X | 100.00 | 111.43 | 25.50 | 3.98 | 80.0 | ± 9.6 % |
|---------------------------------------|-----------------------------|---|--------|--------|-------|------|-------|---------|
| | | Y | 100.00 | 112.46 | 25.73 | | 80.0 | |
| · · · · · · · · · · · · · · · · · · · | | Z | 100.00 | 110.79 | 25.07 | | 80.0 | |
| 10661- AAA | Pulse Waveform (200Hz, 60%) | X | 100.00 | 110.47 | 23.74 | 2.22 | 100.0 | ± 9.6 % |
| | | Y | 100.00 | 113.22 | 24.78 | | 100.0 | |
| | | Z | 100.00 | 109.90 | 23.38 | | 100.0 | |
| 10662- AAA | Pulse Waveform (200Hz, 80%) | Х | 100.00 | 107.83 | 20.92 | 0.97 | 120.0 | ± 9.6 % |
| | | Y | 100.00 | 115.39 | 23.98 | | 120.0 | |
| | | Z | 100.00 | 107.00 | 20.48 | | 120.0 | |

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

APPENDIX D: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity ε' can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\varepsilon_{r}\varepsilon_{0}}{\left[\ln(b/a)\right]^{2}} \int_{a}^{b} \int_{a}^{b} \int_{0}^{\pi} \cos\phi' \frac{\exp\left[-j\omega r(\mu_{0}\varepsilon_{r}'\varepsilon_{0})^{1/2}\right]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

Table D-I Composition of the Tissue Equivalent Matter

| Frequency (MHz) | 835 | 835 | 1900 | 1900 |
|---------------------------|-------|-------|-------|-------|
| Tissue | Head | Body | Head | Body |
| Ingredients (% by weight) | | | | |
| Bactericide | 0.1 | 0.1 | | |
| DGBE | | | 44.92 | 29.44 |
| HEC | 1 | 1 | | |
| NaCl | 1.45 | 0.94 | 0.18 | 0.39 |
| Sucrose | 57 | 44.9 | | |
| Water | 40.45 | 53.06 | 54.9 | 70.17 |

| FCC ID: ZNFX212TA | PCTEST STATEMENT LABORATORY, INC. | SAR EVALUATION REPORT | (LG | Approved by: Quality Manager |
|---------------------|-----------------------------------|-----------------------|-------------|-------------------------------|
| Test Dates: | DUT Type: | | | APPENDIX D: |
| 10/29/18 - 10/31/18 | Portable Handset | | | page 1 of 1 |

APPENDIX E: SAR SYSTEM VALIDATION

Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

Table E-1 SAR System Validation Summary – 1g

| S | SAR | | | | | | | | PERM. | C | W VALIDATION | | 1 | MOD. VALIDATION | 1 |
|-----|------|-------------|------------|----------|------------|---------|-----------|-------|--------|-------------|--------------|----------|------|-----------------|-----|
| SYS | STEM | FREQ. [MHz] | DATE | PROBE SN | PROBE TYPE | PROBE C | AL. POINT | (a) | (er) | SENSITIVITY | PROBE | PROBE | MOD. | DUTY FACTOR | PAR |
| | # | | | | | | | (σ) | (81) | SENSITIVITI | LINEARITY | ISOTROPY | TYPE | DUTTFACTOR | FAR |
| | E | 835 | 3/5/2018 | 3213 | ES3DV3 | 835 | Head | 0.925 | 43.335 | PASS | PASS | PASS | GMSK | PASS | N/A |
| | D | 1900 | 10/25/2018 | 7357 | EX3DV4 | 1900 | Head | 1.433 | 39.444 | PASS | PASS | PASS | GMSK | PASS | N/A |
| | J | 835 | 9/11/2018 | 3347 | ES3DV3 | 835 | Body | 0.984 | 54.197 | PASS | PASS | PASS | GMSK | PASS | N/A |
| | J | 1900 | 8/30/2018 | 3347 | ES3DV3 | 1900 | Body | 1.566 | 52.424 | PASS | PASS | PASS | GMSK | PASS | N/A |

NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

| FCC ID: ZNFX212TA | PCTEST | SAR EVALUATION REPORT | (LG | Approved by: Quality Manager |
|---------------------|------------------|-----------------------|-----|------------------------------|
| Test Dates: | DUT Type: | | | APPENDIX E: |
| 10/29/18 - 10/31/18 | Portable Handset | | | Page 1 of 1 |