



The Photos of SAR test

No. I18Z60490-SEM01

For

LG Electronics MobileComm USA, Inc.

Multi-band GSM/WCDMA/LTE phone with Bluetooth, WLAN

Model name:

LM-X410FC, LMX410FC, X410FC ; LM-X410FO, LMX410FO, X410FO

With

Hardware Version: Rev.1.0

Software Version: V09p

FCC ID: ZNFX410FC



Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT


No. 51, Xueyuan Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

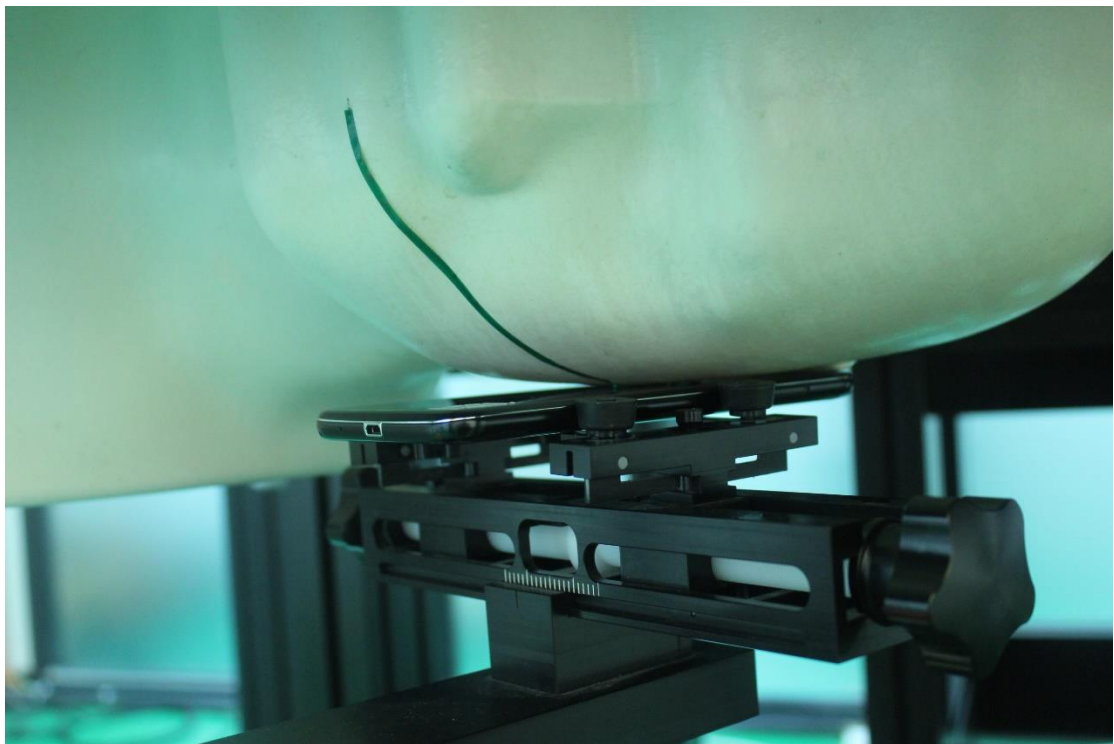


Picture 2: Left Hand Touch Cheek Position

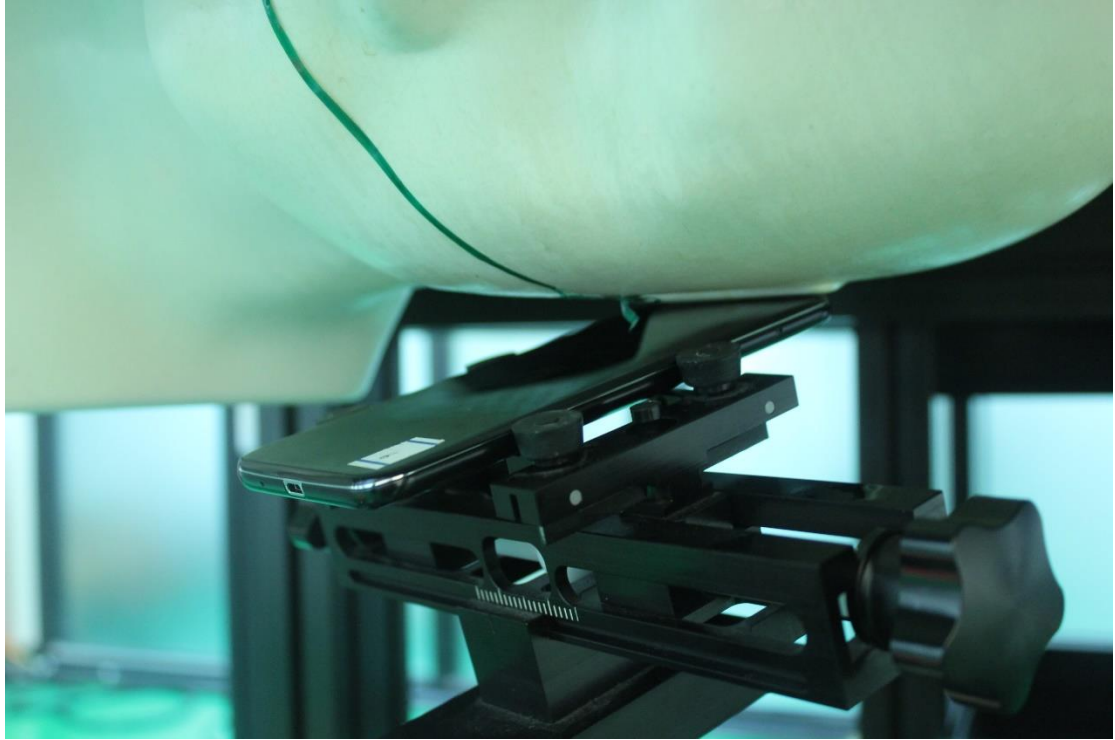

Picture 3: Left Hand Tilt 15° Position

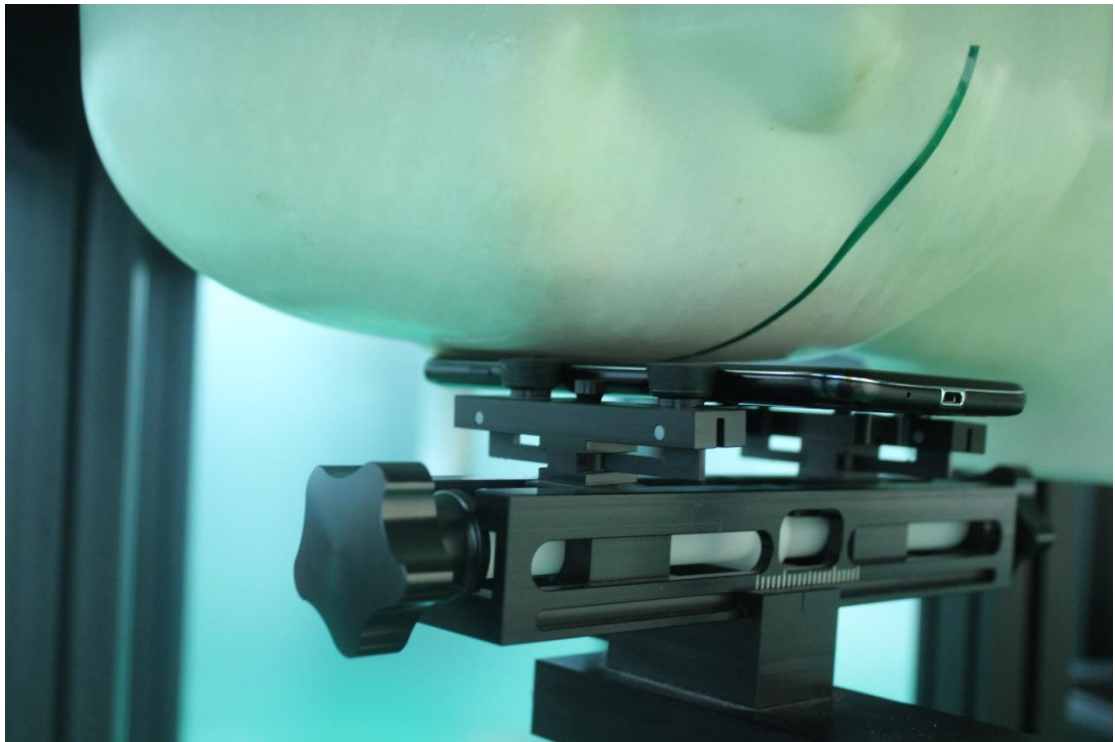


Picture 4: Right Hand Touch Cheek Position

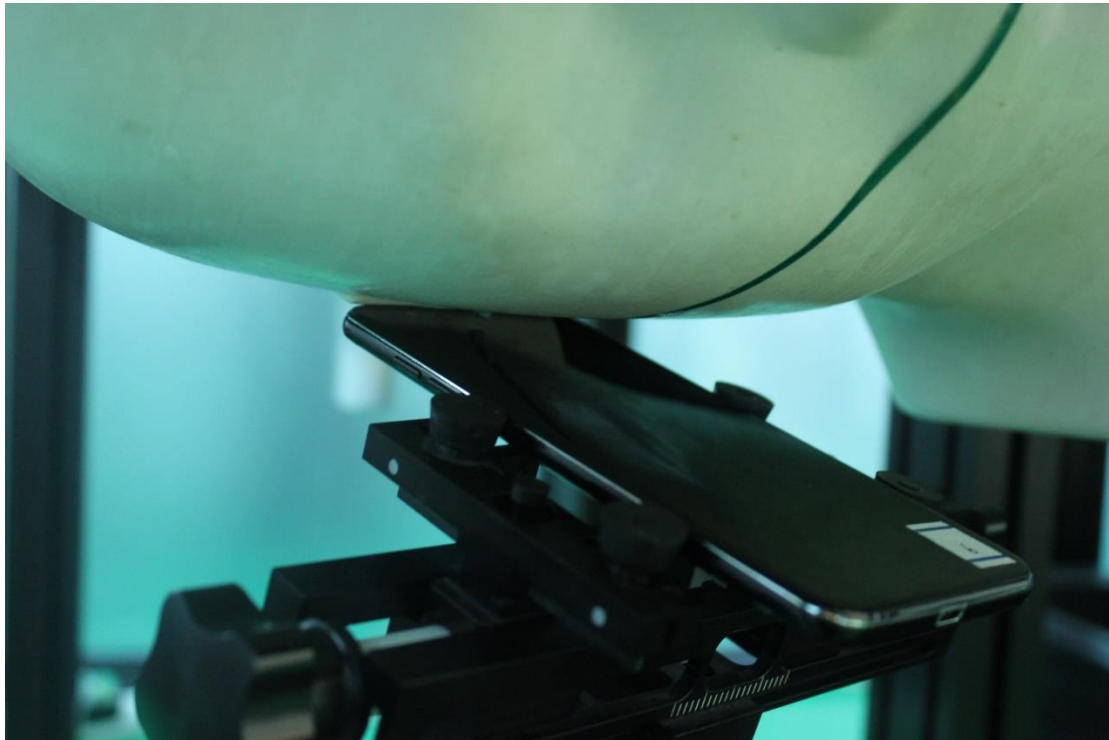


Picture 5: Right Hand Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 6 test positions all with the distance =10mm between the EUT and the phantom bottom:

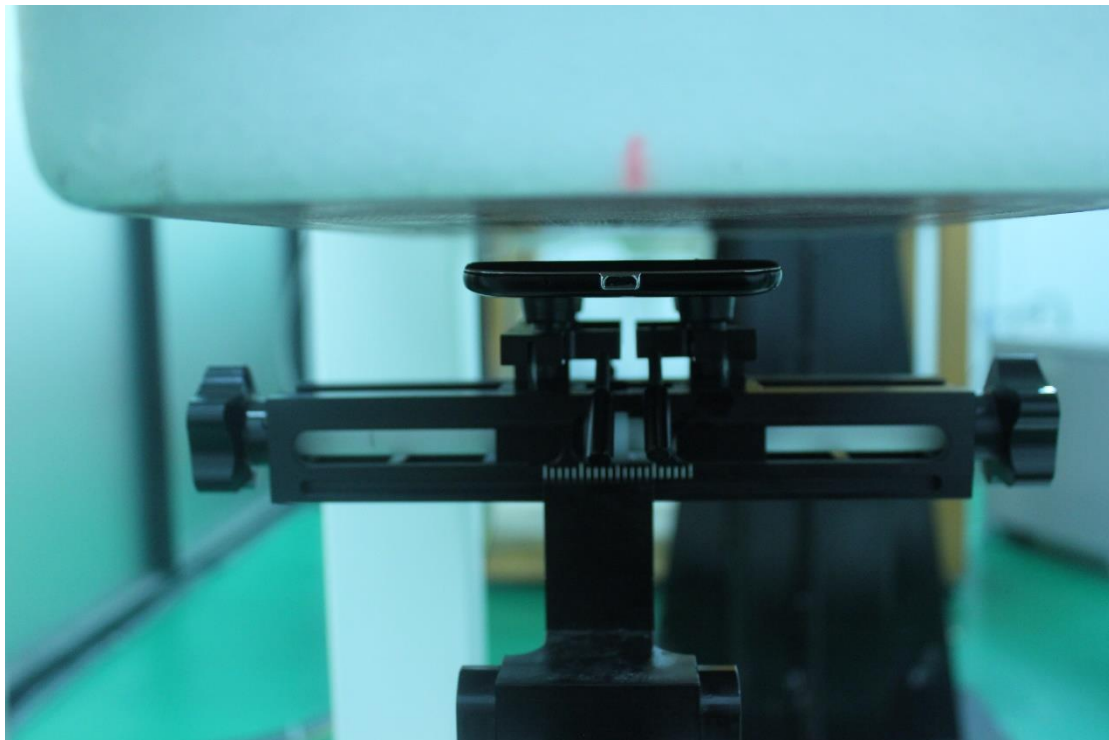

Picture 6: Front with 10mm

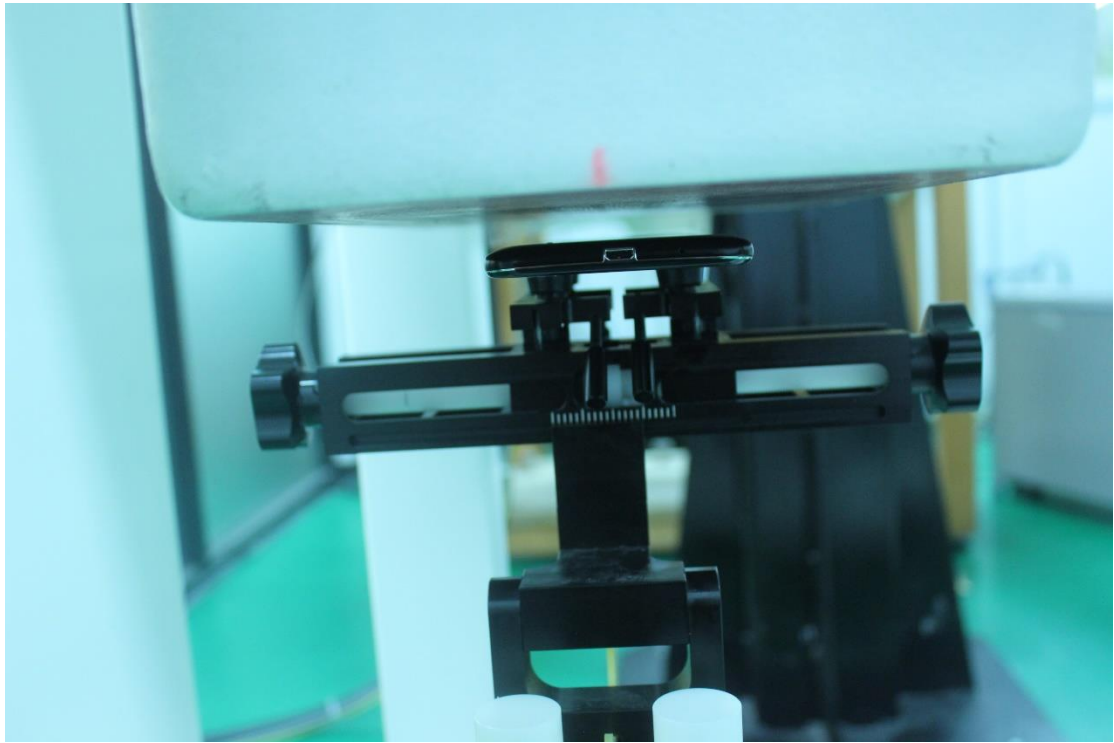

Picture 7: Rear with 10mm

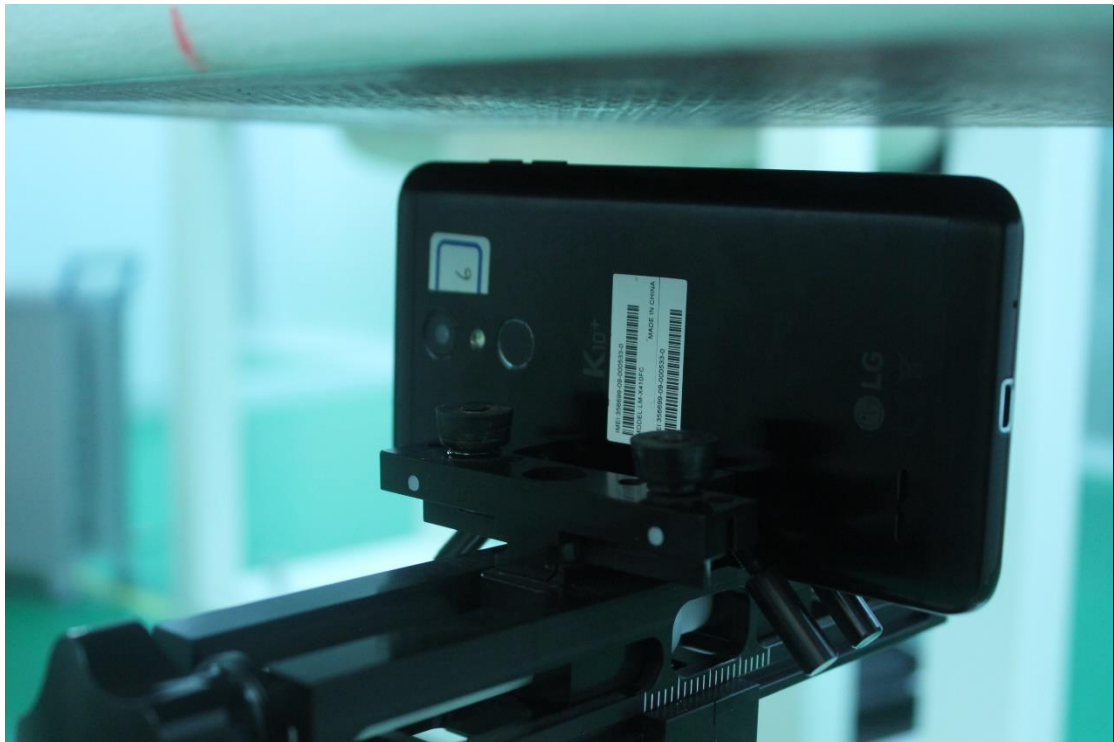

Picture 8: Left with 10mm



Picture 9: Right with 10mm



Picture 10: Top with 10mm



Picture 11: Bottom with 10mm



Picture 12: Bottom with 0mm