



TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC1901-0006(1)
2. Customer
 - Name : LG Electronics USA, Inc.
 - Address : 1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / LM-X420HM
FCC ID : ZNFX420HM
5. Test Method Used : IEEE 1528-2013, FCC SAR KDB Publications (Details in test report)
Test Specification : CFR §2.1093
6. Date of Test : 2018.12.21 ~ 2019.01.10
7. Testing Environment : Refer to appended test report.
8. Test Result : Refer to attached test report.

Affirmation	Tested by Name : HoSik Sim 	Reviewed by Name : HakMin Kim 
-------------	---	--

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2019 . 01 . 23 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRRFCC1901-0006	Jan. 16, 2019	Initial issue
DRRFCC1901-0006(1)	Jan. 23, 2019	Revise of section 1.6, 8.3.5, 9.2, 9.3 and appendix E.

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 General Information.....	5
1.2 Power Reduction for SAR.....	7
1.3 Nominal and Maximum Output Power Specifications.....	7
1.4 DUT Antenna Locations.....	7
1.5 Simultaneous Transmission Capabilities.....	7
1.6 Miscellaneous SAR Test Considerations.....	8
1.7 Guidance Applied.....	9
1.8 Device Serial Numbers.....	9
2. LTE INFORMATION	10
3. INTROCUCTION	11
4. DOSIMETRIC ASSESSMENT	12
4.1 Measurement Procedure.....	12
5. DEFINITION OF REFERENCE POINTS	14
5.1 Ear Reference Point.....	14
5.2 Handset Reference Points.....	14
6. TEST CONFIGURATION POSITIONS FOR HANDSETS	15
6.1 Device Holder.....	15
6.2 Positioning for Cheek/Touch.....	15
6.3 Positioning for Ear / 15 ° Tilt.....	15
6.4 Body-Worn Accessory Configurations.....	16
6.5 Extremity Exposure Configurations.....	16
6.6 Wireless Router Configurations.....	17
6.7 Phablet Configurations.....	17
7. RF EXPOSURE LIMITS	18
8. FCC MEASUREMENT PROCEDURES	19
8.1 Measured and Reported SAR.....	19
8.2 Procedures Used to Establish RF Signal for SAR.....	19
8.3 SAR Measurement Conditions for WCDMA (UMTS).....	19
8.3.1 Output Power Verification.....	19
8.3.2 Head SAR Measurements for Handsets.....	19
8.3.3 Body SAR Measurements.....	20
8.3.4 Release 5 HSDPA Data Devices.....	20
8.3.5 Release 6 HSUPA Data Devices.....	20
8.3.6 SAR Measurement Conditions for DC-HSDPA.....	21
8.4 SAR Measurement Conditions for LTE.....	22
8.4.1 Spectrum Plots for RB Configurations.....	22
8.4.2 MPR.....	22
8.4.3 A-MPR.....	22
8.4.4 Required RB Size and RB Offsets for SAR Testing.....	22
8.4.5 64QAM uplink : Applying KDB inquiry # 331653.....	22
8.4.6 Downlink Only Carrier Aggregation.....	23
8.5 SAR Testing with 802.11 Transmitters.....	23
8.5.1 General Device Setup.....	23
8.5.2 U-NII and U-NII-2A.....	23
8.5.3 U-NII-2C and U-NII-3.....	24
8.5.4 Initial Test Position Procedure.....	24
8.5.5 2.4 GHz SAR Test Requirements.....	24
8.5.6 OFDM Transmission Mode and SAR Test Channel Selection.....	24
8.5.7 Initial Test Configuration Procedure.....	25
8.5.8 Subsequent Test Configuration Procedures.....	25

9. RF CONDUCTED POWERS	26
9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers.....	26
9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers	27
9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers.....	28
9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers.....	40
9.5 Bluetooth Conducted Powers	43
10. SYSTEM VERIFICATION	45
10.1 Tissue Verification.....	45
10.2 Test System Verification.....	49
11. SAR TEST RESULTS.....	51
11.1 Head SAR Results	51
11.2 Standalone Body-Worn SAR Worn SAR Results	58
11.3 Standalone Hotspot SAR Results	62
11.4 Standalone Phablet SAR Results	68
11.5 SAR Test Notes.....	69
12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	72
12.1 Introduction	72
12.2 Simultaneous Transmission Procedures.....	72
12.3 Simultaneous Transmission Capabilities	72
12.4 Head SAR Simultaneous Transmission Analysis	74
12.5 Body-Worn Simultaneous Transmission Analysis	82
12.6 Hotspot SAR Simultaneous Transmission Analysis	86
12.7 Phablet SAR Simultaneous Transmission Analysis	92
12.8 Simultaneous Transmission Conclusion	92
13. SAR MEASUREMENT VARIABILITY	93
13.1 Measurement Variability	93
13.2 Measurement Uncertainty.....	93
14. EQUIPMENT LIST	94
15. MEASUREMENT UNCERTAINTIES	95
16. CONCLUSION	117
17. REFERENCES	118
APPENDIX A. – Probe Calibration Data	120
APPENDIX B. – Dipole Calibration Data	143
APPENDIX C. – SAR Tissue Specifications.....	208
APPENDIX D. – SAR SYSTEM VALIDATION	211
APPENDIX E. – Downlink LTE CA RF Conducted Powers	213
APPENDIX F. – Description of Test Equipment.....	218

1. DESCRIPTION OF DEVICE

1.1 General Information

EUT type	Mobile Phone				
FCC ID	ZNFX420HM				
Equipment model name	LM-X420HM				
Equipment add model name	LMX420HM, X420HM, LM-X420BMW, LMX420BMW, X420BMW • 6 models are same mechanical, electrical and functional except follows. - LM-X420HM, LMX420HM, X420HM : No differences - LM-X420BMW, LMX420BMW, X420BMW : Dual SIM support(1 RF Path)				
Equipment serial no.	Identical prototype				
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, WCDMA 1700, WCDMA 1900, LTE Band 12, 17, 5, 66, 4, 2, 7, 2.4 G W-LAN (802.11b/g/n-HT20), 5 G W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40/ac-VHT80), Bluetooth				
TX Frequency Range	Band	Mode	Operating Modes	Bandwidth	Frequency
	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	824.2 ~ 848.8 MHz
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1850.2 ~ 1909.8 MHz
	WCDMA 850	WCDMA	Voice/Data	-	826.4 ~ 846.6 MHz
	WCDMA 1700	WCDMA	Voice/Data	-	1712.4 ~ 1752.6 MHz
	WCDMA 1900	WCDMA	Voice/Data	-	1852.4 ~ 1907.6 MHz
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 ~ 715.3 MHz
	LTE Band 17	LTE	Voice/Data	5/10MHz	706.5 ~ 713.5 MHz
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	824.7 ~ 848.3 MHz
	LTE Band 66	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1710.7 ~ 1779.3 MHz
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1710.7 ~ 1754.3 MHz
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1850.7 ~ 1909.3 MHz
	LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2502.5 ~ 2567.5 MHz
	2.4 GHz W-LAN	802.11b/g/n	Voice/Data	HT20	2412 ~ 2472 MHz
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	Voice/Data	VHT80	5210 MHz
	5.3 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5260 ~ 5320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	Voice/Data	VHT80	5290 MHz
	5.6 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz
	5.8 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	Voice/Data	VHT80	5775 MHz
	Bluetooth	-	Data	-	2402 ~ 2480 MHz
	RX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-
GSM 1900		GSM/GPRS/EDGE	Voice/Data	-	1930.2 ~ 1989.8 MHz
WCDMA 850		WCDMA	Voice/Data	-	871.4 ~ 891.6 MHz
WCDMA 1700		WCDMA	Voice/Data	-	2112.4 ~ 2152.6 MHz
WCDMA 1900		WCDMA	Voice/Data	-	1932.4 ~ 1987.6 MHz
LTE Band 12		LTE	Voice/Data	1.4/3/5/10MHz	729.7 ~ 745.3 MHz
LTE Band 17		LTE	Voice/Data	5/10MHz	736.5 ~ 743.5 MHz
LTE Band 5		LTE	Voice/Data	1.4/3/5/10MHz	869.7 ~ 893.3 MHz
LTE Band 66		LTE	Voice/Data	1.4/3/5/10/15/20MHz	2110.7 ~ 2179.3 MHz
LTE Band 4		LTE	Voice/Data	1.4/3/5/10/15/20MHz	2110.7 ~ 2154.3 MHz
LTE Band 2		LTE	Voice/Data	1.4/3/5/10/15/20MHz	1930.7 ~ 1989.3 MHz
LTE Band 7		LTE	Voice/Data	5/10/15/20MHz	2622.5 ~ 2687.5 MHz
2.4 GHz W-LAN		802.11b/g/n	Voice/Data	HT20	2412 ~ 2472 MHz
5.2 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz
		802.11ac	Voice/Data	VHT80	5210 MHz
5.3 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5260 ~ 5320 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz
		802.11ac	Voice/Data	VHT80	5290 MHz
5.6 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz
		802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz
5.8 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5745 ~ 5825 MHz
		802.11n/ac	Voice/Data	HT40/VHT40	5755 ~ 5795 MHz
		802.11ac	Voice/Data	VHT80	5775 MHz
Bluetooth		-	Data	-	2402 ~ 2480 MHz

SAR Summary Table

Equipment Class	Band	Reported SAR			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
PCE	GSM 850	0.26	0.44	-	-
PCE	GPRS 850	0.32	0.55	0.60	-
PCE	GSM 1900	0.22	0.29	-	-
PCE	GPRS 1900	0.31	0.45	0.45	-
PCE	WCDMA 850	0.46	0.74	0.80	-
PCE	WCDMA 1700	0.20	0.52	0.52	-
PCE	WCDMA 1900	0.39	0.63	0.63	-
PCE	LTE Band 12	0.34	0.51	0.51	-
PCE	LTE Band 17	-	-	-	-
PCE	LTE Band 5	0.50	0.72	0.72	-
PCE	LTE Band 66	0.35	0.66	0.66	-
PCE	LTE Band 4	-	-	-	-
PCE	LTE Band 2	0.45	0.70	0.70	-
PCE	LTE Band 7	0.24	0.71	0.71	-
DTS	2.4 GHz W-LAN	0.45	0.12	0.12	-
U-NII-1	5.2 GHz W-LAN	-	-	0.32	-
U-NII-2A	5.3 GHz W-LAN	0.91	0.33	-	0.96
U-NII-2C	5.6 GHz W-LAN	0.75	0.34	-	0.98
U-NII-3	5.8 GHz W-LAN	0.83	0.26	0.24	0.70
DSS	Bluetooth	0.17	< 0.1	< 0.1	-
Simultaneous SAR per KDB 690783 D01v01r03		1.58	1.10	1.09	-
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)				
Date(s) of Tests	2018.12.21 ~ 2019.01.10				
Antenna Type	Internal Antenna				
Functions	<ul style="list-style-type: none"> ● GSM/GPRS/EDGE (GPRS/EDGE Class: 12) supported. * DTM not supported. ● No simultaneous transmission between BT & 2.4GHz WLAN ● Simultaneous transmission between [GSM, WCDMA voice & WLAN], [GPRS, WCDMA & WLAN], [LTE & WLAN]. ● VoIP is supported. ● W-LAN 2.4GHz is supported Hotspot. ● W-LAN 5 GHz is supported Hotspot in UNII B1, B3. 				

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 9 of this test report.

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in ZNFX420HM_Antenna Location. Since the diagonal dimension of this device is > 160 mm and < 200 mm. it is considered a "phablet".

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS/EDGE 850	X	O	O	O	O	O
GSM/GPRS/EDGE 1900	X	O	O	O	X	O
WCDMA 850	X	O	O	O	O	O
WCDMA 1700	X	O	O	O	X	O
WCDMA 1900	X	O	O	O	X	O
LTE Band 12	X	O	O	O	O	O
LTE Band 17	X	O	O	O	O	O
LTE Band 5	X	O	O	O	O	O
LTE Band 66	X	O	O	O	X	O
LTE Band 4	X	O	O	O	X	O
LTE Band 2	X	O	O	O	X	O
LTE Band 7	X	O	O	O	O	O
2.4G W-LAN	O	X	O	O	X	O
5G W-LAN	O ^{Note 2}	X	O	O	X	O ^{Note 2}
Bluetooth	O	X	O	O	X	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: WLAN Hotspot UNII-1, 3 supported.

Note 3: O - Test / X - Not test.

1.5 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 12 of this test report.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4GHz, U-NII-1, U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn and hotspot **Bluetooth SAR were not required; [(9/10)*√2.480] = 1.4 (< 3.0)**. Per KDB Publication 447498 D01 v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v06, the 10g SAR exclusion threshold for distance < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, phablet **Bluetooth SAR was not required; [(9/5)*√2.480] = 2.8 (< 7.5)**. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160 mm and less than 200 mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C & U-NII-3 WLAN(CH 165), phablet SAR tests were performed. Phablet SAR was not evaluated for 2.4 GHz WLAN operations since wireless router 1g SAR was < 1.2 W/kg.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

Per FCC KDB Publication 648474 D04 v01r03, this device is considered a “phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01 (Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

2. LTE INFORMATION

LTE Information					
FCC ID	ZNFX420HM				
Form Factor	Mobile Phone				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 66 (AWS) (1710.7 ~ 1779.3 MHz) LTE Band 4 (AWS) (1710.7 ~ 1754.3 MHz) LTE Band 2 (PCS) (1850.7 ~ 1909.3 MHz) LTE Band 7 (2502.5 ~ 2567.5 MHz)				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17 : 5 MHz, 10 MHz LTE Band 5 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 66 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) ^{Note1}	N/A	711.0 (23130)
LTE Band 17: 5 MHz	706.5(23755)	N/A	710.0(23790)	N/A	713.5(23825)
LTE Band 17: 10 MHz	709.0(23780)	N/A	710.0(23790)	N/A	711.0(23800)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) ^{Note2}	N/A	844.0 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	N/A	1745.0 (132322)	N/A	1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	N/A	1745.0 (132322)	N/A	1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	N/A	1745.0 (132322)	N/A	1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715.0 (132022)	N/A	1745.0 (132322)	N/A	1775.0 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	N/A	1745.0 (132322)	N/A	1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720.0 (132072)	N/A	1745.0 (132322)	N/A	1770.0 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	N/A	1732.5 (20175)	N/A	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	N/A	1732.5 (20175)	N/A	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	N/A	1732.5 (20175)	N/A	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715.0 (20000)	N/A	1732.5 (20175)	N/A	1750.0 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	N/A	1732.5 (20175)	N/A	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720.0 (20050)	N/A	1732.5 (20175)	N/A	1745.0 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	N/A	1880.0 (18900)	N/A	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	N/A	1880.0 (18900)	N/A	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	N/A	1880.0 (18900)	N/A	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	N/A	1880.0 (18900)	N/A	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	N/A	1880.0 (18900)	N/A	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	N/A	1880.0 (18900)	N/A	1900.0 (19100)
LTE Band 7: 5 MHz	2502.5 (20775)	N/A	2535.0 (21100)	N/A	2567.5 (21425)
LTE Band 7: 10 MHz	2505.0 (20800)	N/A	2535.0 (21100)	N/A	2565.0 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	N/A	2535.0 (21100)	N/A	2562.5 (21375)
LTE Band 7: 20 MHz	2510.0 (20850)	N/A	2535.0 (21100)	N/A	2560.0 (21350)
UE Category	LTE Rel.11, UE Cat. 6 with only downlink carrier aggregation (not support uplink MIMO and uplink carrier aggregation)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 11. It supports only downlink carrier aggregation. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 11 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

Note(s)

- LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.
Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

3. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 3.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

4. DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4.1
Sample SAR Area Scan

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: $\leq 15 \text{ mm}$ 2 – 3 GHz: $\leq 12 \text{ mm}$	3 – 4 GHz: $\leq 12 \text{ mm}$ 4 – 6 GHz: $\leq 10 \text{ mm}$
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: $\leq 8 \text{ mm}$ 2 – 3 GHz: $\leq 5 \text{ mm}^*$	3 – 4 GHz: $\leq 5 \text{ mm}^*$ 4 – 6 GHz: $\leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5 \text{ mm}$	3 – 4 GHz: $\leq 4 \text{ mm}$ 4 – 5 GHz: $\leq 3 \text{ mm}$ 5 – 6 GHz: $\leq 2 \text{ mm}$
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1) \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	3 – 4 GHz: $\geq 28 \text{ mm}$ 4 – 5 GHz: $\geq 25 \text{ mm}$ 5 – 6 GHz: $\geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Table 4.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

5. DEFINITION OF REFERENCE POINTS

5.1 Ear Reference Point

Figure 5.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 5.1
Close-up side view of ERP

5.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 5.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5.2 Front, back and side view SAM Twin Phantom

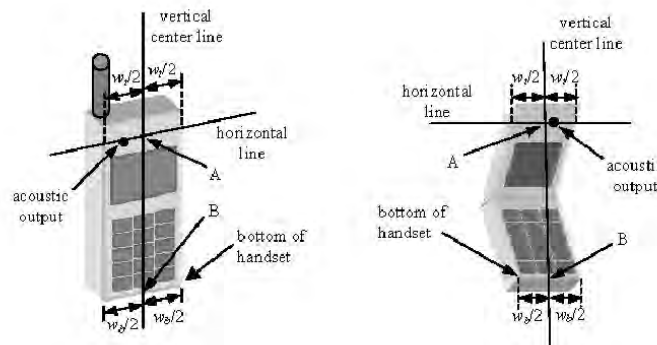


Figure 5.3 Handset Vertical Center & Horizontal Line Reference Points

6. TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 6.2)

6.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6.3).




Figure 6.2 Side view w/relevant markings



Figure 6.3 Front, Side and Top View of Ear/15° Position

6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

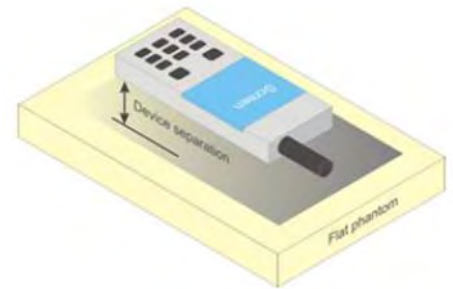


Figure 6.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.7 Phablet Configurations

For smart phones with a display diagonal $> 150 \text{ mm}$ or an overall diagonal dimension $> 160 \text{ mm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR $> 1.2 \text{ W/kg}$.

7. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

8. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

8.3 SAR Measurement Conditions for WCDMA (UMTS)

8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC,(transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

8.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Figure 8.1 Table 1

8.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}: 47/15$ $\beta_{ed}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 8.2 Table 2
Note:

- The manufacturer declares that the HSDPA, HSUPA and DC-HSDPA transmitter's power will not exceed the R99 maximum transmit power in devices based on MTK's HSPA chipset solutions.(WCDMA B5/B4/B2: Please refer to the tune-up procedure about MPR setting 2.)
- MPR is not applied as shown in Table 2 but it will not exceed R99 maximum transmit power due to MTK's HSPA chipset solution as declared by the manufacturer.

8.3.6 SAR Measurement Conditions for DC-HSDPA

In the following DB 941225 D01v03r01 procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The call simulator was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.4.3 A-MPR

A-MPR (Addition MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.4.5 64QAM uplink : Applying KDB inquiry # 331653

According to the Response to Inquiry to FCC (KDB Inquiry Tracking Number: 331653), the SAR Power Measurement Plan is as follows.

(1) Per KDB 941225 D05 V02r05, we'll measure conducted powers per Section 5.1 for all uplink modulations (QPSK, 16QAM, 64QAM) and include in the test report.

(2) From these power measurements, we will apply the procedures in Section 5.2.4 ("Higher Order Modulations") to determine SAR test reduction for 16QAM and 64QAM test cases.

8.4.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02, April 2018 TCB Workshop notes (LTE Carrier Aggregation). The RCC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

8.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

8.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

8.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

8.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

9. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GMSK [dBm]				Burst Average GMSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS/EDGE 850	Maximum	33.2	33.2	30.7	28.7	27.7	27.2	25.7	23.7	22.7
	Nominal	32.7	32.7	30.2	28.2	27.2	26.7	25.2	23.2	22.2
GSM/GPRS/EDGE 1900	Maximum	30.2	30.2	28.2	26.2	25.2	27.2	24.7	22.7	21.7
	Nominal	29.7	29.7	27.7	25.7	24.7	26.7	24.2	22.2	21.2

Table 9.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	32.8	32.8	30.5	28.5	27.5	26.7	25.2	23.2	22.5
	190	32.9	32.9	30.6	28.6	27.6	26.8	25.3	23.3	22.6
	251	33.1	33.1	30.7	28.7	27.7	26.8	25.3	23.4	22.7
PCS 1900	512	29.7	29.7	28.0	25.8	25.0	26.8	24.7	22.5	21.7
	661	30.0	30.0	28.1	26.1	25.1	26.8	24.7	22.6	21.7
	810	30.2	30.2	28.2	26.2	25.2	26.8	24.7	22.6	21.7
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)								
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)			
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
GSM850	128	23.77	23.77	24.48	24.24	24.49	17.67	19.18	18.94	19.49
	190	23.87	23.87	24.58	24.34	24.59	17.77	19.28	19.04	19.59
	251	24.07	24.07	24.68	24.44	24.69	17.77	19.28	19.14	19.69
PCS 1900	512	20.67	20.67	21.98	21.54	21.99	17.77	18.68	18.24	18.69
	661	20.97	20.97	22.08	21.84	22.09	17.77	18.68	18.34	18.69
	810	21.17	21.17	22.18	21.94	22.19	17.77	18.68	18.34	18.69
GSM850	Frame Avg. Targets:	23.67	23.67	24.18	23.94	24.19	17.67	19.18	18.94	19.19
PCS 1900	Frame Avg. Targets:	20.67	20.67	21.68	21.44	21.69	17.67	18.18	17.94	18.19

Table 9.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GPRS Multislot class: 12 (max 4 TX Uplink slots)
EDGE Multislot class: 12 (max 4 TX Uplink slots)
DTM Multislot Class: N/A



Figure 9.1 Power Measurement Setup

9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

3GPP Release Version	Mode		Cellular Band (dBm)		AWS Band (dBm)		PCS Band (dBm)		3GPP MPR (dB)
99	WCDMA	Voice	Maximum	24.7	23.7	23.7	23.7	-	
			Nominal	24.2	23.2	23.2	23.2		
5	HSDPA	Subtest 1	Maximum	23.7	22.7	22.7	22.7	1	
			Nominal	23.2	22.2	22.2	22.2		
5		Subtest 2	Maximum	23.7	22.7	22.7	1		
			Nominal	23.2	22.2	22.2			
5		Subtest 3	Maximum	23.2	22.2	22.2	1.5		
			Nominal	22.7	21.7	21.7			
5		Subtest 4	Maximum	23.2	22.2	22.2	1.5		
			Nominal	22.7	21.7	21.7			
6	HSUPA	Subtest 1	Maximum	21.7	20.7	20.7	3		
			Nominal	21.2	20.2	20.2			
6		Subtest 2	Maximum	21.7	20.7	20.7	3		
			Nominal	21.2	20.2	20.2			
6		Subtest 3	Maximum	22.7	21.7	21.7	2		
			Nominal	22.2	21.2	21.2			
6		Subtest 4	Maximum	21.2	20.2	20.2	3.5		
			Nominal	20.7	19.7	19.7			
6		Subtest 5	Maximum	22.7	21.7	21.7	2		
			Nominal	22.2	21.2	21.2			
8	DC-HSDPA	Subtest 1	Maximum	23.7	22.7	22.7	1		
			Nominal	23.2	22.2	22.2			
8		Subtest 2	Maximum	23.7	22.7	22.7	1		
			Nominal	23.2	22.2	22.2			
8		Subtest 3	Maximum	23.2	22.2	22.2	1.5		
			Nominal	22.7	21.7	21.7			
8		Subtest 4	Maximum	23.2	22.2	22.2	1.5		
			Nominal	22.7	21.7	21.7			

Table 9.2.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			AWS Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.62	24.58	24.58	23.45	23.53	23.58	23.50	23.55	23.53	-
99		12.2 kbps AMR	24.61	24.57	24.57	23.44	23.52	23.57	23.48	23.53	23.51	-
5	HSDPA	Subtest 1	23.65	23.60	23.61	22.48	22.56	22.61	22.52	22.56	22.54	1
5		Subtest 2	23.62	23.57	23.58	22.45	22.52	22.57	22.49	22.54	22.51	1
5		Subtest 3	23.14	23.09	23.09	21.96	22.03	22.08	22.03	22.06	22.02	1.5
5		Subtest 4	23.13	23.08	23.07	21.95	22.02	22.06	22.01	22.05	22.01	1.5
6	HSUPA	Subtest 1	21.64	21.59	21.60	20.46	20.53	20.59	20.51	20.56	20.53	3
6		Subtest 2	21.64	21.59	21.59	20.46	20.53	20.58	20.52	20.55	20.55	3
6		Subtest 3	22.64	22.58	22.58	21.47	21.54	21.59	21.54	21.58	21.55	2
6		Subtest 4	21.16	21.11	21.10	20.06	20.11	20.11	20.06	20.10	20.08	3.5
6		Subtest 5	22.61	22.56	22.56	21.45	21.52	21.56	21.54	21.56	21.53	2
8	DC-HSDPA	Subtest 1	23.57	23.58	23.59	22.46	22.54	22.59	22.50	22.54	22.53	1
8		Subtest 2	23.56	23.56	23.57	22.44	22.51	22.56	22.48	22.53	22.49	1
8		Subtest 3	23.11	23.07	23.07	21.93	22.02	22.04	22.01	22.05	22.00	1.5
8		Subtest 4	23.10	23.04	23.05	21.91	21.99	22.02	21.99	22.03	21.99	1.5

Table 9.2.2 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA, HSUPA and DC-HSDPA transmitter's power will not exceed the R99 maximum transmit power in devices based on MTK's HSPA chipset solutions.(WCDMA B5/B4/B2: Please refer to the tune-up procedure about MPR setting 2.)

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance.
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements.
- The DUT supports UE category 24 for HSDPA.



Figure 9.2 Power Measurement Setup

9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode	Modulated Average[dBm]	
	LTE Band 12	Maximum
	Nominal	24.2

Table 9.3.1.1 Nominal and Maximum Output Power Spec

1) LTE Band 12

LTE Band 12 Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23095 (707.5 MHz)	Conducted Power (dBm)			
QPSK	1	0		24.05	≤ 1	0	
	1	25		24.28			
	1	49		24.11			
	25	0		23.14		1	
	25	12		23.19			
	25	25		23.10			
16QAM	50	0		23.17	≤ 1	1	
	1	0		23.23			
	1	25		23.39			
	1	49		23.28			
	25	0		22.20		≤ 2	2
	25	12		22.22			
25	25		22.20				
64QAM	50	0		22.19	≤ 2	2	
	1	0		22.20			
	1	25		22.35			
	1	49		22.25			
	25	0		21.19		≤ 3	3
	25	12		21.21			
25	25		21.20				
	50	0		21.12		3	

Table 9.3.1.2 LTE Conducted Power

Note : LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.02	24.00	24.01	≤ 1	0	
	1	12	24.15	24.11	24.08			
	1	24	24.04	24.02	24.01			
	12	0	23.09	23.15	23.08		1	
	12	6	23.22	23.21	23.14			
	12	13	23.19	23.13	23.07			
16QAM	25	0	23.15	23.17	23.06	≤ 1	1	
	1	0	23.21	23.18	23.15			
	1	12	23.33	23.24	23.28			
	1	24	23.22	23.17	23.15			
	12	0	22.13	22.20	22.13		≤ 2	2
	12	6	22.27	22.25	22.22			
12	13	22.23	22.17	22.10				
64QAM	25	0	22.19	22.20	22.14	≤ 2	2	
	1	0	22.15	22.15	22.11			
	1	12	22.34	22.27	22.25			
	1	24	22.19	22.11	22.15			
	12	0	21.17	21.24	21.13		≤ 3	3
	12	6	21.30	21.27	21.23			
12	13	21.24	21.21	21.14				
	15	0	21.17	21.19	21.11		3	

Table 9.3.1.3 LTE Conducted Power

LTE Band 12 Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.12	24.06	24.07	≤ 1	0	
	1	7	24.13	24.11	24.06			
	1	14	24.14	24.12	24.11			
	8	0	23.16	23.14	23.10		1	
	8	4	23.22	23.19	23.13			
	8	7	23.21	23.16	23.13			
16QAM	15	0	23.16	23.14	23.11	≤ 1	1	
	1	0	23.29	23.25	23.25		1	
	1	7	23.30	23.27	23.22			
	1	14	23.31	23.31	23.28			
	8	0	22.29	22.27	22.22		≤ 2	2
	8	4	22.35	22.30	22.23			
8	7	22.32	22.28	22.23				
64QAM	15	0	22.26	22.22	22.16	≤ 2	2	
	1	0	22.27	22.20	22.17		2	
	1	7	22.30	22.23	22.17			
	1	14	22.29	22.25	22.25			
	8	0	21.25	21.21	21.22		≤ 3	3
	8	4	21.30	21.29	21.24			
8	7	21.31	21.23	21.23				
	15	0	21.20	21.17	21.12		3	

Table 9.3.1.4 LTE Conducted Power

LTE Band 12 Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.13	24.06	24.03	≤ 1	0
	1	2	24.27	24.25	24.15		
	1	5	24.14	24.09	24.04		
	3	0	24.23	24.14	24.12		0
	3	2	24.26	24.21	24.19		
	3	3	24.22	24.18	24.16		
16QAM	6	0	23.23	23.18	23.17	≤ 1	1
	1	0	23.26	23.26	23.20		1
	1	2	23.41	23.37	23.32		
	1	5	23.30	23.28	23.17		
	3	0	23.24	23.19	23.12		1
	3	2	23.28	23.25	23.22		
3	3	23.26	23.26	23.18			
64QAM	6	0	22.33	22.32	22.26	≤ 2	2
	1	0	22.26	22.23	22.16		2
	1	2	22.40	22.32	22.29		
	1	5	22.27	22.20	22.20		
	3	0	22.39	22.31	22.29		2
	3	2	22.45	22.32	22.36		
3	3	22.39	22.31	22.32			
	6	0	21.26	21.21	21.17	≤ 3	3

Table 9.3.1.5 LTE Conducted Power

Band & Mode	Modulated Average[dBm]
LTE Band 5	Maximum
	Nominal

Table 9.3.2.1 Nominal and Maximum Output Power Spec

2) LTE Band 5 (Cell)

LTE Band 5 (Cell) Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20525 (836.5 MHz)				
			Conducted Power (dBm)				
QPSK	1	0	24.40		≤ 1	0	
	1	25	24.37				
	1	49	24.14				
	25	0	23.49			1	
	25	12	23.44				
	25	25	23.39				
16QAM	50	0	23.48		≤ 1	1	
	1	0	23.43				
	1	25	23.53				
	1	49	23.30			≤ 2	
	25	0	22.53				
	25	12	22.47				
64QAM	25	25	22.43		≤ 2	2	
	50	0	22.48				
	1	0	22.39				≤ 2
	1	25	22.49				
	1	49	22.32			≤ 3	
	25	0	21.53				
25	12	21.48					
64QAM	25	25	21.42		≤ 3	3	
	50	0	21.48				
	1	0	22.39				≤ 3
	1	25	22.49				
	1	49	22.32				
	25	0	21.53				
25	12	21.48					
64QAM	25	25	21.42		≤ 3	3	
	50	0	21.48				

Table 9.3.2.2 LTE Conducted Power

Note : LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 5 (Cell) Conducted Power– 5 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.17	24.22	24.11	≤ 1	0	
	1	12	24.30	24.30	24.23			
	1	24	24.19	24.16	24.16			1
	12	0	23.34	23.45	23.36			
	12	6	23.43	23.45	23.40			
	16QAM	12	13	23.41	23.37		23.35	≤ 1
25		0	23.38	23.42	23.36			
1		0	23.32	23.39	23.24	≤ 1	1	
1		12	23.48	23.44	23.38			
1		24	23.36	23.28	23.32			
64QAM		12	0	22.33	22.43		22.35	
	12	6	22.42	22.48	22.39			
	12	13	22.38	22.39	22.33			
	25	0	22.42	22.45	22.34	≤ 2	2	
	1	0	22.35	22.33	22.24			
	1	12	22.49	22.43	22.42			
64QAM	1	24	22.34	22.29	22.31		≤ 2	2
	12	0	21.38	21.50	21.40			
	12	6	21.48	21.53	21.45			
	12	13	21.47	21.45	21.41			
	25	0	21.43	21.47	21.38			

Table 9.3.2.3 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.28	24.33	24.27	≤ 1	0
	1	7	24.29	24.30	24.23		
	1	14	24.31	24.29	24.26		
	8	0	23.35	23.40	23.34		1
	8	4	23.42	23.42	23.39		
	8	7	23.38	23.38	23.36		
	15	0	23.39	23.39	23.41	1	
16QAM	1	0	23.48	23.52	23.39	≤ 1	1
	1	7	23.44	23.48	23.40		
	1	14	23.46	23.49	23.43		
	8	0	22.44	22.46	22.40	≤ 2	2
	8	4	22.49	22.47	22.46		
	8	7	22.43	22.47	22.40		
	15	0	22.38	22.45	22.38	2	
64QAM	1	0	22.46	22.52	22.37	≤ 2	2
	1	7	22.46	22.48	22.38		
	1	14	22.46	22.47	22.40		
	8	0	21.45	21.50	21.40	≤ 3	3
	8	4	21.51	21.52	21.46		
	8	7	21.45	21.49	21.46		
	15	0	21.36	21.42	21.37	3	

Table 9.3.2.4 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.27	24.27	24.18	≤ 1	0
	1	2	24.37	24.39	24.36		
	1	5	24.28	24.25	24.17		
	3	0	24.35	24.36	24.31		0
	3	2	24.39	24.36	24.35		
	3	3	24.37	24.36	24.37		
	6	0	23.44	23.46	23.42	1	
16QAM	1	0	23.46	23.47	23.34	≤ 1	1
	1	2	23.55	23.59	23.54		
	1	5	23.42	23.41	23.37		
	3	0	23.35	23.38	23.31		1
	3	2	23.41	23.42	23.37		
	3	3	23.39	23.39	23.31		
	6	0	22.47	22.50	22.46	≤ 2	2
64QAM	1	0	22.45	22.45	22.36	≤ 2	2
	1	2	22.52	22.49	22.53		
	1	5	22.45	22.43	22.35		
	3	0	22.53	22.53	22.50		2
	3	2	22.53	22.55	22.47		
	3	3	22.51	22.50	22.49		
	6	0	21.45	21.45	21.40	≤ 3	3

Table 9.3.2.5 LTE Conducted Power

Band & Mode	Modulated Average[dBm]	
	LTE Band 66 (AWS)	Maximum
	Nominal	23.2

Table 9.3.3.1 Nominal and Maximum Output Power Spec

3) LTE Band 66 (AWS)

LTE Band 66 (AWS) Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.30	23.24	23.28	≤ 1	0
	1	50	23.49	23.49	23.51		
	1	99	23.18	23.12	23.14		
	50	0	22.44	22.44	22.50		1
	50	25	22.49	22.46	22.58		
	50	50	22.41	22.37	22.44		
	100	0	22.39	22.40	22.52		
16QAM	1	0	22.50	22.42	22.45	≤ 1	1
	1	50	22.66	22.59	22.67		
	1	99	22.36	22.31	22.28		
	50	0	21.40	21.44	21.59	≤ 2	2
	50	25	21.47	21.43	21.52		
	50	50	21.39	21.35	21.44		
	100	0	21.38	21.41	21.50		
64QAM	1	0	21.48	21.40	21.42	≤ 2	2
	1	50	21.59	21.62	21.56		
	1	99	21.35	21.31	21.23		
	50	0	20.38	20.45	20.57	≤ 3	3
	50	25	20.48	20.42	20.50		
	50	50	20.38	20.34	20.42		
	100	0	20.38	20.38	20.50		

Table 9.3.3.2 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.37	23.32	23.33	≤ 1	0
	1	36	23.40	23.40	23.41		
	1	74	23.25	23.19	23.21		
	36	0	22.43	22.45	22.53		1
	36	18	22.51	22.46	22.50		
	36	37	22.46	22.38	22.42		
	75	0	22.47	22.42	22.48		
16QAM	1	0	22.54	22.51	22.46	≤ 1	1
	1	36	22.51	22.57	22.58		
	1	74	22.44	22.39	22.33		
	36	0	21.42	21.43	21.52	≤ 2	2
	36	18	21.50	21.45	21.51		
	36	37	21.43	21.39	21.44		
	75	0	21.48	21.43	21.47		
64QAM	1	0	21.54	21.40	21.48	≤ 2	2
	1	36	21.55	21.50	21.57		
	1	74	21.42	21.36	21.39		
	36	0	20.43	20.45	20.54	≤ 3	3
	36	18	20.49	20.45	20.52		
	36	37	20.44	20.40	20.46		
	75	0	20.43	20.40	20.46		

Table 9.3.3.3 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.36	23.33	23.36	≤ 1	0
	1	25	23.48	23.46	23.47		
	1	49	23.27	23.25	23.25		
	25	0	22.41	22.44	22.52		1
	25	12	22.52	22.46	22.49		
	25	25	22.49	22.44	22.46		
16QAM	50	0	22.50	22.45	22.49	≤ 1	1
	1	0	22.55	22.53	22.55		
	1	25	22.68	22.63	22.65		
	1	49	22.45	22.42	22.39		≤ 2
	25	0	21.46	21.47	21.55		
	25	12	21.53	21.46	21.52		
64QAM	25	25	21.52	21.45	21.48	≤ 2	2
	50	0	21.47	21.42	21.51		
	1	0	21.51	21.46	21.52		
	1	25	21.66	21.58	21.65		≤ 3
	1	49	21.45	21.39	21.35		
	25	0	20.43	20.43	20.50		
64QAM	25	12	20.56	20.47	20.52	≤ 3	3
	25	25	20.51	20.44	20.47		
	50	0	20.50	20.42	20.48		

Table 9.3.3.4 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.26	23.23	23.24	≤ 1	0
	1	12	23.39	23.34	23.33		
	1	24	23.23	23.19	23.17		
	12	0	22.41	22.41	22.42		1
	12	6	22.49	22.45	22.48		
	12	13	22.44	22.40	22.36		
16QAM	25	0	22.43	22.42	22.43	≤ 1	1
	1	0	22.38	22.42	22.43		
	1	12	22.54	22.46	22.49		
	1	24	22.37	22.38	22.34		≤ 2
	12	0	21.44	21.43	21.45		
	12	6	21.51	21.49	21.48		
64QAM	12	13	21.46	21.40	21.40	≤ 2	2
	25	0	21.47	21.43	21.44		
	1	0	21.42	21.42	21.43		
	1	12	21.57	21.50	21.52		≤ 3
	1	24	21.41	21.36	21.34		
	12	0	20.45	20.43	20.46		
64QAM	12	6	20.53	20.48	20.53	≤ 3	3
	12	13	20.54	20.40	20.42		
	25	0	20.44	20.40	20.45		

Table 9.3.3.5 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.36	23.31	23.35	≤ 1	0	
	1	7	23.37	23.31	23.34			
	1	14	23.37	23.27	23.30			
	8	0	22.41	22.37	22.41		1	
	8	4	22.47	22.40	22.41			
	8	7	22.42	22.38	22.38			
16QAM	15	0	22.42	22.38	22.42	≤ 1	1	
	1	0	22.50	22.47	22.47		≤ 1	1
	1	7	22.50	22.44	22.53			
	1	14	22.51	22.41	22.45			
	8	0	21.57	21.51	21.53		≤ 2	2
	8	4	21.59	21.51	21.54			
8	7	21.52	21.47	21.49				
64QAM	15	0	21.49	21.46	21.47	≤ 2	2	
	1	0	21.54	21.49	21.46		≤ 2	2
	1	7	21.55	21.47	21.45			
	1	14	21.53	21.45	21.42			
	8	0	20.52	20.46	20.51		≤ 3	3
	8	4	20.55	20.47	20.51			
8	7	20.49	20.45	20.48				
	15	0	20.46	20.38	20.43		3	

Table 9.3.3.6 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.31	23.28	23.30	≤ 1	0	
	1	2	23.44	23.44	23.37			
	1	5	23.32	23.25	23.27			
	3	0	23.44	23.39	23.43		0	
	3	2	23.50	23.41	23.42			
	3	3	23.45	23.38	23.40			
16QAM	6	0	22.49	22.43	22.44	≤ 1	1	
	1	0	22.51	22.48	22.45		≤ 1	1
	1	2	22.56	22.61	22.54			
	1	5	22.47	22.44	22.42			
	3	0	22.49	22.44	22.38		1	
	3	2	22.52	22.49	22.43			
3	3	22.49	22.42	22.41				
64QAM	6	0	21.62	21.58	21.55	≤ 2	2	
	1	0	21.50	21.45	21.46		≤ 2	2
	1	2	21.59	21.61	21.54			
	1	5	21.50	21.41	21.41			
	3	0	21.50	21.58	21.53		2	
	3	2	21.68	21.59	21.60			
3	3	21.61	21.52	21.53				
	6	0	20.51	20.43	20.48	≤ 3	3	

Table 9.3.3.7 LTE Conducted Power

Band & Mode	Modulated Average[dBm]	
	LTE Band 2(PCS)	Maximum
	Nominal	23.2

Table 9.3.4.1 Nominal and Maximum Output Power Spec

4) LTE Band 2 (PCS)

LTE Band 2 (PCS) Conducted Power-- 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.33	23.34	23.22	≤ 1	0
	1	50	23.52	23.56	23.43		
	1	99	23.24	23.19	23.07		
	50	0	22.48	22.51	22.46		1
	50	25	22.50	22.56	22.40		
	50	50	22.49	22.41	22.27		
	100	0	22.46	22.48	22.32		
16QAM	1	0	22.50	22.48	22.35	≤ 1	1
	1	50	22.69	22.65	22.58		
	1	99	22.41	22.38	22.24		
	50	0	21.47	21.45	21.45	≤ 2	2
	50	25	21.49	21.53	21.41		
	50	50	21.48	21.37	21.23		
	100	0	21.46	21.39	21.31		
64QAM	1	0	21.44	21.53	21.25	≤ 2	2
	1	50	21.66	21.59	21.54		
	1	99	21.42	21.37	21.23		
	50	0	20.44	20.43	20.38	≤ 3	3
	50	25	20.47	20.49	20.37		
	50	50	20.45	20.34	20.19		
	100	0	20.45	20.36	20.27		

Table 9.3.4.2 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power-- 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.35	23.35	23.24	≤ 1	0
	1	36	23.44	23.47	23.30		
	1	74	23.30	23.29	23.12		
	36	0	22.46	22.52	22.40		1
	36	18	22.47	22.52	22.35		
	36	37	22.46	22.51	22.25		
	75	0	22.48	22.50	22.32		
16QAM	1	0	22.53	22.54	22.42	≤ 1	1
	1	36	22.57	22.59	22.48		
	1	74	22.45	22.42	22.27		
	36	0	21.46	21.46	21.39	≤ 2	2
	36	18	21.48	21.48	21.34		
	36	37	21.44	21.42	21.23		
	75	0	21.51	21.47	21.31		
64QAM	1	0	21.50	21.46	21.41	≤ 2	2
	1	36	21.55	21.57	21.46		
	1	74	21.48	21.43	21.24		
	36	0	20.45	20.48	20.38	≤ 3	3
	36	18	20.47	20.49	20.35		
	36	37	20.45	20.44	20.22		
	75	0	20.46	20.44	20.29		

Table 9.3.4.3 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power-- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.40	23.40	23.27	≤ 1	0
	1	25	23.47	23.51	23.31		
	1	49	23.36	23.39	23.17		
	25	0	22.47	22.52	22.36		1
	25	12	22.45	22.54	22.30		
	25	25	22.45	22.50	22.23		
16QAM	50	0	22.47	22.51	22.34	≤ 1	1
	1	0	22.55	22.58	22.40		
	1	25	22.58	22.67	22.42		
	1	49	22.55	22.58	22.35		≤ 2
	25	0	21.47	21.50	21.38		
	25	12	21.47	21.52	21.31		
64QAM	25	25	21.48	21.47	21.25	≤ 2	2
	50	0	21.47	21.49	21.35		
	1	0	21.55	21.54	21.38		
	1	25	21.57	21.67	21.41		≤ 3
	1	49	21.53	21.51	21.35		
	25	0	20.46	20.48	20.33		
64QAM	25	12	20.46	20.53	20.29	≤ 3	3
	25	25	20.45	20.45	20.22		
	50	0	20.43	20.48	20.31		

Table 9.3.4.4 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power-- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.33	23.34	23.12	≤ 1	0
	1	12	23.39	23.45	23.21		
	1	24	23.26	23.35	23.11		
	12	0	22.45	22.49	22.29		1
	12	6	22.49	22.54	22.31		
	12	13	22.44	22.48	22.21		
16QAM	25	0	22.44	22.51	22.27	≤ 1	1
	1	0	22.50	22.48	22.32		
	1	12	22.58	22.56	22.38		
	1	24	22.41	22.54	22.30		≤ 2
	12	0	21.43	21.45	21.32		
	12	6	21.49	21.50	21.34		
64QAM	12	13	21.43	21.47	21.21	≤ 2	2
	25	0	21.46	21.49	21.28		
	1	0	21.44	21.48	21.24		
	1	12	21.52	21.63	21.32		≤ 3
	1	24	21.40	21.49	21.21		
	12	0	20.48	20.50	20.30		
64QAM	12	6	20.51	20.54	20.32	≤ 3	3
	12	13	20.46	20.48	20.26		
	25	0	20.45	20.48	20.29		

Table 9.3.4.5 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.44	23.45	23.20	≤ 1	0	
	1	7	23.42	23.45	23.22			
	1	14	23.38	23.43	23.21			
	8	0	22.44	22.47	22.22		1	
	8	4	22.45	22.48	22.27			
	8	7	22.42	22.44	22.23			
16QAM	15	0	22.44	22.48	22.24	≤ 1	1	
	1	0	22.59	22.56	22.37		≤ 1	1
	1	7	22.55	22.60	22.39			
	1	14	22.54	22.55	22.40			
	8	0	21.52	21.50	21.31		≤ 2	2
	8	4	21.53	21.55	21.35			
8	7	21.49	21.50	21.29				
64QAM	15	0	21.46	21.47	21.27	≤ 2	2	
	1	0	21.61	21.59	21.31		≤ 2	2
	1	7	21.52	21.62	21.41			
	1	14	21.48	21.58	21.37			
	8	0	20.52	20.51	20.30		≤ 3	3
	8	4	20.52	20.53	20.34			
8	7	20.50	20.49	20.31				
	15	0	20.44	20.46	20.23		3	

Table 9.3.4.6 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.28	23.32	23.08	≤ 1	0	
	1	2	23.39	23.44	23.22			
	1	5	23.28	23.32	23.09			
	3	0	23.39	23.39	23.18		0	
	3	2	23.41	23.43	23.20			
	3	3	23.37	23.44	23.19			
16QAM	6	0	22.39	22.44	22.19	≤ 1	1	
	1	0	22.47	22.45	22.26		≤ 1	1
	1	2	22.58	22.62	22.37			
	1	5	22.44	22.51	22.26			
	3	0	22.37	22.38	22.21		1	
	3	2	22.40	22.40	22.22			
3	3	22.36	22.37	22.16				
64QAM	6	0	21.52	21.51	21.28	≤ 2	2	
	1	0	21.43	21.48	21.22		≤ 2	2
	1	2	21.50	21.55	21.36			
	1	5	21.40	21.48	21.22			
	3	0	21.49	21.48	21.29		2	
	3	2	21.54	21.50	21.28			
3	3	21.50	21.46	21.26				
	6	0	20.40	20.41	20.22	≤ 3	3	

Table 9.3.4.7 LTE Conducted Power

Band & Mode	Modulated Average[dBm]	
	LTE Band 7	Maximum
	Nominal	23.2

Table 9.3.5.1 Nominal and Maximum Output Power Spec

5) LTE Band 7

LTE Band 7 Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.01	23.14	23.05	≤ 1	0
	1	50	23.26	23.29	23.28		
	1	99	23.02	23.03	23.05		
	50	0	22.11	22.15	22.27		1
	50	25	22.25	22.32	22.29		
	50	50	22.15	22.31	22.28		
	100	0	22.14	22.29	22.28	1	
16QAM	1	0	22.14	22.13	22.13	≤ 1	1
	1	50	22.41	22.43	22.47		
	1	99	22.15	22.19	22.24		
	50	0	21.05	21.10	21.22	≤ 2	2
	50	25	21.20	21.19	21.24		
	50	50	21.10	21.23	21.24		
	100	0	21.07	21.15	21.21	2	
64QAM	1	0	21.10	21.08	21.10	≤ 2	2
	1	50	21.37	21.41	21.35		
	1	99	21.14	21.16	21.20		
	50	0	20.06	20.10	20.22	≤ 3	3
	50	25	20.18	20.17	20.21		
	50	50	20.11	20.24	20.23		
	100	0	20.07	20.16	20.22	3	

Table 9.3.5.2 LTE Conducted Power

LTE Band 7 Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.07	23.02	23.04	≤ 1	0
	1	36	23.12	23.14	23.15		
	1	74	23.06	23.09	23.13		
	36	0	22.18	22.16	22.26		1
	36	18	22.22	22.20	22.27		
	36	37	22.21	22.24	22.29		
	75	0	22.21	22.20	22.27	1	
16QAM	1	0	22.23	22.22	22.21	≤ 1	1
	1	36	22.29	22.30	22.30		
	1	74	22.25	22.27	22.29		
	36	0	21.11	21.13	21.19	≤ 2	2
	36	18	21.15	21.16	21.20		
	36	37	21.14	21.20	21.21		
	75	0	21.12	21.17	21.23	2	
64QAM	1	0	21.19	21.18	21.15	≤ 2	2
	1	36	21.27	21.25	21.29		
	1	74	21.21	21.22	21.24		
	36	0	20.13	20.13	20.21	≤ 3	3
	36	18	20.18	20.17	20.23		
	36	37	20.15	20.21	20.24		
	75	0	20.13	20.15	20.22	3	

Table 9.3.5.3 LTE Conducted Power

LTE Band 7 Conducted Power– 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	23.11	23.05	23.09	≤ 1	0	
	1	25	23.24	23.22	23.22			
	1	49	23.05	23.09	23.13			
	25	0	22.18	22.19	22.25		1	
	25	12	22.24	22.22	22.26			
	25	25	22.27	22.29	22.30			
16QAM	50	0	22.24	22.24	22.28	≤ 1	1	
	1	0	22.31	22.25	22.29		≤ 1	1
	1	25	22.40	22.40	22.41			
	1	49	22.25	22.29	22.31			
	25	0	21.15	21.15	21.22		≤ 2	2
	25	12	21.19	21.19	21.20			
25	25	21.24	21.25	21.28				
64QAM	50	0	21.20	21.20	21.24	≤ 2	2	
	1	0	21.20	21.22	21.23		≤ 2	2
	1	25	21.33	21.41	21.38			
	1	49	21.19	21.23	21.21			
	25	0	20.14	20.15	20.21		≤ 3	3
	25	12	20.18	20.20	20.19			
25	25	20.24	20.24	20.26				
	50	0	20.19	20.21	20.24		3	

Table 9.3.5.4 LTE Conducted Power

LTE Band 7 Conducted Power– 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)		
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)				
			Conducted Power (dBm)						
QPSK	1	0	23.05	23.08	23.06	≤ 1	0		
	1	12	23.11	23.12	23.18				
	1	24	23.06	23.01	23.02				
	12	0	22.14	22.10	22.19		1		
	12	6	22.21	22.18	22.26				
	12	13	22.19	22.18	22.19				
16QAM	25	0	22.15	22.14	22.20	≤ 1	1		
	1	0	22.23	22.21	22.20		≤ 1	1	
	1	12	22.28	22.24	22.34				
	1	24	22.23	22.13	22.21				
	12	0	21.13	21.09	21.14		≤ 2	2	
	12	6	21.20	21.17	21.23				
12	13	21.18	21.15	21.17					
64QAM	25	0	21.16	21.16	21.18	≤ 2	2		
	1	0	21.19	21.16	21.18			≤ 2	2
	1	12	21.23	21.30	21.34				
	1	24	21.17	21.18	21.20				
	12	0	20.17	20.09	20.20		≤ 3	3	
	12	6	20.25	20.22	20.28				
12	13	20.21	20.18	20.22					
	25	0	20.18	20.13	20.20		3		

Table 9.3.5.5 LTE Conducted Power

9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
2.4	802.11b	1~11	15.0	14.0
		12~13	3.5	2.5
	802.11g (6~12Mbps)	1~11	15.0	14.0
		12~13	3.5	2.5
	802.11g (18~54Mbps)	1~11	13.0	12.0
		12~13	3.5	2.5
	802.11n (MCS0~MCS2)	1~11	14.0	13.0
		12~13	3.5	2.5
	802.11n (MCS3~MCS7)	1~11	12.0	11.0
		12~13	3.5	2.5

Table 9.4.1 Nominal and Maximum Output Power Spec

Mode	Freq.	Channel	IEEE 802.11 (2.4 GHz) Conducted Power
	(MHz)		[dBm]
802.11b	2412	1	14.98
	2437	6	14.72
	2462	11	14.96
	2467	12	3.34
	2472	13	3.49
802.11g	2412	1	14.82
	2437	6	14.78
	2462	11	14.43
	2467	12	3.5
	2472	13	3.3
802.11n (HT-20)	2412	1	13.84
	2437	6	13.30
	2462	11	13.26
	2467	12	3.46
	2472	13	3.05

Table 9.4.2 IEEE 802.11 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
5 (UNII)	802.11a 6~64Mbps	36~165	14.0	13.0
	802.11n (20MHz) MCS0~7	36~165	14.0	13.0
	802.11ac (20MHz) MCS0~8	36~165	11.0	10.0
	802.11n (40MHz) MCS0~7	38~159	11.0	10.0
	802.11ac (40MHz) MCS0~9	38~159	11.0	10.0
	802.11ac (80MHz) MCS0~9	42~155	11.0	10.0

Table 9.4.3 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power	
				[dBm]
802.11a	5180	36		13.49
	5200	40		13.46
	5220	44		13.55
	5240	48		13.47
	5260	52		13.72
	5280	56		13.48
	5300	60		13.48
	5320	64		13.89
	5500	100		13.95
	5600	120		13.89
	5660	132		13.86
	5720	144		13.93
	5745	149		13.98
	5785	157		13.95
5825	165		13.99	

Table 9.4.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power	
				[dBm]
802.11n (HT-20)	5180	36		13.39
	5200	40		13.64
	5220	44		13.59
	5240	48		13.68
	5260	52		13.66
	5280	56		13.68
	5300	60		13.94
	5320	64		13.81
	5500	100		13.98
	5600	120		13.92
	5660	132		13.96
	5720	144		13.89
	5745	149		13.99
	5785	157		13.96
5825	165		13.95	

Table 9.4.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power
			[dBm]
802.11ac (VHT-20)	5180	36	10.83
	5200	40	10.64
	5220	44	10.66
	5240	48	10.45
	5260	52	10.59
	5280	56	10.81
	5300	60	10.60
	5320	64	10.92
	5500	100	10.85
	5600	120	10.79
	5660	132	10.92
	5720	144	10.95
	5745	149	10.89
	5785	157	10.95
5825	165	10.88	

Table 9.4.6 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power
			[dBm]
802.11n (HT-40)	5190	38	10.58
	5230	46	10.60
	5270	54	10.90
	5310	62	10.93
	5510	102	10.82
	5590	118	10.81
	5670	134	10.87
	5710	142	10.92
	5755	151	11.00
	5795	159	10.96

Table 9.4.7 IEEE 802.11n HT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power
			[dBm]
802.11ac (VHT-40)	5190	38	9.99
	5230	46	10.59
	5270	54	10.81
	5310	62	10.90
	5510	102	10.87
	5590	118	10.84
	5670	134	10.91
	5710	142	10.90
	5755	151	10.99
	5795	159	10.97

Table 9.4.8 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power
			[dBm]
802.11ac (VHT-80)	5210	42	10.48
	5290	58	10.74
	5530	106	10.88
	5610	122	10.94
	5690	138	10.84
	5775	155	10.95

Table 9.4.9 IEEE 802.11ac VHT80 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 9.4 Power Measurement Setup

9.5 Bluetooth Conducted Powers

Burst Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	9.5
	Nominal	8.5
Bluetooth 2 Mbps	Maximum	6.0
	Nominal	5.0
Bluetooth 3 Mbps	Maximum	6.0
	Nominal	5.0
Bluetooth LE	Maximum	0.0
	Nominal	-1.0

Table 9.5.1 Nominal and Maximum Output Power Spec (Burst)

Frame Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	8.35
	Nominal	7.35
Bluetooth 2 Mbps	Maximum	4.85
	Nominal	3.85
Bluetooth 3 Mbps	Maximum	4.85
	Nominal	3.85
Bluetooth (LE / 1Mbps)	Maximum	-0.69
	Nominal	-1.69
Bluetooth (LE / 2Mbps)	Maximum	-2.41
	Nominal	-3.41

Table 9.5.2 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency	Burst AVG Output Power (1Mbps)	Frame AVG Output Power (1Mbps)	Burst AVG Output Power (2Mbps)	Frame AVG Output Power (2Mbps)	Burst AVG Output Power (3Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	8.04	6.89	4.73	3.58	4.74	3.59
Mid	2441	8.80	7.65	5.35	4.20	5.36	4.21
High	2480	8.93	7.78	5.62	4.47	5.63	4.48

Table 9.5.3 Bluetooth Burst and Frame Average RF Power

Channel	Frequency	Burst AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 1Mbps)	Burst AVG Output Power(LE / 2Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	-2.96	-3.65	-2.97	-5.38
Mid	2440	-0.77	-1.46	-0.78	-3.19
High	2480	-2.30	-2.99	-2.30	-4.71

Table 9.5.4 Bluetooth LE Burst and Frame Average RF Power

- Bluetooth Conducted Powers procedures

- Bluetooth (BDR, EDR)

- 1) Enter DUT mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 9.5.1(A).
- 3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.
- 4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

- 1) Enter LE mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum Burst power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 9.5.1(B).
- 3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.
- 4) Power levels were measured by a Power Meter.

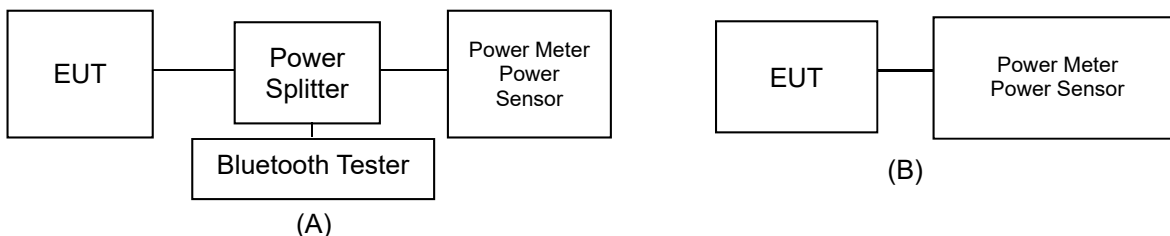


Figure 9.5.1 Average Power Measurement Setup

Bluetooth Transmission Plot

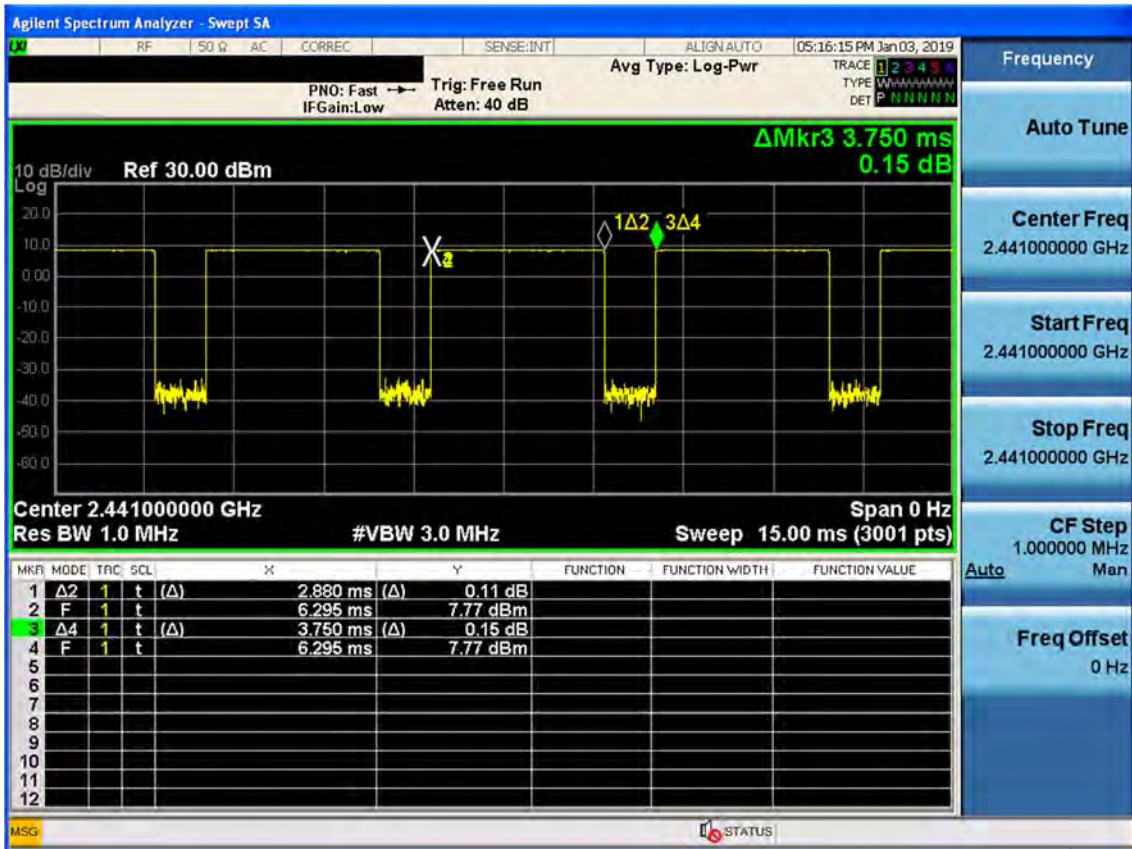


Figure 9.5.2 Bluetooth Transmission Plot

Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

10. SYSTEM VERIFICATION

10.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Dec. 27. 2018	750 Head	20.6	21.4	707.5	42.129	0.887	41.733	0.858	-0.94	-3.27
				750.0	41.900	0.890	41.122	0.895	-1.86	0.56
Dec. 27. 2018	750 Body	20.6	21.3	707.5	55.699	0.960	55.353	0.924	-0.62	-3.75
				750.0	55.531	0.963	54.948	0.965	-1.05	0.21
Dec. 28. 2018	835 Head	20.2	21.1	824.2	41.552	0.899	41.451	0.871	-0.24	-3.11
				835.0	41.500	0.900	41.337	0.880	-0.39	-2.22
				836.6	41.500	0.901	41.324	0.881	-0.42	-2.22
				848.8	41.500	0.914	41.194	0.892	-0.74	-2.41
Dec. 28. 2018	835 Body	20.2	21.0	824.2	55.243	0.969	53.966	0.981	-2.31	1.24
				835.0	55.200	0.970	53.892	0.991	-2.37	2.16
				836.6	55.197	0.971	53.879	0.993	-2.39	2.27
				848.8	55.160	0.986	53.790	1.003	-2.48	1.72
Jan. 02. 2019	835 Head	20.3	21.1	826.4	41.542	0.899	41.350	0.869	-0.46	-3.34
				835.0	41.500	0.900	41.259	0.876	-0.58	-2.67
				836.6	41.500	0.901	41.240	0.877	-0.63	-2.66
				846.6	41.500	0.912	41.124	0.886	-0.91	-2.85
Jan. 02. 2019	835 Body	20.3	21.2	826.4	55.235	0.969	54.414	0.985	-1.49	1.65
				835.0	55.200	0.970	54.346	0.992	-1.55	2.27
				836.6	55.197	0.971	54.335	0.994	-1.56	2.37
				846.6	55.166	0.984	54.232	1.002	-1.69	1.83
Dec. 25. 2018	835 Head	20.2	21.3	829.0	41.528	0.899	41.515	0.873	-0.03	-2.89
				835.0	41.500	0.900	41.442	0.877	-0.14	-2.56
				836.5	41.500	0.901	41.426	0.878	-0.18	-2.55
				844.0	41.500	0.910	41.337	0.883	-0.39	-2.97
Dec. 25. 2018	835 Body	20.2	21.4	829.0	55.223	0.970	53.809	0.970	-2.56	0.00
				835.0	55.200	0.970	53.755	0.976	-2.62	0.62
				836.5	55.197	0.971	53.742	0.977	-2.64	0.62
				844.0	55.172	0.981	53.689	0.983	-2.69	0.20
Jan. 01. 2019	1800 Head	20.1	21.2	1712.4	40.126	1.350	40.666	1.303	1.35	-3.48
				1732.4	40.097	1.361	40.599	1.322	1.25	-2.87
				1752.6	40.069	1.373	40.516	1.342	1.12	-2.26
				1800.0	40.000	1.400	40.306	1.386	0.76	-1.00
Jan. 01. 2019	1800 Body	20.1	21.0	1712.4	53.596	1.464	52.372	1.429	-2.28	-2.39
				1732.4	53.556	1.477	52.366	1.447	-2.22	-2.03
				1752.6	53.516	1.489	52.336	1.465	-2.20	-1.61
				1800.0	53.300	1.520	52.217	1.506	-2.03	-0.92
Dec. 24. 2018	1800 Head	20.4	21.2	1720.0	40.114	1.354	41.122	1.307	2.51	-3.47
				1745.0	40.079	1.369	41.019	1.331	2.35	-2.78
				1770.0	40.043	1.383	40.898	1.354	2.14	-2.10
				1800.0	40.000	1.400	40.744	1.382	1.86	-1.29
Dec. 24. 2018	1800 Body	20.4	21.1	1720.0	53.580	1.469	52.510	1.420	-2.00	-3.34
				1745.0	53.530	1.485	52.472	1.443	-1.98	-2.83
				1770.0	53.480	1.501	52.418	1.466	-1.99	-2.33
				1800.0	53.300	1.520	52.349	1.493	-1.78	-1.78

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Dec. 29. 2018	1900 Head	20.1	20.9	1850.2	40.000	1.400	39.204	1.362	-1.99	-2.71
				1880.0	40.000	1.400	39.133	1.395	-2.17	-0.36
				1900.0	40.000	1.400	39.060	1.415	-2.35	1.07
				1909.8	40.000	1.400	39.020	1.425	-2.45	1.79
Dec. 29. 2018	1900 Body	20.1	21.1	1850.2	53.300	1.520	51.755	1.501	-2.90	-1.25
				1880.0	53.300	1.520	51.544	1.539	-3.29	1.25
				1900.0	53.300	1.520	51.304	1.564	-3.74	2.89
				1909.8	53.300	1.520	51.173	1.579	-3.99	3.88
Dec. 31. 2018	1900 Head	20.2	20.7	1852.4	40.000	1.400	39.573	1.365	-1.07	-2.50
				1880.0	40.000	1.400	39.490	1.395	-1.28	-0.36
				1900.0	40.000	1.400	39.405	1.415	-1.49	1.07
				1907.6	40.000	1.400	39.369	1.423	-1.58	1.64
Dec. 31. 2018	1900 Body	20.2	20.9	1852.4	53.300	1.520	51.792	1.502	-2.83	-1.18
				1880.0	53.300	1.520	51.595	1.536	-3.20	1.05
				1900.0	53.300	1.520	51.350	1.562	-3.66	2.76
				1907.6	53.300	1.520	51.243	1.573	-3.86	3.49
Dec. 21. 2018	1900 Head	20.2	21.5	1860.0	40.000	1.400	39.652	1.375	-0.87	-1.79
				1880.0	40.000	1.400	39.583	1.396	-1.04	-0.29
				1900.0	40.000	1.400	39.495	1.416	-1.26	1.14
Dec. 21. 2018	1900 Body	20.2	21.3	1860.0	53.300	1.520	51.825	1.515	-2.77	-0.33
				1880.0	53.300	1.520	51.672	1.538	-3.05	1.18
				1900.0	53.300	1.520	51.430	1.563	-3.51	2.83
Jan. 01. 2019	2450 Head	20.6	20.4	2402.0	39.282	1.757	39.858	1.702	1.47	-3.13
				2412.0	39.265	1.766	39.845	1.715	1.48	-2.89
				2437.0	39.222	1.788	39.812	1.748	1.50	-2.24
				2441.0	39.215	1.792	39.811	1.753	1.52	-2.18
				2450.0	39.200	1.800	39.798	1.765	1.53	-1.94
				2462.0	39.184	1.813	39.792	1.781	1.55	-1.77
				2472.0	39.171	1.823	39.780	1.792	1.55	-1.70
				2480.0	39.160	1.832	39.764	1.802	1.54	-1.64
Jan. 02. 2019	2450 Body	20.9	20.7	2402.0	52.764	1.904	54.466	1.891	3.23	-0.68
				2412.0	52.751	1.914	54.433	1.903	3.19	-0.57
				2437.0	52.717	1.938	54.362	1.936	3.12	-0.10
				2441.0	52.712	1.941	54.352	1.941	3.11	0.00
				2450.0	52.700	1.950	54.323	1.953	3.08	0.15
				2462.0	52.685	1.967	54.293	1.967	3.05	0.00
				2472.0	52.672	1.981	54.262	1.980	3.02	-0.05
				2480.0	52.662	1.993	54.239	1.989	2.99	-0.20

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Dec. 26. 2018	2600 Head	20.3	21.0	2510.0	39.120	1.864	39.573	1.870	1.16	0.32
				2535.0	39.087	1.891	39.513	1.898	1.09	0.37
				2560.0	39.053	1.917	39.451	1.928	1.02	0.57
				2600.0	39.000	1.960	39.355	1.973	0.91	0.66
Dec. 26. 2018	2600 Body	20.3	21.2	2510.0	52.624	2.035	53.244	1.990	1.18	-2.21
				2535.0	52.592	2.071	53.184	2.022	1.13	-2.37
				2560.0	52.560	2.106	53.130	2.054	1.08	-2.47
				2600.0	52.509	2.163	53.037	2.104	1.01	-2.73
Jan. 04. 2019	5200 Body	21.0	20.9	5180.0	49.041	5.276	49.074	5.260	0.07	-0.30
				5190.0	49.028	5.288	49.051	5.271	0.05	-0.32
				5200.0	49.014	5.299	49.028	5.285	0.03	-0.26
				5210.0	49.001	5.311	49.009	5.301	0.02	-0.19
				5220.0	48.987	5.323	48.992	5.316	0.01	-0.13
				5230.0	48.974	5.334	48.974	5.328	0.00	-0.11
Jan. 08. 2019	5300 Head	21.2	21.4	5240.0	48.960	5.346	48.947	5.341	-0.03	-0.09
				5260.0	35.940	4.720	35.378	4.569	-1.56	-3.20
				5270.0	35.930	4.730	35.342	4.578	-1.64	-3.21
				5280.0	35.920	4.740	35.311	4.587	-1.70	-3.23
				5290.0	35.910	4.750	35.287	4.594	-1.73	-3.28
				5300.0	35.900	4.760	35.254	4.601	-1.80	-3.34
				5310.0	35.890	4.770	35.220	4.614	-1.87	-3.27
Jan. 05. 2019	5300 Body	21.1	21.0	5320.0	35.880	4.780	35.200	4.629	-1.90	-3.16
				5260.0	48.933	5.369	48.585	5.347	-0.71	-0.41
				5270.0	48.919	5.381	48.560	5.363	-0.73	-0.33
				5280.0	48.906	5.393	48.547	5.378	-0.73	-0.28
				5290.0	48.892	5.404	48.537	5.391	-0.73	-0.24
				5300.0	48.879	5.416	48.515	5.403	-0.74	-0.24
				5310.0	48.865	5.428	48.490	5.417	-0.77	-0.20
5320.0	48.851	5.439	48.470	5.434	-0.78	-0.09				

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Jan. 09. 2019	5600 Head	21.1	20.8	5500.0	35.650	4.965	35.225	4.812	-1.19	-3.08
				5510.0	35.635	4.976	35.213	4.823	-1.18	-3.07
				5530.0	35.605	4.997	35.169	4.848	-1.22	-2.98
				5550.0	35.575	5.018	35.148	4.876	-1.20	-2.83
				5580.0	35.530	5.049	35.095	4.903	-1.22	-2.89
				5600.0	35.500	5.070	35.042	4.927	-1.29	-2.82
				5660.0	35.440	5.130	34.943	4.996	-1.40	-2.61
				5670.0	35.430	5.140	34.935	5.004	-1.40	-2.65
				5690.0	35.410	5.160	34.897	5.023	-1.45	-2.66
				5710.0	35.390	5.180	34.851	5.045	-1.52	-2.61
5720.0	35.380	5.190	34.839	5.053	-1.53	-2.64				
Jan. 07. 2019	5600 Body	21.0	21.3	5500.0	48.607	5.650	47.375	5.460	-2.53	-3.36
				5510.0	48.594	5.661	47.368	5.472	-2.52	-3.34
				5530.0	48.566	5.685	47.311	5.504	-2.58	-3.18
				5550.0	48.539	5.708	47.274	5.538	-2.61	-2.98
				5580.0	48.499	5.743	47.211	5.576	-2.66	-2.91
				5600.0	48.471	5.766	47.178	5.606	-2.67	-2.77
				5660.0	48.390	5.836	47.083	5.695	-2.70	-2.42
				5670.0	48.376	5.848	47.058	5.708	-2.72	-2.39
				5690.0	48.349	5.872	47.012	5.735	-2.77	-2.33
				5710.0	48.322	5.895	46.981	5.763	-2.78	-2.24
5720.0	48.309	5.907	46.974	5.775	-2.76	-2.23				
Jan. 10. 2019	5800 Head	20.9	21.3	5745.0	35.355	5.215	34.687	5.045	-1.89	-3.26
				5755.0	35.345	5.225	34.664	5.060	-1.93	-3.16
				5775.0	35.325	5.245	34.643	5.083	-1.93	-3.09
				5785.0	35.315	5.255	34.629	5.093	-1.94	-3.08
				5795.0	35.305	5.265	34.608	5.104	-1.97	-3.06
				5800.0	35.300	5.270	34.599	5.111	-1.99	-3.02
				5825.0	35.275	5.296	34.565	5.138	-2.01	-2.98
Jan. 03. 2019	5800 Body	20.5	20.8	5745.0	48.275	5.936	46.984	5.812	-2.67	-2.09
				5755.0	48.261	5.947	46.955	5.831	-2.71	-1.95
				5775.0	48.234	5.971	46.929	5.863	-2.71	-1.81
				5785.0	48.220	5.982	46.904	5.877	-2.73	-1.76
				5795.0	48.207	5.994	46.879	5.892	-2.75	-1.70
				5800.0	48.200	6.000	46.863	5.899	-2.77	-1.68
				5825.0	48.166	6.029	46.833	5.935	-2.77	-1.56

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r'(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r'} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

10.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 10.2.1 System Verification Results (1g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
D	750	D750V3, SN:1049	Dec. 27. 2018	Head	20.6	21.4	3933	250	8.32	1.96	7.84	-5.77
D	750	D750V3, SN:1049	Dec. 27. 2018	Body	20.6	21.3	3933	250	8.70	2.18	8.72	0.23
D	835	D835V2, SN:4d159	Dec. 28. 2018	Head	20.2	21.1	3933	250	9.36	2.26	9.04	-3.42
D	835	D835V2, SN:4d159	Dec. 28. 2018	Body	20.2	21.0	3933	250	9.56	2.37	9.48	-0.84
D	835	D835V2, SN:4d159	Jan. 02. 2019	Head	20.3	21.1	3933	250	9.36	2.25	9.00	-3.85
D	835	D835V2, SN:4d159	Jan. 02. 2019	Body	20.3	21.2	3933	250	9.56	2.42	9.68	1.26
D	835	D835V2, SN:4d159	Dec. 25. 2018	Head	20.2	21.3	3933	250	9.36	2.36	9.44	0.85
D	835	D835V2, SN:4d159	Dec. 25. 2018	Body	20.2	21.4	3933	250	9.56	2.33	9.32	-2.51
D	1800	D1800V2, SN:2d202	Jan. 01. 2019	Head	20.1	21.2	3933	100	38.7	3.64	36.4	-5.94
D	1800	D1800V2, SN:2d202	Jan. 01. 2019	Body	20.1	21.0	3933	100	38.8	4.05	40.5	4.38
D	1800	D1800V2, SN:2d202	Dec. 24. 2018	Head	20.4	21.2	3933	100	38.7	4.10	41.00	5.94
D	1800	D1800V2, SN:2d202	Dec. 24. 2018	Body	20.4	21.1	3933	100	38.8	4.07	40.70	4.90
D	1900	D1900V2, SN:5d176	Dec. 29. 2018	Head	20.1	20.9	3933	100	40.7	3.93	39.3	-3.44
D	1900	D1900V2, SN:5d176	Dec. 29. 2018	Body	20.1	21.1	3933	100	39.7	4.17	41.7	5.04
D	1900	D1900V2, SN:5d176	Dec. 31. 2018	Head	20.2	20.7	3933	100	40.7	3.99	39.9	-1.97
D	1900	D1900V2, SN:5d176	Dec. 31. 2018	Body	20.2	20.9	3933	100	39.7	3.98	39.8	0.25
D	1900	D1900V2, SN:5d176	Dec. 21. 2018	Head	20.2	21.5	3933	100	40.7	4.21	42.10	3.44
D	1900	D1900V2, SN:5d176	Dec. 21. 2018	Body	20.2	21.3	3933	100	39.7	4.11	41.10	3.53
C	2450	D2450V2, SN: 920	Jan. 01. 2019	Head	20.6	20.4	3916	100	51.9	5.03	50.30	-3.08
C	2450	D2450V2, SN: 920	Jan. 02. 2019	Body	20.9	20.7	3916	100	52.1	5.18	51.80	-0.58
D	2600	D2600V2, SN: 1103	Dec. 26. 2018	Head	20.3	21.0	3933	100	56.4	5.91	59.10	4.79
D	2600	D2600V2, SN: 1103	Dec. 26. 2018	Body	20.3	21.2	3933	100	55.7	5.45	54.50	-2.15
C	5200	D5GHzV2, SN:1212	Jan. 04. 2019	Body	21.0	20.9	3916	100	72.7	7.19	71.90	-1.10
C	5300	D5GHzV2, SN:1212	Jan. 08. 2019	Head	21.2	21.4	3916	100	81.1	7.99	79.90	-1.48
C	5300	D5GHzV2, SN:1212	Jan. 05. 2019	Body	21.1	21.0	3916	100	75.2	7.48	74.80	-0.53
C	5600	D5GHzV2, SN:1212	Jan. 09. 2019	Head	21.1	20.8	3916	100	83.6	8.36	83.60	0.00
C	5600	D5GHzV2, SN:1212	Jan. 07. 2019	Body	21.0	21.3	3916	100	78.9	7.91	79.10	0.25
C	5800	D5GHzV2, SN:1212	Jan. 10. 2019	Head	20.9	21.3	3916	100	79.5	7.83	78.30	-1.51
C	5800	D5GHzV2, SN:1212	Jan. 03. 2019	Body	20.5	20.8	3916	100	75.7	7.52	75.20	-0.66

Table 10.2.2 System Verification Results (10g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{10g} (W/kg)	Measured SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation [%]
C	5300	D5GHzV2, SN:1212	Jan. 05. 2019	Body	21.1	21.0	3916	100	20.9	2.03	20.30	-2.87
C	5600	D5GHzV2, SN:1212	Jan. 07. 2019	Body	21.0	21.3	3916	100	21.8	2.16	21.60	-0.92
C	5800	D5GHzV2, SN:1212	Jan. 03. 2019	Body	20.5	20.8	3916	100	20.8	2.06	20.60	-0.96

Note1 : System Verification was measured with input 250 mW, 100 mW and normalized to 1W.

Note2 : Full system validation status and results can be found in Attachment 3.

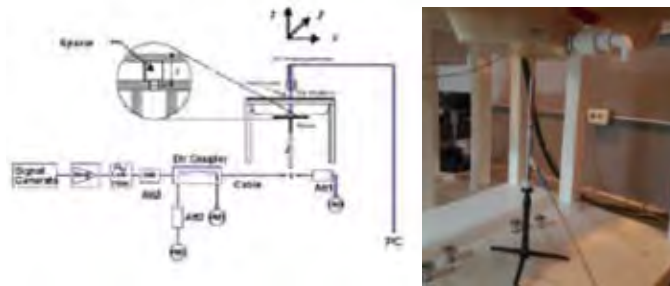


Figure 10.1 Dipole Verification Test Setup Diagram & Photo

11. SAR TEST RESULTS

11.1 Head SAR Results

Table 11.1.1 GSM/GPRS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.20	32.90	0.030	Left Touch	FCC #1	1	1:8.3	0.210	1.072	0.225	
836.6	190	GSM850	GSM	33.20	32.90	-0.160	Right Touch	FCC #1	1	1:8.3	0.241	1.072	0.258	A1
836.6	190	GSM850	GSM	33.20	32.90	0.000	Left Tilt	FCC #1	1	1:8.3	0.111	1.072	0.119	
836.6	190	GSM850	GSM	33.20	32.90	-0.010	Right Tilt	FCC #1	1	1:8.3	0.124	1.072	0.133	
836.6	190	GSM850	GPRS	27.70	27.60	-0.160	Left Touch	FCC #1	4	1:2.075	0.271	1.023	0.277	
836.6	190	GSM850	GPRS	27.70	27.60	0.130	Right Touch	FCC #1	4	1:2.075	0.317	1.023	0.324	A2
836.6	190	GSM850	GPRS	27.70	27.60	0.130	Left Tilt	FCC #1	4	1:2.075	0.145	1.023	0.148	
836.6	190	GSM850	GPRS	27.70	27.60	0.100	Right Tilt	FCC #1	4	1:2.075	0.154	1.023	0.158	
836.6	190	GSM850	GPRS	27.70	27.60	0.000	Right Touch	FCC #1	4	1:2.075	0.307	1.023	0.314	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.2 PCS/GPRS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	30.20	30.00	0.050	Left Touch	FCC #1	1	1:8.3	0.213	1.047	0.223	A3
1880.0	661	PCS1900	PCS	30.20	30.00	-0.090	Right Touch	FCC #1	1	1:8.3	0.119	1.047	0.125	
1880.0	661	PCS1900	PCS	30.20	30.00	0.000	Left Tilt	FCC #1	1	1:8.3	0.091	1.047	0.095	
1880.0	661	PCS1900	PCS	30.20	30.00	0.190	Right Tilt	FCC #1	1	1:8.3	0.113	1.047	0.118	
1880.0	661	PCS1900	GPRS	25.20	25.10	0.120	Left Touch	FCC #1	4	1:2.075	0.306	1.023	0.313	A4
1880.0	661	PCS1900	GPRS	25.20	25.10	-0.000	Right Touch	FCC #1	4	1:2.075	0.190	1.023	0.194	
1880.0	661	PCS1900	GPRS	25.20	25.10	0.080	Left Tilt	FCC #1	4	1:2.075	0.131	1.023	0.134	
1880.0	661	PCS1900	GPRS	25.20	25.10	0.140	Right Tilt	FCC #1	4	1:2.075	0.165	1.023	0.169	
1880.0	661	PCS1900	GPRS	25.20	25.10	0.100	Left Touch	FCC #1	4	1:2.075	0.304	1.023	0.311	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
836.6	4183	WCDMA 850	RMC	24.70	24.58	0.130	Left Touch	FCC #1	1:1	0.427	1.028	0.439	
836.6	4183	WCDMA 850	RMC	24.70	24.58	0.070	Right Touch	FCC #1	1:1	0.451	1.028	0.464	A5
836.6	4183	WCDMA 850	RMC	24.70	24.58	-0.070	Left Tilt	FCC #1	1:1	0.257	1.028	0.264	
836.6	4183	WCDMA 850	RMC	24.70	24.58	-0.170	Right Tilt	FCC #1	1:1	0.250	1.028	0.257	
836.6	4183	WCDMA 850	RMC	24.70	24.58	-0.020	Right Touch	FCC #1	1:1	0.440	1.028	0.452	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):

1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.4 WCDMA 1700 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	-0.090	Left Touch	FCC #1	1:1	0.171	1.040	0.178	
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	0.190	Right Touch	FCC #1	1:1	0.195	1.040	0.203	A6
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	0.040	Left Tilt	FCC #1	1:1	0.127	1.040	0.132	
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	0.160	Right Tilt	FCC #1	1:1	0.101	1.040	0.105	
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	0.040	Right Touch	FCC #1	1:1	0.185	1.040	0.192	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):

1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.5 WCDMA 1900 Head SAR

MEASUREMENT RESULTS													
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch												
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	-0.080	Left Touch	FCC #1	1:1	0.380	1.035	0.393	A7
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.090	Right Touch	FCC #1	1:1	0.187	1.035	0.194	
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.190	Left Tilt	FCC #1	1:1	0.162	1.035	0.168	
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.130	Right Tilt	FCC #1	1:1	0.137	1.035	0.142	
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.150	Left Touch	FCC #1	1:1	0.370	1.035	0.383	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):

1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.6 LTE Band 12 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.70	24.28	0.100	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.230	1.102	0.253	
707.5	23095	LTE B12	10	23.70	23.19	0.060	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.181	1.125	0.204	
707.5	23095	LTE B12	10	24.70	24.28	0.080	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.304	1.102	0.335	A8
707.5	23095	LTE B12	10	23.70	23.19	0.150	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.257	1.125	0.289	
707.5	23095	LTE B12	10	24.70	24.28	0.060	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.177	1.102	0.195	
707.5	23095	LTE B12	10	23.70	23.19	0.130	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.134	1.125	0.151	
707.5	23095	LTE B12	10	24.70	24.28	0.080	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.180	1.102	0.198	
707.5	23095	LTE B12	10	23.70	23.19	0.070	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.154	1.125	0.173	
707.5	23095	LTE B12	10	24.70	24.28	-0.010	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.303	1.102	0.334	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.7 LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
836.5	20525	LTE B5	10	24.70	24.40	0.060	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.416	1.072	0.446	
836.5	20525	LTE B5	10	23.70	23.49	0.180	1	Left Touch	FCC #1	QPSK	25	0	1:1	0.340	1.050	0.357	
836.5	20525	LTE B5	10	24.70	24.40	0.040	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.469	1.072	0.503	A9
836.5	20525	LTE B5	10	23.70	23.49	0.080	1	Right Touch	FCC #1	QPSK	25	0	1:1	0.362	1.050	0.380	
836.5	20525	LTE B5	10	24.70	24.40	-0.020	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.295	1.072	0.316	
836.5	20525	LTE B5	10	23.70	23.49	0.030	1	Left Tilt	FCC #1	QPSK	25	0	1:1	0.242	1.050	0.254	
836.5	20525	LTE B5	10	24.70	24.40	0.030	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.242	1.072	0.259	
836.5	20525	LTE B5	10	23.70	23.49	0.010	1	Right Tilt	FCC #1	QPSK	25	0	1:1	0.177	1.050	0.186	
836.5	20525	LTE B5	10	24.70	24.40	0.010	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.454	1.072	0.487	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.8 LTE Band 66 (AWS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1770.0	132572	LTE B66	20	23.70	23.51	0.000	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.332	1.045	0.347	A10
1770.0	132572	LTE B66	20	22.70	22.58	0.190	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.289	1.028	0.297	
1770.0	132572	LTE B66	20	23.70	23.51	-0.080	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.186	1.045	0.194	
1770.0	132572	LTE B66	20	22.70	22.58	0.190	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.137	1.028	0.141	
1770.0	132572	LTE B66	20	23.70	23.51	0.190	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.115	1.045	0.120	
1770.0	132572	LTE B66	20	22.70	22.58	-0.110	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.093	1.028	0.096	
1770.0	132572	LTE B66	20	23.70	23.51	0.140	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.143	1.045	0.149	
1770.0	132572	LTE B66	20	22.70	22.58	0.060	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.123	1.028	0.126	
1770.0	132572	LTE B66	20	23.70	23.51	-0.050	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.308	1.045	0.322	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.9 LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1880.0	18900	LTE B2	20	23.70	23.56	-0.130	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.433	1.033	0.447	A11
1880.0	18900	LTE B2	20	22.70	22.56	-0.170	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.353	1.033	0.365	
1880.0	18900	LTE B2	20	23.70	23.56	-0.040	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.239	1.033	0.247	
1880.0	18900	LTE B2	20	22.70	22.56	0.160	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.183	1.033	0.189	
1880.0	18900	LTE B2	20	23.70	23.56	0.080	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.142	1.033	0.147	
1880.0	18900	LTE B2	20	22.70	22.56	0.130	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.104	1.033	0.107	
1860.0	18700	LTE B2	20	23.70	23.56	0.040	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.123	1.033	0.127	
1860.0	18700	LTE B2	20	22.70	22.56	0.110	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.105	1.033	0.108	
1880.0	18900	LTE B2	20	23.70	23.56	-0.070	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.417	1.033	0.431	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.10 LTE Band 7 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2535.0	21100	LTE B7	20	23.70	23.29	0.170	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.220	1.099	0.242	A12
2535.0	21100	LTE B7	20	22.70	22.32	0.160	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.171	1.091	0.187	
2535.0	21100	LTE B7	20	23.70	23.29	-0.180	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.163	1.099	0.179	
2535.0	21100	LTE B7	20	22.70	22.32	-0.100	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.119	1.091	0.130	
2535.0	21100	LTE B7	20	23.70	23.29	-0.020	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.066	1.099	0.073	
2535.0	21100	LTE B7	20	22.70	22.32	0.170	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.052	1.091	0.057	
2535.0	21100	LTE B7	20	23.70	23.29	0.140	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.078	1.099	0.086	
2535.0	21100	LTE B7	20	22.70	22.32	-0.060	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.058	1.091	0.063	
2535.0	21100	LTE B7	20	23.70	23.29	0.010	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.217	1.099	0.238	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.11 DTS Head SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plot s #	
MHz	Ch															
2412.0	1	802.11b	15.00	14.98	0.030	Left Touch	FCC #2	0.243	1	98.5	0.240	1.005	1.015	0.245		
2412.0	1	802.11b	15.00	14.98	0.050	Right Touch	FCC #2	0.484	1	98.5	0.439	1.005	1.015	0.448	A13	
2412.0	1	802.11b	15.00	14.98	-0.000	Left Tilt	FCC #2	0.239	1	98.5	0.233	1.005	1.015	0.238		
2412.0	1	802.11b	15.00	14.98	-0.020	Right Tilt	FCC #2	0.307	1	98.5	0.303	1.005	1.015	0.309		
2412.0	1	802.11b	15.00	14.98	0.010	Right Touch	FCC #2	0.410	1	98.5	0.374	1.005	1.015	0.382		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2412.0	1	802.11b	DSSS	15.0	0.448	2437	802.11g	OFDM	15.0	1.000	0.448	X
2412.0	1	802.11b	DSSS	15.0	0.448	2437	802.11n	OFDM	14.0	0.794	0.356	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure							Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.1.12 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5320.0	64	802.11a	14.00	13.89	0.150	Left Touch	FCC #2	0.585	6	96.1	0.590	1.026	1.041	0.630	
5260.0	52	802.11a	14.00	13.72	0.110	Right Touch	FCC #2	0.661	6	96.1	0.804	1.067	1.041	0.893	
5320.0	64	802.11a	14.00	13.89	0.120	Right Touch	FCC #2	0.701	6	96.1	0.856	1.026	1.041	0.914	A14
5320.0	64	802.11a	14.00	13.89	0.130	Left Tilt	FCC #2	0.511	6	96.1	0.513	1.026	1.041	0.548	
5320.0	64	802.11a	14.00	13.89	0.040	Right Tilt	FCC #2	0.583	6	96.1	0.664	1.026	1.041	0.709	
5320.0	64	802.11a	14.00	13.89	0.080	Right Touch	FCC #2	0.703	6	96.1	0.853	1.026	1.041	0.911	
5320.0	64	802.11a	14.00	13.89	-0.010	Right Touch	FCC #2	0.676	6	96.1	0.810	1.026	1.041	0.865	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.
- Yellow entries represent variability measurements.

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5320.0	64	802.11a	OFDM	14.0	0.91	5220	802.11a	OFDM	14.0	1.000	0.91	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Head 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.1.13 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5500.0	100	802.11a	14.00	13.95	0.170	Left Touch	FCC #2	0.595	6	96.1	0.595	1.012	1.041	0.627	
5500.0	100	802.11a	14.00	13.95	-0.080	Right Touch	FCC #2	0.559	6	96.1	0.711	1.012	1.041	0.749	A15
5500.0	100	802.11a	14.00	13.95	0.110	Left Tilt	FCC #2	0.532	6	96.1	0.449	1.012	1.041	0.473	
5500.0	100	802.11a	14.00	13.95	0.090	Right Tilt	FCC #2	0.608	6	96.1	0.551	1.012	1.041	0.580	
5500.0	100	802.11a	14.00	13.95	-0.160	Right Touch	FCC #2	0.559	6	96.1	0.705	1.012	1.041	0.742	
5825.0	165	802.11a	14.00	13.99	0.190	Left Touch	FCC #2	0.608	6	96.1	0.608	1.002	1.041	0.634	
5745.0	149	802.11a	14.00	13.98	0.010	Right Touch	FCC #2	0.499	6	96.1	0.632	1.005	1.041	0.661	
5825.0	165	802.11a	14.00	13.99	0.090	Right Touch	FCC #2	0.583	6	96.1	0.791	1.002	1.041	0.825	A16
5825.0	165	802.11a	14.00	13.99	-0.020	Left Tilt	FCC #2	0.459	6	96.1	0.466	1.002	1.041	0.486	
5825.0	165	802.11a	14.00	13.99	0.060	Right Tilt	FCC #2	0.526	6	96.1	0.604	1.002	1.041	0.630	
5825.0	165	802.11a	14.00	13.99	-0.190	Right Touch	FCC #2	0.584	6	96.1	0.786	1.002	1.041	0.820	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Head 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.14 Bluetooth Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	8.35	7.65	-0.130	Left Touch	FCC #2	1	76.8	0.065	1.174	1.302	0.099	
2441.0	39	Bluetooth	8.35	7.65	-0.070	Right Touch	FCC #2	1	76.8	0.108	1.174	1.302	0.165	A17
2441.0	39	Bluetooth	8.35	7.65	0.140	Left Tilt	FCC #2	1	76.8	0.051	1.174	1.302	0.078	
2441.0	39	Bluetooth	8.35	7.65	0.180	Right Tilt	FCC #2	1	76.8	0.104	1.174	1.302	0.159	
2441.0	39	Bluetooth	8.35	7.65	0.050	Right Touch	FCC #2	1	76.8	0.102	1.174	1.302	0.156	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Head 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

11.2 Standalone Body-Worn SAR Worn SAR Results

Table 11.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slot s	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.20	32.90	-0.050	10 mm [Front]	FCC #1	1	1:8.3	0.305	1.072	0.327	
836.6	190	GSM850	GSM	33.20	32.90	0.030	10 mm [Rear]	FCC #1	1	1:8.3	0.414	1.072	0.444	A18
836.6	190	GSM850	GPRS	27.70	27.60	0.020	10 mm [Front]	FCC #1	4	1:2.075	0.391	1.023	0.400	
836.6	190	GSM850	GPRS	27.70	27.60	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.538	1.023	0.550	A19
1880.0	661	PCS1900	PCS	30.20	30.00	-0.050	10 mm [Front]	FCC #1	1	1:8.3	0.277	1.047	0.290	
1880.0	661	PCS1900	PCS	30.20	30.00	0.010	10 mm [Rear]	FCC #1	1	1:8.3	0.280	1.047	0.293	A20
1880.0	661	PCS1900	GPRS	25.20	25.10	-0.020	10 mm [Front]	FCC #1	4	1:2.075	0.408	1.023	0.417	
1880.0	661	PCS1900	GPRS	25.20	25.10	0.070	10 mm [Rear]	FCC #1	4	1:2.075	0.441	1.023	0.451	A21
1880.0	661	PCS1900	GPRS	25.20	25.10	0.070	10 mm [Rear]	FCC #1	4	1:2.075	0.404	1.023	0.413	
836.6	4183	WCDMA 850	RMC	24.70	24.58	0.000	10 mm [Front]	FCC #1	N/A	1:1	0.611	1.028	0.628	
836.6	4183	WCDMA 850	RMC	24.70	24.58	-0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.717	1.028	0.737	A22
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	0.080	10 mm [Front]	FCC #1	N/A	1:1	0.400	1.040	0.416	
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	-0.140	10 mm [Rear]	FCC #1	N/A	1:1	0.499	1.040	0.519	A23
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	-0.110	10 mm [Rear]	FCC #1	N/A	1:1	0.455	1.040	0.473	
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.060	10 mm [Front]	FCC #1	N/A	1:1	0.613	1.035	0.634	A24
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.563	1.035	0.583	
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.020	10 mm [Front]	FCC #1	N/A	1:1	0.587	1.035	0.608	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.2 LTE B12, B5, B66 Body-Worn SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.70	24.28	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.333	1.102	0.367	
707.5	23095	LTE B12	10	23.70	23.19	-0.000	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.281	1.125	0.316	
707.5	23095	LTE B12	10	24.70	24.28	-0.130	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.459	1.102	0.506	A25
707.5	23095	LTE B12	10	23.70	23.19	-0.020	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.396	1.125	0.446	
707.5	23095	LTE B12	10	24.70	24.28	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.451	1.102	0.497	
836.5	20525	LTE B5	10	24.70	24.40	0.050	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.492	1.072	0.527	
836.5	20525	LTE B5	10	23.70	23.49	-0.020	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.385	1.050	0.404	
836.5	20525	LTE B5	10	24.70	24.40	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.667	1.072	0.715	A26
836.5	20525	LTE B5	10	23.70	23.49	-0.030	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.530	1.050	0.557	
836.5	20525	LTE B5	10	24.70	24.40	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.663	1.072	0.711	
1770.0	132572	LTE B66	20	23.70	23.51	0.100	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.487	1.045	0.509	
1770.0	132572	LTE B66	20	22.70	22.58	0.140	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.418	1.028	0.430	
1770.0	132572	LTE B66	20	23.70	23.51	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.629	1.045	0.657	A27
1770.0	132572	LTE B66	20	22.70	22.58	-0.080	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.541	1.028	0.556	
1770.0	132572	LTE B66	20	23.70	23.51	-0.100	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.626	1.045	0.654	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.3 LTE B2/B7 Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1880.0	18900	LTE B2	20	23.70	23.56	0.050	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.681	1.033	0.703	A28
1880.0	18900	LTE B2	20	22.70	22.56	0.070	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.546	1.033	0.564	
1880.0	18900	LTE B2	20	23.70	23.56	-0.110	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.632	1.033	0.653	
1880.0	18900	LTE B2	20	22.70	22.56	-0.080	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.511	1.033	0.528	
1880.0	18900	LTE B2	20	23.70	23.56	0.110	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.644	1.033	0.665	
2535.0	21100	LTE B7	20	23.70	23.29	-0.130	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.448	1.099	0.492	
2535.0	21100	LTE B7	20	22.70	22.32	-0.010	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.345	1.091	0.376	
2535.0	21100	LTE B7	20	23.70	23.29	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.643	1.099	0.707	A29
2535.0	21100	LTE B7	20	22.70	22.32	0.100	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.486	1.091	0.530	
2535.0	21100	LTE B7	20	23.70	23.29	0.080	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.614	1.099	0.675	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.4 DTS Body-Worn SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #	
MHz	Ch															
2412.0	1	802.11b	15.00	14.98	0.050	10 mm [Front]	FCC #2	0.100	1	98.5	0.101	1.005	1.015	0.103		
2412.0	1	802.11b	15.00	14.98	-0.110	10 mm [Rear]	FCC #2	0.116	1	98.5	0.113	1.005	1.015	0.115	A30	
2412.0	1	802.11b	15.00	14.98	0.120	10 mm [Rear]	FCC #2	0.110	1	98.5	0.106	1.005	1.015	0.108		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure									Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2412.0	1	802.11b	DSSS	15.0	0.115	2437	802.11g	OFDM	15.0	1.000	0.115	X
2412.0	1	802.11b	DSSS	15.0	0.115	2437	802.11n	OFDM	14.0	0.794	0.091	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.2.5 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5320.0	64	802.11a	14.00	13.89	-0.090	10 mm [Front]	FCC #2	0.198	6	96.1	0.197	1.026	1.041	0.210	
5320.0	64	802.11a	14.00	13.89	-0.120	10 mm [Rear]	FCC #2	0.295	6	96.1	0.308	1.026	1.041	0.329	A31
5320.0	64	802.11a	14.00	13.89	0.020	10 mm [Rear]	FCC #2	0.264	6	96.1	0.278	1.026	1.041	0.297	
ANSI / IEEE C95.1-2005– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Adjusted SAR results for UNII-1 and UNII-2A SAR													
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power	
MHz	Ch												
5320.0	64	802.11a	OFDM	14.0	0.329	5220	802.11a	OFDM	14.0	1.000	0.329	X	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.2.6 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5500.0	100	802.11a	14.00	13.95	-0.050	10 mm [Front]	FCC #2	0.171	6	96.1	0.170	1.012	1.041	0.179	
5500.0	100	802.11a	14.00	13.95	-0.120	10 mm [Rear]	FCC #2	0.303	6	96.1	0.318	1.012	1.041	0.335	A32
5500.0	100	802.11a	14.00	13.95	0.050	10 mm [Rear]	FCC #2	0.259	6	96.1	0.265	1.012	1.041	0.279	
5825.0	165	802.11a	14.00	13.99	0.060	10 mm [Front]	FCC #2	0.174	6	96.1	0.177	1.002	1.041	0.185	
5825.0	165	802.11a	14.00	13.99	-0.160	10 mm [Rear]	FCC #2	0.244	6	96.1	0.248	1.002	1.041	0.259	A33
5825.0	165	802.11a	14.00	13.99	-0.160	10 mm [Rear]	FCC #2	0.249	6	96.1	0.247	1.002	1.041	0.258	
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.7 Bluetooth Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
2441.0	39	Bluetooth	8.35	7.65	-0.030	10 mm [Front]	FCC #2	1	76.8	0.013	1.174	1.302	0.020		
2441.0	39	Bluetooth	8.35	7.65	0.110	10 mm [Rear]	FCC #2	1	76.8	0.017	1.174	1.302	0.026	A34	
2441.0	39	Bluetooth	8.35	7.65	-0.080	10 mm [Rear]	FCC #2	1	76.8	0.016	1.174	1.302	0.024		
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

11.3 Standalone Hotspot SAR Results

Table 11.3.1 GPRS/WCDMA Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slot s	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GPRS	27.70	27.60	-0.170	10 mm [Bottom]	FCC #1	4	1:2.075	0.181	1.023	0.185	
836.6	190	GSM850	GPRS	27.70	27.60	0.020	10 mm [Front]	FCC #1	4	1:2.075	0.391	1.023	0.400	
836.6	190	GSM850	GPRS	27.70	27.60	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.538	1.023	0.550	
836.6	190	GSM850	GPRS	27.70	27.60	-0.050	10 mm [Right]	FCC #1	4	1:2.075	0.585	1.023	0.598	A35
836.6	190	GSM850	GPRS	27.70	27.60	-0.030	10 mm [Left]	FCC #1	4	1:2.075	0.315	1.023	0.322	
836.6	190	GSM850	GPRS	27.70	27.60	-0.050	10 mm [Right]	FCC #1	4	1:2.075	0.578	1.023	0.591	
1880.0	661	PCS1900	GPRS	25.20	25.10	-0.120	10 mm [Bottom]	FCC #1	4	1:2.075	0.328	1.023	0.336	
1880.0	661	PCS1900	GPRS	25.20	25.10	-0.020	10 mm [Front]	FCC #1	4	1:2.075	0.408	1.023	0.417	
1880.0	661	PCS1900	GPRS	25.20	25.10	0.070	10 mm [Rear]	FCC #1	4	1:2.075	0.441	1.023	0.451	A21
1880.0	661	PCS1900	GPRS	25.20	25.10	-0.110	10 mm [Left]	FCC #1	4	1:2.075	0.383	1.023	0.392	
1880.0	661	PCS1900	GPRS	25.20	25.10	0.070	10 mm [Rear]	FCC #1	4	1:2.075	0.404	1.023	0.413	
836.6	4183	WCDMA 850	RMC	24.70	24.58	-0.150	10 mm [Bottom]	FCC #1	N/A	1:1	0.246	1.028	0.253	
836.6	4183	WCDMA 850	RMC	24.70	24.58	0.000	10 mm [Front]	FCC #1	N/A	1:1	0.611	1.028	0.628	
836.6	4183	WCDMA 850	RMC	24.70	24.58	-0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.717	1.028	0.737	
836.6	4183	WCDMA 850	RMC	24.70	24.58	-0.060	10 mm [Right]	FCC #1	N/A	1:1	0.773	1.028	0.795	A36
836.6	4183	WCDMA 850	RMC	24.70	24.58	-0.050	10 mm [Left]	FCC #1	N/A	1:1	0.490	1.028	0.504	
836.6	4183	WCDMA 850	RMC	24.70	24.58	0.110	10 mm [Right]	FCC #1	N/A	1:1	0.752	1.028	0.773	
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	-0.050	10 mm [Bottom]	FCC #1	N/A	1:1	0.300	1.040	0.312	
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	0.080	10 mm [Front]	FCC #1	N/A	1:1	0.400	1.040	0.416	
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	-0.140	10 mm [Rear]	FCC #1	N/A	1:1	0.499	1.040	0.519	A23
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	0.070	10 mm [Left]	FCC #1	N/A	1:1	0.436	1.040	0.453	
1732.4	1412	WCDMA 1700	RMC	23.70	23.53	-0.110	10 mm [Rear]	FCC #1	N/A	1:1	0.455	1.040	0.473	
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	-0.080	10 mm [Bottom]	FCC #1	N/A	1:1	0.414	1.035	0.428	
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.060	10 mm [Front]	FCC #1	N/A	1:1	0.613	1.035	0.634	A24
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.563	1.035	0.583	
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.040	10 mm [Left]	FCC #1	N/A	1:1	0.492	1.035	0.509	
1880.0	9400	WCDMA 1900	RMC	23.70	23.55	0.020	10 mm [Front]	FCC #1	N/A	1:1	0.587	1.035	0.608	
ANSI / IEEE C95.1-1992– SAFETY LIMIT									Body					
Spatial Peak									1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population Exposure									averaged over 1 gram					

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.2 LTE B12, B5 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.70	24.28	-0.180	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.138	1.102	0.152	
707.5	23095	LTE B12	10	23.70	23.19	-0.160	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.116	1.125	0.131	
707.5	23095	LTE B12	10	24.70	24.28	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.333	1.102	0.367	
707.5	23095	LTE B12	10	23.70	23.19	-0.000	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.281	1.125	0.316	
707.5	23095	LTE B12	10	24.70	24.28	-0.130	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.459	1.102	0.506	A25
707.5	23095	LTE B12	10	23.70	23.19	-0.020	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.396	1.125	0.446	
707.5	23095	LTE B12	10	24.70	24.28	-0.050	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.416	1.102	0.458	
707.5	23095	LTE B12	10	23.70	23.19	-0.040	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.354	1.125	0.398	
707.5	23095	LTE B12	10	24.70	24.28	-0.100	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.265	1.102	0.292	
707.5	23095	LTE B12	10	23.70	23.19	-0.030	1	10 mm [Left]	FCC #1	QPSK	25	12	1:1	0.222	1.125	0.250	
707.5	23095	LTE B12	10	24.70	24.28	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.451	1.102	0.497	
836.5	20525	LTE B5	10	24.70	24.40	-0.160	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.267	1.072	0.286	
836.5	20525	LTE B5	10	23.70	23.49	-0.180	1	10 mm [Bottom]	FCC #1	QPSK	25	0	1:1	0.211	1.050	0.222	
836.5	20525	LTE B5	10	24.70	24.40	0.050	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.492	1.072	0.527	
836.5	20525	LTE B5	10	23.70	23.49	-0.020	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.385	1.050	0.404	
836.5	20525	LTE B5	10	24.70	24.40	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.667	1.072	0.715	A26
836.5	20525	LTE B5	10	23.70	23.49	-0.030	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.530	1.050	0.557	
836.5	20525	LTE B5	10	24.70	24.40	-0.040	0	10 mm [Right]	FCC #1	QPSK	1	0	1:1	0.646	1.072	0.693	
836.5	20525	LTE B5	10	23.70	23.49	-0.060	1	10 mm [Right]	FCC #1	QPSK	25	0	1:1	0.548	1.050	0.575	
836.5	20525	LTE B5	10	24.70	24.40	-0.030	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1	0.347	1.072	0.372	
836.5	20525	LTE B5	10	23.70	23.49	-0.060	1	10 mm [Left]	FCC #1	QPSK	25	0	1:1	0.252	1.050	0.265	
836.5	20525	LTE B5	10	24.70	24.40	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.663	1.072	0.711	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.3 LTE B66 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1770.0	132572	LTE B66	20	23.70	23.51	-0.020	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.342	1.045	0.357	
1770.0	132572	LTE B66	20	22.70	22.58	-0.100	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.292	1.028	0.300	
1770.0	132572	LTE B66	20	23.70	23.51	0.100	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.487	1.045	0.509	
1770.0	132572	LTE B66	20	22.70	22.58	0.140	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.418	1.028	0.430	
1770.0	132572	LTE B66	20	23.70	23.51	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.629	1.045	0.657	A27
1770.0	132572	LTE B66	20	22.70	22.58	-0.080	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.541	1.028	0.556	
1770.0	132572	LTE B66	20	23.70	23.51	-0.150	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1	0.547	1.045	0.572	
1770.0	132572	LTE B66	20	22.70	22.58	-0.180	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.463	1.028	0.476	
1770.0	132572	LTE B66	20	23.70	23.51	-0.100	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.626	1.045	0.654	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.4 LTE B2 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1880.0	18900	LTE B2	20	23.70	23.56	-0.090	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.561	1.033	0.580	
1880.0	18900	LTE B2	20	22.70	22.56	-0.110	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.421	1.033	0.435	
1880.0	18900	LTE B2	20	23.70	23.56	0.050	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.681	1.033	0.703	A28
1880.0	18900	LTE B2	20	22.70	22.56	0.070	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.546	1.033	0.564	
1880.0	18900	LTE B2	20	23.70	23.56	-0.110	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.632	1.033	0.653	
1880.0	18900	LTE B2	20	22.70	22.56	-0.080	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.511	1.033	0.528	
1880.0	18900	LTE B2	20	23.70	23.56	-0.020	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1	0.614	1.033	0.634	
1880.0	18900	LTE B2	20	22.70	22.56	-0.030	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.500	1.033	0.517	
1880.0	18900	LTE B2	20	23.70	23.56	0.110	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.644	1.033	0.665	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.5 LTE B7 Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2535.0	21100	LTE B7	20	23.70	23.29	-0.130	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.359	1.099	0.395	
2535.0	21100	LTE B7	20	22.70	22.32	-0.080	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.265	1.091	0.289	
2535.0	21100	LTE B7	20	23.70	23.29	-0.130	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.448	1.099	0.492	
2535.0	21100	LTE B7	20	22.70	22.32	-0.010	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.345	1.091	0.376	
2535.0	21100	LTE B7	20	23.70	23.29	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.643	1.099	0.707	A29
2535.0	21100	LTE B7	20	22.70	22.32	0.100	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.486	1.091	0.530	
2535.0	21100	LTE B7	20	23.70	23.29	-0.080	0	10 mm [Right]	FCC #1	QPSK	1	50	1:1	0.127	1.099	0.140	
2535.0	21100	LTE B7	20	22.70	22.32	0.040	1	10 mm [Right]	FCC #1	QPSK	50	25	1:1	0.089	1.091	0.097	
2535.0	21100	LTE B7	20	23.70	23.29	0.090	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1	0.135	1.099	0.148	
2535.0	21100	LTE B7	20	22.70	22.32	0.020	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.105	1.091	0.115	
2535.0	21100	LTE B7	20	23.70	23.29	0.080	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.614	1.099	0.675	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.6 DTS Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2412.0	1	802.11b	15.00	14.98	0.020	10 mm [Top]	FCC #2	0.053	1	98.5	0.051	1.005	1.015	0.052	
2412.0	1	802.11b	15.00	14.98	0.050	10 mm [Front]	FCC #2	0.100	1	98.5	0.101	1.005	1.015	0.103	
2412.0	1	802.11b	15.00	14.98	-0.110	10 mm [Rear]	FCC #2	0.116	1	98.5	0.113	1.005	1.015	0.115	A30
2412.0	1	802.11b	15.00	14.98	0.130	10 mm [Left]	FCC #2	0.065	1	98.5	0.061	1.005	1.015	0.062	
2412.0	1	802.11b	15.00	14.98	0.120	10 mm [Rear]	FCC #2	0.110	1	98.5	0.106	1.005	1.015	0.108	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2412.0	1	802.11b	DSSS	15.0	0.115	2437	802.11g	OFDM	15.0	1.000	0.115	X
2412.0	1	802.11b	DSSS	15.0	0.115	2437	802.11n	OFDM	14.0	0.794	0.091	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure							Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.3.7 UNII Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5220.0	44	802.11a	14.00	13.55	-0.060	10 mm [Top]	FCC #2	0.215	6	96.1	0.209	1.109	1.041	0.241	
5220.0	44	802.11a	14.00	13.55	0.120	10 mm [Front]	FCC #2	0.208	6	96.1	0.210	1.109	1.041	0.242	
5220.0	44	802.11a	14.00	13.55	-0.110	10 mm [Rear]	FCC #2	0.266	6	96.1	0.279	1.109	1.041	0.322	A37
5220.0	44	802.11a	14.00	13.55	-0.020	10 mm [Left]	FCC #2	0.153	6	96.1	0.158	1.109	1.041	0.182	
5220.0	44	802.11a	14.00	13.55	-0.100	10 mm [Rear]	FCC #2	0.268	6	96.1	0.278	1.109	1.041	0.321	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.8 UNII Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5745.0	149	802.11a	14.00	13.98	-0.090	10 mm [Top]	FCC #2	0.186	1	96.1	0.182	1.005	1.041	0.190	
5745.0	149	802.11a	14.00	13.98	0.100	10 mm [Front]	FCC #2	0.157	1	96.1	0.160	1.005	1.041	0.167	
5745.0	149	802.11a	14.00	13.98	-0.060	10 mm [Rear]	FCC #2	0.229	1	96.1	0.229	1.005	1.041	0.239	A38
5745.0	149	802.11a	14.00	13.98	-0.120	10 mm [Left]	FCC #2	0.094	1	96.1	0.085	1.005	1.041	0.089	
5745.0	149	802.11a	14.00	13.98	-0.090	10 mm [Rear]	FCC #2	0.226	1	96.1	0.227	1.005	1.041	0.237	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.
- UNII-3 Band CH 165(5825 MHz) is not support Hotspot mode as described on operational description, so other required CHs are tested.

Table 11.3.9 Bluetooth Hotspot SAR

MEASUREMENT RESULTS

FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
2441.0	39	Bluetooth	8.35	7.65	0.060	10 mm [Top]	FCC #2	1	76.8	0.012	1.174	1.302	0.018		
2441.0	39	Bluetooth	8.35	7.65	-0.030	10 mm [Front]	FCC #2	1	76.8	0.013	1.174	1.302	0.020		
2441.0	39	Bluetooth	8.35	7.65	0.110	10 mm [Rear]	FCC #2	1	76.8	0.017	1.174	1.302	0.026	A34	
2441.0	39	Bluetooth	8.35	7.65	0.150	10 mm [Left]	FCC #2	1	76.8	0.008	1.174	1.302	0.012		
2441.0	39	Bluetooth	8.35	7.65	-0.080	10 mm [Rear]	FCC #2	1	76.8	0.016	1.174	1.302	0.024		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Body 1.6 W/kg (mW/g) averaged over 1 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

11.4 Standalone Phablet SAR Results

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required when Hotspot 1g SAR (scaled to maximum output power including tolerance) < 1.2 W/kg.

Table 11.4.1 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5320.0	64	802.11a	14.00	13.89	-0.120	0 mm [Top]	FCC #2	0.353	6	96.1	0.356	1.026	1.041	0.380	
5320.0	64	802.11a	14.00	13.89	-0.170	0 mm [Front]	FCC #2	0.568	6	96.1	0.618	1.026	1.041	0.660	
5320.0	64	802.11a	14.00	13.89	-0.020	0 mm [Rear]	FCC #2	0.638	6	96.1	0.899	1.026	1.041	0.960	A39
5320.0	64	802.11a	14.00	13.89	0.120	0 mm [Left]	FCC #2	0.342	6	96.1	0.359	1.026	1.041	0.383	
5320.0	64	802.11a	14.00	13.89	-0.020	0 mm [Rear]	FCC #2	0.675	6	96.1	0.879	1.026	1.041	0.938	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.4.2 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5500.0	100	802.11a	14.00	13.95	-0.120	0 mm [Top]	FCC #2	0.351	6	96.1	0.368	1.012	1.019	0.379	
5500.0	100	802.11a	14.00	13.95	0.120	0 mm [Front]	FCC #2	0.440	6	96.1	0.485	1.012	1.019	0.500	
5500.0	100	802.11a	14.00	13.95	-0.080	0 mm [Rear]	FCC #2	0.711	6	96.1	0.947	1.012	1.019	0.977	A40
5500.0	100	802.11a	14.00	13.95	0.090	0 mm [Left]	FCC #2	0.238	6	96.1	0.244	1.012	1.019	0.252	
5500.0	100	802.11a	14.00	13.95	-0.080	0 mm [Rear]	FCC #2	0.879	6	96.1	0.894	1.012	1.019	0.922	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.4.3 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5825.0	165	802.11a	14.00	13.99	-0.140	0 mm [Top]	FCC #2	0.285	6	96.1	0.306	1.002	1.041	0.319	
5825.0	165	802.11a	14.00	13.99	0.120	0 mm [Front]	FCC #2	0.378	6	96.1	0.424	1.002	1.041	0.442	
5825.0	165	802.11a	14.00	13.99	-0.130	0 mm [Rear]	FCC #2	0.546	6	96.1	0.670	1.002	1.041	0.699	A41
5825.0	165	802.11a	14.00	13.99	0.060	0 mm [Left]	FCC #2	0.162	6	96.1	0.163	1.002	1.041	0.170	
5825.0	165	802.11a	14.00	13.99	-0.160	0 mm [Rear]	FCC #2	0.546	6	96.1	0.668	1.002	1.041	0.696	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure								Phablet 4.0 W/kg (mW/g) averaged over 10 gram							

Note(s):

- Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.
- UNII-3 Band CH 165 (5825 MHz) is not support Hotspot mode as described on operational description of this device, so phablet SAR is tested on this CH.

11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
9. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not > 1/2 dB, the middle channel was used for testing.

WCDMA (UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 8.4.4.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required.
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. Per KDB Publication 941225 D05Av01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
6. SAR test reduction is applied using the following criteria:
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg, Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjusted SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.

12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

12.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 12.3.1 Simultaneous Transmission Scenarios

No.	Capable TX Configuration	GSM 850/1900 (Voice)	GPRS/EDGE 850/1900 (Data)	WCDMA B5/B4/B2 (Voice)	WCDMA B5/B4/B2 (Data)	LTE B12/B17/B5/B66/B4/B2/B7	WiFi 2.4GHz 802.11b/g/n	WiFi 5GHz 802.11a/n/ac	Bluetooth 2.4GHz
1	GSM 850/1900 (Voice)		No	No	No	No	Yes	Yes	Yes
2	GPRS/EDGE 850/1900 (Data)	No		No	No	No	Yes	Yes	Yes
3	WCDMA B5/B4/B2 (Voice)	No	No		No	No	Yes	Yes	Yes
4	WCDMA B5/B4/B2 (Data)	No	No	No		No	Yes	Yes	Yes
5	LTE B12/B17/B5/B66/B4/B2/B7	No	No	No	No		Yes	Yes	Yes
6	WiFi 2.4GHz 802.11b/g/n	Yes	Yes	Yes	Yes	Yes		No	No
7	WiFi 5GHz 802.11a/n/ac	Yes	Yes	Yes	Yes	Yes	No		Yes
8	Bluetooth 2.4GHz	Yes	Yes	Yes	Yes	Yes	No	Yes	

Table 12.3.2 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Phablet SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz	Yes	Yes	N/A	Yes	
2	GSM Voice + Wi-Fi 5 GHz	Yes	Yes	N/A	Yes	
3	GSM Voice + Bluetooth 2.4 GHz	Yes	Yes	N/A	Yes	
4	GSM Voice + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	N/A	Yes	
5	WCDMA + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
6	WCDMA + Wi-Fi 5 GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
7	WCDMA + Bluetooth 2.4 GHz	Yes	Yes	Yes	Yes	
8	WCDMA + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
9	LTE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
10	LTE + Wi-Fi 5 GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
11	LTE + Bluetooth 2.4 GHz	Yes	Yes	Yes	Yes	
12	LTE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
13	GPRS/EDGE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
14	GPRS/EDGE + Wi-Fi 5 GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
15	GPRS/EDGE + Bluetooth 2.4 GHz	Yes	Yes	Yes	Yes	
16	GPRS/EDGE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.

Notes:

- WiFi 2.4GHz is supported Hotspot and WiFi-Direct(GO/GC).
- WiFi 5GHz is supported Hotspot in UNII B1,B3 and WiFi-Direct(GO/GC) in UNII B1,B3.
- LTE, WCDMA, GPRS/EDGE is supported Hotspot.
- VoIP is supported in LTE, WCDMA, GSM
- Bluetooth and WiFi can not transmit simultaneously at 2.4G band.
- GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WiFi Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WiFi direct are included in the above table.

12.4 Head SAR Simultaneous Transmission Analysis

Table 12.4.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.225	0.099	0.630	0.324	0.855	0.954
		Right Touch	0.258	0.165	0.914	0.423	1.172	1.337
		Left Tilt	0.119	0.078	0.548	0.197	0.667	0.745
		Right Tilt	0.133	0.159	0.709	0.292	0.842	1.001
	GPRS 850	Left Touch	0.277	0.099	0.630	0.376	0.907	1.006
		Right Touch	0.324	0.165	0.914	0.489	1.238	1.403
		Left Tilt	0.148	0.078	0.548	0.226	0.696	0.774
		Right Tilt	0.158	0.159	0.709	0.317	0.867	1.026
	GSM 1900	Left Touch	0.223	0.099	0.630	0.322	0.853	0.952
		Right Touch	0.125	0.165	0.914	0.290	1.039	1.204
		Left Tilt	0.095	0.078	0.548	0.173	0.643	0.721
		Right Tilt	0.118	0.159	0.709	0.277	0.827	0.986
	GPRS 1900	Left Touch	0.313	0.099	0.630	0.412	0.943	1.042
		Right Touch	0.194	0.165	0.914	0.359	1.108	1.273
		Left Tilt	0.134	0.078	0.548	0.212	0.682	0.760
		Right Tilt	0.169	0.159	0.709	0.328	0.878	1.037
	WCDMA 850	Left Touch	0.439	0.099	0.630	0.538	1.069	1.168
		Right Touch	0.464	0.165	0.914	0.629	1.378	1.543
		Left Tilt	0.264	0.078	0.548	0.342	0.812	0.890
		Right Tilt	0.257	0.159	0.709	0.416	0.966	1.125
	WCDMA 1700	Left Touch	0.178	0.099	0.630	0.277	0.808	0.907
		Right Touch	0.203	0.165	0.914	0.368	1.117	1.282
		Left Tilt	0.132	0.078	0.548	0.210	0.680	0.758
		Right Tilt	0.105	0.159	0.709	0.264	0.814	0.973
	WCDMA 1900	Left Touch	0.393	0.099	0.630	0.492	1.023	1.122
		Right Touch	0.194	0.165	0.914	0.359	1.108	1.273
		Left Tilt	0.168	0.078	0.548	0.246	0.716	0.794
		Right Tilt	0.142	0.159	0.709	0.301	0.851	1.010
	LTE Band 12	Left Touch	0.253	0.099	0.630	0.352	0.883	0.982
		Right Touch	0.335	0.165	0.914	0.500	1.249	1.414
		Left Tilt	0.195	0.078	0.548	0.273	0.743	0.821
		Right Tilt	0.198	0.159	0.709	0.357	0.907	1.066
LTE Band 5	Left Touch	0.446	0.099	0.630	0.545	1.076	1.175	
	Right Touch	0.503	0.165	0.914	0.668	1.417	1.582	
	Left Tilt	0.316	0.078	0.548	0.394	0.864	0.942	
	Right Tilt	0.259	0.159	0.709	0.418	0.968	1.127	
LTE Band 66	Left Touch	0.347	0.099	0.630	0.446	0.977	1.076	
	Right Touch	0.194	0.165	0.914	0.359	1.108	1.273	
	Left Tilt	0.120	0.078	0.548	0.198	0.668	0.746	
	Right Tilt	0.149	0.159	0.709	0.308	0.858	1.017	
LTE Band 2	Left Touch	0.447	0.099	0.630	0.546	1.077	1.176	
	Right Touch	0.247	0.165	0.914	0.412	1.161	1.326	
	Left Tilt	0.147	0.078	0.548	0.225	0.695	0.773	
	Right Tilt	0.127	0.159	0.709	0.286	0.836	0.995	
LTE Band 7	Left Touch	0.242	0.099	0.630	0.341	0.872	0.971	
	Right Touch	0.179	0.165	0.914	0.344	1.093	1.258	
	Left Tilt	0.073	0.078	0.548	0.151	0.621	0.699	
	Right Tilt	0.086	0.159	0.709	0.245	0.795	0.954	

Table 12.4.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.225	0.099	0.627	0.324	0.852	0.951
		Right Touch	0.258	0.165	0.749	0.423	1.007	1.172
		Left Tilt	0.119	0.078	0.473	0.197	0.592	0.670
		Right Tilt	0.133	0.159	0.580	0.292	0.713	0.872
	GPRS 850	Left Touch	0.277	0.099	0.627	0.376	0.904	1.003
		Right Touch	0.324	0.165	0.749	0.489	1.073	1.238
		Left Tilt	0.148	0.078	0.473	0.226	0.621	0.699
		Right Tilt	0.158	0.159	0.580	0.317	0.738	0.897
	GSM 1900	Left Touch	0.223	0.099	0.627	0.322	0.850	0.949
		Right Touch	0.125	0.165	0.749	0.290	0.874	1.039
		Left Tilt	0.095	0.078	0.473	0.173	0.568	0.646
		Right Tilt	0.118	0.159	0.580	0.277	0.698	0.857
	GPRS 1900	Left Touch	0.313	0.099	0.627	0.412	0.940	1.039
		Right Touch	0.194	0.165	0.749	0.359	0.943	1.108
		Left Tilt	0.134	0.078	0.473	0.212	0.607	0.685
		Right Tilt	0.169	0.159	0.580	0.328	0.749	0.908
	WCDMA 850	Left Touch	0.439	0.099	0.627	0.538	1.066	1.165
		Right Touch	0.464	0.165	0.749	0.629	1.213	1.378
		Left Tilt	0.264	0.078	0.473	0.342	0.737	0.815
		Right Tilt	0.257	0.159	0.580	0.416	0.837	0.996
	WCDMA 1700	Left Touch	0.178	0.099	0.627	0.277	0.805	0.904
		Right Touch	0.203	0.165	0.749	0.368	0.952	1.117
		Left Tilt	0.132	0.078	0.473	0.210	0.605	0.683
		Right Tilt	0.105	0.159	0.580	0.264	0.685	0.844
	WCDMA 1900	Left Touch	0.393	0.099	0.627	0.492	1.020	1.119
		Right Touch	0.194	0.165	0.749	0.359	0.943	1.108
		Left Tilt	0.168	0.078	0.473	0.246	0.641	0.719
		Right Tilt	0.142	0.159	0.580	0.301	0.722	0.881
	LTE Band 12	Left Touch	0.253	0.099	0.627	0.352	0.880	0.979
		Right Touch	0.335	0.165	0.749	0.500	1.084	1.249
		Left Tilt	0.195	0.078	0.473	0.273	0.668	0.746
		Right Tilt	0.198	0.159	0.580	0.357	0.778	0.937
	LTE Band 5	Left Touch	0.446	0.099	0.627	0.545	1.073	1.172
		Right Touch	0.503	0.165	0.749	0.668	1.252	1.417
		Left Tilt	0.316	0.078	0.473	0.394	0.789	0.867
		Right Tilt	0.259	0.159	0.580	0.418	0.839	0.998
	LTE Band 66	Left Touch	0.347	0.099	0.627	0.446	0.974	1.073
		Right Touch	0.194	0.165	0.749	0.359	0.943	1.108
		Left Tilt	0.120	0.078	0.473	0.198	0.593	0.671
		Right Tilt	0.149	0.159	0.580	0.308	0.729	0.888
LTE Band 2	Left Touch	0.447	0.099	0.627	0.546	1.074	1.173	
	Right Touch	0.247	0.165	0.749	0.412	0.996	1.161	
	Left Tilt	0.147	0.078	0.473	0.225	0.620	0.698	
	Right Tilt	0.127	0.159	0.580	0.286	0.707	0.866	
LTE Band 7	Left Touch	0.242	0.099	0.627	0.341	0.869	0.968	
	Right Touch	0.179	0.165	0.749	0.344	0.928	1.093	
	Left Tilt	0.073	0.078	0.473	0.151	0.546	0.624	
	Right Tilt	0.086	0.159	0.580	0.245	0.666	0.825	

Table 12.4.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.225	0.099	0.634	0.324	0.859	0.958
		Right Touch	0.258	0.165	0.825	0.423	1.083	1.248
		Left Tilt	0.119	0.078	0.486	0.197	0.605	0.683
		Right Tilt	0.133	0.159	0.630	0.292	0.763	0.922
	GPRS 850	Left Touch	0.277	0.099	0.634	0.376	0.911	1.010
		Right Touch	0.324	0.165	0.825	0.489	1.149	1.314
		Left Tilt	0.148	0.078	0.486	0.226	0.634	0.712
		Right Tilt	0.158	0.159	0.630	0.317	0.788	0.947
	GSM 1900	Left Touch	0.223	0.099	0.634	0.322	0.857	0.956
		Right Touch	0.125	0.165	0.825	0.290	0.950	1.115
		Left Tilt	0.095	0.078	0.486	0.173	0.581	0.659
		Right Tilt	0.118	0.159	0.630	0.277	0.748	0.907
	GPRS 1900	Left Touch	0.313	0.099	0.634	0.412	0.947	1.046
		Right Touch	0.194	0.165	0.825	0.359	1.019	1.184
		Left Tilt	0.134	0.078	0.486	0.212	0.620	0.698
		Right Tilt	0.169	0.159	0.630	0.328	0.799	0.958
	WCDMA 850	Left Touch	0.439	0.099	0.634	0.538	1.073	1.172
		Right Touch	0.464	0.165	0.825	0.629	1.289	1.454
		Left Tilt	0.264	0.078	0.486	0.342	0.750	0.828
		Right Tilt	0.257	0.159	0.630	0.416	0.887	1.046
	WCDMA 1700	Left Touch	0.178	0.099	0.634	0.277	0.812	0.911
		Right Touch	0.203	0.165	0.825	0.368	1.028	1.193
		Left Tilt	0.132	0.078	0.486	0.210	0.618	0.696
		Right Tilt	0.105	0.159	0.630	0.264	0.735	0.894
	WCDMA 1900	Left Touch	0.393	0.099	0.634	0.492	1.027	1.126
		Right Touch	0.194	0.165	0.825	0.359	1.019	1.184
		Left Tilt	0.168	0.078	0.486	0.246	0.654	0.732
		Right Tilt	0.142	0.159	0.630	0.301	0.772	0.931
	LTE Band 12	Left Touch	0.253	0.099	0.634	0.352	0.887	0.986
		Right Touch	0.335	0.165	0.825	0.500	1.160	1.325
		Left Tilt	0.195	0.078	0.486	0.273	0.681	0.759
		Right Tilt	0.198	0.159	0.630	0.357	0.828	0.987
	LTE Band 5	Left Touch	0.446	0.099	0.634	0.545	1.080	1.179
		Right Touch	0.503	0.165	0.825	0.668	1.328	1.493
		Left Tilt	0.316	0.078	0.486	0.394	0.802	0.880
		Right Tilt	0.259	0.159	0.630	0.418	0.889	1.048
	LTE Band 66	Left Touch	0.347	0.099	0.634	0.446	0.981	1.080
		Right Touch	0.194	0.165	0.825	0.359	1.019	1.184
		Left Tilt	0.120	0.078	0.486	0.198	0.606	0.684
		Right Tilt	0.149	0.159	0.630	0.308	0.779	0.938
LTE Band 2	Left Touch	0.447	0.099	0.634	0.546	1.081	1.180	
	Right Touch	0.247	0.165	0.825	0.412	1.072	1.237	
	Left Tilt	0.147	0.078	0.486	0.225	0.633	0.711	
	Right Tilt	0.127	0.159	0.630	0.286	0.757	0.916	
LTE Band 7	Left Touch	0.242	0.099	0.634	0.341	0.876	0.975	
	Right Touch	0.179	0.165	0.825	0.344	1.004	1.169	
	Left Tilt	0.073	0.078	0.486	0.151	0.559	0.637	
	Right Tilt	0.086	0.159	0.630	0.245	0.716	0.875	

Table 12.4.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.225	0.245	0.470
		Right Touch	0.258	0.448	0.706
		Left Tilt	0.119	0.238	0.357
		Right Tilt	0.133	0.309	0.442
	GPRS 850	Left Touch	0.277	0.245	0.522
		Right Touch	0.324	0.448	0.772
		Left Tilt	0.148	0.238	0.386
		Right Tilt	0.158	0.309	0.467
	GSM 1900	Left Touch	0.223	0.245	0.468
		Right Touch	0.125	0.448	0.573
		Left Tilt	0.095	0.238	0.333
		Right Tilt	0.118	0.309	0.427
	GPRS 1900	Left Touch	0.313	0.245	0.558
		Right Touch	0.194	0.448	0.642
		Left Tilt	0.134	0.238	0.372
		Right Tilt	0.169	0.309	0.478
	WCDMA 850	Left Touch	0.439	0.245	0.684
		Right Touch	0.464	0.448	0.912
		Left Tilt	0.264	0.238	0.502
		Right Tilt	0.257	0.309	0.566
	WCDMA 1700	Left Touch	0.178	0.245	0.423
		Right Touch	0.203	0.448	0.651
		Left Tilt	0.132	0.238	0.370
		Right Tilt	0.105	0.309	0.414
	WCDMA 1900	Left Touch	0.393	0.245	0.638
		Right Touch	0.194	0.448	0.642
		Left Tilt	0.168	0.238	0.406
		Right Tilt	0.142	0.309	0.451
	LTE Band 12	Left Touch	0.253	0.245	0.498
		Right Touch	0.335	0.448	0.783
		Left Tilt	0.195	0.238	0.433
		Right Tilt	0.198	0.309	0.507
	LTE Band 5	Left Touch	0.446	0.245	0.691
		Right Touch	0.503	0.448	0.951
		Left Tilt	0.316	0.238	0.554
		Right Tilt	0.259	0.309	0.568
	LTE Band 66	Left Touch	0.347	0.245	0.592
		Right Touch	0.194	0.448	0.642
		Left Tilt	0.120	0.238	0.358
		Right Tilt	0.149	0.309	0.458
LTE Band 2	Left Touch	0.447	0.245	0.692	
	Right Touch	0.247	0.448	0.695	
	Left Tilt	0.147	0.238	0.385	
	Right Tilt	0.127	0.309	0.436	
LTE Band 7	Left Touch	0.242	0.245	0.487	
	Right Touch	0.179	0.448	0.627	
	Left Tilt	0.073	0.238	0.311	
	Right Tilt	0.086	0.309	0.395	

Table 12.4.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.225	0.630	0.855
		Right Touch	0.258	0.914	1.172
		Left Tilt	0.119	0.548	0.667
		Right Tilt	0.133	0.709	0.842
	GPRS 850	Left Touch	0.277	0.630	0.907
		Right Touch	0.324	0.914	1.238
		Left Tilt	0.148	0.548	0.696
		Right Tilt	0.158	0.709	0.867
	GSM 1900	Left Touch	0.223	0.630	0.853
		Right Touch	0.125	0.914	1.039
		Left Tilt	0.095	0.548	0.643
		Right Tilt	0.118	0.709	0.827
	GPRS 1900	Left Touch	0.313	0.630	0.943
		Right Touch	0.194	0.914	1.108
		Left Tilt	0.134	0.548	0.682
		Right Tilt	0.169	0.709	0.878
	WCDMA 850	Left Touch	0.439	0.630	1.069
		Right Touch	0.464	0.914	1.378
		Left Tilt	0.264	0.548	0.812
		Right Tilt	0.257	0.709	0.966
	WCDMA 1700	Left Touch	0.178	0.630	0.808
		Right Touch	0.203	0.914	1.117
		Left Tilt	0.132	0.548	0.680
		Right Tilt	0.105	0.709	0.814
	WCDMA 1900	Left Touch	0.393	0.630	1.023
		Right Touch	0.194	0.914	1.108
		Left Tilt	0.168	0.548	0.716
		Right Tilt	0.142	0.709	0.851
	LTE Band 12	Left Touch	0.253	0.630	0.883
		Right Touch	0.335	0.914	1.249
		Left Tilt	0.195	0.548	0.743
		Right Tilt	0.198	0.709	0.907
	LTE Band 5	Left Touch	0.446	0.630	1.076
		Right Touch	0.503	0.914	1.417
		Left Tilt	0.316	0.548	0.864
		Right Tilt	0.259	0.709	0.968
	LTE Band 66	Left Touch	0.347	0.630	0.977
		Right Touch	0.194	0.914	1.108
		Left Tilt	0.120	0.548	0.668
		Right Tilt	0.149	0.709	0.858
LTE Band 2	Left Touch	0.447	0.630	1.077	
	Right Touch	0.247	0.914	1.161	
	Left Tilt	0.147	0.548	0.695	
	Right Tilt	0.127	0.709	0.836	
LTE Band 7	Left Touch	0.242	0.630	0.872	
	Right Touch	0.179	0.914	1.093	
	Left Tilt	0.073	0.548	0.621	
	Right Tilt	0.086	0.709	0.795	

Table 12.4.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.225	0.627	0.852
		Right Touch	0.258	0.749	1.007
		Left Tilt	0.119	0.473	0.592
		Right Tilt	0.133	0.580	0.713
	GPRS 850	Left Touch	0.277	0.627	0.904
		Right Touch	0.324	0.749	1.073
		Left Tilt	0.148	0.473	0.621
		Right Tilt	0.158	0.580	0.738
	GSM 1900	Left Touch	0.223	0.627	0.850
		Right Touch	0.125	0.749	0.874
		Left Tilt	0.095	0.473	0.568
		Right Tilt	0.118	0.580	0.698
	GPRS 1900	Left Touch	0.313	0.627	0.940
		Right Touch	0.194	0.749	0.943
		Left Tilt	0.134	0.473	0.607
		Right Tilt	0.169	0.580	0.749
	WCDMA 850	Left Touch	0.439	0.627	1.066
		Right Touch	0.464	0.749	1.213
		Left Tilt	0.264	0.473	0.737
		Right Tilt	0.257	0.580	0.837
	WCDMA 1700	Left Touch	0.178	0.627	0.805
		Right Touch	0.203	0.749	0.952
		Left Tilt	0.132	0.473	0.605
		Right Tilt	0.105	0.580	0.685
	WCDMA 1900	Left Touch	0.393	0.627	1.020
		Right Touch	0.194	0.749	0.943
		Left Tilt	0.168	0.473	0.641
		Right Tilt	0.142	0.580	0.722
	LTE Band 12	Left Touch	0.253	0.627	0.880
		Right Touch	0.335	0.749	1.084
		Left Tilt	0.195	0.473	0.668
		Right Tilt	0.198	0.580	0.778
	LTE Band 5	Left Touch	0.446	0.627	1.073
		Right Touch	0.503	0.749	1.252
		Left Tilt	0.316	0.473	0.789
		Right Tilt	0.259	0.580	0.839
	LTE Band 66	Left Touch	0.347	0.627	0.974
		Right Touch	0.194	0.749	0.943
		Left Tilt	0.120	0.473	0.593
		Right Tilt	0.149	0.580	0.729
LTE Band 2	Left Touch	0.447	0.627	1.074	
	Right Touch	0.247	0.749	0.996	
	Left Tilt	0.147	0.473	0.620	
	Right Tilt	0.127	0.580	0.707	
LTE Band 7	Left Touch	0.242	0.627	0.869	
	Right Touch	0.179	0.749	0.928	
	Left Tilt	0.073	0.473	0.546	
	Right Tilt	0.086	0.580	0.666	

Table 12.4.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.225	0.634	0.859
		Right Touch	0.258	0.825	1.083
		Left Tilt	0.119	0.486	0.605
		Right Tilt	0.133	0.630	0.763
	GPRS 850	Left Touch	0.277	0.634	0.911
		Right Touch	0.324	0.825	1.149
		Left Tilt	0.148	0.486	0.634
		Right Tilt	0.158	0.630	0.788
	GSM 1900	Left Touch	0.223	0.634	0.857
		Right Touch	0.125	0.825	0.950
		Left Tilt	0.095	0.486	0.581
		Right Tilt	0.118	0.630	0.748
	GPRS 1900	Left Touch	0.313	0.634	0.947
		Right Touch	0.194	0.825	1.019
		Left Tilt	0.134	0.486	0.620
		Right Tilt	0.169	0.630	0.799
	WCDMA 850	Left Touch	0.439	0.634	1.073
		Right Touch	0.464	0.825	1.289
		Left Tilt	0.264	0.486	0.750
		Right Tilt	0.257	0.630	0.887
	WCDMA 1700	Left Touch	0.178	0.634	0.812
		Right Touch	0.203	0.825	1.028
		Left Tilt	0.132	0.486	0.618
		Right Tilt	0.105	0.630	0.735
	WCDMA 1900	Left Touch	0.393	0.634	1.027
		Right Touch	0.194	0.825	1.019
		Left Tilt	0.168	0.486	0.654
		Right Tilt	0.142	0.630	0.772
	LTE Band 12	Left Touch	0.253	0.634	0.887
		Right Touch	0.335	0.825	1.160
		Left Tilt	0.195	0.486	0.681
		Right Tilt	0.198	0.630	0.828
	LTE Band 5	Left Touch	0.446	0.634	1.080
		Right Touch	0.503	0.825	1.328
		Left Tilt	0.316	0.486	0.802
		Right Tilt	0.259	0.630	0.889
	LTE Band 66	Left Touch	0.347	0.634	0.981
		Right Touch	0.194	0.825	1.019
		Left Tilt	0.120	0.486	0.606
		Right Tilt	0.149	0.630	0.779
LTE Band 2	Left Touch	0.447	0.634	1.081	
	Right Touch	0.247	0.825	1.072	
	Left Tilt	0.147	0.486	0.633	
	Right Tilt	0.127	0.630	0.757	
LTE Band 7	Left Touch	0.242	0.634	0.876	
	Right Touch	0.179	0.825	1.004	
	Left Tilt	0.073	0.486	0.559	
	Right Tilt	0.086	0.630	0.716	

Table 12.4.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.225	0.099	0.324
		Right Touch	0.258	0.165	0.423
		Left Tilt	0.119	0.078	0.197
		Right Tilt	0.133	0.159	0.292
	GPRS 850	Left Touch	0.277	0.099	0.376
		Right Touch	0.324	0.165	0.489
		Left Tilt	0.148	0.078	0.226
		Right Tilt	0.158	0.159	0.317
	GSM 1900	Left Touch	0.223	0.099	0.322
		Right Touch	0.125	0.165	0.290
		Left Tilt	0.095	0.078	0.173
		Right Tilt	0.118	0.159	0.277
	GPRS 1900	Left Touch	0.313	0.099	0.412
		Right Touch	0.194	0.165	0.359
		Left Tilt	0.134	0.078	0.212
		Right Tilt	0.169	0.159	0.328
	WCDMA 850	Left Touch	0.439	0.099	0.538
		Right Touch	0.464	0.165	0.629
		Left Tilt	0.264	0.078	0.342
		Right Tilt	0.257	0.159	0.416
	WCDMA 1700	Left Touch	0.178	0.099	0.277
		Right Touch	0.203	0.165	0.368
		Left Tilt	0.132	0.078	0.210
		Right Tilt	0.105	0.159	0.264
	WCDMA 1900	Left Touch	0.393	0.099	0.492
		Right Touch	0.194	0.165	0.359
		Left Tilt	0.168	0.078	0.246
		Right Tilt	0.142	0.159	0.301
	LTE Band 12	Left Touch	0.253	0.099	0.352
		Right Touch	0.335	0.165	0.500
		Left Tilt	0.195	0.078	0.273
		Right Tilt	0.198	0.159	0.357
	LTE Band 5	Left Touch	0.446	0.099	0.545
		Right Touch	0.503	0.165	0.668
		Left Tilt	0.316	0.078	0.394
		Right Tilt	0.259	0.159	0.418
	LTE Band 66	Left Touch	0.347	0.099	0.446
		Right Touch	0.194	0.165	0.359
		Left Tilt	0.120	0.078	0.198
		Right Tilt	0.149	0.159	0.308
	LTE Band 2	Left Touch	0.447	0.099	0.546
		Right Touch	0.247	0.165	0.412
		Left Tilt	0.147	0.078	0.225
		Right Tilt	0.127	0.159	0.286
LTE Band 7	Left Touch	0.242	0.099	0.341	
	Right Touch	0.179	0.165	0.344	
	Left Tilt	0.073	0.078	0.151	
	Right Tilt	0.086	0.159	0.245	

Table 12.4.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	5.3G W-LAN	Left Touch	0.099	0.630	0.729
		Right Touch	0.165	0.914	1.079
		Left Tilt	0.078	0.548	0.626
		Right Tilt	0.159	0.709	0.868
	5.6G W-LAN	Left Touch	0.099	0.627	0.726
		Right Touch	0.165	0.749	0.914
		Left Tilt	0.078	0.473	0.551
		Right Tilt	0.159	0.580	0.739
	5.8G W-LAN	Left Touch	0.099	0.634	0.733
		Right Touch	0.165	0.825	0.990
		Left Tilt	0.078	0.486	0.564
		Right Tilt	0.159	0.630	0.789

12.5 Body-Worn Simultaneous Transmission Analysis

Table 12.5.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.327	0.020	0.210	0.347	0.537	0.557
		Rear	0.444	0.026	0.329	0.470	0.773	0.799
	GPRS 850	Front	0.400	0.020	0.210	0.420	0.610	0.630
		Rear	0.550	0.026	0.329	0.576	0.879	0.905
	GSM 1900	Front	0.290	0.020	0.210	0.310	0.500	0.520
		Rear	0.293	0.026	0.329	0.319	0.622	0.648
	GPRS 1900	Front	0.417	0.020	0.210	0.437	0.627	0.647
		Rear	0.451	0.026	0.329	0.477	0.780	0.806
	WCDMA 850	Front	0.628	0.020	0.210	0.648	0.838	0.858
		Rear	0.737	0.026	0.329	0.763	1.066	1.092
	WCDMA 1700	Front	0.416	0.020	0.210	0.436	0.626	0.646
		Rear	0.519	0.026	0.329	0.545	0.848	0.874
	WCDMA 1900	Front	0.634	0.020	0.210	0.654	0.844	0.864
		Rear	0.583	0.026	0.329	0.609	0.912	0.938
	LTE Band 12	Front	0.367	0.020	0.210	0.387	0.577	0.597
		Rear	0.506	0.026	0.329	0.532	0.835	0.861
	LTE Band 5	Front	0.527	0.020	0.210	0.547	0.737	0.757
		Rear	0.715	0.026	0.329	0.741	1.044	1.070
	LTE Band 66	Front	0.509	0.020	0.210	0.529	0.719	0.739
		Rear	0.657	0.026	0.329	0.683	0.986	1.012
LTE Band 2	Front	0.703	0.020	0.210	0.723	0.913	0.933	
	Rear	0.653	0.026	0.329	0.679	0.982	1.008	
LTE Band 7	Front	0.492	0.020	0.210	0.512	0.702	0.722	
	Rear	0.707	0.026	0.329	0.733	1.036	1.062	

Table 12.5.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.327	0.020	0.179	0.347	0.506	0.526
		Rear	0.444	0.026	0.335	0.470	0.779	0.805
	GPRS 850	Front	0.400	0.020	0.179	0.420	0.579	0.599
		Rear	0.550	0.026	0.335	0.576	0.885	0.911
	GSM 1900	Front	0.290	0.020	0.179	0.310	0.469	0.489
		Rear	0.293	0.026	0.335	0.319	0.628	0.654
	GPRS 1900	Front	0.417	0.020	0.179	0.437	0.596	0.616
		Rear	0.451	0.026	0.335	0.477	0.786	0.812
	WCDMA 850	Front	0.628	0.020	0.179	0.648	0.807	0.827
		Rear	0.737	0.026	0.335	0.763	1.072	1.098
	WCDMA 1700	Front	0.416	0.020	0.179	0.436	0.595	0.615
		Rear	0.519	0.026	0.335	0.545	0.854	0.880
	WCDMA 1900	Front	0.634	0.020	0.179	0.654	0.813	0.833
		Rear	0.583	0.026	0.335	0.609	0.918	0.944
	LTE Band 12	Front	0.367	0.020	0.179	0.387	0.546	0.566
		Rear	0.506	0.026	0.335	0.532	0.841	0.867
	LTE Band 5	Front	0.527	0.020	0.179	0.547	0.706	0.726
		Rear	0.715	0.026	0.335	0.741	1.050	1.076
	LTE Band 66	Front	0.509	0.020	0.179	0.529	0.688	0.708
		Rear	0.657	0.026	0.335	0.683	0.992	1.018
LTE Band 2	Front	0.703	0.020	0.179	0.723	0.882	0.902	
	Rear	0.653	0.026	0.335	0.679	0.988	1.014	
LTE Band 7	Front	0.492	0.020	0.179	0.512	0.671	0.691	
	Rear	0.707	0.026	0.335	0.733	1.042	1.068	

Table 12.5.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.327	0.020	0.185	0.347	0.512	0.532
		Rear	0.444	0.026	0.259	0.470	0.703	0.729
	GPRS 850	Front	0.400	0.020	0.185	0.420	0.585	0.605
		Rear	0.550	0.026	0.259	0.576	0.809	0.835
	GSM 1900	Front	0.290	0.020	0.185	0.310	0.475	0.495
		Rear	0.293	0.026	0.259	0.319	0.552	0.578
	GPRS 1900	Front	0.417	0.020	0.185	0.437	0.602	0.622
		Rear	0.451	0.026	0.259	0.477	0.710	0.736
	WCDMA 850	Front	0.628	0.020	0.185	0.648	0.813	0.833
		Rear	0.737	0.026	0.259	0.763	0.996	1.022
	WCDMA 1700	Front	0.416	0.020	0.185	0.436	0.601	0.621
		Rear	0.519	0.026	0.259	0.545	0.778	0.804
	WCDMA 1900	Front	0.634	0.020	0.185	0.654	0.819	0.839
		Rear	0.583	0.026	0.259	0.609	0.842	0.868
	LTE Band 12	Front	0.367	0.020	0.185	0.387	0.552	0.572
		Rear	0.506	0.026	0.259	0.532	0.765	0.791
	LTE Band 5	Front	0.527	0.020	0.185	0.547	0.712	0.732
		Rear	0.715	0.026	0.259	0.741	0.974	1.000
	LTE Band 66	Front	0.509	0.020	0.185	0.529	0.694	0.714
		Rear	0.657	0.026	0.259	0.683	0.916	0.942
LTE Band 2	Front	0.703	0.020	0.185	0.723	0.888	0.908	
	Rear	0.653	0.026	0.259	0.679	0.912	0.938	
LTE Band 7	Front	0.492	0.020	0.185	0.512	0.677	0.697	
	Rear	0.707	0.026	0.259	0.733	0.966	0.992	

Table 12.5.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.327	0.103	0.430
		Rear	0.444	0.115	0.559
	GPRS 850	Front	0.400	0.103	0.503
		Rear	0.550	0.115	0.665
	GSM 1900	Front	0.290	0.103	0.393
		Rear	0.293	0.115	0.408
	GPRS 1900	Front	0.417	0.103	0.520
		Rear	0.451	0.115	0.566
	WCDMA 850	Front	0.628	0.103	0.731
		Rear	0.737	0.115	0.852
	WCDMA 1700	Front	0.416	0.103	0.519
		Rear	0.519	0.115	0.634
	WCDMA 1900	Front	0.634	0.103	0.737
		Rear	0.583	0.115	0.698
	LTE Band 12	Front	0.367	0.103	0.470
		Rear	0.506	0.115	0.621
	LTE Band 5	Front	0.527	0.103	0.630
		Rear	0.715	0.115	0.830
	LTE Band 66	Front	0.509	0.103	0.612
		Rear	0.657	0.115	0.772
LTE Band 2	Front	0.703	0.103	0.806	
	Rear	0.653	0.115	0.768	
LTE Band 7	Front	0.492	0.103	0.595	
	Rear	0.707	0.115	0.822	

Table 12.5.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.327	0.210	0.537
		Rear	0.444	0.329	0.773
	GPRS 850	Front	0.400	0.210	0.610
		Rear	0.550	0.329	0.879
	GSM 1900	Front	0.290	0.210	0.500
		Rear	0.293	0.329	0.622
	GPRS 1900	Front	0.417	0.210	0.627
		Rear	0.451	0.329	0.780
	WCDMA 850	Front	0.628	0.210	0.838
		Rear	0.737	0.329	1.066
	WCDMA 1700	Front	0.416	0.210	0.626
		Rear	0.519	0.329	0.848
	WCDMA 1900	Front	0.634	0.210	0.844
		Rear	0.583	0.329	0.912
	LTE Band 12	Front	0.367	0.210	0.577
		Rear	0.506	0.329	0.835
	LTE Band 5	Front	0.527	0.210	0.737
		Rear	0.715	0.329	1.044
	LTE Band 66	Front	0.509	0.210	0.719
		Rear	0.657	0.329	0.986
LTE Band 2	Front	0.703	0.210	0.913	
	Rear	0.653	0.329	0.982	
LTE Band 7	Front	0.492	0.210	0.702	
	Rear	0.707	0.329	1.036	

Table 12.5.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.327	0.179	0.506
		Rear	0.444	0.335	0.779
	GPRS 850	Front	0.400	0.179	0.579
		Rear	0.550	0.335	0.885
	GSM 1900	Front	0.290	0.179	0.469
		Rear	0.293	0.335	0.628
	GPRS 1900	Front	0.417	0.179	0.596
		Rear	0.451	0.335	0.786
	WCDMA 850	Front	0.628	0.179	0.807
		Rear	0.737	0.335	1.072
	WCDMA 1700	Front	0.416	0.179	0.595
		Rear	0.519	0.335	0.854
	WCDMA 1900	Front	0.634	0.179	0.813
		Rear	0.583	0.335	0.918
	LTE Band 12	Front	0.367	0.179	0.546
		Rear	0.506	0.335	0.841
	LTE Band 5	Front	0.527	0.179	0.706
		Rear	0.715	0.335	1.050
	LTE Band 66	Front	0.509	0.179	0.688
		Rear	0.657	0.335	0.992
LTE Band 2	Front	0.703	0.179	0.882	
	Rear	0.653	0.335	0.988	
LTE Band 7	Front	0.492	0.179	0.671	
	Rear	0.707	0.335	1.042	

Table 12.5.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.327	0.185	0.512
		Rear	0.444	0.259	0.703
	GPRS 850	Front	0.400	0.185	0.585
		Rear	0.550	0.259	0.809
	GSM 1900	Front	0.290	0.185	0.475
		Rear	0.293	0.259	0.552
	GPRS 1900	Front	0.417	0.185	0.602
		Rear	0.451	0.259	0.710
	WCDMA 850	Front	0.628	0.185	0.813
		Rear	0.737	0.259	0.996
	WCDMA 1700	Front	0.416	0.185	0.601
		Rear	0.519	0.259	0.778
	WCDMA 1900	Front	0.634	0.185	0.819
		Rear	0.583	0.259	0.842
	LTE Band 12	Front	0.367	0.185	0.552
		Rear	0.506	0.259	0.765
	LTE Band 5	Front	0.527	0.185	0.712
		Rear	0.715	0.259	0.974
	LTE Band 66	Front	0.509	0.185	0.694
		Rear	0.657	0.259	0.916
LTE Band 2	Front	0.703	0.185	0.888	
	Rear	0.653	0.259	0.912	
LTE Band 7	Front	0.492	0.185	0.677	
	Rear	0.707	0.259	0.966	

Table 12.5.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.327	0.020	0.347
		Rear	0.444	0.026	0.470
	GPRS 850	Front	0.400	0.020	0.420
		Rear	0.550	0.026	0.576
	GSM 1900	Front	0.290	0.020	0.310
		Rear	0.293	0.026	0.319
	GPRS 1900	Front	0.417	0.020	0.437
		Rear	0.451	0.026	0.477
	WCDMA 850	Front	0.628	0.020	0.648
		Rear	0.737	0.026	0.763
	WCDMA 1700	Front	0.416	0.020	0.436
		Rear	0.519	0.026	0.545
	WCDMA 1900	Front	0.634	0.020	0.654
		Rear	0.583	0.026	0.609
	LTE Band 12	Front	0.367	0.020	0.387
		Rear	0.506	0.026	0.532
	LTE Band 5	Front	0.527	0.020	0.547
		Rear	0.715	0.026	0.741
	LTE Band 66	Front	0.509	0.020	0.529
		Rear	0.657	0.026	0.683
LTE Band 2	Front	0.703	0.020	0.723	
	Rear	0.653	0.026	0.679	
LTE Band 7	Front	0.492	0.020	0.512	
	Rear	0.707	0.026	0.733	

Table 12.5.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN	Front	0.020	0.210	0.230
		Rear	0.026	0.329	0.355
	5.6G W-LAN	Front	0.020	0.179	0.199
		Rear	0.026	0.335	0.361
	5.8G W-LAN	Front	0.020	0.185	0.205
		Rear	0.026	0.259	0.285

12.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR ("--").

Table 12.6.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.2G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.018	0.241	0.018	0.241	0.259
		Bottom	0.185	-	-	0.185	0.185	0.185
		Front	0.400	0.020	0.242	0.420	0.642	0.662
		Rear	0.550	0.026	0.322	0.576	0.872	0.898
		Right	0.598	-	-	0.598	0.598	0.598
		Left	0.322	0.012	0.182	0.334	0.504	0.516
	GPRS 1900	Top	-	0.018	0.241	0.018	0.241	0.259
		Bottom	0.336	-	-	0.336	0.336	0.336
		Front	0.417	0.020	0.242	0.437	0.659	0.679
		Rear	0.451	0.026	0.322	0.477	0.773	0.799
		Right	-	-	-	-	-	-
		Left	0.392	0.012	0.182	0.404	0.574	0.586
	WCDMA 850	Top	-	0.018	0.241	0.018	0.241	0.259
		Bottom	0.253	-	-	0.253	0.253	0.253
		Front	0.628	0.020	0.242	0.648	0.870	0.890
		Rear	0.737	0.026	0.322	0.763	1.059	1.085
		Right	0.795	-	-	0.795	0.795	0.795
		Left	0.504	0.012	0.182	0.516	0.686	0.698
	WCDMA 1700	Top	-	0.018	0.241	0.018	0.241	0.259
		Bottom	0.312	-	-	0.312	0.312	0.312
		Front	0.416	0.020	0.242	0.436	0.658	0.678
		Rear	0.519	0.026	0.322	0.545	0.841	0.867
		Right	-	-	-	-	-	-
		Left	0.453	0.012	0.182	0.465	0.635	0.647
	WCDMA 1900	Top	-	0.018	0.241	0.018	0.241	0.259
		Bottom	0.428	-	-	0.428	0.428	0.428
		Front	0.634	0.020	0.242	0.654	0.876	0.896
		Rear	0.583	0.026	0.322	0.609	0.905	0.931
		Right	-	-	-	-	-	-
		Left	0.509	0.012	0.182	0.521	0.691	0.703
	LTE Band 12	Top	-	0.018	0.241	0.018	0.241	0.259
		Bottom	0.152	-	-	0.152	0.152	0.152
		Front	0.367	0.020	0.242	0.387	0.609	0.629
		Rear	0.506	0.026	0.322	0.532	0.828	0.854
		Right	0.458	-	-	0.458	0.458	0.458
		Left	0.292	0.012	0.182	0.304	0.474	0.486
	LTE Band 5	Top	-	0.018	0.241	0.018	0.241	0.259
		Bottom	0.286	-	-	0.286	0.286	0.286
		Front	0.527	0.020	0.242	0.547	0.769	0.789
		Rear	0.715	0.026	0.322	0.741	1.037	1.063
		Right	0.693	-	-	0.693	0.693	0.693
		Left	0.372	0.012	0.182	0.384	0.554	0.566
	LTE Band 66	Top	-	0.018	0.241	0.018	0.241	0.259
		Bottom	0.357	-	-	0.357	0.357	0.357
		Front	0.509	0.020	0.242	0.529	0.751	0.771
		Rear	0.657	0.026	0.322	0.683	0.979	1.005
		Right	-	-	-	-	-	-
		Left	0.572	0.012	0.182	0.584	0.754	0.766
LTE Band 2	Top	-	0.018	0.241	0.018	0.241	0.259	
	Bottom	0.580	-	-	0.580	0.580	0.580	
	Front	0.703	0.020	0.242	0.723	0.945	0.965	
	Rear	0.653	0.026	0.322	0.679	0.975	1.001	
	Right	-	-	-	-	-	-	
	Left	0.634	0.012	0.182	0.646	0.816	0.828	
LTE Band 7	Top	-	0.018	0.241	0.018	0.241	0.259	
	Bottom	0.395	-	-	0.395	0.395	0.395	
	Front	0.492	0.020	0.242	0.512	0.734	0.754	
	Rear	0.707	0.026	0.322	0.733	1.029	1.055	
	Right	0.140	-	-	0.140	0.140	0.140	
	Left	0.148	0.012	0.182	0.160	0.330	0.342	

Table 12.6.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Hotspot SAR	GPRS 850	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.185	-	-	0.185	0.185	0.185
		Front	0.400	0.020	0.167	0.420	0.567	0.587
		Rear	0.550	0.026	0.239	0.576	0.789	0.815
		Right	0.598	-	-	0.598	0.598	0.598
		Left	0.322	0.012	0.089	0.334	0.411	0.423
	GPRS 1900	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.336	-	-	0.336	0.336	0.336
		Front	0.417	0.020	0.167	0.437	0.584	0.604
		Rear	0.451	0.026	0.239	0.477	0.690	0.716
		Right	-	-	-	-	-	-
		Left	0.392	0.012	0.089	0.404	0.481	0.493
	WCDMA 850	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.253	-	-	0.253	0.253	0.253
		Front	0.628	0.020	0.167	0.648	0.795	0.815
		Rear	0.737	0.026	0.239	0.763	0.976	1.002
		Right	0.795	-	-	0.795	0.795	0.795
		Left	0.504	0.012	0.089	0.516	0.593	0.605
	WCDMA 1700	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.312	-	-	0.312	0.312	0.312
		Front	0.416	0.020	0.167	0.436	0.583	0.603
		Rear	0.519	0.026	0.239	0.545	0.758	0.784
		Right	-	-	-	-	-	-
		Left	0.453	0.012	0.089	0.465	0.542	0.554
	WCDMA 1900	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.428	-	-	0.428	0.428	0.428
		Front	0.634	0.020	0.167	0.654	0.801	0.821
		Rear	0.583	0.026	0.239	0.609	0.822	0.848
		Right	-	-	-	-	-	-
		Left	0.509	0.012	0.089	0.521	0.598	0.610
	LTE Band 12	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.152	-	-	0.152	0.152	0.152
		Front	0.367	0.020	0.167	0.387	0.534	0.554
		Rear	0.506	0.026	0.239	0.532	0.745	0.771
		Right	0.458	-	-	0.458	0.458	0.458
		Left	0.292	0.012	0.089	0.304	0.381	0.393
	LTE Band 5	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.286	-	-	0.286	0.286	0.286
		Front	0.527	0.020	0.167	0.547	0.694	0.714
		Rear	0.715	0.026	0.239	0.741	0.954	0.980
		Right	0.693	-	-	0.693	0.693	0.693
		Left	0.372	0.012	0.089	0.384	0.461	0.473
	LTE Band 66	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.357	-	-	0.357	0.357	0.357
		Front	0.509	0.020	0.167	0.529	0.676	0.696
		Rear	0.657	0.026	0.239	0.683	0.896	0.922
		Right	-	-	-	-	-	-
		Left	0.572	0.012	0.089	0.584	0.661	0.673
	LTE Band 2	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.580	-	-	0.580	0.580	0.580
		Front	0.703	0.020	0.167	0.723	0.870	0.890
		Rear	0.653	0.026	0.239	0.679	0.892	0.918
		Right	-	-	-	-	-	-
		Left	0.634	0.012	0.089	0.646	0.723	0.735
	LTE Band 7	Top	-	0.018	0.190	0.018	0.190	0.208
		Bottom	0.395	-	-	0.395	0.395	0.395
		Front	0.492	0.020	0.167	0.512	0.659	0.679
		Rear	0.707	0.026	0.239	0.733	0.946	0.972
		Right	0.140	-	-	0.140	0.140	0.140
		Left	0.148	0.012	0.089	0.160	0.237	0.249

Table 12.6.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.052	0.052
		Bottom	0.185	-	0.185
		Front	0.400	0.103	0.503
		Rear	0.550	0.115	0.665
		Right	0.598	-	0.598
		Left	0.322	0.062	0.384
	GPRS 1900	Top	-	0.052	0.052
		Bottom	0.336	-	0.336
		Front	0.417	0.103	0.520
		Rear	0.451	0.115	0.566
		Right	-	-	-
		Left	0.392	0.062	0.454
	WCDMA 850	Top	-	0.052	0.052
		Bottom	0.253	-	0.253
		Front	0.628	0.103	0.731
		Rear	0.737	0.115	0.852
		Right	0.795	-	0.795
		Left	0.504	0.062	0.566
	WCDMA 1700	Top	-	0.052	0.052
		Bottom	0.312	-	0.312
		Front	0.416	0.103	0.519
		Rear	0.519	0.115	0.634
		Right	-	-	-
		Left	0.453	0.062	0.515
	WCDMA 1900	Top	-	0.052	0.052
		Bottom	0.428	-	0.428
		Front	0.634	0.103	0.737
		Rear	0.583	0.115	0.698
		Right	-	-	-
		Left	0.509	0.062	0.571
	LTE Band 12	Top	-	0.052	0.052
		Bottom	0.152	-	0.152
		Front	0.367	0.103	0.470
		Rear	0.506	0.115	0.621
		Right	0.458	-	0.458
		Left	0.292	0.062	0.354
	LTE Band 5	Top	-	0.052	0.052
		Bottom	0.286	-	0.286
		Front	0.527	0.103	0.630
		Rear	0.715	0.115	0.830
		Right	0.693	-	0.693
		Left	0.372	0.062	0.434
	LTE Band 66	Top	-	0.052	0.052
		Bottom	0.357	-	0.357
		Front	0.509	0.103	0.612
		Rear	0.657	0.115	0.772
		Right	-	-	-
		Left	0.572	0.062	0.634
	LTE Band 2	Top	-	0.052	0.052
		Bottom	0.580	-	0.580
Front		0.703	0.103	0.806	
Rear		0.653	0.115	0.768	
Right		-	-	-	
Left		0.634	0.062	0.696	
LTE Band 7	Top	-	0.052	0.052	
	Bottom	0.395	-	0.395	
	Front	0.492	0.103	0.595	
	Rear	0.707	0.115	0.822	
	Right	0.140	-	0.140	
	Left	0.148	0.062	0.210	

Table 12.6.4 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.241	0.241
		Bottom	0.185	-	0.185
		Front	0.400	0.242	0.642
		Rear	0.550	0.322	0.872
		Right	0.598	-	0.598
		Left	0.322	0.182	0.504
	GPRS 1900	Top	-	0.241	0.241
		Bottom	0.336	-	0.336
		Front	0.417	0.242	0.659
		Rear	0.451	0.322	0.773
		Right	-	-	-
		Left	0.392	0.182	0.574
	WCDMA 850	Top	-	0.241	0.241
		Bottom	0.253	-	0.253
		Front	0.628	0.242	0.870
		Rear	0.737	0.322	1.059
		Right	0.795	-	0.795
		Left	0.504	0.182	0.686
	WCDMA 1700	Top	-	0.241	0.241
		Bottom	0.312	-	0.312
		Front	0.416	0.242	0.658
		Rear	0.519	0.322	0.841
		Right	-	-	-
		Left	0.453	0.182	0.635
	WCDMA 1900	Top	-	0.241	0.241
		Bottom	0.428	-	0.428
		Front	0.634	0.242	0.876
		Rear	0.583	0.322	0.905
		Right	-	-	-
		Left	0.509	0.182	0.691
	LTE Band 12	Top	-	0.241	0.241
		Bottom	0.152	-	0.152
		Front	0.367	0.242	0.609
		Rear	0.506	0.322	0.828
		Right	0.458	-	0.458
		Left	0.292	0.182	0.474
	LTE Band 5	Top	-	0.241	0.241
		Bottom	0.286	-	0.286
		Front	0.527	0.242	0.769
		Rear	0.715	0.322	1.037
		Right	0.693	-	0.693
		Left	0.372	0.182	0.554
	LTE Band 66	Top	-	0.241	0.241
		Bottom	0.357	-	0.357
		Front	0.509	0.242	0.751
		Rear	0.657	0.322	0.979
		Right	-	-	-
		Left	0.572	0.182	0.754
	LTE Band 2	Top	-	0.241	0.241
		Bottom	0.580	-	0.580
Front		0.703	0.242	0.945	
Rear		0.653	0.322	0.975	
Right		-	-	-	
Left		0.634	0.182	0.816	
LTE Band 7	Top	-	0.241	0.241	
	Bottom	0.395	-	0.395	
	Front	0.492	0.242	0.734	
	Rear	0.707	0.322	1.029	
	Right	0.140	-	0.140	
	Left	0.148	0.182	0.330	

Table 12.6.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.190	0.190
		Bottom	0.185	-	0.185
		Front	0.400	0.167	0.567
		Rear	0.550	0.239	0.789
		Right	0.598	-	0.598
		Left	0.322	0.089	0.411
	GPRS 1900	Top	-	0.190	0.190
		Bottom	0.336	-	0.336
		Front	0.417	0.167	0.584
		Rear	0.451	0.239	0.690
		Right	-	-	-
		Left	0.392	0.089	0.481
	WCDMA 850	Top	-	0.190	0.190
		Bottom	0.253	-	0.253
		Front	0.628	0.167	0.795
		Rear	0.737	0.239	0.976
		Right	0.795	-	0.795
		Left	0.504	0.089	0.593
	WCDMA 1700	Top	-	0.190	0.190
		Bottom	0.312	-	0.312
		Front	0.416	0.167	0.583
		Rear	0.519	0.239	0.758
		Right	-	-	-
		Left	0.453	0.089	0.542
	WCDMA 1900	Top	-	0.190	0.190
		Bottom	0.428	-	0.428
		Front	0.634	0.167	0.801
		Rear	0.583	0.239	0.822
		Right	-	-	-
		Left	0.509	0.089	0.598
	LTE Band 12	Top	-	0.190	0.190
		Bottom	0.152	-	0.152
		Front	0.367	0.167	0.534
		Rear	0.506	0.239	0.745
		Right	0.458	-	0.458
		Left	0.292	0.089	0.381
	LTE Band 5	Top	-	0.190	0.190
		Bottom	0.286	-	0.286
		Front	0.527	0.167	0.694
		Rear	0.715	0.239	0.954
		Right	0.693	-	0.693
		Left	0.372	0.089	0.461
	LTE Band 66	Top	-	0.190	0.190
		Bottom	0.357	-	0.357
		Front	0.509	0.167	0.676
		Rear	0.657	0.239	0.896
		Right	-	-	-
		Left	0.572	0.089	0.661
LTE Band 2	Top	-	0.190	0.190	
	Bottom	0.580	-	0.580	
	Front	0.703	0.167	0.870	
	Rear	0.653	0.239	0.892	
	Right	-	-	-	
	Left	0.634	0.089	0.723	
LTE Band 7	Top	-	0.190	0.190	
	Bottom	0.395	-	0.395	
	Front	0.492	0.167	0.659	
	Rear	0.707	0.239	0.946	
	Right	0.140	-	0.140	
	Left	0.148	0.089	0.237	

Table 12.6.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.018	0.018
		Bottom	0.185	-	0.185
		Front	0.400	0.020	0.420
		Rear	0.550	0.026	0.576
		Right	0.598	-	0.598
		Left	0.322	0.012	0.334
	GPRS 1900	Top	-	0.018	0.018
		Bottom	0.336	-	0.336
		Front	0.417	0.020	0.437
		Rear	0.451	0.026	0.477
		Right	-	-	-
		Left	0.392	0.012	0.404
	WCDMA 850	Top	-	0.018	0.018
		Bottom	0.253	-	0.253
		Front	0.628	0.020	0.648
		Rear	0.737	0.026	0.763
		Right	0.795	-	0.795
		Left	0.504	0.012	0.516
	WCDMA 1700	Top	-	0.018	0.018
		Bottom	0.312	-	0.312
		Front	0.416	0.020	0.436
		Rear	0.519	0.026	0.545
		Right	-	-	-
		Left	0.453	0.012	0.465
	WCDMA 1900	Top	-	0.018	0.018
		Bottom	0.428	-	0.428
		Front	0.634	0.020	0.654
		Rear	0.583	0.026	0.609
		Right	-	-	-
		Left	0.509	0.012	0.521
	LTE Band 12	Top	-	0.018	0.018
		Bottom	0.152	-	0.152
		Front	0.367	0.020	0.387
		Rear	0.506	0.026	0.532
		Right	0.458	-	0.458
		Left	0.292	0.012	0.304
	LTE Band 5	Top	-	0.018	0.018
		Bottom	0.286	-	0.286
		Front	0.527	0.020	0.547
		Rear	0.715	0.026	0.741
		Right	0.693	-	0.693
		Left	0.372	0.012	0.384
	LTE Band 66	Top	-	0.018	0.018
		Bottom	0.357	-	0.357
		Front	0.509	0.020	0.529
		Rear	0.657	0.026	0.683
		Right	-	-	-
		Left	0.572	0.012	0.584
	LTE Band 2	Top	-	0.018	0.018
		Bottom	0.580	-	0.580
Front		0.703	0.020	0.723	
Rear		0.653	0.026	0.679	
Right		-	-	-	
Left		0.634	0.012	0.646	
LTE Band 7	Top	-	0.018	0.018	
	Bottom	0.395	-	0.395	
	Front	0.492	0.020	0.512	
	Rear	0.707	0.026	0.733	
	Right	0.140	-	0.140	
	Left	0.148	0.012	0.160	

Table 12.6.7 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	5.2G W-LAN	Top	0.018	0.241	0.259
		Bottom	-	-	-
		Front	0.020	0.242	0.262
		Rear	0.026	0.322	0.348
		Right	-	-	-
		Left	0.012	0.182	0.194
	5.8G W-LAN	Top	0.018	0.190	0.208
		Bottom	-	-	-
		Front	0.020	0.167	0.187
		Rear	0.026	0.239	0.265
		Right	-	-	-
		Left	0.012	0.089	0.101

12.7 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required of Hotspot 1g SAR (scaled to maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis was required to for Phablet Simultaneous Transmission Analysis.

12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

13. SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

Table 13.1 Head SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
5320.0	64	802.11a	-	-	Right Touch	0.856	0.810	1.06	-	-	-	-
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Head 1.6 W/kg (mW/g) averaged over 1 gram						

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

14. EQUIPMENT LIST

Table 14.1.1 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	Robot	SPEAG	TX90XL	N/A	N/A	F13/5P9GA1/A/01
<input checked="" type="checkbox"/>	Robot	SPEAG	TX90XL	N/A	N/A	F13/5RR2A1/A/01
<input checked="" type="checkbox"/>	Robot Controller	SPEAG	CS8C	N/A	N/A	F13/5P9GA1/C/01
<input checked="" type="checkbox"/>	Robot Controller	SPEAG	CS8C	N/A	N/A	F13/5RR2A1/C/01
<input checked="" type="checkbox"/>	Joystick	SPEAG	N/A	N/A	N/A	S-12450905
<input checked="" type="checkbox"/>	Joystick	SPEAG	N/A	N/A	N/A	S-13200990
<input checked="" type="checkbox"/>	IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Device Holder	SPEAG	Holder	N/A	N/A	SD000H01HA
<input checked="" type="checkbox"/>	Device Holder	SPEAG	Holder	N/A	N/A	SD000H01HA
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1783
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1782
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1786
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SPEAG	DAE4V1	2018-08-22	2019-08-22	1396
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SPEAG	DAE4V1	2018-03-19	2019-03-19	1394
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2018-09-25	2019-09-25	3933
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2018-04-25	2019-04-25	3916
<input checked="" type="checkbox"/>	750MHz SAR Dipole	SPEAG	D750V3	2018-01-18	2020-01-18	1049
<input checked="" type="checkbox"/>	835MHz SAR Dipole	SPEAG	D835V2	2018-08-23	2020-08-23	4d159
<input checked="" type="checkbox"/>	1800MHz SAR Dipole	SPEAG	D1800V2	2018-04-26	2020-04-26	2d202
<input checked="" type="checkbox"/>	1900MHz SAR Dipole	SPEAG	D1900V2	2018-08-27	2020-08-27	5d176
<input checked="" type="checkbox"/>	2450MHz SAR Dipole	SPEAG	D2450V2	2018-08-24	2020-08-24	920
<input checked="" type="checkbox"/>	2600MHz SAR Dipole	SPEAG	D2600V2	2018-02-16	2020-02-16	1103
<input checked="" type="checkbox"/>	5GHz SAR Dipole	SPEAG	D5GHzV2	2018-02-15	2020-02-15	1212
<input checked="" type="checkbox"/>	Network Analyzer	Agilent	E5071C	2018-02-02	2019-02-02	MY46111534
<input checked="" type="checkbox"/>	Signal Generator	Agilent	E4438C	2018-07-04	2019-07-04	US41461520
<input checked="" type="checkbox"/>	Amplifier	RFBAI.Inc	MPA-40-40	2018-12-20	2019-12-20	21151801
<input checked="" type="checkbox"/>	Amplifier	EMPOWER	BBS3Q7ELU	2018-07-10	2019-07-10	1020
<input checked="" type="checkbox"/>	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2018-07-06	2019-07-06	1005
<input checked="" type="checkbox"/>	Power Meter	HP	EPM-442A	2018-12-19	2019-12-19	GB37170267
<input checked="" type="checkbox"/>	Power Meter	HP	EPM-442A	2018-12-18	2019-12-18	GB37170413
<input checked="" type="checkbox"/>	Power Meter	Anritsu	ML2495A	2018-07-04	2019-07-04	1435003
<input checked="" type="checkbox"/>	Power Sensor	Anritsu	MA2490A	2018-07-04	2019-07-04	1409034
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2018-12-18	2019-12-18	US37294267
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2018-12-19	2019-12-19	3318A96566
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2018-12-19	2019-12-19	2702A65976
<input checked="" type="checkbox"/>	Dual Directional Coupler	Agilent	778D-012	2018-12-19	2019-12-19	50228
<input checked="" type="checkbox"/>	Directional Coupler	HP	772D	2018-07-03	2019-07-03	2889A01064
<input checked="" type="checkbox"/>	Low Pass Filter 1GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2018-07-05	2019-07-05	165
<input checked="" type="checkbox"/>	Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2018-07-05	2019-07-05	2
<input checked="" type="checkbox"/>	Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2018-07-05	2019-07-05	2
<input checked="" type="checkbox"/>	Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2018-12-19	2019-12-19	03942
<input checked="" type="checkbox"/>	Attenuators(3 dB)	Agilent	8491B	2018-12-19	2019-12-19	MY39260700
<input checked="" type="checkbox"/>	Attenuators(10 dB)	WEINSCHL	23-10-34	2018-12-19	2019-12-19	BP4387
<input checked="" type="checkbox"/>	Dielectric Probe kit	SPEAG	DAK-3.5	2018-07-24	2019-07-24	1046
<input checked="" type="checkbox"/>	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2018-07-04	2019-07-04	GB41321164
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2018-03-07	2019-03-07	162709
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2018-02-05	2019-02-05	101414
<input checked="" type="checkbox"/>	Radio Communication Analyzer	KEYSIGHT	E7515A	2018-07-06	2019-07-06	MY55210201
<input checked="" type="checkbox"/>	Radio Communication Analyzer	KEYSIGHT	E7515A	2018-12-19	2019-12-19	MY57270113
<input checked="" type="checkbox"/>	Power Splitter	Anritsu	K241B	2018-12-18	2019-12-18	1301183
<input checked="" type="checkbox"/>	Bluetooth Tester	TESCOM	TC-3000B	2018-12-18	2019-12-18	3000B770243

NOTE(S):

- The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.
- CBT(Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

15. MEASUREMENT UNCERTAINTIES

750 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.78	0.71	$\pm 3.3 \%$	$\pm 3.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.7 \%$	$\pm 11.5 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.4 \%$	$\pm 23.0 \%$	

The above measurement uncertainties are according to IEEE Std 1528

750 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3\%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.78	0.71	$\pm 2.9 \%$	$\pm 2.6 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.78	0.71	$\pm 3.4 \%$	$\pm 3.1 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.7 \%$	$\pm 11.5 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.4 \%$	$\pm 23.0 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.8	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.78	0.71	$\pm 3.4 \%$	$\pm 3.1 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 12.0 \%$	$\pm 11.8 \%$	330
Expanded Uncertainty (k=2)						$\pm 24.0 \%$	$\pm 23.6 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.7	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6\%$	$\pm 6.6\%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3\%$	$\pm 1.3\%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14\%$	$\pm 0.14\%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3\%$	$\pm 0.3\%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46\%$	$\pm 0.46\%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46\%$	$\pm 0.46\%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9\%$	$\pm 3.9\%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4\%$	$\pm 4.4\%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0\%$	$\pm 0.0\%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2\%$	$\pm 2.9\%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9\%$	$\pm 1.0\%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9\%$	$\pm 0.8\%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3\%$	$\pm 0.3\%$	∞
Combined Standard Uncertainty						$\pm 11.9\%$	$\pm 11.7\%$	330
Expanded Uncertainty (k=2)						$\pm 23.8\%$	$\pm 23.4\%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.78	0.71	$\pm 2.9 \%$	$\pm 2.6 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.8 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.6 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.78	0.71	$\pm 2.9 \%$	$\pm 2.6 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.8 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.6 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.78	0.71	$\pm 3.3 \%$	$\pm 3.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.8 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.6 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Body (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.

APPENDIX A. – Probe Calibration Data

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **DT&C (Dymstec)**

Certificate No: **EX3-3933_Sep18**

CALIBRATION CERTIFICATE



Object **EX3DV4 - SN:3933**
 Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
 Calibration procedure for dosimetric E-field probes**
 Calibration date: **September 25, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3842U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: September 27, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3933

September 25, 2018

Probe EX3DV4

SN:3933

Manufactured: July 24, 2013
Calibrated: September 25, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.50	0.52	0.19	$\pm 10.1\%$
DCP (mV) ^B	104.5	98.7	93.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	144.0	$\pm 2.7\%$
		Y	0.0	0.0	1.0		147.5	
		Z	0.0	0.0	1.0		142.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4– SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.76	10.76	10.76	0.35	1.00	± 12.0 %
835	41.5	0.90	10.26	10.26	10.26	0.46	0.83	± 12.0 %
900	41.5	0.97	9.91	9.91	9.91	0.43	0.80	± 12.0 %
1750	40.1	1.37	8.83	8.83	8.83	0.34	0.83	± 12.0 %
1900	40.0	1.40	8.54	8.54	8.54	0.25	0.80	± 12.0 %
2300	39.5	1.67	7.90	7.90	7.90	0.41	0.80	± 12.0 %
2450	39.2	1.80	7.61	7.61	7.61	0.21	1.16	± 12.0 %
2600	39.0	1.96	7.41	7.41	7.41	0.25	1.00	± 12.0 %
3500	37.9	2.91	7.30	7.30	7.30	0.27	1.20	± 13.1 %
3700	37.7	3.12	7.13	7.13	7.13	0.25	1.20	± 13.1 %
5200	36.0	4.66	5.24	5.24	5.24	0.40	1.80	± 13.1 %
5300	35.9	4.76	5.02	5.02	5.02	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.87	4.87	4.87	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.71	4.71	4.71	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.77	4.77	4.77	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.43	10.43	10.43	0.32	1.02	± 12.0 %
835	55.2	0.97	10.27	10.27	10.27	0.44	0.80	± 12.0 %
900	55.0	1.05	10.20	10.20	10.20	0.42	0.80	± 12.0 %
1750	53.4	1.49	8.62	8.62	8.62	0.31	0.88	± 12.0 %
1900	53.3	1.52	8.21	8.21	8.21	0.38	0.80	± 12.0 %
2300	52.9	1.81	7.86	7.86	7.86	0.34	0.88	± 12.0 %
2450	52.7	1.95	7.75	7.75	7.75	0.34	0.95	± 12.0 %
2600	52.5	2.16	7.63	7.63	7.63	0.31	0.95	± 12.0 %
3500	51.3	3.31	7.13	7.13	7.13	0.30	1.25	± 13.1 %
3700	51.0	3.55	7.08	7.08	7.08	0.30	1.25	± 13.1 %
5200	49.0	5.30	4.67	4.67	4.67	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.51	4.51	4.51	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.14	4.14	4.14	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.01	4.01	4.01	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.10	4.10	4.10	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4– SN:3933

September 25, 2018

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

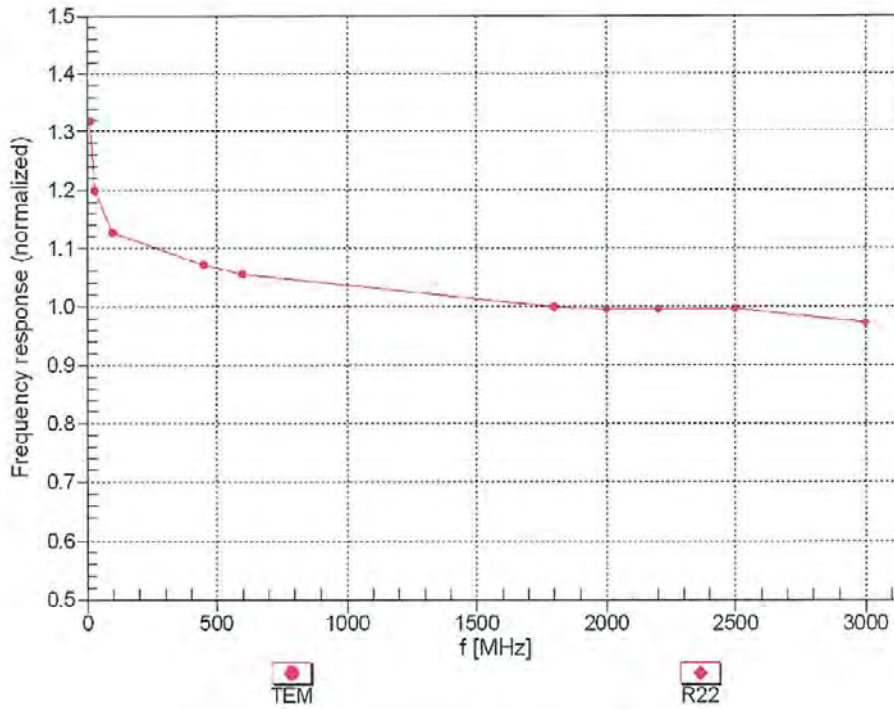

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



EX3DV4- SN:3933

September 25, 2018

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22

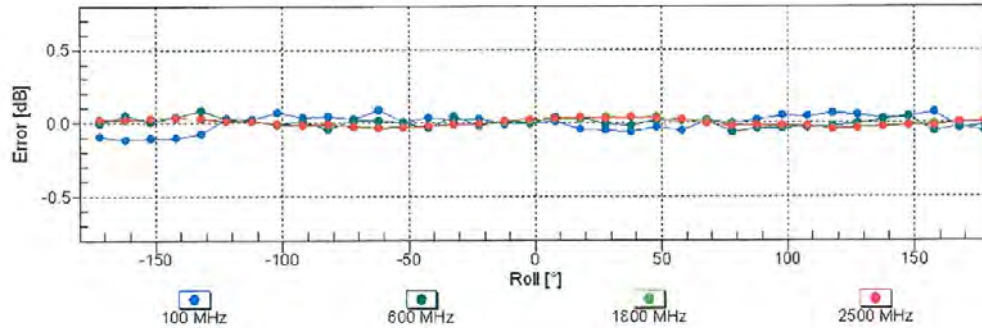
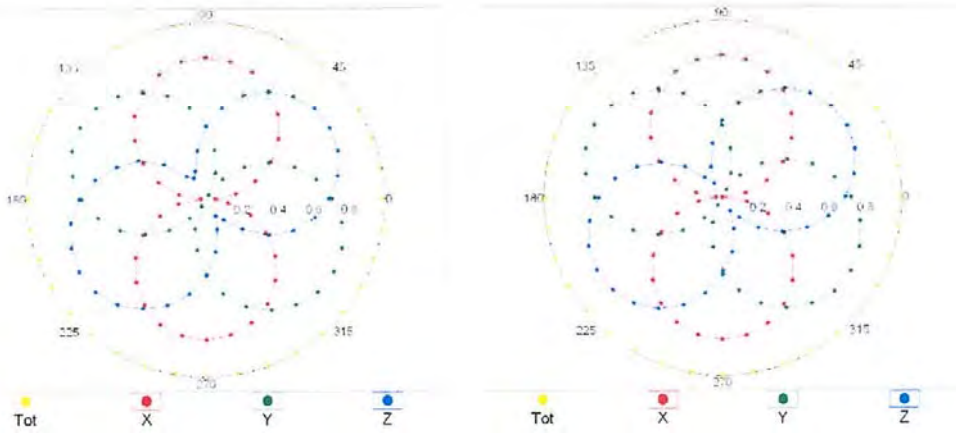


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:3933

September 25, 2018

Dynamic Range $f(SAR_{head})$ (TEM cell , $f_{aval}= 1900$ MHz)

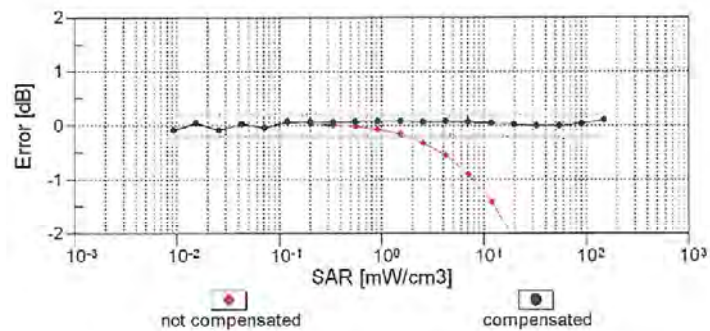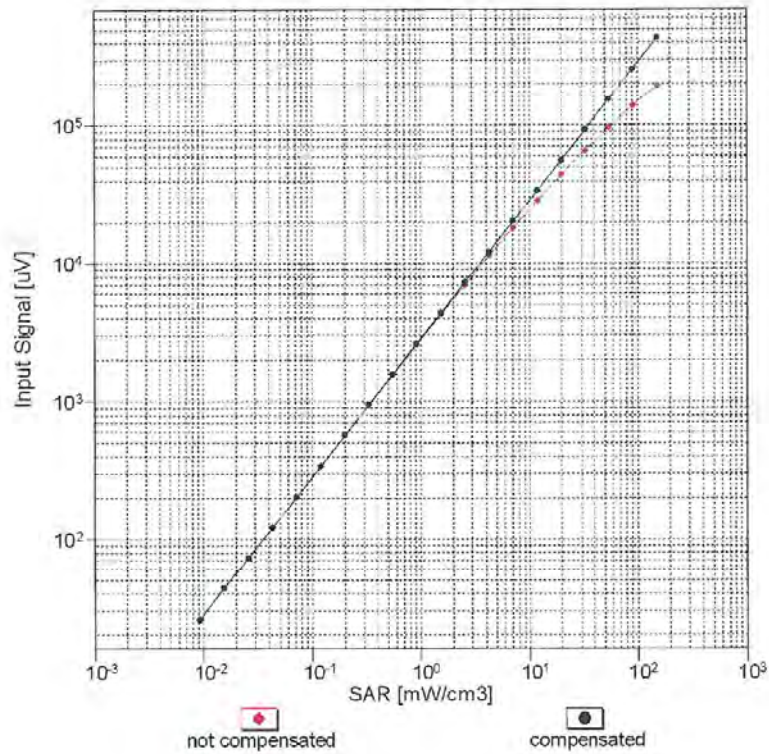


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

EX3DV4--SN:3933



September 25, 2018

Conversion Factor Assessment

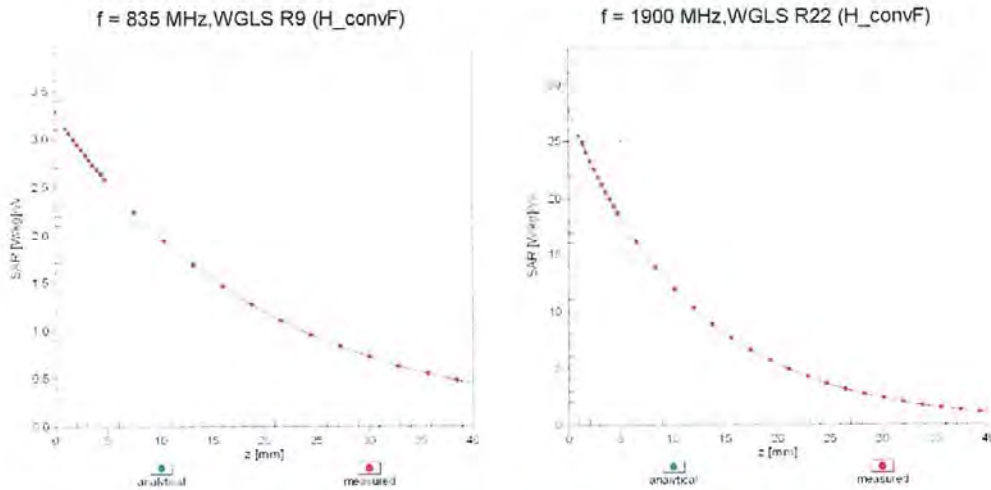

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

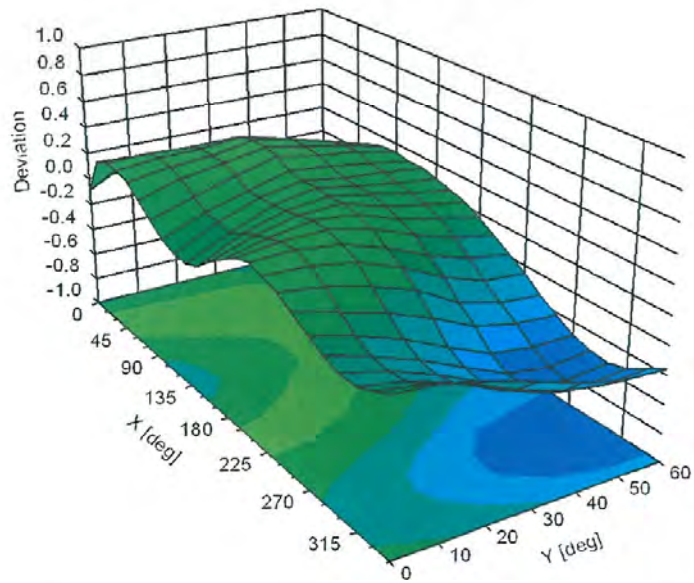

EX3DV4-- SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	77.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **DT&C (Dymstec)**

Certificate No: **EX3-3916_Apr18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3916**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes



Calibration date: **April 25, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: April 26, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3916

April 25, 2018

Probe EX3DV4

SN:3916

Manufactured: December 18, 2012
Calibrated: April 25, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4– SN:3916

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.56	0.47	0.52	$\pm 10.1\%$
DCP (mV) ^B	99.6	101.3	99.8	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	148.6	$\pm 3.5\%$
		Y	0.0	0.0	1.0		159.6	
		Z	0.0	0.0	1.0		142.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4– SN:3916

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
2450	39.2	1.80	7.72	7.72	7.72	0.36	0.85	± 12.0 %
2600	39.0	1.96	7.51	7.51	7.51	0.37	0.84	± 12.0 %
5200	36.0	4.66	5.38	5.38	5.38	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.04	5.04	5.04	0.40	1.80	± 13.1 %
5500	35.6	4.96	5.01	5.01	5.01	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.84	4.84	4.84	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.94	4.94	4.94	0.40	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4– SN:3916

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	52.7	1.95	7.69	7.69	7.69	0.36	0.90	± 12.0 %
2600	52.5	2.16	7.42	7.42	7.42	0.41	0.90	± 12.0 %
5200	49.0	5.30	4.66	4.66	4.66	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.44	4.44	4.44	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.23	4.23	4.23	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.02	4.02	4.02	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.31	4.31	4.31	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4-SN:3916

April 25, 2018

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)


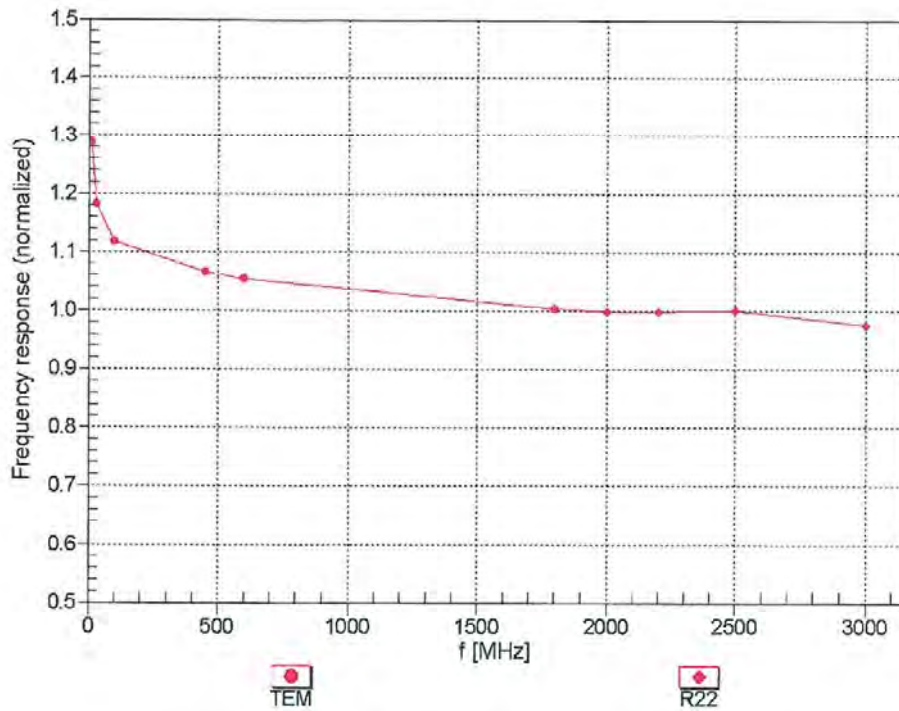


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX3DV4-SN:3916

April 25, 2018

Receiving Pattern (ϕ), $\theta = 0^\circ$

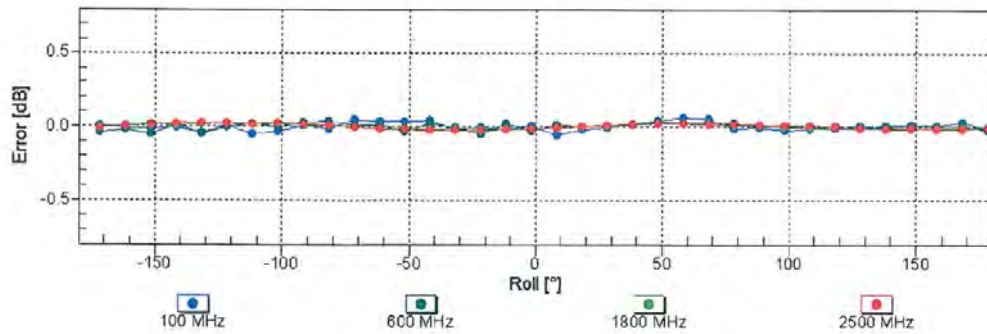
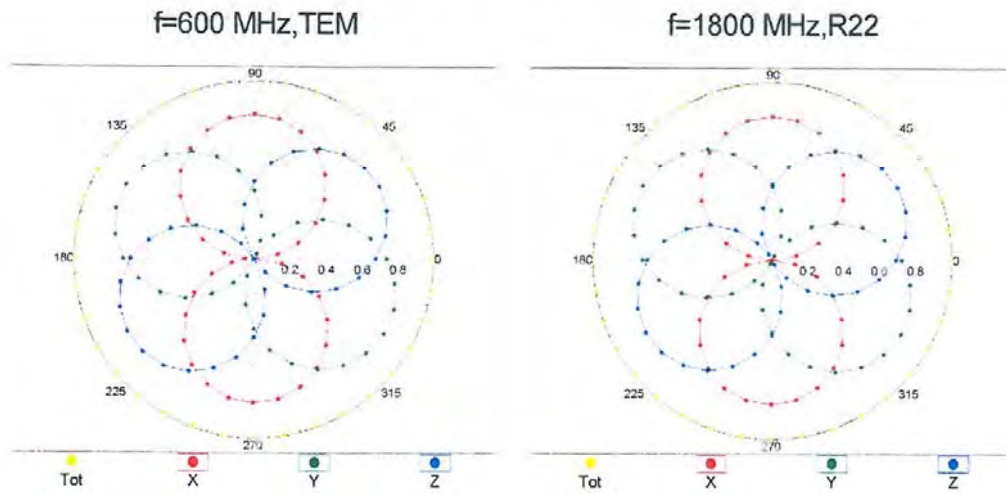


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

EX3DV4- SN:3916

April 25, 2018

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

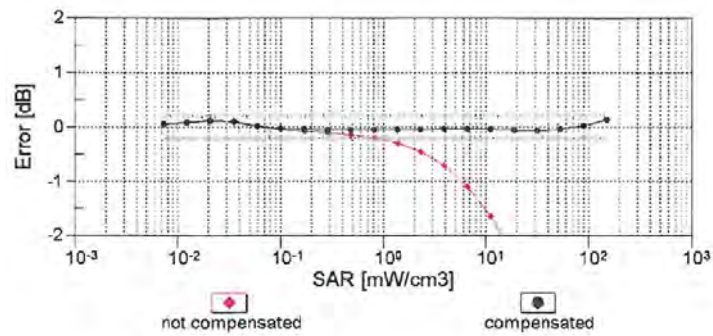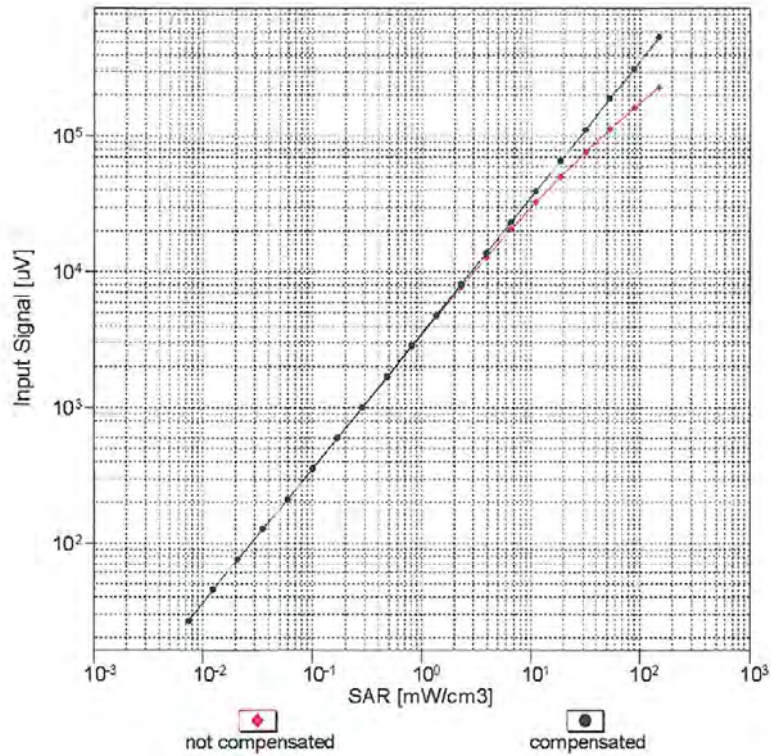


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

EX3DV4- SN:3916



April 25, 2018

Conversion Factor Assessment

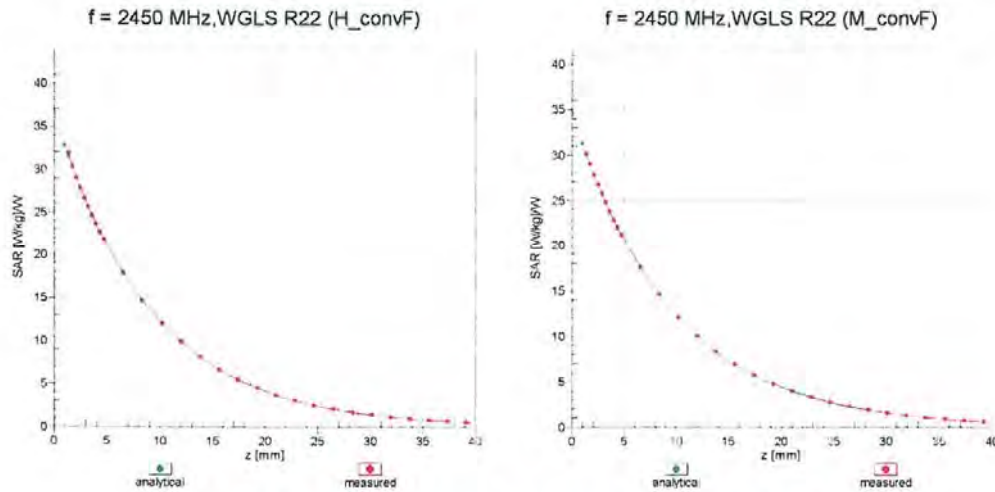

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

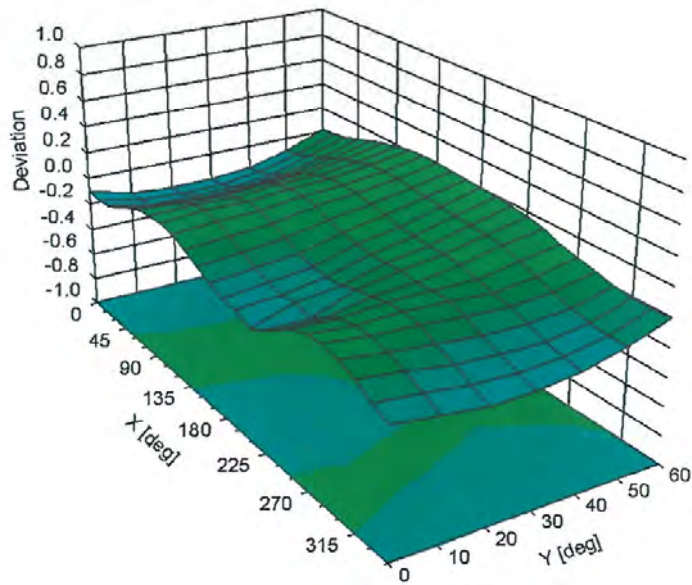

EX3DV4- SN:3916

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	88.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm