


TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRRFCC1904-0036
2. Customer
 - Name : LG Electronics USA, Inc.
 - Address : 1000 Sylvan Ave. Englewood Cliffs, New Jersey, United States 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / LM-X525BAW
FCC ID : ZNFX525HA
5. Test Method Used : IEEE 1528-2013, FCC SAR KDB Publications (Details in test report)
Test Specification : CFR §2.1093
6. Date of Test : 2019.03.01 ~ 2019.03.28
7. Testing Environment : Refer to appended test report.
8. Test Result : Refer to attached test report.

Affirmation	Tested by	 (signature)	Reviewed by	 (signature)
	Name : HoSik Sim		Name : HakMin Kim	

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2019 . 04 . 03 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRRFCC1904-0036	Apr. 03, 2019	Initial issue

Table of Contents

1. DESCRIPTION OF DEVICE	5
1.1 General Information	5
1.2 Power Reduction for SAR	7
1.3 Nominal and Maximum Output Power Specifications	7
1.4 DUT Antenna Locations	7
1.5 Simultaneous Transmission Capabilities	7
1.6 Miscellaneous SAR Test Considerations	8
1.7 Guidance Applied	9
1.8 Device Serial Numbers	9
2. LTE INFORMATION	10
3. INTROCUCTION	11
4. DOSIMETRIC ASSESSMENT	12
4.1 Measurement Procedure	12
5. DEFINITION OF REFERENCE POINTS	14
5.1 Ear Reference Point	14
5.2 Handset Reference Points	14
6. TEST CONFIGURATION POSITIONS FOR HANDSETS	15
6.1 Device Holder	15
6.2 Positioning for Cheek/Touch	15
6.3 Positioning for Ear / 15 ° Tilt	15
6.4 Body-Worn Accessory Configurations	16
6.5 Extremity Exposure Configurations	16
6.6 Wireless Router Configurations	17
6.7 Phablet Configurations	17
7. RF EXPOSURE LIMITS	18
8. FCC MEASUREMENT PROCEDURES	19
8.1 Measured and Reported SAR	19
8.2 Procedures Used to Establish RF Signal for SAR	19
8.3 SAR Measurement Conditions for WCDMA (UMTS)	19
8.3.1 Output Power Verification	19
8.3.2 Head SAR Measurements for Handsets	19
8.3.3 Body SAR Measurements	20
8.3.4 Release 5 HSDPA Data Devices	20
8.3.5 Release 6 HSUPA Data Devices	20
8.3.6 SAR Measurement Conditions for DC-HSDPA	21
8.4 SAR Measurement Conditions for LTE	22
8.4.1 Spectrum Plots for RB Configurations	22
8.4.2 MPR	22
8.4.3 A-MPR	22
8.4.4 Required RB Size and RB Offsets for SAR Testing	22
8.4.5 64QAM uplink	22
8.4.6 Downlink Only Carrier Aggregation	23
8.5 SAR Testing with 802.11 Transmitters	23
8.5.1 General Device Setup	23
8.5.2 U-NII and U-NII-2A	23
8.5.3 U-NII-2C and U-NII-3	24
8.5.4 Initial Test Position Procedure	24
8.5.5 2.4 GHz SAR Test Requirements	24
8.5.6 OFDM Transmission Mode and SAR Test Channel Selection	24
8.5.7 Initial Test Configuration Procedure	25
8.5.8 Subsequent Test Configuration Procedures	25
9. RF CONDUCTED POWERS	26
9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers	26
9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers	27
9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers	28
9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers	38
9.5 Bluetooth Conducted Powers	41

10. SYSTEM VERIFICATION	43
10.1 Tissue Verification	43
10.2 Test System Verification	47
11. SAR TEST RESULTS	48
11.1 Head SAR Results	48
11.2 Standalone Body-Worn SAR Worn SAR Results	51
11.3 Standalone Hotspot SAR Results	53
11.4 Standalone Phablet SAR Results	56
11.5 SAR Test Notes	57
12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS	60
12.1 Introduction	60
12.2 Simultaneous Transmission Procedures	60
12.3 Simultaneous Transmission Capabilities	60
12.4 Head SAR Simultaneous Transmission Analysis	62
12.5 Body-Worn Simultaneous Transmission Analysis	67
12.6 Hotspot SAR Simultaneous Transmission Analysis	70
12.7 Phablet SAR Simultaneous Transmission Analysis	73
12.8 Simultaneous Transmission Conclusion	73
13. SAR MEASUREMENT VARIABILITY	74
13.1 Measurement Variability	74
13.2 Measurement Uncertainty	74
14. EQUIPMENT LIST	75
15. MEASUREMENT UNCERTAINTIES	76
16. CONCLUSION	98
17. REFERENCES	99
APPENDIX A. – Probe Calibration Data	101
APPENDIX B. – Dipole Calibration Data	135
APPENDIX C. – SAR Tissue Specifications	200
APPENDIX D. – SAR SYSTEM VALIDATION	202
APPENDIX E. – Downlink LTE CA RF Conducted Powers	204
APPENDIX F. – Description of Test Equipment	209

1. DESCRIPTION OF DEVICE

1.1 General Information

EUT type	Mobile Phone					
FCC ID	ZNFX525HA					
Equipment model name	LM-X525BAW					
Equipment add model name	LMX525BAW, X525BAW, LM-X525HA, LMX525HA, X525HA, LM-X520HM, LMX520HM, X520HM, LM-X520BMW, LMX520BMW, X520BMW • 12 models are same mechanical, electrical and functional except follows. - LM-X525HA, LMX525HA, X525HA, LM-X520HM, LMX520HM, X520HM : No differences - LM-X525BAW, LMX525BAW, X525BAW, LM-X520BMW, LMX520BMW, X520BMW : Dual SIM support(1 RF Path)					
Equipment serial no.	Identical prototype					
Mode(s) of Operation	GSM 850, GSM 1900, WCDMA 850, WCDMA 1700, WCDMA 1900, LTE Band 12, 17, 5, 66, 4, 2, 7, 2.4 G W-LAN (802.11b/g/n-HT20), 5 G W-LAN (802.11a/n-HT20/n-HT40/ac-VHT20/ac-VHT40/ac-VHT80), Bluetooth					
TX Frequency Range	Band	Mode	Operating Modes	Bandwidth	Frequency	
	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	824.2 ~ 848.8 MHz	
	GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1850.2 ~ 1909.8 MHz	
	WCDMA 850	WCDMA	Voice/Data	-	826.4 ~ 846.6 MHz	
	WCDMA 1700	WCDMA	Voice/Data	-	1712.4 ~ 1752.6 MHz	
	WCDMA 1900	WCDMA	Voice/Data	-	1852.4 ~ 1907.6 MHz	
	LTE Band 12	LTE	Voice/Data	1.4/3/5/10MHz	699.7 ~ 715.3 MHz	
	LTE Band 17	LTE	Voice/Data	5/10MHz	706.5 ~ 713.5 MHz	
	LTE Band 5	LTE	Voice/Data	1.4/3/5/10MHz	824.7 ~ 848.3 MHz	
	LTE Band 66	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1710.7 ~ 1779.3 MHz	
	LTE Band 4	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1710.7 ~ 1754.3 MHz	
	LTE Band 2	LTE	Voice/Data	1.4/3/5/10/15/20MHz	1850.7 ~ 1909.3 MHz	
	LTE Band 7	LTE	Voice/Data	5/10/15/20MHz	2502.5 ~ 2567.5 MHz	
	2.4 GHz W-LAN	802.11b/g/n	Voice/Data	HT20	2412 ~ 2472 MHz	
	5.2 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz	
	5.3 GHz W-LAN	802.11ac	Voice/Data	VHT80	5210 MHz	
		802.11a/n/ac	Voice/Data	HT20/VHT20	5260 ~ 5320 MHz	
	5.6 GHz W-LAN	802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz	
		802.11ac	Voice/Data	VHT80	5290 MHz	
	5.8 GHz W-LAN	802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz	
	Bluetooth	802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz	
		-	Data	-	5745 ~ 5825 MHz	
					5755 ~ 5795 MHz	
					5775 MHz	
					2402 ~ 2480 MHz	
	RX Frequency Range	GSM 850	GSM/GPRS/EDGE	Voice/Data	-	869.2 ~ 893.8 MHz
		GSM 1900	GSM/GPRS/EDGE	Voice/Data	-	1930.2 ~ 1989.8 MHz
		WCDMA 850	WCDMA	Voice/Data	-	871.4 ~ 891.6 MHz
		WCDMA 1700	WCDMA	Voice/Data	-	2112.4 ~ 2152.6 MHz
		WCDMA 1900	WCDMA	Voice/Data	-	1932.4 ~ 1987.6 MHz
LTE Band 12		LTE	Voice/Data	1.4/3/5/10MHz	729.7 ~ 745.3 MHz	
LTE Band 17		LTE	Voice/Data	5/10MHz	736.5 ~ 743.5 MHz	
LTE Band 5		LTE	Voice/Data	1.4/3/5/10MHz	869.7 ~ 893.3 MHz	
LTE Band 66		LTE	Voice/Data	1.4/3/5/10/15/20MHz	2110.7 ~ 2179.3 MHz	
LTE Band 4		LTE	Voice/Data	1.4/3/5/10/15/20MHz	2110.7 ~ 2154.3 MHz	
LTE Band 2		LTE	Voice/Data	1.4/3/5/10/15/20MHz	1930.7 ~ 1989.3 MHz	
LTE Band 7		LTE	Voice/Data	5/10/15/20MHz	2622.5 ~ 2687.5 MHz	
2.4 GHz W-LAN		802.11b/g/n	Voice/Data	HT20	2412 ~ 2472 MHz	
5.2 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5180 ~ 5240 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5190 ~ 5230 MHz	
5.3 GHz W-LAN		802.11ac	Voice/Data	VHT80	5210 MHz	
		802.11a/n/ac	Voice/Data	HT20/VHT20	5260 ~ 5320 MHz	
5.6 GHz W-LAN		802.11n/ac	Voice/Data	HT40/VHT40	5270 ~ 5310 MHz	
		802.11ac	Voice/Data	VHT80	5290 MHz	
5.8 GHz W-LAN		802.11a/n/ac	Voice/Data	HT20/VHT20	5500 ~ 5720 MHz	
		802.11n/ac	Voice/Data	HT40/VHT40	5510 ~ 5710 MHz	
Bluetooth		802.11ac	Voice/Data	VHT80	5530 ~ 5690 MHz	
		-	Data	-	5745 ~ 5825 MHz	
					5755 ~ 5795 MHz	
					5775 MHz	
					2402 ~ 2480 MHz	

SAR Summary Table

Equipment Class	Band	Reported SAR			
		1g SAR (W/kg)			10g SAR (W/kg)
		Head	Body-Worn	Hotspot	Phablet
PCE	GSM 850	0.29	0.50	-	-
PCE	GPRS 850	0.35	0.57	0.57	-
PCE	GSM 1900	0.17	0.32	-	-
PCE	GPRS 1900	0.25	0.46	0.46	-
PCE	WCDMA 850	0.30	0.47	0.51	-
PCE	WCDMA 1700	0.26	0.48	0.48	-
PCE	WCDMA 1900	0.37	0.87	0.87	-
PCE	LTE Band 12	0.26	0.39	0.39	-
PCE	LTE Band 17	-	-	-	-
PCE	LTE Band 5	0.20	0.43	0.58	-
PCE	LTE Band 66	0.27	0.53	0.53	-
PCE	LTE Band 4	-	-	-	-
PCE	LTE Band 2	0.35	0.66	0.66	-
PCE	LTE Band 7	0.15	0.63	0.99	-
DTS	2.4 GHz W-LAN	0.67	0.17	0.17	-
U-NII-1	5.2 GHz W-LAN	-	-	0.39	-
U-NII-2A	5.3 GHz W-LAN	0.64	0.42	-	1.10
U-NII-2C	5.6 GHz W-LAN	0.56	0.41	-	0.96
U-NII-3	5.8 GHz W-LAN	0.46	0.48	0.48	1.06
DSS	Bluetooth	0.14	< 0.1	< 0.1	-
Simultaneous SAR per KDB 690783 D01v01r03		1.02	1.38	1.38	-
FCC Equipment Class	Licensed Portable Transmitter Held to Ear (PCE) Part 15 Spread Spectrum Transmitter(DSS) Digital Transmission System(DTS) Unlicensed National Information Infrastructure (UNII)				
Date(s) of Tests	2019.03.01 ~ 2019.03.28				
Antenna Type	Internal Antenna				
Functions	<ul style="list-style-type: none"> ● GSM/GPRS/EDGE (GPRS/EDGE Class: 12) supported. * DTM not supported. ● No simultaneous transmission between BT & 2.4GHz WLAN ● Simultaneous transmission between [GSM, WCDMA voice & WLAN], [GPRS, WCDMA & WLAN], [LTE & WLAN]. ● VoIP is supported. ● W-LAN 2.4GHz is supported Hotspot. ● W-LAN 5 GHz is supported Hotspot in UNII B1, B3. 				

1.2 Power Reduction for SAR

There is no power reduction used for any band/mode implemented in this device for SAR purposes.

1.3 Nominal and Maximum Output Power Specifications

The Nominal and Maximum Output Power Specifications are in section 9 of this test report.

1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device of the device antenna can be found in ZNFX525HA_Antenna Location. Since the diagonal dimension of this device is > 160 mm and < 200 mm. it is considered a "phablet".

Mode	Device Sides for SAR Testing					
	Top	Bottom	Front	Rear	Right	Left
GSM/GPRS/EDGE 850	X	O	O	O	O	O
GSM/GPRS/EDGE 1900	X	O	O	O	X	O
WCDMA 850	X	O	O	O	O	O
WCDMA 1700	X	O	O	O	X	O
WCDMA 1900	X	O	O	O	X	O
LTE Band 12	X	O	O	O	O	O
LTE Band 17	X	O	O	O	O	O
LTE Band 5	X	O	O	O	O	O
LTE Band 66	X	O	O	O	X	O
LTE Band 4	X	O	O	O	X	O
LTE Band 2	X	O	O	O	X	O
LTE Band 7	X	O	O	O	O	O
2.4G W-LAN	O	X	O	O	X	O
5G W-LAN	O ^{Note 2}	X	O	O	X	O ^{Note 2}
Bluetooth	O	X	O	O	X	O

Note 1: Particular DUT edges were not required to be evaluated for Hotspot SAR or Phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 648474 D04v01r03. The antenna document shows the distances between the transmit antennas and the edges of the device.

Note 2: WLAN Hotspot UNII-1, 3 supported.

Note 3: O - Test / X - Not test.

1.5 Simultaneous Transmission Capabilities

The Simultaneous Transmission Capabilities are in section 12 of this test report.

1.6 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB publication 248227 D01v02r02.

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4GHz, U-NII-1, U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Per FCC KDB 447498 D01v06, the 1g SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, body-worn and hotspot **Bluetooth SAR were not required; [(13/10)*√2.480] = 2.0 (< 3.0)**. Per KDB Publication 447498 D01 v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB 447498 D01v06, the 10g SAR exclusion threshold for distance < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency(GHz)}} \leq 7.5$$

Based on the maximum conducted power of Bluetooth (rounded to the nearest mW) and the antenna to user separation distance, phablet **Bluetooth SAR was not required; [(13/5)*√2.480] = 4.0 (< 7.5)**. Per KDB Publication 447498 D01v06, the maximum power of the channel was rounded to the nearest mW before calculation.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a “phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C & U-NII-3 WLAN(CH 165), phablet SAR tests were performed.

(B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink only. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.

Per FCC KDB Publication 648474 D04 v01r03, this device is considered a “phablet” since the diagonal dimension is greater than 160 mm and less than 200 mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

1.7 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01 (3G SAR Procedures)
- FCC KDB Publication 941225 D05v02r05 (SAR for LTE Devices)
- FCC KDB Publication 941225 D05Av01r02 (LTE Rel.10 KDB Inquiry Sheet)
- FCC KDB Publication 941225 D06v02r01 (Hotspot Mode)
- FCC KDB Publication 248227 D01v02r02 (802.11 Wi-Fi SAR)
- FCC KDB Publication 447498 D01v06 (General RF Exposure Guidance)
- FCC KDB Publication 648474 D04v01r03 (Handset SAR)
- FCC KDB Publication 690783 D01v01r03 (SAR Listings on Grants)
- FCC KDB Publication 865664 D01v01r04 (SAR Measurement 100 MHz to 6 GHz)
- FCC KDB Publication 865664 D02v01r02 (RF Exposure Reporting)
- October 2013 TCB Workshop Notes (GPRS testing criteria)
- April 2015 TCB Workshop Notes (Simultaneous transmission summation clarified)
- October 2016 TCB Workshop Notes (Bluetooth Duty Factor)
- April 2018 TCB Workshop Notes (LTE Carrier Aggregation)

1.8 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

2. LTE INFORMATION

LTE Information					
FCC ID	ZNFX525HA				
Form Factor	Mobile Phone				
Frequency Range of each LTE transmission Band	LTE Band 12 (699.7 ~ 715.3 MHz) LTE Band 17 (706.5 ~ 713.5 MHz) LTE Band 5 (Cell) (824.7 ~ 848.3 MHz) LTE Band 66 (AWS) (1710.7 ~ 1779.3 MHz) LTE Band 4 (AWS) (1710.7 ~ 1754.3 MHz) LTE Band 2 (PCS) (1850.7 ~ 1909.3 MHz) LTE Band 7 (2502.5 ~ 2567.5 MHz)				
Channel Bandwidths	LTE Band 12 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 17 : 5 MHz, 10 MHz LTE Band 5 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz LTE Band 66 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 4 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 2 : 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Number and Frequencies(MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)	N/A	707.5 (23095)	N/A	715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)	N/A	707.5 (23095)	N/A	714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)	N/A	707.5 (23095)	N/A	713.5 (23155)
LTE Band 12: 10 MHz	704.0 (23060)	N/A	707.5 (23095) ^{Note1}	N/A	711.0 (23130)
LTE Band 17: 5 MHz	706.5(23755)	N/A	710.0(23790)	N/A	713.5(23825)
LTE Band 17: 10 MHz	709.0(23780)	N/A	710.0(23790)	N/A	711.0(23800)
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)	N/A	836.5 (20525)	N/A	848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)	N/A	836.5 (20525)	N/A	847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)	N/A	836.5 (20525)	N/A	846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829.0 (20450)	N/A	836.5 (20525) ^{Note2}	N/A	844.0 (20600)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)	N/A	1745.0 (132322)	N/A	1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)	N/A	1745.0 (132322)	N/A	1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)	N/A	1745.0 (132322)	N/A	1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715.0 (132022)	N/A	1745.0 (132322)	N/A	1775.0 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)	N/A	1745.0 (132322)	N/A	1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720.0 (132072)	N/A	1745.0 (132322)	N/A	1770.0 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)	N/A	1732.5 (20175)	N/A	1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)	N/A	1732.5 (20175)	N/A	1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)	N/A	1732.5 (20175)	N/A	1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715.0 (20000)	N/A	1732.5 (20175)	N/A	1750.0 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)	N/A	1732.5 (20175)	N/A	1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720.0 (20050)	N/A	1732.5 (20175)	N/A	1745.0 (20300)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)	N/A	1880.0 (18900)	N/A	1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)	N/A	1880.0 (18900)	N/A	1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)	N/A	1880.0 (18900)	N/A	1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855.0 (18650)	N/A	1880.0 (18900)	N/A	1905.0 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)	N/A	1880.0 (18900)	N/A	1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860.0 (18700)	N/A	1880.0 (18900)	N/A	1900.0 (19100)
LTE Band 7: 5 MHz	2502.5 (20775)	N/A	2535.0 (21100)	N/A	2567.5 (21425)
LTE Band 7: 10 MHz	2505.0 (20800)	N/A	2535.0 (21100)	N/A	2565.0 (21400)
LTE Band 7: 15 MHz	2507.5 (20825)	N/A	2535.0 (21100)	N/A	2562.5 (21375)
LTE Band 7: 20 MHz	2510.0 (20850)	N/A	2535.0 (21100)	N/A	2560.0 (21350)
UE Category	LTE Rel.11, UE Cat. 6 with only downlink carrier aggregation (not support uplink MIMO and uplink carrier aggregation)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3~6.2.5? (manufacturer attestation to be provided)	Yes				
A-MPR (Additional MPR) disabled for SAR Testing?	Yes				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 11. It supports only downlink carrier aggregation. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 11 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, WIFI Offloading, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

Note(s)
 1. LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.
 Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
 2. LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.
 Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

3. INTROCUCTION

The FCC and Industry Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices.

The FCC has adopted the guidelines for evaluating the environmental effects of radio frequency radiation in ET Docket 93-62 on Aug. 6, 1996 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave is used for guidance in measuring SAR due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields," NCRP Report No. 86 NCRP, 1986, Bethesda, MD 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

SAR Definition

Specific Absorption Rate (SAR) is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Fig. 3.1)

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

Fig. 3.1 SAR Mathematical Equation

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m^3)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relations to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.

4. DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4.1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4.1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4.1
Sample SAR Area Scan

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		$5 \text{ mm} \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \text{ mm} \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: $\leq 15 \text{ mm}$ 2 – 3 GHz: $\leq 12 \text{ mm}$	3 – 4 GHz: $\leq 12 \text{ mm}$ 4 – 6 GHz: $\leq 10 \text{ mm}$
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: $\leq 8 \text{ mm}$ 2 – 3 GHz: $\leq 5 \text{ mm}^*$	3 – 4 GHz: $\leq 5 \text{ mm}^*$ 4 – 6 GHz: $\leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5 \text{ mm}$	3 – 4 GHz: $\leq 4 \text{ mm}$ 4 – 5 GHz: $\leq 3 \text{ mm}$ 5 – 6 GHz: $\leq 2 \text{ mm}$
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1) \text{ mm}$
Minimum zoom scan volume	x, y, z	$\geq 30 \text{ mm}$	3 – 4 GHz: $\geq 28 \text{ mm}$ 4 – 5 GHz: $\geq 25 \text{ mm}$ 5 – 6 GHz: $\geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Table 4.1 Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

5. DEFINITION OF REFERENCE POINTS

5.1 Ear Reference Point

Figure 5.1 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point(ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to the Ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5.1. The plane Passing, through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck- Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 5.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning.




Figure 5.1
Close-up side view of ERP

5.2 Handset Reference Points

Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 5.3). The “test device reference point” was then located at the same level as the center of the ear reference point. The device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.



Figure 5.2 Front, back and side view SAM Twin Phantom

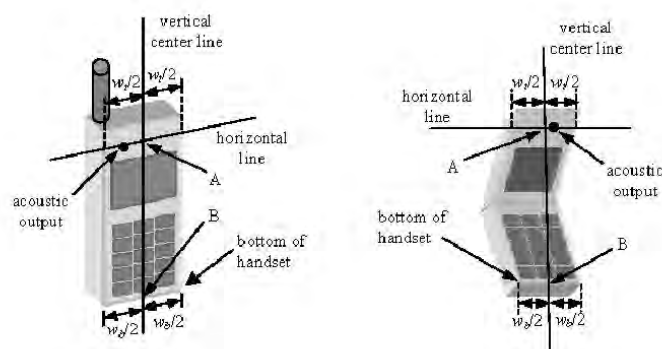


Figure 5.3 Handset Vertical Center & Horizontal Line Reference Points

6. TEST CONFIGURATION POSITIONS FOR HANDSETS

6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

6.2 Positioning for Cheek/Touch

1. The test device was positioned with the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.



Figure 6.1 Front, Side and Top View of Cheek/Touch Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the ear.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the plane normal to MB-NF including the line MB (reference plane).
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the phone contact with the ear, the handset was rotated about the line NF until any point on the handset made contact with a phantom point below the ear (cheek). (See Figure 6.2)

6.3 Positioning for Ear / 15 ° Tilt

With the test device aligned in the “Cheek/Touch Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degree.
2. The phone was then rotated around the horizontal line by 15 degree.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the phone touches the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. The tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6.3).




Figure 6.2 Side view w/relevant markings



Figure 6.3 Front, Side and Top View of Ear/15° Position

6.4 Body-Worn Accessory Configurations

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4). Per FCC KDB Publication 648474 D04v01r03, Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB Publication 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

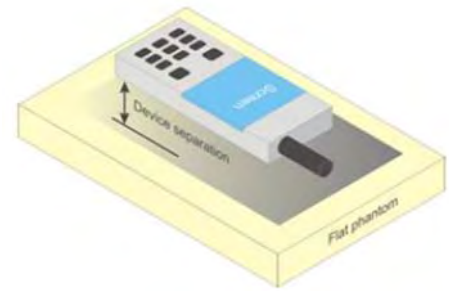


Figure 6.4 Sample Body-Worn Diagram

Accessories for Body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented.

Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

6.5 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1-g body and 10-g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.

6.6 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 mm from the front, rear and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitter often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was not activated during SAR assessment, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

6.7 Phablet Configurations

For smart phones with a display diagonal $> 150 \text{ mm}$ or an overall diagonal dimension $> 160 \text{ mm}$ that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna $\leq 25 \text{ mm}$ from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR $> 1.2 \text{ W/kg}$.

7. RF EXPOSURE LIMITS

Uncontrolled Environment:

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Controlled Environment:

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 7.1.SAR Human Exposure Specified in ANSI/IEEE C95.1-1992

	HUMAN EXPOSURE LIMITS	
	General Public Exposure (W/kg) or (mW/g)	Occupational Exposure (W/kg) or (mW/g)
SPATIAL PEAK SAR * (Brain)	1.60	8.00
SPATIAL AVERAGE SAR ** (Whole Body)	0.08	0.40
SPATIAL PEAK SAR *** (Hands / Feet / Ankle / Wrist)	4.00	20.0

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e.as a result of employment or occupation).

8. FCC MEASUREMENT PROCEDURES

Power measurements were performed using a base station simulator under digital average power.

8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, When SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

8.2 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01.

The device was placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test were evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device was tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviated by more than 5%, the SAR test and drift measurements were repeated.

8.3 SAR Measurement Conditions for WCDMA (UMTS)

8.3.1 Output Power Verification

Maximum output power is measured on the High, Middle and Low channels for each applicable transmission band according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1s”.

Maximum output power is verified on the High, Middle and Low channels according to the general, descriptions in section 5.2 of 3GPP TS 34.121 (release 5), using the appropriate RMC with TPC,(transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

8.3.2 Head SAR Measurements for Handsets

SAR for head exposure configurations is measured using the 12.2 kbps RMC with TPC bits configured to all “1s”. SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than 0.25 dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that resulted in the highest SAR for that RF channel in the 12.2 kbps RMC mode.

8.3.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all "1s".

8.3.4 Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA with HSDPA remain inactive, to establish a radio link between the test device and a communication test set using a 12.2 kbps RMC configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest reported SAR configuration in WCDMA, with an FRC in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to exposure conditions, device operating capabilities and maximum output power specified for production units, including tune-up tolerance by applying the 3G SAR test reduction procedures. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Figure 8.1 Table 1

8.3.5 Release 6 HSUPA Data Devices

The following procedures are applicable to HSPA (HSUPA/HSDPA) data devices operating under 3GPP Release 6. SAR is required for devices in body-worn accessory and other body exposure conditions, including handsets and data modems operating in various electronic devices. HSUPA operates in conjunction with WCDMA and HSDPA. SAR is initially measured in WCDMA test configurations with HSPA remain inactive. The default test configuration is to establish a radio link between the test device and a communication test set to configure a 12.2 kbps RMC in Test Loop Mode 1. SAR for HSPA is selectively measured with HS-DPCCH, E-DPCCH and E-DPDCH, all enabled, along with a 12.2 kbps RMC using the highest reported SAR configuration in WCDMA with 12.2 kbps RMC only.

An FRC is configured according to HS-DPCCH Sub-test 1 using H-set 1 and QPSK. HSPA is configured according to E-DCH Sub-test 5 requirements. SAR for other HSPA sub-test configurations is confirmed selectively according to exposure conditions, E-DCH UE Category and maximum output power of production units, including tune-up tolerance by applying the 3G SAR test reduction procedure. Maximum output power is verified according to procedures in applicable versions of 3GPP TS 34.121. SAR must be measured based on these maximum output conditions and requirements in KDB Publication 447498, with respect to the UE Categories for HS-DPCCH and HSPA, and explained in the SAR report. When Maximum Power Reduction (MPR) applies, the implementations must be clearly identified in the SAR report to support test results according to Cubic Metric (CM) and, as appropriate, Enhanced MPR (E-MPR) requirements.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCl
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed}: 47/15$ $\beta_{ed}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Figure 8.2 Table 2
Note:

- The manufacturer declares that the HSDPA, HSUPA and DC-HSDPA transmitter's power will not exceed the R99 maximum transmit power in devices based on MTK's HSPA chipset solutions. (WCDMA B5/B4/B2: Please refer to the tune-up procedure about MPR setting 2.)
- MPR is not applied as shown in Table 2 but it will not exceed R99 maximum transmit power due to MTK's HSPA chipset solution as declared by the manufacturer.

8.3.6 SAR Measurement Conditions for DC-HSDPA

In the following DB 941225 D01v03r01 procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

8.4 SAR Measurement Conditions for LTE

LTE modes were tested according to FCC KDB 941225 D05v02r05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The call simulator was used for LTE output power measurement and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

8.4.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

8.4.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

8.4.3 A-MPR

A-MPR (Addition MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

8.4.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r05:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channel is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to 0.5 dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

8.4.5 64QAM uplink

(1) Per KDB 941225 D05 V02r05, we measure conducted powers per Section 5.1 for all uplink modulations (QPSK, 16QAM, 64QAM) and include in the test report.

(2) From these power measurements, we apply the procedures in Section 5.2.4 ("Higher Order Modulations") to determine SAR test reduction for 16QAM and 64QAM test cases.

8.4.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02, April 2018 TCB Workshop notes (LTE Carrier Aggregation). The RCC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

8.5 SAR Testing with 802.11 Transmitters

The normal network operating configurations are not suitable for measuring the SAR of 802.11 b/g/n transmitters. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227D01v02r02 for more details.

8.5.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92-96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

8.5.2 U-NII and U-NII-2A

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following, with respect to the highest reported SAR and maximum output power specified for production units. The procedures are applied independently to each exposure configuration; for example, head, body, hotspot mode etc.

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.

8.5.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements.

When Terminal Doppler Weather Rader (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification.

Unless band gap channels are permanently disabled, SAR must be considered for these channels. When band gap channels are disabled, each band is tested independently according to the normally required OFDM SAR measurements and probe calibration frequency points requirements.

8.5.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all position in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR position until the reported SAR result is ≤ 0.8 W/kg or all test position are measured.

8.5.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed.

8.5.6 OFDM Transmission Mode and SAR Test Channel Selection

For the 2.4 GHz and 5 GHz bands, when the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a and 802.11n or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11g then 802.11n is used for SAR measurement. When the maximum output power were the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

8.5.7 Initial Test Configuration Procedure

For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, and lowest data rate. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required.

Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured.

8.5.8 Subsequent Test Configuration Procedures

For OFDM configurations, in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure, when applicable. When the highest reported SAR for the initial test configuration, adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power is ≤ 1.2 W/kg, no additional SAR testing for the subsequent test configurations is required.

9. RF CONDUCTED POWERS

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06

9.1 GSM Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode		Voice[dBm]	Burst Average GMSK [dBm]				Burst Average 8-PSK [dBm]			
		1 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot	1 TX Slot	2 TX Slot	3 TX Slot	4 TX Slot
GSM/GPRS/EDGE 850	Maximum	33.7	33.7	31.2	29.2	28.2	27.2	25.7	23.7	22.7
	Nominal	33.2	33.2	30.7	28.7	27.7	26.7	25.2	23.2	22.2
GSM/GPRS/EDGE 1900	Maximum	30.2	30.2	28.2	26.2	25.2	27.2	24.7	22.7	21.7
	Nominal	29.7	29.7	27.7	25.7	24.7	26.7	24.2	22.2	21.2

Table 9.1.1 GSM Nominal and Maximum Output Power Spec

Band	Channel	Maximum Burst-Averaged Output Power(dBm)									
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)				
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot	
GSM850	128	33.5	33.5	30.6	29.1	28.1	27.1	25.6	23.6	22.4	
	190	33.5	33.5	30.6	29.1	28.1	27.1	25.6	23.6	22.4	
	251	33.7	33.7	30.8	29.2	28.2	27.2	25.7	23.7	22.5	
PCS 1900	512	30.1	30.1	27.6	25.9	24.9	27.0	24.7	22.6	21.6	
	661	30.1	30.1	27.6	25.9	24.9	26.9	24.6	22.4	21.3	
	810	30.2	30.2	27.7	26.0	25.0	26.8	24.5	22.3	21.2	
Band	Channel	Calculated Maximum Frame-Averaged Output Power(dBm)									
		Voice	GPRS/EDGE Data (GMSK)				EDGE Data (8-PSK)				
		GSM CS 1 Slot	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot	
GSM850	128	24.47	24.47	24.58	24.84	25.09	18.07	19.58	19.34	19.39	
	190	24.47	24.47	24.58	24.84	25.09	18.07	19.58	19.34	19.39	
	251	24.67	24.67	24.78	24.94	25.19	18.17	19.68	19.44	19.49	
PCS 1900	512	21.07	21.07	21.58	21.64	21.89	17.97	18.68	18.34	18.59	
	661	21.07	21.07	21.58	21.64	21.89	17.87	18.58	18.14	18.29	
	810	21.17	21.17	21.68	21.74	21.99	17.77	18.48	18.04	18.19	
GSM850	Frame Avg. Targets:	24.17	24.17	24.68	24.44	24.69	17.67	19.18	18.94	19.19	
PCS 1900		20.67	20.67	21.68	21.44	21.69	17.67	18.18	17.94	18.19	

Table 9.1.2 GSM Conducted Power

Note:

- Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
- GPRS (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
- EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

GPRS Multislot class: 12 (max 4 TX Uplink slots)
 EDGE Multislot class: 12 (max 4 TX Uplink slots)
 DTM Multislot Class: N/A



Figure 9.1 Power Measurement Setup

9.2 WCDMA Nominal and Maximum Output Power Spec and Conducted Powers

3GPP Release Version	Mode		Cellular Band (dBm)		AWS Band (dBm)		PCS Band (dBm)			3GPP MPR (dB)
99	WCDMA	Voice	Maximum	25.2	23.2		23.7			-
			Nominal	24.7	22.7		23.2			
5	HSDPA	Subtest 1	Maximum	24.2	22.2		22.7			1
			Nominal	23.7	21.7		22.2			
5		Subtest 2	Maximum	24.2	22.2		22.7			1
			Nominal	23.7	21.7		22.2			
5		Subtest 3	Maximum	23.7	21.7		22.2			1.5
			Nominal	23.2	21.2		21.7			
5		Subtest 4	Maximum	23.7	21.7		22.2			1.5
			Nominal	23.2	21.2		21.7			
6	HSUPA	Subtest 1	Maximum	22.2	20.2		20.7			3
			Nominal	21.7	19.7		20.2			
6		Subtest 2	Maximum	22.2	20.2		20.7			3
			Nominal	21.7	19.7		20.2			
6		Subtest 3	Maximum	23.2	21.2		21.7			2
			Nominal	22.7	20.7		21.2			
6		Subtest 4	Maximum	21.7	19.7		20.2			3.5
			Nominal	21.2	19.2		19.7			
6		Subtest 5	Maximum	23.2	21.2		21.7			2
			Nominal	22.7	20.7		21.2			
8	DC-HSDPA	Subtest 1	Maximum	24.2	22.2		22.7			1
			Nominal	23.7	21.7		22.2			
8		Subtest 2	Maximum	24.2	22.2		22.7			1
			Nominal	23.7	21.7		22.2			
8		Subtest 3	Maximum	23.7	21.7		22.2			1.5
			Nominal	23.2	21.2		21.7			
8		Subtest 4	Maximum	23.7	21.7		22.2			1.5
			Nominal	23.2	21.2		21.7			

Table 9.2.1 WCDMA Nominal and Maximum Output Power Spec

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band (dBm)			AWS Band (dBm)			PCS Band (dBm)			3GPP MPR (dB)
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.97	24.98	24.96	23.07	23.02	23.06	23.63	23.50	23.52	-
99		12.2 kbps AMR	24.92	24.94	24.93	23.02	22.97	23.03	23.58	23.45	23.47	-
5	HSDPA	Subtest 1	24.00	24.02	23.99	22.07	22.01	22.06	22.58	22.46	22.48	1
5		Subtest 2	23.98	24.00	23.97	22.03	21.97	22.03	22.55	22.42	22.45	1
5		Subtest 3	23.51	23.51	23.48	21.57	21.48	21.53	22.08	21.93	21.95	1.5
5		Subtest 4	23.49	23.49	23.48	21.55	21.46	21.52	22.05	21.93	21.94	1.5
6	HSUPA	Subtest 1	22.00	22.01	21.99	20.05	20.00	20.05	20.57	20.44	20.47	3
6		Subtest 2	22.00	22.02	21.98	20.06	20.00	20.04	20.57	20.44	20.47	3
6		Subtest 3	23.01	23.03	23.00	21.07	21.01	21.06	21.58	21.46	21.47	2
6		Subtest 4	21.54	21.55	21.52	19.59	19.52	19.57	20.10	19.97	19.99	3.5
6		Subtest 5	22.98	22.91	22.89	21.04	20.98	21.03	21.56	21.43	21.44	2
8	DC-HSDPA	Subtest 1	23.98	24.00	23.95	22.05	22.00	22.05	22.55	22.44	22.45	1
8		Subtest 2	23.97	23.98	23.94	22.02	21.95	22.02	22.51	22.41	22.43	1
8		Subtest 3	23.48	23.48	23.44	21.55	21.45	21.52	22.04	21.91	21.94	1.5
8		Subtest 4	23.47	23.48	23.43	21.51	21.44	21.50	22.02	21.91	21.92	1.5

Table 9.2.2 WCDMA Conducted Power

WCDMA SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

The manufacturer declares that the HSDPA, HSUPA and DC-HSDPA transmitter's power will not exceed the R99 maximum transmit power in devices based on MTK's HSPA chipset solutions. (WCDMA B5/B4/B2: Please refer to the tune-up procedure about MPR setting 2.)

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance.
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements.
- The DUT supports UE category 24 for HSDPA.




Figure 9.2 Power Measurement Setup

9.3 LTE Nominal and Maximum Output Power Spec and Conducted Powers

Band & Mode	Modulated Average[dBm]	
	LTE Band 12	Maximum
	Nominal	24.2

Table 9.3.1.1 Nominal and Maximum Output Power Spec

1) LTE Band 12

LTE Band 12 Conducted Power-- 10 MHz Bandwidth						
Modulation	RB Size	RB Offset	Mid Channel		MPR Allowed Per 3GPP(dB)	MPR (dB)
			23095 (70.5 MHz)	Conducted Power (dBm)		
QPSK	1	0		24.35	≤ 1	0
	1	25		24.12		
	1	49		24.18		
	25	0		23.26		1
	25	12		23.21		
	25	25		23.17		
	50	0		23.24	1	
16QAM	1	0		23.46	≤ 1	1
	1	25		23.30		
	1	49		23.35		
	25	0		22.29	≤ 2	2
	25	12		22.27		
	25	25		22.27		
	50	0		22.26	2	
64QAM	1	0		22.42	≤ 2	2
	1	25		22.27		
	1	49		22.32		
	25	0		21.28	≤ 3	3
	25	12		21.26		
	25	25		21.27		
	50	0		21.19	3	

Table 9.3.1.2 LTE Conducted Power

Note : LTE B12 can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 12 Conducted Power-- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			23035 (70.5 MHz)	23095 (70.5 MHz)	23155 (713.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.09	24.07	24.08	≤ 1	0
	1	12	24.22	24.18	24.15		
	1	24	24.11	24.09	24.08		
	12	0	23.16	23.22	23.15		1
	12	6	23.29	23.28	23.21		
	12	13	23.26	23.20	23.14		
	25	0	23.22	23.24	23.13	1	
16QAM	1	0	23.28	23.25	23.22	≤ 1	1
	1	12	23.40	23.31	23.35		
	1	24	23.29	23.24	23.22		
	12	0	22.20	22.27	22.20	≤ 2	2
	12	6	22.34	22.32	22.29		
	12	13	22.30	22.24	22.17		
	25	0	22.26	22.27	22.21	2	
64QAM	1	0	22.22	22.22	22.18	≤ 2	2
	1	12	22.41	22.34	22.32		
	1	24	22.26	22.18	22.22		
	12	0	21.24	21.31	21.20	≤ 3	3
	12	6	21.37	21.34	21.30		
	12	13	21.31	21.28	21.21		
	15	0	21.24	21.26	21.18	3	

Table 9.3.1.3 LTE Conducted Power

LTE Band 12 Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.19	24.13	24.14	≤ 1	0	
	1	7	24.20	24.18	24.13			
	1	14	24.21	24.19	24.18			
	8	0	23.23	23.21	23.17		1	
	8	4	23.29	23.26	23.20			
	8	7	23.28	23.23	23.20			
16QAM	15	0	23.23	23.21	23.18	≤ 1	1	
	1	0	23.36	23.32	23.32			
	1	7	23.37	23.34	23.29			
	1	14	23.38	23.38	23.35		≤ 2	
	8	0	22.36	22.34	22.29			
	8	4	22.42	22.37	22.30			
64QAM	8	7	22.39	22.35	22.30	≤ 2	2	
	15	0	22.33	22.29	22.23			
	1	0	22.34	22.27	22.24			≤ 2
	1	7	22.37	22.30	22.24			
	1	14	22.36	22.32	22.32		≤ 3	
	8	0	21.32	21.28	21.29			
8	4	21.37	21.36	21.31				
64QAM	8	7	21.38	21.30	21.30	≤ 3	3	
	15	0	21.27	21.24	21.19			
								3

Table 9.3.1.4 LTE Conducted Power

LTE Band 12 Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.20	24.13	24.10	≤ 1	0	
	1	2	24.34	24.32	24.22			
	1	5	24.21	24.16	24.11			
	3	0	24.30	24.21	24.19		0	
	3	2	24.33	24.28	24.26			
	3	3	24.29	24.25	24.23			
16QAM	6	0	23.30	23.25	23.24	≤ 1	1	
	1	0	23.33	23.33	23.27			
	1	2	23.48	23.44	23.39			
	1	5	23.37	23.35	23.24		≤ 1	
	3	0	23.31	23.26	23.19			
	3	2	23.35	23.32	23.29			
64QAM	3	3	23.33	23.33	23.25	≤ 2	1	
	6	0	22.40	22.39	22.33			
	1	0	22.33	22.30	22.23			≤ 2
	1	2	22.47	22.39	22.36			
	1	5	22.34	22.27	22.27		≤ 2	
	3	0	22.46	22.38	22.36			
3	2	22.52	22.39	22.43				
64QAM	3	3	22.46	22.38	22.39	≤ 3	2	
	6	0	21.33	21.28	21.24			
								3

Table 9.3.1.5 LTE Conducted Power

Band & Mode		Modulated Average[dBm]
LTE Band 5	Maximum	25.2
	Nominal	24.7

Table 9.3.2.1 Nominal and Maximum Output Power Spec

2) LTE Band 5 (Cell)

LTE Band 5 (Cell) Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Mid Channel			MPR Allowed Per 3GPP(dB)	MPR (dB)
			20525 (836.5 MHz)				
			Conducted Power (dBm)				
QPSK	1	0	24.76			≤ 1	0
	1	25	24.87				
	1	49	24.64				
	25	0	23.92				1
	25	12	23.95				
	25	25	23.89				
	50	0	23.92				
16QAM	1	0	23.93			≤ 1	1
	1	25	23.94				
	1	49	23.80				
	25	0	22.93			≤ 2	2
	25	12	22.97				
	25	25	22.93				
	50	0	22.98				
64QAM	1	0	22.89			≤ 2	2
	1	25	22.99				
	1	49	22.82				
	25	0	21.93			≤ 3	3
	25	12	21.98				
	25	25	21.92				
	50	0	21.98				

Table 9.3.2.2 LTE Conducted Power

Note : LTE B5(Cell) can not contain three non-overlapping channels of 10 MHz bandwidth.

Per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Band 5 (Cell) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	24.67	24.72	24.61	≤ 1	0
	1	12	24.80	24.80	24.73		
	1	24	24.69	24.66	24.66		
	12	0	23.84	23.95	23.86		1
	12	6	23.93	23.95	23.90		
	12	13	23.91	23.87	23.85		
	25	0	23.88	23.92	23.86		
16QAM	1	0	23.82	23.89	23.74	≤ 1	1
	1	12	23.98	23.94	23.88		
	1	24	23.86	23.78	23.82		
	12	0	22.83	22.93	22.85	≤ 2	2
	12	6	22.92	22.98	22.89		
	12	13	22.88	22.89	22.83		
	25	0	22.92	22.95	22.84		
64QAM	1	0	22.85	22.83	22.74	≤ 2	2
	1	12	22.99	22.93	22.92		
	1	24	22.84	22.79	22.81		
	12	0	21.88	22.00	21.90	≤ 3	3
	12	6	21.98	21.93	21.95		
	12	13	21.97	21.95	21.91		
	25	0	21.93	21.97	21.88		

Table 9.3.2.3 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.78	24.83	24.77	≤ 1	0	
	1	7	24.79	24.80	24.73			
	1	14	24.81	24.79	24.76			
	8	0	23.85	23.90	23.84		1	
	8	4	23.92	23.92	23.89			
	8	7	23.88	23.88	23.86			
16QAM	15	0	23.89	23.89	23.91	≤ 1	1	
	1	0	23.98	23.92	23.89		≤ 1	1
	1	7	23.94	23.98	23.90			
	1	14	23.96	23.99	23.93			
	8	0	22.94	22.96	22.90		≤ 2	2
	8	4	22.99	22.97	22.96			
8	7	22.93	22.97	22.90				
64QAM	15	0	22.88	22.95	22.88	≤ 2	2	
	1	0	22.96	22.92	22.87		≤ 2	2
	1	7	22.96	22.98	22.88			
	1	14	22.96	22.97	22.90			
	8	0	21.95	22.00	21.90		≤ 3	3
	8	4	21.91	21.92	21.96			
8	7	21.95	21.99	21.96				
	15	0	21.86	21.92	21.87		3	

Table 9.3.2.4 LTE Conducted Power

LTE Band 5 (Cell) Conducted Power– 1.4 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)	
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)			
			Conducted Power (dBm)					
QPSK	1	0	24.77	24.77	24.68	≤ 1	0	
	1	2	24.81	24.82	24.86			
	1	5	24.78	24.75	24.67			
	3	0	24.85	24.86	24.81		0	
	3	2	24.85	24.86	24.85			
	3	3	24.81	24.86	24.81			
16QAM	6	0	23.94	23.96	23.92	≤ 1	1	
	1	0	23.96	23.97	23.84		≤ 1	1
	1	2	23.95	23.99	23.93			
	1	5	23.92	23.91	23.87			
	3	0	23.85	23.88	23.81		1	
	3	2	23.91	23.92	23.87			
3	3	23.89	23.89	23.81				
64QAM	6	0	22.97	23.00	22.96	≤ 2	2	
	1	0	22.95	22.95	22.86		≤ 2	2
	1	2	22.92	22.99	22.93			
	1	5	22.95	22.93	22.85			
	3	0	22.93	22.93	23.00		2	
	3	2	22.93	22.95	22.97			
3	3	22.91	23.00	22.99				
	6	0	21.95	21.95	21.90	≤ 3	3	

Table 9.3.2.5 LTE Conducted Power

Band & Mode	Modulated Average[dBm]
LTE Band 66 (AWS)	Maximum
	Nominal

Table 9.3.3.1 Nominal and Maximum Output Power Spec

3) LTE Band 66 (AWS)

LTE Band 66 (AWS) Conducted Power- 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.20	23.14	23.18	≤ 1	0
	1	50	23.41	23.39	23.40		
	1	99	23.08	23.02	23.04		
	50	0	22.34	22.34	22.40		1
	50	25	22.49	22.36	22.48		
	50	50	22.31	22.27	22.34		
	100	0	22.44	22.30	22.42		
16QAM	1	0	22.40	22.32	22.35	≤ 1	1
	1	50	22.56	22.49	22.47		
	1	99	22.26	22.21	22.18		
	50	0	21.30	21.34	21.49		≤ 2
	50	25	21.37	21.33	21.42		
	50	50	21.29	21.25	21.34		
	100	0	21.28	21.31	21.40		
64QAM	1	0	21.38	21.30	21.32	≤ 2	2
	1	50	21.52	21.49	21.46		
	1	99	21.25	21.21	21.13		
	50	0	20.28	20.35	20.47		≤ 3
	50	25	20.38	20.32	20.40		
	50	50	20.28	20.24	20.32		
	100	0	20.28	20.28	20.40		

Table 9.3.3.2 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.27	23.22	23.23	≤ 1	0
	1	36	23.30	23.30	23.31		
	1	74	23.15	23.09	23.11		
	36	0	22.33	22.35	22.43		1
	36	18	22.41	22.36	22.40		
	36	37	22.36	22.28	22.32		
	75	0	22.37	22.32	22.38		
16QAM	1	0	22.44	22.41	22.36	≤ 1	1
	1	36	22.41	22.47	22.48		
	1	74	22.34	22.29	22.23		
	36	0	21.32	21.33	21.42		≤ 2
	36	18	21.40	21.35	21.41		
	36	37	21.33	21.29	21.34		
	75	0	21.38	21.33	21.37		
64QAM	1	0	21.44	21.30	21.38	≤ 2	2
	1	36	21.45	21.40	21.47		
	1	74	21.32	21.26	21.29		
	36	0	20.33	20.35	20.44		≤ 3
	36	18	20.39	20.35	20.42		
	36	37	20.34	20.30	20.36		
	75	0	20.33	20.30	20.36		

Table 9.3.3.3 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.26	23.23	23.26	≤ 1	0
	1	25	23.38	23.36	23.37		
	1	49	23.17	23.15	23.15		
	25	0	22.31	22.34	22.42		1
	25	12	22.42	22.36	22.39		
	25	25	22.39	22.34	22.36		
	50	0	22.40	22.35	22.39		
16QAM	1	0	22.45	22.43	22.45	≤ 1	1
	1	25	22.48	22.53	22.55		
	1	49	22.35	22.32	22.29		
	25	0	21.36	21.37	21.45		≤ 2
	25	12	21.43	21.36	21.42		
	25	25	21.42	21.35	21.38		
	50	0	21.37	21.32	21.41		
64QAM	1	0	21.41	21.36	21.42	≤ 2	2
	1	25	21.56	21.48	21.55		
	1	49	21.35	21.29	21.25		
	25	0	20.33	20.33	20.40		≤ 3
	25	12	20.46	20.37	20.42		
	25	25	20.41	20.34	20.37		
	50	0	20.40	20.32	20.38		

Table 9.3.3.4 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.16	23.13	23.14	≤ 1	0
	1	12	23.29	23.24	23.23		
	1	24	23.13	23.09	23.07		
	12	0	22.31	22.31	22.32		1
	12	6	22.39	22.35	22.38		
	12	13	22.34	22.30	22.26		
	25	0	22.33	22.32	22.33		
16QAM	1	0	22.28	22.32	22.33	≤ 1	1
	1	12	22.44	22.36	22.39		
	1	24	22.27	22.28	22.24		
	12	0	21.34	21.33	21.35	≤ 2	2
	12	6	21.41	21.39	21.38		
	12	13	21.36	21.30	21.30		
	25	0	21.37	21.33	21.34		
64QAM	1	0	21.32	21.32	21.33	≤ 2	2
	1	12	21.47	21.40	21.42		
	1	24	21.31	21.26	21.24		
	12	0	20.35	20.33	20.36	≤ 3	3
	12	6	20.43	20.38	20.43		
	12	13	20.44	20.30	20.32		
	25	0	20.34	20.30	20.35		

Table 9.3.3.5 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.26	23.21	23.25	≤ 1	0
	1	7	23.27	23.21	23.24		
	1	14	23.27	23.17	23.20		
	8	0	22.31	22.27	22.31		1
	8	4	22.37	22.30	22.31		
	8	7	22.32	22.28	22.28		
	15	0	22.32	22.28	22.32		
16QAM	1	0	22.40	22.37	22.37	≤ 1	1
	1	7	22.40	22.34	22.43		
	1	14	22.41	22.31	22.35		
	8	0	21.47	21.41	21.43	≤ 2	2
	8	4	21.49	21.41	21.44		
	8	7	21.42	21.37	21.39		
	15	0	21.39	21.36	21.37		
64QAM	1	0	21.44	21.39	21.36	≤ 2	2
	1	7	21.45	21.37	21.35		
	1	14	21.43	21.35	21.32		
	8	0	20.42	20.36	20.41	≤ 3	3
	8	4	20.45	20.37	20.41		
	8	7	20.39	20.35	20.38		
	15	0	20.36	20.28	20.33		

Table 9.3.3.6 LTE Conducted Power

LTE Band 66 (AWS) Conducted Power- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.21	23.18	23.20	≤ 1	0
	1	2	23.34	23.34	23.27		
	1	5	23.22	23.15	23.17		
	3	0	23.34	23.29	23.33		0
	3	2	23.40	23.31	23.32		
	3	3	23.35	23.28	23.30		
	6	0	22.39	22.33	22.34		
16QAM	1	0	22.41	22.38	22.35	≤ 1	1
	1	2	22.46	22.51	22.44		
	1	5	22.37	22.34	22.32		
	3	0	22.39	22.34	22.28		1
	3	2	22.42	22.39	22.33		
	3	3	22.39	22.32	22.31		
	6	0	21.52	21.48	21.45		
64QAM	1	0	21.40	21.35	21.36	≤ 2	2
	1	2	21.49	21.51	21.44		
	1	5	21.40	21.31	21.31		
	3	0	21.40	21.48	21.43	≤ 2	2
	3	2	21.48	21.49	21.50		
	3	3	21.51	21.42	21.43		
	6	0	20.41	20.33	20.38		

Table 9.3.3.7 LTE Conducted Power

Band & Mode	Modulated Average(dBm)
LTE Band 2(PCS)	Maximum
	Nominal

Table 9.3.4.1 Nominal and Maximum Output Power Spec

4) LTE Band 2 (PCS)

LTE Band 2 (PCS) Conducted Power-- 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18700 (1860.0 MHz)	18900 (1880.0 MHz)	19100 (1900.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.33	23.32	23.22	≤ 1	0
	1	50	23.55	23.53	23.43		
	1	99	23.24	23.19	23.07		
	50	0	22.48	22.41	22.46		
	50	25	22.57	22.56	22.40		
	50	50	22.49	22.41	22.27		
	100	0	22.49	22.48	22.32		
16QAM	1	0	22.50	22.48	22.35	≤ 1	1
	1	50	22.69	22.65	22.58		
	1	99	22.41	22.38	22.24		
	50	0	21.47	21.45	21.45		
	50	25	21.49	21.43	21.41		
	50	50	21.48	21.37	21.23		
	100	0	21.46	21.39	21.31		
64QAM	1	0	21.44	21.43	21.25	≤ 2	2
	1	50	21.66	21.59	21.54		
	1	99	21.42	21.37	21.23		
	50	0	20.44	20.43	20.38		
	50	25	20.47	20.46	20.37		
	50	50	20.45	20.34	20.19		
	100	0	20.45	20.36	20.27		

Table 9.3.4.2 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power-- 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18675 (1857.5 MHz)	18900 (1880.0 MHz)	19125 (1902.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.35	23.35	23.24	≤ 1	0
	1	36	23.44	23.47	23.30		
	1	74	23.30	23.29	23.12		
	36	0	22.46	22.52	22.40		
	36	18	22.47	22.52	22.35		
	36	37	22.46	22.51	22.25		
	75	0	22.48	22.50	22.32		
16QAM	1	0	22.53	22.54	22.42	≤ 1	1
	1	36	22.57	22.59	22.48		
	1	74	22.45	22.42	22.27		
	36	0	21.46	21.46	21.39		
	36	18	21.48	21.48	21.34		
	36	37	21.44	21.42	21.23		
	75	0	21.51	21.47	21.31		
64QAM	1	0	21.50	21.46	21.41	≤ 2	2
	1	36	21.55	21.57	21.46		
	1	74	21.48	21.43	21.24		
	36	0	20.45	20.48	20.38		
	36	18	20.47	20.49	20.35		
	36	37	20.45	20.44	20.22		
	75	0	20.46	20.44	20.29		

Table 9.3.4.3 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power-- 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18650 (1855.0 MHz)	18900 (1880.0 MHz)	19150 (1905.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.40	23.40	23.27	≤ 1	0
	1	25	23.47	23.51	23.31		
	1	49	23.36	23.39	23.17		
	25	0	22.47	22.52	22.36		
	25	12	22.45	22.54	22.30		
	25	25	22.45	22.50	22.23		
	50	0	22.47	22.51	22.34		
16QAM	1	0	22.55	22.58	22.40	≤ 1	1
	1	25	22.58	22.67	22.42		
	1	49	22.55	22.58	22.35		
	25	0	21.47	21.50	21.38		
	25	12	21.47	21.52	21.31		
	25	25	21.48	21.47	21.25		
	50	0	21.47	21.49	21.35		
64QAM	1	0	21.55	21.54	21.38	≤ 2	2
	1	25	21.57	21.67	21.41		
	1	49	21.53	21.51	21.35		
	25	0	20.46	20.48	20.33		
	25	12	20.46	20.53	20.29		
	25	25	20.45	20.45	20.22		
	50	0	20.43	20.48	20.31		

Table 9.3.4.4 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18625 (1852.5 MHz)	18900 (1880.0 MHz)	19175 (1907.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.33	23.34	23.12	≤ 1	0
	1	12	23.39	23.45	23.21		
	1	24	23.26	23.35	23.11		
	12	0	22.45	22.49	22.29		1
	12	6	22.49	22.54	22.31		
	12	13	22.44	22.48	22.21		
	25	0	22.44	22.51	22.27		
16QAM	1	0	22.50	22.48	22.32	≤ 1	1
	1	12	22.58	22.56	22.38		
	1	24	22.41	22.54	22.30		
	12	0	21.43	21.45	21.32	≤ 2	2
	12	6	21.49	21.50	21.34		
	12	13	21.43	21.47	21.21		
	25	0	21.46	21.49	21.28		
64QAM	1	0	21.44	21.48	21.24	≤ 2	2
	1	12	21.52	21.63	21.32		
	1	24	21.40	21.49	21.21		
	12	0	20.48	20.50	20.30	≤ 3	3
	12	6	20.51	20.54	20.32		
	12	13	20.46	20.48	20.26		
	25	0	20.45	20.48	20.29		

Table 9.3.4.5 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18615 (1851.5 MHz)	18900 (1880.0 MHz)	19185 (1908.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.44	23.45	23.20	≤ 1	0
	1	7	23.42	23.45	23.22		
	1	14	23.38	23.43	23.21		
	8	0	22.44	22.47	22.22		1
	8	4	22.45	22.48	22.27		
	8	7	22.42	22.44	22.23		
	15	0	22.44	22.48	22.24		
16QAM	1	0	22.59	22.56	22.37	≤ 1	1
	1	7	22.55	22.60	22.39		
	1	14	22.54	22.55	22.40		
	8	0	21.52	21.50	21.31	≤ 2	2
	8	4	21.53	21.55	21.35		
	8	7	21.49	21.50	21.29		
	15	0	21.46	21.47	21.27		
64QAM	1	0	21.61	21.59	21.31	≤ 2	2
	1	7	21.52	21.62	21.41		
	1	14	21.48	21.58	21.37		
	8	0	20.52	20.51	20.30	≤ 3	3
	8	4	20.52	20.53	20.34		
	8	7	20.50	20.49	20.31		
	15	0	20.44	20.46	20.23		

Table 9.3.4.6 LTE Conducted Power

LTE Band 2 (PCS) Conducted Power- 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			18607 (1850.7 MHz)	18900 (1880.0 MHz)	19193 (1909.3 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.28	23.32	23.08	≤ 1	0
	1	2	23.39	23.44	23.22		
	1	5	23.28	23.32	23.09		
	3	0	23.39	23.39	23.18		0
	3	2	23.41	23.43	23.20		
	3	3	23.37	23.44	23.19		
	6	0	22.39	22.44	22.19		
16QAM	1	0	22.47	22.45	22.26	≤ 1	1
	1	2	22.58	22.62	22.37		
	1	5	22.44	22.51	22.26		
	3	0	22.37	22.38	22.21		1
	3	2	22.40	22.40	22.22		
	3	3	22.36	22.37	22.16		
	6	0	21.52	21.51	21.28		
64QAM	1	0	21.43	21.48	21.22	≤ 2	2
	1	2	21.50	21.55	21.36		
	1	5	21.40	21.48	21.22		
	3	0	21.49	21.48	21.29	≤ 2	2
	3	2	21.54	21.50	21.28		
	3	3	21.50	21.46	21.26		
	6	0	20.40	20.41	20.22		

Table 9.3.4.7 LTE Conducted Power

Band & Mode	Modulated Average[dBm]
LTE Band 7	Maximum
	Nominal

Table 9.3.5.1 Nominal and Maximum Output Power Spec

5) LTE Band 7

LTE Band 7 Conducted Power– 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.35	23.33	23.34	≤ 1	0
	1	50	23.60	23.58	23.57		
	1	99	23.36	23.32	23.34		
	50	0	22.45	22.44	22.56		1
	50	25	22.62	22.61	22.58		
	50	50	22.49	22.60	22.57		
16QAM	100	0	22.60	22.58	22.57	≤ 2	2
	1	0	22.48	22.42	22.42		
	1	50	22.75	22.72	22.74		
	1	99	22.49	22.48	22.48		2
	50	0	21.39	21.39	21.51		
	50	25	21.54	21.48	21.53		
64QAM	50	50	21.44	21.52	21.53	≤ 3	3
	100	0	21.41	21.44	21.50		
	1	0	21.44	21.37	21.39		
	1	50	21.71	21.70	21.64		2
	1	99	21.48	21.45	21.47		
	50	0	20.40	20.39	20.51		
64QAM	50	25	20.52	20.46	20.50	≤ 3	3
	50	50	20.45	20.53	20.52		
	100	0	20.41	20.45	20.51		

Table 9.3.5.2 LTE Conducted Power

LTE Band 7 Conducted Power– 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20825 (2507.5 MHz)	21100 (2535.0 MHz)	21375 (2562.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.41	23.36	23.38	≤ 1	0
	1	36	23.46	23.48	23.49		
	1	74	23.40	23.43	23.47		
	36	0	22.52	22.50	22.60		1
	36	18	22.56	22.54	22.61		
	36	37	22.55	22.58	22.63		
16QAM	75	0	22.55	22.54	22.61	≤ 2	2
	1	0	22.57	22.56	22.55		
	1	36	22.63	22.64	22.64		
	1	74	22.59	22.61	22.63		2
	36	0	21.45	21.47	21.53		
	36	18	21.49	21.50	21.54		
64QAM	36	37	21.48	21.54	21.55	≤ 3	3
	75	0	21.46	21.51	21.57		
	1	0	21.53	21.52	21.49		
	1	36	21.61	21.59	21.63		2
	1	74	21.55	21.56	21.58		
	36	0	20.47	20.47	20.55		
64QAM	36	18	20.52	20.51	20.57	≤ 3	3
	36	37	20.49	20.55	20.58		
	75	0	20.47	20.49	20.56		

Table 9.3.5.3 LTE Conducted Power

LTE Band 7 Conducted Power– 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20800 (2505.0 MHz)	21100 (2535.0 MHz)	21400 (2565.0 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.45	23.39	23.43	≤ 1	0
	1	25	23.58	23.56	23.56		
	1	49	23.39	23.43	23.47		
	25	0	22.52	22.53	22.59		1
	25	12	22.58	22.56	22.60		
	25	25	22.61	22.63	22.64		
16QAM	1	0	22.58	22.59	22.63	≤ 1	1
	1	25	22.74	22.74	22.75		
	1	49	22.59	22.63	22.65		
	25	0	21.49	21.49	21.56		≤ 2
	25	12	21.53	21.53	21.54		
	25	25	21.58	21.59	21.62		
64QAM	1	0	21.54	21.56	21.57	≤ 2	2
	1	25	21.67	21.75	21.72		
	1	49	21.53	21.57	21.55		
	25	0	20.48	20.49	20.55		≤ 3
	25	12	20.52	20.54	20.53		
	25	25	20.58	20.58	20.60		
	50	0	20.53	20.55	20.58		3

Table 9.3.5.4 LTE Conducted Power

LTE Band 7 Conducted Power– 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed Per 3GPP(dB)	MPR (dB)
			20775 (2502.5 MHz)	21100 (2535.0 MHz)	21425 (2567.5 MHz)		
			Conducted Power (dBm)				
QPSK	1	0	23.39	23.42	23.40	≤ 1	0
	1	12	23.45	23.46	23.52		
	1	24	23.40	23.35	23.36		
	12	0	22.48	22.44	22.53		1
	12	6	22.55	22.52	22.60		
	12	13	22.53	22.52	22.53		
16QAM	25	0	22.49	22.48	22.54	≤ 1	1
	1	0	22.57	22.55	22.54		
	1	12	22.62	22.58	22.68		
	1	24	22.57	22.47	22.55		≤ 2
	12	0	21.47	21.43	21.48		
	12	6	21.54	21.51	21.57		
64QAM	12	13	21.52	21.49	21.51	≤ 2	2
	25	0	21.50	21.50	21.52		
	1	0	21.53	21.50	21.52		
	1	12	21.57	21.64	21.68		
	1	24	21.51	21.52	21.54		
	12	0	20.51	20.43	20.54		≤ 3
12	6	20.59	20.56	20.62			
12	13	20.55	20.52	20.56			
	25	0	20.52	20.47	20.54		3

Table 9.3.5.5 LTE Conducted Power

9.4 WLAN Nominal and Maximum Output Power Spec and Conducted Powers

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
2.4	802.11b	1~11	16.5	15.5
		12~13	4.0	3.0
	802.11g (6~12Mbps)	1	14.0	13.0
		2~10	15.5	14.5
		11	14.5	13.5
		12~13	4.0	3.0
	802.11g (18~54Mbps)	1	14.0	13.0
		2~10	15.0	14.0
		11	14.5	13.5
		12~13	4.0	3.0
	802.11n (MCS0~MCS2)	1	12.5	11.5
		2~10	14.0	13.0
		11	13.0	12.0
		12~13	4.0	3.0
	802.11n (MCS3~MCS7)	1	12.5	11.5
		2~10	14.0	13.0
		11	13.0	12.0
		12~13	4.0	3.0

Table 9.4.1 Nominal and Maximum Output Power Spec

Mode	Freq.	Channel	IEEE 802.11 (2.4 GHz) Conducted Power
	(MHz)		[dBm]
802.11b	2412	1	15.08
	2437	6	15.51
	2462	11	15.50
	2467	12	3.74
	2472	13	3.65
802.11g	2412	1	13.45
	2437	6	14.79
	2462	11	13.36
	2467	12	3.16
	2472	13	2.93
802.11n (HT-20)	2412	1	11.51
	2437	6	13.14
	2462	11	12.05
	2467	12	3.07
	2472	13	2.80

Table 9.4.2 IEEE 802.11 Average RF Power

Band (GHz)	Mode	Ch	Modulated Average[dBm]	
			Maximum	Nominal
5 (UNII)	802.11a 6~12Mbps	36-44	14.0	13.0
		48-64	15.0	14.0
		100-144	16.0	15.0
		149-165	16.5	15.5
	802.11a 18~54Mbps	36-44	13.0	12.0
		48-64	14.0	13.0
		100-144	15.0	14.0
		149-165	15.5	14.5
	802.11n (20MHz) MCS0~2	36-44	13.0	12.0
		48-64	14.5	13.5
		100-144	15.0	14.0
		149-165	15.5	14.5
	802.11n (20MHz) MCS3~7	36-44	12.0	11.0
		48-64	13.5	12.5
		100-144	14.0	13.0
		149-165	14.5	13.5
	802.11ac (20MHz) MCS0~8	36-44	11.0	10.0
		48-64	12.0	11.0
		100-144	13.0	12.0
		149-165	13.5	12.5
	802.11n (40MHz) MCS0~7	38, 46	11.0	10.0
		54, 62	12.5	11.5
		102-159	13.0	12.0
	802.11ac (40MHz) MCS0~9	38, 46	10.0	9.0
		54, 62	11.5	10.5
		102-159	12.5	11.5
	802.11ac (80MHz) MCS0~9	42	10.5	9.5
		58	11.0	10.0
106-155		12.5	11.5	

Table 9.4.3 Nominal and Maximum Output Power Spec

Mode	Freq. (MHz)	Channel	IEEE 802.11a (5 GHz) Conducted Power	
				[dBm]
802.11a	5180	36		12.51
	5200	40		12.99
	5220	44		13.33
	5240	48		13.58
	5260	52		14.05
	5280	56		14.03
	5300	60		14.24
	5320	64		14.31
	5500	100		14.71
	5600	120		15.37
	5660	132		15.24
	5720	144		15.43
	5745	149		15.79
	5785	157		15.62
	5825	165		15.78

Table 9.4.4 IEEE 802.11a Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT20 (5 GHz) Conducted Power	
				[dBm]
802.11n (HT-20)	5180	36		11.91
	5200	40		12.53
	5220	44		12.61
	5240	48		13.08
	5260	52		13.41
	5280	56		13.53
	5300	60		13.60
	5320	64		13.90
	5500	100		14.04
	5600	120		14.66
	5660	132		14.76
	5720	144		14.92
	5745	149		15.02
	5785	157		15.11
	5825	165		15.07

Table 9.4.5 IEEE 802.11n HT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT20 (5 GHz) Conducted Power	
				[dBm]
802.11ac (VHT-20)	5180	36		9.83
	5200	40		10.14
	5220	44		10.66
	5240	48		10.99
	5260	52		11.12
	5280	56		11.36
	5300	60		11.55
	5320	64		11.61
	5500	100		12.25
	5600	120		12.55
	5660	132		12.44
	5720	144		12.72
	5745	149		12.43
	5785	157		12.44
5825	165		12.85	

Table 9.4.6 IEEE 802.11ac VHT20 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11n HT40 (5 GHz) Conducted Power	
				[dBm]
802.11n (HT-40)	5190	38		9.88
	5230	46		10.52
	5270	54		11.26
	5310	62		11.63
	5510	102		12.31
	5590	118		12.66
	5670	134		12.59
	5710	142		12.60
	5755	151		12.70
	5795	159		12.84

Table 9.4.7 IEEE 802.11n HT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT40 (5 GHz) Conducted Power	
				[dBm]
802.11ac (VHT-40)	5190	38		8.97
	5230	46		9.65
	5270	54		10.25
	5310	62		10.77
	5510	102		11.32
	5590	118		11.60
	5670	134		11.54
	5710	142		11.43
	5755	151		11.87
	5795	159		12.01

Table 9.4.8 IEEE 802.11ac VHT40 Average RF Power

Mode	Freq. (MHz)	Channel	IEEE 802.11ac VHT80 (5 GHz) Conducted Power	
				[dBm]
802.11ac (VHT-80)	5210	42		9.17
	5290	58		10.21
	5530	106		11.39
	5610	122		11.55
	5690	138		11.47
	5775	155		11.80

Table 9.4.9 IEEE 802.11ac VHT80 Average RF Power

Justification for reduced test configurations for WIFI channels per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- Output Power and SAR is not required for 802.11 g/n HT20/ac VHT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjust SAR is ≤ 1.2 W/kg.
- The underlined data rate and channel above were tested for SAR.

The average output powers of this device were tested by below configuration.




Figure 9.4 Power Measurement Setup

9.5 Bluetooth Conducted Powers

Burst Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	11.0
	Nominal	10.0
Bluetooth 2 Mbps	Maximum	7.5
	Nominal	6.5
Bluetooth 3 Mbps	Maximum	7.5
	Nominal	6.5
Bluetooth LE	Maximum	-1.5
	Nominal	-2.5

Table 9.5.1 Nominal and Maximum Output Power Spec (Burst)

Frame Modulated Average[dBm]		
Bluetooth 1 Mbps	Maximum	9.85
	Nominal	8.85
Bluetooth 2 Mbps	Maximum	6.35
	Nominal	5.35
Bluetooth 3 Mbps	Maximum	6.35
	Nominal	5.35
Bluetooth (LE / 1Mbps)	Maximum	-2.19
	Nominal	-3.19
Bluetooth (LE / 2Mbps)	Maximum	-3.91
	Nominal	-4.91

Table 9.5.2 Nominal and Maximum Output Power Spec (Frame)

Channel	Frequency	Burst AVG Output Power (1Mbps)	Frame AVG Output Power (1Mbps)	Burst AVG Output Power (2Mbps)	Frame AVG Output Power (2Mbps)	Burst AVG Output Power (3Mbps)	Frame AVG Output Power (3Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	9.88	8.73	6.79	5.64	6.79	5.64
Mid	2441	10.38	9.23	7.07	5.92	7.08	5.93
High	2480	10.04	8.89	6.74	5.59	6.75	5.60

Table 9.5.3 Bluetooth Burst and Frame Average RF Power

Channel	Frequency	Burst AVG Output Power(LE / 1Mbps)	Frame AVG Output Power(LE / 1Mbps)	Burst AVG Output Power(LE / 2Mbps)	Frame AVG Output Power(LE / 2Mbps)
	(MHz)	(dBm)	(dBm)	(dBm)	(dBm)
Low	2402	-3.29	-3.98	-3.29	-5.70
Mid	2440	-2.19	-2.88	-2.18	-4.59
High	2480	-3.33	-4.02	-3.33	-5.74

Table 9.5.4 Bluetooth LE Burst and Frame Average RF Power

● Bluetooth Conducted Powers procedures

1. Bluetooth (BDR, EDR)

- 1) Enter DUT mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 9.5.1(A).
- 3) The maximum output powers of BDR(1 Mbps), EDR(2, 3 Mbps) and each frequency were set by a Bluetooth Tester.
- 4) Power levels were measured by a Power Meter.

2. Bluetooth (LE)

- 1) Enter LE mode in EUT and operate it.
When it operating, The EUT is transmitting at maximum power level and duty cycle fixed.
- 2) Instruments and EUT were connected like Figure 9.5.1(B).
- 3) The average conducted output powers of LE and each frequency can measurement according to setting program in EUT.
- 4) Power levels were measured by a Power Meter.

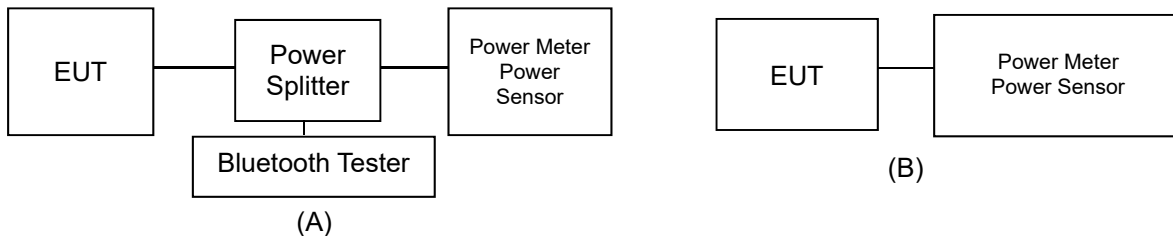


Figure 9.5.1 Average Power Measurement Setup

Bluetooth Transmission Plot

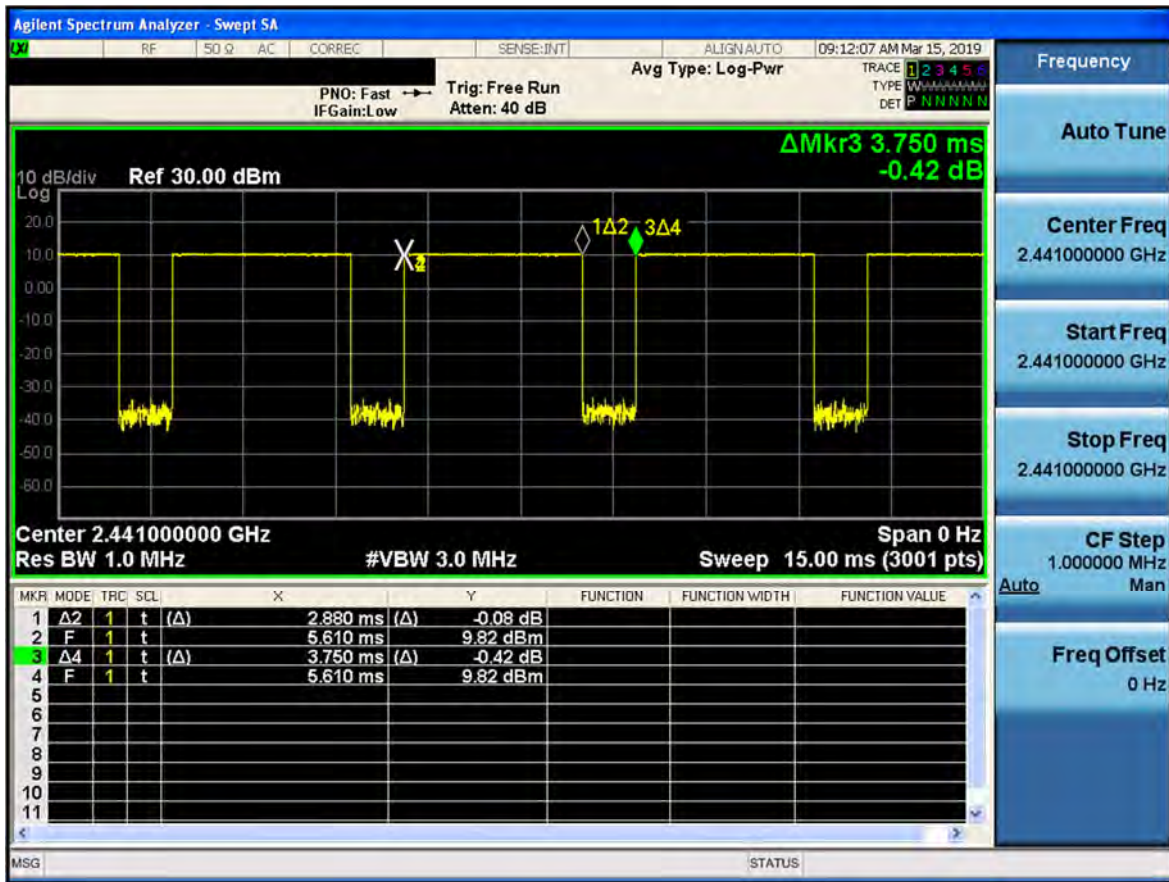


Figure 9.5.2 Bluetooth Transmission Plot

Bluetooth Duty Cycle Calculation

$$\text{Duty Cycle} = \text{Pulse/Period} * 100\% = (2.880/3.750) * 100 = 76.8\%$$

10. SYSTEM VERIFICATION

10.1 Tissue Verification

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Mar. 06. 2019	750 Head	20.4	20.9	707.5	42.129	0.887	41.417	0.887	-1.69	0.00
				750.0	41.900	0.890	40.868	0.920	-2.46	3.37
Mar. 06. 2019	750 Body	20.4	21.0	707.5	55.699	0.960	56.288	0.932	1.06	-2.92
				750.0	55.531	0.963	55.941	0.968	0.74	0.52
Mar. 07. 2019	835 Head	20.5	21.1	824.2	41.552	0.899	41.635	0.884	0.20	-1.67
				835.0	41.500	0.900	41.507	0.894	0.02	-0.67
				836.6	41.500	0.901	41.486	0.895	-0.03	-0.67
				848.8	41.500	0.914	41.316	0.906	-0.44	-0.88
Mar. 07. 2019	835 Body	20.5	21.0	824.2	55.243	0.969	54.765	0.978	-0.87	0.93
				835.0	55.200	0.970	54.670	0.990	-0.96	2.06
				836.6	55.197	0.971	54.655	0.992	-0.98	2.16
				848.8	55.160	0.986	54.561	1.006	-1.09	2.03
Mar. 13. 2019	835 Head	20.1	20.9	826.4	41.542	0.899	41.620	0.884	0.19	-1.67
				835.0	41.500	0.900	41.516	0.892	0.04	-0.89
				836.6	41.500	0.901	41.502	0.894	0.00	-0.78
				846.6	41.500	0.912	41.361	0.903	-0.33	-0.99
Mar. 13. 2019	835 Body	20.1	21.0	826.4	55.235	0.969	54.667	0.980	-1.03	1.14
				835.0	55.200	0.970	54.602	0.989	-1.08	1.96
				836.6	55.197	0.971	54.589	0.991	-1.10	2.06
				846.6	55.166	0.984	54.515	1.003	-1.18	1.93
Mar. 04. 2019	835 Head	20.5	21.0	829.0	41.528	0.899	41.617	0.886	0.21	-1.45
				835.0	41.500	0.900	41.543	0.892	0.10	-0.89
				836.5	41.500	0.901	41.529	0.893	0.07	-0.89
				844.0	41.500	0.910	41.422	0.900	-0.19	-1.10
Mar. 04. 2019	835 Body	20.5	20.8	829.0	55.223	0.970	54.574	0.981	-1.18	1.13
				835.0	55.200	0.970	54.526	0.988	-1.22	1.86
				836.5	55.197	0.971	54.516	0.990	-1.23	1.96
				844.0	55.172	0.981	54.455	0.998	-1.30	1.73
Mar. 12. 2019	1800 Head	20.2	21.0	1712.4	40.126	1.350	41.263	1.327	2.83	-1.70
				1732.4	40.097	1.361	41.137	1.348	2.59	-0.96
				1752.6	40.069	1.373	40.987	1.366	2.29	-0.51
				1800.0	40.000	1.400	40.729	1.402	1.82	0.14
Mar. 12. 2019	1800 Body	20.2	21.1	1712.4	53.596	1.464	54.536	1.458	1.75	-0.41
				1732.4	53.556	1.477	54.507	1.467	1.78	-0.68
				1752.6	53.516	1.489	54.443	1.480	1.73	-0.60
				1800.0	53.300	1.520	54.401	1.535	2.07	0.99
Mar. 02. 2019	1800 Head	20.4	21.1	1720.0	40.114	1.354	41.092	1.303	2.44	-3.77
				1745.0	40.079	1.369	40.971	1.327	2.23	-3.07
				1770.0	40.043	1.383	40.847	1.350	2.01	-2.39
				1800.0	40.000	1.400	40.694	1.376	1.74	-1.71
Mar. 02. 2019	1800 Body	20.4	21.3	1720.0	53.580	1.469	55.530	1.464	3.64	-0.34
				1745.0	53.530	1.485	55.460	1.483	3.61	-0.13
				1770.0	53.480	1.501	55.366	1.502	3.53	0.07
				1800.0	53.300	1.520	55.279	1.527	3.71	0.46

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Mar. 08. 2019	1900 Head	20.6	21.3	1850.2	40.000	1.400	40.061	1.354	0.15	-3.29
				1880.0	40.000	1.400	39.907	1.382	-0.23	-1.29
				1900.0	40.000	1.400	39.783	1.399	-0.54	-0.07
				1909.8	40.000	1.400	39.728	1.407	-0.68	0.50
Mar. 08. 2019	1900 Body	20.6	21.1	1850.2	53.300	1.520	55.191	1.482	3.55	-2.50
				1880.0	53.300	1.520	55.115	1.509	3.41	-0.72
				1900.0	53.300	1.520	55.032	1.524	3.25	0.26
				1909.8	53.300	1.520	55.001	1.531	3.19	0.72
Mar. 11. 2019	1900 Head	20.4	21.2	1852.4	40.000	1.400	39.797	1.358	-0.51	-3.00
				1880.0	40.000	1.400	39.640	1.384	-0.90	-1.14
				1900.0	40.000	1.400	39.505	1.401	-1.24	0.07
				1907.6	40.000	1.400	39.457	1.407	-1.36	0.50
Mar. 11. 2019	1900 Body	20.4	21.0	1852.4	53.300	1.520	55.358	1.489	3.86	-2.04
				1880.0	53.300	1.520	55.252	1.514	3.66	-0.39
				1900.0	53.300	1.520	55.153	1.528	3.48	0.53
				1907.6	53.300	1.520	55.118	1.534	3.41	0.92
Mar. 01. 2019	1900 Head	20.2	20.9	1860.0	40.000	1.400	39.519	1.370	-1.20	-2.14
				1880.0	40.000	1.400	39.402	1.388	-1.50	-0.86
				1900.0	40.000	1.400	39.276	1.405	-1.81	0.36
Mar. 01. 2019	1900 Body	20.2	20.8	1860.0	53.300	1.520	55.306	1.493	3.76	-1.78
				1880.0	53.300	1.520	55.217	1.510	3.60	-0.66
				1900.0	53.300	1.520	55.116	1.524	3.41	0.26
Mar. 14. 2019	2450 Head	20.2	21.1	2402.0	39.282	1.757	40.008	1.755	1.85	-0.11
				2412.0	39.265	1.766	39.987	1.768	1.84	0.11
				2437.0	39.222	1.788	39.971	1.801	1.91	0.73
				2441.0	39.215	1.792	39.966	1.805	1.92	0.73
				2450.0	39.200	1.800	39.953	1.815	1.92	0.83
				2462.0	39.184	1.813	39.926	1.826	1.89	0.72
				2472.0	39.171	1.823	39.882	1.835	1.82	0.66
				2480.0	39.160	1.832	39.835	1.842	1.72	0.55
Mar. 14. 2019	2450 Body	20.2	21.2	2402.0	52.764	1.904	53.612	1.907	1.61	0.16
				2412.0	52.751	1.914	53.594	1.924	1.60	0.52
				2437.0	52.717	1.938	53.575	1.963	1.63	1.29
				2441.0	52.712	1.941	53.570	1.968	1.63	1.39
				2450.0	52.700	1.950	53.559	1.977	1.63	1.38
				2462.0	52.685	1.967	53.539	1.987	1.62	1.02
				2472.0	52.672	1.981	53.505	1.994	1.58	0.66
				2480.0	52.662	1.993	53.473	2.000	1.54	0.35

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Mar. 05. 2019	2600 Head	20.2	20.8	2510.0	39.120	1.864	38.645	1.862	-1.21	-0.11
				2535.0	39.087	1.891	38.574	1.892	-1.31	0.05
				2560.0	39.053	1.917	38.532	1.926	-1.33	0.47
				2600.0	39.000	1.960	38.438	1.965	-1.44	0.26
Mar. 05. 2019	2600 Body	20.2	21.1	2510.0	52.624	2.035	51.285	1.975	-2.54	-2.95
				2535.0	52.592	2.071	51.236	2.012	-2.58	-2.85
				2560.0	52.560	2.106	51.219	2.049	-2.55	-2.71
				2600.0	52.509	2.163	51.127	2.086	-2.63	-3.56
Mar. 25. 2019	5200 Body	20.4	20.6	5180.0	49.041	5.276	49.150	5.434	0.22	2.99
				5190.0	49.028	5.288	49.126	5.447	0.20	3.01
				5200.0	49.014	5.299	49.103	5.463	0.18	3.09
				5210.0	49.001	5.311	49.090	5.479	0.18	3.16
				5220.0	48.987	5.323	49.080	5.492	0.19	3.17
				5230.0	48.974	5.334	49.061	5.503	0.18	3.17
Mar. 26. 2019	5300 Head	20.6	20.9	5240.0	48.960	5.346	49.036	5.514	0.16	3.14
				5260.0	35.940	4.720	35.117	4.897	-2.29	3.75
				5270.0	35.930	4.730	35.096	4.910	-2.32	3.81
				5280.0	35.920	4.740	35.089	4.921	-2.31	3.82
				5290.0	35.910	4.750	35.078	4.928	-2.32	3.75
				5300.0	35.900	4.760	35.052	4.936	-2.36	3.70
				5310.0	35.890	4.770	35.026	4.949	-2.41	3.75
Mar. 26. 2019	5300 Body	20.6	20.8	5320.0	35.880	4.780	35.008	4.961	-2.43	3.79
				5260.0	48.933	5.369	48.551	5.247	-0.78	-2.27
				5270.0	48.919	5.381	48.531	5.261	-0.79	-2.23
				5280.0	48.906	5.393	48.516	5.273	-0.80	-2.23
				5290.0	48.892	5.404	48.500	5.283	-0.80	-2.24
				5300.0	48.879	5.416	48.471	5.294	-0.83	-2.25
				5310.0	48.865	5.428	48.444	5.308	-0.86	-2.21
	5320.0	48.851	5.439	48.427	5.323	-0.87	-2.13			

MEASURED TISSUE PARAMETERS										
Date(s)	Tissue Type	Ambient Temp.[°C]	Liquid Temp.[°C]	Measured Frequency [MHz]	Target Dielectric Constant, ϵ_r	Target Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ_r	Measured Conductivity, σ (S/m)	Er Deviation [%]	σ Deviation [%]
Mar. 27. 2019	5600 Head	20.8	21.1	5500.0	35.650	4.965	35.244	4.928	-1.14	-0.75
				5510.0	35.635	4.976	35.230	4.938	-1.14	-0.76
				5530.0	35.605	4.997	35.185	4.964	-1.18	-0.66
				5550.0	35.575	5.018	35.161	4.988	-1.16	-0.60
				5580.0	35.530	5.049	35.092	5.022	-1.23	-0.53
				5600.0	35.500	5.070	35.059	5.049	-1.24	-0.41
				5660.0	35.440	5.130	34.965	5.113	-1.34	-0.33
				5670.0	35.430	5.140	34.947	5.121	-1.36	-0.37
				5690.0	35.410	5.160	34.899	5.145	-1.44	-0.29
				5710.0	35.390	5.180	34.869	5.170	-1.47	-0.19
Mar. 27. 2019	5600 Body	20.8	21.2	5500.0	48.607	5.650	48.926	5.519	0.66	-2.32
				5510.0	48.594	5.661	48.919	5.532	0.67	-2.28
				5530.0	48.566	5.685	48.885	5.563	0.66	-2.15
				5550.0	48.539	5.708	48.863	5.590	0.67	-2.07
				5580.0	48.499	5.743	48.808	5.629	0.64	-1.99
				5600.0	48.471	5.766	48.777	5.660	0.63	-1.84
				5660.0	48.390	5.836	48.686	5.742	0.61	-1.61
				5670.0	48.376	5.848	48.668	5.752	0.60	-1.64
				5690.0	48.349	5.872	48.633	5.776	0.59	-1.63
				5710.0	48.322	5.895	48.609	5.803	0.59	-1.56
Mar. 28. 2019	5800 Head	20.5	20.7	5745.0	35.355	5.215	34.800	5.216	-1.57	0.02
				5755.0	35.345	5.225	34.789	5.229	-1.57	0.08
				5775.0	35.325	5.245	34.764	5.246	-1.59	0.02
				5785.0	35.315	5.255	34.741	5.255	-1.63	0.00
				5795.0	35.305	5.265	34.714	5.267	-1.67	0.04
				5800.0	35.300	5.270	34.701	5.273	-1.70	0.06
				5825.0	35.275	5.296	34.674	5.302	-1.70	0.11
Mar. 28. 2019	5800 Body	20.9	21.0	5745.0	48.275	5.936	48.276	5.827	0.00	-1.84
				5755.0	48.261	5.947	48.266	5.845	0.01	-1.72
				5775.0	48.234	5.971	48.249	5.868	0.03	-1.73
				5785.0	48.220	5.982	48.235	5.878	0.03	-1.74
				5795.0	48.207	5.994	48.218	5.890	0.02	-1.74
				5800.0	48.200	6.000	48.208	5.895	0.02	-1.75
				5825.0	48.166	6.029	48.175	5.921	0.02	-1.79

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB 865664 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system was configured and calibrated.
- 2) The probe was immersed in the sample which was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity, for example from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where Y is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively, $r^2 = \rho^2 + \rho'^2 - 2\rho\rho'\cos\phi'$, ω is the angular frequency, and $j = \sqrt{-1}$.

10.2 Test System Verification

Prior to assessment, the system is verified to the $\pm 10\%$ of the specifications at using the SAR Dipole kit(s). (Graphic Plots Attached)

Table 10.2.1 System Verification Results (1g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	1 W Normalized SAR _{1g} (W/kg)	Deviation [%]
D	750	D750V3, SN:1049	Mar. 06. 2019	Head	20.4	20.9	3933	250	8.38	2.01	8.04	-4.06
D	750	D750V3, SN:1049	Mar. 06. 2019	Body	20.4	21.0	3933	250	8.70	2.19	8.76	0.69
D	835	D835V2, SN:4d159	Mar. 07. 2019	Head	20.5	21.1	3933	250	9.36	2.20	8.80	-5.98
D	835	D835V2, SN:4d159	Mar. 07. 2019	Body	20.5	21.0	3933	250	9.56	2.37	9.48	-0.84
D	835	D835V2, SN:4d159	Mar. 13. 2019	Head	20.1	20.9	3933	250	9.36	2.19	8.76	-6.41
D	835	D835V2, SN:4d159	Mar. 13. 2019	Body	20.1	21.0	3933	250	9.56	2.47	9.88	3.35
D	835	D835V2, SN:4d159	Mar. 04. 2019	Head	20.5	21.0	3933	250	9.36	2.29	9.16	-2.14
D	835	D835V2, SN:4d159	Mar. 04. 2019	Body	20.5	20.8	3933	250	9.56	2.36	9.44	-1.26
D	1800	D1800V2, SN:2d202	Mar. 12. 2019	Head	20.2	21.0	3933	100	38.7	3.73	37.30	-3.62
D	1800	D1800V2, SN:2d202	Mar. 12. 2019	Body	20.2	21.1	3933	100	38.8	4.06	40.60	4.64
D	1800	D1800V2, SN:2d202	Mar. 02. 2019	Head	20.4	21.1	3933	100	38.7	4.06	40.60	4.91
D	1800	D1800V2, SN:2d202	Mar. 02. 2019	Body	20.4	21.3	3933	100	38.8	3.89	38.90	0.26
D	1900	D1900V2, SN:5d176	Mar. 08. 2019	Head	20.6	21.3	3933	100	40.7	4.33	43.30	6.39
D	1900	D1900V2, SN:5d176	Mar. 08. 2019	Body	20.6	21.1	3933	100	39.7	4.13	41.30	4.03
D	1900	D1900V2, SN:5d176	Mar. 11. 2019	Head	20.4	21.2	3933	100	40.7	3.91	39.10	-3.93
D	1900	D1900V2, SN:5d176	Mar. 11. 2019	Body	20.4	21.0	3933	100	39.7	3.78	37.80	-4.79
D	1900	D1900V2, SN:5d176	Mar. 01. 2019	Head	20.2	20.9	3933	100	40.7	4.15	41.50	1.97
D	1900	D1900V2, SN:5d176	Mar. 01. 2019	Body	20.2	20.8	3933	100	39.7	3.85	38.50	-3.02
D	2450	D2450V2, SN: 920	Mar. 14. 2019	Head	20.2	21.1	3933	100	51.9	5.06	50.60	-2.50
D	2450	D2450V2, SN: 920	Mar. 14. 2019	Body	20.2	21.2	3933	100	52.1	5.10	51.00	-2.11
D	2600	D2600V2, SN: 1016	Mar. 05. 2019	Head	20.2	20.8	3933	100	56.6	5.89	58.90	4.06
D	2600	D2600V2, SN: 1016	Mar. 05. 2019	Body	20.2	21.1	3933	100	53.5	5.39	53.90	0.75
A	5200	D5GHZV2, SN:1103	Mar. 25. 2019	Body	20.4	20.6	3930	100	75.5	7.35	73.50	-2.65
F	5300	D5GHZV2, SN:1103	Mar. 26. 2019	Head	20.6	20.9	3916	100	82.4	7.84	78.40	-4.85
A	5300	D5GHZV2, SN:1103	Mar. 26. 2019	Body	20.6	20.8	3930	100	74.4	7.39	73.90	-0.67
F	5800	D5GHZV2, SN:1103	Mar. 27. 2019	Head	20.8	21.1	3916	100	81.4	8.23	82.30	1.11
A	5800	D5GHZV2, SN:1103	Mar. 27. 2019	Body	20.8	21.2	3930	100	74.8	7.19	71.90	-3.88
F	5800	D5GHZV2, SN:1103	Mar. 28. 2019	Head	20.5	20.7	3916	100	81.4	7.91	79.10	-2.83
A	5800	D5GHZV2, SN:1103	Mar. 28. 2019	Body	20.9	21.0	3930	100	74.8	7.48	74.80	0.00

Table 10.2.2 System Verification Results (10g)

SYSTEM DIPOLE VERIFICATION TARGET & MEASURED												
SAR System #	Freq. [MHz]	SAR Dipole kits	Date(s)	Tissue Type	Ambient Temp. [°C]	Liquid Temp. [°C]	Probe S/N	Input Power (mW)	1 W Target SAR _{10g} (W/kg)	Measured SAR _{10g} (W/kg)	1 W Normalized SAR _{10g} (W/kg)	Deviation [%]
A	5300	D5GHZV2, SN:1103	Mar. 26. 2019	Body	20.6	20.8	3930	100	20.9	2.06	20.60	-1.44
A	5800	D5GHZV2, SN:1103	Mar. 27. 2019	Body	20.8	21.2	3930	100	20.9	1.99	19.90	-4.78
A	5800	D5GHZV2, SN:1103	Mar. 28. 2019	Body	20.9	21.0	3930	100	20.9	2.07	20.70	-0.96

Note1 : System Verification was measured with input 250 mW, 100 mW and normalized to 1W.

Note2 : Full system validation status and results can be found in Appendix D.

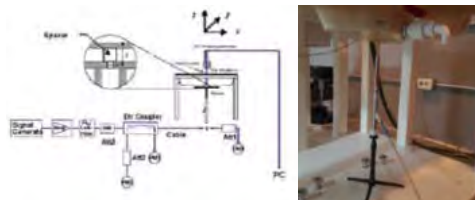


Figure 10.1 Dipole Verification Test Setup Diagram & Photo

11. SAR TEST RESULTS

11.1 Head SAR Results

Table 11.1.1 GSM/GPRS 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.70	33.50	0.170	Left Touch	FCC #1	1	1:8.3	0.220	1.047	0.230	
836.6	190	GSM850	GSM	33.70	33.50	-0.070	Right Touch	FCC #1	1	1:8.3	0.277	1.047	0.290	A1
836.6	190	GSM850	GSM	33.70	33.50	0.080	Left Tilt	FCC #1	1	1:8.3	0.094	1.047	0.098	
836.6	190	GSM850	GSM	33.70	33.50	0.130	Right Tilt	FCC #1	1	1:8.3	0.095	1.047	0.099	
836.6	190	GSM850	GPRS	28.20	28.10	-0.080	Left Touch	FCC #1	4	1:2.075	0.248	1.023	0.254	
836.6	190	GSM850	GPRS	28.20	28.10	0.040	Right Touch	FCC #1	4	1:2.075	0.340	1.023	0.348	A2
836.6	190	GSM850	GPRS	28.20	28.10	-0.190	Left Tilt	FCC #1	4	1:2.075	0.116	1.023	0.119	
836.6	190	GSM850	GPRS	28.20	28.10	-0.100	Right Tilt	FCC #1	4	1:2.075	0.109	1.023	0.112	
836.6	190	GSM850	GPRS	28.20	28.10	-0.090	Right Touch	FCC #1	4	1:2.075	0.310	1.023	0.317	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.2 PCS/GPRS 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
1880.0	661	PCS1900	PCS	30.20	30.10	-0.000	Left Touch	FCC #1	1	1:8.3	0.169	1.023	0.173	A3
1880.0	661	PCS1900	PCS	30.20	30.10	0.100	Right Touch	FCC #1	1	1:8.3	0.098	1.023	0.100	
1880.0	661	PCS1900	PCS	30.20	30.10	0.130	Left Tilt	FCC #1	1	1:8.3	0.101	1.023	0.103	
1880.0	661	PCS1900	PCS	30.20	30.10	0.160	Right Tilt	FCC #1	1	1:8.3	0.072	1.023	0.074	
1880.0	661	PCS1900	GPRS	25.20	24.90	0.150	Left Touch	FCC #1	4	1:2.075	0.229	1.072	0.245	A4
1880.0	661	PCS1900	GPRS	25.20	24.90	0.130	Right Touch	FCC #1	4	1:2.075	0.133	1.072	0.143	
1880.0	661	PCS1900	GPRS	25.20	24.90	0.010	Left Tilt	FCC #1	4	1:2.075	0.136	1.072	0.146	
1880.0	661	PCS1900	GPRS	25.20	24.90	0.050	Right Tilt	FCC #1	4	1:2.075	0.101	1.072	0.108	
1880.0	661	PCS1900	GPRS	25.20	24.90	0.060	Left Touch	FCC #1	4	1:2.075	0.216	1.072	0.232	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.3 WCDMA 850 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch													
836.6	4183	WCDMA 850	RMC	25.20	24.98	0.040	Left Touch	FCC #1	1:1	0.153	1.052	0.161		
836.6	4183	WCDMA 850	RMC	25.20	24.98	0.190	Right Touch	FCC #1	1:1	0.284	1.052	0.299	A5	
836.6	4183	WCDMA 850	RMC	25.20	24.98	-0.110	Left Tilt	FCC #1	1:1	0.151	1.052	0.159		
836.6	4183	WCDMA 850	RMC	25.20	24.98	0.120	Right Tilt	FCC #1	1:1	0.141	1.052	0.148		
836.6	4183	WCDMA 850	RMC	25.20	24.98	-0.040	Right Touch	FCC #1	1:1	0.275	1.052	0.289		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.4 WCDMA 1700 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch													
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	-0.040	Left Touch	FCC #1	1:1	0.253	1.042	0.264	A6	
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	-0.080	Right Touch	FCC #1	1:1	0.105	1.042	0.109		
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	-0.020	Left Tilt	FCC #1	1:1	0.125	1.042	0.130		
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	0.160	Right Tilt	FCC #1	1:1	0.124	1.042	0.129		
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	0.040	Left Touch	FCC #1	1:1	0.250	1.042	0.261		
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.5 WCDMA 1900 Head SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch													
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	-0.080	Left Touch	FCC #1	1:1	0.354	1.047	0.371	A7	
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	-0.110	Right Touch	FCC #1	1:1	0.206	1.047	0.216		
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	0.100	Left Tilt	FCC #1	1:1	0.228	1.047	0.239		
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	0.060	Right Tilt	FCC #1	1:1	0.238	1.047	0.249		
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	0.110	Left Touch	FCC #1	1:1	0.349	1.047	0.365		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.6 LTE Band 12 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.70	24.35	-0.030	0	Left Touch	FCC #1	QPSK	1	0	1:1	0.223	1.084	0.242	
707.5	23095	LTE B12	10	23.70	23.26	0.160	1	Left Touch	FCC #1	QPSK	25	0	1:1	0.197	1.107	0.218	
707.5	23095	LTE B12	10	24.70	24.35	0.170	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.237	1.084	0.257	A8
707.5	23095	LTE B12	10	23.70	23.26	0.080	1	Right Touch	FCC #1	QPSK	25	0	1:1	0.178	1.107	0.197	
707.5	23095	LTE B12	10	24.70	24.35	0.130	0	Left Tilt	FCC #1	QPSK	1	0	1:1	0.126	1.084	0.137	
707.5	23095	LTE B12	10	23.70	23.26	-0.080	1	Left Tilt	FCC #1	QPSK	25	0	1:1	0.115	1.107	0.127	
707.5	23095	LTE B12	10	24.70	24.35	0.060	0	Right Tilt	FCC #1	QPSK	1	0	1:1	0.089	1.084	0.096	
707.5	23095	LTE B12	10	23.70	23.26	-0.140	1	Right Tilt	FCC #1	QPSK	25	0	1:1	0.081	1.107	0.090	
707.5	23095	LTE B12	10	24.70	24.35	0.020	0	Right Touch	FCC #1	QPSK	1	0	1:1	0.216	1.084	0.234	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.7 LTE Band 5 (Cell) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
836.5	20525	LTE B5	10	25.20	24.87	0.100	0	Left Touch	FCC #1	QPSK	1	25	1:1	0.150	1.079	0.162	
836.5	20525	LTE B5	10	24.20	23.95	-0.150	1	Left Touch	FCC #1	QPSK	25	12	1:1	0.128	1.059	0.136	
836.5	20525	LTE B5	10	25.20	24.87	-0.110	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.184	1.079	0.199	A9
836.5	20525	LTE B5	10	24.20	23.95	0.030	1	Right Touch	FCC #1	QPSK	25	12	1:1	0.150	1.059	0.159	
836.5	20525	LTE B5	10	25.20	24.87	0.170	0	Left Tilt	FCC #1	QPSK	1	25	1:1	0.092	1.079	0.099	
836.5	20525	LTE B5	10	24.20	23.95	0.000	1	Left Tilt	FCC #1	QPSK	25	12	1:1	0.078	1.059	0.083	
836.5	20525	LTE B5	10	25.20	24.87	0.110	0	Right Tilt	FCC #1	QPSK	1	25	1:1	0.168	1.079	0.181	
836.5	20525	LTE B5	10	24.20	23.95	-0.050	1	Right Tilt	FCC #1	QPSK	25	12	1:1	0.138	1.059	0.146	
836.5	20525	LTE B5	10	25.20	24.87	-0.190	0	Right Touch	FCC #1	QPSK	1	25	1:1	0.184	1.079	0.199	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.8 LTE Band 66 (AWS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1720.0	132072	LTE B66	20	23.70	23.41	0.080	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.256	1.069	0.274	A10
1720.0	132072	LTE B66	20	22.70	22.49	0.180	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.216	1.050	0.227	
1720.0	132072	LTE B66	20	23.70	23.41	-0.020	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.110	1.069	0.118	
1720.0	132072	LTE B66	20	22.70	22.49	0.180	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.087	1.050	0.091	
1720.0	132072	LTE B66	20	23.70	23.41	0.140	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.133	1.069	0.142	
1720.0	132072	LTE B66	20	22.70	22.49	0.020	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.110	1.050	0.116	
1720.0	132072	LTE B66	20	23.70	23.41	0.160	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.124	1.069	0.133	
1720.0	132072	LTE B66	20	22.70	22.49	0.030	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.103	1.050	0.108	
1720.0	132072	LTE B66	20	23.70	23.41	0.080	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.223	1.069	0.238	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.9 LTE Band 2 (PCS) Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1860.0	18700	LTE B2	20	23.70	23.55	0.110	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.341	1.035	0.353	A11
1860.0	18700	LTE B2	20	22.70	22.57	0.130	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.268	1.030	0.276	
1860.0	18700	LTE B2	20	23.70	23.55	0.060	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.174	1.035	0.180	
1860.0	18700	LTE B2	20	22.70	22.57	0.090	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.143	1.030	0.147	
1860.0	18700	LTE B2	20	23.70	23.55	0.140	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.220	1.035	0.228	
1860.0	18700	LTE B2	20	22.70	22.57	0.070	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.174	1.030	0.179	
1860.0	18700	LTE B2	20	23.70	23.53	0.130	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.181	1.040	0.188	
1860.0	18700	LTE B2	20	22.70	22.56	0.100	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.146	1.033	0.151	
1860.0	18700	LTE B2	20	23.70	23.55	-0.050	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.293	1.035	0.303	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.10 LTE Band 7 Head SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2510.0	20850	LTE B7	20	23.90	23.60	0.000	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.142	1.072	0.152	A12
2510.0	20850	LTE B7	20	22.90	22.62	0.000	1	Left Touch	FCC #1	QPSK	50	25	1:1	0.113	1.067	0.121	
2510.0	20850	LTE B7	20	23.90	23.60	-0.010	0	Right Touch	FCC #1	QPSK	1	50	1:1	0.086	1.072	0.092	
2510.0	20850	LTE B7	20	22.90	22.62	0.080	1	Right Touch	FCC #1	QPSK	50	25	1:1	0.068	1.067	0.070	
2510.0	20850	LTE B7	20	23.90	23.60	0.000	0	Left Tilt	FCC #1	QPSK	1	50	1:1	0.068	1.072	0.073	
2510.0	20850	LTE B7	20	22.90	22.62	0.000	1	Left Tilt	FCC #1	QPSK	50	25	1:1	0.058	1.067	0.062	
2510.0	20850	LTE B7	20	23.90	23.60	-0.060	0	Right Tilt	FCC #1	QPSK	1	50	1:1	0.105	1.072	0.113	
2510.0	20850	LTE B7	20	22.90	22.62	-0.050	1	Right Tilt	FCC #1	QPSK	50	25	1:1	0.078	1.067	0.083	
2510.0	20850	LTE B7	20	23.90	23.60	0.000	0	Left Touch	FCC #1	QPSK	1	50	1:1	0.141	1.072	0.151	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure													Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.11 DTS Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
2437.0	6	802.11b	16.50	15.51	-0.090	Left Touch	FCC #2	0.179	1	99.0	0.177	1.256	1.010	0.225	A13
2437.0	6	802.11b	16.50	15.51	0.170	Right Touch	FCC #2	0.592	1	99.0	0.531	1.256	1.010	0.674	
2437.0	6	802.11b	16.50	15.51	0.060	Left Tilt	FCC #2	0.246	1	99.0	0.245	1.256	1.010	0.311	
2437.0	6	802.11b	16.50	15.51	0.090	Right Tilt	FCC #2	0.400	1	99.0	0.357	1.256	1.010	0.453	
2437.0	6	802.11b	16.50	15.51	0.170	Right Touch	FCC #2	0.507	1	99.0	0.448	1.256	1.010	0.568	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2437.0	6	802.11b	DSSS	16.5	0.674	2437	802.11g	OFDM	15.5	0.794	0.535	X
2437.0	6	802.11b	DSSS	16.5	0.674	2437	802.11n	OFDM	14.0	0.562	0.379	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram	

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.1.12 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5320.0	64	802.11a	15.00	14.31	0.070	Left Touch	FCC #2	0.321	6	100.0	0.334	1.172	1.000	0.391	A14
5320.0	64	802.11a	15.00	14.31	0.000	Right Touch	FCC #2	0.402	6	100.0	0.421	1.172	1.000	0.493	
5320.0	64	802.11a	15.00	14.31	0.160	Left Tilt	FCC #2	0.370	6	100.0	0.386	1.172	1.000	0.452	
5320.0	64	802.11a	15.00	14.31	-0.040	Right Tilt	FCC #2	0.530	6	100.0	0.544	1.172	1.000	0.638	
5320.0	64	802.11a	15.00	14.31	0.120	Right Tilt	FCC #2	0.501	6	100.0	0.543	1.172	1.000	0.636	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5320.0	64	802.11a	OFDM	15.0	0.638	5240	802.11a	OFDM	14.0	0.794	0.507	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram	

Note(s):
1. U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.1.13 UNII Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode (Antenna)	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5720.0	144	802.11a	16.00	15.43	0.160	Left Touch	FCC #2	0.187	6	100.0	0.179	1.140	1.000	0.204	A15
5720.0	144	802.11a	16.00	15.43	0.120	Right Touch	FCC #2	0.348	6	100.0	0.369	1.140	1.000	0.421	
5720.0	144	802.11a	16.00	15.43	0.010	Left Tilt	FCC #2	0.301	6	100.0	0.309	1.140	1.000	0.352	
5720.0	144	802.11a	16.00	15.43	0.170	Right Tilt	FCC #2	0.444	6	100.0	0.495	1.140	1.000	0.564	
5720.0	144	802.11a	16.00	15.43	-0.160	Right Tilt	FCC #2	0.438	6	100.0	0.487	1.140	1.000	0.555	
5745.0	149	802.11a	16.50	15.79	0.060	Left Touch	FCC #2	0.168	6	100.0	0.147	1.178	1.000	0.173	A16
5745.0	149	802.11a	16.50	15.79	0.060	Right Touch	FCC #2	0.291	6	100.0	0.285	1.178	1.000	0.336	
5745.0	149	802.11a	16.50	15.79	0.190	Left Tilt	FCC #2	0.191	6	100.0	0.187	1.178	1.000	0.220	
5745.0	149	802.11a	16.50	15.79	0.050	Right Tilt	FCC #2	0.374	6	100.0	0.390	1.178	1.000	0.459	
5745.0	149	802.11a	16.50	15.79	0.160	Right Tilt	FCC #2	0.373	6	100.0	0.386	1.178	1.000	0.455	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.1.14 Bluetooth Head SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch														
2441.0	39	Bluetooth	9.85	9.23	-0.120	Left Touch	FCC #2	1	76.8	0.026	1.153	1.302	0.039	A17	
2441.0	39	Bluetooth	9.85	9.23	0.060	Right Touch	FCC #2	1	76.8	0.091	1.153	1.302	0.137		
2441.0	39	Bluetooth	9.85	9.23	-0.160	Left Tilt	FCC #2	1	76.8	0.036	1.153	1.302	0.054		
2441.0	39	Bluetooth	9.85	9.23	0.170	Right Tilt	FCC #2	1	76.8	0.062	1.153	1.302	0.093		
2441.0	39	Bluetooth	9.85	9.23	0.150	Right Touch	FCC #2	1	76.8	0.084	1.153	1.302	0.126		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Head 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

11.2 Standalone Body-Worn SAR Worn SAR Results

Table 11.2.1 GSM/PCS/GPRS/WCDMA Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GSM	33.70	33.50	-0.000	10 mm [Front]	FCC #1	1	1:8.3	0.413	1.047	0.432	
836.6	190	GSM850	GSM	33.70	33.50	0.020	10 mm [Rear]	FCC #1	1	1:8.3	0.481	1.047	0.504	A18
836.6	190	GSM850	GPRS	28.20	28.10	0.050	10 mm [Front]	FCC #1	4	1:2.075	0.479	1.023	0.490	
836.6	190	GSM850	GPRS	28.20	28.10	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.560	1.023	0.573	A19
836.6	190	GSM850	GPRS	28.20	28.10	0.030	10 mm [Rear]	FCC #1	4	1:2.075	0.559	1.023	0.572	
1880.0	661	PCS1900	PCS	30.20	30.10	-0.150	10 mm [Front]	FCC #1	1	1:8.3	0.236	1.023	0.241	
1880.0	661	PCS1900	PCS	30.20	30.10	-0.030	10 mm [Rear]	FCC #1	1	1:8.3	0.314	1.023	0.321	A20
1880.0	661	PCS1900	GPRS	25.20	24.90	-0.110	10 mm [Front]	FCC #1	4	1:2.075	0.327	1.072	0.351	
1880.0	661	PCS1900	GPRS	25.20	24.90	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.425	1.072	0.456	A21
1880.0	661	PCS1900	GPRS	25.20	24.90	0.020	10 mm [Rear]	FCC #1	4	1:2.075	0.418	1.072	0.448	
836.6	4183	WCDMA 850	RMC	25.20	24.98	0.100	10 mm [Front]	FCC #1	N/A	1:1	0.451	1.052	0.474	A22
836.6	4183	WCDMA 850	RMC	25.20	24.98	0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.412	1.052	0.433	
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	0.050	10 mm [Front]	FCC #1	N/A	1:1	0.334	1.042	0.348	
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.462	1.042	0.481	A23
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.446	1.042	0.465	
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	0.040	10 mm [Front]	FCC #1	N/A	1:1	0.695	1.047	0.728	
1852.4	9262	WCDMA 1900	RMC	23.70	23.63	0.070	10 mm [Rear]	FCC #1	N/A	1:1	0.759	1.016	0.771	
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.793	1.047	0.830	
1907.6	9538	WCDMA 1900	RMC	23.70	23.52	0.100	10 mm [Rear]	FCC #1	N/A	1:1	0.838	1.042	0.873	A24
1907.6	9538	WCDMA 1900	RMC	23.70	23.52	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.800	1.042	0.834	
1907.6	9538	WCDMA 1900	RMC	23.70	23.52	0.100	10 mm [Rear]	FCC #1	N/A	1:1	0.819	1.042	0.853	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.
2. Yellow entries represent variability measurements.

Table 11.2.2 LTE B12, B5, B66 Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.70	24.35	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.232	1.084	0.251	
707.5	23095	LTE B12	10	23.70	23.26	0.020	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.206	1.107	0.228	
707.5	23095	LTE B12	10	24.70	24.35	-0.050	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.358	1.084	0.388	A25
707.5	23095	LTE B12	10	23.70	23.26	-0.040	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.290	1.107	0.321	
707.5	23095	LTE B12	10	24.70	24.35	-0.060	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.321	1.084	0.348	
836.5	20525	LTE B5	10	25.20	24.87	0.110	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.373	1.079	0.402	
836.5	20525	LTE B5	10	24.20	23.95	0.120	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.310	1.059	0.328	
836.5	20525	LTE B5	10	25.20	24.87	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.398	1.079	0.429	A26
836.5	20525	LTE B5	10	24.20	23.95	-0.050	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.327	1.059	0.346	
1720.0	132072	LTE B66	20	23.70	23.41	0.070	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.287	1.069	0.307	
1720.0	132072	LTE B66	20	22.70	22.49	0.110	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.232	1.050	0.244	
1720.0	132072	LTE B66	20	23.70	23.41	-0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.498	1.069	0.532	A27
1720.0	132072	LTE B66	20	22.70	22.49	0.000	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.399	1.050	0.419	
1720.0	132072	LTE B66	20	23.70	23.41	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.498	1.069	0.532	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.3 LTE B2/B7 Body-Worn SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1860.0	18700	LTE B2	20	23.70	23.55	0.090	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.465	1.035	0.481	
1860.0	18700	LTE B2	20	22.70	22.57	0.100	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.385	1.030	0.397	
1860.0	18700	LTE B2	20	23.70	23.55	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.636	1.035	0.658	A28
1860.0	18700	LTE B2	20	22.70	22.57	-0.000	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.525	1.030	0.541	
1860.0	18700	LTE B2	20	23.70	23.55	0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.607	1.035	0.628	
2510.0	20850	LTE B7	20	23.90	23.60	0.130	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.584	1.072	0.626	A29
2510.0	20850	LTE B7	20	22.90	22.62	-0.060	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.479	1.067	0.511	
2510.0	20850	LTE B7	20	23.90	23.60	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.495	1.072	0.531	
2510.0	20850	LTE B7	20	22.90	22.62	0.030	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.409	1.067	0.436	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram						

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.4 DTS Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #
MHz	Ch														
2437.0	6	802.11b	16.50	15.51	0.070	10 mm [Front]	FCC #2	0.063	1	99.0	0.062	1.256	1.010	0.079	
2437.0	6	802.11b	16.50	15.51	-0.000	10 mm [Rear]	FCC #2	0.132	1	99.0	0.130	1.256	1.010	0.165	A30
2437.0	6	802.11b	16.50	15.51	0.080	10 mm [Rear]	FCC #2	0.130	1	99.0	0.127	1.256	1.010	0.161	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Adjusted SAR results for OFDM SAR

Adjusted SAR results for OFDM SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR
MHz	Ch											
2437.0	6	802.11b	DSSS	16.5	0.165	2437	802.11g	OFDM	15.5	0.794	0.131	X
2437.0	6	802.11b	DSSS	16.5	0.165	2437	802.11n	OFDM	14.0	0.562	0.093	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram	

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.2.5 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5320.0	64	802.11a	15.00	14.31	-0.030	10 mm [Front]	FCC #2	0.159	6	100.0	0.157	1.172	1.000	0.184	
5320.0	64	802.11a	15.00	14.31	-0.090	10 mm [Rear]	FCC #2	0.355	6	100.0	0.359	1.172	1.000	0.421	A31
5320.0	64	802.11a	15.00	14.31	-0.090	10 mm [Rear]	FCC #2	0.356	6	100.0	0.353	1.172	1.000	0.414	
ANSI / IEEE C95.1-2005- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Adjusted SAR results for UNII-1 and UNII-2A SAR												
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Adjusted Factor	1g Adjusted SAR (W/kg)	SAR for the band with lower maximum output power
MHz	Ch											
5320.0	64	802.11a	OFDM	15.0	0.421	5240	802.11a	OFDM	14.0	0.794	0.334	X
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram	

Note(s):
1. U-NII-1 and U-NII-2A Bands: When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration.

Table 11.2.6 UNII Body-Worn SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5720.0	144	802.11a	16.00	15.43	-0.190	10 mm [Front]	FCC #2	0.096	6	100.0	0.090	1.140	1.000	0.103	
5720.0	144	802.11a	16.00	15.43	-0.060	10 mm [Rear]	FCC #2	0.354	6	100.0	0.356	1.140	1.000	0.406	A32
5720.0	144	802.11a	16.00	15.43	-0.050	10 mm [Rear]	FCC #2	0.341	6	100.0	0.356	1.140	1.000	0.406	
5745.0	149	802.11a	16.50	15.79	-0.140	10 mm [Front]	FCC #2	0.070	6	100.0	0.061	1.178	1.000	0.072	
5745.0	149	802.11a	16.50	15.79	-0.060	10 mm [Rear]	FCC #2	0.394	6	100.0	0.408	1.178	1.000	0.481	A33
5745.0	149	802.11a	16.50	15.79	-0.110	10 mm [Rear]	FCC #2	0.391	6	100.0	0.405	1.178	1.000	0.477	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.2.7 Bluetooth Body-Worn SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	9.85	9.23	-0.030	10 mm [Front]	FCC #2	1	76.8	0.010	1.153	1.302	0.015	
2441.0	39	Bluetooth	9.85	9.23	0.160	10 mm [Rear]	FCC #2	1	76.8	0.020	1.153	1.302	0.030	A34
2441.0	39	Bluetooth	9.85	9.23	0.070	10 mm [Rear]	FCC #2	1	76.8	0.020	1.153	1.302	0.030	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Body 1.6 W/kg (mW/g) averaged over 1 gram			

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

11.3 Standalone Hotspot SAR Results

Table 11.3.1 GPRS/WCDMA Hotspot SAR

FREQUENCY		Mode/ Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Spacing [Side]	Device Serial Number	# of Time Slots	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
836.6	190	GSM850	GPRS	28.20	28.10	-0.050	10 mm [Bottom]	FCC #1	4	1:2.075	0.375	1.023	0.384	
836.6	190	GSM850	GPRS	28.20	28.10	0.050	10 mm [Front]	FCC #1	4	1:2.075	0.479	1.023	0.490	
836.6	190	GSM850	GPRS	28.20	28.10	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.560	1.023	0.573	A18
836.6	190	GSM850	GPRS	28.20	28.10	-0.110	10 mm [Right]	FCC #1	4	1:2.075	0.526	1.023	0.538	
836.6	190	GSM850	GPRS	28.20	28.10	0.000	10 mm [Left]	FCC #1	4	1:2.075	0.267	1.023	0.273	
836.6	190	GSM850	GPRS	28.20	28.10	0.030	10 mm [Rear]	FCC #1	4	1:2.075	0.559	1.023	0.572	
1880.0	661	PCS1900	GPRS	25.20	24.90	-0.080	10 mm [Bottom]	FCC #1	4	1:2.075	0.178	1.072	0.191	
1880.0	661	PCS1900	GPRS	25.20	24.90	-0.110	10 mm [Front]	FCC #1	4	1:2.075	0.327	1.072	0.351	
1880.0	661	PCS1900	GPRS	25.20	24.90	0.010	10 mm [Rear]	FCC #1	4	1:2.075	0.455	1.072	0.466	A21
1880.0	661	PCS1900	GPRS	25.20	24.90	-0.160	10 mm [Left]	FCC #1	4	1:2.075	0.396	1.072	0.425	
1880.0	661	PCS1900	GPRS	25.20	24.90	0.020	10 mm [Rear]	FCC #1	4	1:2.075	0.418	1.072	0.448	
836.6	4183	WCDMA 850	RMC	25.20	24.98	0.150	10 mm [Bottom]	FCC #1	N/A	1:1	0.301	1.052	0.317	
836.6	4183	WCDMA 850	RMC	25.20	24.98	0.100	10 mm [Front]	FCC #1	N/A	1:1	0.451	1.052	0.474	
836.6	4183	WCDMA 850	RMC	25.20	24.98	0.050	10 mm [Rear]	FCC #1	N/A	1:1	0.412	1.052	0.433	
836.6	4183	WCDMA 850	RMC	25.20	24.98	-0.020	10 mm [Right]	FCC #1	N/A	1:1	0.487	1.052	0.512	A35
836.6	4183	WCDMA 850	RMC	25.20	24.98	-0.140	10 mm [Left]	FCC #1	N/A	1:1	0.246	1.052	0.259	
836.6	4183	WCDMA 850	RMC	25.20	24.98	-0.060	10 mm [Right]	FCC #1	N/A	1:1	0.482	1.052	0.507	
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	-0.080	10 mm [Bottom]	FCC #1	N/A	1:1	0.187	1.042	0.195	
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	0.050	10 mm [Front]	FCC #1	N/A	1:1	0.334	1.042	0.348	
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	0.020	10 mm [Rear]	FCC #1	N/A	1:1	0.462	1.042	0.481	A23
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	-0.050	10 mm [Left]	FCC #1	N/A	1:1	0.454	1.042	0.473	
1732.4	1412	WCDMA 1700	RMC	23.20	23.02	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.446	1.042	0.466	
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	-0.090	10 mm [Bottom]	FCC #1	N/A	1:1	0.295	1.047	0.309	
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	0.040	10 mm [Front]	FCC #1	N/A	1:1	0.695	1.047	0.728	
1852.4	9262	WCDMA 1900	RMC	23.70	23.63	0.070	10 mm [Rear]	FCC #1	N/A	1:1	0.759	1.016	0.771	
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	0.010	10 mm [Rear]	FCC #1	N/A	1:1	0.793	1.047	0.830	
1907.6	9538	WCDMA 1900	RMC	23.70	23.52	0.100	10 mm [Rear]	FCC #1	N/A	1:1	0.838	1.042	0.873	A24
1880.0	9400	WCDMA 1900	RMC	23.70	23.50	-0.160	10 mm [Left]	FCC #1	N/A	1:1	0.582	1.047	0.609	
1907.6	9538	WCDMA 1900	RMC	23.70	23.52	-0.030	10 mm [Rear]	FCC #1	N/A	1:1	0.800	1.042	0.834	
1907.6	9538	WCDMA 1900	RMC	23.70	23.52	0.100	10 mm [Rear]	FCC #1	N/A	1:1	0.819	1.042	0.853	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak											Body 1.6 W/kg (mW/g) averaged over 1 gram			
Uncontrolled Exposure/General Population Exposure														

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.
2. Yellow entries represent variability measurements.

Table 11.3.2 LTE B12, B5 Hotspot SAR

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
707.5	23095	LTE B12	10	24.70	24.35	-0.180	0	10 mm [Bottom]	FCC #1	QPSK	1	0	1:1	0.120	1.084	0.130	
707.5	23095	LTE B12	10	23.70	23.26	-0.180	1	10 mm [Bottom]	FCC #1	QPSK	25	0	1:1	0.105	1.107	0.116	
707.5	23095	LTE B12	10	24.70	24.35	-0.010	0	10 mm [Front]	FCC #1	QPSK	1	0	1:1	0.232	1.084	0.251	
707.5	23095	LTE B12	10	23.70	23.26	0.020	1	10 mm [Front]	FCC #1	QPSK	25	0	1:1	0.206	1.107	0.228	
707.5	23095	LTE B12	10	24.70	24.35	-0.050	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.358	1.084	0.388	A25
707.5	23095	LTE B12	10	23.70	23.26	-0.040	1	10 mm [Rear]	FCC #1	QPSK	25	0	1:1	0.290	1.107	0.321	
707.5	23095	LTE B12	10	24.70	24.35	-0.080	0	10 mm [Right]	FCC #1	QPSK	1	0	1:1	0.210	1.084	0.228	
707.5	23095	LTE B12	10	23.70	23.26	-0.060	1	10 mm [Right]	FCC #1	QPSK	25	0	1:1	0.198	1.107	0.219	
707.5	23095	LTE B12	10	24.70	24.35	-0.100	0	10 mm [Left]	FCC #1	QPSK	1	0	1:1	0.151	1.084	0.164	
707.5	23095	LTE B12	10	23.70	23.26	-0.060	1	10 mm [Left]	FCC #1	QPSK	25	0	1:1	0.136	1.107	0.151	
707.5	23095	LTE B12	10	24.70	24.35	-0.060	0	10 mm [Rear]	FCC #1	QPSK	1	0	1:1	0.321	1.084	0.348	
836.5	20525	LTE B5	10	25.20	24.87	-0.160	0	10 mm [Bottom]	FCC #1	QPSK	1	25	1:1	0.298	1.079	0.322	
836.5	20525	LTE B5	10	24.20	23.95	-0.190	1	10 mm [Bottom]	FCC #1	QPSK	25	12	1:1	0.240	1.059	0.254	
836.5	20525	LTE B5	10	25.20	24.87	0.110	0	10 mm [Front]	FCC #1	QPSK	1	25	1:1	0.373	1.079	0.402	
836.5	20525	LTE B5	10	24.20	23.95	0.120	1	10 mm [Front]	FCC #1	QPSK	25	12	1:1	0.310	1.059	0.328	
836.5	20525	LTE B5	10	25.20	24.87	-0.040	0	10 mm [Rear]	FCC #1	QPSK	1	25	1:1	0.398	1.079	0.429	
836.5	20525	LTE B5	10	24.20	23.95	-0.050	1	10 mm [Rear]	FCC #1	QPSK	25	12	1:1	0.327	1.059	0.346	
836.5	20525	LTE B5	10	25.20	24.87	-0.080	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.533	1.079	0.575	A26
836.5	20525	LTE B5	10	24.20	23.95	-0.080	1	10 mm [Right]	FCC #1	QPSK	25	12	1:1	0.460	1.059	0.487	
836.5	20525	LTE B5	10	25.20	24.87	-0.050	0	10 mm [Left]	FCC #1	QPSK	1	25	1:1	0.293	1.079	0.316	
836.5	20525	LTE B5	10	24.20	23.95	-0.080	1	10 mm [Left]	FCC #1	QPSK	25	12	1:1	0.259	1.059	0.274	
836.5	20525	LTE B5	10	25.20	24.87	-0.030	0	10 mm [Right]	FCC #1	QPSK	1	25	1:1	0.501	1.079	0.541	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak											Body 1.6 W/kg (mW/g) averaged over 1 gram						
Uncontrolled Exposure/General Population Exposure																	

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.3 LTE B66 Hotspot SAR

FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1720.0	132072	LTE B66	20	23.70	23.41	0.030	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.233	1.069	0.249	
1720.0	132072	LTE B66	20	22.70	22.49	0.010	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.178	1.050	0.187	
1720.0	132072	LTE B66	20	23.70	23.41	0.070	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.287	1.069	0.307	
1720.0	132072	LTE B66	20	22.70	22.49	0.110	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.232	1.050	0.244	
1720.0	132072	LTE B66	20	23.70	23.41	-0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.498	1.069	0.532	A27
1720.0	132072	LTE B66	20	22.70	22.49	0.000	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.399	1.050	0.419	
1720.0	132072	LTE B66	20	23.70	23.41	-0.030	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1	0.453	1.069	0.484	
1720.0	132072	LTE B66	20	22.70	22.49	-0.060	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.385	1.050	0.404	
1720.0	132072	LTE B66	20	23.70	23.41	-0.020	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.498	1.069	0.532	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak											Body 1.6 W/kg (mW/g) averaged over 1 gram						
Uncontrolled Exposure/General Population Exposure																	

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.4 LTE B2 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
1860.0	18700	LTE B2	20	23.70	23.55	0.000	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.261	1.035	0.270	
1860.0	18700	LTE B2	20	22.70	22.57	0.010	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.214	1.030	0.220	
1860.0	18700	LTE B2	20	23.70	23.55	0.090	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.465	1.035	0.481	
1860.0	18700	LTE B2	20	22.70	22.57	0.100	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.385	1.030	0.397	
1860.0	18700	LTE B2	20	23.70	23.55	-0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.636	1.035	0.658	A28
1860.0	18700	LTE B2	20	22.70	22.57	-0.000	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.525	1.030	0.541	
1860.0	18700	LTE B2	20	23.70	23.55	-0.060	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1	0.545	1.035	0.564	
1860.0	18700	LTE B2	20	22.70	22.57	-0.060	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.461	1.030	0.475	
1860.0	18700	LTE B2	20	23.70	23.55	0.010	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.607	1.035	0.628	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.5 LTE B7 Hotspot SAR

MEASUREMENT RESULTS																	
FREQUENCY		Mode/ Band	BW [MHz]	Max Allowed Power [dBm]	Cond. PWR [dBm]	Drift Power [dB]	MPR	Position	Device Serial Number	Mod.	RB Size	RB Offs.	Duty Cycle	1g SAR (W/kg)	Scaling Factor	1g Scaled SAR (W/kg)	Plots #
MHz	Ch																
2510.0	20850	LTE B7	20	23.90	23.60	-0.090	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.924	1.072	0.991	A29
2510.0	20850	LTE B7	20	22.90	22.62	-0.100	1	10 mm [Bottom]	FCC #1	QPSK	50	25	1:1	0.732	1.067	0.781	
2510.0	20850	LTE B7	20	22.90	22.60	-0.100	1	10 mm [Bottom]	FCC #1	QPSK	100	0	1:1	0.711	1.072	0.762	
2535.0	21100	LTE B7	20	23.90	23.58	-0.080	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.824	1.076	0.887	
2560.0	21350	LTE B7	20	23.90	23.57	-0.100	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.832	1.079	0.898	
2510.0	20850	LTE B7	20	23.90	23.60	0.130	0	10 mm [Front]	FCC #1	QPSK	1	50	1:1	0.584	1.072	0.626	
2510.0	20850	LTE B7	20	22.90	22.62	-0.060	1	10 mm [Front]	FCC #1	QPSK	50	25	1:1	0.479	1.067	0.511	
2510.0	20850	LTE B7	20	23.90	23.60	0.030	0	10 mm [Rear]	FCC #1	QPSK	1	50	1:1	0.495	1.072	0.531	
2510.0	20850	LTE B7	20	22.90	22.62	0.030	1	10 mm [Rear]	FCC #1	QPSK	50	25	1:1	0.409	1.067	0.436	
2510.0	20850	LTE B7	20	23.90	23.60	0.130	0	10 mm [Right]	FCC #1	QPSK	1	50	1:1	0.101	1.072	0.108	
2510.0	20850	LTE B7	20	22.90	22.62	0.040	1	10 mm [Right]	FCC #1	QPSK	50	25	1:1	0.081	1.067	0.086	
2510.0	20850	LTE B7	20	23.90	23.60	0.100	0	10 mm [Left]	FCC #1	QPSK	1	50	1:1	0.188	1.072	0.202	
2510.0	20850	LTE B7	20	22.90	22.62	0.110	1	10 mm [Left]	FCC #1	QPSK	50	25	1:1	0.150	1.067	0.160	
2510.0	20850	LTE B7	20	23.90	23.60	-0.080	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.834	1.072	0.894	
2510.0	20850	LTE B7	20	23.90	23.60	-0.120	0	10 mm [Bottom]	FCC #1	QPSK	1	50	1:1	0.894	1.072	0.958	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.
2. Yellow entries represent variability measurements.

Table 11.3.6 DTS Hotspot SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	SAR (W/kg)	Plots #	
MHz	Ch															
2437.0	6	802.11b	16.50	15.51	-0.040	10 mm [Top]	FCC #2	0.073	1	99.0	0.078	1.256	1.010	0.099		
2437.0	6	802.11b	16.50	15.51	0.070	10 mm [Front]	FCC #2	0.063	1	99.0	0.062	1.256	1.010	0.079		
2437.0	6	802.11b	16.50	15.51	-0.000	10 mm [Rear]	FCC #2	0.132	1	99.0	0.130	1.256	1.010	0.165	A30	
2437.0	6	802.11b	16.50	15.51	0.070	10 mm [Left]	FCC #2	0.060	1	99.0	0.060	1.256	1.010	0.076		
2437.0	6	802.11b	16.50	15.51	0.080	10 mm [Rear]	FCC #2	0.130	1	99.0	0.127	1.256	1.010	0.161		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Adjusted SAR results for OFDM SAR													
FREQUENCY		Mode/ Antenna	Service	Maximum Allowed Power [dBm]	1g Scaled SAR (W/kg)	FREQUENCY [MHz]	Mode	Service	Maximum Allowed Power [dBm]	Ratio of OFDM to DSSS	1g Adjusted SAR (W/kg)	Determine OFDM SAR	
MHz	Ch												
2437.0	6	802.11b	DSSS	16.5	0.165	2437	802.11g	OFDM	15.5	0.794	0.131	X	
2437.0	6	802.11b	DSSS	16.5	0.165	2437	802.11n	OFDM	14.0	0.562	0.093	X	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram	

Note: SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Table 11.3.7 UNII Hotspot SAR

MEASUREMENT RESULTS																
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #	
MHz	Ch															
5240.0	48	802.11a	14.00	13.58	-0.020	10 mm [Top]	FCC #2	0.315	6	100.0	0.312	1.102	1.000	0.344		
5240.0	48	802.11a	14.00	13.58	-0.090	10 mm [Front]	FCC #2	0.134	6	100.0	0.132	1.102	1.000	0.145		
5240.0	48	802.11a	14.00	13.58	-0.020	10 mm [Rear]	FCC #2	0.367	6	100.0	0.357	1.102	1.000	0.393	A36	
5240.0	48	802.11a	14.00	13.58	-0.060	10 mm [Left]	FCC #2	0.281	6	100.0	0.278	1.102	1.000	0.306		
5240.0	48	802.11a	14.00	13.58	-0.100	10 mm [Rear]	FCC #2	0.333	6	100.0	0.322	1.102	1.000	0.355		
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure												Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.3.8 UNII Hotspot SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch														
5745.0	149	802.11a	16.50	15.79	-0.110	10 mm [Top]	FCC #2	0.183	6	100.0	0.178	1.178	1.000	0.210	
5745.0	149	802.11a	16.50	15.79	-0.140	10 mm [Front]	FCC #2	0.070	6	100.0	0.061	1.178	1.000	0.072	
5745.0	149	802.11a	16.50	15.79	-0.060	10 mm [Rear]	FCC #2	0.394	6	100.0	0.408	1.178	1.000	0.481	A33
5745.0	149	802.11a	16.50	15.79	-0.080	10 mm [Left]	FCC #2	0.186	6	100.0	0.187	1.178	1.000	0.220	
5745.0	149	802.11a	16.50	15.79	-0.110	10 mm [Rear]	FCC #2	0.391	6	100.0	0.405	1.178	1.000	0.477	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram					

Note(s):
 1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.
 2. UNII-3 Band CH 165(5825 MHz) is not support Hotspot mode as described on operational description, so other required CHs are tested.

Table 11.3.9 Bluetooth Hotspot SAR

MEASUREMENT RESULTS														
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Rate [Mbps]	Duty Cycle (%)	1g SAR (W/kg)	Scaling Factor	Scaling Factor (Duty Cycle)	1g Scaled SAR (W/kg)	Plots #
MHz	Ch													
2441.0	39	Bluetooth	9.85	9.23	-0.020	10 mm [Top]	FCC #2	1	76.8	0.009	1.153	1.302	0.014	
2441.0	39	Bluetooth	9.85	9.23	-0.030	10 mm [Front]	FCC #2	1	76.8	0.010	1.153	1.302	0.015	
2441.0	39	Bluetooth	9.85	9.23	0.160	10 mm [Rear]	FCC #2	1	76.8	0.020	1.153	1.302	0.030	A34
2441.0	39	Bluetooth	9.85	9.23	0.000	10 mm [Left]	FCC #2	1	76.8	0.006	1.153	1.302	0.010	
2441.0	39	Bluetooth	9.85	9.23	0.070	10 mm [Rear]	FCC #2	1	76.8	0.020	1.153	1.302	0.030	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure										Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note(s):
 1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

11.4 Standalone Phablet SAR Results

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required when Hotspot 1g SAR (scaled to maximum output power including tolerance) < 1.2 W/kg.

Table 11.4.1 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR [W/kg]	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR [W/kg]	Plots #
MHz	Ch														
5320.0	64	802.11a	15.00	14.31	-0.190	0 mm [Top]	FCC #2	0.455	6	100.0	0.480	1.172	1.000	0.563	
5320.0	64	802.11a	15.00	14.31	0.180	0 mm [Front]	FCC #2	0.274	6	100.0	0.296	1.172	1.000	0.347	
5320.0	64	802.11a	15.00	14.31	0.010	0 mm [Rear]	FCC #2	0.752	6	100.0	0.934	1.172	1.000	1.095	A37
5320.0	64	802.11a	15.00	14.31	0.100	0 mm [Left]	FCC #2	0.320	6	100.0	0.363	1.172	1.000	0.425	
5320.0	64	802.11a	15.00	14.31	-0.020	0 mm [Rear]	FCC #2	0.746	6	100.0	0.931	1.172	1.000	1.091	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Phablet 4.0 W/kg (mW/g) averaged over 10 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.4.2 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR [W/kg]	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR [W/kg]	Plots #
MHz	Ch														
5720.0	144	802.11a	16.00	15.43	-0.060	10 mm [Top]	FCC #2	0.344	6	100.0	0.374	1.140	1.000	0.426	
5720.0	144	802.11a	16.00	15.43	-0.150	10 mm [Front]	FCC #2	0.261	6	100.0	0.260	1.140	1.000	0.296	
5720.0	144	802.11a	16.00	15.43	-0.130	10 mm [Rear]	FCC #2	0.657	6	100.0	0.846	1.140	1.000	0.964	A38
5720.0	144	802.11a	16.00	15.43	0.090	10 mm [Left]	FCC #2	0.221	6	100.0	0.259	1.140	1.000	0.295	
5720.0	144	802.11a	16.00	15.43	-0.170	10 mm [Rear]	FCC #2	0.639	6	100.0	0.845	1.140	1.000	0.963	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Phablet 4.0 W/kg (mW/g) averaged over 10 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.

Table 11.4.3 UNII Phablet SAR

MEASUREMENT RESULTS															
FREQUENCY		Mode	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Drift Power [dB]	Phantom Position	Device Serial Number	Peak SAR of Area Scan	Data Rate [Mbps]	Duty Cycle	10g SAR [W/kg]	Scaling Factor	Scaling Factor (Duty Cycle)	10g Scaled SAR [W/kg]	Plots #
MHz	Ch														
5825.0	165	802.11a	16.50	15.78	-0.120	0 mm [Top]	FCC #2	0.294	6	100.0	0.318	1.180	1.000	0.375	
5825.0	165	802.11a	16.50	15.78	-0.020	0 mm [Front]	FCC #2	0.155	6	100.0	0.156	1.180	1.000	0.184	
5825.0	165	802.11a	16.50	15.78	0.190	0 mm [Rear]	FCC #2	0.767	6	100.0	0.898	1.180	1.000	1.060	A39
5825.0	165	802.11a	16.50	15.78	0.150	0 mm [Left]	FCC #2	0.202	6	100.0	0.238	1.180	1.000	0.281	
5825.0	165	802.11a	16.50	15.78	0.120	0 mm [Rear]	FCC #2	0.704	6	100.0	0.894	1.180	1.000	1.055	
ANSI / IEEE C95.1-1992- SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure											Phablet 4.0 W/kg (mW/g) averaged over 10 gram				

Note(s):
1. Blue entries represent SIM2(This device supports Dual SIM and is 1 RF Path.) measurements.
2. UNII-3 Band CH 165 (5825 MHz) is not support Hotspot mode as described on operational description of this device, so phablet SAR is tested on this CH.

11.5 SAR Test Notes

General Notes:

1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements. A standard battery was used for all SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was not > 1.2 W/kg, no additional body-worn SAR evaluations using a headset cable were performed.
8. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated.
9. SAR measurements were performed using the DASY5 automated system. The procedure for spatial peak SAR evaluation has been implemented according to the IEEE 1528 standard. During a maximum search, global and local maxima searches are automatically performed in 2-D after each area scan measurement. The algorithm will find the global maximum and all local maxima within 2 dB of the global maxima for all SAR distributions. All local maxima within 2 dB of the global maximum were searched and passed for the Zoom Scan measurement.

GSM Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. This device supports GSM VOIP in the head and body-worn configurations; therefore GPRS was additionally evaluated for head and body-worn compliance.
3. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR.
4. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). Since the maximum output power variation across the required test channels is not $> \frac{1}{2}$ dB, the middle channel was used for testing.

WCDMA (UMTS) Notes:

1. WCDMA (UMTS) mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is ≤ 0.8 W/kg then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel was used.

LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r05. The general test procedures used for testing can be found in Section 8.4.4.
2. According to FCC KDB 941225 D05v02r05, when the reported SAR is ≤ 0.8 W/kg, testing of the 100% RB allocation and required test channels is not required.
Otherwise, SAR is required for the remaining required test channels using the 1 RB, 50% RB and 100% RB allocation with highest output power for that channel.
Only one channel, and as reported SAR values for 1 RB allocation and 50% RB allocation were less than 1.45 W/kg only the highest power RB offset for each allocation was required.
3. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36. 101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
4. A-MPR was disabled for all SAR tests by setting NS=1 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
5. Per KDB Publication 941225 D05Av01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
6. SAR test reduction is applied using the following criteria:
Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is > 0.8 W/kg, testing for other channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel. Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg, Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg. Testing for 16QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that a QPSK. Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

WLAN Notes:

1. The initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output and the adjust SAR is ≤ 1.2 W/kg.
3. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg.
4. When the maximum reported 1g averaged SAR ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor to determine compliance.

Bluetooth Notes:

1. Bluetooth SAR was measured with the device connected to a call with hopping disabled with DH5 operation and Tx test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. Refer to section 9.5 for the time-domain plot and calculation for the duty factor of the device.
2. Head and hotspot Bluetooth SAR were evaluated for BT tethering applications.

12. FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to handsets with built-in unlicensed transmitters such as 802.11b/g/n and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore simultaneous transmission analysis is required. Per FCC KDB 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the sum 1-g SAR for all the simultaneous transmitting antennas in a specific a physical test configuration is ≤ 1.6 W/kg. The different test position in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1-g or 10-g SAR.

12.3 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06.

Table 12.3.1 Simultaneous Transmission Scenarios

No.	Capable TX Configuration	GSM 850/1900 (Voice)	GPRS/EDGE 850/1900 (Data)	WCDMA B5/B4/B2 (Voice)	WCDMA B5/B4/B2 (Data)	LTE B12/B17/B5/B66/B4/B2/B7	WiFi 2.4GHz 802.11b/g/n	WiFi 5GHz 802.11a/n/ac	Bluetooth 2.4GHz
1	GSM 850/1900 (Voice)	No	No	No	No	No	Yes	Yes	Yes
2	GPRS/EDGE 850/1900 (Data)	No	No	No	No	No	Yes	Yes	Yes
3	WCDMA B5/B4/B2 (Voice)	No	No	No	No	No	Yes	Yes	Yes
4	WCDMA B5/B4/B2 (Data)	No	No	No	No	No	Yes	Yes	Yes
5	LTE B12/B17/B5/B66/B4/B2/B7	No	No	No	No	No	Yes	Yes	Yes
6	WiFi 2.4GHz 802.11b/g/n	Yes	Yes	Yes	Yes	Yes	No	No	No
7	WiFi 5GHz 802.11a/n/ac	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes
8	Bluetooth 2.4GHz	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes

Table 12.3.2 Simultaneous SAR Cases

No.	Capable Transmit Configuration	Head SAR	Body-Worn SAR	Hotspot SAR	Phablet SAR	Note
1	GSM Voice + Wi-Fi 2.4 GHz	Yes	Yes	N/A	Yes	
2	GSM Voice + Wi-Fi 5 GHz	Yes	Yes	N/A	Yes	
3	GSM Voice + Bluetooth 2.4 GHz	Yes	Yes	N/A	Yes	
4	GSM Voice + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	N/A	Yes	
5	WCDMA + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
6	WCDMA + Wi-Fi 5 GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
7	WCDMA + Bluetooth 2.4 GHz	Yes	Yes	Yes	Yes	
8	WCDMA + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
9	LTE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
10	LTE + Wi-Fi 5 GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
11	LTE + Bluetooth 2.4 GHz	Yes	Yes	Yes	Yes	
12	LTE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
13	GPRS/EDGE + Wi-Fi 2.4 GHz	Yes	Yes	Yes	Yes	
14	GPRS/EDGE + Wi-Fi 5 GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.
15	GPRS/EDGE + Bluetooth 2.4 GHz	Yes	Yes	Yes	Yes	
16	GPRS/EDGE + Bluetooth 2.4 GHz + Wi-Fi 5GHz	Yes	Yes	Yes*	Yes	* Hotspot of UNII-1 & UNII-3 can be operated simultaneous transmission.

Notes:

- WiFi 2.4GHz is supported Hotspot and WiFi-Direct(GO/GC).
- WiFi 5GHz is supported Hotspot in UNII B1,B3 and WiFi-Direct(GO/GC) in UNII B1,B3.
- LTE, WCDMA, GPRS/EDGE is supported Hotspot.
- VoIP is supported in LTE, WCDMA, GSM
- Bluetooth and WiFi can not transmit simultaneously at 2.4G band.
- GSM, WCDMA and LTE can not transmit simultaneously since they share the same chip.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCC]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WiFi Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Simultaneous transmission scenarios involving WiFi direct are included in the above table.

12.4 Head SAR Simultaneous Transmission Analysis

Table 12.4.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.230	0.039	0.391	0.269	0.621	0.660
		Right Touch	0.290	0.137	0.493	0.427	0.783	0.920
		Left Tilt	0.098	0.054	0.452	0.152	0.550	0.604
		Right Tilt	0.099	0.093	0.638	0.192	0.737	0.830
	GPRS 850	Left Touch	0.254	0.039	0.391	0.293	0.645	0.684
		Right Touch	0.348	0.137	0.493	0.485	0.841	0.978
		Left Tilt	0.119	0.054	0.452	0.173	0.571	0.625
		Right Tilt	0.112	0.093	0.638	0.205	0.750	0.843
	GSM 1900	Left Touch	0.173	0.039	0.391	0.212	0.564	0.603
		Right Touch	0.100	0.137	0.493	0.237	0.593	0.730
		Left Tilt	0.103	0.054	0.452	0.157	0.555	0.609
		Right Tilt	0.074	0.093	0.638	0.167	0.712	0.805
	GPRS 1900	Left Touch	0.245	0.039	0.391	0.284	0.636	0.675
		Right Touch	0.143	0.137	0.493	0.280	0.636	0.773
		Left Tilt	0.146	0.054	0.452	0.200	0.598	0.652
		Right Tilt	0.108	0.093	0.638	0.201	0.746	0.839
	WCDMA 850	Left Touch	0.161	0.039	0.391	0.200	0.552	0.591
		Right Touch	0.299	0.137	0.493	0.436	0.792	0.929
		Left Tilt	0.159	0.054	0.452	0.213	0.611	0.665
		Right Tilt	0.148	0.093	0.638	0.241	0.786	0.879
	WCDMA 1700	Left Touch	0.264	0.039	0.391	0.303	0.655	0.694
		Right Touch	0.109	0.137	0.493	0.246	0.602	0.739
		Left Tilt	0.130	0.054	0.452	0.184	0.582	0.636
		Right Tilt	0.129	0.093	0.638	0.222	0.767	0.860
	WCDMA 1900	Left Touch	0.371	0.039	0.391	0.410	0.762	0.801
		Right Touch	0.216	0.137	0.493	0.353	0.709	0.846
		Left Tilt	0.239	0.054	0.452	0.293	0.691	0.745
		Right Tilt	0.249	0.093	0.638	0.342	0.887	0.980
	LTE Band 12	Left Touch	0.242	0.039	0.391	0.281	0.633	0.672
		Right Touch	0.257	0.137	0.493	0.394	0.750	0.887
		Left Tilt	0.137	0.054	0.452	0.191	0.589	0.643
		Right Tilt	0.096	0.093	0.638	0.189	0.734	0.827
	LTE Band 5	Left Touch	0.162	0.039	0.391	0.201	0.553	0.592
		Right Touch	0.199	0.137	0.493	0.336	0.692	0.829
		Left Tilt	0.099	0.054	0.452	0.153	0.551	0.605
		Right Tilt	0.181	0.093	0.638	0.274	0.819	0.912
	LTE Band 66	Left Touch	0.274	0.039	0.391	0.313	0.665	0.704
		Right Touch	0.118	0.137	0.493	0.255	0.611	0.748
		Left Tilt	0.142	0.054	0.452	0.196	0.594	0.648
		Right Tilt	0.133	0.093	0.638	0.226	0.771	0.864
	LTE Band 2	Left Touch	0.353	0.039	0.391	0.392	0.744	0.783
		Right Touch	0.180	0.137	0.493	0.317	0.673	0.810
		Left Tilt	0.228	0.054	0.452	0.282	0.680	0.734
		Right Tilt	0.188	0.093	0.638	0.281	0.826	0.919
	LTE Band 7	Left Touch	0.152	0.039	0.391	0.191	0.543	0.582
		Right Touch	0.092	0.137	0.493	0.229	0.585	0.722
		Left Tilt	0.073	0.054	0.452	0.127	0.525	0.579
		Right Tilt	0.113	0.093	0.638	0.206	0.751	0.844

Table 12.4.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.230	0.039	0.204	0.269	0.434	0.473
		Right Touch	0.290	0.137	0.421	0.427	0.711	0.848
		Left Tilt	0.098	0.054	0.352	0.152	0.450	0.504
		Right Tilt	0.099	0.093	0.564	0.192	0.663	0.756
	GPRS 850	Left Touch	0.254	0.039	0.204	0.293	0.458	0.497
		Right Touch	0.348	0.137	0.421	0.485	0.769	0.906
		Left Tilt	0.119	0.054	0.352	0.173	0.471	0.525
		Right Tilt	0.112	0.093	0.564	0.205	0.676	0.769
	GSM 1900	Left Touch	0.173	0.039	0.204	0.212	0.377	0.416
		Right Touch	0.100	0.137	0.421	0.237	0.521	0.658
		Left Tilt	0.103	0.054	0.352	0.157	0.455	0.509
		Right Tilt	0.074	0.093	0.564	0.167	0.638	0.731
	GPRS 1900	Left Touch	0.245	0.039	0.204	0.284	0.449	0.488
		Right Touch	0.143	0.137	0.421	0.280	0.564	0.701
		Left Tilt	0.146	0.054	0.352	0.200	0.498	0.552
		Right Tilt	0.108	0.093	0.564	0.201	0.672	0.765
	WCDMA 850	Left Touch	0.161	0.039	0.204	0.200	0.365	0.404
		Right Touch	0.299	0.137	0.421	0.436	0.720	0.857
		Left Tilt	0.159	0.054	0.352	0.213	0.511	0.565
		Right Tilt	0.148	0.093	0.564	0.241	0.712	0.805
	WCDMA 1700	Left Touch	0.264	0.039	0.204	0.303	0.468	0.507
		Right Touch	0.109	0.137	0.421	0.246	0.530	0.667
		Left Tilt	0.130	0.054	0.352	0.184	0.482	0.536
		Right Tilt	0.129	0.093	0.564	0.222	0.693	0.786
	WCDMA 1900	Left Touch	0.371	0.039	0.204	0.410	0.575	0.614
		Right Touch	0.216	0.137	0.421	0.353	0.637	0.774
		Left Tilt	0.239	0.054	0.352	0.293	0.591	0.645
		Right Tilt	0.249	0.093	0.564	0.342	0.813	0.906
	LTE Band 12	Left Touch	0.242	0.039	0.204	0.281	0.446	0.485
		Right Touch	0.257	0.137	0.421	0.394	0.678	0.815
		Left Tilt	0.137	0.054	0.352	0.191	0.489	0.543
		Right Tilt	0.096	0.093	0.564	0.189	0.660	0.753
	LTE Band 5	Left Touch	0.162	0.039	0.204	0.201	0.366	0.405
		Right Touch	0.199	0.137	0.421	0.336	0.620	0.757
		Left Tilt	0.099	0.054	0.352	0.153	0.451	0.505
		Right Tilt	0.181	0.093	0.564	0.274	0.745	0.838
	LTE Band 66	Left Touch	0.274	0.039	0.204	0.313	0.478	0.517
		Right Touch	0.118	0.137	0.421	0.255	0.539	0.676
		Left Tilt	0.142	0.054	0.352	0.196	0.494	0.548
		Right Tilt	0.133	0.093	0.564	0.226	0.697	0.790
	LTE Band 2	Left Touch	0.353	0.039	0.204	0.392	0.557	0.596
		Right Touch	0.180	0.137	0.421	0.317	0.601	0.738
		Left Tilt	0.228	0.054	0.352	0.282	0.580	0.634
		Right Tilt	0.188	0.093	0.564	0.281	0.752	0.845
	LTE Band 7	Left Touch	0.152	0.039	0.204	0.191	0.356	0.395
		Right Touch	0.092	0.137	0.421	0.229	0.513	0.650
		Left Tilt	0.073	0.054	0.352	0.127	0.425	0.479
		Right Tilt	0.113	0.093	0.564	0.206	0.677	0.770

Table 12.4.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Head SAR	GSM 850	Left Touch	0.230	0.039	0.173	0.269	0.403	0.442
		Right Touch	0.290	0.137	0.336	0.427	0.626	0.763
		Left Tilt	0.098	0.054	0.220	0.152	0.318	0.372
		Right Tilt	0.099	0.093	0.459	0.192	0.558	0.651
	GPRS 850	Left Touch	0.254	0.039	0.173	0.293	0.427	0.466
		Right Touch	0.348	0.137	0.336	0.485	0.684	0.821
		Left Tilt	0.119	0.054	0.220	0.173	0.339	0.393
		Right Tilt	0.112	0.093	0.459	0.205	0.571	0.664
	GSM 1900	Left Touch	0.173	0.039	0.173	0.212	0.346	0.385
		Right Touch	0.100	0.137	0.336	0.237	0.436	0.573
		Left Tilt	0.103	0.054	0.220	0.157	0.323	0.377
		Right Tilt	0.074	0.093	0.459	0.167	0.533	0.626
	GPRS 1900	Left Touch	0.245	0.039	0.173	0.284	0.418	0.457
		Right Touch	0.143	0.137	0.336	0.280	0.479	0.616
		Left Tilt	0.146	0.054	0.220	0.200	0.366	0.420
		Right Tilt	0.108	0.093	0.459	0.201	0.567	0.660
	WCDMA 850	Left Touch	0.161	0.039	0.173	0.200	0.334	0.373
		Right Touch	0.299	0.137	0.336	0.436	0.635	0.772
		Left Tilt	0.159	0.054	0.220	0.213	0.379	0.433
		Right Tilt	0.148	0.093	0.459	0.241	0.607	0.700
	WCDMA 1700	Left Touch	0.264	0.039	0.173	0.303	0.437	0.476
		Right Touch	0.109	0.137	0.336	0.246	0.445	0.582
		Left Tilt	0.130	0.054	0.220	0.184	0.350	0.404
		Right Tilt	0.129	0.093	0.459	0.222	0.588	0.681
	WCDMA 1900	Left Touch	0.371	0.039	0.173	0.410	0.544	0.583
		Right Touch	0.216	0.137	0.336	0.353	0.552	0.689
		Left Tilt	0.239	0.054	0.220	0.293	0.459	0.513
		Right Tilt	0.249	0.093	0.459	0.342	0.708	0.801
	LTE Band 12	Left Touch	0.242	0.039	0.173	0.281	0.415	0.454
		Right Touch	0.257	0.137	0.336	0.394	0.593	0.730
		Left Tilt	0.137	0.054	0.220	0.191	0.357	0.411
		Right Tilt	0.096	0.093	0.459	0.189	0.555	0.648
	LTE Band 5	Left Touch	0.162	0.039	0.173	0.201	0.335	0.374
		Right Touch	0.199	0.137	0.336	0.336	0.535	0.672
		Left Tilt	0.099	0.054	0.220	0.153	0.319	0.373
		Right Tilt	0.181	0.093	0.459	0.274	0.640	0.733
	LTE Band 66	Left Touch	0.274	0.039	0.173	0.313	0.447	0.486
		Right Touch	0.118	0.137	0.336	0.255	0.454	0.591
		Left Tilt	0.142	0.054	0.220	0.196	0.362	0.416
		Right Tilt	0.133	0.093	0.459	0.226	0.592	0.685
	LTE Band 2	Left Touch	0.353	0.039	0.173	0.392	0.526	0.565
		Right Touch	0.180	0.137	0.336	0.317	0.516	0.653
		Left Tilt	0.228	0.054	0.220	0.282	0.448	0.502
		Right Tilt	0.188	0.093	0.459	0.281	0.647	0.740
	LTE Band 7	Left Touch	0.152	0.039	0.173	0.191	0.325	0.364
		Right Touch	0.092	0.137	0.336	0.229	0.428	0.565
		Left Tilt	0.073	0.054	0.220	0.127	0.293	0.347
		Right Tilt	0.113	0.093	0.459	0.206	0.572	0.665

Table 12.4.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.230	0.225	0.455
		Right Touch	0.290	0.674	0.964
		Left Tilt	0.098	0.311	0.409
		Right Tilt	0.099	0.453	0.552
	GPRS 850	Left Touch	0.254	0.225	0.479
		Right Touch	0.348	0.674	1.022
		Left Tilt	0.119	0.311	0.430
		Right Tilt	0.112	0.453	0.565
	GSM 1900	Left Touch	0.173	0.225	0.398
		Right Touch	0.100	0.674	0.774
		Left Tilt	0.103	0.311	0.414
		Right Tilt	0.074	0.453	0.527
	GPRS 1900	Left Touch	0.245	0.225	0.470
		Right Touch	0.143	0.674	0.817
		Left Tilt	0.146	0.311	0.457
		Right Tilt	0.108	0.453	0.561
	WCDMA 850	Left Touch	0.161	0.225	0.386
		Right Touch	0.299	0.674	0.973
		Left Tilt	0.159	0.311	0.470
		Right Tilt	0.148	0.453	0.601
	WCDMA 1700	Left Touch	0.264	0.225	0.489
		Right Touch	0.109	0.674	0.783
		Left Tilt	0.130	0.311	0.441
		Right Tilt	0.129	0.453	0.582
	WCDMA 1900	Left Touch	0.371	0.225	0.596
		Right Touch	0.216	0.674	0.890
		Left Tilt	0.239	0.311	0.550
		Right Tilt	0.249	0.453	0.702
	LTE Band 12	Left Touch	0.242	0.225	0.467
		Right Touch	0.257	0.674	0.931
		Left Tilt	0.137	0.311	0.448
		Right Tilt	0.096	0.453	0.549
	LTE Band 5	Left Touch	0.162	0.225	0.387
		Right Touch	0.199	0.674	0.873
		Left Tilt	0.099	0.311	0.410
		Right Tilt	0.181	0.453	0.634
	LTE Band 66	Left Touch	0.274	0.225	0.499
		Right Touch	0.118	0.674	0.792
		Left Tilt	0.142	0.311	0.453
		Right Tilt	0.133	0.453	0.586
	LTE Band 2	Left Touch	0.353	0.225	0.578
		Right Touch	0.180	0.674	0.854
		Left Tilt	0.228	0.311	0.539
		Right Tilt	0.188	0.453	0.641
	LTE Band 7	Left Touch	0.152	0.225	0.377
		Right Touch	0.092	0.674	0.766
		Left Tilt	0.073	0.311	0.384
		Right Tilt	0.113	0.453	0.566

Table 12.4.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.230	0.391	0.621
		Right Touch	0.290	0.493	0.783
		Left Tilt	0.098	0.452	0.550
		Right Tilt	0.099	0.638	0.737
	GPRS 850	Left Touch	0.254	0.391	0.645
		Right Touch	0.348	0.493	0.841
		Left Tilt	0.119	0.452	0.571
		Right Tilt	0.112	0.638	0.750
	GSM 1900	Left Touch	0.173	0.391	0.564
		Right Touch	0.100	0.493	0.593
		Left Tilt	0.103	0.452	0.555
		Right Tilt	0.074	0.638	0.712
	GPRS 1900	Left Touch	0.245	0.391	0.636
		Right Touch	0.143	0.493	0.636
		Left Tilt	0.146	0.452	0.598
		Right Tilt	0.108	0.638	0.746
	WCDMA 850	Left Touch	0.181	0.391	0.552
		Right Touch	0.299	0.493	0.792
		Left Tilt	0.159	0.452	0.611
		Right Tilt	0.148	0.638	0.786
	WCDMA 1700	Left Touch	0.264	0.391	0.655
		Right Touch	0.109	0.493	0.602
		Left Tilt	0.130	0.452	0.582
		Right Tilt	0.129	0.638	0.767
	WCDMA 1900	Left Touch	0.371	0.391	0.762
		Right Touch	0.216	0.493	0.709
		Left Tilt	0.239	0.452	0.691
		Right Tilt	0.249	0.638	0.887
	LTE Band 12	Left Touch	0.242	0.391	0.633
		Right Touch	0.257	0.493	0.750
		Left Tilt	0.137	0.452	0.589
		Right Tilt	0.096	0.638	0.734
	LTE Band 5	Left Touch	0.162	0.391	0.553
		Right Touch	0.199	0.493	0.692
		Left Tilt	0.099	0.452	0.551
		Right Tilt	0.181	0.638	0.819
	LTE Band 66	Left Touch	0.274	0.391	0.665
		Right Touch	0.118	0.493	0.611
		Left Tilt	0.142	0.452	0.594
		Right Tilt	0.133	0.638	0.771
	LTE Band 2	Left Touch	0.353	0.391	0.744
		Right Touch	0.180	0.493	0.673
		Left Tilt	0.228	0.452	0.680
		Right Tilt	0.188	0.638	0.826
	LTE Band 7	Left Touch	0.152	0.391	0.543
		Right Touch	0.092	0.493	0.585
		Left Tilt	0.073	0.452	0.525
		Right Tilt	0.113	0.638	0.751

Table 12.4.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.230	0.204	0.434
		Right Touch	0.290	0.421	0.711
		Left Tilt	0.098	0.352	0.450
		Right Tilt	0.099	0.564	0.663
	GPRS 850	Left Touch	0.254	0.204	0.458
		Right Touch	0.348	0.421	0.769
		Left Tilt	0.119	0.352	0.471
		Right Tilt	0.112	0.564	0.676
	GSM 1900	Left Touch	0.173	0.204	0.377
		Right Touch	0.100	0.421	0.521
		Left Tilt	0.103	0.352	0.455
		Right Tilt	0.074	0.564	0.638
	GPRS 1900	Left Touch	0.245	0.204	0.449
		Right Touch	0.143	0.421	0.564
		Left Tilt	0.146	0.352	0.498
		Right Tilt	0.108	0.564	0.672
	WCDMA 850	Left Touch	0.161	0.204	0.365
		Right Touch	0.299	0.421	0.720
		Left Tilt	0.159	0.352	0.511
		Right Tilt	0.148	0.564	0.712
	WCDMA 1700	Left Touch	0.264	0.204	0.468
		Right Touch	0.109	0.421	0.530
		Left Tilt	0.130	0.352	0.482
		Right Tilt	0.129	0.564	0.693
	WCDMA 1900	Left Touch	0.371	0.204	0.575
		Right Touch	0.216	0.421	0.637
		Left Tilt	0.239	0.352	0.591
		Right Tilt	0.249	0.564	0.813
	LTE Band 12	Left Touch	0.242	0.204	0.446
		Right Touch	0.257	0.421	0.678
		Left Tilt	0.137	0.352	0.489
		Right Tilt	0.096	0.564	0.660
	LTE Band 5	Left Touch	0.162	0.204	0.366
		Right Touch	0.199	0.421	0.620
		Left Tilt	0.099	0.352	0.451
		Right Tilt	0.181	0.564	0.745
	LTE Band 66	Left Touch	0.274	0.204	0.478
		Right Touch	0.118	0.421	0.539
		Left Tilt	0.142	0.352	0.494
		Right Tilt	0.133	0.564	0.697
	LTE Band 2	Left Touch	0.353	0.204	0.557
		Right Touch	0.180	0.421	0.601
		Left Tilt	0.228	0.352	0.580
		Right Tilt	0.188	0.564	0.752
	LTE Band 7	Left Touch	0.152	0.204	0.356
		Right Touch	0.092	0.421	0.513
		Left Tilt	0.073	0.352	0.425
		Right Tilt	0.113	0.564	0.677

Table 12.4.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.230	0.173	0.403
		Right Touch	0.290	0.336	0.626
		Left Tilt	0.098	0.220	0.318
		Right Tilt	0.099	0.459	0.558
	GPRS 850	Left Touch	0.254	0.173	0.427
		Right Touch	0.348	0.336	0.684
		Left Tilt	0.119	0.220	0.339
		Right Tilt	0.112	0.459	0.571
	GSM 1900	Left Touch	0.173	0.173	0.346
		Right Touch	0.100	0.336	0.436
		Left Tilt	0.103	0.220	0.323
		Right Tilt	0.074	0.459	0.533
	GPRS 1900	Left Touch	0.245	0.173	0.418
		Right Touch	0.143	0.336	0.479
		Left Tilt	0.146	0.220	0.366
		Right Tilt	0.108	0.459	0.567
	WCDMA 850	Left Touch	0.181	0.173	0.334
		Right Touch	0.299	0.336	0.635
		Left Tilt	0.159	0.220	0.379
		Right Tilt	0.148	0.459	0.607
	WCDMA 1700	Left Touch	0.264	0.173	0.437
		Right Touch	0.109	0.336	0.445
		Left Tilt	0.130	0.220	0.350
		Right Tilt	0.129	0.459	0.588
	WCDMA 1900	Left Touch	0.371	0.173	0.544
		Right Touch	0.216	0.336	0.552
		Left Tilt	0.239	0.220	0.459
		Right Tilt	0.249	0.459	0.708
	LTE Band 12	Left Touch	0.242	0.173	0.415
		Right Touch	0.257	0.336	0.593
		Left Tilt	0.137	0.220	0.357
		Right Tilt	0.096	0.459	0.555
	LTE Band 5	Left Touch	0.162	0.173	0.335
		Right Touch	0.199	0.336	0.535
		Left Tilt	0.099	0.220	0.319
		Right Tilt	0.181	0.459	0.640
	LTE Band 66	Left Touch	0.274	0.173	0.447
		Right Touch	0.118	0.336	0.454
		Left Tilt	0.142	0.220	0.362
		Right Tilt	0.133	0.459	0.592
	LTE Band 2	Left Touch	0.353	0.173	0.526
		Right Touch	0.180	0.336	0.516
		Left Tilt	0.228	0.220	0.448
		Right Tilt	0.188	0.459	0.647
LTE Band 7	Left Touch	0.152	0.173	0.325	
	Right Touch	0.092	0.336	0.428	
	Left Tilt	0.073	0.220	0.293	
	Right Tilt	0.113	0.459	0.572	

Table 12.4.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Held to Ear)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Head SAR	GSM 850	Left Touch	0.230	0.039	0.269
		Right Touch	0.290	0.137	0.427
		Left Tilt	0.098	0.054	0.152
		Right Tilt	0.099	0.093	0.192
	GPRS 850	Left Touch	0.254	0.039	0.293
		Right Touch	0.348	0.137	0.485
		Left Tilt	0.119	0.054	0.173
		Right Tilt	0.112	0.093	0.205
	GSM 1900	Left Touch	0.173	0.039	0.212
		Right Touch	0.100	0.137	0.237
		Left Tilt	0.103	0.054	0.157
		Right Tilt	0.074	0.093	0.167
	GPRS 1900	Left Touch	0.245	0.039	0.284
		Right Touch	0.143	0.137	0.280
		Left Tilt	0.146	0.054	0.200
		Right Tilt	0.108	0.093	0.201
	WCDMA 850	Left Touch	0.161	0.039	0.200
		Right Touch	0.299	0.137	0.436
		Left Tilt	0.159	0.054	0.213
		Right Tilt	0.148	0.093	0.241
	WCDMA 1700	Left Touch	0.264	0.039	0.303
		Right Touch	0.109	0.137	0.246
		Left Tilt	0.130	0.054	0.184
		Right Tilt	0.129	0.093	0.222
	WCDMA 1900	Left Touch	0.371	0.039	0.410
		Right Touch	0.216	0.137	0.353
		Left Tilt	0.239	0.054	0.293
		Right Tilt	0.249	0.093	0.342
	LTE Band 12	Left Touch	0.242	0.039	0.281
		Right Touch	0.257	0.137	0.394
		Left Tilt	0.137	0.054	0.191
		Right Tilt	0.096	0.093	0.189
	LTE Band 5	Left Touch	0.162	0.039	0.201
		Right Touch	0.199	0.137	0.336
		Left Tilt	0.099	0.054	0.153
		Right Tilt	0.181	0.093	0.274
	LTE Band 66	Left Touch	0.274	0.039	0.313
		Right Touch	0.118	0.137	0.255
		Left Tilt	0.142	0.054	0.196
		Right Tilt	0.133	0.093	0.226
	LTE Band 2	Left Touch	0.353	0.039	0.392
		Right Touch	0.180	0.137	0.317
		Left Tilt	0.228	0.054	0.282
		Right Tilt	0.188	0.093	0.281
LTE Band 7	Left Touch	0.152	0.039	0.191	
	Right Touch	0.092	0.137	0.229	
	Left Tilt	0.073	0.054	0.127	
	Right Tilt	0.113	0.093	0.206	

Table 12.4.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Held to Ear)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)		5G W-LAN SAR (W/kg)		Σ SAR (W/kg)	
			1	2	1	2	1+2	1+2
Head SAR	5.3G W-LAN	Left Touch	0.039		0.391			0.430
		Right Touch	0.137		0.493			0.630
		Left Tilt	0.054		0.452			0.506
		Right Tilt	0.093		0.638			0.731
	5.6G W-LAN	Left Touch	0.039		0.204			0.243
		Right Touch	0.137		0.421			0.558
		Left Tilt	0.054		0.352			0.406
		Right Tilt	0.093		0.564			0.657
	5.8G W-LAN	Left Touch	0.039		0.173			0.212
		Right Touch	0.137		0.336			0.473
		Left Tilt	0.054		0.220			0.274
		Right Tilt	0.093		0.459			0.552

12.5 Body-Worn Simultaneous Transmission Analysis

Table 12.5.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.3 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.432	0.015	0.184	0.447	0.616	0.631
		Rear	0.504	0.030	0.421	0.534	0.925	0.955
	GPRS 850	Front	0.490	0.015	0.184	0.505	0.674	0.689
		Rear	0.573	0.030	0.421	0.603	0.994	1.024
	GSM 1900	Front	0.241	0.015	0.184	0.256	0.425	0.440
		Rear	0.321	0.030	0.421	0.351	0.742	0.772
	GPRS 1900	Front	0.351	0.015	0.184	0.366	0.535	0.550
		Rear	0.456	0.030	0.421	0.486	0.877	0.907
	WCDMA 850	Front	0.474	0.015	0.184	0.489	0.658	0.673
		Rear	0.433	0.030	0.421	0.463	0.854	0.884
	WCDMA 1700	Front	0.348	0.015	0.184	0.363	0.532	0.547
		Rear	0.481	0.030	0.421	0.511	0.902	0.932
	WCDMA 1900	Front	0.728	0.015	0.184	0.743	0.912	0.927
		Rear	0.873	0.030	0.421	0.903	1.294	1.324
	LTE Band 12	Front	0.251	0.015	0.184	0.266	0.435	0.450
		Rear	0.388	0.030	0.421	0.418	0.809	0.839
	LTE Band 5	Front	0.402	0.015	0.184	0.417	0.586	0.601
		Rear	0.429	0.030	0.421	0.459	0.850	0.880
	LTE Band 66	Front	0.307	0.015	0.184	0.322	0.491	0.506
		Rear	0.532	0.030	0.421	0.562	0.953	0.983
	LTE Band 2	Front	0.481	0.015	0.184	0.496	0.665	0.680
		Rear	0.658	0.030	0.421	0.688	1.079	1.109
	LTE Band 7	Front	0.626	0.015	0.184	0.641	0.810	0.825
		Rear	0.531	0.030	0.421	0.561	0.952	0.982

Table 12.5.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.6 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.432	0.015	0.103	0.447	0.535	0.550
		Rear	0.504	0.030	0.406	0.534	0.910	0.940
	GPRS 850	Front	0.490	0.015	0.103	0.505	0.593	0.608
		Rear	0.573	0.030	0.406	0.603	0.979	1.009
	GSM 1900	Front	0.241	0.015	0.103	0.256	0.344	0.359
		Rear	0.321	0.030	0.406	0.351	0.727	0.757
	GPRS 1900	Front	0.351	0.015	0.103	0.366	0.454	0.469
		Rear	0.456	0.030	0.406	0.486	0.862	0.892
	WCDMA 850	Front	0.474	0.015	0.103	0.489	0.577	0.592
		Rear	0.433	0.030	0.406	0.463	0.839	0.869
	WCDMA 1700	Front	0.348	0.015	0.103	0.363	0.451	0.466
		Rear	0.481	0.030	0.406	0.511	0.887	0.917
	WCDMA 1900	Front	0.728	0.015	0.103	0.743	0.831	0.846
		Rear	0.873	0.030	0.406	0.903	1.279	1.309
	LTE Band 12	Front	0.251	0.015	0.103	0.266	0.354	0.369
		Rear	0.388	0.030	0.406	0.418	0.794	0.824
	LTE Band 5	Front	0.402	0.015	0.103	0.417	0.505	0.520
		Rear	0.429	0.030	0.406	0.459	0.835	0.865
	LTE Band 66	Front	0.307	0.015	0.103	0.322	0.410	0.425
		Rear	0.532	0.030	0.406	0.562	0.938	0.968
	LTE Band 2	Front	0.481	0.015	0.103	0.496	0.584	0.599
		Rear	0.658	0.030	0.406	0.688	1.064	1.094
	LTE Band 7	Front	0.626	0.015	0.103	0.641	0.729	0.744
		Rear	0.531	0.030	0.406	0.561	0.937	0.967

Table 12.5.3 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3
Body-Worn SAR	GSM 850	Front	0.432	0.015	0.072	0.447	0.504	0.519
		Rear	0.504	0.030	0.481	0.534	0.985	1.015
	GPRS 850	Front	0.490	0.015	0.072	0.505	0.562	0.577
		Rear	0.573	0.030	0.481	0.603	1.054	1.084
	GSM 1900	Front	0.241	0.015	0.072	0.256	0.313	0.328
		Rear	0.321	0.030	0.481	0.351	0.802	0.832
	GPRS 1900	Front	0.351	0.015	0.072	0.366	0.423	0.438
		Rear	0.456	0.030	0.481	0.486	0.937	0.967
	WCDMA 850	Front	0.474	0.015	0.072	0.489	0.546	0.561
		Rear	0.433	0.030	0.481	0.463	0.914	0.944
	WCDMA 1700	Front	0.348	0.015	0.072	0.363	0.420	0.435
		Rear	0.481	0.030	0.481	0.511	0.962	0.992
	WCDMA 1900	Front	0.728	0.015	0.072	0.743	0.800	0.815
		Rear	0.873	0.030	0.481	0.903	1.354	1.384
	LTE Band 12	Front	0.251	0.015	0.072	0.266	0.323	0.338
		Rear	0.388	0.030	0.481	0.418	0.869	0.899
	LTE Band 5	Front	0.402	0.015	0.072	0.417	0.474	0.489
		Rear	0.429	0.030	0.481	0.459	0.910	0.940
	LTE Band 66	Front	0.307	0.015	0.072	0.322	0.379	0.394
		Rear	0.532	0.030	0.481	0.562	1.013	1.043
	LTE Band 2	Front	0.481	0.015	0.072	0.496	0.553	0.568
		Rear	0.658	0.030	0.481	0.688	1.139	1.169
	LTE Band 7	Front	0.626	0.015	0.072	0.641	0.698	0.713
		Rear	0.531	0.030	0.481	0.561	1.012	1.042

Table 12.5.4 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.432	0.079	0.511
		Rear	0.504	0.165	0.669
	GPRS 850	Front	0.490	0.079	0.569
		Rear	0.573	0.165	0.738
	GSM 1900	Front	0.241	0.079	0.320
		Rear	0.321	0.165	0.486
	GPRS 1900	Front	0.351	0.079	0.430
		Rear	0.456	0.165	0.621
	WCDMA 850	Front	0.474	0.079	0.553
		Rear	0.433	0.165	0.598
	WCDMA 1700	Front	0.348	0.079	0.427
		Rear	0.481	0.165	0.646
	WCDMA 1900	Front	0.728	0.079	0.807
		Rear	0.873	0.165	1.038
	LTE Band 12	Front	0.251	0.079	0.330
		Rear	0.388	0.165	0.553
	LTE Band 5	Front	0.402	0.079	0.481
		Rear	0.429	0.165	0.594
	LTE Band 66	Front	0.307	0.079	0.386
		Rear	0.532	0.165	0.697
LTE Band 2	Front	0.481	0.079	0.560	
	Rear	0.658	0.165	0.823	
LTE Band 7	Front	0.626	0.079	0.705	
	Rear	0.531	0.165	0.696	

Table 12.5.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.3 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.3G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.432	0.184	0.616
		Rear	0.504	0.421	0.925
	GPRS 850	Front	0.490	0.184	0.674
		Rear	0.573	0.421	0.994
	GSM 1900	Front	0.241	0.184	0.425
		Rear	0.321	0.421	0.742
	GPRS 1900	Front	0.351	0.184	0.535
		Rear	0.456	0.421	0.877
	WCDMA 850	Front	0.474	0.184	0.658
		Rear	0.433	0.421	0.854
	WCDMA 1700	Front	0.348	0.184	0.532
		Rear	0.481	0.421	0.902
	WCDMA 1900	Front	0.728	0.184	0.912
		Rear	0.873	0.421	1.294
	LTE Band 12	Front	0.251	0.184	0.435
		Rear	0.388	0.421	0.809
	LTE Band 5	Front	0.402	0.184	0.586
		Rear	0.429	0.421	0.850
	LTE Band 66	Front	0.307	0.184	0.491
		Rear	0.532	0.421	0.953
LTE Band 2	Front	0.481	0.184	0.665	
	Rear	0.658	0.421	1.079	
LTE Band 7	Front	0.626	0.184	0.810	
	Rear	0.531	0.421	0.952	

Table 12.5.6 Simultaneous Transmission Scenario : 2G/3G/4G + 5.6 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.6G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.432	0.103	0.535
		Rear	0.504	0.406	0.910
	GPRS 850	Front	0.490	0.103	0.593
		Rear	0.573	0.406	0.979
	GSM 1900	Front	0.241	0.103	0.344
		Rear	0.321	0.406	0.727
	GPRS 1900	Front	0.351	0.103	0.454
		Rear	0.456	0.406	0.862
	WCDMA 850	Front	0.474	0.103	0.577
		Rear	0.433	0.406	0.839
	WCDMA 1700	Front	0.348	0.103	0.451
		Rear	0.481	0.406	0.887
	WCDMA 1900	Front	0.728	0.103	0.831
		Rear	0.873	0.406	1.279
	LTE Band 12	Front	0.251	0.103	0.354
		Rear	0.388	0.406	0.794
	LTE Band 5	Front	0.402	0.103	0.505
		Rear	0.429	0.406	0.835
	LTE Band 66	Front	0.307	0.103	0.410
		Rear	0.532	0.406	0.938
LTE Band 2	Front	0.481	0.103	0.584	
	Rear	0.658	0.406	1.064	
LTE Band 7	Front	0.626	0.103	0.729	
	Rear	0.531	0.406	0.937	

Table 12.5.7 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.432	0.072	0.504
		Rear	0.504	0.481	0.985
	GPRS 850	Front	0.490	0.072	0.562
		Rear	0.573	0.481	1.054
	GSM 1900	Front	0.241	0.072	0.313
		Rear	0.321	0.481	0.802
	GPRS 1900	Front	0.351	0.072	0.423
		Rear	0.456	0.481	0.937
	WCDMA 850	Front	0.474	0.072	0.546
		Rear	0.433	0.481	0.914
	WCDMA 1700	Front	0.348	0.072	0.420
		Rear	0.481	0.481	0.962
	WCDMA 1900	Front	0.728	0.072	0.800
		Rear	0.873	0.481	1.354
	LTE Band 12	Front	0.251	0.072	0.323
		Rear	0.388	0.481	0.869
	LTE Band 5	Front	0.402	0.072	0.474
		Rear	0.429	0.481	0.910
	LTE Band 66	Front	0.307	0.072	0.379
		Rear	0.532	0.481	1.013
	LTE Band 2	Front	0.481	0.072	0.553
		Rear	0.658	0.481	1.139
	LTE Band 7	Front	0.626	0.072	0.698
		Rear	0.531	0.481	1.012

Table 12.5.8 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	GSM 850	Front	0.432	0.015	0.447
		Rear	0.504	0.030	0.534
	GPRS 850	Front	0.490	0.015	0.505
		Rear	0.573	0.030	0.603
	GSM 1900	Front	0.241	0.015	0.256
		Rear	0.321	0.030	0.351
	GPRS 1900	Front	0.351	0.015	0.366
		Rear	0.456	0.030	0.486
	WCDMA 850	Front	0.474	0.015	0.489
		Rear	0.433	0.030	0.463
	WCDMA 1700	Front	0.348	0.015	0.363
		Rear	0.481	0.030	0.511
	WCDMA 1900	Front	0.728	0.015	0.743
		Rear	0.873	0.030	0.903
	LTE Band 12	Front	0.251	0.015	0.266
		Rear	0.388	0.030	0.418
	LTE Band 5	Front	0.402	0.015	0.417
		Rear	0.429	0.030	0.459
	LTE Band 66	Front	0.307	0.015	0.322
		Rear	0.532	0.030	0.562
	LTE Band 2	Front	0.481	0.015	0.496
		Rear	0.658	0.030	0.688
	LTE Band 7	Front	0.626	0.015	0.641
		Rear	0.531	0.030	0.561

Table 12.5.9 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Body-Worn at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN SAR (W/kg)	Σ SAR (W/kg)
			1	2	1+2
Body-Worn SAR	5.3G W-LAN	Front	0.015	0.184	0.199
		Rear	0.030	0.421	0.451
	5.6G W-LAN	Front	0.015	0.103	0.118
		Rear	0.030	0.406	0.436
	5.8G W-LAN	Front	0.015	0.072	0.087
		Rear	0.030	0.481	0.511

12.6 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the device edges with antennas within 2.5 cm from edge are not required to be evaluated for SAR ("*").

Table 12.6.1 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			Bluetooth SAR (W/kg)			5.2G W-LAN SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3	1+2	1+3	1+2+3			
Hotspot SAR	GPRS 850	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384
		Bottom	0.384	-	-	-	-	-	0.384	0.384	0.384	0.384	0.384	0.384
		Front	0.490	0.015	0.030	0.015	0.145	0.393	0.603	0.565	0.650	0.650	0.650	0.996
		Rear	0.573	0.030	-	0.030	-	-	0.603	0.966	0.966	0.966	0.966	0.966
		Right	0.538	-	-	-	-	-	0.538	0.538	0.538	0.538	0.538	0.538
	Left	0.273	0.010	-	0.010	0.306	-	0.283	0.579	0.579	0.579	0.579	0.579	
	GPRS 1900	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384
		Bottom	0.191	-	-	-	-	-	0.191	0.191	0.191	0.191	0.191	0.191
		Front	0.351	0.015	0.030	0.015	0.145	0.393	0.366	0.496	0.511	0.511	0.511	0.879
		Rear	0.456	0.030	-	0.030	-	-	0.486	0.849	0.849	0.849	0.849	0.879
		Right	-	-	-	-	-	-	-	-	-	-	-	-
	Left	0.425	0.010	-	0.010	0.306	-	0.435	0.731	0.731	0.731	0.731	0.731	
	WCDMA 850	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384
		Bottom	0.317	-	-	-	-	-	0.317	0.317	0.317	0.317	0.317	0.317
		Front	0.474	0.015	0.030	0.015	0.145	0.393	0.439	0.619	0.634	0.634	0.634	0.856
		Rear	0.433	0.030	-	0.030	-	-	0.463	0.826	0.826	0.826	0.826	0.856
		Right	0.512	-	-	-	-	-	0.512	0.512	0.512	0.512	0.512	0.512
	Left	0.259	0.010	-	0.010	0.306	-	0.269	0.565	0.565	0.565	0.565	0.565	
	WCDMA 1700	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384
		Bottom	0.195	-	-	-	-	-	0.195	0.195	0.195	0.195	0.195	0.195
		Front	0.348	0.015	0.030	0.015	0.145	0.393	0.363	0.493	0.508	0.508	0.508	0.904
		Rear	0.481	0.030	-	0.030	-	-	0.511	0.874	0.874	0.874	0.874	0.904
		Right	-	-	-	-	-	-	-	-	-	-	-	-
	Left	0.473	0.010	-	0.010	0.306	-	0.483	0.779	0.779	0.779	0.779	0.779	
	WCDMA 1900	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384
		Bottom	0.309	-	-	-	-	-	0.309	0.309	0.309	0.309	0.309	0.309
		Front	0.728	0.015	0.030	0.015	0.145	0.393	0.743	0.873	0.888	0.888	0.888	1.296
		Rear	0.873	0.030	-	0.030	-	-	0.903	1.266	1.266	1.266	1.266	1.296
		Right	-	-	-	-	-	-	-	-	-	-	-	-
	Left	0.609	0.010	-	0.010	0.306	-	0.619	0.915	0.915	0.915	0.915	0.925	
	LTE Band 12	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384
		Bottom	0.130	-	-	-	-	-	0.130	0.130	0.130	0.130	0.130	0.130
		Front	0.251	0.015	0.030	0.015	0.145	0.393	0.286	0.396	0.411	0.411	0.411	0.811
		Rear	0.388	0.030	-	0.030	-	-	0.418	0.781	0.811	0.811	0.811	0.811
		Right	0.228	-	-	-	-	-	0.228	0.228	0.228	0.228	0.228	0.228
	Left	0.164	0.010	-	0.010	0.306	-	0.174	0.470	0.480	0.480	0.480	0.480	
	LTE Band 5	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384
		Bottom	0.322	-	-	-	-	-	0.322	0.322	0.322	0.322	0.322	0.322
		Front	0.402	0.015	0.030	0.015	0.145	0.393	0.417	0.547	0.562	0.562	0.562	0.852
		Rear	0.429	0.030	-	0.030	-	-	0.459	0.822	0.852	0.852	0.852	0.852
		Right	0.575	-	-	-	-	-	0.575	0.575	0.575	0.575	0.575	0.575
	Left	0.316	0.010	-	0.010	0.306	-	0.326	0.622	0.632	0.632	0.632	0.632	
	LTE Band 66	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384
		Bottom	0.249	-	-	-	-	-	0.249	0.249	0.249	0.249	0.249	0.249
		Front	0.307	0.015	0.030	0.015	0.145	0.393	0.322	0.452	0.467	0.467	0.467	0.855
		Rear	0.532	0.030	-	0.030	-	-	0.562	0.925	0.925	0.925	0.925	0.925
		Right	-	-	-	-	-	-	-	-	-	-	-	-
	Left	0.484	0.010	-	0.010	0.306	-	0.494	0.790	0.800	0.800	0.800	0.800	
	LTE Band 2	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384
		Bottom	0.270	-	-	-	-	-	0.270	0.270	0.270	0.270	0.270	0.270
Front		0.481	0.015	0.030	0.015	0.145	0.393	0.496	0.626	0.641	0.641	0.641	1.081	
Rear		0.658	0.030	-	0.030	-	-	0.688	1.051	1.081	1.081	1.081	1.081	
Right		-	-	-	-	-	-	-	-	-	-	-	-	
Left	0.564	0.010	-	0.010	0.306	-	0.574	0.870	0.880	0.880	0.880	0.880		
LTE Band 7	Top	-	0.014	-	0.014	0.344	-	0.014	0.344	0.358	0.384	0.384	0.384	
	Bottom	0.991	-	-	-	-	-	0.991	0.991	0.991	0.991	0.991	0.991	
	Front	0.626	0.015	0.030	0.015	0.145	0.393	0.641	0.771	0.786	0.786	0.786	0.786	
	Rear	0.531	0.030	-	0.030	-	-	0.561	0.924	0.954	0.954	0.954	0.954	
	Right	0.108	-	-	-	-	-	0.108	0.108	0.108	0.108	0.108	0.108	
Left	0.202	0.010	-	0.010	0.306	-	0.212	0.508	0.518	0.518	0.518	0.518		

Table 12.6.2 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth + 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)			Bluetooth SAR (W/kg)			5.8G W-LAN SAR (W/kg)			ΣSAR (W/kg)		
			1	2	3	1+2	1+3	1+2+3	1+2	1+3	1+2+3			
Hotspot SAR	GPRS 850	Top	-	0.014	-	0.014	0.210	-	0.014	0.210	0.224	0.240	0.240	0.240
		Bottom	0.384	-	-	-	-	-	0.384	0.384	0.384	0.384	0.384	0.384
		Front	0.490	0.015	0.030	0.015	0.072	0.481	0.505	0.562	0.577	0.577	0.577	1.084
		Rear	0.573	0.030	-	0.030	-	-	0.603	1.054	1.084	1.084	1.084	1.084
		Right	0.538	-	-	-	-	-	0.538	0.538	0.538	0.538	0.538	0.538
	Left	0.273	0.010	-	0.010	0.220	-	0.283	0.493	0.503	0.503	0.503	0.503	
	GPRS 1900	Top	-	0.014	-	0.014	0.210	-	0.014	0.210	0.224	0.240	0.240	0.240
		Bottom	0.191	-	-	-	-	-	0.191	0.191	0.191	0.191	0.191	0.191
		Front	0.351	0.015	0.030	0.015	0.072	0.481	0.366	0.423	0.438	0.438	0.438	0.867
		Rear	0.456	0.030	-	0.030	-	-	0.486	0.937	0.967	0.967	0.967	0.967
		Right	-	-	-	-	-	-	-	-	-	-	-	-
	Left	0.425	0.010	-	0.010	0.220	-	0.435	0.645	0.655	0.655	0.655	0.655	
	WCDMA 850	Top	-	0.014	-	0.014	0.210	-	0.014	0.210	0.224	0.240	0.240	0.240
		Bottom	0.317	-	-	-	-	-	0.317	0.317	0.317	0.317	0.317	0.317
		Front	0.474	0.015	0.030	0.015	0.072	0.481	0.489	0.546	0.561	0.561	0.561	0.944
		Rear	0.433	0.030	-	0.030	-	-	0.463	0.914	0.914	0.914	0.914	0.914
		Right	0.512	-	-	-	-	-	0.512	0.512	0.512	0.512	0.512	0.512
	Left	0.259	0.010	-	0.010	0.220	-	0.269	0.479	0.489	0.489	0.489	0.489	
	WCDMA 1700	Top	-	0.014	-	0.014	0.210	-	0.014	0.210	0.224	0.240	0.240	0.240
		Bottom	0.195	-	-	-	-	-	0.195	0.195	0.195	0.195	0.195	0.195
		Front	0.348	0.015	0.030	0.015	0.072	0.481	0.363	0.420	0.435	0.435	0.435	0.852
		Rear	0.481	0.030	-	0.030	-	-	0.511	0.962	0.992	0.992	0.992	0.992
		Right	-	-	-	-	-	-	-	-	-	-	-	-
	Left	0.473	0.010	-	0.010	0.220	-	0.483	0.693	0.703	0.703	0.703	0.703	
	WCDMA 1900	Top	-	0.014	-	0.014	0.210	-	0.014	0.210	0.224	0.240	0.240	0.240
		Bottom	0.309	-	-	-	-	-	0.309	0.309	0.309	0.309	0.309	0.309
		Front	0.728	0.015	0.030	0.015	0.072	0.481	0.743	0.800	0.815	0.815	0.815	1.384
		Rear	0.873	0.030	-	0.								

Table 12.6.3 Simultaneous Transmission Scenario : 2G/3G/4G + 2.4 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	2.4G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.099	0.099
		Bottom	0.384	-	0.384
		Front	0.490	0.079	0.569
		Rear	0.573	0.165	0.738
		Right	0.538	-	0.538
	GPRS 1900	Left	0.273	0.076	0.349
		Top	-	0.099	0.099
		Bottom	0.191	-	0.191
		Front	0.351	0.079	0.430
		Rear	0.456	0.165	0.621
	WCDMA 850	Right	-	-	-
		Left	0.425	0.076	0.501
		Top	-	0.099	0.099
		Bottom	0.317	-	0.317
		Front	0.474	0.079	0.553
	WCDMA 1700	Rear	0.433	0.165	0.598
		Right	0.512	-	0.512
		Left	0.259	0.076	0.335
		Top	-	0.099	0.099
		Bottom	0.195	-	0.195
	WCDMA 1900	Front	0.348	0.079	0.427
		Rear	0.481	0.165	0.646
		Right	-	-	-
		Left	0.473	0.076	0.549
		Top	-	0.099	0.099
	LTE Band 12	Bottom	0.309	-	0.309
		Front	0.728	0.079	0.807
		Rear	0.873	0.165	1.038
		Right	-	-	-
		Left	0.609	0.076	0.685
	LTE Band 5	Top	-	0.099	0.099
		Bottom	0.130	-	0.130
		Front	0.251	0.079	0.330
		Rear	0.388	0.165	0.553
		Right	0.228	-	0.228
	LTE Band 66	Left	0.164	0.076	0.240
		Top	-	0.099	0.099
		Bottom	0.322	-	0.322
		Front	0.402	0.079	0.481
		Rear	0.429	0.165	0.594
	LTE Band 2	Right	0.575	-	0.575
		Left	0.316	0.076	0.392
		Top	-	0.099	0.099
		Bottom	0.249	-	0.249
		Front	0.307	0.079	0.386
	LTE Band 7	Rear	0.532	0.165	0.697
		Right	-	-	-
		Left	0.484	0.076	0.560
		Top	-	0.099	0.099
		Bottom	0.270	-	0.270
LTE Band 12	Front	0.481	0.079	0.560	
	Rear	0.658	0.165	0.823	
	Right	-	-	-	
	Left	0.564	0.076	0.640	
	Top	-	0.099	0.099	
LTE Band 5	Bottom	0.991	-	0.991	
	Front	0.626	0.079	0.705	
	Rear	0.531	0.165	0.696	
	Right	0.108	-	0.108	
	Left	0.202	0.076	0.278	

Table 12.6.4 Simultaneous Transmission Scenario : 2G/3G/4G + 5.2 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.2G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.344	0.344
		Bottom	0.384	-	0.384
		Front	0.490	0.145	0.635
		Rear	0.573	0.393	0.966
		Right	0.538	-	0.538
	GPRS 1900	Left	0.273	0.306	0.579
		Top	-	0.344	0.344
		Bottom	0.191	-	0.191
		Front	0.351	0.145	0.496
		Rear	0.456	0.393	0.849
	WCDMA 850	Right	-	-	-
		Left	0.425	0.306	0.731
		Top	-	0.344	0.344
		Bottom	0.317	-	0.317
		Front	0.474	0.145	0.619
	WCDMA 1700	Rear	0.433	0.393	0.826
		Right	0.512	-	0.512
		Left	0.259	0.306	0.565
		Top	-	0.344	0.344
		Bottom	0.195	-	0.195
	WCDMA 1900	Front	0.348	0.145	0.493
		Rear	0.481	0.393	0.874
		Right	-	-	-
		Left	0.473	0.306	0.779
		Top	-	0.344	0.344
	LTE Band 12	Bottom	0.309	-	0.309
		Front	0.728	0.145	0.873
		Rear	0.873	0.393	1.266
		Right	-	-	-
		Left	0.609	0.306	0.915
	LTE Band 5	Top	-	0.344	0.344
		Bottom	0.130	-	0.130
		Front	0.251	0.145	0.396
		Rear	0.388	0.393	0.781
		Right	0.228	-	0.228
	LTE Band 66	Left	0.164	0.306	0.470
		Top	-	0.344	0.344
		Bottom	0.322	-	0.322
		Front	0.402	0.145	0.547
		Rear	0.429	0.393	0.822
	LTE Band 2	Right	0.575	-	0.575
		Left	0.316	0.306	0.622
		Top	-	0.344	0.344
		Bottom	0.249	-	0.249
		Front	0.307	0.145	0.452
	LTE Band 7	Rear	0.532	0.393	0.925
		Right	-	-	-
		Left	0.484	0.306	0.790
		Top	-	0.344	0.344
		Bottom	0.270	-	0.270
LTE Band 12	Front	0.481	0.145	0.626	
	Rear	0.658	0.393	1.051	
	Right	-	-	-	
	Left	0.564	0.306	0.870	
	Top	-	0.344	0.344	
LTE Band 5	Bottom	0.991	-	0.991	
	Front	0.626	0.145	0.771	
	Rear	0.531	0.393	0.924	
	Right	0.108	-	0.108	
	Left	0.202	0.306	0.508	

Table 12.6.5 Simultaneous Transmission Scenario : 2G/3G/4G + 5.8 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	5.8G W-LAN SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.210	0.210
		Bottom	0.384	-	0.384
		Front	0.490	0.072	0.562
		Rear	0.573	0.481	1.054
		Right	0.538	-	0.538
	GPRS 1900	Left	0.273	0.220	0.493
		Top	-	0.210	0.210
		Bottom	0.191	-	0.191
		Front	0.351	0.072	0.423
		Rear	0.456	0.481	0.937
	WCDMA 850	Right	-	-	-
		Left	0.425	0.220	0.645
		Top	-	0.210	0.210
		Bottom	0.317	-	0.317
		Front	0.474	0.072	0.546
	WCDMA 1700	Rear	0.433	0.481	0.914
		Right	0.512	-	0.512
		Left	0.259	0.220	0.479
		Top	-	0.210	0.210
		Bottom	0.195	-	0.195
	WCDMA 1900	Front	0.348	0.072	0.420
		Rear	0.481	0.481	0.962
		Right	-	-	-
		Left	0.473	0.220	0.693
		Top	-	0.210	0.210
	LTE Band 12	Bottom	0.309	-	0.309
		Front	0.728	0.072	0.800
		Rear	0.873	0.481	1.354
		Right	-	-	-
		Left	0.609	0.220	0.829
	LTE Band 5	Top	-	0.210	0.210
		Bottom	0.130	-	0.130
		Front	0.251	0.072	0.323
		Rear	0.388	0.481	0.869
		Right	0.228	-	0.228
	LTE Band 66	Left	0.164	0.220	0.384
		Top	-	0.210	0.210
		Bottom	0.322	-	0.322
		Front	0.402	0.072	0.474
		Rear	0.429	0.481	0.910
	LTE Band 2	Right	0.575	-	0.575
		Left	0.316	0.220	0.536
		Top	-	0.210	0.210
		Bottom	0.249	-	0.249
		Front	0.307	0.072	0.379
	LTE Band 7	Rear	0.532	0.481	1.013
		Right	-	-	-
		Left	0.484	0.220	0.704
		Top	-	0.210	0.210
		Bottom	0.270	-	0.270
LTE Band 12	Front	0.481	0.072	0.553	
	Rear	0.658	0.481	1.139	
	Right	-	-	-	
	Left	0.564	0.220	0.784	
	Top	-	0.210	0.210	
LTE Band 5	Bottom	0.991	-	0.991	
	Front	0.626	0.072	0.698	
	Rear	0.531	0.481	1.012	
	Right	0.108	-	0.108	
	Left	0.202	0.220	0.422	

Table 12.6.6 Simultaneous Transmission Scenario : 2G/3G/4G + Bluetooth (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	GPRS 850	Top	-	0.014	0.014
		Bottom	0.384	-	0.384
		Front	0.490	0.015	0.505
		Rear	0.573	0.030	0.603
		Right	0.538	-	0.538
	GPRS 1900	Left	0.273	0.010	0.283
		Top	-	0.014	0.014
		Bottom	0.191	-	0.191
		Front	0.351	0.015	0.366
		Rear	0.456	0.030	0.486
	WCDMA 850	Right	-	-	-
		Left	0.425	0.010	0.435
		Top	-	0.014	0.014
		Bottom	0.317	-	0.317
		Front	0.474	0.015	0.489
	WCDMA 1700	Rear	0.433	0.030	0.463
		Right	0.512	-	0.512
		Left	0.259	0.010	0.269
		Top	-	0.014	0.014
		Bottom	0.195	-	0.195
	WCDMA 1900	Front	0.348	0.015	0.363
		Rear	0.481	0.030	0.511
		Right	-	-	-
		Left	0.473	0.010	0.483
		Top	-	0.014	0.014
	LTE Band 12	Bottom	0.309	-	0.309
		Front	0.728	0.015	0.743
		Rear	0.873	0.030	0.903
		Right	-	-	-
		Left	0.609	0.010	0.619
	LTE Band 5	Top	-	0.014	0.014
		Bottom	0.130	-	0.130
		Front	0.251	0.015	0.266
		Rear	0.388	0.030	0.418
		Right	0.228	-	0.228
	LTE Band 66	Left	0.164	0.010	0.174
		Top	-	0.014	0.014
		Bottom	0.322	-	0.322
		Front	0.402	0.015	0.417
		Rear	0.429	0.030	0.459
	LTE Band 2	Right	0.575	-	0.575
		Left	0.316	0.010	0.326
		Top	-	0.014	0.014
		Bottom	0.249	-	0.249
		Front	0.307	0.015	0.322
	LTE Band 7	Rear	0.532	0.030	0.562
		Right	-	-	-
		Left	0.484	0.010	0.494
		Top	-	0.014	0.014
		Bottom	0.270	-	0.270
LTE Band 12	Front	0.481	0.015	0.496	
	Rear	0.658	0.030	0.688	
	Right	-	-	-	
	Left	0.564	0.010	0.574	
	Top	-	0.014	0.014	
LTE Band 5	Bottom	0.991	-	0.991	
	Front	0.626	0.015	0.641	
	Rear	0.531	0.030	0.561	
	Right	0.108	-	0.108	
	Left	0.202	0.010	0.212	

Table 12.6.7 Simultaneous Transmission Scenario : Bluetooth + 5 GHz W-LAN (Hotspot at 10 mm)

Exposure Condition	Mode	Configuration	Bluetooth SAR (W/kg)	5G W-LAN Ant.2 SAR (W/kg)	ΣSAR (W/kg)
			1	2	1+2
Hotspot SAR	5.2G W-LAN	Top	0.014	0.344	0.358
		Bottom	-	-	-
		Front	0.015	0.145	0.160
		Rear	0.030	0.393	0.423
		Right	-	-	-
		Left	0.010	0.306	0.316
	5.8G W-LAN	Top	0.014	0.210	0.224
		Bottom	-	-	-
		Front	0.015	0.072	0.087
		Rear	0.030	0.481	0.511
		Right	-	-	-
		Left	0.010	0.220	0.230

12.7 Phablet SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required of Hotspot 1g SAR (scaled to maximum output power, including tolerance) < 1.2 W/kg. Therefore no further analysis was required to for Phablet Simultaneous Transmission Analysis.

12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results for all the worst-case simultaneous transmission conditions were below the SAR limit. Therefore, the above analysis is sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528-2013 Section 6.3.4.1.2.

13. SAR MEASUREMENT VARIABILITY

13.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

1. When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2. A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~10% from the 1-g SAR limit).
3. A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4. Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg
5. The same procedures should be adapted for measurements according to extremity exposure limits by applying a factor of 2.5 for extremity exposure to the corresponding SAR thresholds.

Table 13.1 Body SAR Measurement Variability Results

Frequency		Mode	Service	# of Time Slots	Spacing [Side]	Measured SAR (1g)	1st Repeated SAR(1g)	Ratio	2nd Repeated SAR(1g)	Ratio	3rd Repeated SAR(1g)	Ratio
MHz	Ch.					(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1907.6	9538	WCDMA 1900	RMC	-	10 mm [Rear]	0.838	0.819	1.02	-	-	-	-
2510.0	20850	LTE B7	-	-	10 mm [Bottom]	0.924	0.894	1.03	-	-	-	-
ANSI / IEEE C95.1-1992– SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population Exposure						Body 1.6 W/kg (mW/g) averaged over 1 gram						

13.2 Measurement Uncertainty

The measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

14. EQUIPMENT LIST

Table 14.1.1 Test Equipment Calibration

	Type	Manufacturer	Model	Cal.Date	Next.Cal.Date	S/N
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	SEMITEC Engineering	SEMITEC	N/A	N/A	N/A	Shield Room
<input checked="" type="checkbox"/>	Robot	SPEAG	TX90XL	N/A	N/A	F13/5RR2A1/A/01
<input checked="" type="checkbox"/>	Robot	SPEAG	TX60L	N/A	N/A	F12/5LP5A1/A/01
<input checked="" type="checkbox"/>	Robot	SCHMID	TX60L	N/A	N/A	F14/5WV5D1/A/01
<input checked="" type="checkbox"/>	Robot Controller	SPEAG	CS8C	N/A	N/A	F13/5RR2A1/C/01
<input checked="" type="checkbox"/>	Robot Controller	SPEAG	CS8C	N/A	N/A	F12/5LP5A1/C/01
<input checked="" type="checkbox"/>	Robot Controller	SCHMID	CS8C	N/A	N/A	F14/5WV5D1/C/01
<input checked="" type="checkbox"/>	Joystick	SPEAG	N/A	N/A	N/A	S-13200990
<input checked="" type="checkbox"/>	Joystick	SPEAG	N/A	N/A	N/A	S-12030401
<input checked="" type="checkbox"/>	Joystick	SPEAG	N/A	N/A	N/A	D21142605A
<input checked="" type="checkbox"/>	IntelCorei7-3770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Intel Core i7-2600 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Intel Core i7-4770 3.40 GHz Windows 7 Professional	N/A	N/A	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Probe Alignment Unit LB	N/A	N/A	N/A	N/A	SE UKS 030 AA
<input checked="" type="checkbox"/>	Device Holder	SPEAG	SD000H01HA	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Device Holder	SPEAG	SD000H01HA	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Device Holder	SPEAG	SD000H01KA	N/A	N/A	N/A
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1786
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1679
<input checked="" type="checkbox"/>	Twin SAM Phantom	SPEAG	QD000P40CD	N/A	N/A	1837
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SPEAG	DAE4V1	2018-08-22	2019-08-22	1396
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SPEAG	DAE4V1	2018-07-23	2019-07-23	1335
<input checked="" type="checkbox"/>	Data Acquisition Electronics	SPEAG	DAE4V1	2018-04-24	2019-04-24	1391
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2018-09-25	2019-09-25	3933
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2018-07-26	2019-07-26	3930
<input checked="" type="checkbox"/>	Dosimetric E-Field Probe	SPEAG	EX3DV4	2018-04-25	2019-04-25	3916
<input checked="" type="checkbox"/>	750MHz SAR Dipole	SPEAG	D750V3	2019-01-25	2021-01-25	1049
<input checked="" type="checkbox"/>	835MHz SAR Dipole	SPEAG	D835V2	2018-08-23	2020-08-23	4d159
<input checked="" type="checkbox"/>	1800MHz SAR Dipole	SPEAG	D1800V2	2018-04-26	2020-04-26	2d202
<input checked="" type="checkbox"/>	1900MHz SAR Dipole	SPEAG	D1900V2	2018-08-27	2020-08-27	5d176
<input checked="" type="checkbox"/>	2450MHz SAR Dipole	SPEAG	D2450V2	2018-08-24	2020-08-24	920
<input checked="" type="checkbox"/>	2600MHz SAR Dipole	SPEAG	D2600V2	2019-02-27	2021-02-27	1016
<input checked="" type="checkbox"/>	5GHz SAR Dipole	SPEAG	D5GHzV2	2019-02-28	2021-02-28	1103
<input checked="" type="checkbox"/>	Network Analyzer	Agilent	E5071C	2018-12-19	2019-12-19	MY46111534
<input checked="" type="checkbox"/>	Signal Generator	Agilent	E4438C	2018-07-04	2019-07-04	US41461520
<input checked="" type="checkbox"/>	Amplifier	RFBAY.Inc	MPA-40-40	2018-12-20	2019-12-20	21151801
<input checked="" type="checkbox"/>	Amplifier	EMPOWER	BBS3Q7ELU	2018-07-10	2019-07-10	1020
<input checked="" type="checkbox"/>	High Power RF Amplifier	EMPOWER	BBS3Q8CCJ	2018-07-06	2019-07-06	1005
<input checked="" type="checkbox"/>	Power Meter	HP	EPM-442A	2018-12-19	2019-12-19	GB37170267
<input checked="" type="checkbox"/>	Power Meter	HP	EPM-442A	2018-12-18	2019-12-18	GB37170413
<input checked="" type="checkbox"/>	Power Meter	Anritsu	ML2495A	2018-07-04	2019-07-04	1435003
<input checked="" type="checkbox"/>	Power Sensor	Anritsu	MA2490A	2018-07-04	2019-07-04	1409034
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2018-12-18	2019-12-18	US37294267
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2018-12-19	2019-12-19	3318A96566
<input checked="" type="checkbox"/>	Power Sensor	HP	8481A	2018-12-19	2019-12-19	2702A65976
<input checked="" type="checkbox"/>	Dual Directional Coupler	Agilent	778D-012	2018-12-19	2019-12-19	50228
<input checked="" type="checkbox"/>	Directional Coupler	HP	772D	2018-07-03	2019-07-03	2889A01064
<input checked="" type="checkbox"/>	Low Pass Filter 1GHz	Wainwright Instruments	WLK6-1000-1400-9000-60SS	2018-07-05	2019-07-05	165
<input checked="" type="checkbox"/>	Low Pass Filter 1.5GHz	Micro LAB	LA-15N	2018-07-05	2019-07-05	2
<input checked="" type="checkbox"/>	Low Pass Filter 3.0GHz	Micro LAB	LA-30N	2018-07-05	2019-07-05	2
<input checked="" type="checkbox"/>	Low Pass Filter 6.0GHz	Micro LAB	LA-60N	2018-12-19	2019-12-19	03942
<input checked="" type="checkbox"/>	Attenuators(3 dB)	Agilent	8491B	2018-12-19	2019-12-19	MY39260700
<input checked="" type="checkbox"/>	Attenuators(10 dB)	WEINSCHTEL	23-10-34	2018-12-19	2019-12-19	BP4387
<input checked="" type="checkbox"/>	Dielectric Probe kit	SPEAG	DAK-3.5	2018-07-24	2019-07-24	1046
<input checked="" type="checkbox"/>	8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	2018-07-04	2019-07-04	GB41321164
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2019-03-06	2020-03-06	127323
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	Rohde Schwarz	CMW500	2018-12-19	2019-12-19	101414
<input checked="" type="checkbox"/>	Radio Communication Analyzer	KEYSIGHT	E7515A	2018-07-06	2019-07-06	MY55210201
<input checked="" type="checkbox"/>	Radio Communication Analyzer	KEYSIGHT	E7515A	2018-12-19	2019-12-19	MY57270113
<input checked="" type="checkbox"/>	Power Splitter	Anritsu	K241B	2018-12-18	2019-12-18	1301183
<input checked="" type="checkbox"/>	Bluetooth Tester	TESCOM	TC-3000B	2018-12-18	2019-12-18	3000B770243

NOTE(S):

- The E-field probe was calibrated by SPEAG, by temperature measurement procedure. Dipole Verification measurement is performed by DT&C before each test. The brain and muscle simulating material are calibrated by DT&C using the dielectric probe system and network analyzer to determine the conductivity and permittivity (dielectric constant) of the brain and muscle-equivalent material. Each equipment item was used solely within its respective calibration period.
- CBT(Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

15. MEASUREMENT UNCERTAINTIES

750 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.78	0.71	$\pm 3.3 \%$	$\pm 3.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.7 \%$	$\pm 11.5 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.4 \%$	$\pm 23.0 \%$	

The above measurement uncertainties are according to IEEE Std 1528

750 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.7	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3\%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

835 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.78	0.71	$\pm 2.9 \%$	$\pm 2.6 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1800 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.78	0.71	$\pm 3.4 \%$	$\pm 3.1 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.7 \%$	$\pm 11.5 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.4 \%$	$\pm 23.0 \%$	

The above measurement uncertainties are according to IEEE Std 1528

1900 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2450 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.7	Normal	1	0.78	0.71	$\pm 2.9 \%$	$\pm 2.6 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.2	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Head (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 2.0	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

2600 MHz Body (SN: 3933)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.0	Normal	1	1	1	$\pm 6.0 \%$	$\pm 6.0 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.6 \%$	$\pm 11.4 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.2 \%$	$\pm 22.8 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.3	Normal	1	0.78	0.71	$\pm 3.4 \%$	$\pm 3.1 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 12.0 \%$	$\pm 11.8 \%$	330
Expanded Uncertainty (k=2)						$\pm 24.0 \%$	$\pm 23.6 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5200 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1\%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.8	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8\%$	$\pm 0.7\%$	∞
Temp. unc. - Permittivity	± 1.7	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.0	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5300 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5500 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.8	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.7 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.7	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.1	Normal	1	0.78	0.71	$\pm 3.2 \%$	$\pm 2.9 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.3	Normal	1	0.23	0.26	$\pm 1.0 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5600 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 3.9	Normal	1	0.78	0.71	$\pm 3.0 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.9	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Head (SN: 3916)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.2	Normal	1	0.78	0.71	$\pm 3.3 \%$	$\pm 3.0 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 3.9	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.0 \%$	10
Temp. unc. - Conductivity	± 1.8	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.8 \%$	$\pm 0.7 \%$	∞
Temp. unc. - Permittivity	± 2.0	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.8 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.6 \%$	

The above measurement uncertainties are according to IEEE Std 1528

5800 MHz Body (SN: 3930)

Error Description	Uncertainty value $\pm\%$	Probability Distribution	Divisor	(Ci) 1g	(Ci) 10g	Standard (1g)	Standard (10g)	vi 2 or Veff
Measurement System								
Probe calibration	± 6.55	Normal	1	1	1	$\pm 6.6 \%$	$\pm 6.6 \%$	∞
Isotropy	± 1.3	Normal	1	1	1	$\pm 1.3 \%$	$\pm 1.3 \%$	∞
Boundary Effects	± 2.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.2 \%$	$\pm 1.2 \%$	∞
Probe Linearity	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Probe modulation response	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Detection limits	± 0.25	Rectangular	$\sqrt{3}$	1	1	$\pm 0.14 \%$	$\pm 0.14 \%$	∞
Readout Electronics	± 0.3	Normal	1	1	1	$\pm 0.3 \%$	$\pm 0.3 \%$	∞
Response time	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Integration time	± 2.6	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5 \%$	$\pm 1.5 \%$	∞
RF Ambient Conditions – Noise	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
RF Ambient Conditions – Reflections	± 3.0	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7 \%$	$\pm 1.7 \%$	∞
Probe Positioner	± 0.8	Rectangular	$\sqrt{3}$	1	1	$\pm 0.46 \%$	$\pm 0.46 \%$	∞
Probe Positioning	± 6.7	Rectangular	$\sqrt{3}$	1	1	$\pm 3.9 \%$	$\pm 3.9 \%$	∞
Algorithms for Max. SAR Eval.	± 4.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3 \%$	$\pm 2.3 \%$	∞
Test Sample Related								
Device Positioning	± 2.9	Normal	1	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	145
Device Holder	± 3.6	Normal	1	1	1	$\pm 3.6 \%$	$\pm 3.6 \%$	5
Power Drift	± 5.0	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9 \%$	$\pm 2.9 \%$	∞
SAR Scaling	± 0.0	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Physical Parameters								
Phantom Shell	± 7.6	Rectangular	$\sqrt{3}$	1	1	$\pm 4.4 \%$	$\pm 4.4 \%$	∞
SAR correction	± 0.0	Normal	1	1	0.84	$\pm 0.0 \%$	$\pm 0.0 \%$	∞
Liquid conductivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8 \%$	$\pm 1.2 \%$	∞
Liquid conductivity (Meas.)	± 4.0	Normal	1	0.78	0.71	$\pm 3.1 \%$	$\pm 2.8 \%$	10
Liquid permittivity (Target)	± 5.0	Rectangular	$\sqrt{3}$	0.60	0.49	$\pm 1.7 \%$	$\pm 1.4 \%$	∞
Liquid permittivity (Meas.)	± 4.1	Normal	1	0.23	0.26	$\pm 0.9 \%$	$\pm 1.1 \%$	10
Temp. unc. - Conductivity	± 1.9	Rectangular	$\sqrt{3}$	0.78	0.71	$\pm 0.9 \%$	$\pm 0.8 \%$	∞
Temp. unc. - Permittivity	± 1.8	Rectangular	$\sqrt{3}$	0.23	0.26	$\pm 0.2 \%$	$\pm 0.3 \%$	∞
Combined Standard Uncertainty						$\pm 11.9 \%$	$\pm 11.7 \%$	330
Expanded Uncertainty (k=2)						$\pm 23.8 \%$	$\pm 23.4 \%$	

The above measurement uncertainties are according to IEEE Std 1528

16. CONCLUSION

Measurement Conclusion

The SAR measurement indicates that the EUT complies with the RF radiation exposure limits of the FCC. These measurements are taken to simulate the RF effects exposure under the worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters subject to the test. The test results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are every complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role impossible biological effect are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease).

Because innumerable factors may interact to determine the specific biological outcome of an exposure to electromagnetic fields, any protection guide shall consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables.

17. REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radiofrequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2003, Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for Radio Frequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid& Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct.1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bio electromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computer mathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.

- [20] IEC 62209-1, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300MHz to 3 GHz), Feb. 2005.
- [21] Industry Canada RSS-102 Radio Frequency Exposure Compliance of Radio communication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2009
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225,D01-D07
- [24] SAR Measurement procedures for IEEE 802.11a/b/g KDB Publication 248227 D01v02
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474D02-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] 615223 D01 802 16e WI-Max SAR Guidance v01, Nov. 13, 2009
- [30] Anexo à Resolução No. 533, de 10 de September de 2009.
- [31] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30 MHz to 6 GHz), Mar. 2010.

APPENDIX A. – Probe Calibration Data

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **DT&C (Dymstec)**

Certificate No: **EX3-3933_Sep18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3933**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
 Calibration procedure for dosimetric E-field probes



Calibration date: **September 25, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3842U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature 

Issued: September 27, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3933

September 25, 2018

Probe EX3DV4

SN:3933

Manufactured: July 24, 2013
Calibrated: September 25, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.50	0.52	0.19	$\pm 10.1\%$
DCP (mV) ^B	104.5	98.7	93.5	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	144.0	$\pm 2.7\%$
		Y	0.0	0.0	1.0		147.5	
		Z	0.0	0.0	1.0		142.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4– SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	10.76	10.76	10.76	0.35	1.00	± 12.0 %
835	41.5	0.90	10.26	10.26	10.26	0.46	0.83	± 12.0 %
900	41.5	0.97	9.91	9.91	9.91	0.43	0.80	± 12.0 %
1750	40.1	1.37	8.83	8.83	8.83	0.34	0.83	± 12.0 %
1900	40.0	1.40	8.54	8.54	8.54	0.25	0.80	± 12.0 %
2300	39.5	1.67	7.90	7.90	7.90	0.41	0.80	± 12.0 %
2450	39.2	1.80	7.61	7.61	7.61	0.21	1.16	± 12.0 %
2600	39.0	1.96	7.41	7.41	7.41	0.25	1.00	± 12.0 %
3500	37.9	2.91	7.30	7.30	7.30	0.27	1.20	± 13.1 %
3700	37.7	3.12	7.13	7.13	7.13	0.25	1.20	± 13.1 %
5200	36.0	4.66	5.24	5.24	5.24	0.40	1.80	± 13.1 %
5300	35.9	4.76	5.02	5.02	5.02	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.87	4.87	4.87	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.71	4.71	4.71	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.77	4.77	4.77	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	55.5	0.96	10.43	10.43	10.43	0.32	1.02	± 12.0 %
835	55.2	0.97	10.27	10.27	10.27	0.44	0.80	± 12.0 %
900	55.0	1.05	10.20	10.20	10.20	0.42	0.80	± 12.0 %
1750	53.4	1.49	8.62	8.62	8.62	0.31	0.88	± 12.0 %
1900	53.3	1.52	8.21	8.21	8.21	0.38	0.80	± 12.0 %
2300	52.9	1.81	7.86	7.86	7.86	0.34	0.88	± 12.0 %
2450	52.7	1.95	7.75	7.75	7.75	0.34	0.95	± 12.0 %
2600	52.5	2.16	7.63	7.63	7.63	0.31	0.95	± 12.0 %
3500	51.3	3.31	7.13	7.13	7.13	0.30	1.25	± 13.1 %
3700	51.0	3.55	7.08	7.08	7.08	0.30	1.25	± 13.1 %
5200	49.0	5.30	4.67	4.67	4.67	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.51	4.51	4.51	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.14	4.14	4.14	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.01	4.01	4.01	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.10	4.10	4.10	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4– SN:3933

September 25, 2018

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

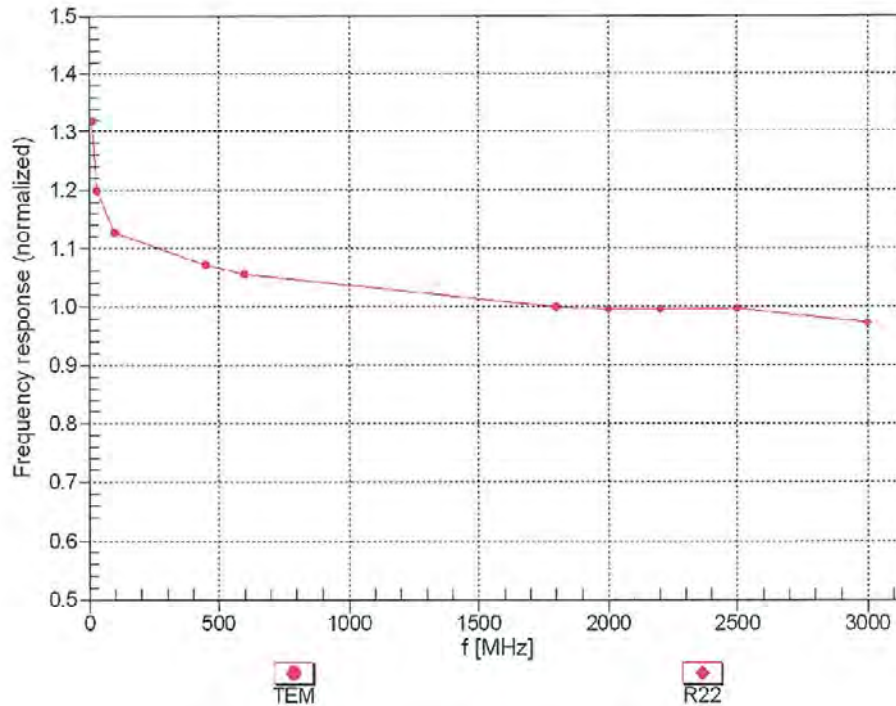

Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)



EX3DV4- SN:3933

September 25, 2018

Receiving Pattern (ϕ), $\theta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22

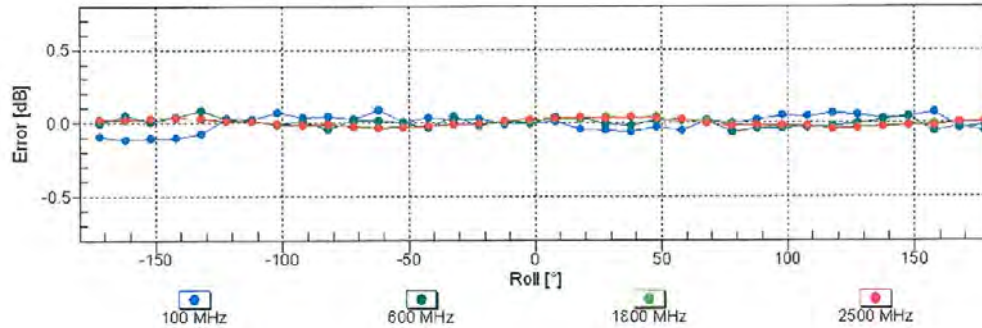
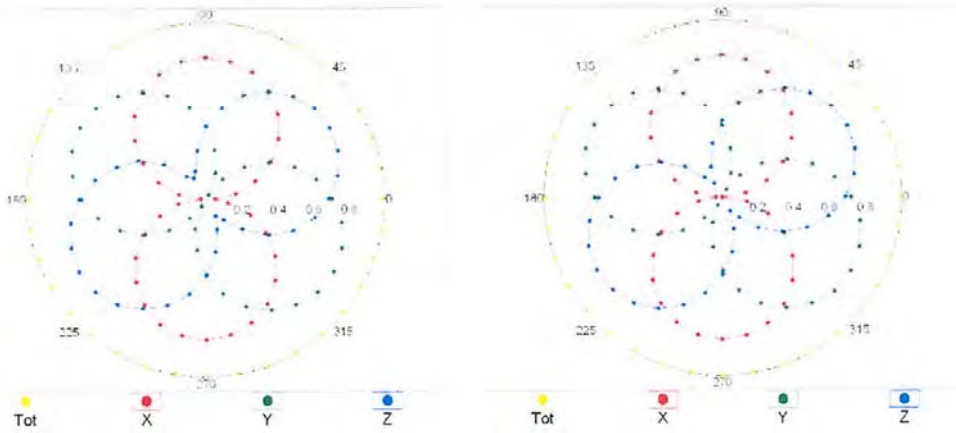


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:3933

September 25, 2018

Dynamic Range $f(SAR_{head})$ (TEM cell , $f_{aval}= 1900$ MHz)

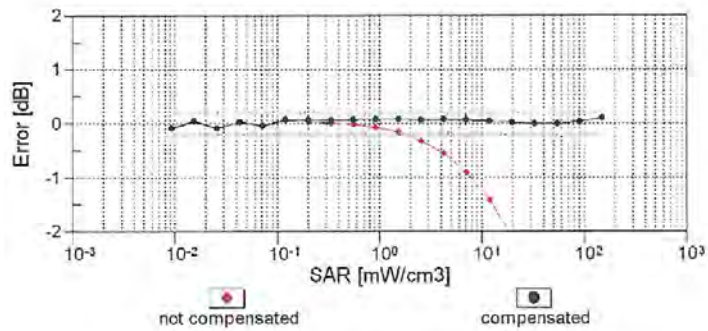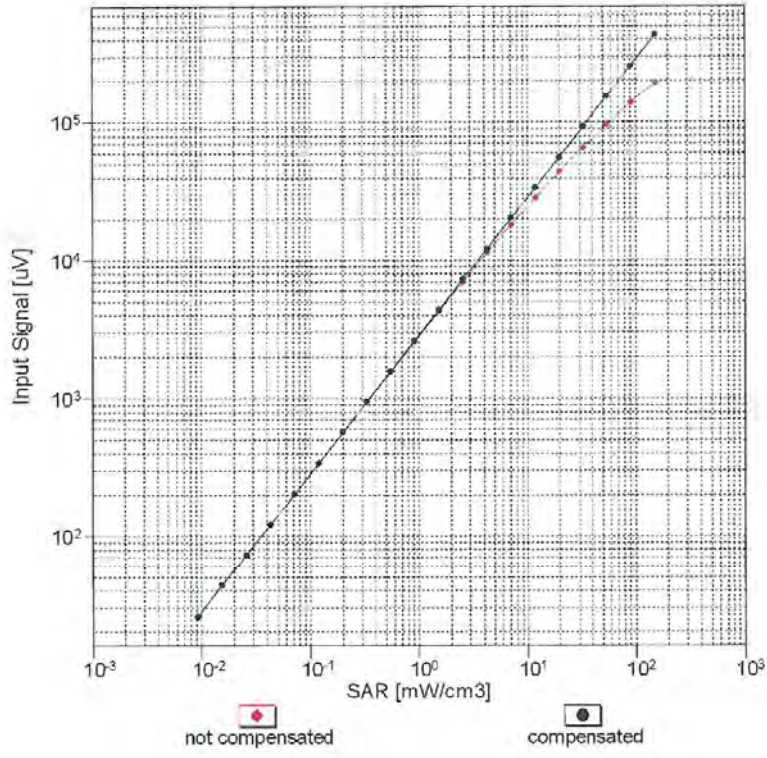


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

EX3DV4-- SN:3933



September 25, 2018

Conversion Factor Assessment

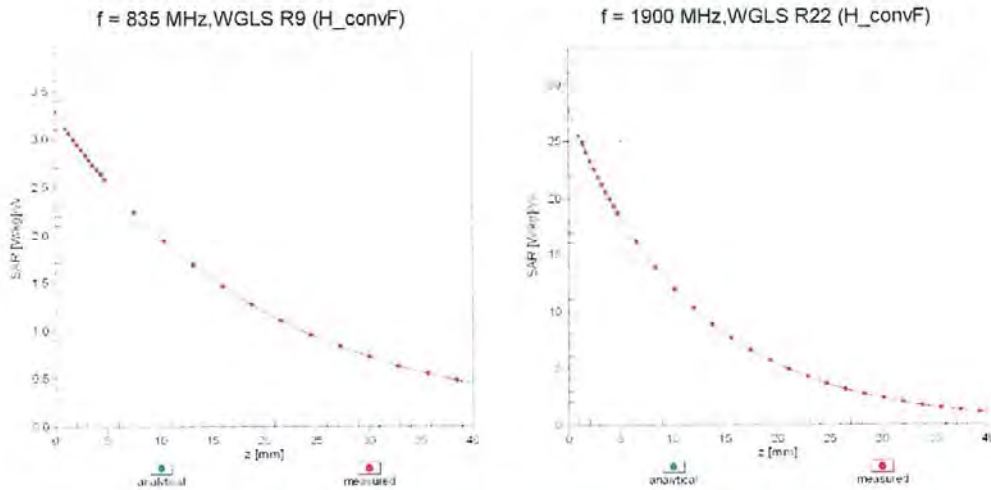

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

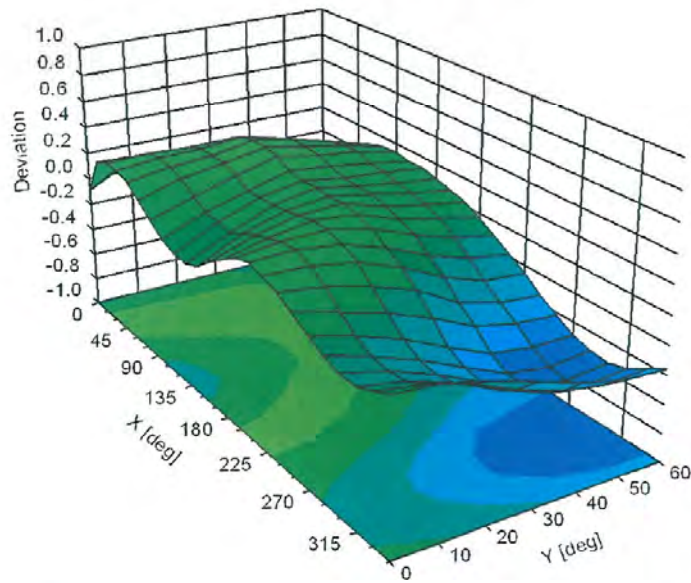

EX3DV4-- SN:3933

September 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3933

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	77.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **DT&C (Dymstec)**

Certificate No: **EX3-3916_Apr18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3916**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6**
Calibration procedure for dosimetric E-field probes



Calibration date: **April 25, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Claudio Leubler	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Technical Manager	

Issued: April 26, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z}** = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3916

April 25, 2018

Probe EX3DV4

SN:3916

Manufactured: December 18, 2012
Calibrated: April 25, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4– SN:3916

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.56	0.47	0.52	$\pm 10.1\%$
DCP (mV) ^B	99.6	101.3	99.8	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	148.6	$\pm 3.5\%$
		Y	0.0	0.0	1.0		159.6	
		Z	0.0	0.0	1.0		142.3	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4– SN:3916

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^f	Conductivity (S/m) ^f	ConvF X	ConvF Y	ConvF Z	Alpha ^g	Depth ^g (mm)	Unc (k=2)
2450	39.2	1.80	7.72	7.72	7.72	0.36	0.85	± 12.0 %
2600	39.0	1.96	7.51	7.51	7.51	0.37	0.84	± 12.0 %
5200	36.0	4.66	5.38	5.38	5.38	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.04	5.04	5.04	0.40	1.80	± 13.1 %
5500	35.6	4.96	5.01	5.01	5.01	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.84	4.84	4.84	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.94	4.94	4.94	0.40	1.80	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^f At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^g Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4- SN:3916

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	52.7	1.95	7.69	7.69	7.69	0.36	0.90	± 12.0 %
2600	52.5	2.16	7.42	7.42	7.42	0.41	0.90	± 12.0 %
5200	49.0	5.30	4.66	4.66	4.66	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.44	4.44	4.44	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.23	4.23	4.23	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.02	4.02	4.02	0.50	1.90	± 13.1 %
5800	48.2	6.00	4.31	4.31	4.31	0.50	1.90	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4-SN:3916

April 25, 2018

Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)


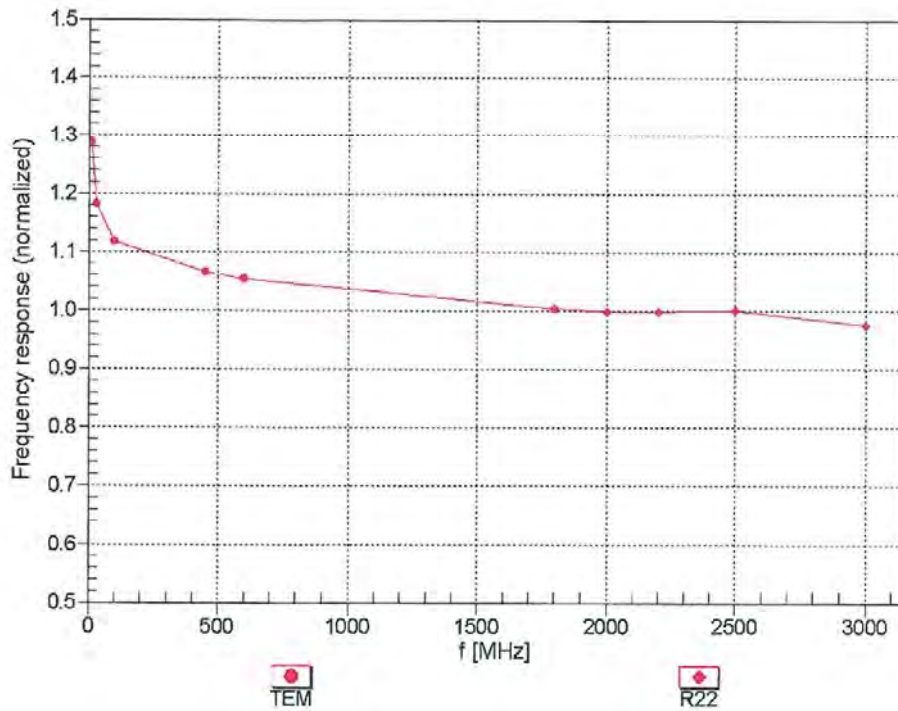


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

EX3DV4-SN:3916

April 25, 2018

Receiving Pattern (ϕ), $\theta = 0^\circ$

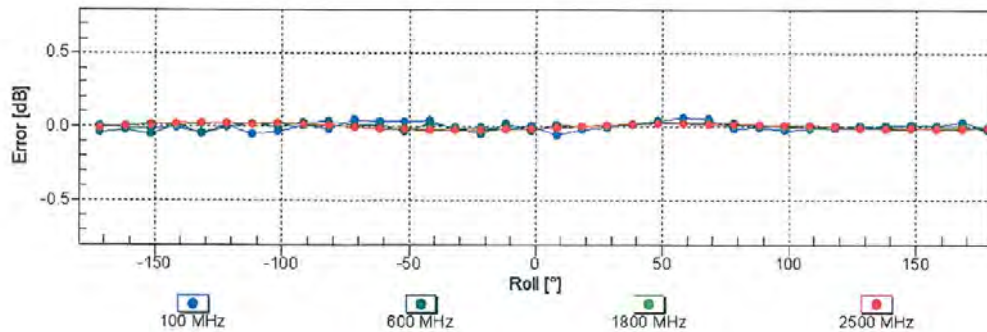
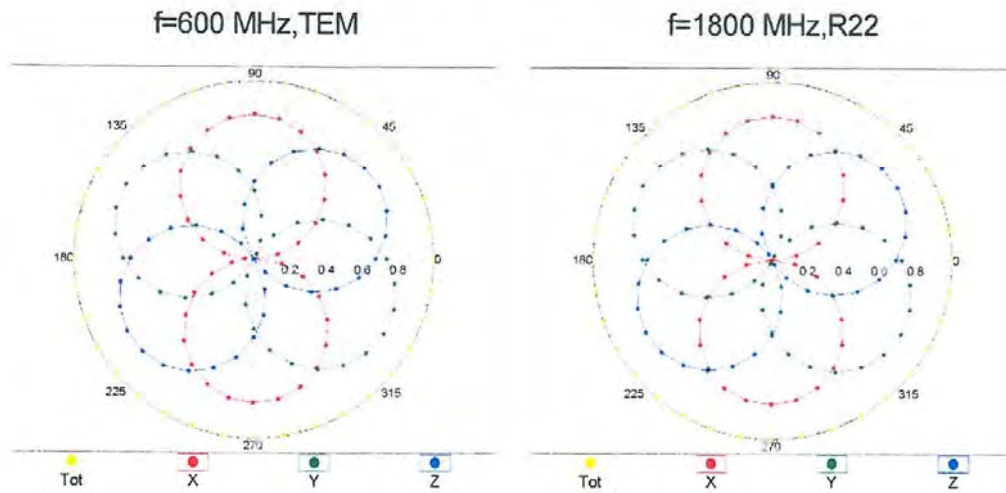


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ (k=2)

EX3DV4- SN:3916

April 25, 2018

Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

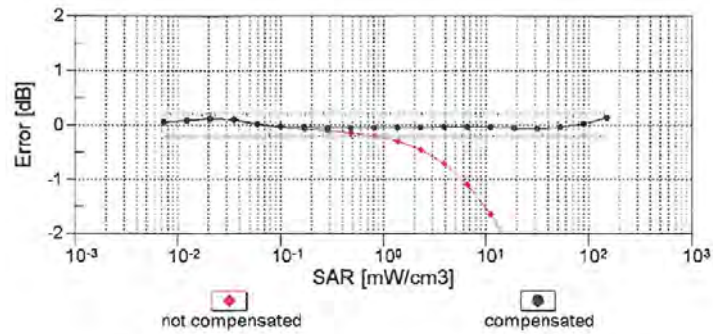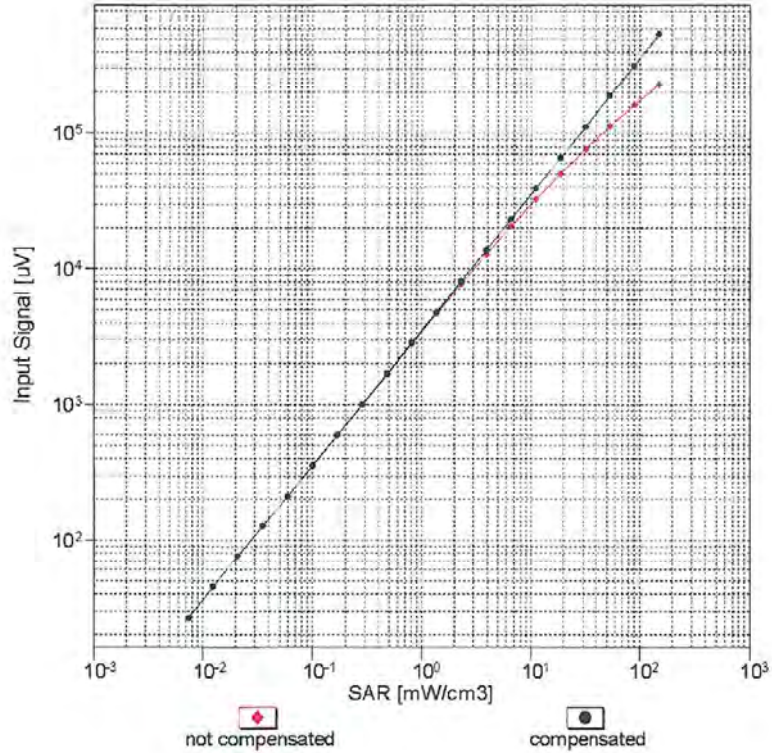


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

EX3DV4- SN:3916



April 25, 2018

Conversion Factor Assessment

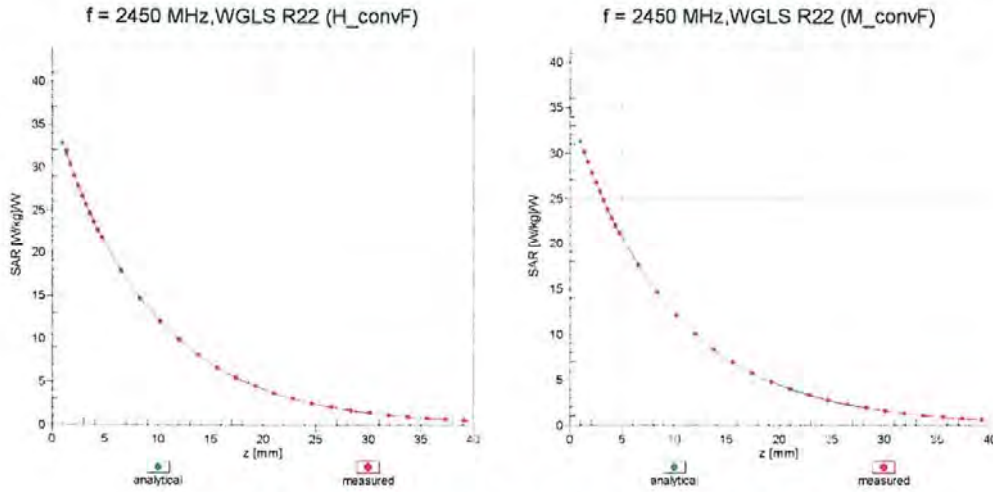

Deviation from Isotropy in Liquid

Error (ϕ, ϑ), f = 900 MHz

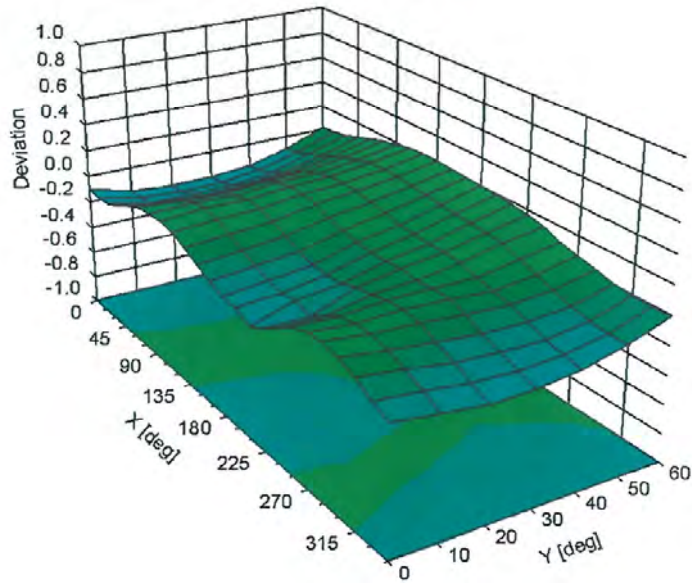

EX3DV4- SN:3916

April 25, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3916

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	88.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
 Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

 Client **DT&C (Dymstec)**

 Certificate No: **EX3-3930_Jul18**

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3930**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6
 Calibration procedure for dosimetric E-field probes**



Calibration date: **July 26, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-18 (No. 217-02672/02673)	Apr-19
Power sensor NRP-Z91	SN: 103244	04-Apr-18 (No. 217-02672)	Apr-19
Power sensor NRP-Z91	SN: 103245	04-Apr-18 (No. 217-02673)	Apr-19
Reference 20 dB Attenuator	SN: S5277 (20x)	04-Apr-18 (No. 217-02682)	Apr-19
Reference Probe ES3DV2	SN: 3013	30-Dec-17 (No. ES3-3013_Dec17)	Dec-18
DAE4	SN: 660	21-Dec-17 (No. DAE4-660_Dec17)	Dec-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-18)	In house check: Jun-20
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-18)	In house check: Jun-20
Network Analyzer E8358A	SN: US41080477	31-Mar-14 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name Michael Weber	Function Laboratory Technician	Signature 
Approved by:	Name Katja Pokovic	Technical Manager	

Issued: July 28, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of
 Schmid & Partner
 Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)_{x,y,z} = NORM_{x,y,z} * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 – SN:3930

July 26, 2018

Probe EX3DV4

SN:3930

Manufactured: July 24, 2013
Calibrated: July 26, 2018

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

EX3DV4- SN:3930

July 26, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.41	0.47	0.43	$\pm 10.1 \%$
DCP (mV) ^B	106.4	99.1	104.4	

Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	147.9	$\pm 3.3 \%$
		Y	0.0	0.0	1.0		154.7	
		Z	0.0	0.0	1.0		156.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

EX3DV4- SN:3930

July 26, 2018

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	39.2	1.80	7.85	7.85	7.85	0.33	0.92	± 12.0 %
2600	39.0	1.96	7.71	7.71	7.71	0.34	0.92	± 12.0 %
3500	37.9	2.91	7.25	7.25	7.25	0.25	1.20	± 13.1 %
3700	37.7	3.12	7.06	7.06	7.06	0.23	1.20	± 13.1 %
5200	36.0	4.66	5.28	5.28	5.28	0.40	1.80	± 13.1 %
5300	35.9	4.76	5.10	5.10	5.10	0.40	1.80	± 13.1 %
5500	35.6	4.96	4.94	4.94	4.94	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.85	4.85	4.85	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.69	4.69	4.69	0.40	1.80	± 13.1 %

^C Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.