

FCC Part 15E Test Report

FCC ID: ZNPWD-R1203U

Product Name:	1200M Relay
Trademark:	N/A
Model Name :	WD-R1203U WD-R1204U, WD-R1205U, WD-R1206U, WD-R1207U, WD-R1208U
Prepared For :	Shenzhen Century Xinyang Tech Co., Ltd
Address :	3F,North Building,Bantian High-tech industrial Zone, No. 2 of Bell Road, Longgang, Shenzhen, Guangdong, China 518129
Prepared By :	Shenzhen BCTC Testing Co., Ltd.
Address :	BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China
Test Date:	May 08, 2020 – May 27, 2020
Date of Report :	May 28, 2020
Report No.:	BCTC2005000113-2E

TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Century Xinyang Tech Co., Ltd
Address : 3F,North Building,Bantian High-tech industrial Zone, No. 2 of Bell Road, Longgang, Shenzhen, Guangdong, China 518129

Manufacture's Name..... : Shenzhen Century Xinyang Tech Co., Ltd
Address : 3F,North Building,Bantian High-tech industrial Zone, No. 2 of Bell Road, Longgang, Shenzhen, Guangdong, China 518129

Product description

Product name : 1200M Relay
Trademark : N/A

Model and/or type reference : WD-R1203U
WD-R1204U, WD-R1205U, WD-R1206U, WD-R1207U,
WD-R1208U

Standards : FCC Part15 15.407
ANSI C63.10-2013
KDB 662911 D01 v02r01
KDB 789033 D02 v02r01

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Cai Fang Zhong

Cai Fang Zhong

Reviewer(Supervisor): Eric Yang

Eric Yang

Approved(Manager): Zero Zhou



Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	17
3.2.1 APPLICABLE STANDARD	17
3.2.2 CONFORMANCE LIMIT	17
3.2.3 MEASURING INSTRUMENTS	17
3.2.4 TEST CONFIGURATION	18
3.2.5 TEST PROCEDURE	19
3.2.6 TEST RESULTS (9KHZ – 30 MHZ)	20
3.2.7 TEST RESULTS (30MHZ – 1GHZ)	21
3.2.8 TEST RESULTS (1GHZ-40GHZ)	23
4 . POWER SPECTRAL DENSITY TEST	35
4.1 APPLIED PROCEDURES / LIMIT	35
4.2 TEST PROCEDURE	36
4.3 DEVIATION FROM STANDARD	36
4.4 TEST SETUP	36
4.5 EUT OPERATION CONDITIONS	36
4.6 TEST RESULTS	37
5 . 26DB & 6DB & 99% EMISSION BANDWIDTH	45
5.1 APPLIED PROCEDURES / LIMIT	45

Table of Contents

	Page
5.2 TEST PROCEDURE	45
5.3 EUT OPERATION CONDITIONS	46
5.4 TEST RESULTS	47
6 . MAXIMUM CONDUCTED OUTPUT POWER	68
6.1 PPLIED PROCEDURES / LIMIT	68
6.2 TEST PROCEDURE	68
6.3 DEVIATION FROM STANDARD	70
6.4 TEST SETUP	70
6.5 EUT OPERATION CONDITIONS	70
6.6 TEST RESULTS	71
7 . OUT OF BAND EMISSIONS	73
7.1 APPLICABLE STANDARD	73
7.2 TEST PROCEDURE	73
7.3 DEVIATION FROM STANDARD	73
7.4 TEST SETUP	73
7.5 EUT OPERATION CONDITIONS	74
7.6 TEST RESULTS	75
8.SPURIOUS RF CONDUCTED EMISSIONS	87
8.1CONFORMANCE LIMIT	87
8.2MEASURING INSTRUMENTS	87
8.3TEST SETUP	87
8.4TEST PROCEDURE	87
8.5TEST RESULTS	87
9. FREQUENCY STABILITY MEASUREMENT	102
9.1 LIMIT	102
9.2 TEST PROCEDURES	102
9.3 TEST SETUP LAYOUT	102
9.4 EUT OPERATION DURING TEST	102
9.5 TEST RESULTS	103
10. ANTENNA REQUIREMENT	109
10.1 STANDARD REQUIREMENT	109
10.2 EUT ANTENNA	109
11. EUT TEST PHOTO	110
12. EUT PHOTO	112

Revision History

Report No.	Version	Description	Issued Date
BCTC2005000113-2E	Rev.01	Initial issue of report	May 28, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.207	Conducted Emission	PASS	
15.407 (a)(5) 15.1049	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.407(g)	Frequency Stability Measurement	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

Shenzhen BCTC Testing Co., Ltd.

Add. : BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
3	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
4	Conducted Adjacent channel power	U=1.38dB
5	Conducted output power uncertainty Above 1G	U=1.576dB
6	Conducted output power uncertainty below 1G	U=1.28dB
7	humidity uncertainty	U=5.3%
8	Temperature uncertainty	U=0.59℃

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	1200M Relay	
Trade Name	N/A	
Model Name	WD-R1203U WD-R1204U, WD-R1205U, WD-R1206U, WD-R1207U, WD-R1208U	
Model Difference	All the model are the same circuit and RF module, except model names.	
Product Description	IEEE 802.11 WLAN Mode Supported	☒ 802.11a/n/ac(20MHz channel bandwidth) ☒ 802.11n/ac(40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS8
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	☒ 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; ☒ 5745-5825 MHz for 802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40; 5775MHz for 802.11 ac80;
	Number of Channels	☒ 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; ☒ 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
	Antenna Type	External antenna
	Antenna Gain	Antenna A:2dBi, Antenna B: 2dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.	
Channel List	Please refer to the Note 2.	
Type of device	Client devices	
Power Supply	AC120/60Hz	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2. Frequency and Channel list for 802.11a/n/ac(20MHz) band I (5180-5240MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel	
Channel	Frequency (MHz)
42	5210

Frequency and Channel list for 802.11a/n/ac(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

802.11ac 80MHz Carrier Frequency Channel	
Channel	Frequency (MHz)
155	5775

EUT has two external antennas with Max gain GANT 2dBi on every antenna, CDD device with two spatial streams, also can operat with one spatial streams according to KDB662911 D01 v02r01,
Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,
 $\text{Array Gain} = 10 \log(\text{NANT}/\text{NSS}) \text{dB} = 10 \log(2/1) = 3.01 \text{dBi}$,
So the directional gain for PSD is 5.01dBi

2) For power measurements,
The Array gain=0 dB for $\text{NANT} \leq 4$,
So the directional gain for Power measurements is 2dBi

Tx Antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	WD-R1203U	External antenna	2	
B	N/A	WD-R1203U	External antenna	2	

2.2 DESCRIPTION OF TEST MODES

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 5	Link Mode

Conducted Emission	
Final Test Mode	Description
Mode 5	Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165

Note:


(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Spurious Emission



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	1200M Relay	N/A	WD-R1203U	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45109572	Jun. 13, 2019	Jun. 12, 2020
2	Test Receiver (9kHz-7GHz)	R&S	ESR7	101154	Jun. 13, 2019	Jun. 12, 2020
3	Bilog Antenna (30MHz-3GHz)	SCHWARZBECK	VULB9163	VULB9163-942	Jun. 22, 2019	Jun. 21, 2020
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1541	Jun. 22, 2019	Jun. 21, 2020
5	Horn Antenna (18GHz-40GHz)	SCHWARZBECK	BBHA9170	822	Jun. 22, 2019	Jun. 21, 2020
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	Jun. 25, 2019	Jun. 24, 2020
7	Amplifier (0.5GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	Jun. 25, 2019	Jun. 24, 2020
8	Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	Jun. 17, 2019	Jun. 16, 2020
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	014	Jul. 02, 2019	Jul. 01, 2020
10	RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-0008	Jun. 25, 2019	Jun. 24, 2020
11	RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	Jun. 25, 2019	Jun. 24, 2020
12	RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	Jun. 25, 2019	Jun. 24, 2020
13	Power Metter	Keysight	E4419B	\	Jun. 17, 2019	Jun. 16, 2020
14	Power Sensor (AV)	Keysight	E9 300A	\	Jun. 17, 2019	Jun. 16, 2020
15	Signal Analyzer 20kHz-26.5GHz	KEYSIGHT	N9020A	MY49100060	Jun. 13, 2019	Jun. 12, 2020
16	Spectrum Analyzer 9kHz-40GHz	Agilent	FSP40	100363	Jun. 13, 2019	Jun. 12, 2020
17	D.C. Power Supply	LongWei	TPR-6405D	\	\	\
18	Software	Frad	EZ-EMC	FA-03A2 RE	\	\

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC/ RSS-247
0.50 -5.0	56.00	46.00	FCC/ RSS-247
5.0 -30.0	60.00	50.00	FCC/ RSS-247

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

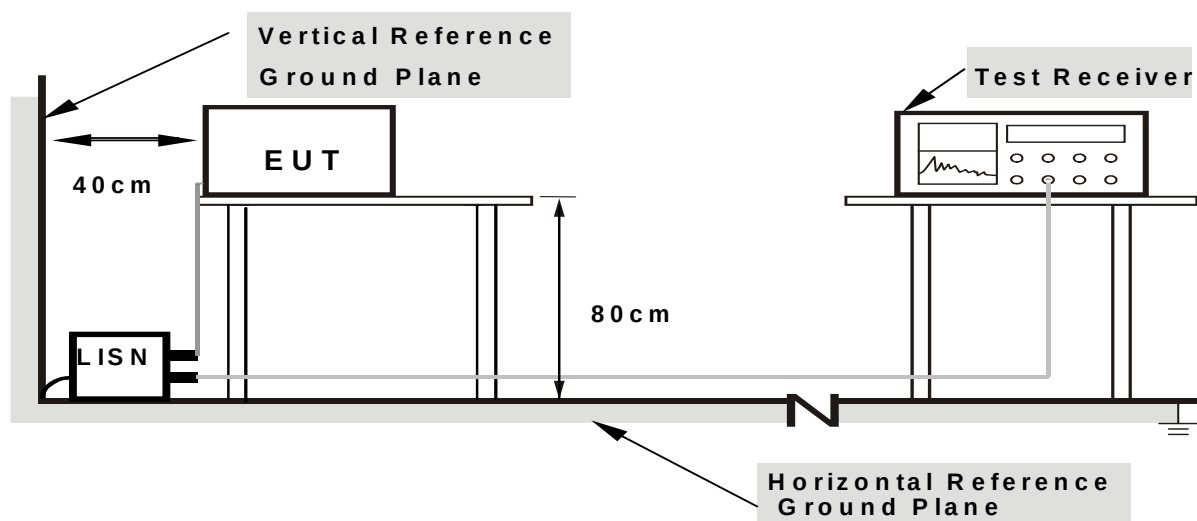

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC120V 60Hz	Test Mode :	Mode 5

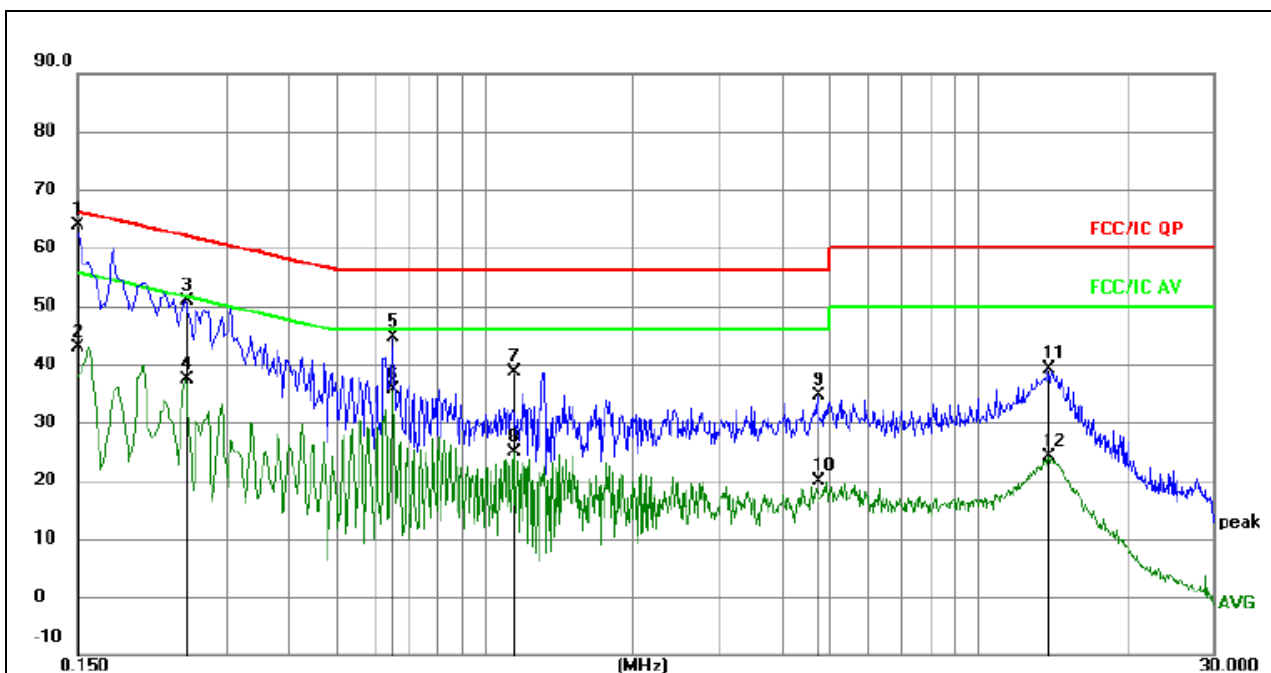


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1	*	0.1500	54.26	9.52	63.78	66.00	-2.22	QP
2		0.1500	33.47	9.52	42.99	56.00	-13.01	AVG
3		0.2490	41.40	9.52	50.92	61.79	-10.87	QP
4		0.2490	27.93	9.52	37.45	51.79	-14.34	AVG
5		0.6539	34.81	9.81	44.62	56.00	-11.38	QP
6		0.6539	25.72	9.81	35.53	46.00	-10.47	AVG
7		1.1489	29.11	9.57	38.68	56.00	-17.32	QP
8		1.1489	15.34	9.57	24.91	46.00	-21.09	AVG
9		4.7265	24.76	9.78	34.54	56.00	-21.46	QP
10		4.7265	10.02	9.78	19.80	46.00	-26.20	AVG
11		13.8435	29.38	9.70	39.08	60.00	-20.92	QP
12		13.8435	14.36	9.70	24.06	50.00	-25.94	AVG

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC120V 60Hz	Test Mode :	Mode 5

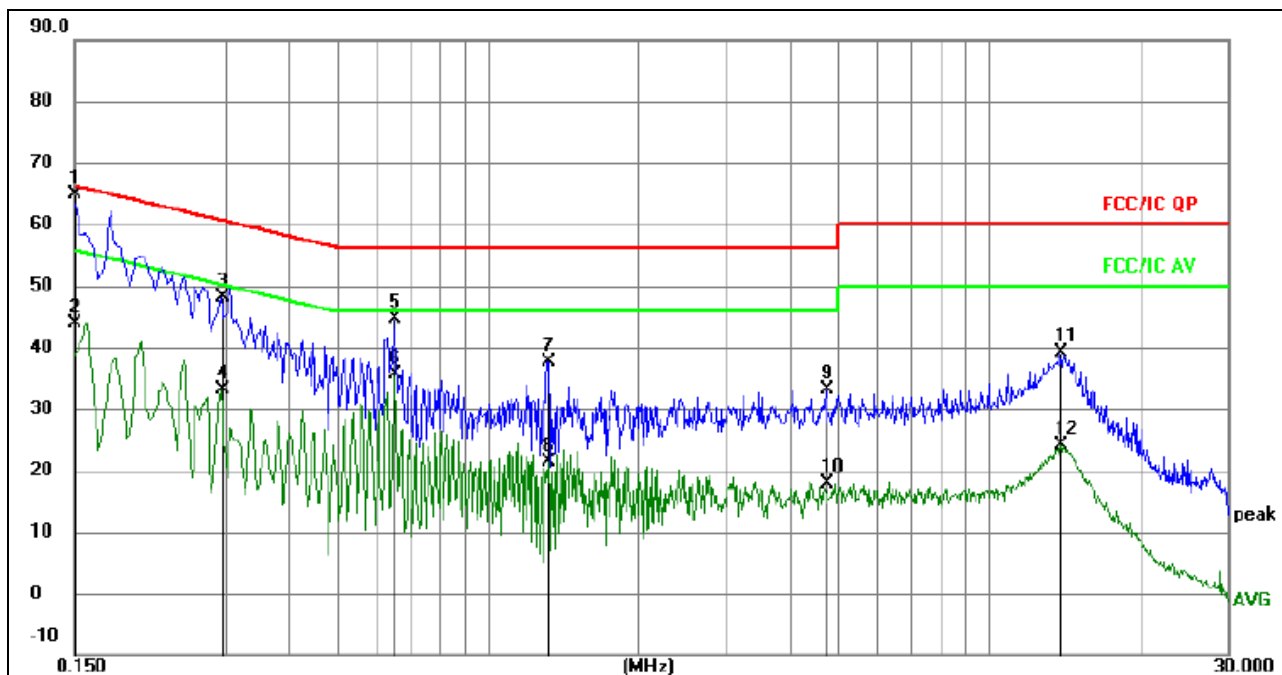

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1500	55.26	9.52	64.78	66.00	-1.22	QP
2		0.1500	34.47	9.52	43.99	56.00	-12.01	AVG
3		0.2940	38.51	9.57	48.08	60.41	-12.33	QP
4		0.2940	23.50	9.57	33.07	50.41	-17.34	AVG
5		0.6540	34.81	9.81	44.62	56.00	-11.38	QP
6		0.6540	25.72	9.81	35.53	46.00	-10.47	AVG
7		1.3200	28.10	9.58	37.68	56.00	-18.32	QP
8		1.3200	11.72	9.58	21.30	46.00	-24.70	AVG
9		4.7265	23.26	9.78	33.04	56.00	-22.96	QP
10		4.7265	8.02	9.78	17.80	46.00	-28.20	AVG
11		13.8435	29.38	9.70	39.08	60.00	-20.92	QP
12		13.8435	14.36	9.70	24.06	50.00	-25.94	AVG

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
 According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	24000/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Remark : 1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

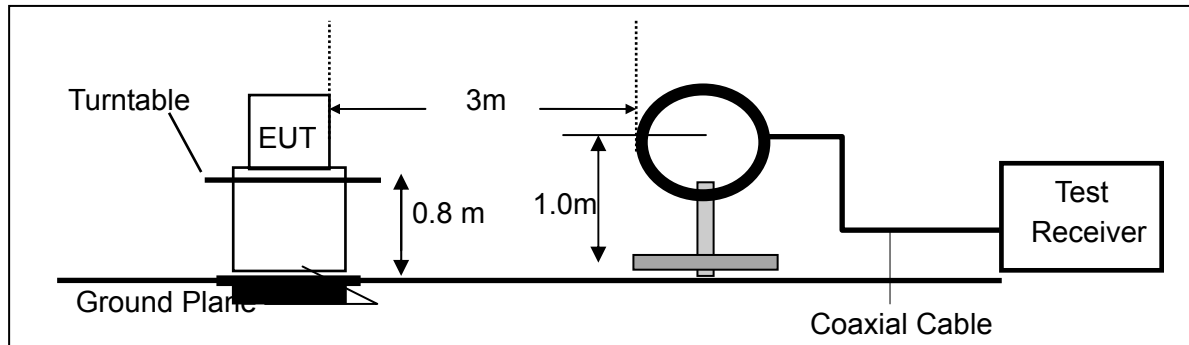

(b) For radiated emissions from 30MHz to 1000MHz

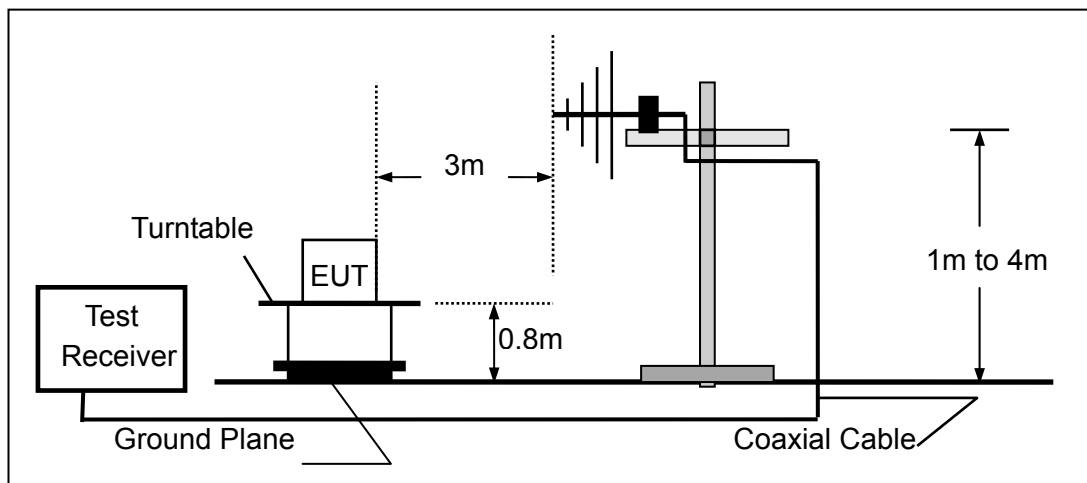

(c) For radiated emissions above 1000MHz

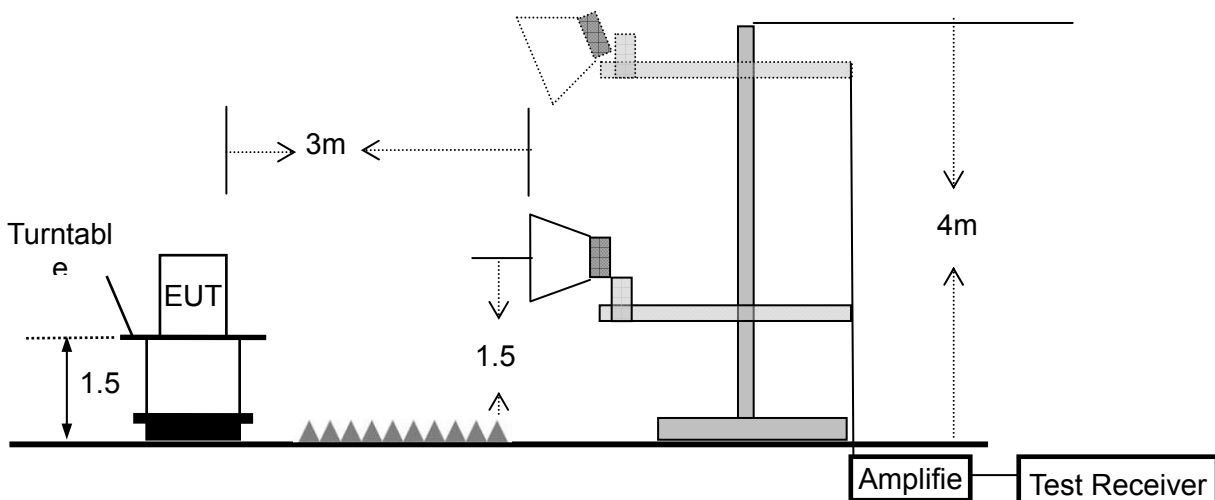

3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (9KHZ – 30 MHZ)

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (30MHZ – 1GHZ)

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

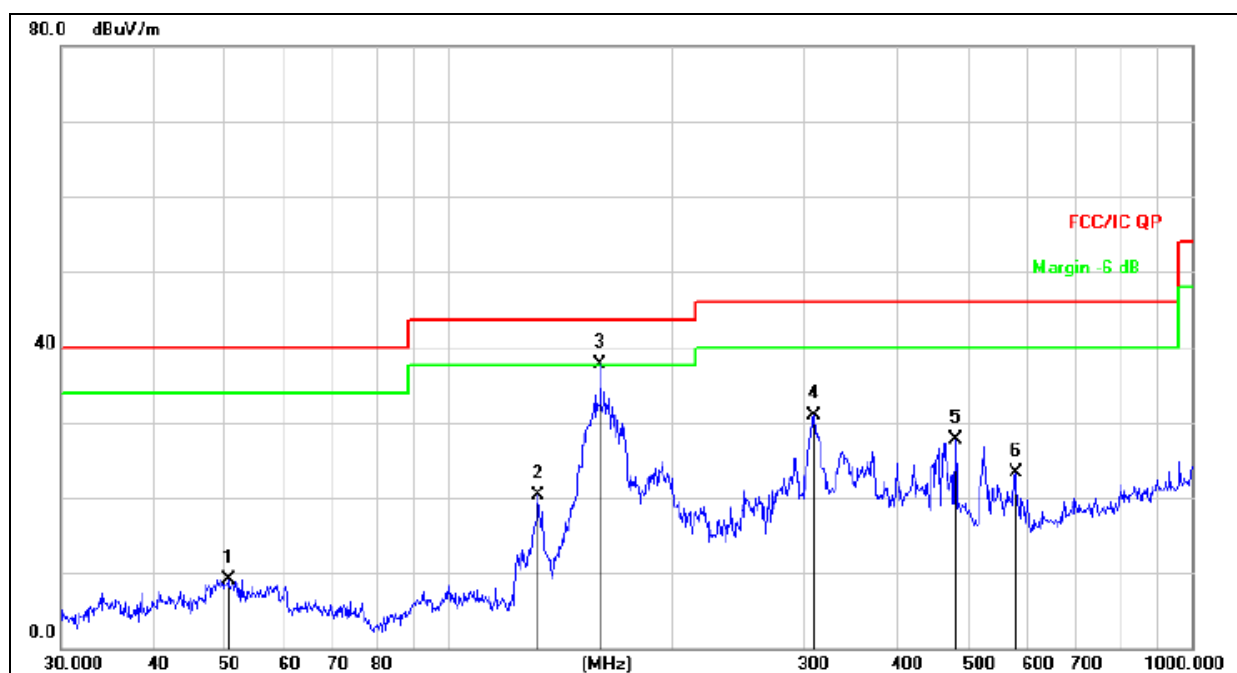


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		50.4089	24.09	-14.91	9.18	40.00	-30.82	QP
2		131.7576	39.05	-18.67	20.38	43.50	-23.12	QP
3	*	159.7844	56.78	-19.10	37.68	43.50	-5.82	QP
4		309.9977	44.12	-13.31	30.81	46.00	-15.19	QP
5		480.5276	36.22	-8.61	27.61	46.00	-18.39	QP
6		578.6698	30.54	-7.22	23.32	46.00	-22.68	QP

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 5

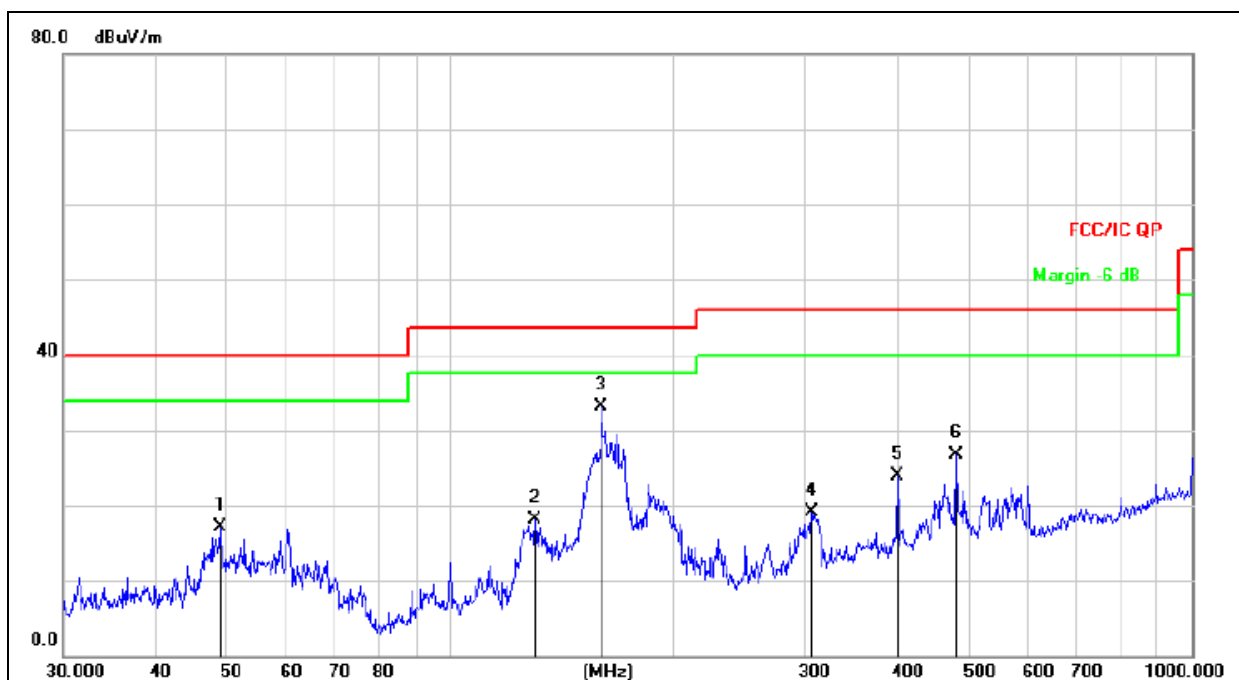

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		48.8429	32.25	-15.12	17.13	40.00	-22.87	QP
2		129.9226	36.61	-18.56	18.05	43.50	-25.45	QP
3	*	159.7844	52.21	-19.10	33.11	43.50	-10.39	QP
4		306.7537	32.49	-13.39	19.10	46.00	-26.90	QP
5		400.4319	34.96	-10.98	23.98	46.00	-22.02	QP
6		480.5276	35.31	-8.61	26.70	46.00	-19.30	QP

3.2.8 TEST RESULTS (1GHz-40GHz)

Test Mode : TX(5.2G) - 802.11a

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4434.157	62.23	5.94	35.40	44.00	59.57	68.20	-8.63	Pk
Vertical	4434.157	46.55	5.94	35.40	44.00	43.89	54.00	-10.11	AV
Vertical	10360.362	60.46	8.46	39.75	44.50	64.17	68.20	-4.03	Pk
Vertical	10360.362	42.91	8.46	39.75	44.50	46.62	54.00	-7.38	AV
Vertical	15540.196	61.45	10.12	38.80	44.10	66.27	68.20	-1.93	Pk
Vertical	15540.196	37.57	10.12	38.80	42.70	43.79	54.00	-10.21	AV
Horizontal	4434.521	66.52	5.94	35.18	44.00	63.64	68.20	-4.56	Pk
Horizontal	4434.521	44.16	5.94	35.18	44.00	41.28	54.00	-12.72	AV
Horizontal	10360.623	58.93	8.46	38.71	44.50	61.6	68.20	-6.6	Pk
Horizontal	10360.623	41.12	8.46	38.71	44.50	43.79	54.00	-10.21	AV
Horizontal	15540.865	56.81	10.12	38.38	44.10	61.21	68.20	-6.99	Pk
Horizontal	15540.865	38.82	10.12	38.38	44.10	43.22	54.00	-10.78	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4592.093	60.23	6.48	36.35	44.05	59.01	68.20	-9.19	Pk
Vertical	4592.093	41.81	6.48	36.35	44.05	40.59	54.00	-13.41	AV
Vertical	10400.424	59.37	8.47	37.88	44.51	61.21	68.20	-6.99	Pk
Vertical	10400.424	42.38	8.47	37.88	44.51	44.22	54.00	-9.78	AV
Vertical	15600.218	56.54	10.12	38.8	44.10	61.36	68.20	-6.84	Pk
Vertical	15600.218	36.65	10.12	38.8	42.70	42.87	54.00	-11.13	AV
Horizontal	4592.691	59.82	6.48	36.37	44.05	58.62	68.20	-9.58	Pk
Horizontal	4592.691	43.19	6.48	36.37	44.05	41.99	54.00	-12.01	AV
Horizontal	10400.114	58.81	8.47	38.64	44.50	61.42	68.20	-6.78	Pk
Horizontal	10400.114	42.22	8.47	38.64	44.50	44.83	54.00	-9.17	AV
Horizontal	15600.187	59.81	10.12	38.38	44.10	64.21	68.20	-3.99	Pk
Horizontal	15600.187	38.71	10.12	38.38	44.10	43.11	54.00	-10.89	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4739.246	61.31	7.10	37.24	43.50	62.15	68.20	-6.05	Pk
Vertical	4739.246	44.25	7.10	37.24	43.50	45.09	54.00	-8.91	AV
Vertical	10480.371	60.33	8.46	37.68	44.50	61.97	68.20	-6.23	Pk
Vertical	10480.371	40.41	8.46	37.68	44.50	42.05	54.00	-11.95	AV
Vertical	15720.359	61.26	10.12	38.8	44.10	66.08	68.20	-2.12	Pk
Vertical	15720.359	39.42	10.12	38.8	42.70	45.64	54.00	-8.36	AV
Horizontal	4739.352	62.24	7.10	37.24	43.50	63.08	68.20	-5.12	Pk
Horizontal	4739.352	43.22	7.10	37.24	43.50	44.06	54.00	-9.94	AV
Horizontal	10480.111	62.54	8.46	38.57	44.50	65.07	68.20	-3.13	Pk
Horizontal	10480.111	43.35	8.46	38.57	44.50	45.88	54.00	-8.12	AV
Horizontal	15720.357	60.28	10.12	38.38	44.10	64.68	68.20	-3.52	Pk
Horizontal	15720.357	42.52	10.12	38.38	44.10	46.92	54.00	-7.08	AV

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

$$\text{Emission level (dBuV/m)} = 20 \log \text{Emission level (uV/m)}.$$

$$\text{Corrected Reading: Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamplifier Factor} = \text{Level}.$$

The worst case is Antenna A.

Test Mode : TX(5.2G) - 802.11n-HT20

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4434.157	62.23	5.94	35.40	44.00	59.57	68.20	-8.63	Pk
Vertical	4434.157	46.55	5.94	35.40	44.00	43.89	54.00	-10.11	AV
Vertical	10360.362	60.47	8.46	39.75	44.50	64.18	68.20	-4.02	Pk
Vertical	10360.362	42.9	8.46	39.75	44.50	46.61	54.00	-7.39	AV
Vertical	15540.196	61.45	10.12	38.80	44.10	66.27	68.20	-1.93	Pk
Vertical	15540.196	37.57	10.12	38.80	42.70	43.79	54.00	-10.21	AV
Horizontal	4434.521	66.52	5.94	35.18	44.00	63.64	68.20	-4.56	Pk
Horizontal	4434.521	44.13	5.94	35.18	44.00	41.25	54.00	-12.75	AV
Horizontal	10360.623	58.92	8.46	38.71	44.50	61.59	68.20	-6.61	Pk
Horizontal	10360.623	41.12	8.46	38.71	44.50	43.79	54.00	-10.21	AV
Horizontal	15540.865	56.63	10.12	38.38	44.10	61.03	68.20	-7.17	Pk
Horizontal	15540.865	38.92	10.12	38.38	44.10	43.32	54.00	-10.68	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4592.093	60.26	6.48	36.35	44.05	59.04	68.20	-9.16	Pk
Vertical	4592.093	41.96	6.48	36.35	44.05	40.74	54.00	-13.26	AV
Vertical	10400.424	59.63	8.47	37.88	44.51	61.47	68.20	-6.73	Pk
Vertical	10400.424	42.75	8.47	37.88	44.51	44.59	54.00	-9.41	AV
Vertical	15600.218	56.57	10.12	38.8	44.10	61.39	68.20	-6.81	Pk
Vertical	15600.218	36.65	10.12	38.8	42.70	42.87	54.00	-11.13	AV
Horizontal	4592.691	59.83	6.48	36.37	44.05	58.63	68.20	-9.57	Pk
Horizontal	4592.691	43.15	6.48	36.37	44.05	41.95	54.00	-12.05	AV
Horizontal	10400.114	58.83	8.47	38.64	44.50	61.44	68.20	-6.76	Pk
Horizontal	10400.114	42.27	8.47	38.64	44.50	44.88	54.00	-9.12	AV
Horizontal	15600.187	59.83	10.12	38.38	44.10	64.23	68.20	-3.97	Pk
Horizontal	15600.187	38.78	10.12	38.38	44.10	43.18	54.00	-10.82	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4739.246	61.22	7.10	37.24	43.50	62.06	68.20	-6.14	Pk
Vertical	4739.246	44.45	7.10	37.24	43.50	45.29	54.00	-8.71	AV
Vertical	10480.371	60.52	8.46	37.68	44.50	62.16	68.20	-6.04	Pk
Vertical	10480.371	40.36	8.46	37.68	44.50	42	54.00	-12	AV
Vertical	15720.359	61.58	10.12	38.8	44.10	66.4	68.20	-1.8	Pk
Vertical	15720.359	39.27	10.12	38.8	42.70	45.49	54.00	-8.51	AV
Horizontal	4739.352	62.53	7.10	37.24	43.50	63.37	68.20	-4.83	Pk
Horizontal	4739.352	43.63	7.10	37.24	43.50	44.47	54.00	-9.53	AV
Horizontal	10480.111	62.76	8.46	38.57	44.50	65.29	68.20	-2.91	Pk
Horizontal	10480.111	43.92	8.46	38.57	44.50	46.45	54.00	-7.55	AV
Horizontal	15720.357	60.23	10.12	38.38	44.10	64.63	68.20	-3.57	Pk
Horizontal	15720.357	42.34	10.12	38.38	44.10	46.74	54.00	-7.26	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

$$\text{Emission level (dBuV/m)} = 20 \log \text{Emission level (uV/m)}.$$

$$\text{Corrected Reading: Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamplifier Factor} = \text{Level}.$$

Test Mode is MIMO Mode.

Test Mode : TX(5.2G) - 802.11n-HT40

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G									
Vertical	4434.157	62.81	5.94	35.40	44.00	60.15	68.20	-8.05	Pk
Vertical	4434.157	46.73	5.94	35.40	44.00	44.07	54.00	-9.93	AV
Vertical	10380.362	60.46	8.46	39.75	44.50	64.17	68.20	-4.03	Pk
Vertical	10380.362	42.94	8.46	39.75	44.50	46.65	54.00	-7.35	AV
Vertical	15570.196	61.46	10.12	38.80	44.10	66.28	68.20	-1.92	Pk
Vertical	15570.196	37.52	10.12	38.80	42.70	43.74	54.00	-10.26	AV
Horizontal	4434.521	66.53	5.94	35.18	44.00	63.65	68.20	-4.55	Pk
Horizontal	4434.521	44.23	5.94	35.18	44.00	41.35	54.00	-12.65	AV
Horizontal	10380.623	58.81	8.46	38.71	44.50	61.48	68.20	-6.72	Pk
Horizontal	10380.623	41.15	8.46	38.71	44.50	43.82	54.00	-10.18	AV
Horizontal	15570.865	56.93	10.12	38.38	44.10	61.33	68.20	-6.87	Pk
Horizontal	15570.865	38.81	10.12	38.38	44.10	43.21	54.00	-10.79	AV
High Channel (5230 MHz)-Above 1G									
Vertical	4739.246	61.27	7.10	37.24	43.50	62.11	68.20	-6.09	Pk
Vertical	4739.246	44.45	7.10	37.24	43.50	45.29	54.00	-8.71	AV
Vertical	10460.371	60.21	8.46	37.68	44.50	61.85	68.20	-6.35	Pk
Vertical	10460.371	40.49	8.46	37.68	44.50	42.13	54.00	-11.87	AV
Vertical	15690.359	61.52	10.12	38.8	44.10	66.34	68.20	-1.86	Pk
Vertical	15690.359	39.66	10.12	38.8	42.70	45.88	54.00	-8.12	AV
Horizontal	4739.352	62.21	7.10	37.24	43.50	63.05	68.20	-5.15	Pk
Horizontal	4739.352	43.16	7.10	37.24	43.50	44	54.00	-10	AV
Horizontal	10460.111	62.56	8.46	38.57	44.50	65.09	68.20	-3.11	Pk
Horizontal	10460.111	43.34	8.46	38.57	44.50	45.87	54.00	-8.13	AV
Horizontal	15690.357	60.75	10.12	38.38	44.10	65.15	68.20	-3.05	Pk
Horizontal	15690.357	42.28	10.12	38.38	44.10	46.68	54.00	-7.32	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode : TX(5.2G) - 802.11ac-HT20

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4434.157	62.53	5.94	35.40	44.00	59.87	68.20	-8.33	Pk
Vertical	4434.157	46.52	5.94	35.40	44.00	43.86	54.00	-10.14	AV
Vertical	10360.367	60.46	8.46	39.75	44.50	64.17	68.20	-4.03	Pk
Vertical	10360.367	42.27	8.46	39.75	44.50	45.98	54.00	-8.02	AV
Vertical	15540.195	61.41	10.12	38.80	44.10	66.23	68.20	-1.97	Pk
Vertical	15540.195	37.55	10.12	38.80	42.70	43.77	54.00	-10.23	AV
Horizontal	4434.524	66.56	5.94	35.18	44.00	63.68	68.20	-4.52	Pk
Horizontal	4434.524	56.77	5.94	35.18	44.00	53.89	54.00	-0.11	AV
Horizontal	10360.627	58.92	8.46	38.71	44.50	61.59	68.20	-6.61	Pk
Horizontal	10360.627	41.08	8.46	38.71	44.50	43.75	54.00	-10.25	AV
Horizontal	15540.865	56.92	10.12	38.38	44.10	61.32	68.20	-6.88	Pk
Horizontal	15540.865	38.84	10.12	38.38	44.10	43.24	54.00	-10.76	AV
middle Channel (5200 MHz)-Above 1G									
Vertical	4592.098	60.36	6.48	36.35	44.05	59.14	68.20	-9.06	Pk
Vertical	4592.098	41.83	6.48	36.35	44.05	40.61	54.00	-13.39	AV
Vertical	10400.428	59.57	8.47	37.88	44.51	61.41	68.20	-6.79	Pk
Vertical	10400.428	42.72	8.47	37.88	44.51	44.56	54.00	-9.44	AV
Vertical	15600.214	56.54	10.12	38.8	44.10	61.36	68.20	-6.84	Pk
Vertical	15600.214	36.62	10.12	38.8	42.70	42.84	54.00	-11.16	AV
Horizontal	4592.699	59.81	6.48	36.37	44.05	58.61	68.20	-9.59	Pk
Horizontal	4592.699	43.12	6.48	36.37	44.05	41.92	54.00	-12.08	AV
Horizontal	10400.113	58.87	8.47	38.64	44.50	61.48	68.20	-6.72	Pk
Horizontal	10400.113	42.21	8.47	38.64	44.50	44.82	54.00	-9.18	AV
Horizontal	15600.187	59.83	10.12	38.38	44.10	64.23	68.20	-3.97	Pk
Horizontal	15600.187	38.78	10.12	38.38	44.10	43.18	54.00	-10.82	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4739.249	61.29	7.10	37.24	43.50	62.13	68.20	-6.07	Pk
Vertical	4739.249	44.57	7.10	37.24	43.50	45.41	54.00	-8.59	AV
Vertical	10480.375	60.54	8.46	37.68	44.50	62.18	68.20	-6.02	Pk
Vertical	10480.375	40.32	8.46	37.68	44.50	41.96	54.00	-12.04	AV
Vertical	15720.358	61.37	10.12	38.8	44.10	66.19	68.20	-2.01	Pk
Vertical	15720.358	39.57	10.12	38.8	42.70	45.79	54.00	-8.21	AV
Horizontal	4739.354	62.56	7.10	37.24	43.50	63.4	68.20	-4.8	Pk
Horizontal	4739.354	43.34	7.10	37.24	43.50	44.18	54.00	-9.82	AV
Horizontal	10480.111	62.65	8.46	38.57	44.50	65.18	68.20	-3.02	Pk
Horizontal	10480.111	43.36	8.46	38.57	44.50	45.89	54.00	-8.11	AV
Horizontal	15720.356	60.27	10.12	38.38	44.10	64.67	68.20	-3.53	Pk
Horizontal	15720.353	42.34	10.12	38.38	44.10	46.74	54.00	-7.26	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode : TX(5.2G) - 802.11ac-HT40

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5190 MHz)-Above 1G									
Vertical	4434.155	62.32	5.94	35.40	44.00	59.66	68.20	-8.54	Pk
Vertical	4434.155	46.55	5.94	35.40	44.00	43.89	54.00	-10.11	AV
Vertical	10380.367	60.45	8.46	39.75	44.50	64.16	68.20	-4.04	Pk
Vertical	10380.367	42.85	8.46	39.75	44.50	46.56	54.00	-7.44	AV
Vertical	15570.193	61.43	10.12	38.80	44.10	66.25	68.20	-1.95	Pk
Vertical	15570.193	37.53	10.12	38.80	42.70	43.75	54.00	-10.25	AV
Horizontal	4434.528	66.57	5.94	35.18	44.00	63.69	68.20	-4.51	Pk
Horizontal	4434.528	44.32	5.94	35.18	44.00	41.44	54.00	-12.56	AV
Horizontal	10380.623	58.81	8.46	38.71	44.50	61.48	68.20	-6.72	Pk
Horizontal	10380.623	41.04	8.46	38.71	44.50	43.71	54.00	-10.29	AV
Horizontal	15570.869	56.61	10.12	38.38	44.10	61.01	68.20	-7.19	Pk
Horizontal	15570.869	38.57	10.12	38.38	44.10	42.97	54.00	-11.03	AV
High Channel (5230 MHz)-Above 1G									
Vertical	4739.244	61.37	7.10	37.24	43.50	62.21	68.20	-5.99	Pk
Vertical	4739.244	44.45	7.10	37.24	43.50	45.29	54.00	-8.71	AV
Vertical	10460.377	60.28	8.46	37.68	44.50	61.92	68.20	-6.28	Pk
Vertical	10460.377	40.36	8.46	37.68	44.50	42	54.00	-12	AV
Vertical	15690.352	61.63	10.12	38.8	44.10	66.45	68.20	-1.75	Pk
Vertical	15690.356	39.62	10.12	38.8	42.70	45.84	54.00	-8.16	AV
Horizontal	4739.352	62.27	7.10	37.24	43.50	63.11	68.20	-5.09	Pk
Horizontal	4739.352	43.18	7.10	37.24	43.50	44.02	54.00	-9.98	AV
Horizontal	10460.115	62.23	8.46	38.57	44.50	64.76	68.20	-3.44	Pk
Horizontal	10460.115	43.25	8.46	38.57	44.50	45.78	54.00	-8.22	AV
Horizontal	15690.353	60.72	10.12	38.38	44.10	65.12	68.20	-3.08	Pk
Horizontal	15690.353	42.25	10.12	38.38	44.10	46.65	54.00	-7.35	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX(5.2G) - 802.11ac-HT80
-------------	--------------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
(5210 MHz)-Above 1G									
Vertical	4434.157	62.55	5.94	35.40	44.00	59.89	68.20	-8.31	Pk
Vertical	4434.157	46.58	5.94	35.40	44.00	43.92	54.00	-10.08	AV
Vertical	10420.361	60.45	8.46	39.75	44.50	64.16	68.20	-4.04	Pk
Vertical	10420.361	42.75	8.46	39.75	44.50	46.46	54.00	-7.54	AV
Vertical	15630.193	61.41	10.12	38.80	44.10	66.23	68.20	-1.97	Pk
Vertical	15630.193	37.53	10.12	38.80	42.70	43.75	54.00	-10.25	AV
Horizontal	4434.157	66.57	5.94	35.18	44.00	63.69	68.20	-4.51	Pk
Horizontal	4434.157	44.28	5.94	35.18	44.00	41.4	54.00	-12.6	AV
Horizontal	10420.366	58.35	8.46	38.71	44.50	61.02	68.20	-7.18	Pk
Horizontal	10420.366	41.07	8.46	38.71	44.50	43.74	54.00	-10.26	AV
Horizontal	15630.194	56.95	10.12	38.38	44.10	61.35	68.20	-6.85	Pk
Horizontal	15630.194	38.86	10.12	38.38	44.10	43.26	54.00	-10.74	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level.

Test Mode is MIMO Mode.

Test Mode : TX (5.8G) -- 802.11a

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4679.195	58.47	5.94	35.40	44.00	55.81	68.20	-12.39	Pk
Vertical	4679.195	39.29	5.94	35.40	44.00	36.63	54.00	-17.37	AV
Vertical	11490.364	61.52	8.46	39.75	44.50	65.23	68.20	-2.97	Pk
Vertical	11490.364	44.08	8.46	39.75	44.50	47.79	54.00	-6.21	AV
Vertical	17235.101	57.90	10.12	38.80	44.10	62.72	68.20	-5.48	Pk
Vertical	17235.101	35.08	10.12	38.80	42.70	41.30	54.00	-12.70	AV
Horizontal	4679.332	57.78	5.94	35.18	44.00	54.90	68.20	-13.30	Pk
Horizontal	4679.332	41.41	5.94	35.18	44.00	38.53	54.00	-15.47	AV
Horizontal	11490.164	56.03	8.46	38.71	44.50	58.70	68.20	-9.50	Pk
Horizontal	11490.164	43.18	8.46	38.71	44.50	45.85	54.00	-8.15	AV
Horizontal	17235.196	55.05	10.12	38.38	44.10	59.45	68.20	-8.75	Pk
Horizontal	17235.196	44.87	10.12	38.38	44.10	49.27	54.00	-4.73	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.228	59.50	6.48	36.35	44.05	58.28	68.20	-9.92	Pk
Vertical	4592.228	35.73	6.48	36.35	44.05	34.51	54.00	-19.49	AV
Vertical	11570.203	61.11	8.47	37.88	44.51	62.95	68.20	-5.25	Pk
Vertical	11570.203	41.78	8.47	37.88	44.51	43.62	54.00	-10.38	AV
Vertical	17355.147	56.97	10.12	38.80	44.10	61.79	68.20	-6.41	Pk
Vertical	17355.147	39.69	10.12	38.80	42.70	45.91	54.00	-8.09	AV
Horizontal	4592.526	58.29	6.48	36.37	44.05	57.09	68.20	-11.11	Pk
Horizontal	4592.526	45.25	6.48	36.37	44.05	44.05	54.00	-9.95	AV
Horizontal	11570.123	55.62	8.47	38.64	44.50	58.23	68.20	-9.97	Pk
Horizontal	11570.123	44.58	8.47	38.64	44.50	47.19	54.00	-6.81	AV
Horizontal	17355.269	55.27	10.12	38.38	44.10	59.67	68.20	-8.53	Pk
Horizontal	17355.269	44.86	10.12	38.38	44.10	49.26	54.00	-4.74	AV
High Channel (5825 MHz)-Above 1G									
Vertical	6039.199	57.14	7.10	37.24	43.50	57.98	68.20	-10.22	Pk
Vertical	6039.199	35.37	7.10	37.24	43.50	36.21	54.00	-17.79	AV
Vertical	11652.562	57.72	8.46	37.68	44.50	59.36	68.20	-8.84	Pk
Vertical	11652.562	41.61	8.46	37.68	44.50	43.25	54.00	-10.75	AV
Vertical	17473.128	58.73	10.12	38.80	44.10	63.55	68.20	-4.65	Pk
Vertical	17473.128	36.30	10.12	38.80	42.70	42.52	54.00	-11.48	AV
Horizontal	6039.232	56.35	7.10	37.24	43.50	57.19	68.20	-11.01	Pk
Horizontal	6039.232	43.44	7.10	37.24	43.50	44.28	54.00	-9.72	AV
Horizontal	11652.319	57.78	8.46	38.57	44.50	60.31	68.20	-7.89	Pk
Horizontal	11652.319	44.12	8.46	38.57	44.50	46.65	54.00	-7.35	AV
Horizontal	17474.062	57.64	10.12	38.38	44.10	62.04	68.20	-6.16	Pk
Horizontal	17474.062	45.23	10.12	38.38	44.10	49.63	54.00	-4.37	AV

Note: ".

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The Worst mode is Antenna A.

Test Mode : TX (5.8G) --802.11n-HT20

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4679.195	58.35	5.94	35.40	44.00	55.69	68.20	-12.51	Pk
Vertical	4679.195	35.08	5.94	35.40	44.00	32.42	54.00	-21.58	AV
Vertical	11490.364	59.90	8.46	39.75	44.50	63.61	68.20	-4.59	Pk
Vertical	11490.364	42.65	8.46	39.75	44.50	46.36	54.00	-7.64	AV
Vertical	17235.101	55.45	10.12	38.80	44.10	60.27	68.20	-7.93	Pk
Vertical	17235.101	39.28	10.12	38.80	42.70	45.50	54.00	-8.50	AV
Horizontal	4679.332	59.58	5.94	35.18	44.00	56.70	68.20	-11.50	Pk
Horizontal	4679.332	44.78	5.94	35.18	44.00	41.90	54.00	-12.10	AV
Horizontal	11490.164	56.53	8.46	38.71	44.50	59.20	68.20	-9.00	Pk
Horizontal	11490.164	44.52	8.46	38.71	44.50	47.19	54.00	-6.81	AV
Horizontal	17235.196	56.76	10.12	38.38	44.10	61.16	68.20	-7.04	Pk
Horizontal	17235.196	45.13	10.12	38.38	44.10	49.53	54.00	-4.47	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.228	59.71	6.48	36.35	44.05	58.49	68.20	-9.71	Pk
Vertical	4592.228	35.14	6.48	36.35	44.05	33.92	54.00	-20.08	AV
Vertical	11570.203	58.59	8.47	37.88	44.51	60.43	68.20	-7.77	Pk
Vertical	11570.203	43.02	8.47	37.88	44.51	44.86	54.00	-9.14	AV
Vertical	17355.147	59.62	10.12	38.8	44.10	64.44	68.20	-3.76	Pk
Vertical	17355.147	35.84	10.12	38.8	42.70	42.06	54.00	-11.94	AV
Horizontal	4592.526	56.32	6.48	36.37	44.05	55.12	68.20	-13.08	Pk
Horizontal	4592.526	45.46	6.48	36.37	44.05	44.26	54.00	-9.74	AV
Horizontal	11570.123	55.63	8.47	38.64	44.50	58.24	68.20	-9.96	Pk
Horizontal	11570.123	43.32	8.47	38.64	44.50	45.93	54.00	-8.07	AV
Horizontal	17355.269	59.18	10.12	38.38	44.10	63.58	68.20	-4.62	Pk
Horizontal	17355.269	43.42	10.12	38.38	44.10	47.82	54.00	-6.18	AV
High Channel (5825 MHz)-Above 1G									
Vertical	6039.199	59.56	7.10	37.24	43.50	60.40	68.20	-7.80	Pk
Vertical	6039.199	37.62	7.10	37.24	43.50	38.46	54.00	-15.54	AV
Vertical	11650.562	58.01	8.46	37.68	44.50	59.65	68.20	-8.55	Pk
Vertical	11650.562	45.93	8.46	37.68	44.50	47.57	54.00	-6.43	AV
Vertical	17475.128	57.38	10.12	38.8	44.10	62.20	68.20	-6.00	Pk
Vertical	17475.128	35.09	10.12	38.8	42.70	41.31	54.00	-12.69	AV
Horizontal	6039.232	58.87	7.10	37.24	43.50	59.71	68.20	-8.49	Pk
Horizontal	6039.232	41.11	7.10	37.24	43.50	41.95	54.00	-12.05	AV
Horizontal	11650.319	58.09	8.46	38.57	44.50	60.62	68.20	-7.58	Pk
Horizontal	11650.319	44.38	8.46	38.57	44.50	46.91	54.00	-7.09	AV
Horizontal	17475.062	59.17	10.12	38.38	44.10	63.57	68.20	-4.63	Pk
Horizontal	17475.062	42.52	10.12	38.38	44.10	46.92	54.00	-7.08	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode :	TX (5.8G) -- 802.11n-HT40
-------------	---------------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G									
Vertical	4679.195	57.45	5.94	35.40	44.00	54.79	68.20	-13.41	Pk
Vertical	4679.195	39.47	5.94	35.40	44.00	36.81	54.00	-17.19	AV
Vertical	11510.364	60.21	8.46	39.75	44.50	63.92	68.20	-4.28	Pk
Vertical	11510.364	43.44	8.46	39.75	44.50	47.15	54.00	-6.85	AV
Vertical	17265.101	60.00	10.12	38.80	44.10	64.82	68.20	-3.38	Pk
Vertical	17265.101	36.19	10.12	38.80	42.70	42.41	54.00	-11.59	AV
Horizontal	4679.332	59.89	5.94	35.18	44.00	57.01	68.20	-11.19	Pk
Horizontal	4679.332	45.31	5.94	35.18	44.00	42.43	54.00	-11.57	AV
Horizontal	11510.164	58.77	8.46	38.71	44.50	61.44	68.20	-6.76	Pk
Horizontal	11510.164	44.39	8.46	38.71	44.50	47.06	54.00	-6.94	AV
Horizontal	17265.196	58.55	10.12	38.38	44.10	62.95	68.20	-5.25	Pk
Horizontal	17265.196	41.17	10.12	38.38	44.10	45.57	54.00	-8.43	AV
High Channel (5795 MHz)-Above 1G									
Vertical	6039.199	56.17	7.10	37.24	43.50	57.01	68.20	-11.19	Pk
Vertical	6039.199	35.01	7.10	37.24	43.50	35.85	54.00	-18.15	AV
Vertical	11590.562	60.58	8.46	37.68	44.50	62.22	68.20	-5.98	Pk
Vertical	11590.562	43.90	8.46	37.68	44.50	45.54	54.00	-8.46	AV
Vertical	17385.128	58.14	10.12	38.80	44.10	62.96	68.20	-5.24	Pk
Vertical	17385.128	39.33	10.12	38.80	42.70	45.55	54.00	-8.45	AV
Horizontal	6039.232	59.03	7.10	37.24	43.50	59.87	68.20	-8.33	Pk
Horizontal	6039.232	45.03	7.10	37.24	43.50	45.87	54.00	-8.13	AV
Horizontal	11590.319	56.64	8.46	38.57	44.50	59.17	68.20	-9.03	Pk
Horizontal	11590.319	41.07	8.46	38.57	44.50	43.60	54.00	-10.40	AV
Horizontal	17385.062	56.94	10.12	38.38	44.10	61.34	68.20	-6.86	Pk
Horizontal	17385.062	41.78	10.12	38.38	44.10	46.18	54.00	-7.82	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode.

Test Mode : TX (5.8G) --802.11ac-HT20

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4679.198	57.37	5.94	35.40	44.00	54.71	68.20	-13.49	Pk
Vertical	4679.198	38.77	5.94	35.40	44.00	36.11	54.00	-17.89	AV
Vertical	11490.364	59.94	8.46	39.75	44.50	63.65	68.20	-4.55	Pk
Vertical	11490.364	41.63	8.46	39.75	44.50	45.34	54.00	-8.66	AV
Vertical	17235.105	55.31	10.12	38.80	44.10	60.13	68.20	-8.07	Pk
Vertical	17235.105	35.71	10.12	38.80	42.70	41.93	54.00	-12.07	AV
Horizontal	4679.332	56.28	5.94	35.18	44.00	53.40	68.20	-14.80	Pk
Horizontal	4679.332	44.42	5.94	35.18	44.00	41.54	54.00	-12.46	AV
Horizontal	11490.169	58.10	8.46	38.71	44.50	60.77	68.20	-7.43	Pk
Horizontal	11490.169	45.25	8.46	38.71	44.50	47.92	54.00	-6.08	AV
Horizontal	17235.196	56.47	10.12	38.38	44.10	60.87	68.20	-7.33	Pk
Horizontal	17235.196	44.65	10.12	38.38	44.10	49.05	54.00	-4.95	AV
middle Channel (5785 MHz)-Above 1G									
Vertical	4592.225	58.26	6.48	36.35	44.05	57.04	68.20	-11.16	Pk
Vertical	4592.225	36.63	6.48	36.35	44.05	35.41	54.00	-18.59	AV
Vertical	11570.208	61.54	8.47	37.88	44.51	63.38	68.20	-4.82	Pk
Vertical	11570.208	41.64	8.47	37.88	44.51	43.48	54.00	-10.52	AV
Vertical	17355.147	58.83	10.12	38.80	44.10	63.65	68.20	-4.55	Pk
Vertical	17355.147	36.62	10.12	38.80	42.70	42.84	54.00	-11.16	AV
Horizontal	4592.525	59.28	6.48	36.37	44.05	58.08	68.20	-10.12	Pk
Horizontal	4592.525	42.39	6.48	36.37	44.05	41.19	54.00	-12.81	AV
Horizontal	11570.123	55.90	8.47	38.64	44.50	58.51	68.20	-9.69	Pk
Horizontal	11570.123	45.71	8.47	38.64	44.50	48.32	54.00	-5.68	AV
Horizontal	17355.261	55.12	10.12	38.38	44.10	59.52	68.20	-8.68	Pk
Horizontal	17355.261	44.71	10.12	38.38	44.10	49.11	54.00	-4.89	AV
High Channel (5825 MHz)-Above 1G									
Vertical	6039.199	59.28	7.10	37.24	43.50	60.12	68.20	-8.08	Pk
Vertical	6039.199	36.57	7.10	37.24	43.50	37.41	54.00	-16.59	AV
Vertical	11650.562	61.48	8.46	37.68	44.50	63.12	68.20	-5.08	Pk
Vertical	11650.562	43.06	8.46	37.68	44.50	44.70	54.00	-9.30	AV
Vertical	17475.128	57.40	10.12	38.80	44.10	62.22	68.20	-5.98	Pk
Vertical	17475.128	37.63	10.12	38.80	42.70	43.85	54.00	-10.15	AV
Horizontal	6039.232	58.95	7.10	37.24	43.50	59.79	68.20	-8.41	Pk
Horizontal	6039.232	44.52	7.10	37.24	43.50	45.36	54.00	-8.64	AV
Horizontal	11650.319	58.05	8.46	38.57	44.50	60.58	68.20	-7.62	Pk
Horizontal	11650.319	42.45	8.46	38.57	44.50	44.98	54.00	-9.02	AV
Horizontal	17475.062	56.24	10.12	38.38	44.10	60.64	68.20	-7.56	Pk
Horizontal	17475.062	44.29	10.12	38.38	44.10	48.69	54.00	-5.31	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

$$\text{Emission level (dBuV/m)} = 20 \log \text{Emission level (uV/m)}.$$

$$\text{Corrected Reading: Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamp Factor} = \text{Level}.$$

Test Mode is MIMO Mode

Test Mode :	TX (5.8G) -- 802.11ac-HT40
-------------	----------------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5755 MHz)-Above 1G									
Vertical	4679.194	58.20	5.94	35.40	44.00	55.54	68.20	-12.66	Pk
Vertical	4679.194	36.17	5.94	35.40	44.00	33.51	54.00	-20.49	AV
Vertical	11510.364	60.88	8.46	39.75	44.50	64.59	68.20	-3.61	Pk
Vertical	11510.364	42.52	8.46	39.75	44.50	46.23	54.00	-7.77	AV
Vertical	17265.105	56.93	10.12	38.80	44.10	61.75	68.20	-6.45	Pk
Vertical	17265.105	37.10	10.12	38.80	42.70	43.32	54.00	-10.68	AV
Horizontal	4679.332	55.47	5.94	35.18	44.00	52.59	68.20	-15.61	Pk
Horizontal	4679.332	43.57	5.94	35.18	44.00	40.69	54.00	-13.31	AV
Horizontal	11510.162	57.39	8.46	38.71	44.50	60.06	68.20	-8.14	Pk
Horizontal	11510.162	44.65	8.46	38.71	44.50	47.32	54.00	-6.68	AV
Horizontal	17265.196	59.66	10.12	38.38	44.10	64.06	68.20	-4.14	Pk
Horizontal	17265.196	44.00	10.12	38.38	44.10	48.40	54.00	-5.60	AV
High Channel (5795 MHz)-Above 1G									
Vertical	6039.195	57.57	7.10	37.24	43.50	58.41	68.20	-9.79	Pk
Vertical	6039.195	43.08	7.10	37.24	43.50	43.92	54.00	-10.08	AV
Vertical	11590.562	60.55	8.46	37.68	44.50	62.19	68.20	-6.01	Pk
Vertical	11590.562	44.36	8.46	37.68	44.50	46.00	54.00	-8.00	AV
Vertical	17385.123	56.55	10.12	38.8	44.10	61.37	68.20	-6.83	Pk
Vertical	17385.123	39.39	10.12	38.8	42.70	45.61	54.00	-8.39	AV
Horizontal	6039.232	59.97	7.10	37.24	43.50	60.81	68.20	-7.39	Pk
Horizontal	6039.232	43.86	7.10	37.24	43.50	44.70	54.00	-9.30	AV
Horizontal	11590.314	57.99	8.46	38.57	44.50	60.52	68.20	-7.68	Pk
Horizontal	11590.314	45.13	8.46	38.57	44.50	47.66	54.00	-6.34	AV
Horizontal	17385.068	58.48	10.12	38.38	44.10	62.88	68.20	-5.32	Pk
Horizontal	17385.065	44.69	10.12	38.38	44.10	49.09	54.00	-4.91	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode

Test Mode :	TX(5.8G) - 802.11ac-HT80
-------------	--------------------------

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamplifier Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
(5775 MHz)-Above 1G									
Vertical	4434.157	62.54	5.94	35.40	44.00	59.88	68.20	-8.32	Pk
Vertical	4434.157	44.57	5.94	35.40	44.00	41.91	54.00	-12.09	AV
Vertical	11550.361	60.81	8.46	39.75	44.50	64.52	68.20	-3.68	Pk
Vertical	11550.361	43.74	8.46	39.75	44.50	47.45	54.00	-6.55	AV
Vertical	17325.193	55.09	10.12	38.80	44.10	59.91	68.20	-8.29	Pk
Vertical	17325.193	36.67	10.12	38.80	42.70	42.89	54.00	-11.11	AV
Horizontal	4434.157	59.88	5.94	35.18	44.00	57.00	68.20	-11.20	Pk
Horizontal	4434.157	45.78	5.94	35.18	44.00	42.90	54.00	-11.10	AV
Horizontal	11550.365	59.22	8.46	38.71	44.50	61.89	68.20	-6.31	Pk
Horizontal	11550.365	43.22	8.46	38.71	44.50	45.89	54.00	-8.11	AV
Horizontal	17325.191	58.93	10.12	38.38	44.10	63.33	68.20	-4.87	Pk
Horizontal	17325.191	42.50	10.12	38.38	44.10	46.90	54.00	-7.10	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode is MIMO Mode

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

- (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3$ RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A, only shown Antenna A Plot.


Note: Antenna A gain: 2dBi, Antenna B gain: 2dBi, Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dBi,
 So the directional gain for PSD is 5.01dBi

Mode	Frequency	Measured Power Density (dBm/MHz)			Limit (dBm/MHz)	Result
		ANT A	ANT B	Total		
802.11 a	5180 MHz	5.532	4.900	/	17	PASS
	5200 MHz	5.887	4.890	/	17	PASS
	5240 MHz	5.885	5.776	/	17	PASS
802.11 n20	5180 MHz	3.661	3.513	6.60	17	PASS
	5200 MHz	4.492	3.963	7.25	17	PASS
	5240 MHz	4.146	4.313	7.24	17	PASS
802.11 n40	5190 MHz	1.774	2.184	4.99	17	PASS
	5230 MHz	2.587	1.406	5.05	17	PASS
802.11 AC20	5180 MHz	3.882	3.529	6.72	17	PASS
	5200 MHz	4.440	3.632	7.07	17	PASS
	5240 MHz	4.825	4.358	7.61	17	PASS
802.11 AC40	5190 MHz	1.541	1.139	4.35	17	PASS
	5230 MHz	2.287	1.724	5.02	17	PASS
802.11 AC80	5210 MHz	1.196	0.417	3.83	17	PASS


(802.11a) PSD plot on channel 36

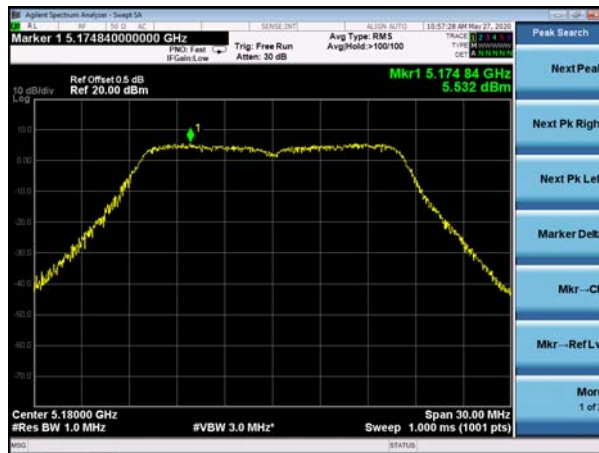


(802.11n20) PSD plot on channel 36

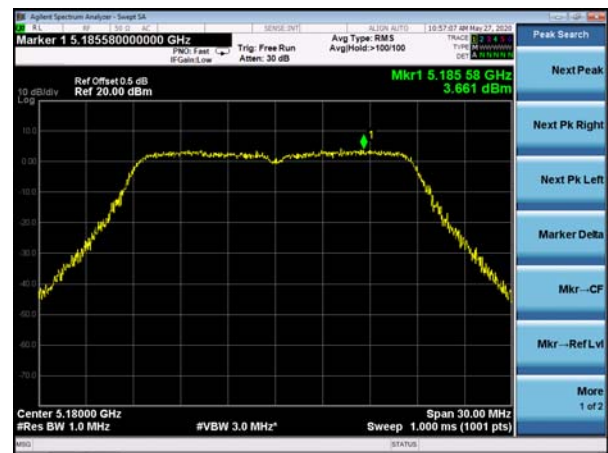


(802.11a) PSD plot on channel 40

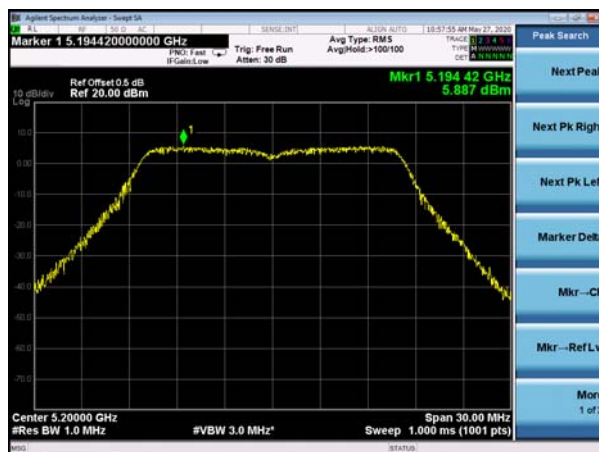


(802.11n20) PSD plot on channel 40

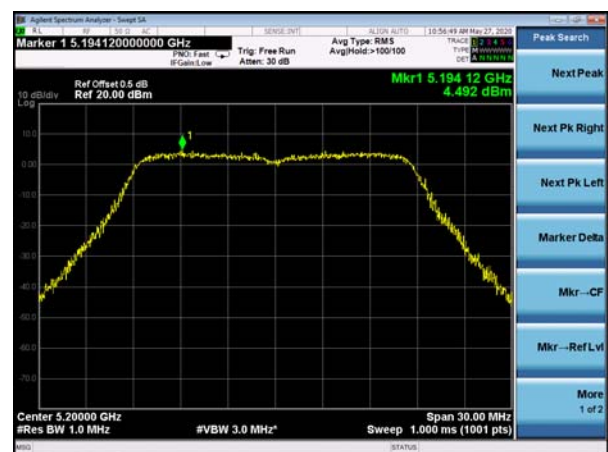


(802.11a) PSD plot on channel 48

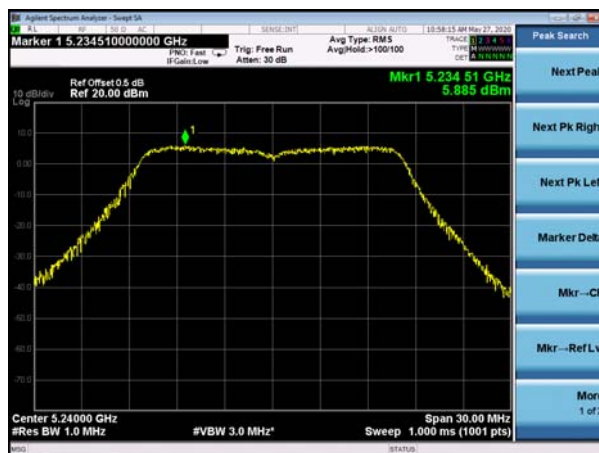


(802.11n20) PSD plot on channel 48

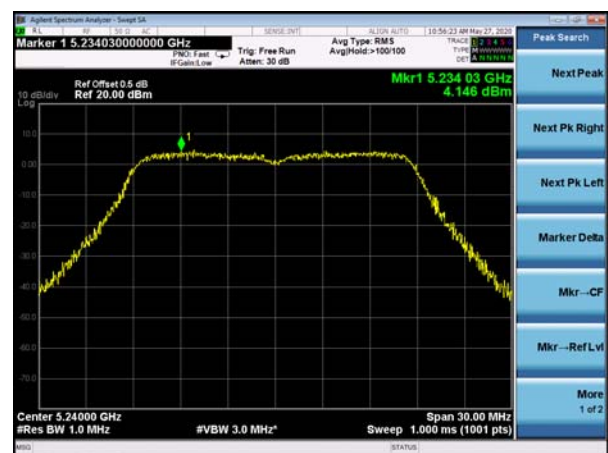


(802.11n40) PSD plot on channel 38

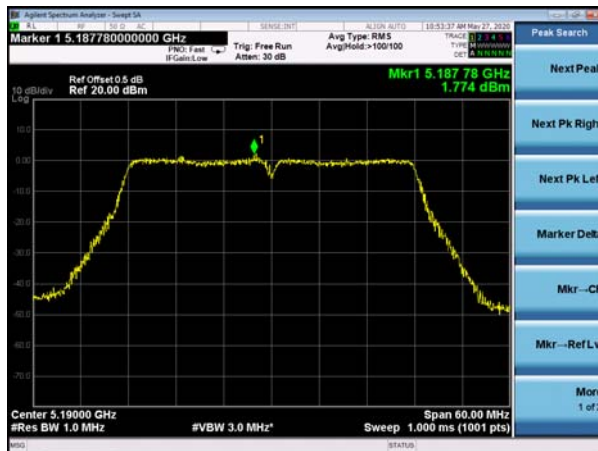


(802.11ac20) PSD plot on channel 36

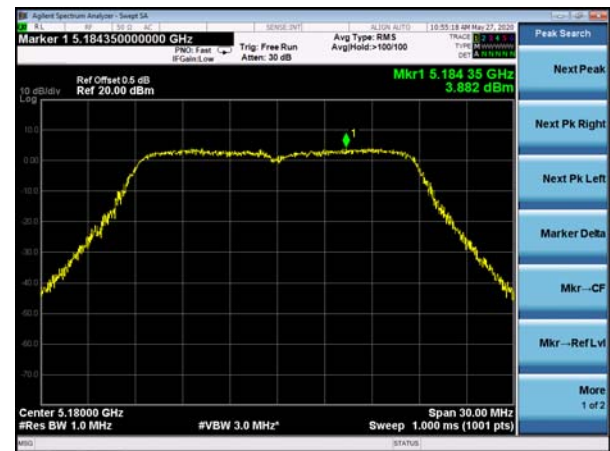


(802.11n40) PSD plot on channel 46

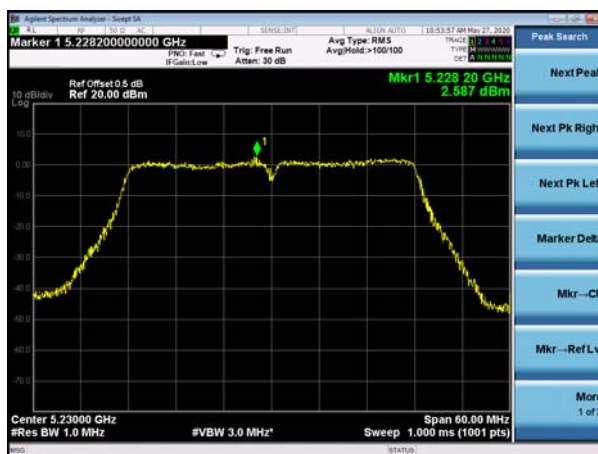


(802.11ac20) PSD plot on channel 40

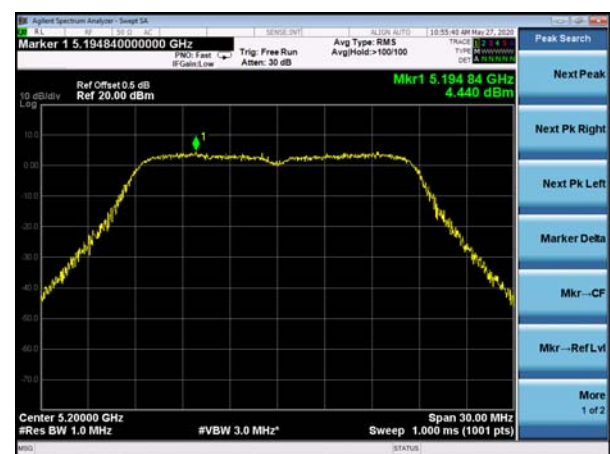


(802.11ac20) PSD plot on channel 48

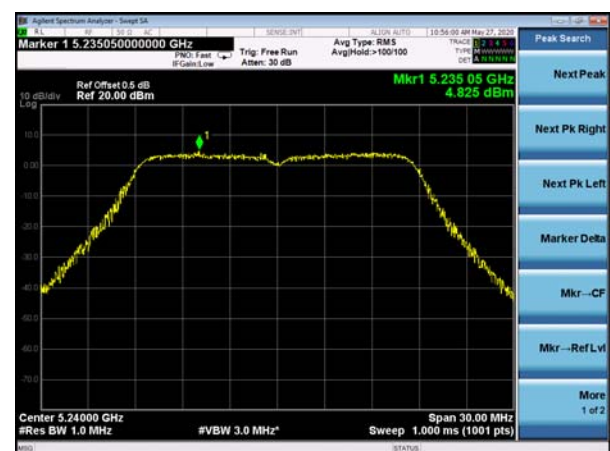


(802.11ac40) PSD plot on channel 38

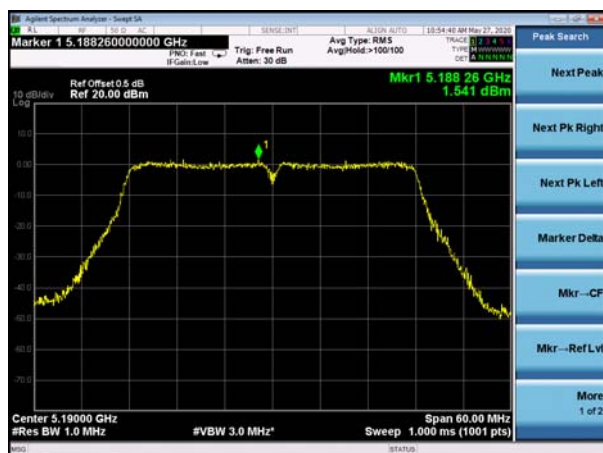

(802.11ac80) PSD plot on channel 42

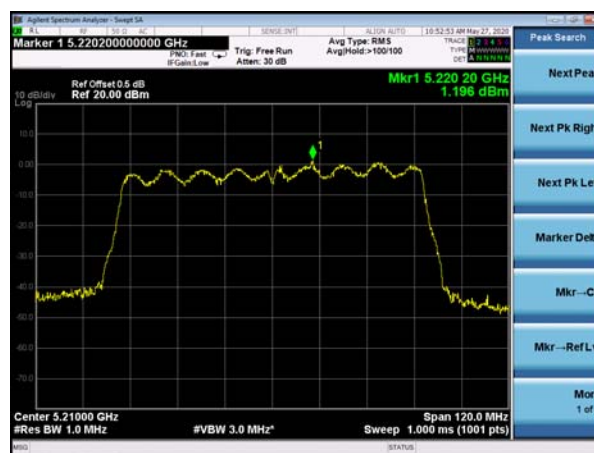

(802.11ac40) PSD plot on channel 46

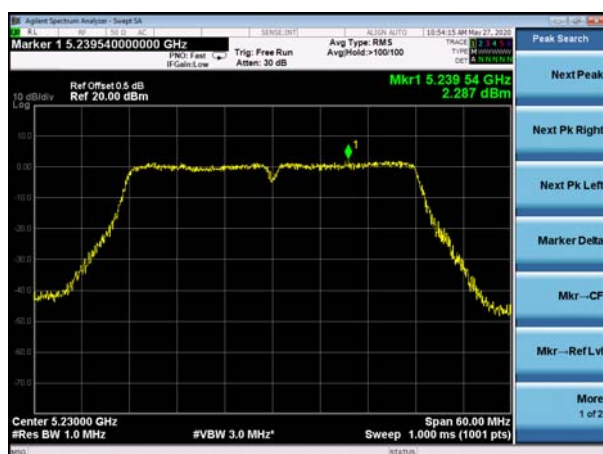

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-3 (5745-5825MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.


Note: Antenna A gain: 2dBi, Antenna B gain: 2dBi, Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dBi,
 So the directional gain for PSD is 5.01dBi

Mode	Frequency	Measured Power Density (dBm/500KHz)			Limit (dBm/500kHz)	Result
		ANT A	ANT B	Total		
802.11 a	5745 MHz	4.387	3.729	/	30	PASS
	5785 MHz	4.292	4.111	/	30	PASS
	5825 MHz	4.592	4.419	/	30	PASS
802.11 n20	5745 MHz	2.920	2.495	5.72	30	PASS
	5785 MHz	2.948	2.581	5.78	30	PASS
	5825 MHz	3.077	3.437	6.27	30	PASS
802.11 n40	5755 MHz	1.288	0.687	4.01	30	PASS
	5795 MHz	1.069	0.708	3.90	30	PASS
802.11 AC20	5745 MHz	3.005	2.844	5.94	30	PASS
	5785 MHz	3.117	2.527	5.84	30	PASS
	5825 MHz	3.368	3.404	6.40	30	PASS
802.11 AC40	5755 MHz	0.948	0.788	3.88	30	PASS
	5795 MHz	0.722	0.864	3.80	30	PASS
802.11 AC80	5775 MHz	-0.753	-0.357	2.46	30	PASS


(802.11a) PSD plot on channel 149




(802.11n20) PSD plot on channel 149

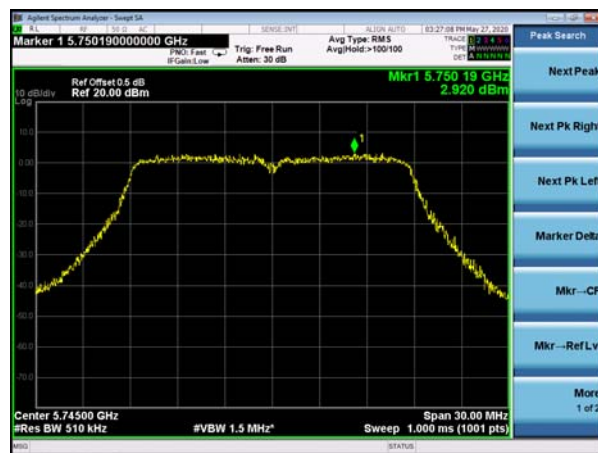

(802.11a) PSD plot on channel 157

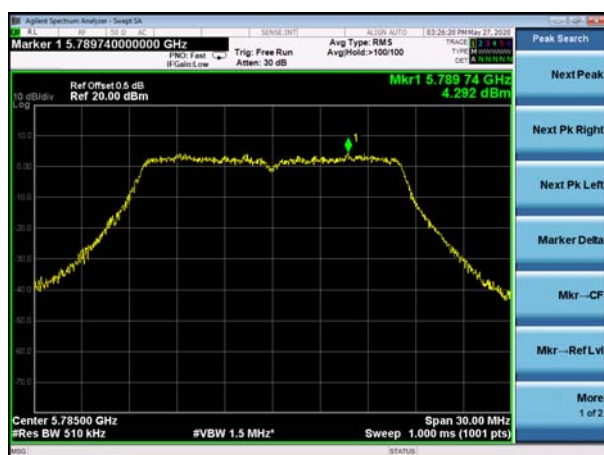


(802.11n20) PSD plot on channel 157

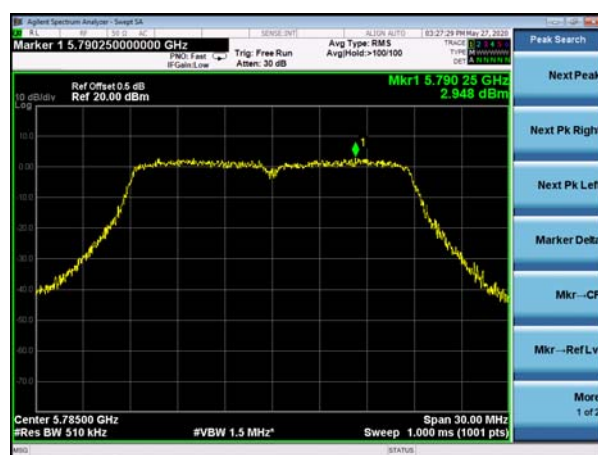


(802.11a) PSD plot on channel 165



(802.11n20) PSD plot on channel 165

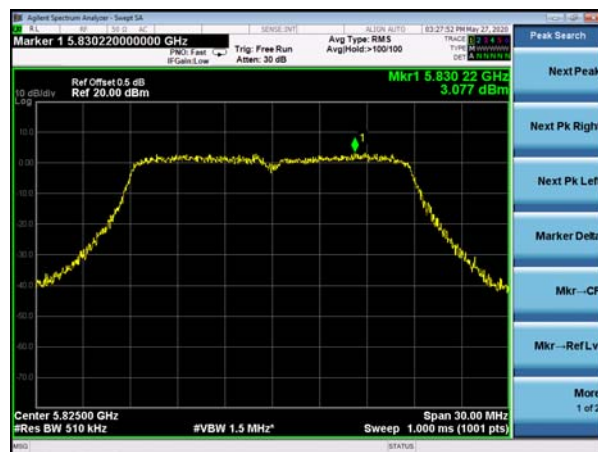


(802.11n40) PSD plot on channel 151

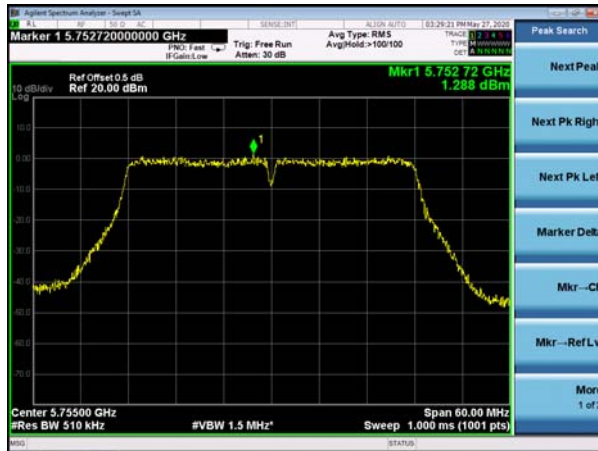


(802.11ac20) PSD plot on channel 149



(802.11n40) PSD plot on channel 159

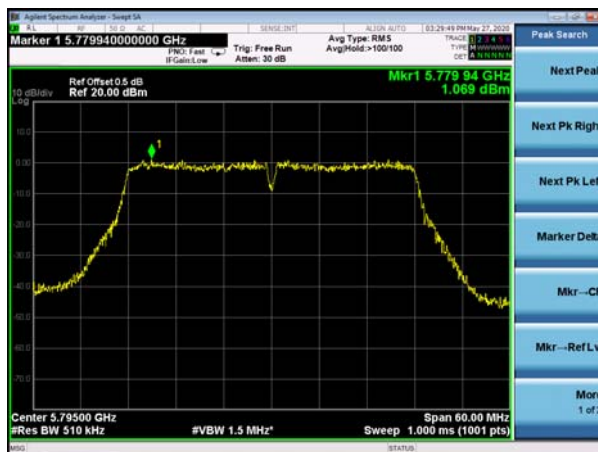

(802.11ac20) PSD plot on channel 157

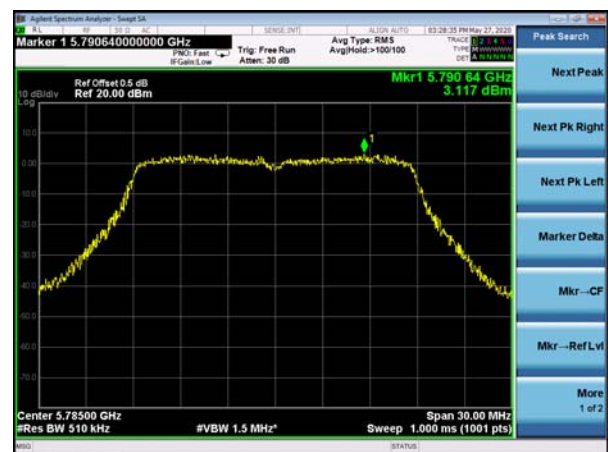


(802.11ac20) PSD plot on channel 165



(802.11ac40) PSD plot on channel 151



(802.11ac80) PSD plot on channel 155

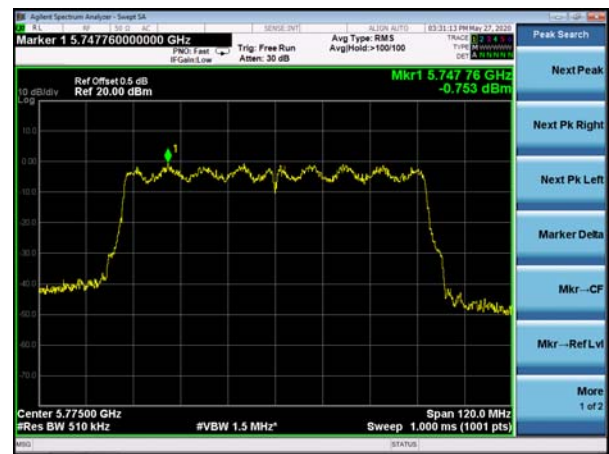

(802.11ac40) PSD plot on channel 159



5. 26DB & 6DB & 99% EMISSION BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

5.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

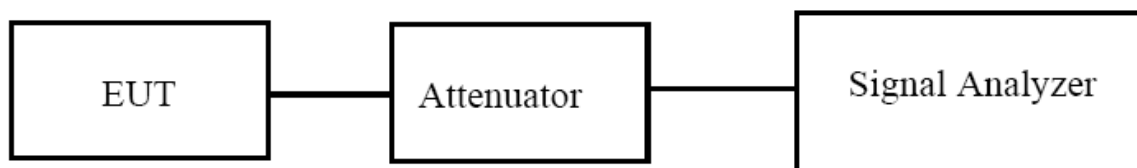

5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.4 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-1 (5180-5240MHz)		


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.

Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	26dB bandwidth (MHz)	Limit MHz	Result
			ANT A	ANT A		
802.11a	CH36	5180	16.655	20.64	N/A	Pass
	CH40	5200	16.669	20.64	N/A	Pass
	CH48	5240	16.665	20.59	N/A	Pass
802.11 n20	CH36	5180	17.741	21.47	N/A	Pass
	CH40	5200	17.734	21.33	N/A	Pass
	CH48	5240	17.694	21.41	N/A	Pass
802.11 n40	CH 38	5190	36.766	43.40	N/A	Pass
	CH 46	5230	36.766	43.44	N/A	Pass
802.11 AC20	CH36	5180	17.727	21.36	N/A	Pass
	CH40	5200	17.767	21.37	N/A	Pass
	CH48	5240	17.748	21.27	N/A	Pass
802.11 AC40	CH 38	5190	36.698	42.82	N/A	Pass
	CH 46	5230	36.694	43.28	N/A	Pass
802.11 AC80	CH 42	5210	75.820	82.62	N/A	Pass


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	26dB bandwidth (MHz)	Limit MHz	Result
			ANT B	ANT B		
802.11a	CH36	5180	16.677	20.41	N/A	Pass
	CH40	5200	16.660	20.48	N/A	Pass
	CH48	5240	16.656	20.53	N/A	Pass
802.11 n20	CH36	5180	17.693	20.91	N/A	Pass
	CH40	5200	17.723	21.42	N/A	Pass
	CH48	5240	17.720	20.70	N/A	Pass
802.11 n40	CH 38	5190	36.767	43.24	N/A	Pass
	CH 46	5230	36.667	43.28	N/A	Pass
802.11 AC20	CH36	5180	17.700	21.25	N/A	Pass
	CH40	5200	17.732	21.39	N/A	Pass
	CH48	5240	17.713	21.34	N/A	Pass
802.11 AC40	CH 38	5190	36.664	43.47	N/A	Pass
	CH 46	5230	36.638	43.77	N/A	Pass
802.11 AC80	CH 42	5210	75.616	81.85	N/A	Pass

Test plot


(802.11a) 26dB&99%Bandwidth plot on channel 36

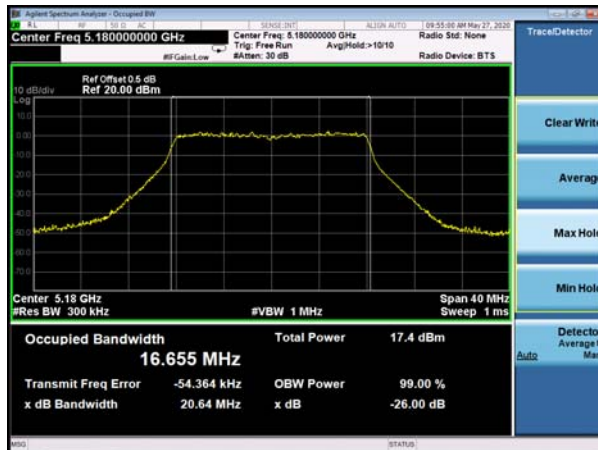


(802.11 n20) 26dB&99%Bandwidth plot on channel 36

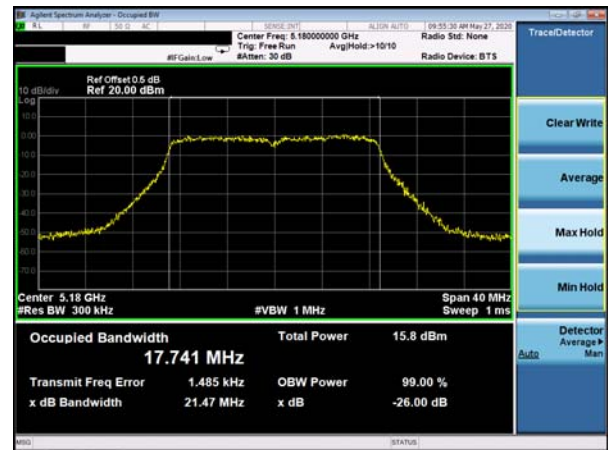


(802.11a) 26dB&99%Bandwidth plot on channel 40

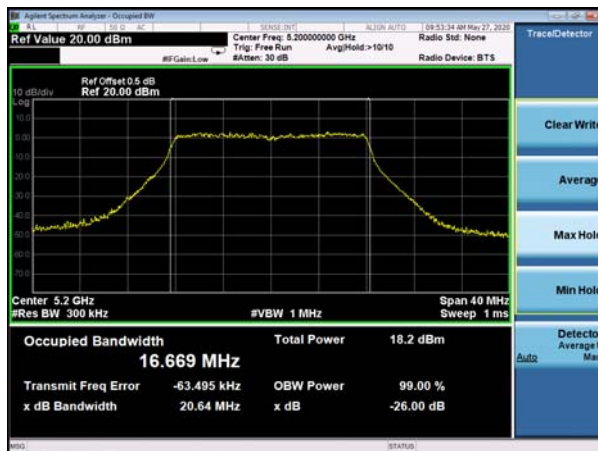


(802.11 n20) 26dB&99%Bandwidth plot on channel 40

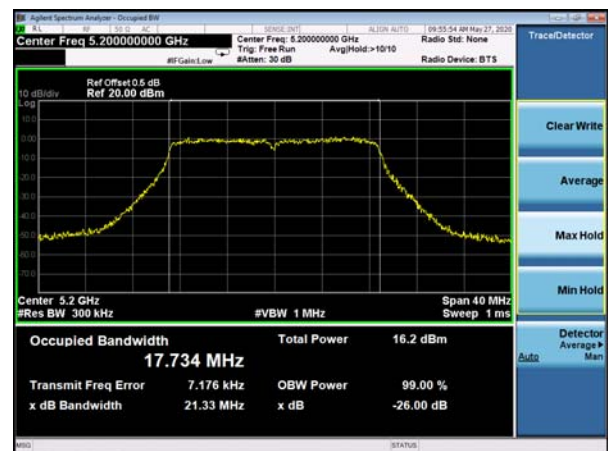

(802.11a) 26dB&99%Bandwidth plot on channel 48

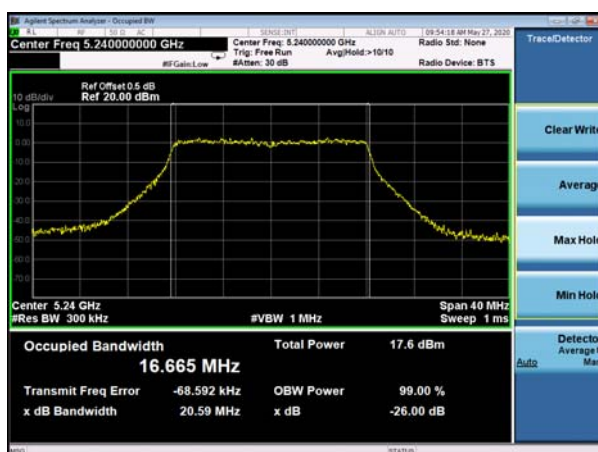

(802.11 n20) 26dB&99%Bandwidth plot on channel 48

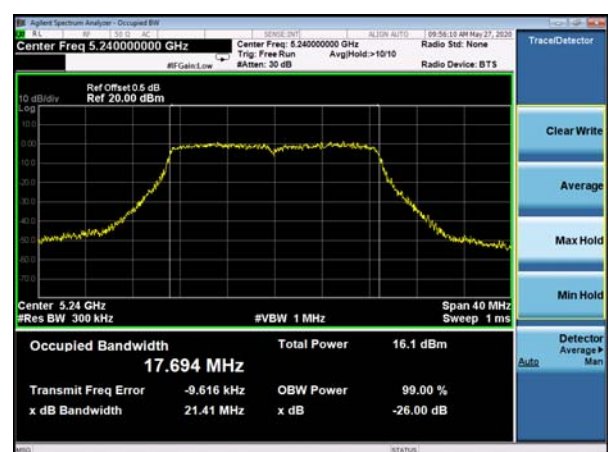

Test plot


(802.11 n40) 26dB&99%Bandwidth plot on channel

38



(802.11 AC20) 26dB&99%Bandwidth plot on

channel 36

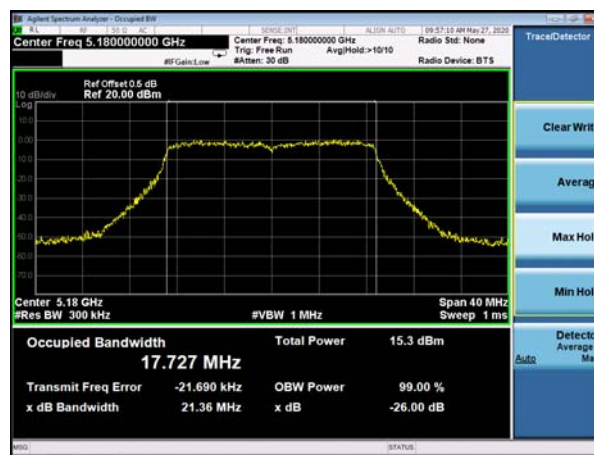


(802.11 n40) 26dB&99%Bandwidth plot on channel

46




(802.11 AC20) 26dB&99%Bandwidth plot on

channel 40

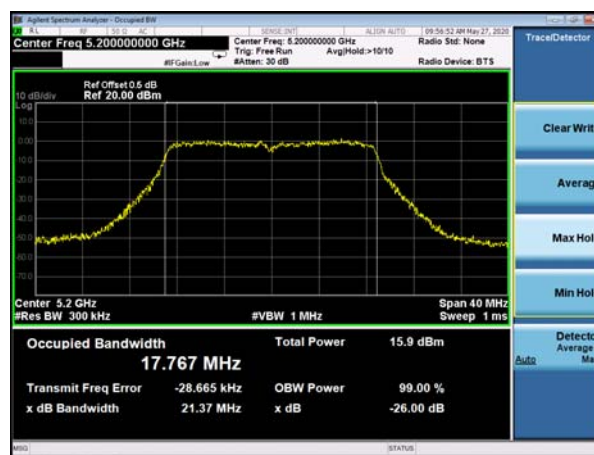


(802.11 AC20) 26dB&99%Bandwidth plot on

channel 48

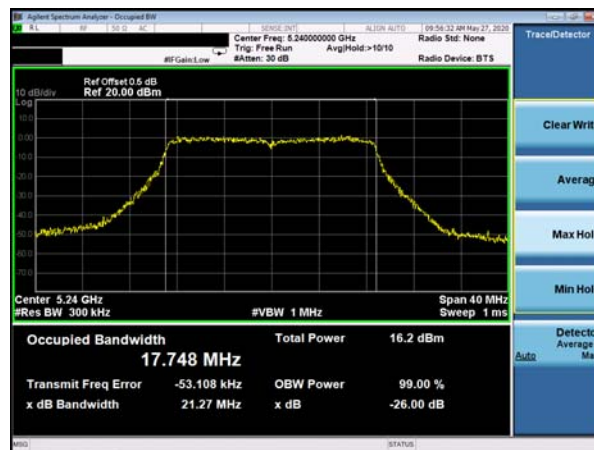


Test plot


(802.11 AC40) 26dB&99%Bandwidth plot on
channel 38

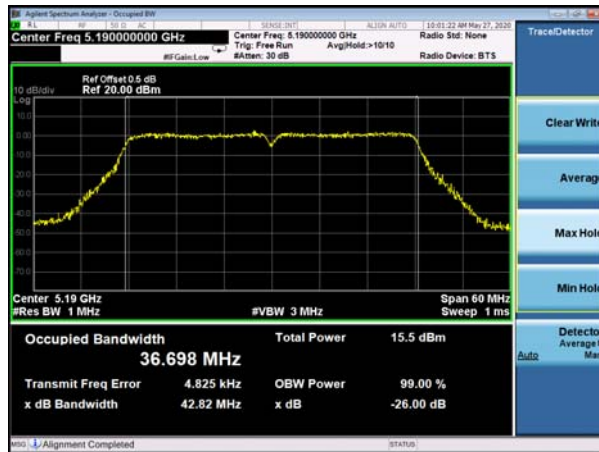

(802.11 AC80) 26dB&99%Bandwidth plot on
channel 42

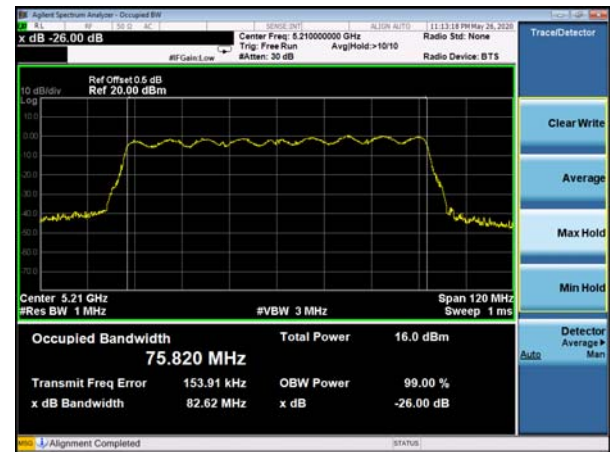

(802.11 AC40) 26dB&99%Bandwidth plot on
channel 46

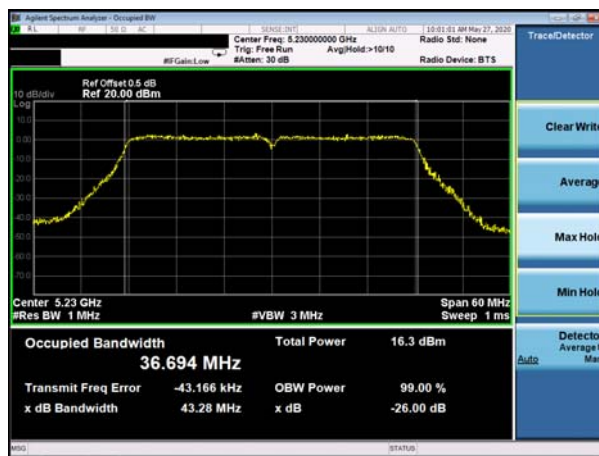



Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX Frequency U-NII-3(5745-5825MHz)		

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A Plot.


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Limit MHz	Result
			ANT A	ANT A		
802.11a	CH149	5745	16.678	16.35	≥500	Pass
	CH157	5785	16.659	16.35	≥500	Pass
	CH165	5825	16.691	16.37	≥500	Pass
802.11 n20	CH149	5745	17.748	17.53	≥500	Pass
	CH157	5785	17.700	17.58	≥500	Pass
	CH165	5825	17.720	17.53	≥500	Pass
802.11 n40	CH151	5755	36.842	36.36	≥500	Pass
	CH159	5795	36.860	36.33	≥500	≥500
802.11 AC20	CH149	5745	17.775	17.56	≥500	≥500
	CH157	5785	17.743	17.56	≥500	≥500
	CH165	5825	17.765	17.59	≥500	≥500
802.11 AC40	CH151	5755	36.711	36.34	≥500	≥500
	CH159	5795	36.747	36.36	≥500	≥500
802.11 AC80	CH155	5775	75.603	75.36	≥500	≥500

Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	6dB bandwidth (MHz)	Limit MHz	Result
			ANT B	ANT B		
802.11a	CH149	5745	16.680	16.32	≥ 500	Pass
	CH157	5785	16.670	16.36	≥ 500	Pass
	CH165	5825	16.648	16.37	≥ 500	Pass
802.11 n20	CH149	5745	17.695	17.38	≥ 500	Pass
	CH157	5785	17.705	17.56	≥ 500	Pass
	CH165	5825	17.750	17.56	≥ 500	Pass
802.11 n40	CH151	5755	36.695	35.98	≥ 500	Pass
	CH159	5795	36.784	36.36	≥ 500	Pass
802.11 AC20	CH149	5745	17.693	17.53	≥ 500	Pass
	CH157	5785	17.735	17.53	≥ 500	Pass
	CH165	5825	17.731	17.56	≥ 500	Pass
802.11 AC40	CH151	5755	36.669	36.35	≥ 500	Pass
	CH159	5795	36.708	36.34	≥ 500	Pass
802.11 AC80	CH155	5775	75.537	76.32	≥ 500	Pass

Antenna A: 5725-5850MHz

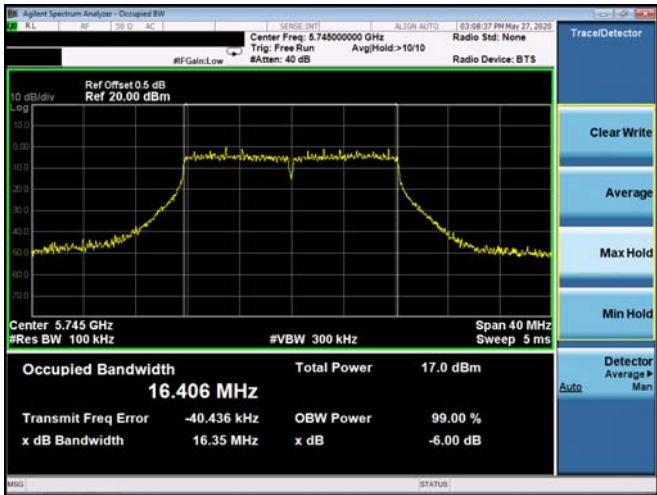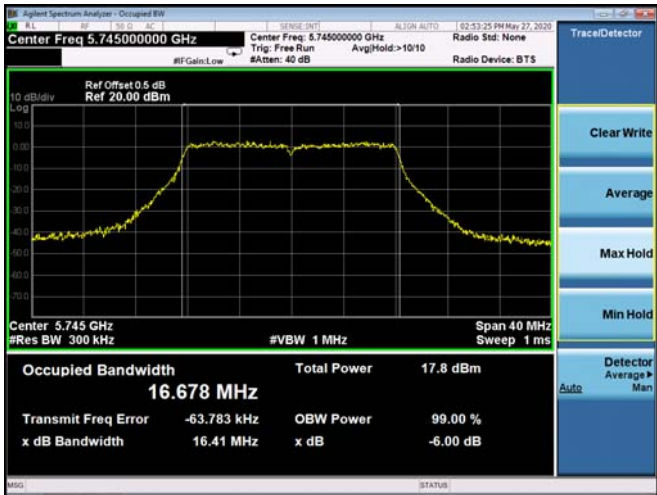Mode:	802.11a
5745MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 40 MHz Sweep: 5 ms Ref Offset: 0.5 dB Ref: 20.00 dBm Occupied Bandwidth: 16.406 MHz Total Power: 17.0 dBm Transmit Freq Error: -40.436 kHz x dB Bandwidth: 16.35 MHz OBW Power: 99.00 % x dB: -6.00 dB
5745MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745 GHz #Res BW: 300 kHz #VBW: 1 MHz Span: 40 MHz Sweep: 1 ms Ref Offset: 0.5 dB Ref: 20.00 dBm Occupied Bandwidth: 16.678 MHz Total Power: 17.8 dBm Transmit Freq Error: -63.783 kHz x dB Bandwidth: 16.41 MHz OBW Power: 99.00 % x dB: -6.00 dB


5785MHz
6dB bandwidth

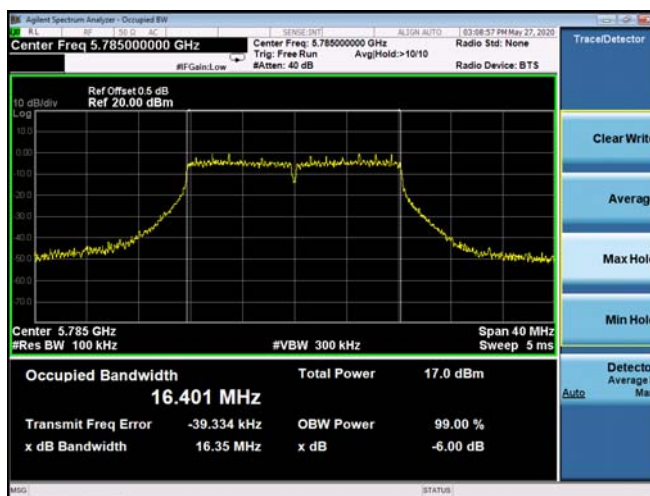


5785MHz
99% bandwidth





5825MHz
6dB bandwidth

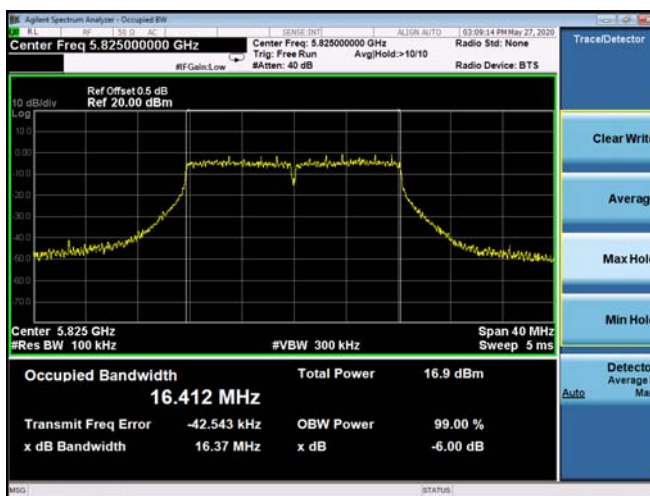


5825MHz
99% bandwidth

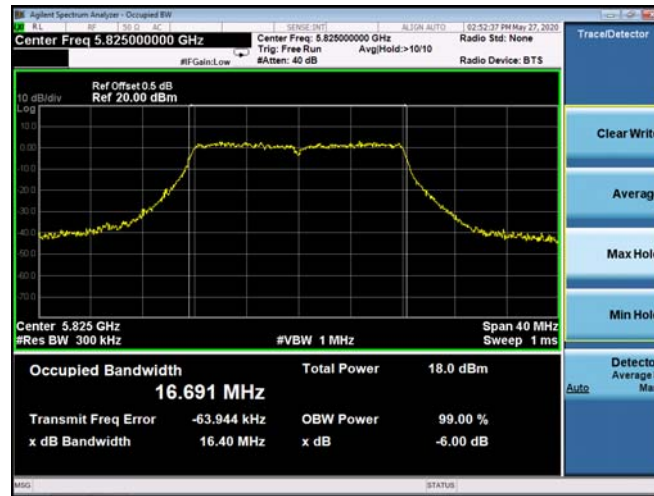

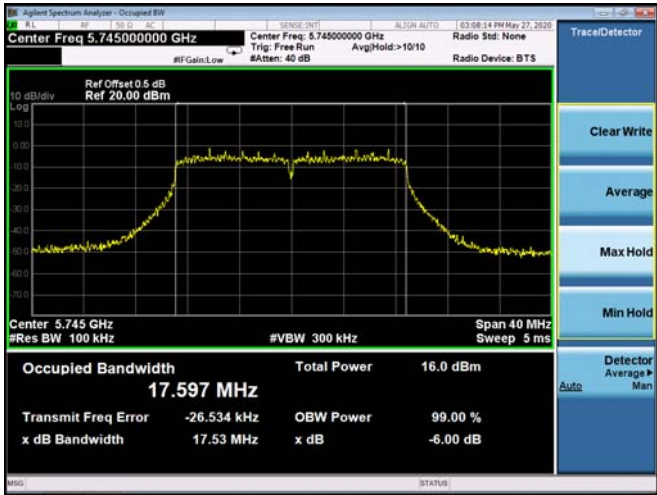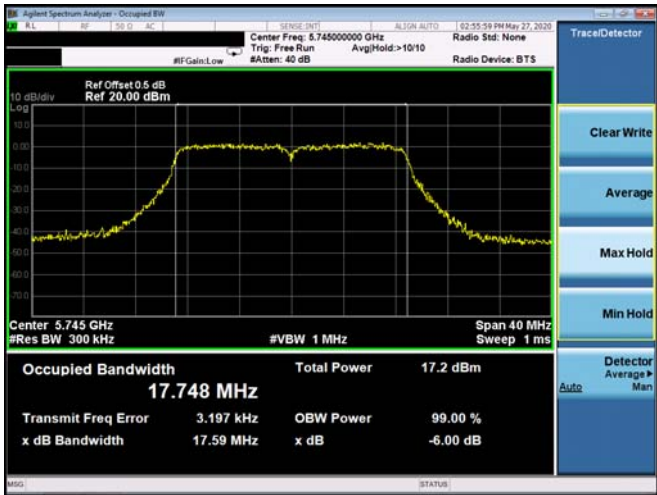Mode:	802.11n-HT20
5745MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745000000 GHz Ref Offset: 0.5 dB Ref: 20.00 dBm Span: 40 MHz Sweep: 5 ms Occupied Bandwidth: 17.597 MHz Total Power: 16.0 dBm Transmit Freq Error: -26.534 kHz OBW Power: 99.00 % x dB Bandwidth: 17.53 MHz x dB: -6.00 dB
5745MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745000000 GHz Ref Offset: 0.5 dB Ref: 20.00 dBm Span: 40 MHz Sweep: 1 ms Occupied Bandwidth: 17.748 MHz Total Power: 17.2 dBm Transmit Freq Error: 3.197 kHz OBW Power: 99.00 % x dB Bandwidth: 17.59 MHz x dB: -6.00 dB


5785MHz
6dB bandwidth

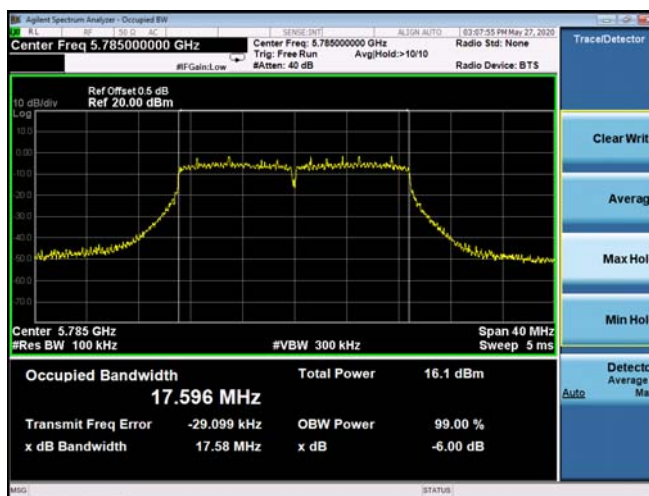


5785MHz
99% bandwidth






5825MHz
6dB bandwidth

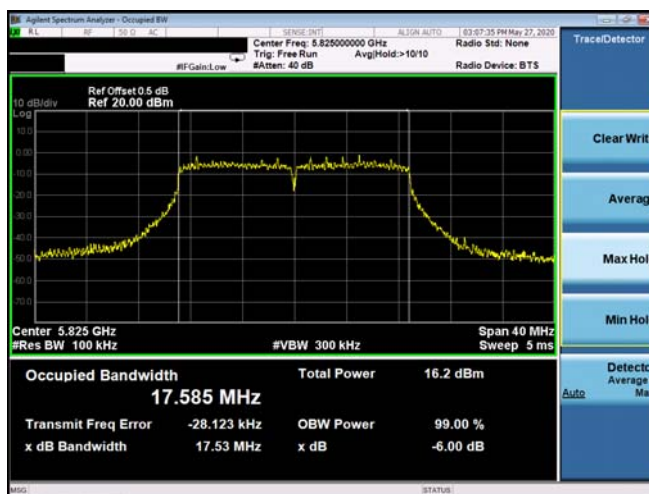



5825MHz
99% bandwidth

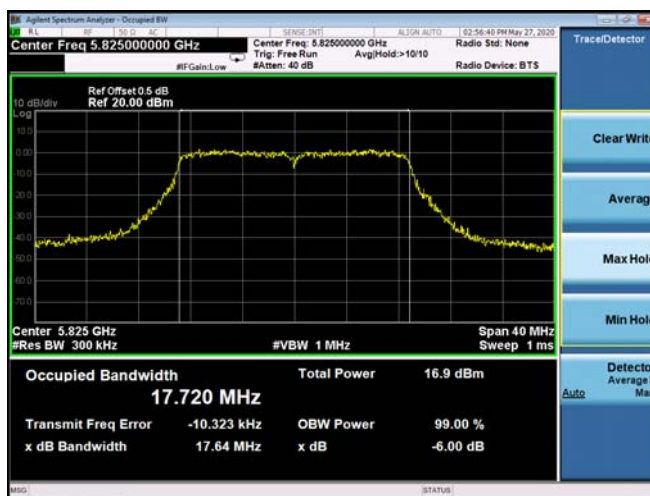

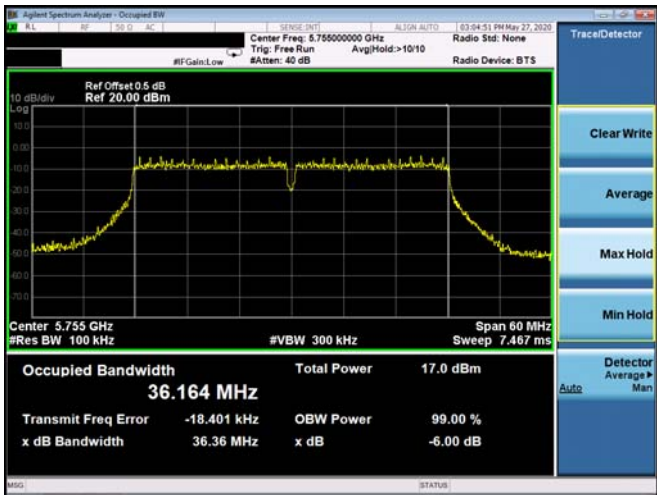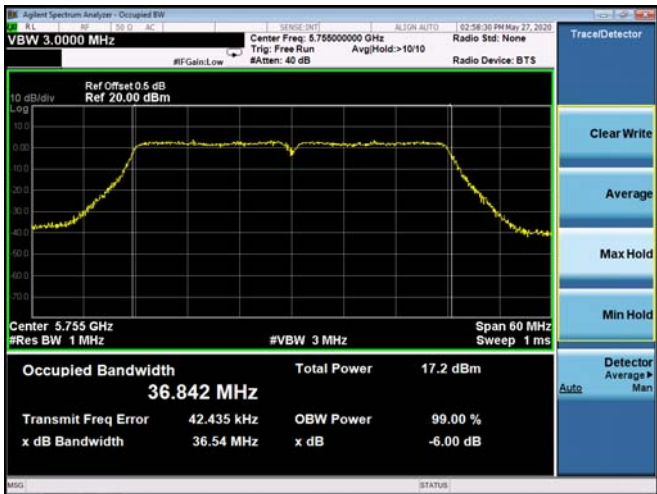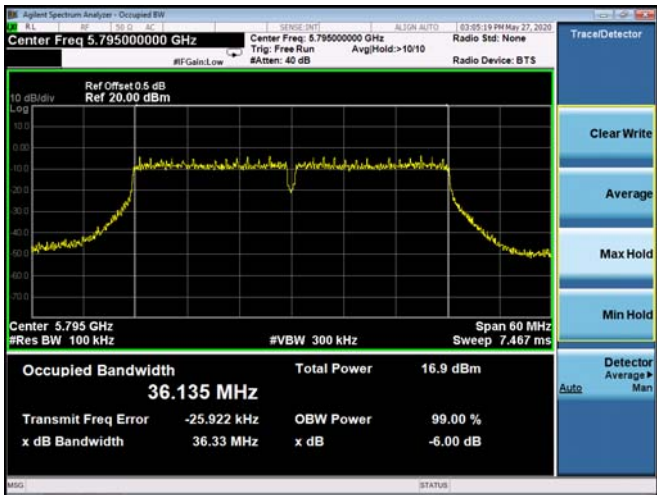
Mode:	802.11n-HT40
5755 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.755000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref Offset: 0.5 dB Ref: 20.00 dBm Center: 5.755 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 7.467 ms Occupied Bandwidth: 36.164 MHz Total Power: 17.0 dBm Transmit Freq Error: -18.401 kHz OBW Power: 99.00 % x dB Bandwidth: 36.36 MHz x dB: -6.00 dB
5755 MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.755000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref Offset: 0.5 dB Ref: 20.00 dBm Center: 5.755 GHz #Res BW: 1 MHz #VBW: 3 MHz Span: 60 MHz Sweep: 1 ms Occupied Bandwidth: 36.842 MHz Total Power: 17.2 dBm Transmit Freq Error: 42.435 kHz OBW Power: 99.00 % x dB Bandwidth: 36.54 MHz x dB: -6.00 dB
5795 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.795000000 GHz Trig: Free Run Avg/Hold: >10/10 Radio Std: None Radio Device: BTS Ref Offset: 0.5 dB Ref: 20.00 dBm Center: 5.795 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 60 MHz Sweep: 7.467 ms Occupied Bandwidth: 36.135 MHz Total Power: 16.9 dBm Transmit Freq Error: -25.922 kHz OBW Power: 99.00 % x dB Bandwidth: 36.33 MHz x dB: -6.00 dB

5795 MHz
99% bandwidth

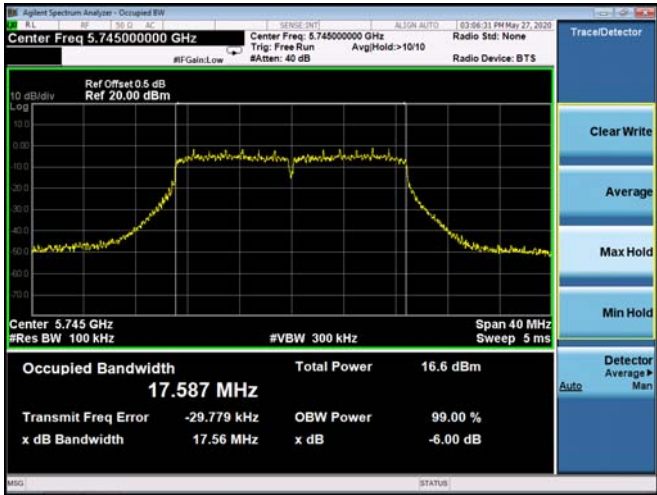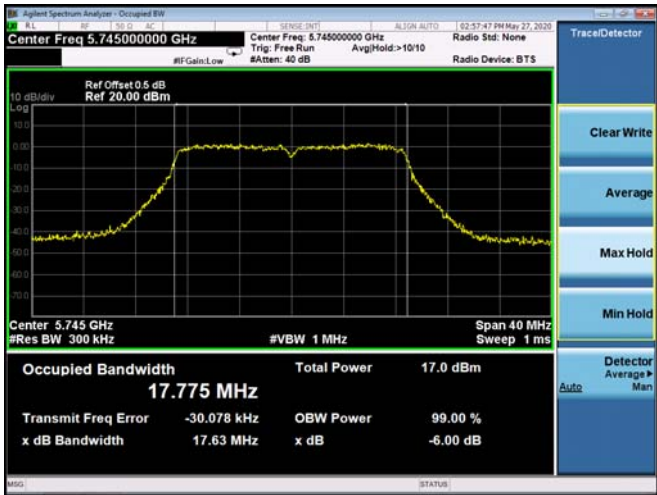


Mode:	802.11ac-HT20
5745MHz 6dB bandwidth	
5745MHz 99% bandwidth	


5785MHz
6dB bandwidth

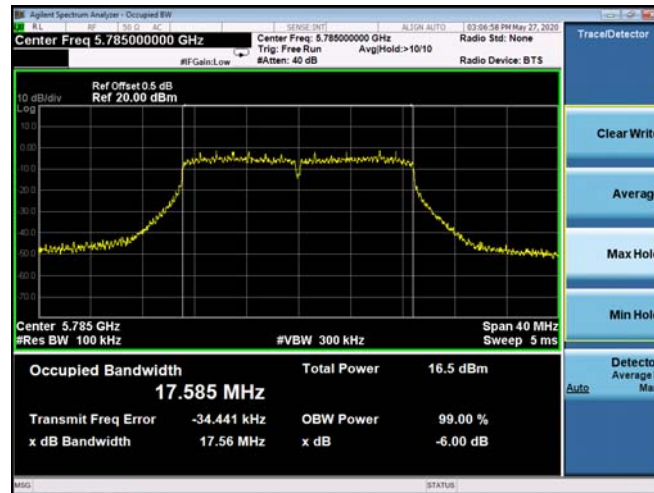

5785MHz
99% bandwidth


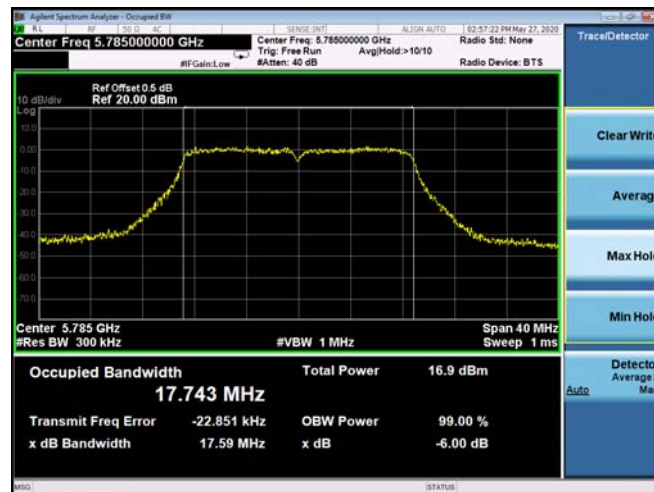


5825MHz
6dB bandwidth

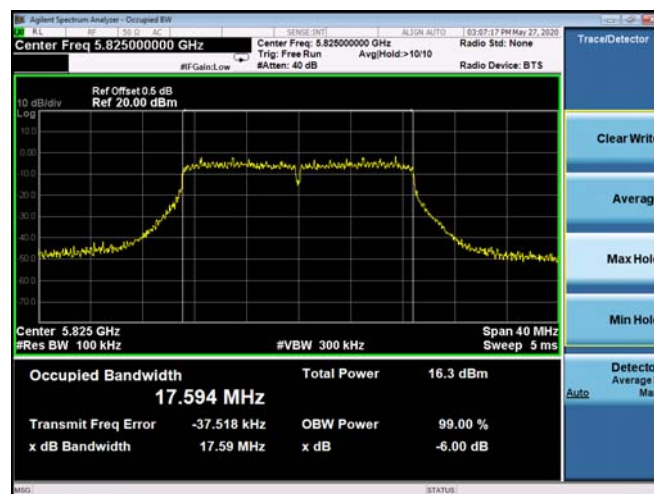




5825MHz
99% bandwidth

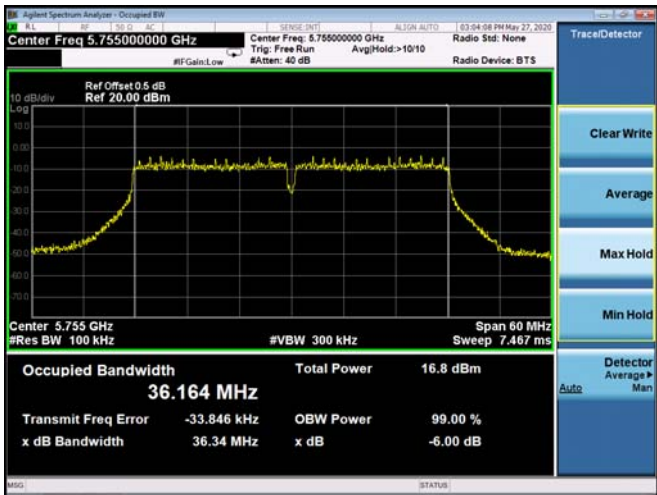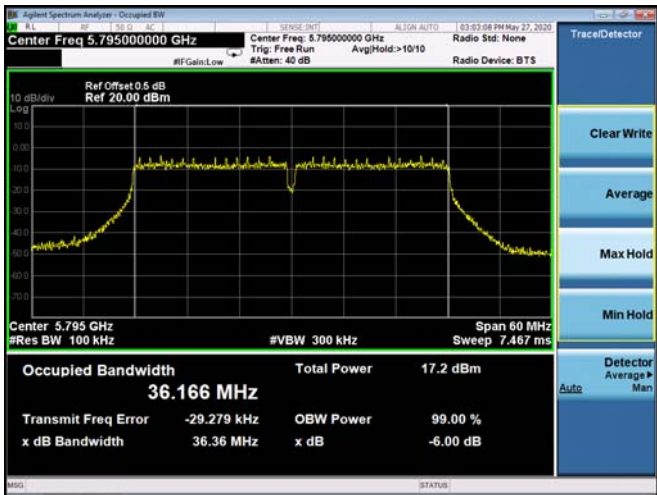

Mode:	802.11ac-HT40
5755 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.755000000 GHz Ref Offset 0.5 dB Ref 20.00 dBm Center 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 7.467 ms Occupied Bandwidth 36.164 MHz Total Power 16.8 dBm Transmit Freq Error -33.846 kHz OBW Power 99.00 % x dB Bandwidth 36.34 MHz x dB -6.00 dB
5755 MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.755000000 GHz Ref Offset 0.5 dB Ref 20.00 dBm Center 5.755 GHz #Res BW 1 MHz #VBW 3 MHz Span 60 MHz Sweep 1 ms Occupied Bandwidth 36.711 MHz Total Power 16.9 dBm Transmit Freq Error -30.018 kHz OBW Power 99.00 % x dB Bandwidth 36.44 MHz x dB -6.00 dB
5795 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq 5.795000000 GHz Ref Offset 0.5 dB Ref 20.00 dBm Center 5.795 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 7.467 ms Occupied Bandwidth 36.166 MHz Total Power 17.2 dBm Transmit Freq Error -29.279 kHz OBW Power 99.00 % x dB Bandwidth 36.36 MHz x dB -6.00 dB

5795 MHz
99% bandwidth

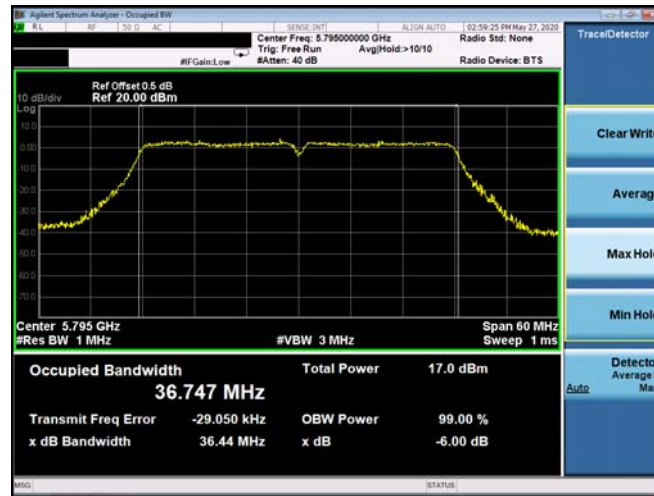

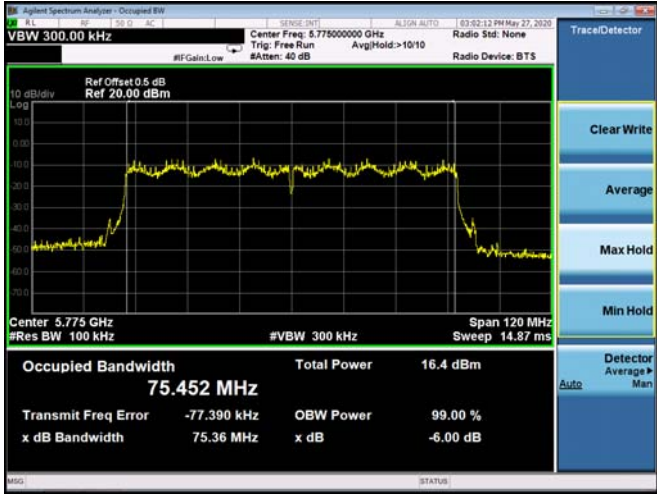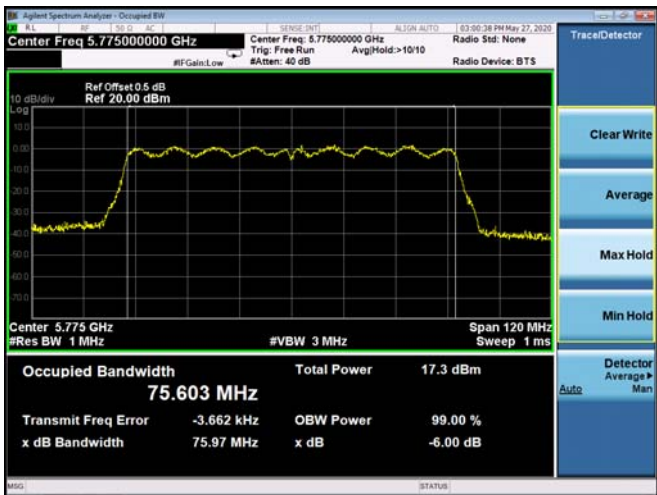Mode:	802.11ac-HT80
5755 MHz 6dB bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.775000000 GHz Span: 120 MHz Res BW: 100 kHz Occupied Bandwidth: 75.452 MHz Total Power: 16.4 dBm Transmit Freq Error: -77.390 kHz OBW Power: 99.00 % x dB Bandwidth: 75.36 MHz x dB: -6.00 dB
5755 MHz 99% bandwidth	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.775000000 GHz Span: 120 MHz Res BW: 1 MHz Occupied Bandwidth: 75.603 MHz Total Power: 17.3 dBm Transmit Freq Error: -3.662 kHz OBW Power: 99.00 % x dB Bandwidth: 75.97 MHz x dB: -6.00 dB

6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 PPLIED PROCEDURES / LIMIT

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

6.2 TEST PROCEDURE

- Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle ≥ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX (5G) Mode Frequency U-NII-1 (5180-5240MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)			LIMIT	Result
	(MHz)	ANT A(dBm)	ANT B(dBm)	Total(dBm)	dBm	
TX 802.11a Mode						
CH36	5180	13.768	13.304	/	30	Pass
CH40	5200	14.149	13.921	/	30	Pass
CH48	5240	14.618	14.973	/	30	Pass
TX 802.11 n20M Mode						
CH36	5180	13.148	12.745	15.96	30	Pass
CH40	5200	13.296	13.222	16.27	30	Pass
CH48	5240	14.006	14.053	17.04	30	Pass
TX 802.11 n40M Mode						
CH38	5190	11.152	10.670	13.93	30	Pass
CH46	5230	11.569	11.639	14.61	30	Pass
TX 802.11 AC20M Mode						
CH36	5180	13.187	12.586	15.91	30	Pass
CH40	5200	13.474	13.150	16.33	30	Pass
CH48	5240	14.160	14.175	17.18	30	Pass
TX 802.11 AC40M Mode						
CH38	5190	11.183	10.543	13.89	30	Pass
CH46	5230	11.728	11.624	14.69	30	Pass
TX 802.11 AC80M Mode						
CH42	5210	9.815	9.287	12.57	30	Pass

Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX (5G) Mode Frequency U-NII-3 (5745-5825MHz)		

Test Channel	Frequency	Maximum output power. Antenna port (AV)			LIMIT	Result
	(MHz)	ANT A(dBm)	ANT B(dBm)	Total(dBm)	dBm	
TX 802.11a Mode						
CH 149	5745	14.853	14.088	/	30	Pass
CH 157	5785	14.848	14.204	/	30	Pass
CH 165	5825	14.773	14.902	/	30	Pass
TX 802.11 n20M Mode						
CH 149	5745	14.369	13.738	17.08	30	Pass
CH 157	5785	14.259	13.833	17.06	30	Pass
CH 165	5825	14.383	14.217	17.31	30	Pass
TX 802.11 n40M Mode						
CH 151	5755	12.271	11.536	14.93	30	Pass
CH 159	5795	12.343	11.871	15.12	30	Pass
TX 802.11 AC20M Mode						
CH 149	5745	14.326	13.439	16.92	30	Pass
CH 157	5785	14.227	13.763	17.01	30	Pass
CH 165	5825	14.242	14.147	17.21	30	Pass
TX 802.11 AC40M Mode						
CH 151	5755	12.202	11.593	14.92	30	Pass
CH 159	5795	12.300	11.899	15.11	30	Pass
TX 802.11 AC80M Mode						
CH 155	5775	10.333	9.857	13.11	30	Pass

7. OUT OF BAND EMISSIONS

7.1 APPLICABLE STANDARD

According to FCC §15.407(b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.


7.2 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

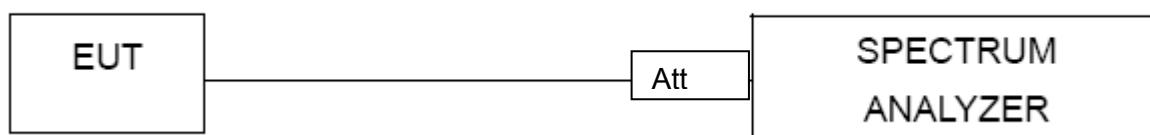

7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS


Temperature :	26 °C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	AC 120V/60Hz

Note: A(B) Represent the value of antenna A and B, The worst data is Antenna A ,only shown Antenna A . Plot.Antenna B: 5180-5240MHz


5.2G

5.180~5.240 GHz


(802.11a) Band Edge, Left Side

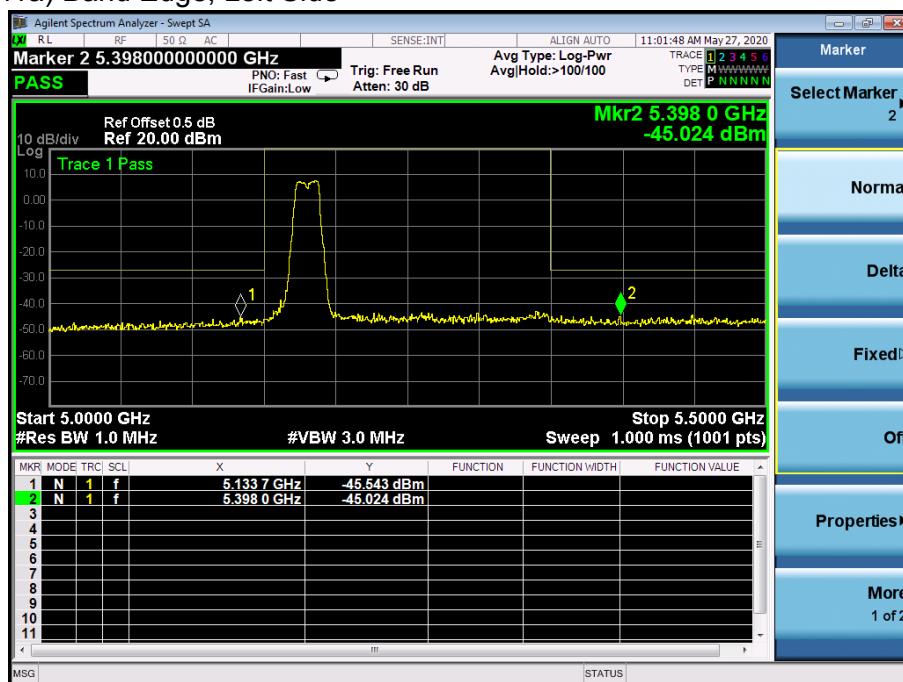


(802.11a) Band Edge, Right Side

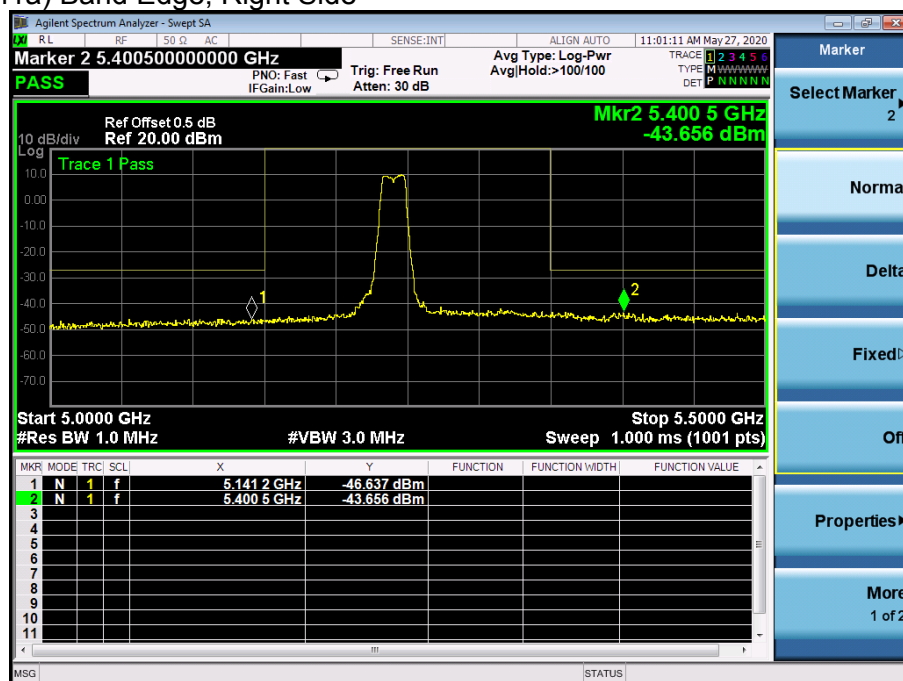

(802.11n20) Band Edge, Left Side

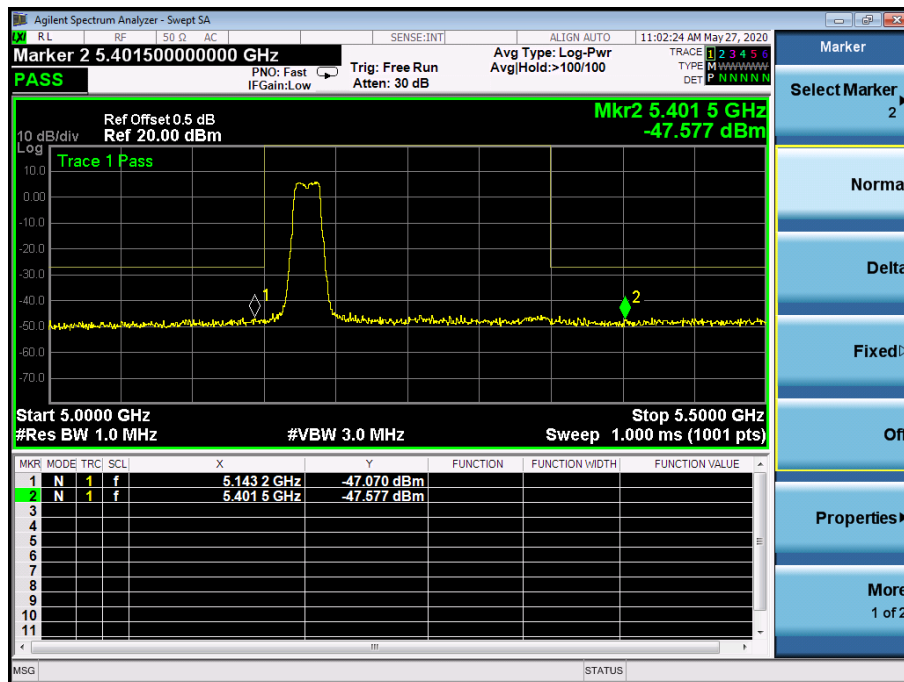


(802.11n20) Band Edge, Right Side

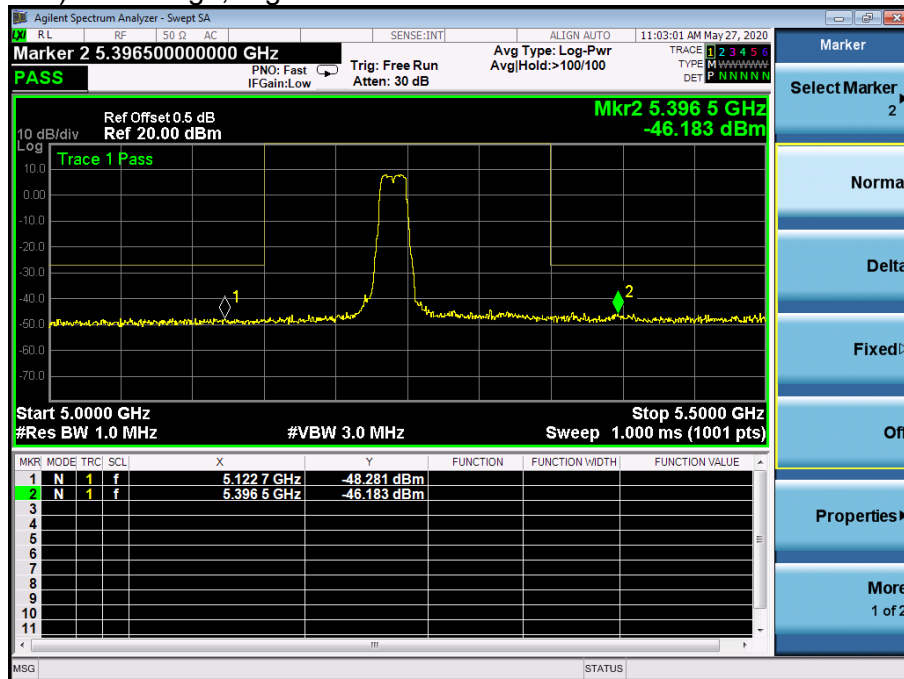


5.180~5.240 GHz

(802.11n40) Band Edge, Left Side

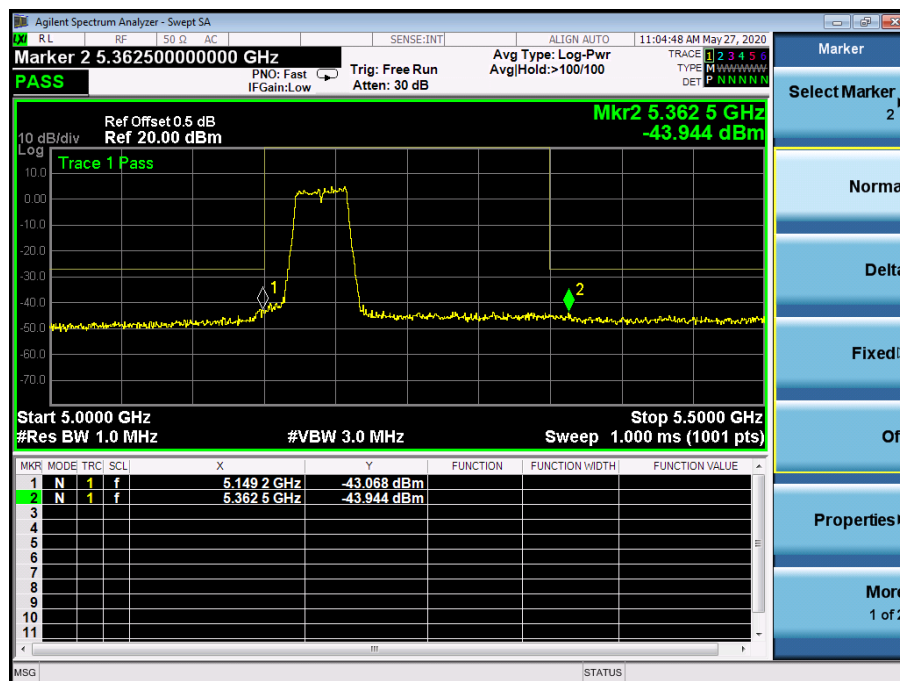


(802.11n40) Band Edge, Right Side

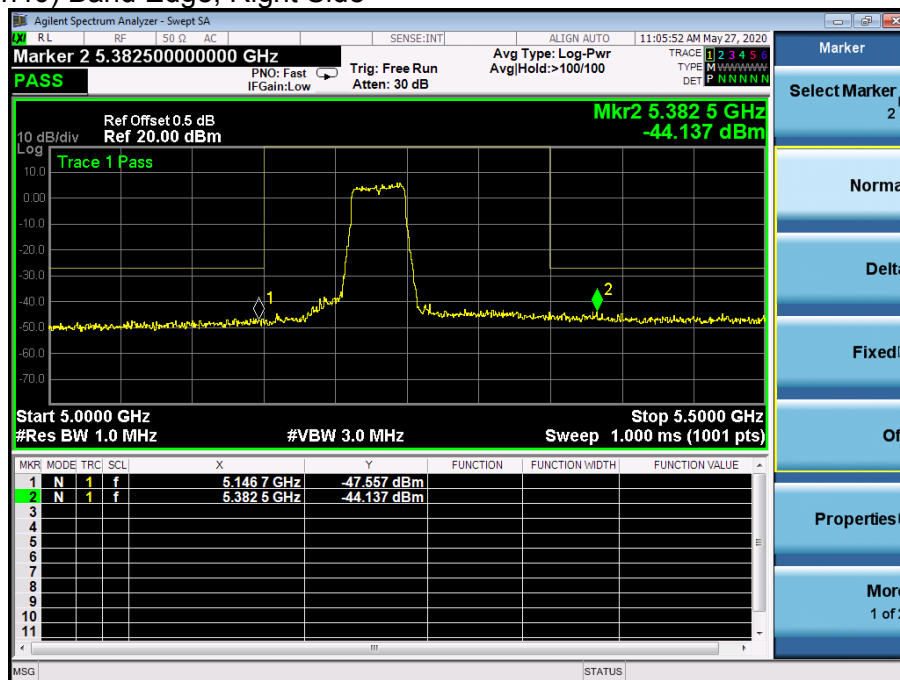


5.180~5.240 GHz

(802.11ac20) Band Edge, Left Side

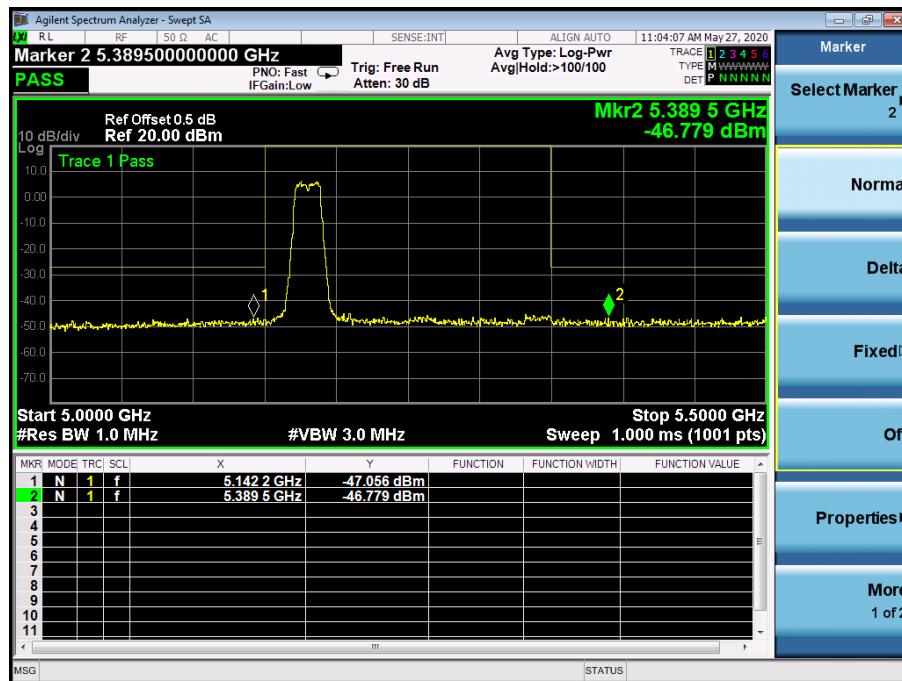


(802.11ac20) Band Edge, Right Side

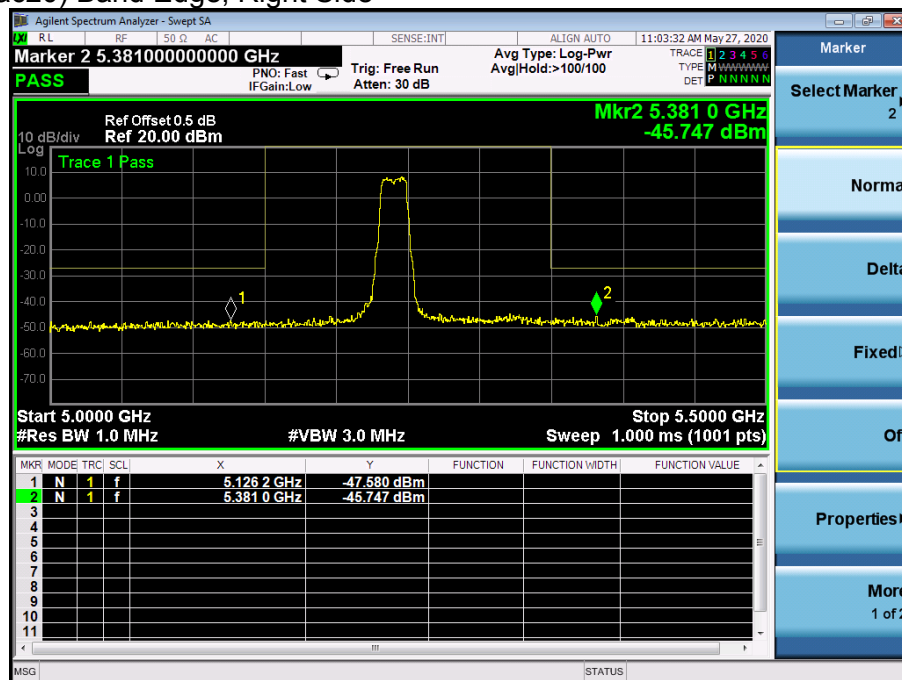


5.180~5.240 GHz

(802.11ac40) Band Edge, Left Side

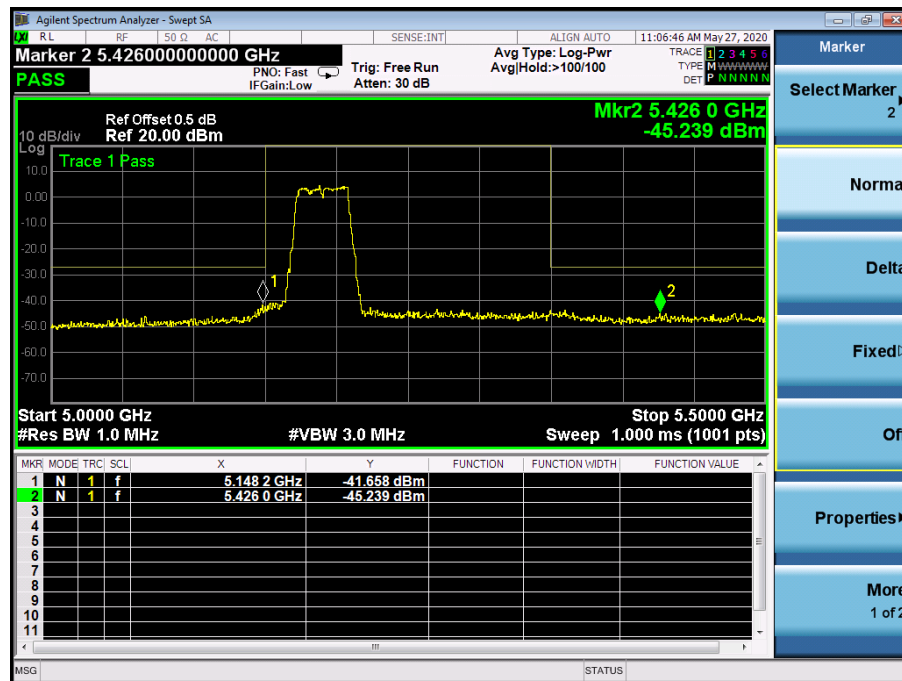


(802.11ac40) Band Edge, Right Side

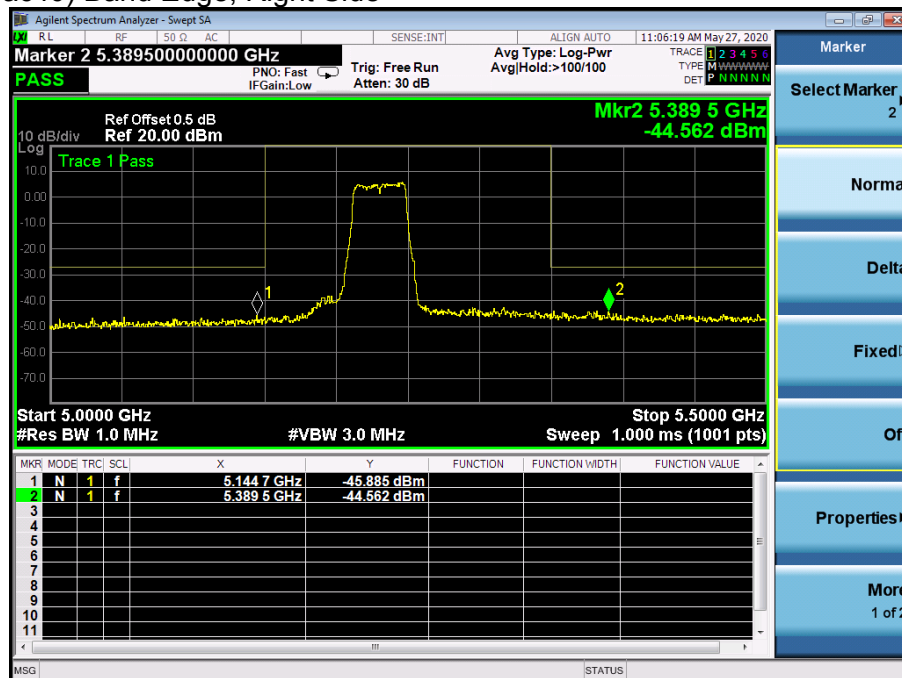


5.180~5.240 GHz

(802.11 ac80) Band Edge, Left Side

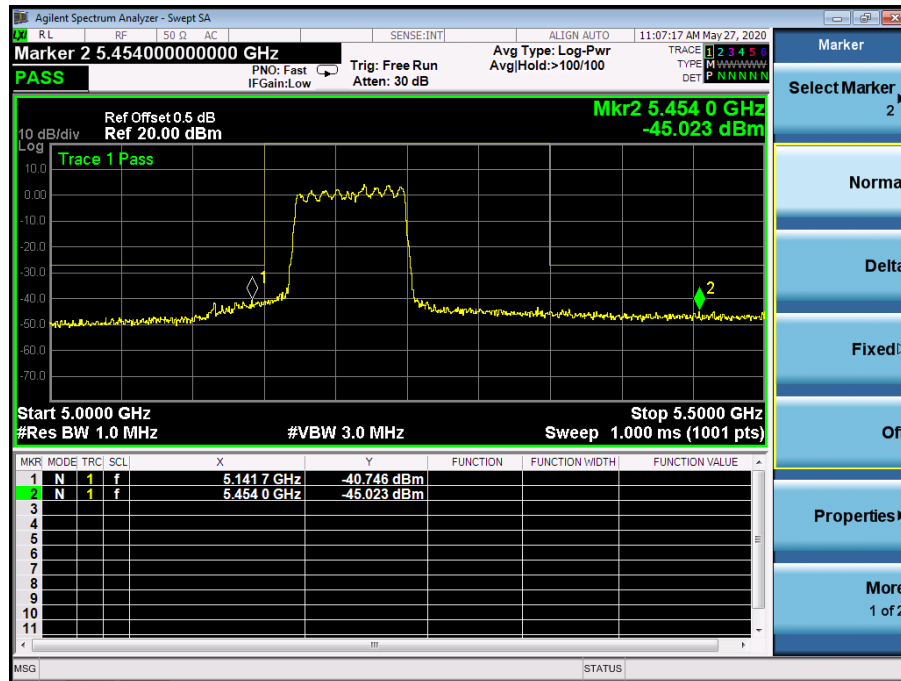

(802.11ac80) Band Edge, Right Side

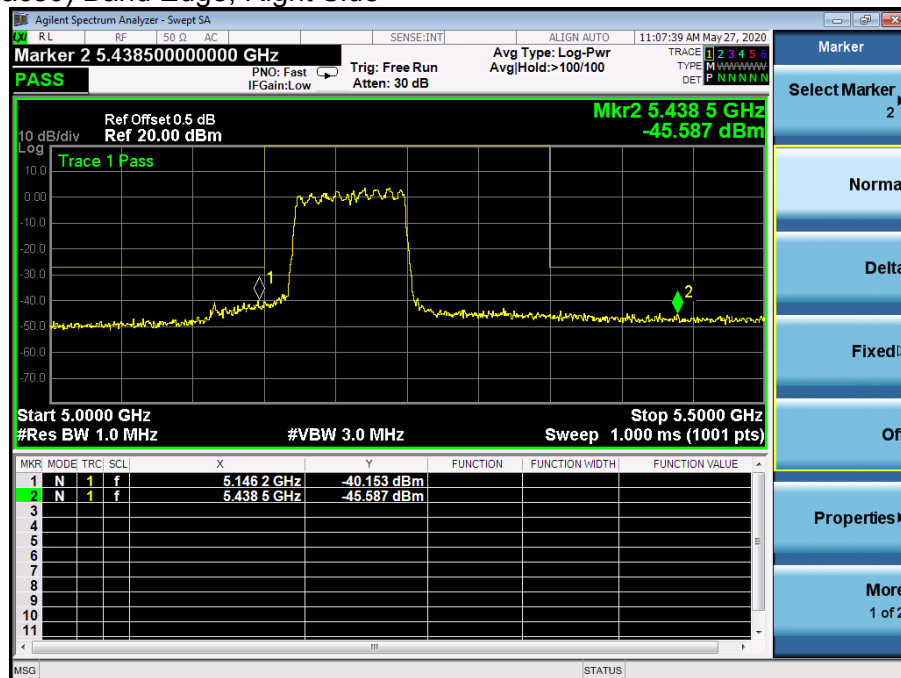


Antenna A: 5745-5825MHz


5.8G

5.745~5.825 GHz


(802.11a) Band Edge, Left Side

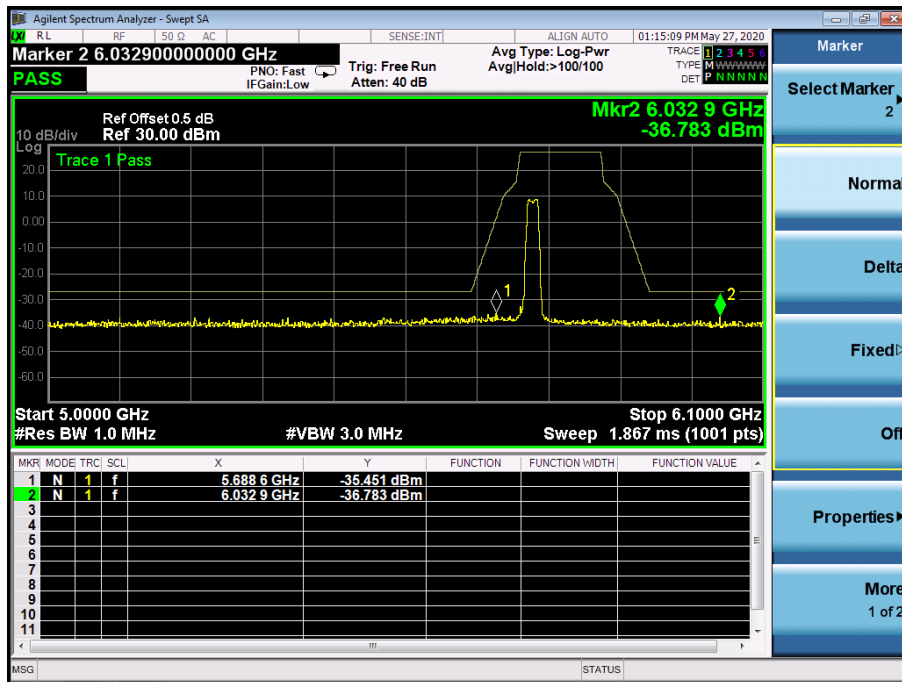


(802.11a) Band Edge, Right Side

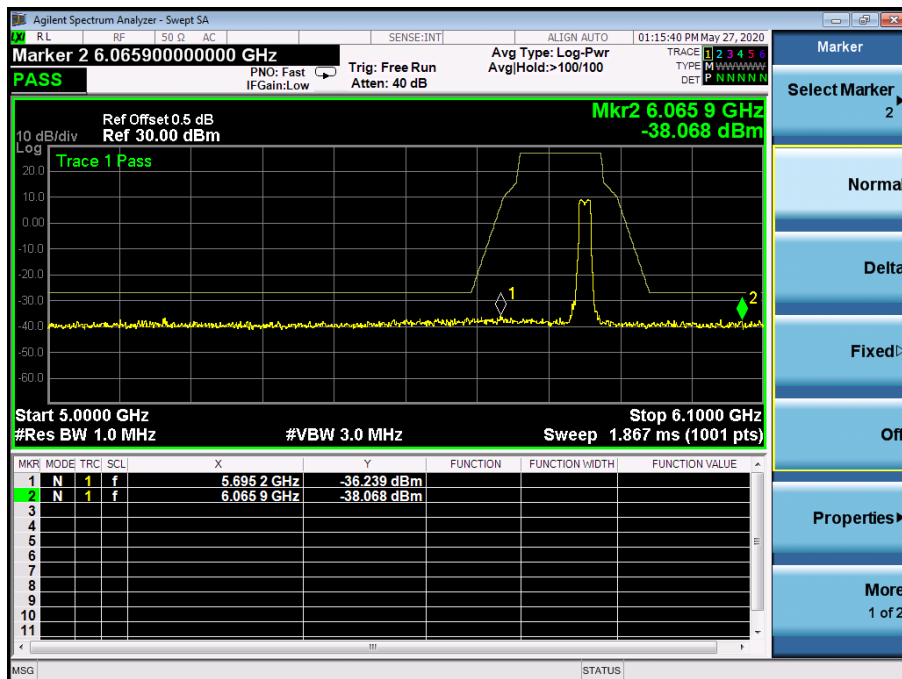

(802.11 n20) Band Edge, Left Side

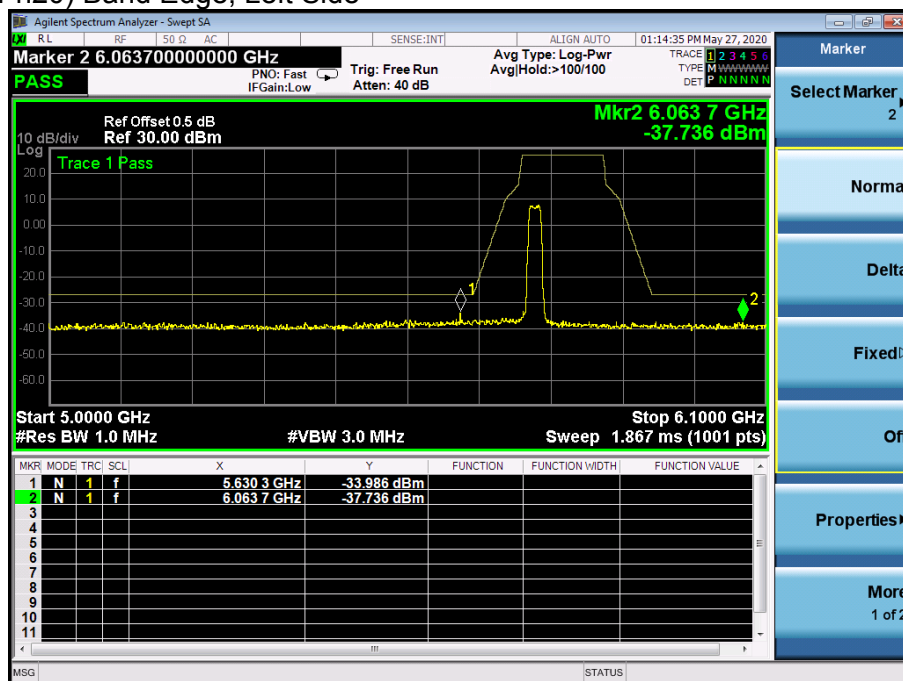


(802.11n20) Band Edge, Right Side

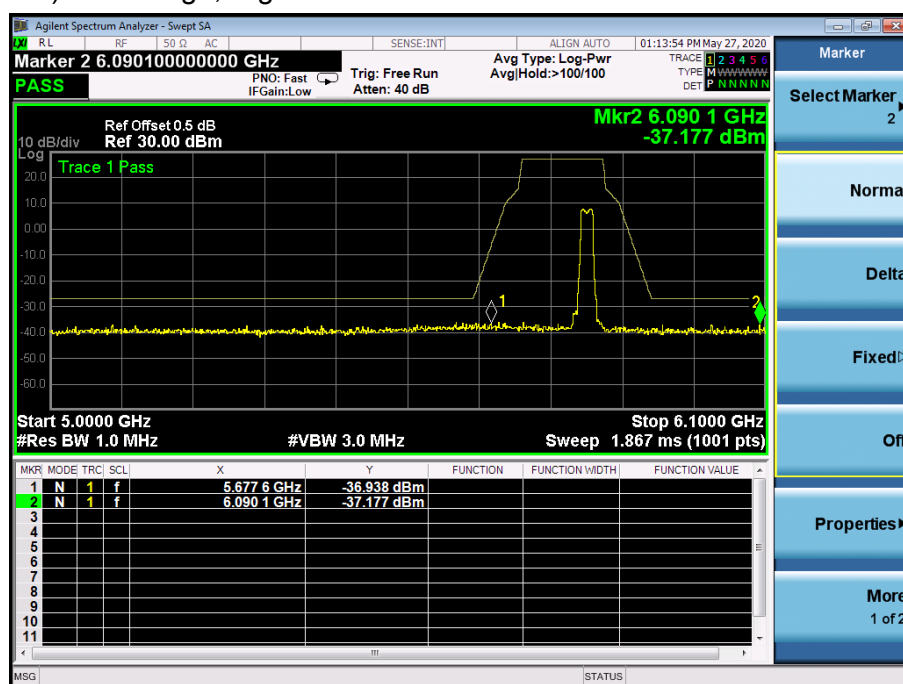


5.745~5.825 GHz

(802.11n40) Band Edge, Left Side

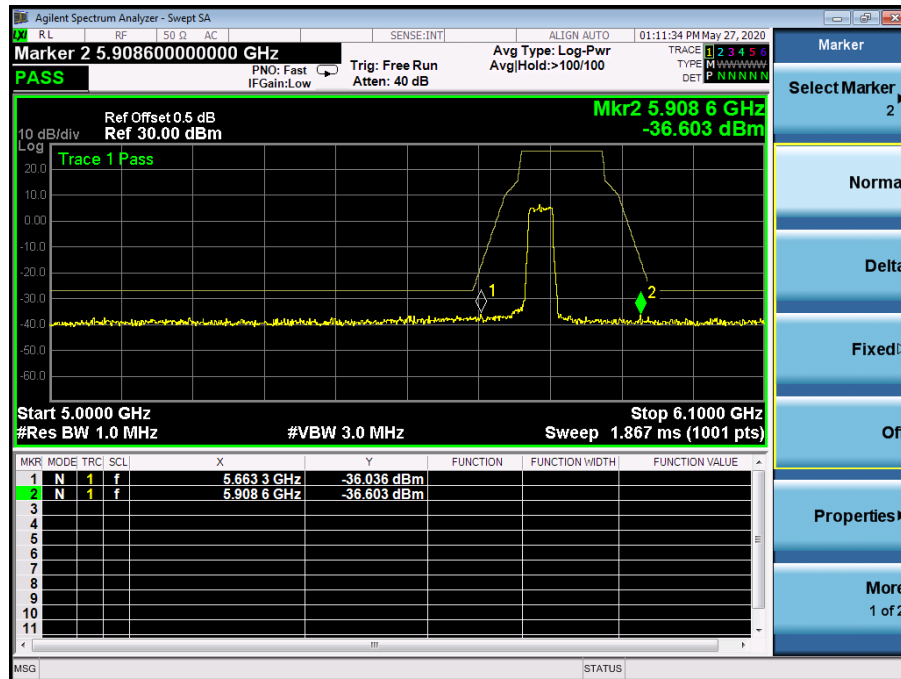


(802.11n40) Band Edge, Right Side

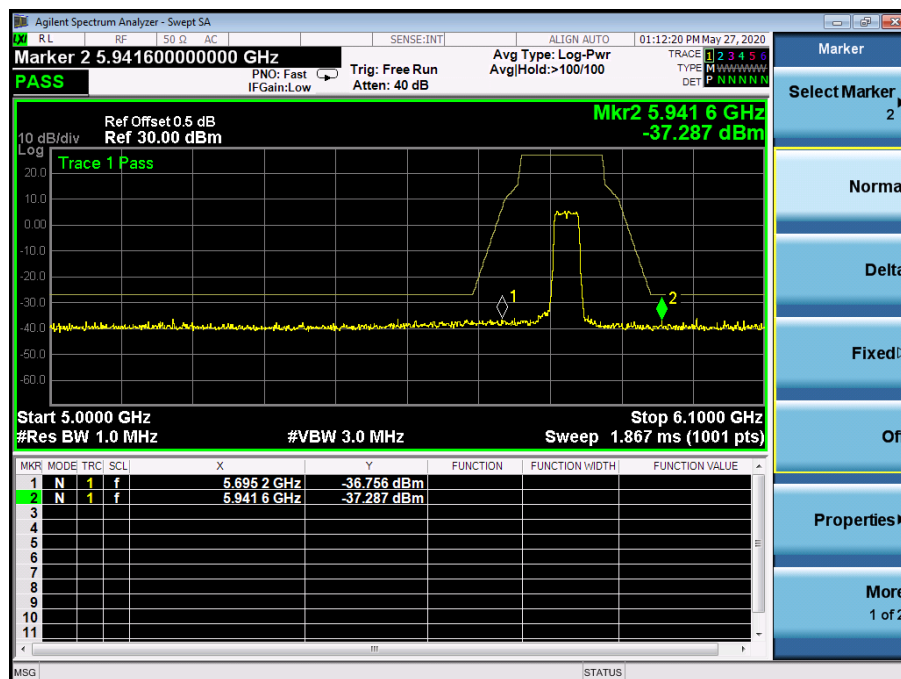


5.745~5.825 GHz

(802.11ac20) Band Edge, Left Side

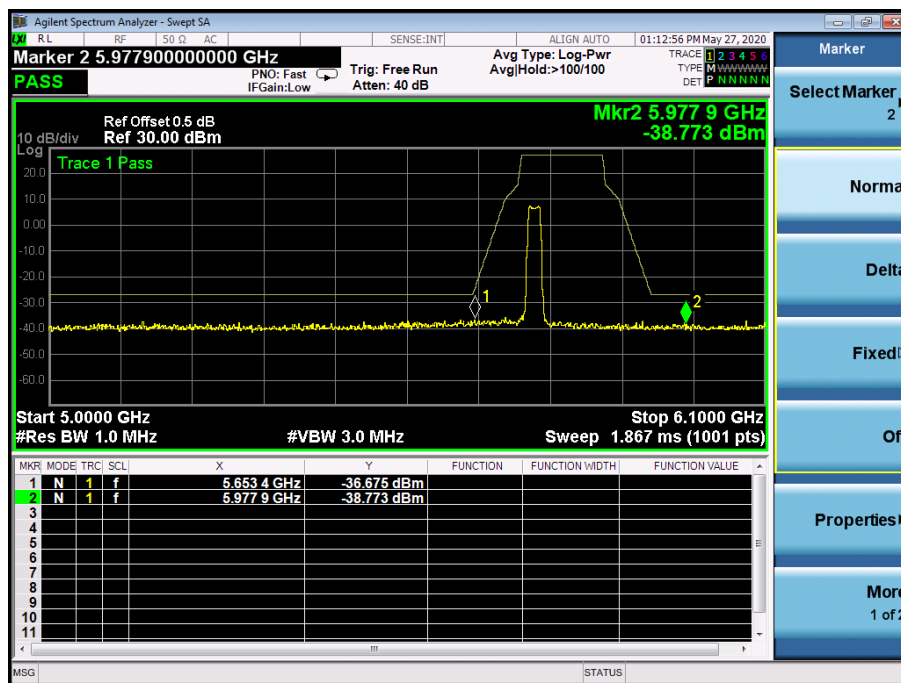


(802.11 ac20) Band Edge, Right Side

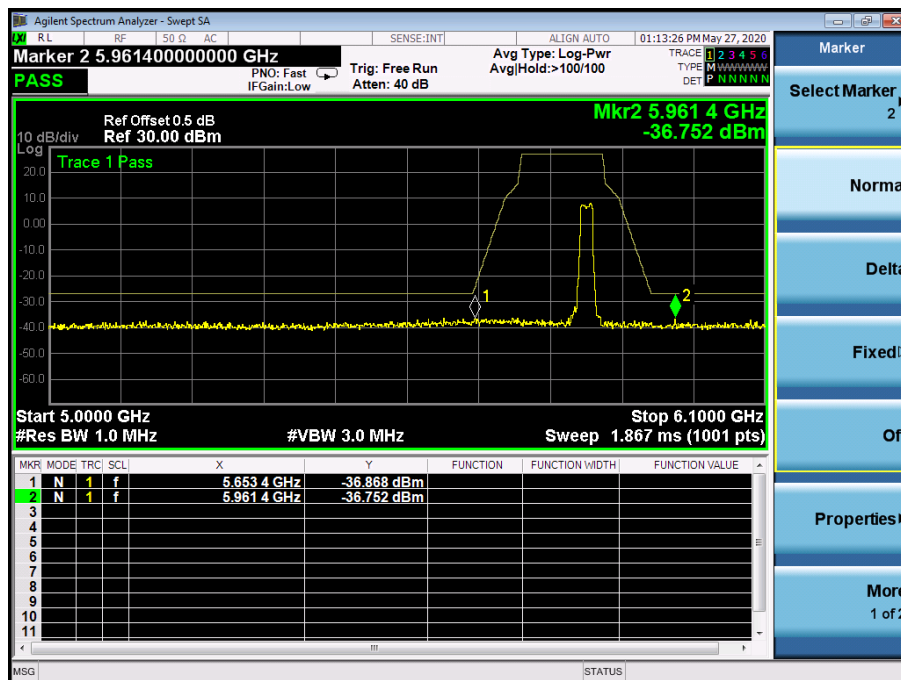


5.745~5.825 GHz

(802.11ac40) Band Edge, Left Side

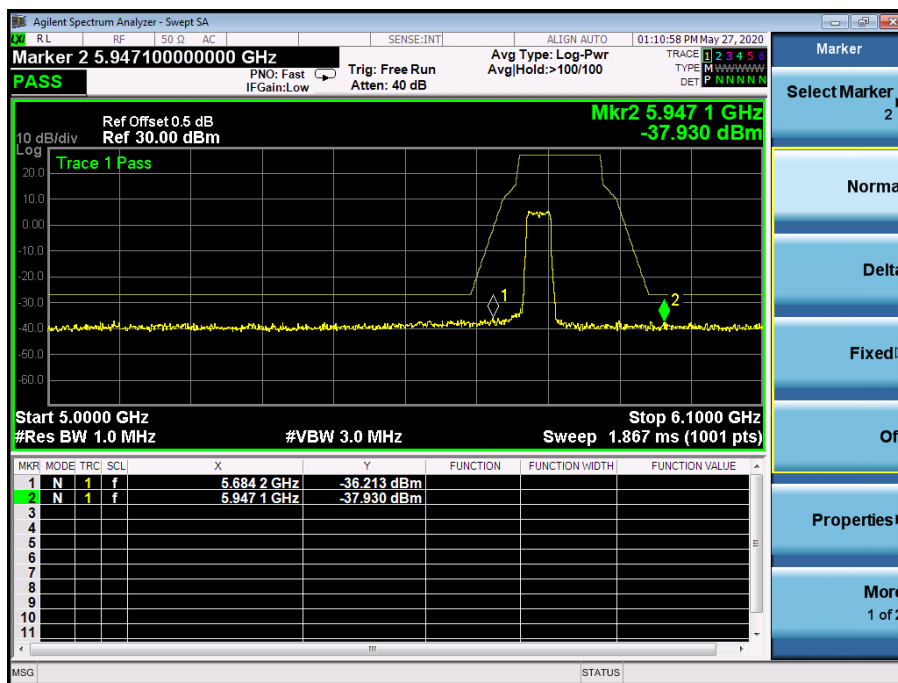


(802.11ac40) Band Edge, Right Side

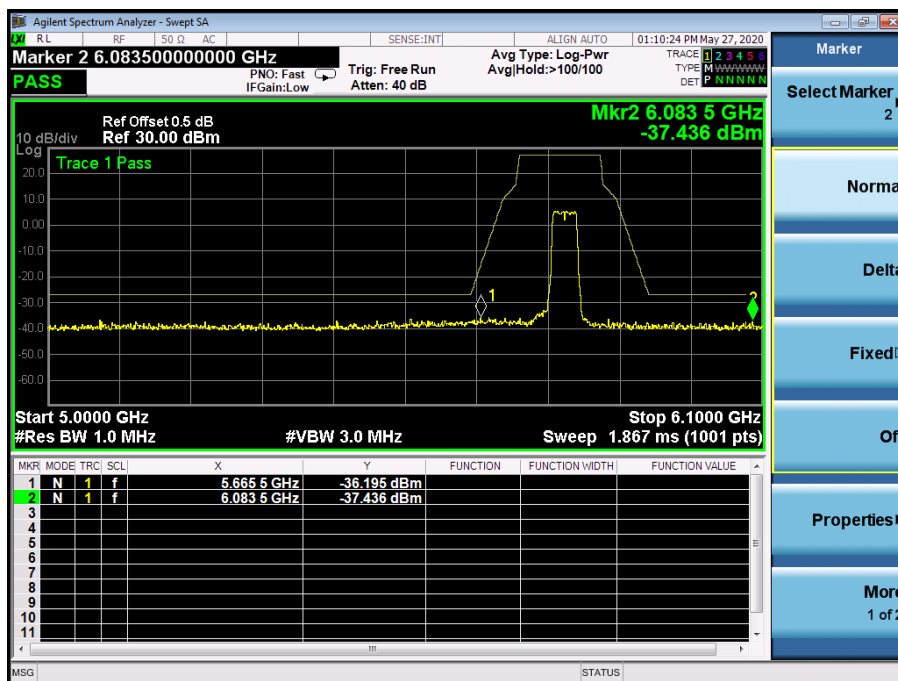


5.745~5.825 GHz

(802.11ac80) Band Edge, Left Side

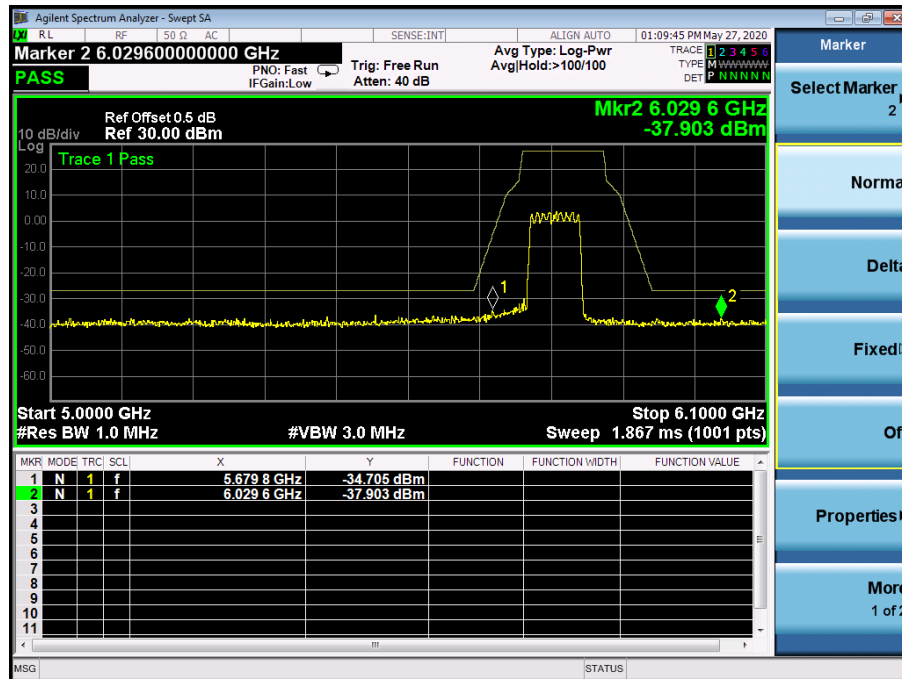

(802.11ac80) Band Edge, Right Side

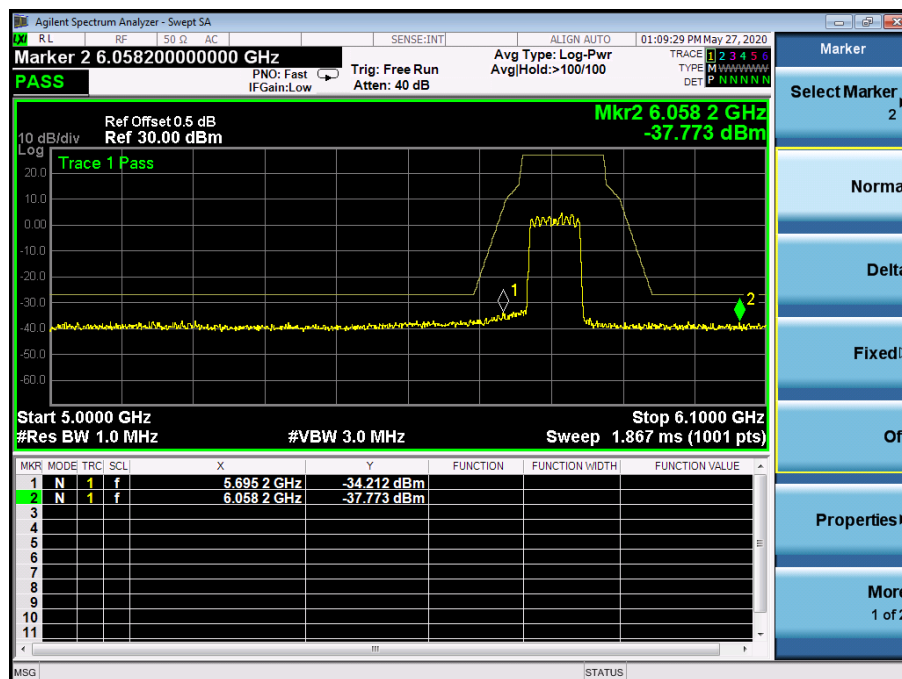

8.SPURIOUS RF CONDUCTED EMISSIONS

8.1CONFORMANCE LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.725-5.85 GHz band(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

8.2MEASURING INSTRUMENTS

The Measuring equipment is listed in the section 6.3 of this test report.

8.3TEST SETUP

Please refer to Section 6.1 of this test report.

8.4TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.5TEST RESULTS


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

About:26.5GHz-40GHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Note: A(B) Represent the value of antenna A and B, The worst data is Antenna B ,only shown Antenna B Plot.

5.2G


802.11a on channel 36

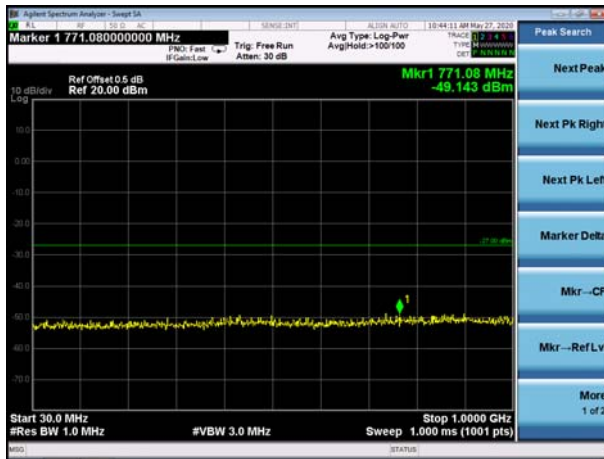


802.11a on channel 40

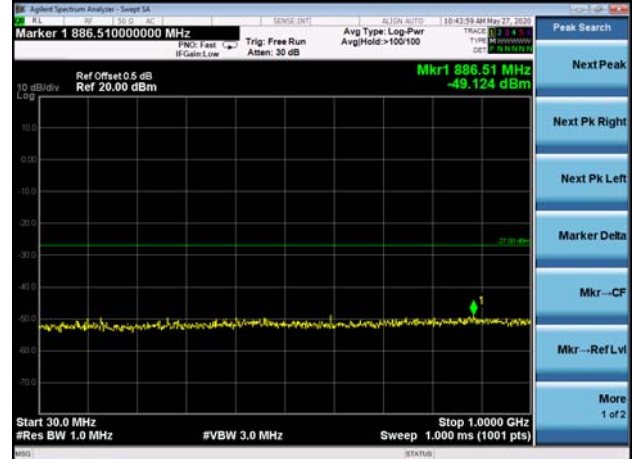

802.11a on channel 36

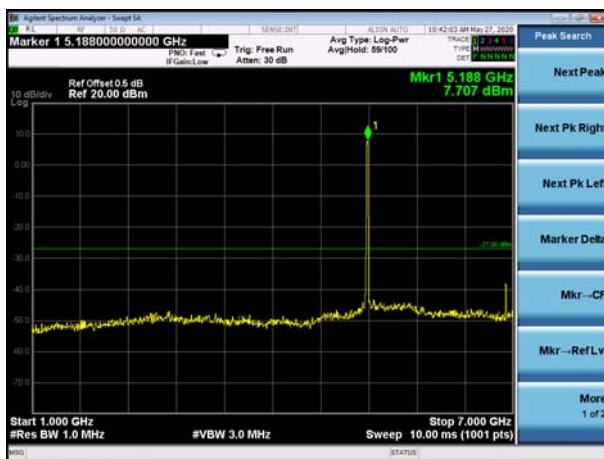

802.11a on channel 40

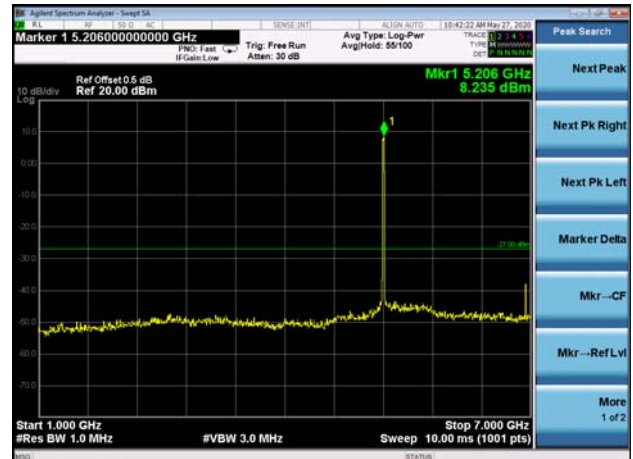

802.11a on channel 36




802.11a on channel 40




Test Plot


802.11a on channel 48

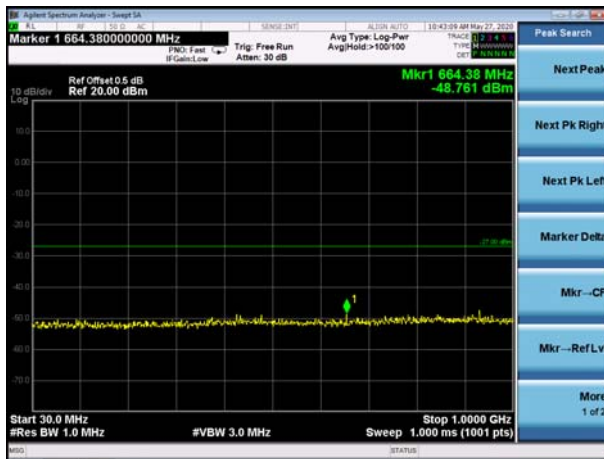


802.11n20 on channel 36

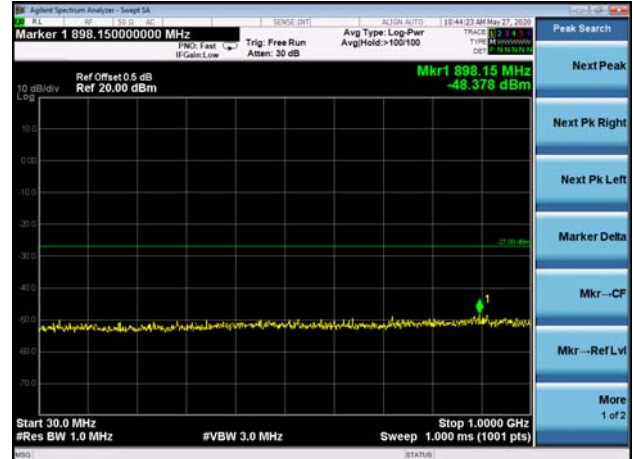

802.11a on channel 48

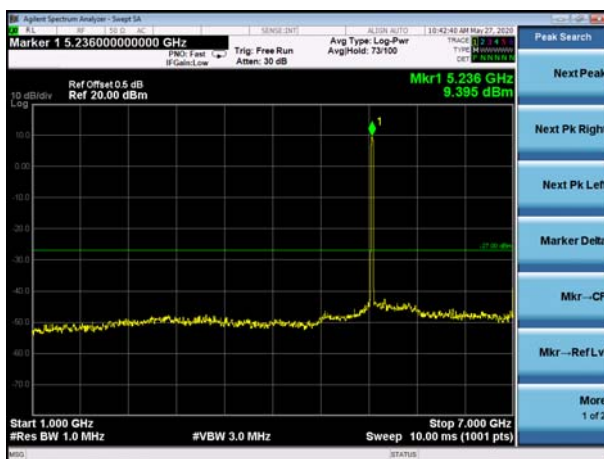

802.11n20 on channel 36

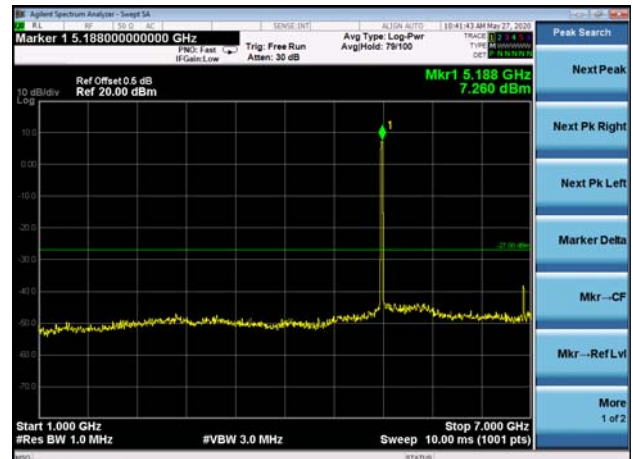

802.11a on channel 48




802.11n20 on channel 36




Test Plot


802.11n20 on channel 40

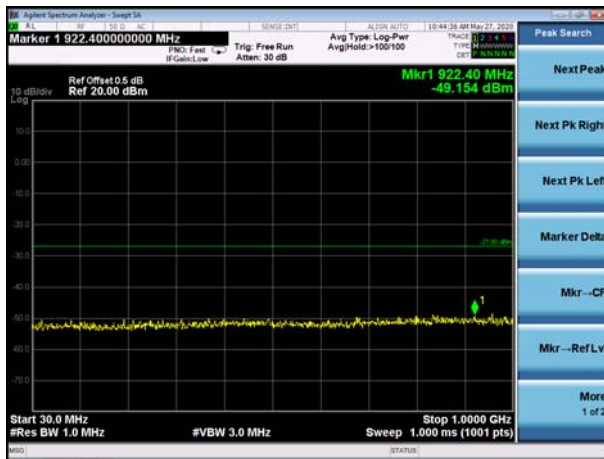

802.11n20 on channel 48

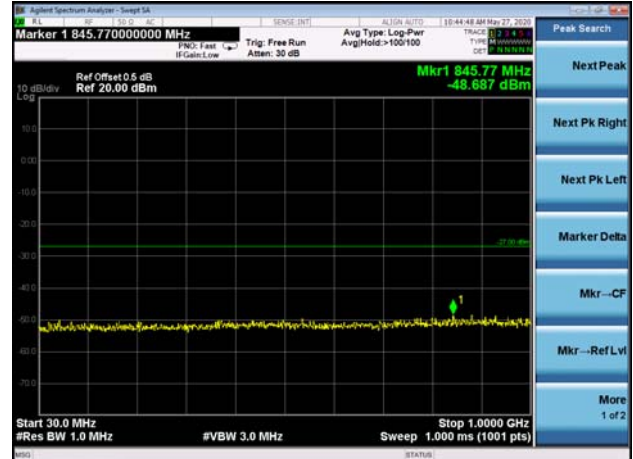

802.11n20 on channel 40

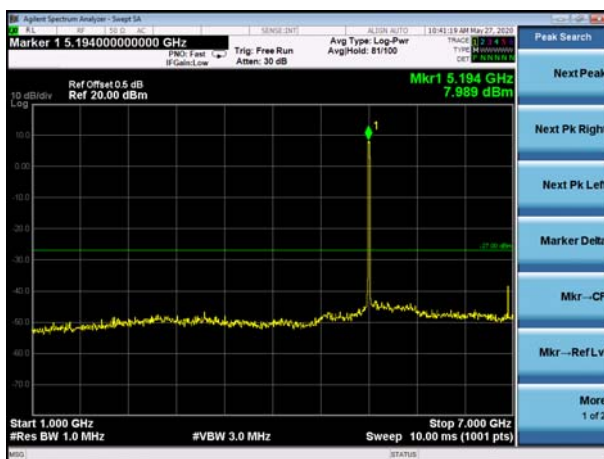

802.11n20 on channel 48



802.11n20 on channel 40



802.11n20 on channel 48

