



# FCC/IC Partial Scope Test Report

FOR

**Verizon Telematics**

**Model Number: AT-150**

**Product Description: GPS Navigation Device with CDMA2000 and Bluetooth**

**FCC ID: ZOQAT-150**

**47 CFR Part 2, 22, 24**

**TEST REPORT #: EMC\_VERIT-006-15001\_FCC22\_24\_AT-150**

**DATE: 2015-Mar-25**



FCC:  
Accredited

IC recognized #  
3462B-1

**CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: +1 (408) 586 6200 • Fax: +1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

## **Table of Contents**

|       |   |    |
|-------|---|----|
| 1     | Assessment.....   | 3  |
| 2     | Administrative Data .....   | 4  |
| 2.1   | Identification of the Testing Laboratory Issuing the Test Report .....        | 4  |
| 2.2   | Identification of the Client .....  | 4  |
| 2.3   | Identification of the Manufacturer .....                                      | 4  |
| 3     | Equipment under Test (EUT).....   | 5  |
| 3.1   | Specification of the Equipment under Test .....                               | 5  |
| 3.2   | Identification of the Equipment under Test (EUT) .....                        | 6  |
| 3.3   | Identification of Accessory equipment.....                                    | 6  |
| 3.4   | Environmental conditions during Test: .....                                   | 6  |
| 3.5   | Dates of Testing: .....   | 6  |
| 4     | Subject of Investigation.....   | 7  |
| 5     | Summary of Measurement Results .....  | 8  |
| 6     | Measurements.....   | 10 |
| 6.1   | RF Power Output.....  | 10 |
|       | <i>References</i> .....   | 10 |
| 6.1.1 | <i>Limits:</i> .....  | 10 |
| 6.1.2 | <i>Conducted Output Power Measurement Procedure:</i> .....                    | 11 |
| 6.1.3 | <i>Measurement Results (Conducted Power and ERP/EIRP Verification):</i> ..... | 12 |
| 6.1.4 | <i>Verification Result</i> .....  | 14 |
| 6.2   | Spurious Emissions Radiated .....   | 14 |
| 6.2.1 | <i>References</i> .....   | 14 |
| 6.2.2 | <i>Measurement requirements:</i> .....  | 14 |
| 6.2.3 | <i>Limits:</i> .....  | 14 |
| 6.2.4 | <i>Radiated out of band measurement procedure:</i> .....                      | 16 |
| 6.2.5 | <i>Sample Calculations for Radiated Measurements</i> .....                    | 17 |
| 6.2.6 | <i>Measurement Survey:</i> .....  | 17 |
| 6.2.7 | <i>Test Conditions:</i> .....   | 17 |
| 6.2.8 | <i>Test Results:</i> .....  | 18 |
| 7     | Test Equipment and Ancillaries used for tests .....                           | 35 |
| 8     | Test Setup Diagrams .....   | 36 |
| 9     | Revision History.....   | 37 |

## **1 Assessment**

**The following device was tested against the applicable criteria specified in FCC rules parts 2, 22 and 24 of Title 47 of the Code of Federal Regulations.**

**No deviations were ascertained during the course of the tests performed.**

| Company                 | Description  | Model # |
|-------------------------|--|---------|
| Verizon Telematics, Inc | <b>GPS Navigation Device with CDMA2000 and Bluetooth</b> | AT-150  |

### **Responsible for Testing Laboratory:**

| 2015-03-25 | Compliance | Franz Engert<br>(Manager Compliance) |           |
|------------|------------|--------------------------------------|-----------|
| Date       | Section    | Name                                 | Signature |

### **Responsible for the Report:**

| 2015-03-25 | Compliance | Danh Le<br>(EMC Engineer) |           |
|------------|------------|---------------------------|-----------|
| Date       | Section    | Name                      | Signature |

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

## **2 Administrative Data**

### **2.1 Identification of the Testing Laboratory Issuing the Test Report**

|                            |  |
|----------------------------|--|
| <b>Company Name:</b>       | CETECOM Inc.   |
| <b>Department:</b>         | Compliance   |
| <b>Address:</b>            | 411 Dixon Landing Road<br>Milpitas, CA 95035<br>U.S.A. |
| <b>Telephone:</b>          | +1 (408) 586 6200                                      |
| <b>Fax:</b>                | +1 (408) 586 6299                                      |
| <b>Compliance Manager:</b> | Franz Engert   |
| <b>Test Engineer:</b>      | Danh Le  |

### **2.2 Identification of the Client**

|                          |                               |
|--------------------------|-------------------------------|
| <b>Applicant's Name:</b> | Verizon Telematics, Inc.      |
| <b>Street Address:</b>   | 2002 Summit Blvd., Suite 1800 |
| <b>City/Zip Code</b>     | Atlanta, GA 30319             |
| <b>Country</b>           | USA                           |
| <b>Contact Person:</b>   | Bryant Elliot                 |
| <b>Phone No.</b>         | 404-573-5848                  |
| <b>Fax:</b>              | ---                           |
| <b>e-mail:</b>           | Bryant.elliot@verizon.com     |

### **2.3 Identification of the Manufacturer**

|                               |               |
|-------------------------------|---------------|
| <b>Manufacturer's Name:</b>   |               |
| <b>Manufacturers Address:</b> | Same as above |
| <b>City/Zip Code</b>          |               |
| <b>Country</b>                |               |

### **3 Equipment under Test (EUT)**

#### **3.1 Specification of the Equipment under Test**

|   |   |
|---|---|
| <b>Marketing Name:</b>                              | in-Drive Communicator AT-150  |
| <b>Model Number:</b>                                | AT-150  |
| <b>FCC-ID :</b>                                     | Z0QAT-150   |
| <b>IC ID:</b>                                       | None  |
| <b>Product Description:</b>                         | <b>GPS Navigation Device with CDMA2000 and Bluetooth</b>  |
| <b>Technology / Type(s) of Modulation:</b>          | CDMA2000 / BPSK/QPSK/HPSK   |
| <b>Integrated Module Info:</b>                      | <b>Sierra Wireless SL3010T</b> -850/1900 MHz CDMA2000 radio module (FCC ID: N7NSL5011)                    |
| <b>Operating Frequency Ranges (MHz) / Channels:</b> | CDMA 850: 824.70-848.31<br>CDMA 1900: 1851.25- 1908.75  |
| <b>Antenna info:</b>                                | Antenna Type: PIFA, dual band<br>Max. Peak Gain: -1.7 dBi @ 850 MHz<br>Max. Peak Gain: 0.4 dBi @ 1900 MHz |
| <b>Rated Operating Voltage Range:</b>               | Vmin: 6 Vdc / Vnom: 12.5 Vdc / Vmax: 24 Vdc   |
| <b>Rated Operating Temperature Range:</b>           | Tmin: -40°C/ Tnom: 25°C / Tmax: 85°C  |
| <b>Test Sample Status:</b>                          | Prototype   |

### 3.2 Identification of the Equipment under Test (EUT)

| EUT # | Serial Number | Sample    | HW / SW Version |
|-------|---------------|-----------|-----------------|
| 1     | AT-150#13     | Radiated  | A0 / V1.0.1     |
| 2     | AT-150#15     | Conducted | A0 / V1.0.1     |

### 3.3 Identification of Accessory equipment

| AE # | Type                           | Manufacturer   | Model  | Serial Number/PN |
|------|--------------------------------|----------------|--------|------------------|
| 1    | J1962M to J1962F adaptor cable | OBD2cables.com | OBD II | 144302           |

### 3.4 Environmental conditions during Test:

The following environmental conditions were maintained during the course of testing:

Ambient Temperature: 20°C - 25°C

Relative humidity: 25% - 27%

### 3.5 Dates of Testing:

2015/03/03

### 3.6 Inheriting Test Results from Incorporated Module Certification:

The EUT integrates a pre-certified module Sierra Wireless SL3010T with FCC ID: N7NSL5011

Taking into account guidance from FCC KDB 996369 (modular approval) and where relevant test procedures did not change conducted test results when comparing to the test results from the Sierra Wireless “SL5011 test report for FCC and IC certifications, February 18, 2011 and Sierra Wireless “SL3010T test report for FCC”, August 22, 2013.

This test report contains full radiated testing as per FCC 22H/24E and conducted power verification required per KDB 996369.

### 3.7 Other Testing Notes:

1. The different cellular operation modes of the EUT as required for testing are controlled through the link with the Digital Radio Communication Tester (R&S CMU200).
2. The EUT is tested on the low, mid and high channel of each of the supported cellular operation modes.

### 3.8 Measurement Method:

Testing is performed according to the guidelines provided in FCC publication (KDB) 971168 D01 Power Meas License Digital Systems v02r02: Measurement Guidance for Certification of Licensed Digital Transmitters7, June 2013 and according to relevant parts of TIA-603C 2004 as detailed below.

#### **4 Subject of Investigation**

The objective of the measurements applied by CETECOM Inc. was to establish compliance of the EUT as described under Ch. 3 of this Test Report, with the applicable criteria specified in

- 47 CFR Part 2: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission Frequency allocations and radio treaty matters; general rules and regulations.
- 47 CFR Part 22: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter B- common carrier services; Part 22- Public mobile services
- 47 CFR Part 24: Title 47 of the Code of Federal Regulations: Chapter I-Federal Communications Commission subchapter B- common carrier services; Part 24- Personal communication services

## 5 Summary of Measurement Results

### CDMA 850MHz Band:

| Test Specification     | Test Case                    | Temperature and Voltage Conditions | Mode     | Pass | Fail | NA | NP | Result   |
|------------------------|------------------------------|------------------------------------|----------|------|------|----|----|----------|
| §2.1046<br>§22.913 (a) | RF Output Power & ERP/EIRP   | Nominal                            | CDMA 850 | ■    | □    | □  | □  | Complies |
| §2.1055<br>§22.355     | Frequency Stability          | Nominal                            | CDMA 850 | □    | □    | □  | ■  | Note 1   |
| §2.1049<br>§22.917(b)  | Occupied Bandwidth           | Nominal                            | CDMA 850 | □    | □    | □  | ■  | Note 1   |
| §2.1051<br>§22.917     | Band Edge Compliance         | Nominal                            | CDMA 850 | □    | □    | □  | ■  | Note 1   |
| §2.1051<br>§22.917     | Conducted Spurious Emissions | Nominal                            | CDMA 850 | □    | □    | □  | ■  | Note 1   |
| §2.1053<br>§22.917     | Radiated Spurious Emissions  | Nominal                            | CDMA 850 | ■    | □    | □  | □  | Complies |

**Note:** NA= Not Applicable; NP= Not Performed.

Note 1: Leveraged from module certification.

**CDMA 1900MHz Band:**

| Test Specification     | Test Case                    | Temperature and Voltage Conditions | Mode      | Pass | Fail | NA | NP | Result   |
|------------------------|------------------------------|------------------------------------|-----------|------|------|----|----|----------|
| §2.1046<br>§24.232 (a) | RF Output Power & ERP/EIRP   | Nominal                            | CDMA 1900 | ■    | □    | □  | □  | Complies |
| §2.1055<br>§24.235     | Frequency Stability          | Nominal                            | CDMA 1900 | □    | □    | □  | ■  | Note 1   |
| §2.1049<br>§24.238(b)  | Occupied Bandwidth           | Nominal                            | CDMA 1900 | □    | □    | □  | ■  | Note 1   |
| §2.1051<br>§24.238     | Band Edge Compliance         | Nominal                            | CDMA 1900 | □    | □    | □  | ■  | Note 1   |
| §2.1051<br>§24.238     | Conducted Spurious Emissions | Nominal                            | CDMA 1900 | □    | □    | □  | ■  | Note 1   |
| §2.1053<br>§24.238     | Radiated Spurious Emissions  | Nominal                            | CDMA 1900 | ■    | □    | □  | □  | Complies |

**Note:** NA= Not Applicable; NP= Not Performed

Note 1: Leveraged from module certification.

## **6 Measurements**

### **6.1 RF Power Output**

#### **References**

FCC: CFR Part 2.1046, CFR Part 22.913, CFR Part 24.232

#### **FCC 2.1046:**

Power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on circuit elements as specified. The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

##### **6.1.1 Limits:**

###### **ERP/EIRP (850 MHz Band)**

###### **FCC 22.913 (a) Effective radiated power limits.**

The effective radiated power (ERP) of mobile transmitters must not exceed 7 Watts.

###### **EIRP (1900 MHz Band)**


###### **FCC 24.232 (b)(c) Power limits.**

(b) Mobile/portable stations are limited to 2 Watts effective isotropic radiated power (EIRP).

(c) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement over the full bandwidth of the channel.

### **6.1.2 Conducted Output Power Measurement Procedure:**

Ref: TIA-603C 2004 2.2.1

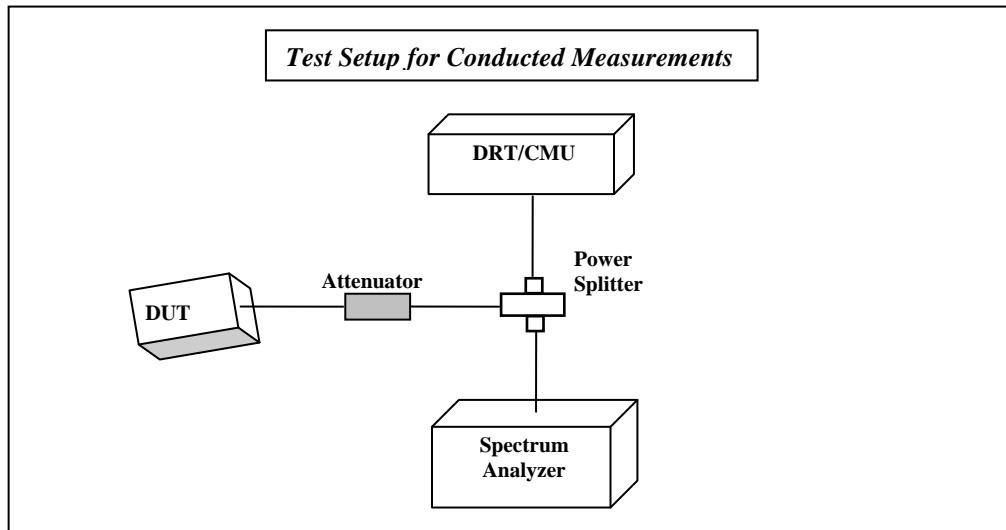

1. Connect the equipment as shown in the above diagram. A Digital Radio Communication Tester (DRT: R&S CMU200 here) is used to enable the EUT to transmit and to measure the output power.
2. Adjust the settings of the CMU200 to set the EUT to its maximum power at the required channel.
3. Record the Peak and Average Output power level measured by the CMU200.
4. Correct the measured level for all losses in the RF path.
5. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band and for all types of modulation schemes.

#### **6.1.2.1 Measurement Uncertainty**

+/- 0.5 dB

#### **6.1.2.2 Test Conditions:**

T<sub>nom</sub>: 22°C; V<sub>nom</sub>: 12.5 V

### **6.1.3 Measurement Results (Conducted Power and ERP/EIRP Verification):**

#### **850MHz Band:**

| <b>CDMA 850 (Cellular)</b> |                 |                                  |                           |                           |                                    |                    |
|----------------------------|-----------------|----------------------------------|---------------------------|---------------------------|------------------------------------|--------------------|
| Channel No.                | Frequency (MHz) | <b>From module's test report</b> |                           | Measured Peak Power (dBm) | Measured Average Power (RMS) (dBm) | Result (Fail/Pass) |
|                            |                 | Peak Output Power (dBm)          | Average Power (RMS) (dBm) |                           |                                    |                    |
| 1013                       | <b>824.70</b>   | 27.88                            | 23.38                     | 27.96                     | 24.29                              | <b>Pass</b>        |
| 384                        | <b>836.52</b>   | 28.18                            | 23.64                     | 28.55                     | 24.26                              | <b>Pass</b>        |
| 777                        | <b>848.31</b>   | 28.04                            | 23.54                     | 28.36                     | 23.90                              | <b>Pass</b>        |

| <b>CDMA 850 (Cellular)</b>                     |                 |                           |                                    |                             |                              |                    |
|--|-----------------|---------------------------|------------------------------------|-----------------------------|------------------------------|--------------------|
| <b>Antenna Gain = -1.7 dBi</b>                 |                 |                           |                                    |                             |                              |                    |
| <b>FCC Limit: Peak ERP &lt; 38.45 dBm (7W)</b> |                 |                           |                                    |                             |                              |                    |
| Channel No.                                    | Frequency (MHz) | Measured Peak Power (dBm) | Measured Average Power (RMS) (dBm) | Calculated Peak ERP (dBm)   | Calculated Average ERP (dBm) | Result (Fail/Pass) |
| 1013   | <b>824.70</b>   | 27.96                     | 24.29                              | 26.26 - 2.15 = <b>24.11</b> | 22.59 - 2.15 = <b>20.44</b>  | <b>Pass</b>        |
| 384  | <b>836.52</b>   | 28.55                     | 24.26                              | 26.85 - 2.15 = <b>24.70</b> | 22.56 - 2.15 = <b>20.41</b>  | <b>Pass</b>        |
| 777  | <b>848.31</b>   | 28.36                     | 23.90                              | 26.66 - 2.15 = <b>24.51</b> | 22.20 - 2.15 = <b>20.05</b>  | <b>Pass</b>        |

**1900MHz Band:**

| CDMA 1900 (PCS) |                 |                           |                           |                           |                                    |                    |
|-----------------|-----------------|---------------------------|---------------------------|---------------------------|------------------------------------|--------------------|
| Channel No.     | Frequency (MHz) | From module's test report |                           | Measured Peak Power (dBm) | Measured Average Power (RMS) (dBm) | Result (Fail/Pass) |
|                 |                 | Peak Output Power (dBm)   | Average Power (RMS) (dBm) |                           |                                    |                    |
| 25              | <b>1851.25</b>  | 28.35                     | 23.85                     | 28.79                     | 23.38                              | <b>Pass</b>        |
| 600             | <b>1880</b>     | 28.44                     | 23.94                     | 27.25                     | 23.05                              | <b>Pass</b>        |
| 1175            | <b>1908.75</b>  | 28.28                     | 23.78                     | 27.46                     | 23.42                              | <b>Pass</b>        |

| CDMA 1900 (PCS)<br>Antenna Gain = 0.4 dBi |                 |                           |                                    |                            |                               |                    |
|---|-----------------|---------------------------|------------------------------------|----------------------------|-------------------------------|--------------------|
| FCC Limit: Peak EIRP < 33 dBm (2W)        |                 |                           |                                    |                            |                               |                    |
| Channel No.                               | Frequency (MHz) | Measured Peak Power (dBm) | Measured Average Power (RMS) (dBm) | Calculated Peak EIRP (dBm) | Calculated Average EIRP (dBm) | Result (Fail/Pass) |
| 1013                                      | <b>824.70</b>   | 28.79                     | 23.38                              | <b>29.19</b>               | <b>23.78</b>                  | <b>Pass</b>        |
| 384                                       | <b>836.52</b>   | 27.25                     | 23.05                              | <b>27.65</b>               | <b>23.45</b>                  | <b>Pass</b>        |
| 777                                       | <b>848.31</b>   | 27.46                     | 23.42                              | <b>27.86</b>               | <b>23.82</b>                  | <b>Pass</b>        |

#### **6.1.4 Verification Result**

All measured results remain within the measurement uncertainty and under the limits.

### **6.2 Spurious Emissions Radiated**

#### **6.2.1 References**

FCC: CFR Part 2.1053, CFR Part 22.917, CFR Part 24.238

#### **6.2.2 Measurement requirements:**

##### **6.2.2.1 FCC 2.1053: Field strength of spurious radiation.**

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission.

#### **6.2.3 Limits:**

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB, where P is power in watt.

For all power levels +30dBm to 0dBm, this becomes a constant specification of -13dBm.

### **6.2.3.1 FCC 22.917 Emission limitations for cellular equipment.**

The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


### **6.2.3.2 FCC 24.238 Emission limitations for Broadband PCS equipment.**

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(b) *Measurement procedure.* Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (*i.e.* 100 kHz of 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

#### **6.2.4 Radiated out of band measurement procedure:**

**Ref: TIA-603C 2004- 2.2.12 Unwanted emissions: Radiated Spurious**

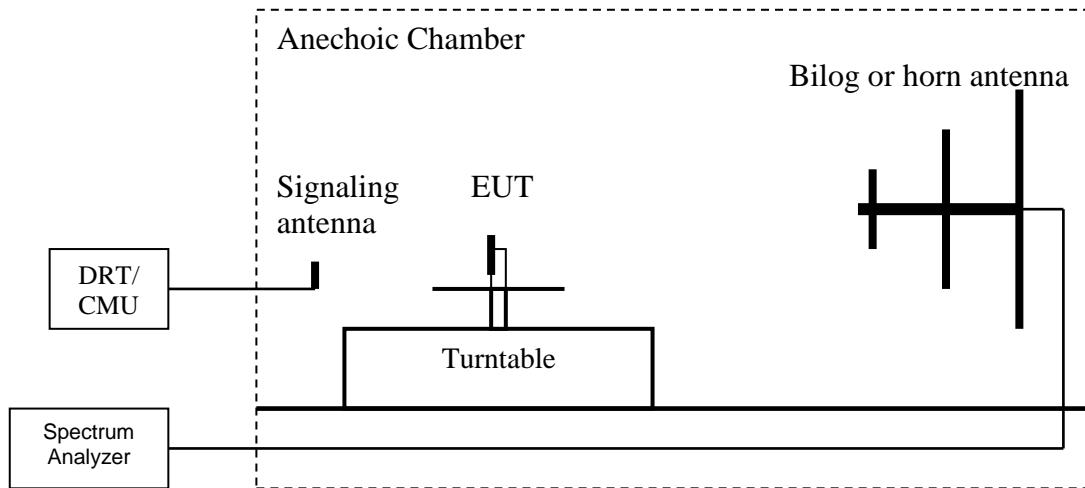

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a horizontal orientation.
2. Adjust the settings of the Digital Radio Communication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Set the spectrum analyzer to measure peak hold with the required settings.
4. Place the measurement antenna in a horizontal orientation. Rotate the EUT 360°. Raise the measurement antenna up to 4 meters in 0.5 meters increments and rotate the EUT 360° at each height to maximize all emissions. Measure and record all spurious emissions (**LVL**) up to the tenth harmonic of the carrier frequency.
5. Replace the EUT with a horizontally polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
7. Determine the level of spurious emissions using the following equation:  
**Spurious** (dBm) = **LVL** (dBm) + **LOSS** (dB):
8. Repeat steps 4, 5 and 6 with all antennas vertically polarized.
9. Determine the level of spurious emissions using the following equation:  
**Spurious** (dBm) = **LVL** (dBm) + **LOSS** (dB):
10. Measurements are to be performed with the EUT set to the low, middle and high channel of each frequency band.  
(**Note:** Steps 5 and 6 above are performed prior to testing and **LOSS** is recorded by test software. Steps 3, 4 and 7 above are performed with test software.)

## **6.2.5 Sample Calculations for Radiated Measurements**

### **6.2.5.1 Power Measurements using Substitution Procedure:**

The measurement on the Spectrum Analyzer is used as a basis for the Substitution procedure. The EUT is replaced with a Signal Generator and an antenna. The setting on the Signal Generator is varied until the Spectrum Analyzer displays the original reading. EIRP is calculated as-

$$\text{EIRP (dBm)} = \text{Signal Generator setting (dBm)} - \text{Cable Loss (dB)} + \text{Antenna Gain (dBi)}$$

Example:

| Frequency (MHz) | Measured SA (dB $\mu$ V) | Signal Generator setting (dBm) | Antenna Gain (dBi) | Dipole Gain (dBd) | Cable Loss (dB) | EIRP (dBm) |
|-----------------|--------------------------|--------------------------------|--------------------|-------------------|-----------------|------------|
| 1000            | 95.5                     | 24.5                           | 6.5                | 0                 | 3.5             | 27.5       |

## **6.2.6 Measurement Survey:**

The site is constructed in accordance with ANSI C63.4 requirements and is recognized by the FCC to be in compliance for a 3m site. The spectrum is scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated by the EUT.

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the 850 MHz and 1900 MHz bands of operation.

It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the CDMA 850 MHz and 1900 MHz band into any of the other blocks respectively. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

Radiated emission measurements were made in CDMA 1x modes.

Additional spot checks in mid channel of operation for all modes were performed with the slimmer battery option of the device.

For radiated measurements, all data in this report shows the worst case emissions data between H/V antenna polarizations and for all 3 orthogonal orientations of the EUT.

Unless mentioned otherwise, the emission signals above the limit line in the plots are from the carrier.

## **6.2.7 Test Conditions:**

T<sub>nom</sub>: 22°C; V<sub>nom</sub>: 12.5 V

### **6.2.8 Test Results:**

#### **6.2.8.1 Transmitter Spurious Emission Test Results in CDMA 850 mode:**

| <b>Harmonic</b> | <b>Tx ch-1013<br/>Freq.<br/>(MHz)</b> | <b>Level<br/>(dBm)</b> | <b>Tx ch-384<br/>Freq.<br/>(MHz)</b> | <b>Level<br/>(dBm)</b> | <b>Tx ch-777<br/>Freq.<br/>(MHz)</b> | <b>Level<br/>(dBm)</b> |
|-----------------|---------------------------------------|------------------------|--------------------------------------|------------------------|--------------------------------------|------------------------|
| <b>1</b>        | <b>824.7</b>                          | Fundamental            | <b>836.52</b>                        | Fundamental            | <b>848.31</b>                        | Fundamental            |
| <b>2</b>        | <b>1649.4</b>                         | -49.543                | <b>1673.04</b>                       | -50.043                | <b>1696.62</b>                       | -51.038                |
| <b>3</b>        | <b>2474.1</b>                         | -51.618                | <b>2509.56</b>                       | NF                     | <b>2544.93</b>                       | NF                     |
| <b>4</b>        | <b>3298.8</b>                         | -49.130                | <b>3346.08</b>                       | -48.674                | <b>3393.24</b>                       | NF                     |
| <b>5</b>        | <b>4123.5</b>                         | NF                     | <b>4182.6</b>                        | NF                     | <b>4241.55</b>                       | NF                     |
| <b>6</b>        | <b>4948.2</b>                         | NF                     | <b>5019.12</b>                       | NF                     | <b>5089.86</b>                       | NF                     |
| <b>7</b>        | <b>5772.9</b>                         | NF                     | <b>5855.64</b>                       | NF                     | <b>5938.17</b>                       | NF                     |
| <b>8</b>        | <b>6597.6</b>                         | NF                     | <b>6692.16</b>                       | -40.666                | <b>6786.48</b>                       | NF                     |
| <b>9</b>        | <b>7422.3</b>                         | NF                     | <b>7528.68</b>                       | NF                     | <b>7634.79</b>                       | NF                     |
| <b>10</b>       | <b>8247</b>                           | NF                     | <b>8365.2</b>                        | NF                     | <b>8483.1</b>                        | NF                     |

NF = Noise Floor  
Measurement Uncertainty:  $\pm 3$ dB


### 6.2.8.2 Transmitter Spurious Emission Test Results in CDMA-1900 mode:

| Harmonic | Tx ch-25<br>Freq.(MHz) | Level<br>(dBm) | Tx ch-600<br>Freq. (MHz) | Level<br>(dBm) | Tx ch-1175<br>Freq. (MHz) | Level<br>(dBm) |
|----------|------------------------|----------------|--------------------------|----------------|---------------------------|----------------|
| 1        | <b>1851.25</b>         | Fundamental    | <b>1880.0</b>            | Fundamental    | <b>1908.75</b>            | Fundamental    |
| 2        | <b>3702.50</b>         | -46.885        | <b>3760</b>              | NF             | <b>3817.5</b>             | -45.086        |
| 3        | <b>5553.75</b>         | NF             | <b>5640</b>              | -42.536        | <b>5726.25</b>            | NF             |
| 4        | <b>7405.00</b>         | NF             | <b>7520</b>              | NF             | <b>7635</b>               | NF             |
| 5        | <b>9256.25</b>         | NF             | <b>9400</b>              | -34.707        | <b>9543.75</b>            | NF             |
| 6        | <b>11107.50</b>        | -31.625        | <b>11280</b>             | NF             | <b>11452.50</b>           | NF             |
| 7        | <b>12958.75</b>        | NF             | <b>13160</b>             | NF             | <b>13361.25</b>           | NF             |
| 8        | <b>14810</b>           | -25.583        | <b>15040</b>             | NF             | <b>15270</b>              | NF             |
| 9        | <b>16661.25</b>        | NF             | <b>16920</b>             | NF             | <b>17178.75</b>           | NF             |
| 10       | <b>18512.50</b>        | NF             | <b>18800</b>             | NF             | <b>19087.50</b>           | NF             |


NF = Noise Floor  
Measurement Uncertainty:  $\pm 3$ dB

### 6.2.8.3 Plots:


#### Radiated Spurious Emissions

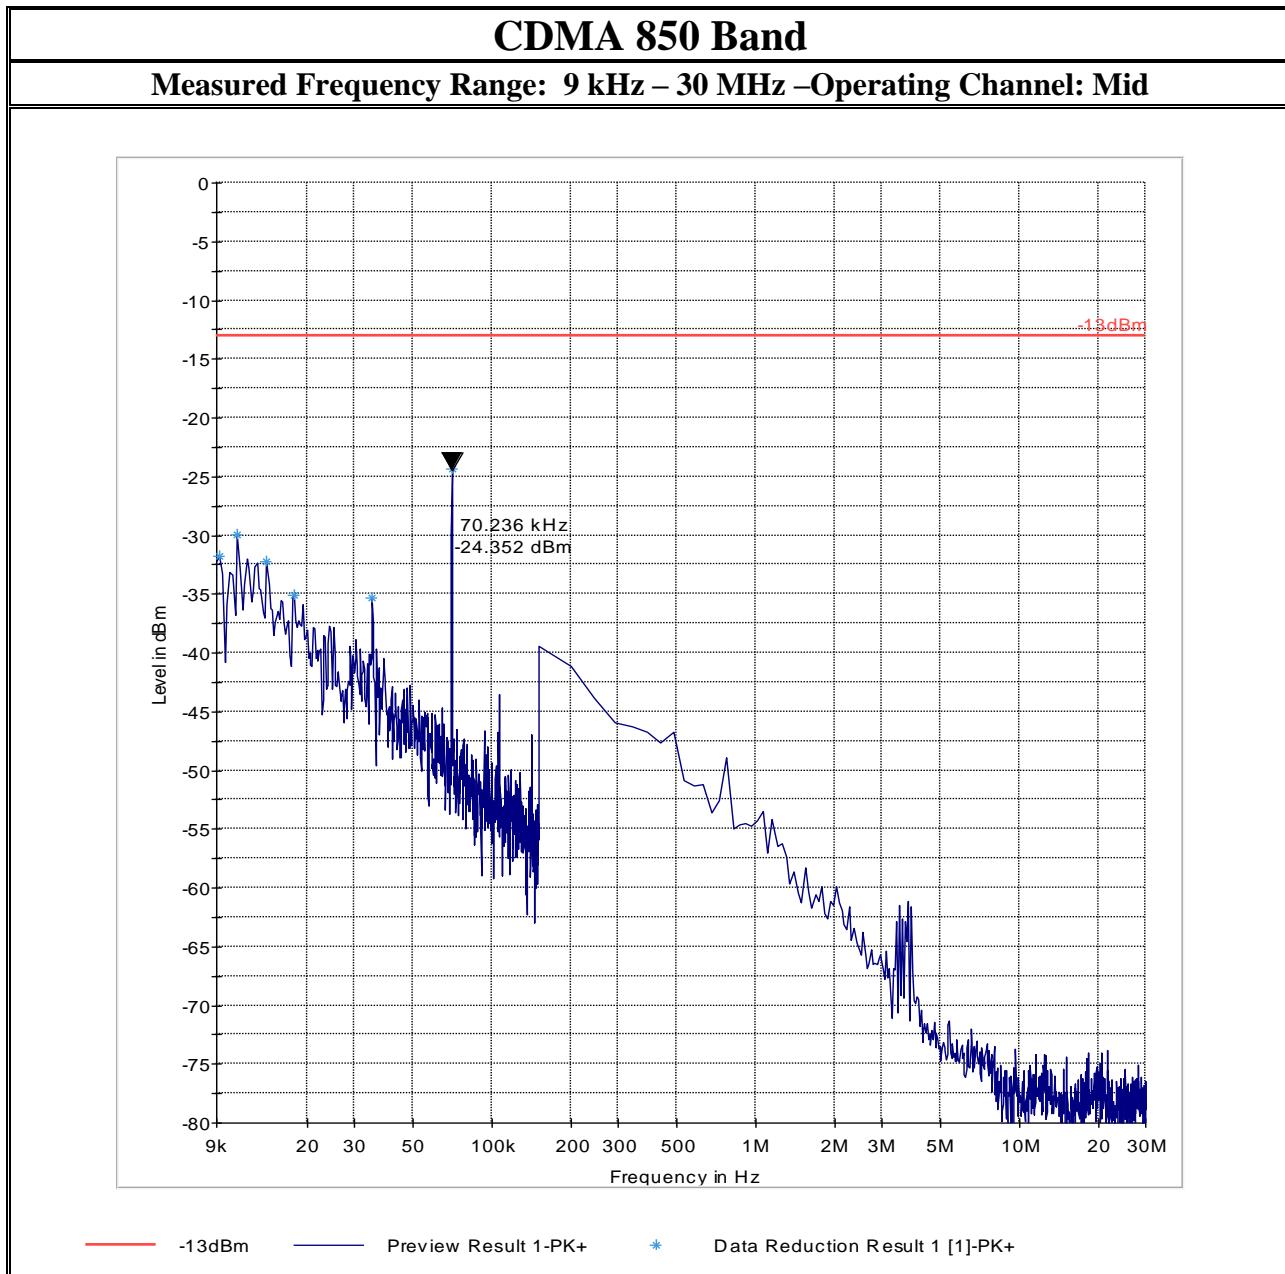


**Radiated Spurious Emissions**

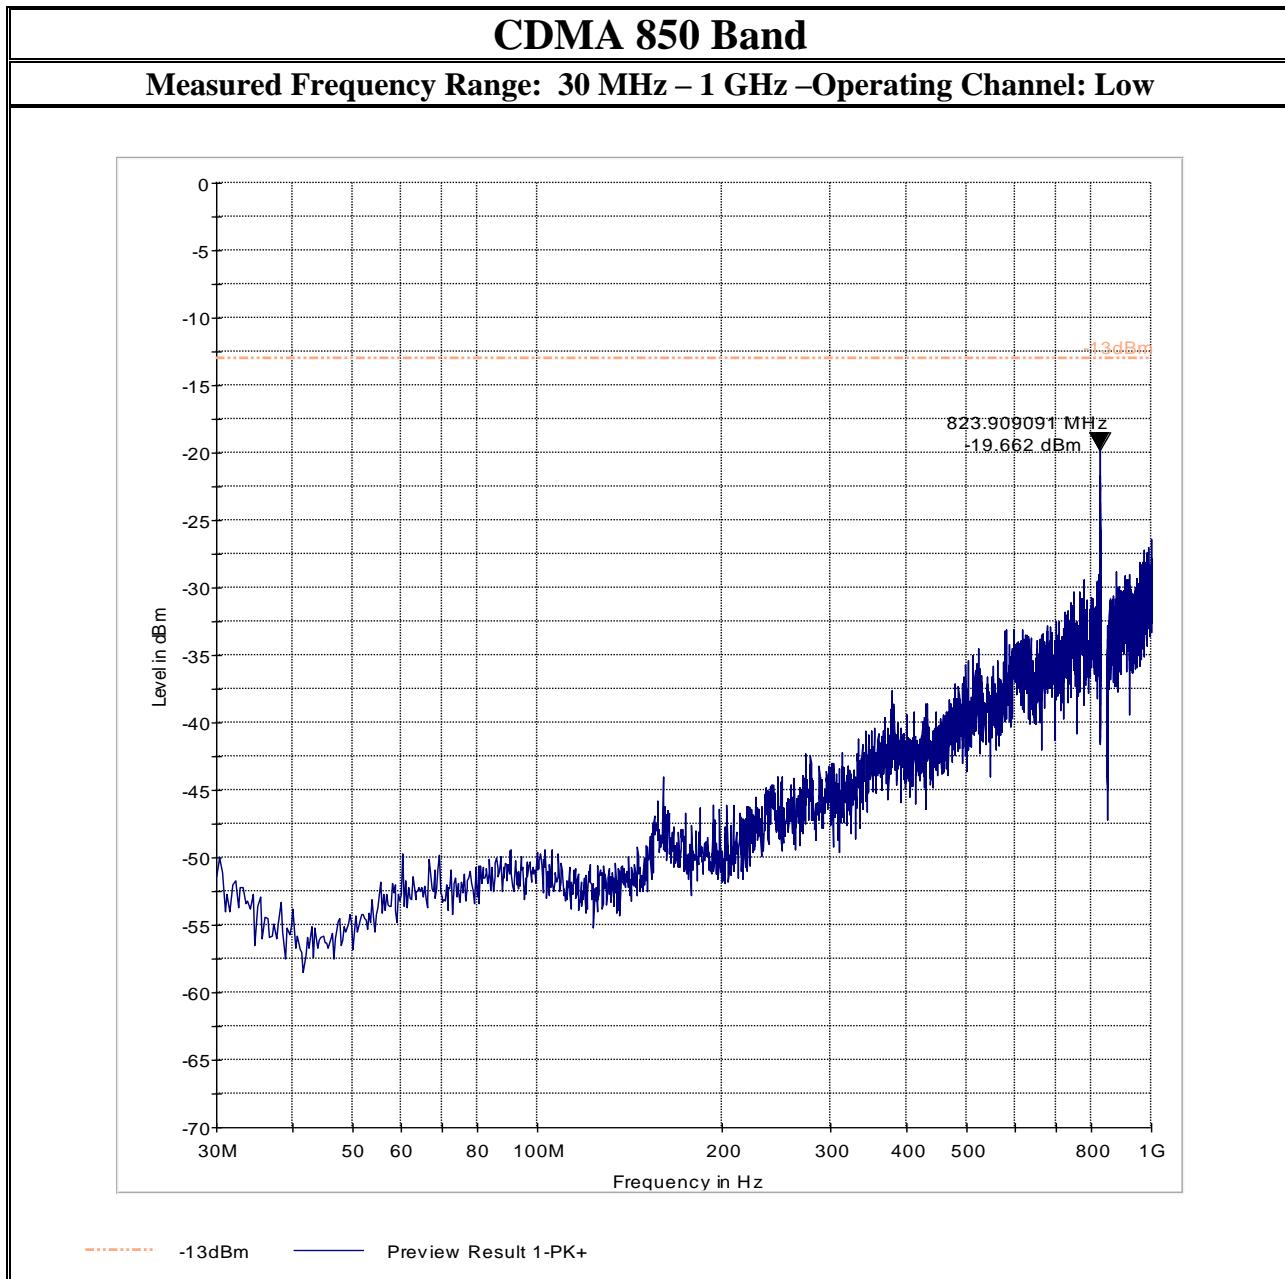


**Radiated Spurious Emissions**

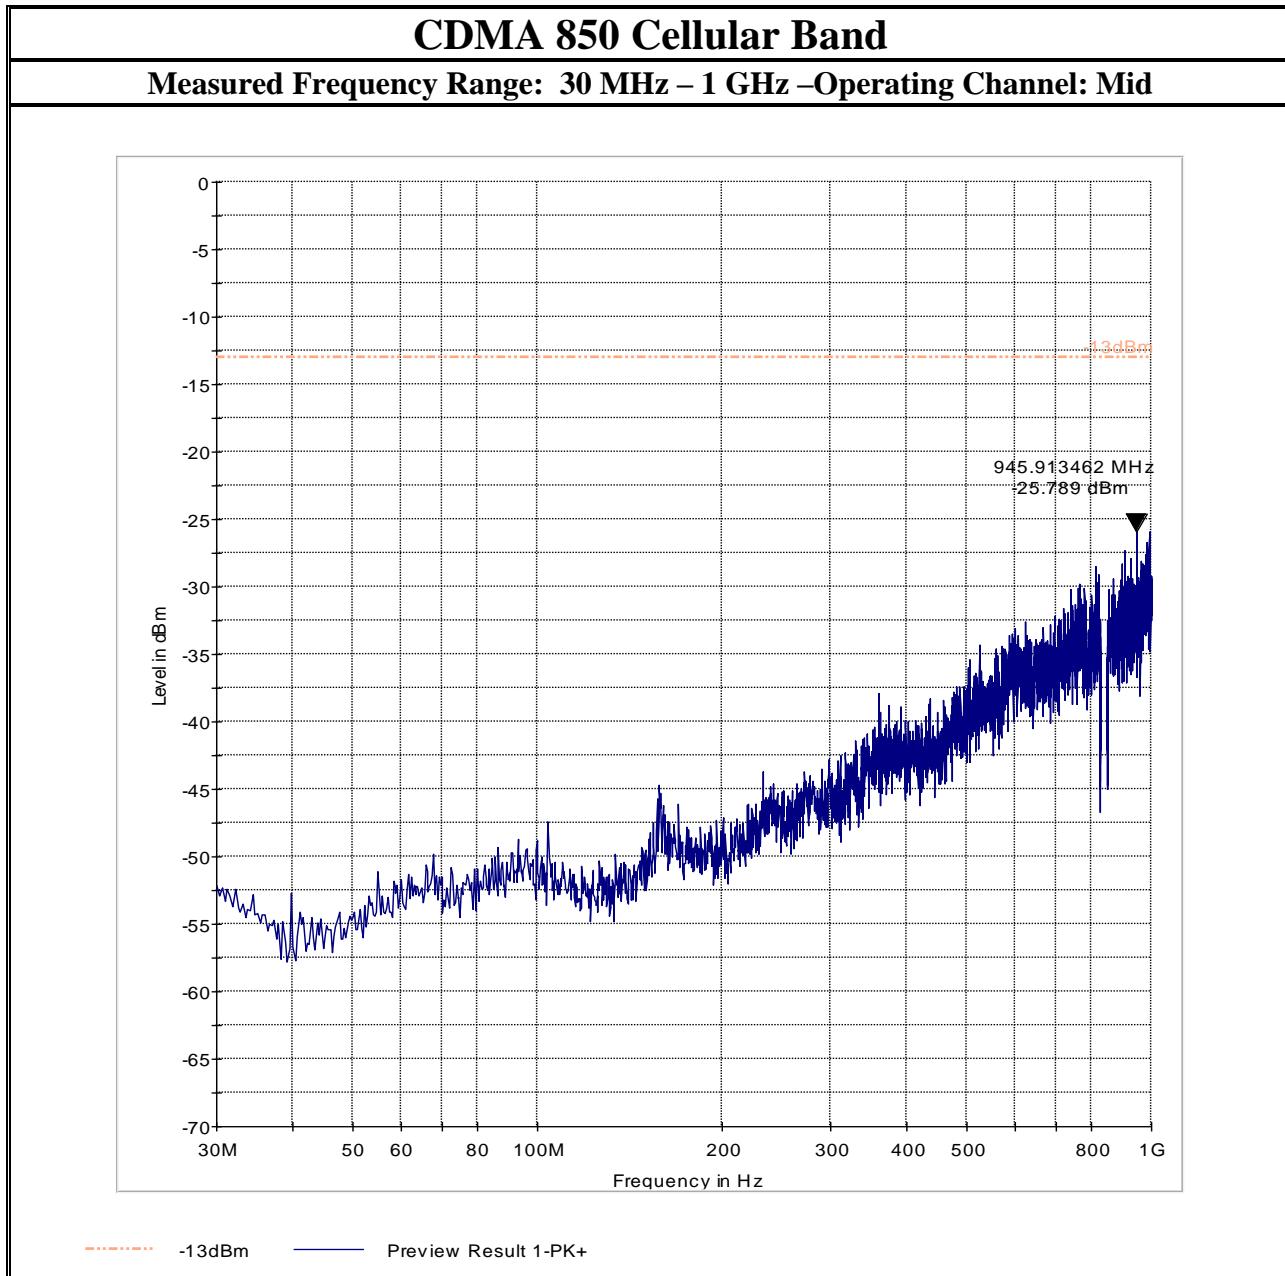


**Radiated Spurious Emissions**

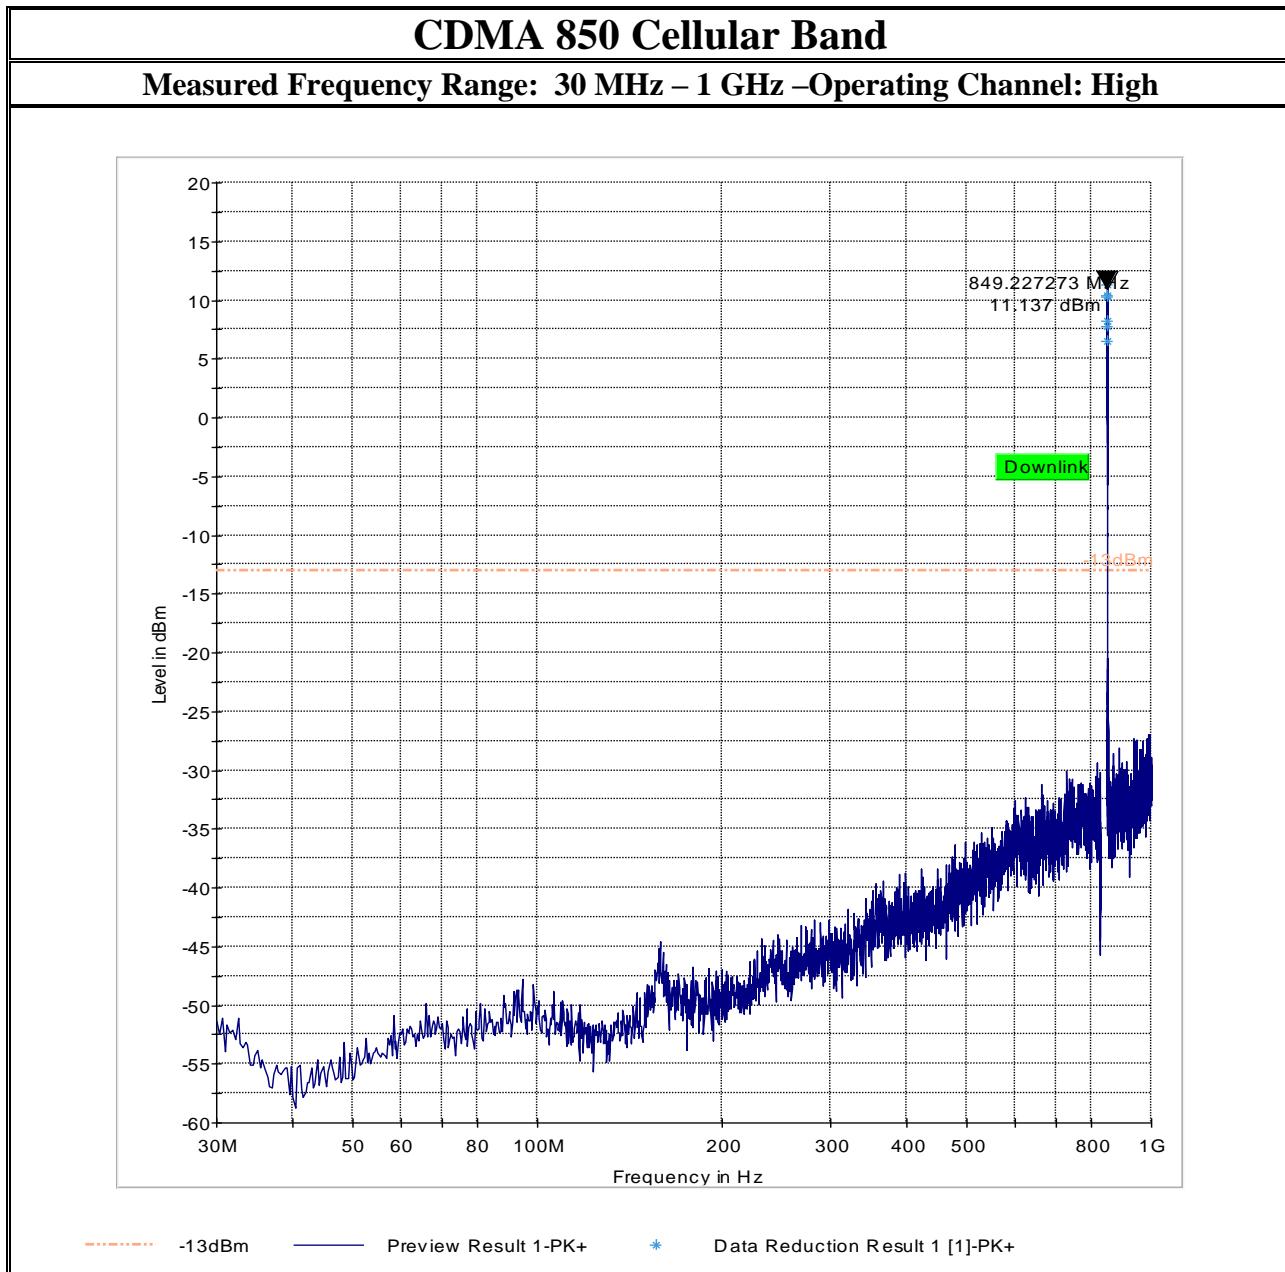


**Radiated Spurious Emissions**

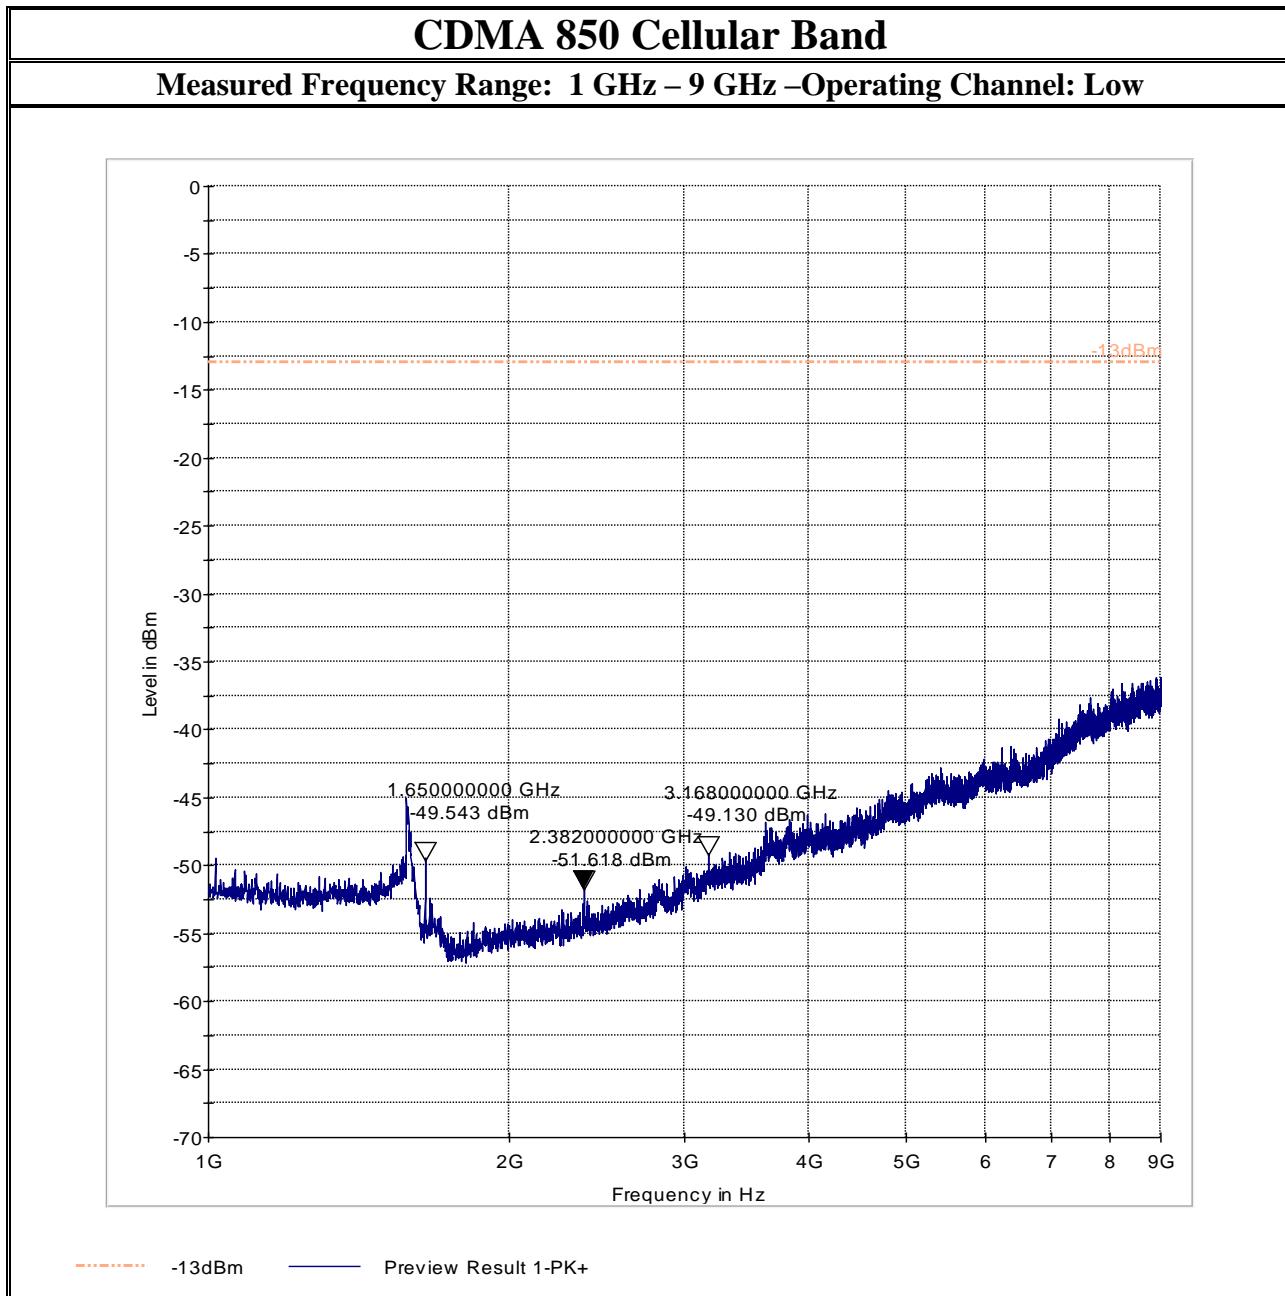


**Radiated Spurious Emissions**

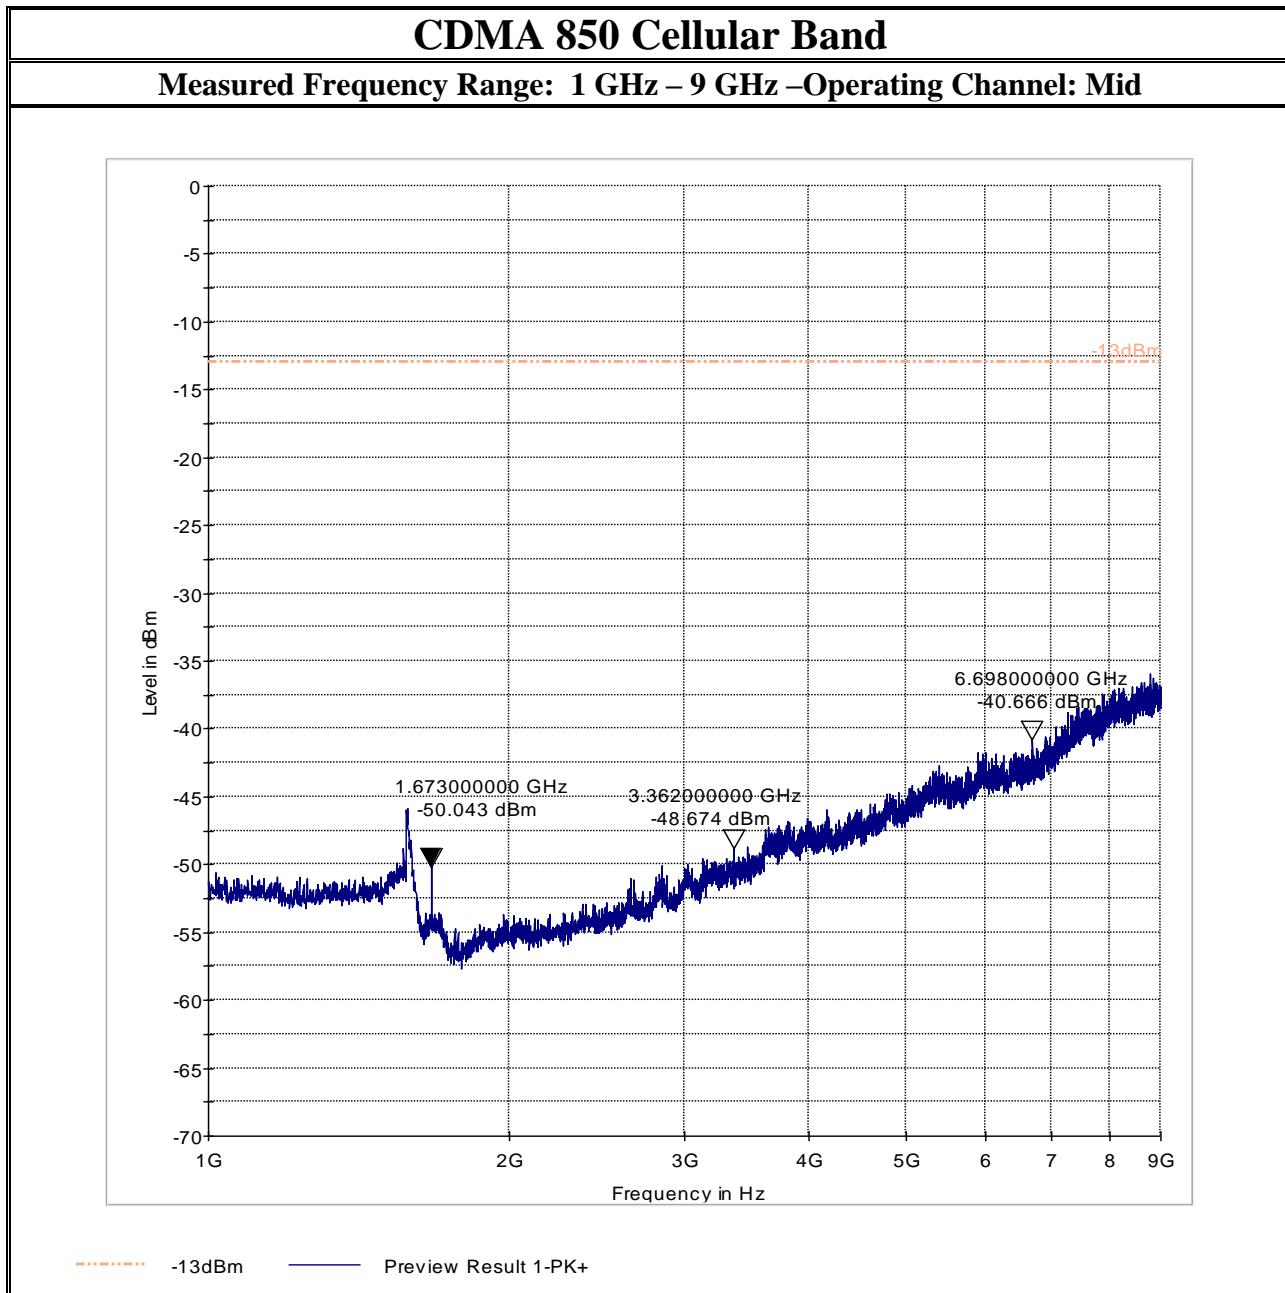


### Radiated Spurious Emissions

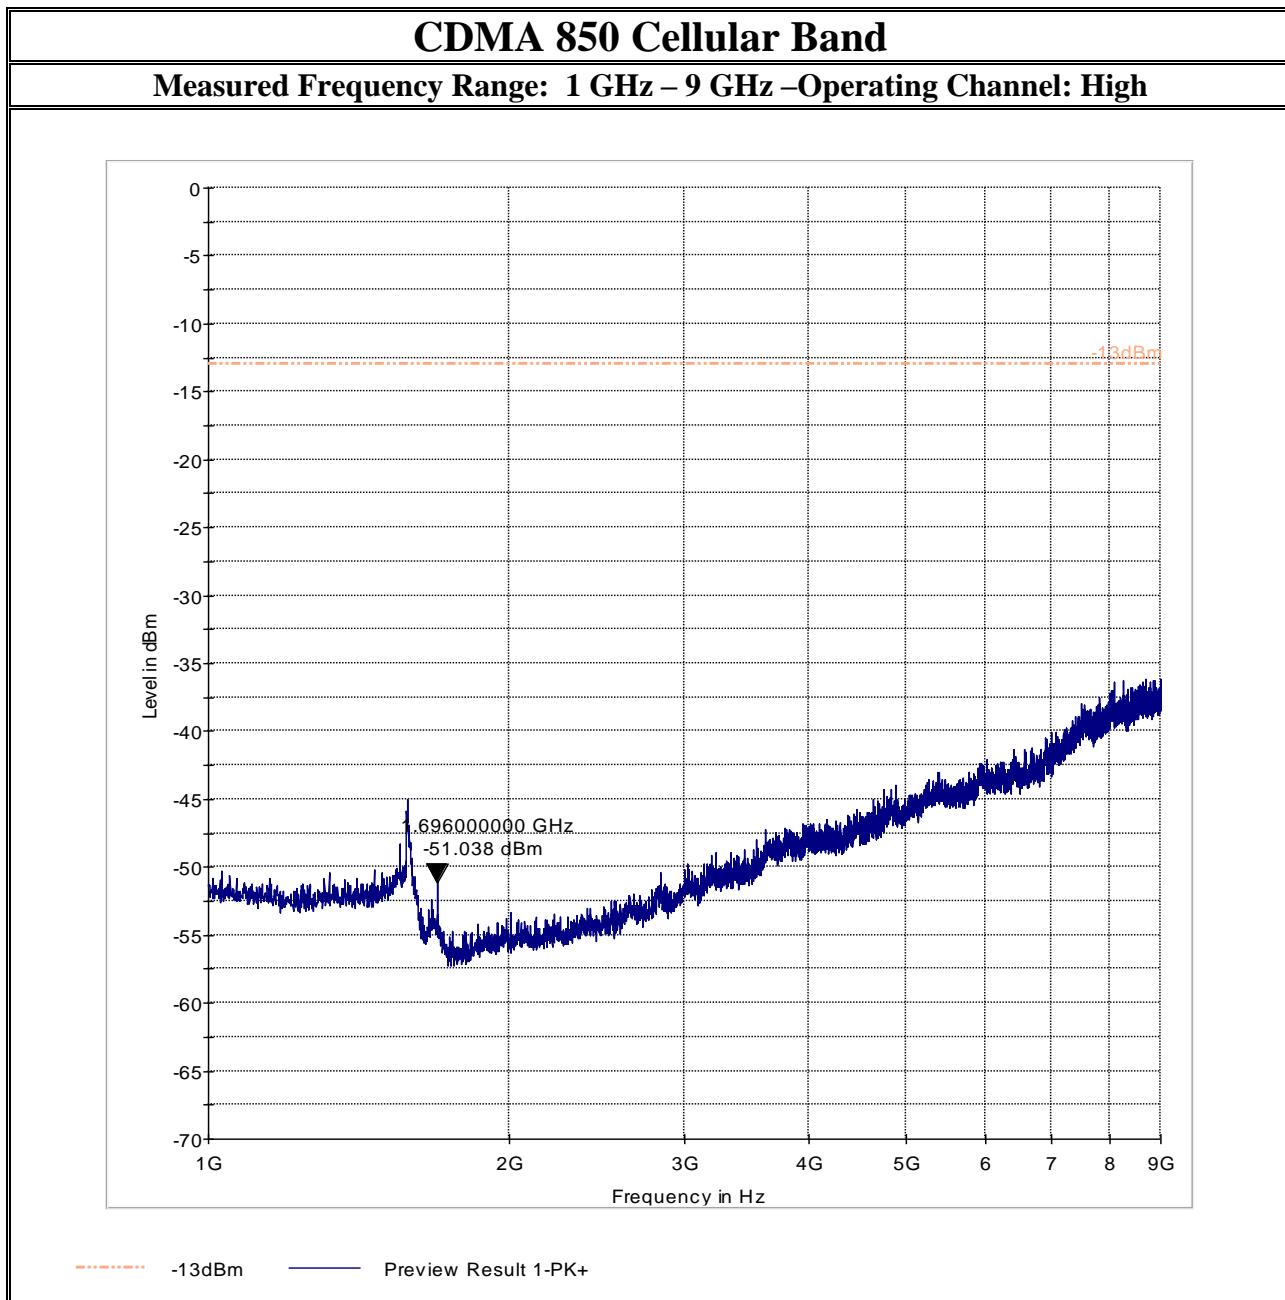


### Radiated Spurious Emissions

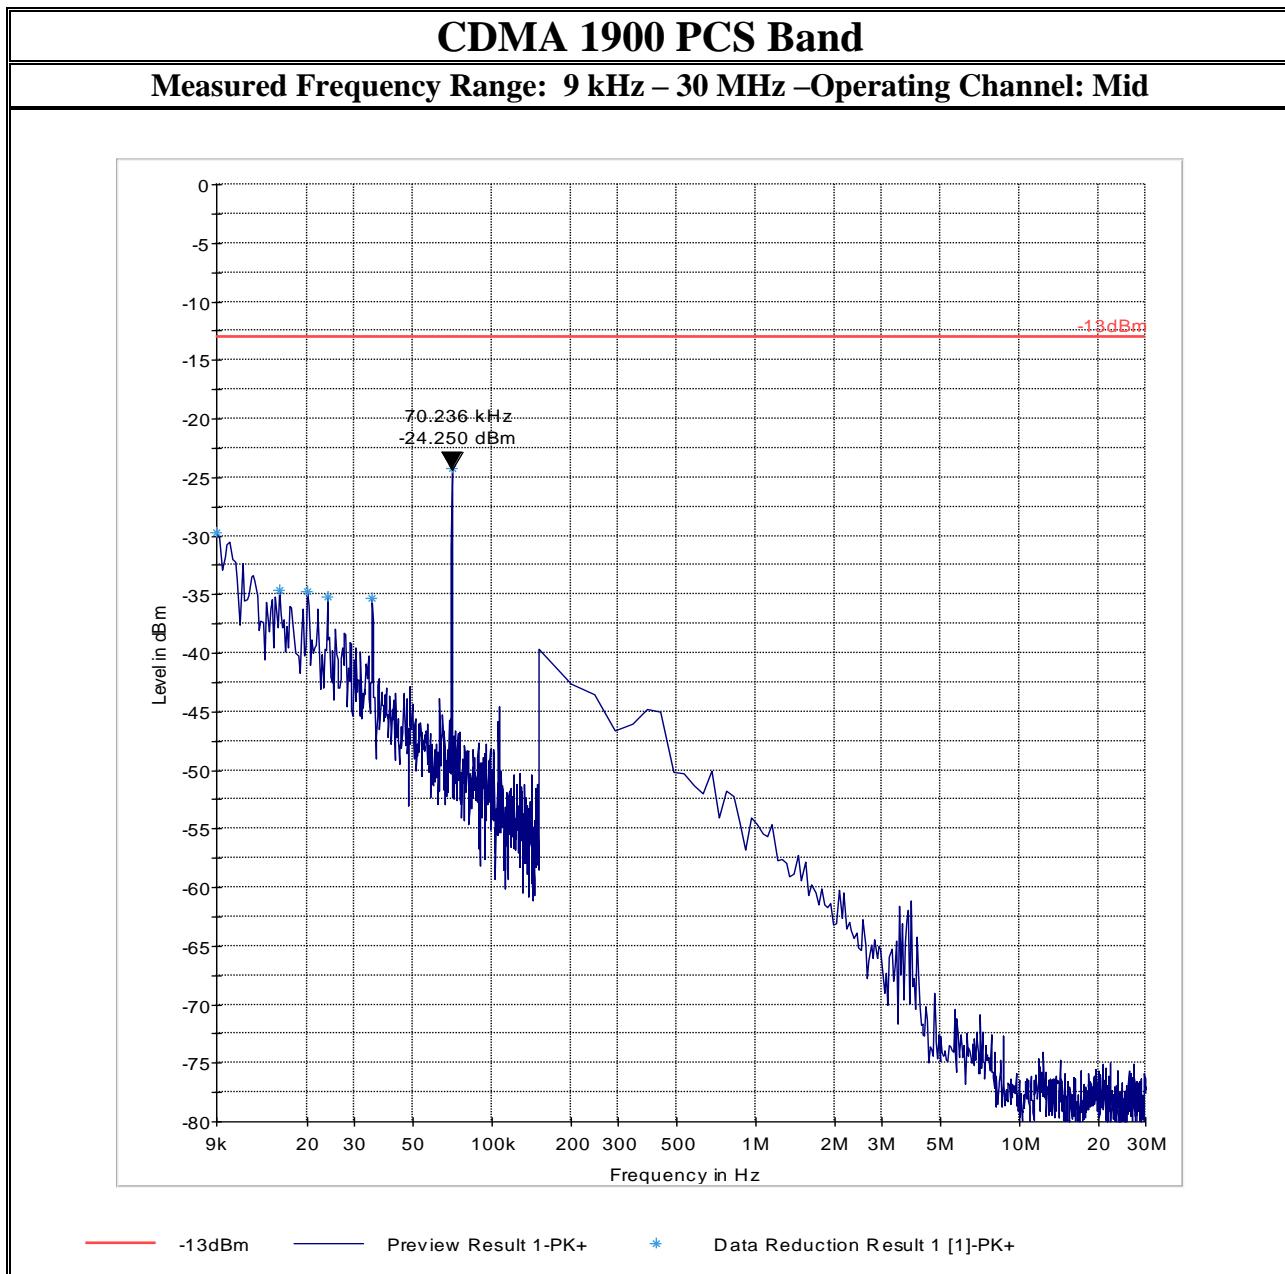


**Radiated Spurious Emissions**

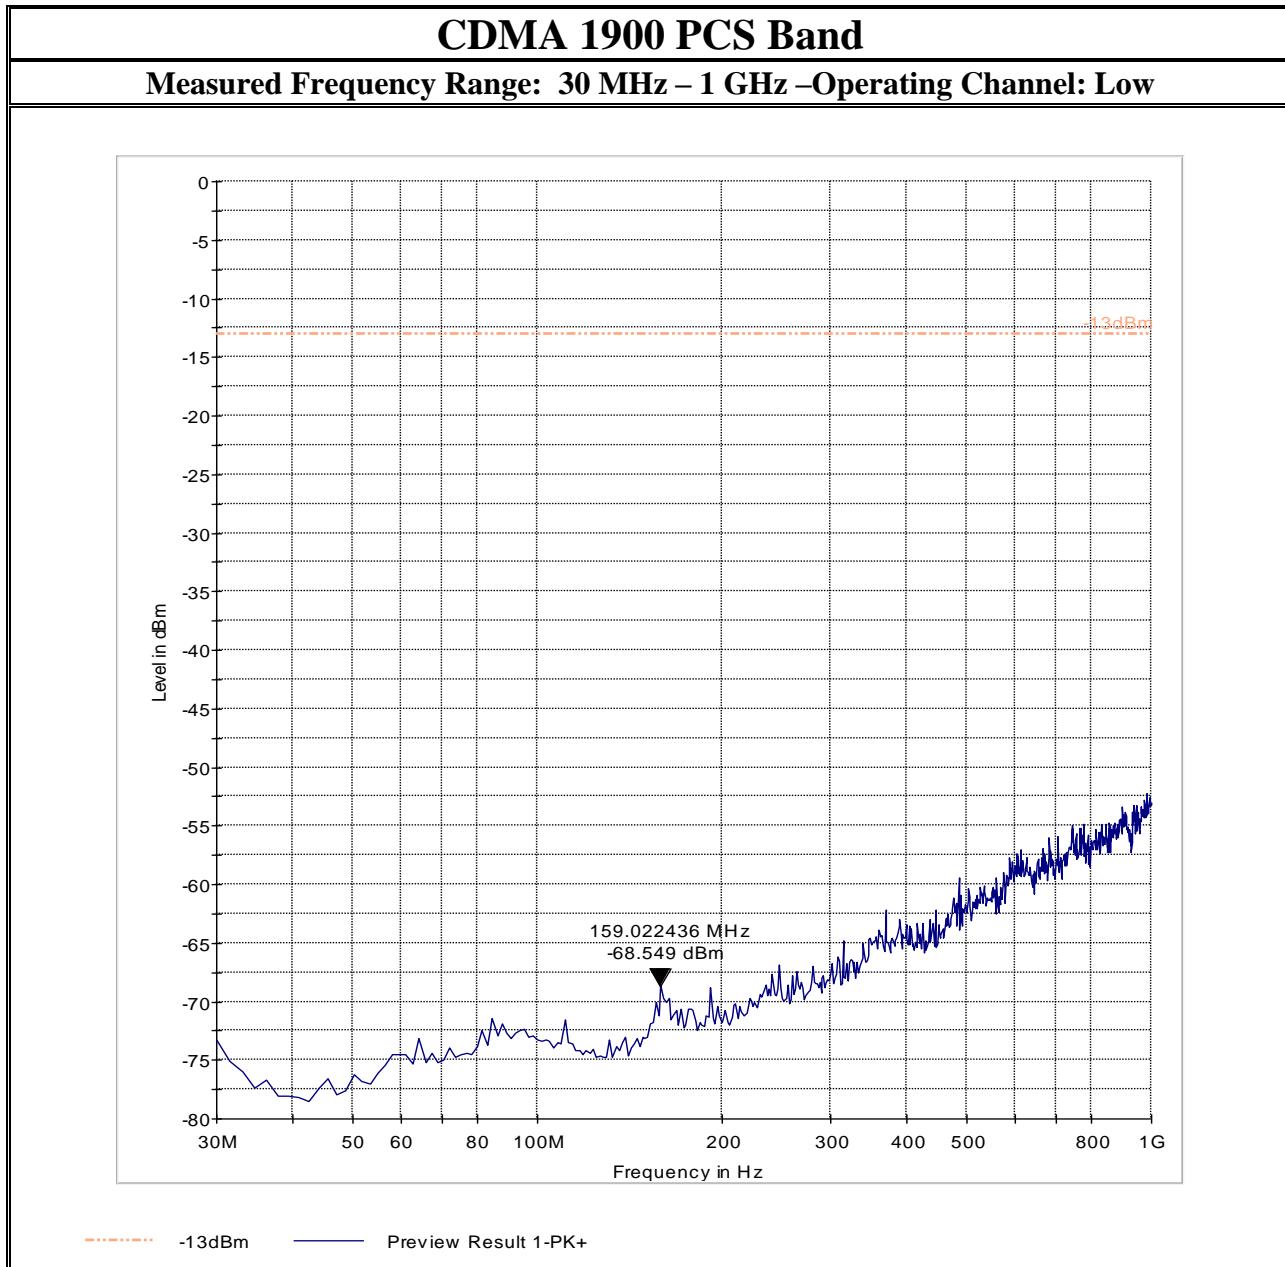


**Radiated Spurious Emissions**

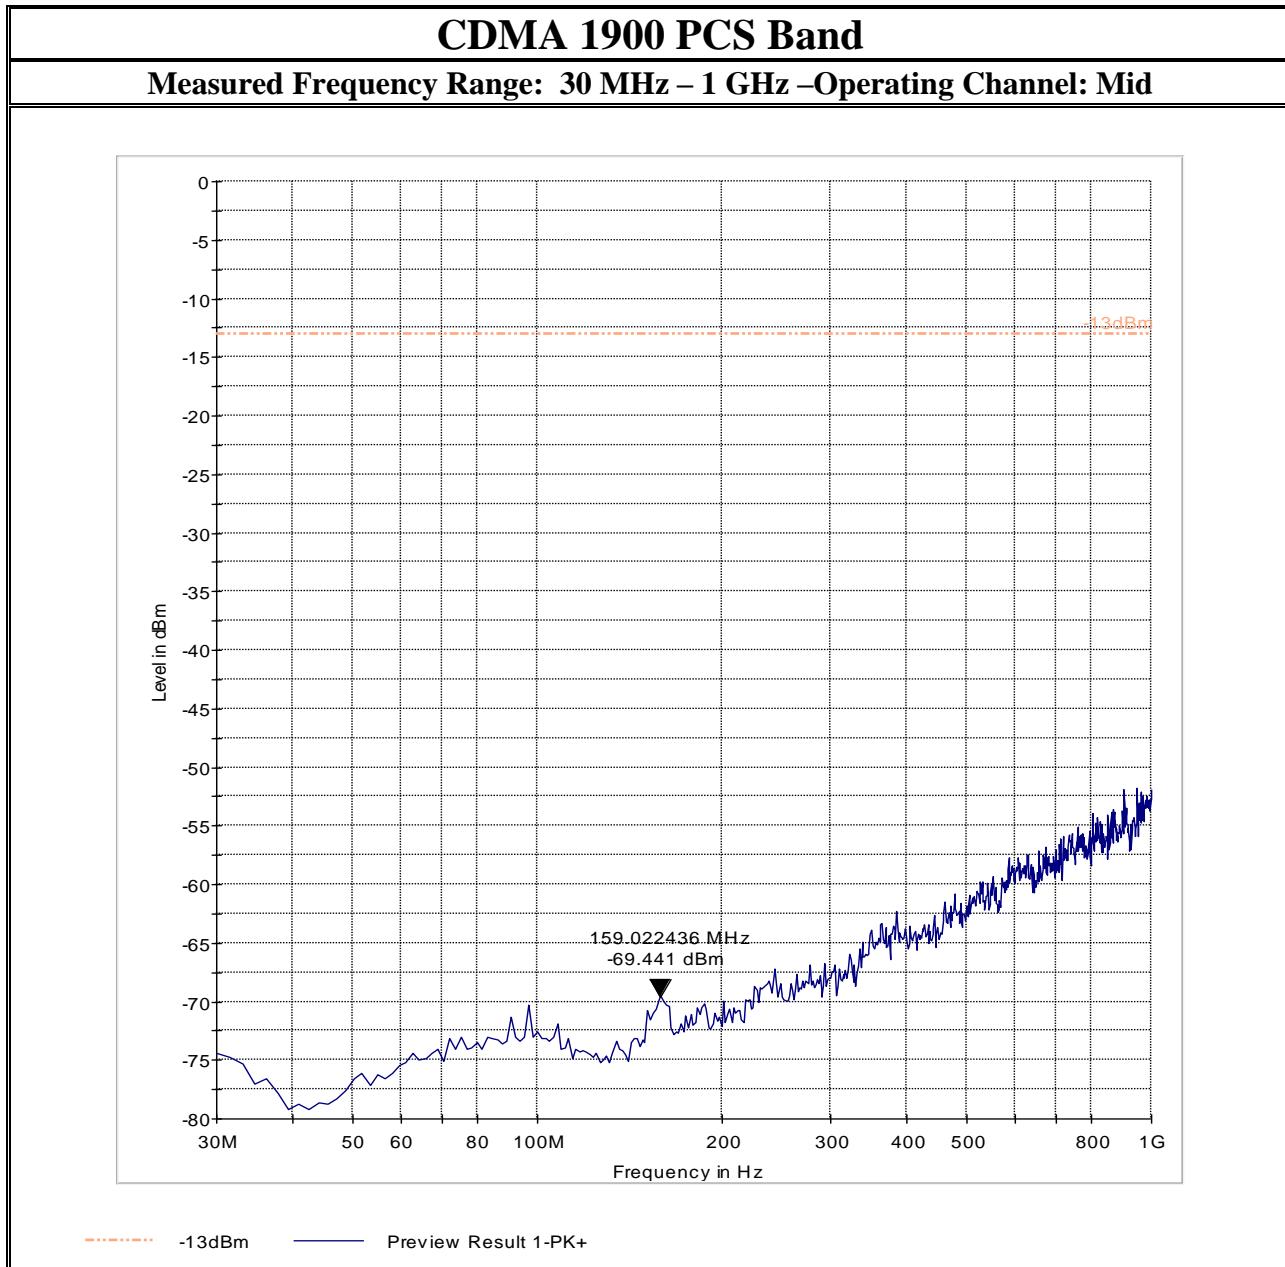


**Radiated Spurious Emissions**

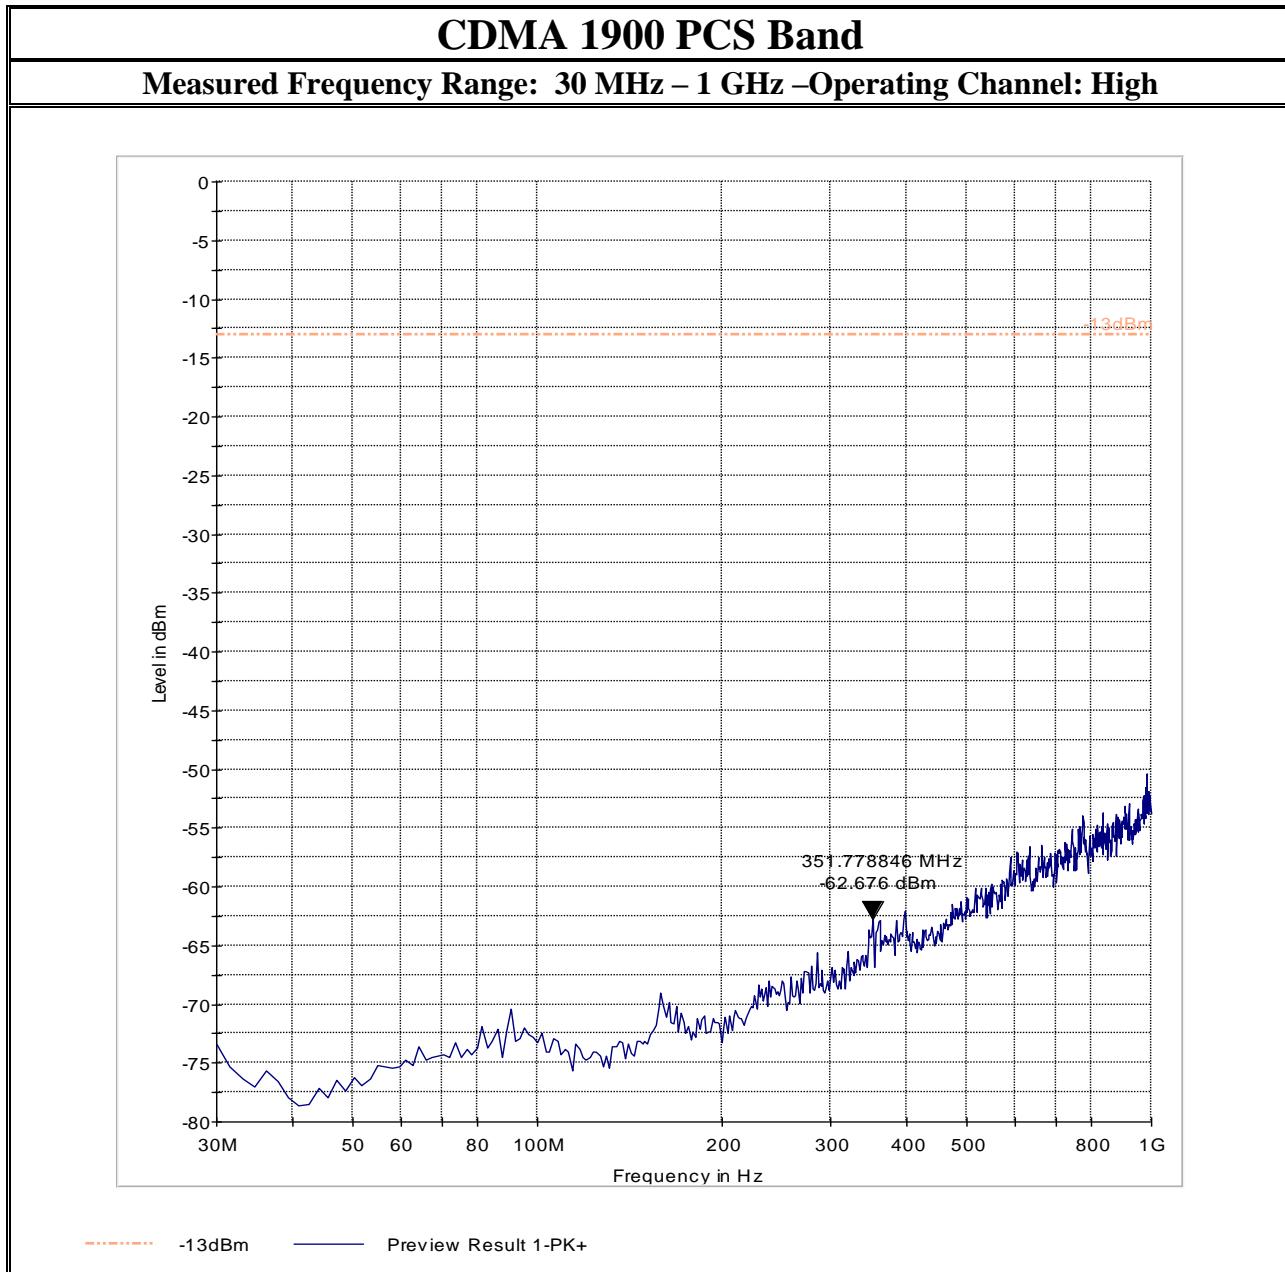


### Radiated Spurious Emissions

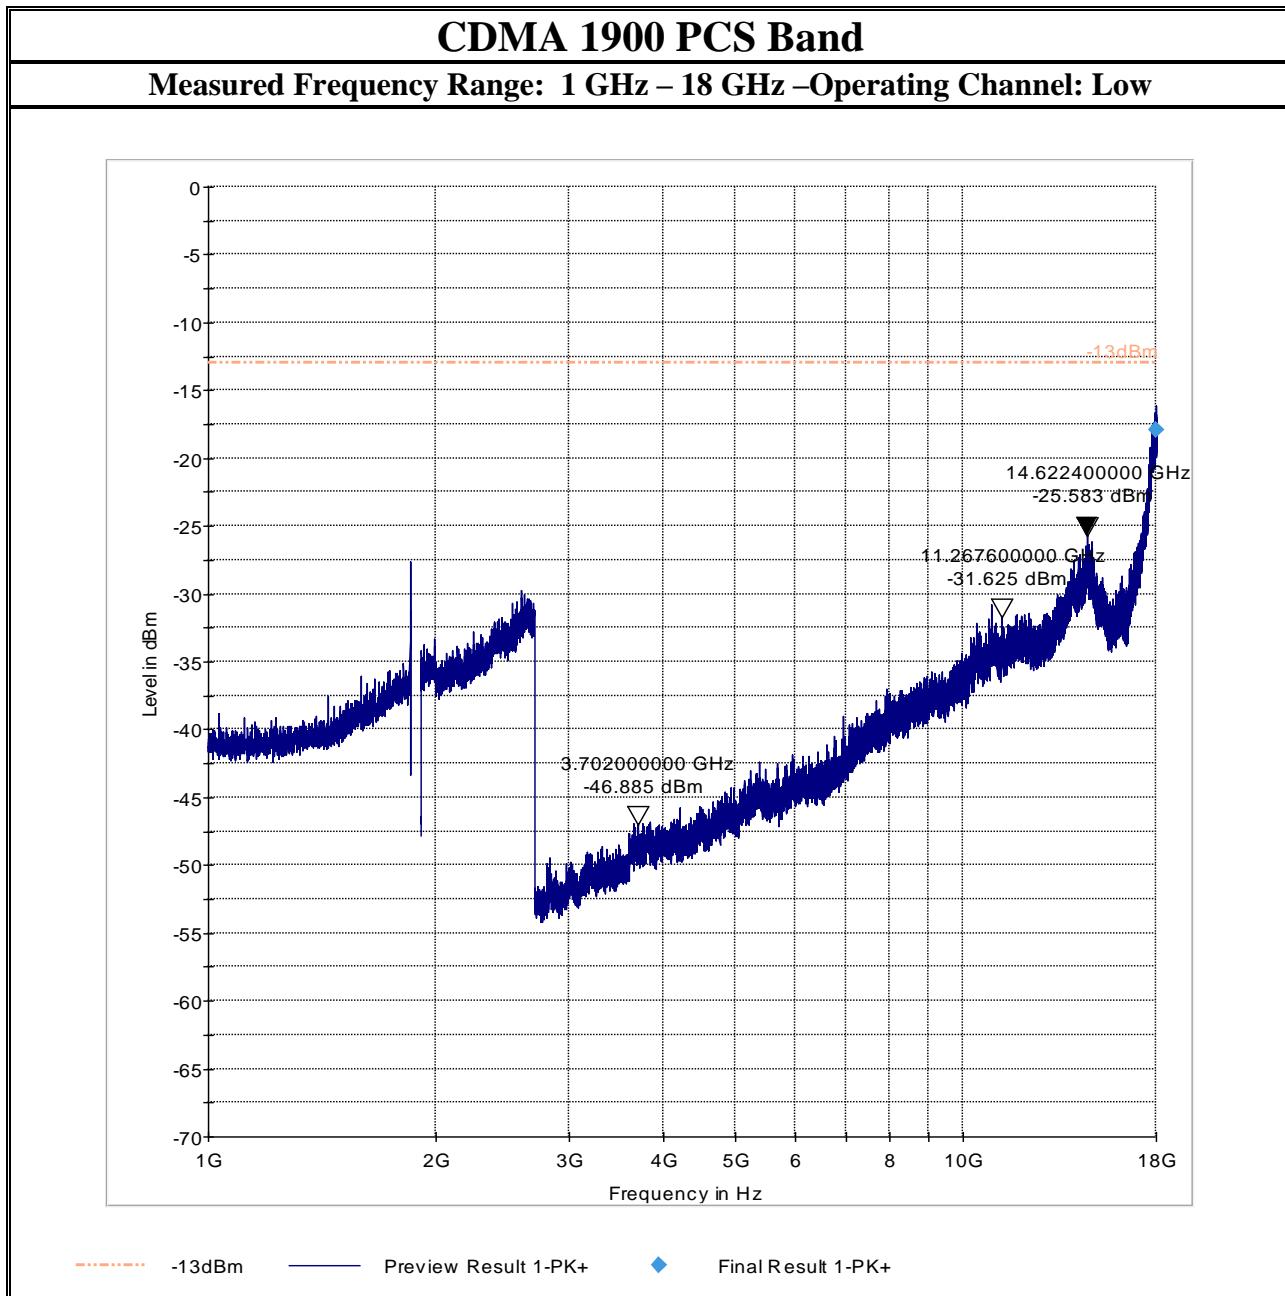


**Radiated Spurious Emissions**

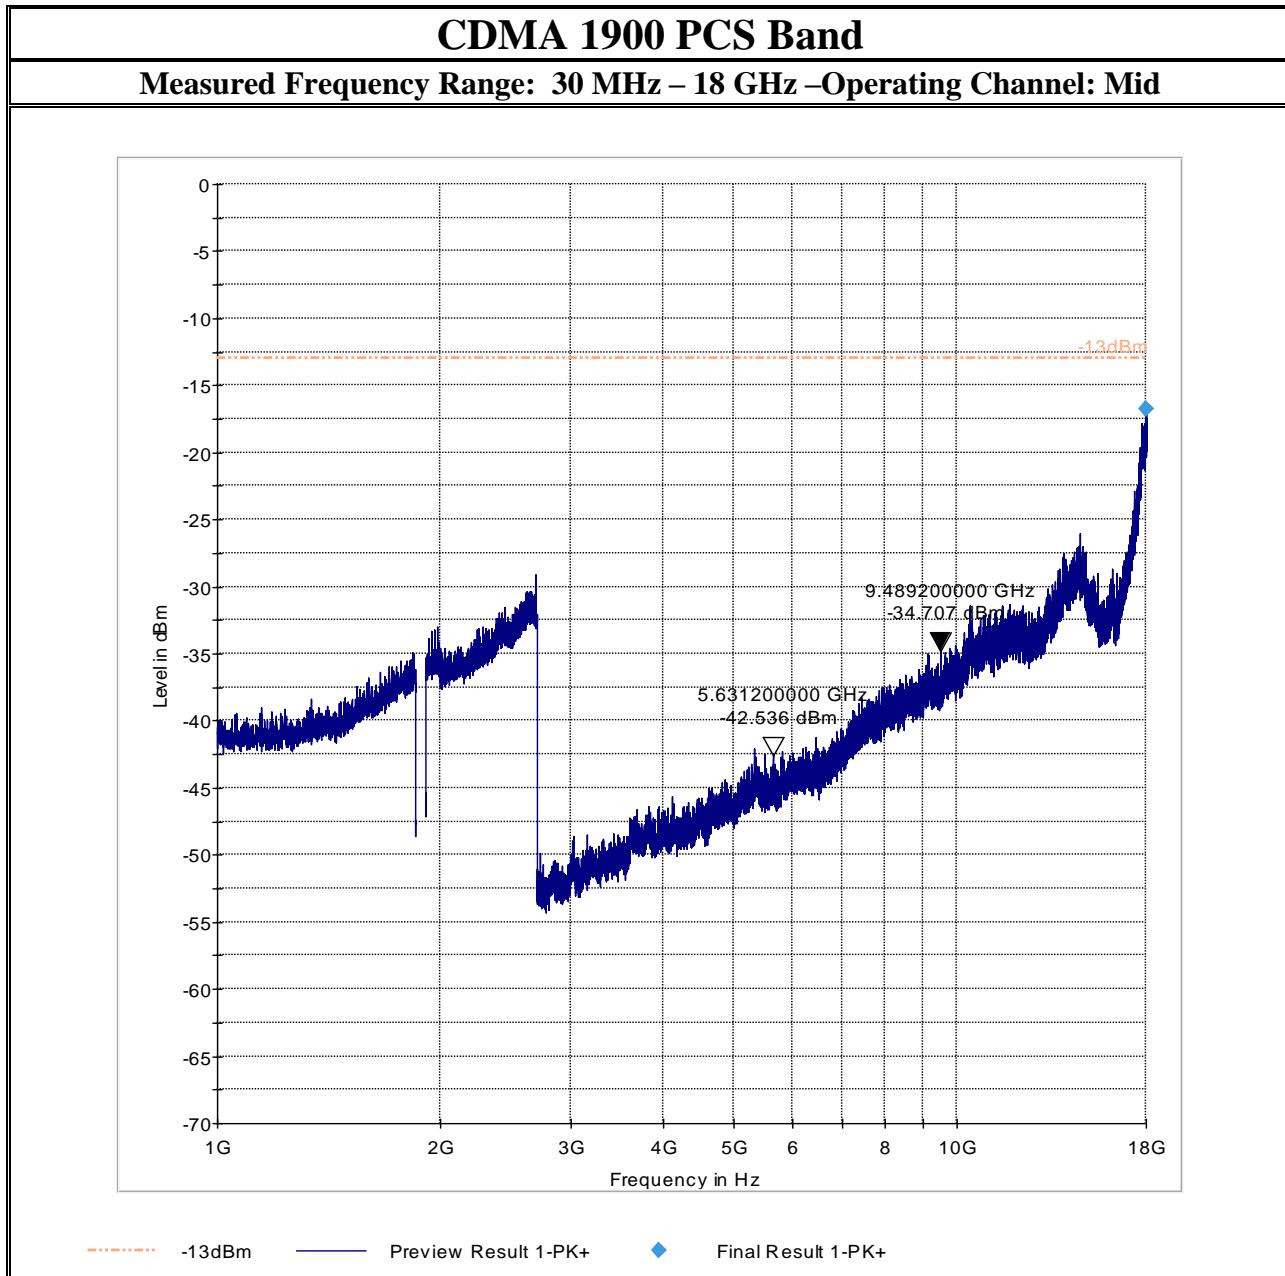

**Radiated Spurious Emissions**

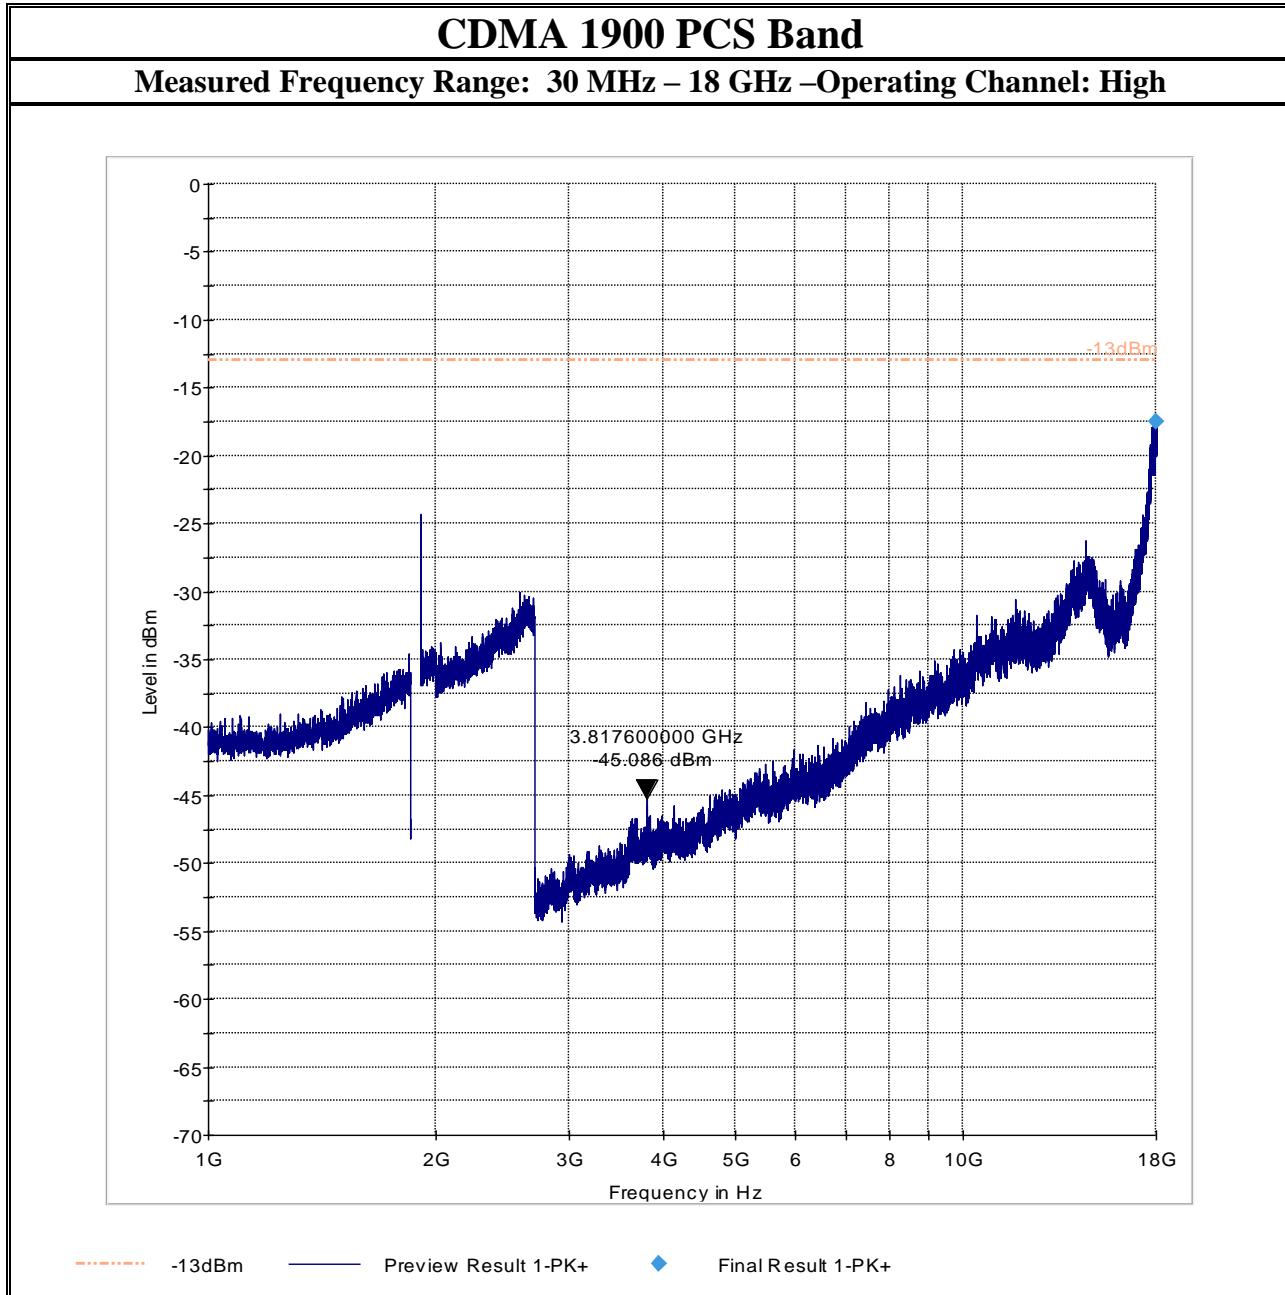



**Radiated Spurious Emissions**

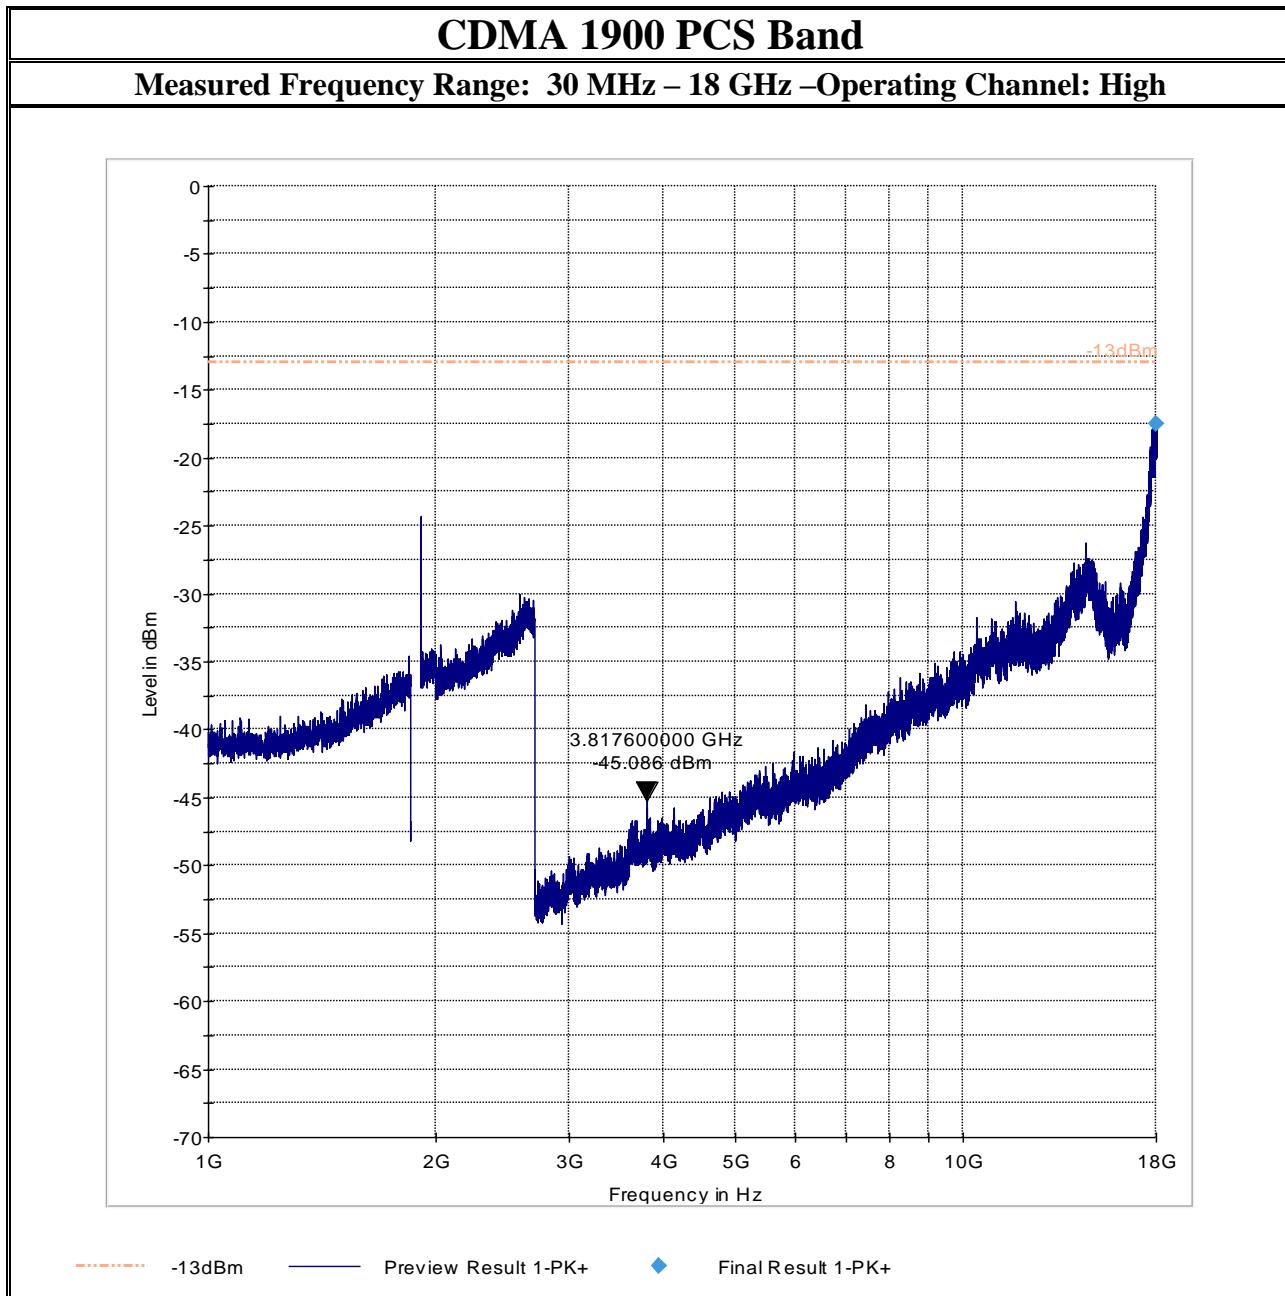

## **7 Test Equipment and Ancillaries used for tests**

| No.                        | Equipment Name                       | Manufacturer      | Type/model   | Serial No.  | Cal Date                       | Cal Interval |
|----------------------------|--------------------------------------|-------------------|--------------|-------------|--------------------------------|--------------|
| 3m Semi- Anechoic Chamber: |                                      |                   |              |             |                                |              |
|                            | Turn table                           | EMCO              | 2075         | N/A         | N/A                            | N/A          |
|                            | MAPS Position Controller             | ETS Lindgren      | 2092         | 0004-1510   | N/A                            | N/A          |
|                            | Antenna Mast                         | EMCO              | 2075         | N/A         | N/A                            | N/A          |
|                            | Relay Switch Unit                    | Rohde&Schwarz     | RSU          | 338964/001  | N/A                            | N/A          |
|                            | EMI Receiver/Analyzer                | Rohde&Schwarz     | ESU 40       | 100251      | Sept 2013                      | 2 Years      |
|                            | Spectrum Analyzer                    | Rohde&Schwarz     | FSU          | 200302      | Jun 2013                       | 2 Years      |
|                            | Universal Radio Communication Tester | Rohde&Schwarz     | CMU 200      | 101821      | Jun 2013                       | 2 Years      |
|                            | 1500MHz HP Filter                    | Filtek            | HP12/1700    | 14c48       | N/A                            | N/A          |
|                            | 2800 MHz HP Filter                   | Filtek            | HP12/2800    | 14C47       | N/A                            | N/A          |
|                            | High Pass Filter                     | Mini-Circuits     | SHP-1200+    | RUU11201224 | Part of the system calibration |              |
|                            | High Pass Filter                     | Wainwright Instr. | WHKX 3.0/18  | 109         | Part of the system calibration |              |
|                            | Pre-Amplifier                        | Miteq             | JS40010260   | 340125      | N/A                            | N/A          |
|                            | Loop Antenna                         | EMCO              | 6512         | 00049838    | Apr 2012                       | 3 years      |
|                            | Binconilog Antenna                   | EMCO              | 3141         | 0005-1186   | Apr 2012                       | 3 Years      |
|                            | Horn Antenna                         | EMCO              | 3115         | 35111       | Apr 2012                       | 3 Years      |
|                            | Multimeter                           | Fluke             | 115 True RMS | 21752138    | Mar/2014                       | 2 years      |
|                            | DC Power Supply                      | GW Instek         | GPS-1850D    | EM845907    | N/A                            | N/A          |

## 8 Test Setup Diagrams

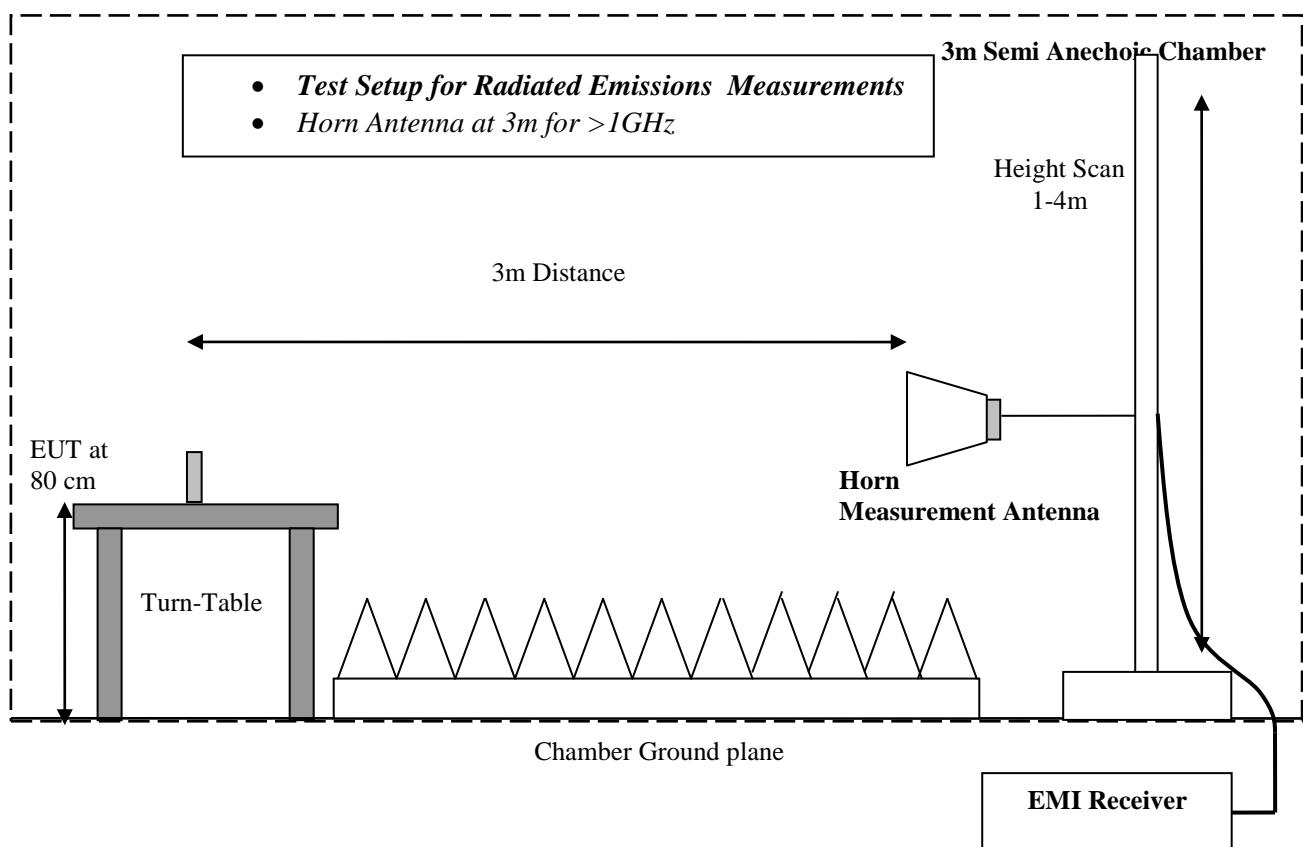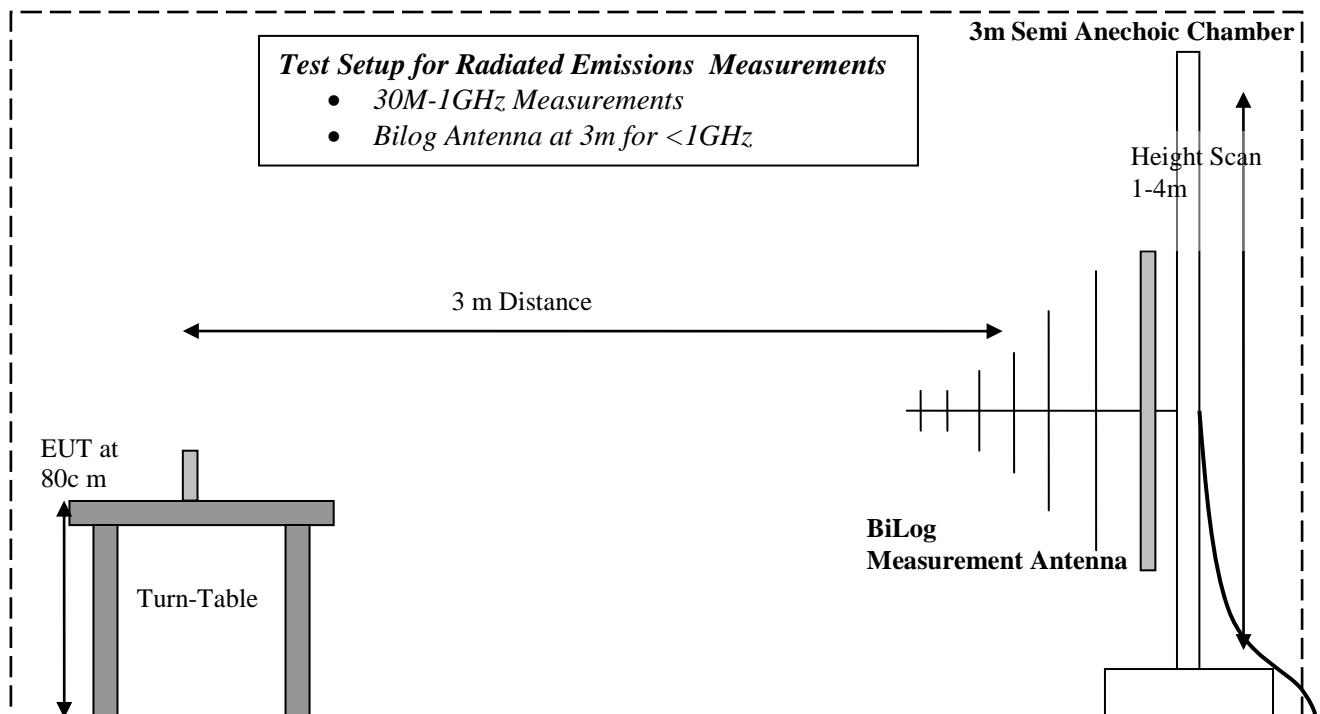

## **9 Revision History**

| Date       | Report Name                         | Changes to report | Report prepared by |
|------------|-------------------------------------|-------------------|--------------------|
| 2015-03-25 | EMC_VERIT-001-13001_FCC22_24_AT-150 | First Version     | Danh Le            |