


1	2	3	4	5	REV	ZONE	ECN NO.	DESCRIPTION	ENGR	DATE	A																																																												
A	B	C	D	E							B																																																												
											C																																																												
											D																																																												
											E																																																												
											F																																																												
<p><b>NOTES:</b></p> <ul style="list-style-type: none"> <li>1. MATERIAL.FINISH.AND APPEARANCE           <ul style="list-style-type: none"> <li>A. AIR VALVE MATERIAL :EPDM / AL6061</li> <li>B. SENSOR HOUSING: MATERIAL : PA6+15%GF APPEARANCE OF COLOR: BLACK</li> <li>C. SCREW : MATERIAL : AISI1022 / ZINC APPEARANCE OF COLOR: WHITE</li> </ul> </li> <li>2. OPERATING FREQUENCY:433.92MHz TYPICAL</li> <li>3. PRESSURE MONITORING RANGE:0~130(MAX)PSI</li> <li>4. M3 SCREW INSTALL TORQUE:1N·m</li> <li>5. PLEASE FOLLOWING CUB USER MANUAL</li> <li>6. REFER TO THE S/N PRINCIPLE</li> </ul>																																																																							
<table border="1"> <thead> <tr> <th colspan="3">TOLERANCE RANGE</th><th colspan="3">GEOMETRIC CHARACTERISTIC SYMBOLS.</th><th rowspan="2">MATERIAL</th><th rowspan="2">PROJECTION METHOD</th><th rowspan="2">UNIT</th><th rowspan="2">SCALE</th><th rowspan="2">WEIGHT</th><th rowspan="2">ORIGINAL MODEL</th></tr> <tr> <th>LEVEL</th><th>1</th><th>2</th><th>3</th><th>Ø DIAMETER</th><th>— STRAIGHTNESS</th></tr> </thead> <tbody> <tr> <td>SIZE</td><td>1</td><td>2</td><td>3</td><td>⊕ POSITION</td><td>□ FLATNESS</td><td rowspan="7">FINISH</td><td rowspan="7"></td><td rowspan="7">mm</td><td rowspan="7">1 : 1</td><td rowspan="7">12g±5%</td><td rowspan="7">62U005</td></tr> <tr> <td>0~10</td><td>±0.1</td><td>±0.15</td><td>±0.2</td><td>✖ CIRCULAR RUNOUT</td><td>○ ROUNDNESS</td></tr> <tr> <td>10.1~40</td><td>±0.15</td><td>±0.25</td><td>±0.35</td><td>✖ TOTAL RUNOUT</td><td>○ CYLINDRICITY</td></tr> <tr> <td>40.1~100</td><td>±0.25</td><td>±0.4</td><td>±0.5</td><td>∠ ANGULARITY</td><td>○ CONCENTRICITY</td></tr> <tr> <td>100.1~250</td><td>±0.3</td><td>±0.5</td><td>±0.65</td><td>// PARALLELISM</td><td>○ PROFILE OF A LINE</td></tr> <tr> <td>251~500</td><td>±0.4</td><td>±0.6</td><td>±0.8</td><td>⊥ PERPENDICULARITY</td><td>○ PROFILE OF A SURFACE</td></tr> </tbody> </table>												TOLERANCE RANGE			GEOMETRIC CHARACTERISTIC SYMBOLS.			MATERIAL	PROJECTION METHOD	UNIT	SCALE	WEIGHT	ORIGINAL MODEL	LEVEL	1	2	3	Ø DIAMETER	— STRAIGHTNESS	SIZE	1	2	3	⊕ POSITION	□ FLATNESS	FINISH		mm	1 : 1	12g±5%	62U005	0~10	±0.1	±0.15	±0.2	✖ CIRCULAR RUNOUT	○ ROUNDNESS	10.1~40	±0.15	±0.25	±0.35	✖ TOTAL RUNOUT	○ CYLINDRICITY	40.1~100	±0.25	±0.4	±0.5	∠ ANGULARITY	○ CONCENTRICITY	100.1~250	±0.3	±0.5	±0.65	// PARALLELISM	○ PROFILE OF A LINE	251~500	±0.4	±0.6	±0.8	⊥ PERPENDICULARITY	○ PROFILE OF A SURFACE
TOLERANCE RANGE			GEOMETRIC CHARACTERISTIC SYMBOLS.			MATERIAL	PROJECTION METHOD	UNIT	SCALE	WEIGHT	ORIGINAL MODEL																																																												
LEVEL	1	2	3	Ø DIAMETER	— STRAIGHTNESS																																																																		
SIZE	1	2	3	⊕ POSITION	□ FLATNESS	FINISH		mm	1 : 1	12g±5%	62U005																																																												
0~10	±0.1	±0.15	±0.2	✖ CIRCULAR RUNOUT	○ ROUNDNESS																																																																		
10.1~40	±0.15	±0.25	±0.35	✖ TOTAL RUNOUT	○ CYLINDRICITY																																																																		
40.1~100	±0.25	±0.4	±0.5	∠ ANGULARITY	○ CONCENTRICITY																																																																		
100.1~250	±0.3	±0.5	±0.65	// PARALLELISM	○ PROFILE OF A LINE																																																																		
251~500	±0.4	±0.6	±0.8	⊥ PERPENDICULARITY	○ PROFILE OF A SURFACE																																																																		
<p>NAME CLAMP-IN LW UNI TPMS SENSOR (433MHZ)</p> <p>PART NO. 10162U005011RA</p> <p><b>CUB</b> ELECPARTS INC. SIZE A3 SHT 1/2 VER A</p>																																																																							

THIS DRAWING AND IT'S RELATED TECHNICAL INFORMATION ARE THE PROPERTY OF CUB ELECPARTS INC. THEY SHALL NOT BE DISCLOSED, IN WHOLE OR IN PART, TO ANY THIRD PARTY WITHOUT PRIOR PERMISSION OF CUB ELECPARTS INC.

REV	ZONE	ECN NO.	DESCRIPTION	ENGR	DATE
					A

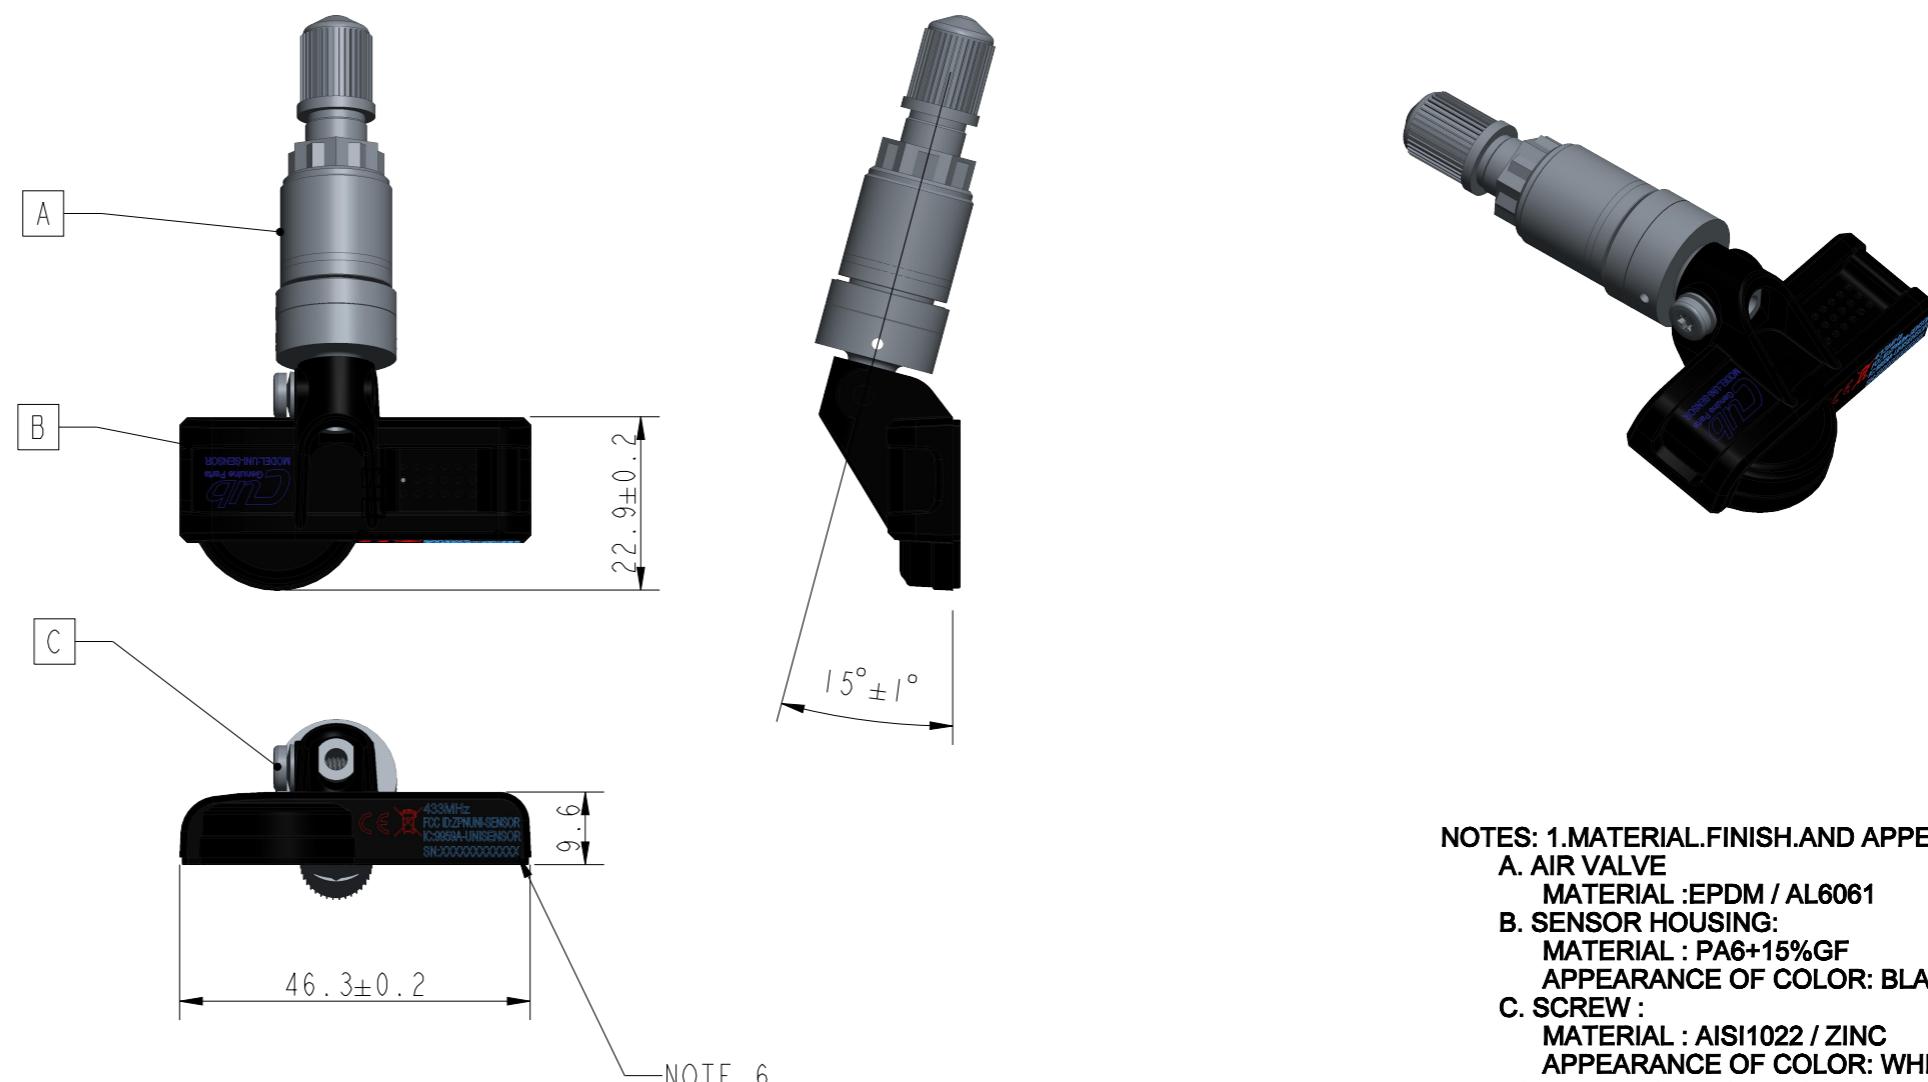

**NOTES:**

- 1. MATERIAL.FINISH.AND APPEARANCE**
  - A. AIR VALVE**  
MATERIAL :EPDM / AL6061
  - B. SENSOR HOUSING:**  
MATERIAL : PA6+15%GF  
APPEARANCE OF COLOR: BLACK
  - C. SCREW :**  
MATERIAL : AISI1022 / ZINC  
APPEARANCE OF COLOR: WHITE
- 2. OPERATING FREQUENCY:433.92MHz TYPICAL**
- 3. PRESSURE MONITORING RANGE:0~130(MAX)PSI**
- 4. M3 SCREW INSTALL TORQUE:6kg/cm<sup>2</sup>**
- 5. PLEASE FOLLOWING CUB USER MANUAL**
- 6 REFER TO THE S/N PRINCIPLE**

TOLERANCE RANGE			GEOMETRIC CHARACTERISTIC SYMBOLS.		MATERIAL	NOTE	PROJECTION METHOD	UNIT mm	SCALE   :	WEIGHT ±5%	ORIGINAL MODEL VS-62U005			
LEVEL	V		Ø DIAMETER	— STRAIGHTNESS										
SIZE	1	2	3	⊕ POSITION	□ FLATNESS	FINISH	NOTE	NAME CLAMP-IN LW UNI TPMS SENSOR (433MHZ)						
0~10	±0.1	±0.15	±0.2	↗ CIRCULAR RUNOUT	○ ROUNDNESS			PART NO. 10162U005011RA						
10.1~40	±0.15	±0.25	±0.35	↖ TOTAL RUNOUT	○ CYLINDRICITY									
40.1~100	±0.25	±0.4	±0.5	∠ ANGULARITY	○ CONCENTRICITY	APPROVED								
100.1~250	±0.3	±0.5	±0.65	// PARALLELISM	⌒ PROFILE OF A LINE	CHECKED								
251~500	±0.4	±0.6	±0.8	⊥ PERPENDICULARITY	○ PROFILE OF A SURFACE	DESIGNED								