



Transmitter Radiated Unwanted Emissions (Below 1GHz)



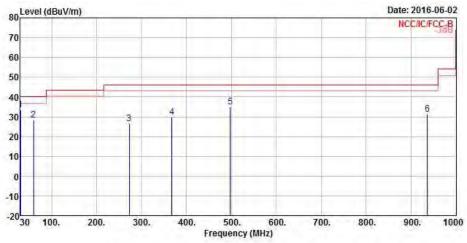

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.000	33.36	-6.64	40.00	45.56	24.90	0.32	37.42	Peak
2	59.100	28.48	-11.52	40.00	53.85	11.28	0.47	37.12	Peak
3	272.500	26.48	-19.52	46.00	43.41	18.55	0.92	36.40	Peak
4	367.560	29.67	-16.33	46.00	44.45	20.72	1.07	36.57	Peak
5	497.540	34.90	-11.10	46.00	47.32	23.26	1.29	36.97	Peak
6	935.980	31.29	-14.71	46.00	37.37	29.62	1.83	37.53	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E1 of E70
TEL: 886-3-327-3456 Report Version : Rev. 02





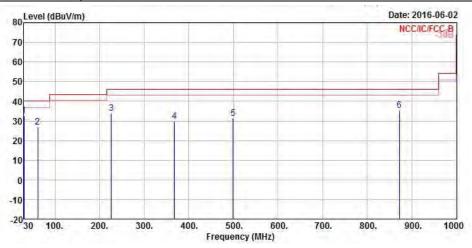

	Freq	Leve1	Over Limit	Limit Line	200	Antenna Factor		Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.000	32.76	-7.24	40.00	44.96	24.90	0.32	37.42	Peak
2	61.040	26.73	-13.27	40.00	52.32	11.05	0.47	37.11	Peak
3	225.940	34.03	-11.97	46.00	53.85	15.73	0.84	36.39	Peak
4	367.560	29.92	-16.08	46.00	44.70	20.72	1.07	36.57	Peak
5	499.480	31.32	-14.68	46.00	43.72	23.29	1.29	36.98	Peak
6	871.960	35.22	-10.78	46.00	42.82	28.29	1.76	37.65	Peak


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E2 of E70
TEL: 886-3-327-3456 Report Version : Rev. 02



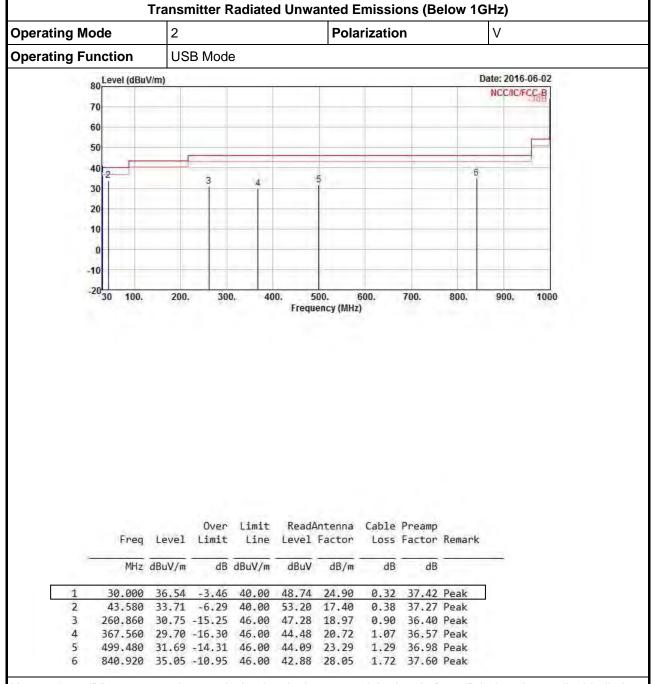

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E3 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02





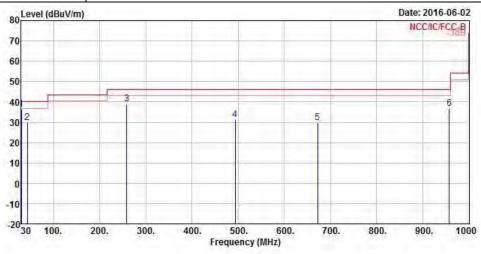

	Freq	The second of th			000,000		Cable Preamp Loss Factor		Remark
.9	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	30.000	36.49	-3.51	40.00	48.69	24.90	0.32	37.42	Peak
2	43.580	29.82	-10.18	40.00	49.31	17.40	0.38	37.27	Peak
3	258.920	39.01	-6.99	46.00	55.62	18.89	0.90	36.40	Peak
4	493.660	31.38	-14.62	46.00	43.87	23.19	1.28	36.96	Peak
5	672.140	29.97	-16.03	46.00	40.23	25.67	1.50	37.43	Peak
6	957,320	36.66	-9.34	46,00	42.21	30.04	1.85	37,44	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E4 of E70
TEL: 886-3-327-3456 Report Version : Rev. 02



Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz



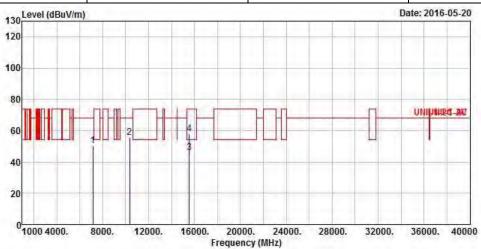



	Freq	Level				Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7145.000	50.51	-17.69	68.20	42.68	35.68	7.55	35.40	Peak
2	10360.000	55.88	-12.32	68.20	42.60	39.48	9.41	35.61	Peak
3	15540.000	46.02	-7.98	54.00	31.70	38.41	11.54	35.63	Average
4	15540.000	58.22	-15.78	74.00	43.90	38.41	11.54	35.63	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E5 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02





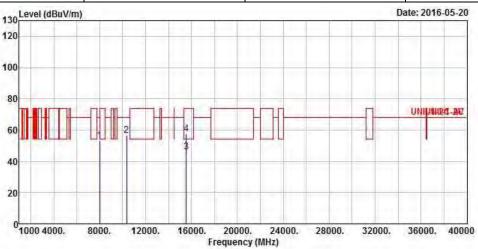

	Freq	Freq Level Li		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8002.000	53.26	-14.94	68.20	43.69	37.20	8.00	35.63	Peak
2	10360.000	56.78	-11.42	68.20	43.50	39.48	9.41	35.61	Peak
3	15540.000	45.82	-8.18	54.00	31.50	38.41	11.54	35.63	Average
4	15540,000	57.62	-16.38	74.00	43.30	38.41	11.54	35.63	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC.

Page No.

TEL: 886-3-327-3456

Report Ve


FAX: 886-3-327-0973

Report Version : Rev. 02

: E6 of E70



Tra	ınsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	11a	Test Freq. (MHz)	5200
N _{TX}	1	Polarization	V

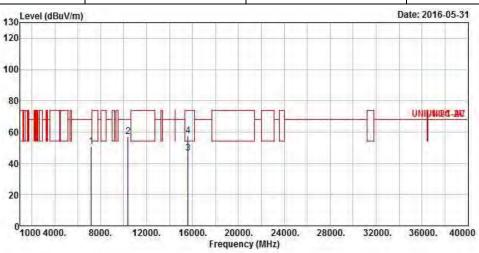

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7185.000	50.62	-17.58	68.20	42.69	35.78	7.56	35.41	Peak
2	10400.000	56.91	-11.29	68.20	43.51	39.54	9.44	35.58	Peak
3	15600.000	46.32	-7.68	54.00	32.21	38.28	11.50	35.67	Average
4	15600,000	57.39	-16.61	74.00	43.28	38.28	11.50	35.67	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC.

Page No.

TEL: 886-3-327-3456


Report Ve


FAX: 886-3-327-0973

Report Version : Rev. 02

: E7 of E70





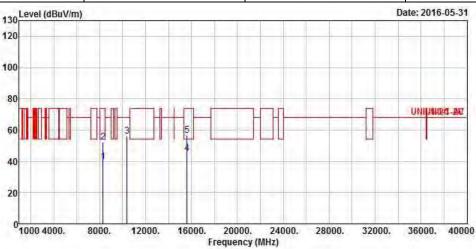

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8296.000	39.93	-14.07	54.00	30.47	36.96	8.16	35.66	Average
2	8296.000	52.13	-21.87	74.00	42.67	36.96	8.16	35.66	Peak
3	10400.000	55.97	-12.23	68.20	42.57	39.54	9.44	35.58	Peak
4	15600.000	45.26	-8.74	54.00	31.15	38.28	11.50	35.67	Average
5	15600.000	56.70	-17.30	74.00	42.59	38.28	11.50	35.67	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. : E8 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02

: E9 of E70

: Rev. 02





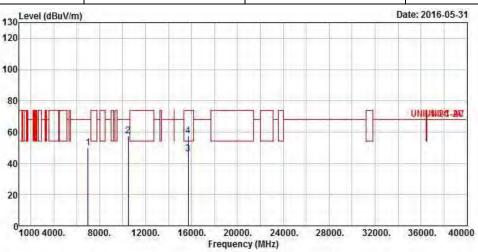

	Freq	Freq Level			Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		
1	7005.000	50.10	-18.10	68.20	42.69	35.31	7.49	35.39	Peak	
2	10480.000	57.36	-10.84	68.20	43.71	39.67	9.48	35.50	Peak	
3	15720.000	45.96	-8.04	54.00	32.27	38.02	11.40	35.73	Average	
4	15720,000	57.79	-16.21	74.00	44.10	38.02	11.40	35.73	Peak	

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version





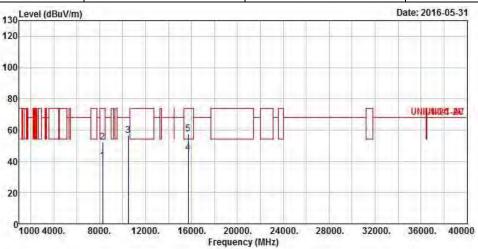

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Control of the last	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8265.000	40.16	-13.84	54.00	30.69	36.99	8.14	35.66	Average
2	8265.000	52.48	-21.52	74.00	43.01	36.99	8.14	35.66	Peak
3	10480.000	56.79	-11.41	68.20	43.14	39.67	9.48	35.50	Peak
4	15720.000	45.57	-8.43	54.00	31.88	38.02	11.40	35.73	Average
5	15720.000	57.43	-16.57	74.00	43.74	38.02	11.40	35.73	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456 Report Ve

FAX: 886-3-327-0973

Page No. : E10 of E70
Report Version : Rev. 02



Tra	ınsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	HT20	Test Freq. (MHz)	5180
N _{TX}	1	Polarization	V

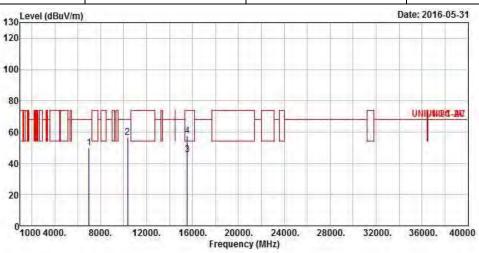

	Freq	Freq Level !			Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		
1	7002.000	50.10	-18.10	68.20	42.69	35.31	7.49	35.39	Peak	
2	10360.000	56.63	-11.57	68.20	43.35	39.48	9.41	35.61	Peak	
3	15540.000	45.80	-8.20	54.00	31.48	38.41	11.54	35.63	Average	
4	15540,000	57.73	-16.27	74.00	43.41	38.41	11.54	35.63	Peak	

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456 Report Ve


FAX: 886-3-327-0973

Report Version : Rev. 02

: E11 of E70





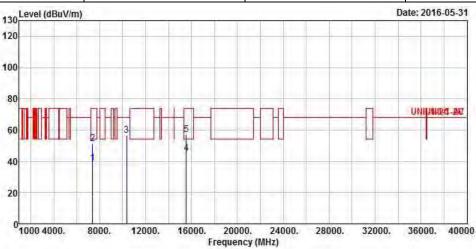

	Freq	Level	Over Limit		E-100	Antenna Factor		and the second	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7369.000	39.02	-14.98	54.00	30.58	36.26	7.61	35.43	Average
2	7369.000	51.20	-22.80	74.00	42.76	36.26	7.61	35.43	Peak
3	10360.000	56.42	-11.78	68.20	43.14	39.48	9.41	35.61	Peak
4	15540.000	45.33	-8.67	54.00	31.01	38.41	11.54	35.63	Average
5	15540.000	57.17	-16.83	74.00	42.85	38.41	11.54	35.63	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version


FAX: 886-3-327-0973


Page No. : E12 of E70
Report Version : Rev. 02

: E13 of E70

: Rev. 02





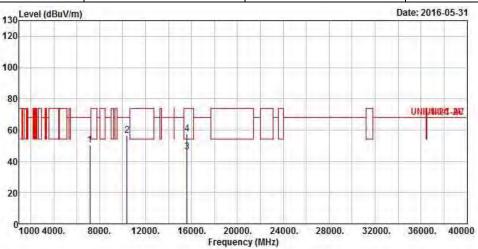

	Freq	Level				Antenna Factor		0.000	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7145.000	50.51	-17.69	68.20	42.68	35.68	7.55	35.40	Peak
2	10400.000	56.47	-11.73	68.20	43.07	39.54	9.44	35.58	Peak
3	15600.000	45.97	-8.03	54.00	31.86	38.28	11.50	35.67	Average
4	15600.000	57.39	-16.61	74.00	43.28	38.28	11.50	35.67	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version





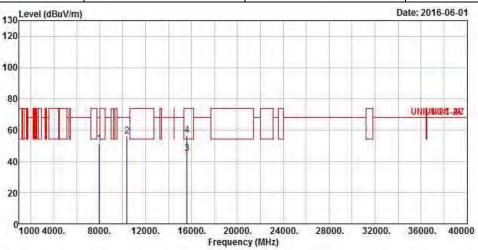

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7965.000	51.48	-16.72	68.20	41.96	37.16	7.98	35.62	Peak
2	10400.000	56.25	-11.95	68.20	42.85	39.54	9.44	35.58	Peak
3	15600.000	45.26	-8.74	54.00	31.15	38.28	11.50	35.67	Average
4	15600,000	56.81	-17.19	74.00	42.70	38.28	11.50	35.67	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973


Page No. : E14 of E70


: Rev. 02

: E15 of E70

: Rev. 02





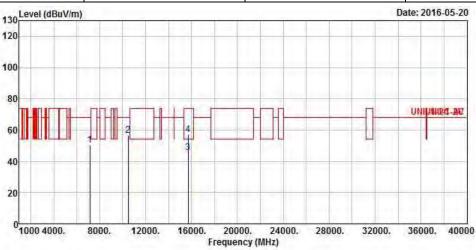

			Over	Limit	Read	Antenna	Cable	Preamp	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7145.000	50.51	-17.69	68.20	42.68	35.68	7.55	35.40	Peak
2	10480.000	56.55	-11.65	68.20	42.90	39.67	9.48	35.50	Peak
3	15720.000	45.38	-8.62	54.00	31.69	38.02	11.40	35.73	Average
4	15720.000	57.18	-16.82	74 99	43.49	38 02	11.40	35 73	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version



Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20	Test Freq. (MHz)	5240							
N _{TX}	1	Polarization	Н							

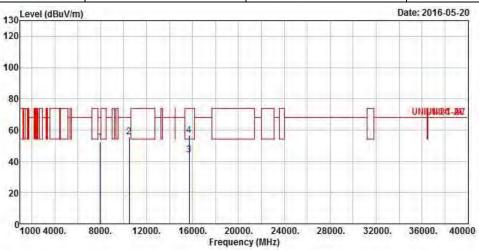

	Freq	Level		Limit Line				0.00	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7985.000	52.19	-16.01	68.20	42.65	37.18	7.98	35.62	Peak
2	10480.000	55.67	-12.53	68.20	42.02	39.67	9.48	35.50	Peak
3	15720.000	44.26	-9.74	54.00	30.57	38.02	11.40	35.73	Average
4	15720.000	56.70	-17.30	74.00	43.01	38.02	11.40	35.73	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


 SPORTON INTERNATIONAL INC.
 Page


 TEL: 886-3-327-3456
 Repo

 FAX: 886-3-327-0973
 FAX: 886-3-327-0973

Page No. : E16 of E70
Report Version : Rev. 02





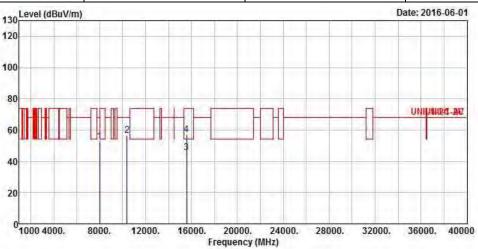

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8002.000	52.83	-15.37	68.20	43.26	37.20	8.00	35.63	Peak
2	10380.000	56.43	-11.77	68.20	43.08	39.51	9.44	35.60	Peak
3	15570.000	45.80	-8.20	54.00	31.60	38.35	11.50	35.65	Average
4	15570.000	57.23	-16.77	74.00	43.03	38.35	11.50	35.65	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

 SPORTON INTERNATIONAL INC.
 Pa

 TEL: 886-3-327-3456
 Re

 FAX: 886-3-327-0973
 FAX: 886-3-327-0973


Page No. : E17 of E70
Report Version : Rev. 02

: E18 of E70

: Rev. 02



Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT40	Test Freq. (MHz)	5190							
N _{TX}	1	Polarization	Н							

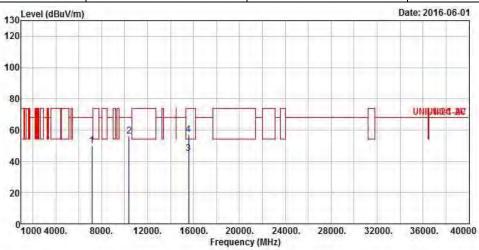

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7152.000	49.80	-18.40	68.20	41.96	35.70	7.55	35.41	Peak
2	10380.000	55.93	-12.27	68.20	42.58	39.51	9.44	35.60	Peak
3	15570.000	44.89	-9.11	54.00	30.69	38.35	11.50	35.65	Average
4	15570.000	56.87	-17.13	74.00	42.67	38.35	11.50	35.65	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version





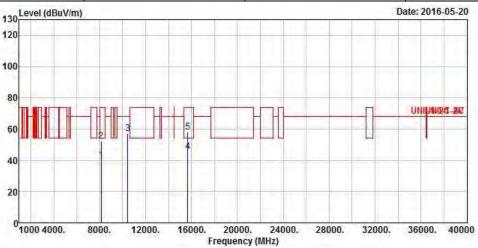

	Freq	Level	Over Limit	-	\$100 miles	Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8145.000	40.03	-13.97	54.00	30.52	37.08	8.07	35.64	Average
2	8145.000	52.20	-21.80	74.00	42.69	37.08	8.07	35.64	Peak
3	10460.000	57.10	-11.10	68.20	43.50	39.64	9.48	35.52	Peak
4	15690.000	45.37	-8.63	54.00	31.61	38.08	11.40	35.72	Average
5	15690.000	57.97	-16.03	74.00	44.21	38.08	11.40	35.72	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E19 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02





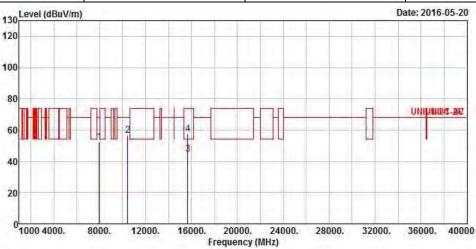

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7965.000	52.10	-16.10	68.20	42.58	37.16	7.98	35.62	Peak
2	10460.000	56.61	-11.59	68.20	43.01	39.64	9.48	35.52	Peak
3	15690.000	44.66	-9.34	54.00	30.90	38.08	11.40	35.72	Average
4	15690,000	57.64	-16.36	74.00	43.88	38.08	11.40	35.72	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E20 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02



Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5250-5350MHz

Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11a	Test Freq. (MHz)	5260							
N_{TX}	1	Polarization	V							

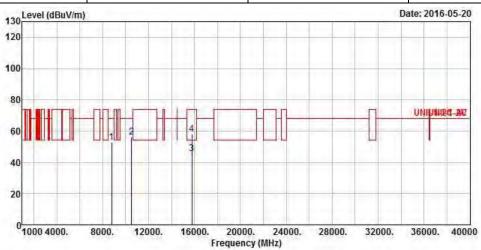


	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8785.000	52.97	-15.23	68.20	43.26	37.14	8.29	35.72	Peak
2	10520.000	55.90	-12.30	68.20	42.15	39.72	9.50	35.47	Peak
3	15780.000	45.35	-8.65	54.00	31.91	37.88	11.33	35.77	Average
4	15780.000	57.95	-16.05	74.00	44.51	37.88	11.33	35.77	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E21 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	11a	Test Freq. (MHz)	5260						
N_{TX}	1	Polarization	Н						

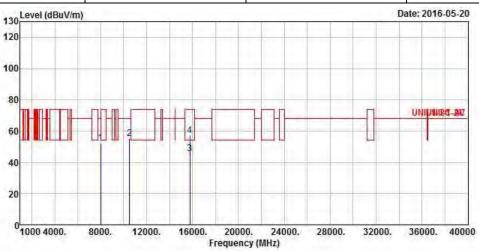

	Freq	Level				Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8002.000	52.15	-16.05	68.20	42.58	37.20	8.00	35.63	Peak
2	10520.000	54.95	-13.25	68.20	41.20	39.72	9.50	35.47	Peak
3	15780.000	45.55	-8.45	54.00	32.11	37.88	11.33	35.77	Average
4	15780,000	57.25	-16.75	74.00	43.81	37.88	11.33	35.77	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456


FAX: 886-3-327-0973


Report Version

: E22 of E70

: Rev. 02





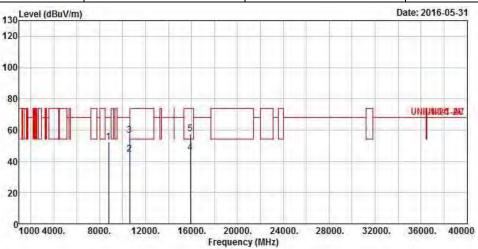

	Freq	Level	Over Limit	Limit Line	F100 1740	Antenna Factor		The state of the s	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8795.000	52.38	-15.82	68.20	42.66	37.15	8.29	35.72	Peak
2	10600.000	44.85	-9.15	54.00	30.96	39.82	9.52	35.45	Average
3	10600.000	56.49	-17.51	74.00	42.60	39.82	9.52	35.45	Peak
4	15900.000	45.75	-8.25	54.00	32.73	37.62	11.23	35.83	Average
5	15900.000	57.54	-16.46	74.00	44.52	37.62	11.23	35.83	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Vers


FAX: 886-3-327-0973


Page No. : E23 of E70
Report Version : Rev. 02

: E24 of E70

: Rev. 02





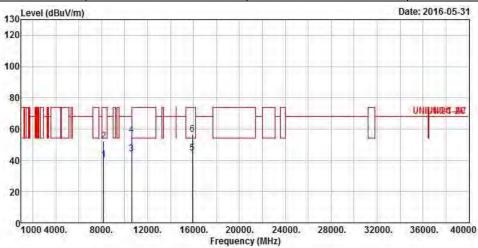

	Freq	Level	Over Limit	The state of the s		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8174.000	40.08	-13.92	54.00	30.58	37.06	8.09	35.65	Average
2	8174.000	52.19	-21.81	74.00	42.69	37.06	8.09	35.65	Peak
3	10600.000	44.03	-9.97	54.00	30.14	39.82	9.52	35.45	Average
4	10600.000	56.04	-17.96	74.00	42.15	39.82	9.52	35.45	Peak
5	15900.000	44.64	-9.36	54.00	31.62	37.62	11.23	35.83	Average
6	15900.000	56.70	-17.30	74.00	43.68	37.62	11.23	35.83	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.

TEL: 886-3-327-3456 Report Version



Tra	ınsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	11a	Test Freq. (MHz)	5320
N _{TX}	1	Polarization	V

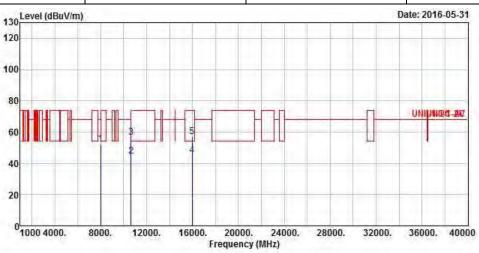

	Freq	Level	Over Limit	Limit Line	\$250 miles	Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8002.000	52.26	-15.94	68.20	42.69	37.20	8.00	35.63	Peak
2	10640.000	44.80	-9.20	54.00	30.84	39.87	9.53	35.44	Average
3	10640.000	56.48	-17.52	74.00	42.52	39.87	9.53	35.44	Peak
4	15960.000	45.30	-8.70	54.00	32.52	37.49	11.16	35.87	Average
5	15960.000	57.08	-16.92	74.00	44.30	37.49	11.16	35.87	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E25 of E70 Report Version : Rev. 02



Tra	ınsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	11a	Test Freq. (MHz)	5320
N_{TX}	1	Polarization	Н

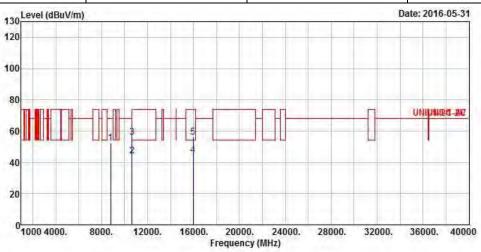

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8796.000	52.35	-15.85	68.20	42.62	37.16	8.29	35.72	Peak
2	10640.000	43.97	-10.03	54.00	30.01	39.87	9.53	35.44	Average
3	10640.000	55.94	-18.06	74.00	41.98	39.87	9.53	35.44	Peak
4	15960.000	44.41	-9.59	54.00	31.63	37.49	11.16	35.87	Average
5	15960.000	56.35	-17.65	74.00	43.57	37.49	11.16	35.87	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E26 of E70 Report Version : Rev. 02





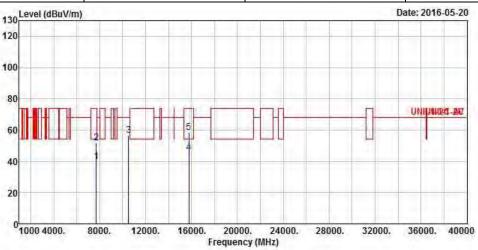

	Freq	Level	Over Limit	Limit Line	F100 100	Antenna Factor		The state of the s	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7698.000	39.70	-14.30	54.00	30.58	36.84	7.80	35.52	Average
2	7698.000	51.81	-22.19	74.00	42.69	36.84	7.80	35.52	Peak
3	10520.000	56.60	-11.60	68.20	42.85	39.72	9.50	35.47	Peak
4	15780.000	45.41	-8.59	54.00	31.97	37.88	11.33	35.77	Average
5	15780.000	58.47	-15.53	74.00	45.03	37.88	11.33	35.77	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E27 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02





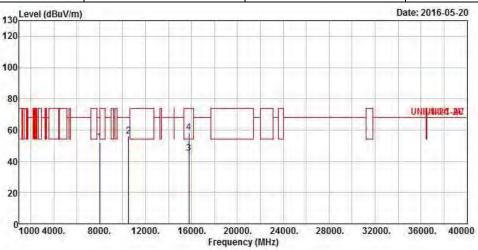

	Freq	Level				Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8003.000	52.26	-15.94	68.20	42.69	37.20	8.00	35.63	Peak
2	10520.000	56.31	-11.89	68.20	42.56	39.72	9.50	35.47	Peak
3	15780.000	45.25	-8.75	54.00	31.81	37.88	11.33	35.77	Average
4	15780.000	58.35	-15.65	74.00	44.91	37.88	11.33	35.77	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E28 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02





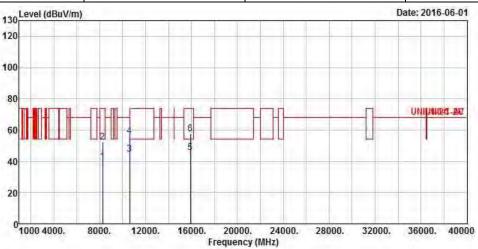

			Over	Limit	Read	Antenna	Cable	Preamp	
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8274.000	39.89	-14.11	54.00	30.41	36.98	8.16	35.66	Average
2	8274.000	52.44	-21.56	74.00	42.96	36.98	8.16	35.66	Peak
3	10600.000	44.60	-9.40	54.00	30.71	39.82	9.52	35.45	Average
4	10600.000	56.34	-17.66	74.00	42.45	39.82	9.52	35.45	Peak
5	15900.000	45.52	-8.48	54.00	32.50	37.62	11.23	35.83	Average
6	15900.000	57.39	-16.61	74.00	44.37	37.62	11.23	35.83	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E29 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02



Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT20	Test Freq. (MHz)	5300						
N_{TX}	1	Polarization	Н						

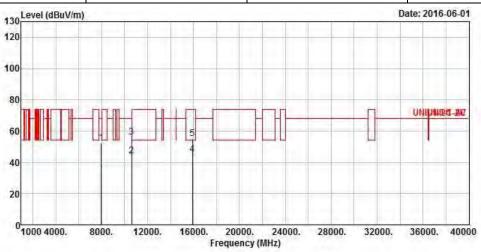

	Freq	Level	Over Limit	Limit Line	\$100 miles	Antenna Factor		The second second	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7965.000	52.21	-15.99	68.20	42.69	37.16	7.98	35.62	Peak
2	10600.000	43.90	-10.10	54.00	30.01	39.82	9.52	35.45	Average
3	10600.000	56.08	-17.92	74.00	42.19	39.82	9.52	35.45	Peak
4	15900.000	45.16	-8.84	54.00	32.14	37.62	11.23	35.83	Average
5	15900.000	55.17	-18.83	74.00	42.15	37.62	11.23	35.83	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456 Report Ve

FAX: 886-3-327-0973

Page No. : E30 of E70
Report Version : Rev. 02





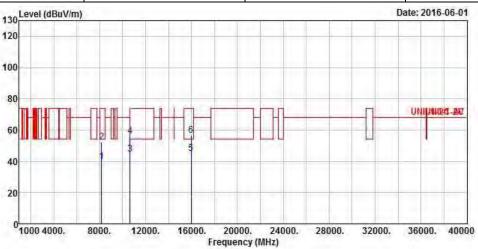

		Over	Limit	Read	Antenna	Cable	Preamp	
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
8175.000	39.97	-14.03	54.00	30.47	37.06	8.09	35.65	Average
8175.000	52.19	-21.81	74.00	42.69	37.06	8.09	35.65	Peak
10640.000	44.65	-9.35	54.00	30.69	39.87	9.53	35.44	Average
10640.000	56.33	-17.67	74.00	42.37	39.87	9.53	35.44	Peak
15960.000	45.05	-8.95	54.00	32.27	37.49	11.16	35.87	Average
15960.000	56.77	-17.23	74.00	43.99	37.49	11.16	35.87	Peak
	8175.000 8175.000 10640.000 10640.000 15960.000	MHz dBuV/m 8175.000 39.97 8175.000 52.19 10640.000 44.65 10640.000 56.33 15960.000 45.05	Freq Level Limit MHz dBuV/m dB 8175.000 39.97 -14.03 8175.000 52.19 -21.81 10640.000 44.65 -9.35 10640.000 56.33 -17.67 15960.000 45.05 -8.95	Freq Level Limit Line MHz dBuV/m dB dBuV/m 8175.000 39.97 -14.03 54.00 8175.000 52.19 -21.81 74.00 10640.000 44.65 -9.35 54.00 10640.000 56.33 -17.67 74.00 15960.000 45.05 -8.95 54.00	Freq Level Limit Line Level MHz dBuV/m dB dBuV/m dBuV/m 8175.000 39.97 -14.03 54.00 30.47 8175.000 52.19 -21.81 74.00 42.69 10640.000 44.65 -9.35 54.00 30.69 10640.000 56.33 -17.67 74.00 42.37 15960.000 45.05 -8.95 54.00 32.27	Freq Level Limit Line Level Factor MHz dBuV/m dB dBuV/m dBuV dB/m 8175.000 39.97 -14.03 54.00 30.47 37.06 8175.000 52.19 -21.81 74.00 42.69 37.06 10640.000 44.65 -9.35 54.00 30.69 39.87 10640.000 56.33 -17.67 74.00 42.37 39.87 15960.000 45.05 -8.95 54.00 32.27 37.49	Freq Level Limit Line Level Factor Loss MHz dBuV/m dB dBuV/m dBuV dB/m dB 8175.000 39.97 -14.03 54.00 30.47 37.06 8.09 8175.000 52.19 -21.81 74.00 42.69 37.06 8.09 10640.000 44.65 -9.35 54.00 30.69 39.87 9.53 10640.000 56.33 -17.67 74.00 42.37 39.87 9.53 15960.000 45.05 -8.95 54.00 32.27 37.49 11.16	Freq Level Limit Line Level Factor Loss Factor MHz dBuV/m dB dBuV/m dBuV dB/m dB dB 8175.000 39.97 -14.03 54.00 30.47 37.06 8.09 35.65 8175.000 52.19 -21.81 74.00 42.69 37.06 8.09 35.65 10640.000 44.65 -9.35 54.00 30.69 39.87 9.53 35.44 10640.000 56.33 -17.67 74.00 42.37 39.87 9.53 35.44 15960.000 45.05 -8.95 54.00 32.27 37.49 11.16 35.87

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E31 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02



Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT20	Test Freq. (MHz)	5320					
N_{TX}	1	Polarization	Н					

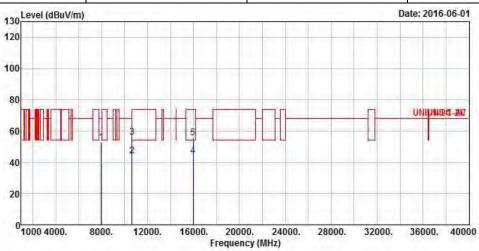

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7985.000	52.79	-15.41	68.20	43.25	37.18	7.98	35.62	Peak
2	10640.000	43.97	-10.03	54.00	30.01	39.87	9.53	35.44	Average
3	10640.000	55.98	-18.02	74.00	42.02	39.87	9.53	35.44	Peak
4	15960.000	44.35	-9.65	54.00	31.57	37.49	11.16	35.87	Average
5	15960.000	55.80	-18.20	74.00	43.02	37.49	11.16	35.87	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E32 of E70 Report Version : Rev. 02



Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	HT40	Test Freq. (MHz)	5270						
N _{TX}	1	Polarization	V						

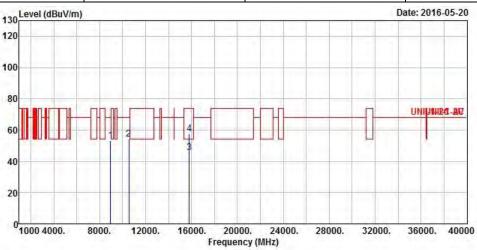

			Over	Limit	Read	Antenna	Cable	Preamp		
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	2	
1	8958.000	53.16	-15.04	68.20	43.24	37.35	8.31	35.74	Peak	
2	10540.000	54.09	-14.11	68.20	40.30	39.75	9.51	35.47	Peak	
3	15810.000	45.43	-8.57	54.00	32.09	37.82	11.30	35.78	Average	
4	15810.000	57.63	-16.37	74.00	44.29	37.82	11.30	35.78	Peak	

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E33 of E70 Report Version : Rev. 02





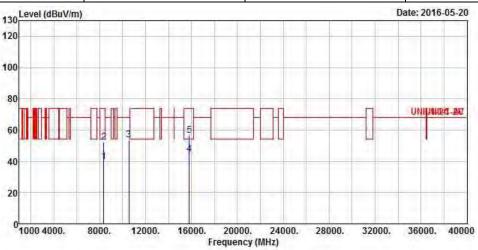

	Freq	Level	Over Limit	Limit Line	\$100 miles	Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8365.000	39.58	-14.42	54.00	30.14	36.91	8.20	35.67	Average
2	8365.000	52.13	-21.87	74.00	42.69	36.91	8.20	35.67	Peak
3	10540.000	53.80	-14.40	68.20	40.01	39.75	9.51	35.47	Peak
4	15810.000	44.58	-9.42	54.00	31.24	37.82	11.30	35.78	Average
5	15810.000	56.80	-17.20	74.00	43.46	37.82	11.30	35.78	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version


FAX: 886-3-327-0973

Page No. : E34 of E70

: Rev. 02





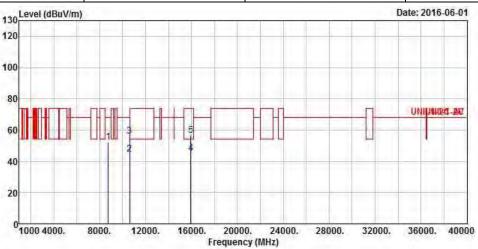

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Control of the last	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8762.000	52.38	-15.82	68.20	42.70	37.11	8.29	35.72	Peak
2	10620.000	44.53	-9.47	54.00	30.60	39.84	9.53	35.44	Average
3	10620.000	56.16	-17.84	74.00	42.23	39.84	9.53	35.44	Peak
4	15930.000	45.20	-8.80	54.00	32.30	37.55	11.20	35.85	Average
5	15930.000	56.79	-17.21	74.00	43.89	37.55	11.20	35.85	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E35 of E70 Report Version : Rev. 02





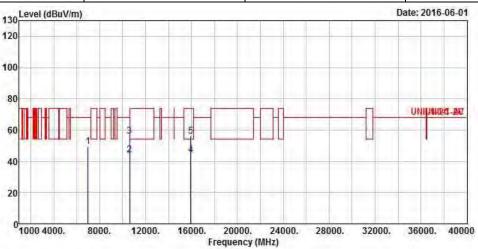

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Control of the last	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7005.000	49.37	-18.83	68.20	41.96	35.31	7.49	35.39	Peak
2	10620.000	43.94	-10.06	54.00	30.01	39.84	9.53	35.44	Average
3	10620.000	55.96	-18.04	74.00	42.03	39.84	9.53	35.44	Peak
4	15930.000	44.15	-9.85	54.00	31.25	37.55	11.20	35.85	Average
5	15930.000	56.15	-17.85	74.00	43.25	37.55	11.20	35.85	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E36 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02



Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5470-5725MHz

Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	Modulation Mode 11a Test Freq. (MHz) 5500								
N _{TX} 1 Polarization V									

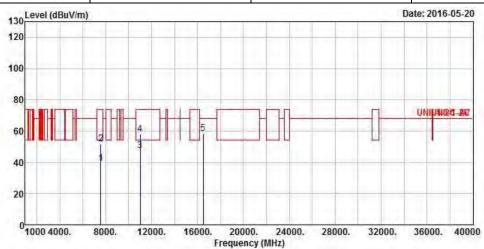

	Freq	Level	Over Limit	The state of the s		Antenna Factor		the same of the same	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7585.000	39.53	-14.47	54.00	30.58	36.70	7.72	35.47	Average
2	7585.000	51.97	-22.03	74.00	43.02	36.70	7.72	35.47	Peak
3	11000.000	47.50	-6.50	54.00	32.90	40.30	9.62	35.32	Average
4	11000.000	58.18	-15.82	74.00	43.58	40.30	9.62	35.32	Peak
5	16500.000	58.45	-9.75	68.20	43.80	38.80	11.35	35.50	Peak


- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. : E37 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02

: E38 of E70

: Rev. 02





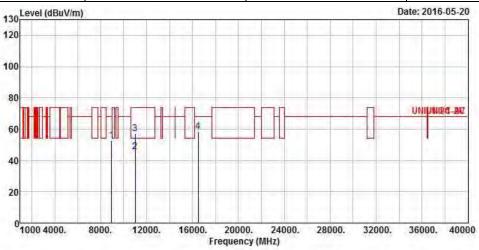

	Freq	Level		Limit Line	\$500 miles			12.4	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8965.000	52.94	-15.26	68.20	43.02	37.36	8.31	35.75	Peak
2	11000.000	45.70	-8.30	54.00	31.10	40.30	9.62	35.32	Average
3	11000.000	57.10	-16.90	74.00	42.50	40.30	9.62	35.32	Peak
4	16500.000	58.45	-9.75	68.20	43.80	38.80	11.35	35.50	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

: E39 of E70

: Rev. 02



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	Modulation Mode 11a Test Freq. (MHz) 5580								
N _{TX} 1 Polarization V									

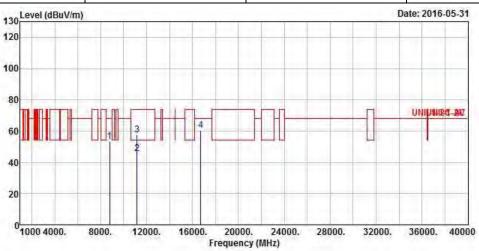

	Freq	Level				Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8792.000	53.33	-14.87	68.20	43.61	37.15	8.29	35.72	Peak
2	11160.000	45.54	-8.46	54.00	30.94	40.24	9.67	35.31	Average
3	11160.000	57.57	-16.43	74.00	42.97	40.24	9.67	35.31	Peak
4	16740.000	60.31	-7.89	68.20	44.38	39.52	11.67	35.26	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version



Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode	Modulation Mode 11a Test Freq. (MHz) 5580									
N_{TX}	N _{TX} 1 Polarization H									

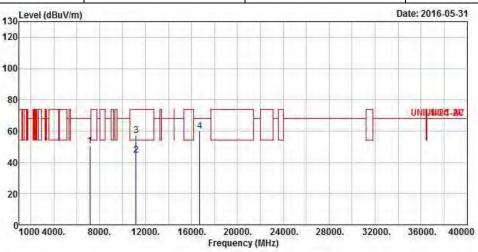

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7152.000	50.51	-17.69	68.20	42.67	35.70	7.55	35.41	Peak
2	11160.000	44.73	-9.27	54.00	30.13	40.24	9.67	35.31	Average
3	11160.000	57.16	-16.84	74.00	42.56	40.24	9.67	35.31	Peak
4	16740,000	59.94	-8.26	68.20	44.01	39.52	11.67	35.26	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456 Report Ve


FAX: 886-3-327-0973

Report Version : Rev. 02

: E40 of E70





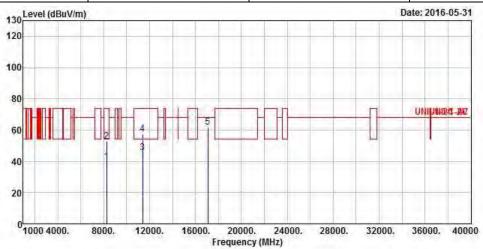

	Freq	Level	Over Limit	Limit Line		Antenna Factor		Control of the Control	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8265.000	39.94	-14.06	54.00	30.47	36.99	8.14	35.66	Average
2	8265.000	52,61	-21.39	74.00	43.14	36.99	8.14	35.66	Peak
3	11400.000	45.62	-8.38	54.00	31.05	40.14	9.72	35.29	Average
4	11400.000	57.45	-16.55	74.00	42.88	40.14	9.72	35.29	Peak
5	17100.000	61.87	-6.33	68.20	44.36	40.62	11.94	35.05	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456 Report Ve


FAX: 886-3-327-0973


Page No. : E41 of E70
Report Version : Rev. 02

: E42 of E70

: Rev. 02





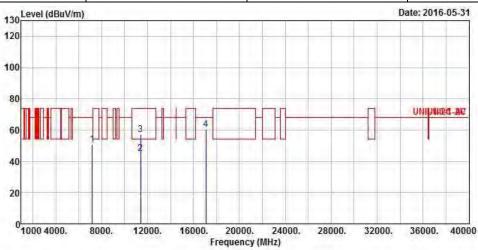

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7185.000	50.90	-17.30	68.20	42.97	35.78	7.56	35.41	Peak
2	11400.000	45.31	-8.69	54.00	30.74	40.14	9.72	35.29	Average
3	11400.000	57.04	-16.96	74.00	42.47	40.14	9.72	35.29	Peak
4	17100.000	60.49	-7.71	68.20	42.98	40.62	11.94	35.05	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version





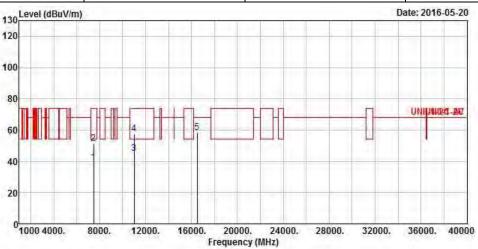

	Freq	Level	Over Limit	7	\$100 miles	Antenna Factor		The second second	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7485.000	39.41	-14.59	54.00	30.63	36.56	7.66	35.44	Average
2	7485.000	51.47	-22.53	74.00	42.69	36.56	7.66	35.44	Peak
3	11000.000	45.30	-8.70	54.00	30.70	40.30	9.62	35.32	Average
4	11000.000	57.80	-16.20	74.00	43.20	40.30	9.62	35.32	Peak
5	16500.000	58.55	-9.65	68.20	43.90	38.80	11.35	35.50	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E43 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02





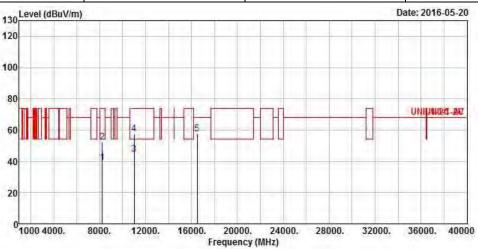

	Freq	Level	Over Limit			Antenna Factor		Control of the Control	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8245.000	39.39	-14.61	54.00	29.90	37.00	8.14	35.65	Average
2	8245.000	52.34	-21.66	74.00	42.85	37.00	8.14	35.65	Peak
3	11000.000	44.61	-9.39	54.00	30.01	40.30	9.62	35.32	Average
4	11000.000	57.50	-16.50	74.00	42.90	40.30	9.62	35.32	Peak
5	16500.000	57.80	-10.40	68.20	43.15	38.80	11.35	35.50	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456 Report Ve


FAX: 886-3-327-0973

Report Version : Rev. 02

: E44 of E70



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	Modulation Mode HT20 Test Freq. (MHz) 5580								
N _{TX} 1 Polarization V									

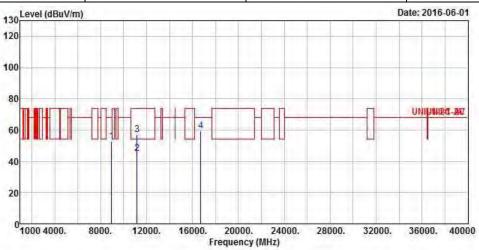

	Freq	Level				Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8945.000	52.59	-15.61	68.20	42.69	37.33	8.31	35.74	Peak
2	11160.000	45.32	-8.68	54.00	30.72	40.24	9.67	35.31	Average
3	11160.000	56.93	-17.07	74.00	42.33	40.24	9.67	35.31	Peak
4	16740.000	59.53	-8.67	68.20	43.60	39.52	11.67	35.26	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E45 of E70 Report Version : Rev. 02



Tra	nsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	HT20	Test Freq. (MHz)	5580
N _{TX}	1	Polarization	Н

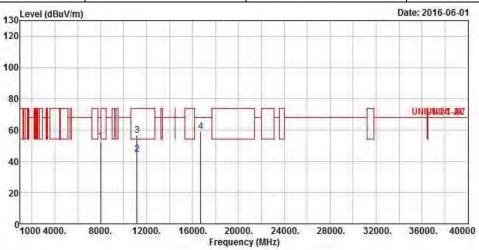

	Freq	Level		1		Antenna Factor		0.000	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8003.000	52.86	-15.34	68.20	43.29	37.20	8.00	35.63	Peak
2	11160.000	44.84	-9.16	54.00	30.24	40.24	9.67	35.31	Average
3	11160.000	56.57	-17.43	74.00	41.97	40.24	9.67	35.31	Peak
4	16740.000	58.95	-9.25	68.20	43.02	39.52	11.67	35.26	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E46 of E70
Report Version : Rev. 02





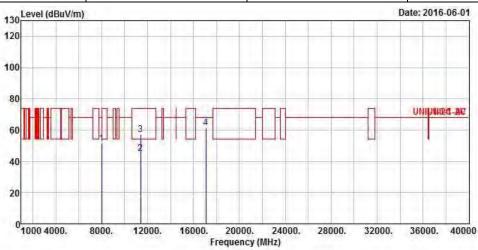

	Freq	Level		Limit Line				A	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8002.000	51.26	-16.94	68.20	41.69	37.20	8.00	35.63	Peak
2	11400.000	45.27	-8.73	54.00	30.70	40.14	9.72	35.29	Average
3	11400.000	57.17	-16.83	74.00	42.60	40.14	9.72	35.29	Peak
4	17100,000	61.31	-6.89	68.20	43.80	40.62	11.94	35.05	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC.
TEL: 886-3-327-3456

FAX: 886-3-327-0973

Page No. : E47 of E70
Report Version : Rev. 02



Tra	nsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	HT20	Test Freq. (MHz)	5700
N _{TX}	1	Polarization	Н

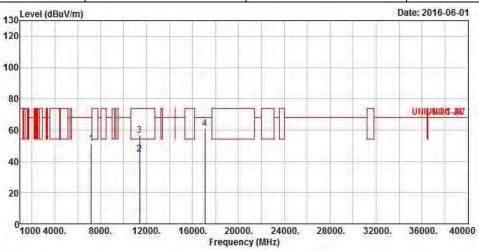

	Freq	Level	Over Limit	Limit Line		Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7196.000	51.54	-16.66	68.20	43.58	35.81	7.56	35.41	Peak
2	11400.000	44.58	-9.42	54.00	30.01	40.14	9.72	35.29	Average
3	11400.000	56.72	-17.28	74.00	42.15	40.14	9.72	35.29	Peak
4	17100.000	60.77	-7.43	68.20	43.26	40.62	11.94	35.05	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version


FAX: 886-3-327-0973

Page No. : E48 of E70

: Rev. 02



Tra	nsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	HT40	Test Freq. (MHz)	5510
N_{TX}	1	Polarization	V

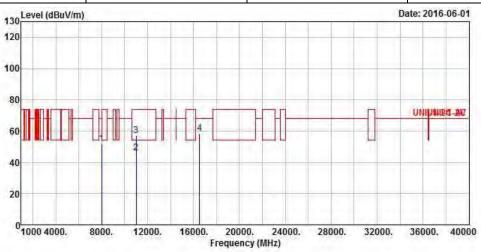

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8003.000	52.04	-16.16	68.20	42.47	37.20	8.00	35.63	Peak
2	11020.000	45.90	-8.10	54.00	31.30	40.29	9.63	35.32	Average
3	11020.000	56.93	-17.07	74.00	42.33	40.29	9.63	35.32	Peak
4	16530.000	58.68	-9.52	68.20	43.86	38.89	11.40	35.47	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E49 of E70 Report Version : Rev. 02





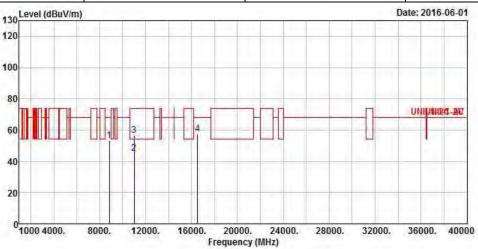

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8862.000	53.29	-14.91	68.20	43.49	37.23	8.30	35.73	Peak
2	11020.000	44.85	-9.15	54.00	30.25	40.29	9.63	35.32	Average
3	11020.000	56.61	-17.39	74.00	42.01	40.29	9.63	35.32	Peak
4	16530.000	57.51	-10.69	68.20	42.69	38.89	11.40	35.47	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page TEL: 886-3-327-3456 Repo

FAX: 886-3-327-0973

Page No. : E50 of E70
Report Version : Rev. 02





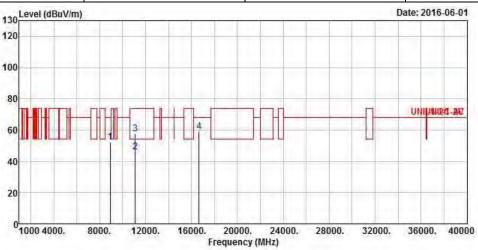

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8914.000	52.05	-16.15	68.20	42.19	37.30	8.30	35.74	Peak
2	11100.000	45.90	-8.10	54.00	31.30	40.26	9.65	35.31	Average
3	11100.000	57.47	-16.53	74.00	42.87	40.26	9.65	35.31	Peak
4	16650,000	59.13	-9.07	68.20	43.70	39.25	11.53	35.35	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456 Report Ve

FAX: 886-3-327-0973

Page No. : E51 of E70
Report Version : Rev. 02



Tra	ınsmitter Radiated Unwan	ted Emissions (Above 1G	Hz)
Modulation Mode	HT40	Test Freq. (MHz)	5550
N _{TX}	1	Polarization	Н

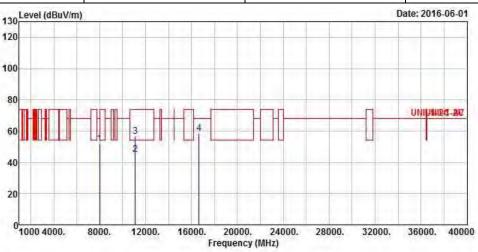

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7999.000	51.80	-16.40	68.20	42.25	37.20	7.98	35.63	Peak
2	11100.000	44.86	-9.14	54.00	30.26	40.26	9.65	35.31	Average
3	11100.000	56.73	-17.27	74.00	42.13	40.26	9.65	35.31	Peak
4	16650,000	58.44	-9.76	68.20	43.01	39.25	11.53	35.35	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version


FAX: 886-3-327-0973


Page No. : E52 of E70 Report Version : Rev. 02

: E53 of E70

: Rev. 02





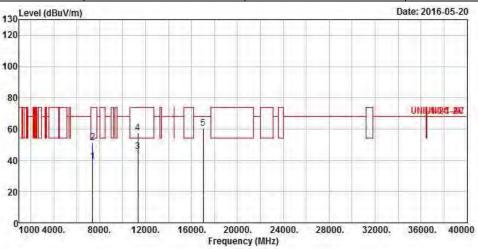

	Freq	Level	Over Limit	Limit Line	\$100 miles	Antenna Factor		The second second	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7395.000	39.11	-14.89	54.00	30.58	36.33	7.63	35.43	Average
2	7395.000	51.12	-22.88	74.00	42.59	36.33	7.63	35.43	Peak
3	11340.000	45.77	-8.23	54.00	31.20	40.16	9.70	35.29	Average
4	11340.000	57.77	-16.23	74.00	43.20	40.16	9.70	35.29	Peak
5	17010.000	60.66	-7.54	68.20	43.39	40.33	11.95	35.01	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version



Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT40	Test Freq. (MHz)	5670							
N _{TX}	1	Polarization	Н							

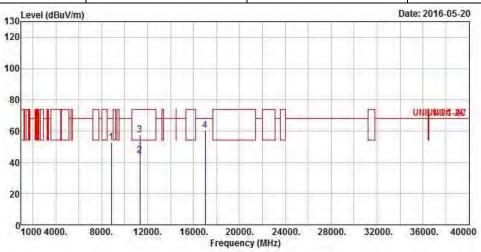

	Freq	Level				Antenna Factor		0	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8859.000	52.94	-15.26	68.20	43.14	37.23	8.30	35.73	Peak
2	11340.000	44.58	-9.42	54.00	30.01	40.16	9.70	35.29	Average
3	11340.000	57.42	-16.58	74.00	42.85	40.16	9.70	35.29	Peak
4	17010.000	60.27	-7.93	68.20	43.00	40.33	11.95	35.01	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456


FAX: 886-3-327-0973

Page No. : E54 of E70 Report Version : Rev. 02



Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz

Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)								
Modulation Mode	11a	Test Freq. (MHz)	5745						
N_{TX}	1	Polarization	V						

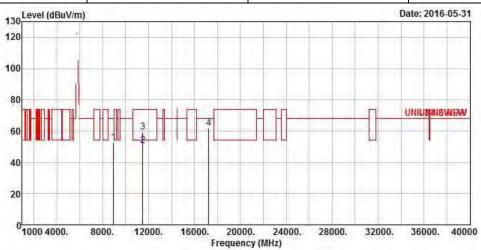



	Freq	Level			E100 100	Antenna Factor		The second second	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8965.000	52.97	-15.23	68.20	43.05	37.36	8.31	35.75	Peak
2	11490.000	50.97	-3.03	54.00	36.41	40.10	9.74	35.28	Average
3	11490.000	59.57	-14.43	74.00	45.01	40.10	9.74	35.28	Peak
4	17235.000	62.08	-6.12	68.20	44.19	41.05	11.93	35.09	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E55 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02





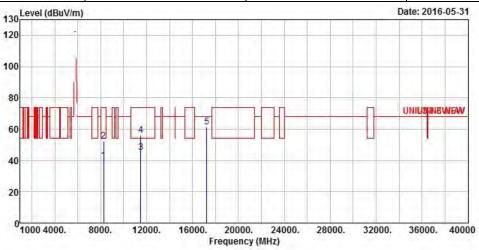

	Freq	Level	Over Limit	Limit Line		Antenna Factor		100	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	_
1	8257.000	40.05	-13.95	54.00	30.58	36.99	8.14	35.66	Average
2	8257.000	52.16	-21.84	74.00	42.69	36.99	8.14	35.66	Peak
3	11490.000	45.14	-8.86	54.00	30.58	40.10	9.74	35.28	Average
4	11490.000	56.34	-17.66	74.00	41.78	40.10	9.74	35.28	Peak
5	17235.000	61.35	-6.85	68.20	43.46	41.05	11.93	35.09	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456

FAX: 886-3-327-0973


Report Version : Rev. 02


: E56 of E70

: E57 of E70

: Rev. 02





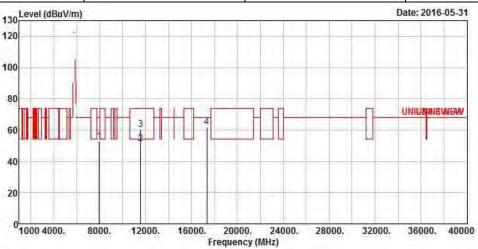

	Freq	Level		1		Antenna Factor		D. J.	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7964.000	52.66	-15.54	68.20	43.14	37.16	7.98	35.62	Peak
2	11570.000	51.30	-2.70	54.00	36.89	39.93	9.79	35.31	Average
3	11570.000	60.39	-13.61	74.00	45.98	39.93	9.79	35.31	Peak
4	17355.000	62.01	-6.19	68.20	43.79	41.44	11.92	35.14	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version





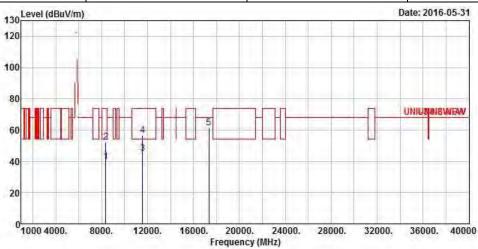

	Freq	Level	Over Limit	Limit Line	F100	Antenna Factor		0.00	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8364.000	39.59	-14.41	54.00	30.15	36.91	8.20	35.67	Average
2	8364.000	52.23	-21.77	74.00	42.79	36.91	8.20	35.67	Peak
3	11570.000	45.26	-8.74	54.00	30.85	39.93	9.79	35.31	Average
4	11570.000	56.55	-17.45	74.00	42.14	39.93	9.79	35.31	Peak
5	17355.000	61.45	-6.75	68.20	43.23	41.44	11.92	35.14	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E58 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02





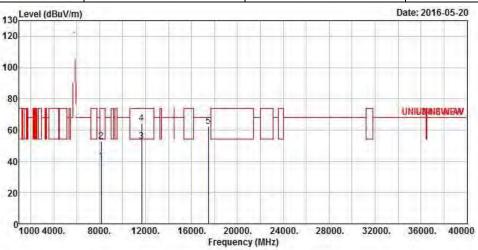

	Freq	Level	Over Limit			Antenna Factor			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8145.000	40.03	-13.97	54.00	30.52	37.08	8.07	35.64	Average
2	8145.000	52.53	-21.47	74.00	43.02	37.08	8.07	35.64	Peak
3	11650.000	52.64	-1.36	54.00	38.40	39.74	9.84	35.34	Average
4	11650.000	64.44	-9.56	74.00	50.20	39.74	9.84	35.34	Peak
5	17475.000	62.44	-5.76	68.20	43.90	41.82	11.90	35.18	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC.


TEL: 886-3-327-3456

FAX: 886-3-327-0973

Page No. : E59 of E70
Report Version : Rev. 02





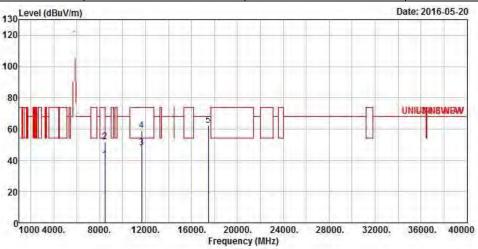

	Freq	Level	Over Limit	-	\$100 miles	Antenna Factor		The second second	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8474.000	40.10	-13.90	54.00	30.69	36.82	8.27	35.68	Average
2	8474.000	52.00	-22.00	74.00	42.59	36.82	8.27	35.68	Peak
3	11650.000	47.94	-6.06	54.00	33.70	39.74	9.84	35.34	Average
4	11650.000	59.14	-14.86	74.00	44.90	39.74	9.84	35.34	Peak
5	17475.000	62.34	-5.86	68.20	43.80	41.82	11.90	35.18	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version


FAX: 886-3-327-0973


Page No. : E60 of E70
Report Version : Rev. 02

: E61 of E70

: Rev. 02





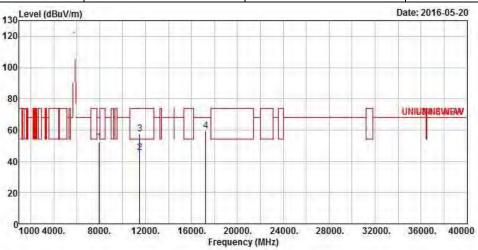

	Freq	Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7985.000	52.16	-16.04	68.20	42.62	37.18	7.98	35.62	Peak
2	11490.000	45.76	-8.24	54.00	31.20	40.10	9.74	35.28	Average
3	11490.000	57.46	-16.54	74.00	42.90	40.10	9.74	35.28	Peak
4	17235,000	59.38	-8.82	68.20	41.49	41.05	11.93	35.09	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version



Tra	ınsmitter Radiated Unwan	Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT20	Test Freq. (MHz)	5745								
N _{TX}	1	Polarization	Н								

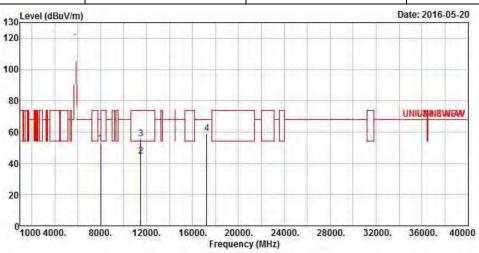

	Freq	Freq Level				Antenna Factor			
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8002.000	52.83	-15.37	68.20	43.26	37.20	8.00	35.63	Peak
2	11490.000	44.68	-9.32	54.00	30.12	40.10	9.74	35.28	Average
3	11490.000	55.80	-18.20	74.00	41.24	40.10	9.74	35.28	Peak
4	17235,000	59.00	-9.20	68.20	41.11	41.05	11.93	35.09	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E62 of E70 Report Version : Rev. 02





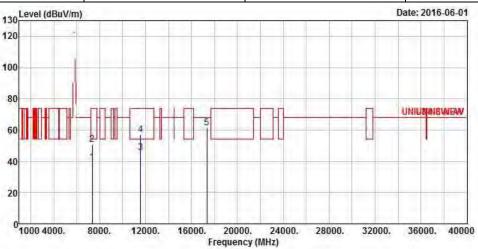

	Freq	Level	Over Limit		F100	Antenna Factor		The state of the s	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7365.000	39.13	-14.87	54.00	30.70	36.25	7.61	35.43	Average
2	7365.000	51.01	-22.99	74.00	42.58	36.25	7.61	35.43	Peak
3	11570.000	45.64	-8.36	54.00	31.23	39.93	9.79	35.31	Average
4	11570.000	56.90	-17.10	74.00	42.49	39.93	9.79	35.31	Peak
5	17355.000	61.46	-6.74	68.20	43.24	41.44	11.92	35.14	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E63 of E70
Report Version : Rev. 02





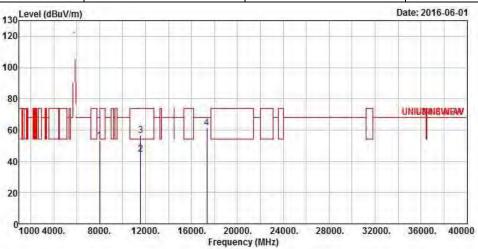

		Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8003.000	53.26	-14.94	68.20	43.69	37.20	8.00	35.63	Peak
2	11570.000	44.66	-9.34	54.00	30.25	39.93	9.79	35.31	Average
3	11570.000	56.50	-17.50	74.00	42.09	39.93	9.79	35.31	Peak
4	17355.000	61.22	-6.98	68.20	43.00	41.44	11.92	35.14	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. TEL: 886-3-327-3456


FAX: 886-3-327-0973

Report Version

: E64 of E70 : Rev. 02





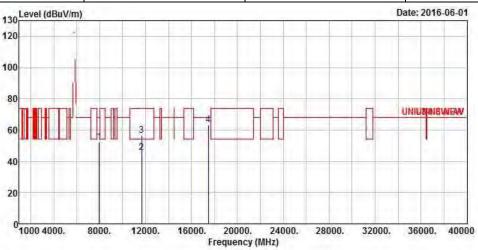

		Level	Over Limit			Antenna Factor		Control of the Control	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7985.000	52.23	-15.97	68.20	42.69	37.18	7.98	35.62	Peak
2	11650.000	45.74	-8.26	54.00	31.50	39.74	9.84	35.34	Average
3	11650.000	56.62	-17.38	74.00	42.38	39.74	9.84	35.34	Peak
4	17475.000	63.08	-5.12	68.20	44.54	41.82	11.90	35.18	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page TEL: 886-3-327-3456 Repo

FAX: 886-3-327-0973

Page No. : E65 of E70
Report Version : Rev. 02





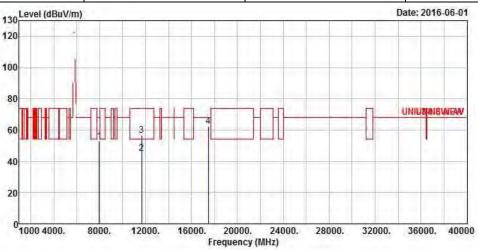

		Level				Antenna Factor			Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7965.000	52.77	-15.43	68.20	43.25	37.16	7.98	35.62	Peak
2	11650.000	45.25	-8.75	54.00	31.01	39.74	9.84	35.34	Average
3	11650.000	56.42	-17.58	74.00	42.18	39.74	9.84	35.34	Peak
4	17475.000	62.16	-6.04	68.20	43.62	41.82	11.90	35.18	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version

FAX: 886-3-327-0973

Page No. : E66 of E70 Report Version : Rev. 02



Tra	Transmitter Radiated Unwanted Emissions (Above 1GHz)										
Modulation Mode	HT40	Test Freq. (MHz)	5755								
N _{TX}	1	Polarization	V								

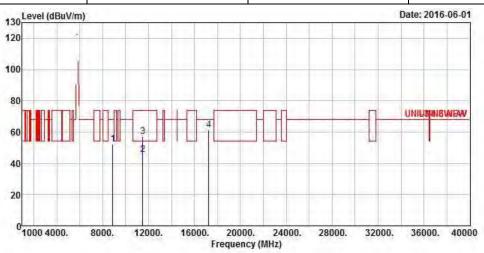

	Freq	Level					Cable Preamp Loss Factor		Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8874.000	52.41	-15.79	68.20	42.59	37.25	8.30	35.73	Peak
2	11510.000	45.65	-8.35	54.00	31.11	40.08	9.74	35.28	Average
3	11510.000	57.02	-16.98	74.00	42.48	40.08	9.74	35.28	Peak
4	17265.000	61.27	-6.93	68.20	43.31	41.15	11.92	35.11	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E67 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02



Transmitter Radiated Unwanted Emissions (Above 1GHz)									
Modulation Mode	HT40	Test Freq. (MHz)	5755						
N _{TX}	1	Polarization	Н						

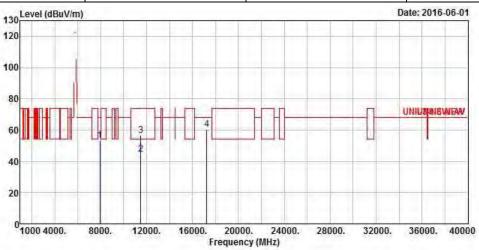

	Freq	Over eq Level Limit					Antenna Cable Factor Loss		Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7947.000	53.16	-15.04	68.20	43.68	37.14	7.95	35.61	Peak
2	11510.000	44.55	-9.45	54.00	30.01	40.08	9.74	35.28	Average
3	11510.000	56.68	-17.32	74.00	42.14	40.08	9.74	35.28	Peak
4	17265.000	60.66	-7.54	68.20	42.70	41.15	11.92	35.11	Peak

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No. : E68 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02





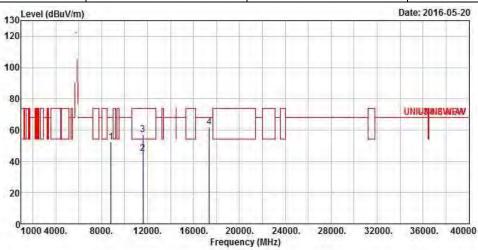

	Freq	Freq Level					Antenna Factor		A	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		
1	8814.000	52.27	-15.93	68.20	42.52	37.18	8.29	35.72	Peak	
2	11590.000	45.18	-8.82	54.00	30.80	39.88	9.82	35.32	Average	
3	11590.000	56.98	-17.02	74.00	42.60	39.88	9.82	35.32	Peak	
4	17385,000	61.69	-6.51	68.20	43,40	41.53	11.91	35.15	Peak	

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.


SPORTON INTERNATIONAL INC. Page No. : E69 of E70 TEL: 886-3-327-3456 Report Version : Rev. 02

: E70 of E70

: Rev. 02





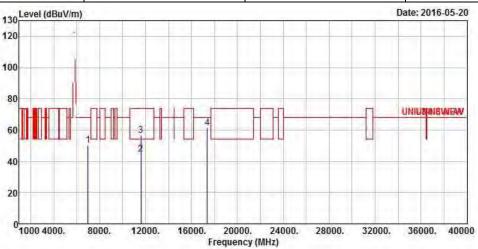

		Level		Limit Line					Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7002.000	50.54	-17.66	68.20	43.13	35.31	7.49	35.39	Peak
2	11590.000	44.48	-9.52	54.00	30.10	39.88	9.82	35.32	Average
3	11590.000	56.39	-17.61	74.00	42.01	39.88	9.82	35.32	Peak
4	17385.000	61.39	-6.81	68.20	43.10	41.53	11.91	35.15	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

SPORTON INTERNATIONAL INC. Page No.
TEL: 886-3-327-3456 Report Version



FS Result Appendix F

Summary

Mode	Result	Ch	Center	FI	Fh	ppm	Limit	Port	Remark
		(Hz)	(Hz)	(Hz)	(Hz)		(ppm)		
5.2G;11a;20;1;1;5200;M;T55,VN	Pass	5.2G	5.20009676G	NaN	NaN	18.608	20	1	10 min

 SPORTON INTERNATIONAL INC.
 Page No.
 : F1 of F2

 TEL: 886-3-327-3456
 Report Version
 : Rev. 02

TEL: 886-3-327-3456 FAX: 886-3-327-0973



Appendix F FS Result

Result

Mode	Result	Ch	Center	FI	Fh	ppm	Limit	Port	Remark
		(Hz)	(Hz)	(Hz)	(Hz)		(ppm)		
5.2G;11a;20;1;1;5200;M;TN,VL	Pass	5.2G	5.19999384G	NaN	NaN	1.185	20	1	0 min
5.2G;11a;20;1;1;5200;M;TN,VL	Pass	5.2G	5.19999463G	NaN	NaN	1.034	20	1	2 min
5.2G;11a;20;1;1;5200;M;TN,VL	Pass	5.2G	5.1999954G	NaN	NaN	0.885	20	1	5 min
5.2G;11a;20;1;1;5200;M;TN,VL	Pass	5.2G	5.19999661G	NaN	NaN	0.651	20	1	10 min
5.2G;11a;20;1;1;5200;M;TN,VH	Pass	5.2G	5.19999889G	NaN	NaN	0.213	20	1	0 min
5.2G;11a;20;1;1;5200;M;TN,VH	Pass	5.2G	5.19999966G	NaN	NaN	0.065	20	1	2 min
5.2G;11a;20;1;1;5200;M;TN,VH	Pass	5.2G	5.200004G	NaN	NaN	0.077	20	1	5 min
5.2G;11a;20;1;1;5200;M;TN,VH	Pass	5.2G	5.20000081G	NaN	NaN	0.156	20	1	10 min
5.2G;11a;20;1;1;5200;M;T55,VN	Pass	5.2G	5.20000302G	NaN	NaN	0.581	20	1	0 min
5.2G;11a;20;1;1;5200;M;T55,VN	Pass	5.2G	5.19998906G	NaN	NaN	2.103	20	1	2 min
5.2G;11a;20;1;1;5200;M;T55,VN	Pass	5.2G	5.20001476G	NaN	NaN	2.839	20	1	5 min
5.2G;11a;20;1;1;5200;M;T55,VN	Pass	5.2G	5.20009676G	NaN	NaN	18.608	20	1	10 min
5.2G;11a;20;1;1;5200;M;T50,VN	Pass	5.2G	5.20004994G	NaN	NaN	9.604	20	1	0 min
5.2G;11a;20;1;1;5200;M;T50,VN	Pass	5.2G	5.2000578G	NaN	NaN	11.115	20	1	2 min
5.2G;11a;20;1;1;5200;M;T50,VN	Pass	5.2G	5.2000645G	NaN	NaN	12.404	20	1	5 min
5.2G;11a;20;1;1;5200;M;T50,VN	Pass	5.2G	5.20006481G	NaN	NaN	12.464	20	1	10 min
5.2G;11a;20;1;1;5200;M;T40,VN	Pass	5.2G	5.20003063G	NaN	NaN	5.89	20	1	0 min
5.2G;11a;20;1;1;5200;M;T40,VN	Pass	5.2G	5.20003231G	NaN	NaN	6.213	20	1	2 min
5.2G;11a;20;1;1;5200;M;T40,VN	Pass	5.2G	5.20003563G	NaN	NaN	6.853	20	1	5 min
5.2G;11a;20;1;1;5200;M;T40,VN	Pass	5.2G	5.20003939G	NaN	NaN	7.576	20	1	10 min
5.2G;11a;20;1;1;5200;M;T30,VN	Pass	5.2G	5.20000288G	NaN	NaN	0.554	20	1	0 min
5.2G;11a;20;1;1;5200;M;T30,VN	Pass	5.2G	5.20000649G	NaN	NaN	1.249	20	1	2 min
5.2G;11a;20;1;1;5200;M;T30,VN	Pass	5.2G	5.20000827G	NaN	NaN	1.59	20	1	5 min
5.2G;11a;20;1;1;5200;M;T30,VN	Pass	5.2G	5.20001196G	NaN	NaN	2.3	20	1	10 min
5.2G;11a;20;1;1;5200;M;T20,VN	Pass	5.2G	5.19999675G	NaN	NaN	0.625	20	1	0 min
5.2G;11a;20;1;1;5200;M;T20,VN	Pass	5.2G	5.19999719G	NaN	NaN	0.539	20	1	2 min
5.2G;11a;20;1;1;5200;M;T20,VN	Pass	5.2G	5.19999809G	NaN	NaN	0.368	20	1	5 min
5.2G;11a;20;1;1;5200;M;T20,VN	Pass	5.2G	5.19999868G	NaN	NaN	0.254	20	1	10 min
5.2G;11a;20;1;1;5200;M;T10,VN	Pass	5.2G	5.19999193G	NaN	NaN	1.552	20	1	0 min
5.2G;11a;20;1;1;5200;M;T10,VN	Pass	5.2G	5.19999189G	NaN	NaN	1.559	20	1	2 min
5.2G;11a;20;1;1;5200;M;T10,VN	Pass	5.2G	5.19999192G	NaN	NaN	1.554	20	1	5 min
5.2G;11a;20;1;1;5200;M;T10,VN	Pass	5.2G	5.19999216G	NaN	NaN	1.508	20	1	10 min
5.2G;11a;20;1;1;5200;M;T0,VN	Pass	5.2G	5.1999932G	NaN	NaN	1.308	20	1	0 min
5.2G;11a;20;1;1;5200;M;T0,VN	Pass	5.2G	5.19999297G	NaN	NaN	1.352	20	1	2 min
5.2G;11a;20;1;1;5200;M;T0,VN	Pass	5.2G	5.19999275G	NaN	NaN	1.395	20	1	5 min
5.2G;11a;20;1;1;5200;M;T0,VN	Pass	5.2G	5.19999343G	NaN	NaN	1.263	20	1	10 min
5.2G;11a;20;1;1;5200;M;T-10,VN	Pass	5.2G	5.19999488G	NaN	NaN	0.984	20	1	0 min
5.2G;11a;20;1;1;5200;M;T-10,VN	Pass	5.2G	5.19999472G	NaN	NaN	1.015	20	1	2 min
5.2G;11a;20;1;1;5200;M;T-10,VN	Pass	5.2G	5.19999466G	NaN	NaN	1.026	20	1	5 min
5.2G;11a;20;1;1;5200;M;T-10,VN	Pass	5.2G	5.19999458G	NaN	NaN	1.041	20	1	10 min
5.2G;11a;20;1;1;5200;M;T-20,VN	Pass	5.2G	5.1999924G	NaN	NaN	1.461	20	1	0 min
5.2G;11a;20;1;1;5200;M;T-20,VN	Pass	5.2G	5.19999247G	NaN	NaN	1.449	20	1	2 min
5.2G;11a;20;1;1;5200;M;T-20,VN	Pass	5.2G	5.19999348G	NaN	NaN	1.254	20	1	5 min
5.2G;11a;20;1;1;5200;M;T-20,VN	Pass	5.2G	5.19999396G	NaN	NaN	1.161	20	1	10 min

SPORTON INTERNATIONAL INC. : F2 of F2 Page No. Report Version : Rev. 02

TEL: 886-3-327-3456 FAX: 886-3-327-0973