



# FCC RF Test Report

**APPLICANT** : Nest Labs Inc.  
**EQUIPMENT** : Nest Hello  
**MODEL NAME** : A0077  
**FCC ID** : ZQANC51  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System

The testing was completed on Oct. 31, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.**

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : ZQANC51

Page Number : 1 of 36

Report Issued Date : Nov. 09, 2017

Report Version : Rev. 02

Report Template No.: BU5-FR15CZigbee Version 1.0



# TABLE OF CONTENTS

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Product Feature of Equipment Under Test..... 5

    1.3 Modification of EUT ..... 5

    1.4 Testing Location ..... 6

    1.5 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 7**

    2.1 Descriptions of Test Mode ..... 7

    2.2 Test Mode ..... 7

    2.3 Connection Diagram of Test System ..... 8

    2.4 Support Unit used in test configuration and system ..... 8

    2.5 EUT Operation Test Setup ..... 9

    2.6 Measurement Results Explanation Example..... 9

**3 TEST RESULT ..... 10**

    3.1 6dB and 99% Bandwidth Measurement ..... 10

    3.2 Peak Output Power Measurement ..... 15

    3.3 Power Spectral Density Measurement ..... 16

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 21

    3.5 Spurious Emission Measurement in the Restricted Band ..... 26

    3.6 AC Conducted Emission Measurement..... 30

    3.7 Antenna Requirements ..... 34

**4 LIST OF MEASURING EQUIPMENT..... 35**

**5 UNCERTAINTY OF EVALUATION..... 36**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. CONDUCTED SPURIOUS EMISSION**

**APPENDIX C. CONDUCTED SPURIOUS EMISSION PLOTS**

**APPENDIX D. CABINET RADIATION DATA**

**APPENDIX E. CABINET RADIATION PLOTS**

**APPENDIX F. DUTY CYCLE PLOTS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass
3.1	-	99% Bandwidth	-	Pass
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass
3.6	15.207	AC Conducted Emission	15.207(a)	Pass
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass



# 1 General Description

## 1.1 Applicant

Nest Labs Inc.  
3400 Hillview Ave.Palo Alto, CA 94304 USA

## 1.2 Product Feature of Equipment Under Test

Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac, Wi-Fi 5GHz 802.11a/n/ac and Zigbee

Product Specification subjective to this standard	
Antenna Type	WLAN: IFA Antenna Bluetooth: IFA Antenna Zigbee: IFA Antenna

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 and TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	TH05-HY	CO05-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.	
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
<b>Test Site No.</b>	<b>Sporton Site No.</b>	
	03CH11-HY	03CH15-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
- ♦ ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

### 2.1 Descriptions of Test Mode

The RF output power was recorded in the following table:

Channel	Frequency	Zigbee RF Output Power	
		Data Rate / Modulation	
		BPSK/QPSK	
		250kbps	
Ch11	2405MHz	21.15 dBm	
Ch18	2440MHz	20.91 dBm	
Ch24	2470MHz	20.02 dBm	
Ch25	2475MHz	15.00 dBm	

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.


### 2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
Conducted TCs	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH18_2440 MHz
	Mode 3: Zigbee Tx CH24_2470 MHz
	Mode 4: Zigbee Tx CH25_2475 MHz
Radiated TCs	Mode 1: Zigbee Tx CH11_2405 MHz
	Mode 2: Zigbee Tx CH18_2440 MHz
	Mode 3: Zigbee Tx CH25_2475 MHz
AC Conducted Emission	Mode 1 :WLAN On + BLE On + Zigbee On + Sensor On + LED On + IR LED On + Speaker On + Camera + AC to AC transformer

## 2.3 Connection Diagram of Test System

<Zigbee Tx Mode>

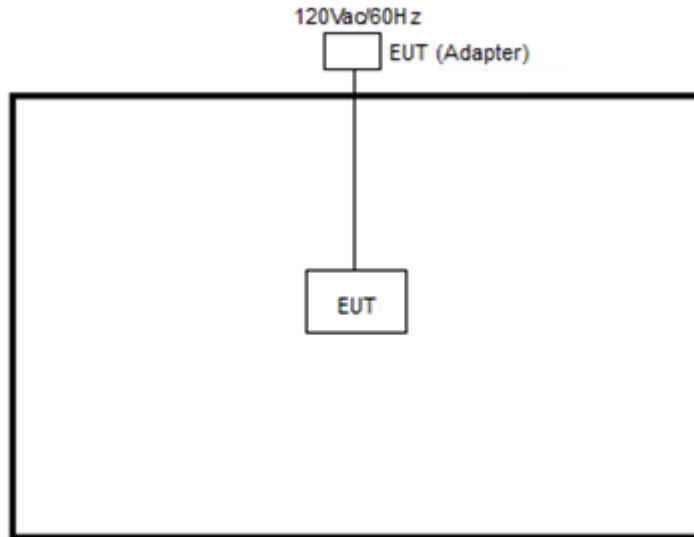

<AC Conducted Emission Mode>

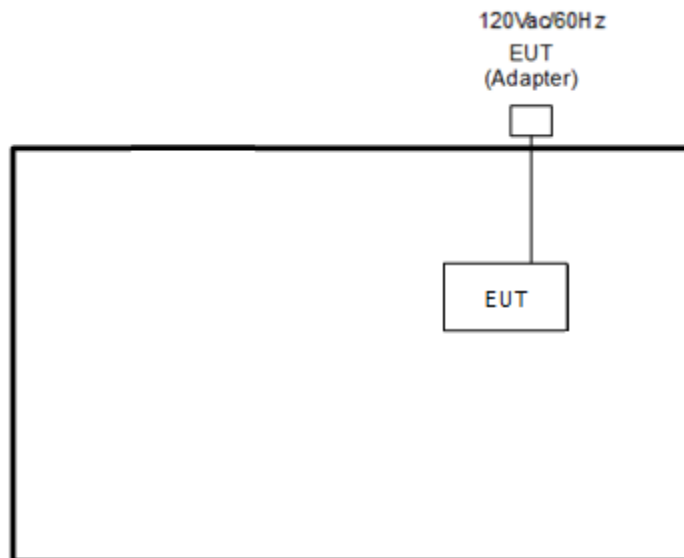

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook-40	Lenovo	IdeaPad(80O7)	N/A	N/A	N/A





## 2.5 EUT Operation Test Setup

For Zigbee function, programmed RF utility, “tera term” installed in the notebook make the EUT provide functions like channel selection and power level for continuous transmitting and receiving signals.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

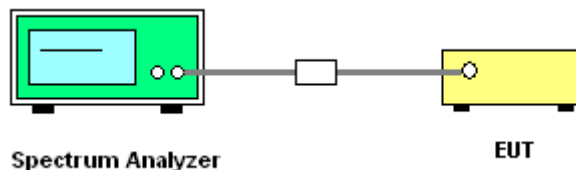




### 3.1.5 Test Result of 6dB Bandwidth

Test data refer to Appendix A.


6 dB Bandwidth Plot on Channel 11

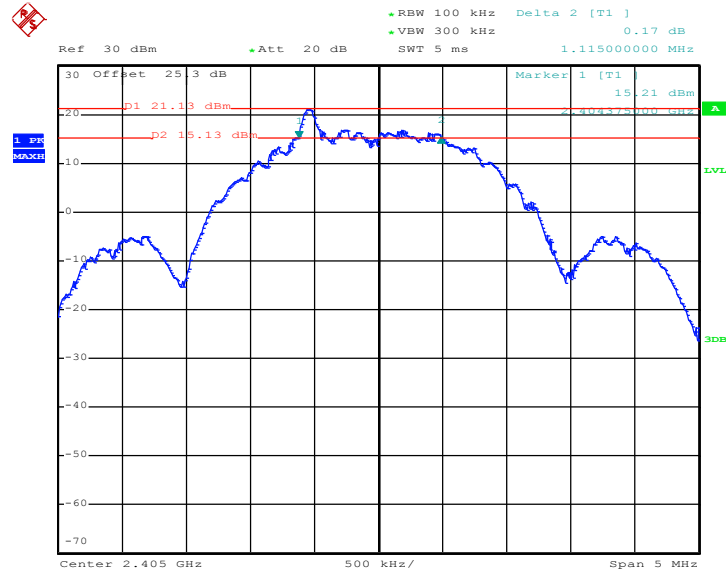

Date: 14.JUL.2017 01:09:36




6 dB Bandwidth Plot on Channel 18

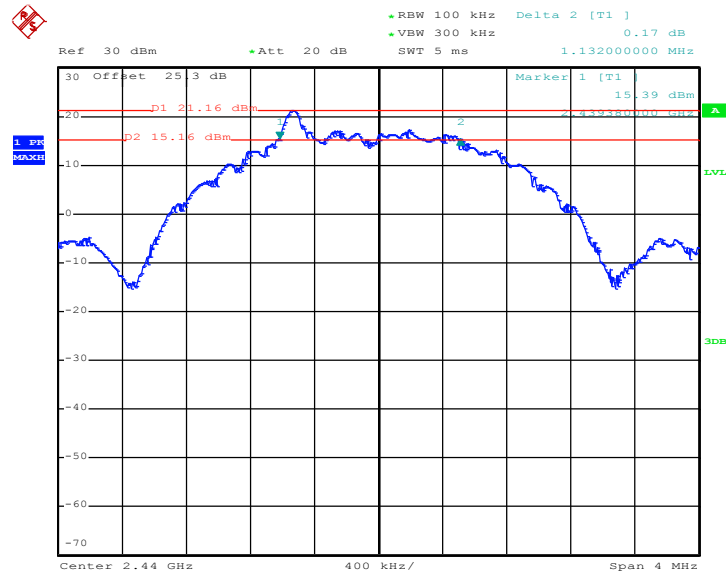

Date: 1.AUG.2017 01:30:15

6 dB Bandwidth Plot on Channel 25

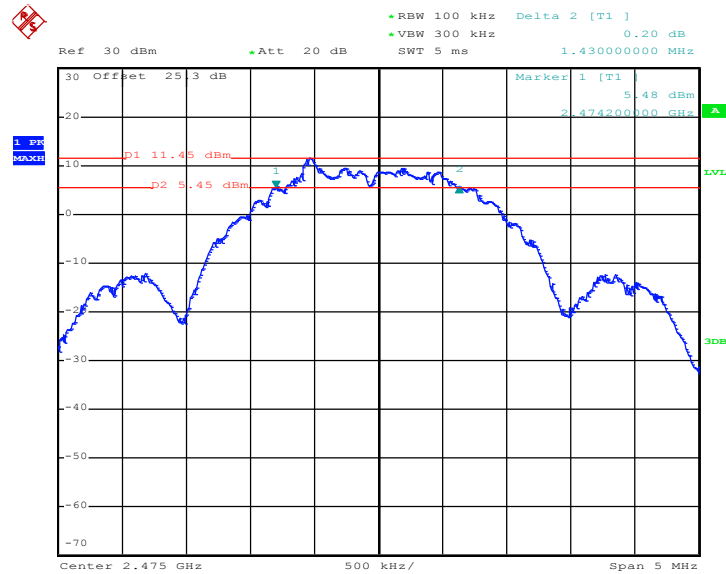


Date: 14.JUL.2017 01:35:46



### 3.1.6 Test Result of 99% Occupied Bandwidth

Test data refer to Appendix A.


99% Bandwidth Plot on Channel 11

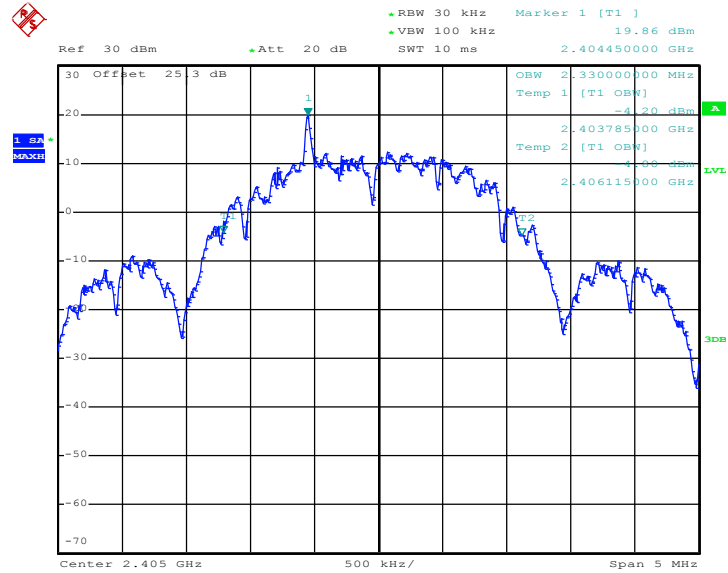

Date: 14.JUL.2017 01:18:08




99% Occupied Bandwidth Plot on Channel 18

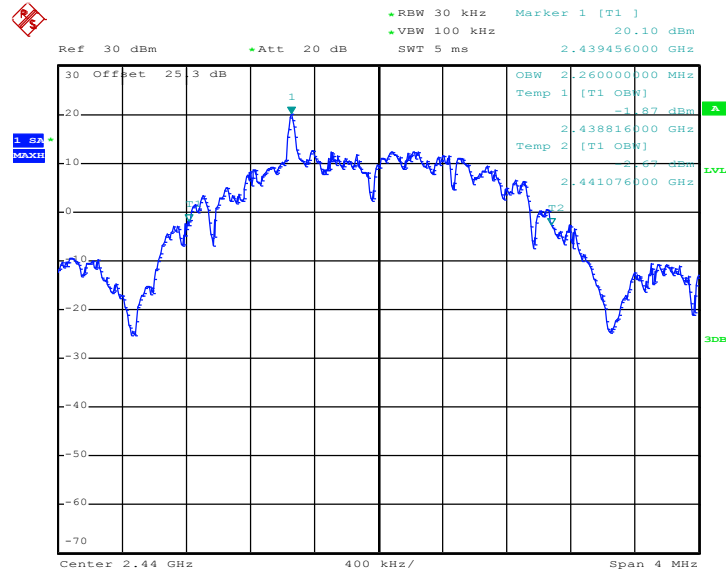

Date: 1.AUG.2017 01:34:02

99% Occupied Bandwidth Plot on Channel 25

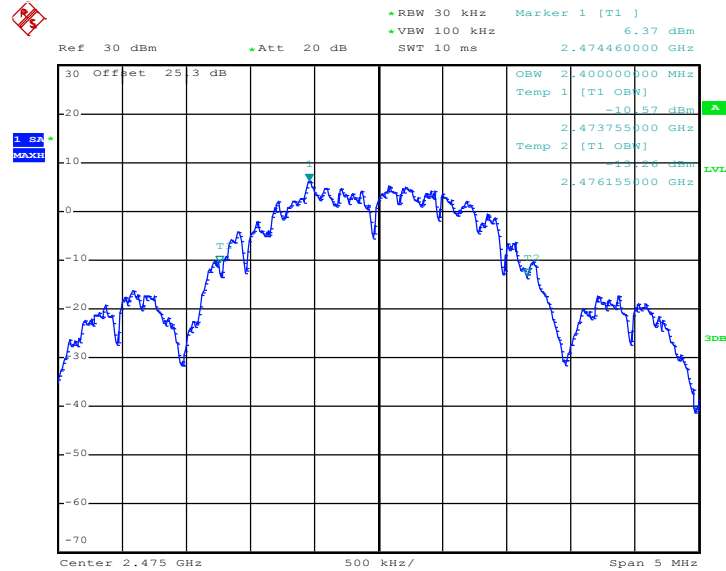

Date: 14.JUL.2017 01:42:08

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Peak Output Power Measurement

### 3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04 section 9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

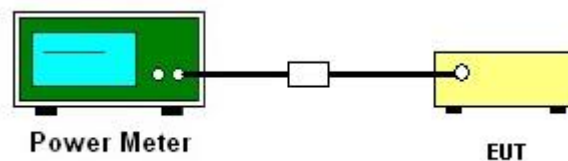

### 3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

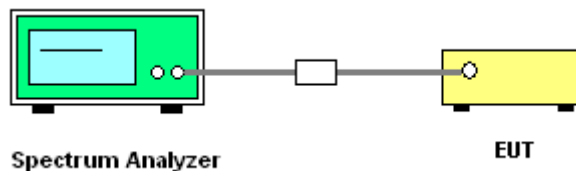

#### 3.3.5 Test Result of Power Spectral Density


Test data refers to Appendix A.





### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


PSD 100kHz Plot on Channel 11

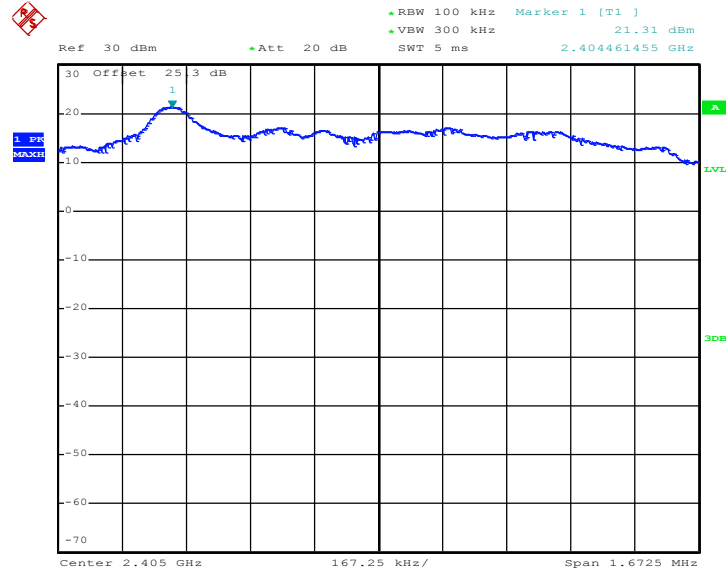

Date: 14.JUL.2017 11:26:06




PSD 100kHz Plot on Channel 18

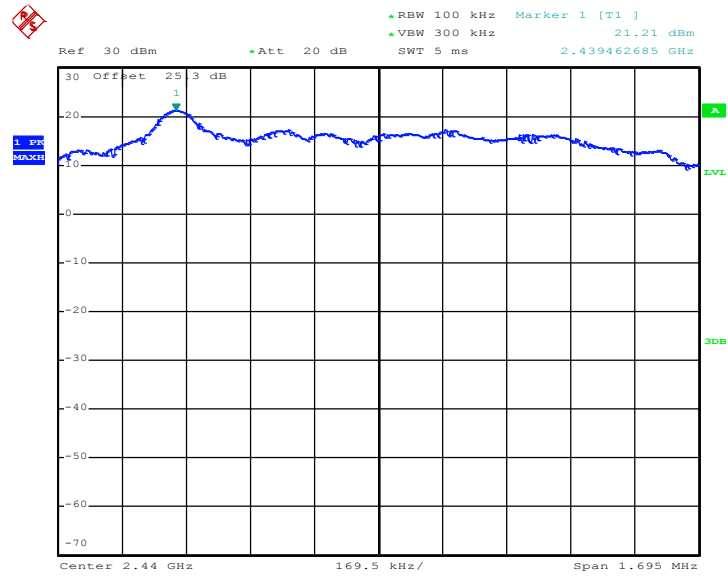

Date: 1.AUG.2017 01:30:58

PSD 100kHz Plot on Channel 25

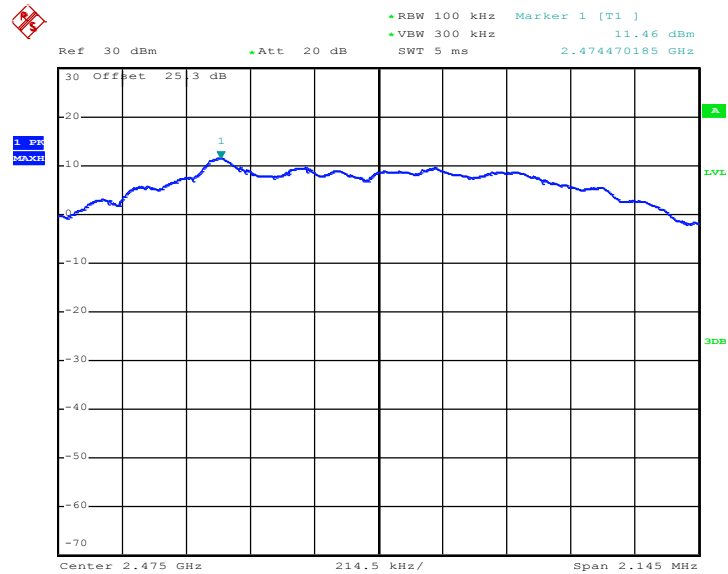


Date: 14.JUL.2017 01:38:29



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 11

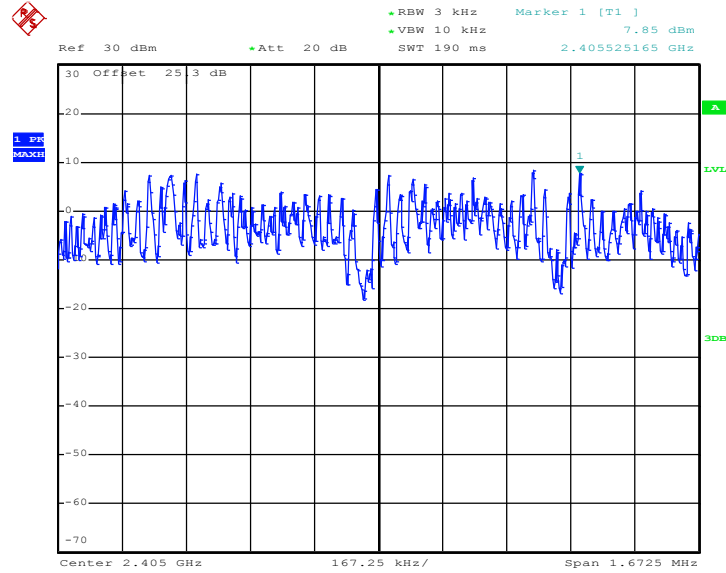

Date: 14.JUL.2017 11:21:10




PSD 3kHz Plot on Channel 18

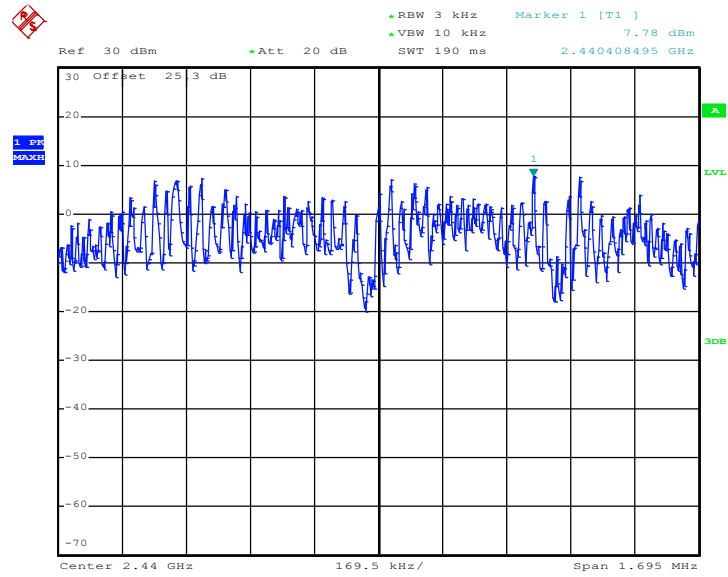

Date: 1.AUG.2017 01:30:31

PSD 3kHz Plot on Channel 25

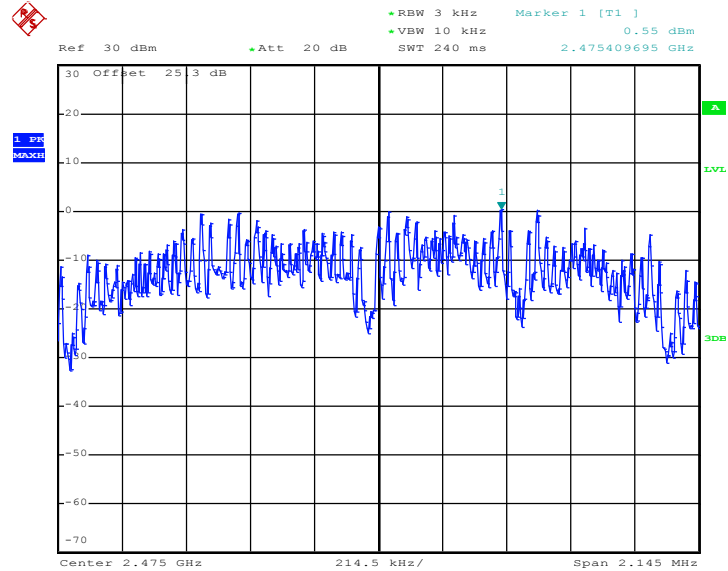

Date: 14.JUL.2017 01:37:14

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

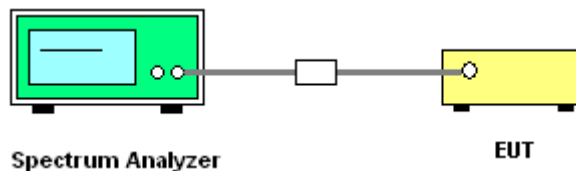




### 3.4.5 Test Result of Conducted Band Edges Plots

#### Low Band Edge Plot on Channel 11

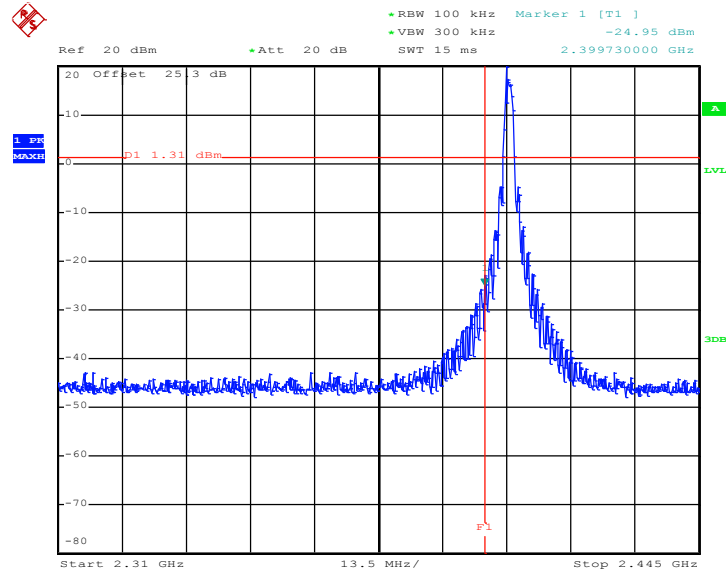

Date: 14.JUL.2017 11:52:33


#### High Band Edge Plot on Channel 25

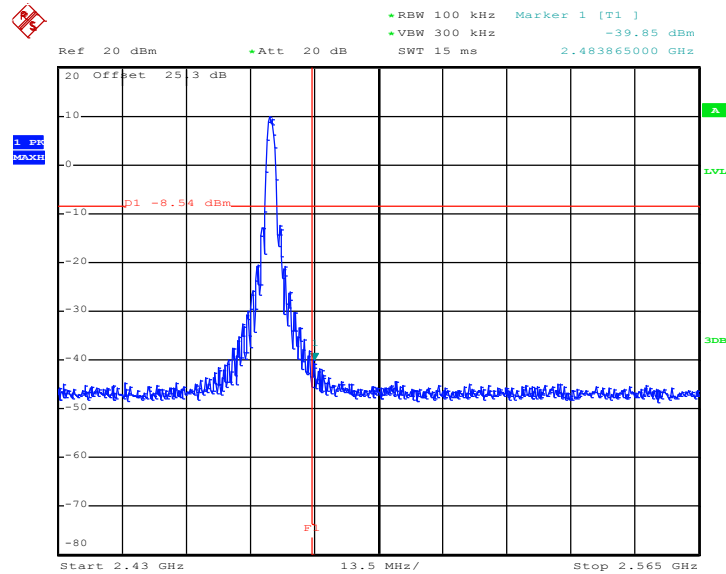

Date: 14.JUL.2017 01:40:05


### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Zigbee Channel 11

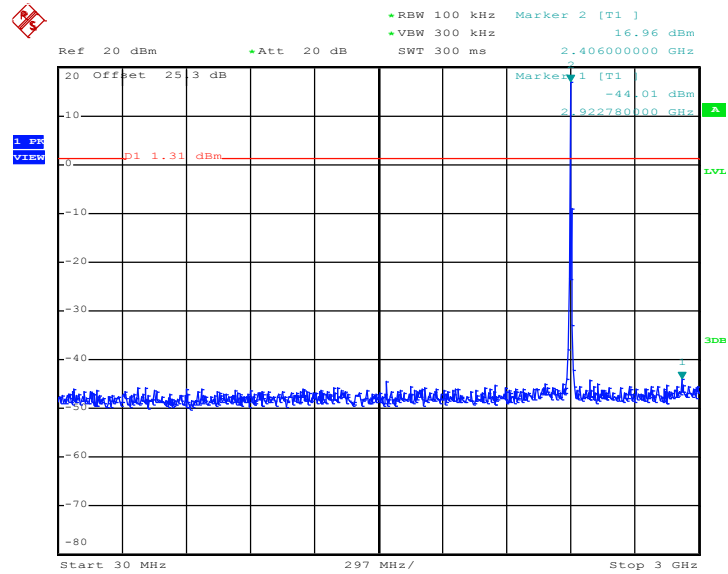

Date: 14.JUL.2017 11:55:07


#### Conducted Spurious Emission Plot on Zigbee Channel 11

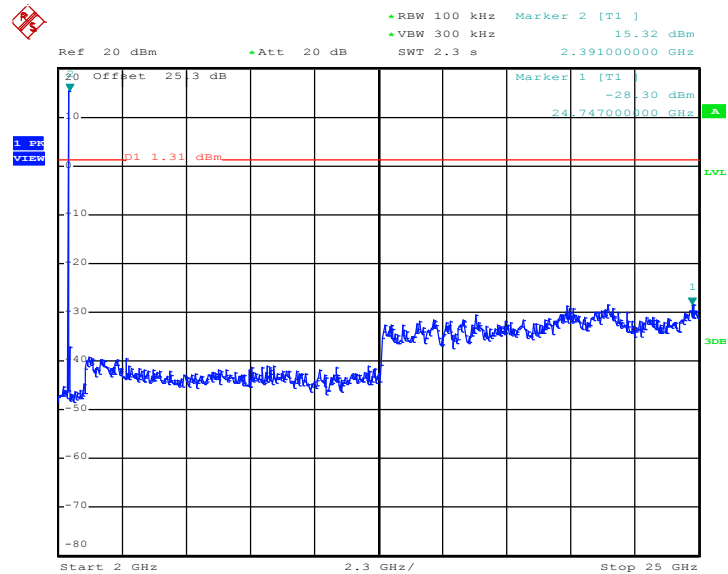

Date: 14.JUL.2017 11:55:15




### Conducted Spurious Emission Plot on Zigbee Channel 18

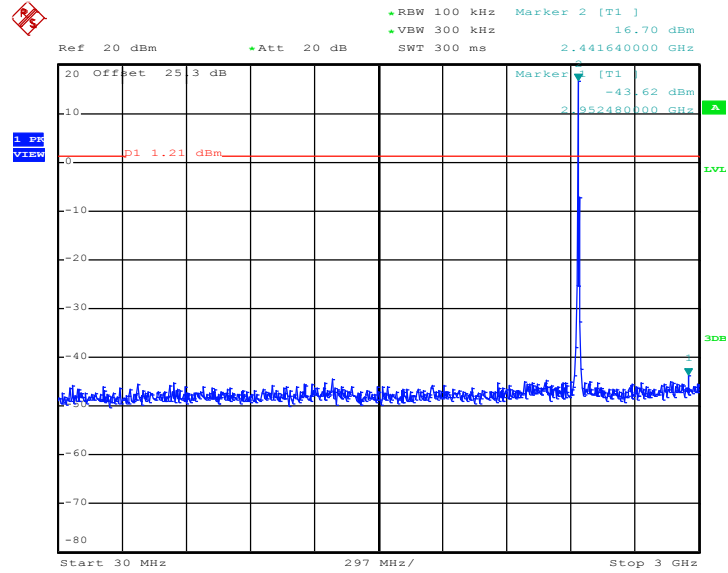

Date: 1.AUG.2017 01:31:38

### Conducted Spurious Emission Plot on Zigbee Channel 18

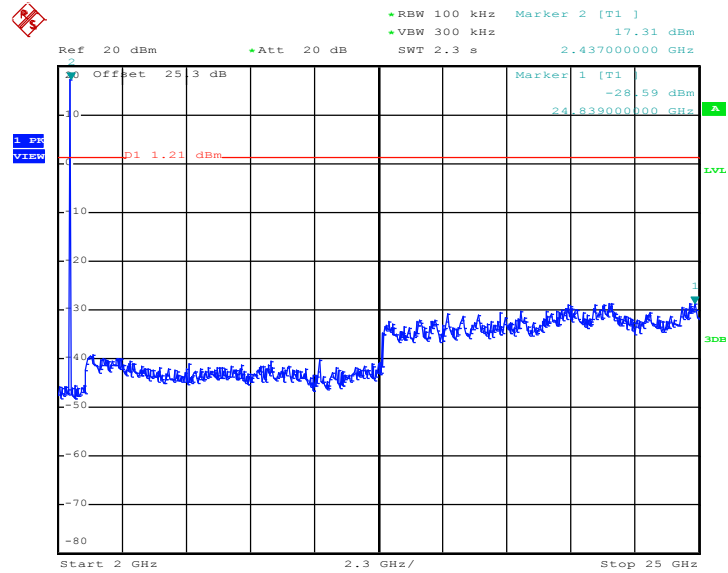


Date: 1.AUG.2017 01:32:42






### Conducted Spurious Emission Plot on Zigbee Channel 25

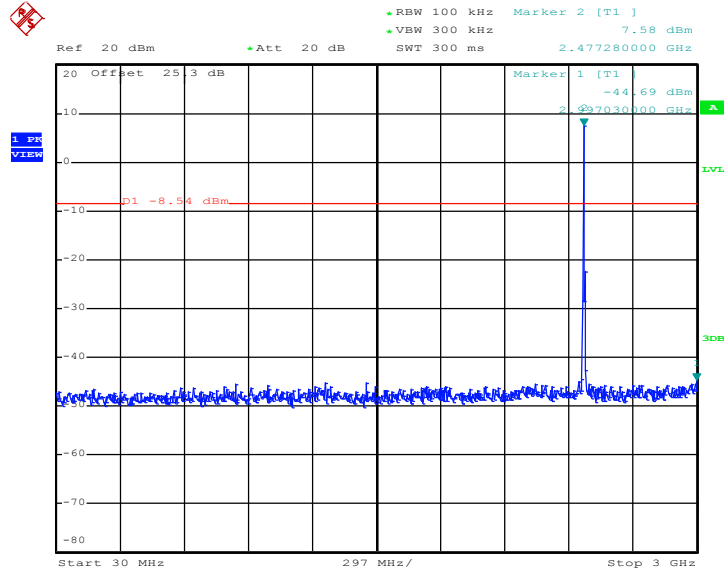

Date: 14.JUL.2017 01:40:21

### Conducted Spurious Emission Plot on Zigbee Channel 25

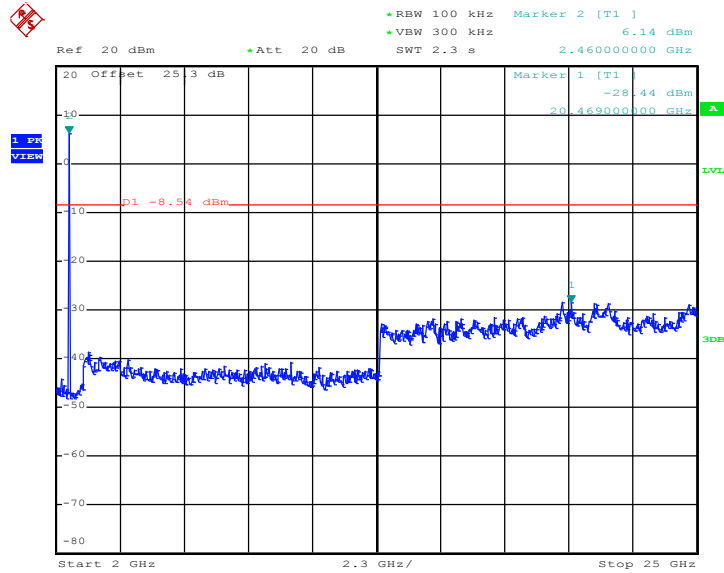

Date: 14.JUL.2017 01:40:29



### 3.5 Spurious Emission Measurement in the Restricted Band

#### 3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




### 3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For Conducted Measurement:

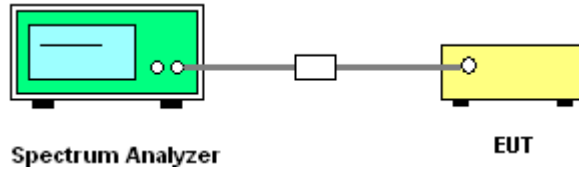


For radiated emissions below 30MHz

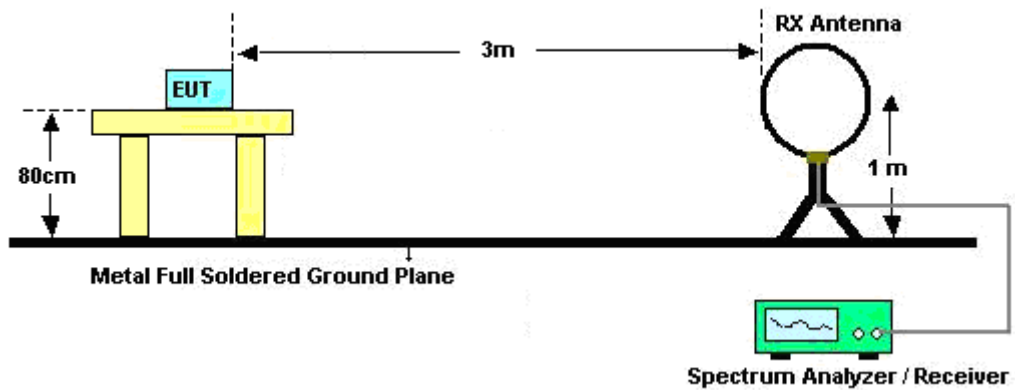

For radiated emissions from 30MHz to 1GHz

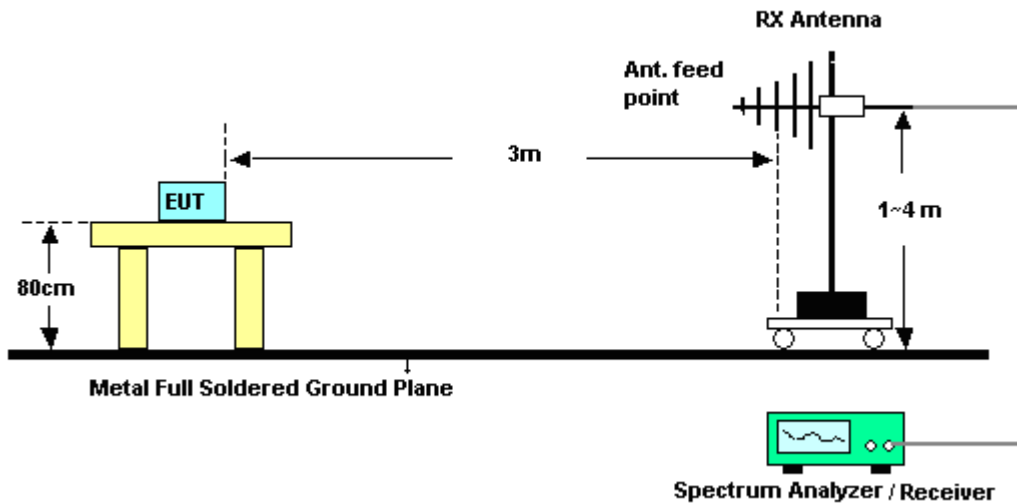

For radiated emissions above 1GHz

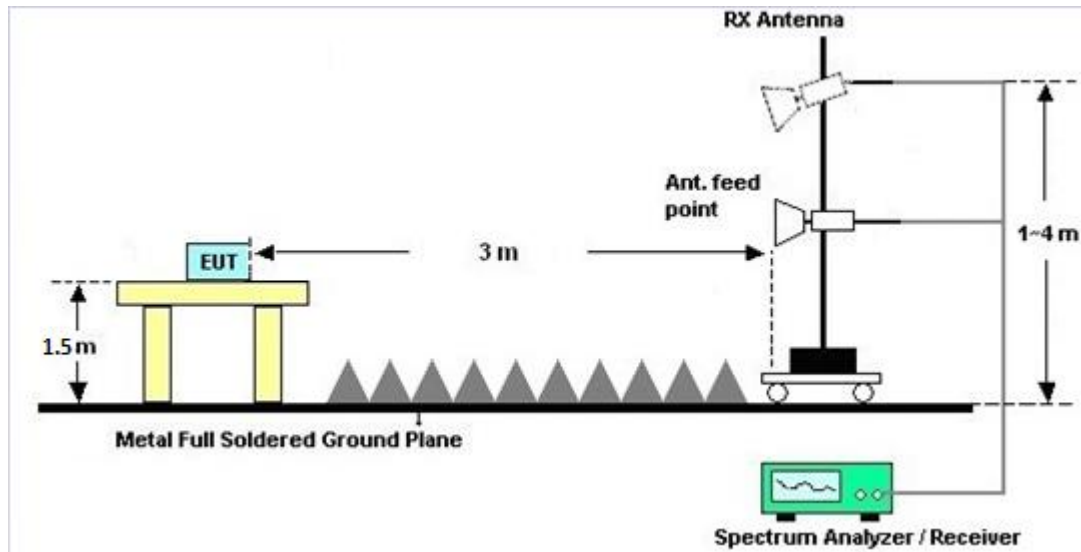

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.5.6 Test Result of Conducted Spurious at Band Edges in the Restricted Band

Please refer to Appendix B and C.

### 3.5.7 Test Result of Conducted Spurious Emission in the Restricted Band

Please refer to Appendix B and C.

### 3.5.8 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix D and E.

### 3.5.9 Duty Cycle

Please refer to Appendix F.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

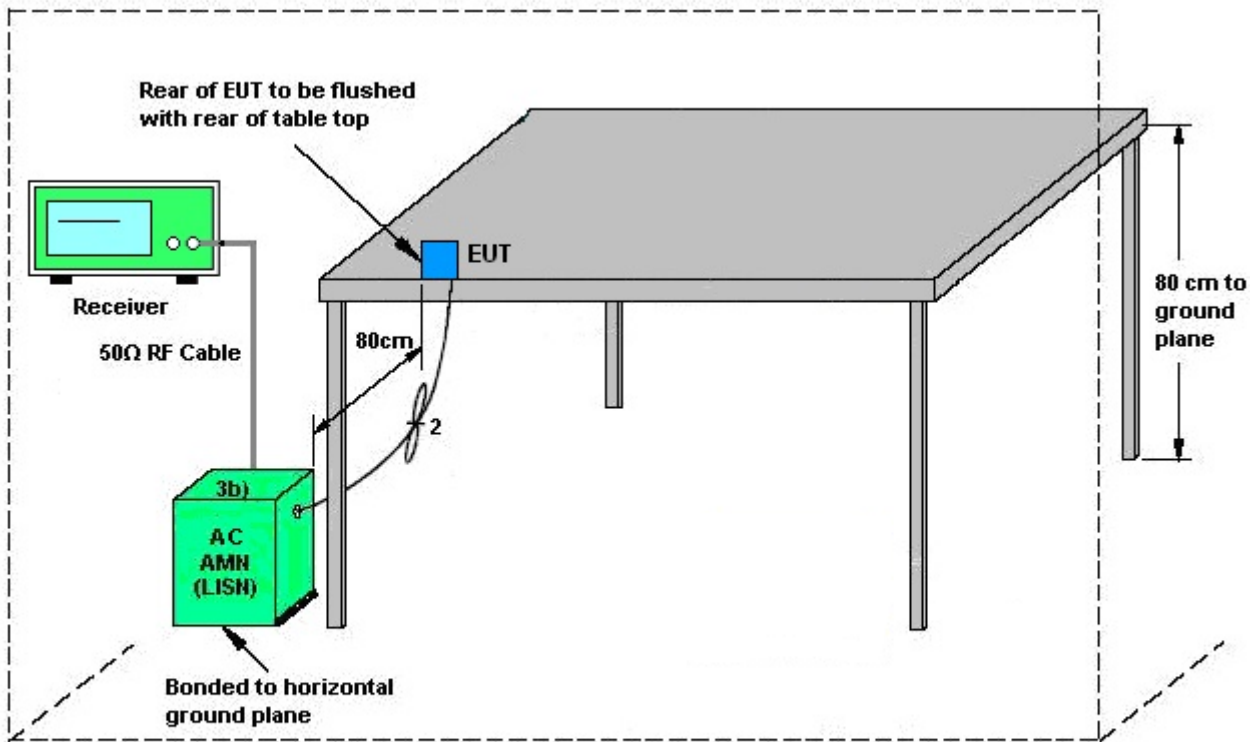


AMN = Artificial mains network (LISH)  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~25°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	52~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN On + BLE On + Zigbee On + Sensor On + LED On + IR LED On + Speaker On + Camera + AC to AC transformer		

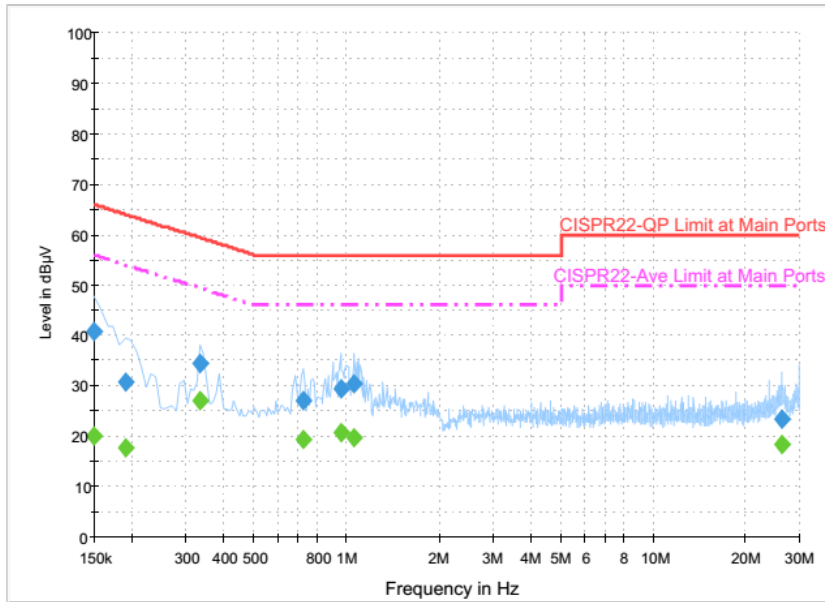

Final Result : QuasiPeak

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	40.9	Off	L1	19.6	25.1	66.0
0.190000	30.7	Off	L1	19.6	33.3	64.0
0.334000	34.5	Off	L1	19.6	24.9	59.4
0.726000	27.1	Off	L1	19.6	28.9	56.0
0.958000	29.6	Off	L1	19.6	26.4	56.0
1.062000	30.3	Off	L1	19.6	25.7	56.0
26.342000	23.3	Off	L1	20.9	36.7	60.0


Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	20.2	Off	L1	19.6	35.8	56.0
0.190000	17.6	Off	L1	19.6	36.4	54.0
0.334000	27.2	Off	L1	19.6	22.2	49.4
0.726000	19.3	Off	L1	19.6	26.7	46.0
0.958000	20.8	Off	L1	19.6	25.2	46.0
1.062000	19.8	Off	L1	19.6	26.2	46.0
26.342000	18.4	Off	L1	20.9	31.6	50.0





Test Mode :	Mode 1	Temperature :	22~25°C
Test Engineer :	Kai-Chun Chu	Relative Humidity :	52~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN On + BLE On + Zigbee On + Sensor On + LED On + IR LED On + Speaker On + Camera + AC to AC transformer		

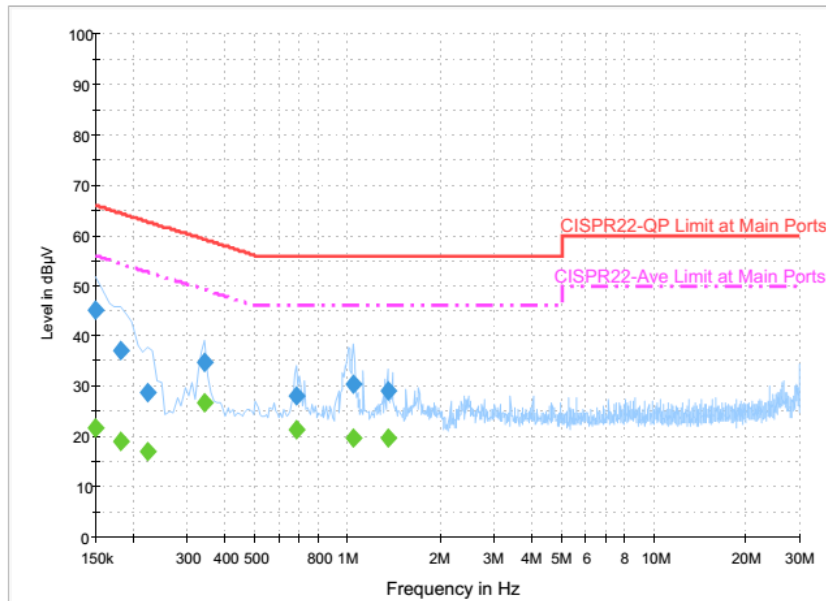

**Final Result : QuasiPeak**

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	45.3	Off	N	19.5	20.7	66.0
0.182000	37.0	Off	N	19.5	27.4	64.4
0.222000	28.6	Off	N	19.5	34.1	62.7
0.342000	34.8	Off	N	19.5	24.4	59.2
0.678000	28.0	Off	N	19.5	28.0	56.0
1.046000	30.3	Off	N	19.6	25.7	56.0
1.350000	29.2	Off	N	19.6	26.8	56.0

**Final Result : Average**

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	21.7	Off	N	19.5	34.3	56.0
0.182000	18.9	Off	N	19.5	35.5	54.4
0.222000	17.0	Off	N	19.5	35.7	52.7
0.342000	26.6	Off	N	19.5	22.6	49.2
0.678000	21.4	Off	N	19.5	24.6	46.0
1.046000	19.9	Off	N	19.6	26.1	46.0
1.350000	19.8	Off	N	19.6	26.2	46.0



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Power Meter	Agilent	E4416A	GB412923 44	N/A	Dec. 26, 2016	Jun. 30, 2017 ~ Oct. 26, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Dec. 26, 2016	Jun. 30, 2017 ~ Oct. 26, 2017	Dec. 25, 2017	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	15I00041S NO10	10MHz~6GHz	May 03, 2017	Jun. 30, 2017 ~ Oct. 26, 2017	May 02, 2018	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100057	9kHz-40GHz	Nov. 25, 2016	Jun. 30, 2017 ~ Oct. 26, 2017	Nov. 24, 2017	Conducted (TH05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Jul. 22, 2017	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI 7	100724	9kHz~7GHz	Aug. 30, 2016	Jul. 22, 2017	Aug. 29, 2017	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Nov. 29, 2016	Jul. 22, 2017	Nov. 28, 2017	Conduction (CO05-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz ~ 44GHz	Oct. 12, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 11, 2017	Radiation (03CH11-HY)
EMI Test Receiver	Agilent	N9038A(MXE )	MY532900 53	20Hz to 26.5GHz	Jan. 12, 2017	Jul. 01, 2017 ~ Jul. 25, 2017	Jan. 11, 2018	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Oct. 20, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 19, 2018	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&N-6-0 6	35414&AT- N0602	30MHz~1GHz	Oct. 15, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 14, 2017	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Oct. 07, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 06, 2017	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA9170 584	18GHz- 40GHz	Nov. 08, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Nov. 07, 2017	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Nov. 10, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY532700 80	1GHz~26.5GHz	Nov. 10, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Nov. 09, 2017	Radiation (03CH11-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1902247	1GHz~18GHz	Jun. 23, 2017	Jul. 01, 2017 ~ Jul. 25, 2017	Jun. 22, 2018	Radiation (03CH11-HY)
Preamplifier	MITEQ	TTA1840-35- HG	1887435	18GHz~40GHz	Oct. 13, 2016	Jul. 01, 2017 ~ Jul. 25, 2017	Oct. 12, 2017	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jul. 01, 2017 ~ Jul. 25, 2017	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jul. 01, 2017 ~ Jul. 25, 2017	N/A	Radiation (03CH11-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV 30	101749	10Hz~30GHz	Jan. 04, 2017	Jul. 05, 2017 ~ Oct. 31, 2017	Jan. 03, 2018	CSE (03CH15-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 23, 2016	Jul. 05, 2017 ~ Oct. 31, 2017	Dec. 22, 2017	CSE (03CH15-HY)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.70
---	------

<03CH11-HY >

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.20
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.50
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.20
---	------

<03CH15-HY >

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.14
---	------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.48
---	------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.12
---	------

**Appendix A. Conducted Test Results****Zigbee**

Test Engineer:	Aking Chang	Temperature:	21~25	°C
Test Date:	2017/6/30~2017/10/26	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250kbps	1	11	2405	2.330	1.115	0.50	Pass
Zigbee	250kbps	1	18	2440	2.260	1.132	0.50	Pass
Zigbee	250kbps	1	25	2475	2.400	1.430	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250kbps	1	11	2405	21.15	30.00	0.95	22.10	36.00	Pass
Zigbee	250kbps	1	18	2440	20.91	30.00	0.95	21.86	36.00	Pass
Zigbee	250kbps	1	24	2470	20.02	30.00	0.95	20.97	36.00	Pass
Zigbee	250kbps	1	25	2475	15.00	30.00	0.95	15.95	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
Zigbee	250kbps	1	11	2405	21.00
Zigbee	250kbps	1	18	2440	20.70
Zigbee	250kbps	1	24	2470	19.20
Zigbee	250kbps	1	25	2475	14.90

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250kbps	1	11	2405	21.31	7.85	0.95	8.00	Pass
Zigbee	250kbps	1	18	2440	21.21	7.78	0.95	8.00	Pass
Zigbee	250kbps	1	25	2475	11.46	0.55	0.95	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.



## Appendix B. Conducted Spurious Emission

Test Engineer :	Rover Lee	Temperature :	22~24°C
		Relative Humidity :	51~55%

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge @ Conducted)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
		( MHz )	( dBm )	( dB )	Limit	Level	Gain	Loss	Factor	Factor	Avg.
					Line	( dBm )	( dBi )	( dB )	( dB )	( dB )	( P/A )
Zigbee CH 11 2405MHz		2371.74	-26.05	-4.85	-21.2	-30.9	2	2.85	0	0	P
		2389.8	-43.81	-2.61	-41.2	-48.67	2	2.86	0	0	A
	*	2405	23.11	-	-	18.25	2	2.86	0	0	P
	*	2405	20.14	-	-	15.28	2	2.86	0	0	A
Zigbee CH 18 2440MHz		2389.8	-26.74	-5.54	-21.2	-31.6	2	2.86	0	0	P
		2320.08	-51.73	-10.53	-41.2	-56.54	2	2.81	0	0	A
	*	2440	22.77	-	-	17.86	2	2.91	0	0	P
	*	2440	19.83	-	-	14.92	2	2.91	0	0	A
		2484.67	-28.37	-7.17	-21.2	-33.32	2	2.95	0	0	P
		2487.54	-50.6	-9.4	-41.2	-55.55	2	2.95	0	0	A
Zigbee CH 24 2470MHz	*	2470	22.7	-	-	17.75	2	2.95	0	0	P
	*	2470	20.12	-	-	15.17	2	2.95	0	0	A
		2483.55	-27.71	-6.51	-21.2	-32.67	2	2.96	0	0	P
		2484	-43.35	-2.15	-41.2	-48.31	2	2.96	0	0	A
Zigbee CH 25 2475MHz	*	2475	16.1	-	-	11.15	2	2.95	0	0	P
	*	2475	13.16	-	-	8.21	2	2.95	0	0	A
		2483.62	-30.46	-9.26	-21.2	-35.42	2	2.95	0	0	P
		2483.5	-42.4	-1.2	-41.2	-47.36	2	2.95	0	0	A
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



2.4GHz 2400~2483.5MHz

Zigbee (Harmonic @ Conducted)

Zigbee	Note	Frequency ( MHz )	Level ( dBm )	Over Limit ( dB )	Limit Line ( dBm )	Read Level ( dBm )	Antenna Gain ( dBi )	Path Loss ( dB )	MIMO Factor ( dB )	Grounding Factor ( dB )	Peak Avg. (P/A)
Zigbee CH 11 2405MHz		4810	-66.59	-45.39	-21.2	-73.47	2	4.88	0	0	P
Zigbee CH 18 2440MHz		4880	-65.54	-44.34	-21.2	-72.43	2	4.89	0	0	P
		7320	-56.38	-35.18	-21.2	-64.73	2	6.35	0	0	P
Zigbee CH 24 2470MHz		4940	-55.09	-33.89	-21.2	-61.99	2	4.9	0	0	P
		7410	-46.02	-24.82	-21.2	-54.49	2	6.47	0	0	P
		12350	-44.5	-23.3	-21.2	-54.72	2	8.22	0	0	P
Zigbee CH 25 2475MHz		4950	-68.28	-47.08	-21.2	-75.17	2	4.89	0	0	P
		7425	-60.72	-39.52	-21.2	-69.16	2	6.44	0	0	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.										



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
				Limit	Line	Level	Gain	Loss	Factor	Factor	Avg.
		( MHz )	( dBm )	( dB )	( dBm )	( dBm )	( dBi )	( dB )	( dB )	( dB )	(P/A)
Zigbee LF		48.09	-79.17	-23.97	-55.2	-86.29	2	0.42	0	4.7	P
		93.18	-79.02	-27.32	-51.7	-86.31	2	0.59	0	4.7	P
		262.74	-79.15	-29.95	-49.2	-86.88	2	1.03	0	4.7	P
		633.2	-78.17	-28.97	-49.2	-86.42	2	1.55	0	4.7	P
		729.1	-69.07	-19.87	-49.2	-77.4	2	1.63	0	4.7	P
		943.3	-76.31	-27.11	-49.2	-84.99	2	1.98	0	4.7	P
Remark	1. No other spurious found. 2. All results are PASS against limit line.										





A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	MIMO	Grounding	Peak
Ant.				Limit	Line	Level	Gain	Loss	Factor	Factor	Avg.
1		( MHz )	( dBm )	( dB )	( dBm )	(dBm)	( dBi )	( dB )	( dB )	( dB )	(P/A)
802.11b		2386.545	-39.03	-17.83	-21.2	-44.06	2	3.03	0	0	P
CH 01											
2412MHz		2386.125	-48.1	-6.9	-41.2	-53.13	2	3.03	0	0	A

1. Level(dBm)

= Antenna Gain(dBi) + Path Loss(dB) + Read Level(dBm) + MIMO Factor(dB) + Grounding Factor(dB)

2. Over Limit(dB)

= Level(dBm) – Limit Line(dBm)

**For Peak Limit @ 2386.545MHz:**

1. Level(dBm)

= Antenna Gain(dBi) + Path Loss(dB) + Read Level(dBm) + MIMO Factor(dB) + Grounding Factor(dB)

= 2(dB) + 3.03(dB) – 44.06(dBm)

= -39.03(dBm)

2. Over Limit(dB)

= Level(dBm) – Limit Line(dBm)

= -39.03(dBm) + 21.2(dBm)

= -17.83(dB)

**For Average Limit @ 2386.125MHz:**

1. Level(dBm)

= Antenna Gain(dBi) + Path Loss(dB) + Read Level(dBm) + MIMO Factor(dB) + Grounding Factor(dB)

= 2(dBi) + 3.03(dB) – 53.13(dBm)

= -48.1(dBm)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -6.9(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix C. Conducted Spurious Emission Plots

Test Engineer :	Rover Lee	Temperature :	22~24°C
		Relative Humidity :	51~55%

**Note symbol**

-L	Low channel location
-R	High channel location



2.4GHz 2400~2483.5MHz

Zigbee (Band Edge @ Conducted)

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ Conducted	
	Zigbee CH11 2405MHz	
	Band Edge - L	Fundamental
Peak	<p>Site : 03CH15-HY Condition : FCC CLASS-B, CON ANT_GAIN+2 HORIZONTAL</p>	<p>Site : 03CH15-HY Condition : FCC CLASS-B, CON ANT_GAIN+2 HORIZONTAL</p>
Avg.	<p>Site : 03CH15-HY Condition : FCC CLASS-B(AVG), CON ANT_GAIN+2 HORIZONTAL</p>	<p>Site : 03CH15-HY Condition : FCC CLASS-B(AVG), CON ANT_GAIN+2 HORIZONTAL</p>



Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ Conducted	
	Zigbee CH18 2440MHz	
	Band Edge - L	Fundamental
Peak	<p>Site : 03CH15-HY Condition : FCC CLASS-B_CON_ANT_GAIN+2 HORIZONTAL</p>	<p>Site : 03CH15-HY Condition : FCC CLASS-B_CON_ANT_GAIN+2 HORIZONTAL</p>
Avg.	<p>Site : 03CH15-HY Condition : FCC CLASS-B(AVG)_CON_ANT_GAIN+2 HORIZONTAL</p>	<p>Site : 03CH15-HY Condition : FCC CLASS-B(AVG)_CON_ANT_GAIN+2 HORIZONTAL</p>



Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ Conducted	
	Zigbee CH18 2440MHz	
	Band Edge - R	Fundamental
Peak	<p>Level (dBm) vs Frequency (MHz) plot. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2430 to 2500 MHz. A blue curve shows a peak at 2440 MHz. A red horizontal line is labeled 'FCC CLASS-B_CON'. The plot date is 2017.07.05. Site: 03CH15-HY, Condition: FCC CLASS-B_CON ANT_GAIN2 HORIZONTAL.</p>	Left blank
Avg.	<p>Level (dBm) vs Frequency (MHz) plot. The y-axis ranges from -100 to 30 dBm, and the x-axis ranges from 2430 to 2500 MHz. A blue curve shows a peak at 2440 MHz. A red horizontal line is labeled 'FCC CLASS-B(AVG)_CON'. The plot date is 2017.07.05. Site: 03CH15-HY, Condition: FCC CLASS-B(AVG)_CON ANT_GAIN2 HORIZONTAL.</p>	Left blank



Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ Conducted	
Zigbee CH24 2470MHz		
Band Edge - R		Fundamental
Peak	<p>Site : 03CH15-HY Condition : FCC CLASS-B CON ANT GAIN+2 HORIZONTAL</p>	<p>Site : 03CH15-HY Condition : FCC CLASS-B CON ANT GAIN+2 HORIZONTAL</p>
Avg.	<p>Site : 03CH15-HY Condition : FCC CLASS-B(AVG) CON ANT GAIN+2 HORIZONTAL</p>	<p>Site : 03CH15-HY Condition : FCC CLASS-B(AVG) CON ANT GAIN+2 HORIZONTAL</p>




Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ Conducted	
	Zigbee CH25 2475MHz	
	Band Edge - R	Fundamental
Peak		
Avg.		





2.4GHz 2400~2483.5MHz


Zigbee (Harmonic @ Conducted)

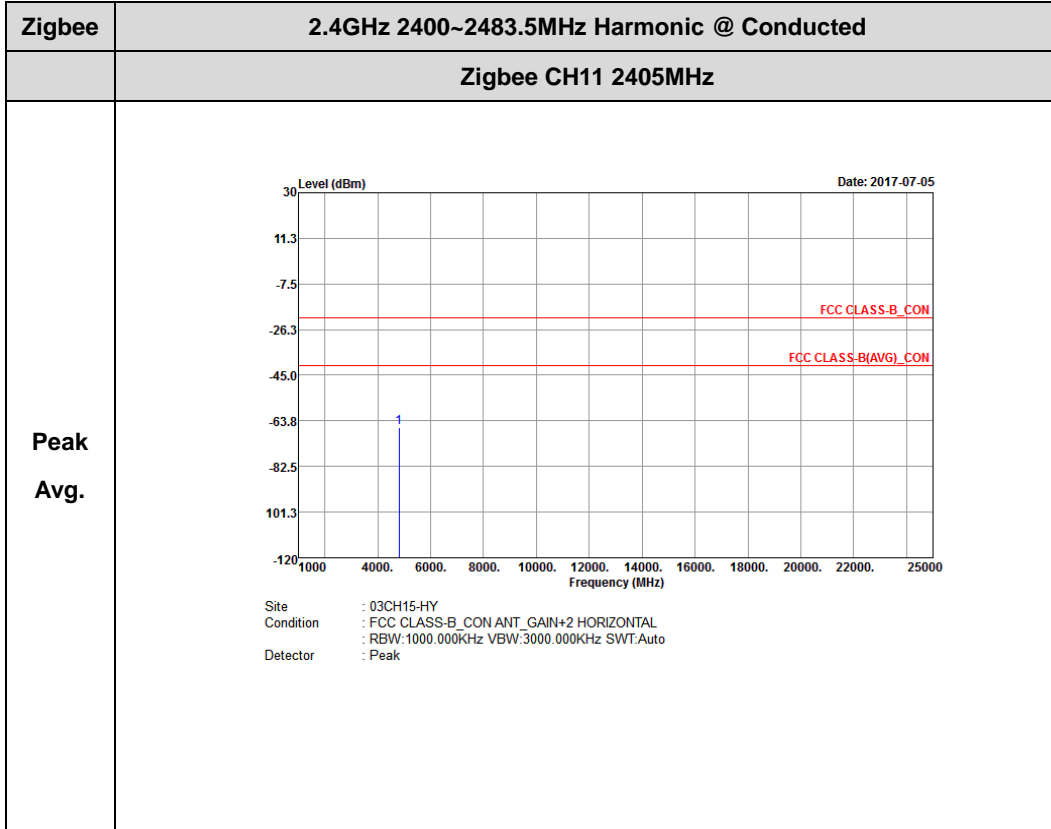



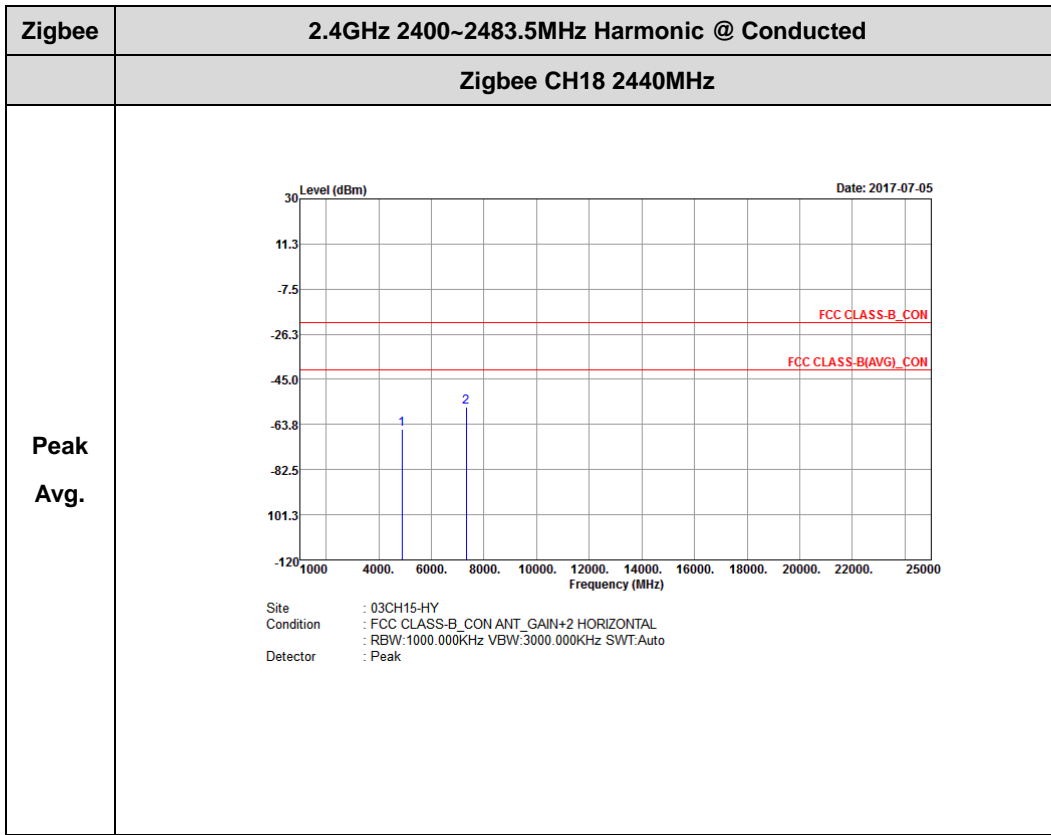


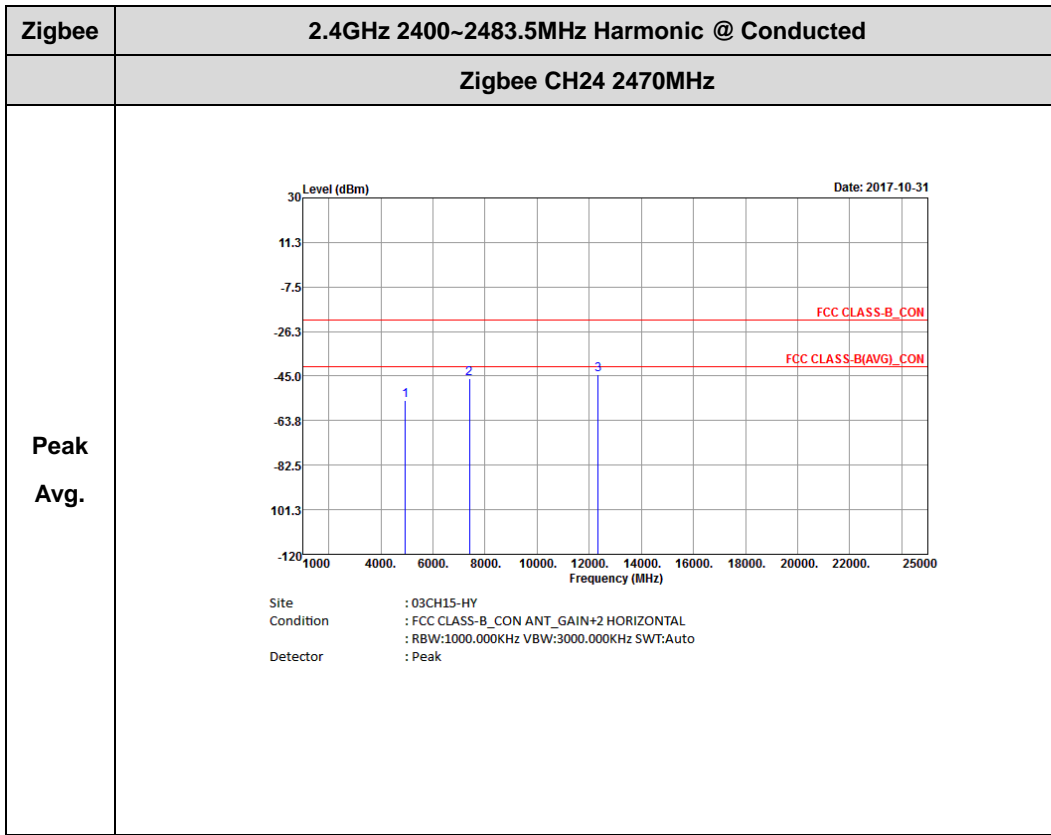

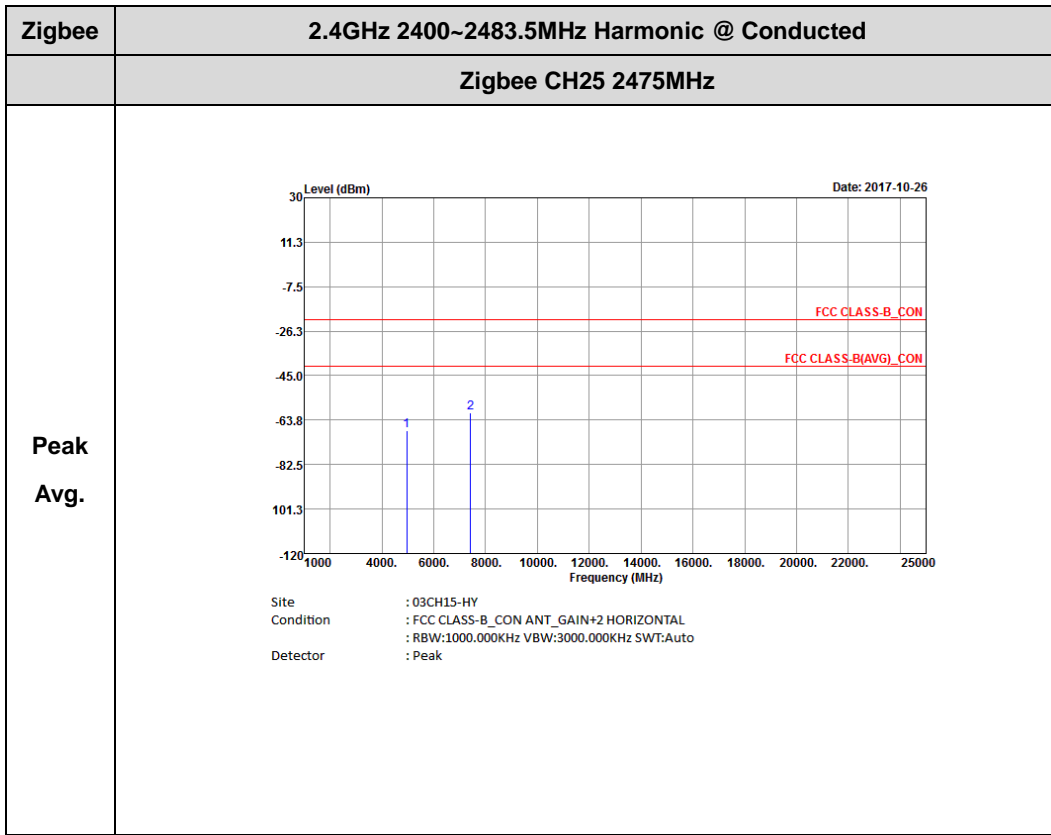



Emission below 1GHz  
2.4GHz Zigbee (LF)

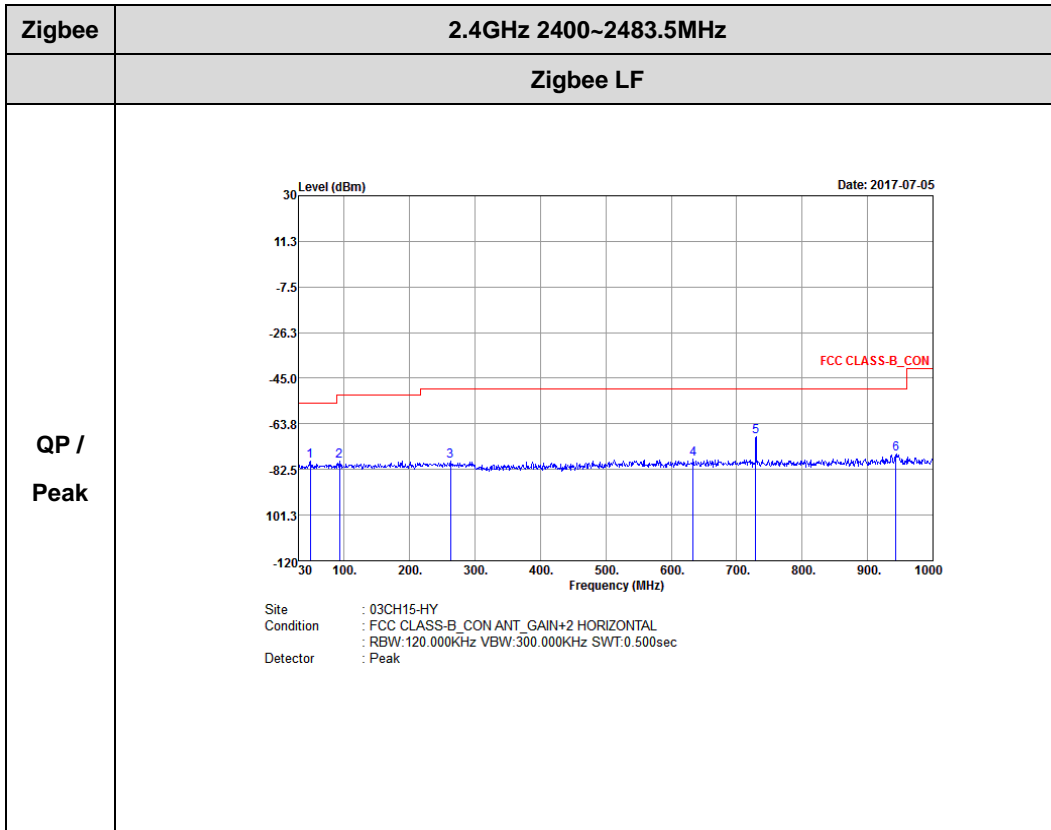



## Appendix D. Cabinet Radiation Data

Test Engineer :	J.C. Liang, Jacky Hung, and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

2.4GHz 2400~2483.5MHz

Zigbee (Band Edge @ 3m)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBm )	( dB )	Limit	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
					Line	( dBm )	( dBi )	( dB )	( dB )	( cm )	( deg )	(P/A)	(H/V)
Zigbee CH 11 2405MHz		2323.125	54.38	-19.62	74	45.26	26.65	6.15	33.61	302	271	P	H
		2389.485	41.25	-12.75	54	31.69	26.87	6.36	33.6	302	271	A	H
	*	2405	87.67	-	-	78.05	26.92	6.36	33.59	302	271	P	H
	*	2405	84.62	-	-	75	26.92	6.36	33.59	302	271	A	H
		2332.575	54.66	-19.34	74	45.47	26.65	6.22	33.61	348	304	P	V
		2382.135	41.33	-12.67	54	31.83	26.81	6.36	33.6	348	304	A	V
	*	2405	88	-	-	78.38	26.92	6.36	33.59	348	304	P	V
	*	2405	83.73	-	-	74.11	26.92	6.36	33.59	348	304	A	V
Zigbee CH 18 2440MHz		2386.3	53.86	-20.14	74	44.3	26.87	6.36	33.6	299	250	P	H
		2352.28	41.28	-12.72	54	31.97	26.76	6.22	33.6	299	250	A	H
	*	2440	87.52	-	-	77.77	27.03	6.38	33.59	299	250	P	H
	*	2440	78.86	-	-	69.11	27.03	6.38	33.59	299	250	A	H
		2497.62	54.89	-19.11	74	44.94	27.2	6.39	33.57	299	250	P	H
		2495.87	41.46	-12.54	54	31.51	27.2	6.39	33.57	299	250	A	H
		2361.66	54.11	-19.89	74	44.73	26.76	6.29	33.6	335	308	P	V
		2383.92	41.15	-12.85	54	31.65	26.81	6.36	33.6	335	308	A	V
	*	2442	87.15	-	-	77.39	27.03	6.38	33.58	335	308	P	V
	*	2440	75.23	-	-	65.48	27.03	6.38	33.59	335	308	A	V
		2488.03	55.4	-18.6	74	45.46	27.2	6.39	33.58	335	308	P	V
		2488.66	41.38	-12.62	54	31.44	27.2	6.39	33.58	335	308	A	V



<b>Zigbee CH 25 2475MHz</b>	*	2475	83.5	-	-	73.63	27.14	6.38	33.58	294	249	P	H
	*	2475	78.11	-	-	68.24	27.14	6.38	33.58	294	249	A	H
		2498.04	55.29	-18.71	74	45.34	27.2	6.39	33.57	294	249	P	H
		2499.56	41.42	-12.58	54	31.47	27.2	6.39	33.57	294	249	A	H
	*	2475	83.97	-	-	74.1	27.14	6.38	33.58	325	311	P	V
	*	2475	79.8	-	-	69.93	27.14	6.38	33.58	325	311	A	V
		2487.48	55.34	-18.66	74	45.46	27.14	6.39	33.58	325	311	P	V
		2487.68	41.68	-12.32	54	31.74	27.2	6.39	33.58	325	311	A	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Zigbee (Harmonic @ 3m)

Zigbee	Note	Frequency ( MHz )	Level ( dBm )	Over Limit ( dB )	Limit Line ( dBm )	Read Level ( dBm )	Antenna Factor ( dBi )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
Zigbee CH 11 2405MHz		4810	38.56	-35.44	74	59.95	31.6	9.6	63.02	100	0	P	H
		4810	38.8	-35.2	74	60.19	31.6	9.6	63.02	100	0	P	V
Zigbee CH 18 2440MHz		4880	38.55	-35.45	74	59.72	31.71	9.56	62.87	100	0	P	H
		7320	43.34	-30.66	74	56.76	37.51	11.31	62.7	100	0	P	H
		4880	38.79	-35.21	74	59.96	31.71	9.56	62.87	100	0	P	V
		7320	43.39	-30.61	74	56.81	37.51	11.31	62.7	100	0	P	V
Zigbee CH 25 2475MHz		4950	39.26	-34.74	74	60.18	31.82	9.53	62.71	100	0	P	H
		7425	44.48	-29.52	74	57.55	37.98	11.34	62.76	100	0	P	H
		4950	38.17	-35.83	74	59.09	31.82	9.53	62.71	100	0	P	V
		7425	44.06	-29.94	74	57.13	37.98	11.34	62.76	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz Zigbee (LF)

Zigbee	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBm )	( dB )	( dBm )	( dBm )	( dBi )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz Zigbee LF		81.57	20.41	-19.59	40	38.24	13.42	1.22	32.48	-	-	P	H
		214.14	25.02	-18.48	43.5	40.5	15.13	1.72	32.39	-	-	P	H
		260.04	32.73	-13.27	46	43.14	19.8	2.09	32.38	-	-	P	H
		699.7	35.92	-10.08	46	38.25	26.66	3.35	32.47	-	-	P	H
		740.3	42.09	-3.91	46	42.88	28.03	3.4	32.35	100	0	P	H
		829.9	39.81	-6.19	46	39.43	28.65	3.6	32.02	-	-	P	H
		31.08	28.93	-11.07	40	36.74	23.84	0.82	32.49	-	-	P	V
		73.74	27.62	-12.38	40	46.43	12.44	1.22	32.49	-	-	P	V
		98.31	25.39	-18.11	43.5	40.67	15.79	1.39	32.48	-	-	P	V
		699.7	37.12	-8.88	46	39.45	26.66	3.35	32.47	-	-	P	V
		740.3	41.64	-4.36	46	42.43	28.03	3.4	32.35	100	0	P	V
		780.2	37.1	-8.9	46	37.36	28.34	3.49	32.24	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												





**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix E. Cabinet Radiation Plots

Test Engineer :	J.C. Liang, Jacky Hung, and Ken Wu	Temperature :	20~24°C
		Relative Humidity :	50~54%

### Note symbol

-L	Low channel location
-R	High channel location







2.4GHz 2400~2483.5MHz





Zigbee (Band Edge @ 3m)

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee Ch11 2405MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : 3</p>	<p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : 3</p>
Avg.	<p>Site : 03CH11-HY            Condition : AV6_BE_54 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : 3</p>	<p>Site : 03CH11-HY            Condition : AV6_54 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : 3</p>

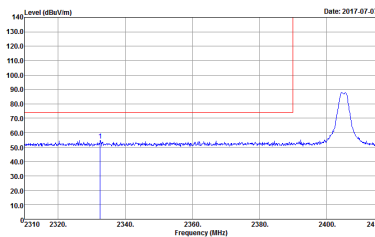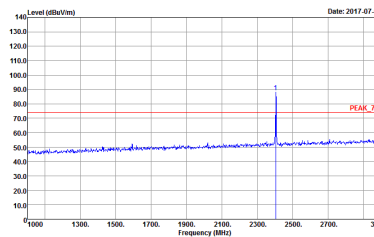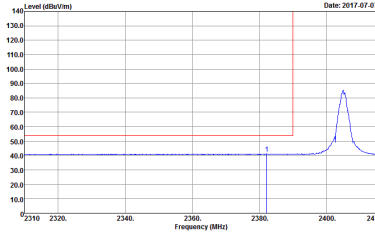
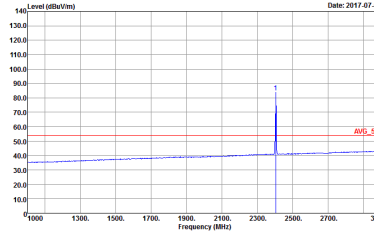


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
Zigbee Ch11 2405MHz		
Vertical		Fundamental
<p><b>Peak</b></p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing a peak at 2405 MHz. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2405 MHz.</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : 3</p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing a peak at 2405 MHz. The y-axis ranges from 0 to 140 dBm/Vm, and the x-axis ranges from 1600 to 3000 MHz. A red vertical line marks the peak at 2405 MHz.</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : 3</p>
<p><b>Avg</b></p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing an average signal at 2405 MHz. The y-axis ranges from 10.0 to 140.0 dBm/Vm, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the average at 2405 MHz.</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : 3</p>	 <p>Level (dBm/Vm) vs Frequency (MHz) plot showing an average signal at 2405 MHz. The y-axis ranges from 0 to 140 dBm/Vm, and the x-axis ranges from 1600 to 3000 MHz. A red vertical line marks the average at 2405 MHz.</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : 3</p>

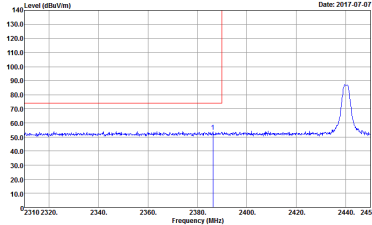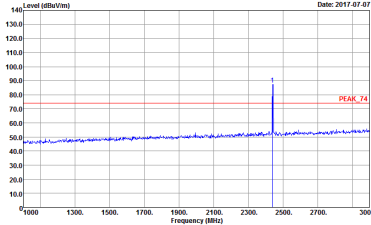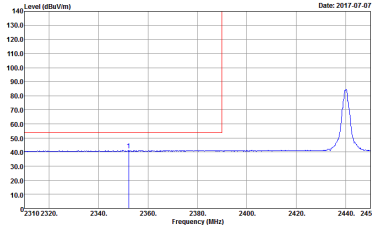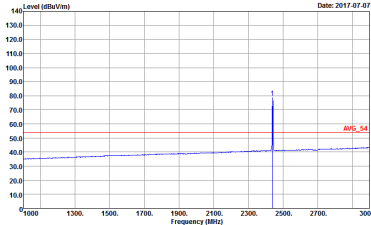

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
Zigbee CH18 2440MHz - L		
Horizontal		Fundamental
Peak	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : 3</p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : 3</p>
Avg.	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : 3</p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : 3</p>

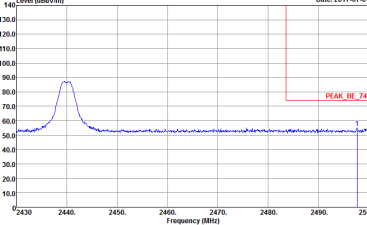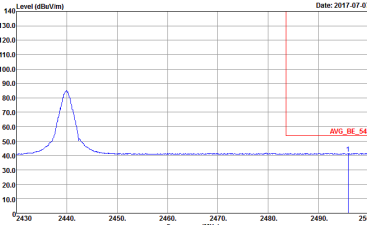



Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH18 2440MHz - R	
	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY  Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL  RBW:1000.000KHz VBW:3000.000KHz SWF:Auto  Detector : Peak  Project : 733120-01  Setting : 3</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY  Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL  RBW:1000.000KHz VBW:1000KHz SWF:Auto  Detector : Peak  Project : 733120-01  Setting : 3</p>	<p>Left blank</p>







Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH18 2440MHz - L	
	Vertical	Fundamental
<p><b>Peak</b></p>	<p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : 3</p>	<p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : 3</p>
<p><b>Avg.</b></p>	<p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : 3</p>	<p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : 3</p>





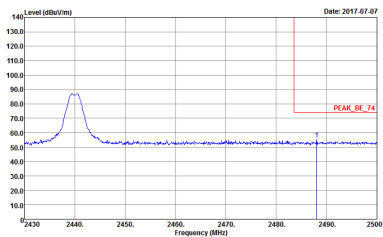
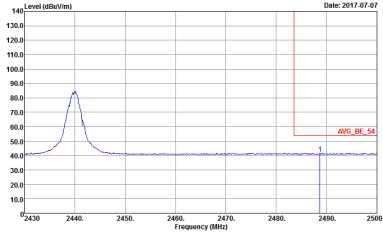


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
Zigbee CH18 2440MHz - R		
Vertical		Fundamental
<p><b>Peak</b></p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:3000.000KHz SWF:Auto            Detector : Peak            Project : 733120-01            Setting : 3</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL            RBW:1000.000KHz VBW:1000KHz SWF:Auto            Detector : Peak            Project : 733120-01            Setting : 3</p>	<p>Left blank</p>

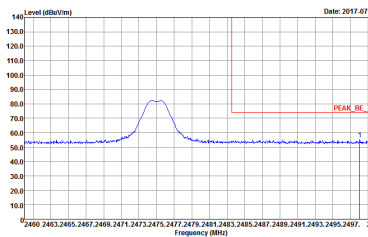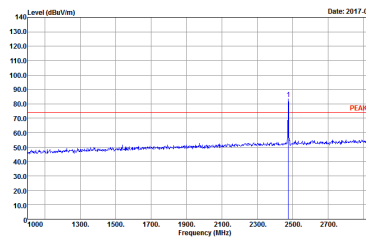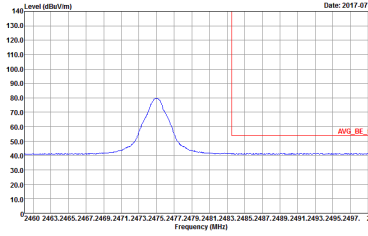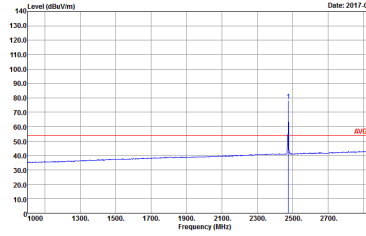

Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH25 2475MHz	
	Horizontal	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2017-07-07</p> <p>Level (dBm/Vm)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : -5</p>	 <p>Date: 2017-07-07</p> <p>Level (dBm/Vm)</p> <p>Frequency (MHz)</p> <p>PEAK_74</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : -5</p>
<p><b>Avg.</b></p>	 <p>Date: 2017-07-07</p> <p>Level (dBm/Vm)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : -5</p>	 <p>Date: 2017-07-07</p> <p>Level (dBm/Vm)</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 91200-HF HORIZONTAL            Detector : Peak            Project : 733120-01            Setting : -5</p>

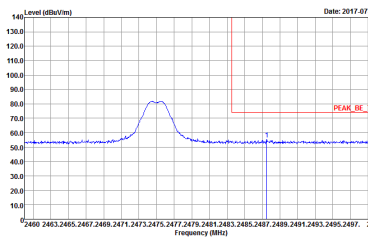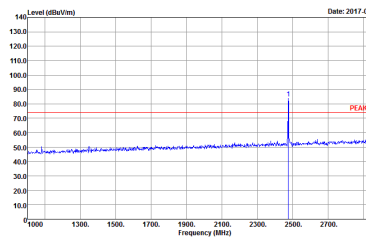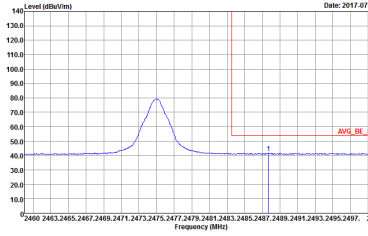
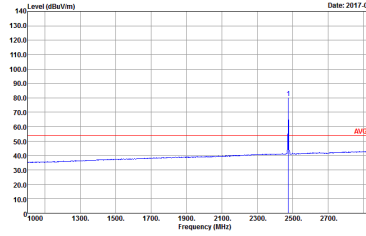


Zigbee	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	Zigbee CH25 2475MHz	
	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : PEAK_BE_74 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : -5</p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : PEAK_74 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : -5</p>
<p><b>Avg.</b></p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : AVG_BE_54 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : -5</p>	 <p>Date: 2017-07-07</p> <p>Site : 03CH11-HY            Condition : AVG_54 3m HORN 9120D-HF VERTICAL            Detector : Peak            Project : 733120-01            Setting : -5</p>





2.4GHz 2400~2483.5MHz



Zigbee (Harmonic @ 3m)
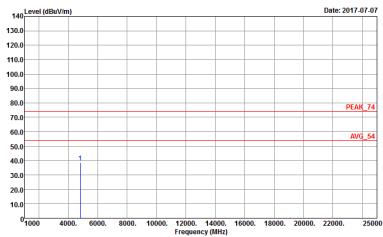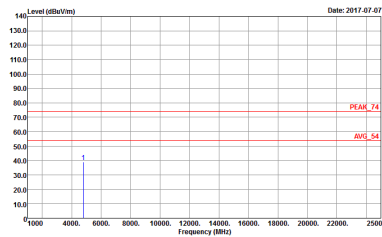
<b>Zigbee</b>	<b>2.4GHz 2400~2483.5MHz Harmonic @ 3m</b>	
	<b>Zigbee Ch11 2405MHz</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<b>Peak Avg.</b>	 <p>Site : 03CH11-HY  Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL  Detector : Peak  Project : 733120-01  Setting : 3</p>	 <p>Site : 03CH11-HY  Condition : PEAK_74 3m HORN 9120D-HF VERTICAL  Detector : Peak  Project : 733120-01  Setting : 3</p>

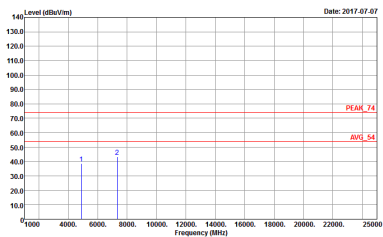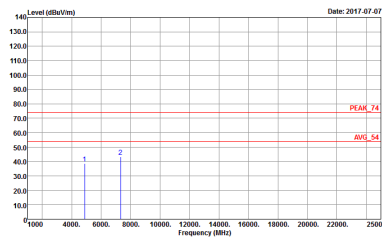

Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH18 2440MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH11-1F          Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 733120-01          Setting : 3</p>	 <p>Site : 03CH11-1F          Condition : PEAK_74 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 733120-01          Setting : 3</p>

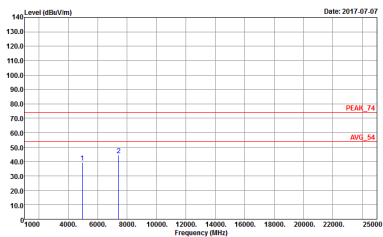
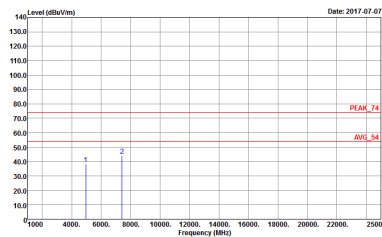


Zigbee	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	Zigbee CH25 2475MHz	
	Horizontal	Vertical
Peak	 <p>Site : 03CH11-14Y          Condition : PEAK_74 3m HORN 9120D-HF HORIZONTAL          Detector : Peak          Project : 733120-01          Setting : -5</p>	 <p>Site : 03CH11-14Y          Condition : PEAK_74 3m HORN 9120D-HF VERTICAL          Detector : Peak          Project : 733120-01          Setting : -5</p>



Emission below 1GHz

2.4GHz Zigbee (LF)

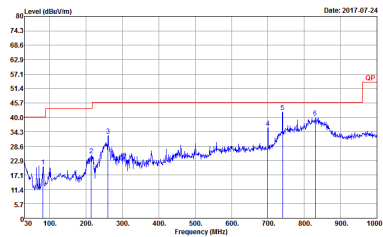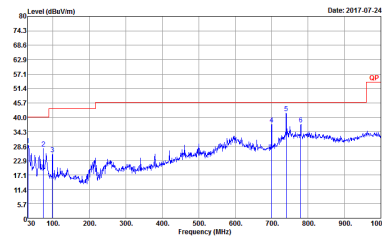
Zigbee	2.4GHz 2400~2483.5MHz	
	Zigbee LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-HY Condition : QP 3m 8E-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak Project : 733120-01</p>	 <p>Site : 03CH11-HY Condition : QP 3m 8E-LOG 6111D-LF_ETC VERTICAL Detector : Peak Project : 733120-01</p>



## Appendix F. Duty Cycle Plots

Band	Duty Cycle(%)	T( $\mu$ s)	1/T(kHz)	VBW Setting
Zigbee 2.4 GHz Band	26.30	1029	0.97	1kHz

### Zigbee 2.4 GHz

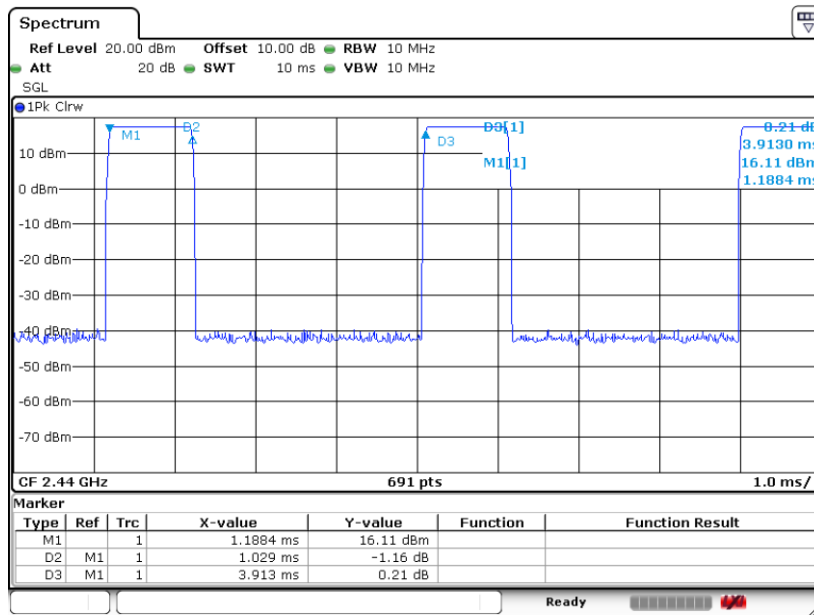

Date: 5.JUL.2017 10:55:24