







EMI TEST REPORT

Test Report No. 14181454M-B-R1

| | |
|---------------------|--------------------------------------|
| Customer | Hitachi, Ltd. |
| Description of EUT | Contactless Vein Authentication Unit |
| Model Number of EUT | PC-KCC300 |
| FCC ID | ZQDPCKCC300 |
| Test Standard | FCC Part15 Subpart B:2021, Class B |
| Test Result | Complied (Refer to SECTION 3) |
| Issue Date | March 15, 2022 |
| Remarks | - |

| | |
|--|--|
| Representative Test Engineer | Approved By |
|  |  |
| Makoto Ebato Engineer | Tadashi Kuroda Leader |
|  | |
|  | |
| CERTIFICATE 1266.01 | |
| <input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc. | |
| <input checked="" type="checkbox"/> There is no testing item of "Non-accreditation". | |

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested.
- This sample tested is in compliance with the limits of the above standard.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers EMC technical requirements.
It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Kashima EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided from the applicant for this report is identified in Section 1.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 14181454M-B

This report is a revised version of 14181454M-B. 14181454M-B is replaced with this report.

| Revision | Test report No. | Date | Page revised Contents |
|-----------------|-----------------|-------------------|--------------------------|
| - (Original) | 14181454M-B | February 28, 2022 | - |
| 1 | 14181454M-B-R1 | March 15, 2022 | Add FCC ID for All pages |

Reference: Abbreviations (Including words undescribed in this report)

| | | | |
|----------------|---|-----------------|--|
| AAN | Asymmetric Artificial Network | GPS | Global Positioning System |
| AC | Alternating Current | Hori. | Horizontal |
| AM | Amplitude Modulation | ICES | Interference-Causing Equipment Standard |
| AMN | Artificial Mains Network | I/O | Input/Output |
| Amp, AMP | Amplifier | IEC | International Electrotechnical Commission |
| ANSI | American National Standards Institute | IEEE | Institute of Electrical and Electronics Engineers |
| Ant, ANT | Antenna | IF | Intermediate Frequency |
| AP | Access Point | ILAC | International Laboratory Accreditation Conference |
| ASK | Amplitude Shift Keying | ISED | Innovation, Science and Economic Development Canada |
| Atten., ATT | Attenuator | ISN | Impedance Stabilization Network |
| AV | Average | ISO | International Organization for Standardization |
| BPSK | Binary Phase-Shift Keying | JAB | Japan Accreditation Board |
| BR | Bluetooth Basic Rate | LAN | Local Area Network |
| BT | Bluetooth | LCL | Longitudinal Conversion Loss |
| BT LE | Bluetooth Low Energy | LIMS | Laboratory Information Management System |
| BW | BandWidth | LISN | Line Impedance Stabilization Network |
| C.F | Correction Factor | MRA | Mutual Recognition Arrangement |
| Cal Int | Calibration Interval | N/A | Not Applicable |
| CAV | CISPR AV | NIST | National Institute of Standards and Technology |
| CCK | Complementary Code Keying | NS | No signal detect. |
| CDN | Coupling Decoupling Network | NSA | Normalized Site Attenuation |
| Ch., CH | Channel | NVLAP | National Voluntary Laboratory Accreditation Program |
| CISPR | Comite International Special des Perturbations Radioelectriques | OBW | Occupied Band Width |
| Corr. | Correction | OFDM | Orthogonal Frequency Division Multiplexing |
| CPE | Customer premise equipment | PK | Peak |
| CW | Continuous Wave | P _{Lt} | long-term flicker severity |
| DBPSK | Differential BPSK | POHC(A) | Partial Odd Harmonic Current |
| DC | Direct Current | Pol., Pola. | Polarization |
| DET | Detector | PR-ASK | Phase Reversal ASK |
| D-factor | Distance factor | P _{ST} | short-term flicker severity |
| Dmax | maximum absolute voltage change during an observation period | QAM | Quadrature Amplitude Modulation |
| DQPSK | Differential QPSK | QP | Quasi-Peak |
| DSSS | Direct Sequence Spread Spectrum | QPSK | Quadrature Phase Shift Keying |
| DUT | Device Under Test | r.m.s., RMS | Root Mean Square |
| EDR | Enhanced Data Rate | RBW | Resolution Band Width |
| e.i.r.p., EIRP | Equivalent Isotropically Radiated Power | RE | Radio Equipment |
| EM clamp | Electromagnetic clamp | REV | Reverse |
| EMC | ElectroMagnetic Compatibility | RF | Radio Frequency |
| EMI | ElectroMagnetic Interference | RFID | Radio Frequency Identifier |
| EMS | ElectroMagnetic Susceptibility | RSS | Radio Standards Specifications |
| EN | European Norm | Rx | Receiving |
| e.r.p., ERP | Effective Radiated Power | SINAD | Ratio of (Signal + Noise + Distortion) to (Noise + Distortion) |
| ETSI | European Telecommunications Standards Institute | S/N | Signal to Noise ratio |
| EU | European Union | SA, S/A | Spectrum Analyzer |
| EUT | Equipment Under Test | SG | Signal Generator |
| Fac. | Factor | SVSWR | Site-Voltage Standing Wave Ratio |
| FCC | Federal Communications Commission | THC(A) | Total Harmonic Current |
| FHSS | Frequency Hopping Spread Spectrum | THD(%) | Total Harmonic Distortion |
| FM | Frequency Modulation | TR | Test Receiver |
| Freq. | Frequency | Tx | Transmitting |
| FSK | Frequency Shift Keying | VBW | Video BandWidth |
| Fund | Fundamental | Vert. | Vertical |
| FWD | Forward | WLAN | Wireless LAN |
| GFSK | Gaussian Frequency-Shift Keying | xDSL | Generic term for all types of DSL technology |
| GNSS | Global Navigation Satellite System | - | (DSL: Digital Subscriber Line) |

| CONTENTS | PAGE |
|---|-------------|
| Section 1: Customer information | 5 |
| Section 2: Equipment under test (EUT) | 5 |
| Section 3: Test specifications, procedures and results | 6 |
| Section 4: Operation of EUT during testing | 9 |
| Section 5: Conducted emission | 11 |
| Section 6: Radiated emission | 12 |
| APPENDIX 1: Photographs of test setup | 14 |
| APPENDIX 2: Test Data | 17 |
| APPENDIX 3: Test instruments | 20 |

Section 1: Customer information

| | |
|------------------|--|
| Company Name | Hitachi, Ltd. |
| Address | Hitachi Omori 2nd Building, 6-27-18, Minamioi, Shinagawa-ku, Tokyo, 140-8572 Japan |
| Telephone Number | +81-80-5931-7168 |
| Contact Person | Keiji Kitane |

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date and Test Date
- SECTION 3: Test specification, procedures and results, SECTION 3.3 Performance criteria
- SECTION 4: Operation of EUT during testing

* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

Section 2: Equipment under test (EUT)

2.1 Identification of EUT

| | |
|---------------|---|
| Description | Contactless Vein Authentication Unit |
| Model Number | PC-KCC300 |
| Serial Number | Refer to SECTION 4.2 |
| Condition | Production prototype (Not for Sale: This sample is equivalent to mass-produced items.) |
| Modification | No Modification by the test lab |
| Receipt Date | January 31, 2022 |
| Test Date | February 02 and February 4, 2022 |

2.2 Product description

General Specification

| | |
|-------------------------------------|--|
| Rating | AC 100 V to 240 V, 50 / 60 Hz DC 12 V, 3 A |
| Size | excluding cable: 96 × 135 × 83 (Width x Depth x Height (mm)) |
| Clock frequency (ies) in the system | CPU:1.8 GHz, USB:240 MHz |

Section 3: Test specifications, procedures and results

3.1 Test specification

| | |
|--------------------|--|
| Test Specification | FCC Part 15 Subpart B FCC Part 15 final revised on May 3, 2021 and effective July 2, 2021 |
| Title | FCC 47CFR Part15 Radio Frequency Device Subpart B Unintentional Radiators |

* The EUT complies with ICES-003 Issue 7: 2020

3.2 Procedures & results

| Test Item | Test Procedure | Limits | Deviation | Worst margin | Result | Remarks |
|--------------------|--|--|-----------|---|----------------|---------|
| Conducted emission | ANSI C63.4: 2014 + C63.4a: 2017 7. AC power - line conducted emission measurements | FCC Part 15 Subpart B 15.107 Class B | N/A | 16.5 dB Freq: 0.15000 MHz Detector: Quasi-Peak Phase: L | Complied a) | - |
| Radiated emission | ANSI C63.4: 2014 + C63.4a: 2017 8. Radiated emission measurements | FCC Part 15 Subpart B 15.109 Class B | N/A | 7.6 dB Freq: 720.000 MHz Detector: Quasi-Peak Pola: Horizontal | Complied b) | *1) |

Note: UL Japan, Inc.'s EMI Work Procedure No.: 13-EM-W0420.

*1) Measurements were limited up to 9 GHz since the highest frequency of internal source of the EUT is 1.8 GHz.

a) Refer to Appendix 2 (data of Conducted emission)

b) Refer to Appendix 2 (data of Radiated emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

3.3 Addition to standards

No addition, exclusion nor deviation has been made from the standards.

3.4 Confirmation

UL Japan, Inc. hereby confirm that EUT, in the configuration tested, complies with the specification(s) FCC Part15 Subpart B:2021, Class B.

3.5 Uncertainty

EMI

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

| Item | Frequency range | Calculate Uncertainty (+/-) | Ucisp (+/-) |
|--|--------------------|-----------------------------|-------------|
| Conducted emission (AC Mains) AMN | 9 kHz to 150 kHz | 3.7 dB | 3.8 dB |
| | 150 kHz to 30 MHz | 3.3 dB | 3.4 dB |
| Conducted emission (Communication port) AAN | 150 kHz to 30 MHz | 4.6 dB | 5.0 dB |
| Conducted emission (Communication port) Current probe | 150 kHz to 30 MHz | 2.5 dB | 2.9 dB |
| Conducted emission (Communication port) Voltage probe | 150 kHz to 30 MHz | 2.5 dB | 2.9 dB |
| Radiated emission (Measurement distance: 3 m) | 9 kHz to 30 MHz | 2.9 dB | Not Defined |
| | 30 MHz to 200 MHz | 6.1 dB | 6.3 dB |
| | 200 MHz to 1 GHz | 6.2 dB | |
| | 1 GHz to 6 GHz | 5.0 dB | 5.2 dB |
| | 6 GHz to 18 GHz | 5.4 dB | 5.5 dB |
| | 18 GHz to 40 GHz | 5.5 dB | Not Defined |
| Radiated emission (Measurement distance: 10 m) | 9 kHz to 30 MHz | 2.7 dB | Not Defined |
| | 30 MHz to 200 MHz | 4.9 dB | 5.2 dB |
| | 200 MHz to 1 GHz | 5.0 dB | |
| Radiated emission (Measurement distance: 1 m) | 1 GHz to 18 GHz | 5.4 dB | Not Defined |
| | 18 GHz to 40 GHz | 5.6 dB | |
| Radiated emission (Measurement distance: 0.5 m) | 26.5 GHz to 40 GHz | 5.9 dB | Not Defined |
| Disturbance power | 9 kHz to 30 MHz | 4.4 dB | 4.5 dB |
| Radiated emission(LLAS) | 9 kHz to 30 MHz | 3.3 dB | 3.3 dB |

3.6 Test Location

UL Japan, Inc. Kashima EMC Lab.

1614 Mushihata, Katori-shi, Chiba-ken, 289-0341 JAPAN

Telephone: +81 478 88 6500, Facsimile: +81 478 82 3373

A2LA Certificate Number: 1266.01 / FCC Test Firm Registration Number: 910230

ISED Lab Company Number: 4659A / CAB identifier: JP0006

| Test site | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Maximum measurement distance |
|-----------------------------|----------------------------|--|------------------------------|
| No.1 Open site | 6.0 x 5.5 x 2.5 | 20 x 40 | 10 m |
| No.5 Open site | 8.6 x 7.1 x 2.4 | 18 x 23 | 10 m |
| No.1 Shielded room | 5.4 x 4.5 x 2.3 | - | - |
| No.5 Shielded Room | 4.2 x 3.1 x 2.5 | - | - |
| No.9 Shielded Room | 6.1 x 3.6 x 2.8 | - | - |
| No.6 Semi-anechoic Chamber | 8.5 x 5.5 x 5.2 | - | 3 m |
| No.10 Semi-anechoic Chamber | 18.4 x 9.9 x 7.7 | - | 10 m |
| No.11 Semi-anechoic Chamber | 9.0 x 6.5 x 5.2 | - | 3 m |
| No.1 Measurement room | 5.0 x 3.7 x 2.6 | - | - |
| No.2 Measurement room | 4.3 x 4.4 x 2.7 | - | - |
| No.3 Measurement room | 4.5 x 5.3 x 2.7 | - | - |

3.7 Test setup, Test Data & Test instruments

Refer to Appendix 1 to 3.


Section 4: Operation of EUT during testing

4.1 Operating mode

The EUT exercise program used during testing was designed to exercise the various system components in a manner similar to typical use.

| | |
|-------------------|---|
| Operating mode(s) | 1. Continuous registration/authentication mode |
| Software | C-1 firmware, Version: V01-02 |
| Justification | The system was configured in typical fashion (as a customer would normally use it) for testing. |

4.2 Configuration and peripherals

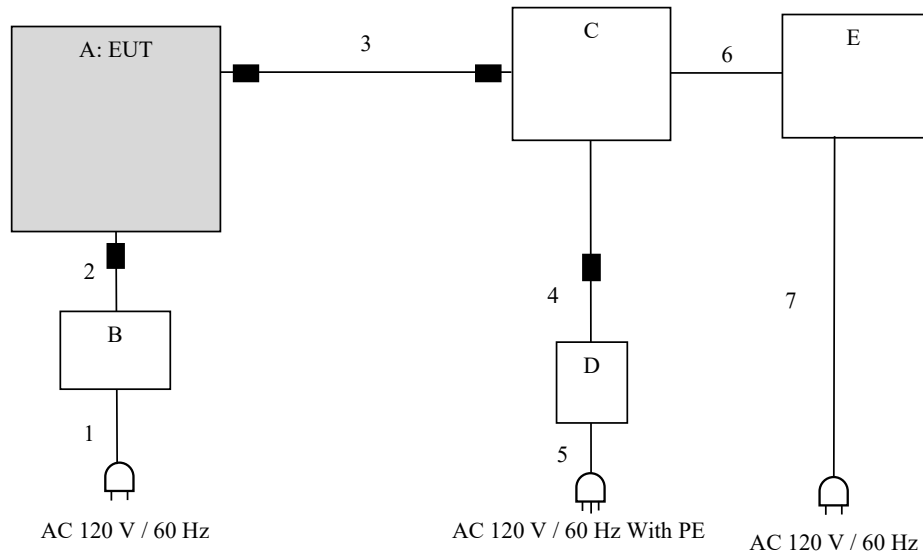

■ : Standard Ferrite Core

*Cabling and setup were taken into consideration and test data was taken under worst case conditions.

*As a result of comparing AC 120 V and AC 240 V at pre-check, conducted emission test was performed with AC 120 V of the worst voltage as representative.

EUT(s) and support equipment(s)

| No. | Item | Model number | Serial number | Brand | Remarks |
|-----|--------------------------------------|--------------|------------------------------|-----------------------------|---------|
| A | Contactless Vein Authentication Unit | PC-KCC300 | No.13 | Hitachi, Ltd. | EUT |
| B | AC Adapter | ATS036T-A120 | - | Adapter Technology Co.,Ltd. | - |
| C | Laptop PC | Vostro 3500 | 4N3K6 A01 | DELL | - |
| D | AC Adapter | LA45NM140 | CN-0KXTTW-LOC00-13G-424B-A12 | DELL | - |
| E | Printer | K10220 | FBNN82506 | CANON | - |

Cable(s) used

| No. | Cable name | Length [m] | Shield | | Remarks |
|-----|------------|------------|------------|------------|---------|
| | | | Cable | Connector | |
| 1 | AC | 2.1 | Unshielded | Unshielded | 2wire |
| 2 | DC | 1.5 | Unshielded | Unshielded | - |
| 3 | USB | 1.8 | Shielded | Shielded | - |
| 4 | DC | 1.8 | Unshielded | Unshielded | - |
| 5 | AC | 0.8 | Unshielded | Unshielded | - |
| 6 | USB | 1.8 | Shielded | Shielded | - |
| 7 | AC | 1.8 | Unshielded | Unshielded | - |

Section 5: Conducted emission

5.1 Operating environment

| | |
|-------------|---------------|
| Test room | Refer to data |
| Temperature | Refer to data |
| Humidity | Refer to data |

5.2 Test configuration

EUT was placed on a wooden table of nominal size, 1.0 m by 2.0 m, raised 0.8 m above the conducting ground plane. The rear of tabletop was located 40 cm to the vertical conducting plane. The rear of EUT and its peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80 cm from any other grounded conducting surface. EUT was located 80 cm from the LISN/AMN and excess AC cable was bundled in center. I/O cables that were connected to the other peripherals were bundled in center. They were folded back and forth forming a bundle 30 cm to 40 cm long and were hanged at a 40 cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/AMN to the input power source. All unused 50 ohm connectors of the LISN/AMN were resistivity terminated in 50 ohm when not connected to the measuring equipment. Photographs of the set up are shown in Appendix 1.

5.3 Test conditions

| | |
|-----------------|--------------------|
| Frequency range | 0.15 MHz to 30 MHz |
| EUT position | Table top |
| EUT operation | See Clause 4.1 |

5.4 Test procedure

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT within a shielded room. The EUT was connected to a Line Impedance Stabilization Network (LISN) / Artificial Mains network (AMN). An overview sweep with peak detection has been performed. The measurements have been performed with a quasi-peak detector and if required, with an average detector. The conducted emission measurements were made with the following detector function of the test receiver.

| | | |
|---------------|-------|----------|
| Detector Type | QP | CISPR AV |
| IF Bandwidth | 9 kHz | 9 kHz |

5.5 Results

| | |
|-----------------------------|------|
| Summary of the test results | Pass |
|-----------------------------|------|

Section 6: Radiated emission

6.1 Operating environment

| | |
|-------------|---------------|
| Test room | Refer to data |
| Temperature | Refer to data |
| Humidity | Refer to data |

6.2 Test configuration

EUT was placed on a polystyrene foam of nominal size, 1.0 m by 2.0 m (below 1 GHz), 1.0 m by 1.5 m (above 1 GHz), raised 0.8 m above the conducting ground plane.

The EUT was set on the edge of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 1.

6.3 Test conditions

| | |
|-----------------|--|
| Frequency range | 30 MHz to 9000 MHz |
| Test distance | 3.0 m (below 1 GHz) 3.0 m (above 1 GHz) |
| EUT position | Table top |

6.4 Test procedure

The height of the measuring antenna varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

For above 1 GHz, test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beam width of the antenna.

The radiated emission measurements were made with the following detector function of the Test Receiver and the Spectrum Analyzer.

| | | | |
|-----------------|--------------------|--------------------------|----------------------|
| Frequency | 30 MHz to 1000 MHz | 1000 MHz to 9000 MHz *1) | |
| Instrument used | Test receiver | Spectrum analyzer | |
| Detector Type | QP | AV *2) | PK |
| IF Band width | 120 kHz | RBW 1 MHz/ VBW 10 Hz | RBW 1 MHz/ VBW 3 MHz |

*1) The measurement data was adjusted to a 3.0 m distance using the following Distance Factor.

Distance Factor: See Figure 2.

*2) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Figure 1: Antenna angle and Absorber placement


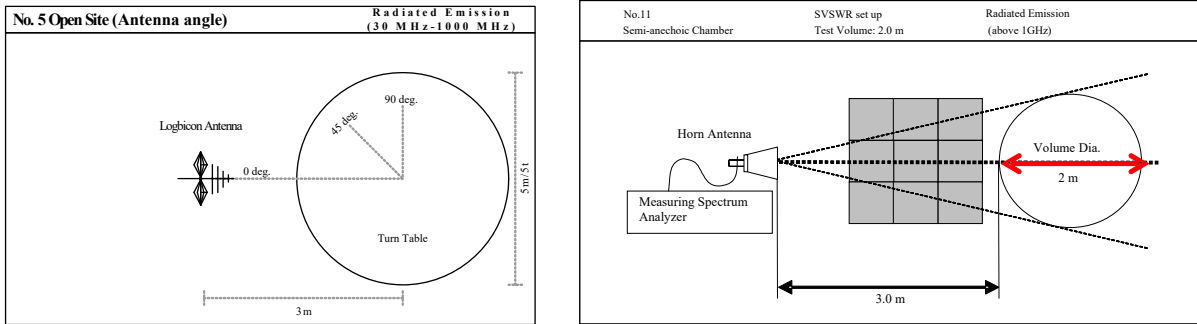


Figure 2: Test Setup


Below 1 GHz

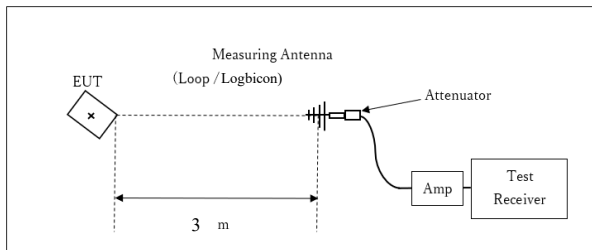

× : Center of turn table

*Test Distance: 3.0 m

1 GHz to 9 GHz

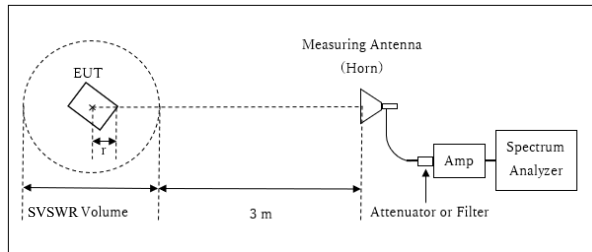

r : Radius of an outer periphery of EUT
 × : Center of turn table

Distance Factor: $20 \times \log (3.20 \text{ m} / 3 \text{ m}) = 0.56 \text{ dB}$
 *Test Distance: $(3 + \text{SVSWR Volume} / 2) - r = 3.2 \text{ m}$

SVSWR Volume: 2 m
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)
 r= 0.8 m

The test was made on EUT at the normal use position.

6.5 Results

| | |
|-----------------------------|------|
| Summary of the test results | Pass |
|-----------------------------|------|

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Kashima EMC Lab. No.5 Shielded Room
Date : 2022/02/02

Company : Hitachi,Ltd.
Kind of EUT : Contactless Vein Authentication Unit
Model No. : PC-KCC300
Serial No. : No.13
Remarks : -

Mode : Continuous registration/authentication mode
Order No. : 14181454M
Power : AC 120V / 60Hz
Temp./Humi. : 23deg.C / 38%RH

Limit : FCC_Part 15 Subpart B(15.107)_Class B

Tested by : Makoto Ebato

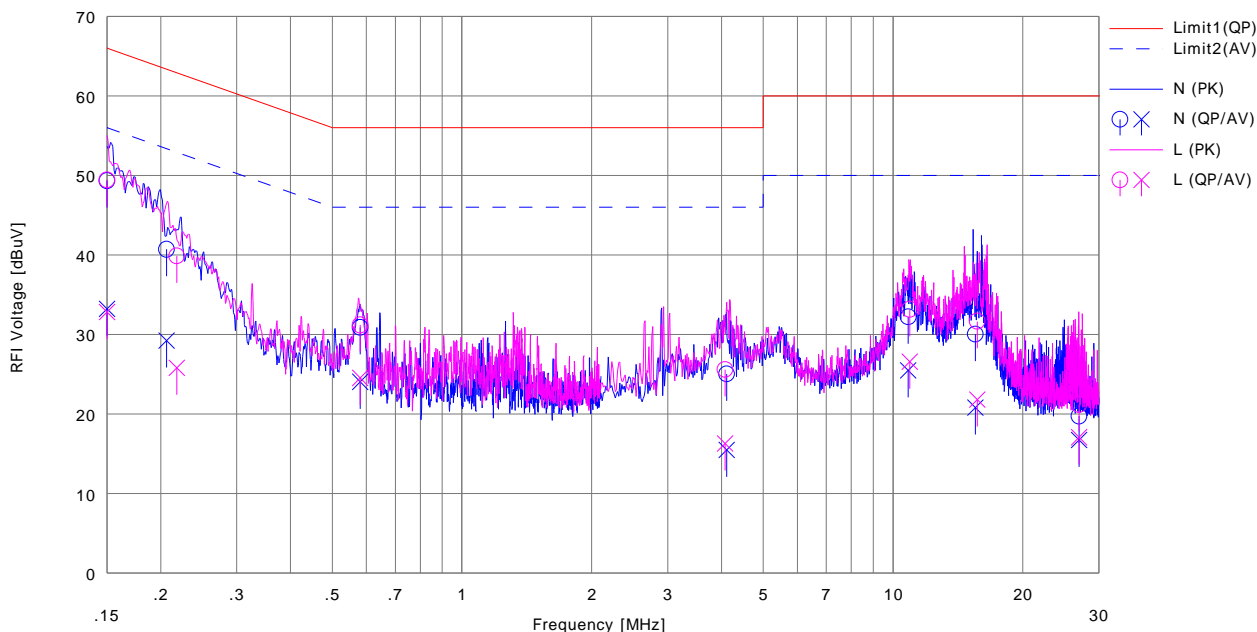

| No. | Freq. [MHz] | Reading | | C.Fac [dB] | Results | | Limit | | Margin | | Phase | Comment |
|-----|----------------|---------|--------|---------------|---------|--------|--------|--------|--------|------|-------|---------|
| | | <QP> | <AV> | | <QP> | <AV> | <QP> | <AV> | <QP> | <AV> | | |
| | | [dBuV] | [dBuV] | | [dBuV] | [dBuV] | [dBuV] | [dBuV] | [dB] | [dB] | | |
| 1 | 0.15000 | 39.23 | 23.11 | 10.11 | 49.34 | 33.22 | 66.00 | 56.00 | 16.6 | 22.7 | N | |
| 2 | 0.20630 | 30.59 | 19.10 | 10.12 | 40.71 | 29.22 | 63.35 | 53.35 | 22.6 | 24.1 | N | |
| 3 | 0.58092 | 20.71 | 13.87 | 10.18 | 30.89 | 24.05 | 56.00 | 46.00 | 25.1 | 21.9 | N | |
| 4 | 4.11125 | 14.57 | 5.00 | 10.48 | 25.05 | 15.48 | 56.00 | 46.00 | 30.9 | 30.5 | N | |
| 5 | 10.84565 | 21.30 | 14.55 | 10.92 | 32.22 | 25.47 | 60.00 | 50.00 | 27.7 | 24.5 | N | |
| 6 | 15.51679 | 18.78 | 9.54 | 11.26 | 30.04 | 20.80 | 60.00 | 50.00 | 29.9 | 29.2 | N | |
| 7 | 27.00000 | 8.00 | 5.00 | 11.74 | 19.74 | 16.74 | 60.00 | 50.00 | 40.2 | 33.2 | N | |
| 8 | 0.15000 | 39.32 | 22.70 | 10.11 | 49.43 | 32.81 | 66.00 | 56.00 | 16.5 | 23.1 | L | |
| 9 | 0.21792 | 29.75 | 15.68 | 10.13 | 39.88 | 25.81 | 62.90 | 52.90 | 23.0 | 27.0 | L | |
| 10 | 0.58090 | 21.01 | 14.36 | 10.18 | 31.19 | 24.54 | 56.00 | 46.00 | 24.8 | 21.4 | L | |
| 11 | 4.07806 | 15.11 | 5.80 | 10.50 | 25.61 | 16.30 | 56.00 | 46.00 | 30.3 | 29.7 | L | |
| 12 | 10.93045 | 22.10 | 15.54 | 11.05 | 33.15 | 26.59 | 60.00 | 50.00 | 26.8 | 23.4 | L | |
| 13 | 15.67010 | 20.17 | 10.32 | 11.49 | 31.66 | 21.81 | 60.00 | 50.00 | 28.3 | 28.1 | L | |
| 14 | 27.00000 | 9.10 | 5.00 | 12.08 | 21.18 | 17.08 | 60.00 | 50.00 | 38.8 | 32.9 | L | |

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Kashima EMC Lab. No.5 Open area test site
 Date : 2022/02/02

Company : Hitachi,Ltd.
 Kind of EUT : Contactless Vein Authentication Unit
 Model No. : PC-KCC300
 Serial No. : No.13
 Remarks : -

Mode : Continuous registration/authentication mode
 Order No. : 14181454M
 Power : AC 120V / 60Hz
 Temp./Humi. : 20deg.C / 41%RH

Limit : FCC_Part 15 Subpart B(15.109)_Class B

Tested by : Makoto Ebato

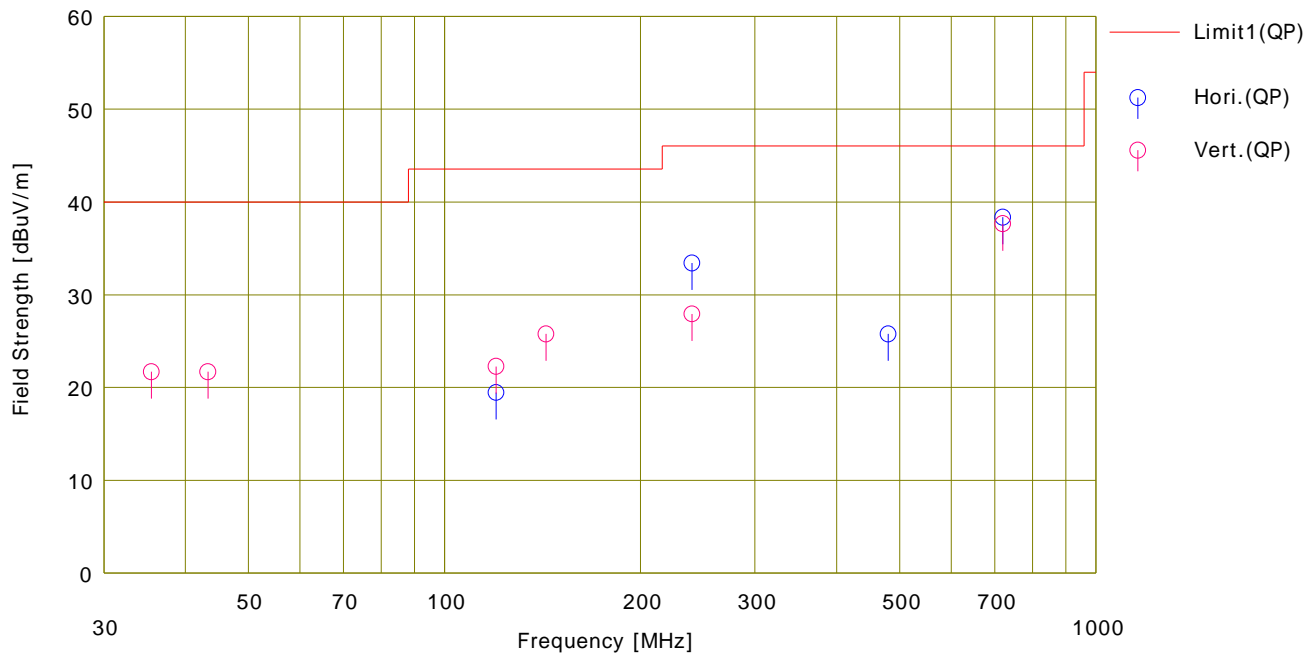

| No. | Freq. [MHz] | Reading | Ant.Fac [dB/m] | Loss [dB] | Gain [dB] | Result | Limit | Margin | Pola. [H/V] | Height [cm] | Angle [deg] | Ant. Type | Comment |
|-----|----------------|----------------|-------------------|--------------|--------------|------------------|--------------|--------|----------------|----------------|----------------|--------------|---------|
| | | <QP> [dBuV] | | | | <QP> [dBuV/m] | <QP> [dB] | | | | | | |
| 1 | 120.000 | 28.80 | 10.96 | 7.29 | 27.59 | 19.46 | 43.52 | 24.0 | Hori. | 280 | 0 | HB | |
| 2 | 240.000 | 40.90 | 11.30 | 8.42 | 27.20 | 33.42 | 46.02 | 12.6 | Hori. | 172 | 170 | HB | |
| 3 | 480.000 | 26.70 | 17.50 | 10.08 | 28.51 | 25.77 | 46.02 | 20.2 | Hori. | 100 | 47 | HB | |
| 4 | 720.000 | 34.60 | 21.22 | 11.37 | 28.85 | 38.34 | 46.02 | 7.6 | Hori. | 120 | 163 | HB | |
| 5 | 35.504 | 30.80 | 12.49 | 6.10 | 27.71 | 21.68 | 40.00 | 18.3 | Vert. | 100 | 120 | HB | |
| 6 | 43.348 | 29.90 | 13.23 | 6.25 | 27.70 | 21.68 | 40.00 | 18.3 | Vert. | 100 | 240 | HB | |
| 7 | 120.000 | 31.60 | 10.96 | 7.29 | 27.59 | 22.26 | 43.52 | 21.2 | Vert. | 100 | 60 | HB | |
| 8 | 143.203 | 33.00 | 12.76 | 7.55 | 27.54 | 25.77 | 43.52 | 17.7 | Vert. | 100 | 0 | HB | |
| 9 | 240.000 | 35.40 | 11.30 | 8.42 | 27.20 | 27.92 | 46.02 | 18.1 | Vert. | 100 | 185 | HB | |
| 10 | 720.000 | 33.90 | 21.22 | 11.37 | 28.85 | 37.64 | 46.02 | 8.3 | Vert. | 100 | 185 | HB | |

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Kashima EMC Lab. No.11 Semi-Anechoic Chamber
 Date : 2022/02/04

Company : Hitachi,Ltd.
 Kind of EUT : Contactless Vein Authentication Unit
 Model No. : PC-KCC300
 Serial No. : No.13
 Remarks : Test Distance=3.2m

Mode : Continuous registration/authentication mode
 Order No. : 14181454M
 Power : AC 120V / 60Hz
 Temp./Humi. : 23deg.C / 37%RH

Limit : FCC_Part 15 Subpart B(15.109)_Class B

Tested by : Makoto Ebato

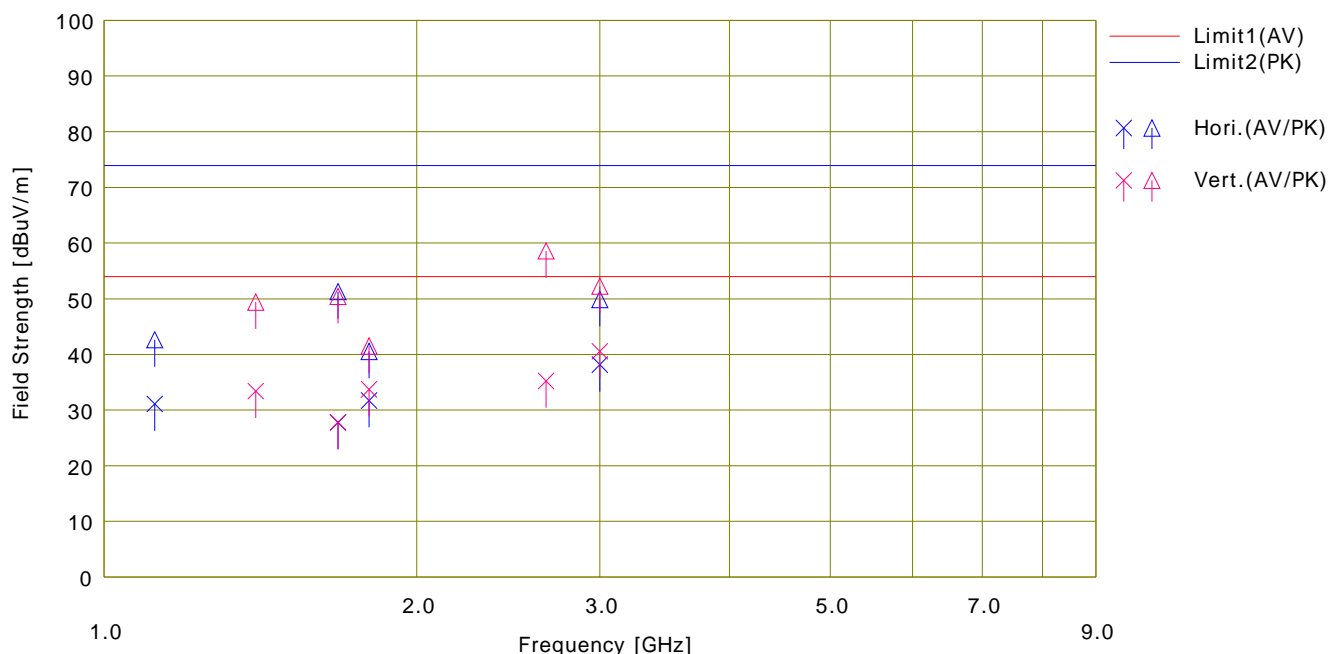

| No. | Freq. [MHz] | Reading | | Ant.Fac [dB/m] | Loss [dB] | Gain [dB] | D.Fac [dB] | Result | | Limit | | Margin | | Pola. [H/V] | Height [cm] | Angle [deg] | Ant. Type | Comment |
|-----|----------------|---------|--------|-------------------|--------------|--------------|---------------|----------|----------|----------|----------|--------|------|----------------|----------------|----------------|--------------|---------|
| | | <AV> | <PK> | | | | | <AV> | <PK> | <AV> | <PK> | <AV> | <PK> | | | | | |
| | | [dBuV] | [dBuV] | | | | | [dBuV/m] | [dBuV/m] | [dBuV/m] | [dBuV/m] | [dB] | [dB] | | | | | |
| 1 | 1120.000 | 50.69 | 62.20 | 24.07 | 2.26 | 46.47 | 0.56 | 31.11 | 42.62 | 53.97 | 73.97 | 22.8 | 31.3 | Hori. | 130 | 50 | Horn | |
| 2 | 1680.000 | 45.35 | 68.85 | 25.42 | 2.80 | 46.38 | 0.56 | 27.75 | 51.25 | 53.97 | 73.97 | 26.2 | 22.7 | Hori. | 100 | 226 | Horn | |
| 3 | 1800.000 | 48.93 | 57.72 | 25.69 | 2.91 | 46.37 | 0.56 | 31.72 | 40.51 | 53.97 | 73.97 | 22.2 | 33.4 | Hori. | 100 | 205 | Horn | |
| 4 | 3000.000 | 50.28 | 62.00 | 29.25 | 3.82 | 45.77 | 0.56 | 38.14 | 49.86 | 53.97 | 73.97 | 15.8 | 24.1 | Hori. | 100 | 148 | Horn | |
| 5 | 1400.000 | 51.51 | 67.49 | 25.21 | 2.54 | 46.41 | 0.56 | 33.41 | 49.39 | 53.97 | 73.97 | 20.5 | 24.5 | Vert. | 283 | 326 | Horn | |
| 6 | 1680.000 | 45.42 | 68.00 | 25.42 | 2.80 | 46.38 | 0.56 | 27.82 | 50.40 | 53.97 | 73.97 | 26.1 | 23.5 | Vert. | 100 | 155 | Horn | |
| 7 | 1800.000 | 50.94 | 58.70 | 25.69 | 2.91 | 46.37 | 0.56 | 33.73 | 41.49 | 53.97 | 73.97 | 20.2 | 32.4 | Vert. | 100 | 185 | Horn | |
| 8 | 2662.802 | 48.00 | 71.33 | 28.91 | 3.59 | 45.84 | 0.56 | 35.22 | 58.55 | 53.97 | 73.97 | 18.7 | 15.4 | Vert. | 339 | 45 | Horn | |
| 9 | 3000.000 | 52.69 | 64.36 | 29.25 | 3.82 | 45.77 | 0.56 | 40.55 | 52.22 | 53.97 | 73.97 | 13.4 | 21.7 | Vert. | 100 | 65 | Horn | |

Appendix 3 : Test Instruments

| Test Name | Local Id | LIMS ID | Description | Manufacturer | Model | Serial | Last Cal Date | CalInt |
|-----------|--------------|------------|----------------------------------|----------------------------------|--------------------------|---------------|---------------|--------|
| CE | CLS-08 | 143502 | A.M.N. | Rohde & Schwarz | ESH3-Z5 | 847265/011 | 2021/07/15 | 12 |
| CE | CLS-11 | 143505 | A.M.N. | Rohde & Schwarz | ESH3-Z5 | 835239/022 | 2021/07/15 | 12 |
| CE | CTM-28 | 143705 | Terminator | Suhner | 65_BNC-50-0-2/133_NE | none | 2021/11/17 | 12 |
| CE | CCC-S5-C(SR) | 143167 | 5 Site CE (SR) System | None | none(No.5 CE SR) | - | 2021/07/09 | 12 |
| CE | CTR-04 | 144195 | Test Receiver | Rohde & Schwarz | ESCI | 100053 | 2021/09/10 | 12 |
| RE | CCC-S5-RL | 142985 | 5 Site RE System | None | none(No.5 RE) | none | 2022/01/12 | 12 |
| RE | CBL-06 | 143119 | LOGBICON | Schwarzbeck Mess-Elektronik OHG | VULB 9168 | 130 | 2021/04/26 | 12 |
| RE | CAF-06 | 142928 | Pre-Amplifier | Hewlett Packard | 8447D | 2944A09906 | 2021/07/09 | 12 |
| RE | CAT5-02 | 178805 | 5dB Fixed Atten. | Pasternack Enterprises | PE7047-5 | none | 2021/04/21 | 12 |
| RE | CTR-04 | 144195 | Test Receiver | Rohde & Schwarz | ESCI | 100053 | 2021/09/10 | 12 |
| RE(GHz) | CHA-25 | 143456 | Double Ridged Wave Guide | ETS-Lindgren (Cedar Park, Texas) | 3115 | 00204573 | 2021/02/06 | 12 |
| RE(GHz) | CTR-01 | 144193 | Test Receiver | Rohde & Schwarz | ESU40 | 100426 | 2021/04/23 | 12 |
| RE(GHz) | TPA-14 | 175395 | Pre Amplifier | Erzia Technologies S.L. | ERZ-LNA-0100-2700-45-4 | 16A2001702002 | 2021/12/07 | 12 |
| RE(GHz) | CCC-G14 | 192241 | Microwave Cable | Huber+Suhner | SF104/PC35m/PC35m/1000mm | 805411/4 | 2022/01/18 | 12 |
| RE(GHz) | CCC-G17 | 192244 | Microwave Cable | Huber+Suhner | SF104/11N/11PC35/800MM | 808996/4 | 2022/01/18 | 12 |
| EMI | CSCL-13 | 143654 | Ruler | TAJIMA | L19-55 | none | - | - |
| EMI | COS-05 | 143537 | Temperature & Humidity Indicator | A&D Company | AD-5681 | 6975761 | 2021/07/27 | 12 |
| EMI | CBM-05 | 143128 | Barometer | OTA | No.11 | 15404 | 2021/11/24 | 36 |
| EMI | CTS-09 | 144211 | Digital Multimeter | Fluke Corporation | 112 | 89790194 | 2021/10/20 | 12 |
| EMI | COTS-CEMI-03 | PRE0189702 | EMI Software | TSJ (Techno Science Japan) | TEPTO-DV3(RE,CE,ME,PE) | - | - | - |

*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required(e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates,

those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test Item :

CE:Conducted emission

RE:Radiated emission

End of Report