



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page: 1 of 30
Date: Jul. 27, 2011

Product Name: Group Cycle Wireless Console
Model No.: A0000488
Applicant: TECHNOGYM S.p.A.
Via G. Perticari, 20-47035 Gambettola (FC) - Italia
Date of Receipt: Jun. 01, 2011
Finished date of Test: Jul. 27, 2011
Applicable Standards: 47 CFR Part 15, Subpart C
47 CFR Part 15, Subpart B
ANSI C63.4: 2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Tested By : Richard Lin, Date: 7/27/2011
(Richard Lin)

Approved By : J. Ho, Date: 7/27/2011
(Johnson Ho, Director)





**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page: 2 of 30
Date: Jul. 27, 2011

Table of Contents

1. DOCUMENT POLICY AND TEST STATEMENT.....	3
1.1 DOCUMENT POLICY	3
1.2 TEST STATEMENT	3
1.3 EUT MODIFICATION.....	3
2. DESCRIPTION OF EUT AND TEST MODE	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF EUT INTERNAL DEVICE	5
2.3 DESCRIPTION OF TEST MODE.....	5
2.4 DESCRIPTION OF SUPPORT UNIT.....	5
2.5 EUT OPERATING CONDITION.....	6
3. DESCRIPTION OF APPLIED STANDARDS.....	6
3.1 SUMMARY OF TEST RESULTS	6
4. TECHNICAL CHARACTERISTICS TEST.....	7
4.1 CONDUCTED EMISSION TEST	7
4.1.1 LIMIT	7
4.1.2 TEST EQUIPMENT	7
4.1.3 TEST SETUP.....	8
4.1.4 TEST PROCEDURE.....	8
4.1.5 TEST RESULT.....	8
4.2 RADIATED EMISSION TEST	9
4.2.1 LIMIT	9
4.2.2 TEST EQUIPMENT	10
4.2.3 TEST SET-UP.....	11
4.2.4 TEST PROCEDURE.....	12
4.2.5 TEST RESULT.....	13
4.3 BAND EDGE TEST	19
4.3.1 LIMIT	19
4.3.2 TEST EQUIPMENT	20
4.3.3 TEST SET-UP	21
4.3.4 TEST PROCEDURE.....	22
4.3.5 EUT OPERATING CONDITION.....	22
4.3.6 TEST RESULT.....	23
5. ANTENNA APPLICATION.....	27
5.1 ANTENNA REQUIREMENT	27
5.2 RESULT.....	27
6. PHOTOS OF TESTING	28
7. TERMS OF ABBREVIATION	30

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	TEST REPORT	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page: 3 of 30 Date: Jul. 27, 2011
---	--------------------	---

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- DC power source, 1.5Vdc of AAA battery x2 (TX) and 1.5Vdc of AA battery x3 (RX), was used during the test

1.3 EUT MODIFICATION

- No modification in SRT Lab.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page: 4 of 30
Date: Jul. 27, 2011

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

TX :

PRODUCT	Group Cycle Wireless Console
MODEL NO.	A0000488
POWER SUPPLY	DC power source from battery : 3Vdc/3mA
CABLE	NA
FREQUENCY BAND	2.400GHz ~ 2.480GHz
CARRIER FREQUENCY	2.457GHz
CHANNEL SPACING	1MHz
NUMBER OF CHANNEL	1
RATED RF OUTPUT POWER	-10.7dBm
MODULATION TYPE	GFSK
BIT RATE OF TRANSMISSION	250Kbit/sec
MODE OF OPERATION	Simplix
ANTENNA TYPE	Chip Antenna
ANTENNA GAIN	2 dBi
OPERATING TEMPERATURE RANGE	-10 ~ 60°C

RX :

PRODUCT	Group Cycle Wireless Console
MODEL NO.	A0000488
POWER SUPPLY	DC power source from battery : 4.5Vdc/3mA
CABLE	NA
FREQUENCY BAND	2.400GHz ~ 2.480GHz
CARRIER FREQUENCY	2.457GHz
CHANNEL SPACING	1MHz
NUMBER OF CHANNEL	1
RATED RF OUTPUT POWER	46.6dBuV/m
MODULATION TYPE	GFSK
BIT RATE OF TRANSMISSION	250Kbit/sec
MODE OF OPERATION	Simplix
ANTENNA TYPE	PCB layout
ANTENNA GAIN	2 dBi
OPERATING TEMPERATURE RANGE	-10 ~ 60°C

NOTE :

For more detailed information, please refer to the EUT's specification or user's manual provided by manufacturer.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page: 5 of 30
Date: Jul. 27, 2011

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID / DOC	REMARK
NA				

2.3 DESCRIPTION OF TEST MODE

Mode		
1	TX	TX
2		Standby
3	RX	Link

Note: The axis X,Y and Z we evaluate in chamber, the X axis is worst case.

TX :

X axis:



Y axis:



Z axis:



RX :

X axis:



Y axis:



Z axis:



2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4:2003. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	CABLE

NOTE : For the actual test configuration, please refer to the photos of testing.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page: 6 of 30 Date: Jul. 27, 2011
---	----------------------	---

2.5 EUT OPERATING CONDITION

1. Setup the EUT and all peripheral devices .
2. Turn on the power of all equipment and EUT.
3. Set the EUT under continuous transmission condition or standby.
4. The EUT was set to the highest available power level.

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a wireless product. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C

47 CFR Part 15, Subpart B

ANSI C63.4: 2003

All tests have been performed and recorded as the above standards.

3.1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

STANDARD SECTION	TEST TYPE AND LIMIT RESULTS	RESULTS
15.203	Antenna requirement Limit : max. 6dBi	PASS
15.207	AC Power Conducted Emission	PASS
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS
15.249	Transmitter Radiated Emissions Limit: Table 15.209	PASS

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	TEST REPORT	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:7 of 30 Date: Jul. 27, 2011
--	--------------------	--

4. TECHNICAL CHARACTERISTICS TEST

4.1 CONDUCTED EMISSION TEST

4.1.1 LIMIT

Frequency (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE :

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.


4.1.2 TEST EQUIPMENT

The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9kHz TO 2.75 GHz	ROHDE & SCHWARZ	ESHS30 / 826003/008	SEP. 2011 ETC
LISN	50 μ H, 50 ohm	FCC	FCC-LISN-50-25-2 / 01017	JUL. 2011 ETC
LISN	50 μ H, 50 ohm	SOLAR	9252-50-R24-BNC / 951315	NOV. 2011 ETC
50 OHM TERMINATOR	50 ohm	HP	11593A / #2	MAY 2012 ETC
COAXIAL CABLE	5M	TIMES	RG214/U / #5M(L1TCAB013)	MAY. 2012 ETC
Filter	2 LINE, 30A	FIL.COIL	FC-943 / 771	NCR
GROUND PLANE	2M (H) x 3M (W)	SRT	N/A	NCR
GROUND PLANE	2.5M (H) x 3M (W)	SRT	N/A	NCR

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.1.3 TEST SETUP

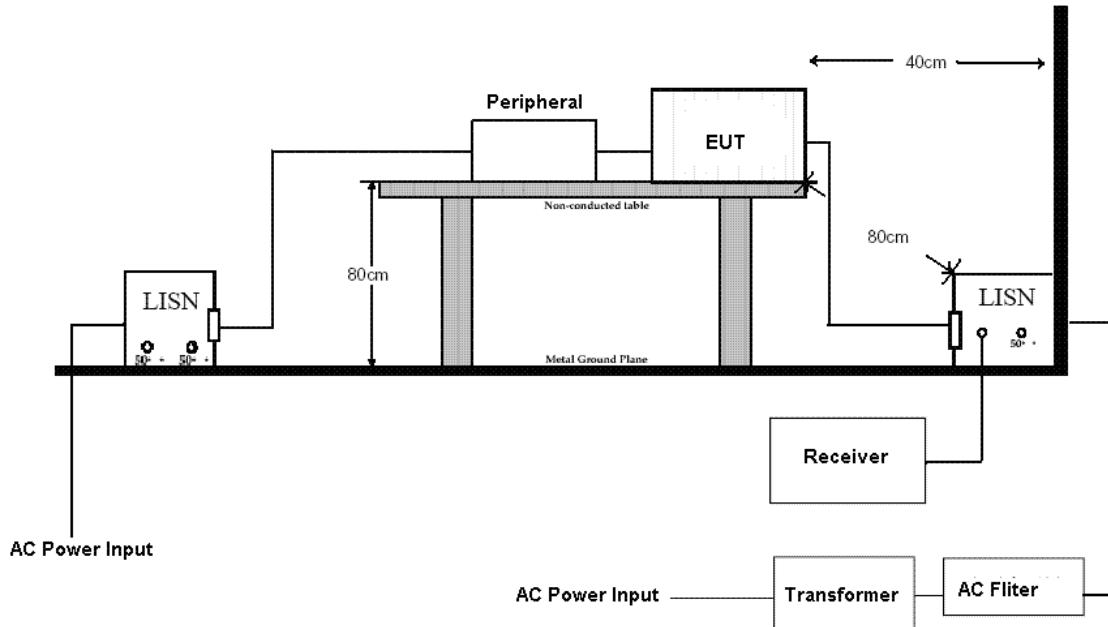

NOTE :

1. The EUT was put on a wooden table with 0.8m heights above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.

4.1.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR22:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50μH as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

4.1.5 TEST RESULT

The test item was not performed, because the EUT uses 1.5Vdc battery(AAA)*2 as power source.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page: 9 of 30
Date: Jul. 27, 2011

4.2 RADIATED EMISSION TEST

4.2.1 LIMIT

FCC Part15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000MHz. The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)
0.009 - 0.490	300	2400/F(KHz)
0.490 - 1.705	30	24000/F(KHz)
1.705 - 30	30	30
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
Above 960	3	54.0

FCC Part15, Subpart C Section 15.249 limit of radiated emission for frequency below 1000MHz (Average).

FREQUENCY (MHz)	FIELD STRENGTH OF FUNDAMENTAL (millivolts/meter)	FIELD STRENGTH OF HARMONICS (millivolts/meter)
902 - 928	50	500
2400 - 2483.5	50	500
5725 - 5875	50	500
24000 - 24250	250	2500

NOTE :

1. In the emission tables above, the tighter limit applies at the band edges.
2. Distance refers to the distance between measuring instrument, antenna, and the closest point of any part of the device or system.
3. 50mV = 94dB μ V

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000 MHz

FREQUENCY (MHz)	Class A (dB μ V/m) (at 3m)		Class B (dB μ V/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:10 of 30 Date: Jul. 27, 2011
---	----------------------	---

4.2.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	20 MHz TO 1000 MHz	ROHDE & SCHWARZ	ESVS30 / 841977/003	DEC. 2011 ETC
BI-LOG ANTENNA	30 MHz TO 2 GHz	SCHAFFNER	CBL6141A / 4181	MAY. 2012 ETC
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	NOV. 2011 SRT
COAXIAL CABLE	30M	TIMES	LMR-400 / #30M	MAY. 2012 ETC
FILTER	2 LINE, 30A	FIL.COIL	FC-943 / 869	NCR
SPECTRUM ANALYZER	9K-40GHz	R&S	FSP40/ 100093	DEC. 2011 ETC
PRE-AMPLIFIER	1 GHz TO 26.5 GHz	HP	8449B/ 3008A01995	JAN. 2012 ETC
HORN ANTENNA	1 GHz TO 18 GHz	EMCO	3115/ 6881	NOV. 2011 ETC
HORN ANTENNA	18 GHz TO 40 GHz	EMCO	3116/ 00032255	FEB. 2012 ETC
K-TYPE CABLE	15M	HUBER SUHNER	SF 102-40/2*11 /23932/2	MAY. 2012 ETC
K-TYPE CABLE	1M	HUBER SUHNER	SF 102-40/2*11 /23934/2	NOV. 2011 ETC

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan


TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page:11 of 30
Date: Jul. 27, 2011

4.2.3 TEST SET-UP 30MHz ~ 1GHz

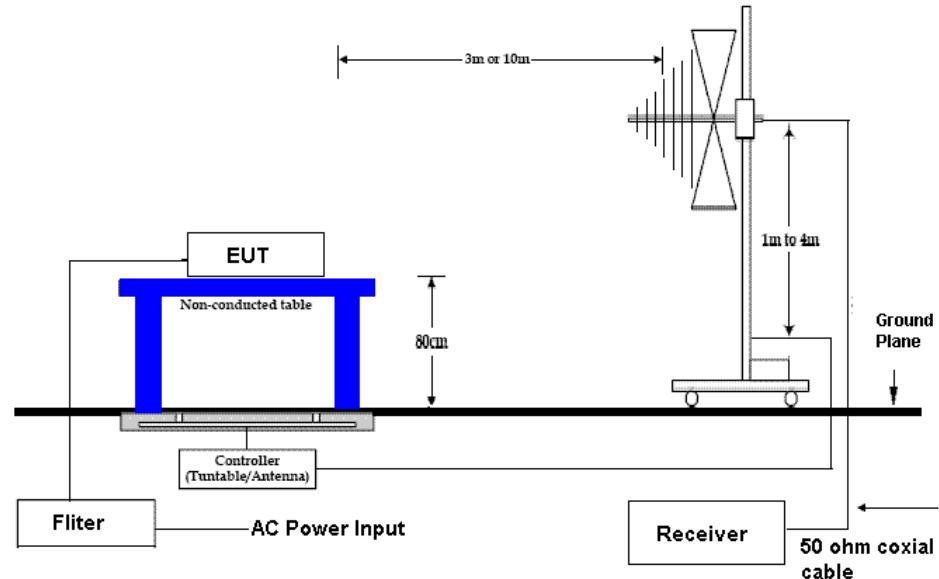

Above 1GHz

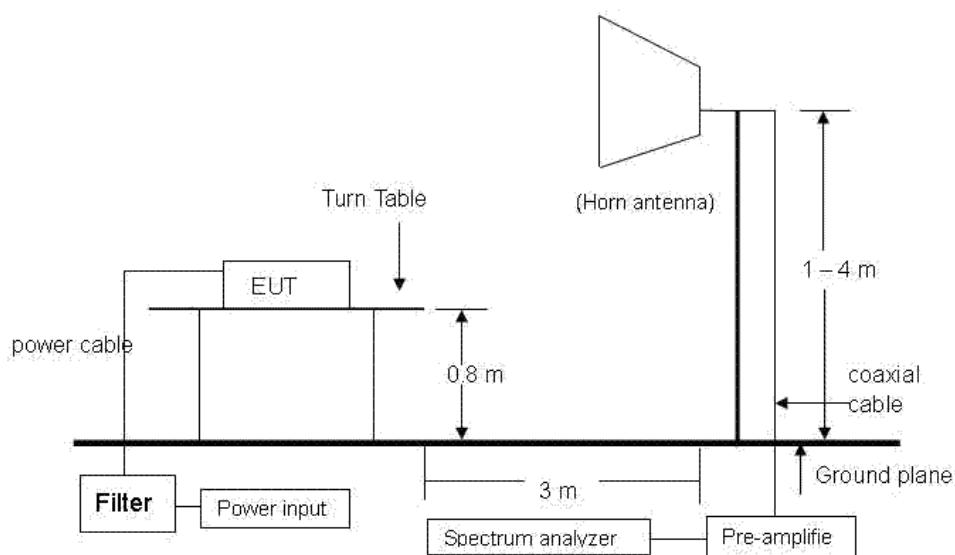

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane. For the actual test configuration, please refer to the photos of testing.



**Spectrum Research &
Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102

Report No.:FCC A11060102

FCC ID : ZQWA0000488

Page:12 of 30

Date: Jul. 27, 2011

4.2.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR 22:2003. The measurements were made at an open area test site with 3 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.

 Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	TEST REPORT	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:13 of 30 Date: Jul. 27, 2011
--	--------------------	---

4.2.5 TEST RESULT

Temperature:	23 °C	Humidity:	62 %RH
Tested By:	Richard Lin	Tested Mode:	Tx
Receiver Detector:	Q.P. or AV.	Modulation Type:	GFSK
Frequency Range:	30M – 1GHz	Tested Date:	Jul. 01, 2011

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
573.1920	3.45	19.06	3.5	26.0	46.0	-20.0	92	1.87
599.4870	3.50	19.58	4.2	27.3	46.0	-18.7	176	1.75
713.3740	3.83	21.01	4.4	29.2	46.0	-16.8	253	1.66
756.8410	3.92	21.92	3.6	29.4	46.0	-16.6	104	1.53
851.6930	4.30	22.90	4.0	31.2	46.0	-14.8	38	1.49
977.4120	4.65	24.42	6.7	35.8	54.0	-18.2	119	1.31

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
560.7950	3.42	18.80	3.7	25.9	46.0	-20.1	49	1.35
701.2460	3.80	20.72	4.5	29.0	46.0	-17.0	138	1.44
747.5580	3.89	21.83	4.4	30.1	46.0	-15.9	195	1.59
810.3390	4.14	22.26	4.2	30.6	46.0	-15.4	214	1.63
873.4520	4.39	22.99	4.9	32.3	46.0	-13.7	37	1.69
916.7310	4.53	23.45	5.1	33.1	46.0	-12.9	172	1.82

NOTE :

1. Measurement uncertainty is +/- 4.73dB.
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:14 of 30 Date: Jul. 27, 2011
---	----------------------	---

Temperature:	23 °C	Humidity:	62 %RH
Tested By:	Richard Lin	Tested Mode:	Standby
Receiver Detector:	Q.P. or AV.	Modulation Type:	GFSK
Frequency Range:	30M – 1GHz	Tested Date:	Jul. 01, 2011

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
46.5130	1.06	15.94	3.8	20.8	40.0	-19.2	91	1.81
208.9670	1.98	12.12	14.7	28.8	43.5	-14.7	135	1.75
584.8920	3.47	19.28	3.7	26.4	46.0	-19.6	197	1.69
752.1950	3.91	21.91	4.6	30.4	46.0	-15.6	15	1.61
870.9570	4.38	22.98	4.0	31.4	46.0	-14.6	318	1.48
958.4420	4.62	24.26	4.5	33.4	46.0	-12.6	304	1.35

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
659.8370	3.72	20.37	4.7	28.8	46.0	-17.2	225	1.33
737.6910	3.87	21.59	5.3	30.8	46.0	-15.2	203	1.32
812.9560	4.15	22.29	4.1	30.5	46.0	-15.5	147	1.39
863.7430	4.35	22.95	4.9	32.2	46.0	-13.8	41	1.47
921.9770	4.54	23.56	5.6	33.7	46.0	-12.3	65	1.53
977.3340	4.65	24.42	6.2	35.3	54.0	-18.7	124	1.66

NOTE :

1. Measurement uncertainty is +/- 4.73dB.
2. ***: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:15 of 30 Date: Jul. 27, 2011
---	----------------------	---

Temperature:	23 °C	Humidity:	62 %RH
Tested By:	Richard Lin	Tested Mode:	Link
Receiver Detector:	Q.P. or AV.	Modulation Type:	GFSK
Frequency Range:	30M – 1GHz	Tested Date:	Jul. 01, 2011

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
679.4170	3.76	20.53	4.8	29.1	46.0	-16.9	77	1.4
718.3390	3.84	21.13	4.3	29.3	46.0	-16.7	159	1.48
769.1350	3.98	21.98	3.4	29.4	46.0	-16.6	124	1.53
858.8410	4.33	22.93	4.0	31.3	46.0	-14.7	238	1.62
892.7680	4.47	23.07	3.9	31.4	46.0	-14.6	201	1.77
943.3520	4.59	24.05	4.6	33.2	46.0	-12.8	196	1.81

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	AZ(°)	EL(m)
560.4180	3.42	18.80	4.1	26.3	46.0	-19.7	92	1.74
618.9350	3.57	19.85	5.4	28.8	46.0	-17.2	37	1.7
664.8910	3.73	20.41	4.6	28.7	46.0	-17.3	146	1.62
754.6270	3.92	21.92	3.9	29.7	46.0	-16.3	258	1.54
844.3620	4.28	22.80	4.3	31.4	46.0	-14.6	299	1.46
895.2470	4.48	23.08	5.3	32.9	46.0	-13.1	314	1.38

NOTE :

1. Measurement uncertainty is +/- 4.73dB.
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:16 of 30 Date: Jul. 27, 2011
---	----------------------	---

Temperature:	23 °C	Humidity:	62 %RH
Receiver Detector:	PK. or AV.	Tested Mode:	Tx
Frequency Range:	1 – 25GHz	Modulation Type:	GFSK
Tested By:	Richard Lin	Tested Date:	Jul. 01, 2011

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2457.00	-22.59	28.21	77.0	65.8	82.6	71.4	114.0	94.0	-31.4	-22.6	37	1.41
1090.75	-28.23	24.42	45.7	34.5	41.9	30.7	74.0	54.0	-32.1	-23.3	129	1.45
2119.32	-23.59	27.46	43.3	32.8	47.2	36.7	74.0	54.0	-26.8	-17.3	195	1.53
2140.60	-23.53	27.51	44.1	35.2	48.1	39.2	74.0	54.0	-25.9	-14.8	224	1.62
2408.23	-22.73	28.10	38.6	28.4	44.0	33.8	74.0	54.0	-30.0	-20.2	83	1.68
2688.73	-22.02	28.98	36.9	25.3	43.9	32.3	74.0	54.0	-30.1	-21.7	102	1.79
4914.00	-16.59	33.25	34.6	23.5	51.3	40.2	74.0	54.0	-22.7	-13.8	63	1.54
7371.00	-12.61	36.16	41.0	27.1	64.6	50.7	74.0	54.0	-9.4	-3.3	108	1.48

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2457.00	-22.59	28.21	79.8	68.5	85.5	74.1	114.0	94.0	-28.5	-19.9	42	1.5
1664.33	-25.28	25.99	42.1	32.5	42.8	33.2	74.0	54.0	-31.2	-20.8	115	1.76
1961.90	-24.10	27.06	42.8	32.1	45.8	35.1	74.0	54.0	-28.2	-18.9	137	1.62
2110.62	-23.61	27.44	41.3	31.2	45.2	35.0	74.0	54.0	-28.8	-19.0	234	1.43
2157.95	-23.48	27.55	40.9	31.1	45.0	35.2	74.0	54.0	-29.0	-18.8	314	1.48
2408.38	-22.73	28.10	38.3	28.6	43.7	34.0	74.0	54.0	-30.3	-20.0	209	1.44
4914.00	-16.59	33.25	36.2	26.8	52.9	43.5	74.0	54.0	-21.1	-10.5	171	1.56
7371.00	-12.61	36.16	40.5	27.5	64.1	51.1	74.0	54.0	-9.9	-2.9	165	1.53

NOTE :

1. Measurement uncertainty is +/- 4.73dB.
2. **: The Peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field strength of fundamental frequency.

	Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan	TEST REPORT	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:17 of 30 Date: Jul. 27, 2011
--	---	--------------------	---

Temperature:	23 °C	Humidity:	62 %RH
Receiver Detector:	PK. or AV.	Tested Mode:	Standby
Frequency Range:	1 – 25GHz	Modulation Type:	GFSK
Tested By:	Richard Lin	Tested Date:	Jul. 01, 2011

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2457.00	-22.59	28.21	41.0	30.5	46.6	36.1	74.0	54.0	-27.4	-17.9	156	1.5
2119.69	-23.59	27.46	37.4	27.6	41.3	31.5	74.0	54.0	-32.7	-22.5	173	1.36
2153.49	-23.49	27.54	38.6	28.1	42.6	32.1	74.0	54.0	-31.4	-21.9	101	1.45
2408.54	-22.73	28.10	39.3	28.7	44.7	34.1	74.0	54.0	-29.3	-19.9	52	1.51
2603.74	-22.22	28.67	38.3	27.6	44.8	34.1	74.0	54.0	-29.2	-19.9	229	1.58
2646.14	-22.12	28.83	37.2	27.1	43.9	33.8	74.0	54.0	-30.1	-20.2	286	1.66
4914.00	-16.59	33.25	35.1	24.8	51.8	41.5	74.0	54.0	-22.2	-12.5	43	1.52
7371.00	-12.61	36.16	38.4	28.6	62.0	52.2	74.0	54.0	-12.0	-1.8	19	1.49

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2457.00	-22.59	28.21	40.9	30.4	46.5	36.0	74.0	54.0	-27.5	-18.0	123	1.55
1090.62	-28.23	24.42	48.8	39.1	45.0	35.3	74.0	54.0	-29.0	-18.7	314	1.82
2119.44	-23.59	27.46	38.8	28.5	42.7	32.4	74.0	54.0	-31.3	-21.6	299	1.75
2408.80	-22.73	28.10	35.1	25.0	40.5	30.4	74.0	54.0	-33.5	-23.6	245	1.63
2527.65	-22.40	28.40	36.3	25.7	42.3	31.7	74.0	54.0	-31.7	-22.3	303	1.51
2629.81	-22.16	28.76	35.9	5.0	42.5	11.6	74.0	54.0	-31.5	-42.4	97	1.44
4914.00	-16.59	33.25	34.2	24.1	50.9	40.8	74.0	54.0	-23.1	-13.2	203	1.47
7371.00	-12.61	36.16	39.7	29.5	63.3	53.1	74.0	54.0	-10.7	-0.9	38	1.48

NOTE :

1. Measurement uncertainty is +/- 4.73dB.
2. **: The Peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field strength of fundamental frequency.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:18 of 30 Date: Jul. 27, 2011
---	----------------------	---

Temperature:	23 °C	Humidity:	62 %RH
Receiver Detector:	PK. or AV.	Tested Mode:	Link
Frequency Range:	1 – 25GHz	Modulation Type:	GFSK
Tested By:	Richard Lin	Tested Date:	Jul. 01, 2011

Antenna Polarization : Horizontal

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2457.00	-22.59	28.21	76.6	65.8	82.3	71.4	114.0	94.0	-31.7	-22.6	162	1.52
1116.34	-28.08	24.48	46.2	36.4	42.6	32.8	74.0	54.0	-31.4	-21.2	324	1.41
2119.18	-23.59	27.46	43.9	33.5	47.8	37.4	74.0	54.0	-26.2	-16.6	312	1.48
2157.42	-23.48	27.55	40.0	31.2	44.1	35.3	74.0	54.0	-29.9	-18.7	26	1.57
2408.36	-22.73	28.10	39.5	28.7	44.9	34.1	74.0	54.0	-29.1	-19.9	83	1.66
2695.81	-22.00	29.00	35.8	26.4	42.8	33.4	74.0	54.0	-31.2	-20.6	105	1.71
4914.00	-16.59	33.25	34.8	24.5	51.5	41.2	74.0	54.0	-22.5	-12.8	144	1.74
7371.00	-12.61	36.16	40.2	28.2	63.8	51.8	74.0	54.0	-10.2	-2.2	129	1.83

Antenna Polarization : Vertical

Frequency (MHz)	Correct Factor (dB)	Ant. Factor (dB/m)	Reading Data (dB μ V)		Emission Level (dB μ V/m)		Limit (dB μ V/m)		Margin (dB)		AZ (°)	EL (m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2457.00	-22.59	28.21	76.3	66.2	81.9	71.8	114.0	94.0	-32.1	-22.2	121	1.55
1821.49	-24.65	26.56	40.3	30.5	42.2	32.4	74.0	54.0	-31.8	-21.6	157	1.81
2119.55	-23.59	27.46	41.3	31.8	45.2	35.7	74.0	54.0	-28.8	-18.3	218	1.76
2148.94	-23.50	27.53	40.4	29.9	44.4	33.9	74.0	54.0	-29.6	-20.1	265	1.68
2408.20	-22.73	28.10	39.9	28.5	45.3	33.9	74.0	54.0	-28.7	-20.1	319	1.61
2675.81	-22.05	28.93	35.3	24.9	42.2	31.8	74.0	54.0	-31.8	-22.2	332	1.53
4914.00	-16.59	33.25	36.1	26.5	52.8	43.2	74.0	54.0	-21.2	-10.8	86	1.51
7371.00	-12.61	36.16	40.3	27.5	63.9	51.1	74.0	54.0	-10.1	-2.9	117	1.46

NOTE :

1. Measurement uncertainty is +/- 4.73dB.
2. **: The Peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. Emission Level = Reading Value + Ant. Factor + Correct Factor (incl.:Cable Loss and Pre-Amplifier Gain)
4. The field strength of other emission frequencies were very low against the limit.
5. (F):The field strength of fundamental frequency.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page:19 of 30
Date: Jul. 27, 2011

4.3 BAND EDGE TEST

4.3.1 LIMIT

FCC Part15, Subpart C Section 15.247. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

OPERATING FREQUENCY RANGE (MHz)	SPURIOUS EMISSION FREQUENCY (MHz)	LIMIT	
		Peak power ration to emission(dBc)	Emission level(dBuV/m)
902 - 928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400 - 2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725 - 5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:20 of 30 Date: Jul. 27, 2011
---	----------------------	---

4.3.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-40GHz	ROHDE & SCHWARZ	FSP40/ 100093	Dec. 2011 ETC
EMI Test Receiver	9kHz-6GHz	ROHDE & SCHWARZ	ESL/ 100176	Mar. 2012 R&S
SPECTRUM	9KHz-26.5GHz	HP	8953E/ 3710A03220	Nov. 2011 ETC
PRE-AMPLIFIER	1GHz-26.5GHz Gain:30dB	HP	8449B/ 3008A01019	Nov. 2011 ETC
HORN ANTENNA	1GHz to 18GHz	EMCO	3115/ 6881	Nov. 2011 ETC
K-TYPE CABLE	15M	HUBER SUHNER	SF102-40/2*11 / 23932/2	Feb. 2012 ETC
K-TYPE CABLE	1M	HUBER SUHNER	SF102-40/2*11 / 28934/2	May. 2012 ETC
RF CABLE	1.5M	JYEBAO	A30A30-L 142 / EQF-0035	Dec. 2011 ETC
RF CABLE	3.5M	JYEBAO	A30A30-L 142 (G3.5M)/ EQF-0036(002)	Dec. 2011 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page:21 of 30
Date: Jul. 27, 2011


4.3.3 TEST SET-UP

FOR RF CONDUCTED TEST (dBc)



The EUT was connected to a spectrum through a 50Ω RF cable.

FOR RADIATED EMISSION TEST

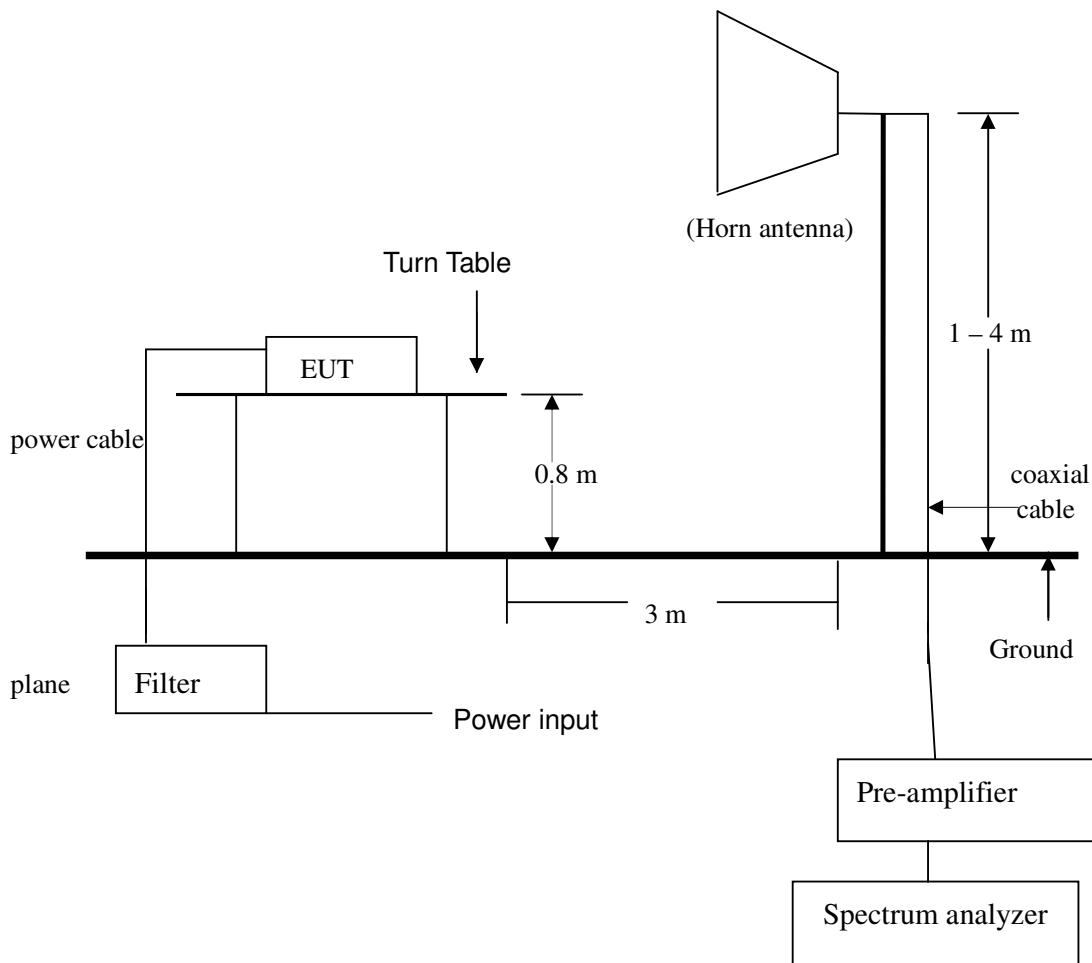

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:22 of 30 Date: Jul. 27, 2011
---	----------------------	---

4.3.4 TEST PROCEDURE

1. The EUT was operating in continuous transmission mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.
2. The EUT was tested according to the requirement of ANSI C63.4 and CISPR 22. The measurements were made at an open area test site with 3 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak and average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

4.3.5 EUT OPERATING CONDITION

1. Set the EUT under continuous transmission condition.
2. The EUT was set to the highest available power level.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page:23 of 30
Date: Jul. 27, 2011


4.3.6 TEST RESULT

Temperature:	26 °C	Humidity:	60%RH
Spectrum Detector:	PK. or AV.	Tested Mode:	Tx
Tested By:	Richard Lin	Modulation Type:	GFSK
Tested Date:	Jul 27, 2011		

1. Conducted test

Frequency (MHz)	PEAK POWER OUTPUT (dBm)	Emission read Value(dBm)	Result of Band edge (dBc)	Band edge LIMIT (dBc)
<2400	-32.09	-67.77	35.68	>20dBc
>2483.5	-31.68	-70.04	38.36	>20dBc

Below 2400MHz :

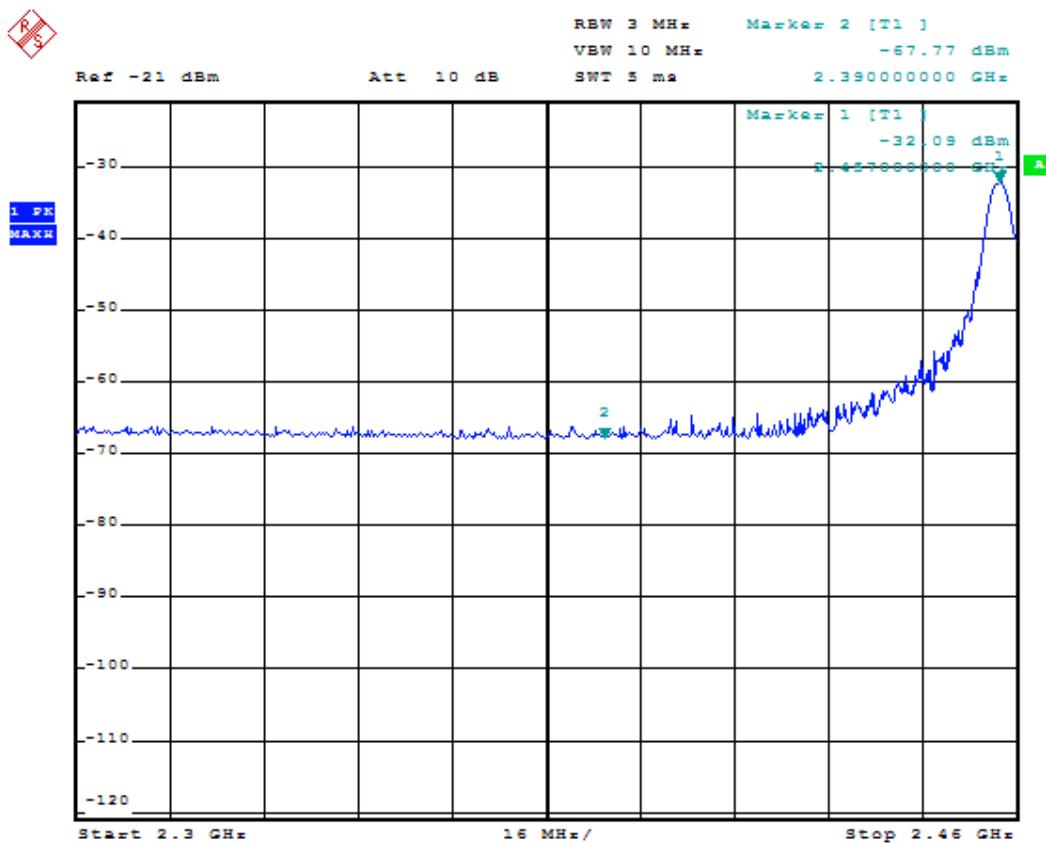




**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page: 24 of 30
Date: Jul. 27, 2011

Above 2483.5 MHz :

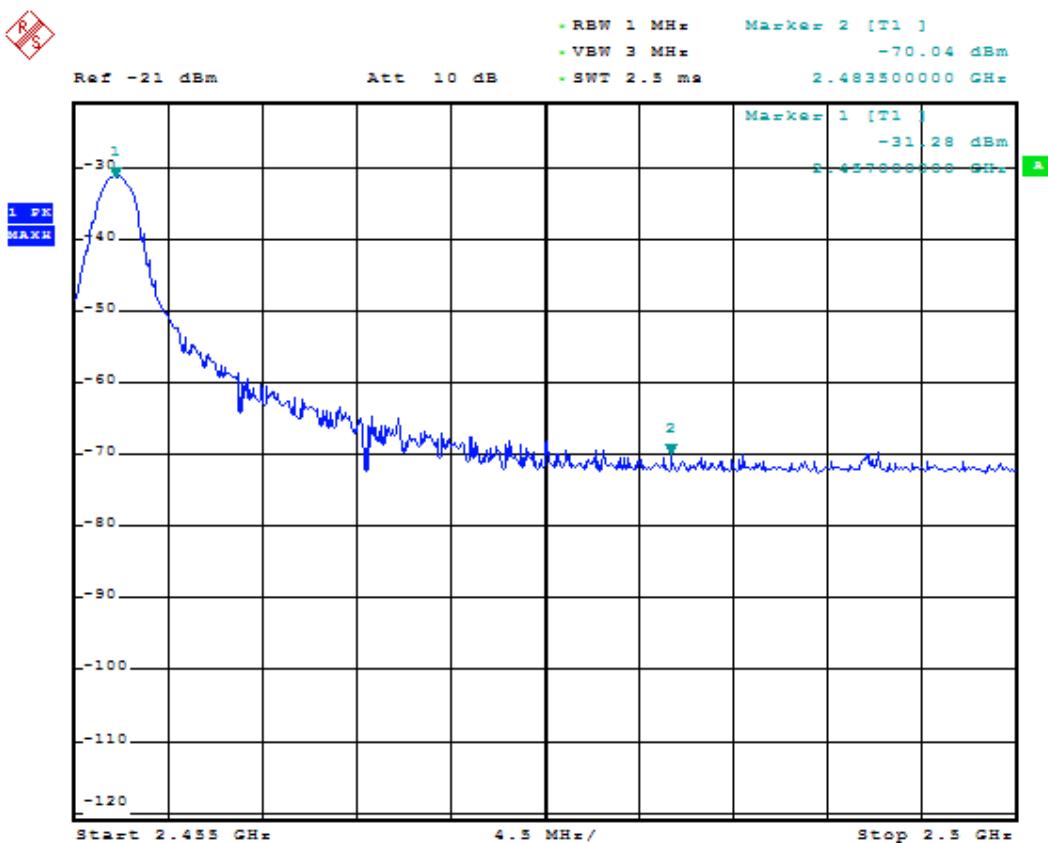

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page:25 of 30 Date: Jul. 27, 2011
---	----------------------	---

2.Radiated emission test :


Below 2400MHz

Frequency (MHz)	Correct Factor (dB)	Ant. Fac. (dB)	Ant. Pol. (H/V)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Over Limit (dBuV/m)	
				PK	AV	PK	AV	PK	AV	PK	AV
2457.00	-22.59	28.21	H	77.0	65.8	82.6	71.4	114.0	94.0	-31.4	-22.6
2457.00	-22.59	28.21	V	79.8	68.5	85.5	74.1	114.0	94.0	-28.5	-19.9
2378.60	-22.82	28.03	H	46.9	34.2	52.1	39.4	74.0	54.0	-21.9	-14.6
2382.20	-22.81	28.04	V	49.6	34.1	54.8	39.3	74.0	54.0	-19.2	-14.7
2390.00	-22.79	28.06	H	45.9	34.3	51.2	39.6	74.0	54.0	-22.8	-14.4
2390.00	-22.79	28.06	V	45.4	34.3	50.7	39.6	74.0	54.0	-23.3	-14.4

Horizontal :



Vertical :

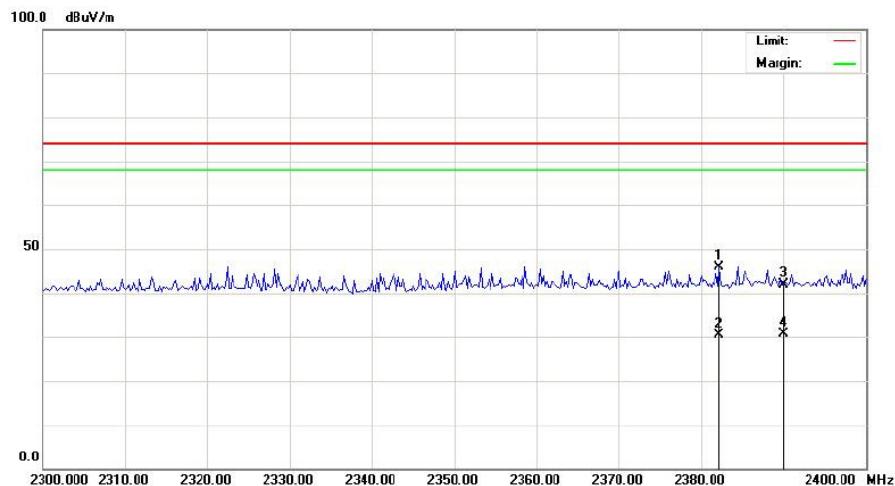



Spectrum Research &
Testing Lab., Inc.

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102

Report No.: FCC A11060102

FCC ID : ZQWA0000488


Page: 26 of 30

Date: Jul. 27, 2011

Above 2483.5MHz

Frequency (MHz)	Correct Factor (dB)	Ant. Fac. (dB)	Ant. Pol. (H/V)	Reading (dBuV)		Emission (dBuV/m)		Limit Line (dBuV/m)		Over Limit (dBuV/m)	
				PK	AV	PK	AV	PK	AV	PK	AV
2457.00	-22.59	28.21	H	77.0	65.8	82.6	71.4	114.0	94.0	-31.4	-22.6
2457.00	-22.59	28.21	V	79.8	68.5	85.5	74.1	114.0	94.0	-28.5	-19.9
2492.52	-22.48	28.28	H	48.1	34.2	53.9	40.0	74.0	54.0	-20.1	-14.0
2486.37	-22.50	28.27	V	47.0	33.7	52.8	39.4	74.0	54.0	-21.2	-14.6
2483.50	-22.51	28.26	H	47.7	33.6	53.5	39.4	74.0	54.0	-20.5	-14.6
2483.50	-22.51	28.26	V	44.8	33.3	50.5	39.0	74.0	54.0	-23.5	-15.0

Horizontal :

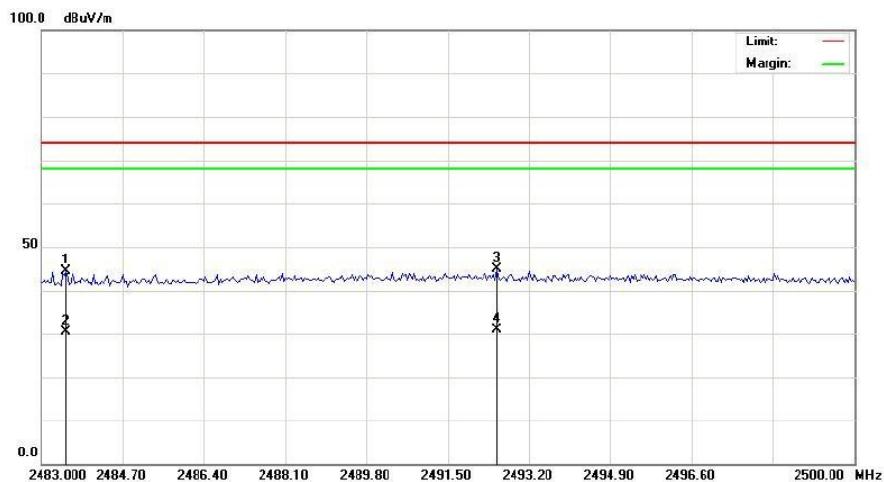

Vertical :



* -



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page:27 of 30
Date: Jul. 27, 2011

5. Antenna application

5.1 Antenna requirement

The EUT's antenna is met the requirement of FCC part15C section15.203 and 15.204.

5.2 Result

The EUT's antenna used a Chip Antenna. Gain of antenna types is 2 dBi that meet the requirement.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page: 28 of 30
Date: Jul. 27, 2011

6. PHOTOS OF TESTING

- Radiated test (below 1G , TX & Standby)





**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: A11060102
Report No.: FCC A11060102
FCC ID : ZQWA0000488
Page:29 of 30
Date: Jul. 27, 2011

- Radiated test (above 1G , TX & Standby)



 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	<h1>TEST REPORT</h1>	Reference No.: A11060102 Report No.: FCC A11060102 FCC ID : ZQWA0000488 Page: 30 of 30 Date: Jul. 27, 2011
---	----------------------	--

7. TERMS OF ABBREVIATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction