

FCC Test Report

Report No.: AGC03055190507FE03

FCC ID	: ZRX62599
APPLICATION PURPOSE	: Original Equipment
PRODUCT DESIGNATION	: Remote control car series
BRAND NAME	: N/A
MODEL NAME	: 62599
SERIES MODEL	Please to see page 5
APPLICANT	: HE TAI TOYS FACTORY
DATE OF ISSUE	: Jun. 21, 2019
STANDARD(S) TEST PROCEDURE(S)	: FCC Part 15 Subpart C Section 15.227
REPORT VERSION	: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.







Re	port	Revise	Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0		Jun. 21, 2019	Valid	Initial release





TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	
2. GENERAL INFORMATION	
2.1. PRODUCT DESCRIPTION	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	7
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF EUT SYSTEM	
5.2. EQUIPMENT USED IN EUT SYSTEM	
5.3. SUMMARY OF TEST RESULTS	7
6. TEST FACILITY	
7. TEST EQUIPMENT LIST	8
8. RADIATED EMISSION	9
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SETUP	11
8.3. TEST RESULT	
9. BANDWIDTH	15
9.1. MEASUREMENT PROCEDURE	15
9.2. TEST SETUP	
9.3. TEST RESULT	16
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	17
APPENDIX B: PHOTOGRAPHS OF EUT	18





1. VERIFICATION OF CONFORMITY

HE TAI TOYS FACTORY	
RONGFU INDUSTRIAL PAPK, FENGXIANG, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG, CHINA	
HE TAI TOYS FACTORY	
RONGFU INDUSTRIAL PAPK, FENGXIANG, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG, CHINA	
HE TAI TOYS FACTORY	
RONGFU INDUSTRIAL PAPK, FENGXIANG, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG, CHINA	
Remote control car series	
N/A	
62599	
Please to see page 5	
All the same except for the model name and different appearance color	
Jun. 09, 2019 to Jun. 21, 2019	
None	
Normal	
Pass	
AGCRT-US-BR/RF	
· · · · · · · · · · · · · · · · · · ·	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.227. The test results of this report relate only to the tested sample identified in this report.

Tested By

Draven.li

Draven Li(Li Ming Liang)

Jun. 21, 2019

Reviewed By

Max Zhang

Max Zhang(Zhang Yi)

Jun. 21, 2019

Approved By

Forrest in

Forrest Lei(Lei Yonggang) Authorized Officer

Jun. 21, 2019



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, No.1–4, Chaxi Sanwei Technial Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China Tel: +86–755 2523 4088 E-mail: agc@agc-cert.com Service Hotline:400 089 2118



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	27.145MHZ	
Field Strength(3m)	64.15dBuV/m(Peak)@3m	
Modulation	AM	
Number of channels		
Hardware Version	YLD410011	
Software Version	V1.0	
Antenna Designation	Fixed antenna	
Antenna Gain	0.5dBi	
Power Supply	DC 3V by Battery	

Series Model:

61599, 63599, 64599, 65599, 66599, 60599, 67599, 67599B, 68599B, 68599B, 69599B, 70599B, 70599B, 74599, 75599, 76599, 73599, 77599, 78599, 79599B, 79599B, 80599, 81599, 82599, 83599, 84599, 85599, 86599, 87599, 88599, 89599, 22599, 91599, 92599, C21599, C31599, 23599, 24599, 25599, 26599, 27599, 29599, 26599P, 22599P, 32599, 33599, 34599, 35599, 37599, 29599P, 67599P, 68599P, 38599, 39599, 30599, 69599P, 69599BP, 70599BP, 70599BP, 74599P, 75599P, 79599BP 69599F, 75599F, 70599F, 76599F, 93599, 94599, 95599, 96599, 97599, 98599, 99599, 10599, 11599, 12599, 13599, 14599, 15599, 16599, 17599, 18599, 19599, 20599, 59599, 01599, 02599, 03599, 04599, 05599





3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, $Uc = \pm 4.8 \text{ dB}$
- Uncertainty of Occupied Channel Bandwidth: $Uc = \pm 2 \%$





4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Transmitting mode
Note:	

1. All the test modes can be supply by new battery, and only the data of the worst case recorded in the test report.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1:

EUT

5.2. EQUIPMENT USED IN EUT SYSTEM

ltem	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Remote control car seriesseries	N/A	62599	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.227&15.209	Radiated Emission	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	N/A





6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Commu Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	11259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA		

7. TEST EQUIPMENT LIST

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.11, 2019	Jun.12, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
Attenuator	Weinachel Corp	58-30-33	N/A	Jun.11, 2019	Jun.12, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2018	Jun. 13, 2020
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 28, 2017	Sep. 27, 2019





8. RADIATED EMISSION

8.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.





The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency 150KHz~30MHz/RBW 9K	
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP






8.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

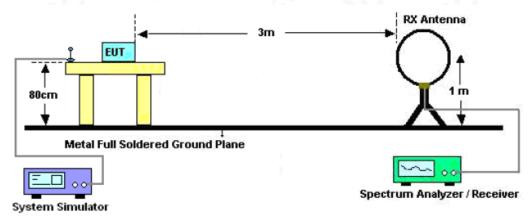

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

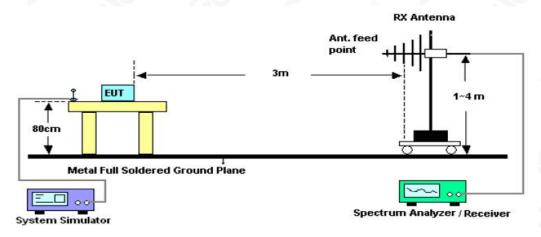





8.3. TEST RESULT

RADIATED EMISSION BELOW 30MHZ


EUT :	Remote control car series	Model Name. :	62599
Temperature :	20 °C	Relative Humidtity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3V
Test Mode :	Mode 1	Polarization :	-9° - 0

Frequency MHz	Polarization	Reading dB(uV) PK	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) AV	Margin dB	Pass/Fail
27.145	Face	51.72	12.43	64.15	80.00	-15.85	Pass
27.145	Side	39.10	12.43	51.53	80.00	-28.47	Pass

Note: The level of peak emission is less than the average limit, so the level of average emission need not to be tested. Other emissions from 9kHz to 30MHz are considered as ambient noise. No recording in the test report.





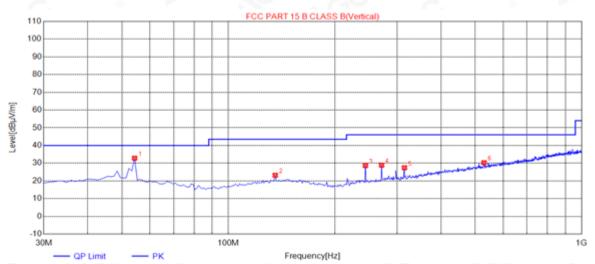


RADIATED EMISSION BELOW 1GHZ-Horizontal

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	54.2500	32.80	14.35	40.00	7.20	100	165	Vertical
2	135.7300	23.20	14.56	43.50	20.30	100	89	Vertical
3	244.3700	28.67	14.78	46.00	17.33	200	2	Vertical
4	271.5300	28.88	15.55	46.00	17.12	200	298	Vertical
5	315.1800	27.42	16.48	46.00	18.58	100	302	Vertical
6	529.5500	30.27	22.85	46.00	15.73	200	41	Vertical
6	529.5500	30.27	22.85	46.00	15.73	200	41	Vertical





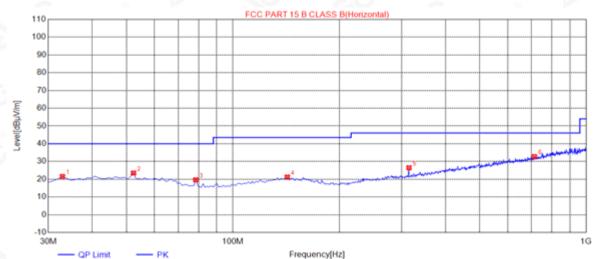

RADIATED EMISSION BELOW 1GHZ-Vertical

1			and the second sec					
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.9100	21.53	13.36	40.00	18.47	150	360	Horizontal
2	52.3100	23.48	14.49	40.00	16.52	150	312	Horizontal
3	78.5000	19.63	10.46	40.00	20.37	200	2	Horizontal
4	142.5200	21.22	14.88	43.50	22.28	100	63	Horizontal
5	315.1800	26.46	16.48	46.00	19.54	200	304	Horizontal
6	713.8500	32.75	26.29	46.00	13.25	100	77	Horizontal
5	315.1800	26.46	16.48	46.00	19.54	200	304	Horizontal

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.





9. BANDWIDTH


9.1. MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below: Centre frequency = Operation Frequency RBW=300Hz VBW=1KHz Span: 30kHz

Sweep time: Auto

- 2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.
- 3. Record the plots and Reported.

9.2. TEST SETUP

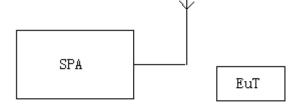






9.3. TEST RESULT

TEST ITEM	20DB BANDWIDTH	No.	100	~0		2
TEST MODULATION	AM	0		N	S	-
		6.0	C	0		10

Test Data (kHz)	Criteria	
Operate Channel	5.789	PASS

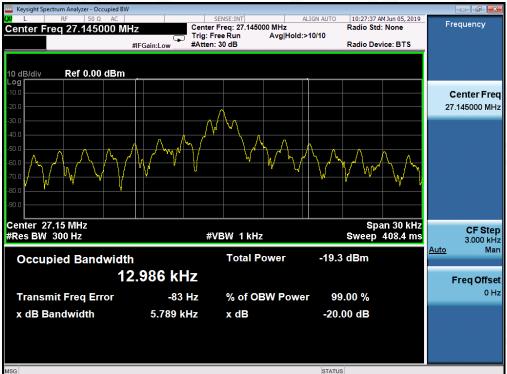


TEST PLOT OF BANDWIDTH





Report No.: AGC03055190507FE03 Page 17 of 24

APPENDIX A: PHOTOGRAPHS OF TEST SETUP FCC RADIATED EMISSION TEST SETUP

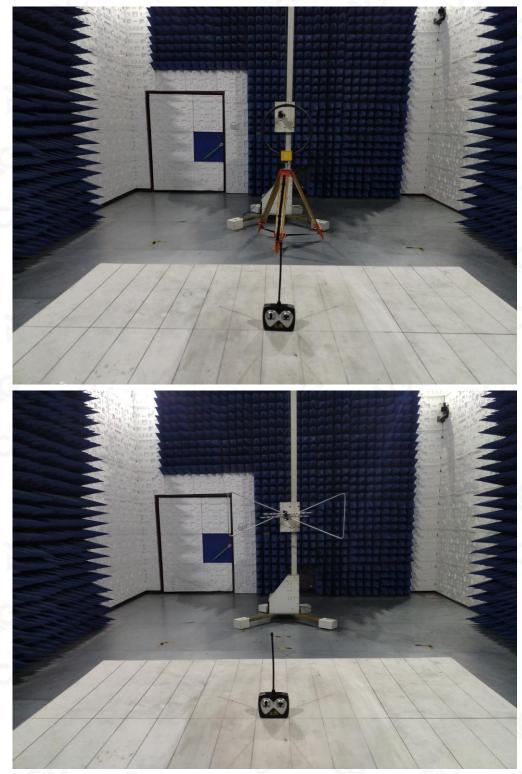



Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Service Hotline:400 089 2118



Report No.: AGC03055190507FE03 Page 18 of 24

APPENDIX B: PHOTOGRAPHS OF EUT ALL VIEW OF EUT

TOP VIEW OF EUT







Report No.: AGC03055190507FE03 Page 19 of 24

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT








Report No.: AGC03055190507FE03 Page 20 of 24

BACK VIEW OF EUT



LEFT VIEW OF EUT

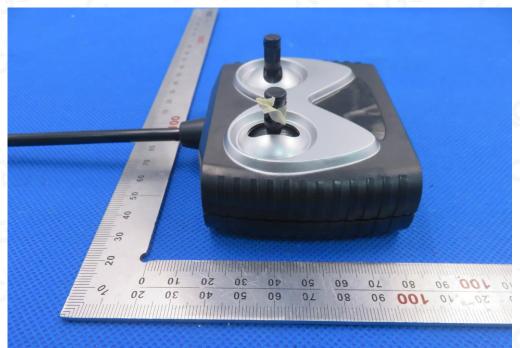





Report No.: AGC03055190507FE03 Page 21 of 24

RIGHT VIEW OF EUT



OPEN VIEW OF EUT-1









Report No.: AGC03055190507FE03 Page 22 of 24

OPEN VIEW OF EUT-2

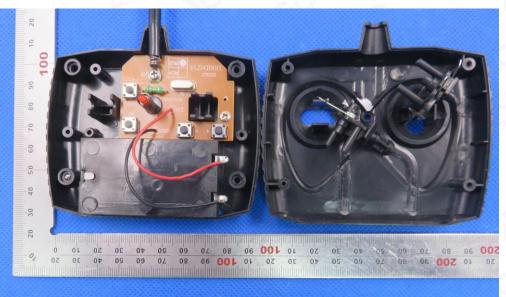

INTERNAL VIEW OF EUT-1

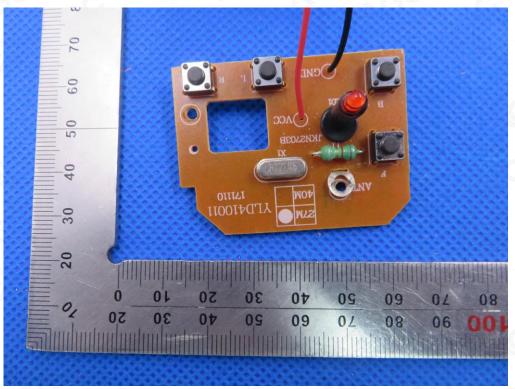






Report No.: AGC03055190507FE03 Page 23 of 24

INTERNAL VIEW OF EUT-2

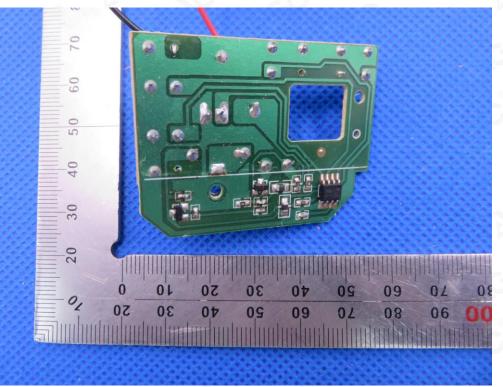

----END OF REPORT----





Report No.: AGC03055190507FE03 Page 24 of 24

Statement

- 1. This report is invalid without the special seal for report of AGC and the signatures of approver.
- 2. This report is invalid if it is blotted out and deleted.
- 3. If the applicant has any questions about results, shall submit to AGC within 15 days.
- 4. This report is responsible for the sample provided by the client only.
- 5. This report shall not be reproduced except in full, or extracted without the written approval of AGC.
- 6. This report photocopy is invalid without the red chop.

