

FCC CFR47 PART 22H, 24E, 27 CERTIFICATION TEST REPORT

FCC ID: ZSHD70

Product: Mobile Phone
Trade Mark: KXD, EL
Model Number: D70
Family Model: N/A
Report No.: STR220401003005E

Prepared for

SHENZHEN KENXINDA TECHNOLOGY CO.,LTD
18TH FLOOR, FUCHUN ORIENT BUILDING, SHENNAN AV 7006,
SHENZHEN China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen 518126 P.R. China
Tel. 400-800-6106, 0755-2320 0050, 0755-2320 0090
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION


Applicant's name	SHENZHEN KENXINDA TECHNOLOGY CO.,LTD
Address.....	18TH FLOOR, FUCHUN ORIENT BUILDING, SHENNAN AV 7006, SHENZHEN China
Manufacturer's Name	SHENZHEN KENXINDA TECHNOLOGY CO.,LTD
Address.....	18TH FLOOR, FUCHUN ORIENT BUILDING, SHENNAN AV 7006, SHENZHEN China
Test sample number.....	T220401003R002
Product name.....	Mobile Phone
Model and/or type reference ..	D70
Family Model:	N/A
Standards	FCC CFR 47 Part 22H, Part 24E, Part 27
Test procedure	ANSI C63.26:2015 ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test	
Date (s) of performance of tests.....	Apr 10. 2022 ~ May 19. 2022
Date of Issue.....	May 19. 2022
Test Result.....	Pass

Testing Engineer :



(Mukzi Lee)

Authorized Signatory :



(Alex Li)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION.....	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY.....	6
1.4 TEST FACILITY.....	6
MEASUREMENT UNCERTAINTY.....	6
1.5 SPECIAL ACCESSORIES.....	6
1.6 WORST-CASE CONFIGURATION AND MODE.....	6
1.6 SUMMARY OF TEST RESULTS.....	7
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE	9
2.3 CONFIGURATION OF EUT SYSTEM.....	9
2.4 TEST SETUP.....	10
3.TEST AND MEASUREMENT EQUIPMENT.....	11
4. OUTPUT POWER.....	13
4.1 OUTPUT POWER MEASUREMENT.....	13
6. BANDEDGE AND EMISSION MASK.....	16
7. OUT OF BAND EMISSIONS	17
7.1 MEASUREMENT METHOD	18
8. RADIATED MEASUREMENT	19
8.1. RADIATED POWER (ERP & EIRP).....	19
8.2 LTE BAND 2.....	20
8.3 LTE BAND 4.....	24
8.4 LTE BAND 5.....	28

8.5 LTE BAND 7.....	30
9. SPURIOUS RADIATION EMISSION	32
9.1 LTE BAND 2.....	34
9.2 LTE BAND 4.....	36
9.3 LTE BAND 5.....	38
9.4 LTE BAND 7.....	40
10. FREQUENCY STABILITY	42
10.1 LTE BAND 2	43
10.2 LTE BAND 4	45
10.3 LTE BAND 5	47
10.4 LTE BAND 7	49
11. PEAK-TO-AVERAGE RATIO.....	51
11.1 Description of the PAR Measurement.....	51
11.2 Measuring Instruments.....	51
11.3 Test Procedures.....	51
11.4 Test Setup.....	51

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Mobile Phone
Trade Mark	KXD, EL
Model Name	D70
Family Model	N/A
Model Difference	N/A
FCC ID:	ZSHD70
Frequency Bands:	U.S. Bands: <input checked="" type="checkbox"/> LTE FDD Band 2, 4, 5, 7
Frequency Range:	LTE FDD Band 2 Uplink: 1850MHz-1910MHz, Downlink: 1930MHz-1990MHz; LTE FDD Band 4 Uplink: 1710MHz-1755MHz, Downlink: 2110MHz-2155MHz; LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; LTE-FDD Band 7 Uplink: 2500MHz-2570MHz, Downlink: 2620MHz-2690MHz;
Type of Modulation:	QPSK/16QAM
Power Class	Class 3
Antenna:	PIFA Antenna
Antenna gain:	Band 2: 0.27dBi; Band 4: 0.23dBi; Band 5: -0.17dBi ; Band 7: 0.26dBi;
Power supply	DC 3.8V from battery or DC 5V from Adapter.
Battery	DC 3.8V, 5000mAh
Adapter	Model: CD-28 Input: AC 100-240V~50/60Hz 0.3A Output: DC 5.0V---2A
Extreme Vol. Limits:	DC 3.4V to DC 4.2V (Nominal DC 3.8V) (Note 1)
HW Version	J523B_63_32EMB_D3EFV1.1
SW Version	D70-JZ-KXD
** Note1: The High Voltage 4.2V and Low Voltage 3.4V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: ZSHD70** filing to comply with the FCC Part 22H&24E &27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R.China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A-1,

CNAS Registration No.:L5516

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.5dB
2	Conducted Emission Test	± 1.38 dB
3	RF power, conducted	± 0.16 dB
4	Spurious emissions, conducted	± 0.21 dB
5	All emissions, radiated(<1G)	± 4.68 dB
6	All emissions, radiated(>1G)	± 4.89 dB
7	Temperature	$\pm 0.5^\circ$ C
8	Humidity	$\pm 2\%$
9	Frequency error, conducted	± 0.19 ppm

1.5 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.6 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has LTE Bands of: Band 2, Band 4, Band 5, Band 7

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.6 SUMMARY OF TEST RESULTS

FCC Part22, Subpart H/ FCC Part24, Subpart E, FCC Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
22.913(d) 24.232(d) 27.50(d)(5) KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b) KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a) 27.53(m), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913(a)(2) 27.50 (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
24.232(c) 27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a) 27.53 (g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	

2.1055 22.355 24.235 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917(a) 24.238(a) 27.53 (g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM


Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Mobile Phone	D70	FCC ID: ZSHD70	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases

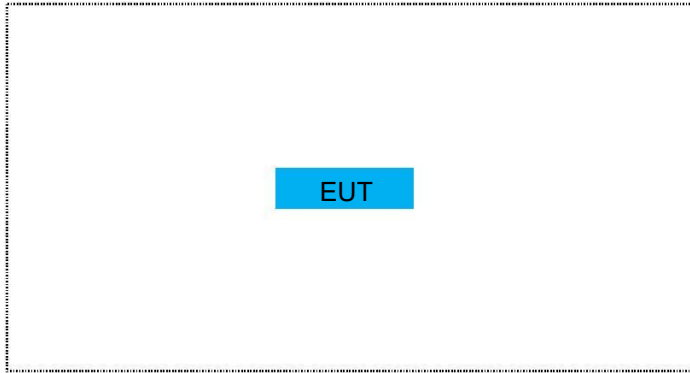


For Conducted Output Power

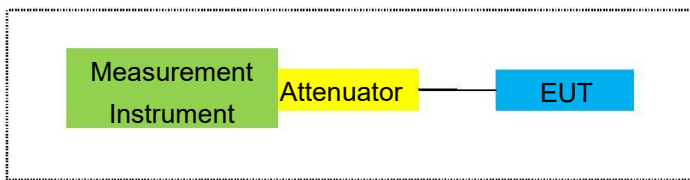

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

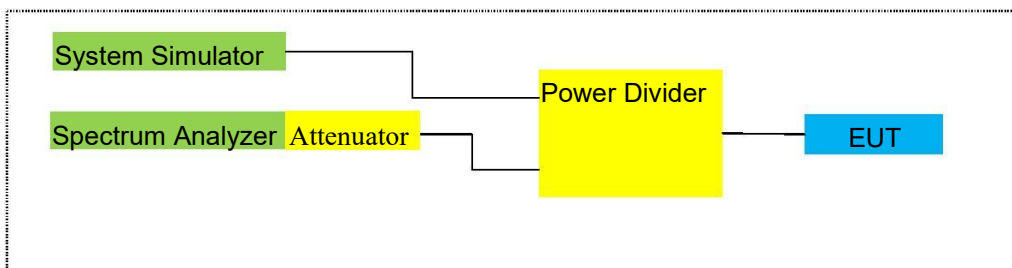

For Frequency Stability

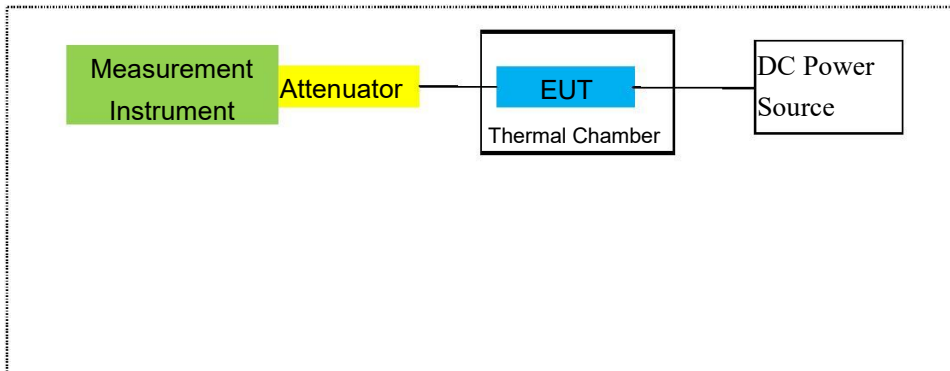

Note: EUT built-in battery-powered, the battery is fully-charged.

3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2022.04.01	2023.03.31	1 year
2	Test Receiver	R&S	ESPI	101318	2022.04.06	2023.04.05	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2022.03.30	2023.03.29	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2020.05.11	2023.05.10	3 year
5	Horn Antenna	EM	EM-AH-1018 0	2011071402	2022.03.31	2023.03.30	1 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2022.04.06	2023.04.05	1 year
7	Amplifier	EM	EM-30180	060538	2021.07.01	2022.06.30	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2022.03.30	2023.03.29	1 year
9	Power Meter	R&S	NRVS	100696	2021.07.01	2022.06.30	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.0 5	2022.04.27	2023.04.26	1 year
11	Test Cable	N/A	R-01	N/A	2019.08.06	2022.08.05	3 year
12	Test Cable	N/A	R-02	N/A	2019.08.06	2022.08.05	3 year
13	Test Cable	N/A	R-03	N/A	2019.06.28	2022.06.27	3 year
14	Test Receiver	R&S	ESCI	101160	2021.04.27 2022.04.06	2022.04.26 2023.04.05	1 year
15	LISN	R&S	ENV216	101313	2022.04.06	2023.04.05	1 year
16	LISN	EMCO	3816/2	00042990	2022.04.06	2023.04.05	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2022.04.06	2023.04.05	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2020.05.11	2023.05.10	3 year
19	Test Cable	N/A	C01	N/A	2020.05.11	2023.05.10	3 year
20	Test Cable	N/A	C02	N/A	2020.05.11	2023.05.10	3 year
21	Test Cable	N/A	C03	N/A	2020.05.11	2023.05.10	3 year
22	Attenuator	MCE	24-10-34	BN9258	2021.07.01	2022.06.30	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2022.04.01	2023.03.31	1 year
24	test receiver	R&S	ESCI	a0304218	2022.04.06	2023.04.05	1 year
25	Communication Tester	R&S	CMU200	A0304247	2022.04.06	2023.04.05	1 year

26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2022.04.06	2023.04.05	1 year
27	DC Power Source	N/A	PS-6005D	20170402923	2020.05.11	2023.05.10	3 year
28	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2021.07.01	2022.06.30	1 year
29	Communication Tester	R&S	CMW500	148500	2022.04.06	2023.04.05	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

LTE Measurement Procedure:

All LTE bands conducted power peak and average are obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

LTE Band2
LTE Band 4
LTE Band 5
LTE Band 7

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(m) (g)(h)

FCC: §2.1046, §22.913, §24.232

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

LTE Band 2

LTE Band 4

LTE Band 5

LTE Band 7

RESULTS

Test data reference attachment.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

Set display
line Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7

7.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §24.232(c) and §27.50 (c)(10)

LIMITS:

- 22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
- 24.232 (c) Mobile and portable stations are limited to 2 watts EIRP.
- 27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
- 27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
- 27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
- 27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 DO1 Power Meas License Digital Systems v02r01, "Measurement Guidance for Licensed Digital Transmitters"

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7

RESULTS

Pass

8.2 LTE BAND 2

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result					Polarization Of Max. ERP	Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)		
1.4MHz Band QPSK	1/#Mid	1850.7	-1.94	3.76	28.24	22.54	179.473	Horizontal	Pass
		1880	-1.76	3.91	28.22	22.55	179.887	Horizontal	Pass
		1909.3	-1.70	3.93	28.20	22.57	180.717	Horizontal	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-1.90	3.77	28.23	22.56	180.302	Horizontal	Pass
		1880	-1.88	3.91	28.24	22.45	175.792	Horizontal	Pass
		1908.5	-1.82	3.94	28.25	22.49	177.419	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-2.07	3.77	28.31	22.47	176.604	Horizontal	Pass
		1880	-1.88	3.91	28.22	22.43	174.985	Horizontal	Pass
		1907.5	-1.85	3.94	28.20	22.41	174.181	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	1855	-2.09	3.79	28.33	22.45	175.792	Horizontal	Pass
		1880	-1.74	3.95	28.22	22.53	179.061	Horizontal	Pass
		1905	-1.64	3.97	28.19	22.58	181.134	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	1857.5	-2.01	3.79	28.34	22.54	179.473	Horizontal	Pass
		1880	-1.78	3.95	28.22	22.49	177.419	Horizontal	Pass
		1902.5	-1.64	3.97	28.18	22.57	180.717	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	1860	-2.09	3.81	28.35	22.45	175.792	Horizontal	Pass
		1880	-1.78	3.96	28.22	22.48	177.011	Horizontal	Pass
		1900	-1.73	4.00	28.16	22.43	174.985	Horizontal	Pass
1.4MHz Band QPSK	1/#Mid	1850.7	-2.01	3.76	28.24	22.47	176.604	Vertical	Pass
		1880	-1.74	3.91	28.22	22.57	180.717	Vertical	Pass
		1909.3	-1.76	3.93	28.20	22.51	178.238	Vertical	Pass
3.0MHz Band QPSK	1/#Mid	1851.5	-1.88	3.77	28.23	22.58	181.134	Vertical	Pass
		1880	-1.77	3.91	28.24	22.56	180.302	Vertical	Pass
		1908.5	-1.79	3.94	28.25	22.52	178.649	Vertical	Pass
5.0MHz Band QPSK	1/#Mid	1852.5	-2.10	3.77	28.31	22.44	175.388	Vertical	Pass
		1880	-1.87	3.91	28.22	22.44	175.388	Vertical	Pass
		1907.5	-1.74	3.94	28.20	22.52	178.649	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	1855	-2.09	3.79	28.33	22.45	175.792	Vertical	Pass
		1880	-1.76	3.95	28.22	22.51	178.238	Vertical	Pass
		1905	-1.68	3.97	28.19	22.54	179.473	Vertical	Pass
15.0MHz	1/#Mid	1857.5	-2.08	3.79	28.34	22.47	176.604	Vertical	Pass

Band		1880	-1.82	3.95	28.22	22.45	175.792	Vertical	Pass
QPSK		1902.5	-1.65	3.97	28.18	22.56	180.302	Vertical	Pass
20.0MHz		1860	-1.94	3.81	28.35	22.60	181.970	Vertical	Pass
Band	1/#Mid	1880	-1.66	3.96	28.22	22.60	181.970	Vertical	Pass
QPSK		1900	-1.56	4.00	28.16	22.60	181.970	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 2									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1850.7	-3.26	3.76	28.24	21.22	132.434	Horizontal	Pass
		1880	-3.04	3.91	28.22	21.27	133.968	Horizontal	Pass
		1909.3	-3.03	3.93	28.20	21.24	133.045	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-3.26	3.77	28.23	21.20	131.826	Horizontal	Pass
		1880	-3.06	3.91	28.24	21.27	133.968	Horizontal	Pass
		1908.5	-3.13	3.94	28.25	21.18	131.220	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-3.43	3.77	28.31	21.11	129.122	Horizontal	Pass
		1880	-3.05	3.91	28.22	21.26	133.660	Horizontal	Pass
		1907.5	-2.99	3.94	28.20	21.27	133.968	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-3.38	3.79	28.33	21.16	130.617	Horizontal	Pass
		1880	-3.00	3.95	28.22	21.27	133.968	Horizontal	Pass
		1905	-3.00	3.97	28.19	21.22	132.434	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	-3.41	3.79	28.34	21.14	130.017	Horizontal	Pass
		1880	-3.08	3.95	28.22	21.19	131.522	Horizontal	Pass
		1902.5	-3.00	3.97	28.18	21.21	132.130	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1860	-3.29	3.81	28.35	21.25	133.352	Horizontal	Pass
		1880	-3.04	3.96	28.22	21.22	132.434	Horizontal	Pass
		1900	-2.94	4.00	28.16	21.22	132.434	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1850.7	-3.28	3.76	28.24	21.20	131.826	Vertical	Pass
		1880	-3.07	3.91	28.22	21.24	133.045	Vertical	Pass
		1909.3	-3.07	3.93	28.20	21.20	131.826	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1851.5	-3.21	3.77	28.23	21.25	133.352	Vertical	Pass
		1880	-3.14	3.91	28.24	21.19	131.522	Vertical	Pass
		1908.5	-3.10	3.94	28.25	21.21	132.130	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1852.5	-3.40	3.77	28.31	21.14	130.017	Vertical	Pass
		1880	-3.20	3.91	28.22	21.11	129.122	Vertical	Pass
		1907.5	-3.05	3.94	28.20	21.21	132.130	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1855	-3.33	3.79	28.33	21.21	132.130	Vertical	Pass
		1880	-3.08	3.95	28.22	21.19	131.522	Vertical	Pass
		1905	-3.00	3.97	28.19	21.22	132.434	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	1857.5	-3.30	3.79	28.34	21.25	133.352	Vertical	Pass
		1880	-3.02	3.95	28.22	21.25	133.352	Vertical	Pass
		1902.5	-2.96	3.97	28.18	21.25	133.352	Vertical	Pass

20.0MHz		1860	-3.25	3.81	28.35	21.29	134.586	Vertical	Pass
Band 16	1/#Mid	1880	-2.96	3.96	28.22	21.30	134.896	Vertical	Pass
QAM		1900	-2.85	4.00	28.16	21.31	135.207	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.3 LTE BAND 4

Radiated Power (EIRP) for Band 4										
Mode	RB/RB SIZE	Frequency	Result						Polarization Of Max. ERP	Conclusion
			SG Level	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP	Max. EIRP			
			(dBm)			Average (dBm)	Average (mW)			
1.4MHz Band QPSK	1/#Mid	1710.7	-2.44	3.12	27.58	22.02	159.221	Horizontal	Pass	
		1732.5	-2.42	3.27	27.61	21.92	155.597	Horizontal	Pass	
		1754.3	-2.44	3.29	27.63	21.90	154.882	Horizontal	Pass	
3.0MHz Band QPSK	1/#Mid	1711.5	-2.45	3.13	27.61	22.03	159.588	Horizontal	Pass	
		1732.5	-2.46	3.27	27.61	21.88	154.170	Horizontal	Pass	
		1753.5	-2.43	3.30	27.62	21.89	154.525	Horizontal	Pass	
5.0MHz Band QPSK	1/#Mid	1712.5	-2.64	3.13	27.63	21.86	153.462	Horizontal	Pass	
		1732.5	-2.45	3.27	27.61	21.89	154.525	Horizontal	Pass	
		1752.5	-2.29	3.30	27.60	22.01	158.855	Horizontal	Pass	
10.0MHz Band QPSK	1/#Mid	1715	-2.47	3.15	27.64	22.02	159.221	Horizontal	Pass	
		1732.5	-2.33	3.31	27.61	21.97	157.398	Horizontal	Pass	
		1750	-2.35	3.33	27.59	21.91	155.239	Horizontal	Pass	
15.0MHz Band QPSK	1/#Mid	1717.5	-2.51	3.15	27.65	21.99	158.125	Horizontal	Pass	
		1732.5	-2.39	3.31	27.61	21.91	155.239	Horizontal	Pass	
		1747.5	-2.36	3.33	27.57	21.88	154.170	Horizontal	Pass	
20.0MHz Band QPSK	1/#Mid	1720	-2.56	3.17	27.66	21.93	155.955	Horizontal	Pass	
		1732.5	-2.37	3.32	27.61	21.92	155.597	Horizontal	Pass	
		1745	-2.20	3.36	27.56	22.00	158.489	Horizontal	Pass	
1.4MHz Band QPSK	1/#Mid	1710.7	-2.50	3.12	27.58	21.96	157.036	Vertical	Pass	
		1732.5	-2.35	3.27	27.61	21.99	158.125	Vertical	Pass	
		1754.3	-2.42	3.29	27.63	21.92	155.597	Vertical	Pass	
3.0MHz Band QPSK	1/#Mid	1711.5	-2.61	3.13	27.61	21.87	153.815	Vertical	Pass	
		1732.5	-2.34	3.27	27.61	22.00	158.489	Vertical	Pass	
		1753.5	-2.30	3.30	27.62	22.02	159.221	Vertical	Pass	
5.0MHz Band QPSK	1/#Mid	1712.5	-2.58	3.13	27.63	21.92	155.597	Vertical	Pass	
		1732.5	-2.43	3.27	27.61	21.91	155.239	Vertical	Pass	
		1752.5	-2.42	3.30	27.60	21.88	154.170	Vertical	Pass	
10.0MHz Band QPSK	1/#Mid	1715	-2.53	3.15	27.64	21.96	157.036	Vertical	Pass	
		1732.5	-2.39	3.31	27.61	21.91	155.239	Vertical	Pass	
		1750	-2.23	3.33	27.59	22.03	159.588	Vertical	Pass	

15.0MHz	1/#Mid	1717.5	-2.57	3.15	27.65	21.93	155.955	Vertical	Pass
Band		1732.5	-2.40	3.31	27.61	21.90	154.882	Vertical	Pass
QPSK		1747.5	-2.23	3.33	27.57	22.01	158.855	Vertical	Pass
20.0MHz	1/#Mid	1720	-2.45	3.17	27.66	22.04	159.956	Vertical	Pass
Band		1732.5	-2.23	3.32	27.61	22.06	160.694	Vertical	Pass
QPSK		1745	-2.14	3.36	27.56	22.06	160.694	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

Radiated Power (EIRP) for Band 4									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	1710.7	-3.43	3.12	27.58	21.03	126.765	Horizontal	Pass
		1732.5	-3.31	3.27	27.61	21.03	126.765	Horizontal	Pass
		1754.3	-3.24	3.29	27.63	21.10	128.825	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-3.49	3.13	27.61	20.99	125.603	Horizontal	Pass
		1732.5	-3.23	3.27	27.61	21.11	129.122	Horizontal	Pass
		1753.5	-3.34	3.30	27.62	20.98	125.314	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-3.45	3.13	27.63	21.05	127.350	Horizontal	Pass
		1732.5	-3.30	3.27	27.61	21.04	127.057	Horizontal	Pass
		1752.5	-3.23	3.30	27.60	21.07	127.938	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-3.46	3.15	27.64	21.03	126.765	Horizontal	Pass
		1732.5	-3.17	3.31	27.61	21.13	129.718	Horizontal	Pass
		1750	-3.19	3.33	27.59	21.07	127.938	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-3.44	3.15	27.65	21.06	127.644	Horizontal	Pass
		1732.5	-3.23	3.31	27.61	21.07	127.938	Horizontal	Pass
		1747.5	-3.12	3.33	27.57	21.12	129.420	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	1720	-3.38	3.17	27.66	21.11	129.122	Horizontal	Pass
		1732.5	-3.24	3.32	27.61	21.05	127.350	Horizontal	Pass
		1745	-3.13	3.36	27.56	21.07	127.938	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	1710.7	-3.37	3.12	27.58	21.09	128.529	Vertical	Pass
		1732.5	-3.30	3.27	27.61	21.04	127.057	Vertical	Pass
		1754.3	-3.36	3.29	27.63	20.98	125.314	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	1711.5	-3.35	3.13	27.61	21.13	129.718	Vertical	Pass
		1732.5	-3.21	3.27	27.61	21.13	129.718	Vertical	Pass
		1753.5	-3.19	3.30	27.62	21.13	129.718	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	1712.5	-3.43	3.13	27.63	21.07	127.938	Vertical	Pass
		1732.5	-3.36	3.27	27.61	20.98	125.314	Vertical	Pass
		1752.5	-3.23	3.30	27.60	21.07	127.938	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	1715	-3.48	3.15	27.64	21.01	126.183	Vertical	Pass
		1732.5	-3.22	3.31	27.61	21.08	128.233	Vertical	Pass
		1750	-3.24	3.33	27.59	21.02	126.474	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	1717.5	-3.50	3.15	27.65	21.00	125.893	Vertical	Pass
		1732.5	-3.31	3.31	27.61	20.99	125.603	Vertical	Pass
		1747.5	-3.11	3.33	27.57	21.13	129.718	Vertical	Pass

20.0MHz		1720	-3.33	3.17	27.66	21.16	130.617	Vertical	Pass
Band 16	1/#Mid	1732.5	-3.11	3.32	27.61	21.18	131.220	Vertical	Pass
QAM		1745	-3.06	3.36	27.56	21.14	130.017	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.4 LTE BAND 5

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. ERP Average (dBm)	Max. ERP Average (mW)	Polarization Of Max. ERP	
1.4MHz Band QPSK	1/#Midd	824.7	5.21	2.01	19.68	2.15	20.73	118.304	Horizontal	Pass
		836.5	5.10	2.01	19.77	2.15	20.71	117.761	Horizontal	Pass
		848.3	5.05	2.02	19.82	2.15	20.70	117.490	Horizontal	Pass
3.0MHz Band QPSK	1/#Midd	825.5	5.04	2.01	19.70	2.15	20.58	114.288	Horizontal	Pass
		836.5	5.03	2.01	19.77	2.15	20.64	115.878	Horizontal	Pass
		847.5	5.01	2.02	19.81	2.15	20.65	116.145	Horizontal	Pass
5.0MHz Band QPSK	1/#Midd	826.5	5.17	2.01	19.71	2.15	20.72	118.032	Horizontal	Pass
		836.5	4.97	2.01	19.77	2.15	20.58	114.288	Horizontal	Pass
		846.5	5.09	2.02	19.79	2.15	20.71	117.761	Horizontal	Pass
10.0MHz Band QPSK	1/#Midd	829	5.15	2.01	19.73	2.15	20.72	118.032	Horizontal	Pass
		836.5	5.00	2.01	19.77	2.15	20.61	115.080	Horizontal	Pass
		844	5.01	2.02	19.78	2.15	20.62	115.345	Horizontal	Pass
1.4MHz Band QPSK	1/#Midd	824.7	5.20	2.01	19.68	2.15	20.72	118.032	Vertical	Pass
		836.5	5.01	2.01	19.77	2.15	20.62	115.345	Vertical	Pass
		848.3	5.08	2.02	19.82	2.15	20.73	118.304	Vertical	Pass
3.0MHz Band QPSK	1/#Midd	825.5	5.14	2.01	19.70	2.15	20.68	116.950	Vertical	Pass
		836.5	5.04	2.01	19.77	2.15	20.65	116.145	Vertical	Pass
		847.5	4.99	2.02	19.81	2.15	20.63	115.611	Vertical	Pass
5.0MHz Band QPSK	1/#Midd	826.5	5.18	2.01	19.71	2.15	20.73	118.304	Vertical	Pass
		836.5	5.05	2.01	19.77	2.15	20.66	116.413	Vertical	Pass
		846.5	4.93	2.02	19.79	2.15	20.55	113.501	Vertical	Pass
10.0MHz Band QPSK	1/#Midd	829	5.19	2.01	19.73	2.15	20.76	119.124	Vertical	Pass
		836.5	5.16	2.01	19.77	2.15	20.77	119.399	Vertical	Pass
		844	5.14	2.02	19.78	2.15	20.75	118.850	Vertical	Pass

Radiated Power (ERP) for Band 5										
Mode	RB/RB SIZE	Frequency	Result							Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Correction (dB)	Max. EPR Average (dBm)	Max. EPR Average (mW)	Polarization Of Max. ERP	
1.4MHz Band 16 QAM	1/#Mid	824.7	4.17	2.01	19.68	2.15	19.69	93.111	Horizontal	Pass
		836.5	3.99	2.01	19.77	2.15	19.60	91.201	Horizontal	Pass
		848.3	4.03	2.02	19.82	2.15	19.68	92.897	Horizontal	Pass
3.0MHz Band 16 QAM	1/#Mid	825.5	4.07	2.01	19.70	2.15	19.61	91.411	Horizontal	Pass
		836.5	4.01	2.01	19.77	2.15	19.62	91.622	Horizontal	Pass
		847.5	4.04	2.02	19.81	2.15	19.68	92.897	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	826.5	4.00	2.01	19.71	2.15	19.55	90.157	Horizontal	Pass
		836.5	4.00	2.01	19.77	2.15	19.61	91.411	Horizontal	Pass
		846.5	4.05	2.02	19.79	2.15	19.67	92.683	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	829	4.13	2.01	19.73	2.15	19.70	93.325	Horizontal	Pass
		836.5	3.98	2.01	19.77	2.15	19.59	90.991	Horizontal	Pass
		844	4.01	2.02	19.78	2.15	19.62	91.622	Horizontal	Pass
1.4MHz Band 16 QAM	1/#Mid	824.7	4.12	2.01	19.68	2.15	19.64	92.045	Vertical	Pass
		836.5	4.03	2.01	19.77	2.15	19.64	92.045	Vertical	Pass
		848.3	3.99	2.02	19.82	2.15	19.64	92.045	Vertical	Pass
3.0MHz Band 16 QAM	1/#Mid	825.5	4.06	2.01	19.70	2.15	19.60	91.201	Vertical	Pass
		836.5	4.07	2.01	19.77	2.15	19.68	92.897	Vertical	Pass
		847.5	3.95	2.02	19.81	2.15	19.59	90.991	Vertical	Pass
5.0MHz Band 16 QAM	1/#Mid	826.5	4.10	2.01	19.71	2.15	19.65	92.257	Vertical	Pass
		836.5	4.09	2.01	19.77	2.15	19.70	93.325	Vertical	Pass
		846.5	4.11	2.02	19.79	2.15	19.73	93.972	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	829	4.17	2.01	19.73	2.15	19.74	94.189	Vertical	Pass
		836.5	4.16	2.01	19.77	2.15	19.77	94.842	Vertical	Pass
		844	4.15	2.02	19.78	2.15	19.76	94.624	Vertical	Pass

Note:

ERP=EIRP-2.15

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

8.5 LTE BAND 7

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band QPSK	1/#Mid	2502.5	-1.15	4.54	27.75	22.06	160.694	Horizontal	Pass
		2535	-0.98	4.69	27.72	22.05	160.325	Horizontal	Pass
		2567.5	-1.07	4.71	27.71	21.93	155.955	Horizontal	Pass
10.0MHz Band QPSK	1/#Mid	2505	-1.15	4.55	27.76	22.06	160.694	Horizontal	Pass
		2535	-0.98	4.69	27.72	22.05	160.325	Horizontal	Pass
		2565	-0.99	4.72	27.70	21.99	158.125	Horizontal	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-1.17	4.55	27.77	22.05	160.325	Horizontal	Pass
		2535	-1.08	4.69	27.72	21.95	156.675	Horizontal	Pass
		2562.5	-1.02	4.72	27.69	21.95	156.675	Horizontal	Pass
20.0MHz Band QPSK	1/#Mid	2510	-1.21	4.57	27.78	22.00	158.489	Horizontal	Pass
		2535	-1.01	4.73	27.72	21.98	157.761	Horizontal	Pass
		2560	-0.97	4.75	27.68	21.96	157.036	Horizontal	Pass
5.0MHz Band QPSK	1/#Mid	2502.5	-1.15	4.54	27.75	22.06	160.694	Vertical	Pass
		2535	-1.07	4.69	27.72	21.96	157.036	Vertical	Pass
		2567.5	-0.96	4.71	27.71	22.04	159.956	Vertical	Pass
10.0MHz Band QPSK	1/#Mid	2505	-1.27	4.55	27.76	21.94	156.315	Vertical	Pass
		2535	-1.07	4.69	27.72	21.96	157.036	Vertical	Pass
		2565	-0.98	4.72	27.70	22.00	158.489	Vertical	Pass
15.0MHz Band QPSK	1/#Mid	2507.5	-1.20	4.55	27.77	22.02	159.221	Vertical	Pass
		2535	-1.09	4.69	27.72	21.94	156.315	Vertical	Pass
		2562.5	-1.00	4.72	27.69	21.97	157.398	Vertical	Pass
20.0MHz Band QPSK	1/#Mid	2510	-1.14	4.57	27.78	22.07	161.065	Vertical	Pass
		2535	-0.88	4.73	27.72	22.11	162.555	Vertical	Pass
		2560	-0.86	4.75	27.68	22.07	161.065	Vertical	Pass

Radiated Power (EIRP) for Band 7									
Mode	RB/RB SIZE	Frequency	Result						Conclusion
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarization Of Max. ERP	
5.0MHz Band 16 QAM	1/#Mid	2502.5	-1.27	4.54	27.75	21.94	156.315	Horizontal	Pass
		2535	-1.08	4.69	27.72	21.95	156.675	Horizontal	Pass
		2567.5	-1.05	4.71	27.71	21.95	156.675	Horizontal	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	-1.33	4.55	27.76	21.88	154.170	Horizontal	Pass
		2535	-1.21	4.69	27.72	21.82	152.055	Horizontal	Pass
		2565	-1.03	4.72	27.70	21.95	156.675	Horizontal	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-1.27	4.55	27.77	21.95	156.675	Horizontal	Pass
		2535	-1.09	4.69	27.72	21.94	156.315	Horizontal	Pass
		2562.5	-1.16	4.72	27.69	21.81	151.705	Horizontal	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	-1.39	4.57	27.78	21.82	152.055	Horizontal	Pass
		2535	-1.11	4.73	27.72	21.88	154.170	Horizontal	Pass
		2560	-1.01	4.75	27.68	21.92	155.597	Horizontal	Pass
5.0MHz Band 16 QAM	1/#Mid	2502.5	-1.27	4.54	27.75	21.94	156.315	Vertical	Pass
		2535	-1.19	4.69	27.72	21.84	152.757	Vertical	Pass
		2567.5	-1.19	4.71	27.71	21.81	151.705	Vertical	Pass
10.0MHz Band 16 QAM	1/#Mid	2505	-1.37	4.55	27.76	21.84	152.757	Vertical	Pass
		2535	-1.23	4.69	27.72	21.80	151.356	Vertical	Pass
		2565	-1.11	4.72	27.70	21.87	153.815	Vertical	Pass
15.0MHz Band 16 QAM	1/#Mid	2507.5	-1.38	4.55	27.77	21.84	152.757	Vertical	Pass
		2535	-1.13	4.69	27.72	21.90	154.882	Vertical	Pass
		2562.5	-1.15	4.72	27.69	21.82	152.055	Vertical	Pass
20.0MHz Band 16 QAM	1/#Mid	2510	-1.23	4.57	27.78	21.98	157.761	Vertical	Pass
		2535	-1.01	4.73	27.72	21.98	157.761	Vertical	Pass
		2560	-0.95	4.75	27.68	21.98	157.761	Vertical	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Antenna Gain(dB)+ SG Level (dBm)- Cable Loss(dBm)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §24.238(a), §27.53 (g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts].

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts], where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10} (p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \text{ Log}_{10} (p)$, dB at the channel edges and $55 + 10 \text{ Log}_{10} (p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

- LTE Band2*
- LTE Band 4
- LTE Band 5
- LTE Band 7

RESULTS

PASS

9.1 LTE BAND 2

QPSK EIRP POWER FOR LTE BAND 2 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1850.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3701.4	-51.11	4.04	33.51	-21.64	-13	-8.64	Horizontal
3701.4	-52.24	4.04	33.51	-22.77	-13	-9.77	Vertical
5552.1	-44.47	5.24	35.84	-13.87	-13	-0.87	Vertical
5552.1	-49.29	5.24	35.84	-18.69	-13	-5.69	Horizontal
211.9	-35.25	1.43	16.02	-20.66	-13	-7.66	Vertical
456.9	-43.07	1.30	17.99	-26.38	-13	-13.38	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-47.19	4.04	33.56	-17.67	-13	-4.67	Horizontal
3760.0	-52.99	4.04	33.56	-23.47	-13	-10.47	Vertical
5640.0	-53.70	5.24	35.91	-23.03	-13	-10.03	Vertical
5640.0	-50.96	5.24	35.91	-20.29	-13	-7.29	Horizontal
183.1	-43.41	1.62	16.97	-28.06	-13	-15.06	Vertical
245.3	-35.77	1.74	15.98	-21.54	-13	-8.54	Horizontal
Test Results for High Channel 1909.3MHz							
3818.6	-44.80	4.04	34.00	-14.84	-13	-1.84	Horizontal
3818.6	-50.28	4.04	34.00	-20.32	-13	-7.32	Vertical
5727.9	-52.54	5.24	36.04	-21.74	-13	-8.74	Vertical
5727.9	-53.01	5.24	36.04	-22.21	-13	-9.21	Horizontal
203.1	-40.35	1.42	17.29	-24.48	-13	-11.48	Vertical
388.9	-43.23	1.50	17.90	-26.82	-13	-13.82	Horizontal

QPSK EIRP POWER FOR LTE BAND 2 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1860MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3720.0	-46.90	4.07	33.54	-17.43	-13	-4.43	Horizontal
3720.0	-47.01	4.07	33.54	-17.54	-13	-4.54	Vertical
5580.0	-45.44	5.28	35.86	-14.86	-13	-1.86	Vertical
5580.0	-50.23	5.28	35.86	-19.65	-13	-6.65	Horizontal
193.0	-35.56	1.58	16.89	-20.24	-13	-7.24	Vertical
283.0	-36.31	1.76	17.26	-20.81	-13	-7.81	Horizontal
Test Results for Mid Channel 1880MHz							
3760.0	-52.90	4.04	33.56	-23.38	-13	-10.38	Horizontal
3760.0	-45.62	4.04	33.56	-16.10	-13	-3.10	Vertical
5640.0	-45.95	5.24	35.91	-15.28	-13	-2.28	Vertical
5640.0	-50.13	5.24	35.91	-19.46	-13	-6.46	Horizontal
182.3	-40.71	1.46	16.27	-25.90	-13	-12.90	Vertical
412.5	-36.57	1.59	15.15	-23.01	-13	-10.01	Horizontal
Test Results for High Channel 1900MHz							
3800.0	-52.52	4.04	34.00	-22.56	-13	-9.56	Horizontal
3800.0	-51.44	4.04	34.00	-21.48	-13	-8.48	Vertical
5700.0	-45.56	5.24	36.04	-14.76	-13	-1.76	Vertical
5700.0	-51.31	5.24	36.04	-20.51	-13	-7.51	Horizontal
200.7	-39.18	1.36	17.39	-23.14	-13	-10.14	Vertical
279.2	-35.63	1.66	15.39	-21.90	-13	-8.90	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

. Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 LTE BAND 4

QPSK EIRP POWER FOR LTE BAND 4 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 1710.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3421.4	-50.03	4.02	29.80	-24.25	-13	-11.25	Horizontal
3421.4	-50.79	4.02	29.80	-25.01	-13	-12.01	Vertical
5132.1	-49.03	5.24	35.84	-18.43	-13	-5.43	Vertical
5132.1	-51.75	5.24	35.84	-21.15	-13	-8.15	Horizontal
176.8	-37.94	1.68	16.04	-23.58	-13	-10.58	Vertical
469.0	-37.87	1.78	17.74	-21.91	-13	-8.91	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-44.96	4.03	30.00	-18.99	-13	-5.99	Horizontal
3465.0	-45.84	4.03	30.00	-19.87	-13	-6.87	Vertical
5197.5	-46.68	5.25	35.86	-16.07	-13	-3.07	Vertical
5197.5	-50.03	5.25	35.86	-19.42	-13	-6.42	Horizontal
200.4	-35.34	1.72	17.69	-19.37	-13	-6.37	Vertical
414.0	-35.51	1.62	16.02	-21.10	-13	-8.10	Horizontal
Test Results for High Channel 1754.3MHz							
3508.6	-51.32	4.05	30.01	-25.36	-13	-12.36	Horizontal
3508.6	-46.97	4.05	30.01	-21.01	-13	-8.01	Vertical
5262.9	-51.35	5.26	35.86	-20.75	-13	-7.75	Vertical
5262.9	-51.42	5.26	35.86	-20.82	-13	-7.82	Horizontal
176.5	-40.20	1.80	16.69	-25.31	-13	-12.31	Vertical
278.3	-39.01	1.75	16.66	-24.11	-13	-11.11	Horizontal

QPSK EIRP POWER FOR LTE BAND 4 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 1720MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
3440.0	-45.65	4.02	29.80	-19.87	-13	-6.87	Horizontal
3440.0	-51.12	4.02	29.80	-25.34	-13	-12.34	Vertical
5160.0	-50.12	5.24	35.84	-19.52	-13	-6.52	Vertical
5160.0	-53.07	5.24	35.84	-22.47	-13	-9.47	Horizontal
204.9	-40.96	1.57	17.26	-25.27	-13	-12.27	Vertical
305.5	-38.24	1.78	16.35	-23.67	-13	-10.67	Horizontal
Test Results for Mid Channel 1732.5MHz							
3465.0	-48.16	4.03	30.00	-22.19	-13	-9.19	Horizontal
3465.0	-47.24	4.03	30.00	-21.27	-13	-8.27	Vertical
5197.5	-45.81	5.25	35.86	-15.20	-13	-2.20	Vertical
5197.5	-50.10	5.25	35.86	-19.49	-13	-6.49	Horizontal
198.2	-39.63	1.44	17.95	-23.12	-13	-10.12	Vertical
237.6	-44.57	1.65	16.09	-30.13	-13	-17.13	Horizontal
Test Results for High Channel 1745MHz							
3490.0	-46.68	4.05	27.68	-23.05	-13	-10.05	Horizontal
3490.0	-52.44	4.05	27.68	-28.81	-13	-15.81	Vertical
5235.0	-47.67	5.26	35.86	-17.07	-13	-4.07	Vertical
5235.0	-49.48	5.26	35.86	-18.88	-13	-5.88	Horizontal
196.0	-36.74	1.61	16.85	-21.50	-13	-8.50	Vertical
424.3	-38.59	1.61	15.19	-25.01	-13	-12.01	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.3 LTE BAND 5

QPSK EIRP POWER FOR LTE BAND 5 (1.4MHZ BANDWIDTH)

Test Results for Low Channel 824.7MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1649.4	-51.68	2.78	27.50	-26.96	-13	-13.96	Horizontal
1649.4	-45.86	2.78	27.50	-21.14	-13	-8.14	Vertical
2474.1	-44.91	2.90	27.80	-20.01	-13	-7.01	Vertical
2474.1	-53.63	2.90	27.80	-28.73	-13	-15.73	Horizontal
177.9	-37.19	1.76	17.59	-21.36	-13	-8.36	Vertical
291.4	-34.22	1.63	15.87	-19.98	-13	-6.98	Horizontal
Test Results For Mid Channel 836.5MHz							
1673.0	-52.38	2.80	27.48	-27.70	-13	-14.70	Horizontal
1673.0	-52.68	2.80	27.48	-28.00	-13	-15.00	Vertical
2509.5	-47.96	2.91	27.70	-23.17	-13	-10.17	Vertical
2509.5	-53.88	2.91	27.70	-29.09	-13	-16.09	Horizontal
182.0	-42.79	1.61	15.68	-28.72	-13	-15.72	Vertical
355.8	-36.19	1.59	17.52	-20.27	-13	-7.27	Horizontal
Test Results for High Channel 848.3MHz							
1696.6	-50.60	2.82	27.43	-25.99	-13	-12.99	Horizontal
1696.6	-46.07	2.82	27.43	-21.46	-13	-8.46	Vertical
2544.9	-49.46	2.92	27.74	-24.64	-13	-11.64	Vertical
2544.9	-53.73	2.92	27.74	-28.91	-13	-15.91	Horizontal
177.6	-38.75	1.69	16.67	-23.76	-13	-10.76	Vertical
461.6	-42.70	1.70	17.18	-27.22	-13	-14.22	Horizontal

QPSK EIRP POWER FOR LTE BAND 5 (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658.0	-52.15	2.78	27.50	-27.43	-13	-14.43	Horizontal
1658.0	-46.29	2.78	27.50	-21.57	-13	-8.57	Vertical
2487.0	-49.60	2.90	27.80	-24.70	-13	-11.70	Vertical
2487.0	-49.64	2.90	27.80	-24.74	-13	-11.74	Horizontal
205.8	-40.55	1.71	15.57	-26.69	-13	-13.69	Vertical
281.0	-35.16	1.34	16.40	-20.10	-13	-7.10	Horizontal
Test Results for Mid Channel 836.5MHz							
1673.0	-51.48	2.80	27.48	-26.80	-13	-13.80	Horizontal
1673.0	-45.21	2.80	27.48	-20.53	-13	-7.53	Vertical
2509.5	-44.70	2.91	27.70	-19.91	-13	-6.91	Vertical
2509.5	-52.50	2.91	27.70	-27.71	-13	-14.71	Horizontal
190.2	-35.78	1.44	17.04	-20.18	-13	-7.18	Vertical
461.1	-37.80	1.76	17.62	-21.94	-13	-8.94	Horizontal
Test Results for High Channel 844MHz							
1688.0	-50.71	2.82	27.43	-26.10	-13	-13.10	Horizontal
1688.0	-52.07	2.82	27.43	-27.46	-13	-14.46	Vertical
2532.0	-45.79	2.92	27.74	-20.97	-13	-7.97	Vertical
2532.0	-52.62	2.92	27.74	-27.80	-13	-14.80	Horizontal
206.7	-39.85	1.74	17.70	-23.89	-13	-10.89	Vertical
448.1	-38.56	1.41	17.46	-22.50	-13	-9.50	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

Over Limit = $P_{Mea}(dBm) - Limit(dBm)$

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.4 LTE BAND 7

QPSK EIRP POWER FOR LTE BAND 7 (5.0MHZ BANDWIDTH)

Test Results for Low Channel 2502.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5005.0	-64.47	5.23	35.81	-33.89	-25	-8.89	Horizontal
5005.0	-60.46	5.23	35.81	-29.88	-25	-4.88	Vertical
7507.5	-63.38	5.67	36.85	-32.20	-25	-7.20	Vertical
7507.5	-61.44	5.67	36.85	-30.26	-25	-5.26	Horizontal
197.2	-48.25	1.73	17.97	-32.01	-25	-7.01	Vertical
382.9	-46.23	1.38	15.11	-32.50	-25	-7.50	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-59.01	5.23	35.82	-28.42	-25	-3.42	Horizontal
5070.0	-59.99	5.23	35.82	-29.40	-25	-4.40	Vertical
7605.0	-63.95	5.67	36.85	-32.77	-25	-7.77	Vertical
7605.0	-60.61	5.67	36.85	-29.43	-25	-4.43	Horizontal
195.8	-49.24	1.77	16.17	-34.83	-25	-9.83	Vertical
325.4	-45.61	1.63	15.21	-32.03	-25	-7.03	Horizontal
Test Results for High Channel 2567.5MHz							
5135.0	-59.93	5.24	35.83	-29.34	-25	-4.34	Horizontal
5135.0	-59.96	5.24	35.83	-29.37	-25	-4.37	Vertical
7702.5	-60.23	5.68	36.87	-29.04	-25	-4.04	Vertical
7702.5	-60.32	5.68	36.87	-29.13	-25	-4.13	Horizontal
178.6	-54.21	1.58	17.56	-38.23	-25	-13.23	Vertical
342.3	-45.72	1.45	16.58	-30.59	-25	-5.59	Horizontal

QPSK EIRP POWER FOR LTE BAND 7 (20.0MHZ BANDWIDTH)

Test Results for Low Channel 2510MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
5020.0	-64.92	5.23	35.82	-34.33	-25	-9.33	Horizontal
5020.0	-59.41	5.23	35.82	-28.82	-25	-3.82	Vertical
7530.0	-60.69	5.67	36.86	-29.50	-25	-4.50	Vertical
7530.0	-60.68	5.67	36.86	-29.49	-25	-4.49	Horizontal
194.1	-53.42	1.63	15.76	-39.29	-25	-14.29	Vertical
453.7	-50.94	1.71	15.44	-37.21	-25	-12.21	Horizontal
Test Results for Mid Channel 2535MHz							
5070.0	-61.69	5.23	35.82	-31.10	-25	-6.10	Horizontal
5070.0	-62.96	5.23	35.82	-32.37	-25	-7.37	Vertical
7605.0	-63.49	5.67	36.85	-32.31	-25	-7.31	Vertical
7605.0	-59.87	5.67	36.85	-28.69	-25	-3.69	Horizontal
175.9	-51.34	1.79	16.84	-36.28	-25	-11.28	Vertical
464.3	-46.53	1.71	17.64	-30.60	-25	-5.60	Horizontal
Test Results for High Channel 2560MHz							
5120.0	-61.22	5.24	35.83	-30.63	-25	-5.63	Horizontal
5120.0	-62.71	5.24	35.83	-32.12	-25	-7.12	Vertical
7680.0	-64.21	5.70	36.88	-33.03	-25	-8.03	Vertical
7680.0	-62.87	5.70	36.88	-31.69	-25	-6.69	Horizontal
211.4	-44.38	1.79	16.84	-29.32	-25	-4.32	Vertical
392.6	-44.76	1.71	17.64	-28.83	-25	-3.83	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

Temp. = -30° to $+50^{\circ}$ C

Voltage = low voltage, DC 3.66V, Normal, DC 3.85V and High voltage, DC 4.43V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30° C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}$ C is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

LTE Band2

LTE Band 4

LTE Band 5

LTE Band 7

RESULTS

See the following pages.

10.1 LTE BAND 2

Band 2 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	12.2	0.006491	2.5
3.8	1880	13.4	0.007107	2.5
4.2	1880	13.5	0.007160	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	13.1	0.006945	2.5
Extreme (50C)	1880	12.0	0.006374	2.5
Extreme (40C)	1880	13.4	0.007121	2.5
Extreme (30C)	1880	13.9	0.007379	2.5
Extreme (10C)	1880	14.2	0.007537	2.5
Extreme (0C)	1880	12.6	0.006679	2.5
Extreme (-10C)	1880	12.6	0.006681	2.5
Extreme (-20C)	1880	13.7	0.007268	2.5
Extreme (-30C)	1880	14.7	0.007798	2.5

Band 2 16QAM. (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1880	10.2	0.005426	2.5
3.8	1880	8.5	0.004538	2.5
4.2	1880	7.7	0.004096	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1880	9.5	0.005040	2.5
Extreme (50C)	1880	9.3	0.004965	2.5
Extreme (40C)	1880	7.7	0.004119902	2.5
Extreme (30C)	1880	9.5	0.00505273	2.5
Extreme (10C)	1880	9.3	0.004969297	2.5
Extreme (0C)	1880	7.7	0.004121907	2.5
Extreme (-10C)	1880	9.1	0.004865531	2.5
Extreme (-20C)	1880	9.4	0.004996687	2.5
Extreme (-30C)	1880	7.6	0.004059606	2.5

*Note: Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 LTE BAND 4

Band 4 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	8.8	0.005101	2.5
3.8	1732.5	9.1	0.005262	2.5
4.2	1732.5	8.0	0.004645	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	8.8	0.005108	2.5
Extreme (50C)	1732.5	9.4	0.005425	2.5
Extreme (40C)	1732.5	7.2	0.004150	2.5
Extreme (30C)	1732.5	6.1	0.003508	2.5
Extreme (10C)	1732.5	7.1	0.004077	2.5
Extreme (0C)	1732.5	9.5	0.005498	2.5
Extreme (-10C)	1732.5	7.9	0.004573	2.5
Extreme (-20C)	1732.5	7.0	0.004059	2.5
Extreme (-30C)	1732.5	8.8	0.005056	2.5

Band 4 16QAM. (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	1732.5	9.5	0.005464	2.5
3.8	1732.5	9.2	0.005303	2.5
4.2	1732.5	8.3	0.004770	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	1732.5	9.4	0.005431	2.5
Extreme (50C)	1732.5	8.6	0.004969	2.5
Extreme (40C)	1732.5	8.0	0.004597	2.5
Extreme (30C)	1732.5	8.6	0.004970	2.5
Extreme (10C)	1732.5	8.4	0.004872	2.5
Extreme (0C)	1732.5	8.4	0.004846	2.5
Extreme (-10C)	1732.5	9.0	0.005207	2.5
Extreme (-20C)	1732.5	9.1	0.005237	2.5
Extreme (-30C)	1732.5	8.0	0.004631	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 LTE BAND 5

Band 5 QPSK, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	5.7	0.006795	2.5
3.8	836.5	6.3	0.007556	2.5
4.2	836.5	4.8	0.005779	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	6.0	0.007152	2.5
Extreme (50C)	836.5	5.7	0.006830	2.5
Extreme (40C)	836.5	6.2	0.007402	2.5
Extreme (30C)	836.5	6.5	0.007773	2.5
Extreme (10C)	836.5	5.0	0.005981	2.5
Extreme (0C)	836.5	4.9	0.005831	2.5
Extreme (-10C)	836.5	5.9	0.007085	2.5
Extreme (-20C)	836.5	5.8	0.006952	2.5
Extreme (-30C)	836.5	6.2	0.007366	2.5

Band 5 16QAM, (10MHz BANDWIDTH RB size 50 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	836.5	6.0	0.007231	2.5
3.8	836.5	6.9	0.008264	2.5
4.2	836.5	4.4	0.005308	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	6.5	0.007759	2.5
Extreme (50C)	836.5	5.8	0.006957	2.5
Extreme (40C)	836.5	6.3	0.007561	2.5
Extreme (30C)	836.5	6.2	0.007449	2.5
Extreme (10C)	836.5	5.7	0.006801	2.5
Extreme (0C)	836.5	5.1	0.006039	2.5
Extreme (-10C)	836.5	5.9	0.007087	2.5
Extreme (-20C)	836.5	5.8	0.006973	2.5
Extreme (-30C)	836.5	6.5	0.007756	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.4 LTE BAND 7

Band 7 QPSK, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	9.8	0.003863	2.5
3.8	2535	8.5	0.003366	2.5
4.2	2535	8.8	0.003483	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	9.5	0.003757	2.5
Extreme (50C)	2535	9.1	0.003600	2.5
Extreme (40C)	2535	8.1	0.003186	2.5
Extreme (30C)	2535	9.3	0.003652	2.5
Extreme (10C)	2535	7.7	0.003055	2.5
Extreme (0C)	2535	8.8	0.003491	2.5
Extreme (-10C)	2535	9.5	0.003741	2.5
Extreme (-20C)	2535	9.3	0.003672	2.5
Extreme (-30C)	2535	8.6	0.003405	2.5

Band 7 16QAM, (20MHz BANDWIDTH RB size 100 RB Offset 0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.4	2535	6.9	0.002722	2.5
3.8	2535	6.6	0.002602	2.5
4.2	2535	6.2	0.002434	2.5

Frequency error vs. Temperature

Temperature [° C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	2535	6.9	0.002722	2.5
Extreme (50C)	2535	5.6	0.002202	2.5
Extreme (40C)	2535	5.5	0.002187	2.5
Extreme (30C)	2535	6.5	0.002565	2.5
Extreme (10C)	2535	5.6	0.002211	2.5
Extreme (0C)	2535	5.1	0.002028	2.5
Extreme (-10C)	2535	4.8	0.001876	2.5
Extreme (-20C)	2535	6.3	0.002484	2.5
Extreme (-30C)	2535	6.2	0.002436	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For LTE operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

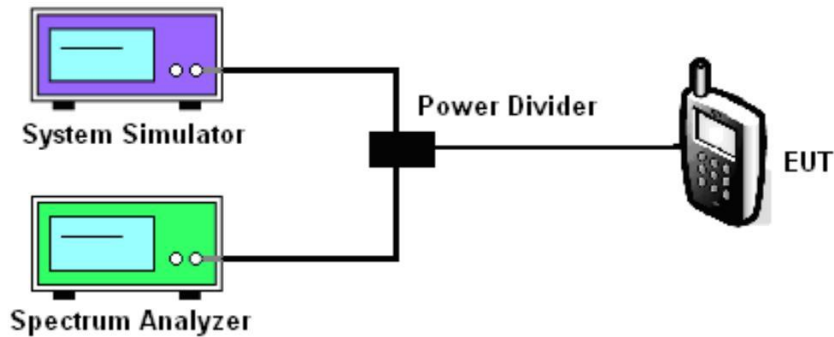

MODES TESTED

LTE Band 2/4/5/7

Test data reference attachment.

----END OF REPORT----