


# 4.4. Band Edge compliance

## <u>LIMIT</u>

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P) dB$ .

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.


# **TEST CONFIGURATION**

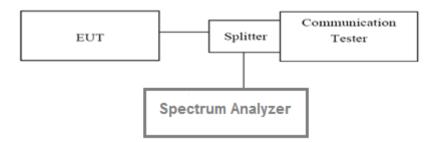



#### TEST PROCEDURE


- 1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
- The band edges of low and high channels for the highest RF powers were measured. Set RBW>= 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
- 3. Set spectrum analyzer with RMS detector.


## TEST RESULTS

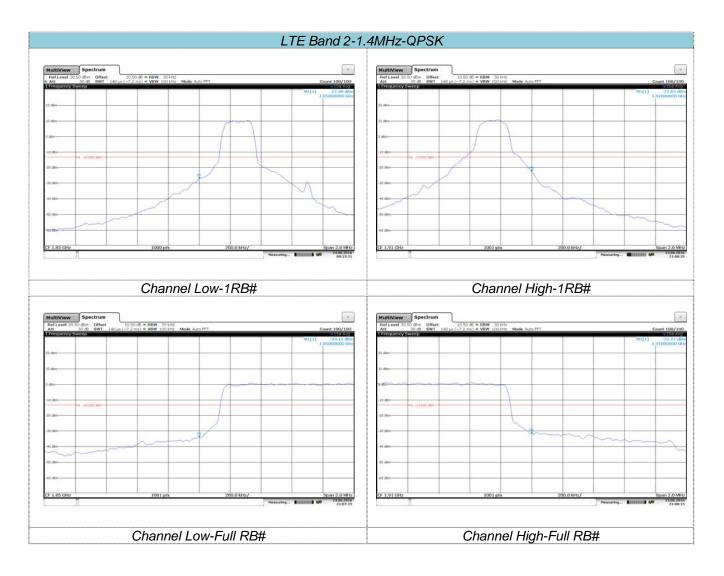


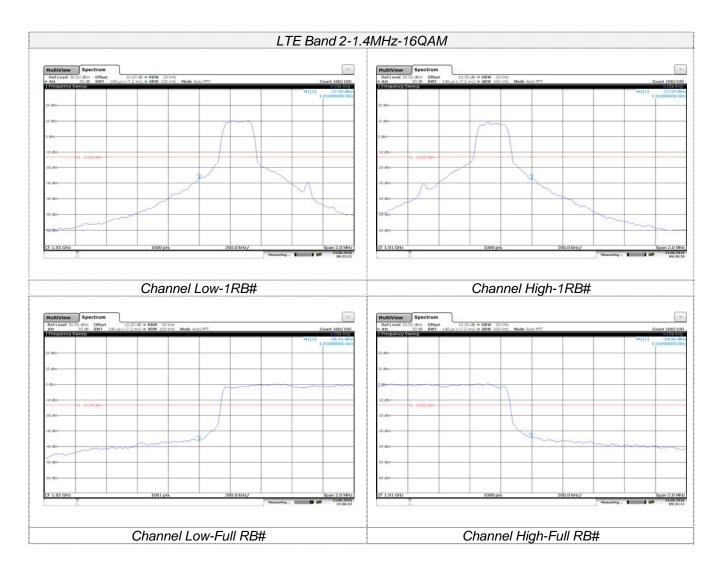


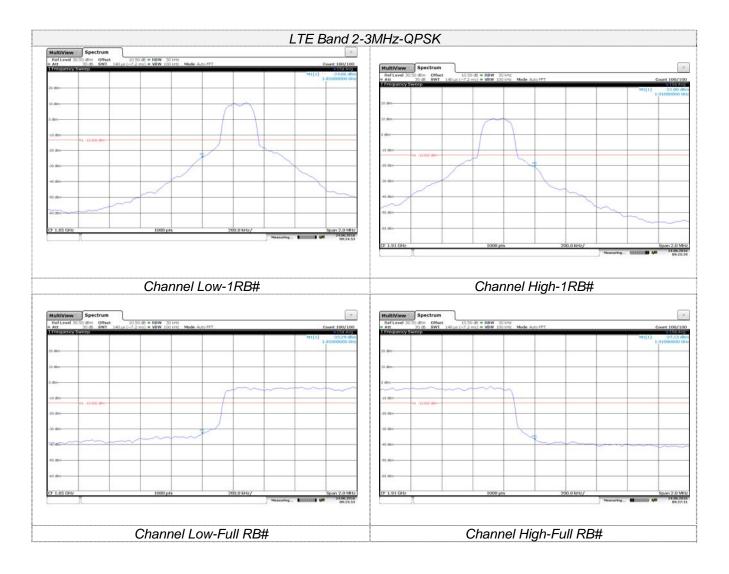


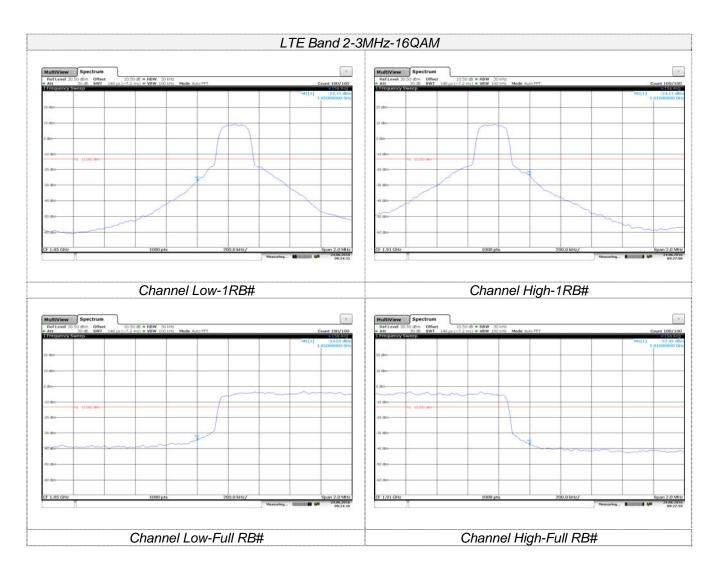

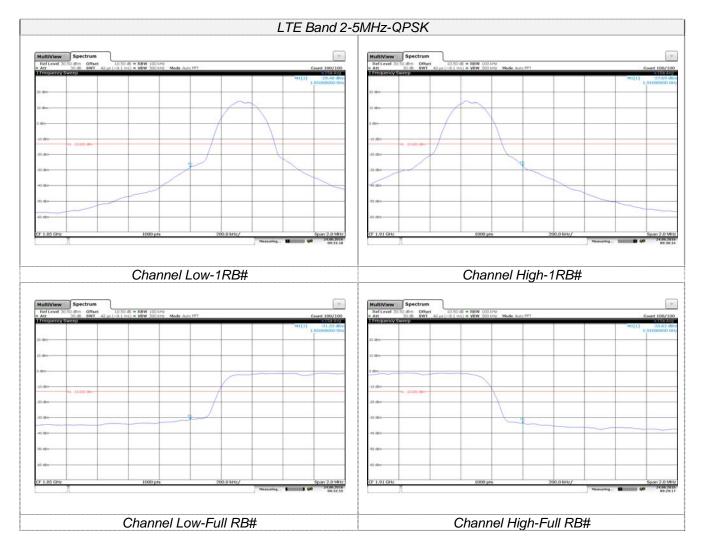


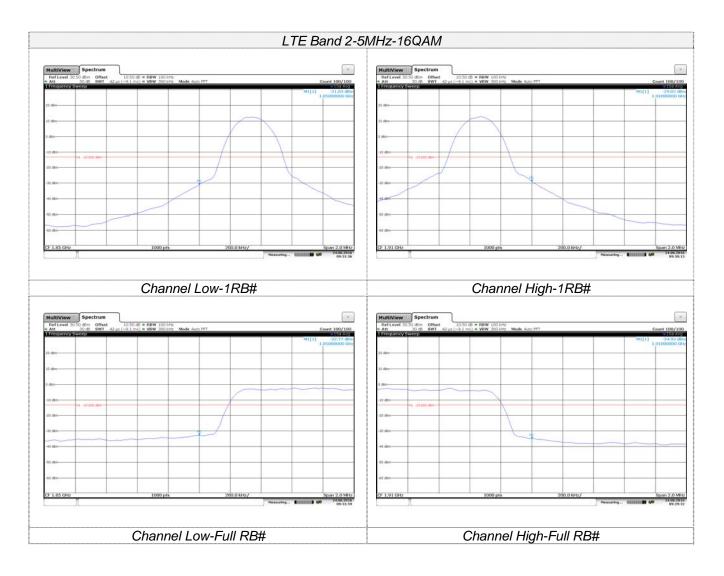


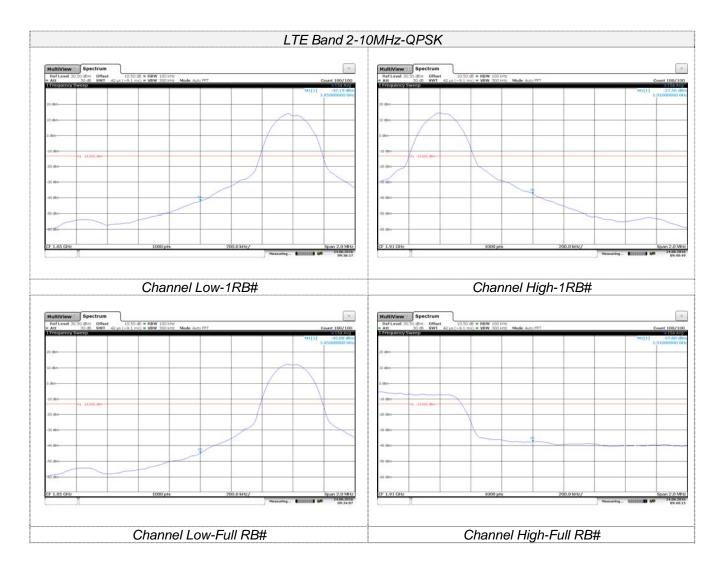


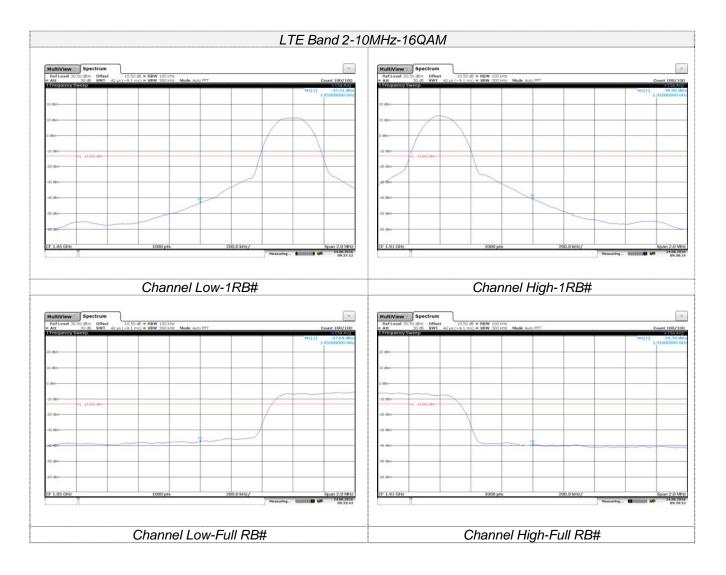

Page: 65 of 122

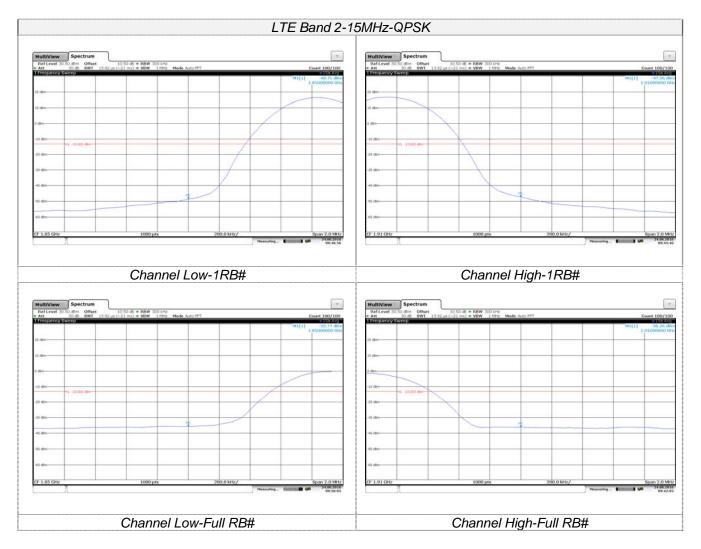


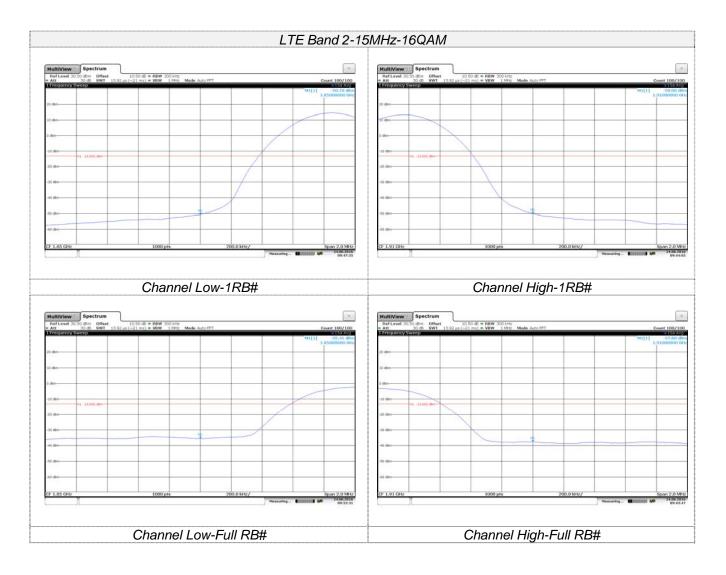


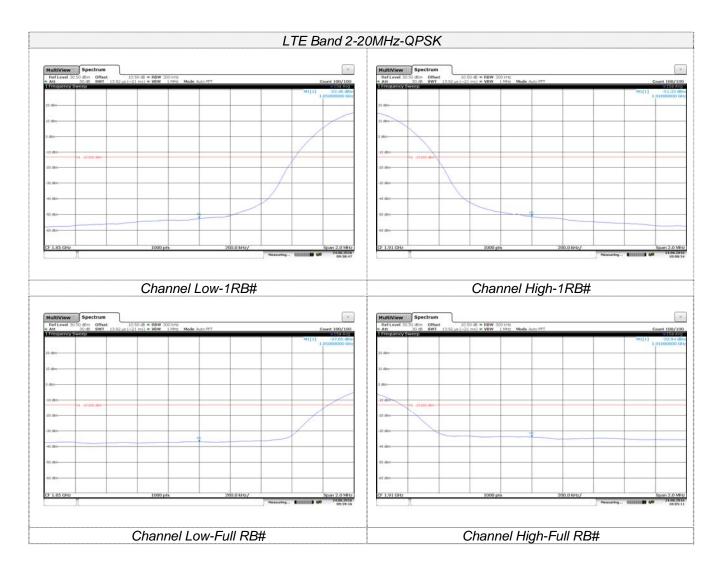



Page: 68 of 122


Issued: 2016-06-29

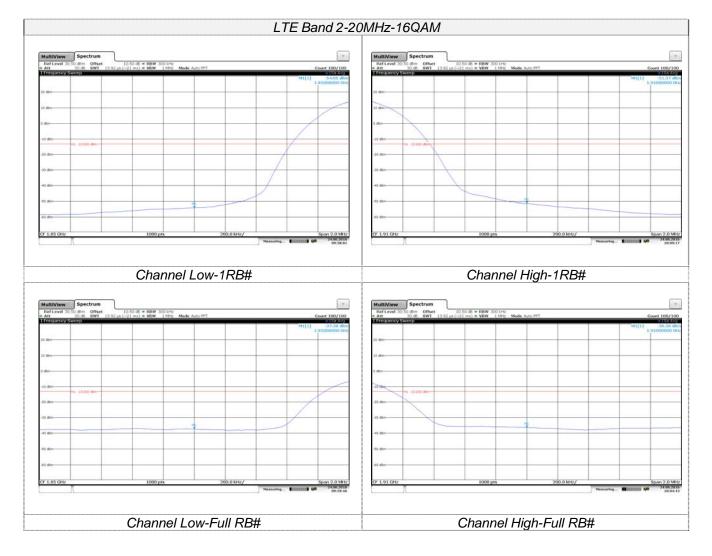


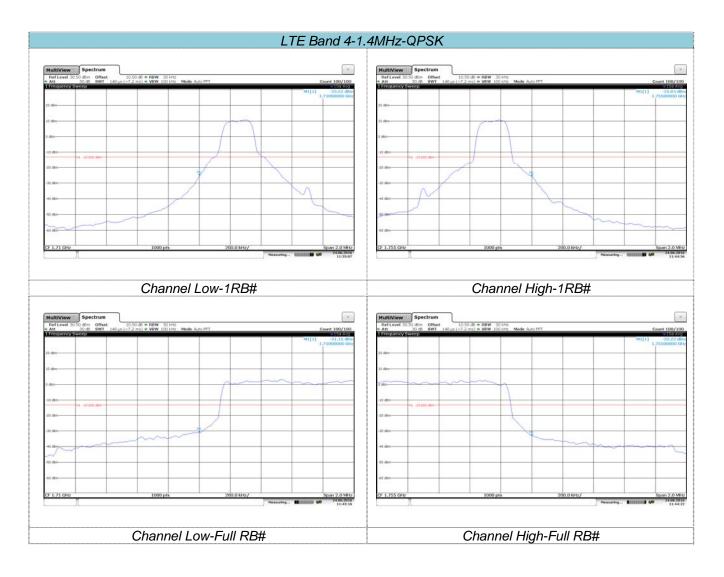


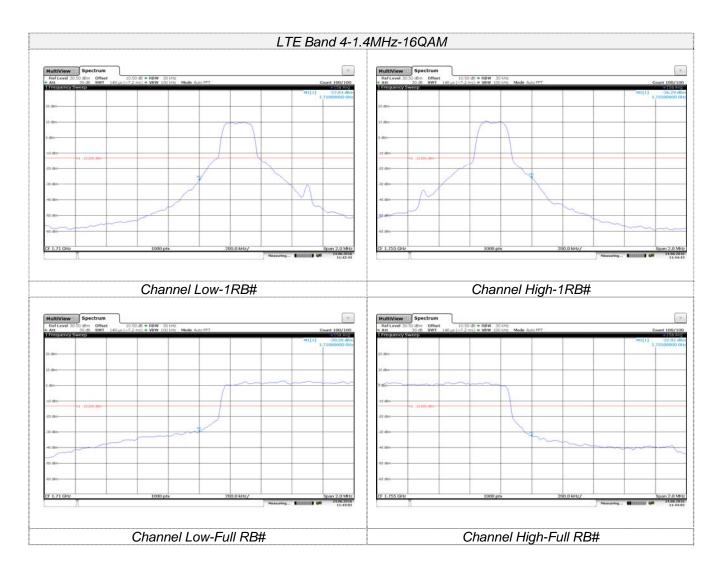


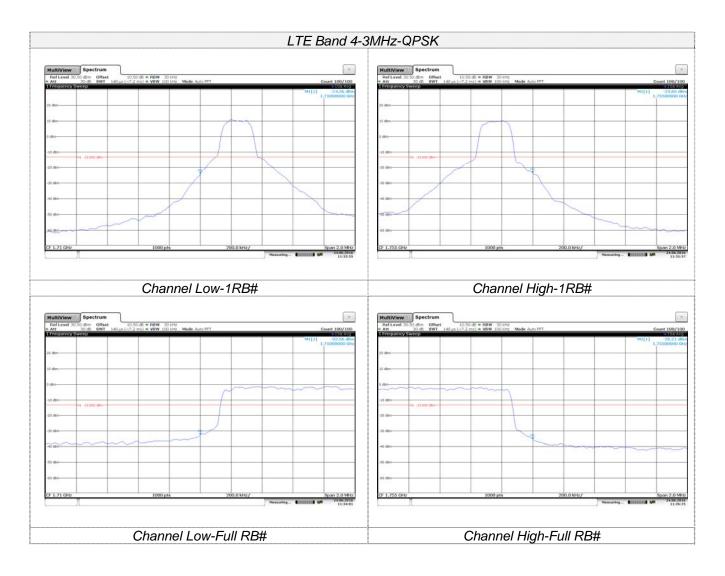


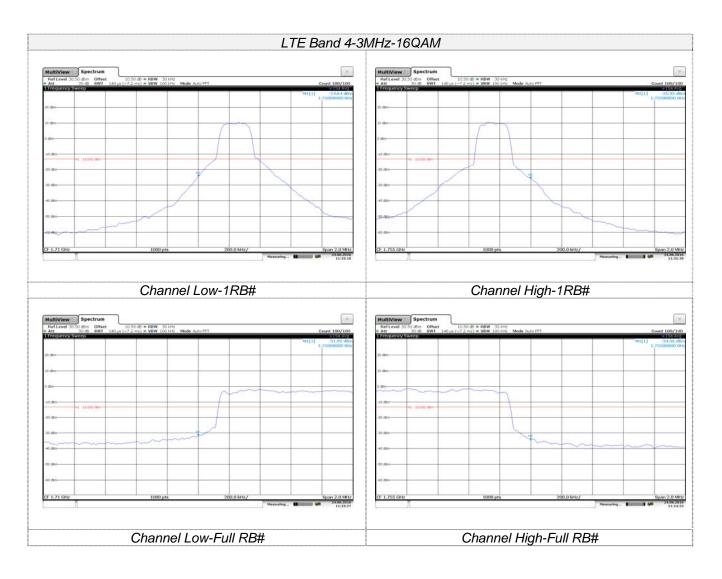


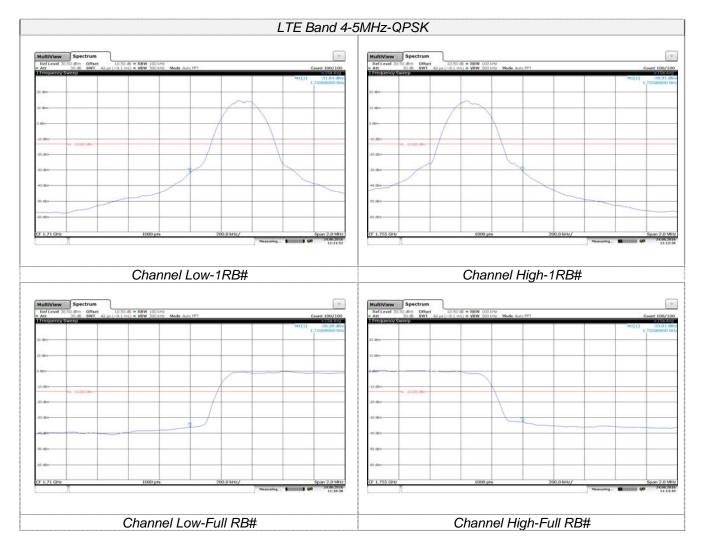


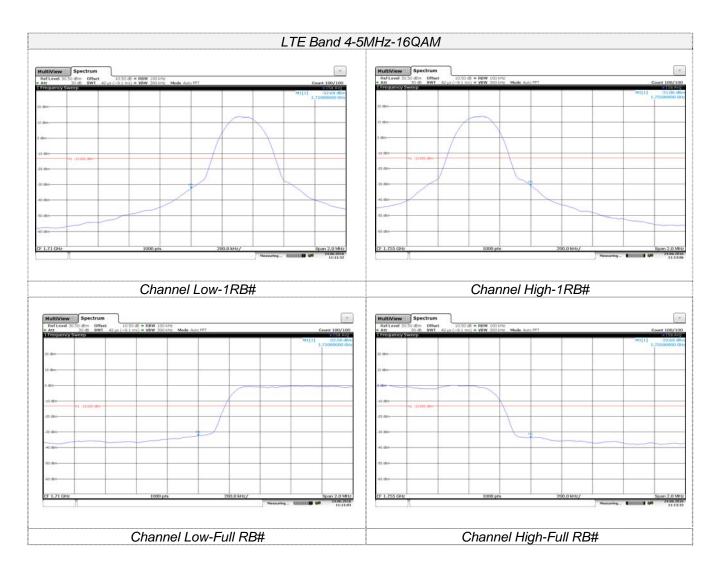


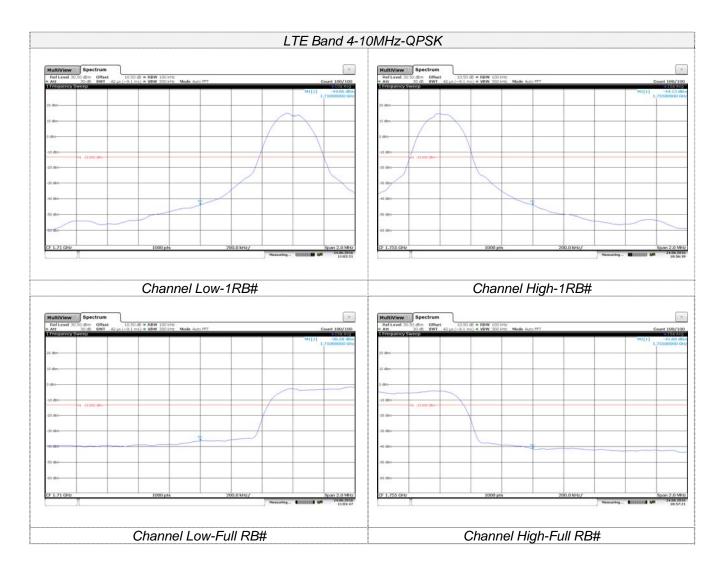


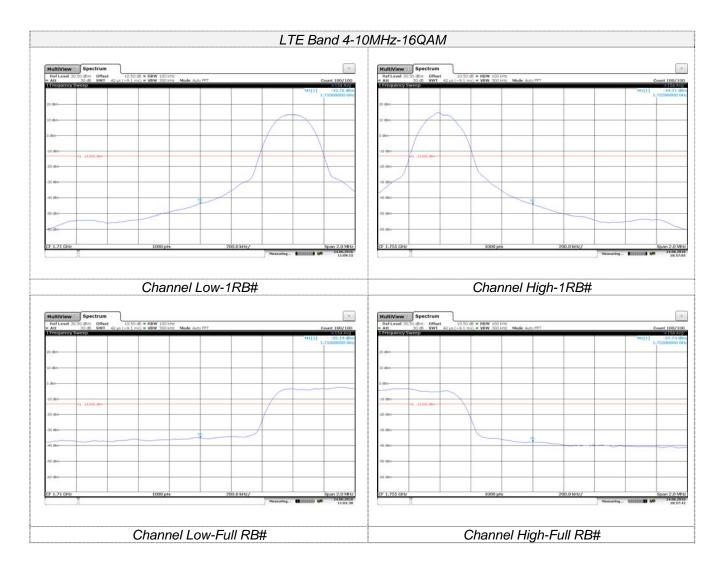


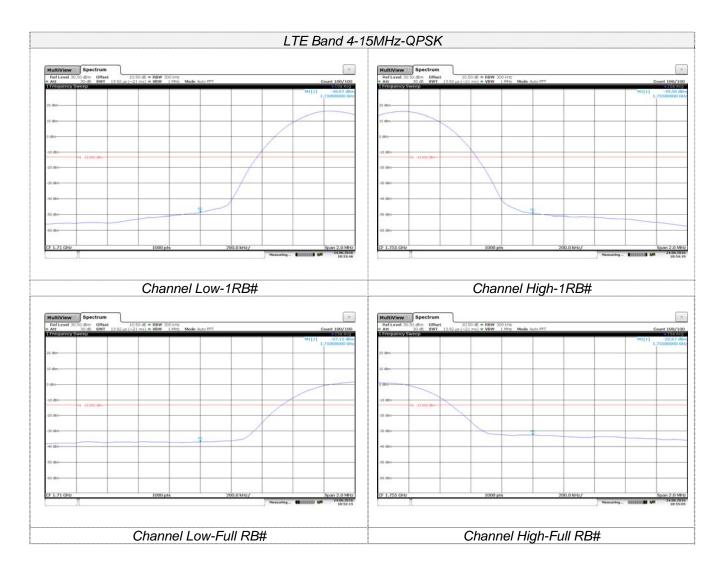


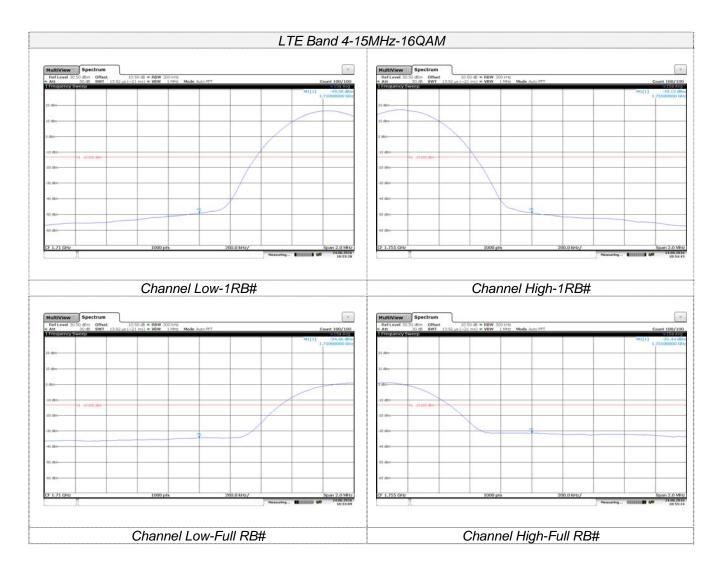


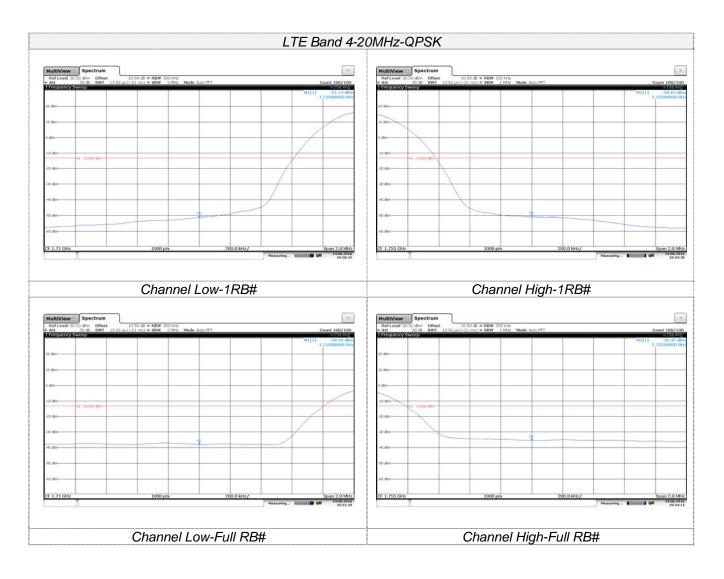


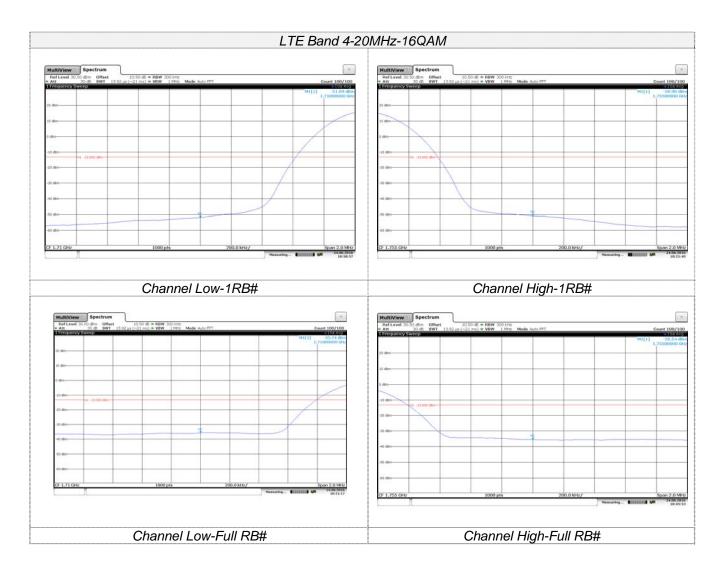





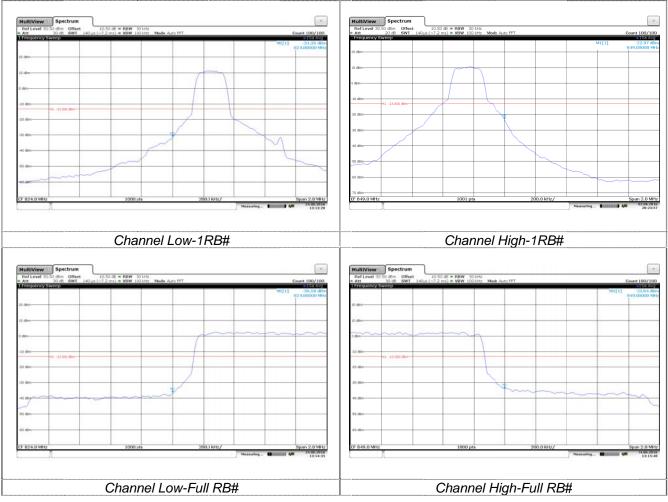


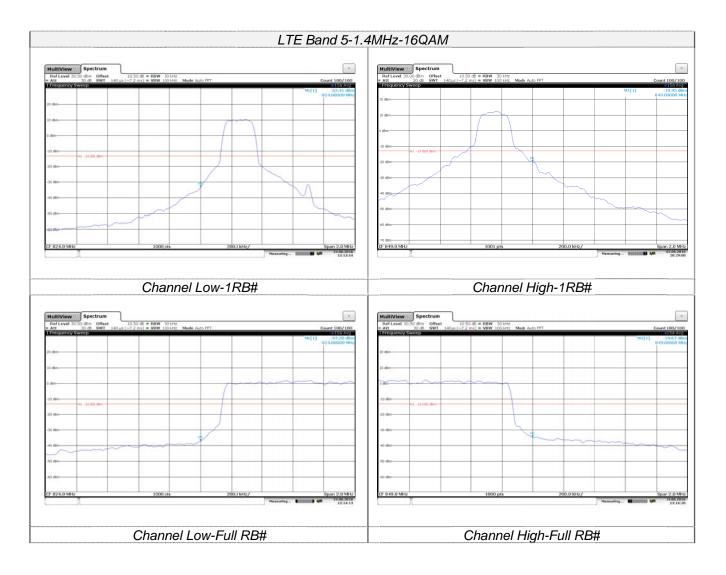


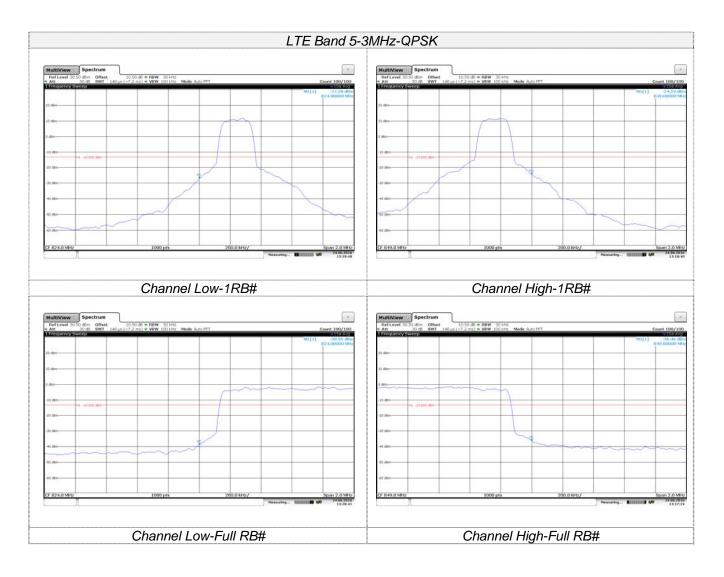


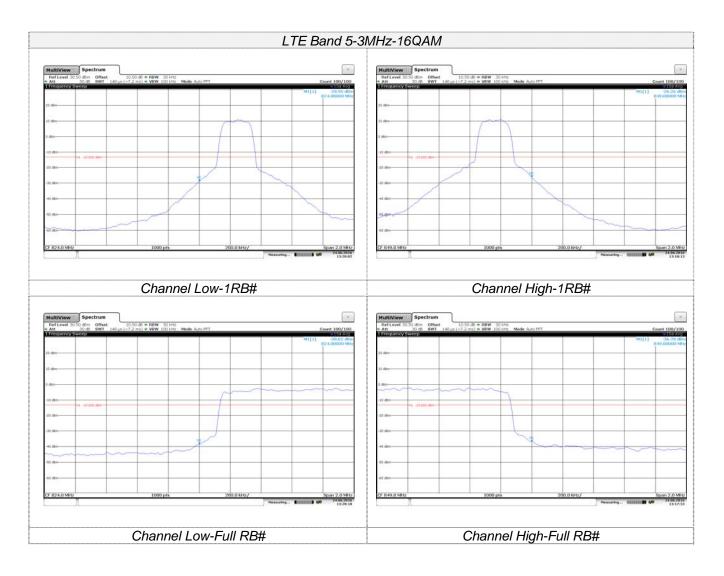


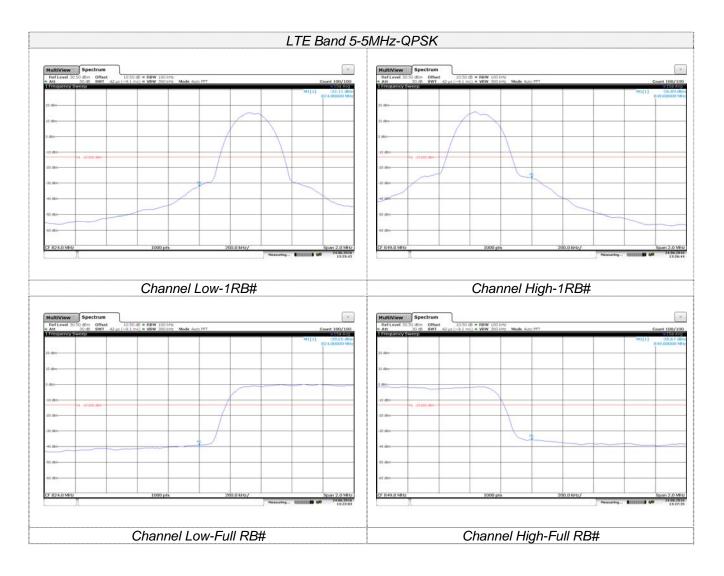


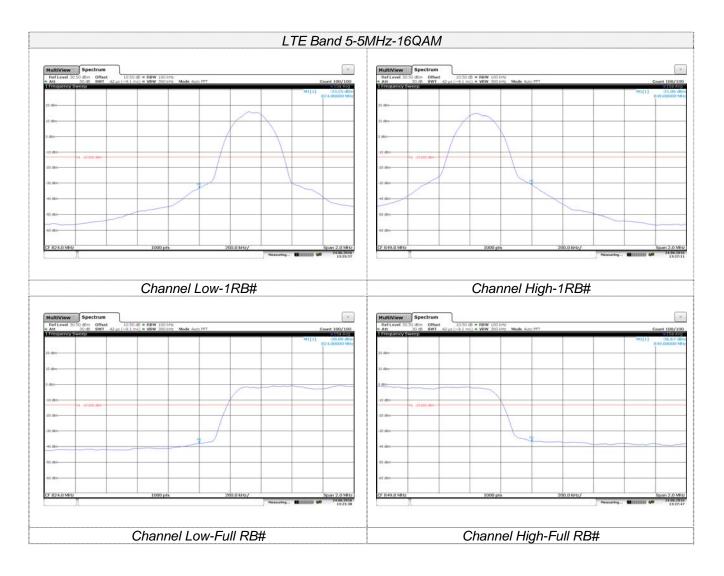


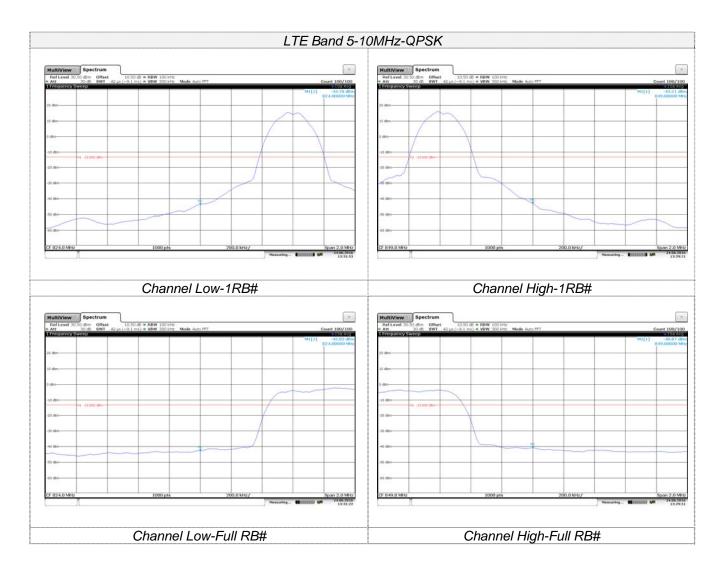


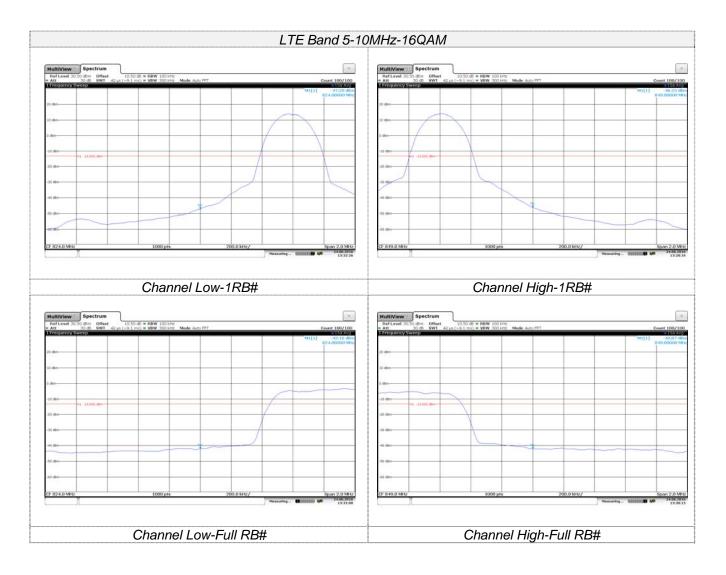

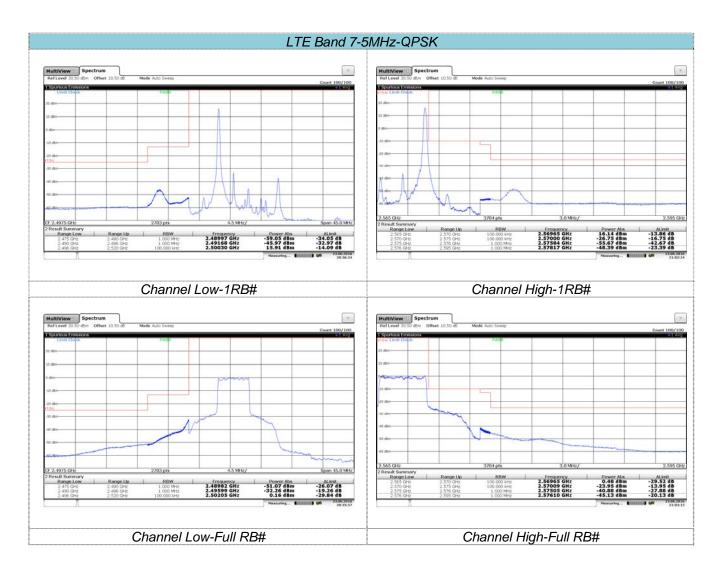


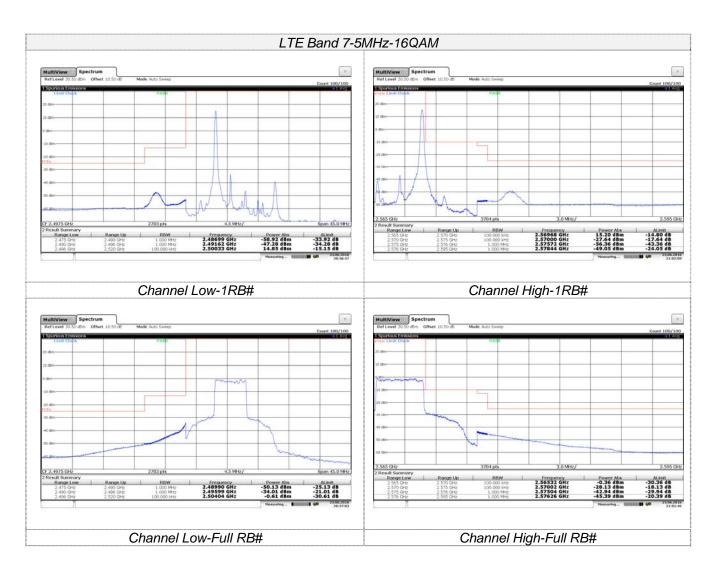


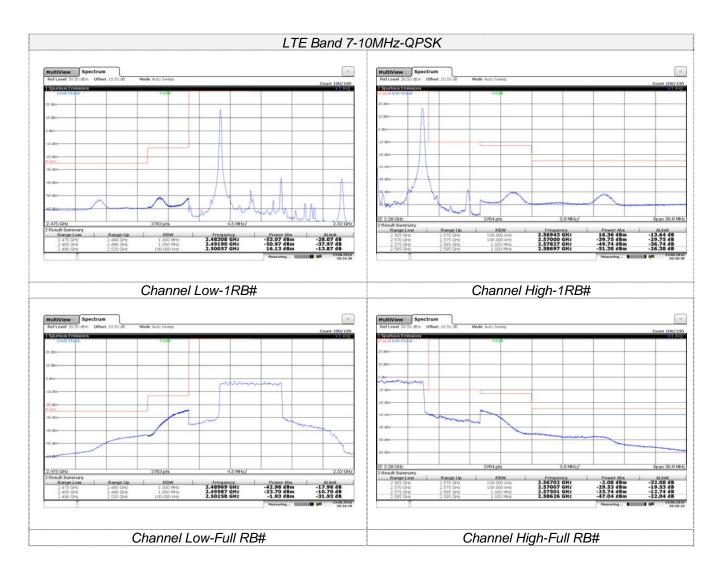


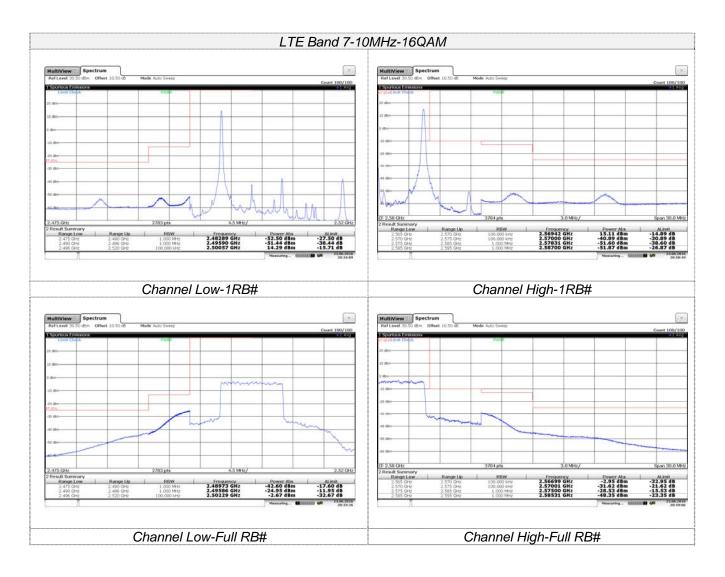


Page: 93 of 122

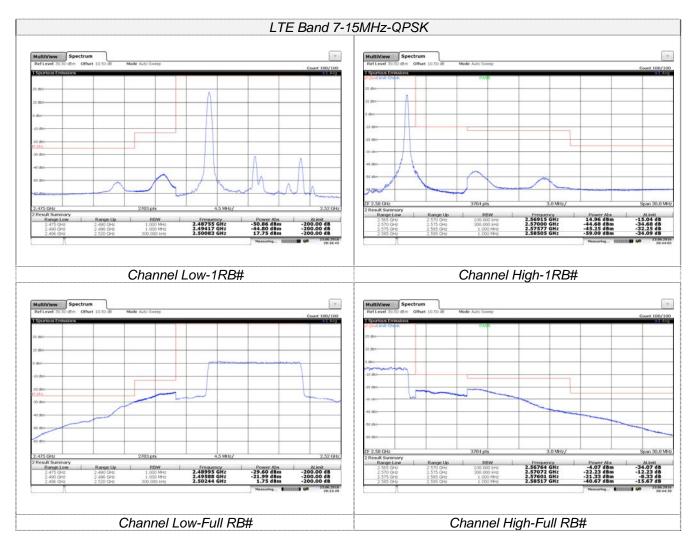

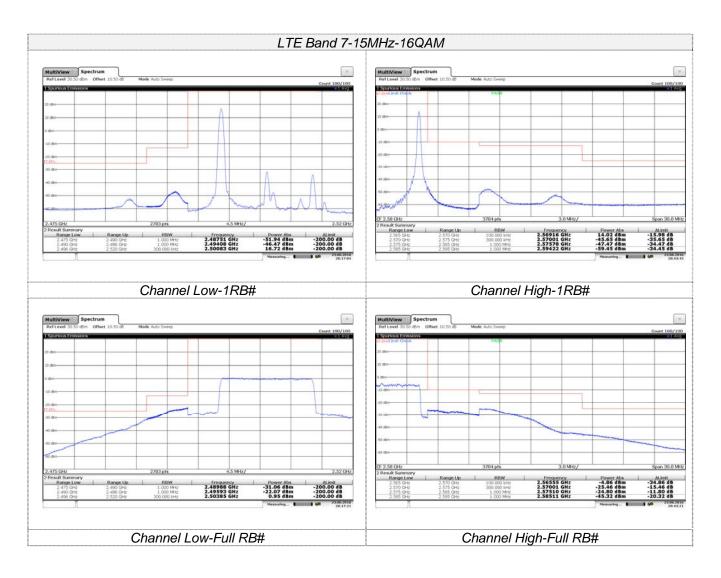

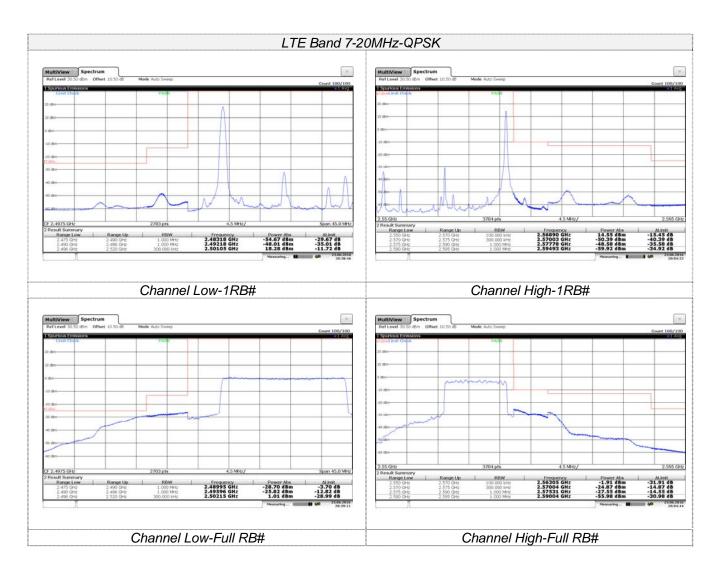

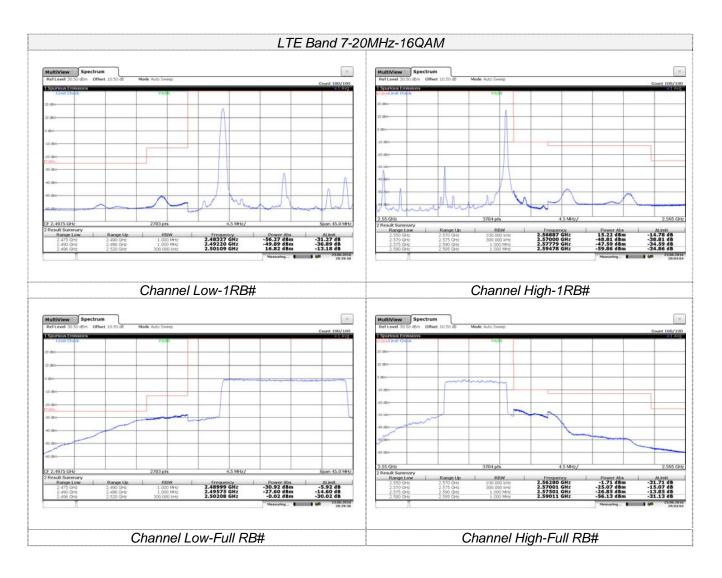


### 4.5. Radiated Power Measurement

### <u>LIMIT</u>

LTE Band 2/7: 2W EIRP, LTE Band 4: 1W EIRP, LTE Band 5: 7W ERP

## TEST CONFIGURATION

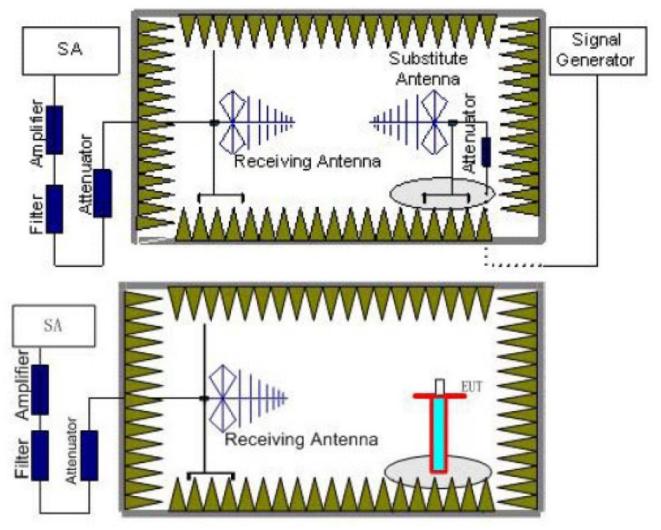

### TEST PROCEDURE

- EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be

performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below: Power(EIRP)=PMea- PAg - Pcl + Ga We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: Power(EIRP)=PMea- Pcl + Ga
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
  ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

Page: 99 of 122

LTE Band 2-1.4MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result				
wooulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.74	21.65						
QPSK	Mid	19.78	21.52		PASS				
	High	19.78	21.84	22					
	Low	18.43	20.66	33					
16QAM	Mid	17.43	20.46		PASS				
	High	18.43	20.72						

	LTE Band 2-3MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result					
wouldtion	Channel	Vertical	Horizontal		Result					
	Low	19.32	21.21	-						
QPSK	Mid	19.85	21.78		PASS					
	High	19.69	21.36							
	Low	18.75	20.84	- 33						
16QAM	Mid	17.52	20.49		PASS					
	High	18.08	20.32							

	LTE Band 2-5MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result					
wooulation	Channel	Vertical	Horizontal	Limit (dBm)	Result					
	Low	19.44	21.28							
QPSK	Mid	19.35	21.74		PASS					
	High	18.52	20.65							
	Low	18.32	20.55	33						
16QAM	Mid	18.40	20.88		PASS					
	High	18.21	20.37							

	LTE Band 2-10MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result					
woodation	Channel	Vertical	Horizontal		Result					
	Low	19.63	21.36	- 33						
QPSK	Mid	19.47	21.54		PASS					
	High	19.52	21.06							
	Low	18.32	20.73							
16QAM	Mid	17.22	20.42		PASS					
	High	18.17	20.52							

Page: 100 of 122

LTE Band 2-15MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result				
wouldtion	Channel	Vertical	Horizontal	-	Result				
	Low	18.95	20.64						
QPSK	Mid	19.47	21.42		PASS				
	High	19.35	21.86	22					
	Low	18.41	20.58	33					
16QAM	Mid	18.02	20.48		PASS				
	High	18.24	20.46						

	LTE Band 2-20MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result					
wouldtion	Channer	Vertical	Horizontal	Liniit (dBill)	Result					
	Low	19.82	21.88							
QPSK	Mid	18.65	21.54		PASS					
	High	19.43	21.66							
	Low	18.95	20.27	33						
16QAM	Mid	17.43	20.45		PASS					
	High	18.21	20.32							

Page: 101 of 122

LTE Band 4-1.4MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dRm)	Result				
wooulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	17.52	20.25						
QPSK	Mid	16.43	19.86		PASS				
	High	17.69	20.42	20					
	Low	17.43	19.78	30					
16QAM	Mid	18.03	20.76		PASS				
	High	16.61	20.04						

	LTE Band 4-3MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dRm)	Result					
wooulation	Channel	Vertical	Horizontal	Limit (dBm)	Result					
	Low	17.78	20.51							
QPSK	Mid	17.99	20.34		PASS					
	High	17.42	20.15	20						
	Low	16.41	19.84	30						
16QAM	Mid	17.33	20.06		PASS					
	High	17.43	19.78							

	LTE Band 4-5MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Popult					
wouldtion	Channel	Vertical	Horizontal	Limit (dBm)	Result					
	Low	17.78	20.51							
QPSK	Mid	16.42	19.85		PASS					
	High	18.23	20.96	20						
	Low	17.56	19.91	30						
16QAM	Mid	18.22	20.95		PASS					
	High	16.14	19.57							

	LTE Band 4-10MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result					
Modulation	Channer	Vertical	Horizontal		Result					
	Low	18.22	20.95							
QPSK	Mid	17.03	19.38		PASS					
	High	17.42	20.25							
	Low	17.85	20.24	30						
16QAM	Mid	16.16	19.08		PASS					
	High	16.58	19.74							

LTE Band 4-15MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result				
Modulation	Channel	Vertical	Horizontal		Result				
	Low	17.68	20.51	_					
QPSK	Mid	16.66	20.05		PASS				
	High	16.22	19.14	20					
	Low	17.32	19.48	30	PASS				
16QAM	Mid	17.23	20.06						
	High	16.61	20.00						

	LTE Band 4-20MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dRm)	Result					
Wouldtion	Channel	Vertical	Horizontal	Limit (dBm)	Result					
	Low	16.79	19.00							
QPSK	Mid	17.75	19.94		PASS					
	High	17.04	19.78	30						
	Low	16.43	19.68							
16QAM	Mid	17.08	19.22		PASS					
	High	17.78	20.14							

Page: 103 of 122

	LTE Band 5-1.4MHz								
Modulation	Channel	ERP	(dBm)	Limit (dPm)	Result				
wooulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	14.85	17.45						
QPSK	Mid	15.76	18.08	- 38.45 -	PASS				
	High	14.83	17.43						
	Low	15.66	18.44						
16QAM	Mid	14.51	17.11		PASS				
	High	15.64	17.96						

LTE Band 5-3MHz									
Modulation	Channel	ERP	(dBm)	Limit (dPm)	Result				
wooulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	14.77	17.37	-					
QPSK	Mid	15.29	18.07		PASS				
	High	14.92	17.52						
	Low	15.77	18.09	38.45					
16QAM	Mid	14.18	16.92		PASS				
	High	15.66	18.32						

	LTE Band 5-5MHz								
Modulation	Channel	ERP	(dBm)	Limit (dPm)	Result				
wouldtion	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	15.68	18.27						
QPSK	Mid	14.76	17.08	- 38.45	PASS				
	High	15.47	18.71						
	Low	14.58	16.85						
16QAM	Mid	14.38	17.44		PASS				
	High	15.95	17.85						

	LTE Band 5-10MHz								
Modulation	Channel	ERP	(dBm)	Limit (dBm)	Result				
Modulation	Channer	Vertical	Horizontal		Result				
	Low	14.48	17.39						
QPSK	Mid	13.93	16.68	33	PASS				
	High	14.82	17.57						
	Low	14.14	17.81						
16QAM	Mid	14.38	17.56		PASS				
	High	14.52	16.98						

Page: 104 of 122

	LTE Band 7-5MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dRm)	Result				
wooulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	18.43	20.25						
QPSK	Mid	18.63	20.47		PASS				
	High	19.72	21.52						
	Low	19.04	20.86	33					
16QAM	Mid	17.22	19.91	1	PASS				
	High	18.56	20.35						

LTE Band 7-10MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dRm)	Deault			
wooulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	19.68	21.46					
QPSK	Mid	18.81	20.49		PASS			
	High	18.47	20.32	22				
	Low	18.64	20.48	33				
16QAM	Mid	20.09	21.87	1	PASS			
	High	19.04	20.86					

	LTE Band 7-15MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Docult				
MODUIATION	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	18.33	20.08	- 33					
QPSK	Mid	18.63	20.47		PASS				
	High	19.50	21.16						
	Low	18.99	20.78						
16QAM	Mid	18.14	19.78		PASS				
	High	18.75	20.66						


	LTE Band 7-20MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Decult					
wouldtion	Channer	Vertical	Horizontal		Result					
	Low	19.50	21.30							
QPSK	Mid	19.20	21.02	33	PASS					
	High	18.45	20.42							
	Low	17.63	19.36							
16QAM	Mid	18.24	20.43		PASS					
	High	17.95	19.86							

## 4.6. Radiated Spurious Emssion

### <u>LIMIT</u>

-13dBm

### **TEST CONFIGURATION**

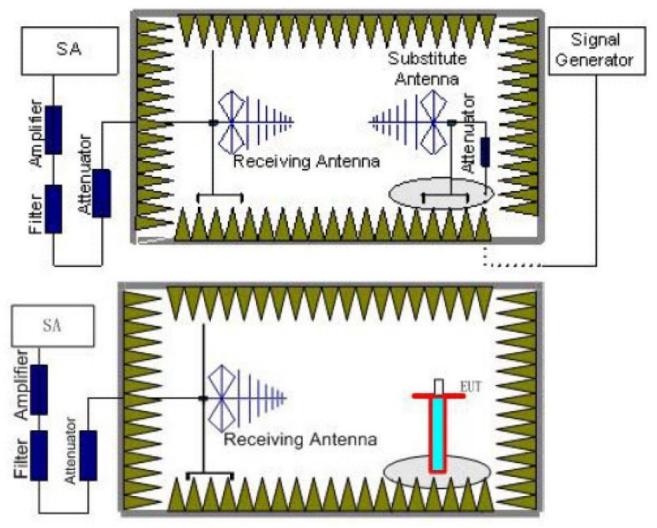

- EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be

performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below: Power(EIRP)=PMea- PAg - Pcl + Ga We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: Power(EIRP)=PMea- Pcl + Ga
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
  ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

LTE Band 2-1.4MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Desult			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3701.4	Vertical	-39.44					
	5552.1	V	-46.52	-13.00	Pass			
Low	7402.8	V						
LOW	3701.4	Horizontal	-38.43					
	5552.1	Н	-42.69	-13.00	Pass			
	7402.8	Н						
	3760	Vertical	-37.35	-13.00	Pass			
	5640	V	-43.84					
Mid	7520	V						
Mid	3760	Horizontal	-35.84					
	5640	Н	-42.48	-13.00	Pass			
	7520	Н						
	3818.6	Vertical	-39.65					
	5727.9	V	-44.65	-13.00	Pass			
High	7637.2	V						
High	3818.6	Horizontal	-35.87					
	5727.9	Н	-42.52	-13.00	Pass			
	7637.2	Н		1				

#### Remark :

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-3MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Desult			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3703	Vertical	-37.52					
	5554.5	V	-44.57	-13.00	Pass			
Law	7406	V						
Low	3703	Horizontal	-35.38					
	5554.5	Н	-43.28	-13.00	Pass			
	7406	Н						
	3760	Vertical	-37.73		Pass			
	5640	V	-43.65	-13.00				
Mid	7520	V						
IVIIC	3760	Horizontal	-36.47					
	5640	Н	-42.64	-13.00	Pass			
	7520	Н						
	3817	Vertical	-37.52					
	5725.5	V	-46.68	-13.00	Pass			
High	7634	V						
High	3817	Horizontal	-36.34					
	5725.5	Н	-44.25	-13.00	Pass			
	7634	Н						

Remark :

1. Remark"----" means that the emission level is too low to be measured

		LTE Bai	nd 2-5MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	D It
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3705	Vertical	-38.42		
	5557.5	V	-46.58	-13.00	Pass
Low	7410	V			
LOW	3705	Horizontal	-35.56		
	5557.5	Н	-43.36	-13.00	Pass
	7410	Н			
	3760	Vertical	-39.89		Pass
	5640	V	-43.36	-13.00	
Mid	7520	V			
IVIIC	3760	Horizontal	-35.79		
	5640	Н	-40.58	-13.00	Pass
	7520	Н			
	3815	Vertical	-38.46		
	5722.5	V	-43.52	-13.00	Pass
High	7630	V			
High	3815	Horizontal	-36.87		
	5722.5	Н	-41.43	-13.00	Pass
	7630	Н			

Remark :

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-10MHz								
Channal	Frequency	Spurious	Emission	Lingit (dDmg)	Dec. II			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3710	Vertical	-38.25					
	5565	V	-44.36	-13.00	Pass			
Low	7420	V						
Low	3710	Horizontal	-35.73					
	5565	Н	-42.47	-13.00	Pass			
	7420	Н						
	3760	Vertical	-38.69	-13.00	Pass			
	5640	V	-44.52					
Mid	7520	V						
IVIIG	3760	Horizontal	-35.87					
	5640	Н	-42.66	-13.00	Pass			
	7520	Н						
	3810	Vertical	-37.84					
	5715	V	-44.65	-13.00	Pass			
High	7620	V						
High	3810	Horizontal	-36.85					
	5715	Н	-41.52	-13.00	Pass			
	7620	Н						

Remark :

1. Remark"---- " means that the emission level is too low to be measured

Issued: 2016-06-29

LTE Band 2-15MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Decili		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3705	Vertical	-40.47				
	5557.5	V	-46.85	-13.00	Pass		
Low	7410	V					
Low	3705	Horizontal	-37.55				
	5557.5	Н	-42.05	-13.00	Pass		
	7410	Н					
	3760	Vertical	-38.65		Pass		
	5640	V	-45.47	-13.00			
Mid	7520	V					
IVIIG	3760	Horizontal	-36.75		Pass		
	5640	Н	-43.84	-13.00			
	7520	Н					
	3815	Vertical	-38.65				
	5722.5	V	-42.25	-13.00	Pass		
Lliab	7630	V					
High	3815	Horizontal	-34.63				
	5722.5	Н	-40.25	-13.00	Pass		
	7630	Н					

Remark :

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 2-20MHz		
Channel	Frequency	Spurious Emission		Lineit (dDree)	Decili
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3720	Vertical	-37.37		
	5580	V	-42.85	-13.00	Pass
Low	7440	V			
LOW	3720	Horizontal	-35.73		
	5580	Н	-40.84	-13.00	Pass
	7440	Н			
	3760	Vertical	-40.62		Pass
	5640	V	-44.38	-13.00	
Mid	7520	V			
IVIIG	3760	Horizontal	-36.65		
	5640	Н	-41.47	-13.00	Pass
	7520	Н			
	3800	Vertical	-36.47		
	5700	V	-42.38	-13.00	Pass
High	7600	V			
High	3800	Horizontal	-34.75		
	5700	Н	-40.24	-13.00	Pass
	7600	Н			

Remark:

1. Remark"---" means that the emission level is too low to be measured

Page: 110 of 122

Issued: 2016-06-29

LTE Band 4-1.4MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Deput		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3421.4	Vertical	-30.47				
	5132.1	V	-38.52	-13.00	Pass		
Low	6842.8	V					
LOW	3421.4	Horizontal	-28.75				
	5132.1	Н	-34.52	-13.00	Pass		
	6842.8	Н					
	3465	Vertical	-28.76	-13.00	Pass		
	5197.5	V	-36.91				
Mid	6930	V					
IVIIC	3465	Horizontal	-27.67		Pass		
	5197.5	Н	-33.51	-13.00			
	6930	Н					
	3508.6	Vertical	-29.18				
	5262.9	V	-37.31	-13.00	Pass		
High	7017.2	V					
High	3508.6	Horizontal	-27.94				
	5262.9	Н	-33.76	-13.00	Pass		
	7017.2	Н					

Remark :

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Bar	nd 4-3MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	Desult
Channer	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3423	Vertical	-31.52		
	5134.5	V	-36.85	-13.00	Pass
Low	6846	V			
LOW	3423	Horizontal	-29.43		
	5134.5	Н	-34.36	-13.00	Pass
	6846	Н			
	3465	Vertical	-33.18	-13.00	Pass
	5197.5	V	-38.41		
Mid	6930	V			
IVIIU	3465	Horizontal	-30.47		Pass
	5197.5	Н	-35.34	-13.00	
	6930	Н			
	3507	Vertical	-32.77		
	5260.5	V	-37.02	-13.00	Pass
High	7014	V			
High	3423	Horizontal	-30.21		
	5134.5	Н	-35.10	-13.00	Pass
	6846	Н			

Remark :

1.

Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report. 2.

	LTE Band 4-5MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dec. II			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3425	Vertical	-34.33					
	5137.5	V	-38.47	-13.00	Pass			
Low	6850	V						
LOW	3425	Horizontal	-30.65					
	5137.5	Н	-35.74	-13.00	Pass			
	6850	Н						
	3465	Vertical	-35.99		Pass			
	5197.5	V	-40.03	-13.00				
Mid	6930	V						
IVIIG	3465	Horizontal	-31.69		Pass			
	5197.5	Н	-36.72	-13.00				
	6930	Н						
	3505	Vertical	-35.58					
	5257.5	V	-39.64	-13.00	Pass			
High	7010	V						
High	3505	Horizontal	-31.43					
	5257.5	Н	-36.48	-13.00	Pass			
	7010	Н						

#### Remark:

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 4-10MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dec. II			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3430	Vertical	-36.74					
	5145	V	-40.35	-13.00	Pass			
Low	6860	V						
LOW	3430	Horizontal	-32.85					
	5145	Н	-36.85	-13.00	Pass			
	6860	Н						
	3465	Vertical	-38.74	-13.00	Pass			
	5197.5	V	-42.23					
Mid	6930	V						
IVIIC	3465	Horizontal	-34.11					
	5197.5	Н	-38.04	-13.00	Pass			
	6930	Н						
	3500	Vertical	-38.24					
	5250	V	-41.76	-13.00	Pass			
Lliab	7000	V						
High	3500	Horizontal	-33.80					
	5250	Н	-37.74	-13.00	Pass			
	7000	Н						

Remark :

1. Remark"---" means that the emission level is too low to be measured

LTE Band 4-15MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dec. It		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3435	Vertical	-37.74				
	5152.5	V	-42.68	-13.00	Pass		
Low	6870	V					
LOW	3435	Horizontal	-32.48				
	5152.5	Н	-36.63	-13.00	Pass		
	6870	Н					
	3465	Vertical	-35.78		Pass		
	5197.5	V	-40.84	-13.00			
Mid	6930	V					
IVIIG	3465	Horizontal	-31.25		Pass		
	5197.5	Н	-35.47	-13.00			
	6930	Н					
	3490	Vertical	-37.25				
	5235	V	-42.22	-13.00	Pass		
High	6980	V					
High	3490	Horizontal	-32.18				
	5235	Н	-36.34	-13.00	Pass		
	6980	Н					

Remark :

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 4-20MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3440	Vertical	-33.37		
	5160	V	-38.65	-13.00	Pass
1	6880	V			
Low	3440	Horizontal	-29.73		
	5160	Н	-34.09	-13.00	Pass
	6880	Н			
	3465	Vertical	-34.73		Pass
	5197.5	V	-39.85	-13.00	
Mid	6930	V			
Mid	3465	Horizontal	-32.43		Pass
	5197.5	Н	-35.27	-13.00	
	6930	Н			
	3490	Vertical	-36.69		
	5235	V	-41.69	-13.00	Pass
Lliab	6980	V			
High	3490	Horizontal	-33.66		
	5235	Н	-36.43	-13.00	Pass
	6980	Н			

Remark:

1. Remark"---" means that the emission level is too low to be measured

	LTE Band 5-1.4MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dec. II			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	1649.4	Vertical	-46.52					
	2474.1	V	-48.47	-13.00	Pass			
Low	3298.8	V						
LOW	1649.4	Horizontal	-42.58					
	2474.1	Н	-46.74	-13.00	Pass			
	3298.8	Н						
	1673	Vertical	-48.60	-13.00	Pass			
	2509.5	V	-50.42					
Mid	3346	V						
IVIIG	1673	Horizontal	-43.89		Pass			
	2509.5	Н	-47.97	-13.00				
	3346	Н						
	1696.6	Vertical	-48.08					
	2544.9	V	-49.94	-13.00	Pass			
Lliab	3393.2	V						
High	1696.6	Horizontal	-43.56					
	2544.9	Н	-47.66	-13.00	Pass			
	3393.2	Н						

#### Remark:

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Bar	nd 5-3MHz		
Channel	Frequency	Spurious	Emission	Lizzit (dDzz)	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1651	Vertical	-44.69		
	2476.5	V	-46.99	-13.00	Pass
Low	3302	V			
LOW	1651	Horizontal	-41.43		
	2476.5	Н	-45.81	-13.00	Pass
	3302	Н			
	1673	Vertical	-43.97		Pass
	2509.5	V	-46.15	-13.00	
Mid	3346	V			
IVIIG	1673	Horizontal	-40.97		Pass
	2509.5	Н	-45.28	-13.00	
	3346	Н			
	1695	Vertical	-45.25		
	2542.5	V	-47.74	-13.00	Pass
High	3390	V			
High	1695	Horizontal	-43.46		
	2542.5	Н	-45.25	-13.00	Pass
	3390	Н			

#### Remark:

1. Remark"---" means that the emission level is too low to be measured

		LTE Bar	nd 5-5MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	Decili
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1653	Vertical	-47.52		
	2479.5	V	-49.81	-13.00	Pass
Low	3306	V			
LOW	1653	Horizontal	-44.89		
	2479.5	Н	-46.55	-13.00	Pass
	3306	Н			
	1673	Vertical	-46.88		Pass
	2509.5	V	-49.06	-13.00	
Mid	3346	V			
IVIIG	1673	Horizontal	-44.48		Pass
	2509.5	Н	-46.08	-13.00	
	3346	Н			
	1693	Vertical	-43.86		
	2539.5	V	-46.44	-13.00	Pass
High	3386	V			
High	1693	Horizontal	-42.59		
	2539.5	Н	-44.43	-13.00	Pass
	3386	Н			

#### Remark:

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 5-10MHz		
Channel	Frequency	Spurious	Emission	Lingit (dDmg)	Decult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1658	Vertical	-43.40		
	2487	V	-46.00	-13.00	Pass
1	3316	V			
Low	1658	Horizontal	-42.30		
	2487	Н	-44.16	-13.00	Pass
	3316	Н			
	1673	Vertical	-46.22		Pass
	2509.5	V	-48.65	-13.00	
Mid	3346	V			
Mid	1673	Horizontal	-42.75		Pass
	2509.5	Н	-44.67	-13.00	
	3346	Н			
	1688	Vertical	-43.67		
	2532	V	-46.30	-13.00	Pass
Llink	3376	V			
High	1688	Horizontal	-42.46		
	2532	Н	-44.34	-13.00	Pass
	3376	Н			

Remark:

1. Remark"---" means that the emission level is too low to be measured

Page: 115 of 122

Issued: 2016-06-29

LTE Band 7-5MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Decult		
Channel	(MHz)	Polarization Level (dBm)		Limit (dBm)	Result		
	5005	Vertical	-45.56				
	7507.5	V	-49.34	-13.00	Pass		
Low	10010	V					
LOW	5005	Horizontal	-41.43				
	7507.5	Н	-43.52	-13.00	Pass		
	10010	Н					
	5070	Vertical	-44.69		Pass		
	7605	V	-48.33	-13.00			
Mid	10140	V					
IVIIC	5070	Horizontal	-40.89				
	7605	Н	-42.89	-13.00	Pass		
	10140	Н					
	5135	Vertical	-40.40				
	7702.5	V	-43.43	-13.00	Pass		
Lliab	10270	V					
High	5135	Horizontal	-38.08				
	7702.5	Н	-40.43	-13.00	Pass		
	10270	Н					

#### Remark:

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-10MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Decili		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	5010	Vertical	-42.52				
	7515	V	-46.57	-13.00	Pass		
Low	10020	V					
Low	5010	Horizontal	-39.52				
	7515	Н	-41.78	-13.00	Pass		
	10020	Н					
	5070	Vertical	-40.05		Pass		
	7605	V	-44.25	-13.00			
Mid	10140	V					
IVIIC	5070	Horizontal	-37.96				
	7605	Н	-40.32	-13.00	Pass		
	10140	Н					
	5130	Vertical	-40.66				
	7695	V	-44.83	-13.00	Pass		
Lliab	10260	V					
High	5130	Horizontal	-38.35				
	7695	Н	-40.68	-13.00	Pass		
	10260	Н					

Remark:

1. Remark"---" means that the emission level is too low to be measured

LTE Band 7-15MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	5015	Vertical	-45.19				
	7522.5	V	-48.09	-13.00	Pass		
Low	10030	V					
LOW	5015	Horizontal	-41.48				
	7522.5	Н	-45.74	-13.00	Pass		
	10030	Н					
	5070	Vertical	-45.75		Pass		
	7605	V	-48.61	-13.00			
Mid	10140	V					
IVIIU	5070	Horizontal	-41.83		Pass		
	7605	Н	-46.07	-13.00			
	10140	н					
	5125	Vertical	-43.52				
	7687.5	V	-46.52	-13.00	Pass		
High	10250	V					
High	5125	Horizontal	-40.43				
	7687.5	Н	-44.75	-13.00	Pass		
	10250	Н					

#### Remark:

1. Remark"---" means that the emission level is too low to be measured

2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 7-20MHz							
Channel	Frequency	Spurious	Emission	Linsit (dDms)	Decult		
Channel	(MHz)	Polarization Level (dBm)		Limit (dBm)	Result		
	5015	Vertical	-40.78				
	7522.5	V	-44.03	-13.00	Pass		
Low	10030	V					
LOW	5015	Horizontal	-38.70				
	7522.5	Н	-43.18	-13.00	Pass		
	10030	Н					
	5070	Vertical	-41.56		Pass		
	7605	V	-44.93	-13.00			
Mid	10140	V					
IVIIG	5070	Horizontal	-39.20		Pass		
	7605	Н	-43.75	-13.00			
	10140	Н					
	5125	Vertical	-41.27				
	7687.5	V	-44.40	-13.00	Pass		
Lliab	10250	V					
High	5125	Horizontal	-39.01				
	7687.5	Н	-43.42	-13.00	Pass		
	10250	Н					

Remark:


1. Remark" --- " means that the emission level is too low to be measured

### 4.7. Frequency stability V.S. Temperature measurement

### <u>LIMIT</u>

2.5ppm

### **TEST CONFIGURATION**

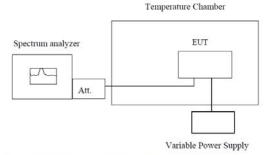

Note : Measurement setup for testing on Antenna connector

#### TEST PROCEDURE

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25℃ operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to  $-30^{\circ}$ C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- 6. Repeat step measure with  $10^{\circ}$ C increased per stage until the highest temperature of +50°C reached.


Refere	nce Frequency: LTE Ba	and 2 Middle cha	nnel=1880MHz,	20MHz Bandwidth	
Power supplied	Temperature (°C)	Frequer	ncy error	Limit (ppm)	Result
(Vdc)		Hz	ppm		Result
	-30	34	0.0479		
	-20	19	0.0268		
	-10	25	0.0352		
	0	36	0.0507		
3.80	10	38	0.0535	2.5	Pass
	20	12	0.0169		
	30	36	0.0507		
	40	27	0.0380		
	50	19	0.0268		
Referer	nce Frequency: LTE Ba	nd 4 Middle char	nel=1732.5MHz	,20MHz Bandwidth	า
Power supplied	Tomporature (°C)	Frequer	ncy error		Decult
(Vdc)	Temperature (℃)	Hz	ppm	– Limit (ppm)	Result
	-30	41	0.0237		
	-20	36	0.0208		Pass
3.80	-10	45	0.0260		
	0	36	0.0208		
	10	18	0.0104	2.5	
	20	44	0.0254		
	30	36	0.0208		
	40	34	0.0196		
	50	35	0.0202	-	
Refere	nce Frequency: LTE Ba	and 5 Middle cha	nnel=836.5MHz,	10MHz Bandwidth	
Power supplied		Frequency error			
(Vdc)	Temperature (℃)	Hz	ppm	– Limit (ppm)	Result
	-30	29	0.0347		
	-20	30	0.0359		
	-10	17	0.0203		
	0	25			
0.00		25	0.0299		
3.80	10	34	0.0299 0.0406	2.5	Pass
3.80	10 20			2.5	Pass
3.80		34	0.0406	2.5	Pass
3.80	20	34 18	0.0406 0.0215	2.5	Pass
3.80	20 30 40	34 18 22 19	0.0406 0.0215 0.0263 0.0227	2.5	Pass
	20 30 40 50	34 18 22 19 35	0.0406 0.0215 0.0263 0.0227 0.0418		
Refere	20 30 40 50 ence Frequency: LTE Ba	34 18 22 19 35 and 7 Middle cha	0.0406 0.0215 0.0263 0.0227 0.0418	20MHz Bandwidth	
	20 30 40 50	34 18 22 19 35 and 7 Middle cha	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz,		
Refere Power supplied	20 30 40 50 ence Frequency: LTE Ba	34 18 22 19 35 and 7 Middle cha Frequer	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz,	20MHz Bandwidth	
Refere Power supplied	20 30 40 50 ence Frequency: LTE Back Temperature (°C)	34 18 22 19 35 and 7 Middle cha Frequer Hz	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz, ncy error ppm	20MHz Bandwidth	
Refere Power supplied	20 30 40 50 ence Frequency: LTE Bac Temperature (°C) -30	34 18 22 19 35 and 7 Middle cha Frequer Hz 36	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz, ncy error ppm 0.0507	20MHz Bandwidth	
Refere Power supplied	20 30 40 50 ence Frequency: LTE Bac Temperature (°C) -30 -20 -10	34 18 22 19 35 and 7 Middle cha Frequer Hz 36 19 35	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz, ncy error ppm 0.0507 0.0268 0.0493	20MHz Bandwidth	
Refere Power supplied (Vdc)	20 30 40 50 ence Frequency: LTE Back Temperature (°C) -30 -20 -10 0	34 18 22 19 35 and 7 Middle cha Frequer Hz 36 19 35 15	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz, ncy error ppm 0.0507 0.0268 0.0493 0.0211	20MHz Bandwidth Limit (ppm)	Result
Refere Power supplied	20 30 40 50 ence Frequency: LTE Back Temperature (°C) -30 -20 -10 0 10	34 18 22 19 35 and 7 Middle cha Frequer Hz 36 19 35 15 37	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz, ncy error ppm 0.0507 0.0268 0.0493 0.0211 0.0521	20MHz Bandwidth	
Refere Power supplied (Vdc)	20 30 40 50 mce Frequency: LTE Base Temperature (°C) -30 -20 -10 0 10 20	34 18 22 19 35 and 7 Middle cha Frequer Hz 36 19 35 15 37 38	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz, ncy error ppm 0.0507 0.0268 0.0493 0.0211 0.0521 0.0535	20MHz Bandwidth Limit (ppm)	Result
Refere Power supplied (Vdc)	20 30 40 50 ence Frequency: LTE Back Temperature (°C) -30 -20 -10 0 10 20 30	34 18 22 19 35 and 7 Middle cha Frequer Hz 36 19 35 15 37 38 14	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz, ncy error ppm 0.0507 0.0268 0.0493 0.0211 0.0521 0.0535 0.0197	20MHz Bandwidth Limit (ppm)	Result
Refere Power supplied (Vdc)	20 30 40 50 mce Frequency: LTE Base Temperature (°C) -30 -20 -10 0 10 20	34 18 22 19 35 and 7 Middle cha Frequer Hz 36 19 35 15 37 38	0.0406 0.0215 0.0263 0.0227 0.0418 nnel=2535MHz, ncy error ppm 0.0507 0.0268 0.0493 0.0211 0.0521 0.0535	20MHz Bandwidth Limit (ppm)	Result

### 4.8. Frequency stability V.S. Voltage measurement

### <u>LIMIT</u>

2.5ppm

### **TEST CONFIGURATION**

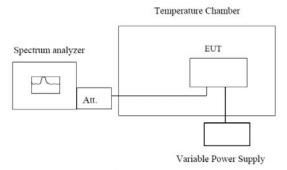

Note : Measurement setup for testing on Antenna connector

### TEST PROCEDURE

- 1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.
- 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.
- 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.


Referen	ce Frequency: LTE E	and 2 Middle cha	nnel=1880MHz,2	0MHz Bandwidth	
Temperature (℃)	Power supplied	Frequen	cy error	Limit (ppm)	Result
remperature ( C)	(Vdc)	Hz	ppm	Emit (ppm)	Result
	4.35	31	0.0437		
25	3.80	40	0.0563	2.5	Pass
	3.60	28	0.0394		
Referenc	e Frequency: LTE Ba	and 4 Middle chan	nel=1732.5MHz,	20MHz Bandwidtl	า
Temperature (℃)	Power supplied	Frequen	icy error	Limit (ppm)	Result
Temperature (C)	(Vdc)	Hz	ppm	Liniit (ppin)	Result
	4.35	32	0.0185		
25	3.80	17	0.0098	2.5	Pass
	3.60	29	0.0167		
Reference	ce Frequency: LTE B	and 5 Middle char	nnel=836.5MHz,1	0MHz Bandwidth	l
Temperature (℃)	Power supplied	Frequen	icy error	Limit (ppm)	Result
remperature (C)	(Vdc)	Hz	ppm	Liniit (ppin)	Result
	4.35	22	0.0263		
25	3.80	29	0.0347	2.5	Pass
	3.60	17	0.0203		
Referen	ce Frequency: LTE E	and 7 Middle cha	nnel=2535MHz,2	0MHz Bandwidth	
Temperature (℃)	Power supplied	Frequen	icy error	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Limit (ppm)	Result
	4.35	15	0.0211		
25	3.80	28	0.0394	2.5	Pass
	3.60	19	0.0268		

### 4.9. Peak-Average Ratio

<u>LIMIT</u>

13dB

### **TEST CONFIGURATION**

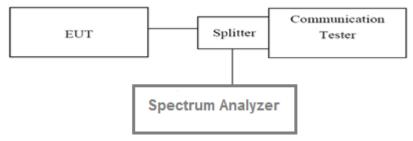

#### TEST PROCEDURE

According with KDB 971168

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve

5. The measurement interval was set depending on the type of signal analyzed. For continuous signals(>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal " RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the " on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

LTE Band 2-20MHz								
Modulation	QPS	SK	16Q	AM	Limit/dD)	Decult		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	4.36	5.28	3.84	5.43	13	Pass		
Mid	4.47	5.74	4.37	4.95	13	Pass		
High	4.52	6.48	4.75	4.74	13	Pass		


LTE Band 4-20MHz								
Modulation	QPS	SK	16Q	AM	Limit(dP)	Decult		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	5.15	4.75	4.52	4.65	13	Pass		
Mid	4.84	5.47	3.98	5.38	13	Pass		
High	4.75	4.42	4.52	4.74	13	Pass		


LTE Band 5-10MHz								
Modulation	QPS	SK	16Q	AM	Limit(dP)	Decult		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	5.38	4.76	4.36	5.75	13	Pass		
Mid	4.47	5.25	4.53	4.98	13	Pass		
High	4.21	4.74	4.76	4.52	13	Pass		

LTE Band 7-20MHz								
Modulation	QPS	SK	16Q	AM	Limit(dP)	Result		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	4.34	5.45	4.25	6.14	13	Pass		
Mid	4.75	5.78	4.63	4.85	13	Pass		
High	4.67	6.02	4.21	4.76	13	Pass		

# 5. Test Setup Photos of the EUT

Radiated emission:

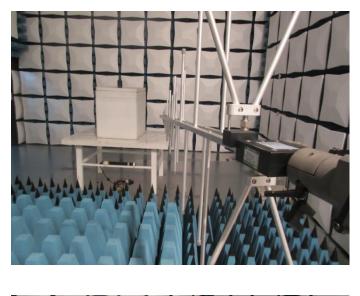

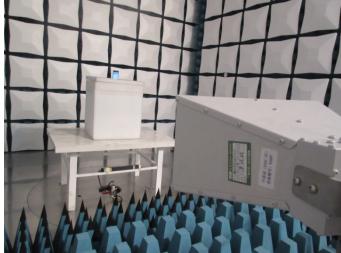

# 6. External and Internal Photos of the EUT

Reference to the test report No. TRE1606007401

.....End of Report.....