

Test Plot 1#: GSM 850_Head Left Cheek_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.295$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.211 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.763 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.253 W/kg
SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.148 W/kg
 Maximum value of SAR (measured) = 0.205 W/kg

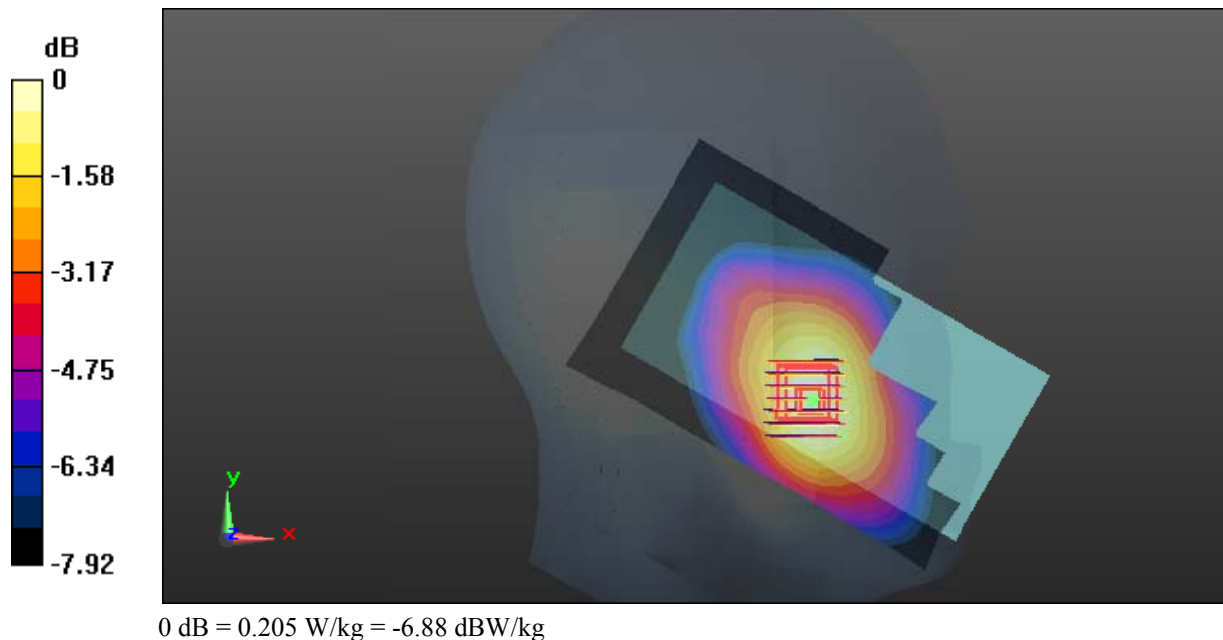

Test Plot 2#: GSM 850_Head Left Tilt_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.295$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0992 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.322 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.0945 W/kg

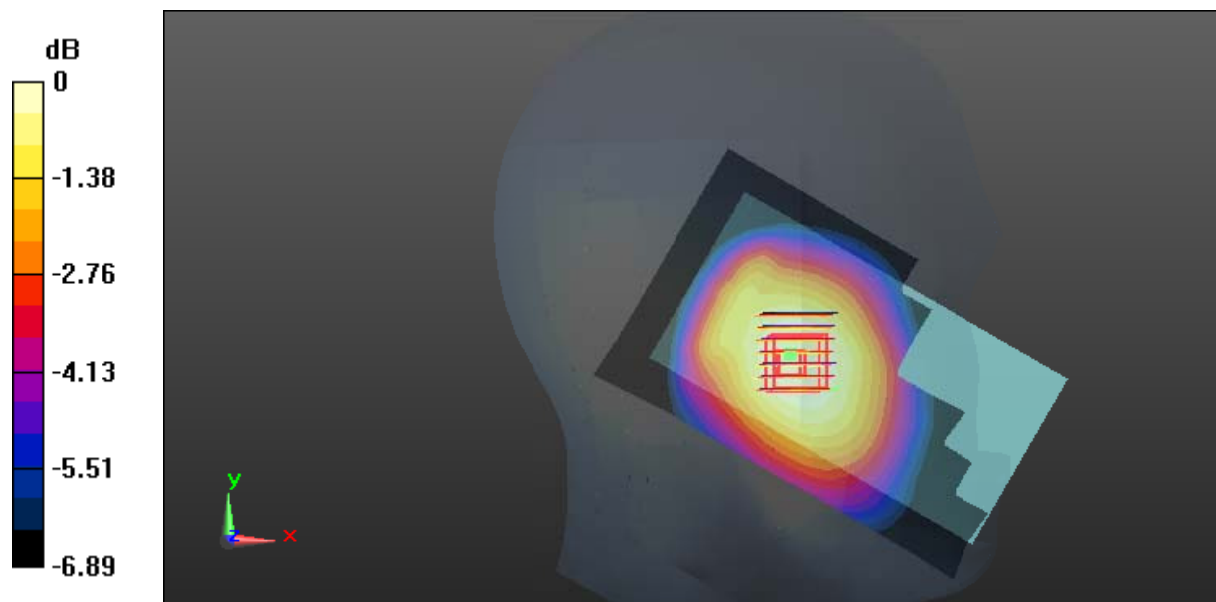

0 dB = 0.0945 W/kg = -10.25 dBW/kg

Test Plot 3#: GSM 850_Head Right Cheek_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.295$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.144 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.710 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.109 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

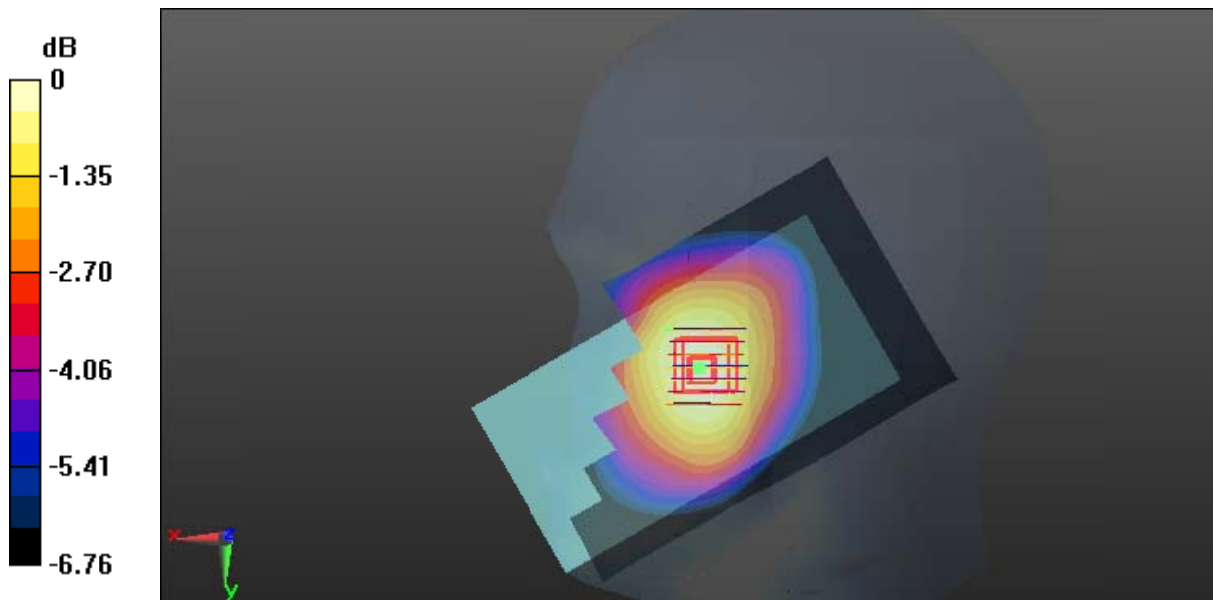

0 dB = 0.144 W/kg = -8.42 dBW/kg

Test Plot 4#: GSM 850_Head Right Tilt_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.295$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0872 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.318 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 0.100 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.068 W/kg
 Maximum value of SAR (measured) = 0.0868 W/kg

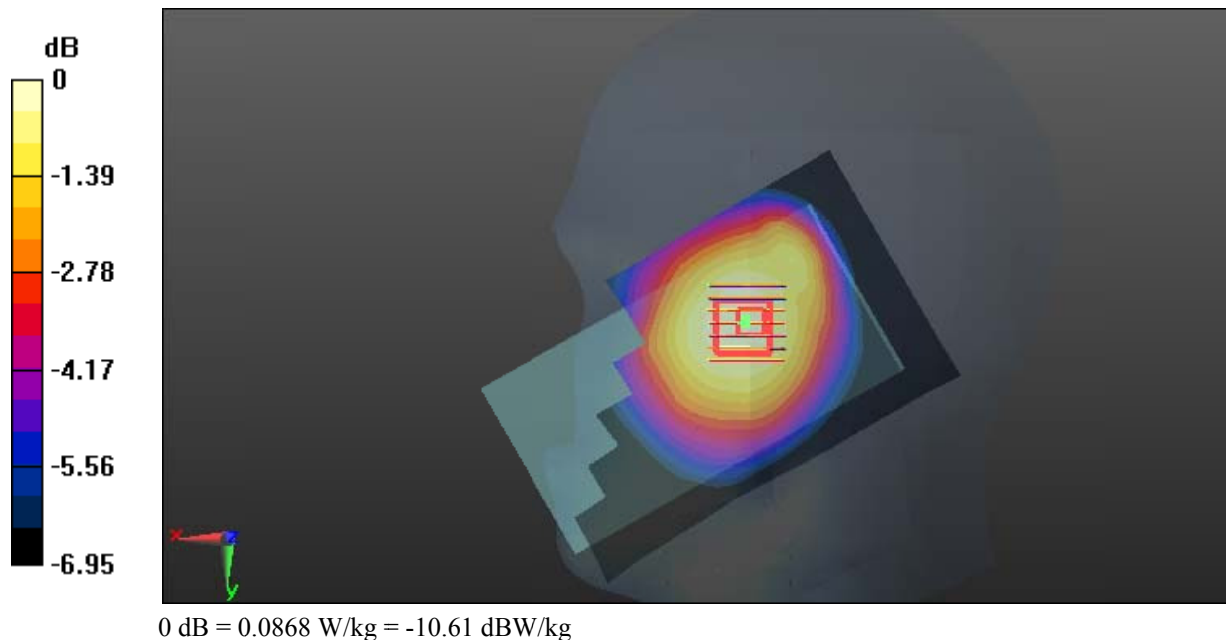

Test Plot 5#: GSM 850_Body Worn Back_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8
 Medium parameters used: 836.6 MHz; $\sigma = 0.987 \text{ S/m}$; $\epsilon_r = 54.49$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.741 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.91 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.360 W/kg

Maximum value of SAR (measured) = 0.788 W/kg

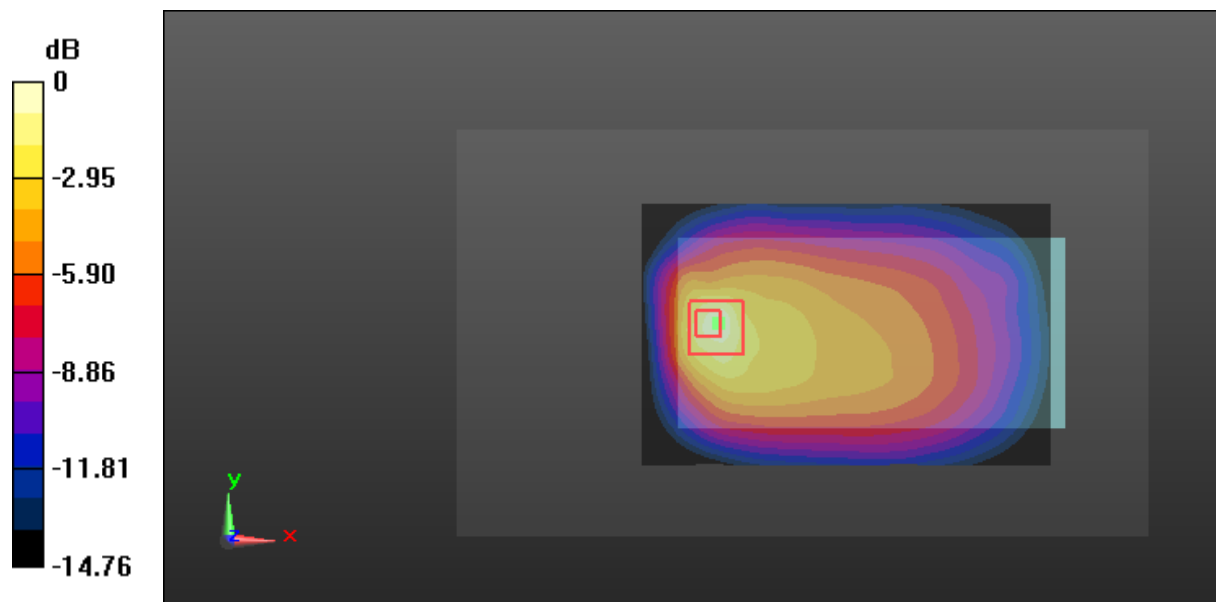

0 dB = 0.788 W/kg = -1.03 dBW/kg

Test Plot 6#: GSM 850_Body Back_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2
 Medium parameters used: 836.6 MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 54.49$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.529 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.17 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.719 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.264 W/kg

Maximum value of SAR (measured) = 0.469 W/kg

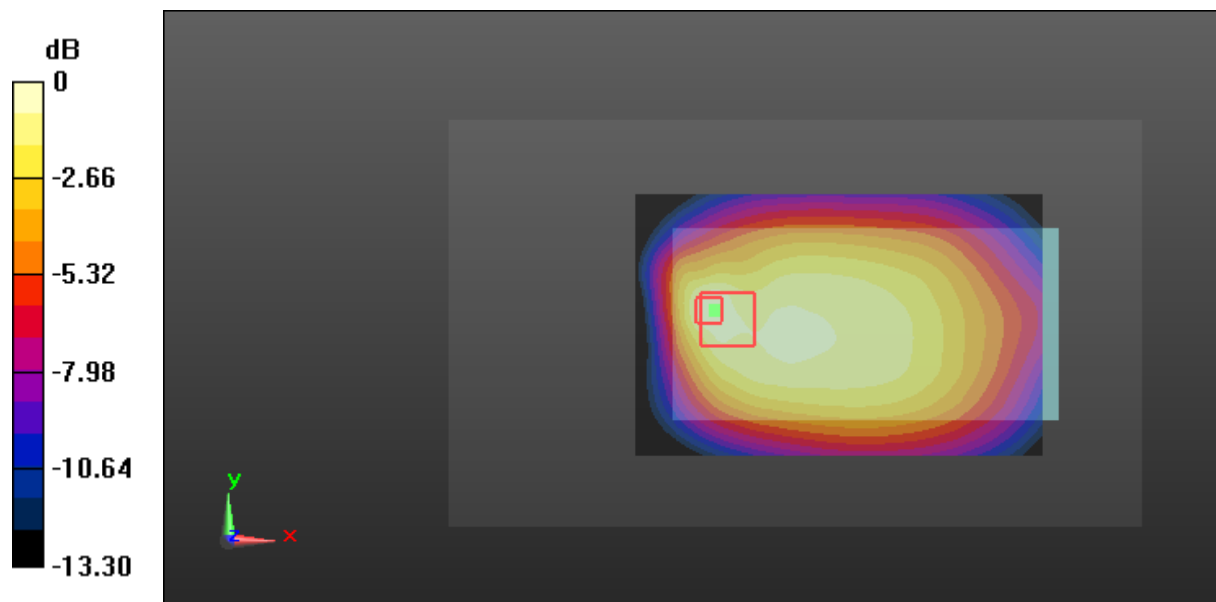

0 dB = 0.469 W/kg = -3.29 dBW/kg

Test Plot 7#: GSM 850_Body Left_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2
 Medium parameters used: 836.6 MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 54.49$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.256 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.26 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.352 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.172 W/kg

Maximum value of SAR (measured) = 0.267 W/kg

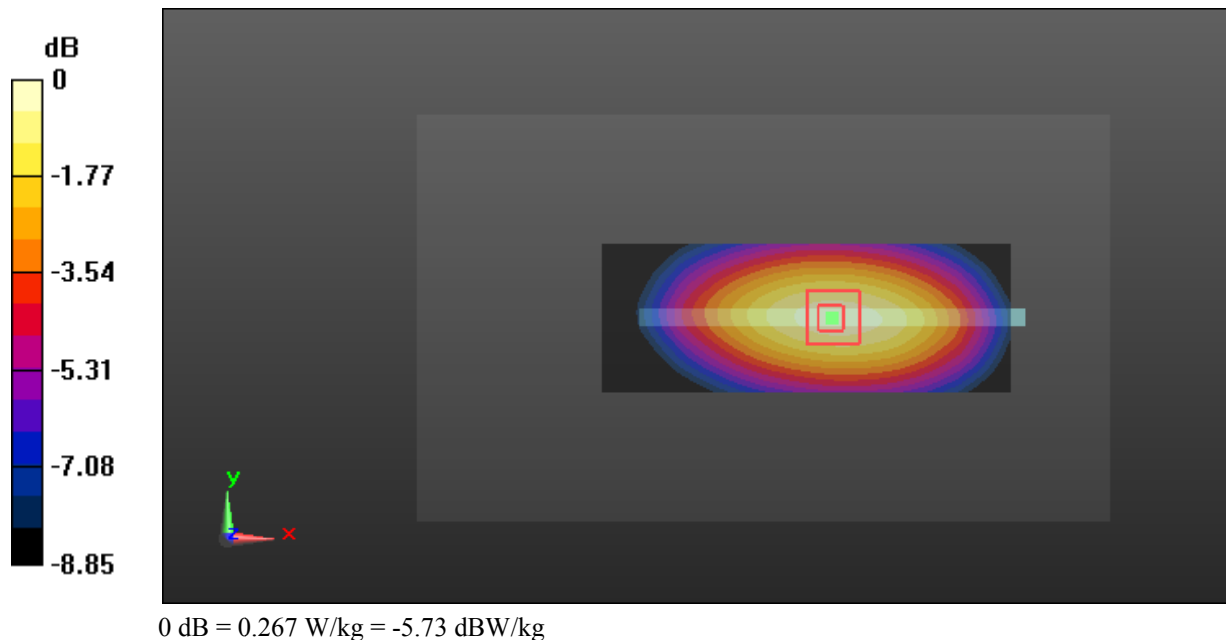

Test Plot 8#: GSM 850_Body Right_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2
 Medium parameters used: 836.6 MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 54.49$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.182 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.74 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

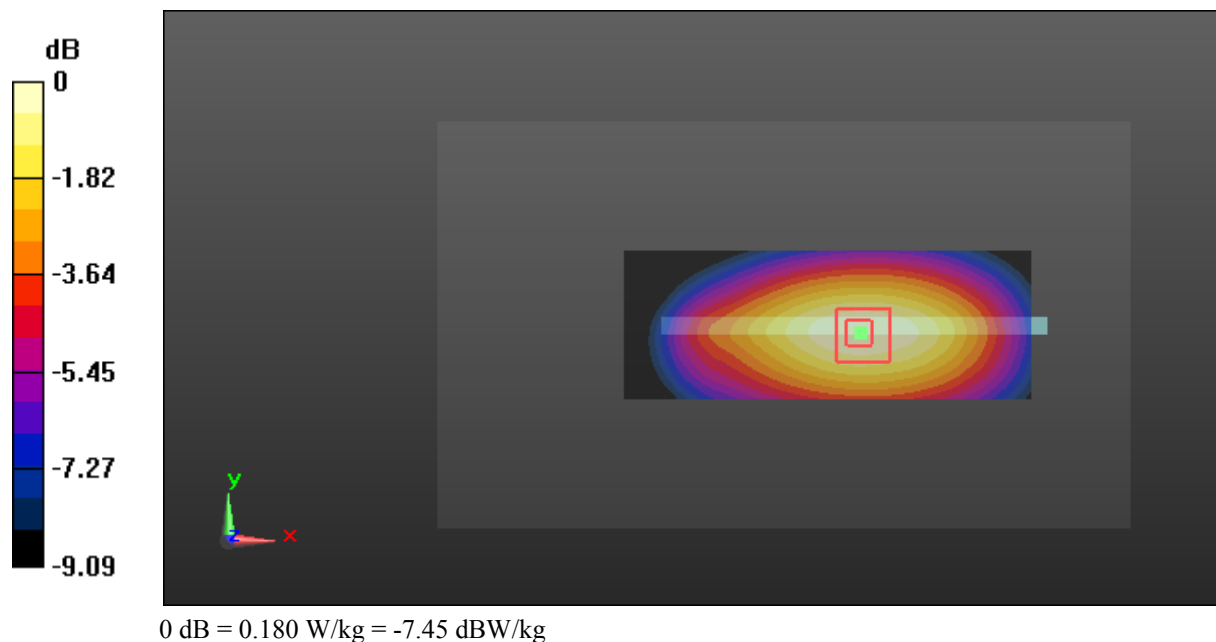

Test Plot 9#: GSM 850_Body Bottom_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GPRS-4 slot; Frequency: 836.6 MHz; Duty Cycle: 1:2
 Medium parameters used: 836.6 MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 54.49$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0922 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.688 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0900 W/kg

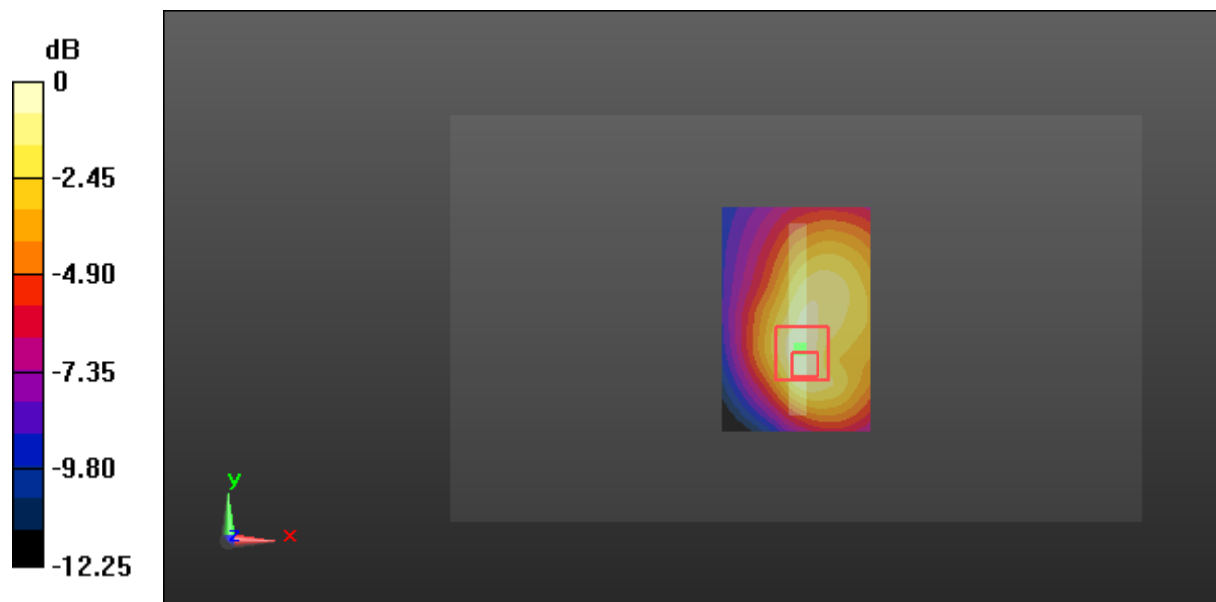

0 dB = 0.0900 W/kg = -10.46 dBW/kg

Test Plot 10#: GSM 1900_Head Left Cheek_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.116 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.577 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.082 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

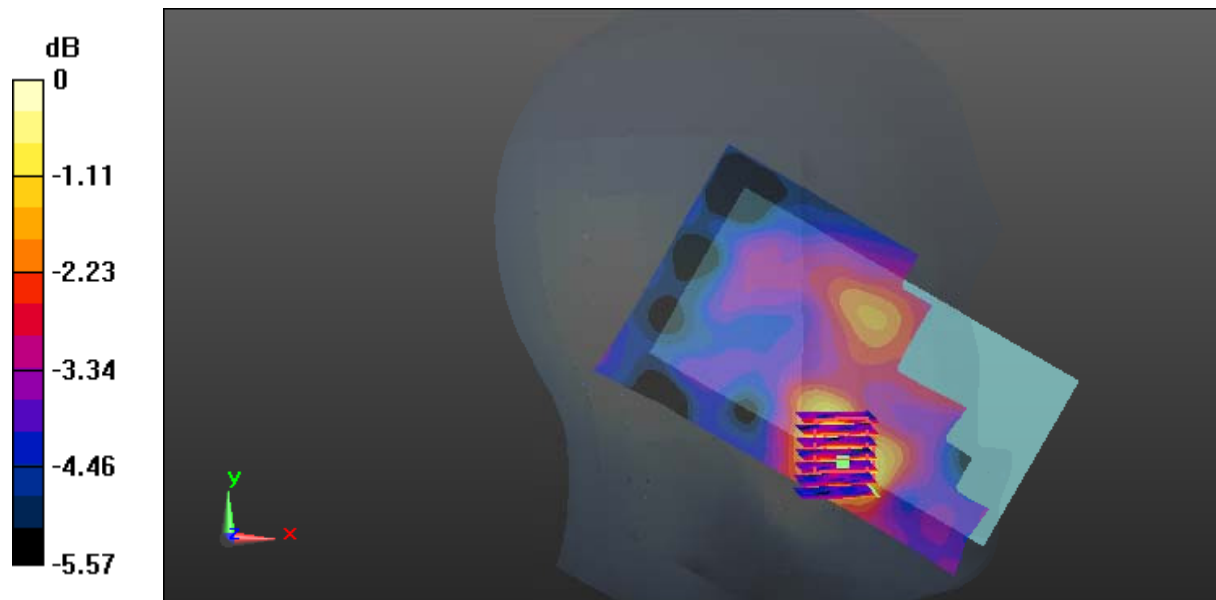

0 dB = 0.125 W/kg = -9.03 dBW/kg

Test Plot 11#: GSM 1900_Head Left Tilt_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0657 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.272 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 0.0850 W/kg

SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0641 W/kg

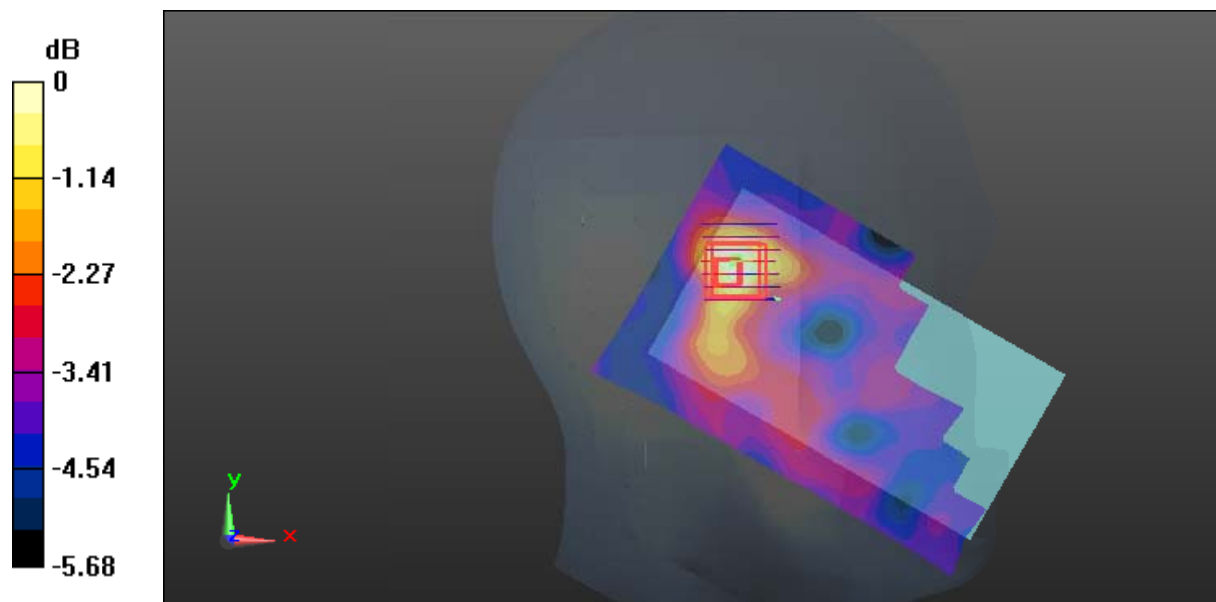

0 dB = 0.0641 W/kg = -11.93 dBW/kg

Test Plot 12#: GSM 1900_Head Right Cheek_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.094 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.093 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

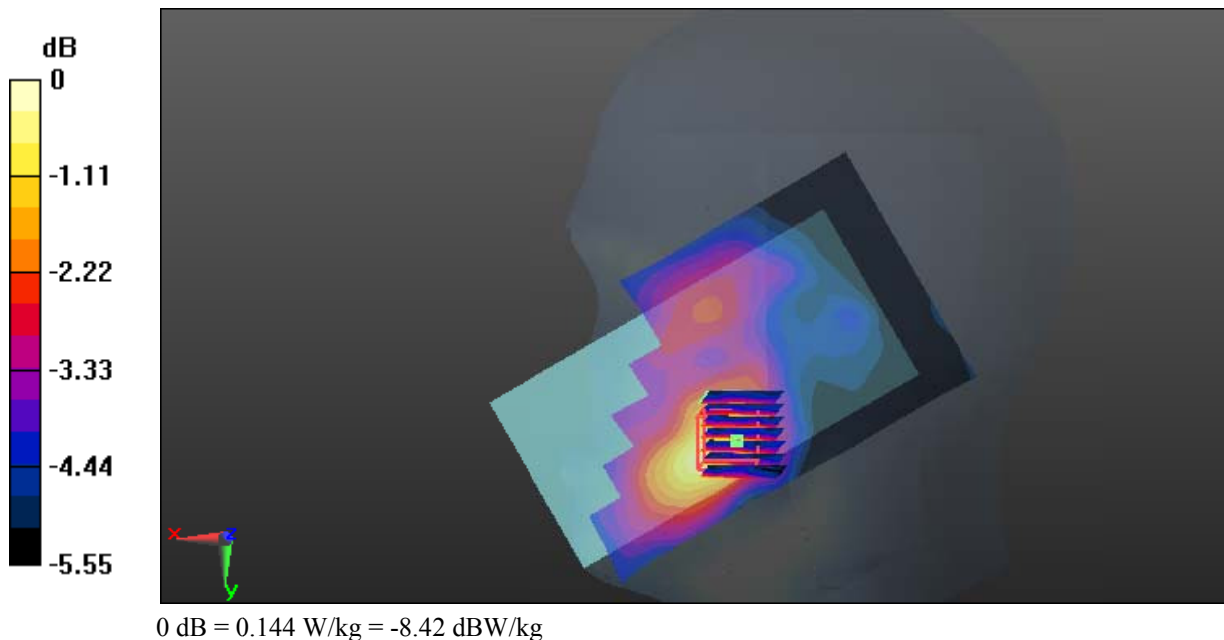

Test Plot 13#: GSM 1900_Head Right Tilt_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0648 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.229 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0636 W/kg

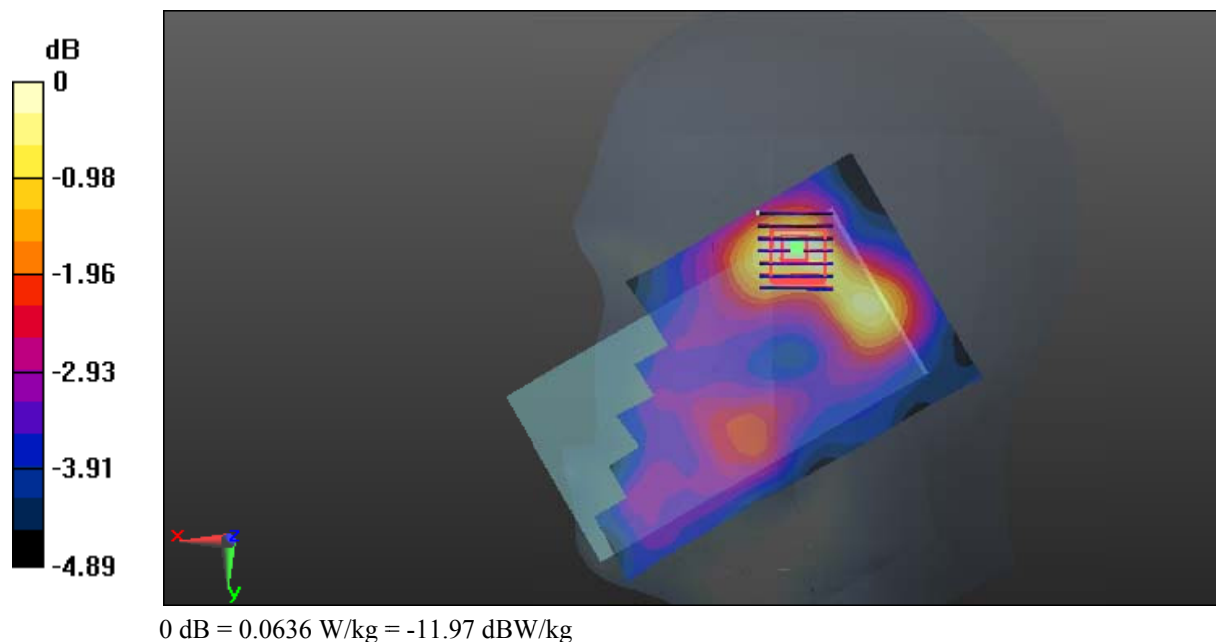

Test Plot 14#: GSM 1900_Body Worn Back_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.377 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.807 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.302 W/kg

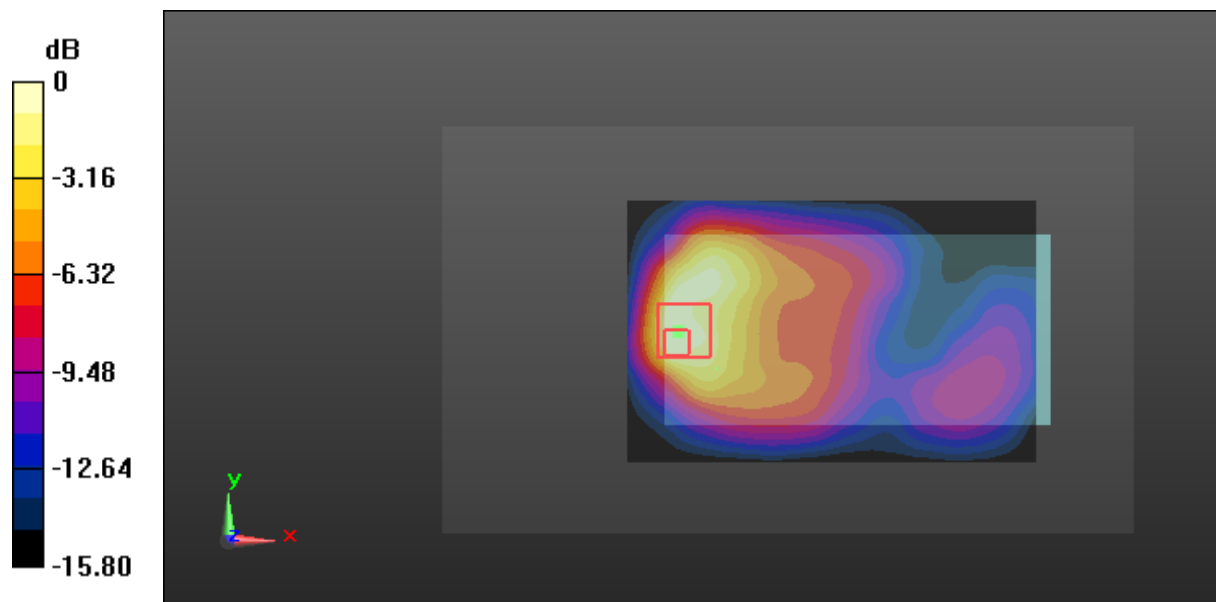

0 dB = 0.302 W/kg = -5.20 dBW/kg

Test Plot 15#: GSM 1900_Body Back_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.232 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 7.026 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.371 W/kg
SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.110 W/kg
 Maximum value of SAR (measured) = 0.209 W/kg

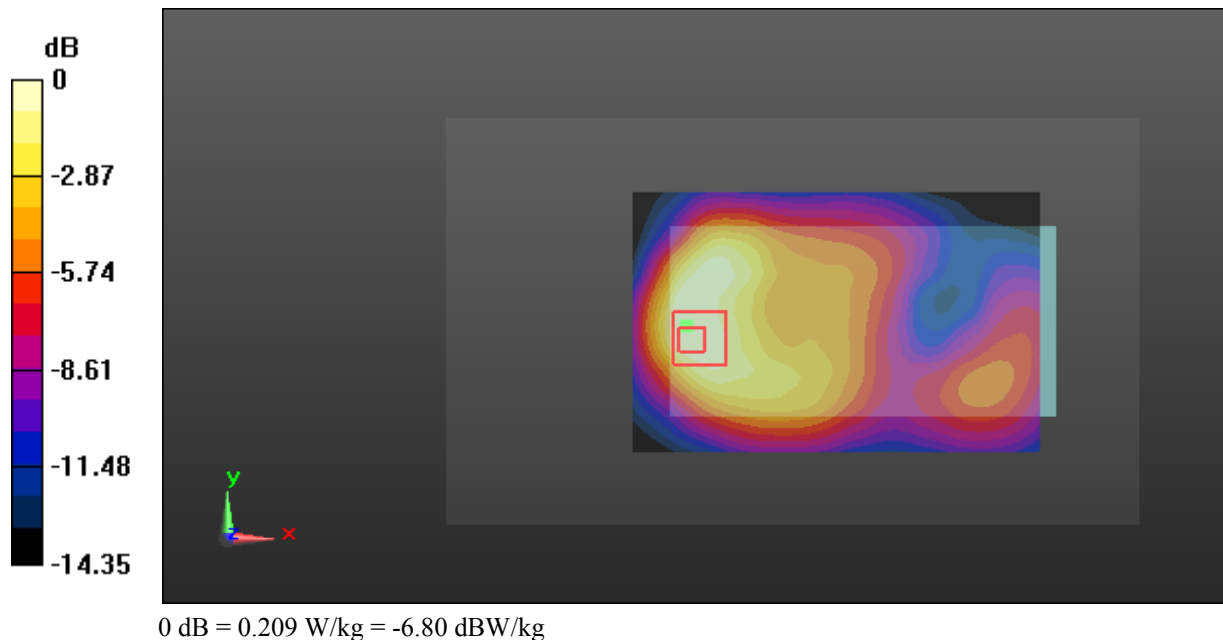

Test Plot 16#: GSM 1900_Body Left_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.114 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.334 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.173 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.114 W/kg

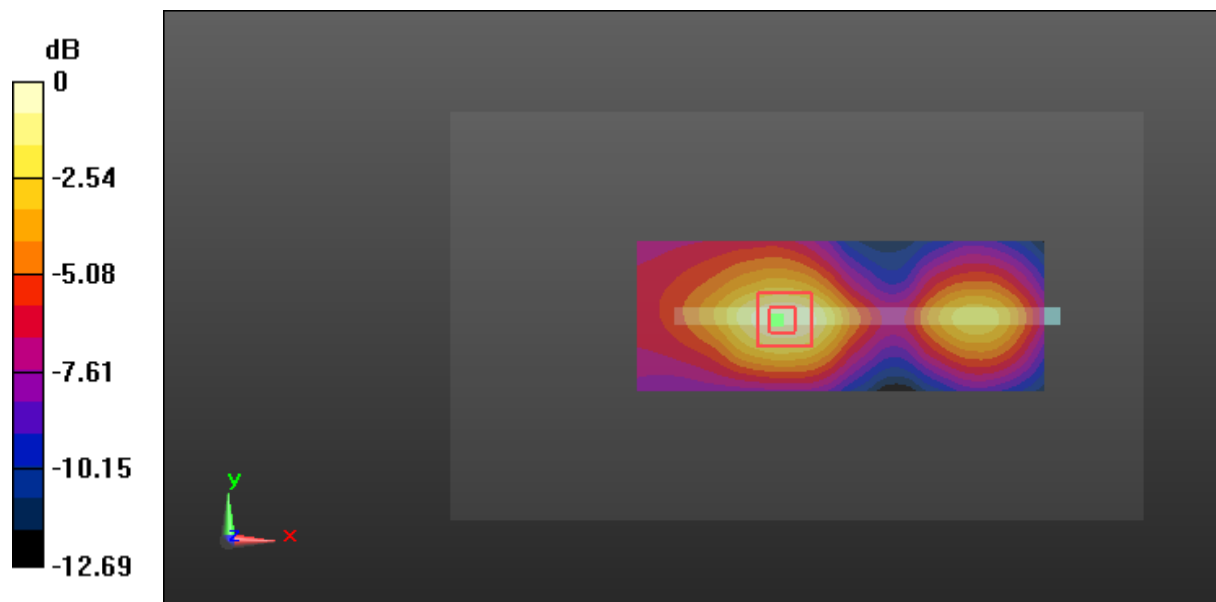

0 dB = 0.114 W/kg = -9.43 dBW/kg

Test Plot 17#: GSM 1900_Body Right_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: 1880 MHz; $\sigma = 1.574$ S/m; $\epsilon_r = 51.148$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.151 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.551 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.078 W/kg

Maximum value of SAR (measured) = 0.144 W/kg

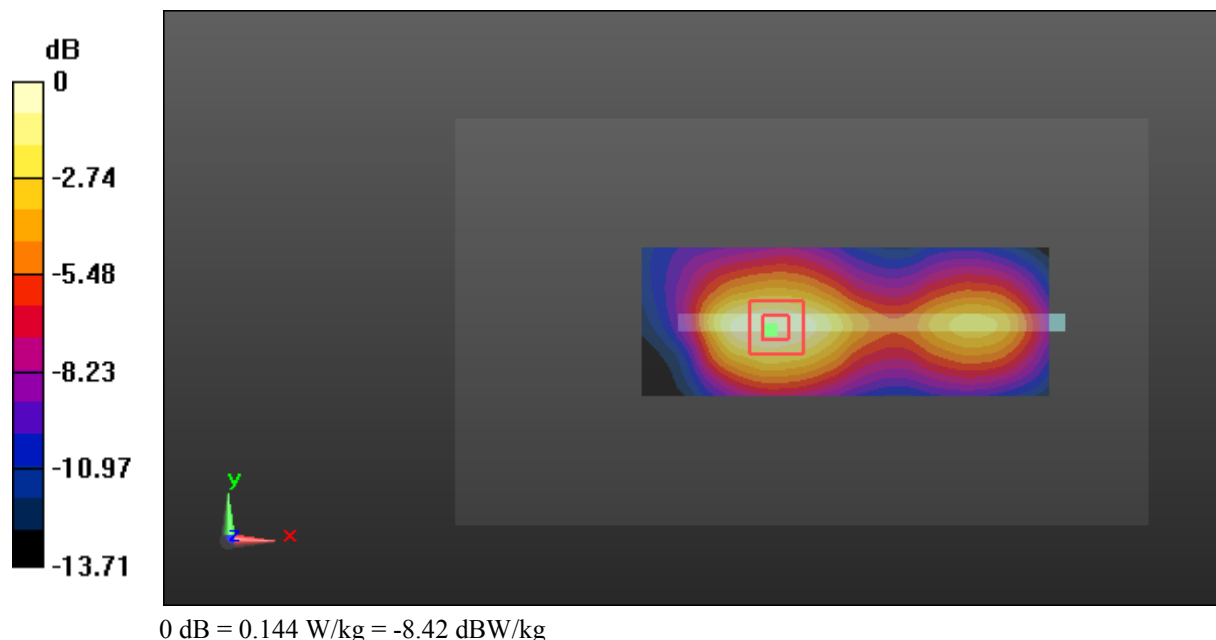

Test Plot 18#: GSM 1900_Body Bottom_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic GPRS-4 slot; Frequency: 1880 MHz; Duty Cycle: 1:2
 Medium parameters used: 1880 MHz; $\sigma = 1.574$ S/m; $\epsilon_r = 51.148$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.299 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.39 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.146 W/kg

Maximum value of SAR (measured) = 0.295 W/kg

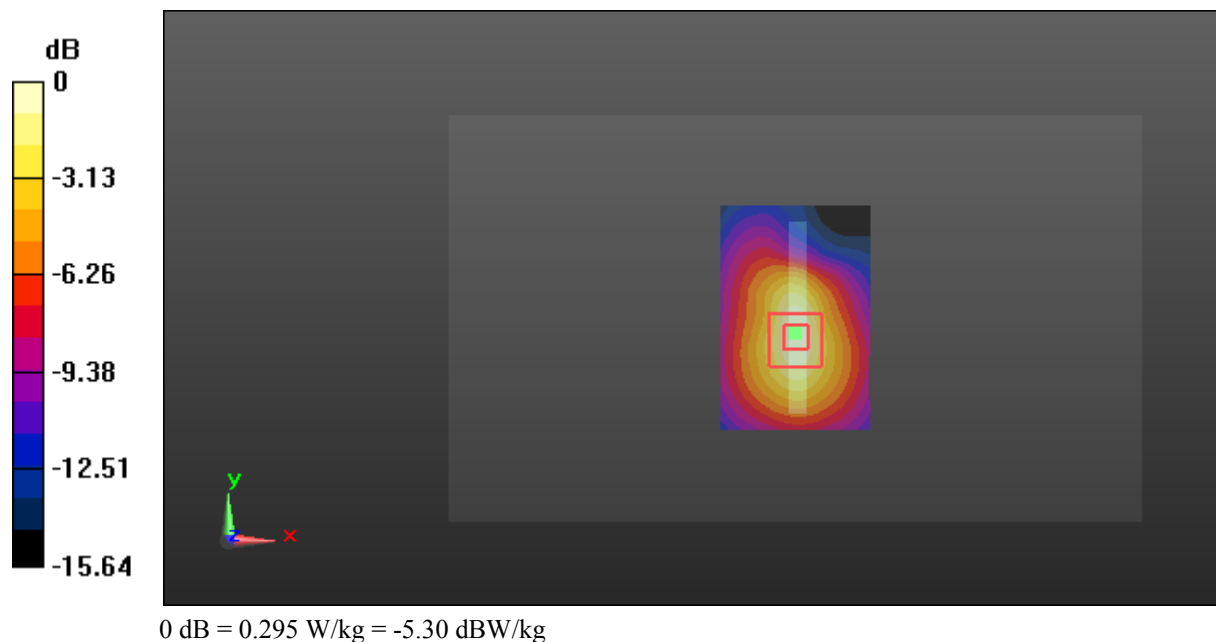

Test Plot 19#: WCDMA Band 2_Head Left Cheek_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.143 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.409 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.141 W/kg

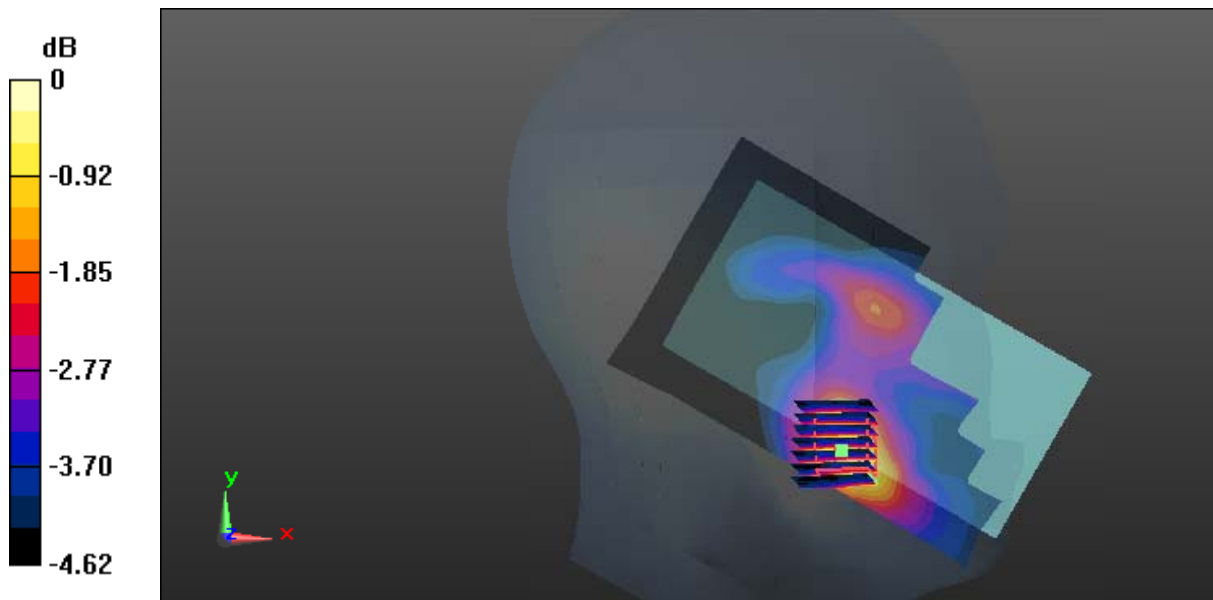

0 dB = 0.141 W/kg = -8.51 dBW/kg

Test Plot 20#: WCDMA Band 2_Head Left Tilt_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0628 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.576 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0633 W/kg

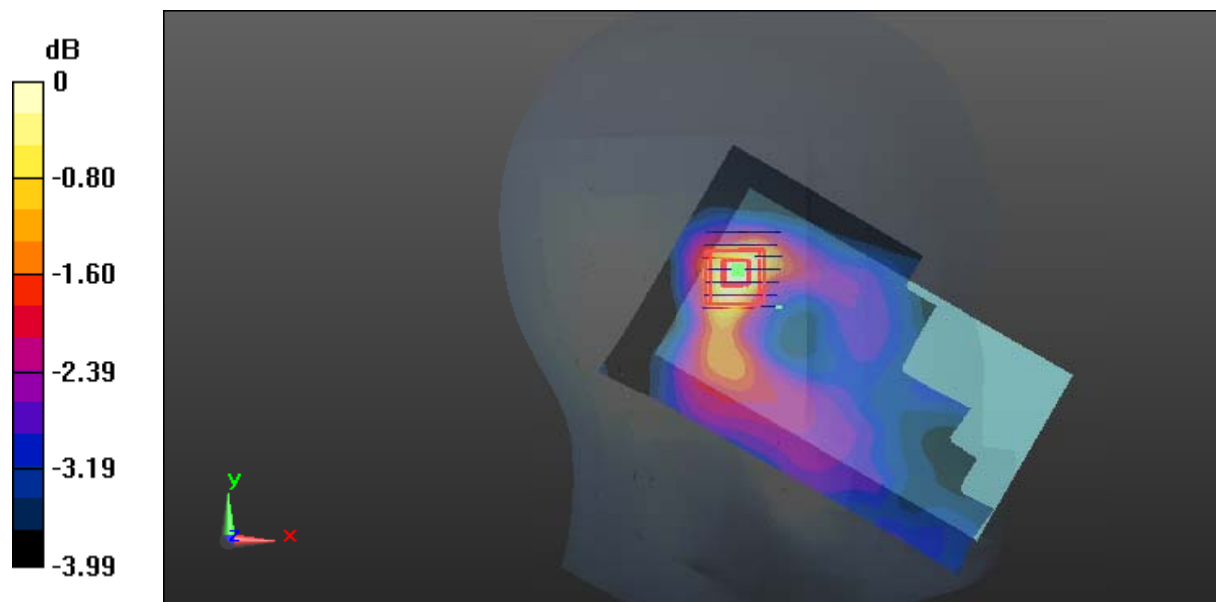

0 dB = 0.0633 W/kg = -11.99 dBW/kg

Test Plot 21#: WCDMA Band 2_Head Right Cheek_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.192 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.672 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.119 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

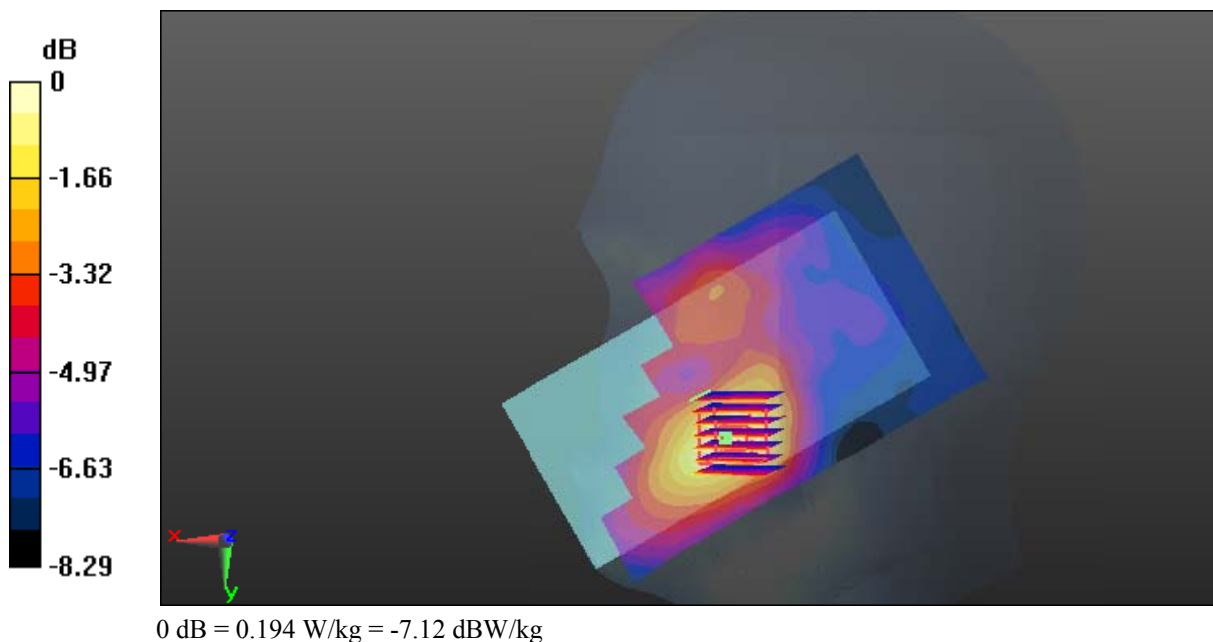

Test Plot 22#: WCDMA Band 2_Head Right Tilt_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0723 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.015 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.0670 W/kg

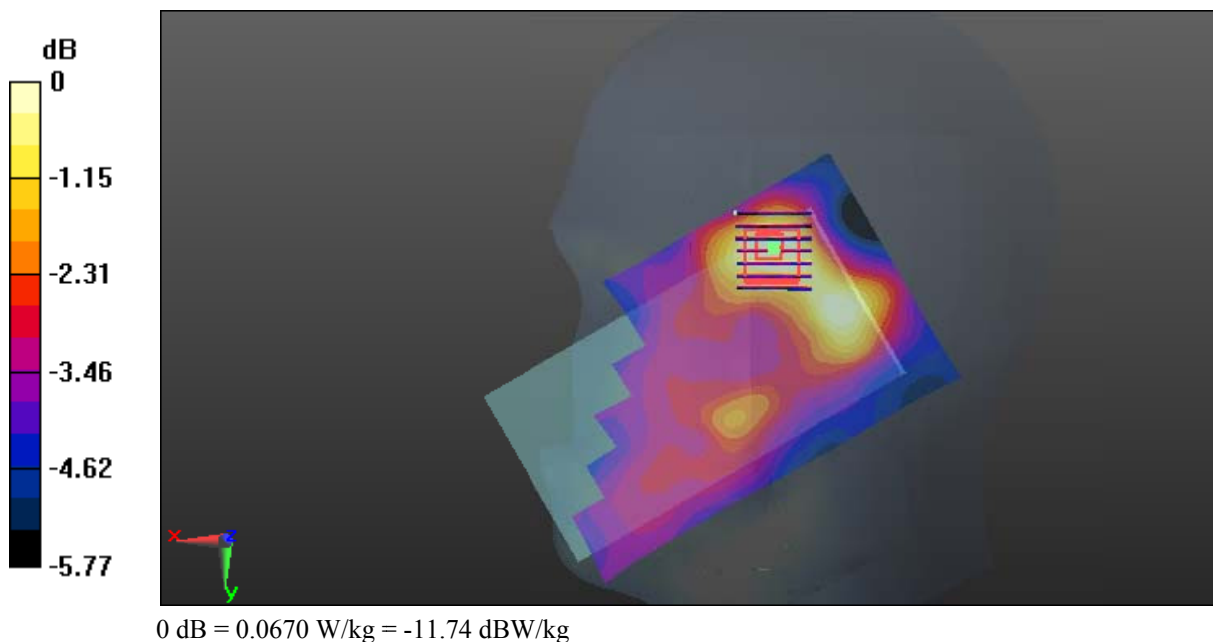

Test Plot 23#: WCDMA Band 2_Body Worn Back_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.389 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.850 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.192 W/kg

Maximum value of SAR (measured) = 0.376 W/kg

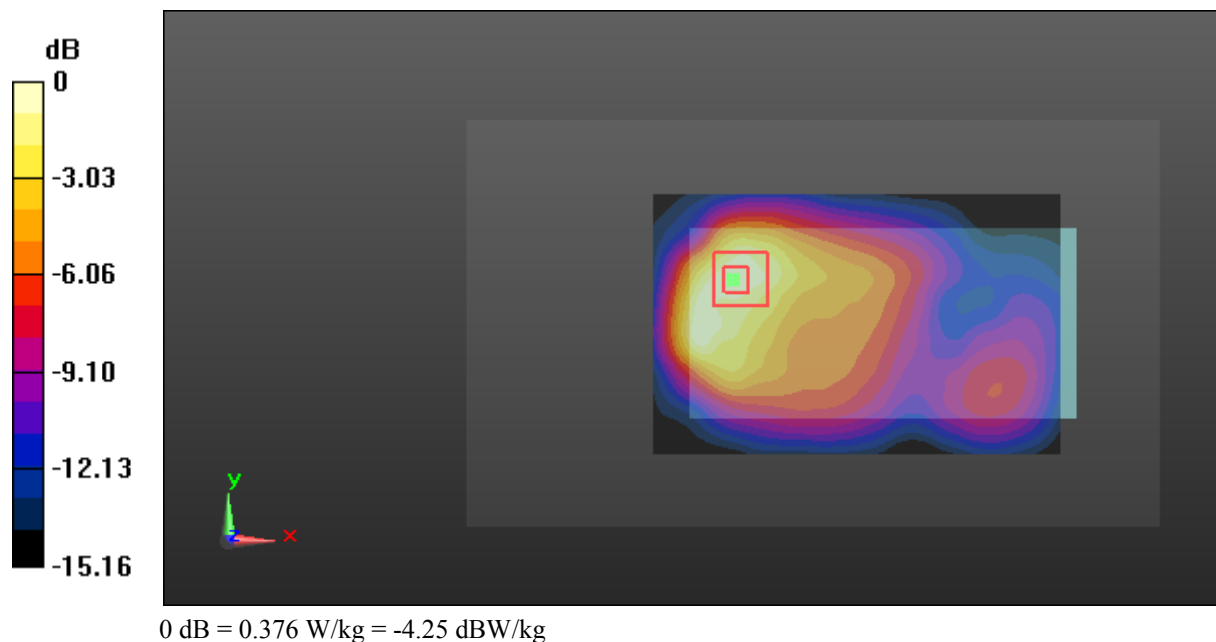

Test Plot 24#: WCDMA Band 2_Body Back_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.164 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.365 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.272 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.084 W/kg

Maximum value of SAR (measured) = 0.163 W/kg

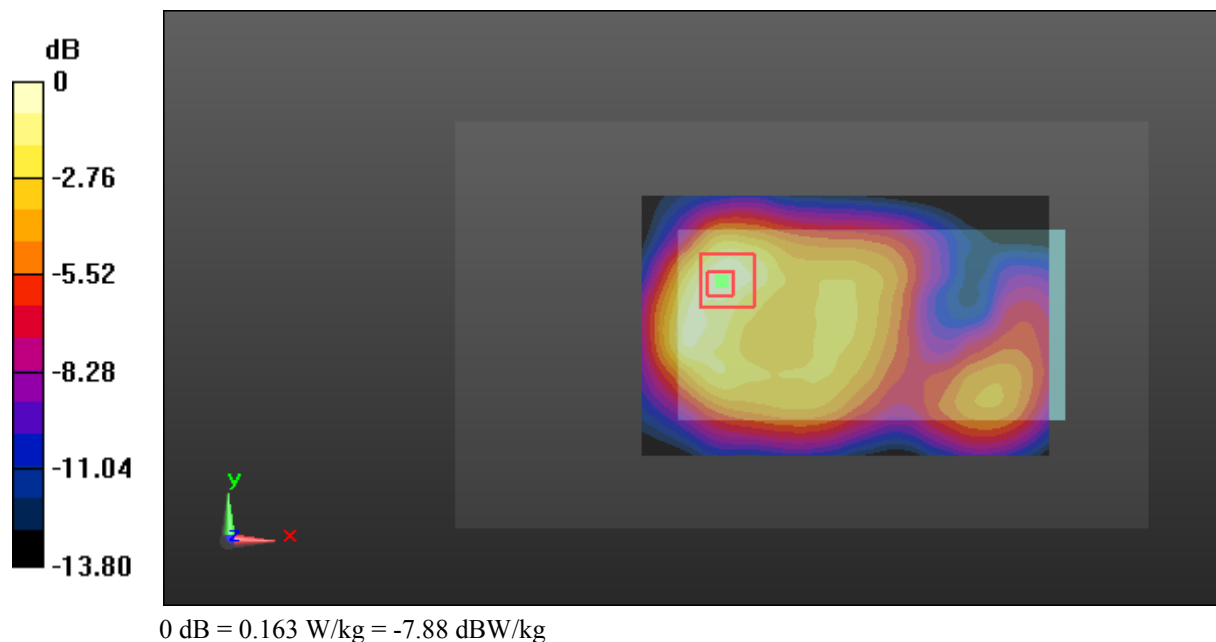

Test Plot 25#: WCDMA Band 2_Body Left_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0782 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.927 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.041 W/kg

Maximum value of SAR (measured) = 0.0759 W/kg

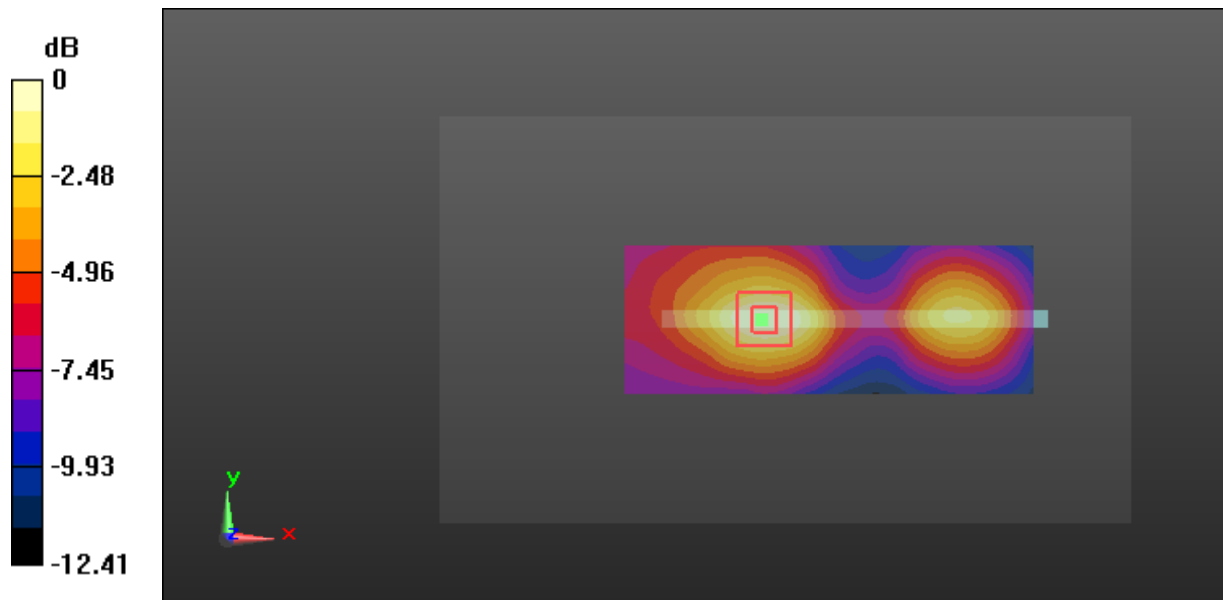

0 dB = 0.0759 W/kg = -11.20 dBW/kg

Test Plot 26#: WCDMA Band 2_Body Right_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.121 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.840 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.109 W/kg

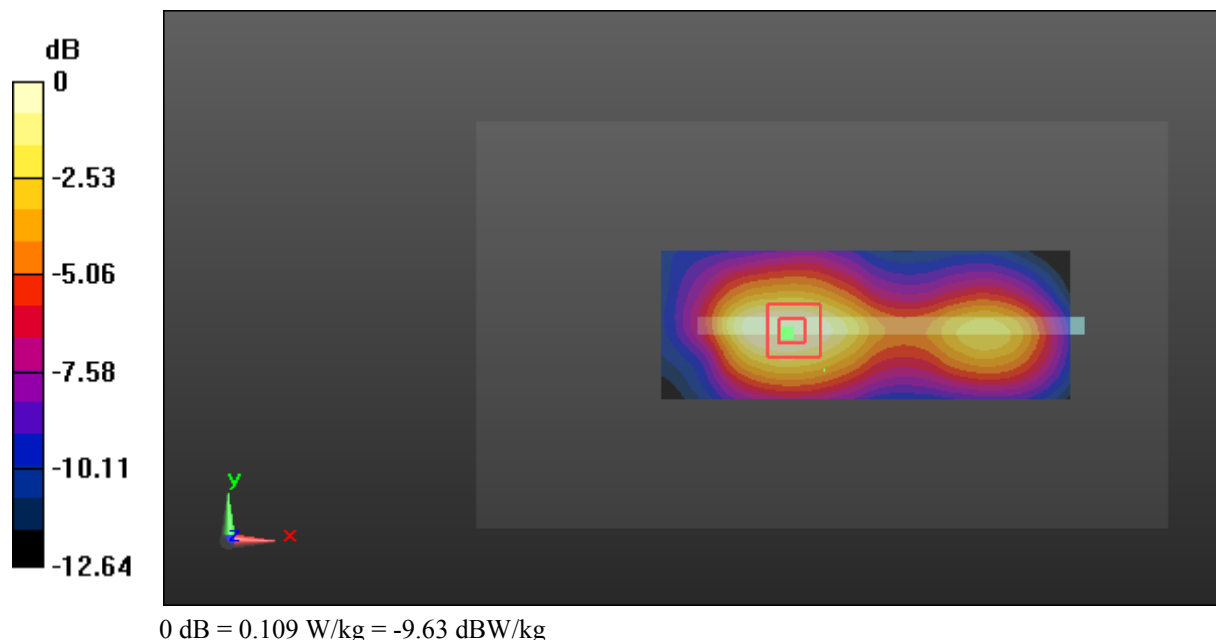

Test Plot 27#: WCDMA Band 2_Body Bottom_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574$ S/m; $\epsilon_r = 51.148$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.216 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.67 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.311 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.206 W/kg

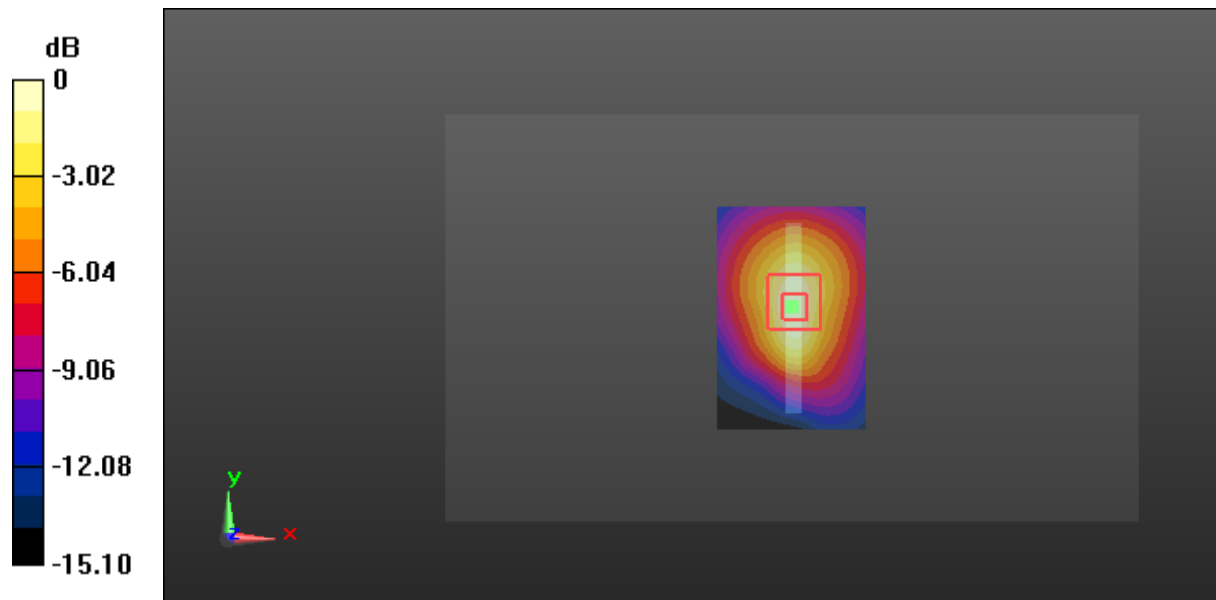

0 dB = 0.206 W/kg = -6.86 dBW/kg

Test Plot 28#: WCDMA Band 5_Head Left Cheek_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.295$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0378 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 2.451 V/m; Power Drift = 0.18 dB
 Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.026 W/kg
 Maximum value of SAR (measured) = 0.0356 W/kg

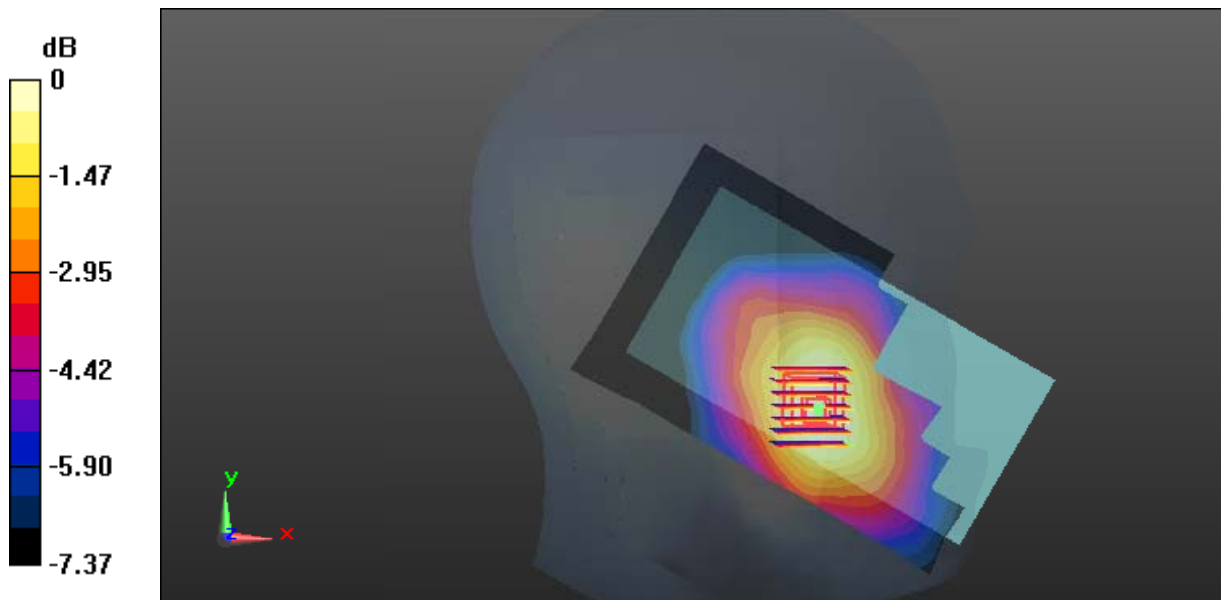

0 dB = 0.0356 W/kg = -14.49 dBW/kg

Test Plot 29#: WCDMA Band 5_Head Left Tilt_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.295$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0251 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.671 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 0.0280 W/kg
SAR(1 g) = 0.022 W/kg; SAR(10 g) = 0.019 W/kg
 Maximum value of SAR (measured) = 0.0227 W/kg

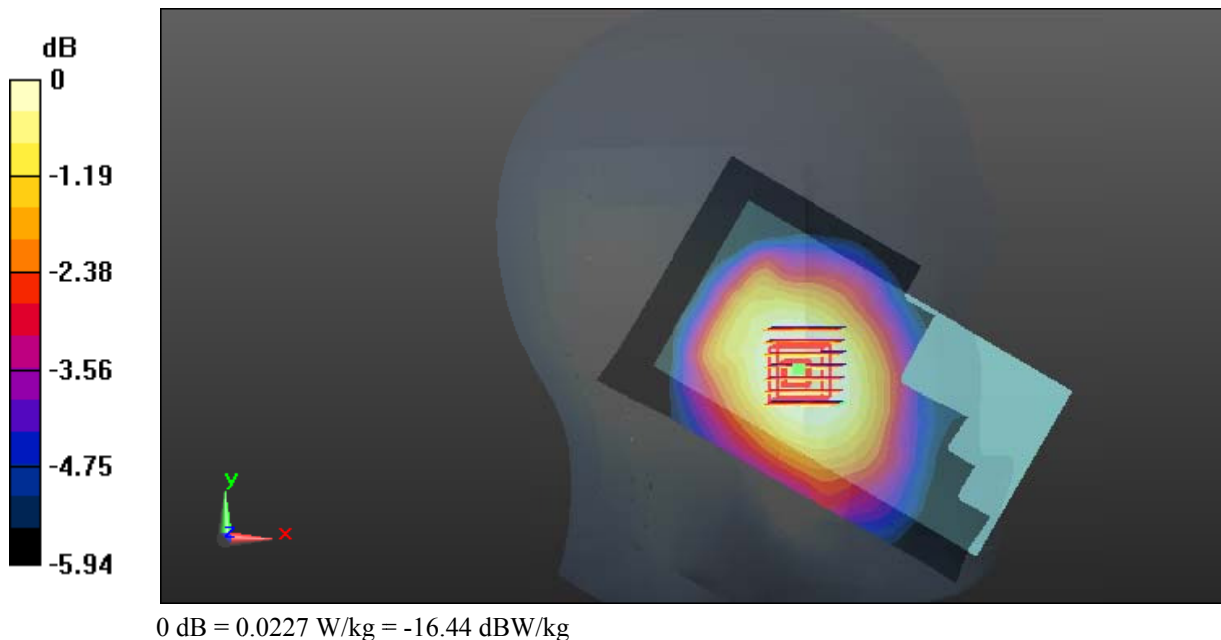

Test Plot 30#: WCDMA Band 5_Head Right Cheek_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.295$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0291 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 2.160 V/m; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 0.0310 W/kg
SAR(1 g) = 0.026 W/kg; SAR(10 g) = 0.021 W/kg
 Maximum value of SAR (measured) = 0.0271 W/kg

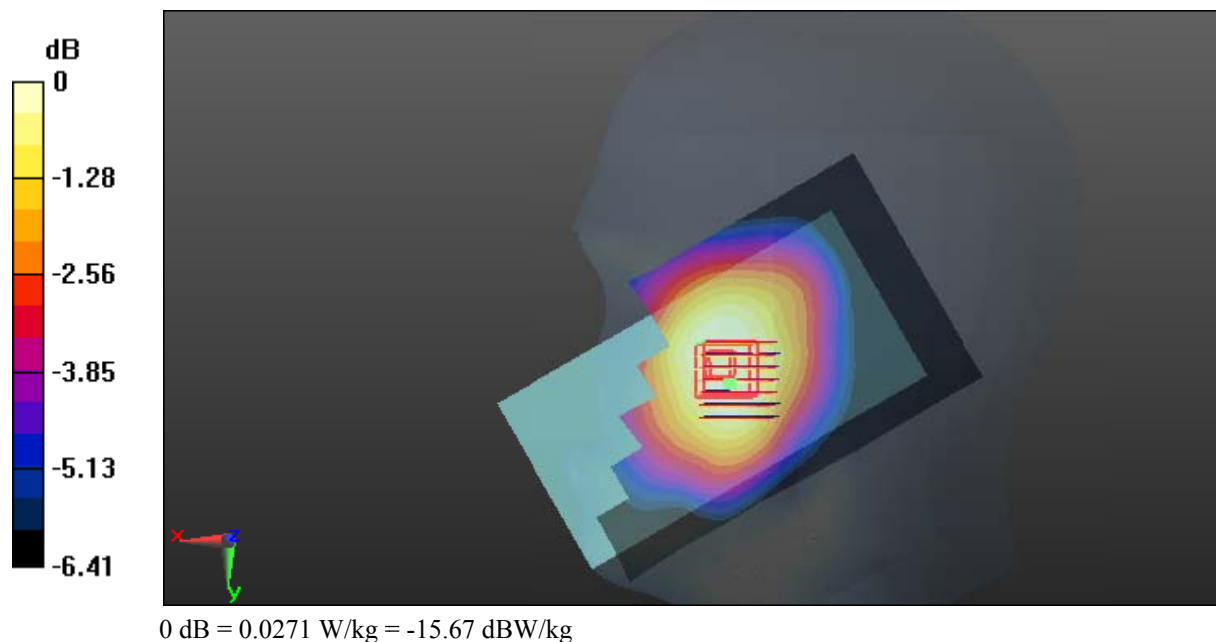

Test Plot 31#: WCDMA Band 5_Head Right Tilt_Middle Channel**DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121**

Communication System: WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
Medium parameters used: 836.6 MHz; $\sigma = 0.929$ S/m; $\epsilon_r = 41.295$; $\rho = 1000$ kg/m³ ;
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0358 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.324 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0390 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.027 W/kg

Maximum value of SAR (measured) = 0.0329 W/kg

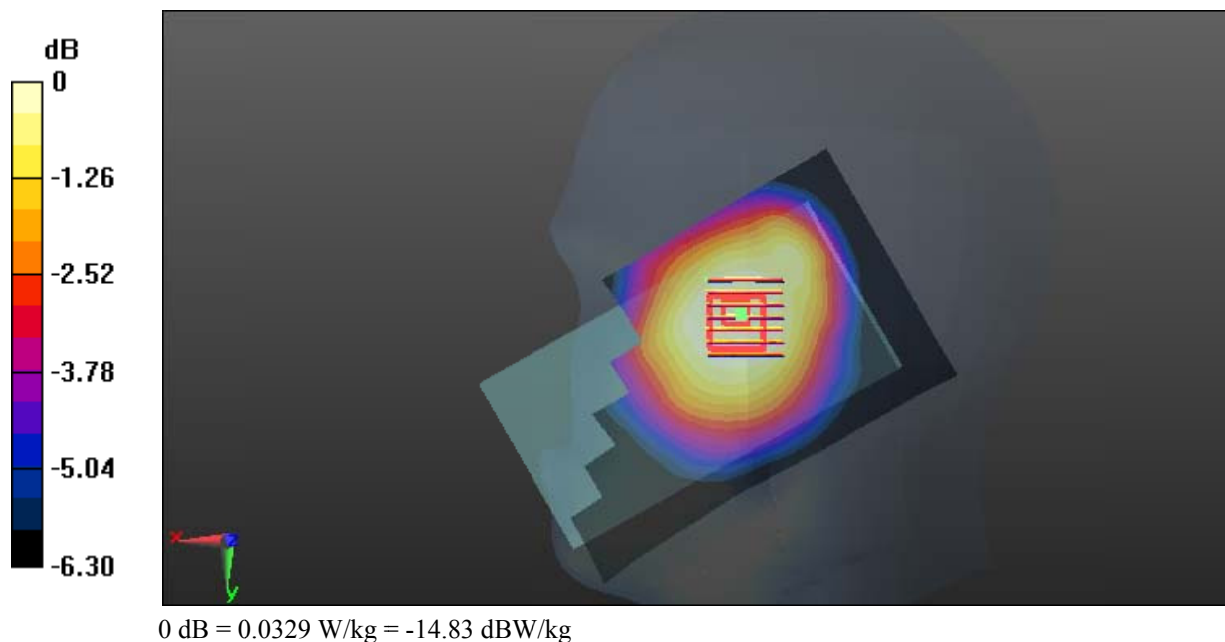

Test Plot 32#: WCDMA Band 5_Body Worn Back_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.987 \text{ S/m}$; $\epsilon_r = 54.49$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.817 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.98 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.762 W/kg; SAR(10 g) = 0.415 W/kg

Maximum value of SAR (measured) = 0.897 W/kg

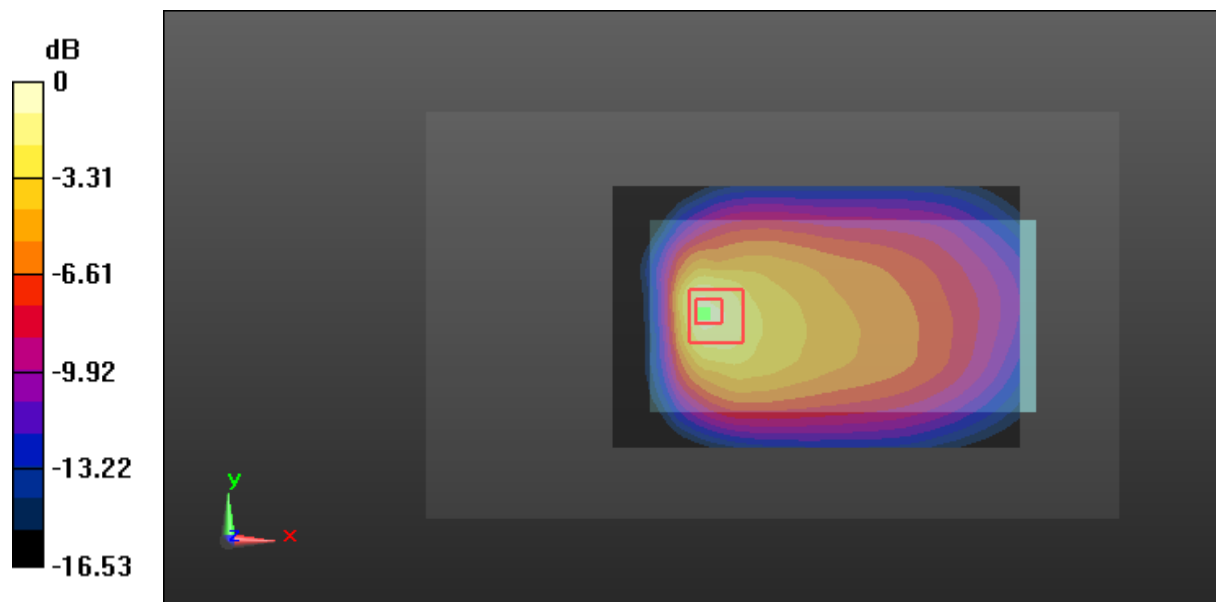

0 dB = 0.897 W/kg = -0.47 dBW/kg

Test Plot 33#: WCDMA Band 5_Body Back_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 54.49$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.357 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.65 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.500 W/kg

SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.179 W/kg

Maximum value of SAR (measured) = 0.326 W/kg

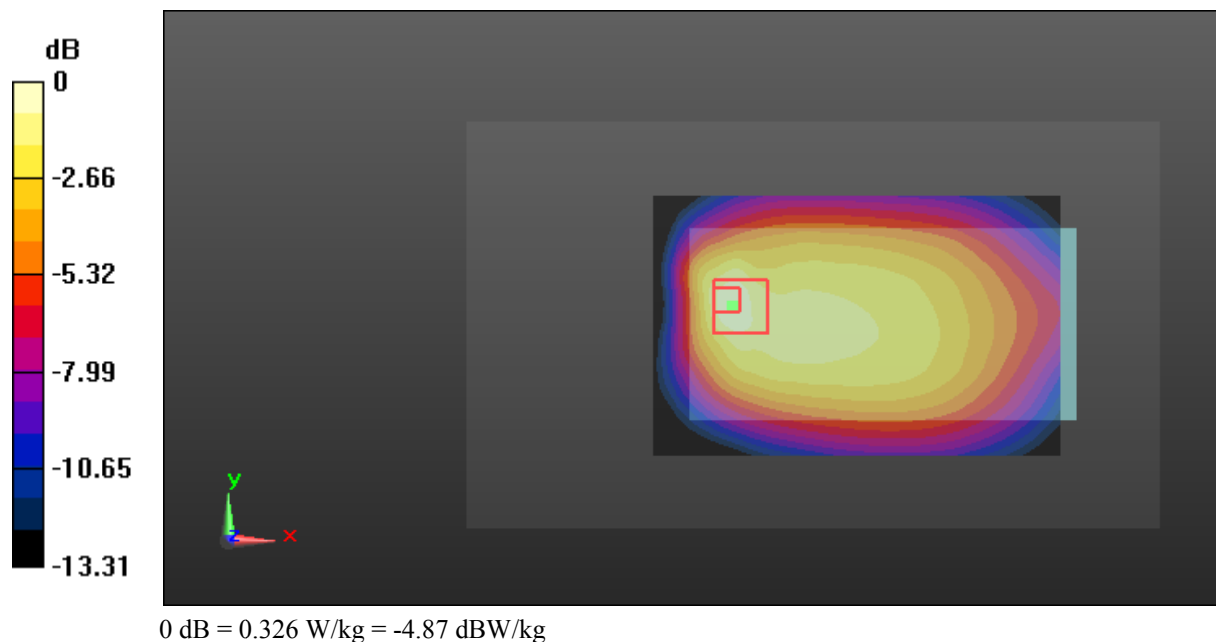

Test Plot 34#: WCDMA Band 5_Body Left_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 54.49$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.138 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.88 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.137 W/kg

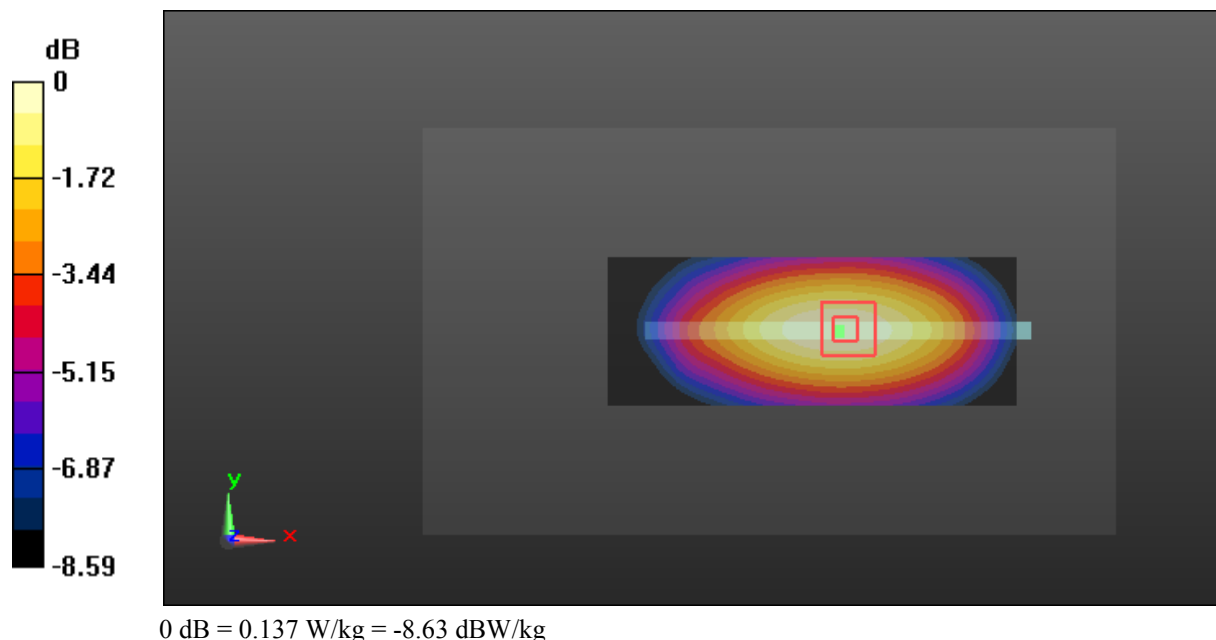

Test Plot 35#: WCDMA Band 5_Body Right_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 54.49$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0804 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.125 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0831 W/kg

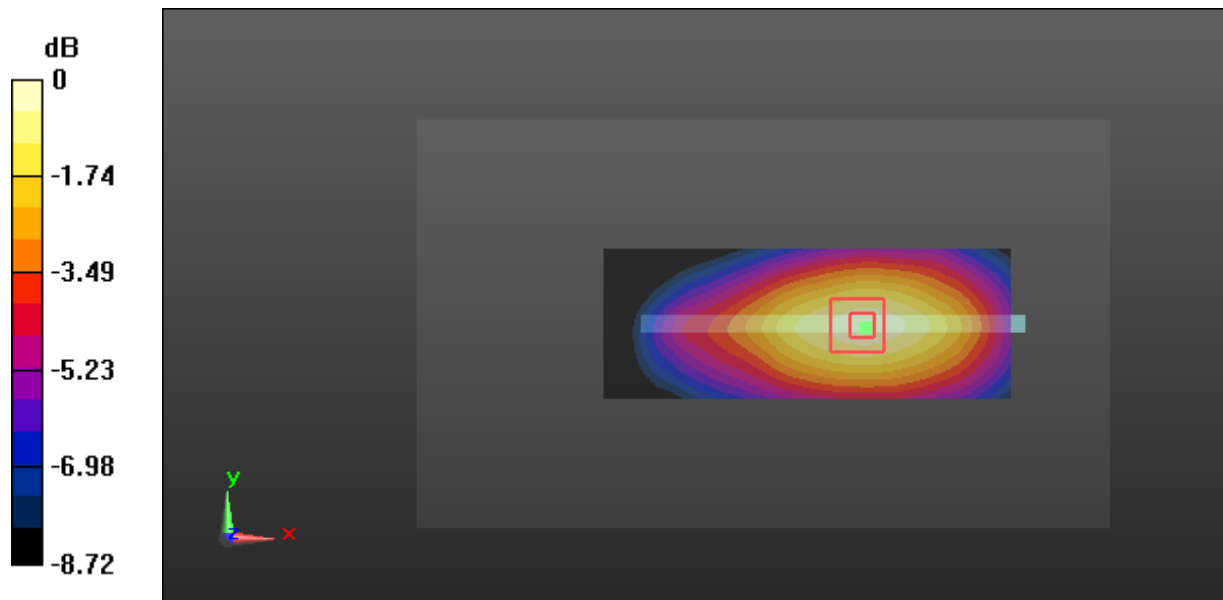

0 dB = 0.0831 W/kg = -10.80 dBW/kg

Test Plot 36#: WCDMA Band 5_Body Bottom_Middle Channel

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.6 MHz; $\sigma = 0.987$ S/m; $\epsilon_r = 54.49$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0720 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.086 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.040 W/kg

Maximum value of SAR (measured) = 0.0753 W/kg

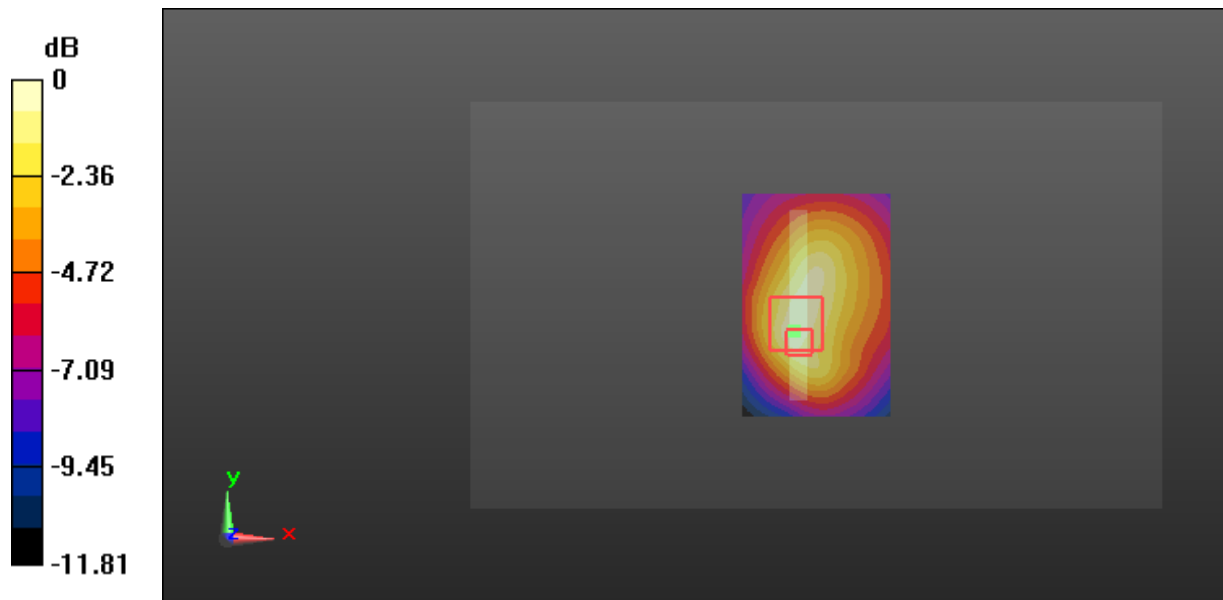

0 dB = 0.0753 W/kg = -11.23 dBW/kg

Test Plot 37#: LTE Band 2_Head Left Cheek_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.150 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.672 V/m; Power Drift = 0.59 dB
 Peak SAR (extrapolated) = 0.228 W/kg
SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.088 W/kg
 Maximum value of SAR (measured) = 0.157 W/kg

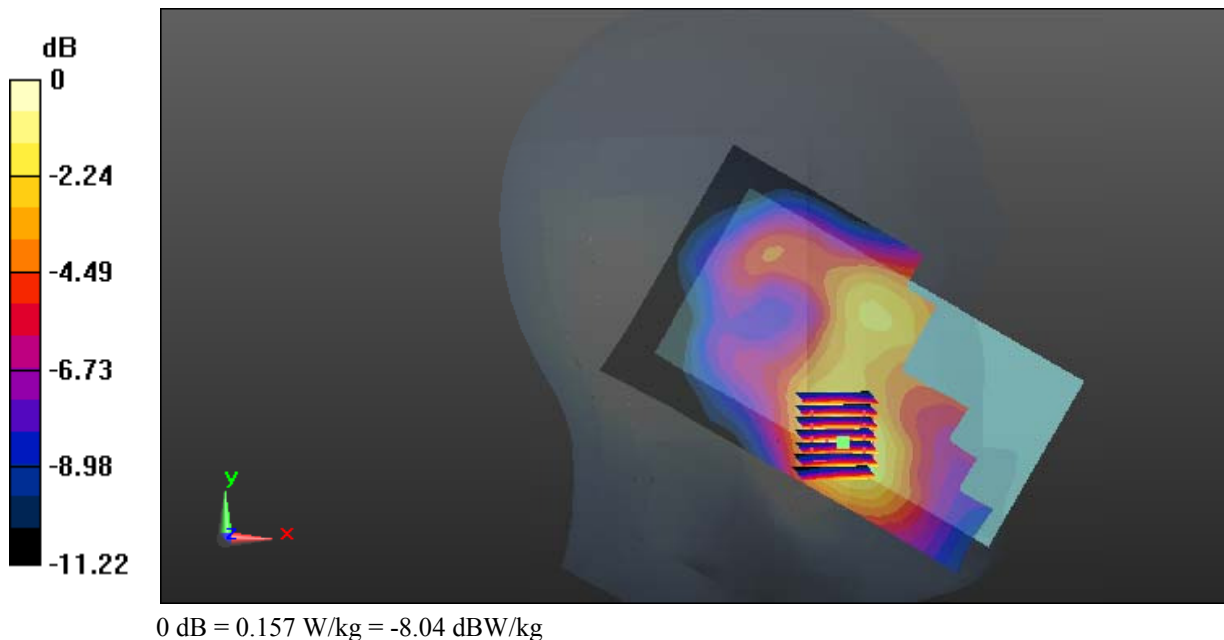

Test Plot 38#: LTE Band 2_Head Left Cheek_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.168 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.515 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

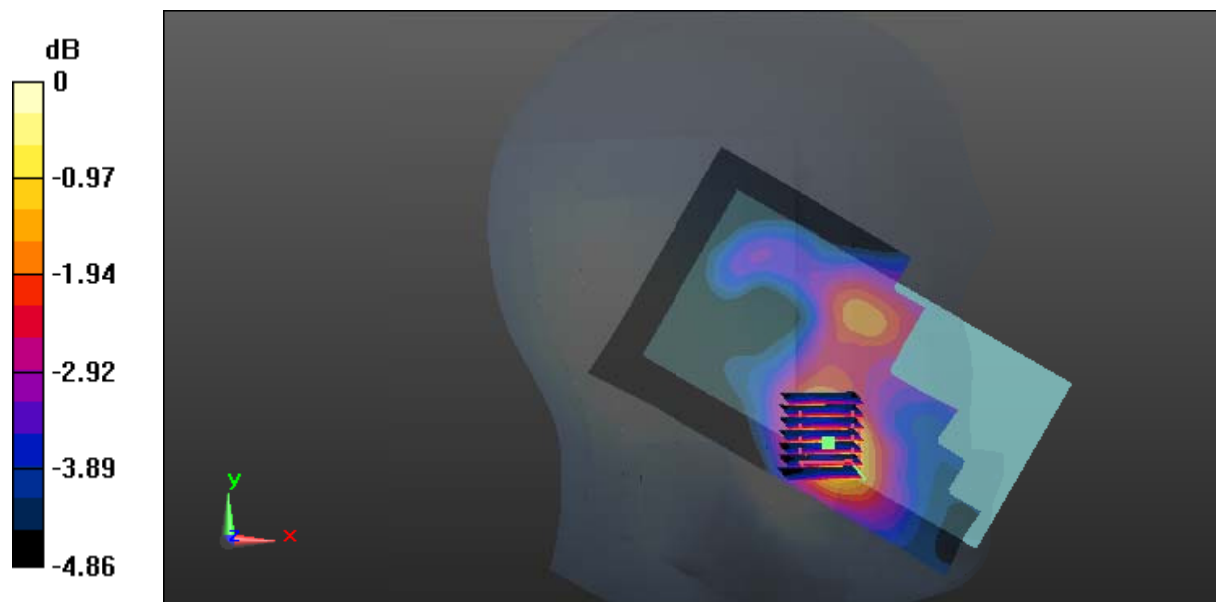

0 dB = 0.170 W/kg = -7.70 dBW/kg

Test Plot 39#: LTE Band 2_Head Left Tilt_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0807 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.018 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.122 W/kg
SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.044 W/kg
 Maximum value of SAR (measured) = 0.0800 W/kg

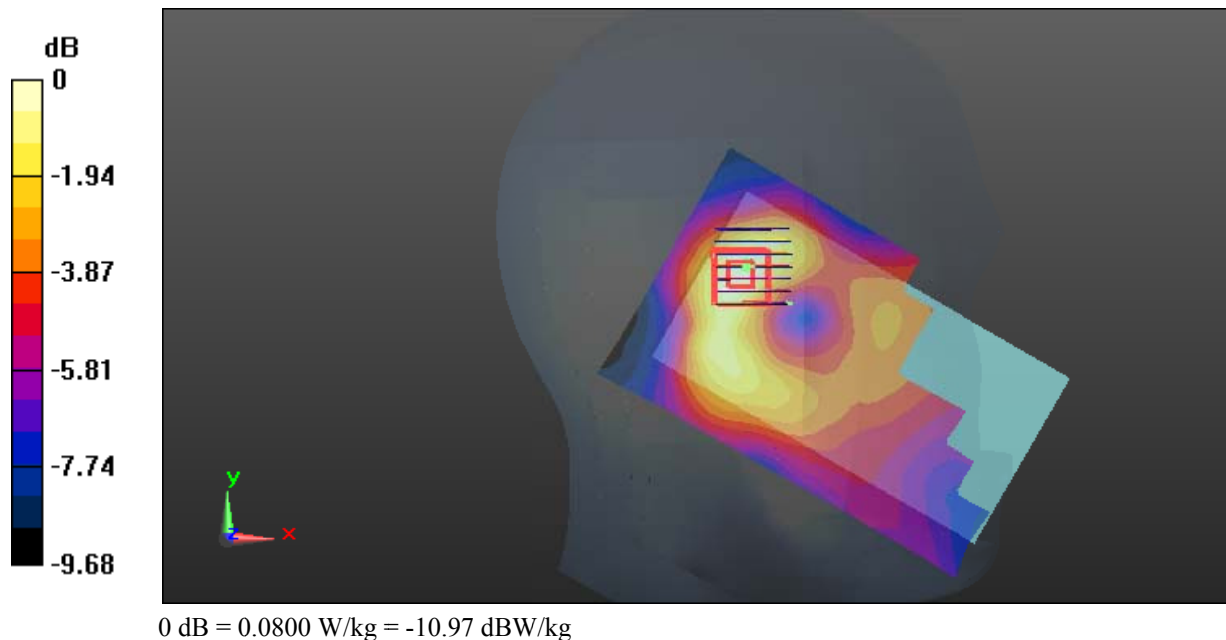

Test Plot 40#: LTE Band 2_Head Left Tilt_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0673 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.498 V/m; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.039 W/kg

Maximum value of SAR (measured) = 0.0686 W/kg

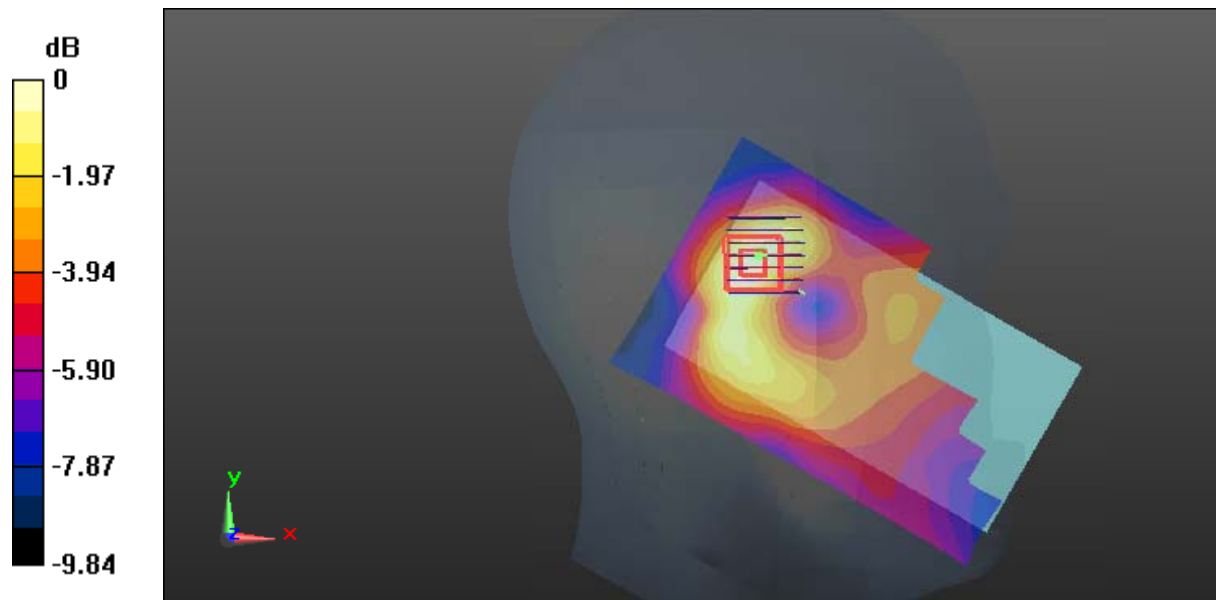

0 dB = 0.0686 W/kg = -11.64 dBW/kg

Test Plot 41#: LTE Band 2_Head Right Cheek_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437 \text{ S/m}$; $\epsilon_r = 38.825$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.137 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.460 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.196 W/kg

SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.076 W/kg

Maximum value of SAR (measured) = 0.130 W/kg

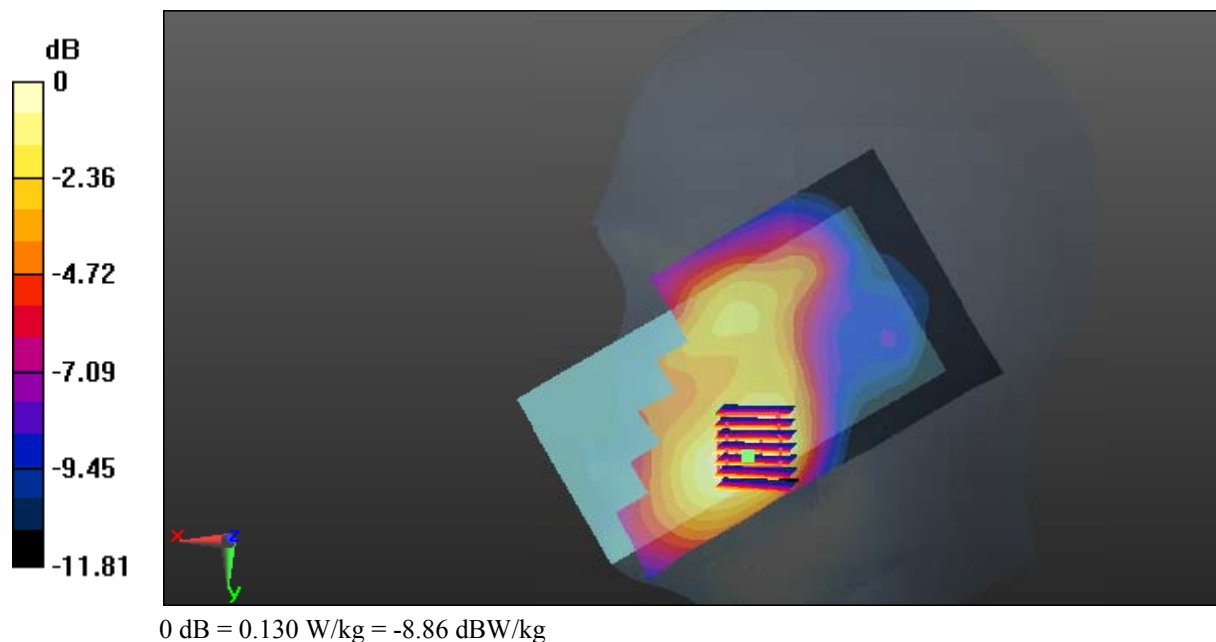

Test Plot 42#: LTE Band 2_Head Right Cheek_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 38.825$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.117 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.050 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 0.161 W/kg
SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.063 W/kg
 Maximum value of SAR (measured) = 0.109 W/kg

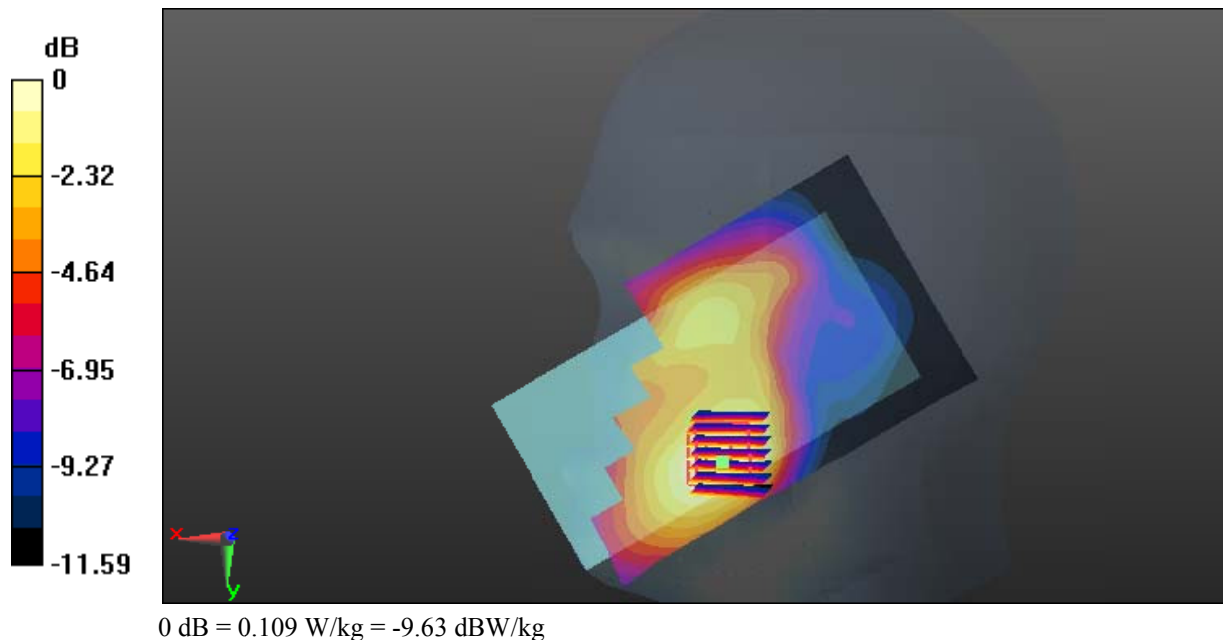

Test Plot 43#: LTE Band 2_Head Right Tilt_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 38.825$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0771 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.539 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.106 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0736 W/kg

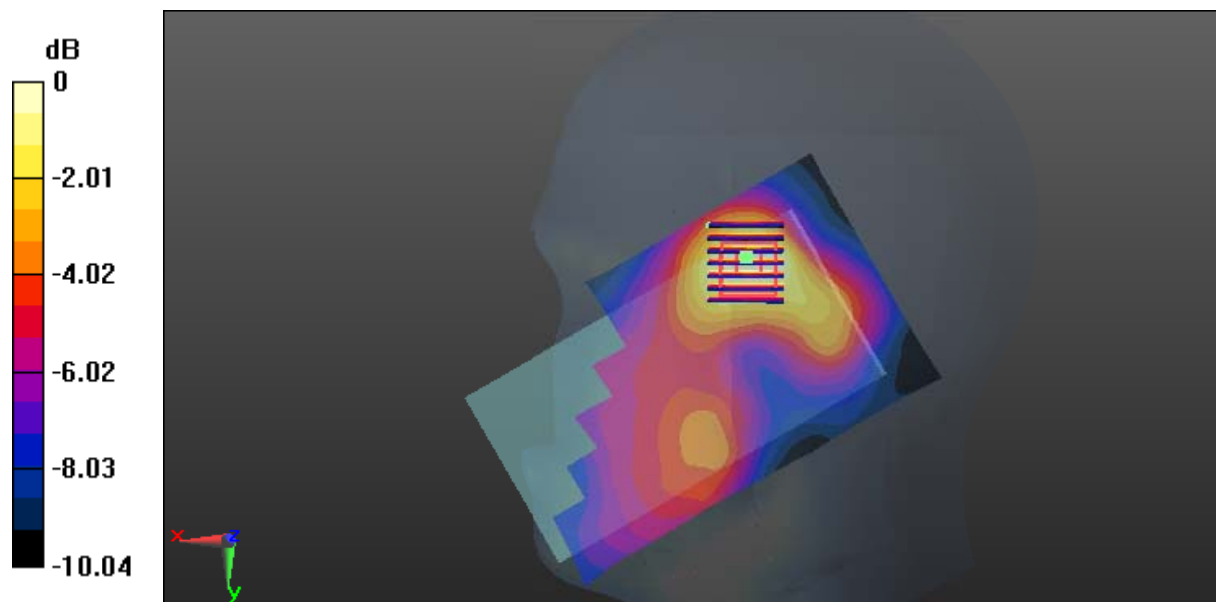

0 dB = 0.0736 W/kg = -11.33 dBW/kg

Test Plot 44#: LTE Band 2_Head Right Tilt_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.437$ S/m; $\epsilon_r = 38.825$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.18, 8.18, 8.18); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);


Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0610 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.919 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0597 W/kg

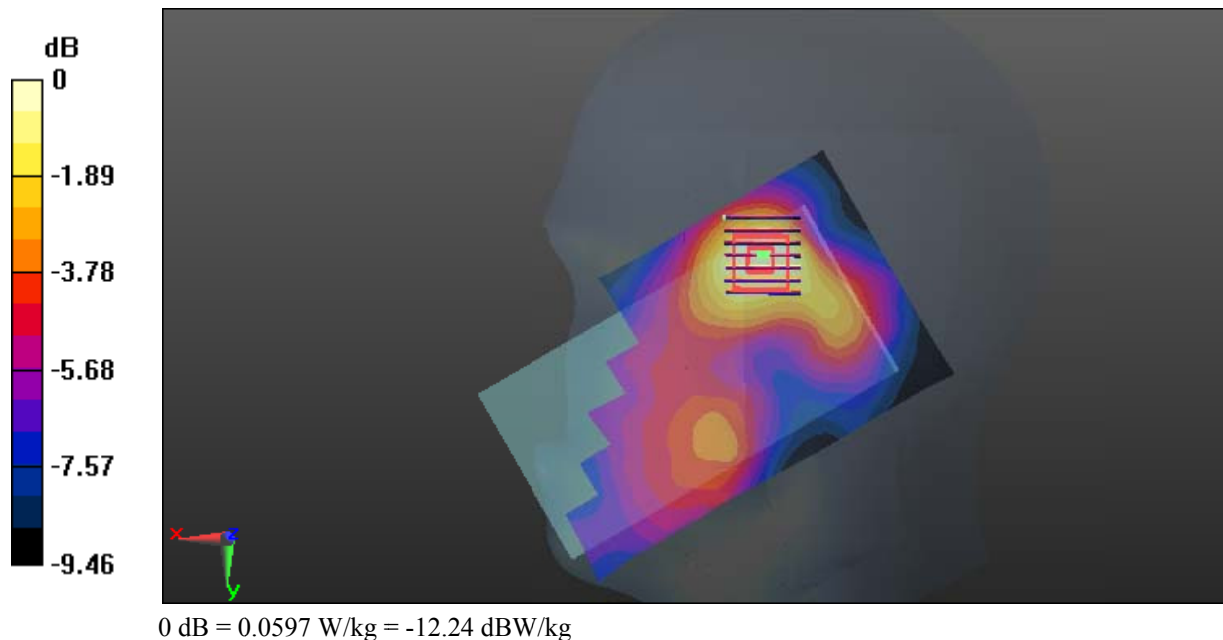

Test Plot 45#: LTE Band 2_Body Back_Middle Channel_1RB**DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121**

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: 1880 MHz; $\sigma = 1.574$ S/m; $\epsilon_r = 51.148$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.216 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.307 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.340 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.211 W/kg

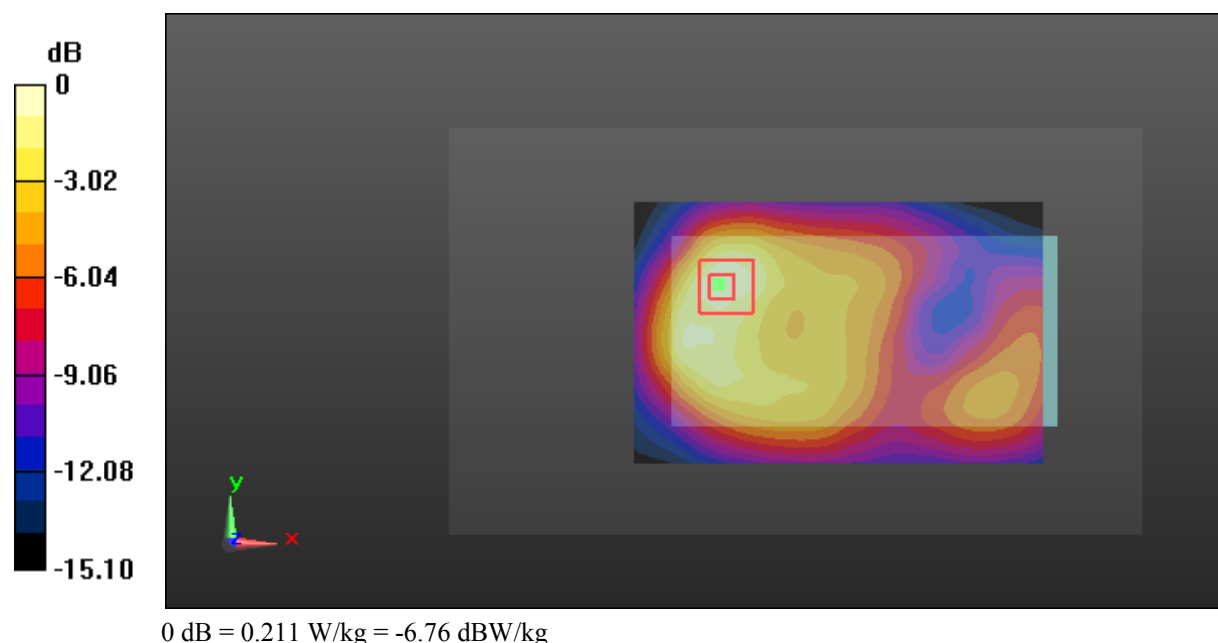

Test Plot 46#: LTE Band 2_Body Back_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.182 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.775 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 0.277 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.091 W/kg

Maximum value of SAR (measured) = 0.176 W/kg

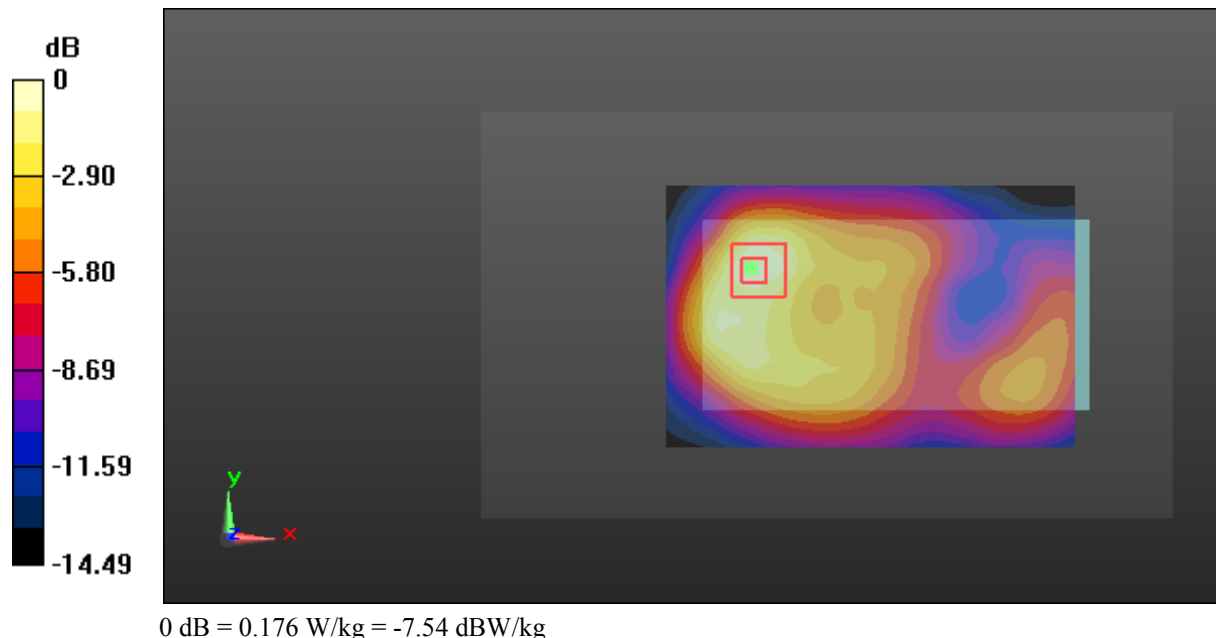

Test Plot 47#: LTE Band 2_Body Left_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0874 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.422 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.134 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.0876 W/kg

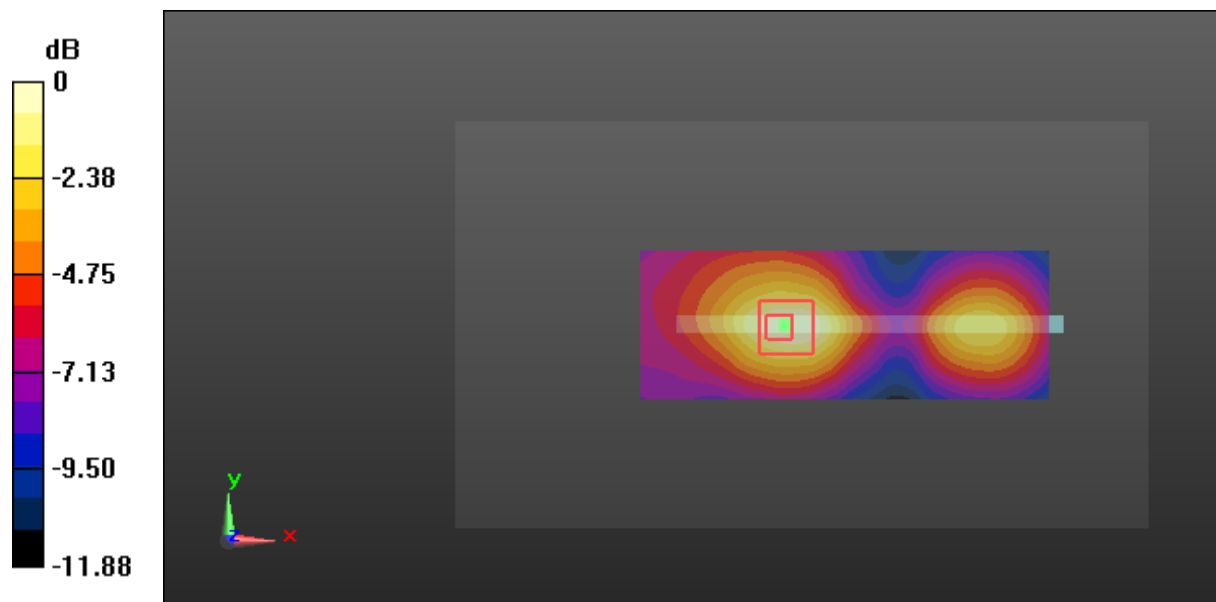

0 dB = 0.0876 W/kg = -10.57 dBW/kg

Test Plot 48#: LTE Band 2_Body Left_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0764 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.010 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.112 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.042 W/kg
 Maximum value of SAR (measured) = 0.0759 W/kg

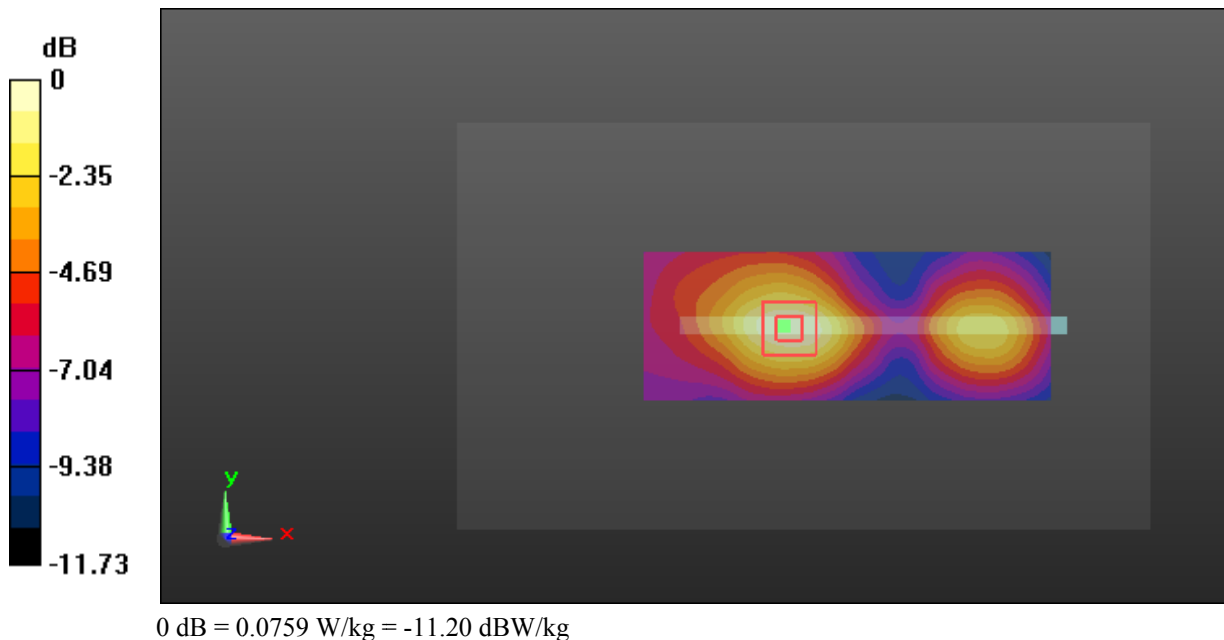

Test Plot 49#: LTE Band 2_Body Right_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.168 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.300 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.085 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

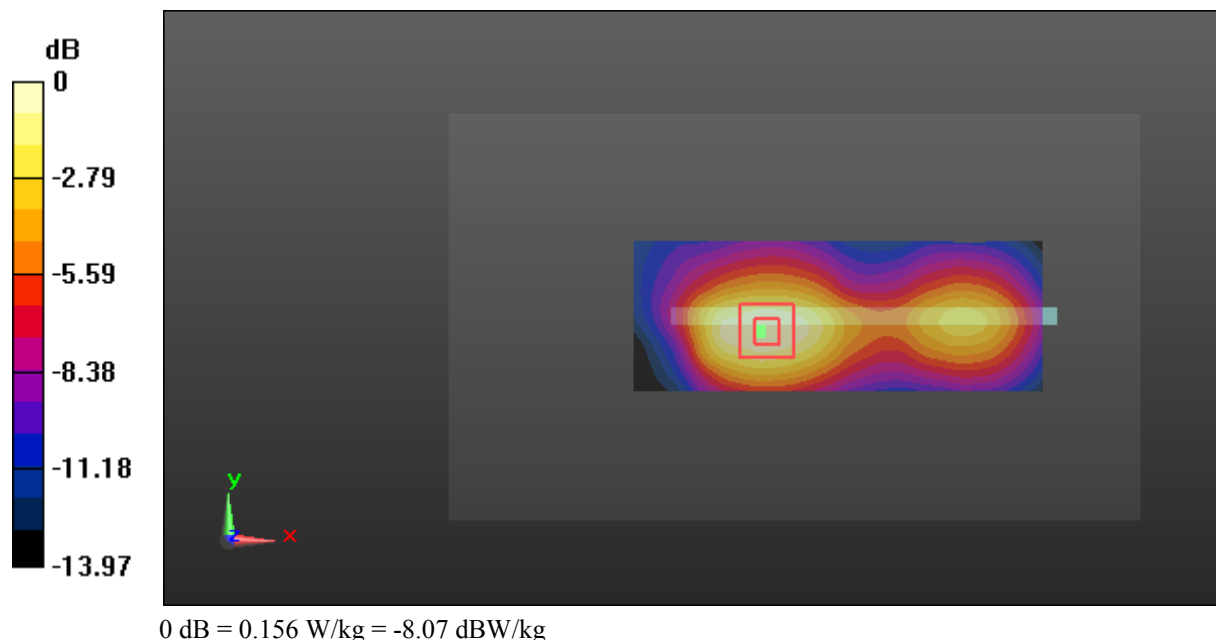

Test Plot 50#: LTE Band 2_Body Right_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.140 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.441 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.216 W/kg
SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.075 W/kg
 Maximum value of SAR (measured) = 0.141 W/kg

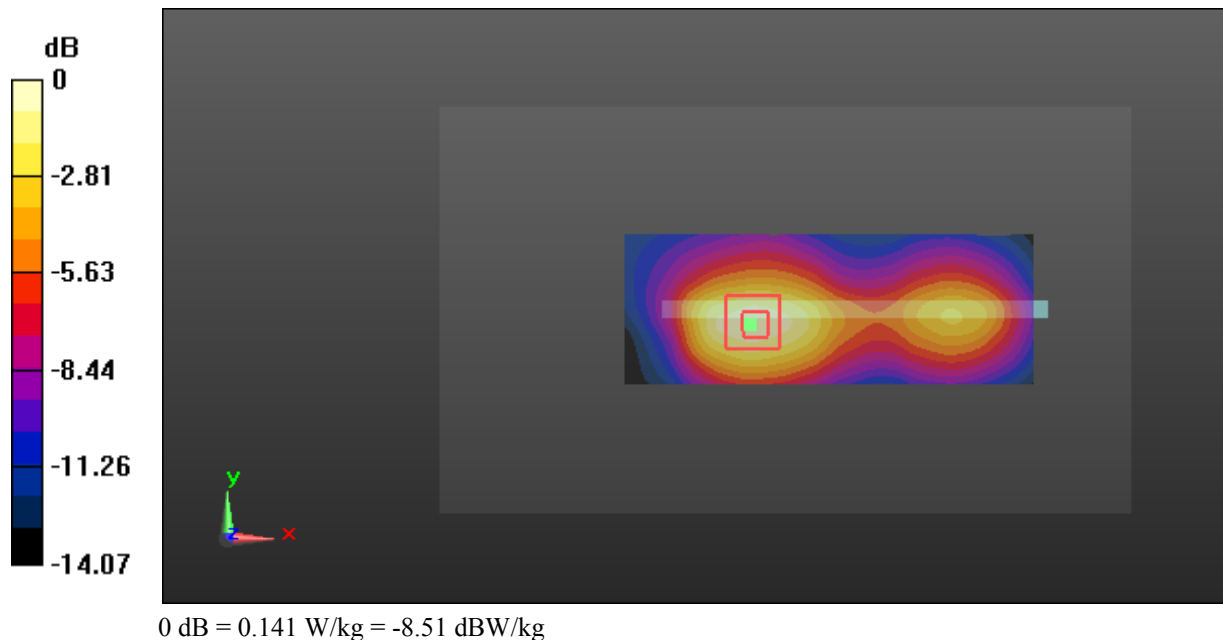

Test Plot 51#: LTE Band 2_Body Bottom_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574$ S/m; $\epsilon_r = 51.148$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.247 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.56 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.363 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.240 W/kg

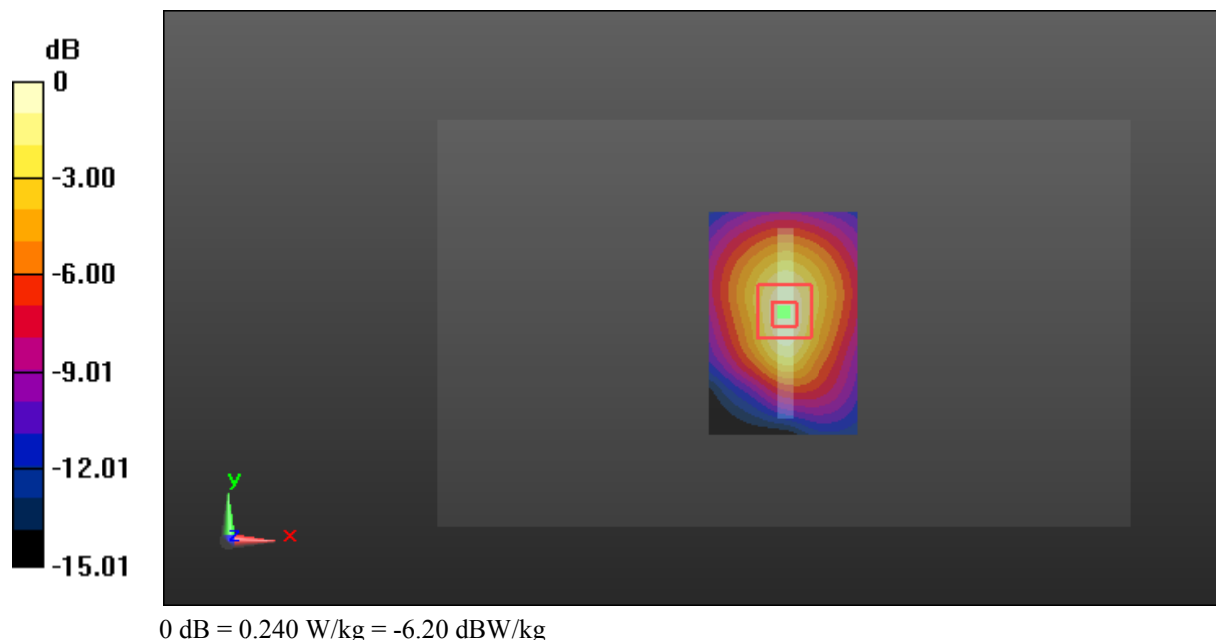

Test Plot 52#: LTE Band 2_Body Bottom_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: 1880 MHz; $\sigma = 1.574 \text{ S/m}$; $\epsilon_r = 51.148$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.98, 7.98, 7.98); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.207 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.47 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.299 W/kg

SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.102 W/kg

Maximum value of SAR (measured) = 0.202 W/kg

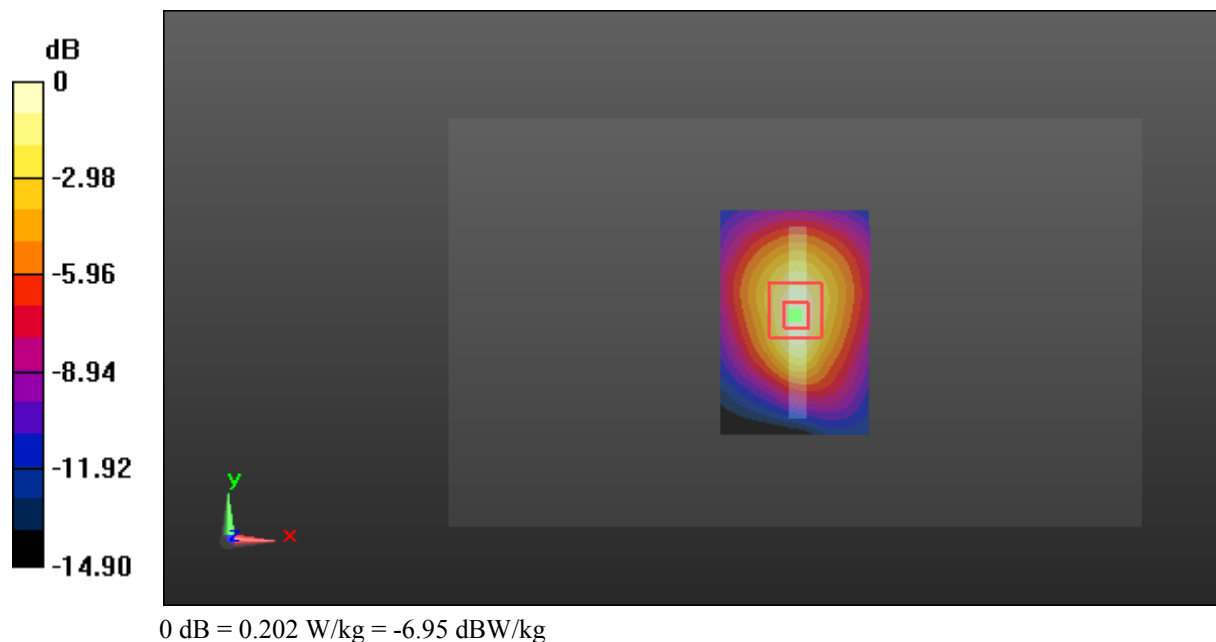

Test Plot 53#: LTE Band 4_Head Left Cheek_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 42.067$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.246 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 4.164 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 0.418 W/kg
SAR(1 g) = 0.271 W/kg; SAR(10 g) = 0.176 W/kg
 Maximum value of SAR (measured) = 0.292 W/kg

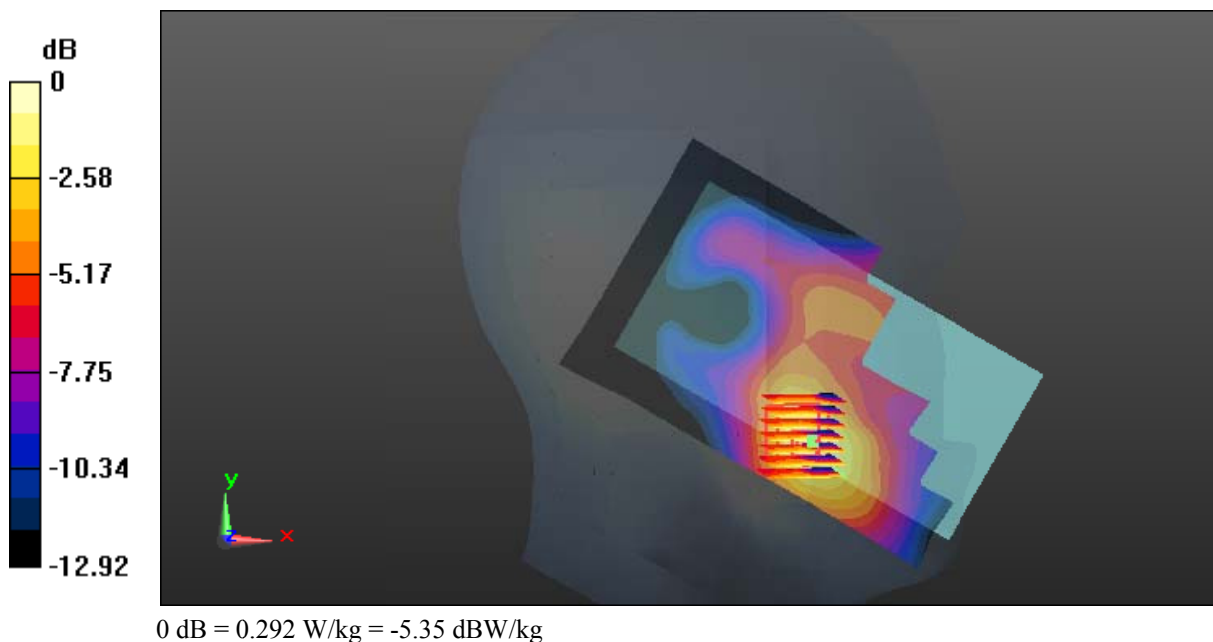

Test Plot 54#: LTE Band 4_Head Left Cheek_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 42.067$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.244 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.385 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.328 W/kg

SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.237 W/kg

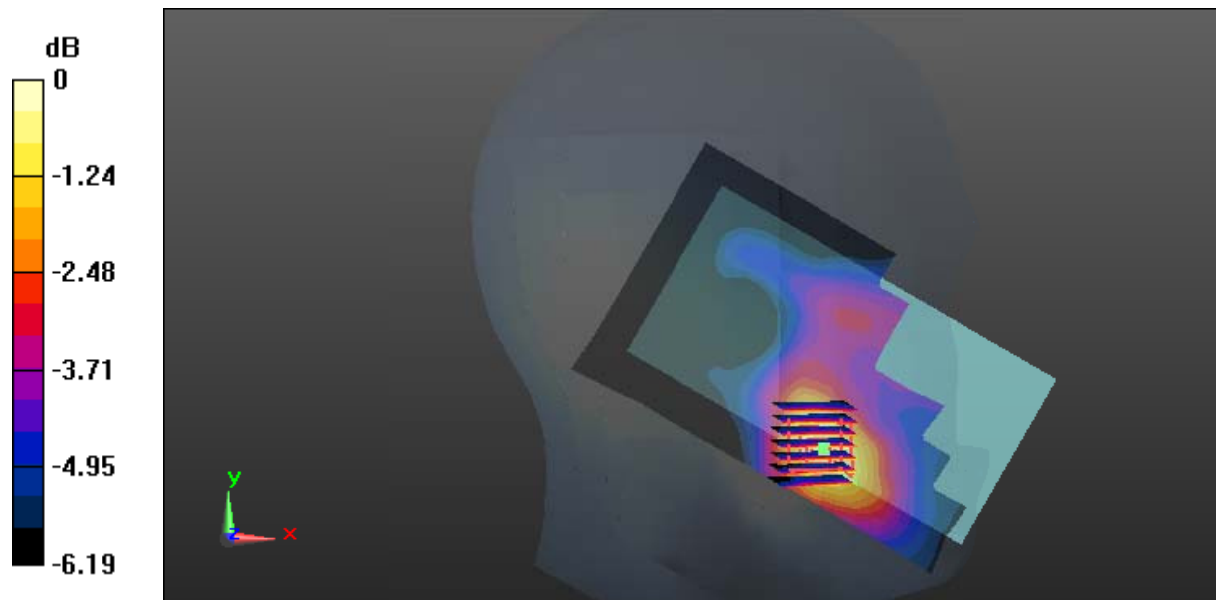

0 dB = 0.237 W/kg = -6.25 dBW/kg

Test Plot 55#: LTE Band 4_Head Left Tilt_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 42.067$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0862 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.009 V/m; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.0893 W/kg

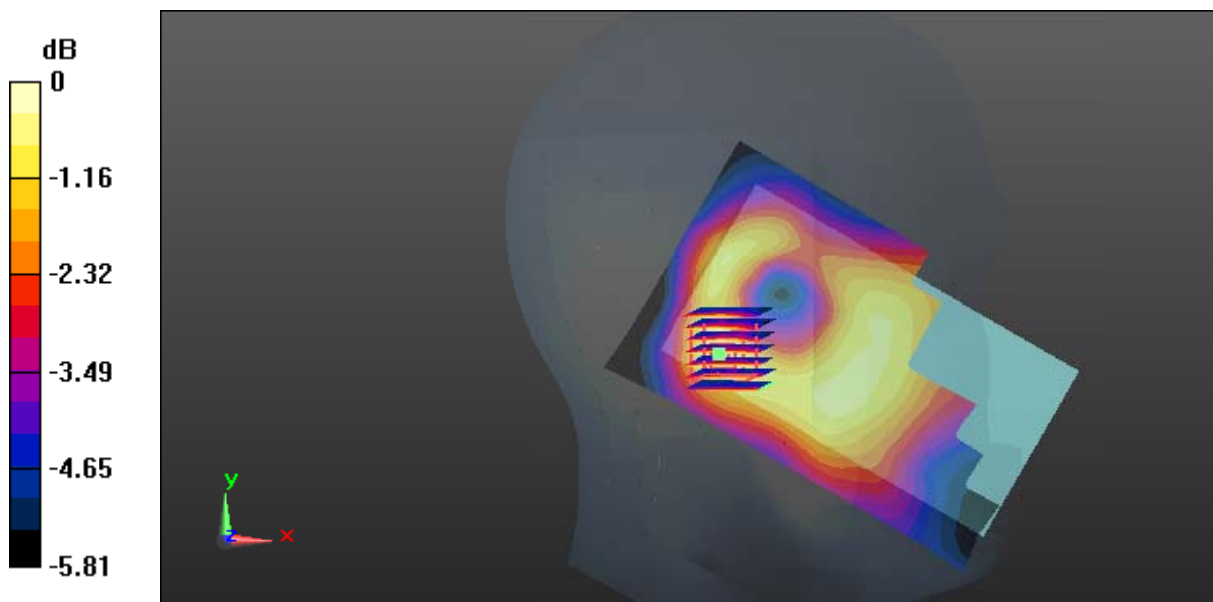

0 dB = 0.0893 W/kg = -10.49 dBW/kg

Test Plot 56#: LTE Band 4_Head Left Tilt_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 42.067$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0721 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.455 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.0990 W/kg
SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.049 W/kg
 Maximum value of SAR (measured) = 0.0714 W/kg

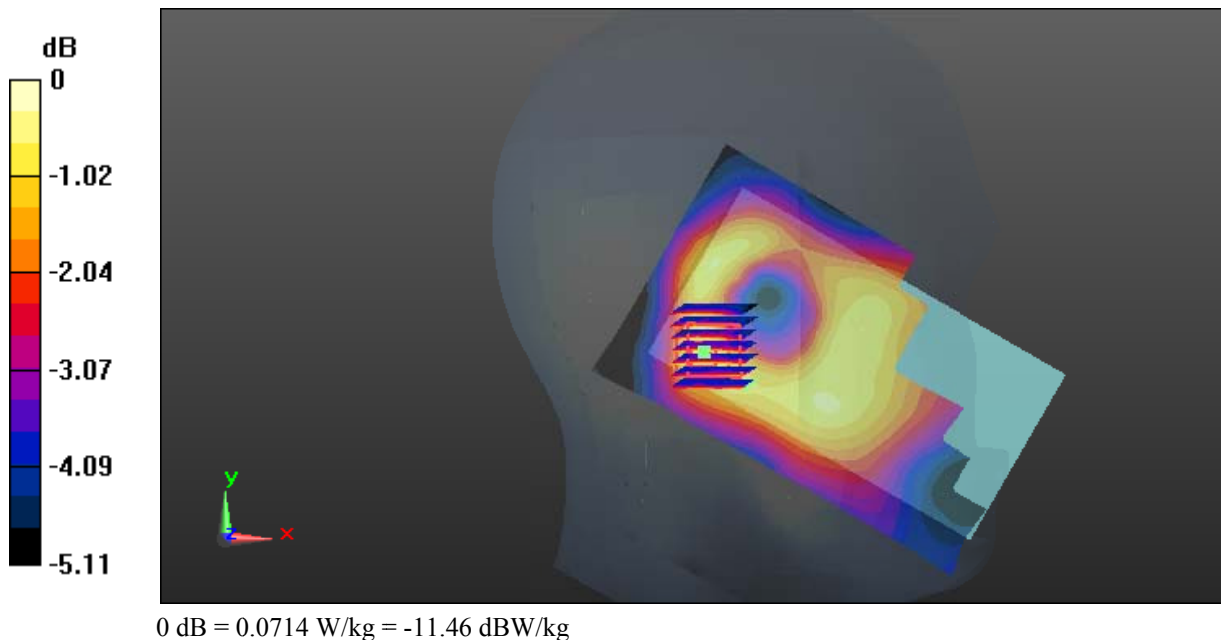

Test Plot 57#: LTE Band 4_Head Right Cheek_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 42.067$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.234 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.752 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.139 W/kg

Maximum value of SAR (measured) = 0.234 W/kg

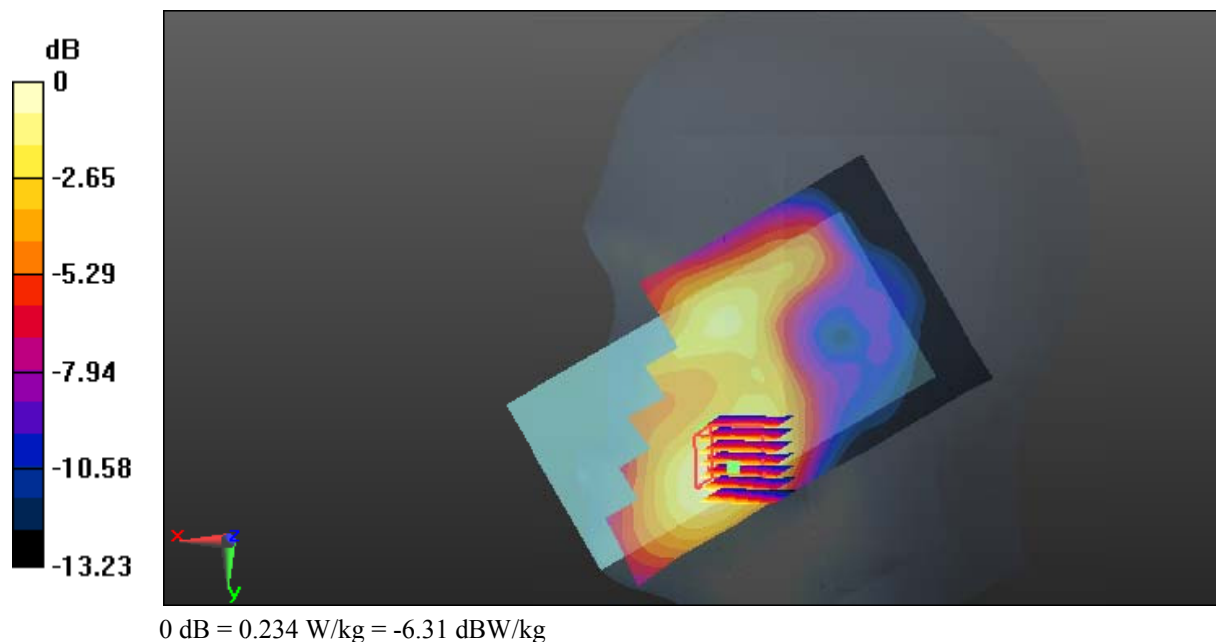

Test Plot 58#: LTE Band 4_Head Right Cheek_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 42.067$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.189 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.400 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.172 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.186 W/kg

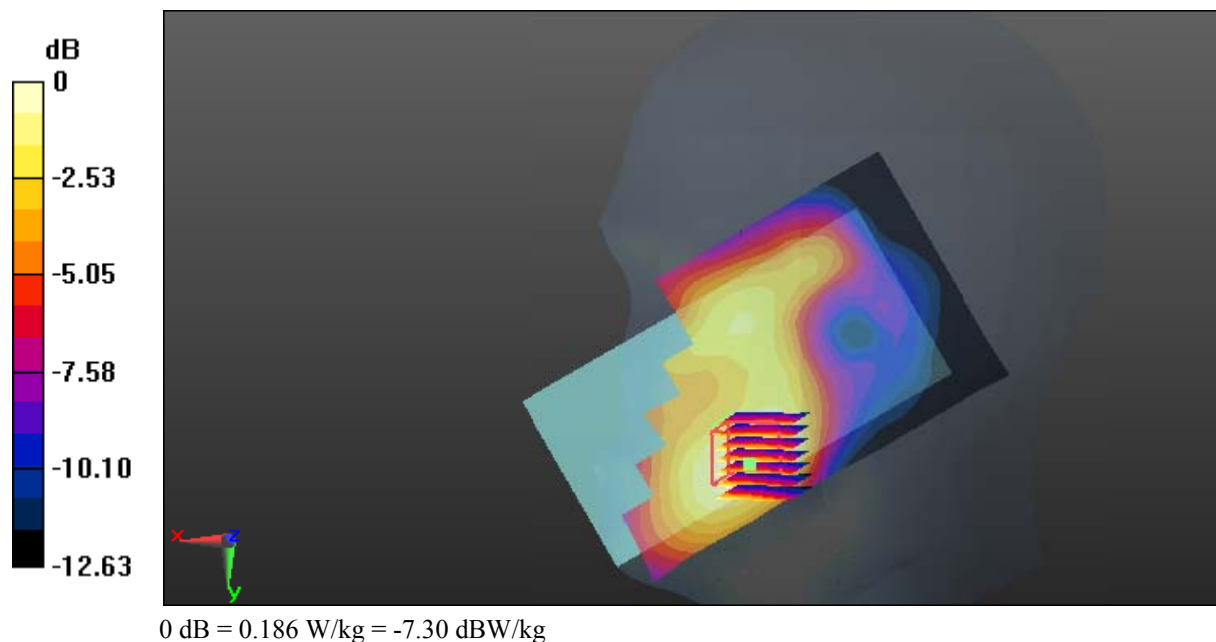

Test Plot 59#: LTE Band 4_Head Right Tilt_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 42.067$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.165 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.241 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.150 W/kg

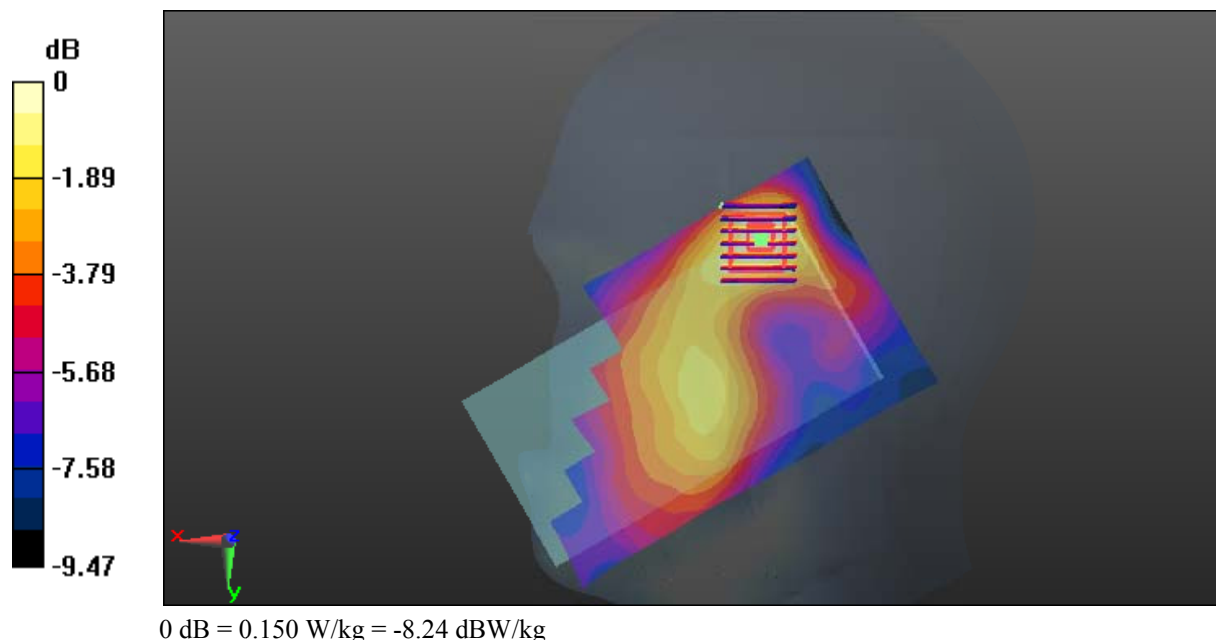

Test Plot 60#: LTE Band 4_Head Right Tilt_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.327$ S/m; $\epsilon_r = 42.067$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.47, 8.47, 8.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.128 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.817 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.180 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.073 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

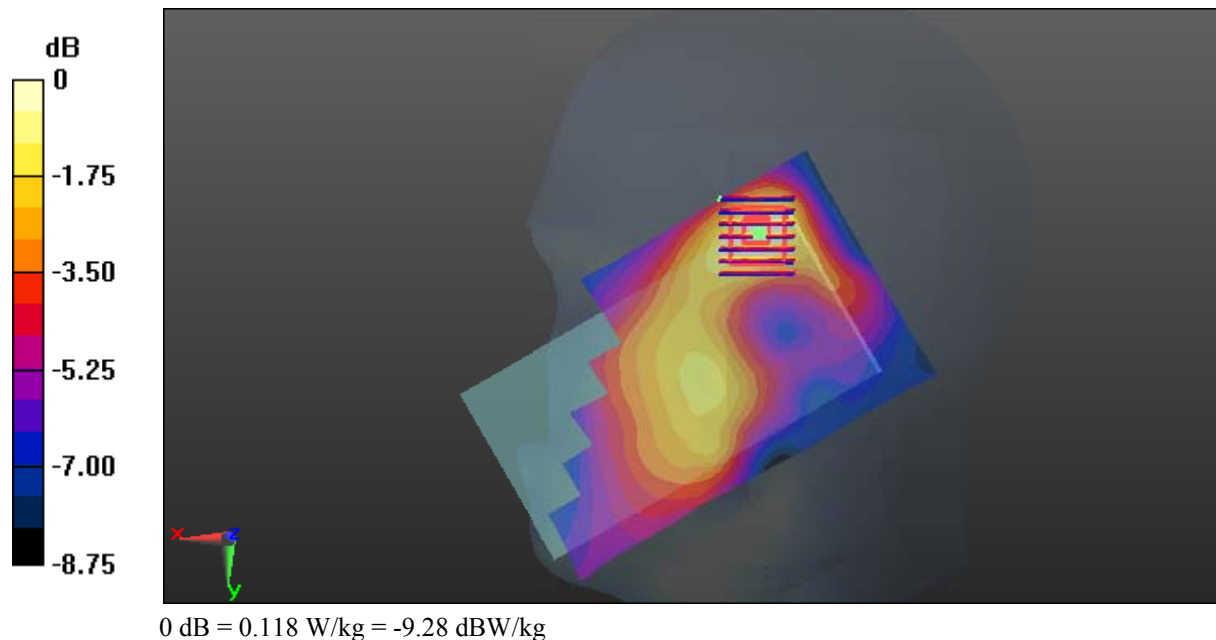

Test Plot 61#: LTE Band 4_Body Back_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 55.56$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.293 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.75 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.427 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.158 W/kg

Maximum value of SAR (measured) = 0.279 W/kg

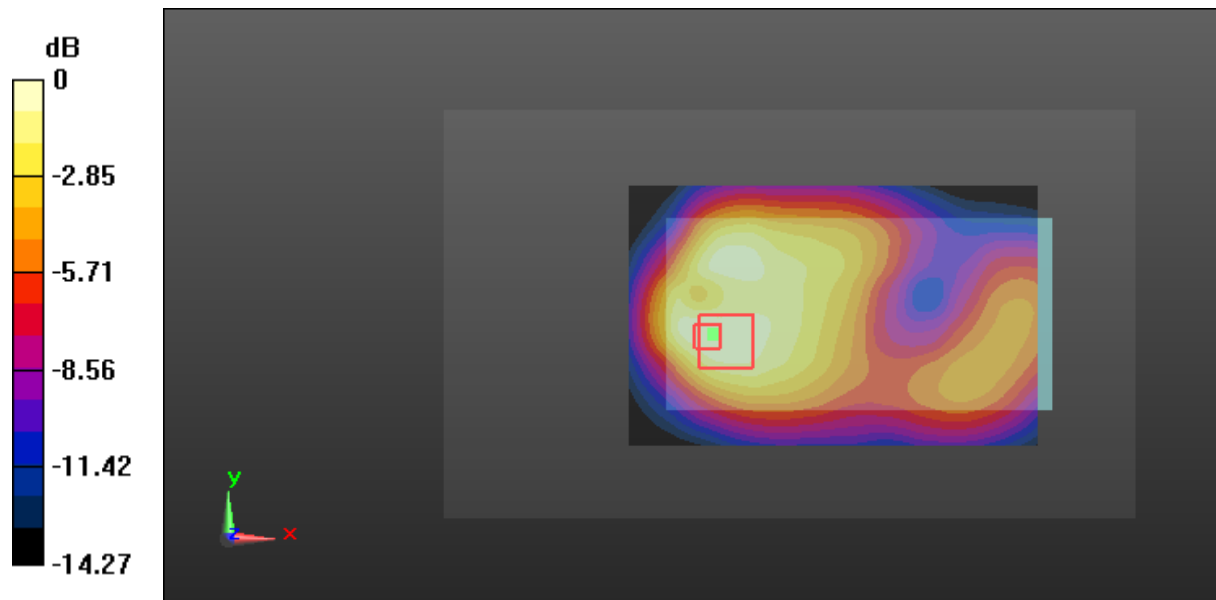

0 dB = 0.279 W/kg = -5.54 dBW/kg

Test Plot 62#: LTE Band 4_Body Back_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 55.56$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.245 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.74 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.351 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

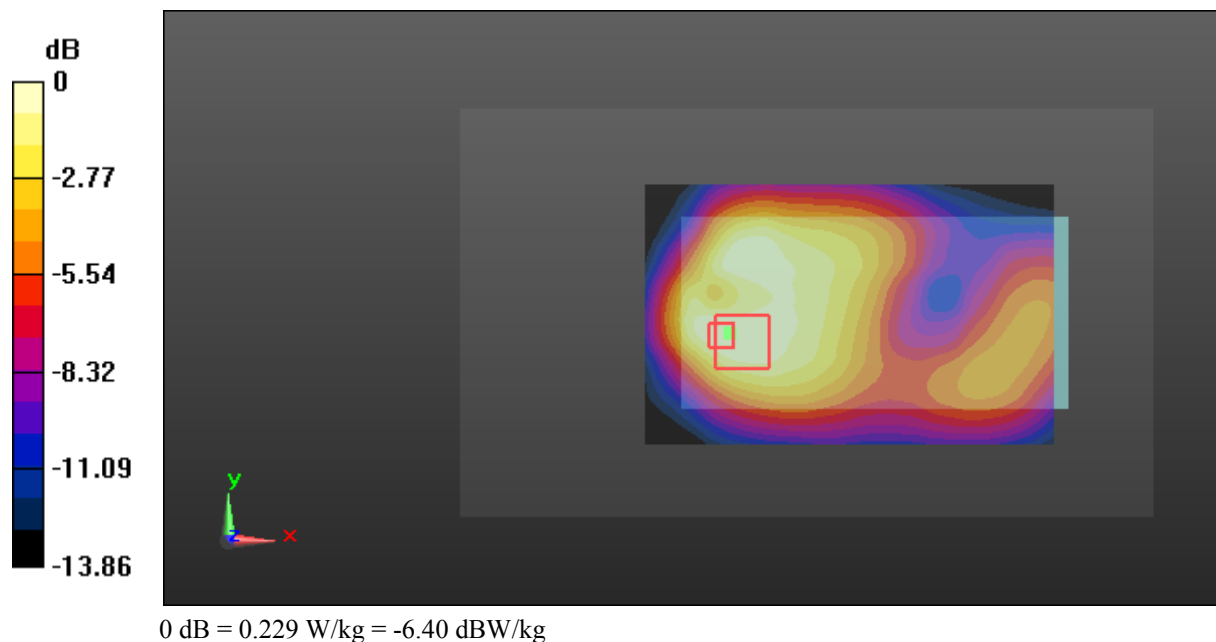

Test Plot 63#: LTE Band 4_Body Left_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 55.56$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.158 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.067 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.156 W/kg

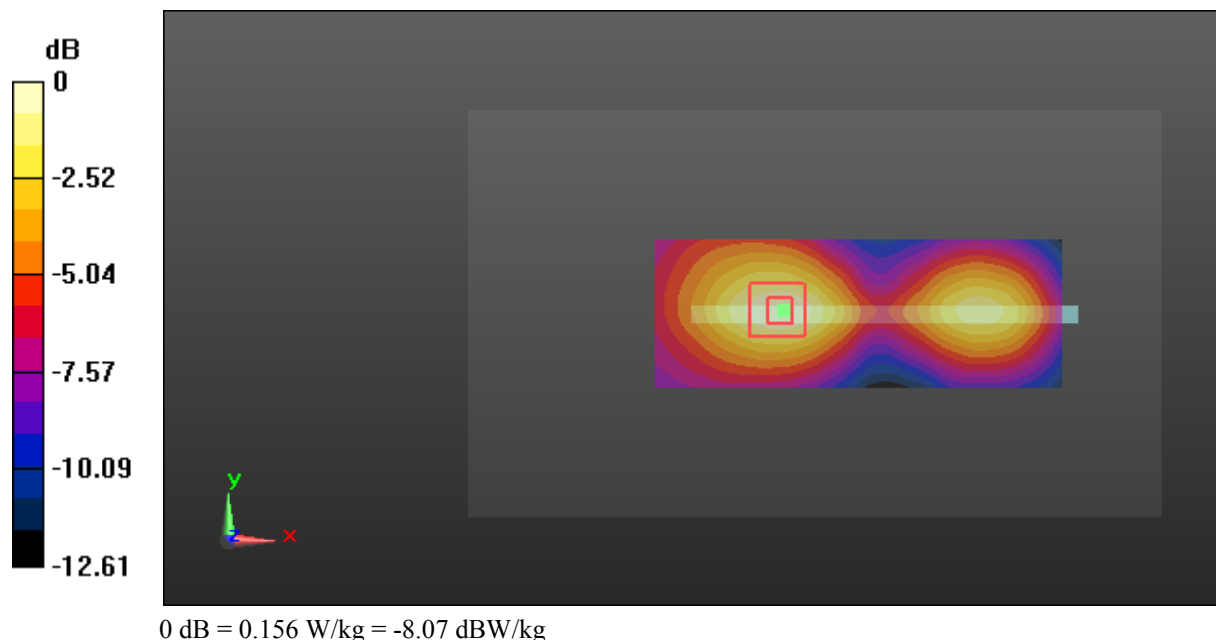

Test Plot 64#: LTE Band 4_Body Left_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 55.56$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.122 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.884 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.176 W/kg

SAR(1 g) = 0.112 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

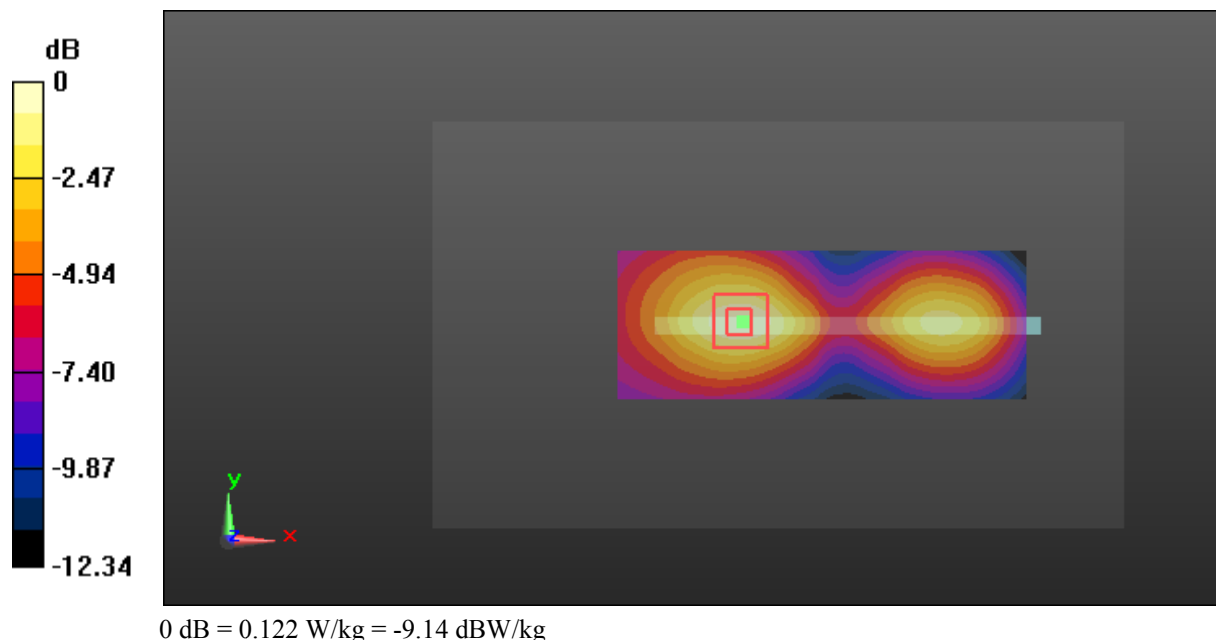

Test Plot 65#: LTE Band 4_Body Right_Middle Channel_1RB**DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121**

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
Medium parameters used: 1732.5 MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 55.56$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.269 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.78 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.136 W/kg

Maximum value of SAR (measured) = 0.254 W/kg

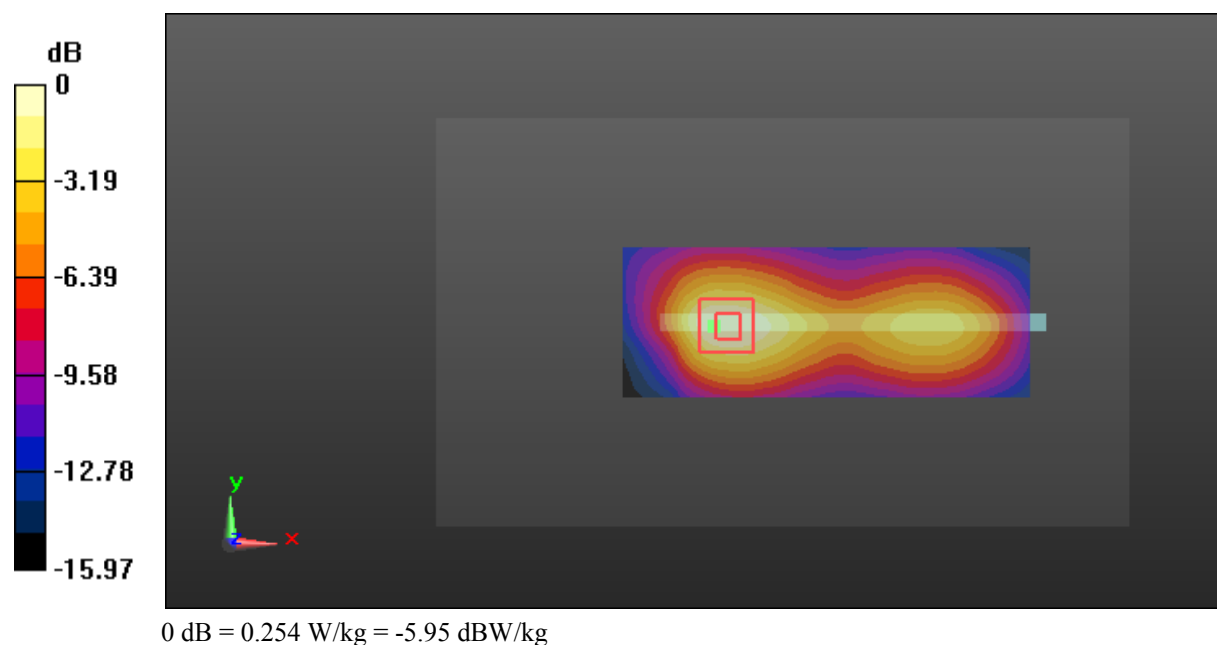

Test Plot 66#: LTE Band 4_Body Right_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 55.56$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.205 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.318 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.280 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.103 W/kg

Maximum value of SAR (measured) = 0.194 W/kg

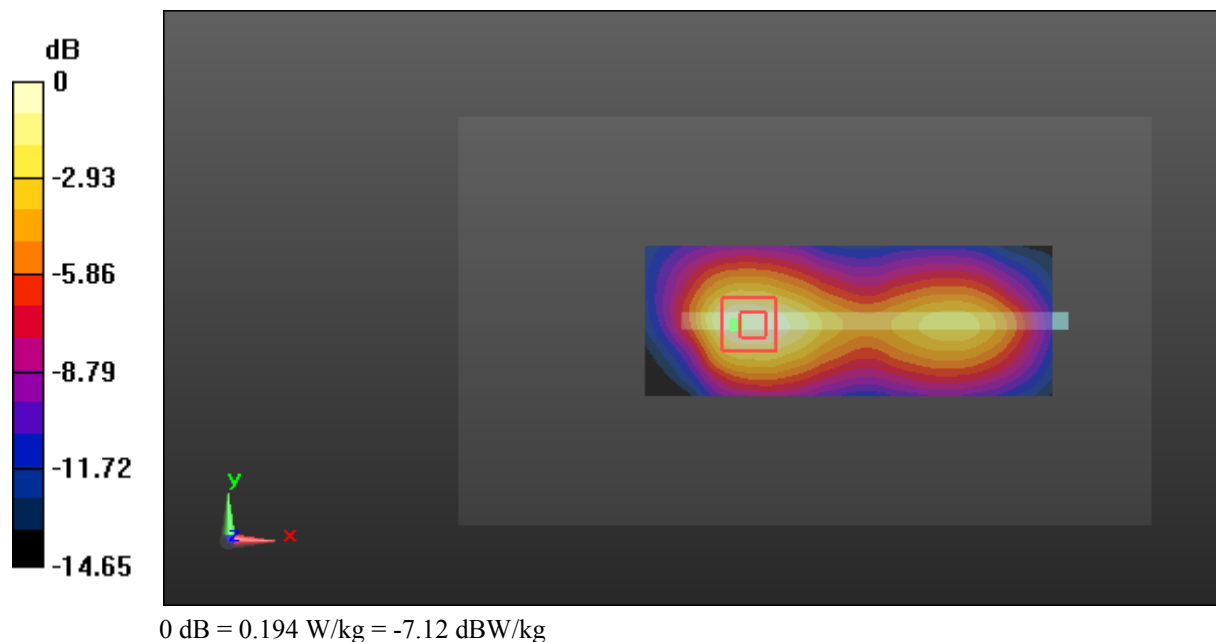

Test Plot 67#: LTE Band 4_Body Bottom_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 55.56$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.381 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.42 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.549 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.193 W/kg

Maximum value of SAR (measured) = 0.381 W/kg

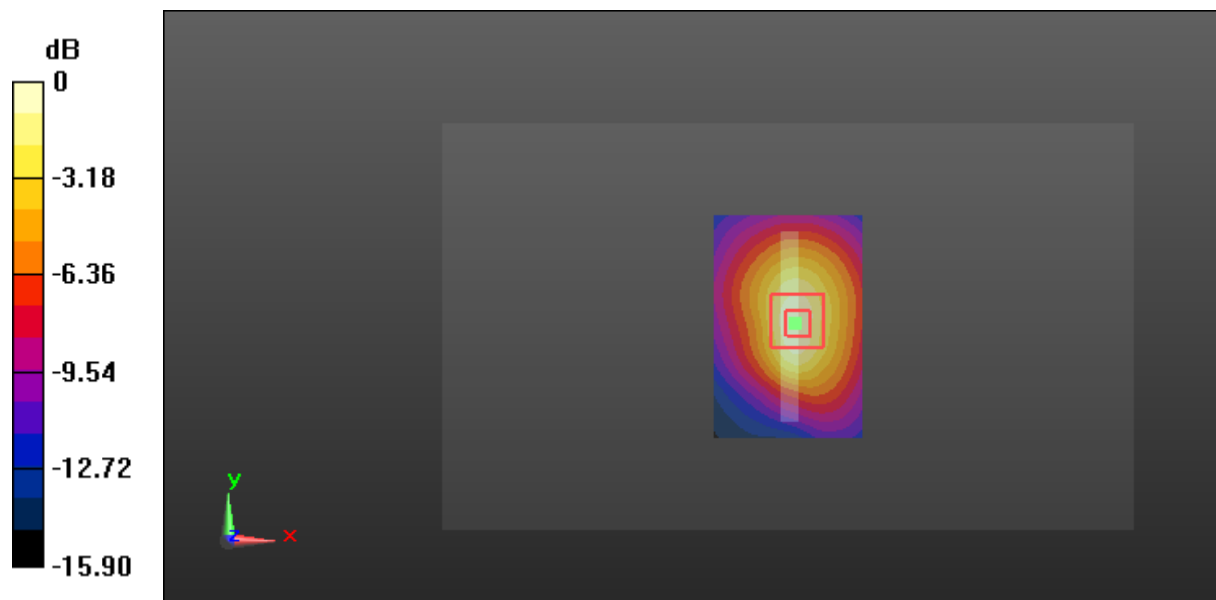

0 dB = 0.381 W/kg = -4.19 dBW/kg

Test Plot 68#: LTE Band 4_Body Bottom_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 1732.5 MHz; $\sigma = 1.429$ S/m; $\epsilon_r = 55.56$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(8.24, 8.24, 8.24); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.299 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.68 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.427 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.297 W/kg

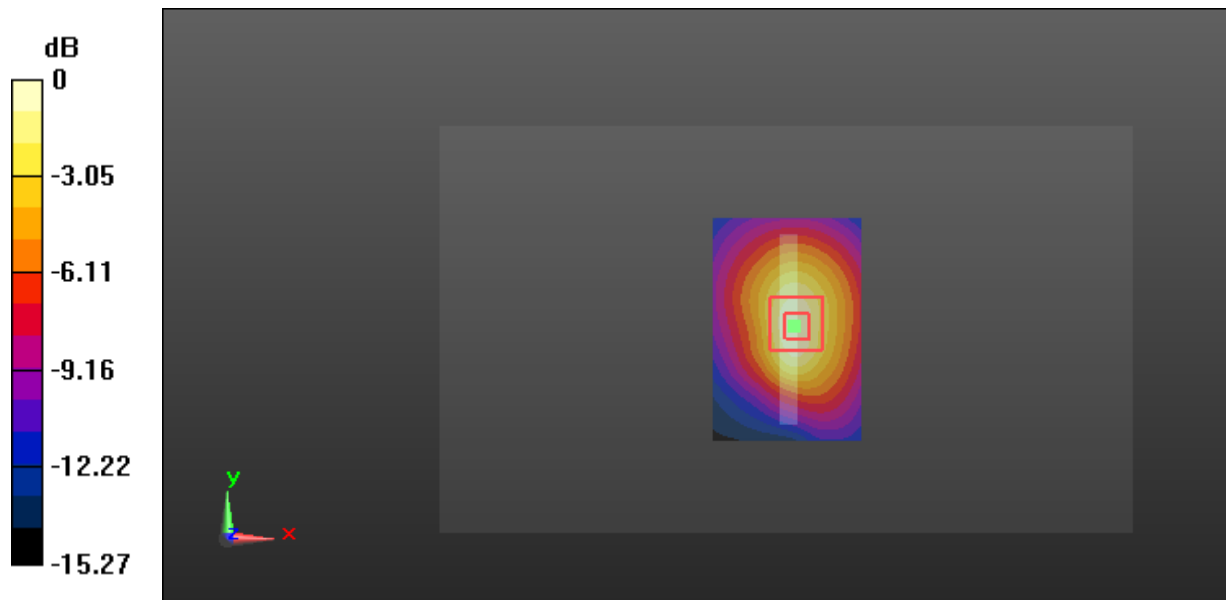

0 dB = 0.297 W/kg = -5.27 dBW/kg

Test Plot 69#: LTE Band 5_Head Left Cheek_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.298$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.232 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.567 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 0.275 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.164 W/kg

Maximum value of SAR (measured) = 0.224 W/kg

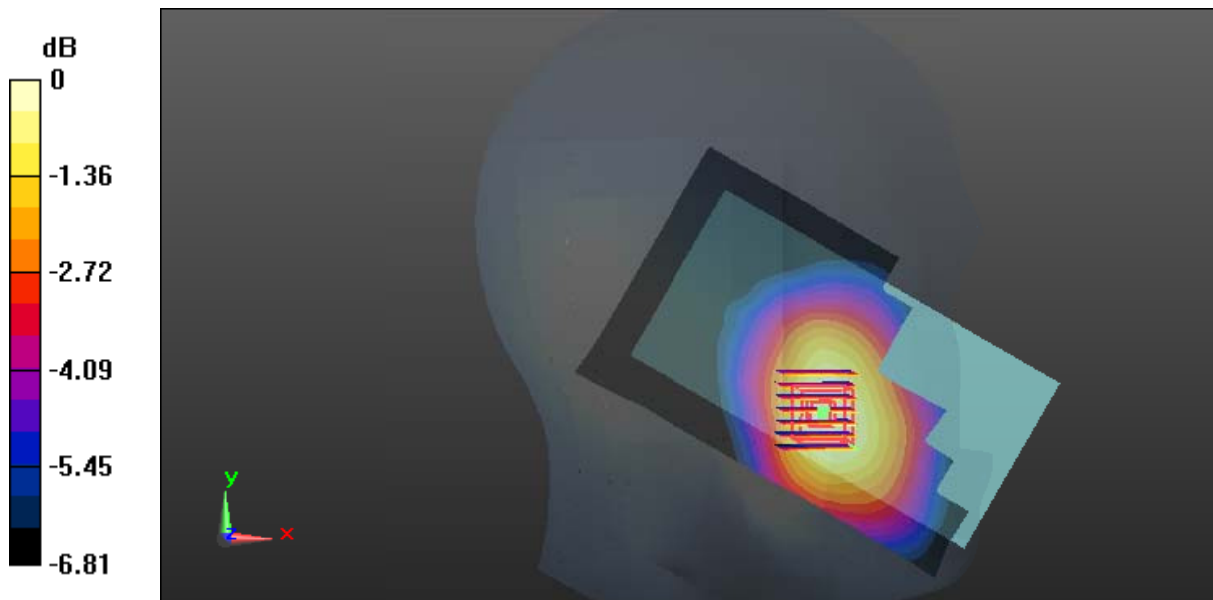

0 dB = 0.224 W/kg = -6.50 dBW/kg

Test Plot 70#: LTE Band 5_Head Left Cheek_Middle Channel_50%RB**DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.298$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.174 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.038 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

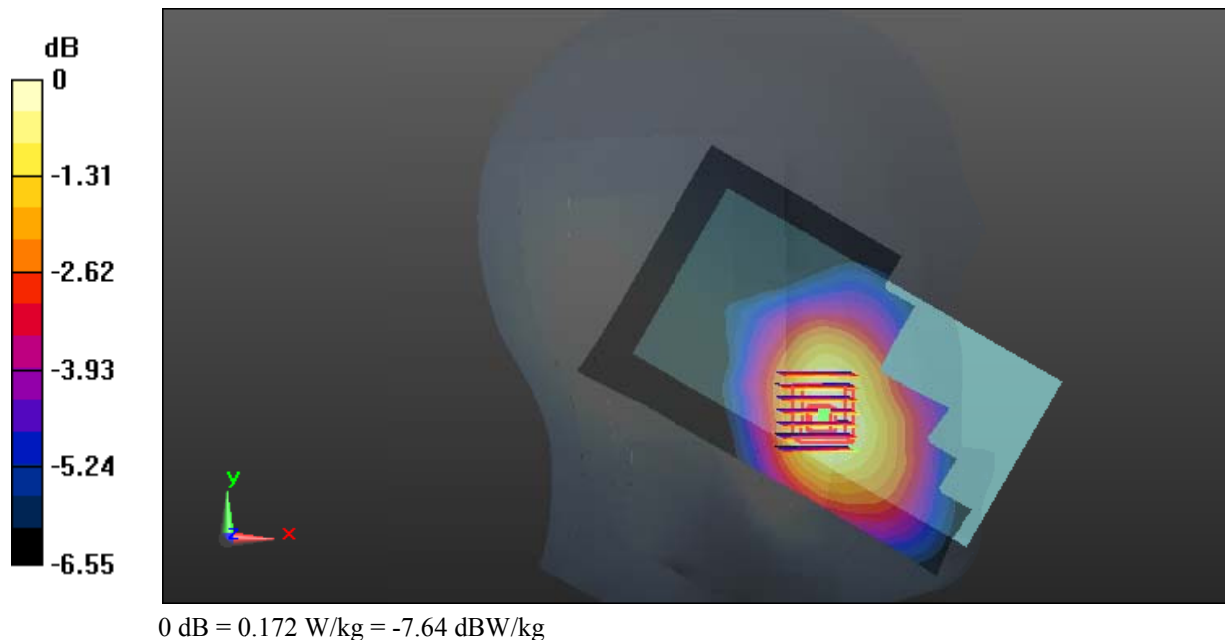

Test Plot 71#: LTE Band 5_Head Left Tilt_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.298$; $\rho = 1000$ kg/m³ ;
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0971 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 8.509 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 0.116 W/kg
SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.080 W/kg
 Maximum value of SAR (measured) = 0.103 W/kg

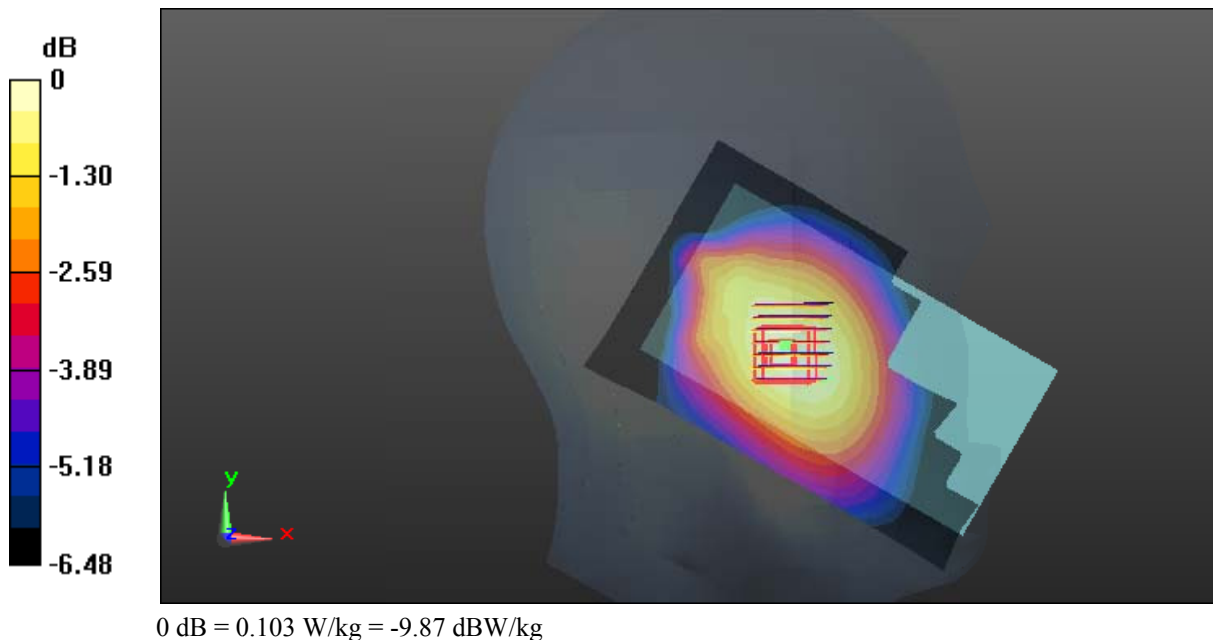

Test Plot 72#: LTE Band 5_Head Left Tilt_Middle Channel_50%RB**DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121**

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: 836.5 MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.298$; $\rho = 1000$ kg/m³ ;
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0760 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.822 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.0820 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.0770 W/kg

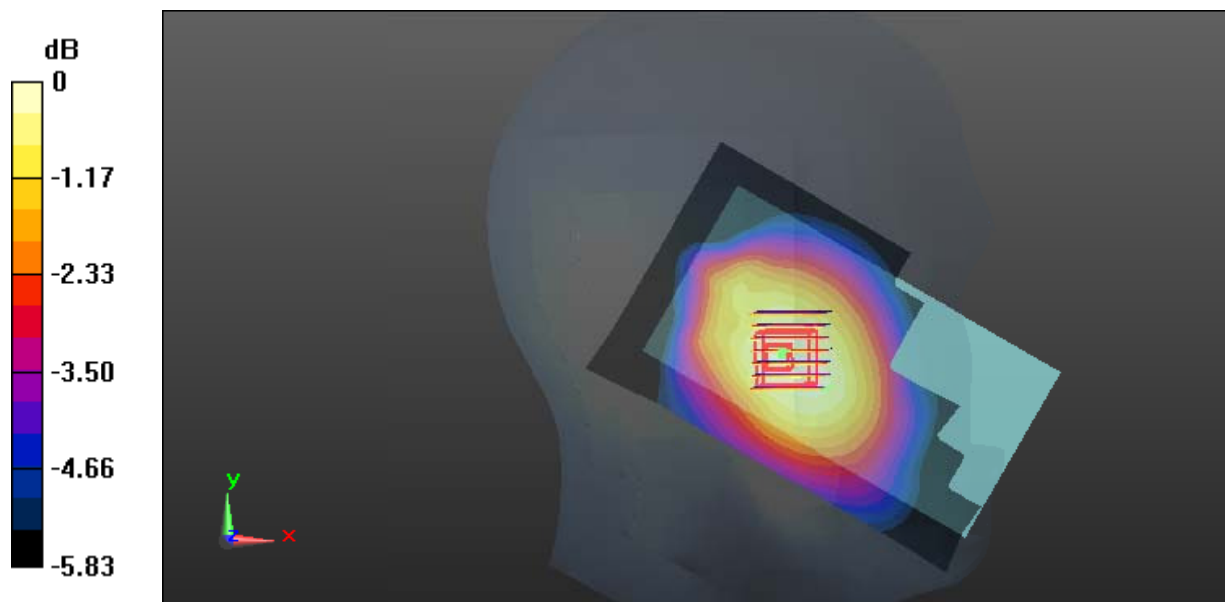

0 dB = 0.0770 W/kg = -11.14 dBW/kg

Test Plot 73#: LTE Band 5_Head Right Cheek_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.298$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.155 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 5.884 V/m; Power Drift = 0.17 dB
 Peak SAR (extrapolated) = 0.186 W/kg
SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.119 W/kg
 Maximum value of SAR (measured) = 0.156 W/kg

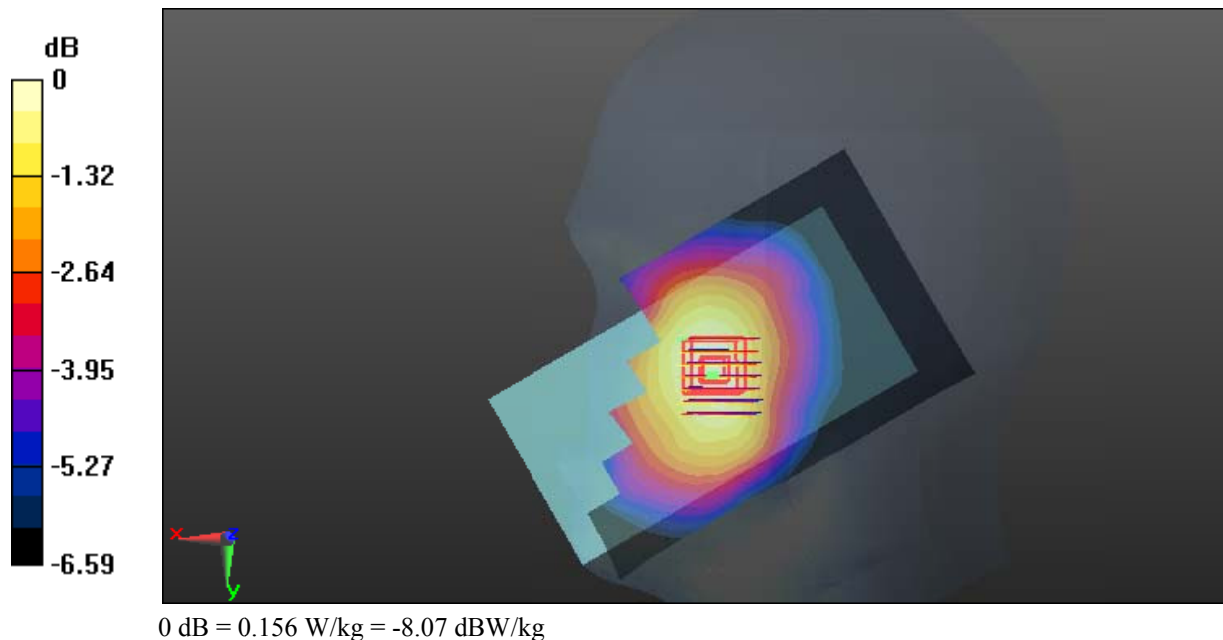

Test Plot 74#: LTE Band 5_Head Right Cheek_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.298$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.122 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 6.031 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.118 W/kg

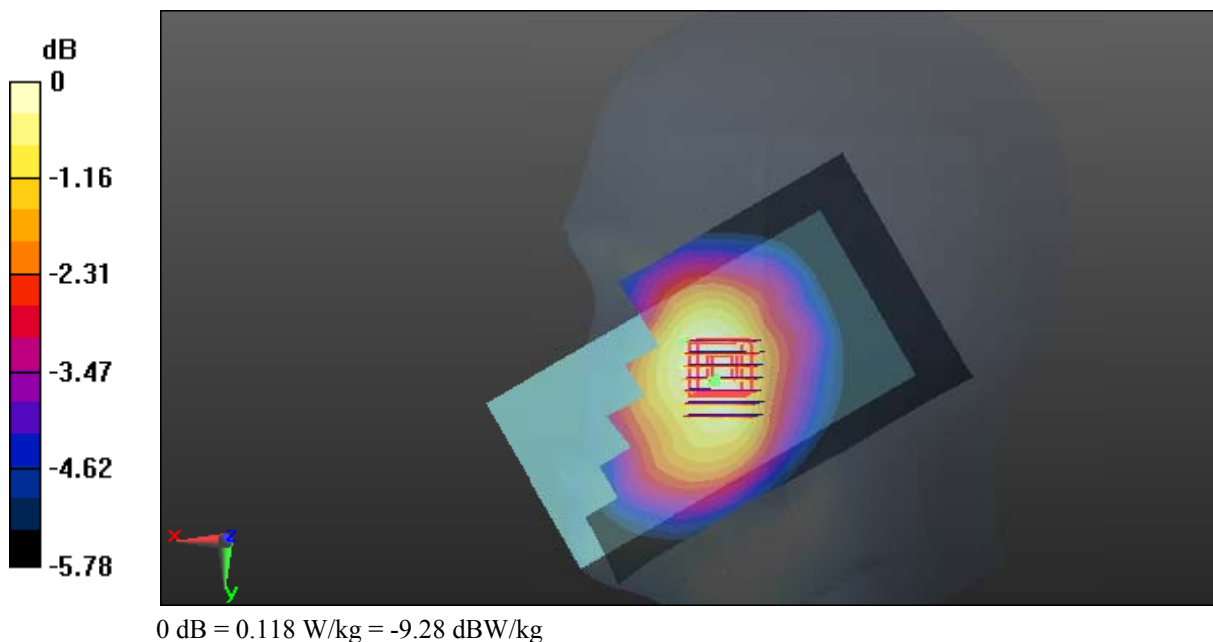

Test Plot 75#: LTE Band 5_Head Right Tilt_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.298$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0828 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.950 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.103 W/kg

SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.075 W/kg

Maximum value of SAR (measured) = 0.0974 W/kg

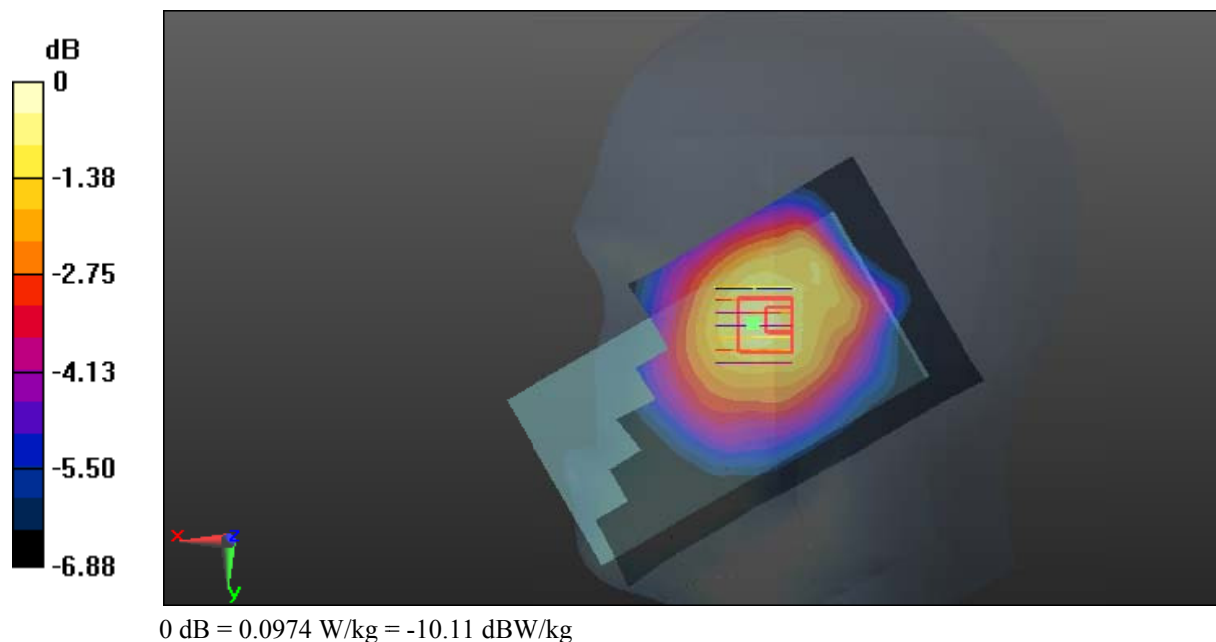

Test Plot 76#: LTE Band 5_Head Right Tilt_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 41.298$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.84, 9.84, 9.84); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x111x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0716 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.437 V/m; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 0.0840 W/kg
SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.059 W/kg
 Maximum value of SAR (measured) = 0.0775 W/kg

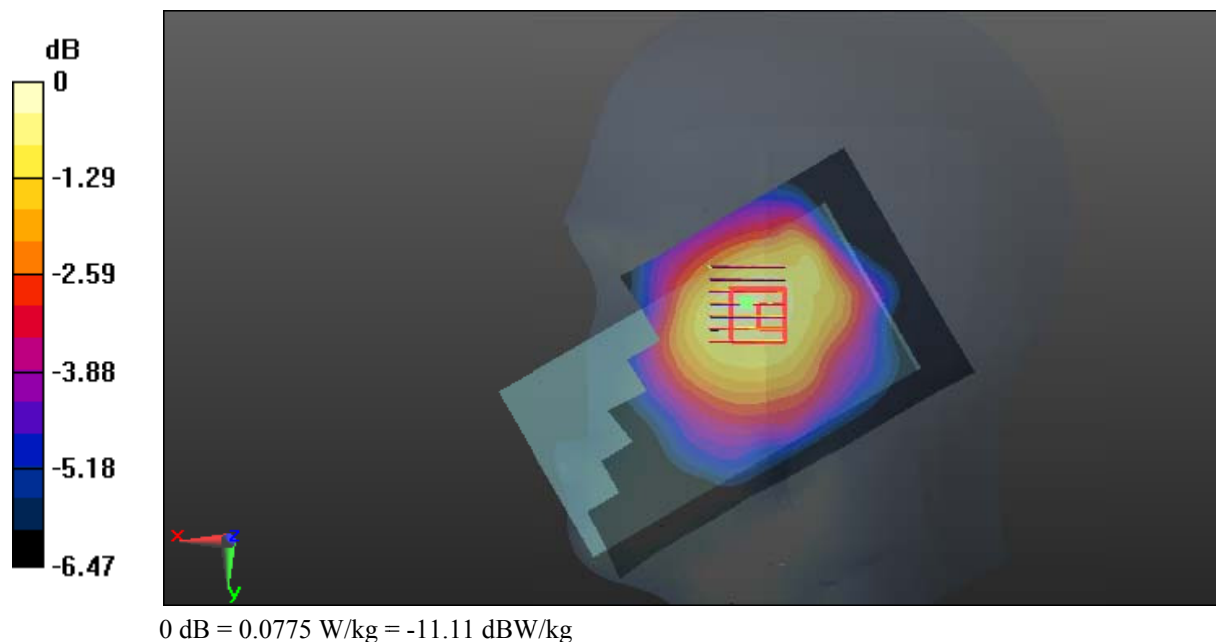

Test Plot 77#: LTE Band 5_Body Back_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.290 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.71 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.242 W/kg; SAR(10 g) = 0.147 W/kg

Maximum value of SAR (measured) = 0.268 W/kg

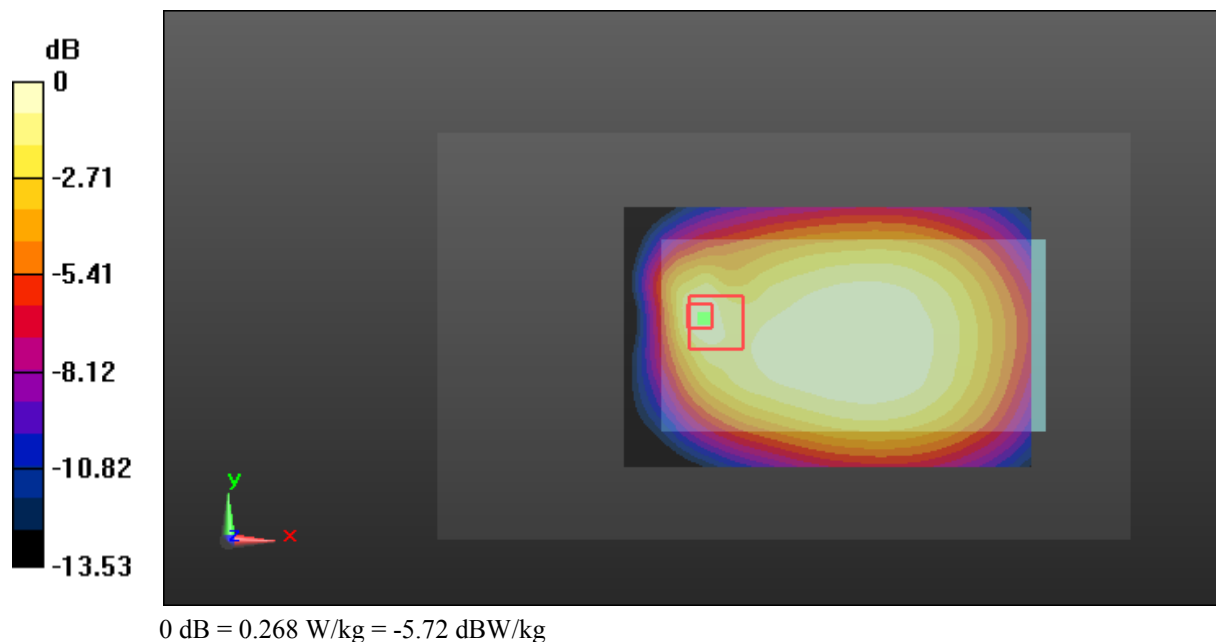

Test Plot 78#: LTE Band 5_Body Back_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.225 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 14.16 V/m; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.115 W/kg

Maximum value of SAR (measured) = 0.203 W/kg

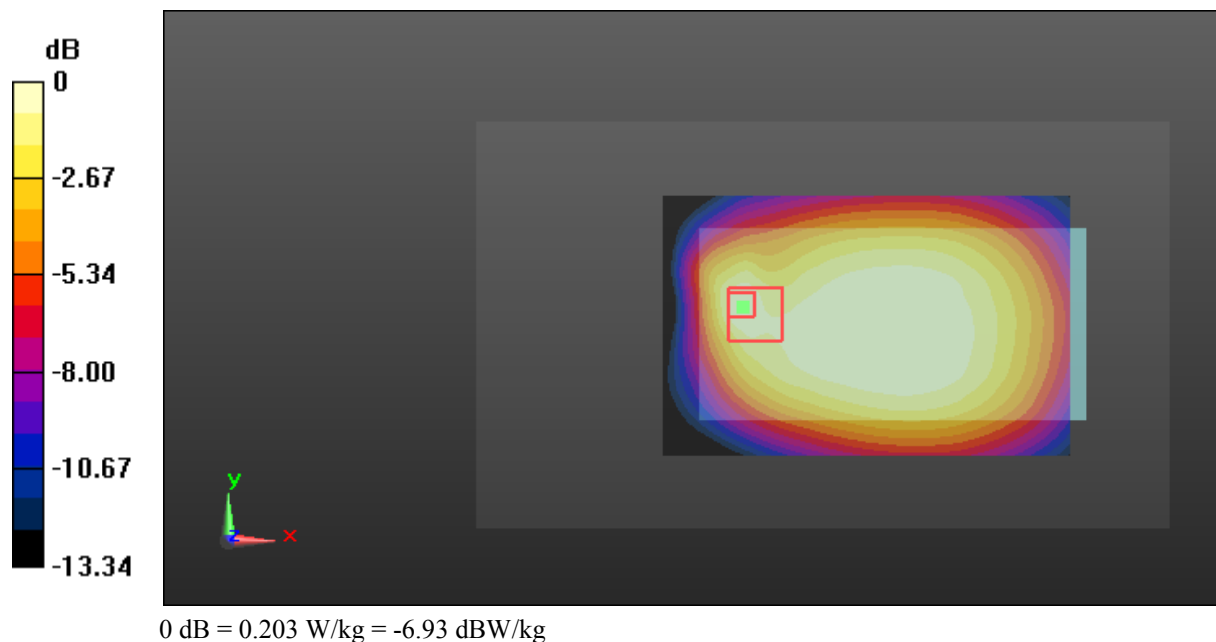

Test Plot 79#: LTE Band 5_Body Left_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.143 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.13 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

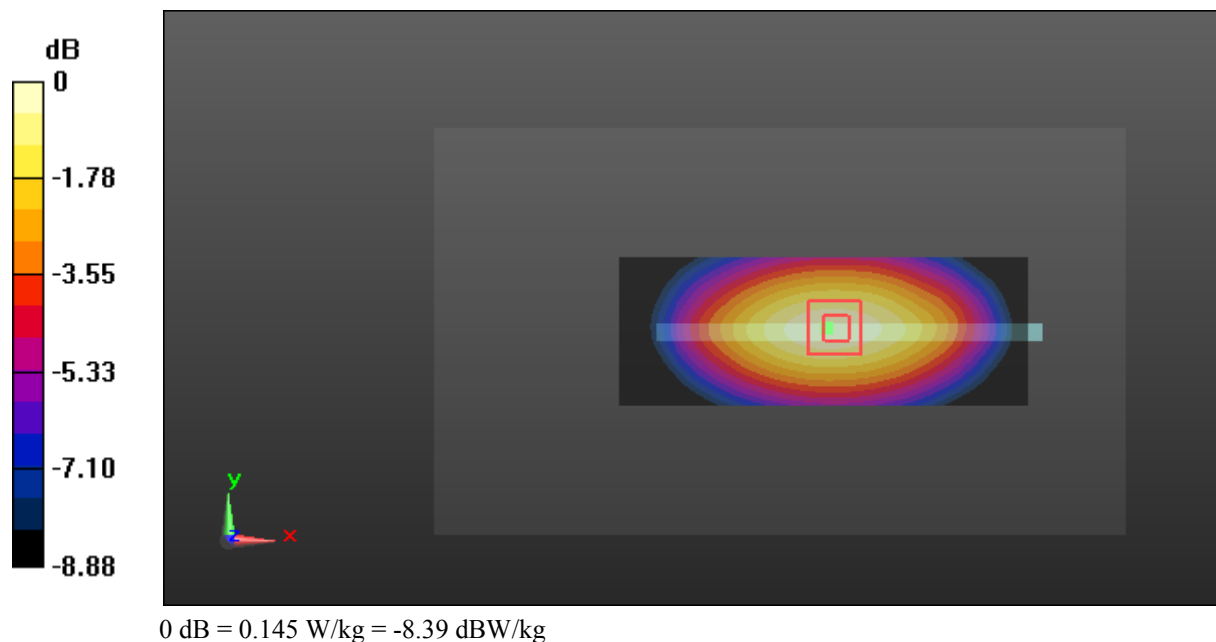

Test Plot 80#: LTE Band 5_Body Left_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.103 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.682 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.104 W/kg

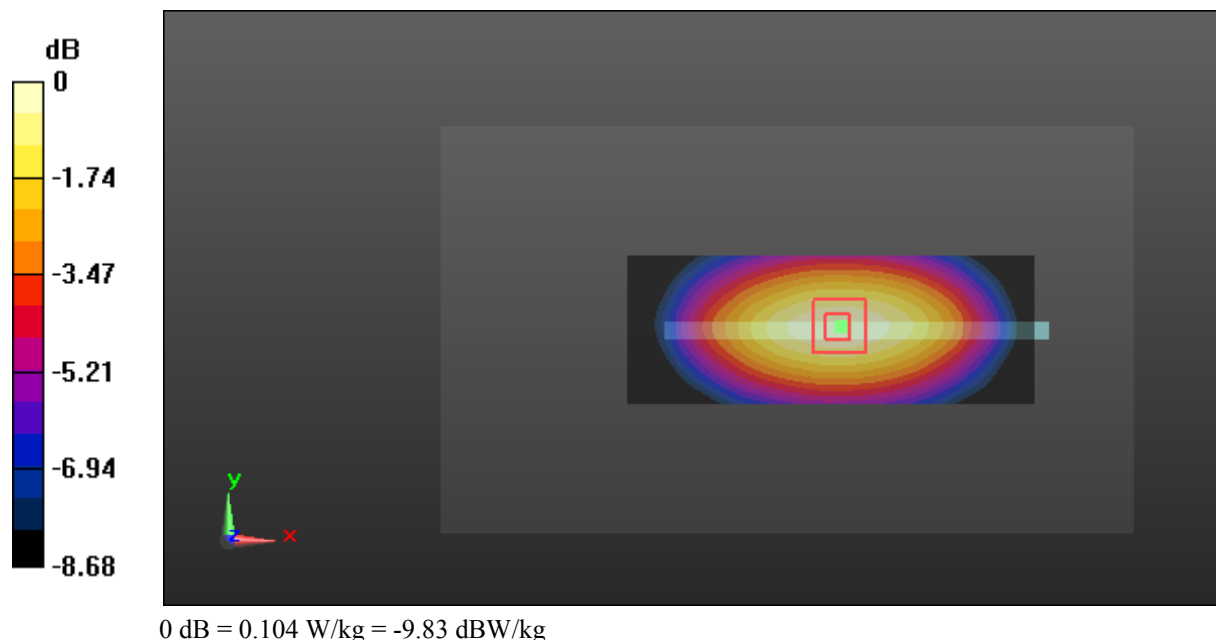

Test Plot 81#: LTE Band 5_Body Right_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.122 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.152 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.163 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.124 W/kg

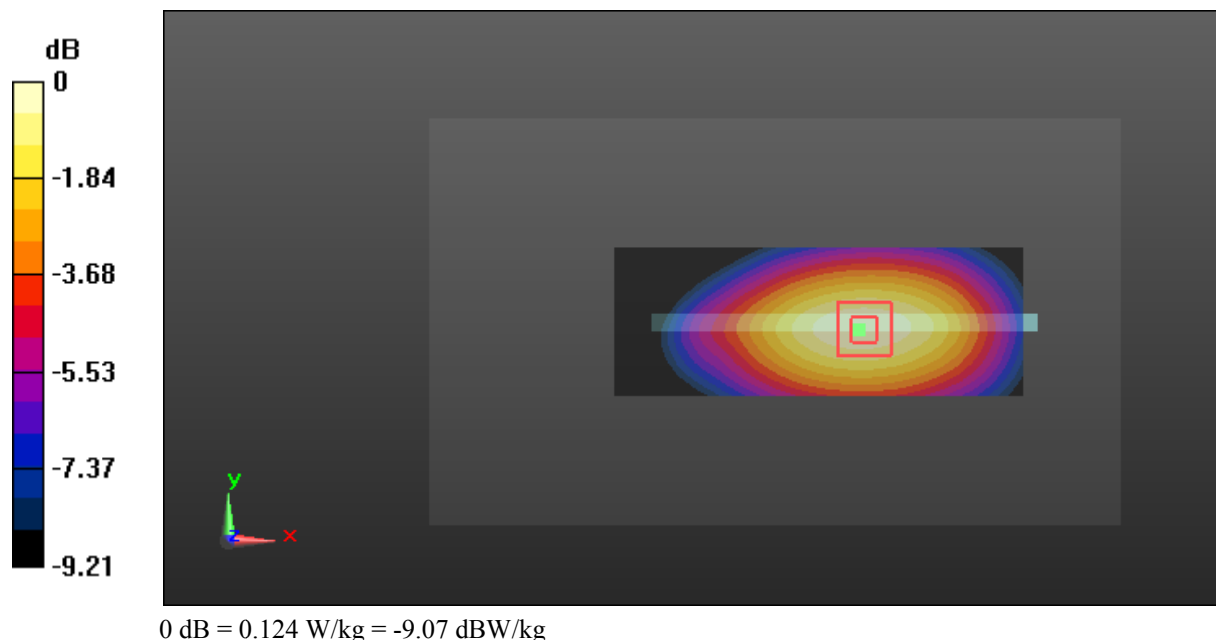

Test Plot 82#: LTE Band 5_Body Right_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0939 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.090 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.0932 W/kg

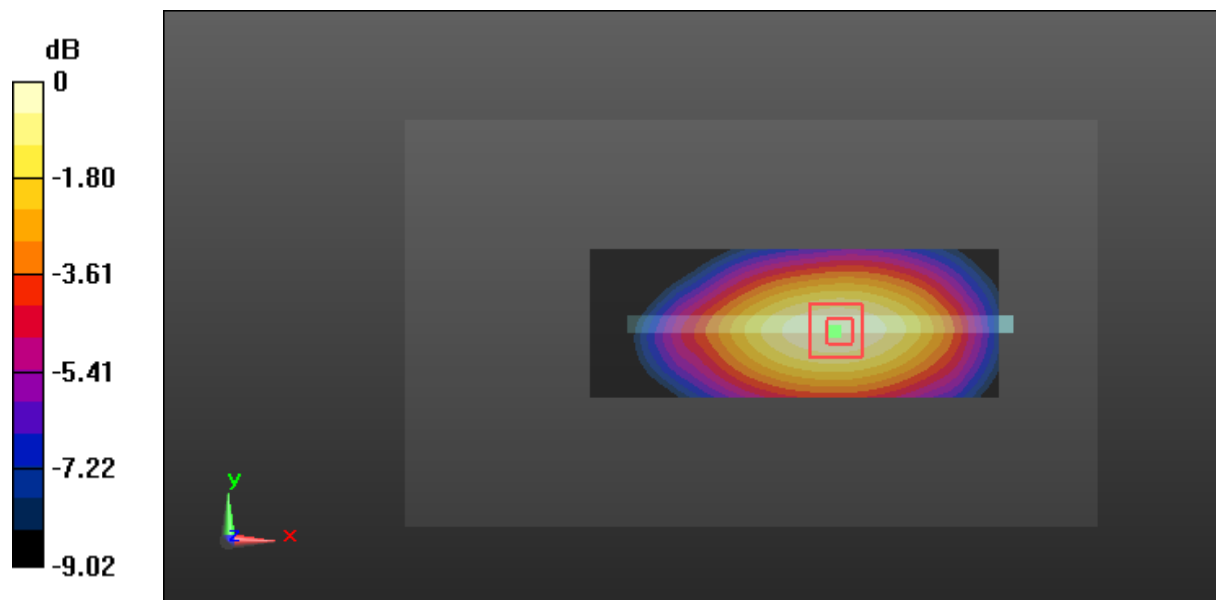

0 dB = 0.0932 W/kg = -10.31 dBW/kg

Test Plot 83#: LTE Band 5_Body Bottom_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0552 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.622 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0980 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.0587 W/kg

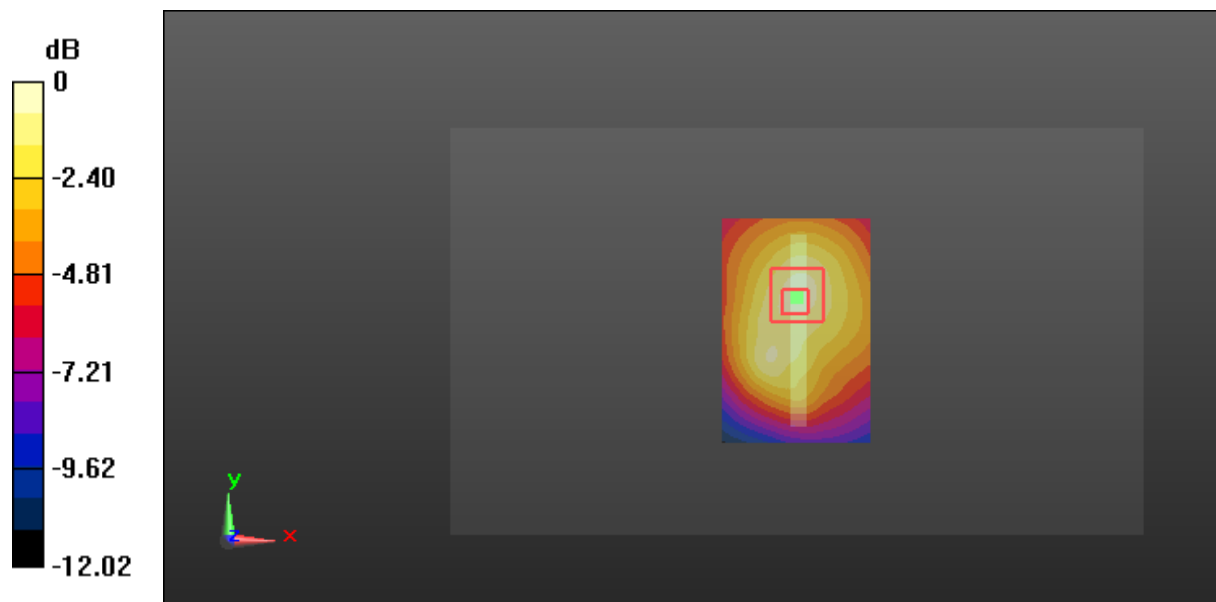

0 dB = 0.0587 W/kg = -12.31 dBW/kg

Test Plot 84#: LTE Band 5_Body Bottom_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1
 Medium parameters used: 836.5 MHz; $\sigma = 0.989$ S/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³ ;
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(9.89, 9.89, 9.89); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0439 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.832 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0790 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.026 W/kg

Maximum value of SAR (measured) = 0.0457 W/kg

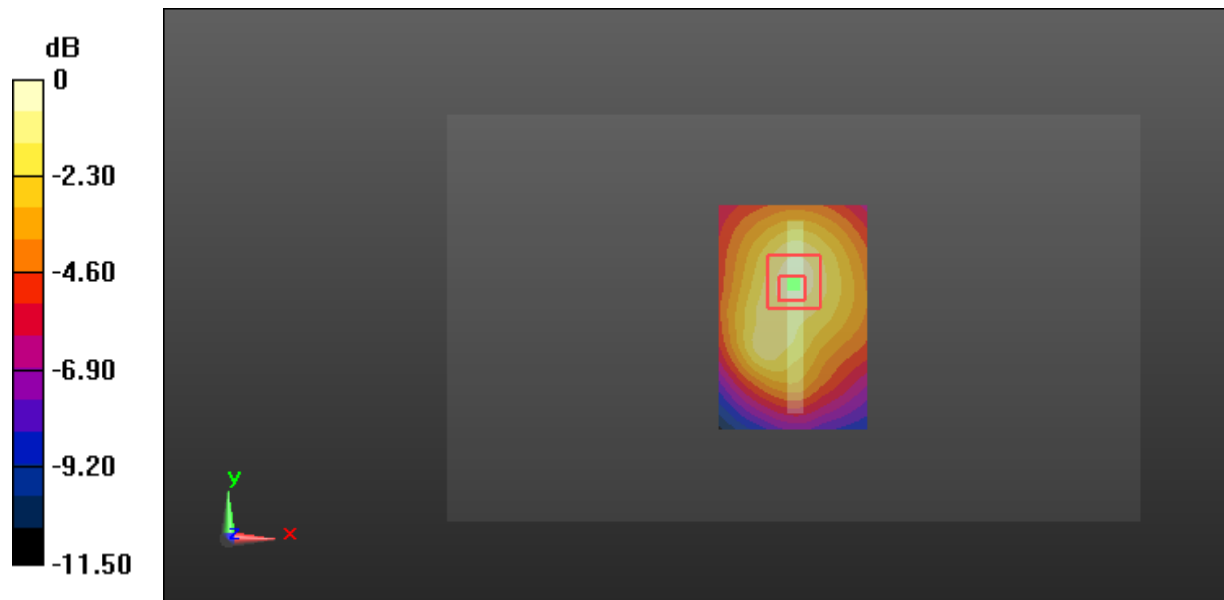

0 dB = 0.0457 W/kg = -13.40 dBW/kg

Test Plot 85#: LTE Band 7_Head Flat_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.935 \text{ S/m}$; $\epsilon_r = 39.017$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.126 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.552 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.050 W/kg

Maximum value of SAR (measured) = 0.125 W/kg

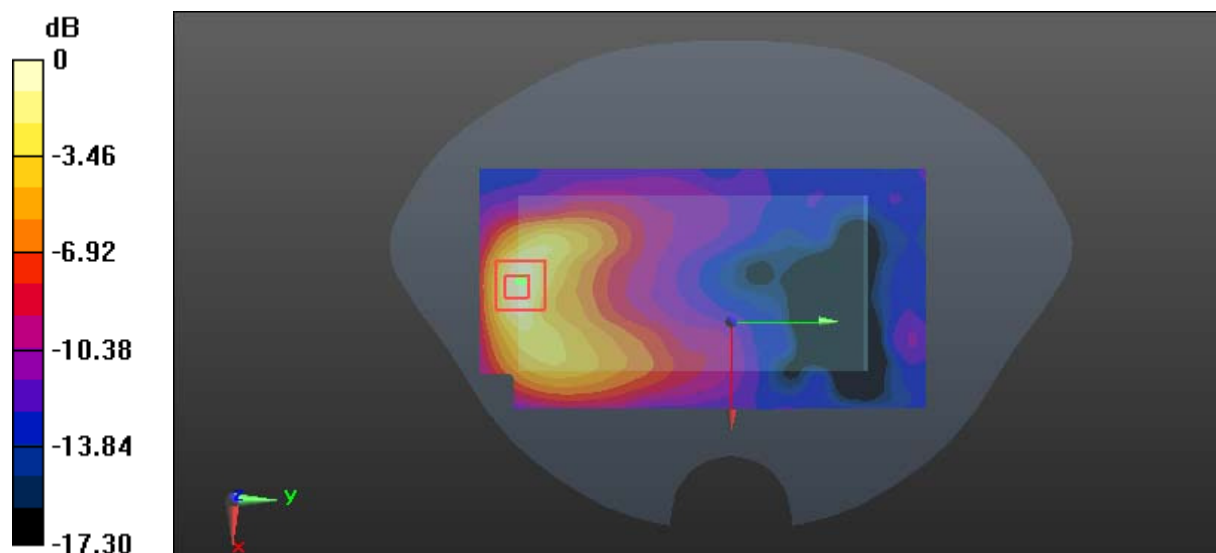

0 dB = 0.125 W/kg = -9.03 dBW/kg

Test Plot 86#: LTE Band 7_Head Flat_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: LTE; Frequency: 2535 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.935 \text{ S/m}$; $\epsilon_r = 39.017$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.44, 7.44, 7.44); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: SAM1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0729 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 0.9110 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.116 W/kg

SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0664 W/kg

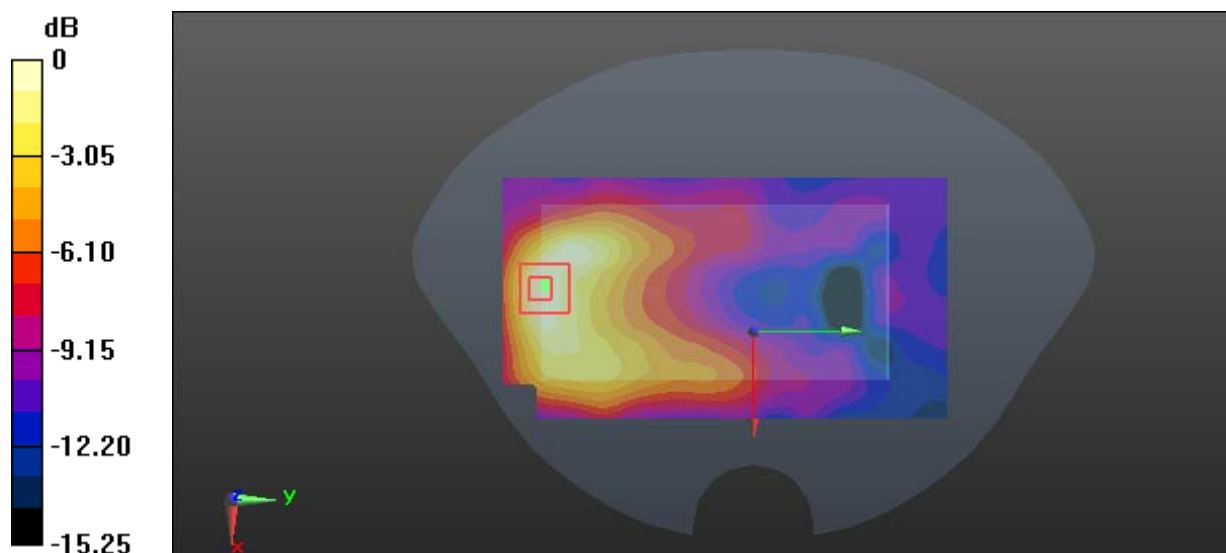

0 dB = 0.0664 W/kg = -11.78 dBW/kg

Test Plot 87#: LTE Band 7_Body Back_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.099 \text{ S/m}$; $\epsilon_r = 52.478$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.352 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.716 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.159 W/kg

Maximum value of SAR (measured) = 0.356 W/kg

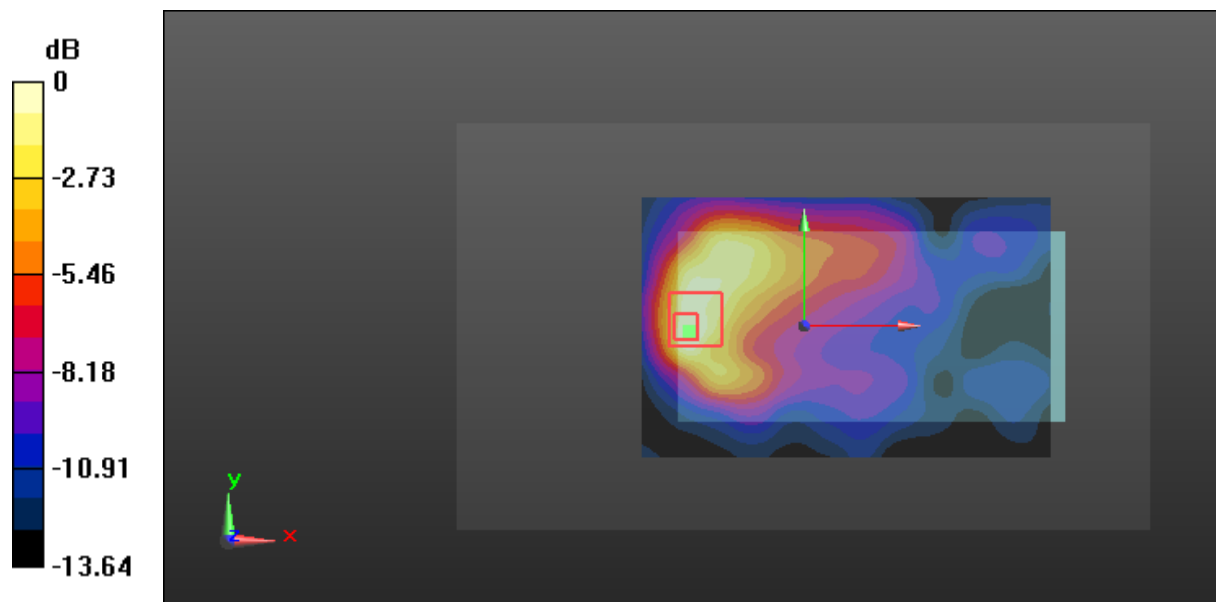

0 dB = 0.356 W/kg = -4.49 dBW/kg

Test Plot 88#: LTE Band 7_Body Back_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.099$ S/m; $\epsilon_r = 52.478$; $\rho = 1000$ kg/m³ ;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.341 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.149 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.144 W/kg

Maximum value of SAR (measured) = 0.324 W/kg

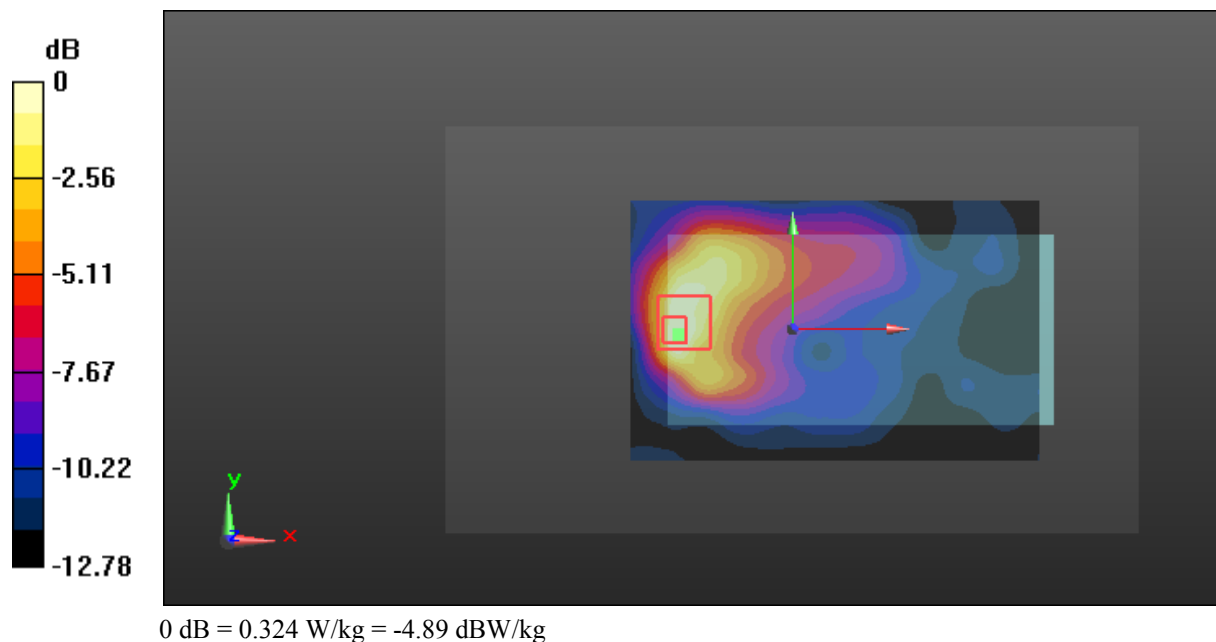

Test Plot 89#: LTE Band 7_Body Left_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.099 \text{ S/m}$; $\epsilon_r = 52.478$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0279 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.805 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0480 W/kg

SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.015 W/kg

Maximum value of SAR (measured) = 0.0285 W/kg

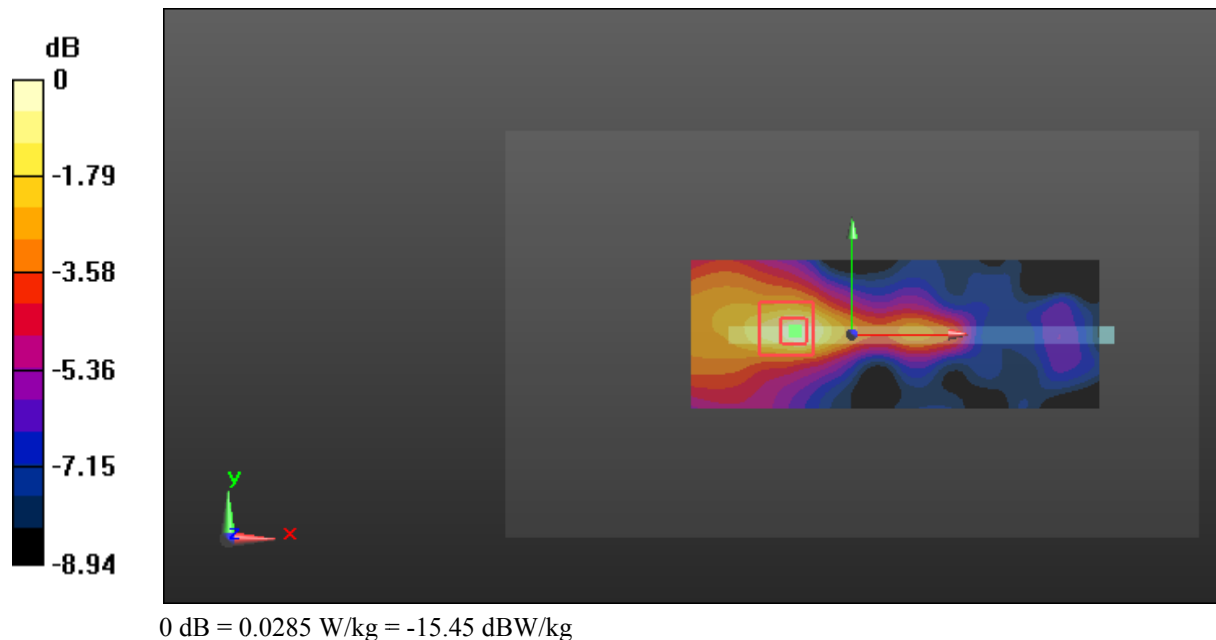

Test Plot 90#: LTE Band 7_Body Left_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.099 \text{ S/m}$; $\epsilon_r = 52.478$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0252 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.690 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0430 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.014 W/kg

Maximum value of SAR (measured) = 0.0245 W/kg

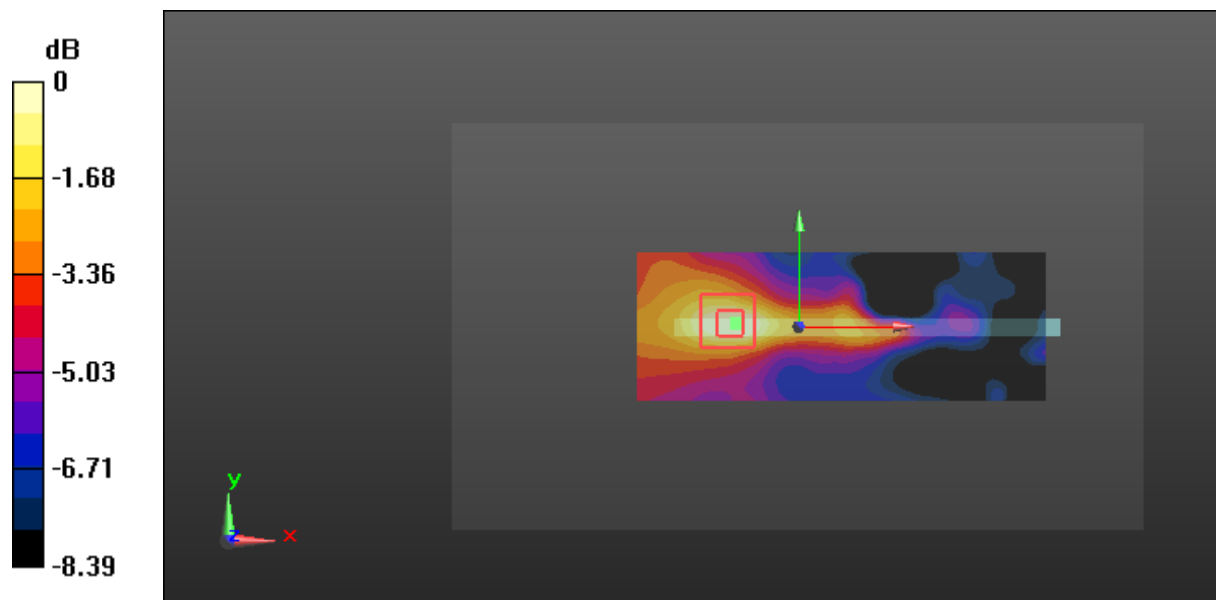

0 dB = 0.0245 W/kg = -16.11 dBW/kg

Test Plot 91#: LTE Band 7_Body Right_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.099 \text{ S/m}$; $\epsilon_r = 52.478$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0587 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.145 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.025 W/kg

Maximum value of SAR (measured) = 0.0525 W/kg

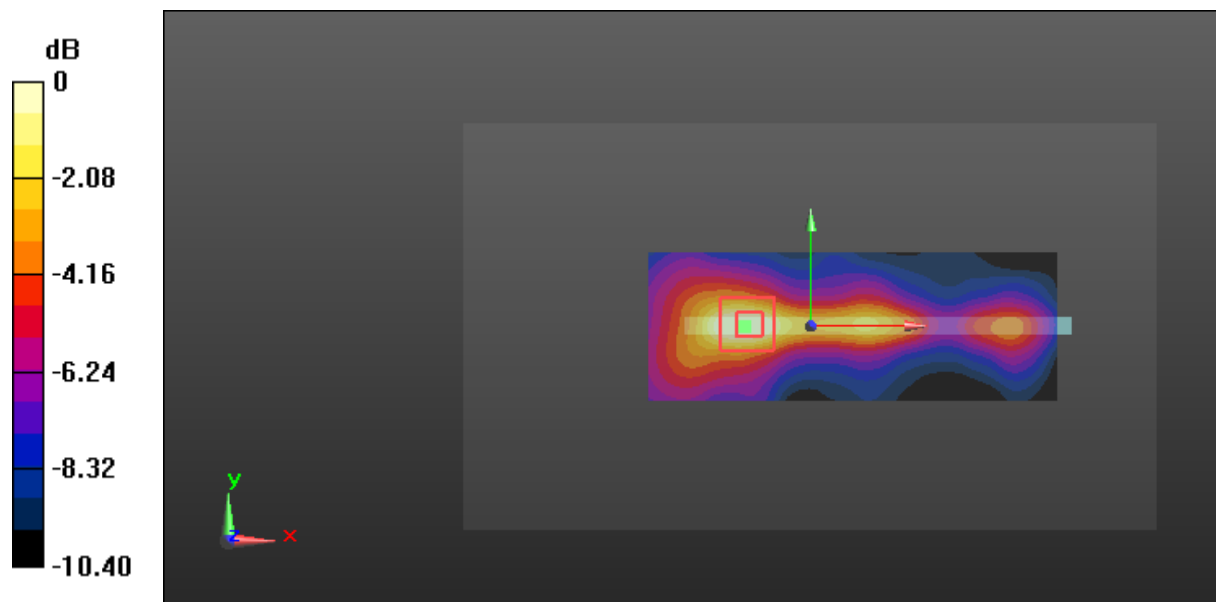

0 dB = 0.0525 W/kg = -12.80 dBW/kg

Test Plot 92#: LTE Band 7_Body Right_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121


Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.099 \text{ S/m}$; $\epsilon_r = 52.478$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (111x41x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0512 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 3.550 V/m; Power Drift = 0.04 dB
 Peak SAR (extrapolated) = 0.0950 W/kg
SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.024 W/kg
 Maximum value of SAR (measured) = 0.0506 W/kg

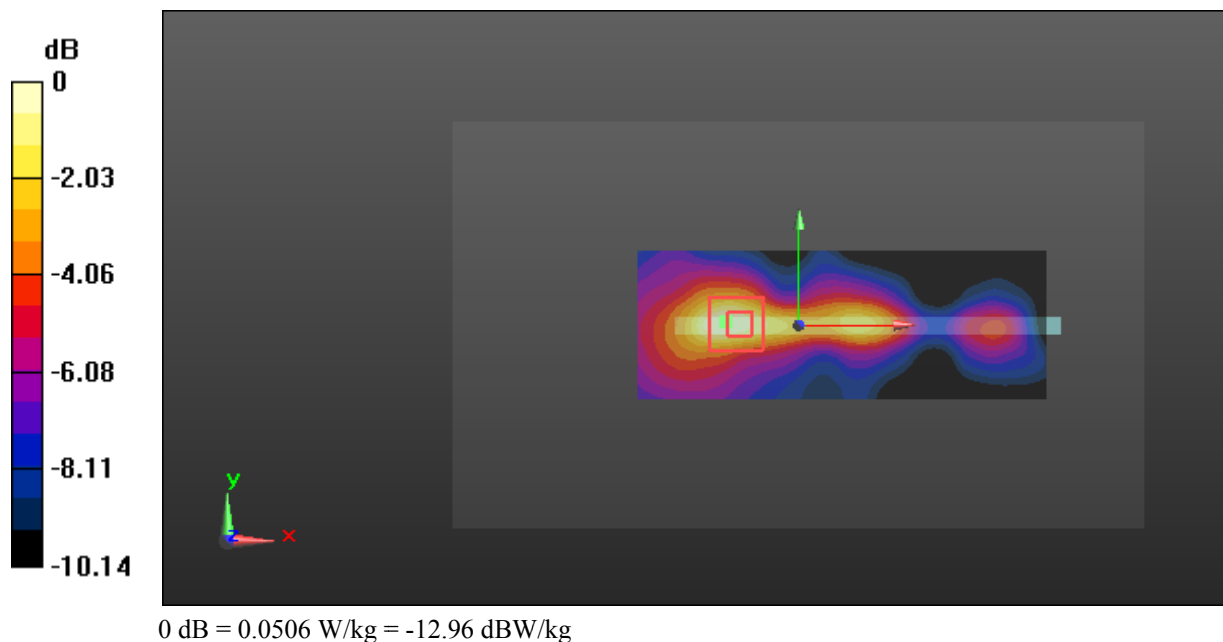

Test Plot 93#: LTE Band 7_Body Bottom_Middle Channel_1RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.099 \text{ S/m}$; $\epsilon_r = 52.478$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.563 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.625 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.941 W/kg

SAR(1 g) = 0.487 W/kg; SAR(10 g) = 0.224 W/kg

Maximum value of SAR (measured) = 0.569 W/kg

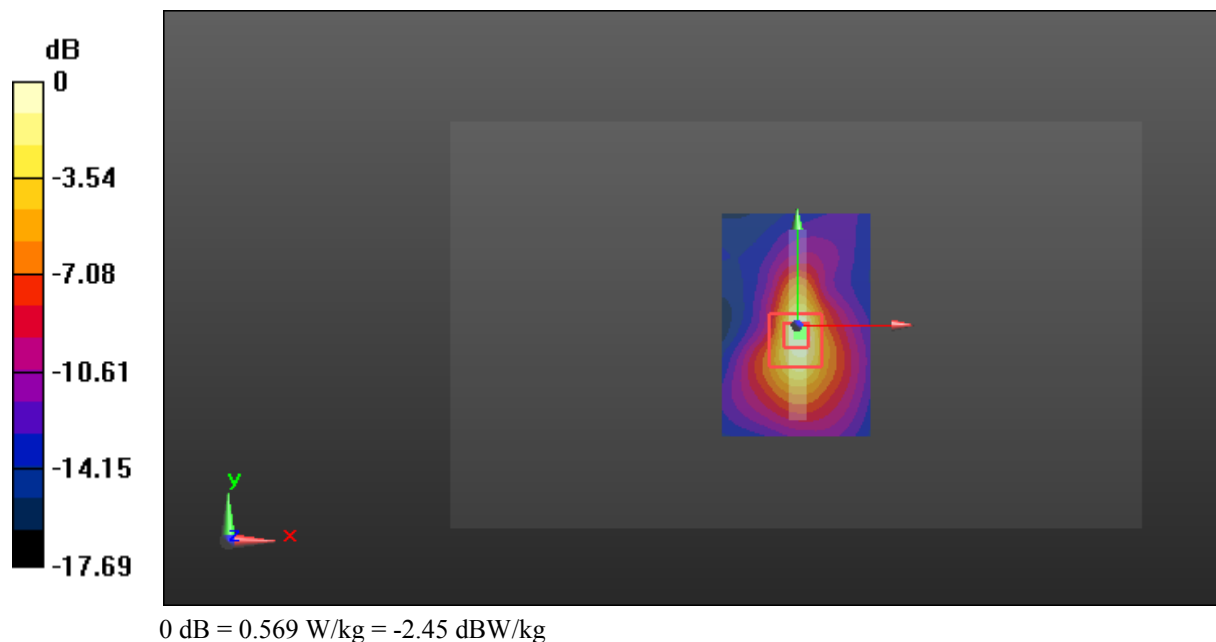

Test Plot 94#: LTE Band 7_Body Bottom_Middle Channel_50%RB

DUT: Mobile Phone; Type: AX 1085; Serial: 16101200121

Communication System: Generic LTE; Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium parameters used: 2535 MHz; $\sigma = 2.099 \text{ S/m}$; $\epsilon_r = 52.478$; $\rho = 1000 \text{ kg/m}^3$;
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.47, 7.47, 7.47); Calibrated: 2016/10/4;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (41x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.526 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.011 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.884 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.209 W/kg

Maximum value of SAR (measured) = 0.537 W/kg

