




Report No: TRE1611005302 Page: 161 of 202 Issued: 2016-11-24

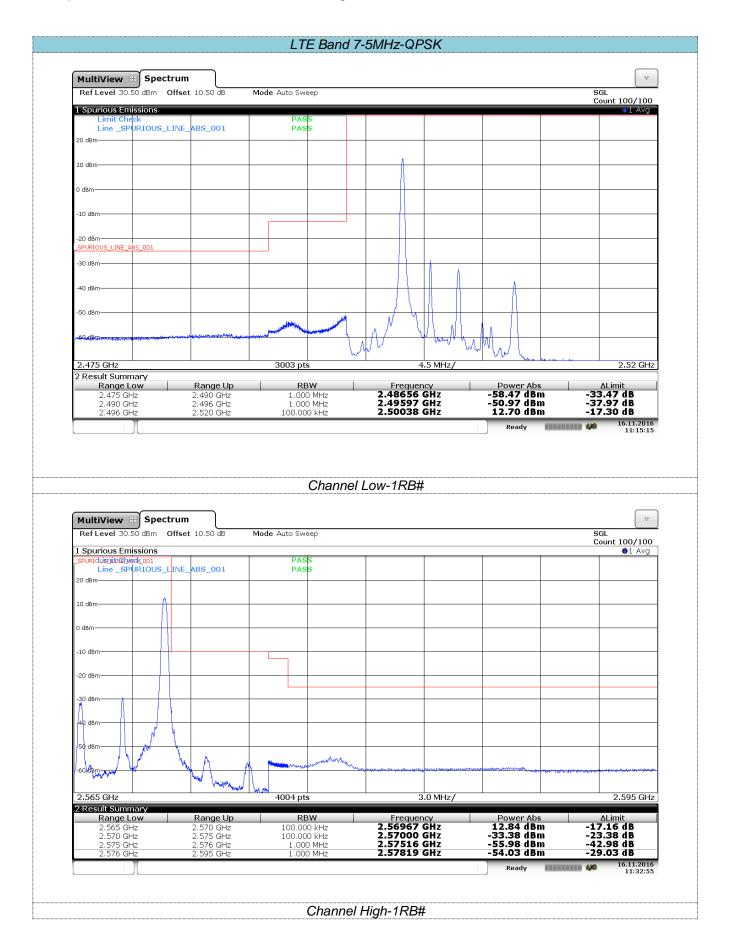



Report No: TRE1611005302 Page: 162 of 202 Issued: 2016-11-24

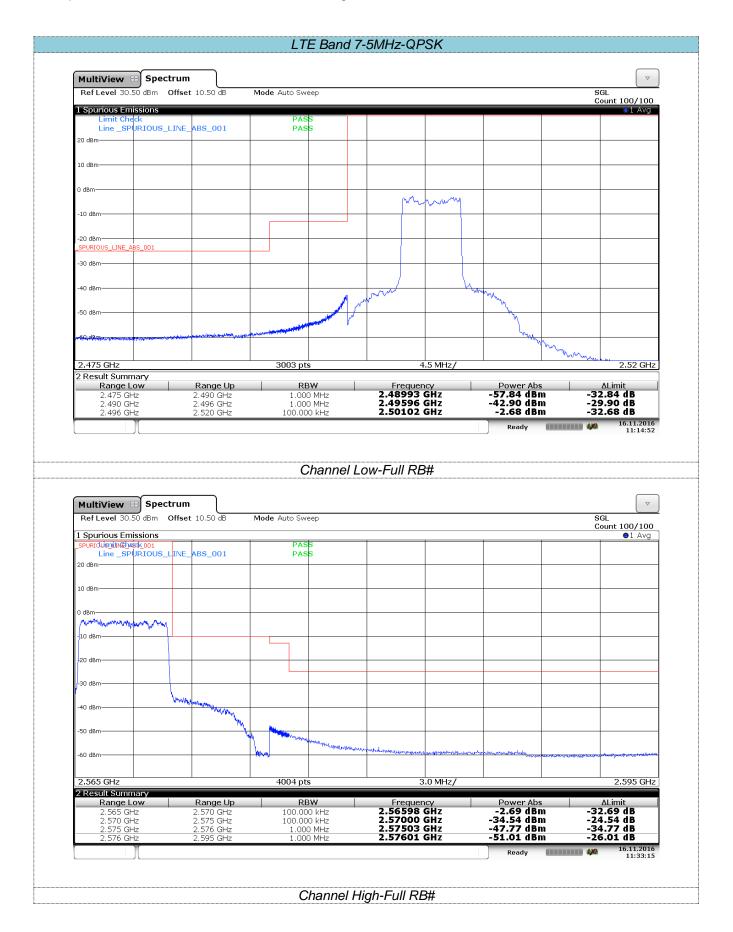

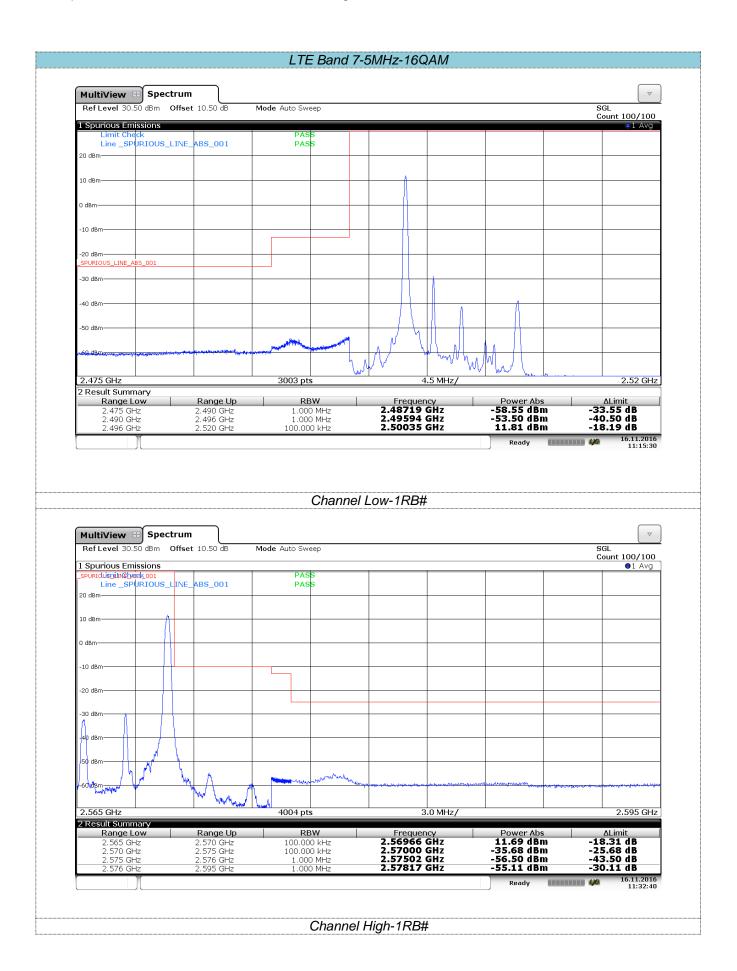



Report No: TRE1611005302 Page: 164 of 202 Issued: 2016-11-24

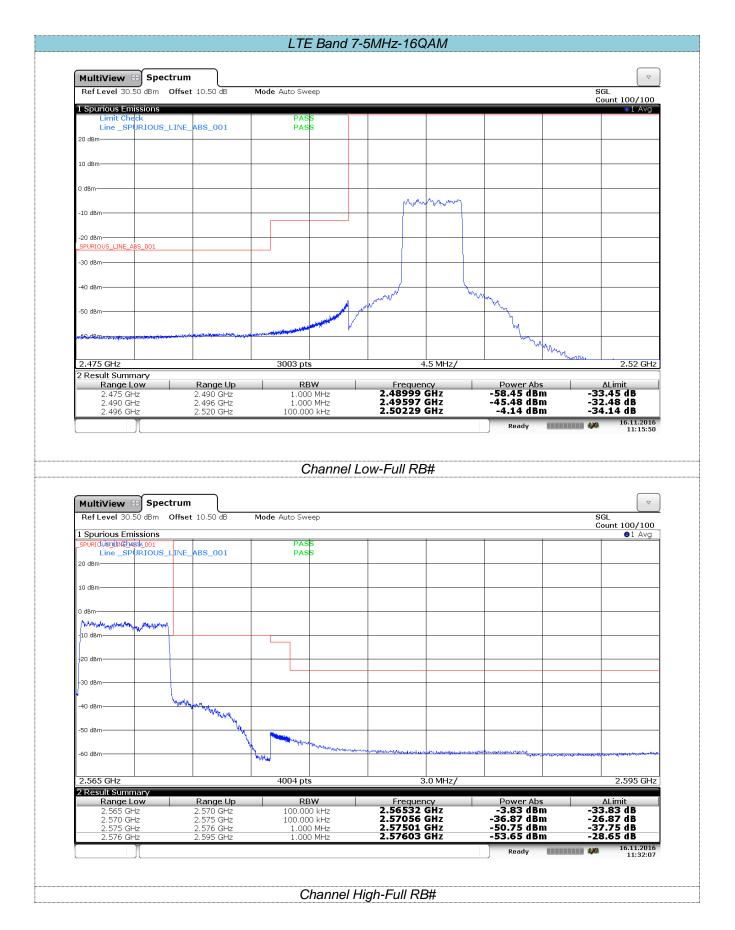

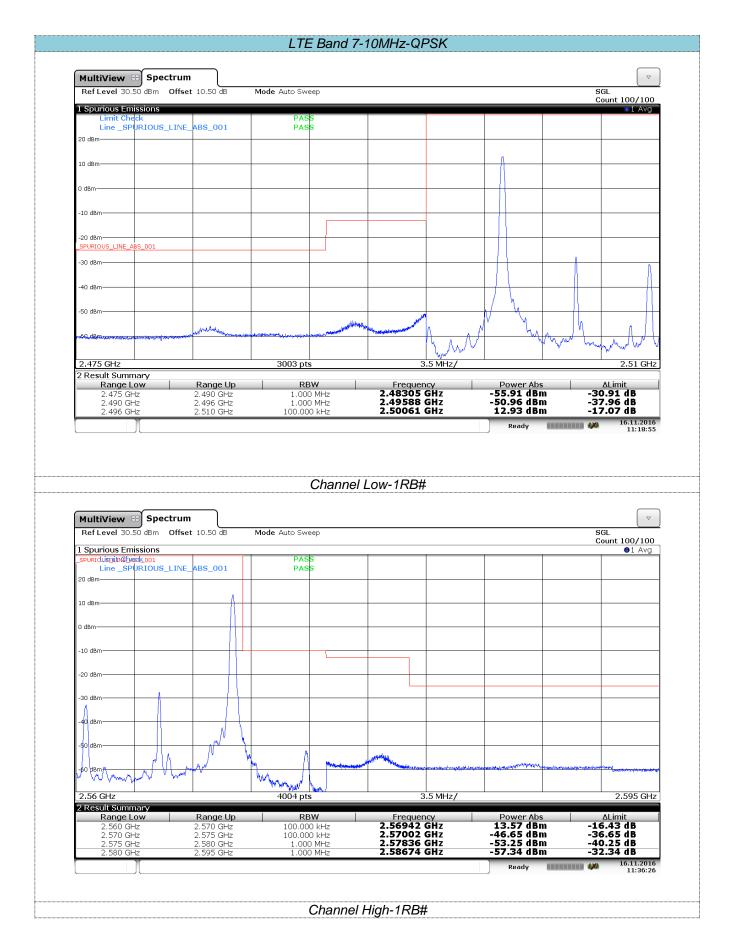



Report No: TRE1611005302 Page: 166 of 202 Issued: 2016-11-24

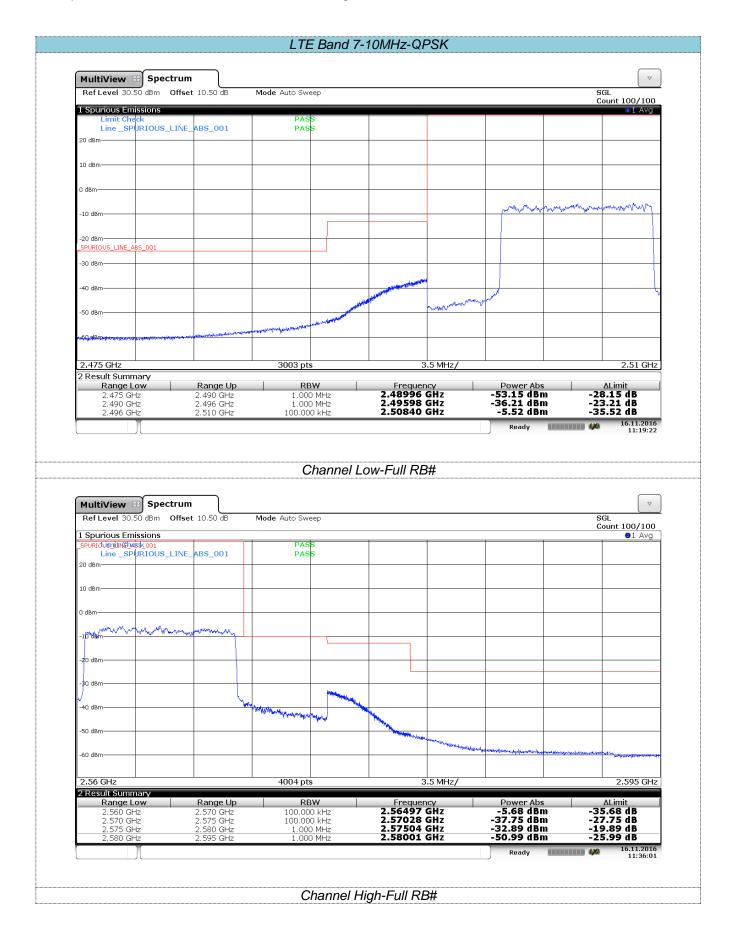

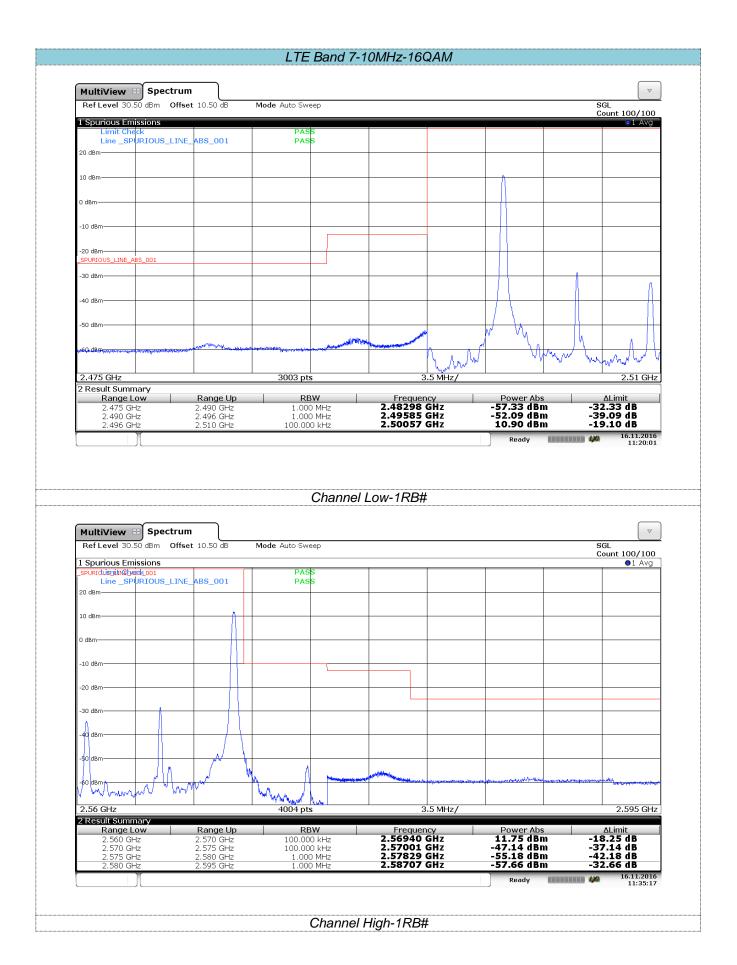


Report No: TRE1611005302 Page: 168 of 202 Issued: 2016-11-24

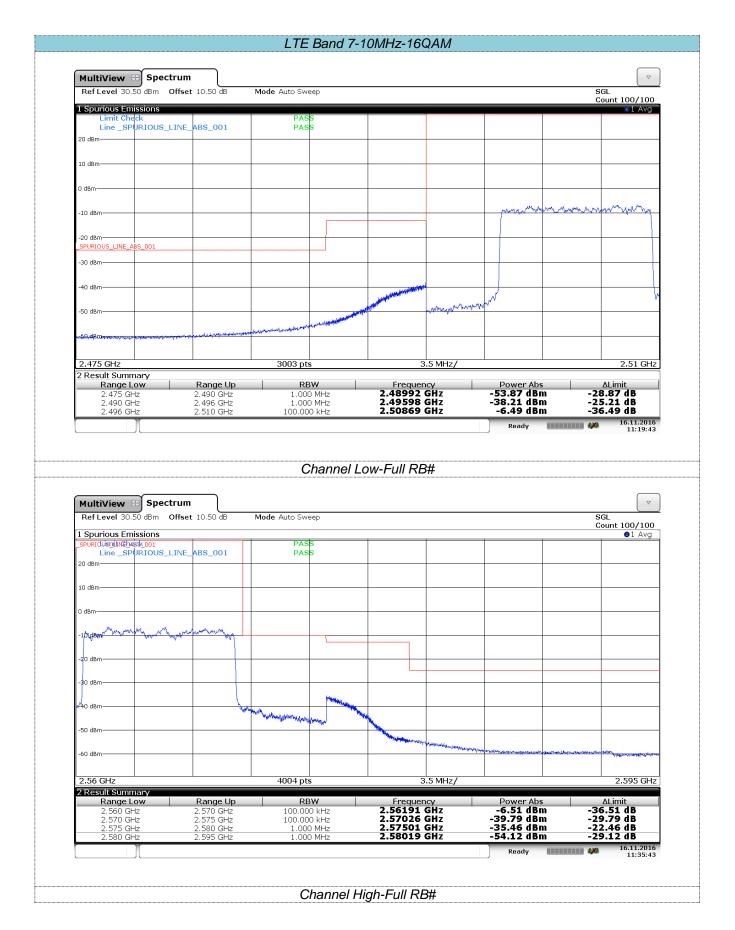


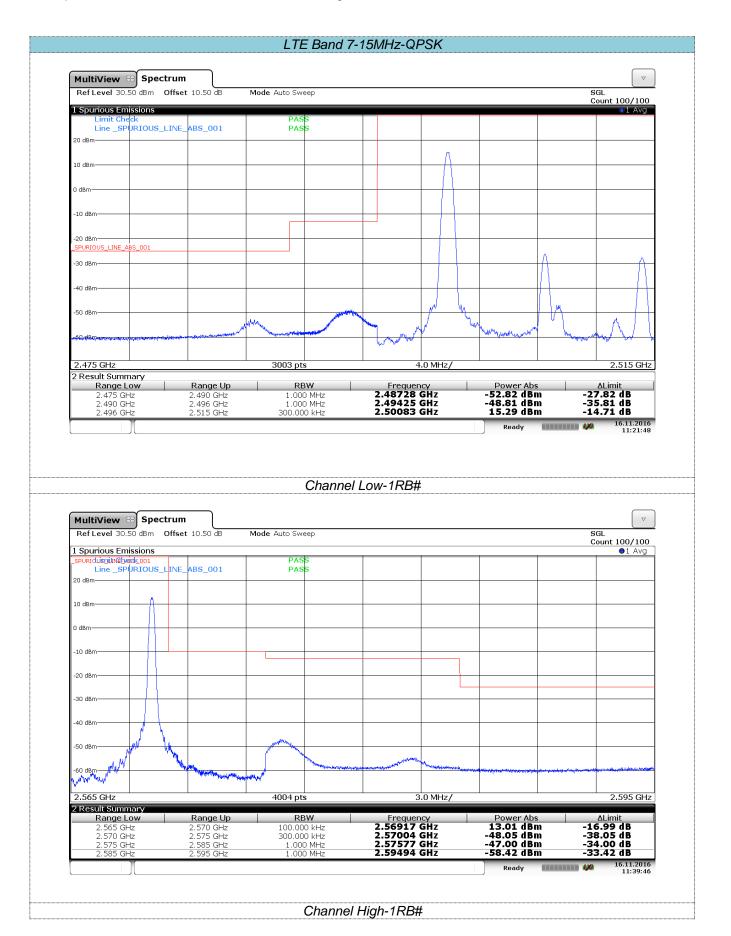


Report No: TRE1611005302 Page: 170 of 202 Issued: 2016-11-24

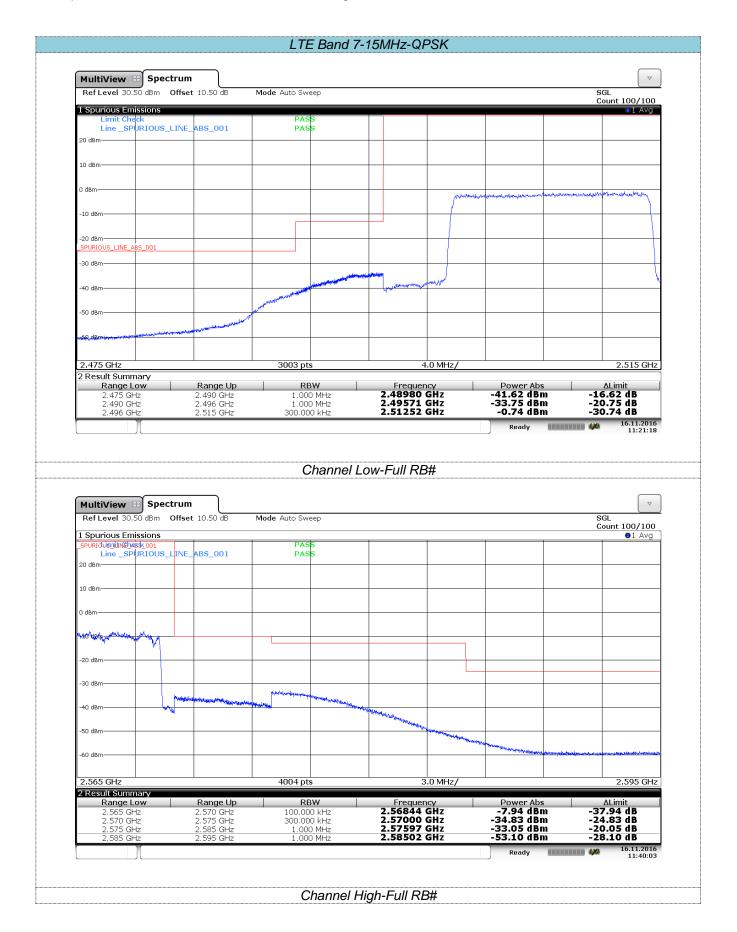


Report No: TRE1611005302 Page: 171 of 202 Issued: 2016-11-24

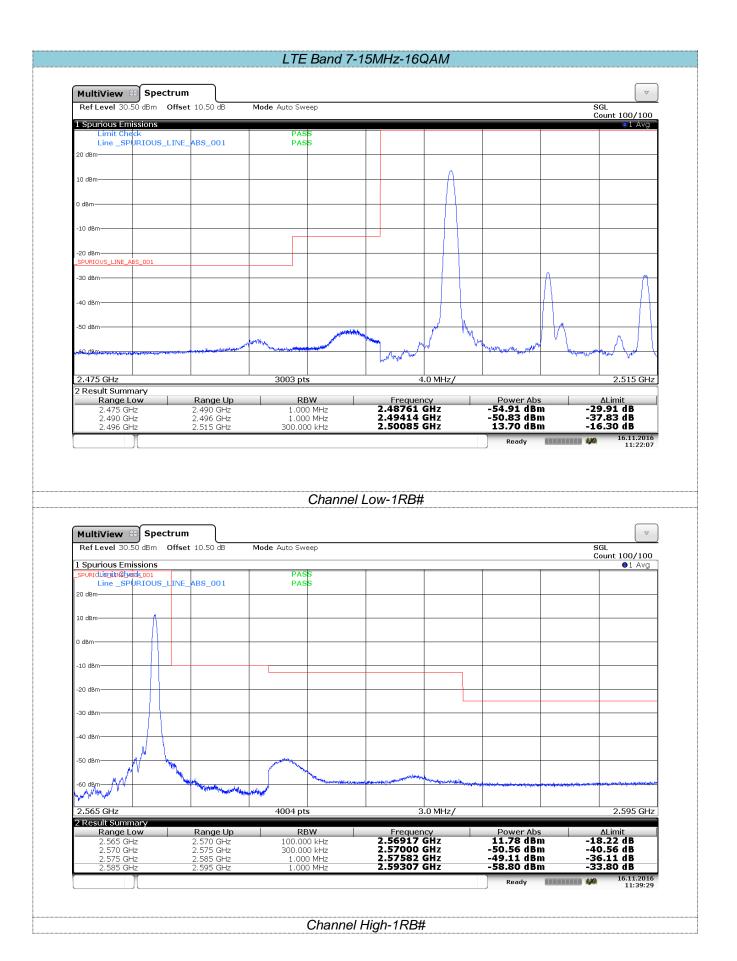


Report No: TRE1611005302 Page: 172 of 202 Issued: 2016-11-24

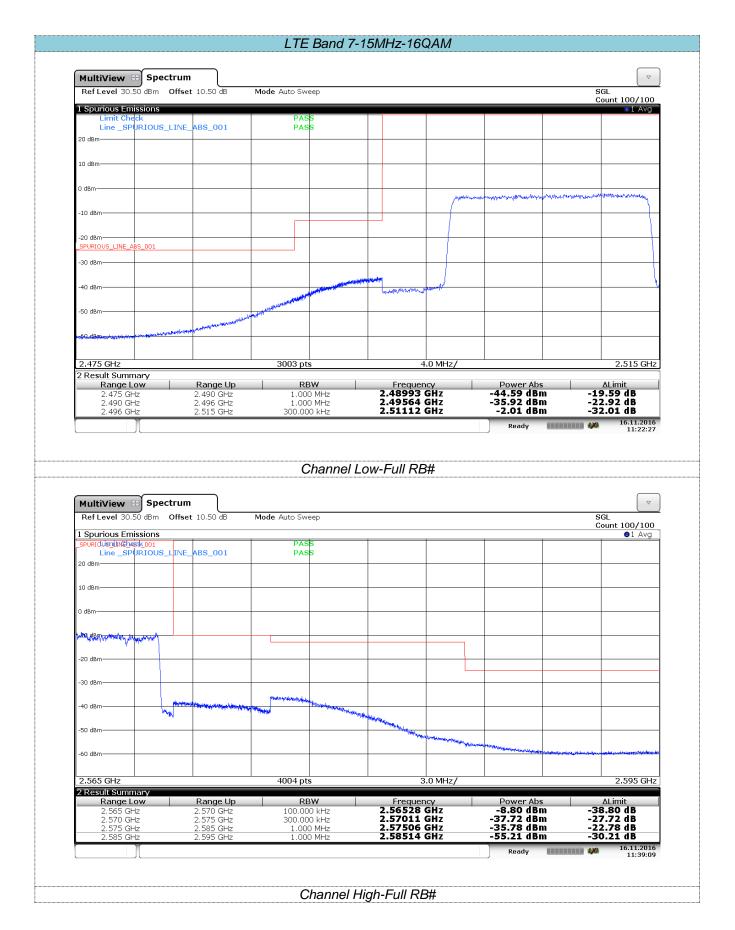


Report No: TRE1611005302 Page: 173 of 202 Issued: 2016-11-24

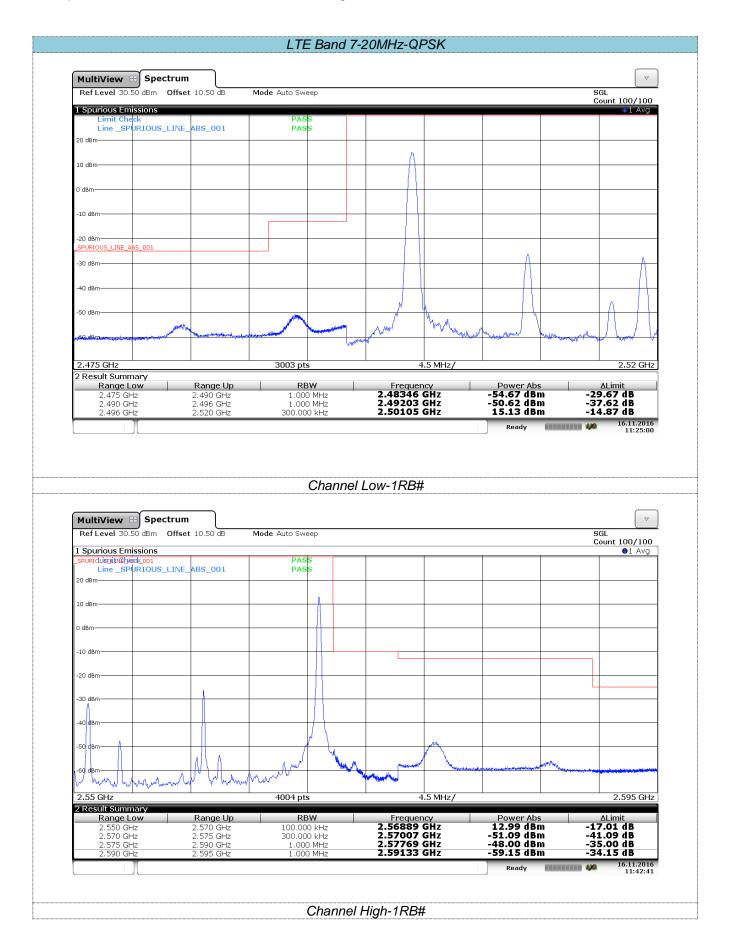


Report No: TRE1611005302 Page: 174 of 202 Issued: 2016-11-24

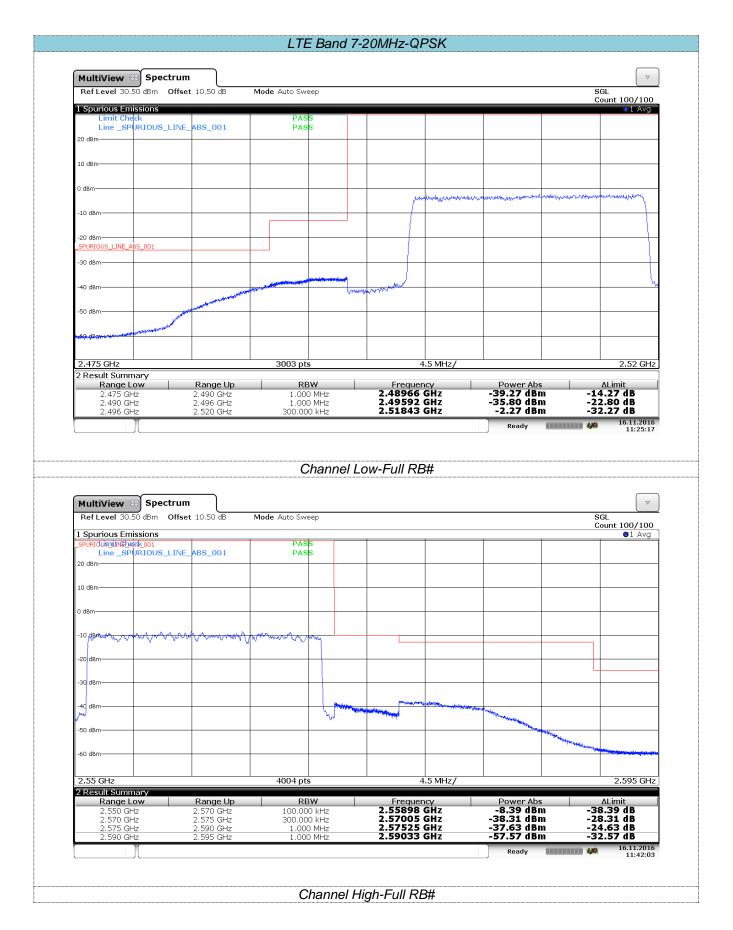

Report No: TRE1611005302 Page: 175 of 202 Issued: 2016-11-24

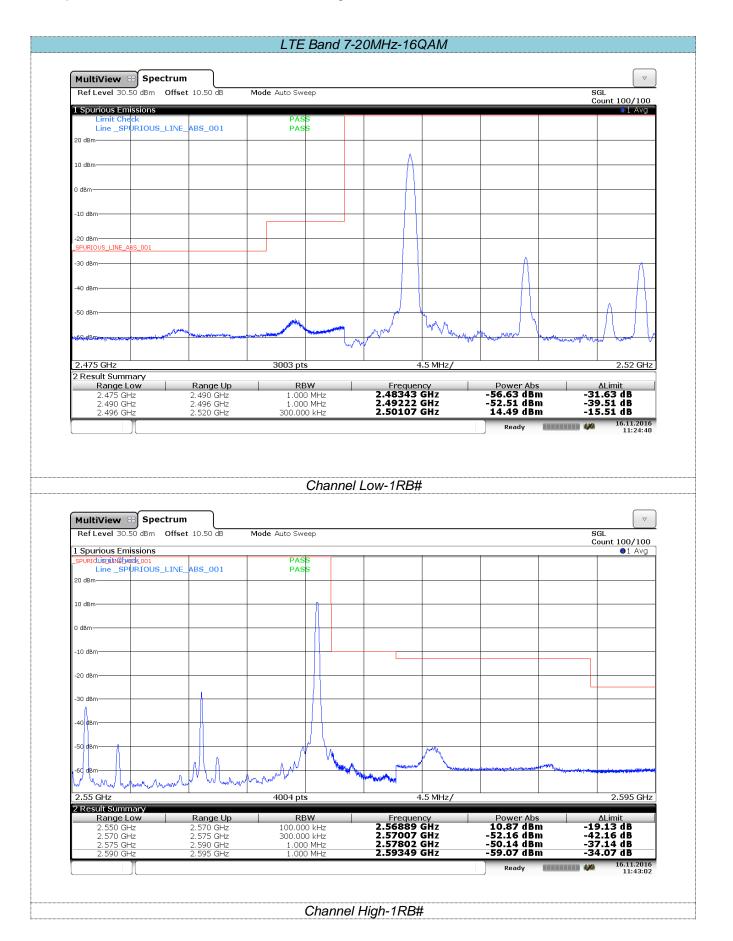

Report No: TRE1611005302 Page: 176 of 202 Issued: 2016-11-24

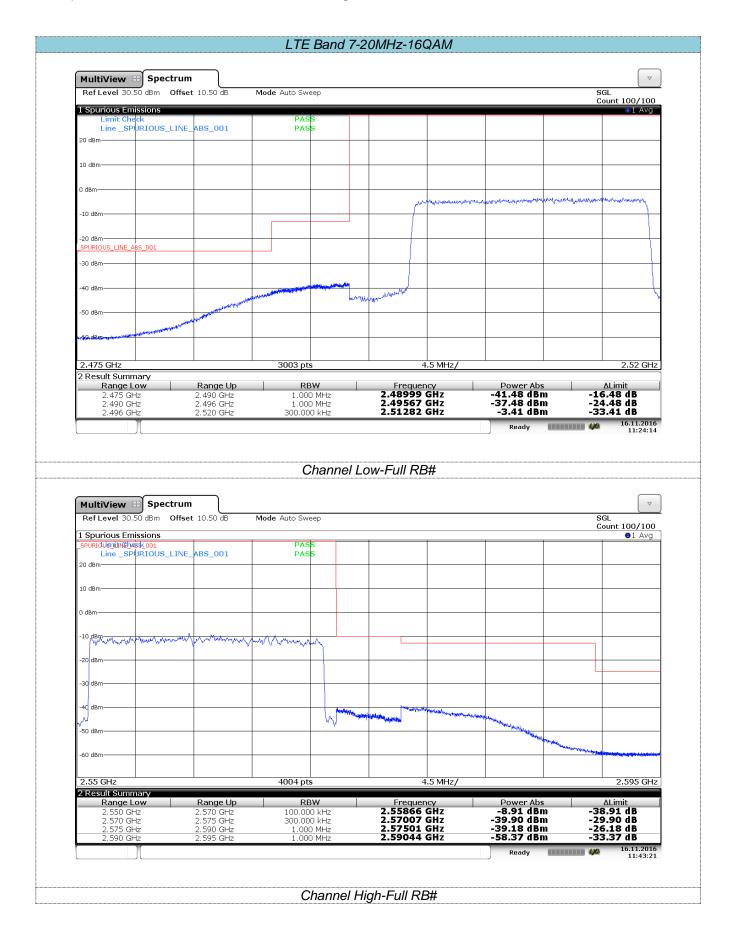


Report No: TRE1611005302 Page: 177 of 202 Issued: 2016-11-24

4.5. Radiated Power Measurement

LIMIT

LTE Band 2: EIRP<2W ,LTE Band 4:EIRP<1W,LTE Band 5:ERP<7W,LTE Band 7:EIPR<2W

TEST CONFIGURATION

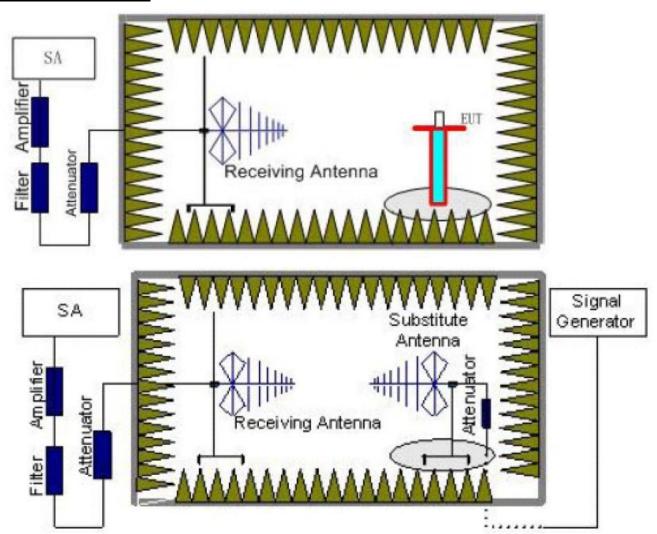

TEST PROCEDURE

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

Report No: TRE1611005302 Page: 178 of 202 Issued: 2016-11-24

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below:
 Power(EIRP)=PMea- PAg Pcl + Ga
 We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power

Amplifier for substituation test; The measurement results are amend as described below:

Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST RESULTS

Report No: TRE1611005302 Page: 179 of 202 Issued: 2016-11-24

LTE Band 2-1.4MHz									
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result				
iviodulation	Chamie	Vertical	Horizontal	Limit (ubin)	Nesult				
	Low	18.52	15.47						
QPSK	Mid	18.47	16.06		PASS				
	High	18.32	15.94	30					
	Low	17.80	15.62	30					
16QAM	Mid	17.84	15.92		PASS				
	High	18.43	15.80						

LTE Band 2-3MHz								
Madulatian	Channel	EIRP	EIRP (dBm)		Result			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	18.34	15.69					
QPSK	Mid	18.25	15.47	00	PASS			
	High	18.37	15.84					
	Low	17.71	15.56	30				
16QAM	Mid	17.31	15.23		PASS			
	High	18.49	15.87					

LTE Band 2-5MHz								
Modulation	Channel	EIRP (dBm)		Limit (dPm)	Result			
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Nesuit			
	Low	18.59	15.25					
QPSK	Mid	18.47	15.93	20	PASS			
	High	18.36	15.64					
	Low	19.27	15.25	30				
16QAM	Mid	19.15	15.93		PASS			
	High	17.82	15.52					

LTE Band 2-10MHz									
Modulation	Channel	EIRP	EIRP (dBm)		Result				
Woddiation	Chamilei	Vertical	Horizontal	Limit (dBm)	1769air				
	Low	18.05	15.34						
QPSK	Mid	18.34	15.39		PASS				
	High	18.25	15.27	20					
	Low	17.96	15.87	30					
16QAM	Mid	18.14	15.28		PASS				
	High	18.43	15.47						

Report No: TRE1611005302 Page: 180 of 202 Issued: 2016-11-24

LTE Band 2-15MHz								
Madulatian	Channel	EIRP	EIRP (dBm)		Result			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Nesult			
	Low	18.32	15.22					
QPSK	Mid	18.47	15.36		PASS			
	High	18.35	15.26	30				
	Low	17.92	15.22	30				
16QAM	Mid	18.47	15.36		PASS			
	High	18.25	15.26					

LTE Band 2-20MHz								
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Dogult			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	18.37	15.23					
QPSK	Mid	18.06	15.14		PASS			
	High	18.25	15.39					
	Low	18.00	15.15	30				
16QAM	Mid	17.51	15.00		PASS			
	High	18.29	15.40					

LTE Band 4-1.4MHz									
Modulation	Channel	EIRP (dBm)		Limit (dRm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Resuit				
	Low	19.32	17.25						
QPSK	Mid	19.43	16.48		PASS				
	High	19.28	16.74						
	Low	19.72	17.19	30					
16QAM	Mid	19.70	16.54		PASS				
	High	19.45	16.80						

LTE Band 4-3MHz								
Modulation	Channel	EIRP	EIRP (dBm)		Result			
Modulation	Charmer	Vertical	Horizontal	Limit (dBm)	Result			
	Low	19.08	17.44					
QPSK	Mid	19.34	17.25		PASS			
	High	19.52	17.39	20				
	Low	19.35	17.50	30				
16QAM	Mid	19.74	17.35		PASS			
	High	19.54	17.40					

Report No: TRE1611005302 Page: 181 of 202 Issued: 2016-11-24

	LTE Band 4-5MHz								
Modulation	Channel	EIRP (dBm)		Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Kesuit				
	Low	19.52	17.66						
QPSK	Mid	19.34	17.14	00	PASS				
	High	19.85	17.08						
	Low	19.96	17.76	30					
16QAM	Mid	18.90	17.06		PASS				
	High	20.20	17.16						

LTE Band 4-10MHz									
Mar Lada	Channel	EIRP	EIRP (dBm)		Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.86	17.38						
QPSK	Mid	19.25	17.00		PASS				
	High	19.34	17.23						
	Low	19.21	17.39	30					
16QAM	Mid	19.24	16.99		PASS				
	High	19.25	17.22]					

	LTE Band 4-15MHz								
Madulation	Channal	EIRP (dBm)		Limit (dDm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.36	17.28						
QPSK	Mid	19.25	17.43		PASS				
	High	18.94	16.39						
	Low	20.19	17.28	30					
16QAM	Mid	19.25	17.43		PASS				
	High	19.15	16.39						

LTE Band 4-20MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Result			
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Nesuit			
	Low	19.44	17.36					
QPSK	Mid	19.52	17.24		PASS			
	High	18.86	16.73	20				
	Low	20.21	17.52	30				
16QAM	Mid	20.67	17.53		PASS			
	High	17.77	16.49					

Report No: TRE1611005302 Page: 182 of 202 Issued: 2016-11-24

LTE Band 5-1.4MHz						
Modulation	Channel	ERP (dBm)		Limit (dPm)	Result	
iviodulation	Chamilei	Vertical	Horizontal	Limit (dBm)	Resuit	
	Low	19.78	17.63	20.5		
QPSK	Mid	19.25	17.58		PASS	
	High	20.43	18.02			
	Low	19.87	17.56	38.5		
16QAM	Mid	19.18	17.65		PASS	
	High	20.75	17.95			

LTE Band 5-3MHz						
Modulation	Channal	ERP	(dBm)	Limit (dBm)	Result	
Modulation	Channel	Vertical	Horizontal			
	Low	19.65	17.25	20.5	PASS	
QPSK	Mid	19.43	17.20			
	High	19.36	17.16			
	Low	19.96	17.32	38.5		
16QAM	Mid	19.90	17.32		PASS	
	High	19.39	17.17	1		

LTE Band 5-5MHz						
Modulation	Channel	ERP (dBm)		Limit (dDm)	Dogult	
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result	
	Low	19.43	17.16	20.5	PASS	
QPSK	Mid	19.47	17.14			
	High	19.32	17.09			
	Low	19.74	17.09	38.5		
16QAM	Mid	19.23	17.19		PASS	
	High	19.09	17.04			

	LTE Band 5-10MHz						
Modulation	Channel	ERP	(dBm)	Limit (dDm)	Result		
Modulation	Channel	Vertical	Horizontal	Limit (dBm)			
	Low	19.44	17.28	20.5	PASS		
QPSK	Mid	19.32	17.21				
	High	19.08	17.05				
	Low	19.10	17.01	38.5			
16QAM	Mid	19.08	17.25		PASS		
	High	18.72	16.99				

Report No: TRE1611005302 Page: 183 of 202 Issued: 2016-11-24

LTE Band 7-5MHz						
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Result	
iviodulation	Chamilei	Vertical	Horizontal	Limit (dBm)	Kesuil	
	Low	17.84	15.43	22.0		
QPSK	Mid	17.52	15.28		PASS	
	High	17.96	15.37			
	Low	17.65	15.59	33.0		
16QAM	Mid	17.67	15.13		PASS	
	High	17.30	15.52			

LTE Band 7-10MHz						
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Daguit	
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result	
	Low	17.44	15.45	22.0	PASS	
QPSK	Mid	17.58	15.64			
	High	17.32	15.37			
	Low	16.78	15.31	33.0		
16QAM	Mid	16.60	15.39		PASS	
	High	17.45	15.40			

LTE Band 7-15MHz						
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result	
iviodulation	Chamilei	Vertical	Horizontal		Result	
	Low	17.26	15.06	33.0	PASS	
QPSK	Mid	17.34	15.43			
	High	17.52	15.65			
	Low	18.01	14.90			
16QAM	Mid	16.76	15.56		PASS	
	High	16.96	15.53			

LTE Band 7-20MHz						
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result	
Modulation	Chamilei	Vertical	Horizontal	Limit (dBm)	Nesuit	
	Low	17.22	15.44	22.0	PASS	
QPSK	Mid	17.31	15.36			
	High	17.08	15.21			
	Low	16.39	14.70	33.0		
16QAM	Mid	16.73	15.69		PASS	
	High	16.21	15.41	1		


Report No: TRE1611005302 Page: 184 of 202 Issued: 2016-11-24

4.6. Radiated Spurious Emssion

LIMIT

LTE Band 2/4/5:<-13dBm;LTE Band 7<-25dBm

TEST CONFIGURATION

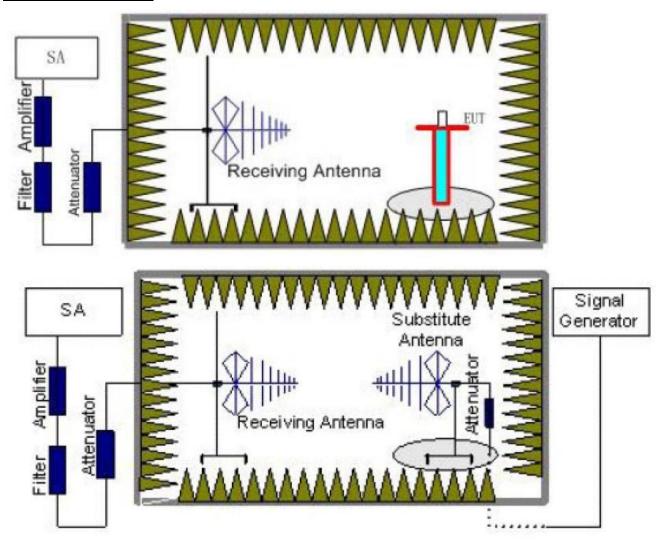

TEST RESULTS

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver

Report No: TRE1611005302 Page: 185 of 202 Issued: 2016-11-24

reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below: Power(EIRP)=PMea- PAg - Pcl + Ga We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: Power(EIRP)=PMea- Pcl + Ga
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
 ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST RESULTS

Report No: TRE1611005302 Page: 186 of 202 Issued: 2016-11-24

LTE Band 2-1.4MHz							
Channal	Frequency	Spurious I	Emission	Limit (dDm)	Dooult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3701.4	Vertical	-45.37				
	5552.1	V	-50.25	-13.00	Pass		
Low	7402.8	V					
LOW	3701.4	Horizontal	-48.52				
	5552.1	Н	-52.37	-13.00	Pass		
	7402.8	Н					
	3760	Vertical	-45.00	-13.00	Pass		
	5640	V	-50.33				
Mid	7520	V					
iviid	3760	Horizontal	-48.44		Pass		
	5640	Н	-52.29	-13.00			
	7520	Н					
	3818.6	Vertical	-45.14				
	5727.9	V	-50.46	-13.00	Pass		
Lliah	7637.2	V					
High	3818.6	Horizontal	-48.45				
	5727.9	Н	-52.28	-13.00	Pass		
	7637.2	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 2-3MHz							
Channal	Frequency	Spurious	Emission	Lineit (dDne)	D 1			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3703	Vertical	-45.72					
	5554.5	V	-50.38	-13.00	Pass			
Low	7406	V						
LOW	3703	Horizontal	-45.13					
	5554.5	Н	-50.50	-13.00	Pass			
	7406	Н						
	3760	Vertical	-45.22	-13.00	Pass			
	5640	V	-50.90					
Mid	7520	V						
iviiu	3760	Horizontal	-45.43		Pass			
	5640	Н	-51.67	-13.00				
	7520	Н						
	3817	Vertical	-44.10					
	5725.5	V	-51.42	-13.00	Pass			
Lligh	7634	V						
High	3817	Horizontal	-44.75					
	5725.5	Н	-51.55	-13.00	Pass			
	7634	Н						

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611005302 Page: 187 of 202 Issued: 2016-11-24

LTE Band 2-5MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Decult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3705	Vertical	-45.30				
	5557.5	V	-50.56	-13.00	Pass		
Low	7410	V					
Low	3705	Horizontal	-44.51				
	5557.5	Н	-50.72	-13.00	Pass		
	7410	Н					
	3760	Vertical	-44.64	-13.00	Pass		
	5640	V	-51.24				
Mid	7520	V					
iviid	3760	Horizontal	-44.12		Pass		
	5640	Н	-50.72	-13.00			
	7520	Н					
	3815	Vertical	-45.03				
	5722.5	V	-50.89	-13.00	Pass		
Lligh	7630	V					
High	3815	Horizontal	-45.59				
	5722.5	Н	-51.00	-13.00	Pass		
	7630	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-10MHz						
Channal	Frequency	Spurious	Emission	Limit (dDm)	Danult	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	3710	Vertical	-44.74			
	5565	V	-50.85	-13.00	Pass	
Law	7420	V				
Low	3710	Horizontal	-43.39			
	5565	Н	-51.13	-13.00	Pass	
	7420	Н				
	3760	Vertical	-43.62		Pass Pass	
	5640	V	-52.03	-13.00		
Mid	7520	V				
IVIIG	3760	Horizontal	-42.72			
	5640	Н	-51.09	-13.00		
	7520	Н				
	3810	Vertical	-44.34			
	5715	V	-51.40	-13.00	Pass	
Lliab	7620	V				
High	3810	Horizontal	-43.58			
	5715	Н	-51.24	-13.00	Pass	
	7620	Н				

- Remark"---" means that the emission level is too low to be measured
- 1. 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611005302 Page: 188 of 202 Issued: 2016-11-24

LTE Band 2-15MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Decult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3705	Vertical	-43.79				
	5557.5	V	-51.24	-13.00	Pass		
Low	7410	V					
LOW	3705	Horizontal	-42.01				
	5557.5	Н	-51.61	-13.00	Pass		
	7410	Н					
	3760	Vertical	-42.30	-13.00	Pass		
	5640	V	-52.79				
Mid	7520	V					
iviid	3760	Horizontal	-41.12		Pass		
	5640	Н	-53.66	-13.00			
	7520	Н					
	3815	Vertical	-39.63				
	5722.5	V	-53.37	-13.00	Pass		
Lligh	7630	V					
High	3815	Horizontal	-39.88				
	5722.5	Н	-53.42	-13.00	Pass		
	7630	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 2-20MHz							
Channal	Frequency	Spurious	Emission	Lineit (dDne)	D 11			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3720	Vertical	-42.53					
	5580	V	-51.69	-13.00	Pass			
Low	7440	V						
LOW	3720	Horizontal	-40.52					
	5580	Н	-52.10	-13.00	Pass			
	7440	Н						
	3760	Vertical	-40.86	-13.00	Pass			
	5640	V	-53.44					
Mid	7520	V						
iviid	3760	Horizontal	-39.52		Pass			
	5640	Н	-53.02	-13.00				
	7520	Н						
	3800	Vertical	-40.23					
	5700	V	-53.16	-13.00	Pass			
∐iah	7600	V						
High	3800	Horizontal	-41.65					
	5700	Н	-53.45	-13.00	Pass			
	7600	Н						

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611005302 Page: 189 of 202 Issued: 2016-11-24

LTE Band 4-1.4MHz							
Channel	Frequency	Spurious I	Emission	Limit (dPm)	Desult		
Chamei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3421.4	Vertical	-31.45				
	5132.1	V	-40.75	-13.00	Pass		
Low	6842.8	V					
LOW	3421.4	Horizontal	-35.32				
	5132.1	Н	-44.47	-13.00	Pass		
	6842.8	Н					
	3465	Vertical	-31.33	-13.00	Pass		
	5197.5	V	-40.86				
Mid	6930	V					
IVIIU	3465	Horizontal	-35.46		Pass		
	5197.5	Н	-44.59	-13.00			
	6930	Н					
	3508.6	Vertical	-31.15				
	5262.9	V	-40.68	-13.00	Pass		
Lliah	7017.2	V					
High	3508.6	Horizontal	-35.48				
	5262.9	Н	-44.61	-13.00	Pass		
	7017.2	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-3MHz							
Channal	Frequency	Spurious	Emission	Lineit (dDne)	D 1		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3423	Vertical	-30.95				
	5134.5	V	-41.00	-13.00	Pass		
Low	6846	V					
Low	3423	Horizontal	-35.71				
	5134.5	Н	-44.70	-13.00	Pass		
	6846	Н					
	3465	Vertical	-30.76	-13.00	Pass		
	5197.5	V	-40.82				
Mid	6930	V					
iviid	3465	Horizontal	-35.43		Pass		
	5197.5	Н	-44.93	-13.00			
	6930	Н					
	3507	Vertical	-31.15				
	5260.5	V	-40.47	-13.00	Pass		
Lligh	7014	V					
High	3423	Horizontal	-35.52				
	5134.5	Н	-44.84	-13.00	Pass		
	6846	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611005302 Page: 190 of 202 Issued: 2016-11-24

LTE Band 4-5MHz							
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Decult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3425	Vertical	-30.15				
	5137.5	V	-41.17	-13.00	Pass		
Low	6850	V					
LOW	3425	Horizontal	-35.70				
	5137.5	Н	-45.01	-13.00	Pass		
	6850	Н					
	3465	Vertical	-30.02	-13.00	Pass		
	5197.5	V	-41.05				
Mid	6930	V	-				
IVIIG	3465	Horizontal	-35.81		Pass		
	5197.5	Н	-45.10	-13.00			
	6930	Н					
	3505	Vertical	-29.87				
	5257.5	V	-40.91	-13.00	Pass		
Lliah	7010	V	-				
High	3505	Horizontal	-35.93				
	5257.5	Н	-45.21	-13.00	Pass		
	7010	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-10MHz						
Channel	Frequency	Spurious Emission		Limit (dDm)	Result	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	3430	Vertical	-29.60			
	5145	V	-41.47	-13.00	Pass	
Low	6860	V				
Low	3430	Horizontal	-35.51			
	5145	Н	-44.86	-13.00	Pass	
	6860	Н				
	3465	Vertical	-29.82	-13.00	Pass Pass	
	5197.5	V	-41.68			
Mid	6930	V				
iviid	3465	Horizontal	-35.20			
	5197.5	Н	-44.61	-13.00		
	6930	Н	-			
	3500	Vertical	-30.26			
	5250	V	-42.07	-13.00	Pass	
Lliab	7000	V	-			
High	3500	Horizontal	-35.03			
	5250	Н	-44.45	-13.00	Pass	
Domark:	7000	Н				

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611005302 Page: 191 of 202 Issued: 2016-11-24

		LTE Ban	d 4-15MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	Desuit
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3435	Vertical	-28.64		
	5152.5	V	-41.86	-13.00	Pass
Low	6870	V			
Low	3435	Horizontal	-35.43		
	5152.5	Н	-44.08	-13.00	Pass
	6870	Н			
	3465	Vertical	-28.94	-13.00	Pass
	5197.5	V	-42.14		
N 4: -1	6930	V			
Mid	3465	Horizontal	-35.49		Pass
	5197.5	Н	-44.13	-13.00	
	6930	Н			
	3490	Vertical	-28.85		
	5235	V	-42.06	-13.00	Pass
Lliah	6980	V			
High	3490	Horizontal	-35.43		
	5235	Н	-44.08	-13.00	Pass
	6980	Н		1	

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-20MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dogult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3440	Vertical	-27.39				
	5160	V	-42.50	-13.00	Pass		
Low	6880	V					
LOW	3440	Horizontal	-35.02				
	5160	Н	-44.43	-13.00	Pass		
	6880	Н					
	3465	Vertical	-27.07	-13.00	Pass Pass		
	5197.5	V	-42.76				
Mid	6930	V					
iviid	3465	Horizontal	-35.28				
	5197.5	Н	-44.22	-13.00			
	6930	Н					
	3490	Vertical	-26.71				
	5235	V	-44.10	-13.00	Pass		
Lligh	6980	V					
High	3490	Horizontal	-34.71				
	5235	Н	-44.14	-13.00	Pass		
	6980	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611005302 Page: 192 of 202 Issued: 2016-11-24

	LTE Band 5-1.4MHz								
Channel	Frequency	Spurious	Emission	Limit (dPm)	Result				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	1649.4	Vertical	-36.52						
	2474.1	V	-40.47	-13.00	Pass				
Low	3298.8	V							
LOW	1649.4	Horizontal	-41.57						
	2474.1	Н	-43.68	-13.00	Pass				
	3298.8	Н							
	1673	Vertical	-36.66		Pass				
	2509.5	V	-40.60	-13.00					
Mid	3346	V							
IVIIU	1673	Horizontal	-41.72						
	2509.5	Н	-43.80	-13.00	Pass				
	3346	Н							
	1696.6	Vertical	-36.46						
	2544.9	V	-40.42	-13.00	Pass				
Lliah	3393.2	V	-						
High	1696.6	Horizontal	-41.75		_				
	2544.9	Н	-43.83	-13.00	Pass				
	3393.2	Н							

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 5-3MHz								
Channal	Frequency	Spurious	Emission	Limit (dDm)	Dooult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	1651	Vertical	-36.48						
	2476.5	V	-40.51	-13.00	Pass				
Low	3302	V							
LOW	1651	Horizontal	-41.42						
	2476.5	Н	-43.65	-13.00	Pass				
	3302	Н							
	1673	Vertical	-36.36		Pass				
	2509.5	V	-40.40	-13.00					
Mid	3346	V							
IVIIU	1673	Horizontal	-41.65						
	2509.5	Н	-43.46	-13.00	Pass				
	3346	Н							
	1696.6	Vertical	-35.54						
	2544.9	V	-39.04	-13.00	Pass				
∐iah	3393.2	V							
High	1696.6	Horizontal	-40.30						
	2544.9	Н	-42.17	-13.00	Pass				
	3393.2	Н							

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611005302 Page: 193 of 202 Issued: 2016-11-24

	LTE Band 5-5MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)					
Chamei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	1653	Vertical	-36.41						
	2479.5	V	-40.58	-13.00	Pass				
Low	3306	V							
LOW	1653	Horizontal	-41.11						
	2479.5	Н	-43.58	-13.00	Pass				
	3306	Н							
	1673	Vertical	-36.16		Pass				
	2509.5	V	-40.36	-13.00					
Mid	3346	V							
IVIIU	1673	Horizontal	-41.30						
	2509.5	Н	-39.70	-13.00	Pass				
	3346	Н							
	1695	Vertical	-35.50						
	2542.5	V	-39.26	-13.00	Pass				
High	3390	V							
High	1695	Horizontal	-41.57						
	2542.5	Н	-39.96	-13.00	Pass				
	3390	Н							

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 5-10MHz		
Channel	Frequency	Spurious	Emission	Limit (dPm)	Desuit
Chamei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1658	Vertical	-36.43		
	2487	V	-40.56	-13.00	Pass
Low	3316	V			
LOW	1658	Horizontal	-41.20		
	2487	Н	-43.60	-13.00	Pass
	3316	Н			
	1673	Vertical	-36.51		Pass
	2509.5	V	-40.62	-13.00	
Mid	3346	V			
IVIIU	1673	Horizontal	-40.81		
	2509.5	Н	-43.53	-13.00	Pass
	3346	Н			
	1688	Vertical	-36.39		
	2532	V	-40.73	-13.00	Pass
Lliah	3376	V	-		
High	1688	Horizontal	-40.79		
	2532	Н	-43.54	-13.00	Pass
	3376	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611005302 Page: 194 of 202 Issued: 2016-11-24

	LTE Band 7-5MHz								
Channel	Frequency	Spurious I	Emission	Limit (dPm)	Result				
Chamei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	5005	Vertical	-35.74						
	7507.5	V	-38.58	-25.00	Pass				
Low	10010	V							
Low	5005	Horizontal	-37.52						
	7507.5	Н	-40.84	-25.00	Pass				
	10010	Н							
	5070	Vertical	-34.68		Pass				
	7605	V	-37.65	-25.00					
Mid	10140	V							
IVIIQ	5070	Horizontal	-36.43		Pass				
	7605	Н	-38.49	-25.00					
	10140	Н							
	5135	Vertical	-35.52						
	7702.5	V	-39.03	-25.00	Pass				
Lligh	10270	V							
High	5135	Horizontal	-35.99						
	7702.5	Н	-39.13	-25.00	Pass				
	10270	Н							

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 7-10MHz								
Channal	Frequency	Spurious	Emission	Lineit (dDne)	Daguit				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	5010	Vertical	-35.67						
	7515	V	-38.65	-25.00	Pass				
Low	10020	V							
LOW	5010	Horizontal	-37.20						
	7515	Н	-40.77	-25.00	Pass				
	10020	Н							
	5070	Vertical	-35.41		Pass				
	7605	V	-38.43	-25.00					
Mid	10140	V							
IVIIU	5070	Horizontal	-38.05						
	7605	Н	-37.78	-25.00	Pass				
	10140	Н							
	5130	Vertical	-34.76						
	7695	V	-37.35	-25.00	Pass				
High	10260	V							
Підп	5130	Horizontal	-37.78						
	7695	Н	-37.41	-25.00	Pass				
	10260	Н							

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611005302 Page: 195 of 202 Issued: 2016-11-24

	LTE Band 7-15MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	5015	Vertical	-35.73						
	7522.5	V	-38.59	-25.00	Pass				
Low	10030	V							
Low	5015	Horizontal	-37.46						
	7522.5	Н	-40.83	-25.00	Pass				
	10030	Н							
	5070	Vertical	-35.94		Pass				
	7605	V	-38.78	-25.00					
Mid	10140	V							
iviid	5070	Horizontal	-36.30						
	7605	Н	-39.67	-25.00	Pass				
	10140	Н							
	5125	Vertical	-36.83						
	7687.5	V	-40.26	-25.00	Pass				
Lligh	10250	V							
High	5125	Horizontal	-35.80						
	7687.5	Н	-40.36	-25.00	Pass				
	10250	Н							

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 7-20MHz								
Channal	Frequency	Spurious	Emission	Limeit (dDms)	Daguit				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	5015	Vertical	-35.80						
	7522.5	V	-38.52	-25.00	Pass				
Low	10030	V							
Low	5015	Horizontal	-37.78						
	7522.5	Н	-40.90	-25.00	Pass				
	10030	Н							
	5070	Vertical	-36.05		Pass				
	7605	V	-38.74	-25.00					
Mid	10140	V							
IVIIU	5070	Horizontal	-37.04						
	7605	Н	-39.31	-25.00	Pass				
	10140	Н							
	5125	Vertical	-36.62						
	7687.5	V	-39.68	-25.00	Pass				
∐iah	10250	V							
High	5125	Horizontal	-36.84						
	7687.5	Н	-39.72	-25.00	Pass				
	10250	Н							

- 1.
- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report. 2.


Report No: TRE1611005302 Page: 196 of 202 Issued: 2016-11-24

4.7. Frequency stability V.S. Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

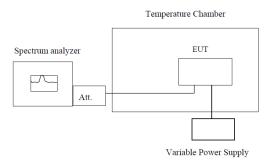

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25℃ operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to -30° C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST RESULTS

Report No: TRE1611005302 Page: 197 of 202 Issued: 2016-11-24

Re	eference Frequency	y: LTE Band	2 Middle ch	annel=188	0MHz,20MHz	Bandwidth	
			Freque	ncy error			
Power supplied (Vdc)	Temperature (℃)	QP	SK	16	6QAM	Limit (ppm)	Result
(Vuc)	(0)	Hz	ppm	Hz	ppm	(ррііі)	
	-30	22	0.0117	19	0.0101		
	-20	18	0.0096	20	0.0106		
	-10	15	0.0080	17	0.0090		
	0	14	0.0074	14	0.0074		
3.70	10	12	0.0064	15	0.0080	2.5	Pass
	20	9	0.0048	10	0.0053		
	30	10	0.0053	16	0.0085		
	40	15	0.0080	18	0.0096		
	50	19	0.0101	15	0.0080		
Ref	erence Frequency	: LTE Band	4 Middle cha	annel=1732	2.5MHz,20MHz	Bandwidth	
	_		Freque	ncy error			
Power supplied (Vdc)	Temperature (℃)	QP	SK	16	6QAM	Limit (ppm)	Result
(vuc)	(0)	Hz	ppm	Hz	ppm	- (ppiii)	
	-30	19	0.0110	18	0.0104		
	-20	18	0.0104	19	0.0110		
	-10	16	0.0092	15	0.0087		
	0	15	0.0087	20	0.0115		
3.70	10	13	0.0075	16	0.0092	2.5	Pass
	20	11	0.0063	14	0.0081		
	30	10	0.0058	15	0.0087		
	40	14	0.0081	13	0.0075		
	50	15	0.0087	10	0.0058		
Re	ference Frequency	: LTE Band	5 Middle ch	annel=836	.5MHz,10MHz	Bandwidth	
	_		Freque	ncy error			
Power supplied (Vdc)	Temperature $(^{\circ}\mathbb{C})$	QP	SK	16	6QAM	Limit	Result
(Vuc)	()	Hz	ppm	Hz	ppm	(ppm)	
	-30	13	0.0155	12	0.0143		
	-20	11	0.0132	13	0.0155		
	-10	9	0.0108	10	0.0120		
	0	9	0.0108	5	0.0060		
3.70	10	8	0.0096	9	0.0108	2.5	Pass
-	20	6	0.0072	10	0.0120		
	30	5	0.0060	6	0.0072		
	40	8	0.0096	5	0.0060		
	50	10	0.0120	11	0.0132		

Report No: TRE1611005302 Page: 198 of 202 Issued: 2016-11-24

Re	Reference Frequency: LTE Band 7 Middle channel=2535MHz,20MHz Bandwidth							
Dames armalia d	Tomporeture		Frequ	ency error		I inait		
Power supplied (Vdc)	Temperature (℃)	QP	SK	160	QAM	Limit (ppm)	Result	
(v a o)	(©)	Hz	ppm	Hz	ppm	(ррііі)		
	-30	21	0.0083	12	0.0047			
	-20	17	0.0067	10	0.0039			
	-10	14	0.0055	20	0.0079			
	0	15	0.0059	13	0.0051			
3.70	10	12	0.0047	16	0.0063	2.5	Pass	
	20	10	0.0039	20	0.0079			
	30	11	0.0043	14	0.0055			
	40	14	0.0055	25	0.0099	1		
	50	19	0.0075	13	0.0051	1		


Report No: TRE1611005302 Page: 199 of 202 Issued: 2016-11-24

4.8. Frequency stability V.S. Voltagemeasurement

LIMIT

2.5ppm

TEST CONFIGURATION

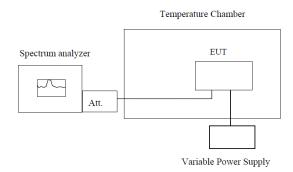

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. Set chamber temperature to 25 ℃. Use a variable DC power source topower the EUT and set the voltage to rated voltage.
- 2. Set the spectrum analyzer RBW lowenough to obtain the desired frequency resolution and recorded the frequency.
- 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, recordthe maximum frequency change.

TEST RESULTS

Refe	erence Frequency	y: LTE Band	d 2 Middle c	hannel=1880	OMHz,20MHz I	Bandwidth	
Temperature (°C)	Power supplied		Freque	ency error 16	QAM	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(11 /	
	4.35	11	0.0059	12	0.0064		
25	3.70	10	0.0053	11	0.0059	2.5	Pass
	3.50	13	0.0069	13	0.0069		
Refe	rence Frequency	: LTE Band	4 Middle ch	annel=1732.	.5MHz,20MHz	Bandwidth	
	Power			ency error		Limit	
Temperature (°C)	supplied	QF	PSK	160	QAM	(ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm		
	4.35	15	0.0087	14	0.0081		
25	3.70	21	0.0121	18	0.0104	2.5	Pass
	3.50	14	0.0081	20	0.0115		
Refe	rence Frequency	: LTE Band	d 5 Middle cl	nannel=836.	5MHz,10MHz	Bandwidth	
	Power	Frequency error			Limit		
Temperature (°C)	supplied	QF	PSK	16QAM		(ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	\(\frac{1}{1}\)	
	4.35	13	0.0155	15	0.0179		
25	3.70	21	0.0251	21	0.0251	2.5	Pass
	3.50	16	0.0191	13	0.0155		
Refe	erence Frequency	y: LTE Band			5MHz,20MHz I	Bandwidth	
	Power			ency error		Limit	
Temperature (°C)	supplied	QF	PSK	169	QAM	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(1.1)	
	4.35	18	0.0071	16	0.0063		
25	3.70	22	0.0087	17	0.0067	2.5	Pass
	3.50	19	0.0075	20	0.0079		


Report No: TRE1611005302 Page: 201 of 202 Issued: 2016-11-24

4.9. Peak-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

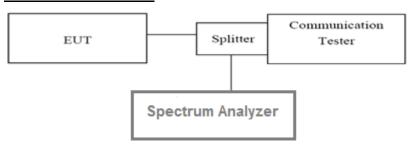

TEST PROCEDURE

According with KDB 971168

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. Forcontinuoussignals(>98% duty cycle), the measurement interval was set to 1ms. For bursttransmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that issynced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in whichthetransmitter is operating at maximum power

TEST RESULTS

LTE Band 2-20MHz								
Modulation	QP:	SK	16Q	AM	Limit(dB)	Decult		
Channel	1RB#	Full RB#	1RB#	Full RB#	LIIIII(UD)	Result		
Low	4.42	5.52	5.24	6.24	13	Pass		
Mid	4.98	5.74	5.56	6.48	13	Pass		
High	5.12	5.60	6.18	6.32	13	Pass		

		LT	E Band 4-20	MHz		
Modulation	QPS	SK	16Q	AM	Limit/dD\	Dooult
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result
Low	4.62	5.46	5.46	6.28	13	Pass
Mid	4.70	5.66	5.30	6.38	13	Pass
High	5.20	5.66	6.22	6.34	13	Pass


		LT	E Band 5-10	MHz		
Modulation	QP:	SK	16Q	AM	Limit(dD)	Result
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result
Low	4.90	5.96	5.56	6.64	13	Pass
Mid	5.42	5.88	6.34	6.54	13	Pass
High	5.44	6.06	6.28	6.70	13	Pass


		LT	E Band 7-20	MHz		
Modulation	QP:	SK	16Q	AM	Limit/dD\	Dogult
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result
Low	4.44	5.36	5.40	6.04	13	Pass
Mid	4.04	5.20	4.60	5.84	13	Pass
High	5.26	4.74	5.94	5.98	13	Pass

Report No: TRE1611005302 Page: 202 of 202 Issued: 2016-11-24

5. Test Setup Photos of the EUT

Radiated emission:

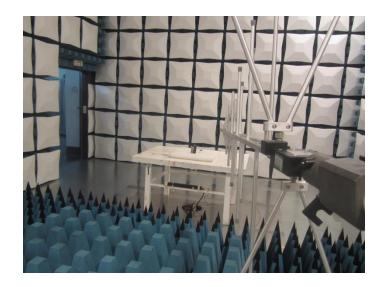

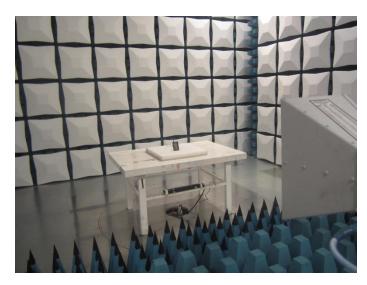

6. External and Internal Photos of the EUT

Reference to the test report No.: TRE1611005301.
--

.....End of Report.....