




Report No: TRE1611001402 Page: 161 of 202 Issued: 2016-11-29

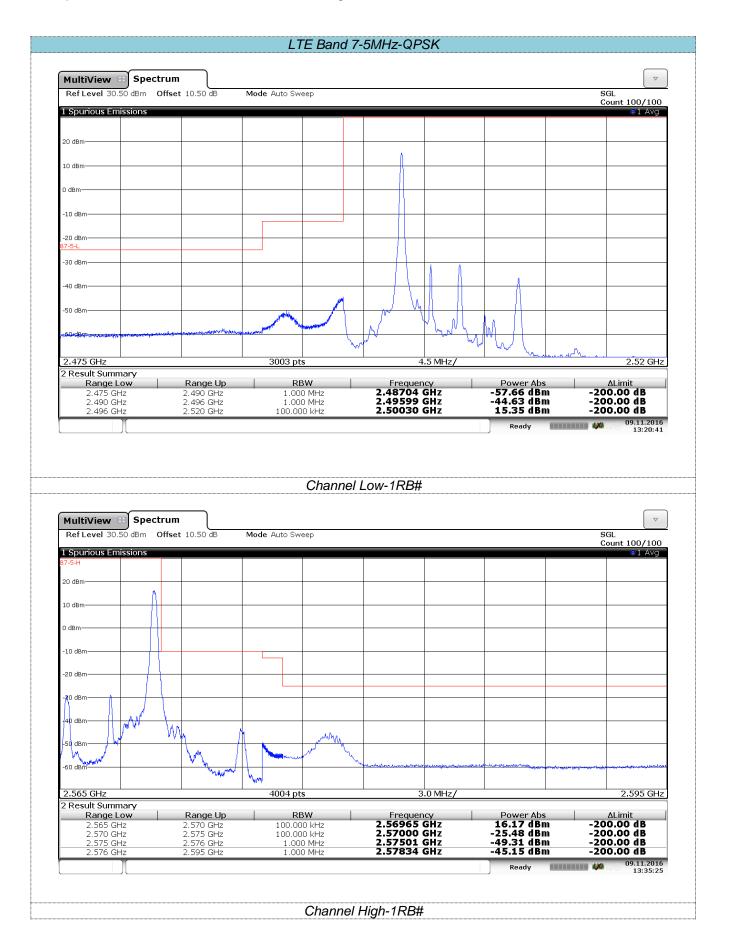



Report No: TRE1611001402 Page: 162 of 202 Issued: 2016-11-29

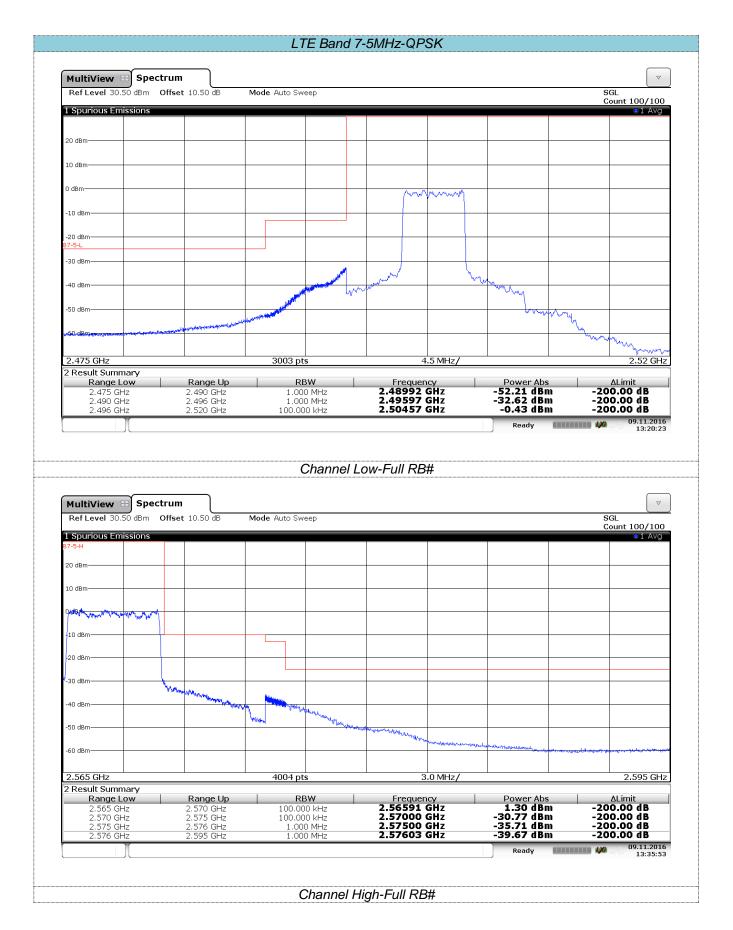

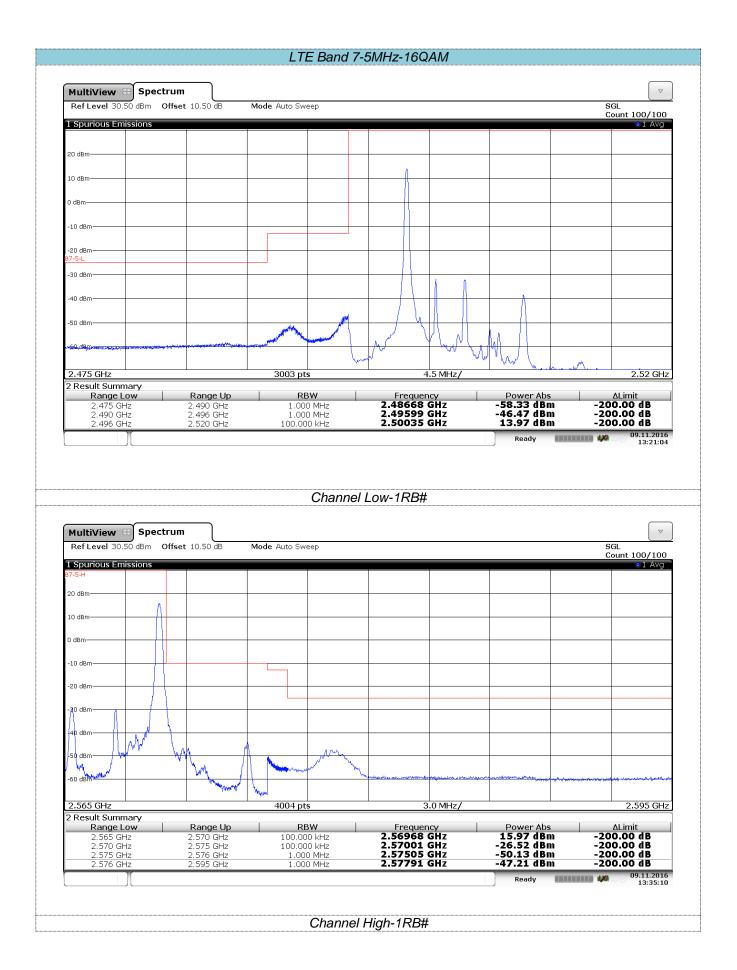



Report No: TRE1611001402 Page: 164 of 202 Issued: 2016-11-29

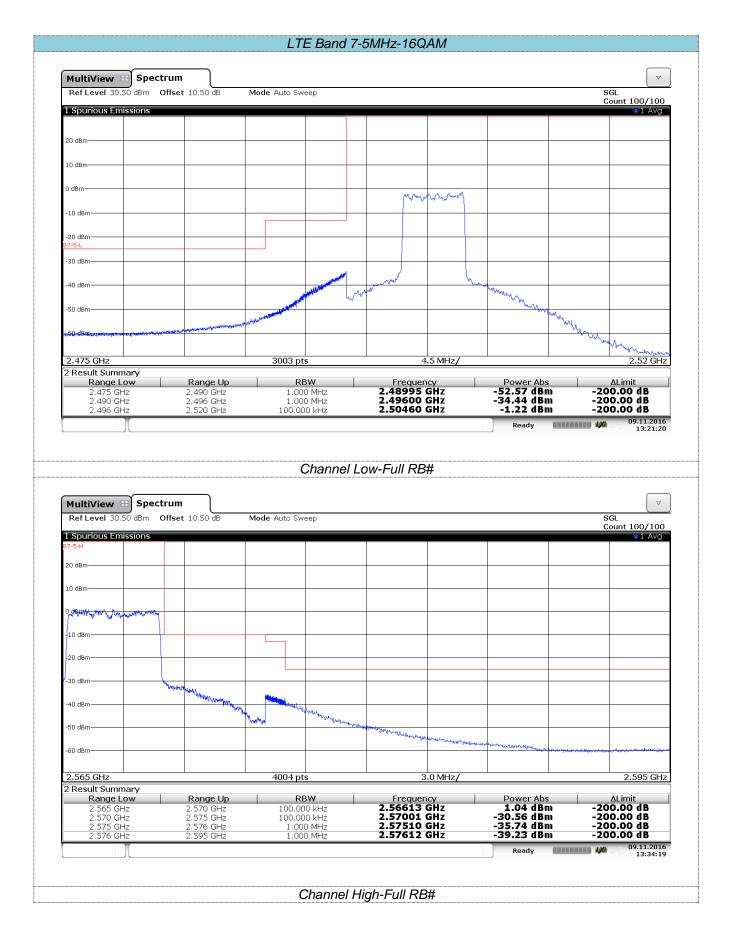

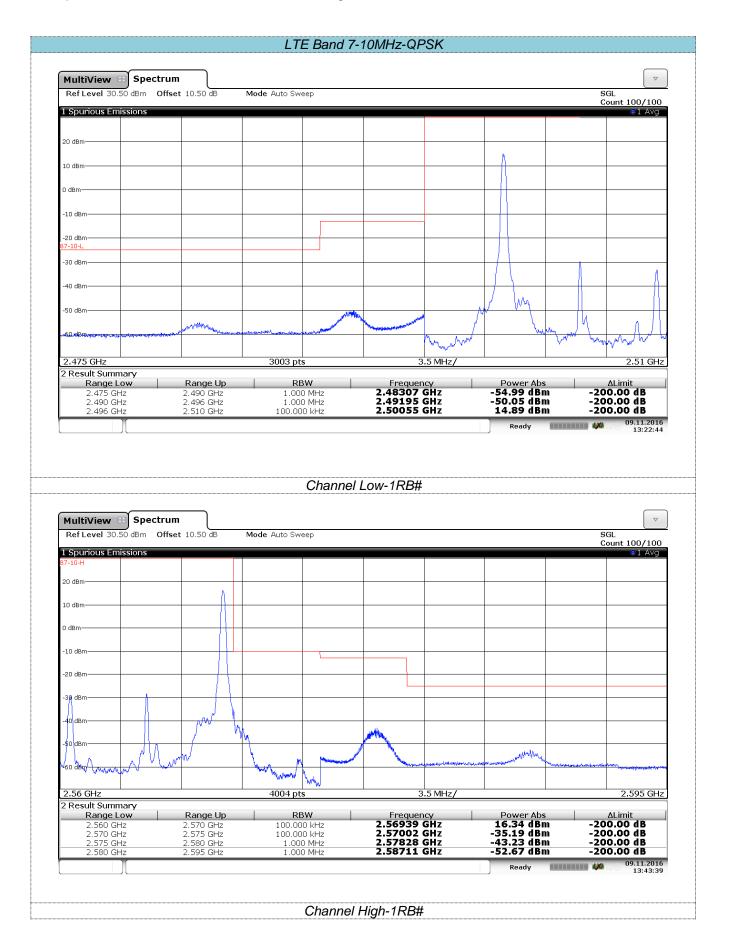


Report No: TRE1611001402 Page: 166 of 202 Issued: 2016-11-29

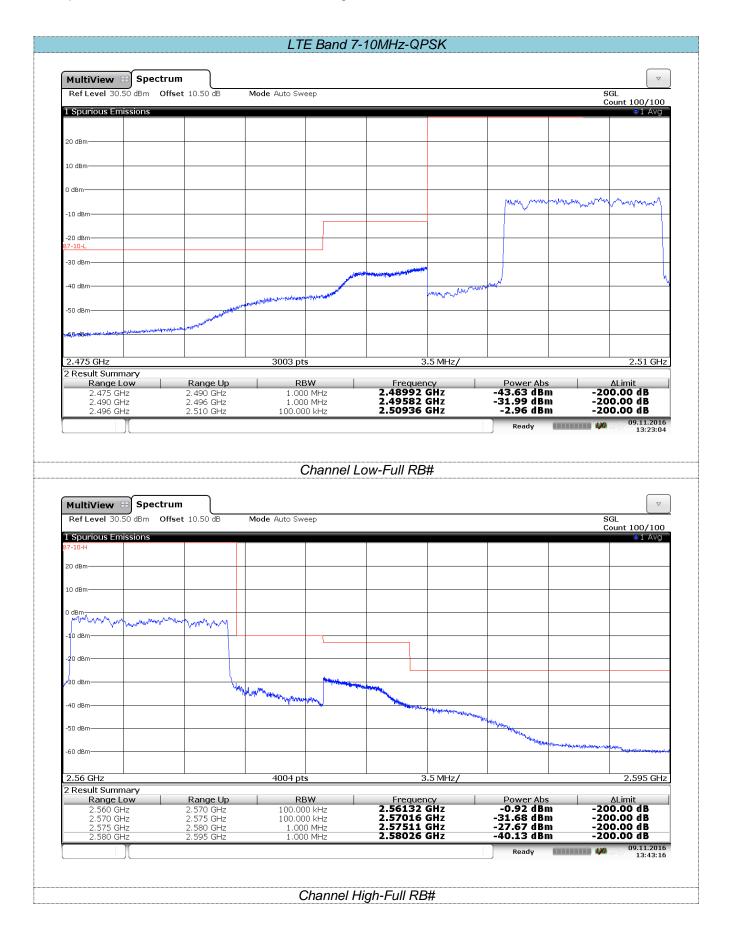


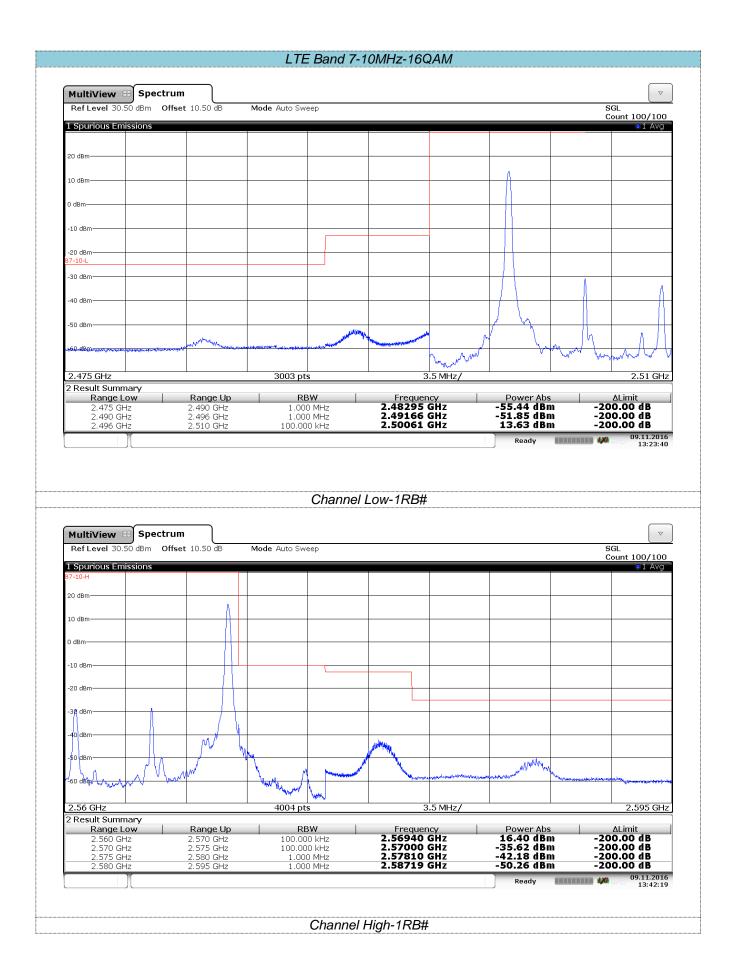


Report No: TRE1611001402 Page: 168 of 202 Issued: 2016-11-29

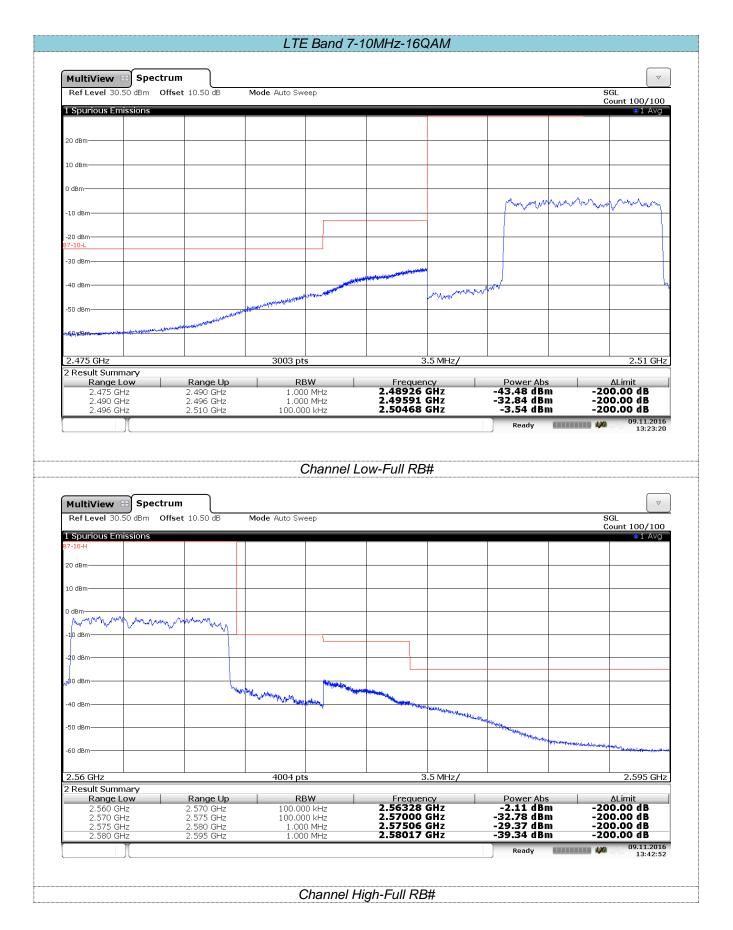


Report No: TRE1611001402 Page: 169 of 202 Issued: 2016-11-29

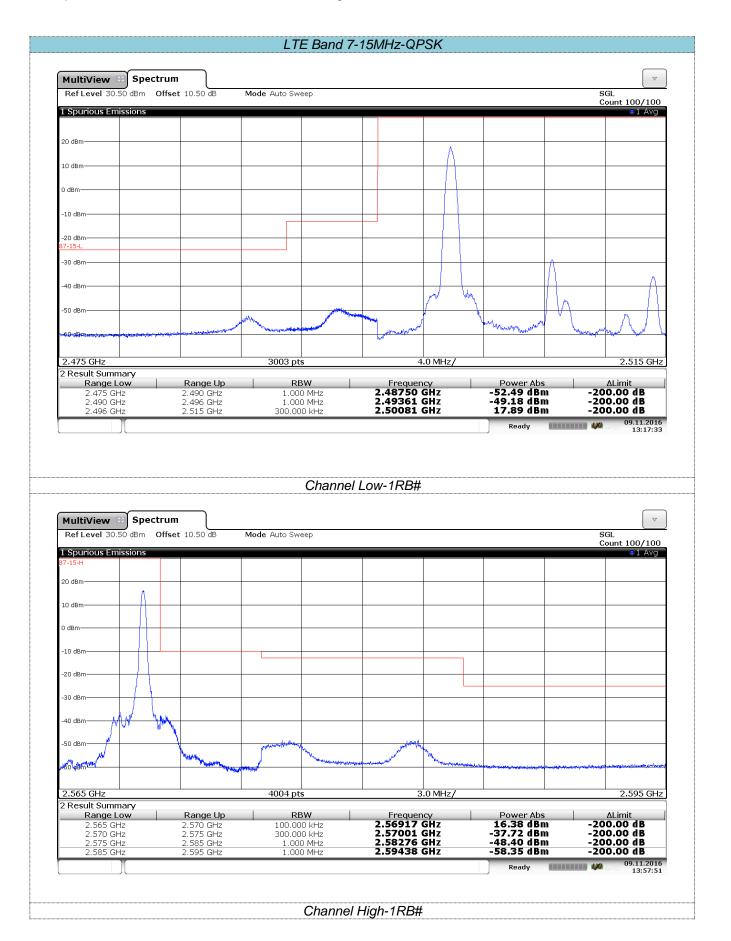


Report No: TRE1611001402 Page: 170 of 202 Issued: 2016-11-29

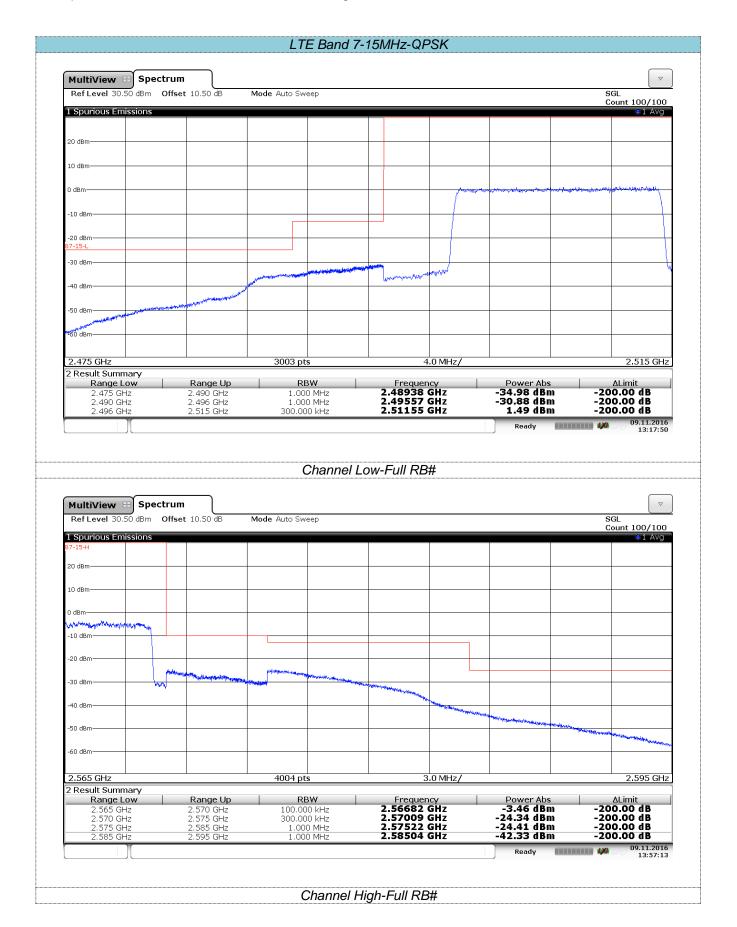


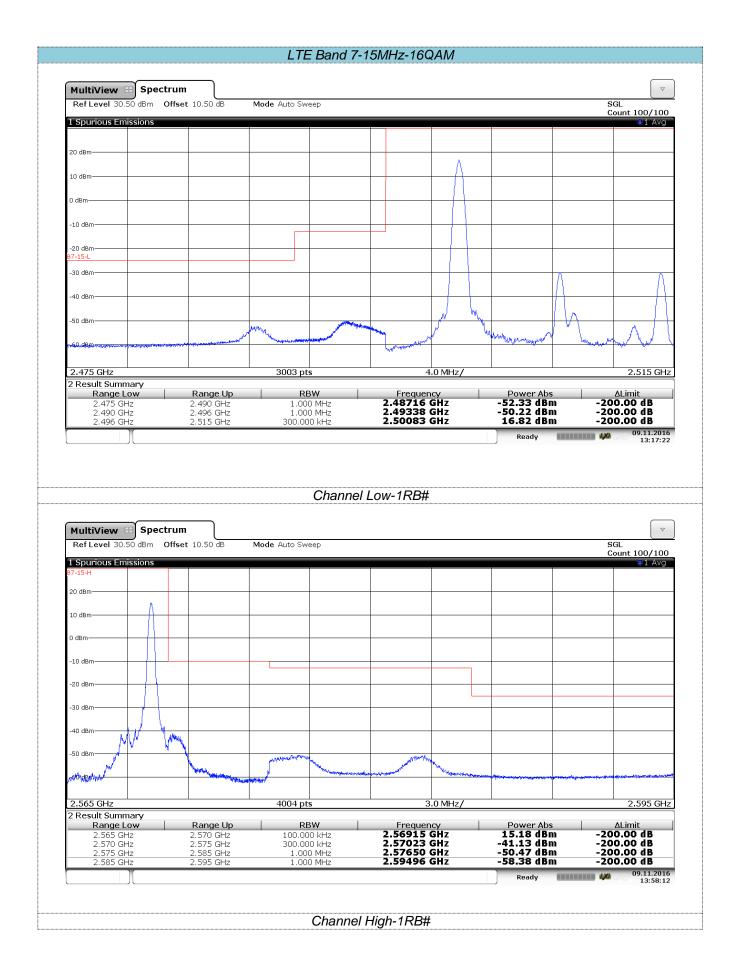


Report No: TRE1611001402 Page: 172 of 202 Issued: 2016-11-29

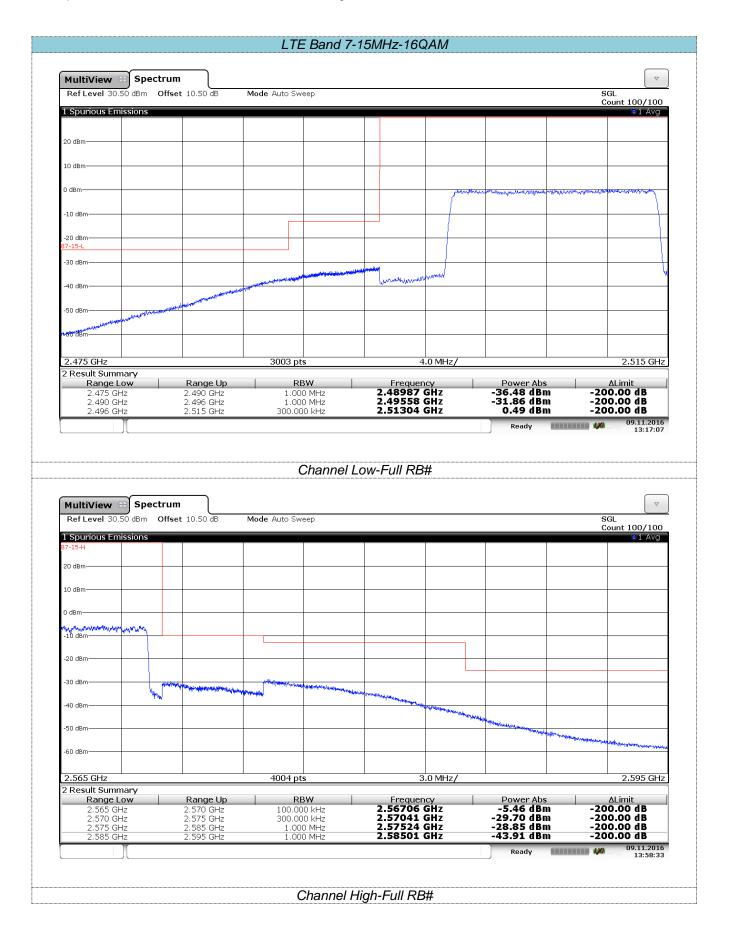


Report No: TRE1611001402 Page: 173 of 202 Issued: 2016-11-29

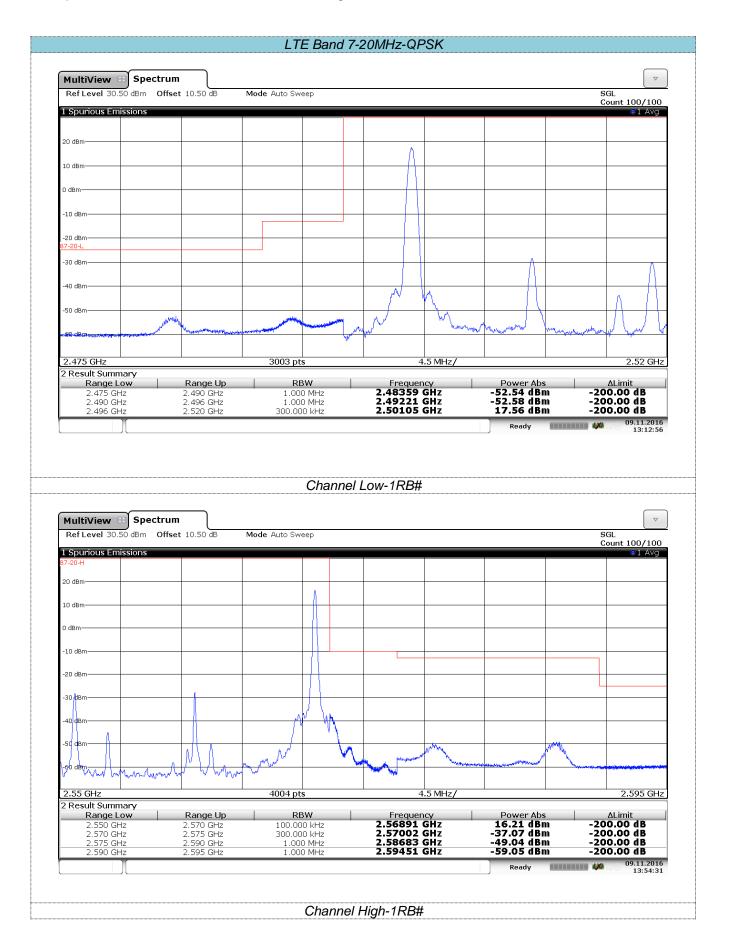


Report No: TRE1611001402 Page: 174 of 202 Issued: 2016-11-29

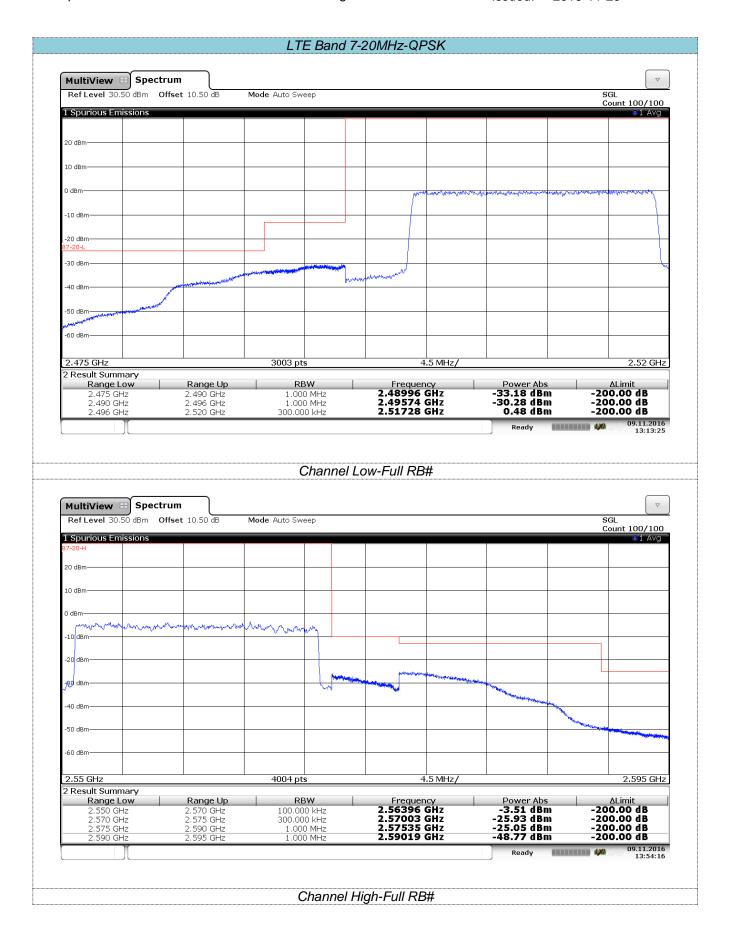

Report No: TRE1611001402 Page: 175 of 202 Issued: 2016-11-29

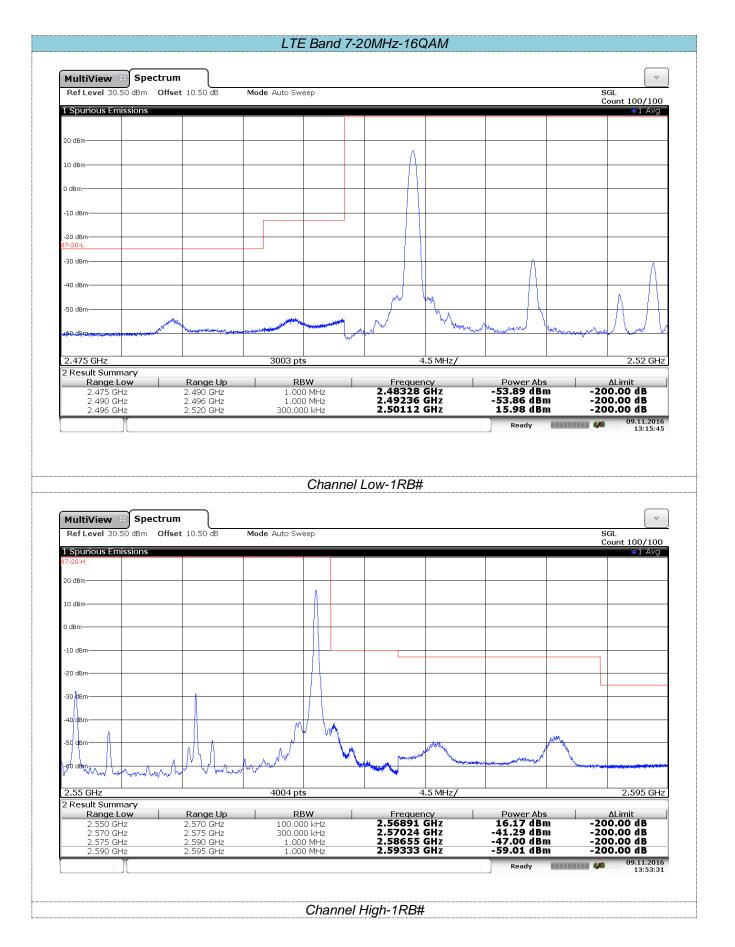

Report No: TRE1611001402 Page: 176 of 202 Issued: 2016-11-29

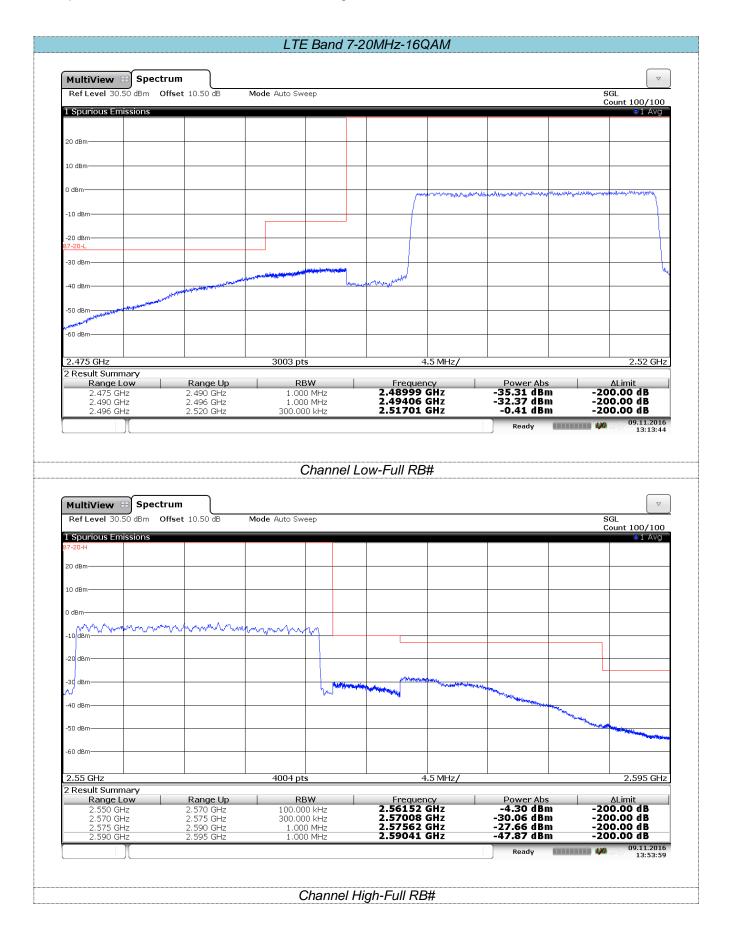


Report No: TRE1611001402 Page: 177 of 202 Issued: 2016-11-29

## 4.5. Radiated Power Measurement

## **LIMIT**

LTE Band 2: EIRP<2W ,LTE Band 4:EIRP<1W,LTE Band 5:ERP<7W,LTE Band 7:EIPR<2W

## **TEST CONFIGURATION**

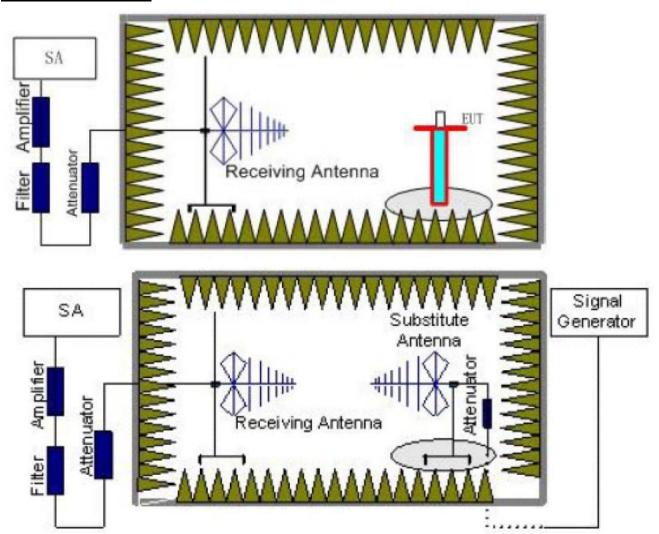

## **TEST PROCEDURE**

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

Report No: TRE1611001402 Page: 178 of 202 Issued: 2016-11-29

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- The measurement results are obtained as described below:
  Power(EIRP)=PMea- PAg Pcl + Ga

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

Report No: TRE1611001402 Page: 179 of 202 Issued: 2016-11-29

LTE Band 2-1.4MHz									
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Pocult				
iviodulation	Channel	Vertical	Horizontal	Limit (dbm)	Result				
	Low	21.08	17.42						
QPSK	Mid	21.43	17.52		PASS				
	High	21.52	17.84	20					
	Low	20.69	17.58	30					
16QAM	Mid	20.74	17.37		PASS				
	High	21.39	17.69						

LTE Band 2-3MHz								
Madulatian	Channel	EIRP (dBm)		Limit (dPm)	Popult			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	21.15	17.36					
QPSK	Mid	21.43	17.43		PASS			
	High	21.53	17.85	20				
	Low	20.47	17.22	30				
16QAM	Mid	20.41	17.17		PASS			
	High	21.68	17.88					

LTE Band 2-5MHz								
Modulation	Channel	EIRP (dBm)		Limit (dPm)	Result			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Resuit			
	Low	21.38	17.45					
QPSK	Mid	21.52	17.52	30	PASS			
	High	21.66	17.84					
	Low	20.77	17.45					
16QAM	Mid	20.91	17.52		PASS			
	High	22.15	17.95					

LTE Band 2-10MHz									
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result				
Wodulation	Chame	Vertical	Horizontal	Limit (ubin)	Nesuit				
	Low	21.25	17.36						
QPSK	Mid	21.36	17.46		PASS				
	High	21.58	17.63	20					
	Low	21.17	16.88	30					
16QAM	Mid	21.54	17.56		PASS				
	High	21.42	17.45						

Report No: TRE1611001402 Page: 180 of 202 Issued: 2016-11-29

LTE Band 2-15MHz									
Modulation	Channel	EIRP	EIRP (dBm)		Pocult				
iviodulation	Chamer	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.44	17.35						
QPSK	Mid	21.52	17.69		PASS				
	High	21.45	17.66	30					
	Low	22.01	17.35	30					
16QAM	Mid	21.52	17.69		PASS				
	High	21.60	17.66						

LTE Band 2-20MHz									
Madulatian	Channel	EIRP (dBm)		Limit (dDm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.06	17.43						
QPSK	Mid	20.94	17.06		PASS				
	High	21.22	17.34	20					
	Low	21.59	17.54	30					
16QAM	Mid	21.73	17.26		PASS				
	High	21.31	17.36						

LTE Band 4-1.4MHz									
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result				
iviodulation	Chamer	Vertical	Horizontal	Limit (ubin)	Kesuit				
	Low	21.88	18.52	30					
QPSK	Mid	21.06	17.94		PASS				
	High	21.52	17.63						
	Low	20.62	18.62						
16QAM	Mid	20.65	17.85		PASS				
	High	21.03	17.54						

LTE Band 4-3MHz								
Modulation	Channel	EIRP	EIRP (dBm)		Result			
Modulation	Chamilei	Vertical	Horizontal	Limit (dBm)	Nesuit			
	Low	21.45	17.94					
QPSK	Mid	20.86	17.52		PASS			
	High	21.38	17.86					
	Low	21.04	17.86	30				
16QAM	Mid	20.25	17.37		PASS			
	High	21.43	17.87					

Report No: TRE1611001402 Page: 181 of 202 Issued: 2016-11-29

	LTE Band 4-5MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Result					
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result					
	Low	21.44	17.80							
QPSK	Mid	21.05	17.43		PASS					
	High	21.59	17.52							
	Low	20.97	17.70	30						
16QAM	Mid	21.52	17.52		PASS					
	High	21.22	17.44							

LTE Band 4-10MHz									
M. Liet.	Channel	EIRP (dBm)		Limit (dDm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.46	17.66						
QPSK	Mid	21.95	18.52		PASS				
	High	21.38	17.38						
	Low	21.90	17.67	30					
16QAM	Mid	21.94	18.51		PASS				
	High	21.95	17.37						

	LTE Band 4-15MHz								
Maril Ladia	Channel	EIRP (dBm)		Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	21.36	17.28						
QPSK	Mid	21.15	17.16		PASS				
	High	21.38	17.33						
	Low	20.69	17.28	30					
16QAM	Mid	21.15	17.16		PASS				
	High	21.21	17.33						

	LTE Band 4-20MHz								
Modulation	01	EIRP (dBm)		Limit (dBm)	Result				
Modulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Result				
	Low	21.05	17.15						
QPSK	Mid	21.06	17.21		PASS				
	High	20.22	17.33	20					
	Low	20.42	17.02	30					
16QAM	Mid	20.12	16.97		PASS				
	High	21.11	17.52						

Report No: TRE1611001402 Page: 182 of 202 Issued: 2016-11-29

LTE Band 5-1.4MHz								
Modulation	Channel	ERP	ERP (dBm)		Result			
iviodulation	Chamilei	Vertical	Horizontal	Limit (dBm)	Result			
	Low	19.34	15.74					
QPSK	Mid	19.52	15.63		PASS			
	High	18.88	15.39	20.5				
	Low	19.31	15.76	38.5				
16QAM	Mid	19.54	15.61		PASS			
	High	18.78	15.41					

	LTE Band 5-3MHz								
Modulation	Channel	ERP	(dBm)	Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.74	15.38						
QPSK	Mid	19.55	15.86		PASS				
	High	19.63	15.43	20.5					
	Low	19.64	15.36	38.5					
16QAM	Mid	19.40	15.82		PASS				
	High	19.63	15.43						

LTE Band 5-5MHz								
Modulation	Channel	ERP	ERP (dBm)		Result			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	19.43	15.36					
QPSK	Mid	19.06	15.47	00.5	PASS			
	High	18.54	15.25					
	Low	19.19	15.41	38.5				
16QAM	Mid	19.25	15.43		PASS			
	High	18.72	15.29					

	LTE Band 5-10MHz								
Modulation	Channel	ERP	(dBm)	Limit (dPm)	Result				
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Resuit				
	Low	18.94	14.69						
QPSK	Mid	18.36	14.37		PASS				
	High	18.83	14.88	20.5					
	Low	19.21	15.47	38.5					
16QAM	Mid	18.55	15.39		PASS				
	High	19.11	15.33						

Report No: TRE1611001402 Page: 183 of 202 Issued: 2016-11-29

LTE Band 7-5MHz								
Madulation	Channel	EIRP (dBm)		Limit (dBm)	Result			
Modulation	Chamilei	Vertical	Horizontal	Limit (dbin)	Result			
	Low	17.84	15.43					
QPSK	Mid	17.52	15.28		PASS			
	High	17.96	15.37	22.0				
	Low	18.00	15.30	33.0				
16QAM	Mid	17.40	15.40		PASS			
	High	18.52	15.25					

LTE Band 7-10MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Resuit			
	Low	17.44	15.45					
QPSK	Mid	17.58	15.64		PASS			
	High	17.32	15.37					
	Low	18.00	15.57	33.0				
16QAM	Mid	18.41	15.85		PASS			
	High	17.42	15.39					

LTE Band 7-15MHz								
Modulation	Channel	EIRP	EIRP (dBm)		Result			
Wodulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	17.26	15.06					
QPSK	Mid	17.34	15.43	00.0	PASS			
	High	17.52	15.65					
	Low	18.07	14.88	33.0				
16QAM	Mid	16.71	15.57		PASS			
	High	16.91	15.52					

	LTE Band 7-20MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	17.22	15.44						
QPSK	Mid	17.31	15.36	00.0	PASS				
	High	17.08	15.21						
	Low	16.33	14.68	33.0					
16QAM	Mid	16.68	15.71		PASS				
	High	16.14	15.39						


Report No: TRE1611001402 Page: 184 of 202 Issued: 2016-11-29

# 4.6. Radiated Spurious Emssion

## **LIMIT**

-13dBm

#### **TEST CONFIGURATION**

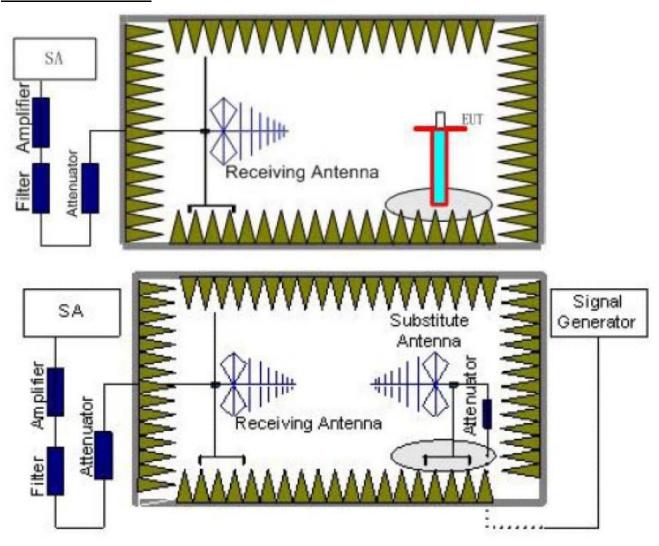

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver

Report No: TRE1611001402 Page: 185 of 202 Issued: 2016-11-29

reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below: Power(EIRP)=PMea- PAg - Pcl + Ga We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: Power(EIRP)=PMea- Pcl + Ga
- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
   ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

Report No: TRE1611001402 Page: 186 of 202 Issued: 2016-11-29

LTE Band 2-1.4MHz								
Channal	Frequency	Spurious I	Emission	Limit (dDm)	Dogult			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3701.4	Vertical	-36.58					
	5552.1	V	-44.37	-13.00	Pass			
Low	7402.8	V						
LOW	3701.4	Horizontal	-38.66					
	5552.1	Н	-48.76	-13.00	Pass			
	7402.8	Н						
	3760	Vertical	-37.18	-13.00	Pass			
	5640	V	-44.25					
Mid	7520	V						
IVIIG	3760	Horizontal	-38.79		Pass			
	5640	Н	-48.89	-13.00				
	7520	Н						
	3818.6	Vertical	-36.95					
	5727.9	V	-44.04	-13.00	Pass			
Lliah	7637.2	V						
High	3818.6	Horizontal	-38.82					
	5727.9	Н	-48.87	-13.00	Pass			
	7637.2	Н						

#### Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-3MHz								
Channal	Frequency	Spurious	Emission	Limit (dDm)	D 1			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3703	Vertical	-36.02					
	5554.5	V	-44.61	-13.00	Pass			
Low	7406	V						
Low	3703	Horizontal	-34.91					
	5554.5	Н	-44.84	-13.00	Pass			
	7406	Н						
	3760	Vertical	-35.10	-13.00	Pass			
	5640	V	-45.57					
Mid	7520	V						
IVIIU	3760	Horizontal	-34.85					
	5640	Н	-44.68	-13.00	Pass			
	7520	Н						
	3817	Vertical	-36.39					
	5725.5	V	-44.97	-13.00	Pass			
∐iab	7634	V						
High	3817	Horizontal	-36.83					
	5725.5	Н	-45.07	-13.00	Pass			
	7634	Н		1				

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611001402 Page: 187 of 202 Issued: 2016-11-29

LTE Band 2-5MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dooult			
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	3705	Vertical	-35.24					
	5557.5	V	-44.79	-13.00	Pass			
Low	7410	V						
Low	3705	Horizontal	-34.45					
	5557.5	Н	-44.95	-13.00	Pass			
	7410	Н						
	3760	Vertical	-34.58	-13.00	Pass			
	5640	V	-45.47					
Mid	7520	V						
IVIIQ	3760	Horizontal	-34.05		Pass			
	5640	Н	-45.94	-13.00				
	7520	Н						
	3815	Vertical	-33.24					
	5722.5	V	-45.79	-13.00	Pass			
Lligh	7630	V						
High	3815	Horizontal	-33.80					
	5722.5	Н	-45.91	-13.00	Pass			
	7630	Н						

## Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-10MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dooult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3710	Vertical	-34.68				
	5565	V	-45.08	-13.00	Pass		
Low	7420	V					
Low	3710	Horizontal	-33.33				
	5565	Н	-45.36	-13.00	Pass		
	7420	Н					
	3760	Vertical	-33.55	-13.00	Pass		
	5640	V	-46.26				
Mid	7520	V					
IVIIG	3760	Horizontal	-32.66				
	5640	Н	-45.59	-13.00	Pass		
	7520	Н					
	3810	Vertical	-33.81				
	5715	V	-45.81	-13.00	Pass		
Lligh	7620	V					
High	3810	Horizontal	-33.05				
	5715	Н	-45.65	-13.00	Pass		
	7620	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611001402 Page: 188 of 202 Issued: 2016-11-29

		LTE Ban	d 2-15MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	Danilt
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3705	Vertical	-33.73		
	5557.5	V	-45.48	-13.00	Pass
Low	7410	V			
LOW	3705	Horizontal	-31.95		
	5557.5	Н	-45.84	-13.00	Pass
	7410	Н			
	3760	Vertical	-32.24		Pass
	5640	V	-47.02	-13.00	
Mid	7520	V			
IVIIU	3760	Horizontal	-31.06		Pass
	5640	Н	-47.49	-13.00	
	7520	Н			
	3815	Vertical	-30.25		
	5722.5	V	-47.34	-13.00	Pass
Lliah	7630	V			
High	3815	Horizontal	-30.50		Pass
	5722.5	Н	-47.39	-13.00	
	7630	Н			

#### Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 2-20MHz		
Channal	Frequency	Spurious	Emission	Limait (dDma)	D !!
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3720	Vertical	-32.47		
	5580	V	-45.92	-13.00	Pass
Low	7440	V			
LOW	3720	Horizontal	-30.46		
	5580	Н	-46.33	-13.00	Pass
	7440	Н			
	3760	Vertical	-30.79		Pass
	5640	V	-47.67	-13.00	
Mid	7520	V			
IVIIU	3760	Horizontal	-29.46		Pass
	5640	Н	-48.21	-13.00	
	7520	Н			
	3800	Vertical	-28.52		
	5700	V	-48.03	-13.00	Pass
Lliah	7600	V			
High	3800	Horizontal	-29.94		Pass
	5700	Н	-48.32	-13.00	
	7600	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611001402 Page: 189 of 202 Issued: 2016-11-29

LTE Band 4-1.4MHz							
Channal	Frequency	Spurious Emission		Limit (dDm)	Danielt		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3421.4	Vertical	-43.35				
	5132.1	V	-47.66	-13.00	Pass		
Low	6842.8	V					
LOW	3421.4	Horizontal	-45.48				
	5132.1	Н	-48.06	-13.00	Pass		
	6842.8	Н					
	3465	Vertical	-43.23		Pass		
	5197.5	V	-47.77	-13.00			
Mid	6930	V					
iviid	3465	Horizontal	-45.62				
	5197.5	Н	-48.18	-13.00	Pass		
	6930	Н					
	3508.6	Vertical	-43.05				
	5262.9	V	-47.59	-13.00	Pass		
∐iah	7017.2	V					
High	3508.6	Horizontal	-45.64				
	5262.9	Н	-48.20	-13.00	Pass		
	7017.2	Н					

#### Remark:

- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Bar	nd 4-3MHz		
Champal	Frequency	Spurious	Emission	Limit (dDm)	<b>D</b> ''
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3423	Vertical	-42.85		
	5134.5	V	-47.49	-13.00	Pass
Low	6846	V			
Low	3423	Horizontal	-45.46		
	5134.5	Н	-47.90	-13.00	Pass
	6846	Н			
	3465	Vertical	-42.97		Pass
	5197.5	V	-47.61	-13.00	
Mid	6930	V			
IVIIG	3465	Horizontal	-45.64		
	5197.5	Н	-47.75	-13.00	Pass
	6930	Н			
	3507	Vertical	-42.71		
	5260.5	V	-47.85	-13.00	Pass
∐iab	7014	V			
High	3423	Horizontal	-45.58		Pass
	5134.5	Н	-47.81	-13.00	
	6846	Н			

- Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611001402 Page: 190 of 202 Issued: 2016-11-29

		LTE Bar	id 4-5MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	Desuit
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3425	Vertical	-43.38		
	5137.5	V	-47.67	-13.00	Pass
Low	6850	V			
LOW	3425	Horizontal	-45.76		
	5137.5	Н	-47.97	-13.00	Pass
	6850	Н			
	3465	Vertical	-43.25		Pass
	5197.5	V	-47.54	-13.00	
Mid	6930	V	-		
IVIIU	3465	Horizontal	-45.91		Pass
	5197.5	Н	-48.10	-13.00	
	6930	Н			
	3505	Vertical	-43.04		
	5257.5	V	-47.35	-13.00	Pass
Lligh	7010	V	-		
High	3505	Horizontal	-46.03		
	5257.5	Н	-48.21	-13.00	Pass
	7010	Н			

## Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 4-10MHz		
Channal	Frequency	Spurious	Emission	Lineit (dDne)	Dooult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3430	Vertical	-42.82		
	5145	V	-47.96	-13.00	Pass
Low	6860	V			
LOW	3430	Horizontal	-45.61		
	5145	Н	-47.86	-13.00	Pass
	6860	Н			
	3465	Vertical	-43.05		Pass
	5197.5	V	-48.17	-13.00	
Mid	6930	V			
iviid	3465	Horizontal	-45.74		
	5197.5	Н	-47.97	-13.00	Pass
	6930	Н	-		
	3500	Vertical	-42.86		
	5250	V	-48.00	-13.00	Pass
∐iah	7000	V	-	-13.00	
High	3500	Horizontal	-45.58		
	5250	Н	-47.81		Pass
	7000	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611001402 Page: 191 of 202 Issued: 2016-11-29

		LTE Ban	d 4-15MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	Desuit
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3435	Vertical	-41.87		
	5152.5	V	-48.36	-13.00	Pass
Laur	6870	V			
Low	3435	Horizontal	-45.97		
	5152.5	Н	-47.44	-13.00	Pass
	6870	Н			
	3465	Vertical	-42.17		Pass
	5197.5	V	-48.63	-13.00	
N 4: -1	6930	V			
Mid	3465	Horizontal	-46.18		Pass
	5197.5	Н	-47.61	-13.00	
	6930	Н			
	3490	Vertical	-41.87		
	5235	V	-48.37	-13.00	Pass
Lliah	6980	V			
High	3490	Horizontal	-46.12		
	5235	Н	-47.56	-13.00	Pass
	6980	Н			

#### Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 4-20MHz		
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dooult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3440	Vertical	-40.61		
	5160	V	-48.81	-13.00	Pass
Low	6880	V			
LOW	3440	Horizontal	-45.71		
	5160	Н	-47.91	-13.00	Pass
	6880	Н			
	3465	Vertical	-40.30		Pass
	5197.5	V	-48.74	-13.00	
Mid	6930	V			
iviid	3465	Horizontal	-45.64		Pass
	5197.5	Н	-47.97	-13.00	
	6930	Н			
	3490	Vertical	-40.39		
	5235	V	-48.00	-13.00	Pass
∐iah	6980	V			
High	3490	Horizontal	-45.39		
	5235	Н	-47.62	-13.00	Pass
	6980	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611001402 Page: 192 of 202 Issued: 2016-11-29

		LTE Band	d 5-1.4MHz		
Channel	Frequency	Spurious Emission		Limit (dBm)	Daguit
Chamilei	(MHz)	Polarization	Level (dBm)	Limit (ubm)	Result
	1649.4	Vertical	-39.45		
	2474.1	V	-36.74	-13.00	Pass
Low	3298.8	V			
LOW	1649.4	Horizontal	-45.38		
	2474.1	Н	-40.88	-13.00	Pass
	3298.8	Н			
	1673	Vertical	-39.55		Pass
	2509.5	V	-36.83	-13.00	
Mid	3346	V			
Mid	1673	Horizontal	-45.48		
	2509.5	Н	-40.96	-13.00	Pass
	3346	Н			
	1696.6	Vertical	-39.41		
	2544.9	V	-36.70	-13.00	Pass
Lliab	3393.2	V	-		
High	1696.6	Horizontal	-45.50		
	2544.9	Н	-40.98	-13.00	Pass
	3393.2	Н			

## Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Bar	nd 5-3MHz		
Channel	Frequency	Spurious	Emission	Limit (dBm)	Result
Chamer	(MHz)	Polarization	Level (dBm)	LIIIII (UDIII)	Result
	1651	Vertical	-39.46		
	2476.5	V	-36.73	-13.00	Pass
Low	3302	V			
LOW	1651	Horizontal	-45.43		
	2476.5	Н	-40.89	-13.00	Pass
	3302	Н			
	1673	Vertical	-39.50		Pass
	2509.5	V	-36.76	-13.00	
Mid	3346	V			
IVIIU	1673	Horizontal	-45.26		
	2509.5	Н	-41.03	-13.00	Pass
	3346	Н			
	1696.6	Vertical	-40.10		
	2544.9	V	-37.75	-13.00	Pass
∐iah	3393.2	V			
High	1696.6	Horizontal	-46.25		
	2544.9	Н	-41.97	-13.00	Pass
	3393.2	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611001402 Page: 193 of 202 Issued: 2016-11-29

	LTE Band 5-5MHz							
Channel	Frequency	Spurious Emission		Limit (dPm)	Danult			
Chamei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result			
	1653	Vertical	-39.49					
	2479.5	V	-36.70	-13.00	Pass			
Low	3306	V						
LOW	1653	Horizontal	-45.54					
	2479.5	Н	-40.91	-13.00	Pass			
	3306	Н						
	1673	Vertical	-39.57		Pass			
	2509.5	V	-36.78	-13.00				
Mid	3346	V						
IVIIU	1673	Horizontal	-45.41					
	2509.5	Н	-37.21	-13.00	Pass			
	3346	Н						
	1695	Vertical	-40.01					
	2542.5	V	-37.49	-13.00	Pass			
Lliab	3390	V						
High	1695	Horizontal	-45.53					
	2542.5	Н	-37.32	-13.00	Pass			
	3390	Н						

#### Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 5-10MHz		
Channel	Frequency	Spurious	Emission	Limit (dPm)	D 11
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1658	Vertical	-39.47		
	2487	V	-36.72	-13.00	Pass
Low	3316	V			
LOW	1658	Horizontal	-45.47		
	2487	Н	-40.90	-13.00	Pass
	3316	Н			
	1673	Vertical	-39.42		Pass
	2509.5	V	-36.67	-13.00	
Mid	3346	V			
IVIIU	1673	Horizontal	-46.13		
	2509.5	Н	-41.02	-13.00	Pass
	3346	Н			
	1688	Vertical	-39.62		
	2532	V	-36.49	-13.00	Pass
∐iah	3376	V	-		
High	1688	Horizontal	-46.10		
	2532	Н	-41.05	-13.00	Pass
	3376	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611001402 Page: 194 of 202 Issued: 2016-11-29

		LTE Ban	d 7-5MHz			
Channel	Frequency	Spurious I	Emission	Limit (dPm)	Result	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	5005	Vertical	-38.78			
	7507.5	V	-40.52	-25.00	Pass	
Low	10010	V				
Low	5005	Horizontal	-39.86			
	7507.5	Н	-42.52	-25.00	Pass	
	10010	Н				
	5070	Vertical	-39.84		Pass	
	7605	V	-41.46	-25.00		
Mid	10140	V				
iviid	5070	Horizontal	-40.96			
	7605	Н	-40.61	-25.00	Pass	
	10140	Н				
	5135	Vertical	-39.00			
	7702.5	V	-40.06	-25.00	Pass	
Ligh	10270	V				
High	5135		-40.51			
	7702.5	Н	-40.15	-25.00	Pass	
	10270	Н				

## Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 7-10MHz			
Channal	Frequency	Spurious	Emission	Limit (dDm)	Dooult	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	5010	Vertical	-38.84			
	7515	V	-40.46	-25.00	Pass	
Low	10020	V				
LOW	5010	Horizontal	-40.11		Pass	
	7515	Н	-42.58	-25.00		
	10020	Н				
	5070	Vertical	-39.04			
	7605	V	-40.64	-25.00	Pass	
Mid	10140	V				
IVIIU	5070	Horizontal	-39.45			
	7605	Н	-41.15	-25.00	Pass	
	10140	Н				
	5130	Vertical	-39.55			
	7695	V	-41.48	-25.00	Pass	
Lliah	10260	V				
High	5130	Horizontal	-39.29			
	7695	Н	-41.51	-25.00	Pass	
	10260	Н				

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No: TRE1611001402 Page: 195 of 202 Issued: 2016-11-29

		LTE Ban	d 7-15MHz			
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	5015	Vertical	-38.88			
	7522.5	V	-40.42	-25.00	Pass	
Low	10030	V				
Low	5015	Horizontal	-40.27			
	7522.5	Н	-42.61	-25.00	Pass	
	10030	Н				
	5070	Vertical	-39.01			
	7605	V	-40.54	-25.00	Pass	
Mid	10140	V				
iviid	5070	Horizontal	-39.11			
	7605	Н	-41.43	-25.00	Pass	
	10140	Н				
	5125	Vertical	-39.90			
	7687.5	V	-42.01	-25.00	Pass	
Lligh	10250	V				
High	5125	Horizontal	-38.61			
	7687.5	Н	-42.12	-25.00	Pass	
	10250	Н				

## Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 7-20MHz		
Channal	Frequency	Spurious	Emission	Limit (dDm)	Dogult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	5015	Vertical	-38.95		
	7522.5	V	-40.35	-25.00	Pass
1	10030	V		-25.00 -25.00 -25.00	
Low	5015	Horizontal	-40.59		
	7522.5	Н	-42.68	-25.00	Pass
	10030	Н			
	5070	Vertical	-39.20		Pass
	7605	V	-40.57	-25.00	
Mid	10140	V			
iviid	5070	Horizontal	-39.85		
	7605	Н	-41.14	-25.00	Pass
	10140	Н			
	5125	Vertical	-39.77		
	7687.5	V	-41.51	-25.00	Pass
∐iah	10250	V			
High	5125	Horizontal	-39.65		
	7687.5	Н	-41.55	-25.00	Pass
	10250	Н			

- 1.
- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report. 2.


Report No: TRE1611001402 Page: 196 of 202 Issued: 2016-11-29

# 4.7. Frequency stability V.S. Temperature measurement

## **LIMIT**

2.5ppm

## **TEST CONFIGURATION**

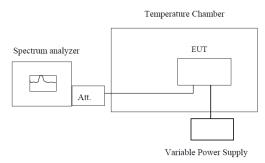

Note: Measurement setup for testing on Antenna connector

## **TEST PROCEDURE**

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25℃ operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to  $-30^{\circ}$ C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

Report No: TRE1611001402 Page: 197 of 202 Issued: 2016-11-29

Re	eference Frequency	y: LTE Band	d 2 Middle ch	annel=188	30MHz,20MHz	Bandwidth	
Б : .	<b>.</b>		Freque	ncy error			
Power supplied (Vdc)	Temperature (℃)	QF	PSK	16	6QAM	Limit (ppm)	Result
(VGC)	( )	Hz	ppm	Hz	ppm	(ррііі)	
	-30	31	0.0165	30	0.0160		
	-20	28	0.0149	29	0.0154		
	-10	28	0.0149	27	0.0144		
	0	27	0.0144	25	0.0133		
3.70	10	25	0.0133	26	0.0138	2.5	Pass
	20	24	0.0128	19	0.0101	]	
	30	26	0.0138	20	0.0106		
	40	28	0.0149	29	0.0154		
	50	29	0.0154	30	0.0160		
Ref	erence Frequency	: LTE Band	4 Middle cha	annel=1732	2.5MHz,20MHz	Bandwidth	
	_		Freque	ncy error			
Power supplied (Vdc)	Temperature	QF	PSK	10	6QAM	Limit	Result
(vuc)	(℃)	Hz	ppm	Hz	ppm	(ppm)	
	-30	42	0.0242	40	0.0231		
	-20	36	0.0208	32	0.0185	]	
	-10	37	0.0214	34	0.0196		
	0	36	0.0208	39	0.0225		
3.70	10	34	0.0196	35	0.0202	2.5	Pass
	20	33	0.0190	40	0.0231		
	30	35	0.0202	33	0.0190		
	40	38	0.0219	37	0.0214	1	
	50	39	0.0225	36	0.0208		
Re	ference Frequency	: LTE Band	l 5 Middle ch	annel=836	.5MHz,10MHz	Bandwidth	
			Freque	ncy error			
Power supplied (Vdc)	Temperature $(^{\circ}\!\mathbb{C})$	QF	PSK	10	6QAM	Limit	Result
(vuc)	(0)	Hz	ppm	Hz	ppm	(ppm)	
	-30	33	0.0395	32	0.0383		
	-20	26	0.0311	28	0.0335		
	-10	25	0.0299	24	0.0287		
	0	21	0.0251	29	0.0347		
3.70	10	23	0.0275	18	0.0215	2.5	Pass
	20	20	0.0239	25	0.0299		
	30	22	0.0263	19	0.0227		
	40	24	0.0287	28	0.0335		
,	50	27	0.0323	36	0.0430		

Report No: TRE1611001402 Page: 198 of 202 Issued: 2016-11-29

Re	Reference Frequency: LTE Band 7 Middle channel=2535MHz,20MHz Bandwidth							
Damas amadia d	Tomporoturo		Frequ		l imais			
Power supplied (Vdc)	Temperature (℃)	QF	PSK	16	QAM	Limit (ppm)	Result	
( v d o )	(0)	Hz	ppm	Hz	ppm	(ррііі)		
	-30	33	0.0130	12	0.0047			
	-20	31	0.0122	10	0.0039			
	-10	27	0.0107	20	0.0079			
	0	27	0.0107	13	0.0051		Pass	
3.70	10	26	0.0103	16	0.0063	2.5		
	20	25	0.0099	20	0.0079			
	30	28	0.0110	14	0.0055			
	40	29	0.0114	25	0.0099			
	50	30	0.0118	13	0.0051			


Report No: TRE1611001402 Page: 199 of 202 Issued: 2016-11-29

# 4.8. Frequency stability V.S. Voltagemeasurement

# **LIMIT**

2.5ppm

## **TEST CONFIGURATION**

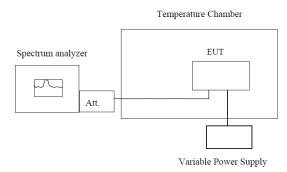

Note: Measurement setup for testing on Antenna connector

## **TEST PROCEDURE**

- 1. Set chamber temperature to 25 ℃. Use a variable DC power source topower the EUT and set the voltage to rated voltage.
- 2. Set the spectrum analyzer RBW lowenough to obtain the desired frequency resolution and recorded the frequency.
- 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, recordthe maximum frequency change.

Report No: TRE1611001402 Page: 200 of 202 Issued: 2016-11-29

Refe	erence Frequency	y: LTE Band	d 2 Middle c	hannel=1880	MHz,20MHz I	Bandwidth	
	Power		Freque	ency error		Limit	
Temperature (°C)	supplied	QF	PSK	160	QAM	(ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(PP)	
	4.35	28	0.0149	27	0.0144		
25	3.70	24	0.0128	24	0.0128	2.5	Pass
	3.50	31	0.0165	26	0.0138		
Refe	rence Frequency	: LTE Band	4 Middle ch	annel=1732.	.5MHz,20MHz	Bandwidth	
	Power			ency error		Limit	
Temperature (°C)	supplied	QF	PSK	160	QAM	(ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(11 /	
	4.35	35	0.0202	35	0.0202		
25	3.70	33	0.0190	28	0.0162	2.5	Pass
	3.50	37	0.0214	37	0.0214		
Refe	rence Frequency	: LTE Band	d 5 Middle cl	nannel=836.	5MHz,10MHz	Bandwidth	
	Power	Frequency error			Limit		
Temperature (°C)	supplied	QF	PSK	16QAM		(ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	( - /	
	4.35	22	0.0263	24	0.0287		
25	3.70	20	0.0239	18	0.0215	2.5	Pass
	3.50	26	0.0311	25	0.0299		
Refe	erence Frequency	y: LTE Band	d 7 Middle c	hannel=2535	5MHz,20MHz I	Bandwidth	
	Power		Freque	ency error		Limit	
Temperature (°C)	supplied	QF	PSK	160	QAM	(ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	( - /	
	4.35	28	0.0110	28	0.0110		
25	3.70	25	0.0099	30	0.0118	2.5	Pass
	3.50	33	0.0130	29	0.0114		


Report No: TRE1611001402 Page: 201 of 202 Issued: 2016-11-29

# 4.9. Peak-Average Ratio

## **LIMIT**

13dB

## **TEST CONFIGURATION**

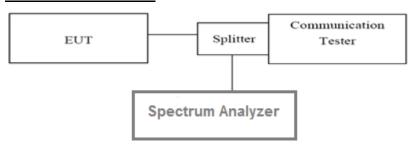

## **TEST PROCEDURE**

According with KDB 971168

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. Forcontinuoussignals(>98% duty cycle), the measurement interval was set to 1ms. For bursttransmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that issynced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in whichthetransmitter is operating at maximum power

LTE Band 2-20MHz						
Modulation	QPSK 16QA		AM	Limit(dD)	Decult	
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result
Low	3.72	5.52	4.74	6.18	13	Pass
Mid	3.82	5.62	4.84	6.34	13	Pass
High	4.02	5.68	4.80	6.30	13	Pass

LTE Band 4-20MHz						
Modulation	QPSK		16QAM		Limit/dD\	D !!
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result
Low	4.02	5.58	4.92	6.24	13	Pass
Mid	3.68	5.26	4.56	6.10	13	Pass
High	5.19	6.02	4.96	6.42	13	Pass


LTE Band 5-10MHz						
Modulation	QPSK		16QAM		Limit/dD\	Dooult
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result
Low	3.88	6.04	4.78	6.68	13	Pass
Mid	4.94	6.20	5.74	6.90	13	Pass
High	4.52	5.82	5.42	6.46	13	Pass


LTE Band 7-20MHz						
Modulation	QPSK		16QAM		l :: t/-ID\	D !!
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result
Low	3.72	5.28	4.36	5.94	13	Pass
Mid	2.78	5.06	3.38	5.74	13	Pass
High	2.84	4.86	3.92	5.60	13	Pass

Report No: TRE1611001402 Page: 202 of 202 Issued: 2016-11-29

# 5. Test Setup Photos of the EUT

Radiated emission:

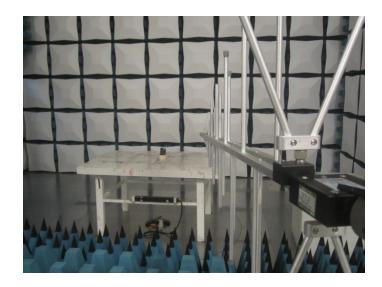

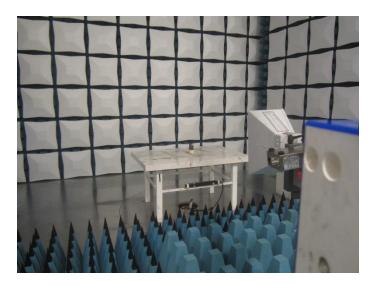

# 6. External and Internal Photos of the EUT

Reference to the test report No.: TRE1611001401.	
--	--

.....End of Report.....