



TEST REPORT

Report Reference No...... : **TRE1801013303** R/C.....: 12078
FCC ID..... : **ZSW-30-060**
Applicant's name..... : **b mobile HK Limited**
Address..... : Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.
Manufacturer..... : b mobile HK Limited
Address..... : Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.
Test item description : **Mobile Phone**
Trade Mark : Bmobile
Model/Type reference..... : AX750
Listed Model(s) : -
Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**
Date of receipt of test sample..... : Jan.17,2018
Date of testing..... : Jan.17,2018- Feb.01,2018
Date of issue..... : Feb.02,2018
Result..... : **PASS**

Compiled by
 (position+printedname+signature).... : File administrators Candy Liu *Candy Liu*
Supervised by
 (position+printedname+signature)..... : Project Engineer : Edward Pan *Edward Pan*
Approved by
 (position+printedname+signature)..... : RF Manager Hans Hu *Hans Hu*

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**
Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	<u>TEST STANDARDS AND REPORT VERSION</u>	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	<u>TEST DESCRIPTION</u>	4
3.	<u>SUMMARY</u>	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
4.	<u>TEST ENVIRONMENT</u>	7
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.1.	Equipments Used during the Test	9
5.	<u>TEST CONDITIONS AND RESULTS</u>	11
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	22
5.6.	Restricted band	28
5.7.	Band edge and Spurious Emissions (conducted)	33
5.8.	Spurious Emissions (radiated)	50
6.	<u>TEST SETUP PHOTOS</u>	57
7.	<u>EXTERANAL AND INTERNAL PHOTOS</u>	58

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB 558074 D01 DTS Meas Guidance v04](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under §15.247

1.2. Report version

Version No.	Date of issue	Description
00	Feb.02,2018	Original

2. TEST DESCRIPTION

Test Item	FCC Rule	Result	Test Engineer
Antenna requirement	15.203/15.247(c)	PASS	Baozhu.hu
Line Conducted Emissions (AC Main)	15.207	PASS	Alex Guo
Conducted Peak Output Power	15.247(b)(3)	PASS	Baozhu.hu
Power Spectral Density	15.247(e)	PASS	Baozhu.hu
6dB Bandwidth	15.247(a)(2)	PASS	Baozhu.hu
Restricted band	15.247(d)/15.205	PASS	Baozhu.hu
Spurious Emissions	15.247(d)/15.209	PASS	Baozhu.hu

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.
Manufacturer:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.

3.2. Product Description

Name of EUT:	Mobile Phone
Trade Mark:	Bmobile
Model No.:	AX750
Listed Model(s):	-
IMEI 1:	357229080262243
IMEI 2:	357229080262250
Power supply:	DC 3.8V
Adapter information:	Input:100-220Va.c.,50/60Hz,0.2A Output: 5Vd.c.,1000mA
Hardware version:	Bmobile_AX750_Base_V001
Software version:	V1.0
WIFI	
Supported type:	802.11b/802.11g/802.11n(HT20)/802.11n(HT40)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Antenna type:	Integral Antenna
Antenna gain:	0.8dBi

3.3. Operation state

➤ Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

802.11b/g/n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	01	-
02	2417	02	-
03	2422	03	2422
04	2427	04	2427
05	2432	05	2432
06	2437	06	2437
07	2442	07	2442
08	2447	08	2447
09	2452	09	2452
10	2457	10	-
11	2462	11	-

➤ Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit (duty cycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit(duty cycle>98%). The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

○	/	Manufacturer:	/
		Model No.:	/
○	/	Manufacturer:	/
		Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mba

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.1. Equipments Used during the Test

Conducted Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Artificial Mains	SCHWARZBECK	NNLK 8121	573	11/11/2017	11/10/2018
3	2-Line V-Network	R&S	ESH3-Z5	100049	11/11/2017	11/10/2018
4	Pulse Limiter	R&S	ESH3-Z2	101488	11/11/2017	11/10/2018
5	RF Connection Cable	HUBER+SUHNER	EF400	N/A	11/21/2017	11/20/2018
6	Test Software	R&S	ES-K1	N/A	N/A	N/A

Radiated Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Loop Antenna	R&S	HFH2-Z2	100020	11/20/2017	11/19/2018
3	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	538	4/5/2017	4/4/2020
4	Preamplifier	SCHWARZBECK	BBV 9743	9743-0022	10/18/2017	10/17/2018
5	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	11/21/2017	11/20/2018
6	EMI Test Software	R&S	ESK1	N/A	N/A	N/A
7	Spectrum Analyzer	R&S	FSP40	100597	11/11/2017	11/10/2018
8	Horn Antenna	SCHWARZBECK	9120D	1011	3/27/2017	3/26/2020
9	Horn Antenna	SCHWARZBECK	BBHA9170	25841	3/27/2017	3/26/2018
10	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-248	10/18/2017	10/17/2018
11	High pass filter	Compliance Direction systems	BSU-6	34202	11/11/2017	11/10/2018
12	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	11/21/2017	11/20/2018
13	EMI Test Software	Audix	E3	N/A	N/A	N/A
14	Turntable	MATURO	TT2.0	/	N/A	N/A
15	Antenna Mast	MATURO	TAM-4.0-P	/	N/A	N/A

RF Conducted Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	Spectrum Analyzer	R&S	FSV40	100048	11/11/2017	11/10/2018
2	EXA Signal Analyzer	Agilent	N9020A	184247	9/22/2017	9/21/2018
3	Power Meter	Anritsu	ML249A	/	9/22/2017	9/21/2018
4	OSP	R&S	OSP120	101317	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

REQUIREMENT:

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST RESULTS

Passed **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.

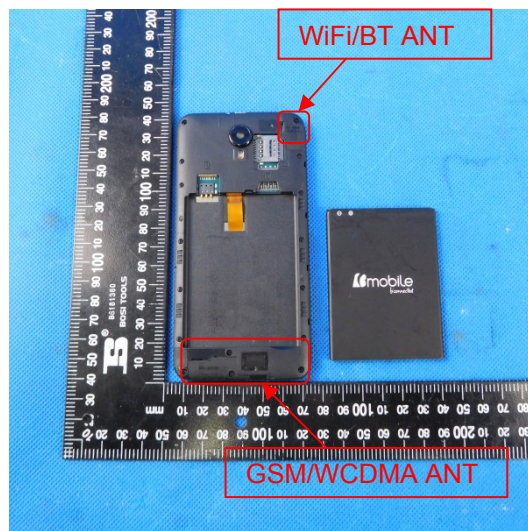

5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

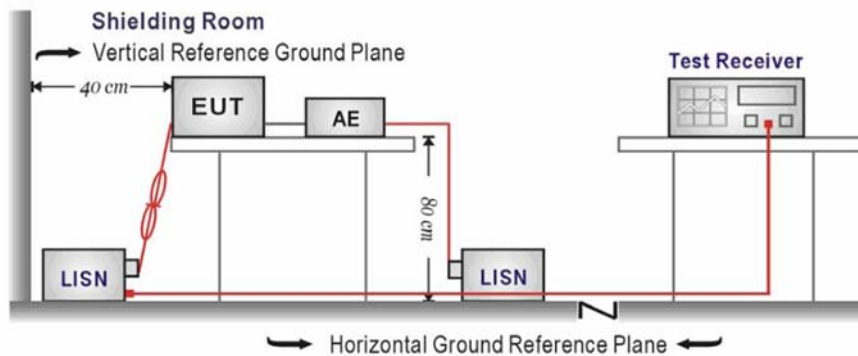

TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted Emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST MODE:

Please refer to the clause 3.3


TEST RESULTS

Passed Not Applicable

Note:

- 1) Transd=Cable lose+ Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit -Level

Test Line: L

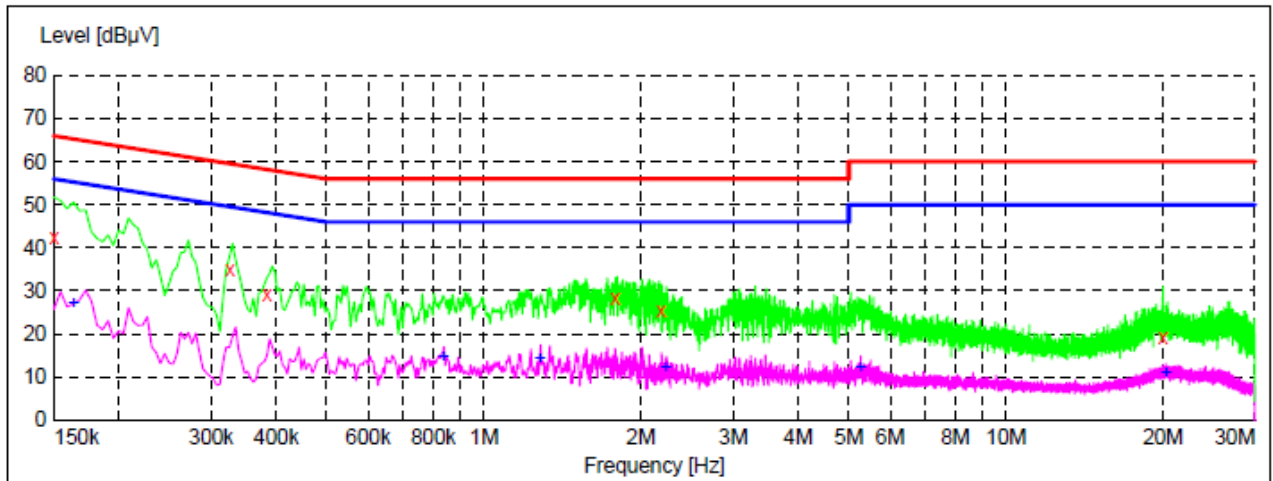

x x x MES GM1802015024_fin

MEASUREMENT RESULT: "GM1802015024_fin"

2/1/2018 11:47AM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	42.50	10.0	66	23.5	QP	L1	GND
0.325500	35.00	9.9	60	24.6	QP	L1	GND
0.384000	29.00	9.9	58	29.2	QP	L1	GND
1.783500	28.30	10.1	56	27.7	QP	L1	GND
2.179500	25.30	10.1	56	30.7	QP	L1	GND
19.959000	19.00	10.6	60	41.0	QP	L1	GND

MEASUREMENT RESULT: "GM1802015024_fin2"

2/1/2018 11:47AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.163500	27.00	10.0	55	28.3	AV	L1	GND
0.834000	14.70	10.0	46	31.3	AV	L1	GND
1.279500	14.10	10.1	46	31.9	AV	L1	GND
2.229000	12.30	10.1	46	33.7	AV	L1	GND
5.271000	12.10	10.2	50	37.9	AV	L1	GND
20.242500	10.90	10.6	50	39.1	AV	L1	GND

Test Line: N

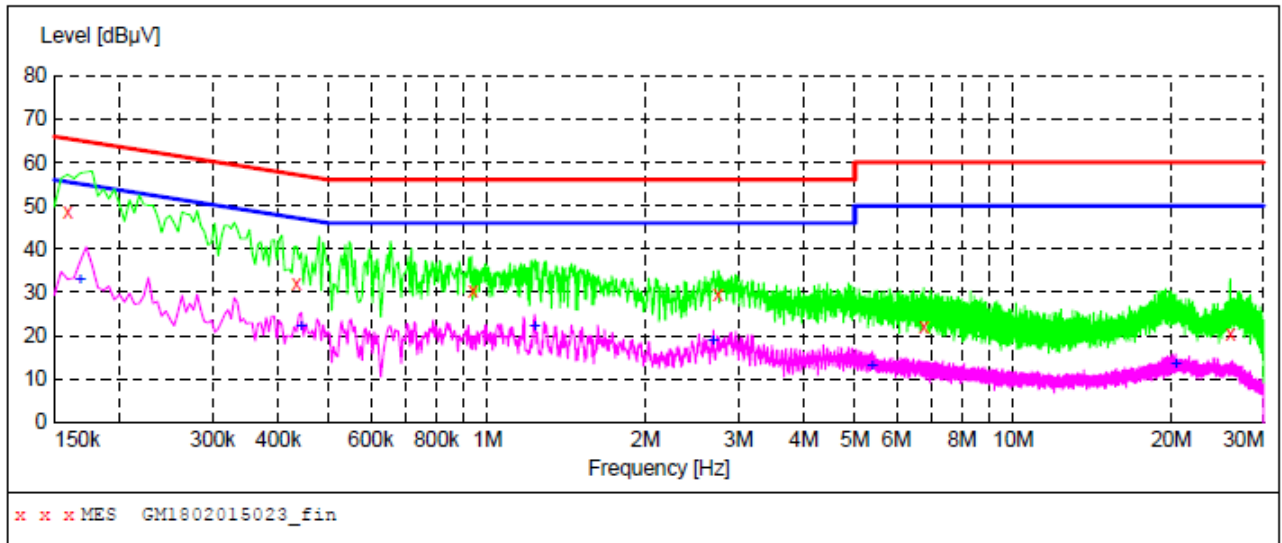

MEASUREMENT RESULT: "GM1802015023_fin"

2/1/2018 11:43AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.159000	48.50	10.0	66	17.0	QP	N	GND
0.433500	32.00	9.9	57	25.2	QP	N	GND
0.937500	30.50	10.0	56	25.5	QP	N	GND
2.742000	29.60	10.1	56	26.4	QP	N	GND
6.765000	22.20	10.2	60	37.8	QP	N	GND
25.917000	20.30	10.8	60	39.7	QP	N	GND

MEASUREMENT RESULT: "GM1802015023_fin2"

2/1/2018 11:43AM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.168000	32.80	10.0	55	22.3	AV	N	GND
0.442500	22.00	9.9	47	25.0	AV	N	GND
1.230000	22.00	10.1	46	24.0	AV	N	GND
2.688000	18.60	10.1	46	27.4	AV	N	GND
5.388000	13.10	10.2	50	36.9	AV	N	GND
20.418000	13.20	10.6	50	36.8	AV	N	GND

5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

TEST CONFIGURATION

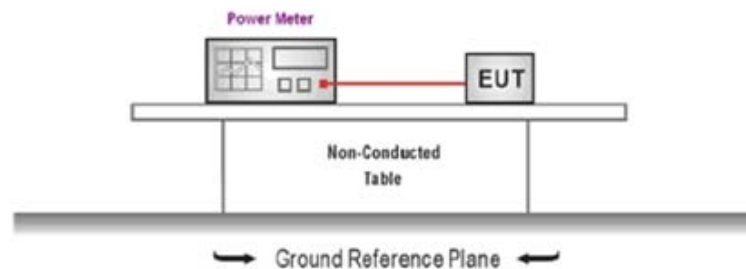

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47 CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
4. Record the measurement data.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11b	01	14.77	≤30.00	Pass
	06	15.04		
	11	14.92		
802.11g	01	14.98	≤30.00	Pass
	06	14.68		
	11	14.78		
802.11n(HT20)	01	13.26	≤30.00	Pass
	06	12.76		
	11	12.93		
802.11n(HT40)	03	12.24	≤30.00	Pass
	06	12.20		
	09	12.14		

5.4. Power Spectral Density

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION

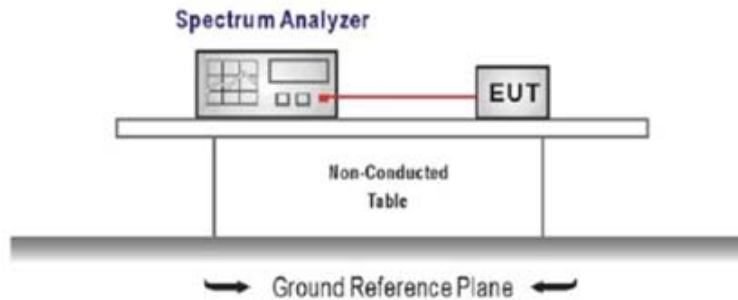

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:
Center frequency=DTS channel center frequency
Span =1.5 times the DTS bandwidth
RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW
Sweep time = auto couple
Detector = peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST MODE:




Please refer to the clause 3.3




TEST RESULTS




Passed Not Applicable




Type	Channel	Power Spectral Density (dBm/30KHz)	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	3.20	-6.80	≤8.00	Pass
	06	-1.62	-11.62		
	11	-1.33	-11.33		
802.11g	01	-8.51	-18.51	≤8.00	Pass
	06	-8.93	-18.93		
	11	-8.25	-18.25		
802.11n(HT20)	01	-10.81	-20.81	≤8.00	Pass
	06	-11.53	-21.53		
	11	-11.15	-21.15		
802.11n(HT40)	03	-15.54	-25.54	≤8.00	Pass
	06	-15.10	-25.10		
	09	-15.57	-25.57		

Test plot as follows:

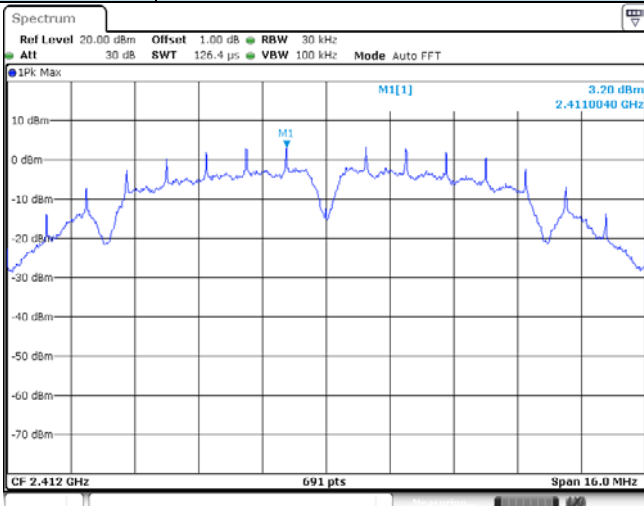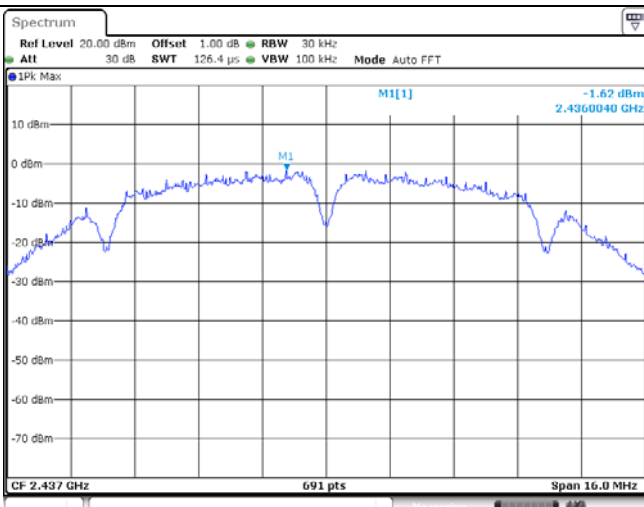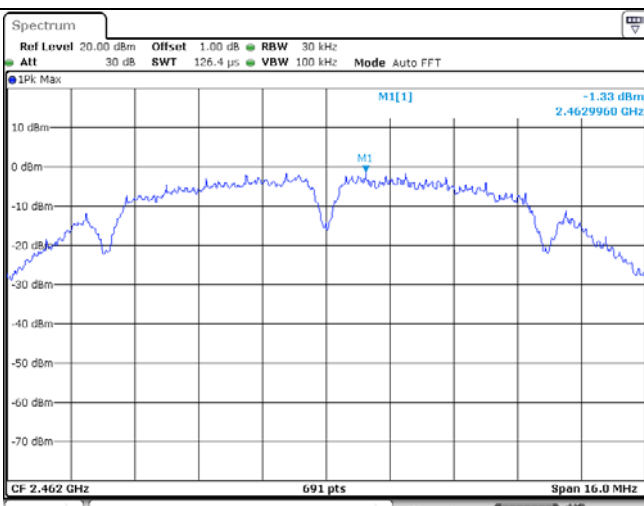Type:		802.11b
CH01		
CH06		
CH11		

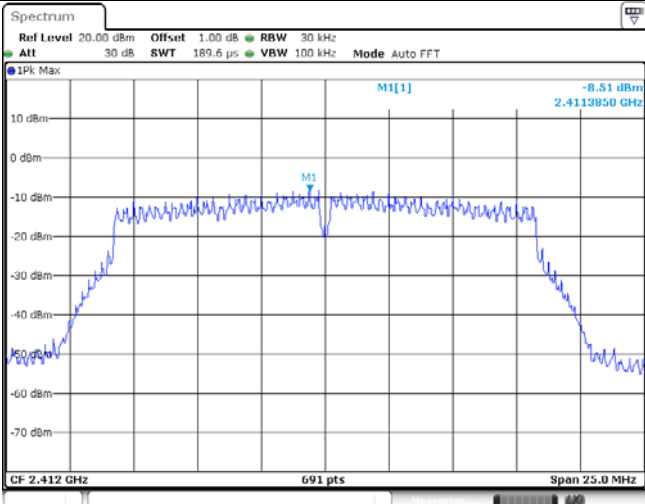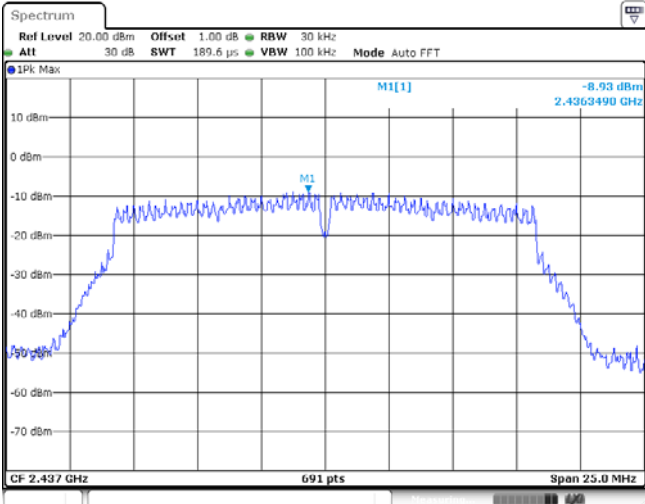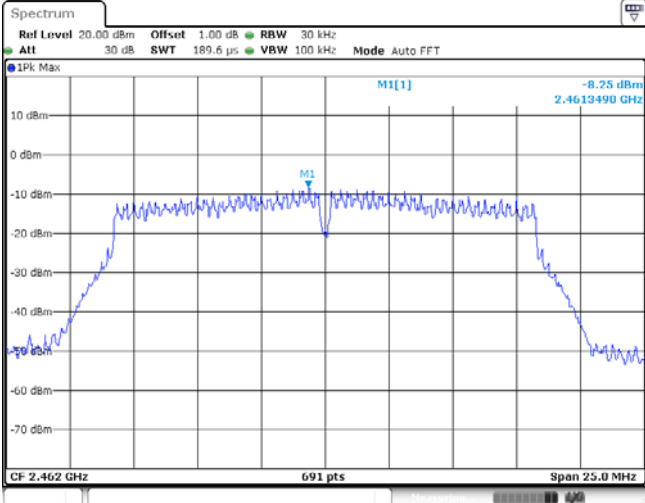Type:		802.11g
CH01		
CH06		
CH11		

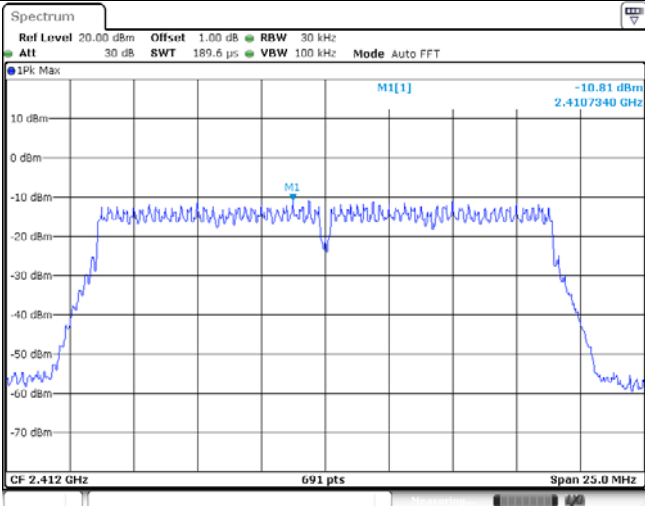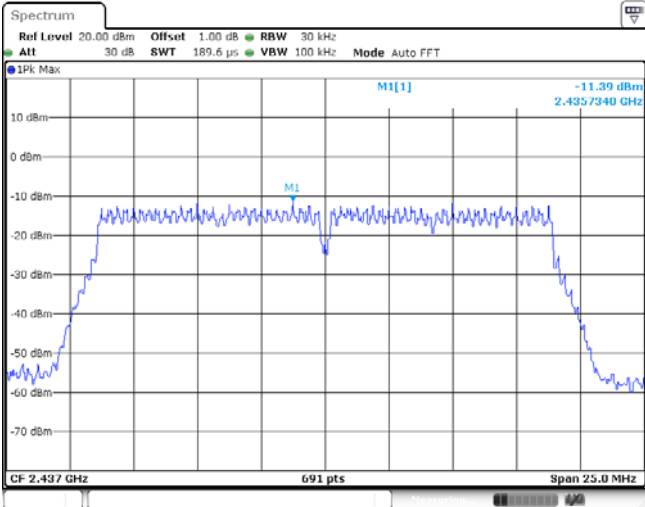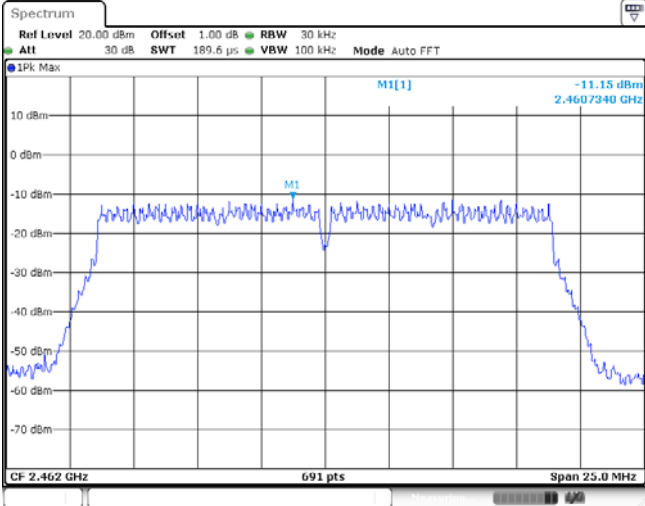Type:		802.11n(HT20)
CH01		
CH06		
CH11		

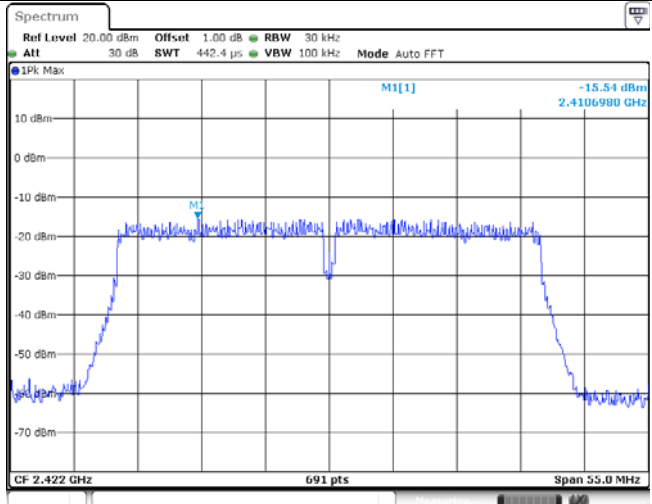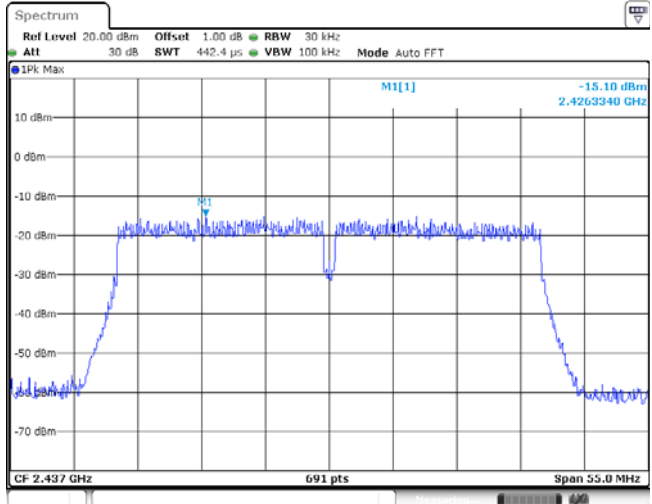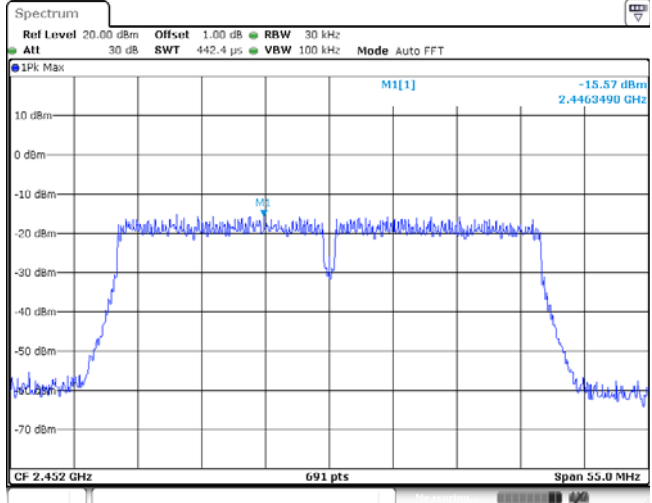Type:		802.11n(HT40)
CH03		
CH06		
CH09		


5.5. 6dB bandwidth

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST CONFIGURATION

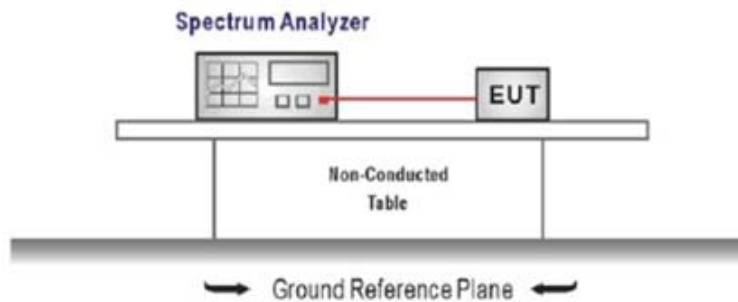

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).
Center Frequency = DTS channel center frequency
Span = 2 x DTS bandwidth
RBW = 100 kHz, VBW ≥ 3 x RBW
Sweep time = auto couple
Detector = Peak
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

TEST MODE:


Please refer to the clause 3.3


TEST RESULTS


Passed Not Applicable




Type	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	9.15	≥500	Pass
	06	9.60		
	11	9.63		
802.11g	01	14.67	≥500	Pass
	06	15.12		
	11	15.09		
802.11n(HT20)	01	17.64	≥500	Pass
	06	17.67		
	11	17.64		
802.11n(HT40)	03	35.82	≥500	Pass
	06	35.76		
	09	35.94		

Test plot as follows:

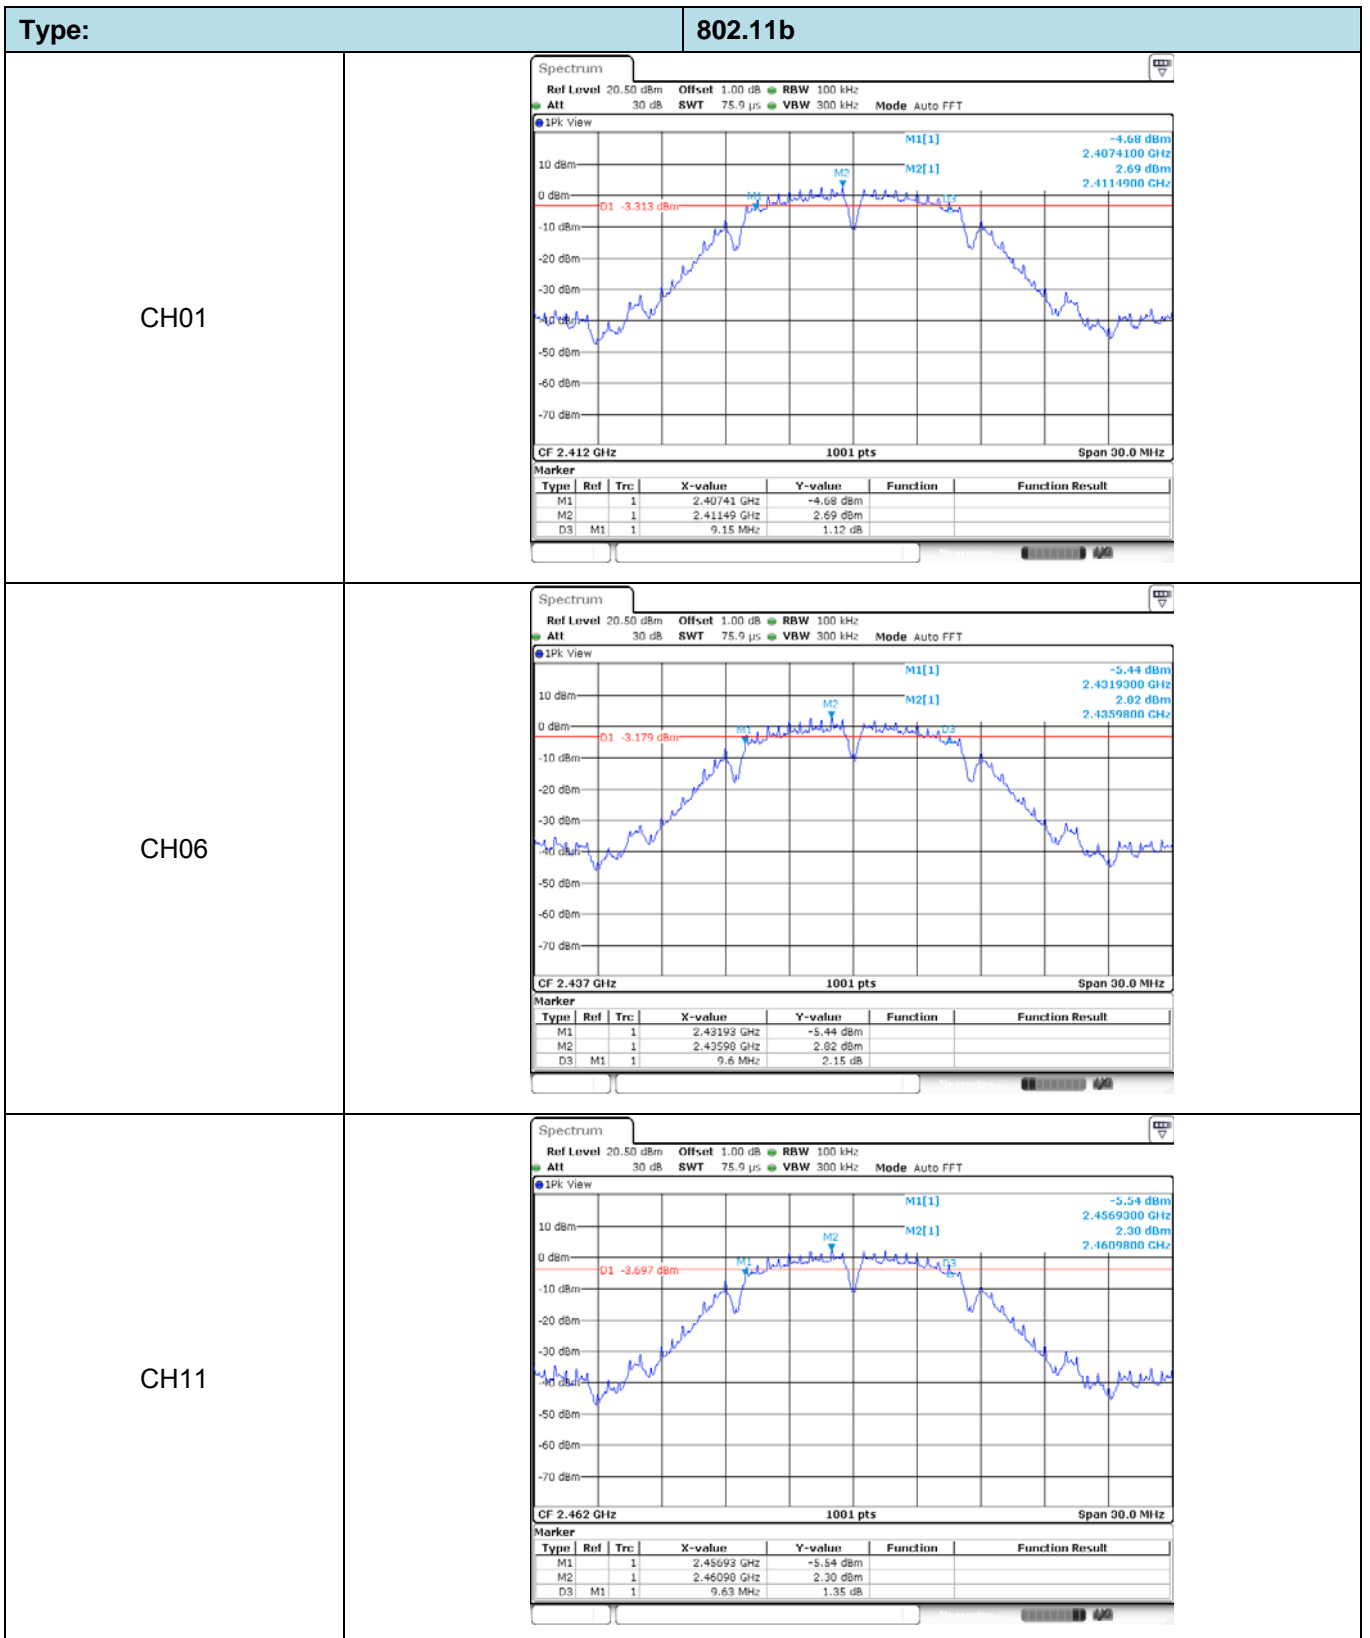

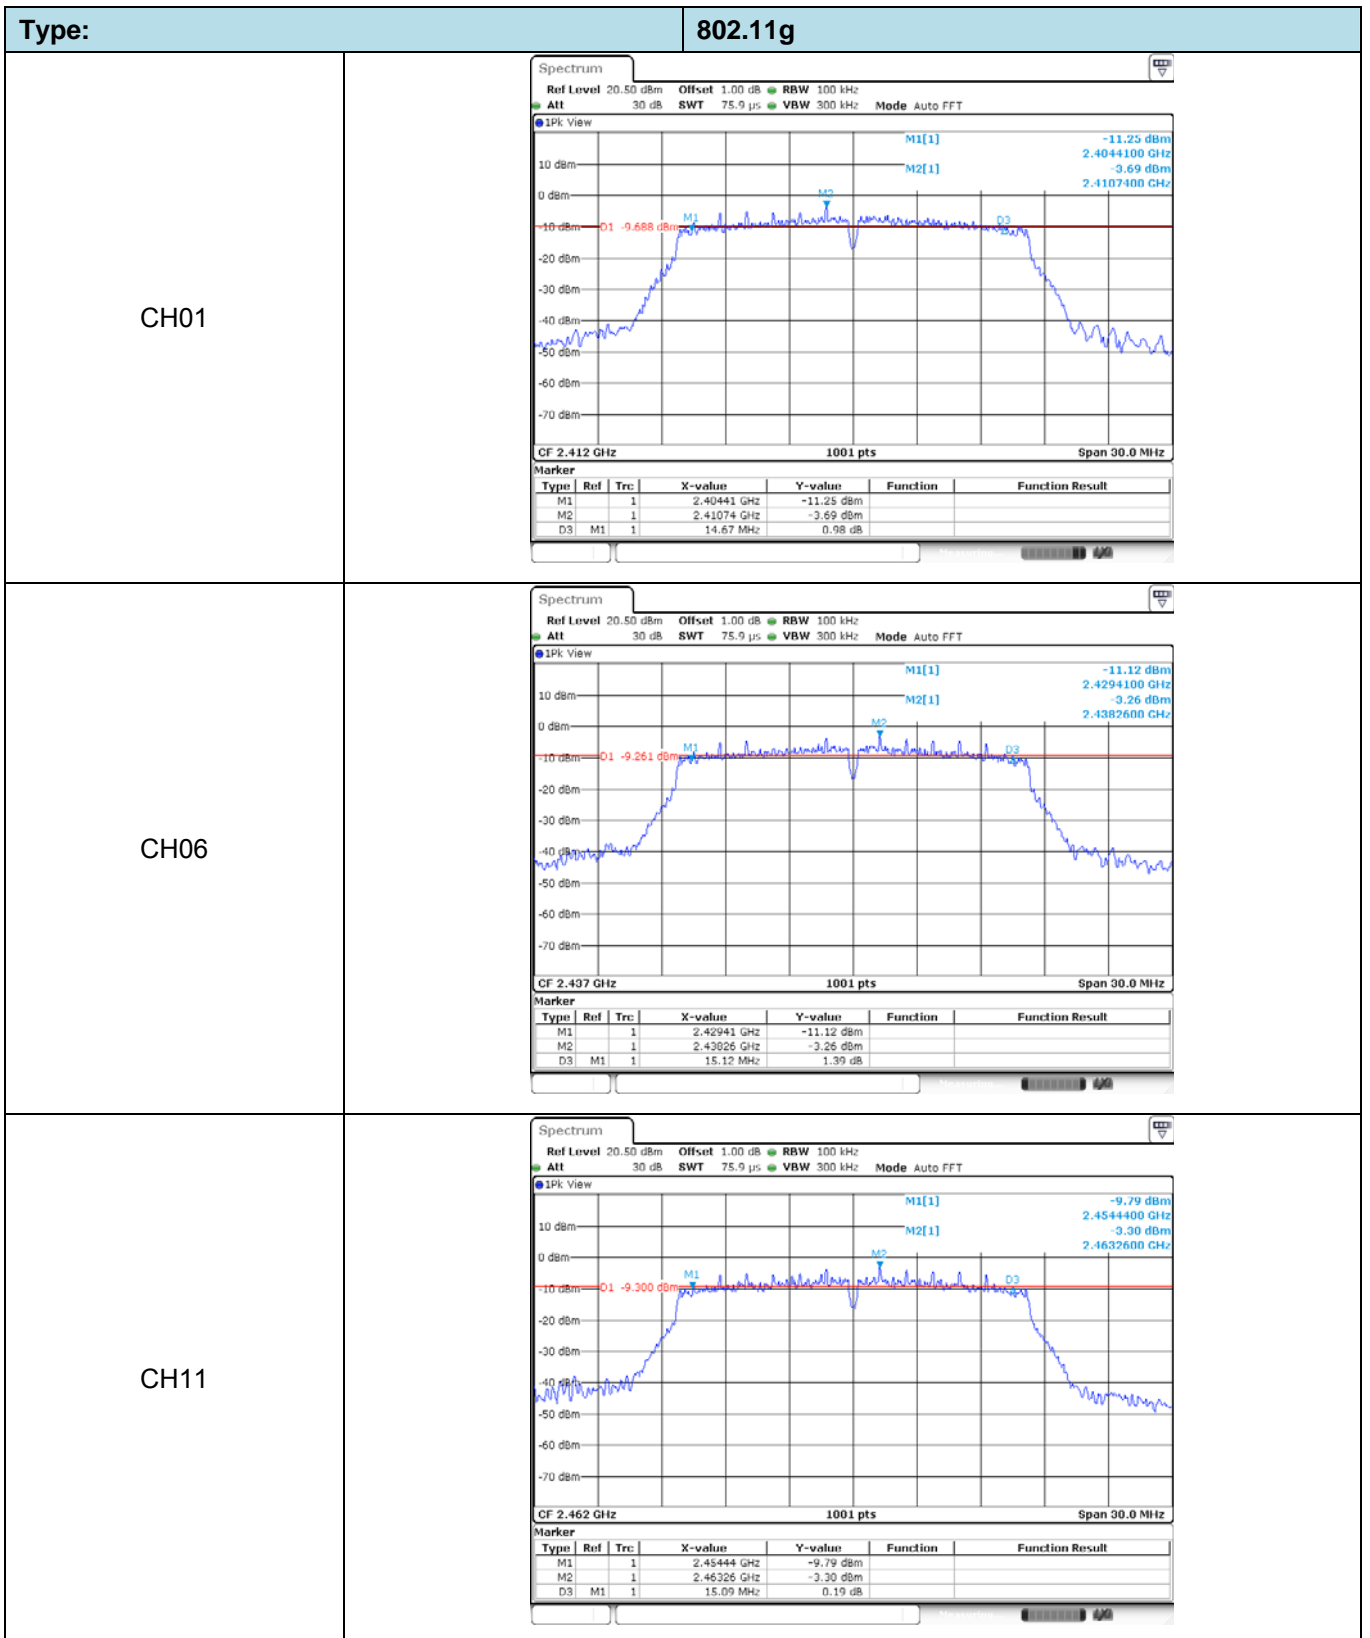

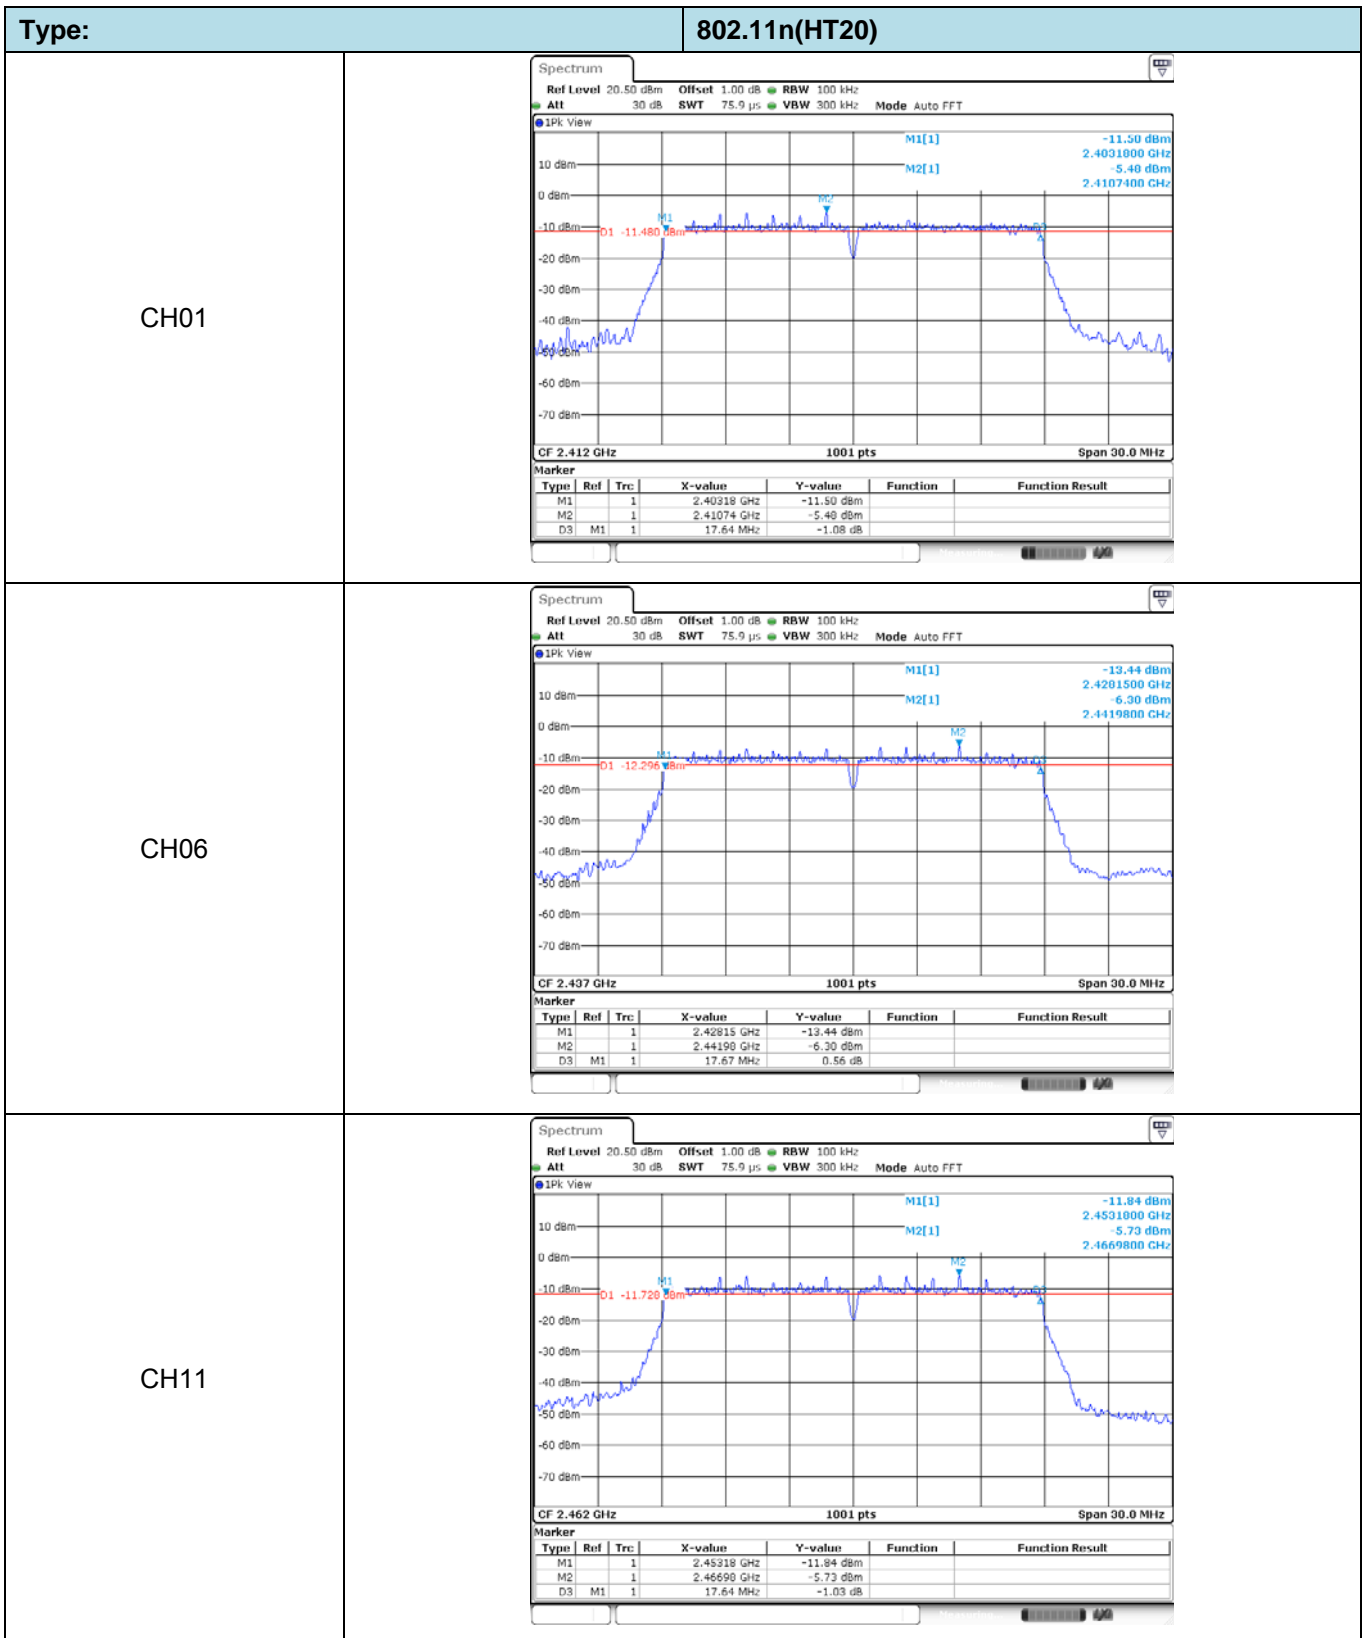

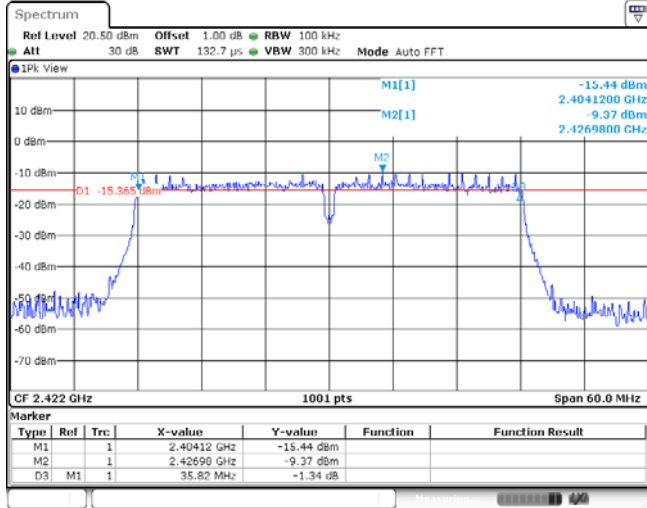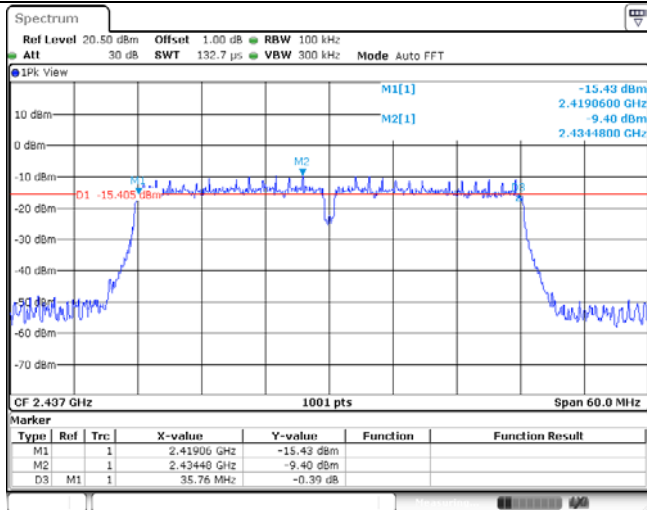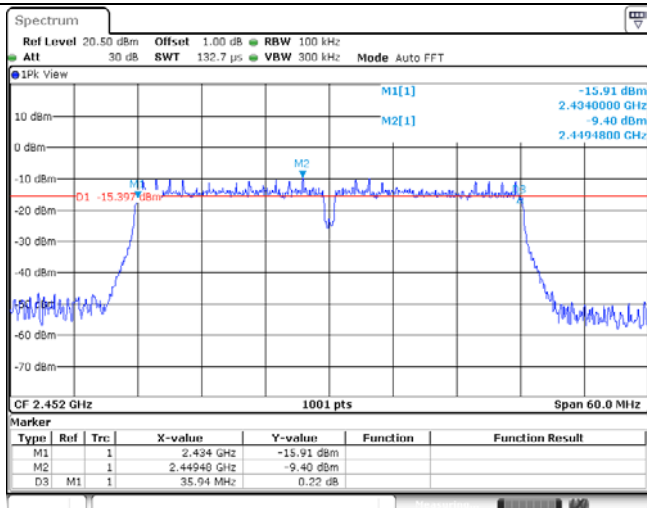Type:	802.11n(HT40)																												
CH03	 <p>Marker Table for CH03:</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.40412 GHz</td> <td>-15.44 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.42690 GHz</td> <td>-9.37 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.82 MHz</td> <td>-1.34 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.40412 GHz	-15.44 dBm			M2		1	2.42690 GHz	-9.37 dBm			D3	M1	1	35.82 MHz	-1.34 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.40412 GHz	-15.44 dBm																									
M2		1	2.42690 GHz	-9.37 dBm																									
D3	M1	1	35.82 MHz	-1.34 dB																									
CH06	 <p>Marker Table for CH06:</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.41906 GHz</td> <td>-15.43 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.43440 GHz</td> <td>-9.40 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.76 MHz</td> <td>-0.39 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.41906 GHz	-15.43 dBm			M2		1	2.43440 GHz	-9.40 dBm			D3	M1	1	35.76 MHz	-0.39 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.41906 GHz	-15.43 dBm																									
M2		1	2.43440 GHz	-9.40 dBm																									
D3	M1	1	35.76 MHz	-0.39 dB																									
CH09	 <p>Marker Table for CH09:</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.434 GHz</td> <td>-15.91 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.44940 GHz</td> <td>-9.40 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>35.94 MHz</td> <td>0.22 dB</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.434 GHz	-15.91 dBm			M2		1	2.44940 GHz	-9.40 dBm			D3	M1	1	35.94 MHz	0.22 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																							
M1		1	2.434 GHz	-15.91 dBm																									
M2		1	2.44940 GHz	-9.40 dBm																									
D3	M1	1	35.94 MHz	0.22 dB																									


5.6. Restricted band

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

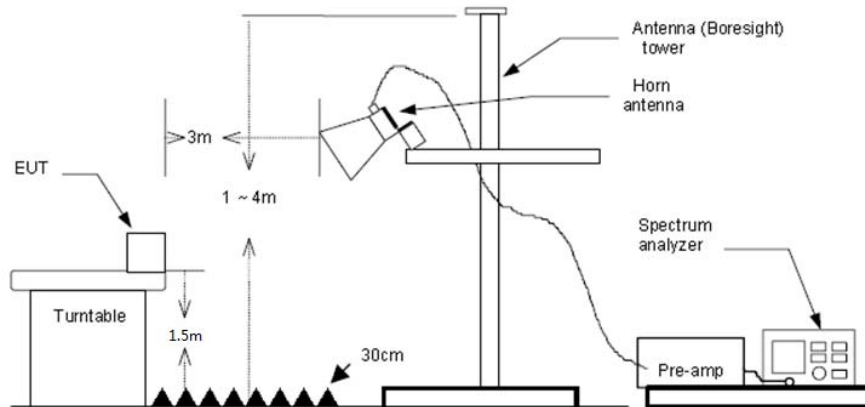

TEST PROCEDURE

- 1) The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2) The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3) The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- 4) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5) The receiver set as follow:
 RBW=1MHz, VBW=3MHz PEAK detector for Peak value.
 RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	14.54	28.05	6.62	0.00	49.21	74.00	-24.79	Vertical	Peak
2390.01	13.90	27.65	6.75	0.00	48.30	74.00	-25.70	Vertical	Peak
2310.00	14.65	28.05	6.62	0.00	49.32	74.00	-24.68	Horizontal	Peak
2390.01	14.94	27.65	6.75	0.00	49.34	74.00	-24.66	Horizontal	Peak
2310.00	11.50	28.05	6.62	0.00	46.17	54.00	-7.83	Vertical	Average
2390.01	11.55	27.65	6.75	0.00	45.95	54.00	-8.05	Vertical	Average
2310.00	11.48	28.05	6.62	0.00	46.15	54.00	-7.85	Horizontal	Average
2390.01	11.80	27.65	6.75	0.00	46.20	54.00	-7.80	Horizontal	Average

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	13.47	27.26	6.83	0.00	47.56	74.00	-26.44	Vertical	Peak
2500.00	15.00	27.20	6.84	0.00	49.04	74.00	-24.96	Vertical	Peak
2483.49	13.76	27.26	6.83	0.00	47.85	74.00	-26.15	Horizontal	Peak
2500.00	13.92	27.20	6.84	0.00	47.96	74.00	-26.04	Horizontal	Peak
2483.49	11.89	27.26	6.83	0.00	45.98	54.00	-8.02	Vertical	Average
2500.00	11.08	27.20	6.84	0.00	45.12	54.00	-8.88	Vertical	Average
2483.49	11.35	27.26	6.83	0.00	45.44	54.00	-8.56	Horizontal	Average
2500.00	11.08	27.20	6.84	0.00	45.12	54.00	-8.88	Horizontal	Average

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	14.48	28.05	6.62	0.00	49.15	74.00	-24.85	Vertical	Peak
2390.01	15.63	27.65	6.75	0.00	50.03	74.00	-23.97	Vertical	Peak
2310.00	13.78	28.05	6.62	0.00	48.45	74.00	-25.55	Horizontal	Peak
2390.01	15.98	27.65	6.75	0.00	50.38	74.00	-23.62	Horizontal	Peak
2310.00	11.50	28.05	6.62	0.00	46.17	54.00	-7.83	Vertical	Average
2390.01	14.45	27.65	6.75	0.00	48.85	54.00	-5.15	Vertical	Average
2310.00	11.49	28.05	6.62	0.00	46.16	54.00	-7.84	Horizontal	Average
2390.01	12.57	27.65	6.75	0.00	46.97	54.00	-7.03	Horizontal	Average

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	17.51	27.26	6.83	0.00	51.60	74.00	-22.40	Vertical	Peak
2500.00	14.38	27.20	6.84	0.00	48.42	74.00	-25.58	Vertical	Peak
2483.49	18.05	27.26	6.83	0.00	52.14	74.00	-21.86	Horizontal	Peak
2500.00	13.81	27.20	6.84	0.00	47.85	74.00	-26.15	Horizontal	Peak
2483.49	16.35	27.26	6.83	0.00	50.44	54.00	-3.56	Vertical	Average
2500.00	11.33	27.20	6.84	0.00	45.37	54.00	-8.63	Vertical	Average
2483.49	13.62	27.26	6.83	0.00	47.71	54.00	-6.29	Horizontal	Average
2500.00	11.09	27.20	6.84	0.00	45.13	54.00	-8.87	Horizontal	Average

802.11n(HT20)					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	13.27	28.05	6.62	0.00	47.94	74.00	-26.06	Vertical	Peak
2390.01	20.55	27.65	6.75	0.00	54.95	74.00	-19.05	Vertical	Peak
2310.00	14.42	28.05	6.62	0.00	49.09	74.00	-24.91	Horizontal	Peak
2390.01	20.76	27.65	6.75	0.00	55.16	74.00	-18.84	Horizontal	Peak
2310.00	11.49	28.05	6.62	0.00	46.16	54.00	-7.84	Vertical	Average
2390.01	17.50	27.65	6.75	0.00	51.90	54.00	-2.10	Vertical	Average
2310.00	11.50	28.05	6.62	0.00	46.17	54.00	-7.83	Horizontal	Average
2390.01	14.61	27.65	6.75	0.00	49.01	54.00	-4.99	Horizontal	Average

802.11n(HT20)					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.49	18.36	27.26	6.83	0.00	52.45	74.00	-21.55	Vertical	Peak
2500.00	14.44	27.20	6.84	0.00	48.48	74.00	-25.52	Vertical	Peak
2483.49	18.88	27.26	6.83	0.00	52.97	74.00	-21.03	Horizontal	Peak
2500.00	13.35	27.20	6.84	0.00	47.39	74.00	-26.61	Horizontal	Peak
2483.49	15.84	27.26	6.83	0.00	49.93	54.00	-4.07	Vertical	Average
2500.00	11.08	27.20	6.84	0.00	45.12	54.00	-8.88	Vertical	Average
2483.49	17.52	27.26	6.83	0.00	51.61	54.00	-2.39	Horizontal	Average
2500.00	11.32	27.20	6.84	0.00	45.36	54.00	-8.64	Horizontal	Average

802.11n(HT40)					CH03				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	14.61	28.05	6.62	0.00	49.28	74.00	-24.72	Vertical	Peak
2389.99	18.13	27.65	6.75	0.00	52.53	74.00	-21.47	Vertical	Peak
2310.00	15.20	28.05	6.62	0.00	49.87	74.00	-24.13	Horizontal	Peak
2389.99	20.32	27.65	6.75	0.00	54.72	74.00	-19.28	Horizontal	Peak
2310.00	11.55	28.05	6.62	0.00	46.22	54.00	-7.78	Vertical	Average
2389.99	18.29	27.65	6.75	0.00	52.69	54.00	-1.31	Vertical	Average
2310.00	11.57	28.05	6.62	0.00	46.24	54.00	-7.76	Horizontal	Average
2389.99	17.60	27.65	6.75	0.00	52.00	54.00	-2.00	Horizontal	Average

802.11n(HT40)					CH09				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	23.38	27.26	6.83	0.00	57.47	74.00	-16.53	Vertical	Peak
2500.00	14.69	27.20	6.84	0.00	48.73	74.00	-25.27	Vertical	Peak
2483.50	23.42	27.26	6.83	0.00	57.51	74.00	-16.49	Horizontal	Peak
2500.00	15.92	27.20	6.84	0.00	49.96	74.00	-24.04	Horizontal	Peak
2483.50	16.56	27.26	6.83	0.00	50.65	54.00	-3.35	Vertical	Average
2500.00	12.50	27.20	6.84	0.00	46.54	54.00	-7.46	Vertical	Average
2483.50	18.57	27.26	6.83	0.00	52.66	54.00	-1.34	Horizontal	Average
2500.00	12.79	27.20	6.84	0.00	46.83	54.00	-7.17	Horizontal	Average


5.7. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

TEST CONFIGURATION

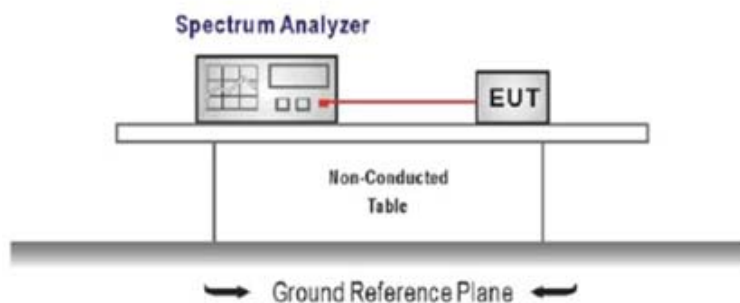

TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure
Center frequency=DTS channel center frequency
The span = 1.5 times the DTS bandwidth.
RBW = 100 kHz, VBW \geq 3 x RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum PSD level



Note: the channel found to contain the maximum PSD level can be used to establish the reference level.
3. Emission level measurement
Set the center frequency and span to encompass frequency range to be measured
RBW = 100 kHz, VBW \geq 3 x RBW
Detector = peak, Sweep time = auto couple, Trace mode = max hold
Allow trace to fully stabilize
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.



TEST MODE:



Please refer to the clause 3.3



TEST RESULTS




Passed Not Applicable

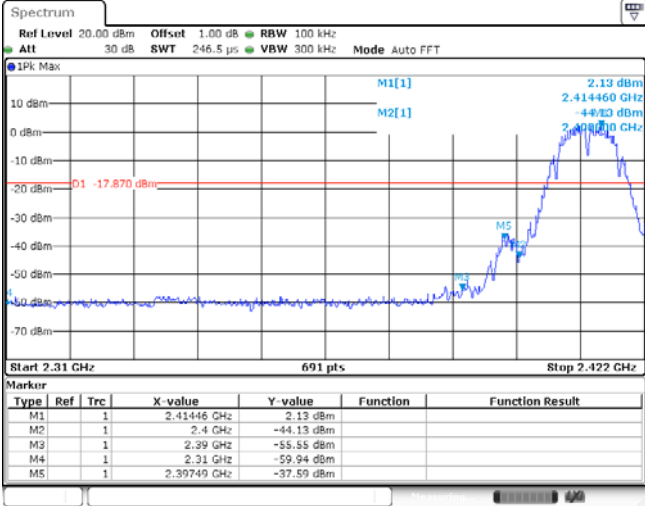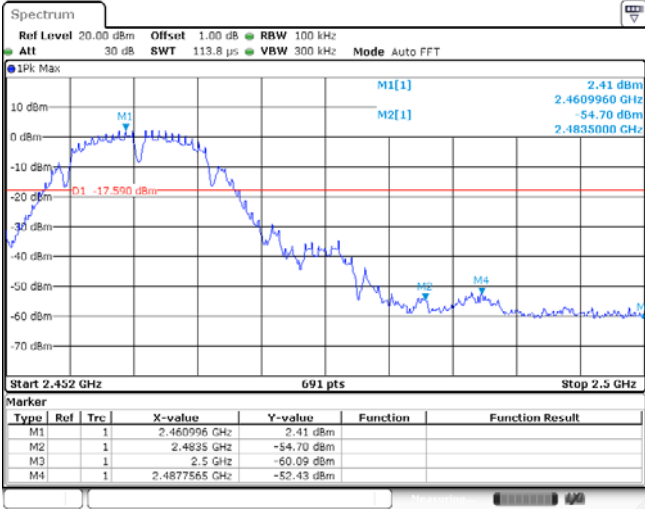Test Item:	Bandedge	Type:	802.11b																																										
CH01	 <p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT 1Pk Max M1[1] 2.13 dBm 2.414460 GHz M2[1] -44.13 dBm 2.414460 GHz M3 -55.55 dBm 2.39 GHz M4 -59.94 dBm 2.31 GHz M5 -37.59 dBm 2.39749 GHz Start 2.31 GHz 691 pts Stop 2.422 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.41446 GHz</td> <td>2.13 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-44.13 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-55.55 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.94 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.39749 GHz</td> <td>-37.59 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41446 GHz	2.13 dBm			M2	1		2.4 GHz	-44.13 dBm			M3	1		2.39 GHz	-55.55 dBm			M4	1		2.31 GHz	-59.94 dBm			M5	1		2.39749 GHz	-37.59 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41446 GHz	2.13 dBm																																									
M2	1		2.4 GHz	-44.13 dBm																																									
M3	1		2.39 GHz	-55.55 dBm																																									
M4	1		2.31 GHz	-59.94 dBm																																									
M5	1		2.39749 GHz	-37.59 dBm																																									
CH11	 <p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT 1Pk Max M1[1] 2.41 dBm 2.460996 GHz M2[1] -54.70 dBm 2.460996 GHz M3 -60.09 dBm 2.5 GHz M4 -52.43 dBm 2.4877565 GHz Start 2.452 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.460996 GHz</td> <td>2.41 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.460996 GHz</td> <td>-54.70 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-60.09 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4877565 GHz</td> <td>-52.43 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.460996 GHz	2.41 dBm			M2	1		2.460996 GHz	-54.70 dBm			M3	1		2.5 GHz	-60.09 dBm			M4	1		2.4877565 GHz	-52.43 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.460996 GHz	2.41 dBm																																									
M2	1		2.460996 GHz	-54.70 dBm																																									
M3	1		2.5 GHz	-60.09 dBm																																									
M4	1		2.4877565 GHz	-52.43 dBm																																									

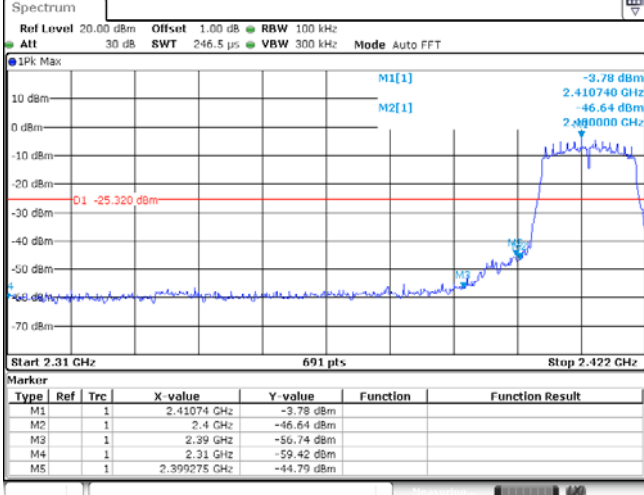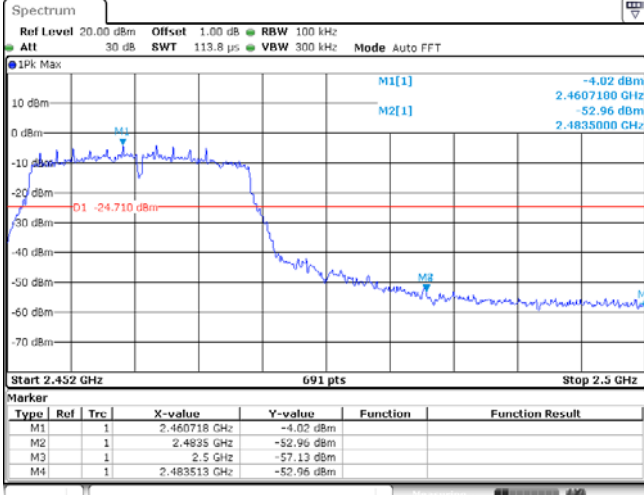
Test Item:	Bandedge	Type:	802.11g																																										
CH01	 <p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk Max</p> <p>M1[1] -3.78 dBm 2.410740 GHz M2[1] -46.64 dBm 2.410000 GHz</p> <p>D1 -25.320 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.422 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.41074 GHz</td> <td>-3.78 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-46.64 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-50.74 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.42 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399275 GHz</td> <td>-44.79 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41074 GHz	-3.78 dBm			M2	1		2.4 GHz	-46.64 dBm			M3	1		2.39 GHz	-50.74 dBm			M4	1		2.31 GHz	-59.42 dBm			M5	1		2.399275 GHz	-44.79 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41074 GHz	-3.78 dBm																																									
M2	1		2.4 GHz	-46.64 dBm																																									
M3	1		2.39 GHz	-50.74 dBm																																									
M4	1		2.31 GHz	-59.42 dBm																																									
M5	1		2.399275 GHz	-44.79 dBm																																									
CH11	 <p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk Max</p> <p>M1[1] -4.02 dBm 2.460718 GHz M2[1] -52.96 dBm 2.4835000 GHz</p> <p>D1 -24.710 dBm</p> <p>Start 2.452 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.460718 GHz</td> <td>-4.02 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4695 GHz</td> <td>-52.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-57.13 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.483513 GHz</td> <td>-52.96 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.460718 GHz	-4.02 dBm			M2	1		2.4695 GHz	-52.96 dBm			M3	1		2.5 GHz	-57.13 dBm			M4	1		2.483513 GHz	-52.96 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.460718 GHz	-4.02 dBm																																									
M2	1		2.4695 GHz	-52.96 dBm																																									
M3	1		2.5 GHz	-57.13 dBm																																									
M4	1		2.483513 GHz	-52.96 dBm																																									

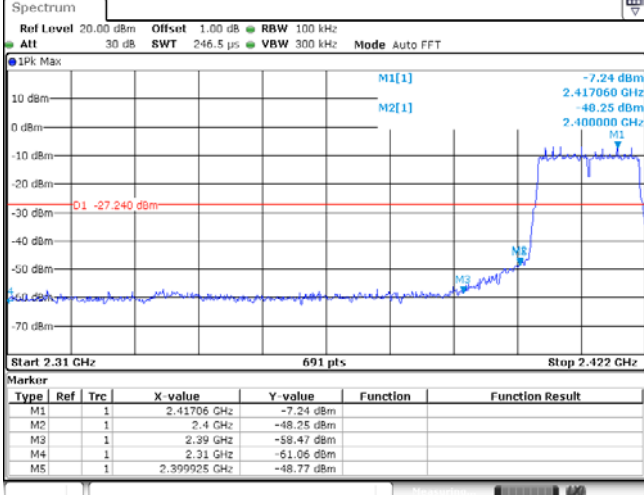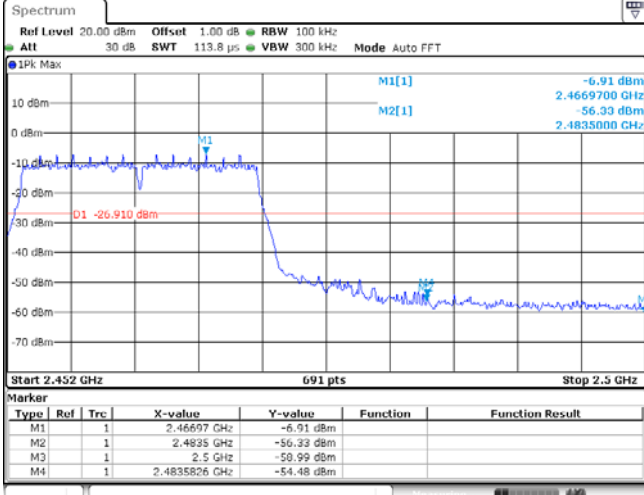Test Item:	Bandedge	Type:	802.11n(HT20)																																										
CH01	 <p>1Pk Max</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 246.5 μs VBW 300 kHz Mode Auto FFT</p> <p>M1[1] -7.24 dBm 2.417060 GHz M2[1] -48.25 dBm 2.400000 GHz</p> <p>D1 -27.240 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.422 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.41706 GHz</td> <td>-7.24 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-48.25 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-50.47 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-61.08 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399925 GHz</td> <td>-48.77 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41706 GHz	-7.24 dBm			M2	1		2.4 GHz	-48.25 dBm			M3	1		2.39 GHz	-50.47 dBm			M4	1		2.31 GHz	-61.08 dBm			M5	1		2.399925 GHz	-48.77 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41706 GHz	-7.24 dBm																																									
M2	1		2.4 GHz	-48.25 dBm																																									
M3	1		2.39 GHz	-50.47 dBm																																									
M4	1		2.31 GHz	-61.08 dBm																																									
M5	1		2.399925 GHz	-48.77 dBm																																									
CH11	 <p>1Pk Max</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 113.8 μs VBW 300 kHz Mode Auto FFT</p> <p>M1[1] -6.91 dBm 2.4669700 GHz M2[1] -56.33 dBm 2.4835000 GHz</p> <p>D1 -26.910 dBm</p> <p>Start 2.452 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.46697 GHz</td> <td>-6.91 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4695 GHz</td> <td>-56.33 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-50.99 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.483526 GHz</td> <td>-54.48 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.46697 GHz	-6.91 dBm			M2	1		2.4695 GHz	-56.33 dBm			M3	1		2.5 GHz	-50.99 dBm			M4	1		2.483526 GHz	-54.48 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.46697 GHz	-6.91 dBm																																									
M2	1		2.4695 GHz	-56.33 dBm																																									
M3	1		2.5 GHz	-50.99 dBm																																									
M4	1		2.483526 GHz	-54.48 dBm																																									

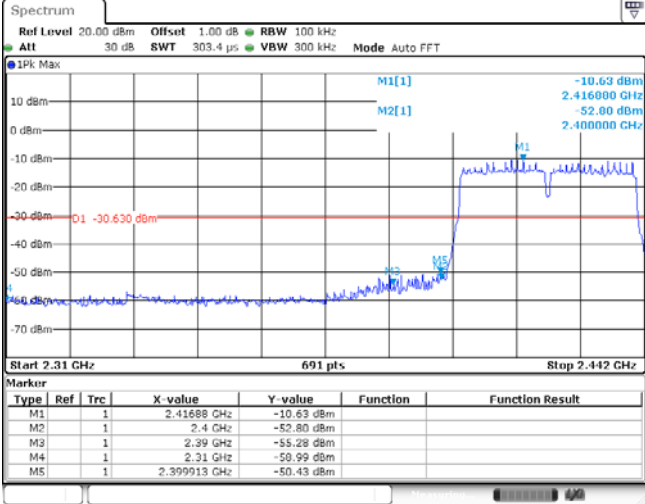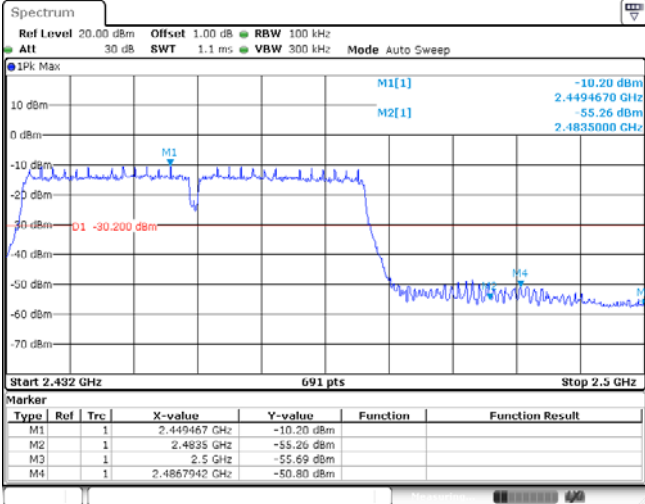
Test Item:	Bandedge	Type:	802.11n(HT40)																																										
CH03	 <p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 303.4 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk Max M1[1] -10.63 dBm 2.41688 GHz M2[1] 52.80 dBm 2.400000 GHz</p> <p>D1 -30.630 dBm</p> <p>Start 2.31 GHz 691 pts Stop 2.442 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.41688 GHz</td> <td>-10.63 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-52.80 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-55.28 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.99 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399913 GHz</td> <td>-50.43 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.41688 GHz	-10.63 dBm			M2	1		2.4 GHz	-52.80 dBm			M3	1		2.39 GHz	-55.28 dBm			M4	1		2.31 GHz	-59.99 dBm			M5	1		2.399913 GHz	-50.43 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.41688 GHz	-10.63 dBm																																									
M2	1		2.4 GHz	-52.80 dBm																																									
M3	1		2.39 GHz	-55.28 dBm																																									
M4	1		2.31 GHz	-59.99 dBm																																									
M5	1		2.399913 GHz	-50.43 dBm																																									
CH09	 <p>Spectrum Ref Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep</p> <p>1Pk Max M1[1] -10.20 dBm 2.4494670 GHz M2[1] -55.26 dBm 2.4835000 GHz</p> <p>D1 -30.200 dBm</p> <p>Start 2.432 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.449467 GHz</td> <td>-10.20 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-55.26 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-55.69 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4867942 GHz</td> <td>-50.80 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.449467 GHz	-10.20 dBm			M2	1		2.4835 GHz	-55.26 dBm			M3	1		2.5 GHz	-55.69 dBm			M4	1		2.4867942 GHz	-50.80 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.449467 GHz	-10.20 dBm																																									
M2	1		2.4835 GHz	-55.26 dBm																																									
M3	1		2.5 GHz	-55.69 dBm																																									
M4	1		2.4867942 GHz	-50.80 dBm																																									

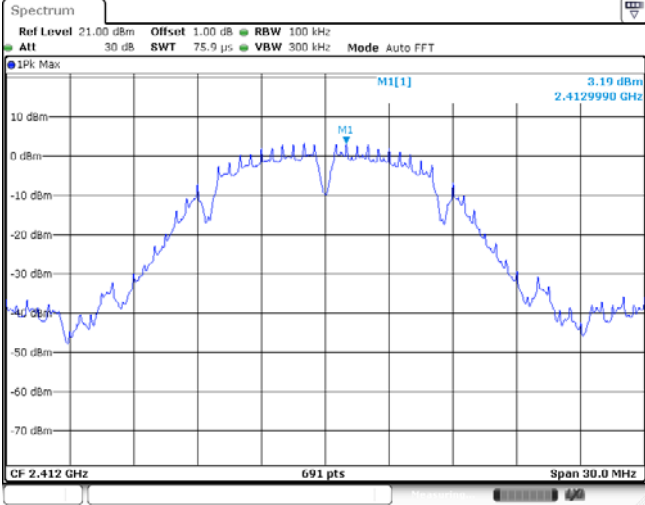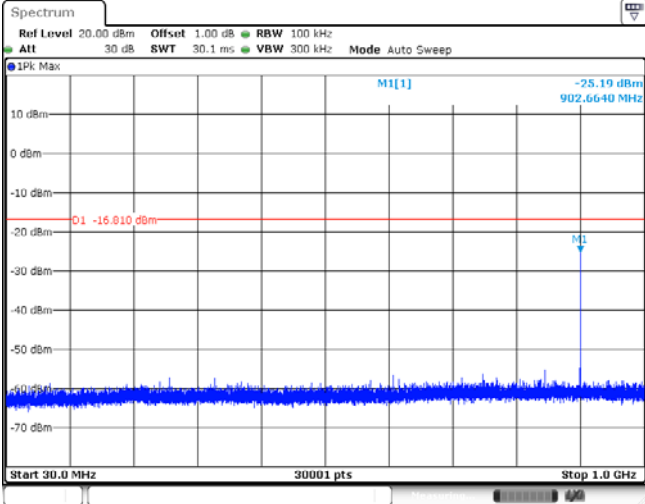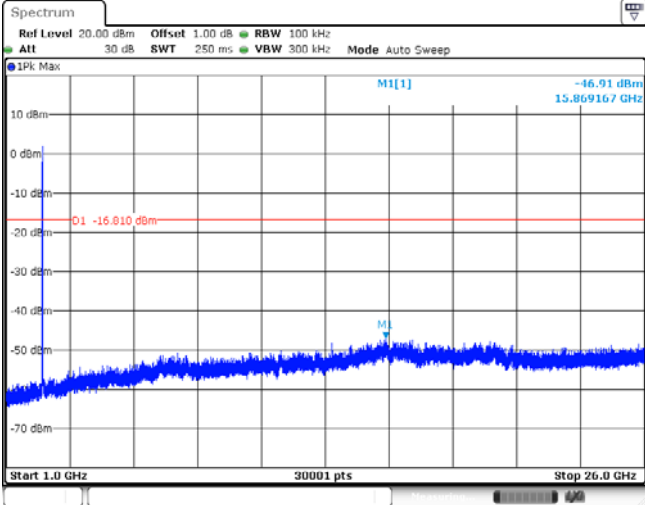Test Item:	SE	Type:	802.11b
CH01 Reference level			 <p>Spectrum plot showing a signal peak at 2.4129990 GHz with a level of 3.19 dBm. The plot includes parameters: Ref Level 21.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 100 kHz, Mode Auto FFT, Span 30.0 MHz, and 691 pts.</p>
CH01 30MHz~1000MHz			 <p>Spectrum plot showing a signal peak at 902.6640 MHz with a level of -25.19 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 100 kHz, Mode Auto Sweep, Start 30.0 MHz, Stop 1.0 GHz, and 30001 pts.</p>
CH01 1GHz~26GHz			 <p>Spectrum plot showing a signal peak at 15.869167 GHz with a level of -46.91 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 100 kHz, Mode Auto Sweep, Start 1.0 GHz, Stop 26.0 GHz, and 30001 pts.</p>


CH06
Reference level

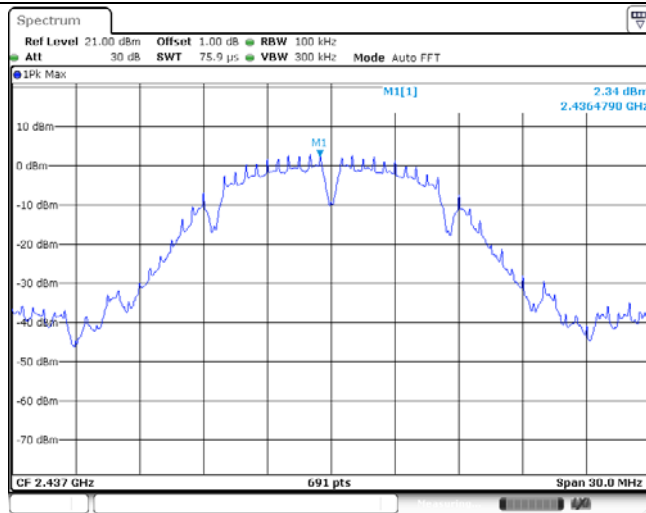


CH06
30MHz~1000MHz

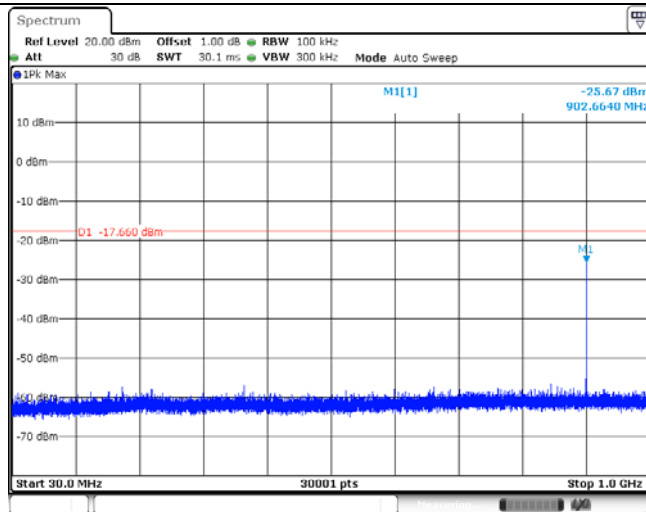


CH06
1GHz~26GHz

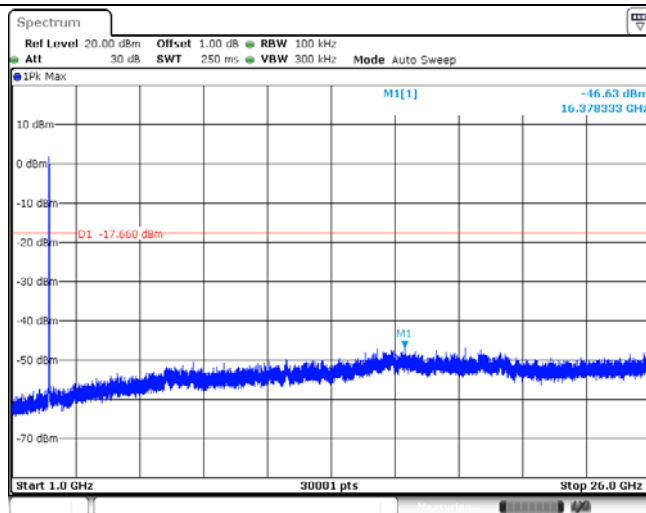


CH11
Reference level



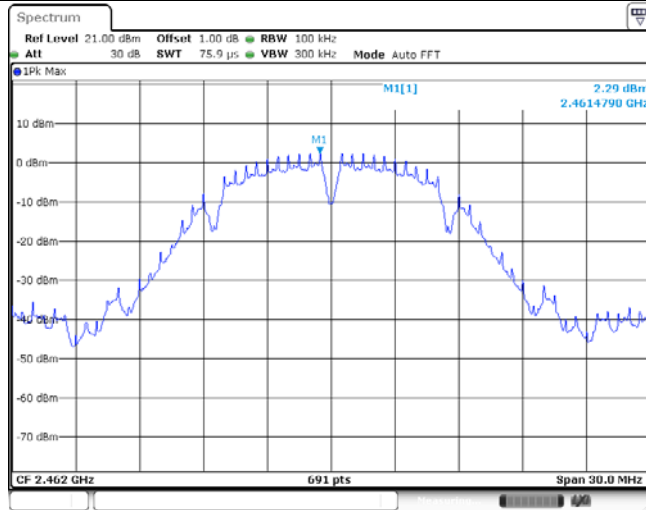


CH11
30MHz~1000MHz

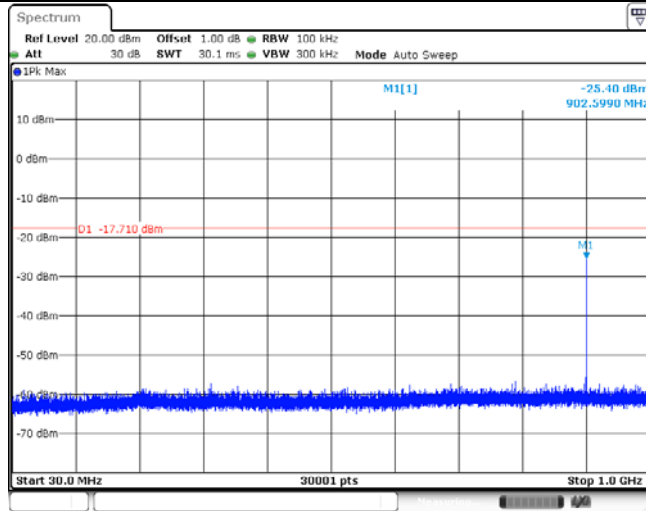


CH11
1GHz~26GHz

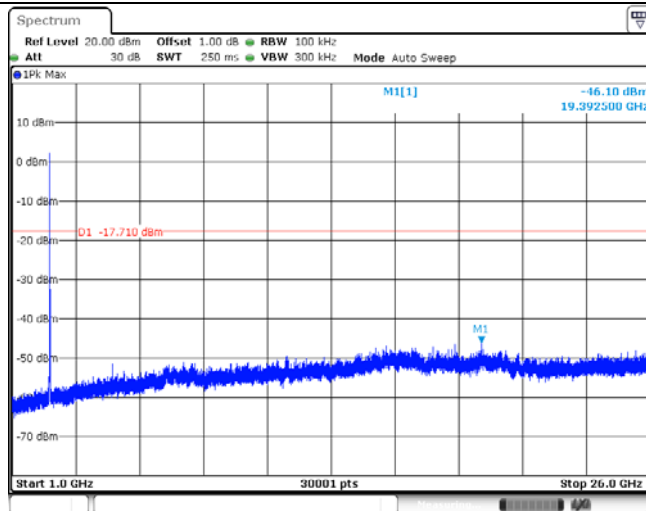


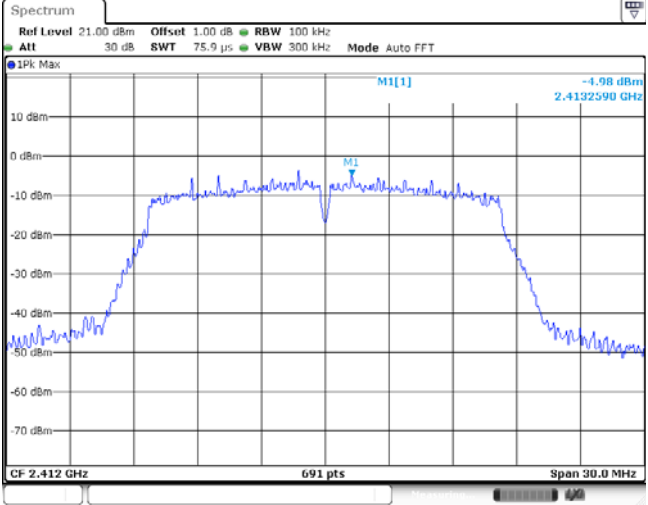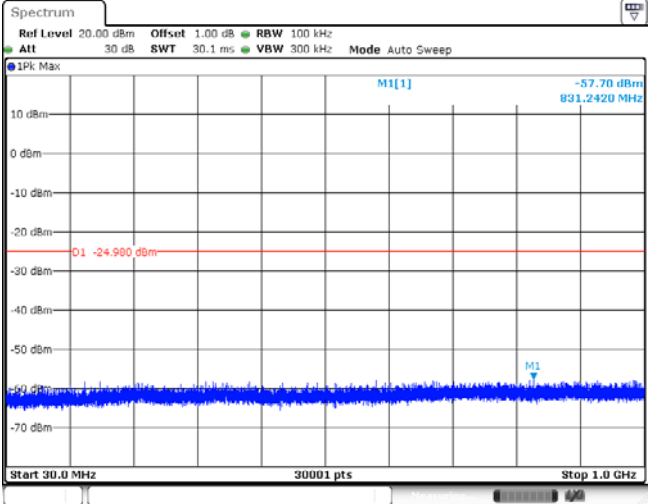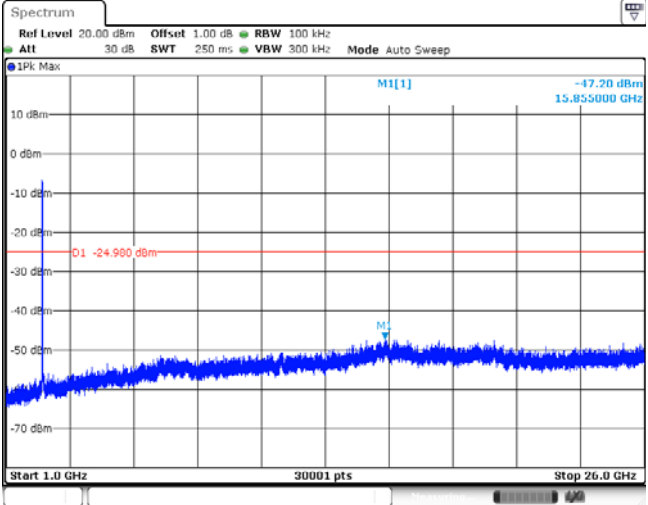Test Item:	SE	Type:	802.11g
CH01 Reference level		 <p>Spectrum plot showing a signal between 2.412 and 2.412590 GHz. The peak is at -4.98 dBm. Parameters: Ref Level 21.00 dBm, Offset 1.00 dB, RBW 100 kHz, Att 30 dB, SWT 75.9 μs, VBW 300 kHz, Mode Auto FFT. Span 30.0 MHz, 691 pts.</p>	
CH01 30MHz~1000MHz		 <p>Spectrum plot showing a noise floor between 30.0 MHz and 1.0 GHz. The peak is at -57.70 dBm. Parameters: Ref Level 20.00 dBm, Offset 1.00 dB, RBW 100 kHz, Att 30 dB, SWT 30.1 ms, VBW 300 kHz, Mode Auto Sweep. Start 30.0 MHz, Stop 1.0 GHz, 30001 pts.</p>	
CH01 1GHz~26GHz		 <p>Spectrum plot showing a noise floor between 1.0 GHz and 26.0 GHz. The peak is at -47.20 dBm. Parameters: Ref Level 20.00 dBm, Offset 1.00 dB, RBW 100 kHz, Att 30 dB, SWT 250 ms, VBW 300 kHz, Mode Auto Sweep. Start 1.0 GHz, Stop 26.0 GHz, 30001 pts.</p>	


CH06
Reference level

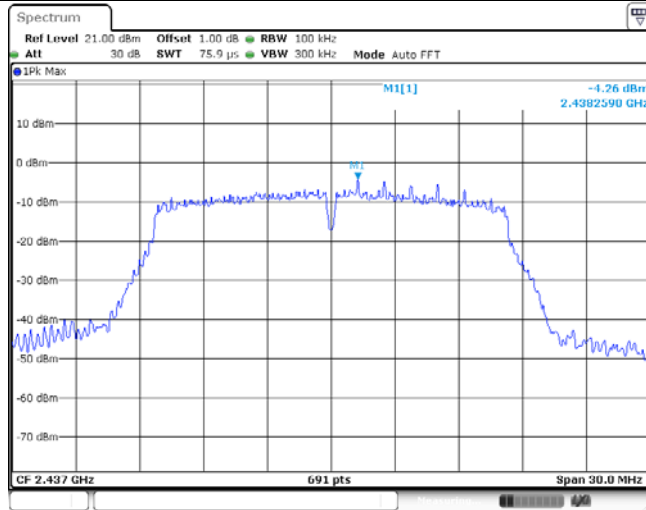


CH06
30MHz~1000MHz

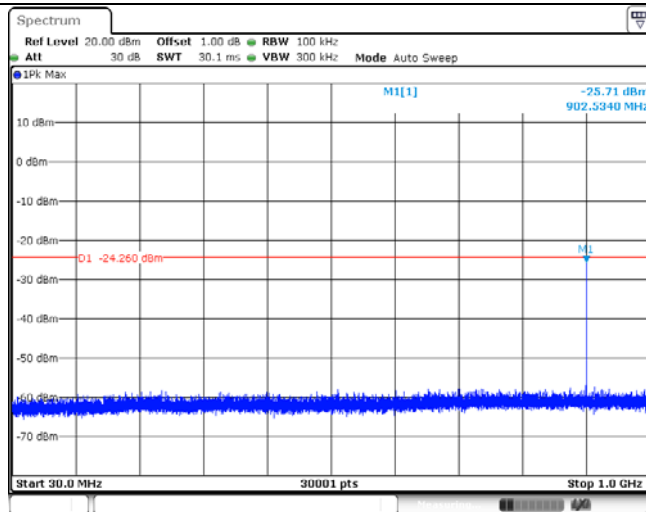


CH06
1GHz~26GHz

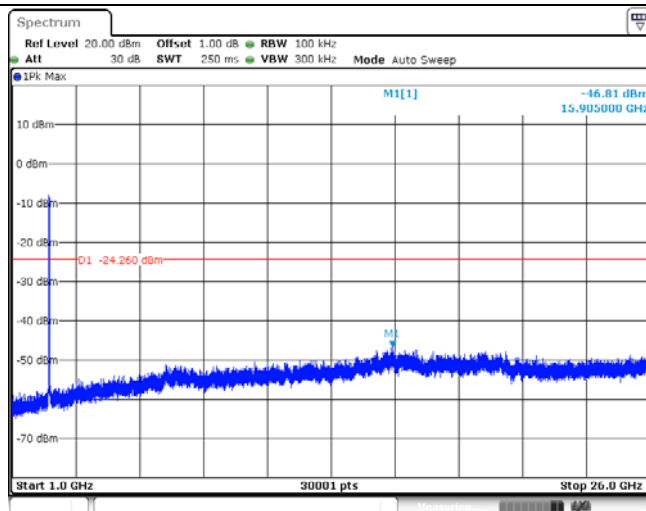


CH11
Reference level



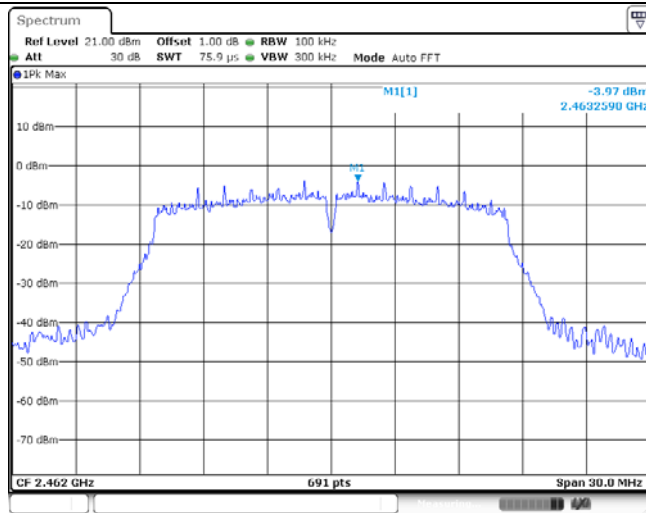


CH11
30MHz~1000MHz

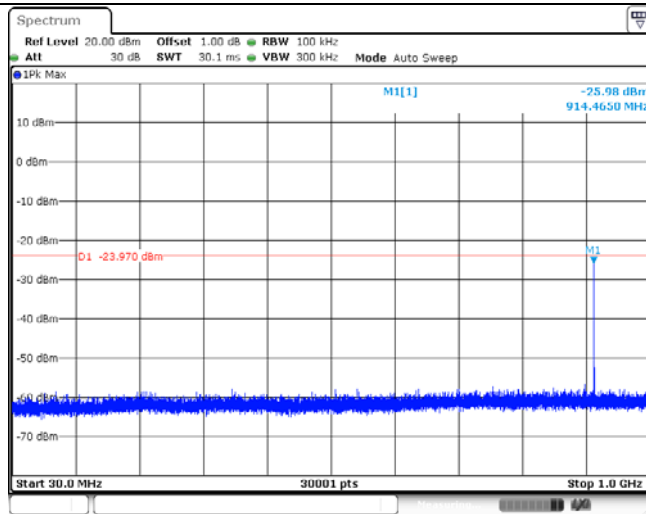


CH11
1GHz~26GHz

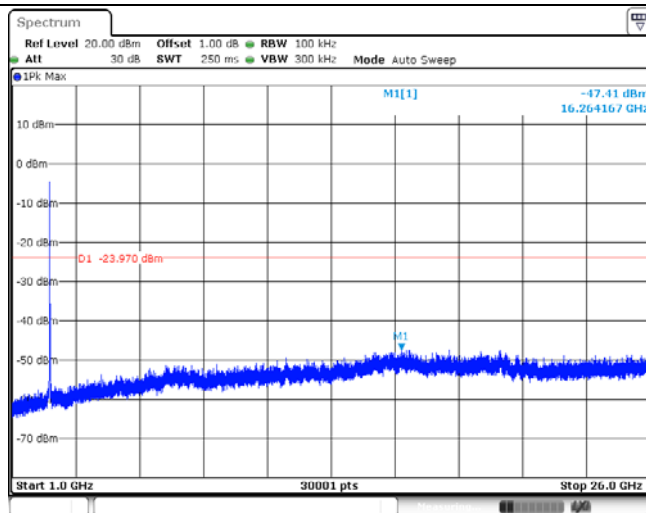


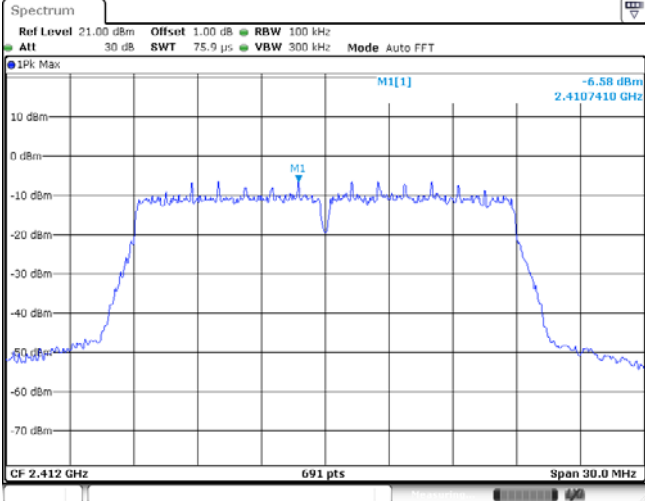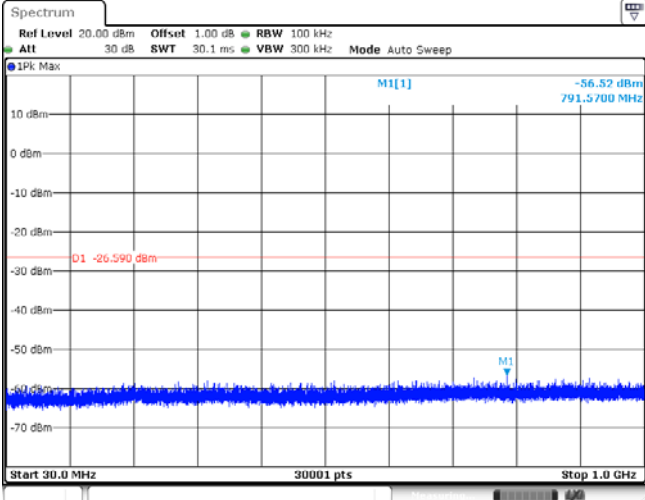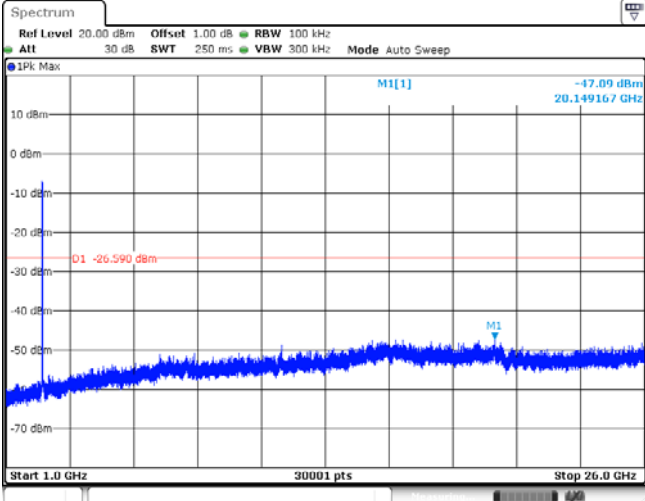Test Item:	SE	Type:	802.11n(HT20)
CH01 Reference level			
CH01 30MHz~1000MHz			
CH01 1GHz~26GHz			


CH06
Reference level

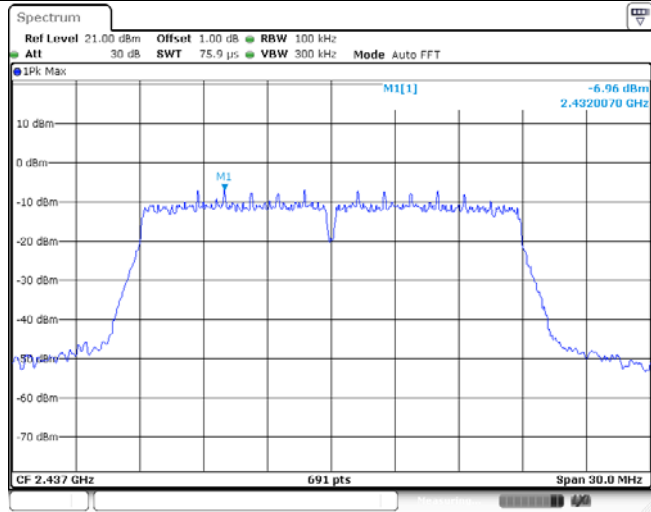


CH06
30MHz~1000MHz

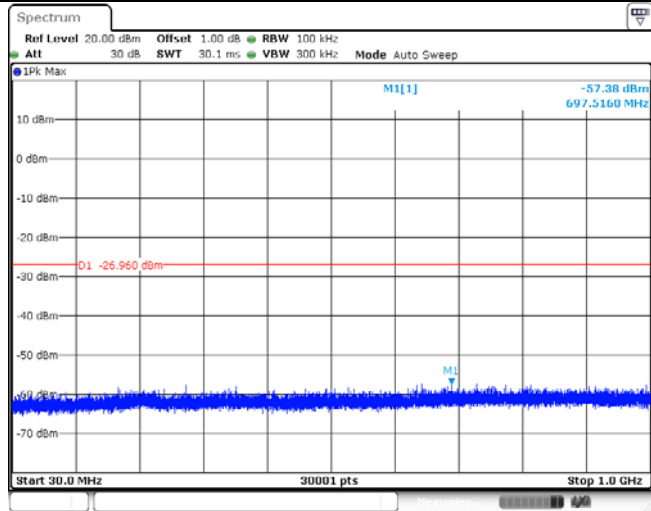


CH06
1GHz~26GHz

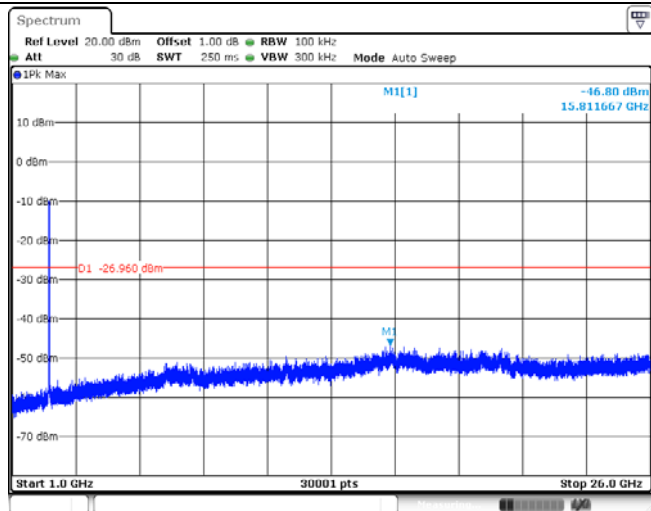


CH11
Reference level



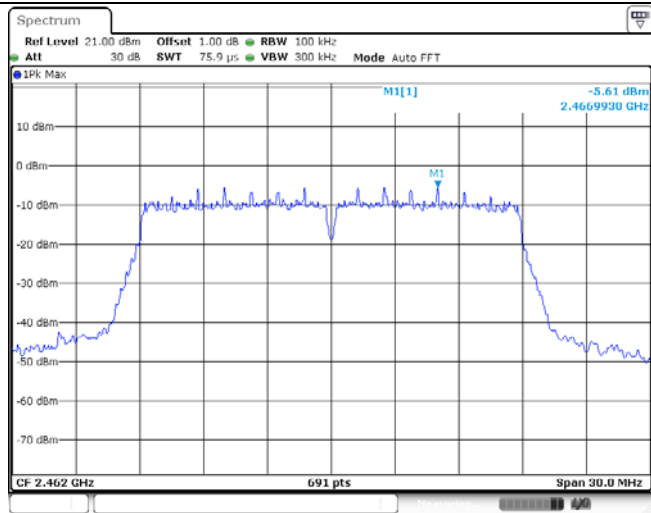


CH11
30MHz~1000MHz

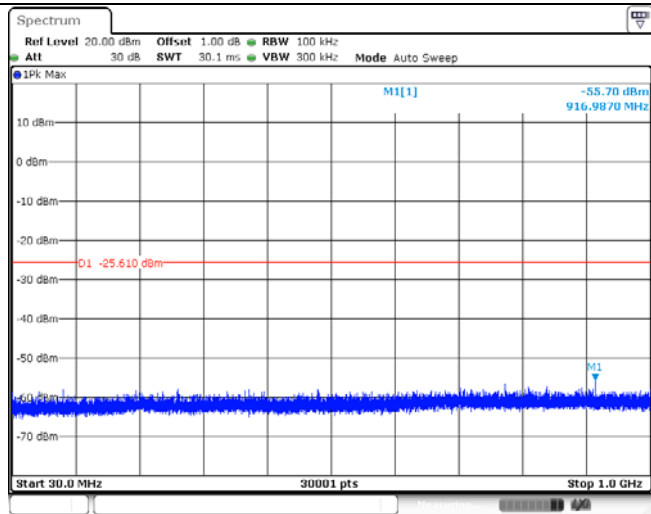


CH11
1GHz~26GHz

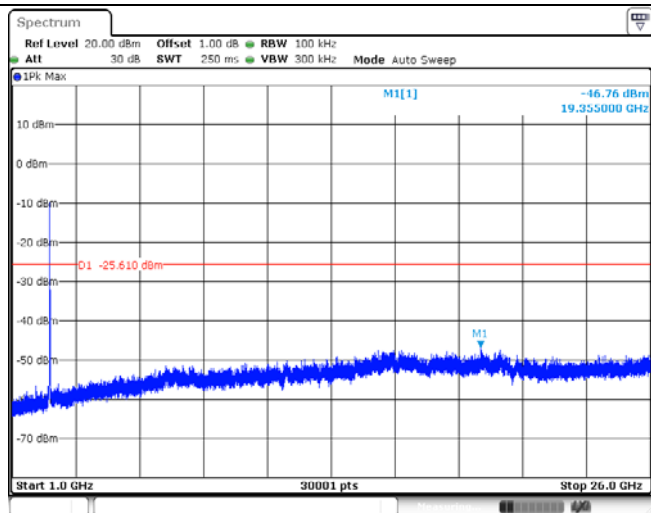


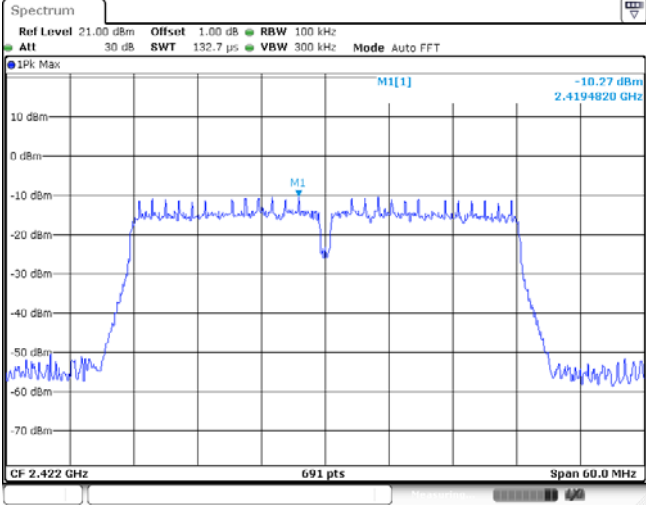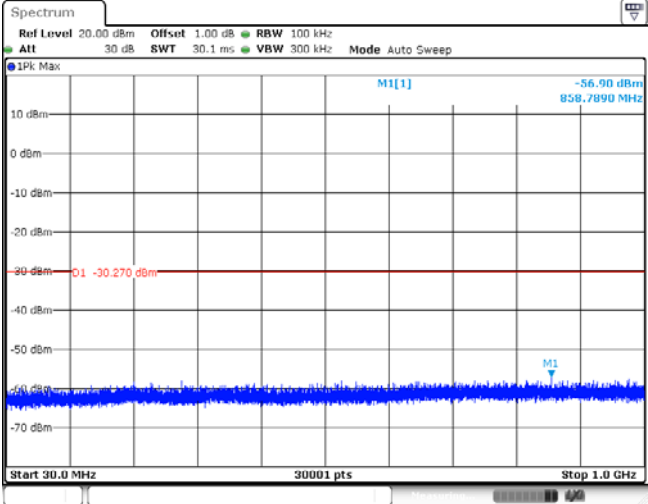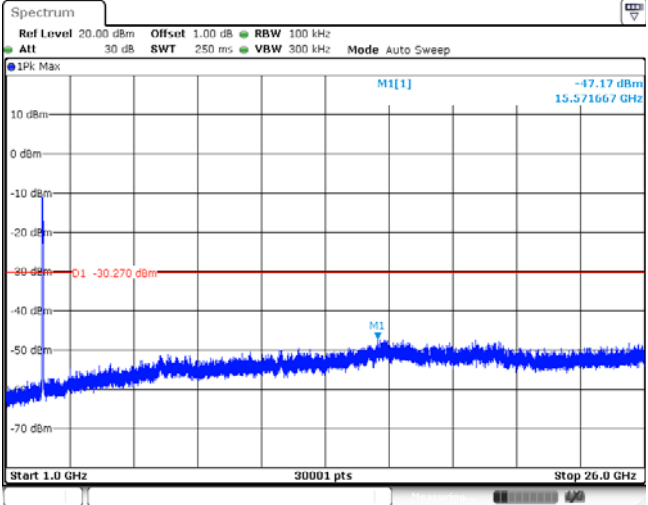Test Item:	SE	Type:	802.11n(HT40)
<p>CH03 Reference level</p>			
<p>CH03 30MHz~1000MHz</p>			
<p>CH03 1GHz~26GHz</p>			


CH06
Reference level



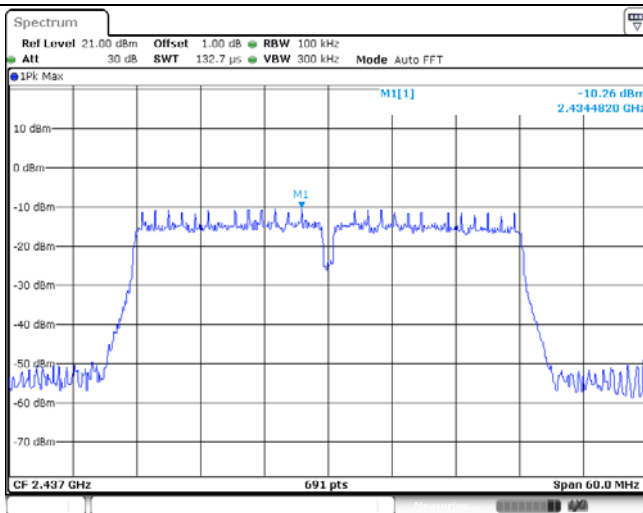


CH06
30MHz~1000MHz

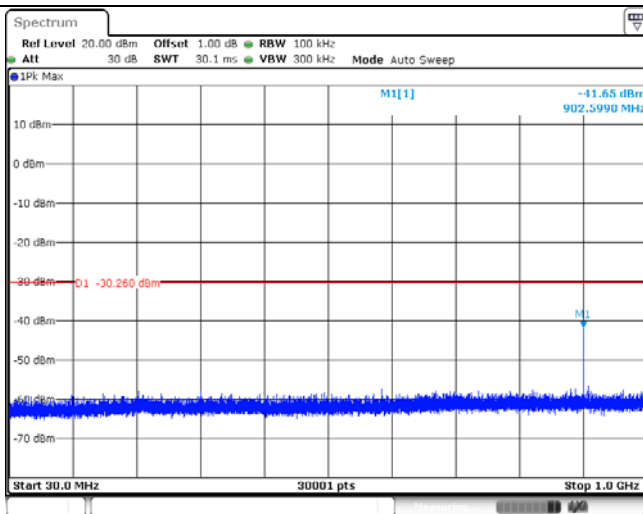

CH06
1GHz~26GHz

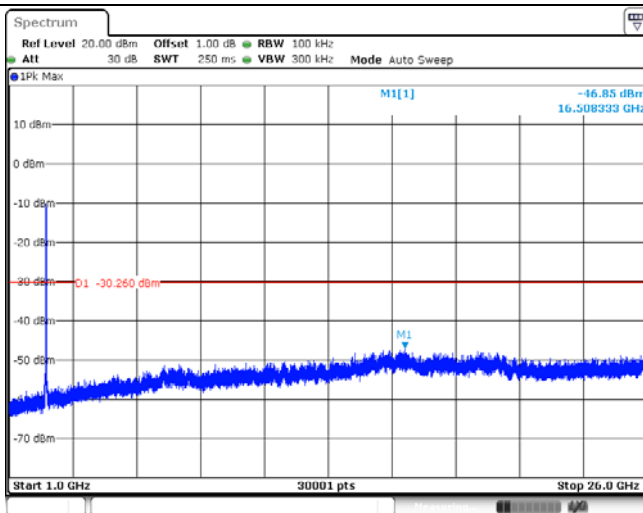
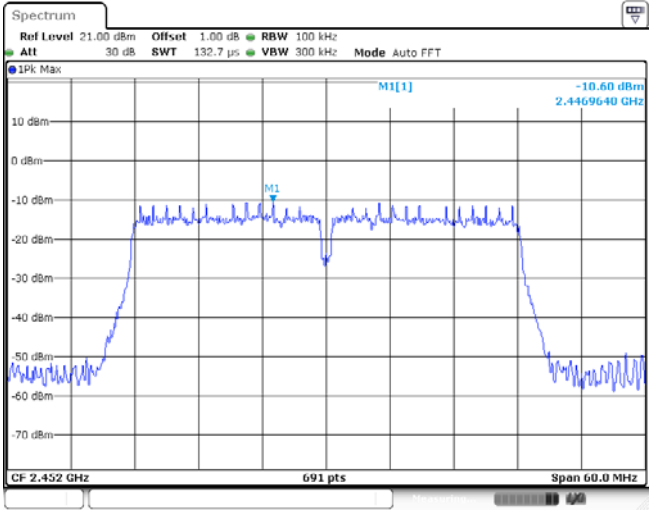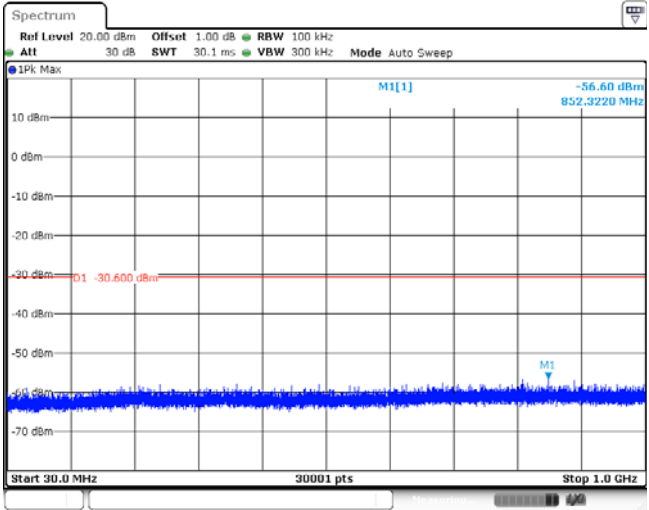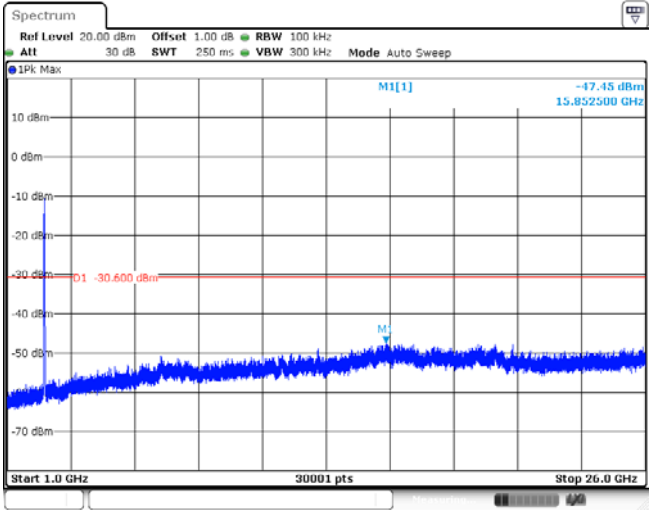
<p>CH09 Reference level</p>	
<p>CH09 30MHz~1000MHz</p>	
<p>CH09 1GHz~26GHz</p>	

5.8. Spurious Emissions (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION


➤ 9kHz ~30MHz

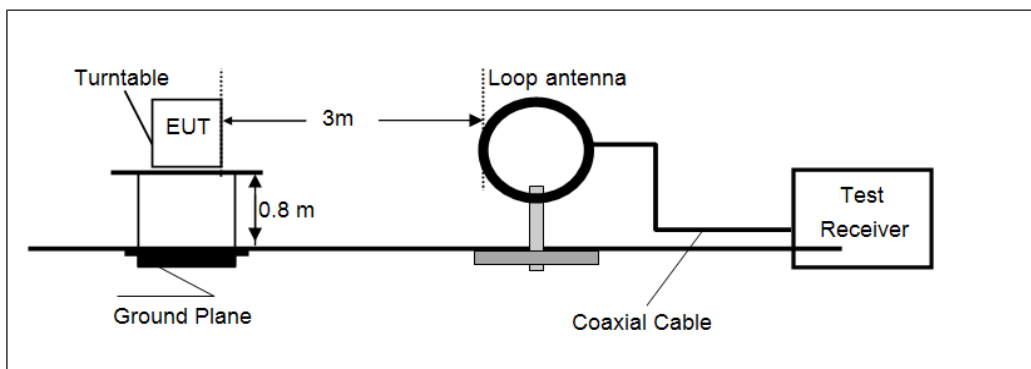

➤ 30MHz ~ 1GHz

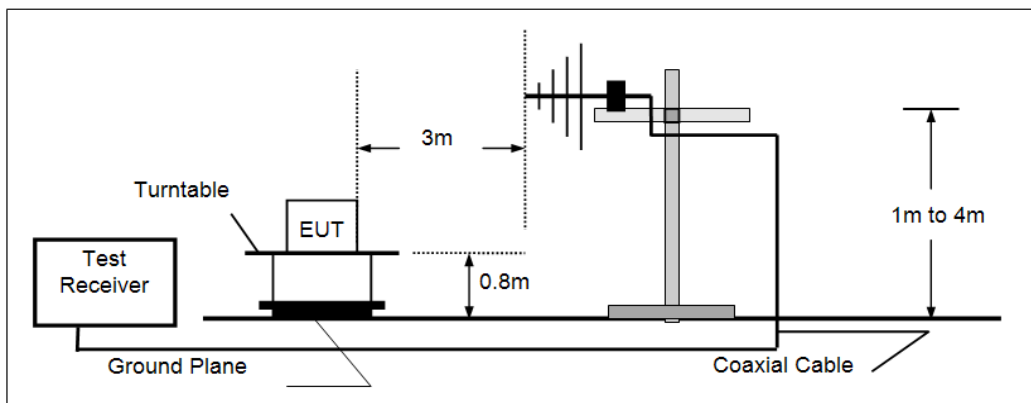

➤ Above 1GHz

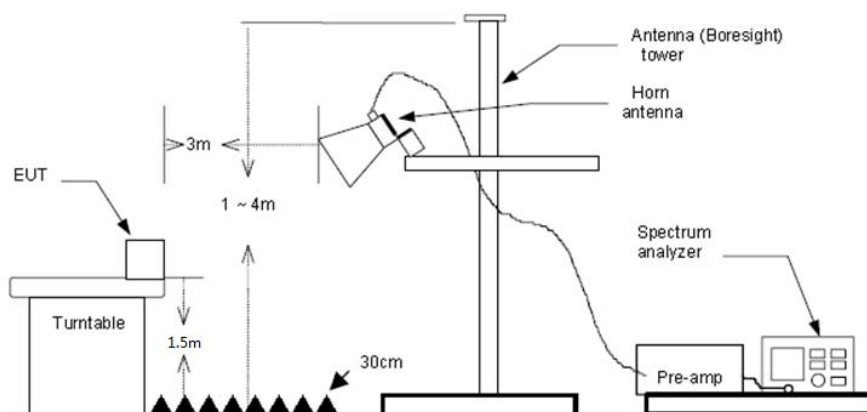

TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW=3MHz RMS detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed **Not Applicable**

Note:

- 1) Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.

➤ 9kHz ~ 30MHz


The EUT was pre-scanned the frequency band (9kHz~30MHz), found the radiated level lower than the limit, so don't show on the report.

➤ 30MHz ~1000MHz

Have pre-scan all modulation mode, found the 802.11b mode CH01 which it was worst case, so only the worst case's data on the test report.

➤ 30MHz ~ 1GHz

Polarization: Vertical

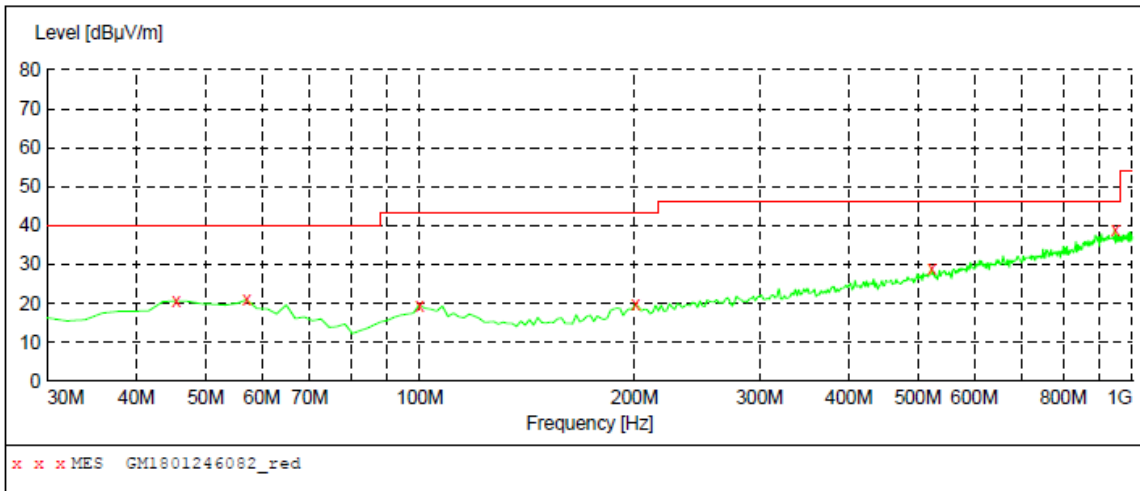


MEASUREMENT RESULT: "GM1801246082_red"

1/24/2018 6:22PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
45.520000	20.70	-8.8	40.0	19.3	QP	100.0	63.00	VERTICAL
57.160000	21.00	-9.4	40.0	19.0	QP	100.0	75.00	VERTICAL
99.840000	19.60	-10.6	43.5	23.9	QP	100.0	283.00	VERTICAL
200.720000	19.80	-9.9	43.5	23.7	QP	100.0	241.00	VERTICAL
522.760000	29.00	-1.3	46.0	17.0	QP	100.0	271.00	VERTICAL
945.680000	38.90	7.2	46.0	7.1	QP	100.0	359.00	VERTICAL

Polarization: Horizontal

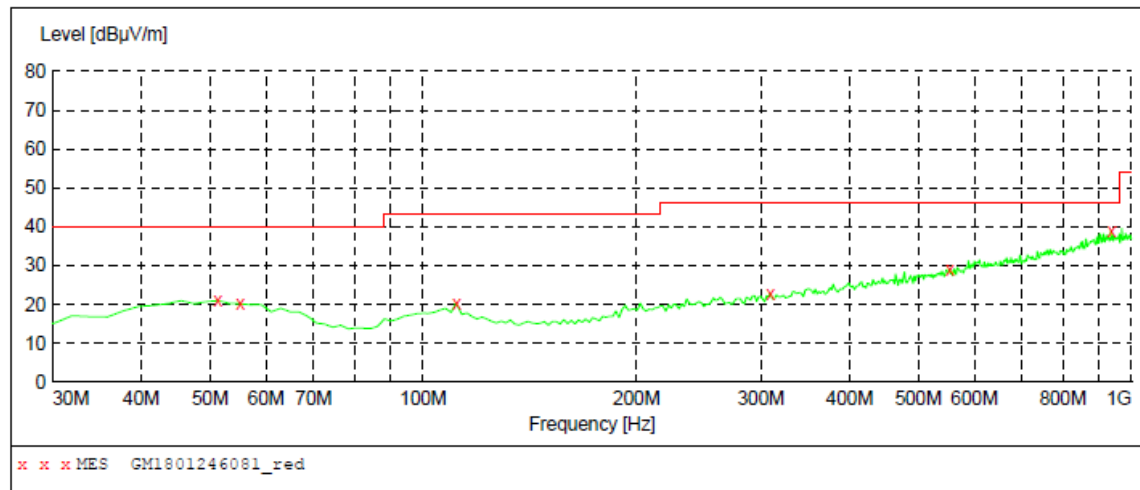

MEASUREMENT RESULT: "GM1801246081_red"

1/24/2018 6:19PM

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
51.340000	21.00	-8.8	40.0	19.0	QP	100.0	63.00	HORIZONTAL
55.220000	20.20	-9.2	40.0	19.8	QP	100.0	239.00	HORIZONTAL
111.480000	20.40	-11.0	43.5	23.1	QP	100.0	292.00	HORIZONTAL
309.360000	22.90	-7.1	46.0	23.1	QP	300.0	211.00	HORIZONTAL
553.800000	29.10	-0.7	46.0	16.9	QP	100.0	145.00	HORIZONTAL
935.980000	38.90	7.1	46.0	7.1	QP	100.0	0.00	HORIZONTAL

➤ 1 GHz ~ 25 GHz

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1222.74	36.07	26.28	4.70	36.56	30.49	74.00	-43.51	Vertical	Peak
4310.85	38.63	30.23	9.05	37.60	40.31	74.00	-33.69	Vertical	Peak
4821.76	45.12	31.56	9.55	36.90	49.33	74.00	-24.67	Vertical	Peak
9960.38	32.04	39.10	13.56	33.65	51.05	74.00	-22.95	Vertical	Peak
1273.57	35.68	26.23	4.79	36.53	30.17	74.00	-43.83	Horizontal	Peak
3634.91	33.90	29.30	8.31	38.26	33.25	74.00	-40.75	Horizontal	Peak
4821.76	40.39	31.56	9.55	36.90	44.60	74.00	-29.40	Horizontal	Peak
8042.90	31.56	37.06	12.40	34.53	46.49	74.00	-27.51	Horizontal	Peak

802.11b					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2173.61	32.92	27.29	6.42	37.33	29.30	74.00	-44.70	Vertical	Peak
4159.93	37.83	29.96	8.91	37.74	38.96	74.00	-35.04	Vertical	Peak
4871.10	45.20	31.46	9.59	36.76	49.49	74.00	-24.51	Vertical	Peak
8637.08	32.52	37.52	12.93	34.48	48.49	74.00	-25.51	Vertical	Peak
1280.07	35.20	26.22	4.80	36.53	29.69	74.00	-44.31	Horizontal	Peak
2590.96	36.34	27.75	6.90	37.84	33.15	74.00	-40.85	Horizontal	Peak
4871.10	40.48	31.46	9.59	36.76	44.77	74.00	-29.23	Horizontal	Peak
9611.66	32.71	39.07	13.73	35.19	50.32	74.00	-23.68	Horizontal	Peak

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
3184.25	34.31	28.80	7.70	38.20	32.61	74.00	-41.39	Vertical	Peak
4310.85	37.58	30.23	9.05	37.60	39.26	74.00	-34.74	Vertical	Peak
4920.96	45.95	31.42	9.62	36.62	50.37	74.00	-23.63	Vertical	Peak
8125.22	32.02	36.92	12.59	34.54	46.99	74.00	-27.01	Vertical	Peak
1374.64	33.82	25.97	4.96	36.47	28.28	74.00	-45.72	Horizontal	Peak
3128.01	35.14	28.80	7.63	38.21	33.36	74.00	-40.64	Horizontal	Peak
4920.96	41.21	31.42	9.62	36.62	45.63	74.00	-28.37	Horizontal	Peak
8615.13	32.30	37.39	12.91	34.50	48.10	74.00	-25.90	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1737.38	33.90	25.28	5.84	37.01	28.01	74.00	-45.99	Vertical	Peak
4332.85	36.66	30.30	9.07	37.59	38.44	74.00	-35.56	Vertical	Peak
4821.76	42.21	31.56	9.55	36.90	46.42	74.00	-27.58	Vertical	Peak
7961.43	31.69	36.95	12.49	34.63	46.50	74.00	-27.50	Vertical	Peak
1254.27	35.32	26.24	4.75	36.54	29.77	74.00	-44.23	Horizontal	Peak
3579.82	33.43	29.24	8.24	38.30	32.61	74.00	-41.39	Horizontal	Peak
4834.05	40.45	31.53	9.56	36.86	44.68	74.00	-29.32	Horizontal	Peak
9042.04	33.07	38.03	13.35	34.71	49.74	74.00	-24.26	Horizontal	Peak

802.11g					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
3176.16	34.75	28.80	7.69	38.20	33.04	74.00	-40.96	Vertical	Peak
4321.84	36.98	30.27	9.06	37.60	38.71	74.00	-35.29	Vertical	Peak
4871.10	38.44	31.46	9.59	36.76	42.73	74.00	-31.27	Vertical	Peak
7470.56	32.33	36.16	12.30	34.88	45.91	74.00	-28.09	Vertical	Peak
3128.01	33.72	28.80	7.63	38.21	31.94	74.00	-42.06	Horizontal	Peak
4871.10	34.95	31.46	9.59	36.76	39.24	74.00	-34.76	Horizontal	Peak
6428.77	31.95	33.50	11.04	35.32	41.17	74.00	-32.83	Horizontal	Peak
8063.40	32.58	37.04	12.45	34.54	47.53	74.00	-26.47	Horizontal	Peak

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
3200.50	33.54	28.80	7.72	38.20	31.86	74.00	-42.14	Vertical	Peak
4138.80	35.23	29.94	8.89	37.79	36.27	74.00	-37.73	Vertical	Peak
4920.96	39.31	31.42	9.62	36.62	43.73	74.00	-30.27	Vertical	Peak
8770.01	32.23	37.76	13.07	34.32	48.74	74.00	-25.26	Vertical	Peak
3480.97	33.38	28.85	8.09	38.44	31.88	74.00	-42.12	Horizontal	Peak
4933.50	35.92	31.43	9.63	36.59	40.39	74.00	-33.61	Horizontal	Peak
6187.93	31.69	32.85	10.99	35.30	40.23	74.00	-33.77	Horizontal	Peak
7527.83	32.31	36.13	12.49	34.92	46.01	74.00	-27.99	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

802.11n(HT20)					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
3041.64	34.59	28.68	7.53	38.22	32.58	74.00	-41.42	Vertical	Peak
4256.33	36.87	30.11	8.99	37.62	38.35	74.00	-35.65	Vertical	Peak
4821.76	41.59	31.56	9.55	36.90	45.80	74.00	-28.20	Vertical	Peak
7961.43	31.77	36.95	12.49	34.63	46.58	74.00	-27.42	Vertical	Peak
1219.64	33.90	26.28	4.69	36.56	28.31	74.00	-45.69	Horizontal	Peak
3266.35	32.73	28.40	7.80	38.32	30.61	74.00	-43.39	Horizontal	Peak
4821.76	33.91	31.56	9.55	36.90	38.12	74.00	-35.88	Horizontal	Peak
7338.62	30.61	36.30	12.01	34.90	44.02	74.00	-29.98	Horizontal	Peak

802.11n(HT20)					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2577.80	34.20	27.67	6.89	37.85	30.91	74.00	-43.09	Vertical	Peak
4267.18	36.00	30.13	9.00	37.62	37.51	74.00	-36.49	Vertical	Peak
4871.10	39.70	31.46	9.59	36.76	43.99	74.00	-30.01	Vertical	Peak
8549.59	32.73	37.10	12.88	34.45	48.26	74.00	-25.74	Vertical	Peak
1326.51	34.78	26.12	4.88	36.50	29.28	74.00	-44.72	Horizontal	Peak
3176.16	33.61	28.80	7.69	38.20	31.90	74.00	-42.10	Horizontal	Peak
4871.10	35.96	31.46	9.59	36.76	40.25	74.00	-33.75	Horizontal	Peak
7961.43	31.83	36.95	12.49	34.63	46.64	74.00	-27.36	Horizontal	Peak

802.11n(HT20)					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
3561.64	34.41	29.19	8.21	38.32	33.49	74.00	-40.51	Vertical	Peak
4310.85	38.18	30.23	9.05	37.60	39.86	74.00	-34.14	Vertical	Peak
4920.96	39.35	31.42	9.62	36.62	43.77	74.00	-30.23	Vertical	Peak
5836.04	32.39	32.17	10.60	35.34	39.82	74.00	-34.18	Vertical	Peak
1228.98	35.29	26.27	4.71	36.55	29.72	74.00	-44.28	Horizontal	Peak
3700.26	33.41	29.30	8.39	38.25	32.85	74.00	-41.15	Horizontal	Peak
4920.96	34.66	31.42	9.62	36.62	39.08	74.00	-34.92	Horizontal	Peak
7376.08	31.90	36.30	12.04	34.85	45.39	74.00	-28.61	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

802.11n(HT40)					CH03				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
3151.99	34.15	28.80	7.66	38.21	32.40	74.00	-41.60	Vertical	Peak
4332.85	37.69	30.30	9.07	37.59	39.47	74.00	-34.53	Vertical	Peak
4846.37	38.55	31.51	9.57	36.83	42.80	74.00	-31.20	Vertical	Peak
7470.56	31.78	36.16	12.30	34.88	45.36	74.00	-28.64	Vertical	Peak
1685.12	34.90	25.16	5.74	36.90	28.90	74.00	-45.10	Horizontal	Peak
3096.33	34.62	28.79	7.60	38.22	32.79	74.00	-41.21	Horizontal	Peak
4834.05	35.29	31.53	9.56	36.86	39.52	74.00	-34.48	Horizontal	Peak
9042.04	32.79	38.03	13.35	34.71	49.46	74.00	-24.54	Horizontal	Peak

802.11n(HT40)					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1764.12	33.69	25.33	5.89	37.06	27.85	74.00	-46.15	Vertical	Peak
3184.25	34.83	28.80	7.70	38.20	33.13	74.00	-40.87	Vertical	Peak
4256.33	35.79	30.11	8.99	37.62	37.27	74.00	-36.73	Vertical	Peak
4871.10	36.03	31.46	9.59	36.76	40.32	74.00	-33.68	Vertical	Peak
1241.56	34.76	26.26	4.73	36.55	29.20	74.00	-44.80	Horizontal	Peak
3192.37	33.63	28.80	7.71	38.20	31.94	74.00	-42.06	Horizontal	Peak
4871.10	34.54	31.46	9.59	36.76	38.83	74.00	-35.17	Horizontal	Peak
7063.69	32.52	35.49	11.85	34.88	44.98	74.00	-29.02	Horizontal	Peak

802.11n(HT40)					CH09				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1476.19	33.68	25.82	5.22	36.56	28.16	74.00	-45.84	Vertical	Peak
4299.89	35.43	30.20	9.03	37.61	37.05	74.00	-36.95	Vertical	Peak
4908.44	37.02	31.41	9.61	36.66	41.38	74.00	-32.62	Vertical	Peak
6611.33	31.86	34.20	11.37	35.34	42.09	74.00	-31.91	Vertical	Peak
1346.93	34.73	26.06	4.91	36.49	29.21	74.00	-44.79	Horizontal	Peak
3168.08	34.05	28.80	7.68	38.20	32.33	74.00	-41.67	Horizontal	Peak
4908.44	34.56	31.41	9.61	36.66	38.92	74.00	-35.08	Horizontal	Peak
7921.00	32.34	36.78	12.68	34.74	47.06	74.00	-26.94	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies(test frequency band is 1GHz to 25GHz) are very lower than the limit and not show in test report.

6. TEST SETUP PHOTOS

Conducted Emissions



Radiated Emissions





7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: TRE1801013301.

-----End of Report-----