



TEST REPORT

Report Reference No...... : **TRE1801017204** R/C.....: 66089

FCC ID..... : **ZSW-30-061**

Applicant's name..... : **b mobile HK Limited**

Address..... : Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.

Manufacturer..... : b mobile HK Limited

Address..... : Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.

Test item description : **Mobile Phone**

Trade Mark : Bmobile

Model/Type reference..... : AX950

Listed Model(s)..... : -

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample..... : Jan. 23, 2018

Date of testing..... : Jan. 24, 2018 - Feb. 04, 2018

Date of issue..... : Feb. 05, 2018

Result..... : **PASS**

Compiled by
(position+printedname+signature).... : File administrators Becky Liang

Supervised by
(position+printedname+signature)..... : Project Engineer : Edward Pan

Approved by
(position+printedname+signature)..... : Manager Hans Hu

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

1.	<u>TEST STANDARDS AND REPORT VERSION</u>	3
1.1.	Test Standards	3
1.2.	Report version	3
2.	<u>TEST DESCRIPTION</u>	4
3.	<u>SUMMARY</u>	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
4.	<u>TEST ENVIRONMENT</u>	7
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Environmental conditions	8
4.4.	Statement of the measurement uncertainty	8
4.5.	Equipments Used during the Test	9
5.	<u>TEST CONDITIONS AND RESULTS</u>	11
5.1.	Antenna requirement	11
5.2.	Conducted Emissions (AC Main)	12
5.3.	Conducted Peak Output Power	15
5.4.	20 dB Bandwidth	19
5.5.	Carrier Frequencies Separation	23
5.6.	Hopping Channel Number	25
5.7.	Dwell Time	27
5.8.	Pseudorandom Frequency Hopping Sequence	34
5.9.	Restricted band (radiated)	35
5.10.	Band edge and Spurious Emissions (conducted)	37
5.11.	Spurious Emissions (radiated)	53
6.	<u>TEST SETUP PHOTOS</u>	57
7.	<u>EXTERANAL AND INTERNAL PHOTOS</u>	58

1. TEST STANDARDS AND REPORT VERSION

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Report version

Revision No.	Date of issue	Description
N/A	Feb. 05, 2018	Original

2. TEST DESCRIPTION

Test Item	Section in CFR 47	Result	Test Engineer
Antenna Requirement	15.203/15.247 (c)	PASS	Edward Pan
AC Power Line Conducted Emissions	15.207	PASS	Michael Jie
Conducted Peak Output Power	15.247 (b)(1)	PASS	Baozhu Hu
20 dB Bandwidth	15.247 (a)(1)	PASS	Baozhu Hu
Carrier Frequencies Separation	15.247 (a)(1)	PASS	Baozhu Hu
Hopping Channel Number	15.247 (a)(1)	PASS	Baozhu Hu
Dwell Time	15.247 (a)(1)	PASS	Baozhu Hu
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	PASS	Baozhu Hu
Restricted band	15.247(d)/15.205	PASS	Baozhu Hu
Radiated Emissions	15.247(d)/15.209	PASS	Baozhu Hu

Note: The measurement uncertainty is not included in the test result.

3. SUMMARY

3.1. Client Information

Applicant:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.
Manufacturer:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.

3.2. Product Description

Name of EUT:	Mobile Phone
Trade Mark:	Bmobile
Model No.:	AX950
Listed Model(s):	-
IMEI 1:	865922019824530
IMEI 2:	865922019825081
Power supply:	DC 3.85V
Adapter information:	Input: 100-240Va.c., 50-60Hz, 0.2A Output: 5Vd.c., 1A
Hardware version:	m603-01
Software version:	Bmobile_AX950_Base_V002_MT6580_N0_V1.23.1@2018-01-06_09-0
Bluetooth	
Version:	Supported BT4.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	Integral Antenna
Antenna gain:	0.98 dBi

3.3. Operation state

➤ **Test frequency list**

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
39	2441
⋮	⋮
77	2479
78	2480

➤ **TEST MODE**

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit
For AC power line conducted emissions:
The EUT was set to connect with the Bluetooth instrument under large package sizes transmission.
For Radiated suprious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data recorded in the report.

3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

/	Manufacturer:	/
	Model No.:	/
/	Manufacturer:	/
	Model No.:	/

3.5. Modifications

No modifications were implemented to meet testing criteria.

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Voltage	V _N =Nominal Voltage	DC 3.85V
	V _L =Lower Voltage	DC 3.60V
	V _H =Higher Voltage	DC 4.40V
Normal Temperature/T _{nor} :		15~35°C
Relative Humidity		30~60 %
Air Pressure		950-1050 hPa

4.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd. quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Here after the best measurement capability for Shenzhen Huatongwei International Inspection Co., Ltd. is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emissions 9kHz~40GHz	1.60 dB	(1)
Radiated spurious emissions 9kHz~40GHz	2.20 dB	(1)
Conducted Emissions 9kHz~30MHz	3.39 dB	(1)
Radiated Emissions 30~1000MHz	4.24 dB	(1)
Radiated Emissions 1~18GHz	5.16 dB	(1)
Radiated Emissions 18~40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

4.5. Equipments Used during the Test

Conducted Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Artificial Mains	SCHWARZBECK	NNLK 8121	573	11/11/2017	11/10/2018
3	2-Line V-Network	R&S	ESH3-Z5	100049	11/11/2017	11/10/2018
4	Pulse Limiter	R&S	ESH3-Z2	101488	11/11/2017	11/10/2018
5	RF Connection Cable	HUBER+SUHNER	EF400	N/A	11/21/2017	11/20/2018
6	Test Software	R&S	ES-K1	N/A	N/A	N/A

Radiated Emissions						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
2	Loop Antenna	R&S	HFH2-Z2	100020	11/20/2017	11/19/2018
3	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	538	4/5/2017	4/4/2020
4	Preamplifier	SCHWARZBECK	BBV 9743	9743-0022	10/18/2017	10/17/2018
5	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	11/21/2017	11/20/2018
6	EMI Test Software	R&S	ESK1	N/A	N/A	N/A
7	Spectrum Analyzer	R&S	FSP40	100597	11/11/2017	11/10/2018
8	Horn Antenna	SCHWARZBECK	9120D	1011	3/27/2017	3/26/2020
9	Horn Antenna	SCHWARZBECK	BBHA9170	25841	3/27/2017	3/26/2018
10	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-248	10/18/2017	10/17/2018
11	High pass filter	Compliance Direction systems	BSU-6	34202	11/11/2017	11/10/2018
12	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	11/21/2017	11/20/2018
13	EMI Test Software	Audix	E3	N/A	N/A	N/A
14	Turntable	MATURO	TT2.0	/	N/A	N/A
15	Antenna Mast	MATURO	TAM-4.0-P	/	N/A	N/A

RF Conducted Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
1	Spectrum Analyzer	R&S	FSV40	100048	11/11/2017	11/10/2018
2	EXA Signal Analyzer	Agilent	N9020A	184247	9/22/2017	9/21/2018
3	Power Meter	Agilent	U2021XA	178231	9/22/2017	9/21/2018
4	OSP	R&S	OSP120	101317	N/A	N/A

5. TEST CONDITIONS AND RESULTS

5.1. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

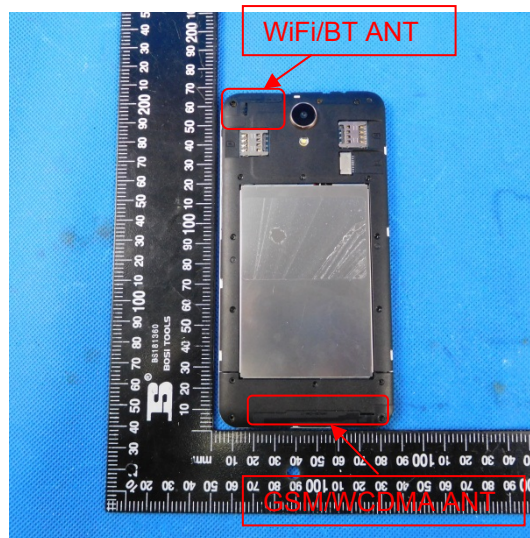
FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Test Result:

Passed **Not Applicable**

The directional gain of the antenna less than 6 dBi, please refer to the below antenna photo.



5.2. Conducted Emissions (AC Main)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

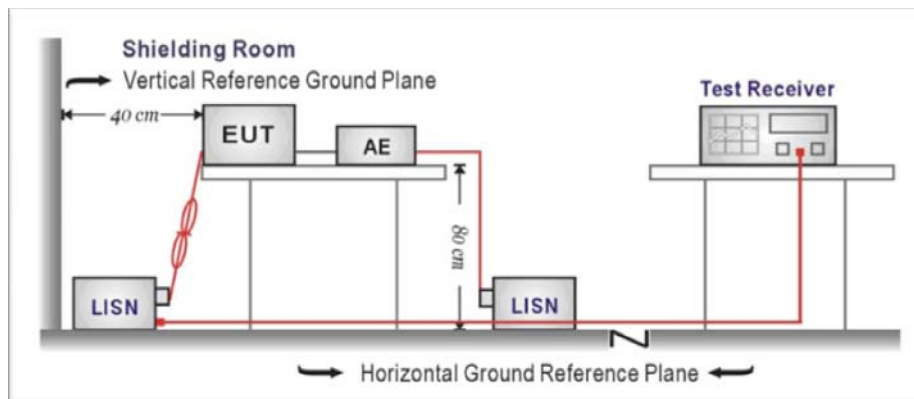TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

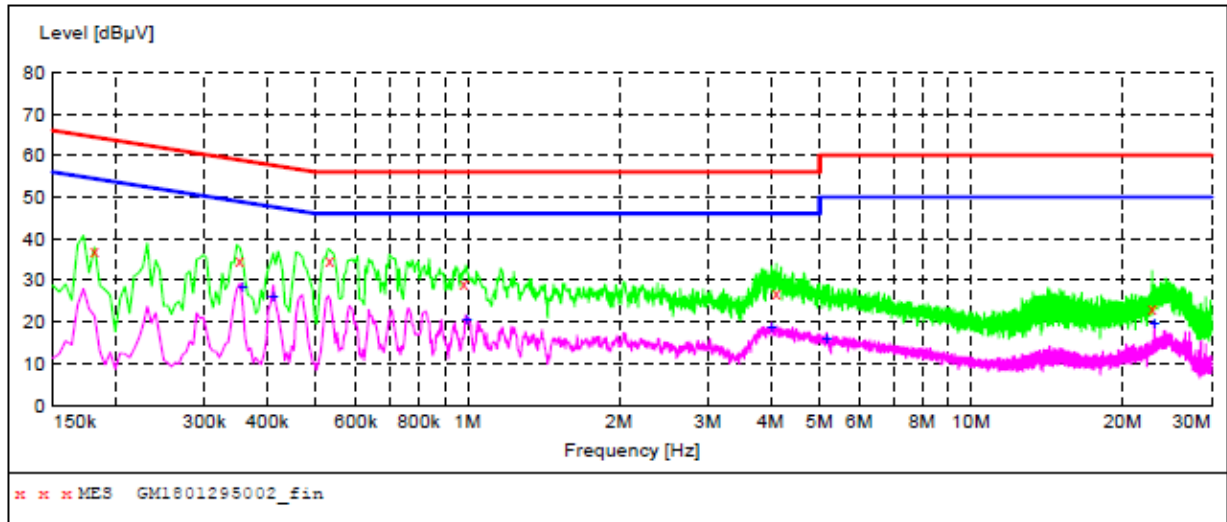
TEST RESULTS

Passed Not Applicable

Note:

- 1) Transd= Cable lose + Pulse Limiter Factor + Artificial Mains Factor
- 2) Margin= Limit - Level

Test Line: L



MEASUREMENT RESULT: "GM1801295002_fin"

1/29/2018 9:09AM


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.181500	36.90	10.0	64	27.5	QP	L1	GND
0.352500	34.90	9.9	59	24.0	QP	L1	GND
0.532500	34.90	10.0	56	21.1	QP	L1	GND
0.982500	29.10	10.1	56	26.9	QP	L1	GND
4.101000	27.10	10.1	56	28.9	QP	L1	GND
22.884000	23.40	10.7	60	36.6	QP	L1	GND

MEASUREMENT RESULT: "GM1801295002_fin2"

1/29/2018 9:09AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.357000	28.50	9.9	49	20.3	AV	L1	GND
0.411000	26.10	9.9	48	21.5	AV	L1	GND
0.996000	20.60	10.1	46	25.4	AV	L1	GND
4.024500	18.80	10.1	46	27.2	AV	L1	GND
5.163000	15.90	10.2	50	34.1	AV	L1	GND
23.127000	19.70	10.7	50	30.3	AV	L1	GND

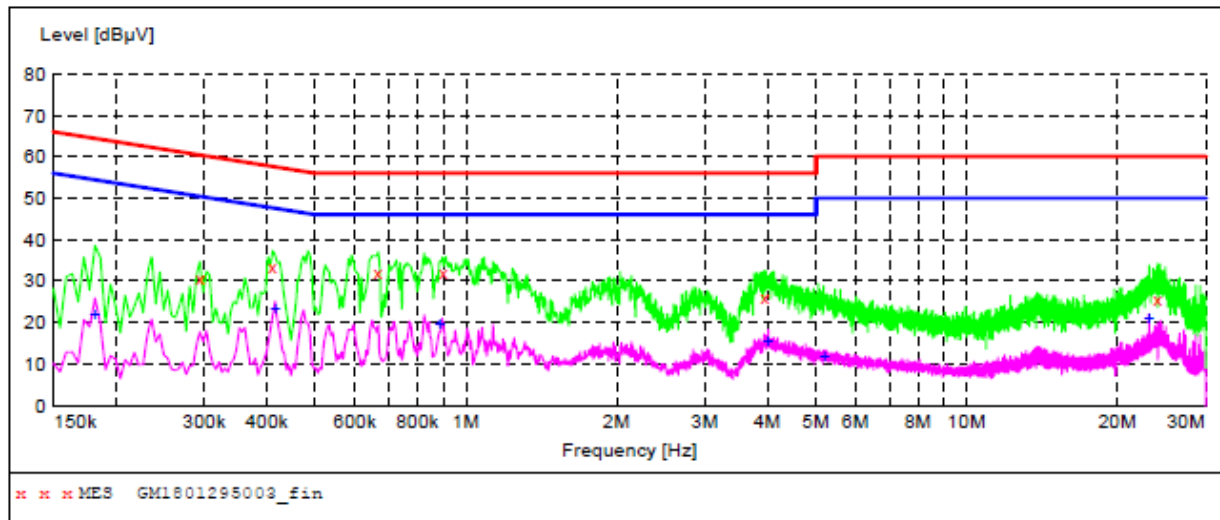Test Line: N



MEASUREMENT RESULT: "GM1801295003_fin"

1/29/2018 9:12AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.294000	30.60	9.9	60	29.8	QP	N	GND
0.411000	33.50	9.9	58	24.1	QP	N	GND
0.667500	31.80	10.0	56	24.2	QP	N	GND
0.901500	32.20	10.0	56	23.8	QP	N	GND
3.957000	25.90	10.1	56	30.1	QP	N	GND
24.018000	25.60	10.8	60	34.4	QP	N	GND

MEASUREMENT RESULT: "GM1801295003_fin2"

1/29/2018 9:12AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.181500	21.90	10.0	54	32.5	AV	N	GND
0.415500	23.40	9.9	48	24.1	AV	N	GND
0.888000	19.50	10.0	46	26.5	AV	N	GND
4.011000	15.50	10.1	46	30.5	AV	N	GND
5.194500	11.90	10.2	50	38.1	AV	N	GND
23.127000	21.00	10.7	50	29.0	AV	N	GND

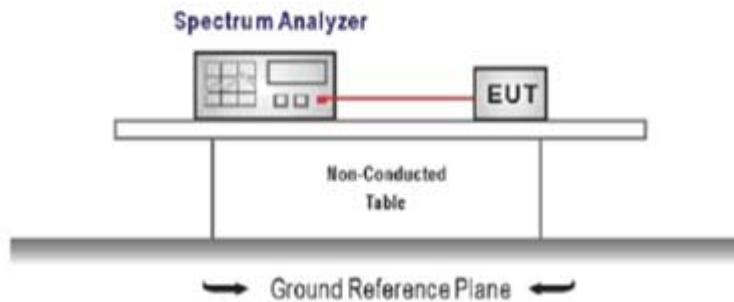
5.3. Conducted Peak Output Power

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(1):

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the pathloss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq the 20 dB bandwidth of the emission being measured, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




TEST MODE:




Please refer to the clause 3.3




TEST RESULTS

Passed Not Applicable

Modulation type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	2.42	≤ 30.00	Pass
	39	1.12		
	78	0.83		
$\pi/4$ DQPSK	00	2.28	≤ 21.00	Pass
	39	1.03		
	78	0.80		
8DPSK	00	2.22	≤ 21.00	Pass
	39	0.97		
	78	0.47		

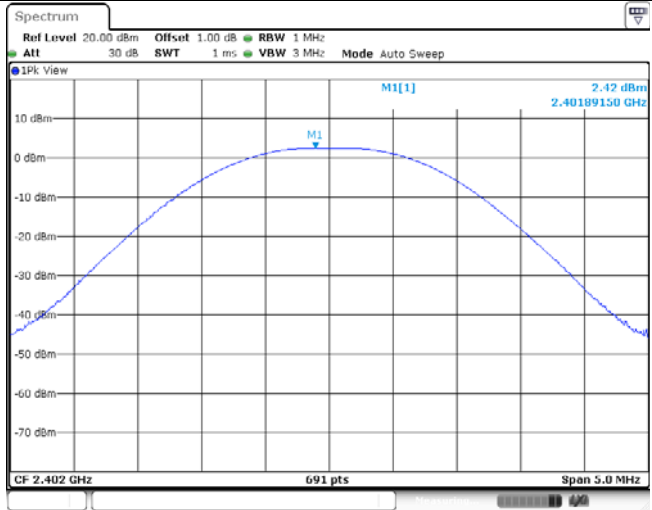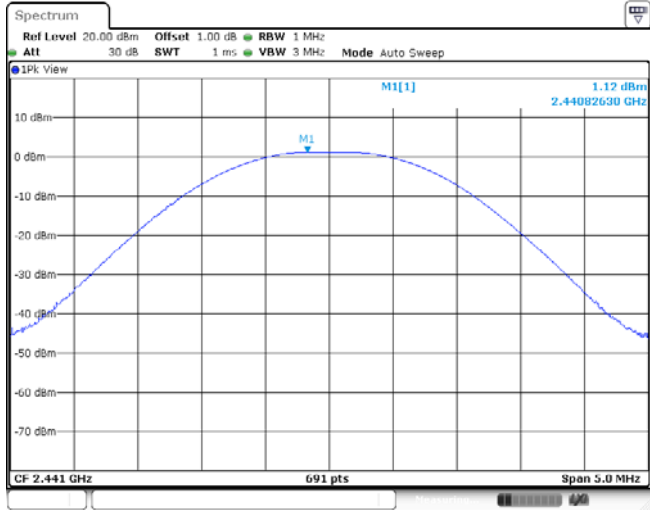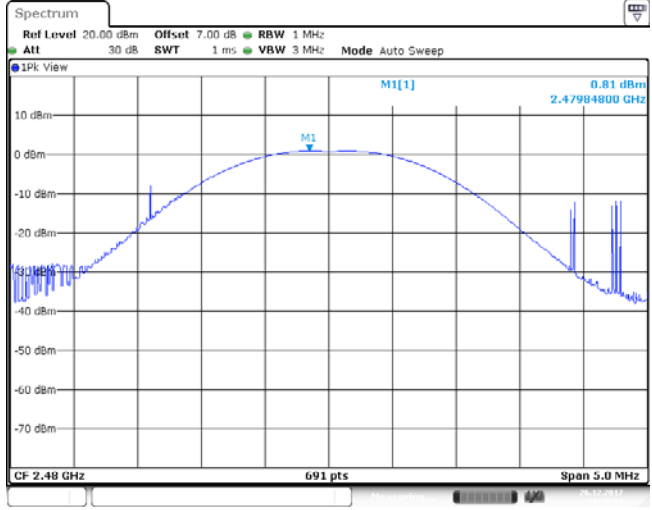Modulation Type: GFSK	
CH00	 <p>Spectrum plot for CH00. The plot shows a peak at 2.40189150 GHz with a power level of 2.42 dBm. The plot shows a smooth curve with a peak at 0 dBm relative to the reference level. The x-axis is frequency in GHz, and the y-axis is power in dBm. The plot is titled 'Spectrum' and includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 1 MHz, Mode Auto Sweep, M1[1], 2.42 dBm, 2.40189150 GHz, CF 2.402 GHz, 691 pts, Span 5.0 MHz.</p>
CH39	 <p>Spectrum plot for CH39. The plot shows a peak at 2.44082630 GHz with a power level of 1.12 dBm. The plot shows a smooth curve with a peak at 0 dBm relative to the reference level. The x-axis is frequency in GHz, and the y-axis is power in dBm. The plot is titled 'Spectrum' and includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 1 MHz, Mode Auto Sweep, M1[1], 1.12 dBm, 2.44082630 GHz, CF 2.441 GHz, 691 pts, Span 5.0 MHz.</p>
CH78	 <p>Spectrum plot for CH78. The plot shows a peak at 2.47984800 GHz with a power level of 0.81 dBm. The plot shows a smooth curve with a peak at 0 dBm relative to the reference level and some noise at the edges. The x-axis is frequency in GHz, and the y-axis is power in dBm. The plot is titled 'Spectrum' and includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 7.00 dB, RBW 1 MHz, Mode Auto Sweep, M1[1], 0.81 dBm, 2.47984800 GHz, CF 2.48 GHz, 691 pts, Span 5.0 MHz.</p>

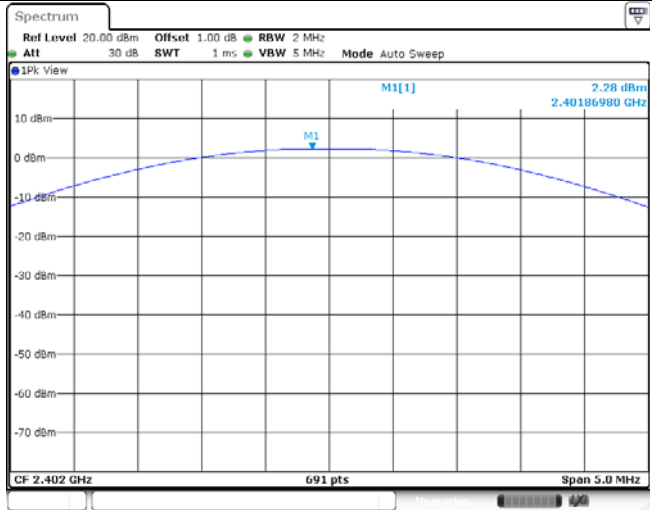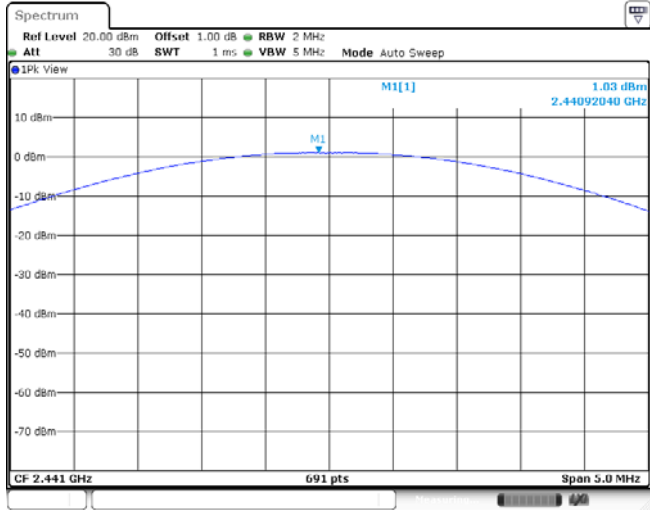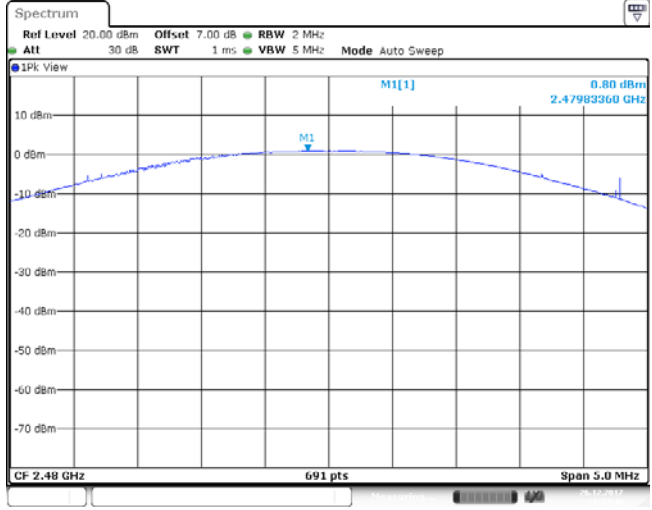Modulation Type: $\pi/4$ DQPSK	
CH00	
CH39	
CH78	

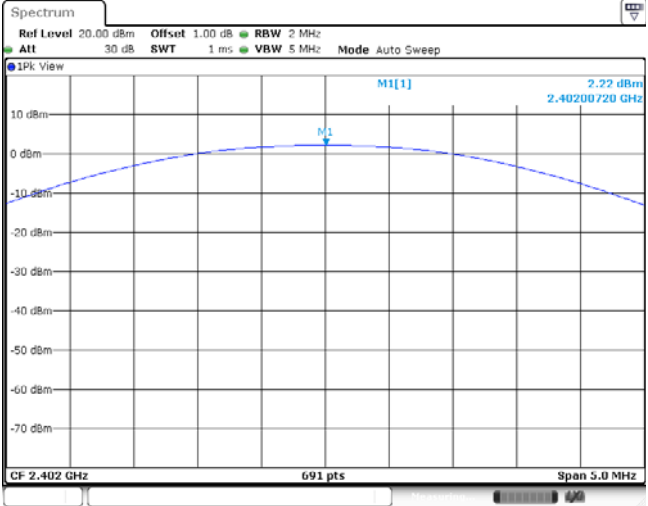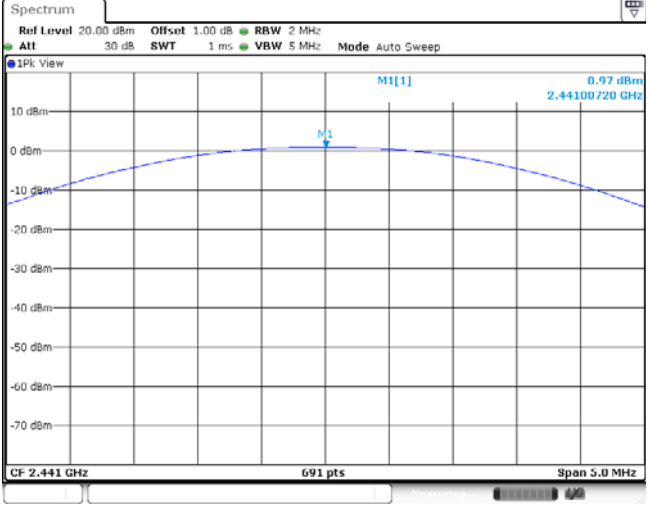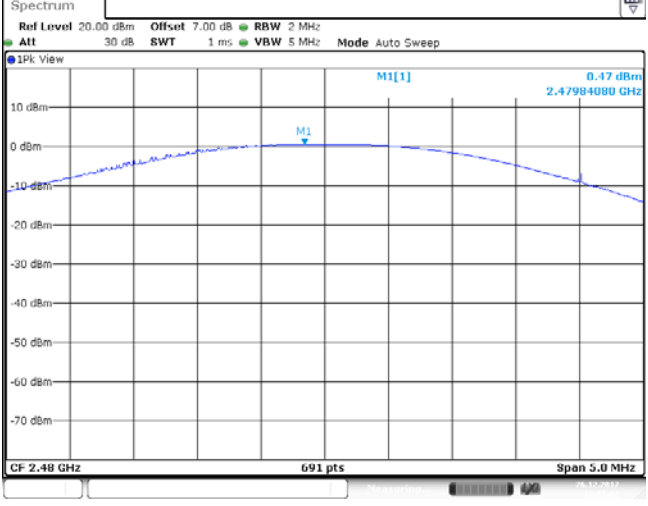
Modulation Type: 8DPSK	
CH00	
CH39	
CH78	

5.4. 20 dB Bandwidth

LIMIT

N/A

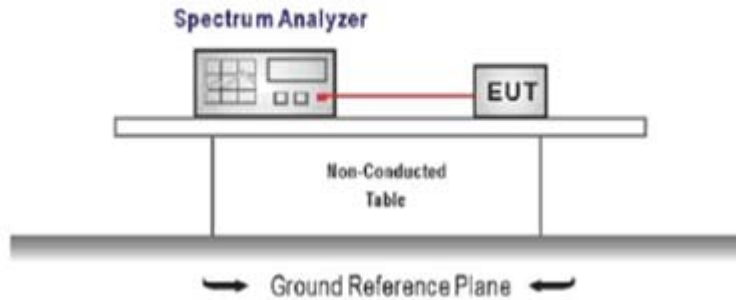TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth, VBW \geq RBW
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

 Passed Not Applicable

Modulation type	Channel	20 dB Bandwidth (MHz)	Limit (MHz)	Result
GFSK	00	0.93	-	Pass
	39	0.93		
	78	0.93		
$\pi/4$ DQPSK	00	1.29	-	Pass
	39	1.29		
	78	1.29		
8DPSK	00	1.28	-	Pass
	39	1.28		
	78	1.28		

Modulation Type:		GFSK																												
CH00	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 10 kHz Att 30 dB SWT 189.6 μs VBW 30 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -24.03 dBm 2.40153750 GHz M2[1] -3.26 dBm 2.40204750 GHz</p> <p>D1 -23.257 dBm</p> <p>CF 2.402 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.4015375 GHz</td> <td>-24.03 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4020475 GHz</td> <td>-3.26 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>927.5 kHz</td> <td>-0.55 dB</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4015375 GHz	-24.03 dBm			M2		1	2.4020475 GHz	-3.26 dBm			D3	M1	1	927.5 kHz	-0.55 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.4015375 GHz	-24.03 dBm																										
M2		1	2.4020475 GHz	-3.26 dBm																										
D3	M1	1	927.5 kHz	-0.55 dB																										
CH39	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 10 kHz Att 30 dB SWT 189.6 μs VBW 30 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -25.33 dBm 2.44053750 GHz M2[1] -4.63 dBm 2.44104750 GHz</p> <p>D1 -24.627 dBm</p> <p>CF 2.441 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.4405375 GHz</td> <td>-25.33 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4410475 GHz</td> <td>-4.63 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>925.0 kHz</td> <td>0.58 dB</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4405375 GHz	-25.33 dBm			M2		1	2.4410475 GHz	-4.63 dBm			D3	M1	1	925.0 kHz	0.58 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.4405375 GHz	-25.33 dBm																										
M2		1	2.4410475 GHz	-4.63 dBm																										
D3	M1	1	925.0 kHz	0.58 dB																										
CH78	<p>Spectrum</p> <p>Ref Level 20.00 dBm Offset 1.00 dB RBW 10 kHz Att 30 dB SWT 189.6 μs VBW 30 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>M1[1] -26.67 dBm 2.47953750 GHz M2[1] -5.86 dBm 2.48004750 GHz</p> <p>D1 -25.864 dBm</p> <p>CF 2.40 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.4795375 GHz</td> <td>-26.67 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4800475 GHz</td> <td>-5.86 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>925.0 kHz</td> <td>0.55 dB</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4795375 GHz	-26.67 dBm			M2		1	2.4800475 GHz	-5.86 dBm			D3	M1	1	925.0 kHz	0.55 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.4795375 GHz	-26.67 dBm																										
M2		1	2.4800475 GHz	-5.86 dBm																										
D3	M1	1	925.0 kHz	0.55 dB																										

Modulation Type:		$\pi/4$ DQPSK																												
CH00	<p>Spectrum</p> <p>Rel Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>CF 2.402 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.4013375 GHz</td> <td>-21.86 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4021550 GHz</td> <td>-1.47 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.285 MHz</td> <td>0.23 dB</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4013375 GHz	-21.86 dBm			M2		1	2.4021550 GHz	-1.47 dBm			D3	M1	1	1.285 MHz	0.23 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.4013375 GHz	-21.86 dBm																										
M2		1	2.4021550 GHz	-1.47 dBm																										
D3	M1	1	1.285 MHz	0.23 dB																										
CH39	<p>Spectrum</p> <p>Rel Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>CF 2.441 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.4403575 GHz</td> <td>-22.93 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4411550 GHz</td> <td>-2.69 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.285 MHz</td> <td>0.08 dB</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4403575 GHz	-22.93 dBm			M2		1	2.4411550 GHz	-2.69 dBm			D3	M1	1	1.285 MHz	0.08 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.4403575 GHz	-22.93 dBm																										
M2		1	2.4411550 GHz	-2.69 dBm																										
D3	M1	1	1.285 MHz	0.08 dB																										
CH78	<p>Spectrum</p> <p>Rel Level 20.00 dBm Offset 1.00 dB RBW 30 kHz Att 30 dB SWT 63.1 μs VBW 100 kHz Mode Auto FFT</p> <p>1Pk View</p> <p>CF 2.40 GHz 1001 pts Span 2.5 MHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.4793575 GHz</td> <td>-24.26 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4001525 GHz</td> <td>-3.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>D3</td> <td>M1</td> <td>1</td> <td>1.285 MHz</td> <td>0.07 dB</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4793575 GHz	-24.26 dBm			M2		1	2.4001525 GHz	-3.96 dBm			D3	M1	1	1.285 MHz	0.07 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.4793575 GHz	-24.26 dBm																										
M2		1	2.4001525 GHz	-3.96 dBm																										
D3	M1	1	1.285 MHz	0.07 dB																										

Modulation Type:		8DPSK																												
CH00	<table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.4013475 GHz</td> <td>-20.99 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4021525 GHz</td> <td>-0.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>DS</td> <td>M1</td> <td>1</td> <td>1.2775 MHz</td> <td>0.01 dB</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.4013475 GHz	-20.99 dBm			M2		1	2.4021525 GHz	-0.96 dBm			DS	M1	1	1.2775 MHz	0.01 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.4013475 GHz	-20.99 dBm																										
M2		1	2.4021525 GHz	-0.96 dBm																										
DS	M1	1	1.2775 MHz	0.01 dB																										
CH39	<table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.440345 GHz</td> <td>-22.58 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4411525 GHz</td> <td>-2.17 dBm</td> <td></td> <td></td> </tr> <tr> <td>DS</td> <td>M1</td> <td>1</td> <td>1.2825 MHz</td> <td>0.35 dB</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.440345 GHz	-22.58 dBm			M2		1	2.4411525 GHz	-2.17 dBm			DS	M1	1	1.2825 MHz	0.35 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.440345 GHz	-22.58 dBm																										
M2		1	2.4411525 GHz	-2.17 dBm																										
DS	M1	1	1.2825 MHz	0.35 dB																										
CH78	<table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td></td> <td>1</td> <td>2.479345 GHz</td> <td>-23.97 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td></td> <td>1</td> <td>2.4801525 GHz</td> <td>-3.45 dBm</td> <td></td> <td></td> </tr> <tr> <td>DS</td> <td>M1</td> <td>1</td> <td>1.2825 MHz</td> <td>0.48 dB</td> <td></td> <td></td> </tr> </tbody> </table>		Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1		1	2.479345 GHz	-23.97 dBm			M2		1	2.4801525 GHz	-3.45 dBm			DS	M1	1	1.2825 MHz	0.48 dB		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																								
M1		1	2.479345 GHz	-23.97 dBm																										
M2		1	2.4801525 GHz	-3.45 dBm																										
DS	M1	1	1.2825 MHz	0.48 dB																										

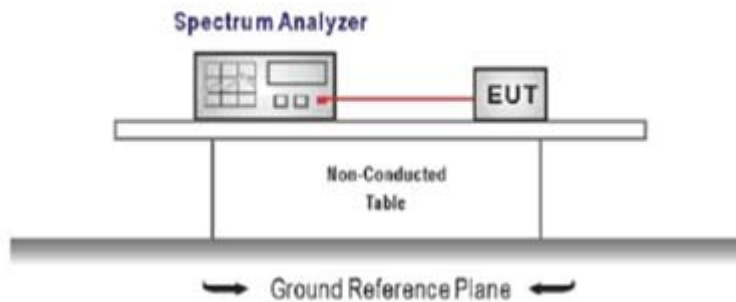
5.5. Carrier Frequencies Separation

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = wide enough to capture the peaks of two adjacent channels
 RBW \geq 1% of the span, VBW \geq RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable




Modulation type	Channel	Carrier Frequencies Separation (MHz)	Limit (MHz) *	Result
GFSK	39	1.00	≥ 0.93	Pass
$\pi/4$ DQPSK	39	1.00	≥ 0.86	Pass
8DPSK	39	1.00	≥ 0.86	Pass

Note:

*: GFSK limit = The maximum 20 dB Bandwidth for GFSK modulation on the section 5.4.

$\pi/4$ DQPSK limit = $2/3$ * The maximum 20 dB Bandwidth for $\pi/4$ DQPSK modulation on the section 5.4.

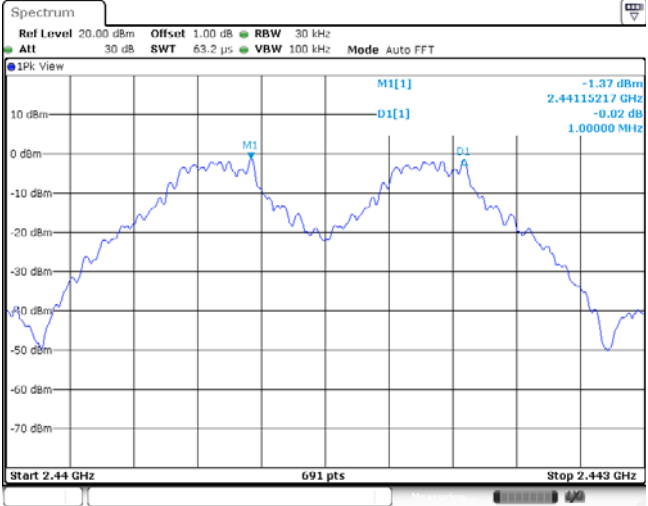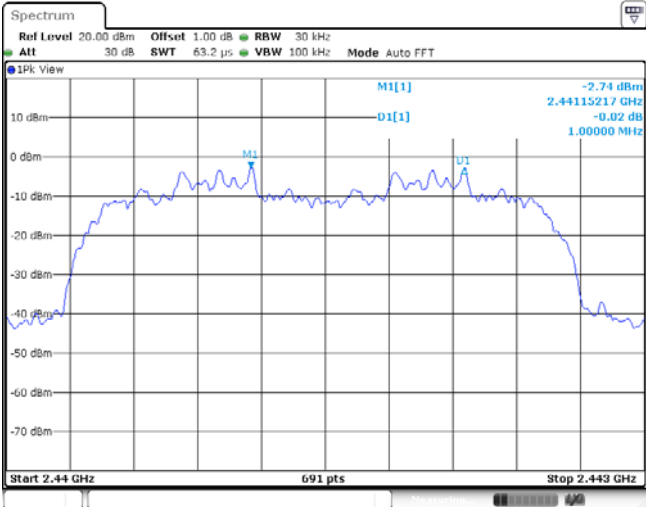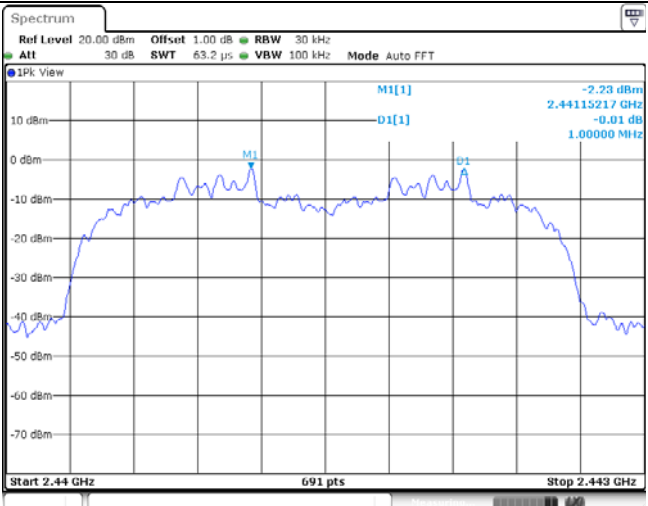8DPSK limit = $2/3$ * The maximum 20 dB Bandwidth for 8DPSK modulation on the section 5.4


<p>GFSK</p>	
<p>$\pi/4$DQPSK</p>	
<p>8DPSK</p>	

5.6. Hopping Channel Number

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems in the 2400–2483.5 MHz band shall use at least **15** channels.

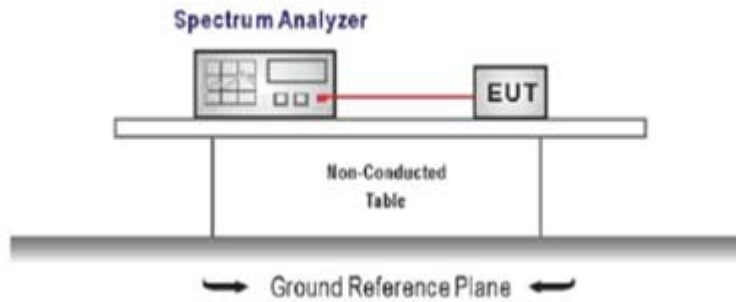TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
 Span = the frequency band of operation
 RBW ≥ 1% of the span, VBW ≥ RBW
 Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.




TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Modulation type	Channel number	Limit	Result
GFSK	79	≥15.00	Pass
π/4DQPSK	79		
8DPSK	79		

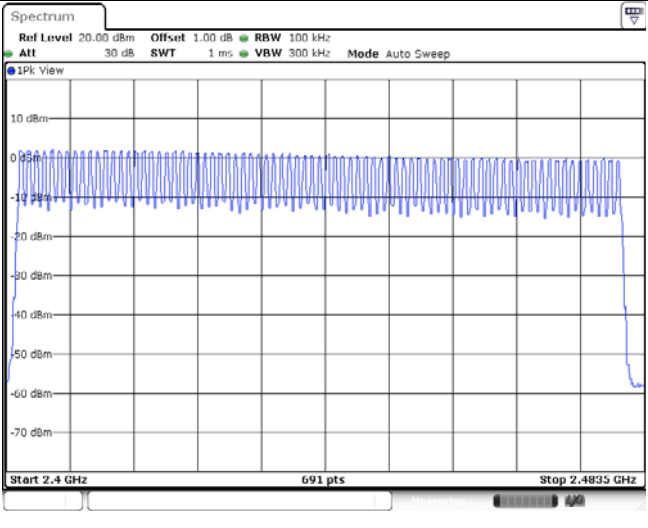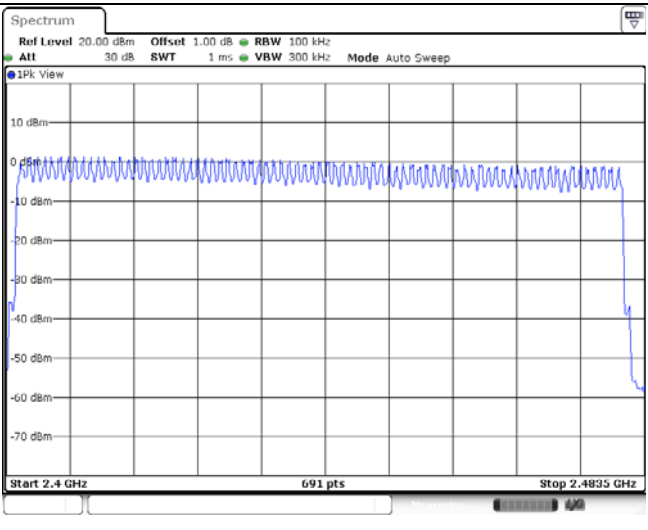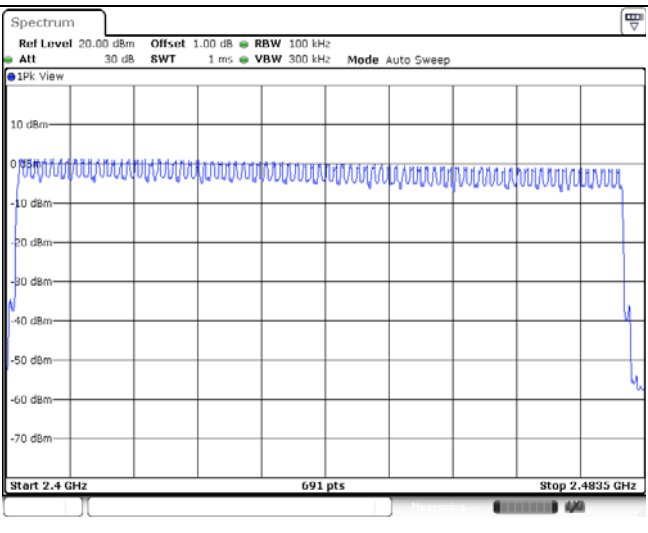
<p>GFSK</p>	
<p>$\pi/4$DQPSK</p>	
<p>8DPSK</p>	

5.7. Dwell Time

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1): The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

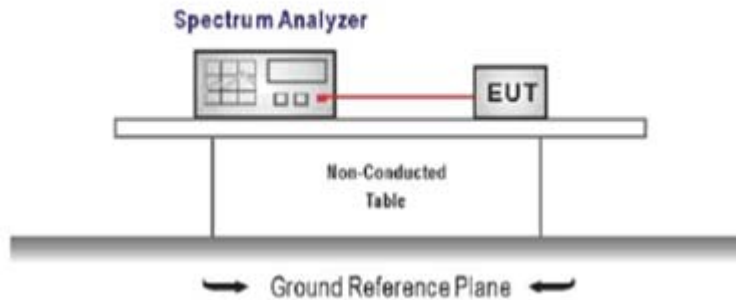TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel, RBW= 1 MHz, VBW ≥ RBW
Sweep = as necessary to capture the entire dwell time per hopping channel,
Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:




Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable


Modulation type	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell time (Second)	Limit (Second)	Result
GFSK	DH1	0.37	314.00	0.12	≤ 0.40	Pass
	DH3	1.63	155.00	0.25		
	DH5	2.87	111.00	0.32		
π/4DQPSK	2DH1	0.38	315.00	0.12	≤ 0.40	Pass
	2DH3	1.63	164.00	0.27		
	2DH5	2.88	110.00	0.32		
8DPSK	3DH1	0.38	314.00	0.12	≤ 0.40	Pass
	3DH3	1.63	158.00	0.26		
	3DH5	2.88	111.00	0.32		

Modulation Type: GFSK	
DH1 Burst width	
DH1 Burst number	
DH3 Burst width	

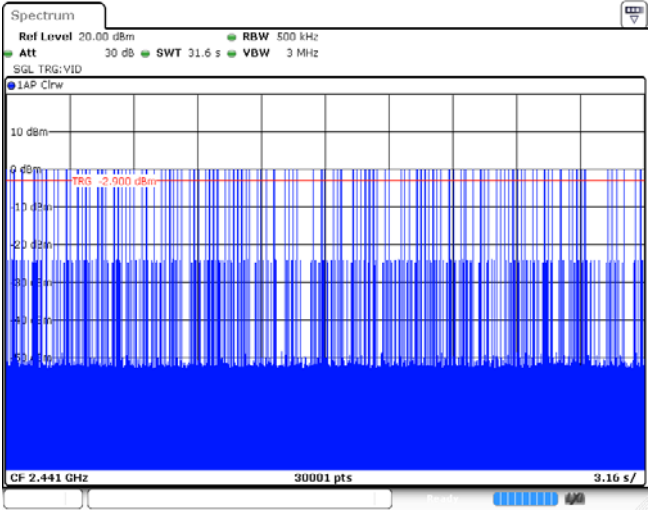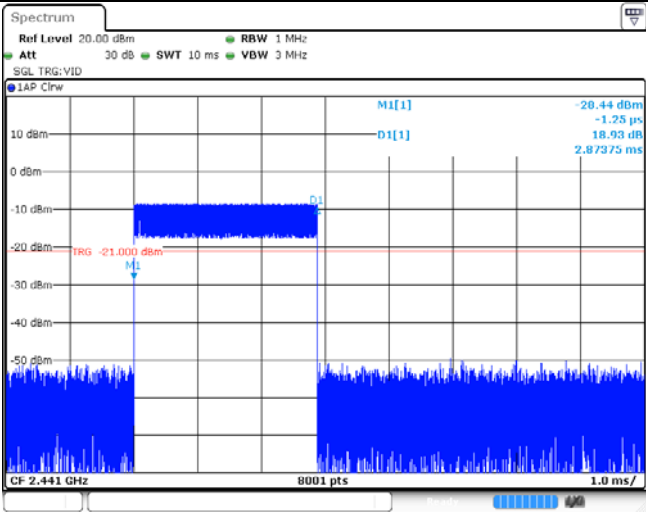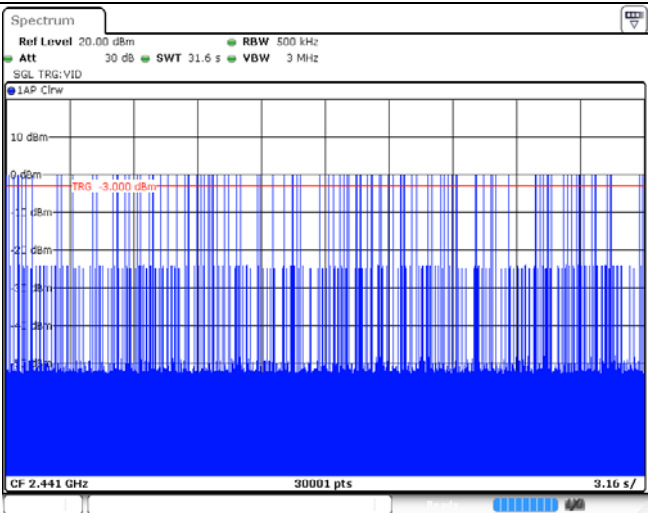
<p>DH3 Burst number</p>	 <p>The plot shows a spectrum with a red trigger line at -2.000 dBm. The y-axis ranges from -50 dBm to 10 dBm. The x-axis is labeled 'CF 2.441 GHz' and '30001 pts'. The plot shows a dense signal with a trigger event.</p>
<p>DH5 Burst width</p>	 <p>The plot shows a spectrum with a red trigger line at -21.000 dBm. The y-axis ranges from -50 dBm to 10 dBm. The x-axis is labeled 'CF 2.441 GHz' and '8001 pts'. The plot shows a burst of signal with a trigger event. Measurement data is shown in the top right: M1[1] -20.44 dBm, -1.25 μs, D1[1] 18.93 dB, 2.87375 ms.</p>
<p>DH5 Burst number</p>	 <p>The plot shows a spectrum with a red trigger line at -3.000 dBm. The y-axis ranges from -50 dBm to 10 dBm. The x-axis is labeled 'CF 2.441 GHz' and '30001 pts'. The plot shows a dense signal with a trigger event.</p>

Modulation Type:		$\pi/4$ DQPSK
2DH1 Burst width		
2DH1 Burst number		
2DH3 Burst width		

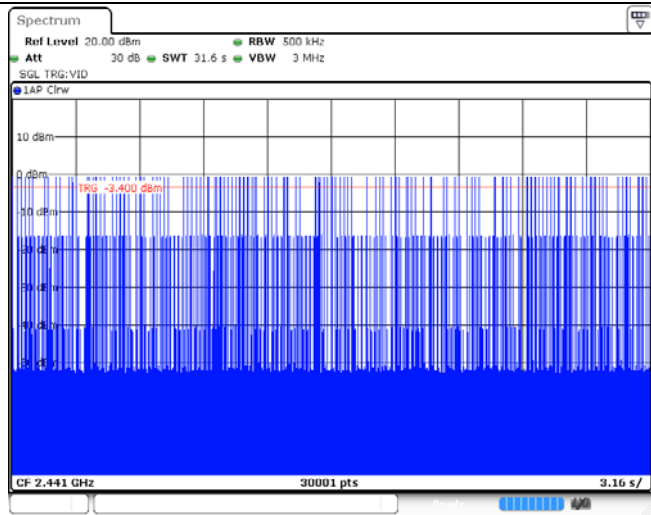
2DH3
Burst number









2DH5
Burst width

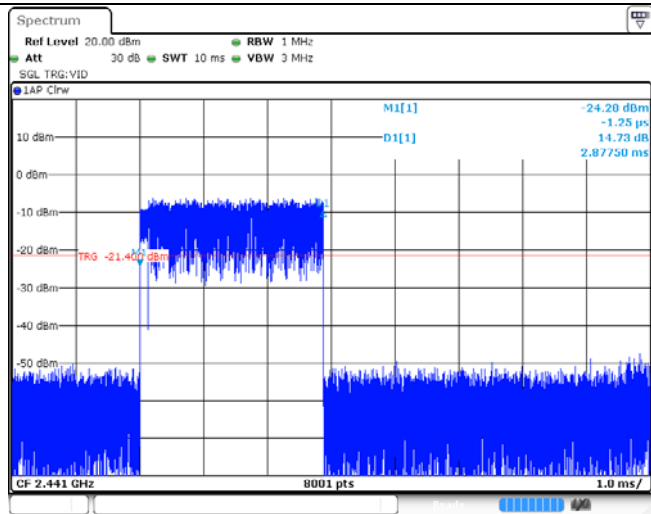

2DH5
Burst number

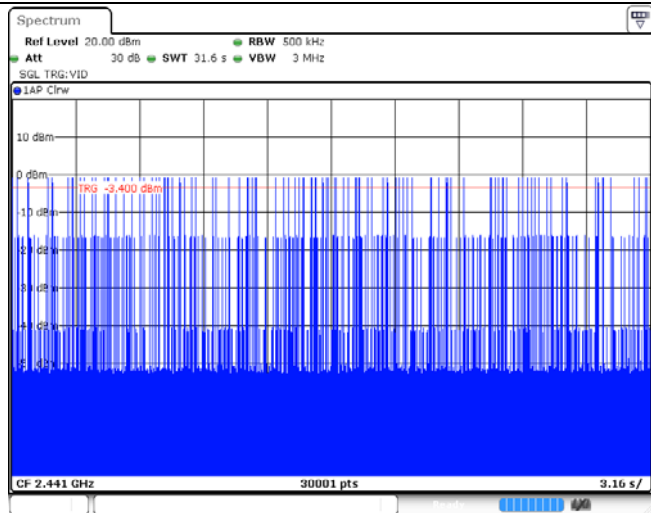

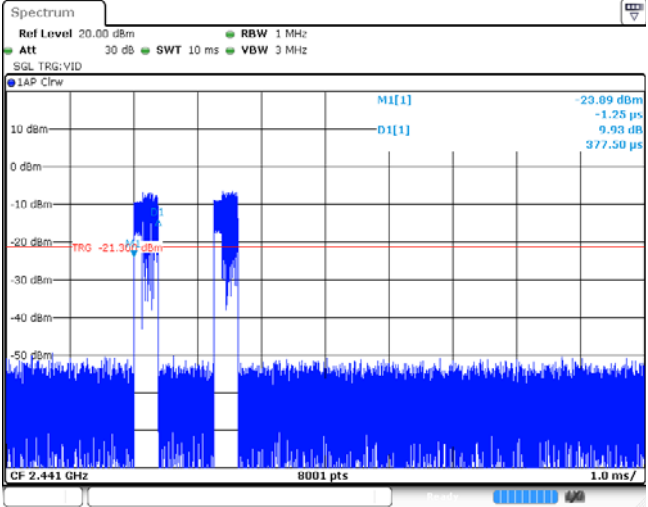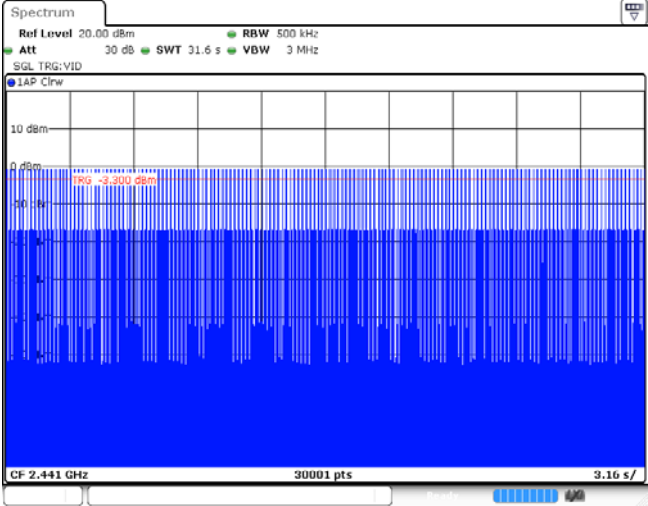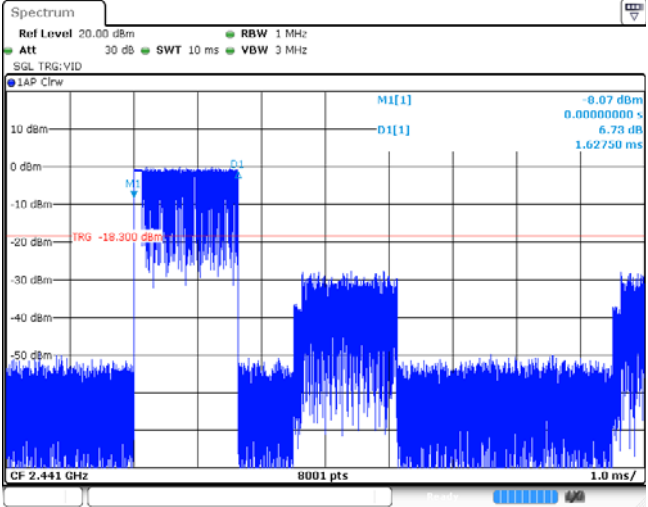Modulation Type: $\pi/4$ DQPSK	
3DH1 Burst width	
3DH1 Burst number	
3DH3 Burst width	
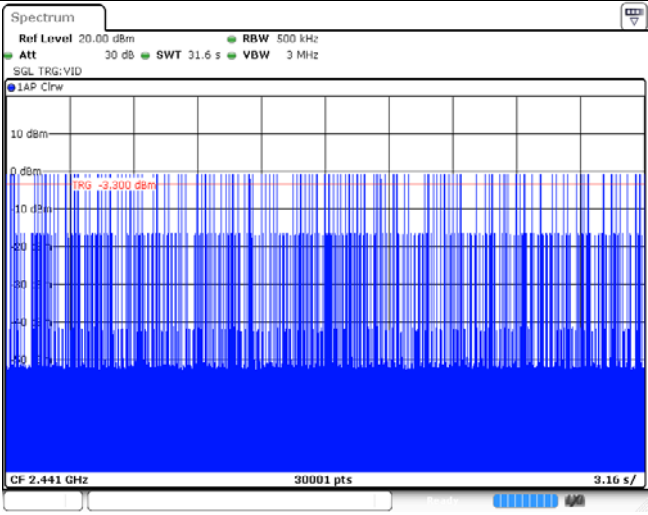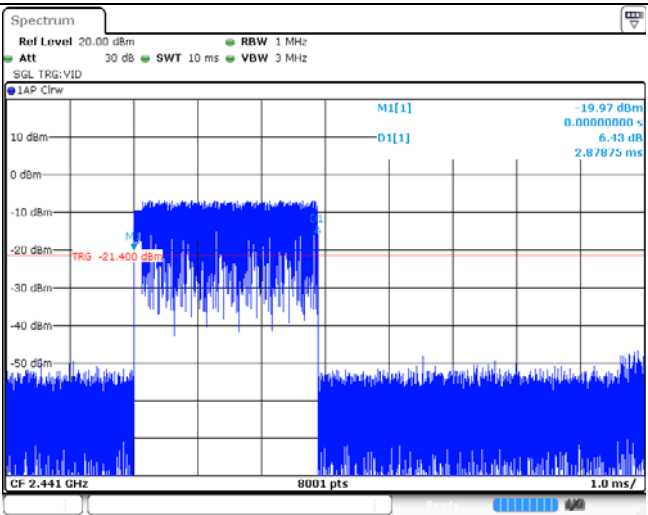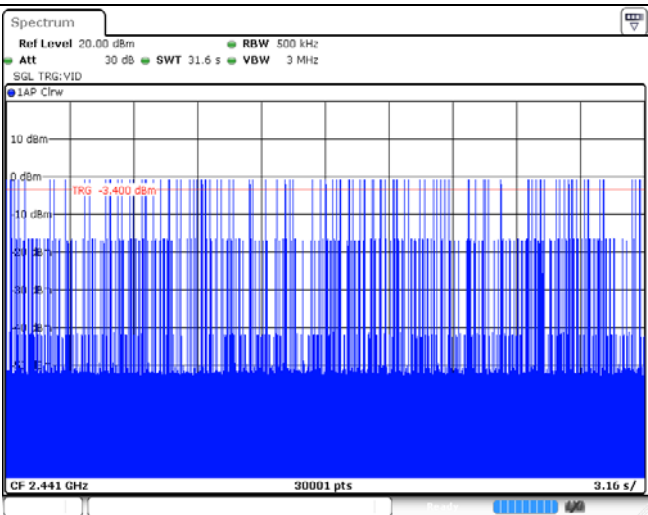
<p>3DH3 Burst number</p>	 <p>The spectrum plot shows a signal at 2.441 GHz with a resolution bandwidth of 500 kHz. The y-axis represents power in dBm, ranging from -50 to 10. A red trigger line is set at -23.000 dBm. The plot shows a dense signal with a burst of activity around 3.16 seconds.</p>
<p>3DH5 Burst width</p>	 <p>The spectrum plot shows a signal at 2.441 GHz with a resolution bandwidth of 1 MHz. The y-axis represents power in dBm, ranging from -50 to 10. A red trigger line is set at -21.400 dBm. The plot shows a signal burst with a duration of 2.87875 ms and a peak power of -19.97 dBm. The burst width is 6.43 dB.</p>
<p>3DH5 Burst number</p>	 <p>The spectrum plot shows a signal at 2.441 GHz with a resolution bandwidth of 500 kHz. The y-axis represents power in dBm, ranging from -50 to 10. A red trigger line is set at -24.000 dBm. The plot shows a dense signal with a burst of activity around 3.16 seconds.</p>

5.8. Pseudorandom Frequency Hopping Sequence

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(1):Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

TEST RESULTS

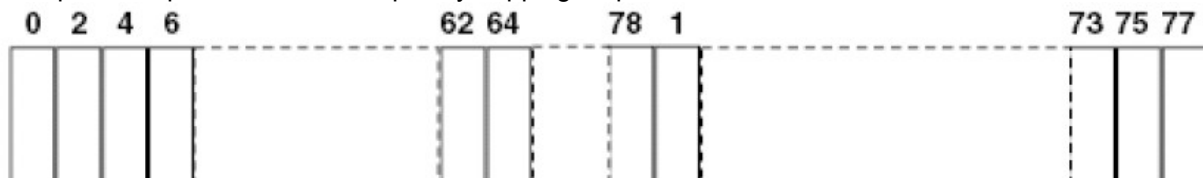
The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:



Each frequency used equally one the average by each transmitter. The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

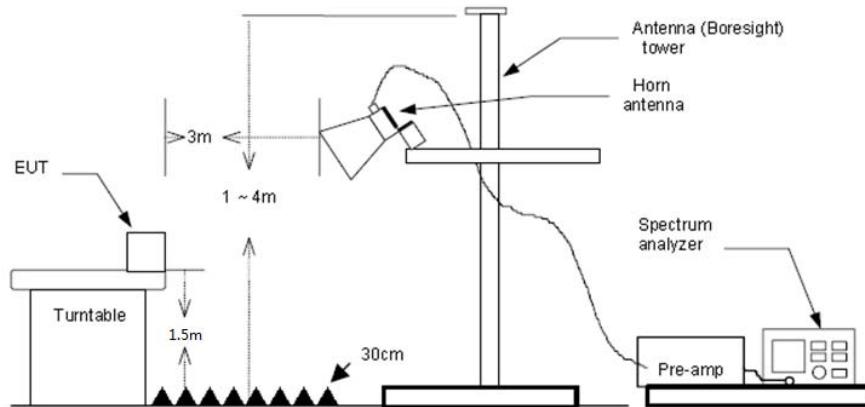
5.9. Restricted band (radiated)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION



TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
 RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
 RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

Note:

- 1) Final level= Read level + Antenna Factor+ Cable Loss- Preamp Factor
- 2) Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report.
- 3) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

Test channel:					CH00				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2310.00	31.21	28.05	6.62	37.65	28.23	74.00	-45.77	Horizontal	Peak
2390.01	31.37	27.65	6.75	37.87	27.90	74.00	-46.10	Horizontal	Peak
2310.00	32.04	28.05	6.62	37.65	29.06	74.00	-44.94	Vertical	Peak
2390.01	31.50	27.65	6.75	37.87	28.03	74.00	-45.97	Vertical	Peak
2310.00	18.26	28.05	6.62	37.65	15.28	54.00	-38.72	Horizontal	Average
2390.01	18.03	27.65	6.75	37.87	14.56	54.00	-39.44	Horizontal	Average
2310.00	19.52	28.05	6.62	37.65	16.54	54.00	-37.46	Vertical	Average
2390.01	19.65	27.65	6.75	37.87	16.18	54.00	-37.82	Vertical	Average


Test channel:					CH78				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2483.50	47.81	27.26	6.83	37.87	44.03	74.00	-29.97	Horizontal	Peak
2500.00	30.80	27.20	6.84	37.87	26.97	74.00	-47.03	Horizontal	Peak
2483.50	50.82	27.26	6.83	37.87	47.04	74.00	-26.96	Vertical	Peak
2500.00	30.66	27.20	6.84	37.87	26.83	74.00	-47.17	Vertical	Peak
2483.50	24.47	27.26	6.83	37.87	20.69	54.00	-33.31	Horizontal	Average
2500.00	18.18	27.20	6.84	37.87	14.35	54.00	-39.65	Horizontal	Average
2483.50	27.19	27.26	6.83	37.87	23.41	54.00	-30.59	Vertical	Average
2500.00	18.31	27.20	6.84	37.87	14.48	54.00	-39.52	Vertical	Average

5.10. Band edge and Spurious Emissions (conducted)

LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

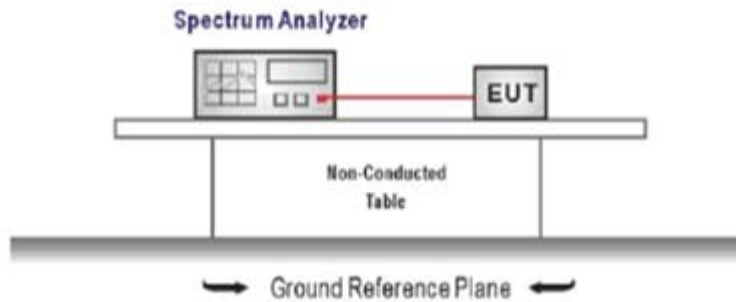TEST CONFIGURATION



TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW \geq RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold
4. Measure and record the results in the test report.

TEST MODE:


Please refer to the clause 3.3




TEST RESULTS

Passed Not Applicable


Test Item:	Band edge	Modulation type:	GFSK																																										
<p>CH00 No hopping mode</p>			<table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40177 GHz</td> <td>1.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-56.12 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-59.51 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.74 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.398529 GHz</td> <td>-56.86 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40177 GHz	1.96 dBm			M2	1		2.4 GHz	-56.12 dBm			M3	1		2.39 GHz	-59.51 dBm			M4	1		2.31 GHz	-59.74 dBm			M5	1		2.398529 GHz	-56.86 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40177 GHz	1.96 dBm																																									
M2	1		2.4 GHz	-56.12 dBm																																									
M3	1		2.39 GHz	-59.51 dBm																																									
M4	1		2.31 GHz	-59.74 dBm																																									
M5	1		2.398529 GHz	-56.86 dBm																																									
<p>CH00 Hopping mode</p>			<table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40301 GHz</td> <td>1.63 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-59.66 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-59.92 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.66 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.398116 GHz</td> <td>-57.27 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40301 GHz	1.63 dBm			M2	1		2.4 GHz	-59.66 dBm			M3	1		2.39 GHz	-59.92 dBm			M4	1		2.31 GHz	-59.66 dBm			M5	1		2.398116 GHz	-57.27 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40301 GHz	1.63 dBm																																									
M2	1		2.4 GHz	-59.66 dBm																																									
M3	1		2.39 GHz	-59.92 dBm																																									
M4	1		2.31 GHz	-59.66 dBm																																									
M5	1		2.398116 GHz	-57.27 dBm																																									
<p>CH78 No hopping mode</p>			<table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.480149 GHz</td> <td>-0.29 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-59.55 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-59.49 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4933043 GHz</td> <td>-57.61 dBm</td> <td></td> <td></td> </tr> </tbody> </table>	Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.480149 GHz	-0.29 dBm			M2	1		2.4835 GHz	-59.55 dBm			M3	1		2.5 GHz	-59.49 dBm			M4	1		2.4933043 GHz	-57.61 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.480149 GHz	-0.29 dBm																																									
M2	1		2.4835 GHz	-59.55 dBm																																									
M3	1		2.5 GHz	-59.49 dBm																																									
M4	1		2.4933043 GHz	-57.61 dBm																																									

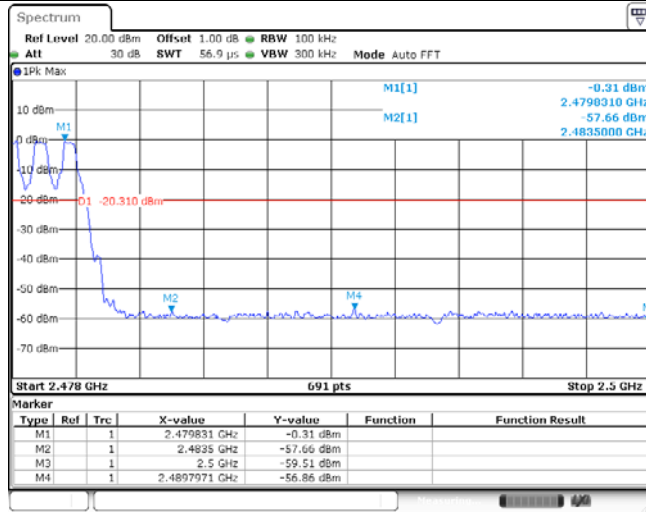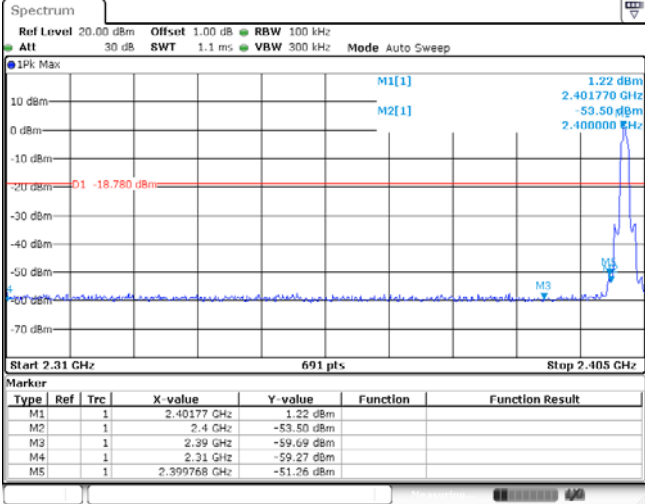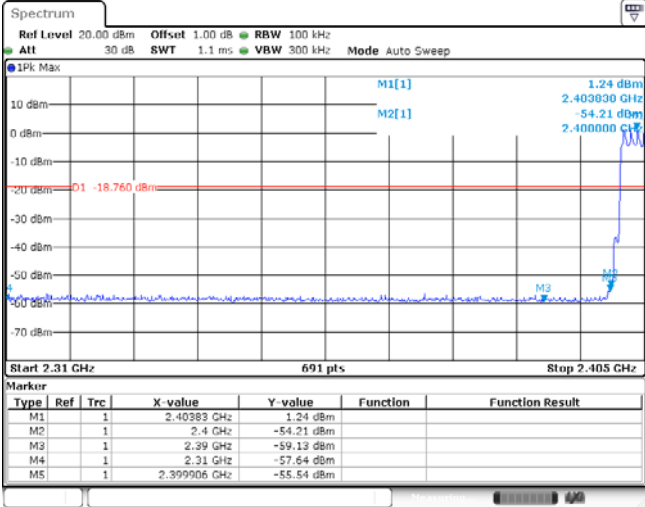
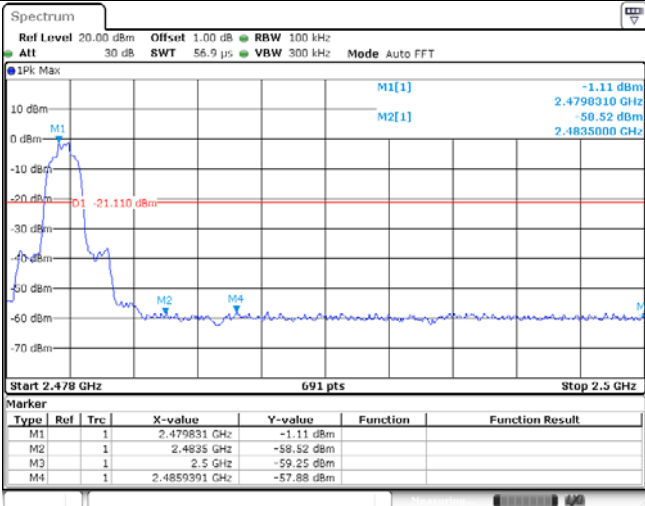
CH78
Hopping mode




Test Item:	Band edge	Modulation type:	$\pi/4$ DQPSK																																										
<p>CH00 No hopping mode</p>	 <p>Spectrum</p> <p>Rel Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep</p> <p>1Pk Max</p> <p>M1[1] 1.22 dBm 2.401770 GHz M2[1] 59.50 dBm 2.400000 GHz</p> <p>D1 -18.780 dBm</p> <p>M3 M4 M5</p> <p>Start 2.31 GHz 691 pts Stop 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40177 GHz</td> <td>1.22 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-53.50 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-59.69 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.27 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399768 GHz</td> <td>-51.26 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40177 GHz	1.22 dBm			M2	1		2.4 GHz	-53.50 dBm			M3	1		2.39 GHz	-59.69 dBm			M4	1		2.31 GHz	-59.27 dBm			M5	1		2.399768 GHz	-51.26 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40177 GHz	1.22 dBm																																									
M2	1		2.4 GHz	-53.50 dBm																																									
M3	1		2.39 GHz	-59.69 dBm																																									
M4	1		2.31 GHz	-59.27 dBm																																									
M5	1		2.399768 GHz	-51.26 dBm																																									
<p>CH00 Hopping mode</p>	 <p>Spectrum</p> <p>Rel Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 1.1 ms VBW 300 kHz Mode Auto Sweep</p> <p>1Pk Max</p> <p>M1[1] 1.24 dBm 2.403830 GHz M2[1] 54.21 dBm 2.400000 GHz</p> <p>D1 -18.760 dBm</p> <p>M3 M4 M5</p> <p>Start 2.31 GHz 691 pts Stop 2.405 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40383 GHz</td> <td>1.24 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-54.21 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-59.13 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-57.64 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399906 GHz</td> <td>-55.54 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40383 GHz	1.24 dBm			M2	1		2.4 GHz	-54.21 dBm			M3	1		2.39 GHz	-59.13 dBm			M4	1		2.31 GHz	-57.64 dBm			M5	1		2.399906 GHz	-55.54 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40383 GHz	1.24 dBm																																									
M2	1		2.4 GHz	-54.21 dBm																																									
M3	1		2.39 GHz	-59.13 dBm																																									
M4	1		2.31 GHz	-57.64 dBm																																									
M5	1		2.399906 GHz	-55.54 dBm																																									
<p>CH78 No hopping mode</p>	 <p>Spectrum</p> <p>Rel Level 20.00 dBm Offset 1.00 dB RBW 100 kHz Att 30 dB SWT 56.9 μs VBW 300 kHz Mode Auto FFT</p> <p>1Pk Max</p> <p>M1[1] -1.11 dBm 2.4798310 GHz M2[1] 58.52 dBm 2.4835000 GHz</p> <p>D1 -21.110 dBm</p> <p>M3 M4</p> <p>Start 2.478 GHz 691 pts Stop 2.5 GHz</p> <table border="1"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.479831 GHz</td> <td>-1.11 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-58.52 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-59.25 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4859391 GHz</td> <td>-57.88 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.479831 GHz	-1.11 dBm			M2	1		2.4835 GHz	-58.52 dBm			M3	1		2.5 GHz	-59.25 dBm			M4	1		2.4859391 GHz	-57.88 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.479831 GHz	-1.11 dBm																																									
M2	1		2.4835 GHz	-58.52 dBm																																									
M3	1		2.5 GHz	-59.25 dBm																																									
M4	1		2.4859391 GHz	-57.88 dBm																																									

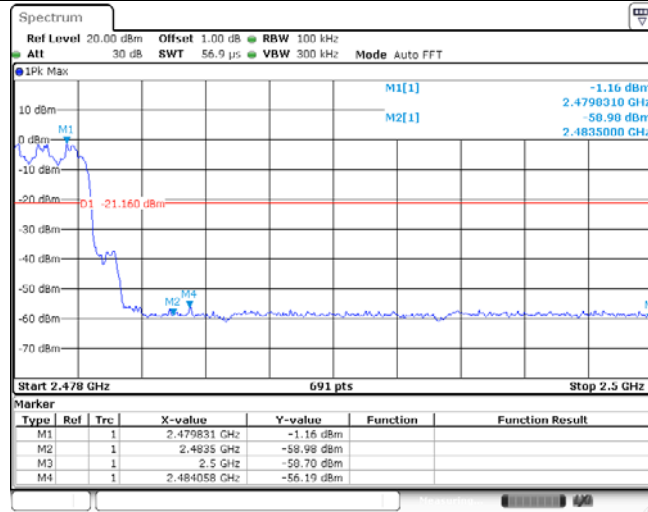
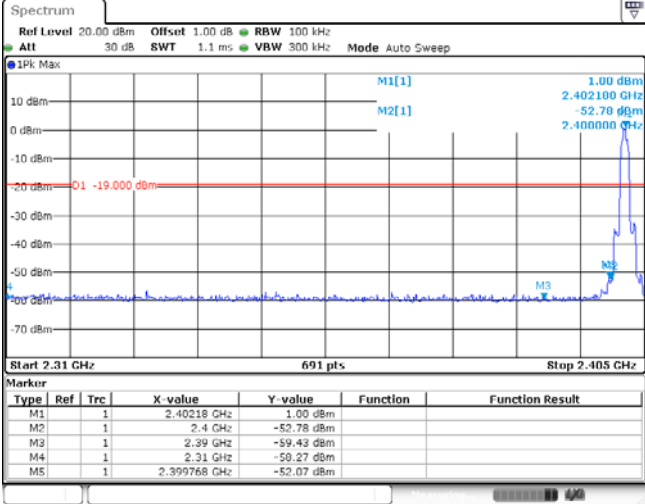
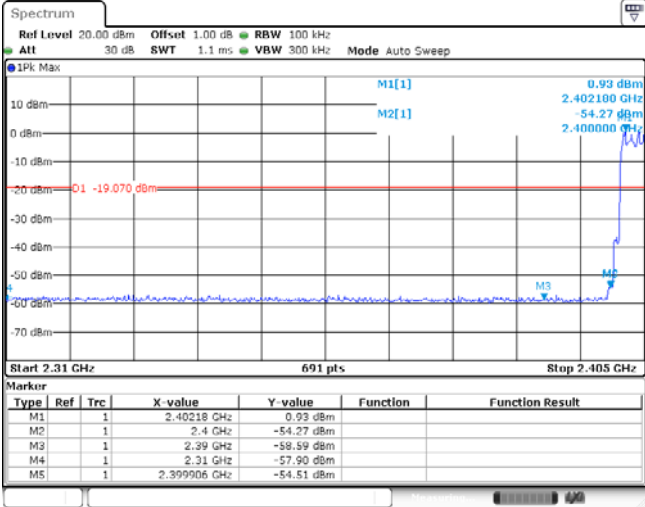
CH78
Hopping mode




Test Item:	Band edge	Modulation type:	8DPSK																																										
<p>CH00 No hopping mode</p>	 <table border="1" data-bbox="687 613 1334 734"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40218 GHz</td> <td>1.00 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-52.78 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-59.43 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-59.27 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399768 GHz</td> <td>-52.07 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40218 GHz	1.00 dBm			M2	1		2.4 GHz	-52.78 dBm			M3	1		2.39 GHz	-59.43 dBm			M4	1		2.31 GHz	-59.27 dBm			M5	1		2.399768 GHz	-52.07 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40218 GHz	1.00 dBm																																									
M2	1		2.4 GHz	-52.78 dBm																																									
M3	1		2.39 GHz	-59.43 dBm																																									
M4	1		2.31 GHz	-59.27 dBm																																									
M5	1		2.399768 GHz	-52.07 dBm																																									
<p>CH00 Hopping mode</p>	 <table border="1" data-bbox="687 1131 1334 1263"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.40218 GHz</td> <td>0.93 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4 GHz</td> <td>-54.27 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.39 GHz</td> <td>-58.59 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.31 GHz</td> <td>-57.90 dBm</td> <td></td> <td></td> </tr> <tr> <td>M5</td> <td>1</td> <td></td> <td>2.399906 GHz</td> <td>-54.51 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.40218 GHz	0.93 dBm			M2	1		2.4 GHz	-54.27 dBm			M3	1		2.39 GHz	-58.59 dBm			M4	1		2.31 GHz	-57.90 dBm			M5	1		2.399906 GHz	-54.51 dBm		
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.40218 GHz	0.93 dBm																																									
M2	1		2.4 GHz	-54.27 dBm																																									
M3	1		2.39 GHz	-58.59 dBm																																									
M4	1		2.31 GHz	-57.90 dBm																																									
M5	1		2.399906 GHz	-54.51 dBm																																									
<p>CH78 No hopping mode</p>	 <table border="1" data-bbox="687 1688 1334 1787"> <thead> <tr> <th>Type</th> <th>Ref</th> <th>Trc</th> <th>X-value</th> <th>Y-value</th> <th>Function</th> <th>Function Result</th> </tr> </thead> <tbody> <tr> <td>M1</td> <td>1</td> <td></td> <td>2.480149 GHz</td> <td>-1.18 dBm</td> <td></td> <td></td> </tr> <tr> <td>M2</td> <td>1</td> <td></td> <td>2.4835 GHz</td> <td>-60.11 dBm</td> <td></td> <td></td> </tr> <tr> <td>M3</td> <td>1</td> <td></td> <td>2.5 GHz</td> <td>-59.68 dBm</td> <td></td> <td></td> </tr> <tr> <td>M4</td> <td>1</td> <td></td> <td>2.4990435 GHz</td> <td>-58.04 dBm</td> <td></td> <td></td> </tr> </tbody> </table>			Type	Ref	Trc	X-value	Y-value	Function	Function Result	M1	1		2.480149 GHz	-1.18 dBm			M2	1		2.4835 GHz	-60.11 dBm			M3	1		2.5 GHz	-59.68 dBm			M4	1		2.4990435 GHz	-58.04 dBm									
Type	Ref	Trc	X-value	Y-value	Function	Function Result																																							
M1	1		2.480149 GHz	-1.18 dBm																																									
M2	1		2.4835 GHz	-60.11 dBm																																									
M3	1		2.5 GHz	-59.68 dBm																																									
M4	1		2.4990435 GHz	-58.04 dBm																																									

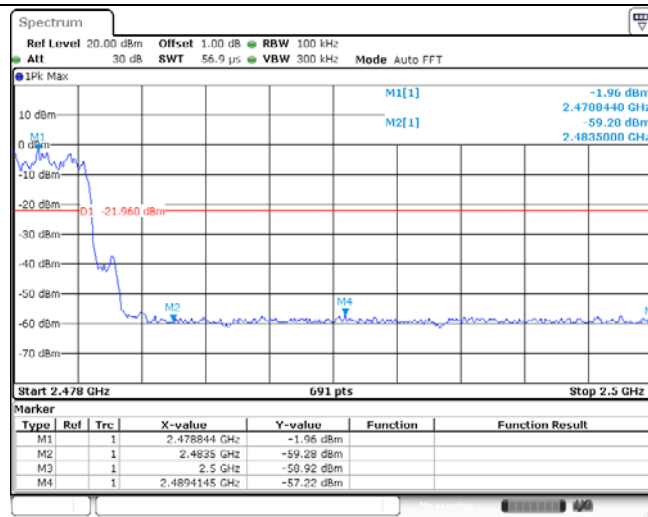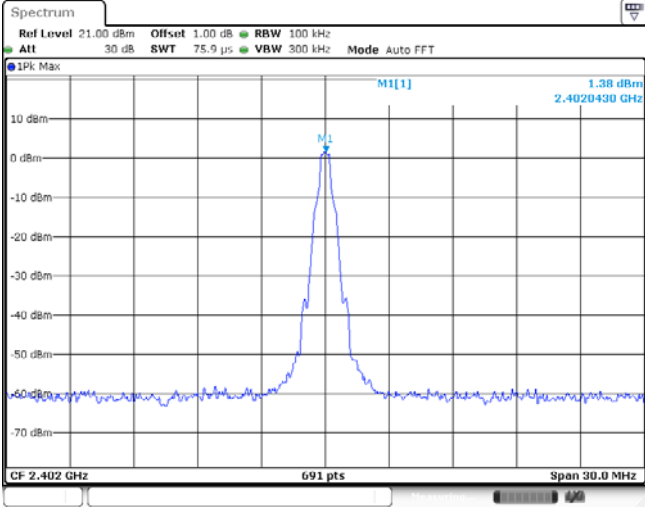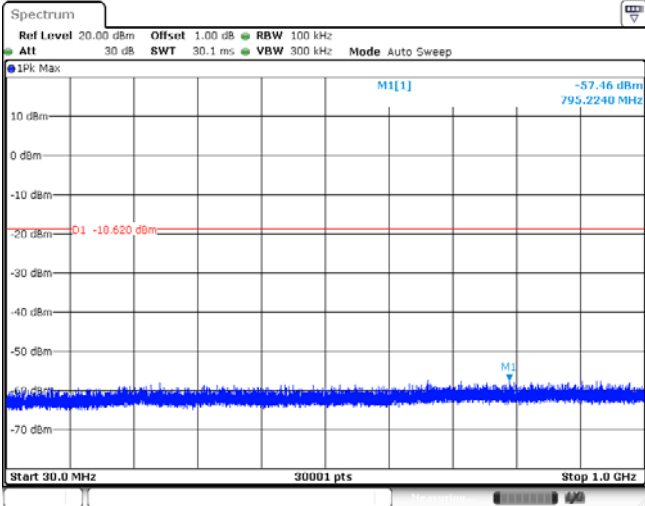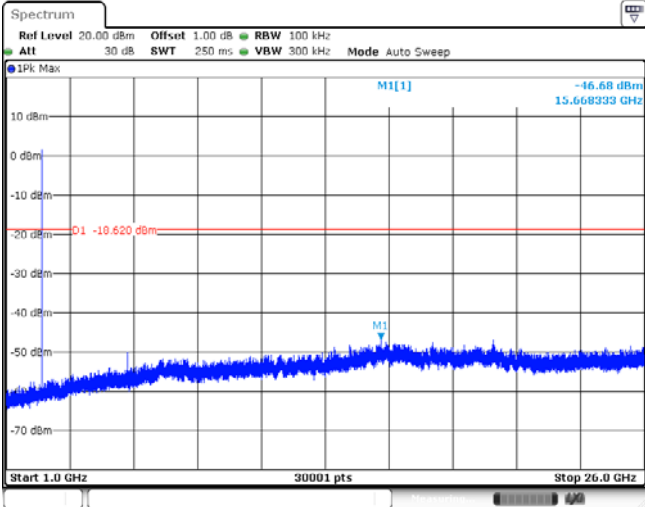CH78
Hoppig mode




Test Item:	SE	Modulation type:	GFSK
CH00 Reference level	 <p>Spectrum plot showing a single peak at 2.4020430 GHz with a level of 1.38 dBm. The plot includes parameters: Ref Level 21.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 100 kHz, Mode Auto FFT, and Span 30.0 MHz.</p>		
CH00 30MHz~1000MHz	 <p>Spectrum plot showing a noise floor at -57.46 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 100 kHz, Mode Auto Sweep, and Stop 1.0 GHz.</p>		
CH00 1GHz~26GHz	 <p>Spectrum plot showing a noise floor at -46.68 dBm. The plot includes parameters: Ref Level 20.00 dBm, Att 30 dB, Offset 1.00 dB, RBW 100 kHz, Mode Auto Sweep, and Stop 26.0 GHz.</p>		

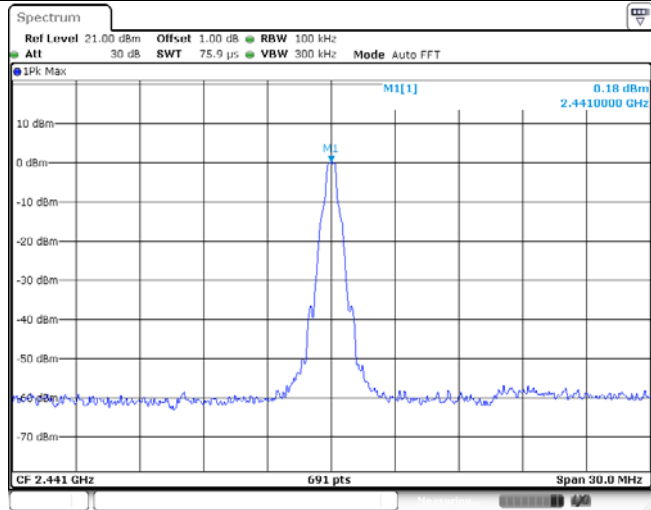
CH39
Reference level




CH39
30MHz~1000MHz

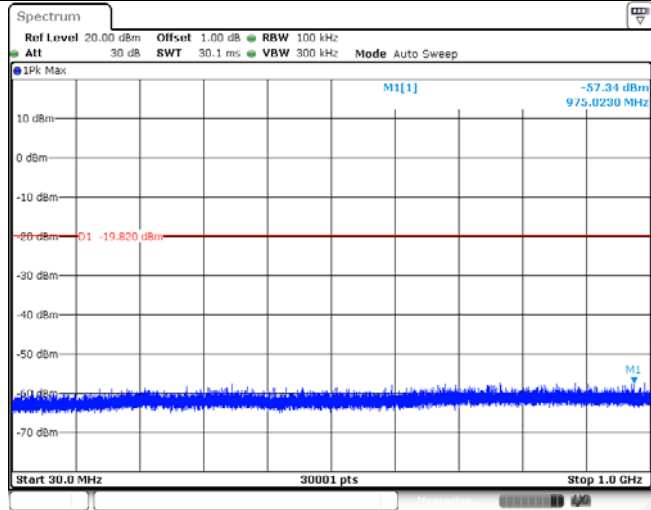


CH39
1GHz~26GHz

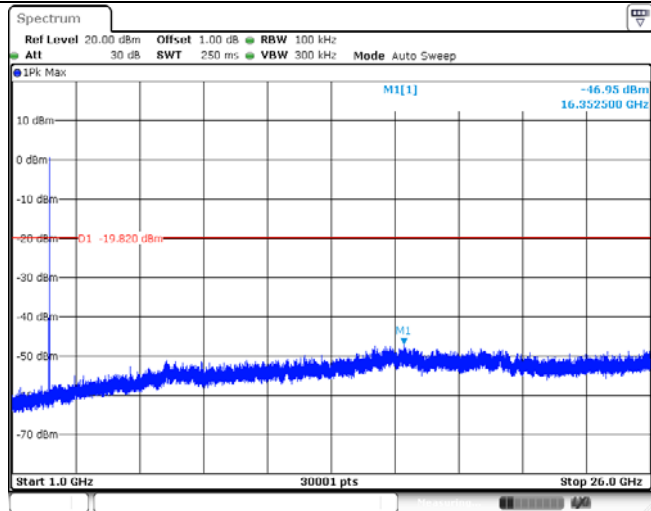


CH78
Reference level



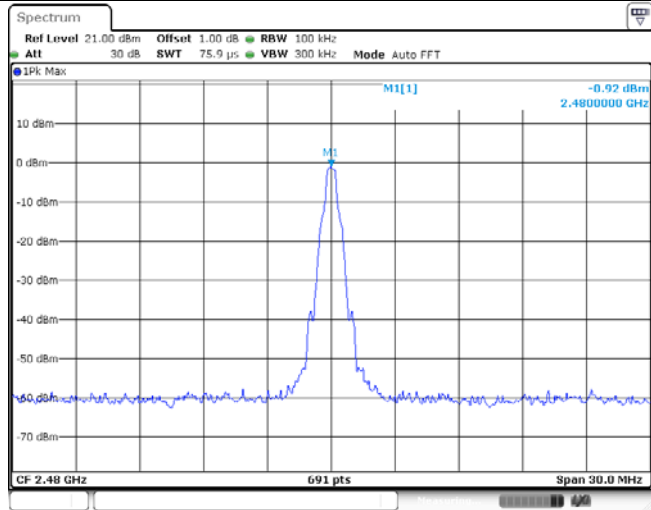





CH78
30MHz~1000MHz

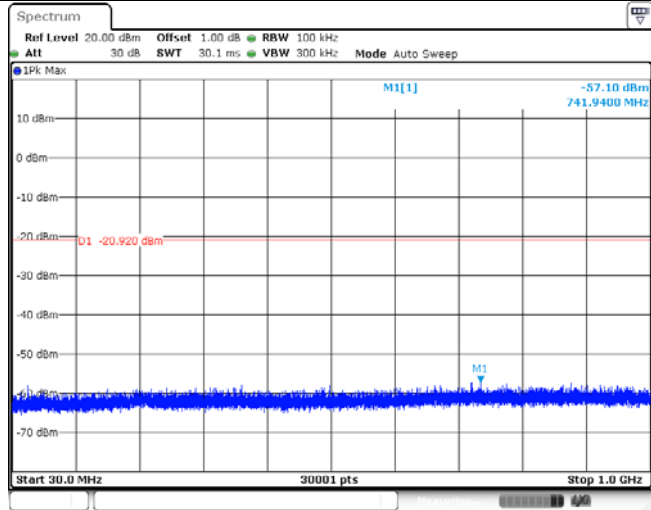


CH78
1GHz~26GHz

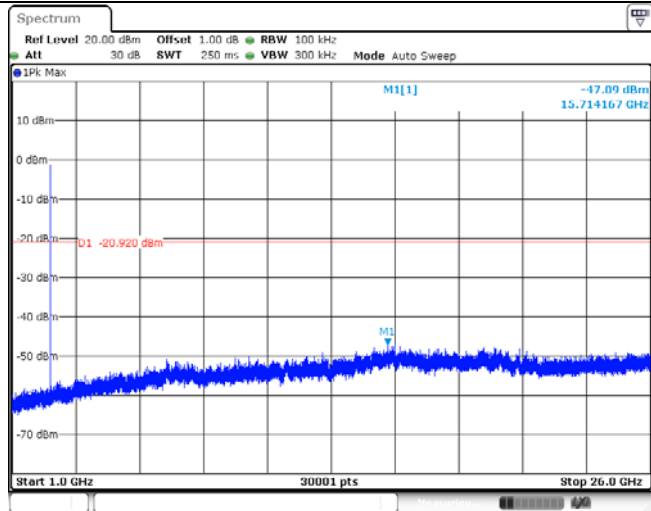

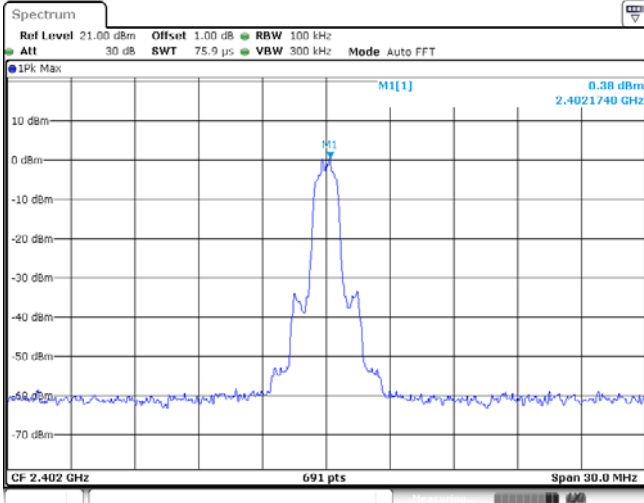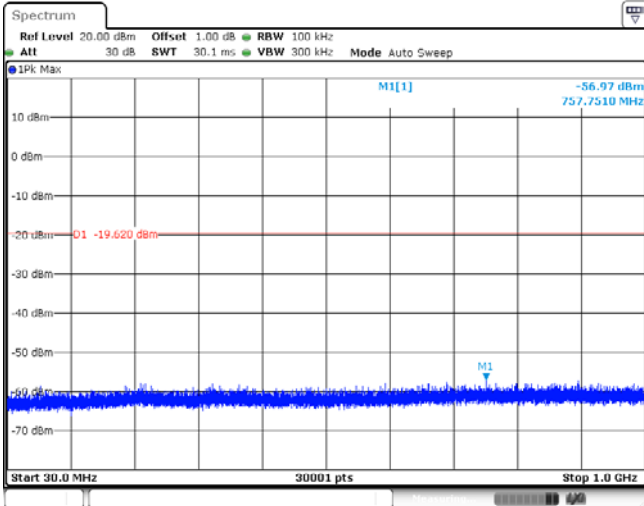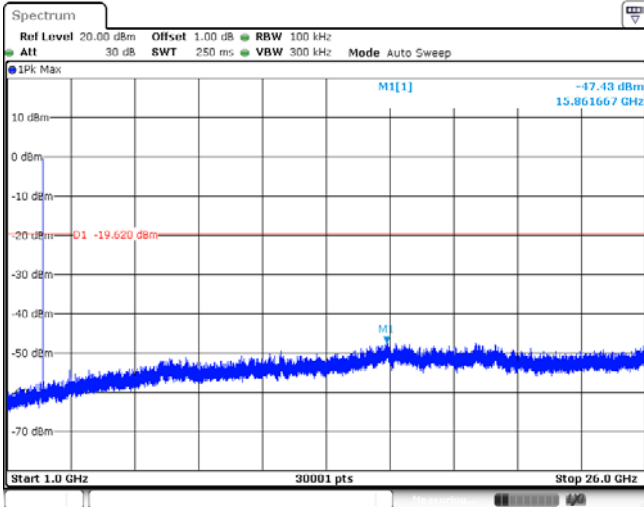
Test Item:	SE	Modulation type:	$\pi/4$ DQPSK
<p>CH00 Reference level</p>			
<p>CH00 30MHz~1000MHz</p>			
<p>CH00 1GHz~26GHz</p>			
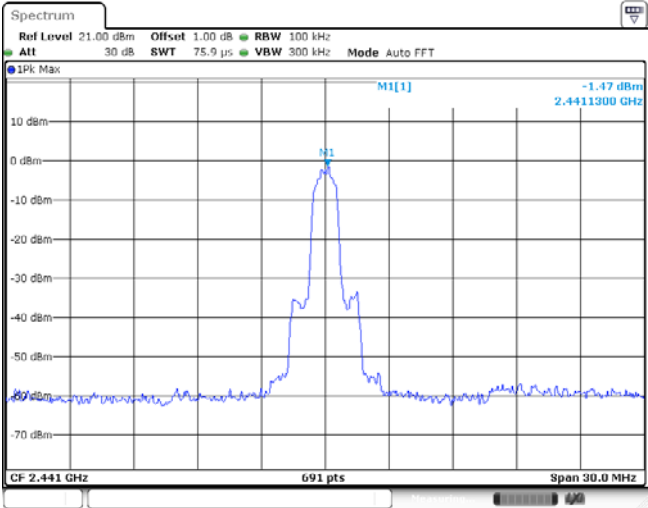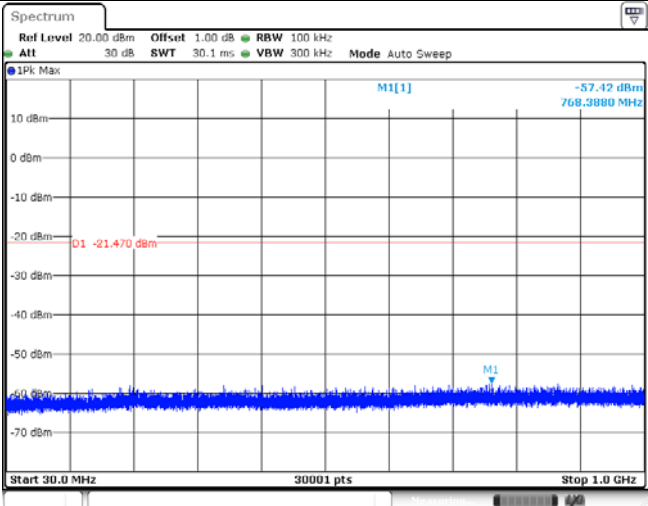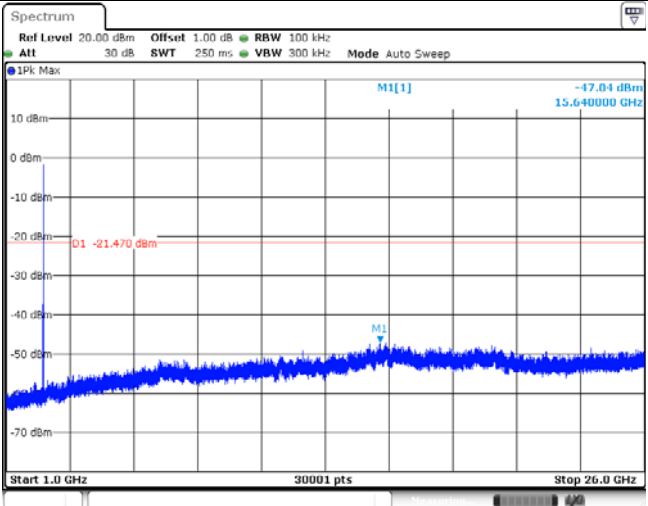
<p>CH39 Reference level</p>	 <p>The plot shows a single sharp peak at 2.441300 GHz. The y-axis represents power in dBm, ranging from -70 to 10. The peak is labeled M1[1] and has a value of -1.47 dBm. The plot title is 'Spectrum' and it includes parameters: Ref Level 21.00 dBm, Offset 1.00 dB, RBW 100 kHz, Alt 30 dB, SWT 75.9 μs, VBW 300 kHz, Mode Auto FFT. The x-axis is centered at CF 2.441 GHz with a span of 30.0 MHz and 691 points.</p>
<p>CH39 30MHz~1000MHz</p>	 <p>The plot shows a wideband noise floor. A red horizontal line indicates a level of -21.470 dBm. A small peak is labeled M1[1] at 768.3880 MHz with a level of -57.42 dBm. The plot title is 'Spectrum' and it includes parameters: Ref Level 20.00 dBm, Offset 1.00 dB, RBW 100 kHz, Alt 30 dB, SWT 30.1 ms, VBW 300 kHz, Mode Auto Sweep. The x-axis ranges from Start 30.0 MHz to Stop 1.0 GHz with 30001 points.</p>
<p>CH39 1GHz~26GHz</p>	 <p>The plot shows a wideband noise floor. A red horizontal line indicates a level of -21.470 dBm. A small peak is labeled M1[1] at 15.640000 GHz with a level of -47.04 dBm. The plot title is 'Spectrum' and it includes parameters: Ref Level 20.00 dBm, Offset 1.00 dB, RBW 100 kHz, Alt 30 dB, SWT 250 ms, VBW 300 kHz, Mode Auto Sweep. The x-axis ranges from Start 1.0 GHz to Stop 26.0 GHz with 30001 points.</p>

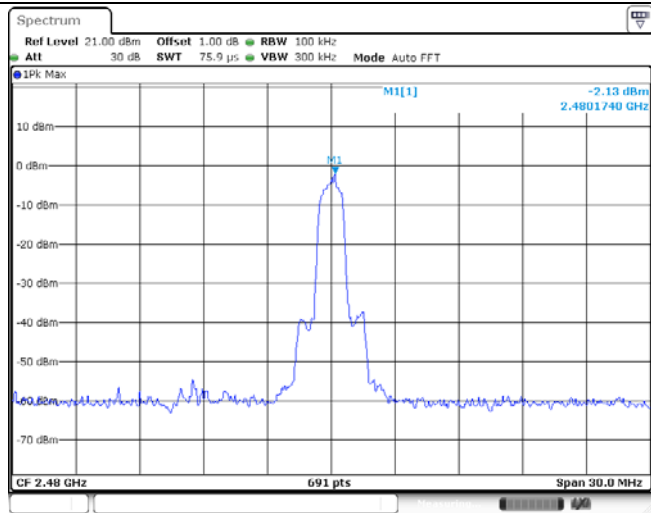
CH78
Reference level









CH78
30MHz~1000MHz

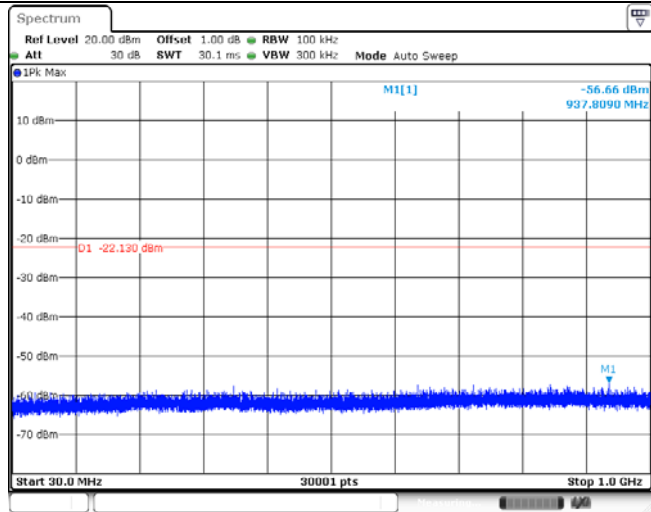


CH78
1GHz~26GHz

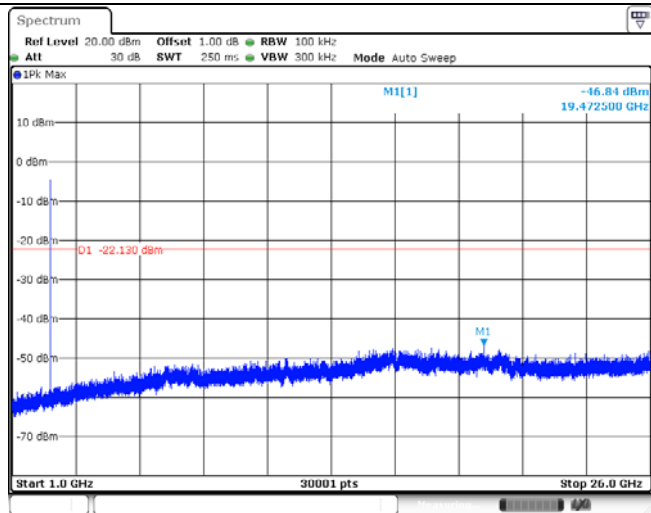

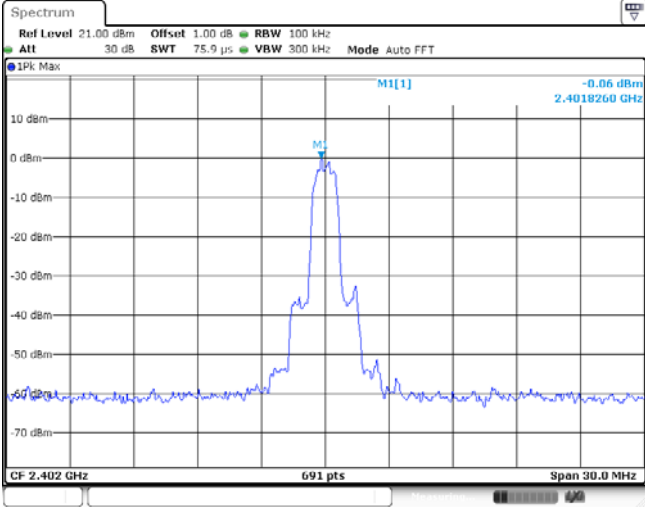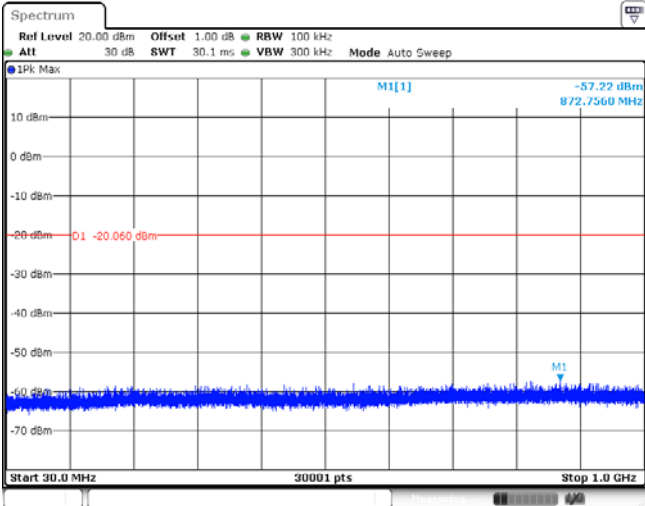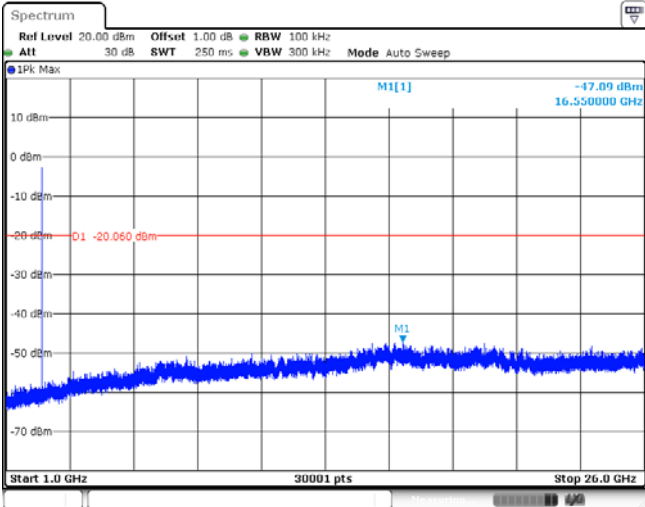
Test Item:	SE	Modulation type:	8DPSK
<p>CH00 Reference level</p>			
<p>CH00 30MHz~1000MHz</p>			
<p>CH00 1GHz~26GHz</p>			
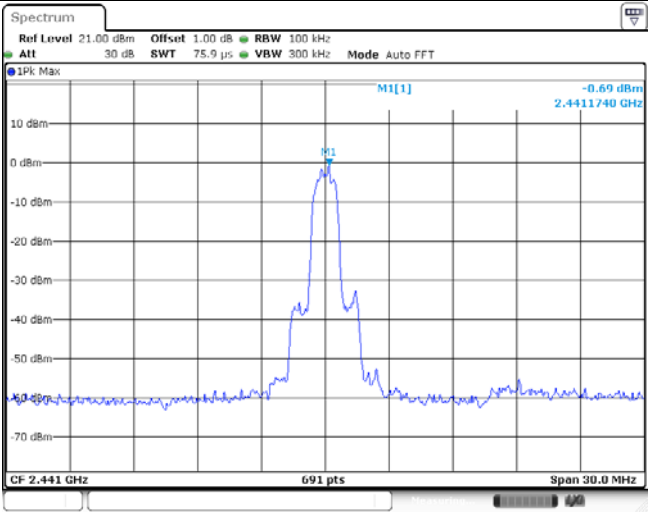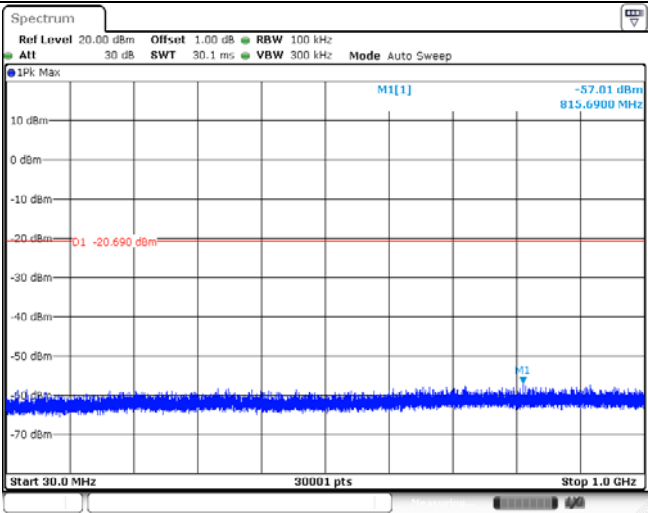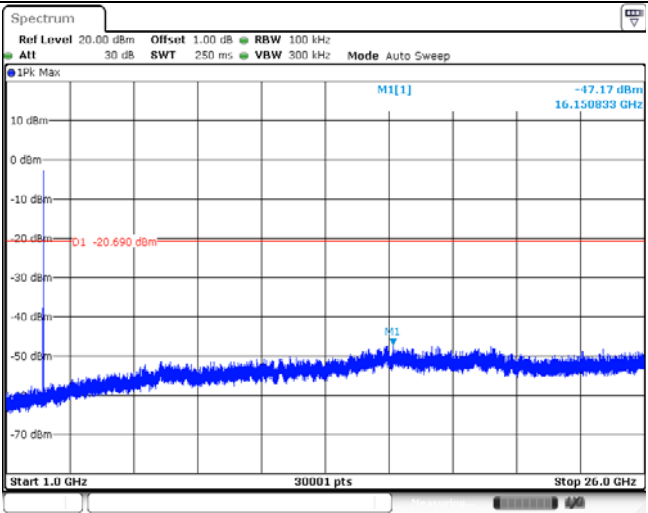
<p>CH39 Reference level</p>	
<p>CH39 30MHz~1000MHz</p>	
<p>CH39 1GHz~26GHz</p>	

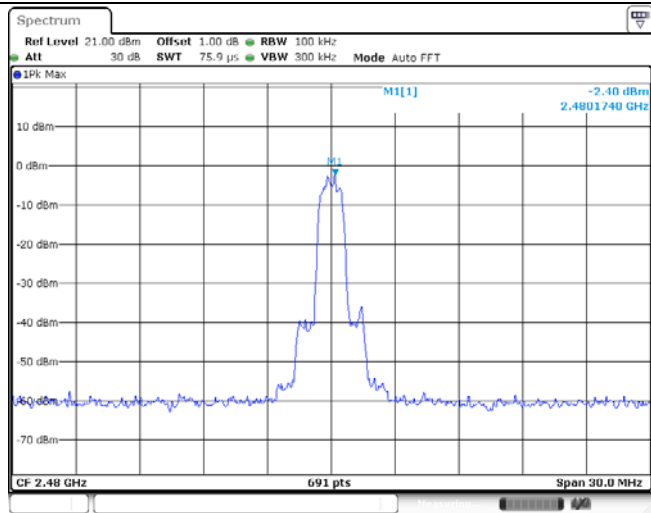
CH78
Reference level



CH78
30MHz~1000MHz

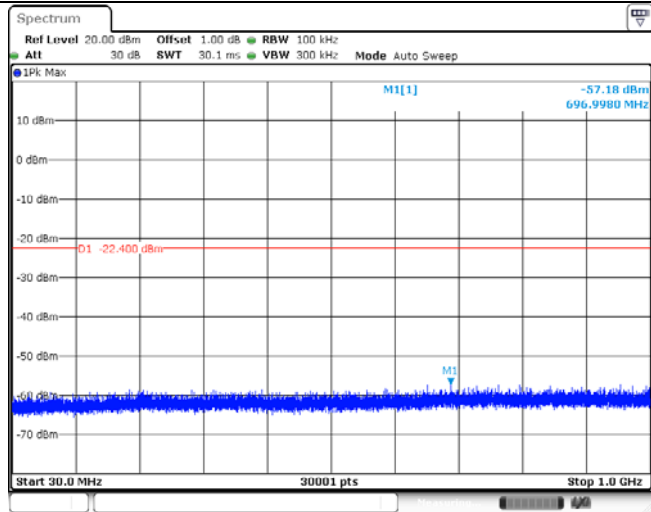

CH78
1GHz~26GHz

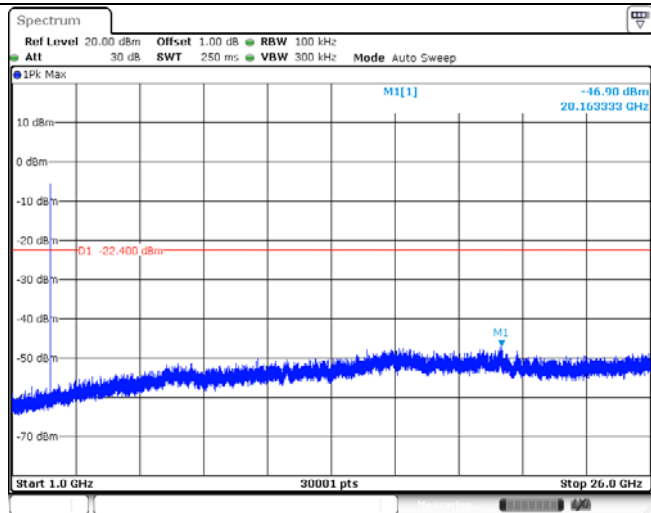

5.11. Spurious Emissions (radiated)


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30 MHz ~ 88 MHz	40.00	Quasi-peak
88 MHz ~ 216 MHz	43.50	Quasi-peak
216 MHz ~ 960 MHz	46.00	Quasi-peak
960 MHz ~ 1 GHz	54.00	Quasi-peak
Above 1 GHz	54.00	Average
	74.00	Peak

TEST CONFIGURATION

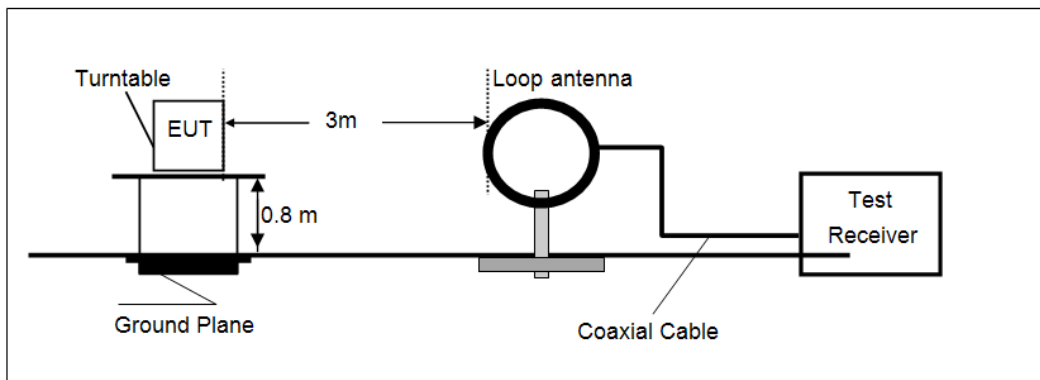
- Below 30 MHz



- 30 MHz ~1000 MHz

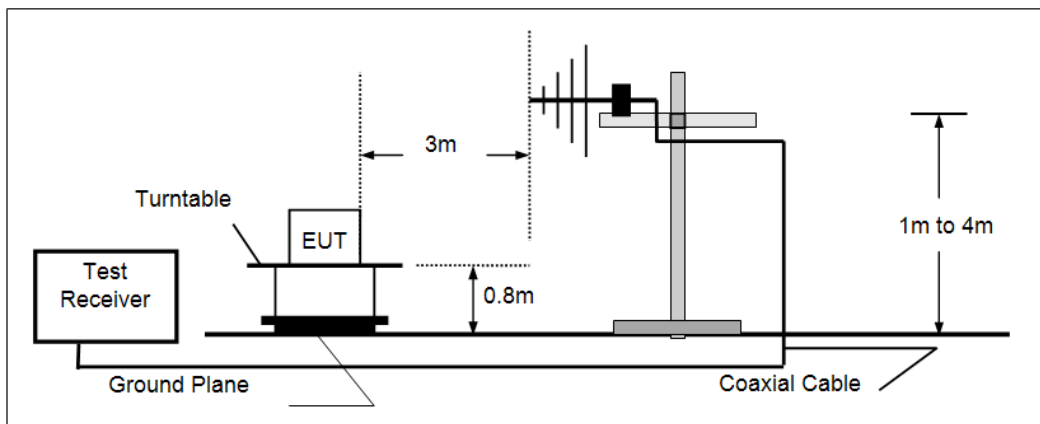

- Above 1 GHz

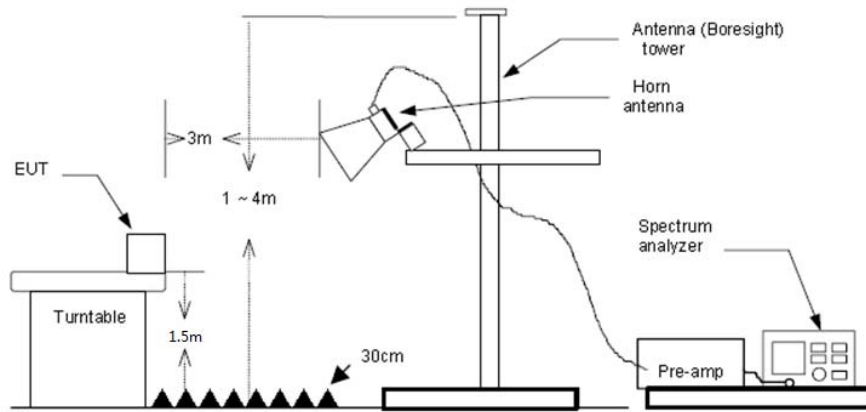

TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table with 0.8 meter above ground for below 1GHz, 1.5 meter above ground for above 1GHz.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Below 1 GHz:
 - RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;
 - If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
 - (3) From 1 GHz to 10th harmonic:
 - RBW=1 MHz, VBW=3 MHz Peak detector for Peak value
 - RBW=1 MHz, VBW=10 Hz Peak detector for Average value.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Passed Not Applicable

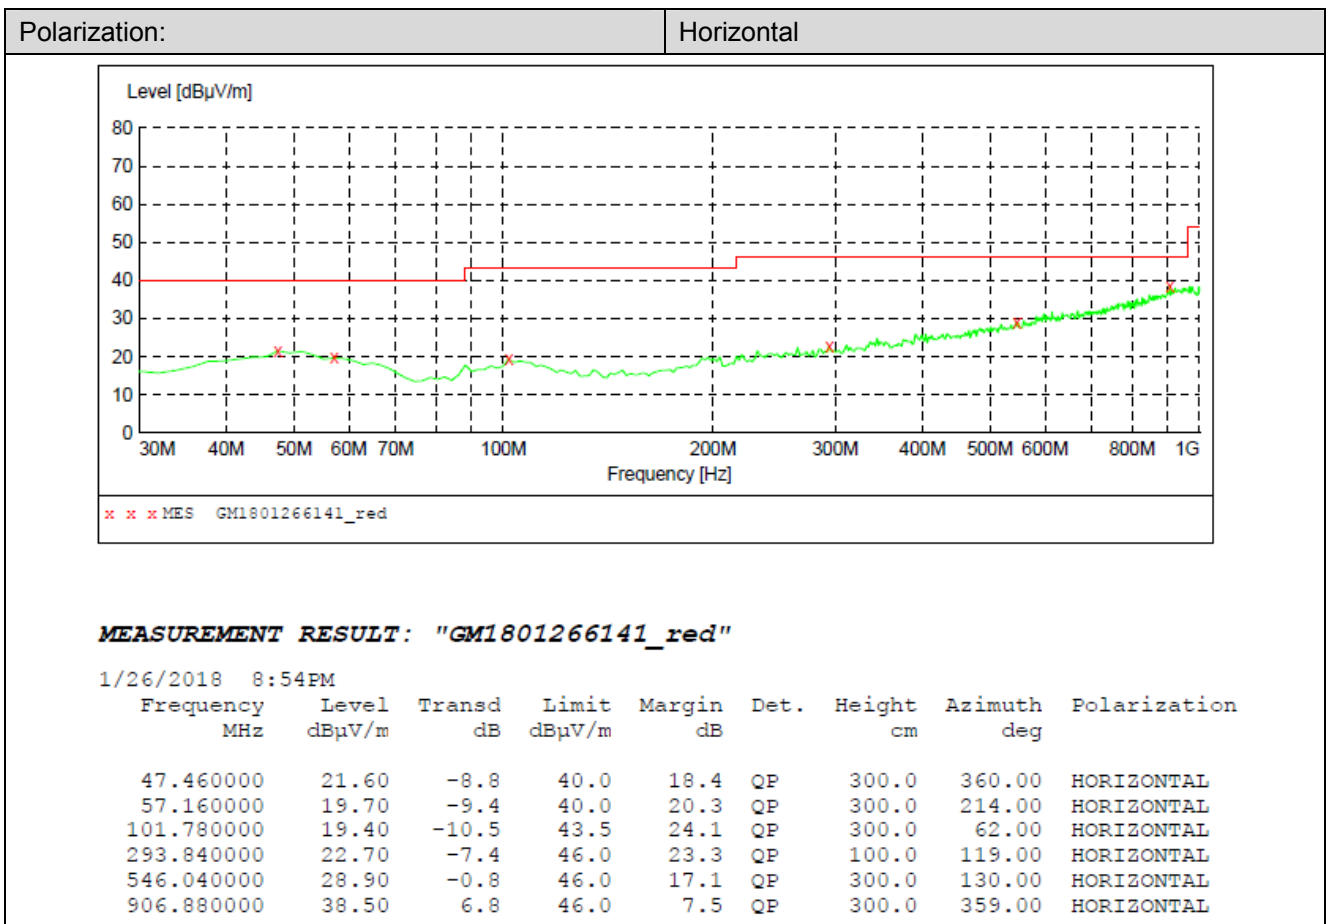
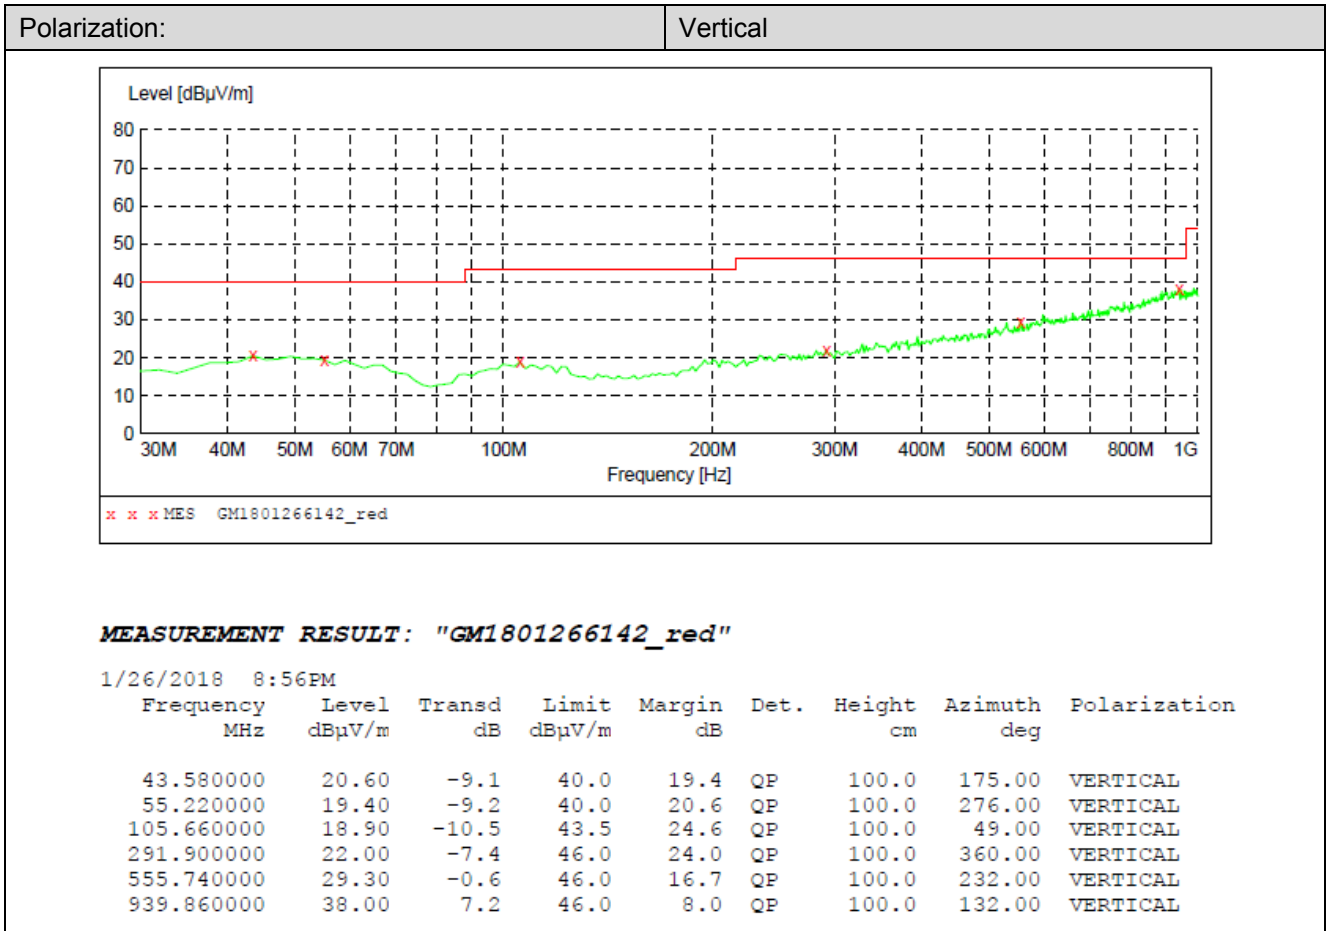
Note:

- 1) Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2) The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3) Below 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation High channel which it was worst case, so only the worst case's data on the test report.
- 4) Above 1 GHz, Have pre-scan all modulation mode, found the GFSK modulation which it was worst case, so only the worst case's data on the test report
- 5) The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.

➤ **9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

➤ 30 MHz ~ 1 GHz



➤ 1 GHz ~ 25 GHz

CH00									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2590.96	40.30	27.75	6.90	37.84	37.11	74.00	-36.89	Vertical	Peak
3607.26	35.27	29.30	8.28	38.27	34.58	74.00	-39.42	Vertical	Peak
4809.50	38.34	31.58	9.55	36.93	42.54	54.00	-11.46	Vertical	Average
4809.50	55.16	31.58	9.55	36.93	59.36	74.00	-14.64	Vertical	Peak
7209.01	23.56	36.21	11.87	35.07	36.57	54.00	-17.43	Vertical	Average
7209.02	40.32	36.21	11.87	35.07	53.33	74.00	-20.67	Vertical	Peak
3135.99	34.85	28.80	7.64	38.21	33.08	74.00	-40.92	Horizontal	Peak
3607.26	39.34	29.30	8.28	38.27	38.65	74.00	-35.35	Horizontal	Peak
4809.50	31.41	31.58	9.55	36.93	35.61	54.00	-18.39	Horizontal	Average
4809.50	47.30	31.58	9.55	36.93	51.50	74.00	-22.50	Horizontal	Peak
8681.17	32.26	37.79	12.98	34.42	48.61	74.00	-25.39	Horizontal	Peak

CH39									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
2761.20	32.97	28.10	7.28	38.26	30.09	74.00	-43.91	Vertical	Peak
3662.78	35.80	29.30	8.34	38.26	35.18	74.00	-38.82	Vertical	Peak
4883.52	36.39	31.43	9.59	36.73	40.68	54.00	-13.32	Vertical	Average
4883.52	51.85	31.43	9.59	36.73	56.14	74.00	-17.86	Vertical	Peak
7319.96	37.37	36.30	11.99	34.92	50.74	74.00	-23.26	Vertical	Peak
2584.37	41.37	27.71	6.90	37.84	38.14	74.00	-35.86	Horizontal	Peak
3662.78	37.04	29.30	8.34	38.26	36.42	74.00	-37.58	Horizontal	Peak
4883.52	29.63	31.43	9.59	36.73	33.92	54.00	-20.08	Horizontal	Average
4883.52	46.01	31.43	9.59	36.73	50.30	74.00	-23.70	Horizontal	Peak
9985.76	31.34	39.10	13.55	33.33	50.66	74.00	-23.34	Horizontal	Peak

CH78									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	Test value
1273.57	36.31	26.23	4.79	36.53	30.80	74.00	-43.20	Vertical	Peak
2584.37	42.77	27.71	6.90	37.84	39.54	74.00	-34.46	Vertical	Peak
4958.68	34.64	31.46	9.64	36.52	39.22	54.00	-14.78	Vertical	Average
4958.68	47.86	31.46	9.64	36.52	52.44	74.00	-21.56	Vertical	Peak
7451.57	31.64	36.20	12.24	34.86	45.22	74.00	-28.78	Vertical	Peak
2577.80	34.67	27.67	6.89	37.85	31.38	74.00	-42.62	Horizontal	Peak
3719.15	36.41	29.36	8.41	38.25	35.93	74.00	-38.07	Horizontal	Peak
4958.68	26.63	31.46	9.64	36.52	31.21	54.00	-22.79	Horizontal	Average
4958.68	42.95	31.46	9.64	36.52	47.53	74.00	-26.47	Horizontal	Peak
9909.80	32.40	39.10	13.59	34.30	50.79	74.00	-23.21	Horizontal	Peak

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

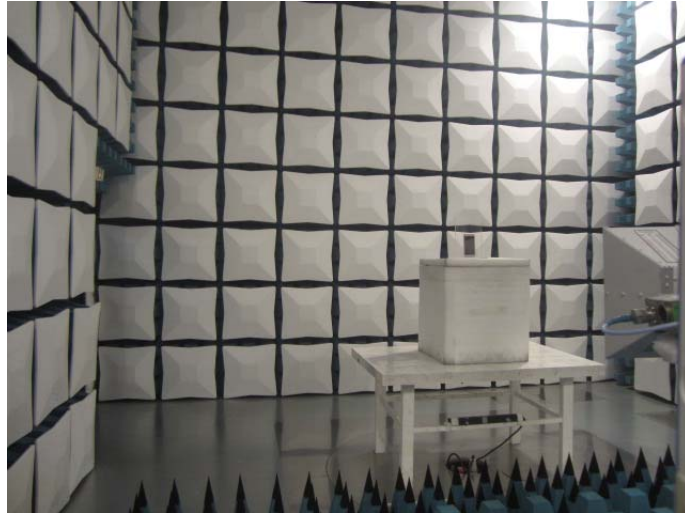
6. TEST SETUP PHOTOS

Conducted Emissions (AC Mains)



Radiated Emissions





7. EXTERANAL AND INTERNAL PHOTOS

Reference to the test report No.: TRE1801017201.

.....End of Report.....