



TEST REPORT

Report Reference No...... : **TRE18030096** R/C.....: 69720
FCC ID..... : **ZSW-30-065**
Applicant's name..... : **b mobile HK Limited**
 Address.....: Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung;New Territories, HONG KONG
 Manufacturer.....: b mobile HK Limited
 Address.....: Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; HONG KONG
Test item description : **Mobile Phone**
 Trade Mark: Bmobile
 Model/Type reference.....: AX1073+
 Listed Model(s): -
Standard : **FCC 47 CFR Part2.1093**
ANSI/IEEE C95.1: 1999
IEEE 1528: 2013
 Date of receipt of test sample.....: Mar.13, 2018
 Date of testing.....: Mar.13, 2018- Mar.21, 2018
 Date of issue.....: Apr.02, 2018
Result.....: **PASS**

Compiled by
 (position+printedname+signature)....: File administrators: Charley Wu 
 Supervised by
 (position+printedname+signature)....: Test Engineer: Charley Wu 
 Approved by
 (position+printedname+signature)....: Manager: Hans Hu 

Testing Laboratory Name : **Shenzhen Huatongwei International Inspection Co., Ltd**
 Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.
 This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Contents

<u>1.</u>	<u>Test Standards and Report version</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version information	3
<u>2.</u>	<u>Summary</u>	<u>4</u>
2.1.	Client Information	4
2.2.	Product Description	4
<u>3.</u>	<u>Test Environment</u>	<u>6</u>
3.1.	Test laboratory	6
3.2.	Test Facility	6
<u>4.</u>	<u>Equipments Used during the Test</u>	<u>7</u>
<u>5.</u>	<u>Measurement Uncertainty</u>	<u>8</u>
<u>6.</u>	<u>SAR Measurements System Configuration</u>	<u>10</u>
6.1.	SAR Measurement Set-up	10
6.2.	DASY5 E-field Probe System	11
6.3.	Phantoms	12
6.4.	Device Holder	12
<u>7.</u>	<u>SAR Test Procedure</u>	<u>13</u>
7.1.	Scanning Procedure	13
7.2.	Data Storage and Evaluation	15
<u>8.</u>	<u>Position of the wireless device in relation to the phantom</u>	<u>17</u>
8.1.	Head Position	17
8.2.	Body Position	18
8.3.	Hotspot Mode Exposure conditions	18
<u>9.</u>	<u>System Check</u>	<u>19</u>
9.1.	Tissue Dielectric Parameters	19
9.2.	SAR System Check	22
<u>10.</u>	<u>SAR Exposure Limits</u>	<u>37</u>
<u>11.</u>	<u>Conducted Power Measurement Results</u>	<u>38</u>
<u>12.</u>	<u>Maximum Tune-up Limit</u>	<u>54</u>
<u>13.</u>	<u>Antenna Location</u>	<u>61</u>
<u>14.</u>	<u>SAR Measurement Results</u>	<u>62</u>
<u>15.</u>	<u>Simultaneous Transmission analysis</u>	<u>102</u>
<u>16.</u>	<u>TestSetup Photos</u>	<u>112</u>
<u>17.</u>	<u>External and Internal Photos of the EUT</u>	<u>115</u>

1 . Test Standards and Report version

1.1. Test Standards

The tests were performed according to following standards:

[FCC 47 Part 2.1093](#): Radiofrequency Radiation Exposure Evaluation:Portable Devices

[IEEE Std C95.1, 1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz.

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB 865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB 447498 D01 General RF Exposure Guidance v06](#): Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB 248227 D01 802.11 Wi-Fi SAR v02r02](#): SAR Measurement Procedures for 802.11 a/b/g Transmitters

[KDB 648474 D04 Handset SAR v01r03](#): SAR Evaluation Considerations for Wireless Handsets

[KDB 941225 D01 3G SAR Procedures v03r01](#): SAR Measurement Procedures for 3G Devices

[KDB 941225 D06 Hotspot Mode v02r01](#): SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities

[KDB 941225 D05 SAR for LTE Devices v02r05](#): SAR Evaluation Considerations for LTE Devices

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2018-04-02	Original

2. Summary

2.1. Client Information

Applicant:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung;New Territories, HONG KONG
Manufacturer:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung;New Territories, HONG KONG

2.2. Product Description

Name of EUT:	Mobile Phone			
Trade Mark:	Bmobile			
Model No.:	AX1073+			
Listed Model(s):	-			
Power supply:	DC 3.7V			
Device Category:	Portable			
Product stage:	Production unit			
RF Exposure Environment:	General Population / Uncontrolled			
IMEI:	321625100000120			
Hardware version:	W4G01_MB_V3.0_20170406			
Software version:	Bmobile_AX1073_TIGO_LAT_V001			
Maximum SAR Value				
Separation Distance:	Head: 0mm Body: 10mm			
Max Report SAR Value (1g):	Test location:	PCE	DTS	Simultaneous TX
	Head:	0.420 W/Kg	0.472 W/Kg	0.892 W/Kg
	Body:	0.689 W/Kg	0.442 W/Kg	1.131 W/Kg
	Hotspot:	0.689 W/Kg	0.442 W/Kg	1.131 W/Kg
GSM				
Support Network:	GSM, GPRS, EGPRS			
Support Band:	GSM850, PCS1900			
Modulation:	GSM/GPRS/EGPRS: GMSK			
GPRS Class:	12			
EGPRS Class:	12			
Antenna type:	Integral Antenna			
WCDMA				
Operation Band:	WCDMA Band II, WCDMA Band V			
Power Class:	Power Class 3			
Modulation Type:	QPSK/16QAM/64QAM/HSUPA/HSDPA			
DC-HSUPA Release Version:	Not Supported			
Antenna type:	Integral Antenna			
LTE				

Operation Band:	FDD Band 2,FDD Band 4, FDD Band 5, FDD Band 7, FDD Band 17
Modulation Type:	QPSK,16QAM
Antenna type:	Integral Antenna
WIFI	
Supported type:	802.11b/802.11g/802.11n(HT20)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)
Operation frequency:	2412MHz~2462MHz
Channel number:	11
Channel separation:	5MHz
Antenna type:	PIFA
Bluetooth	
Version:	Supported BT4.0+EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PIFA
Bluetooth-BLE	
Version:	Supported BT4.0+BLE
Modulation:	GFSK
Operation frequency:	2402MHz~2480MHz
Channel number:	40
Channel separation:	2MHz
Antenna type:	PIFA
Remark:	
1. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power	

3. Test Environment

3.1. Test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

3.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025:2005 General Requirements) for the Competence of Testing and Calibration Laboratories

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

4. Equipments Used during the Test

Test Equipment	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
Data Acquisition Electronics DAEx	SPEAG	DAE4	1315	2017/08/15	2018/08/14
E-field Probe	SPEAG	EX3DV4	3842	2017/08/15	2018/08/14
System Validation Dipole	SPEAG	D750V3	1156	2016/02/02	2019/02/01
System Validation Dipole	SPEAG	D835V2	4d134	2017/10/27	2020/10/26
System Validation Dipole	SPEAG	D1750V2	1062	2017/10/26	2020/10/25
System Validation Dipole	SPEAG	D1900V2	5d150	2017/10/26	2020/10/25
System Validation Dipole	SPEAG	D2450V2	884	2017/10/26	2020/10/25
System Validation Dipole	SPEAG	D2600V2	1120	2016/02/03	2019/02/02
Dielectric Assessment Kit	SPEAG	DAK-3.5	1038	2016/08/25	2019/08/24
Network analyzer	Agilent	N9923A	MY51491493	2017/09/05	2018/09/04
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMU200	112012	2017/11/27	2018/11/26
Universal Radio Communication Tester	ROHDE & SCHWARZ	CMW500	155690	2017/04/17	2018/04/16
Signal Generator	ROHDE & SCHWARZ	SMB100A	175248	2017/09/02	2018/09/01
Power meter	Agilent	N1914A	MY52090010	2017/03/23	2018/03/22
Power sensor	Agilent	E9304A	MY52140008	2017/03/23	2018/03/22
Power sensor	Agilent	E9301H	MY54470001	2017/06/02	2018/06/01
Power Amplifier	Mini-Circuits	ZHL-42W	QA1202003	2017/11/27	2018/11/26
Dual Directional Coupler	Agilent	772D	MY46151257	2017/03/23	2018/03/22

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix A.
2. Referring to KDB865664 D01, the dipole calibration interval can be extended to 3 years with justification. The dipole are also not physically damaged or repaired during the interval.

5. Measurement Uncertainty

Measurement Uncertainty										
No.	Error Description	Type	Uncertainty Value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement System										
1	Probe calibration	B	6.0%	N	1	1	1	6.0%	6.0%	∞
2	Axial isotropy	B	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	∞
3	Hemispherical isotropy	B	9.60%	R	$\sqrt{3}$	0.7	0.7	3.90%	3.90%	∞
4	Boundary Effects	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
5	Probe Linearity	B	4.70%	R	$\sqrt{3}$	1	1	2.70%	2.70%	∞
6	Detection limit	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
7	RF ambient conditions-noise	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
8	RF ambient conditions-reflection	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
9	Response time	B	0.80%	R	$\sqrt{3}$	1	1	0.50%	0.50%	∞
10	Integration time	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	∞
11	RF ambient	B	3.00%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
12	Probe positioned mech. restrictions	B	0.40%	R	$\sqrt{3}$	1	1	0.20%	0.20%	∞
13	Probe positioning with respect to phantom shell	B	2.90%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
14	Max.SAR evaluation	B	3.90%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
Test Sample Related										
15	Test sample positioning	A	1.86%	N	1	1	1	1.86%	1.86%	∞
16	Device holder uncertainty	A	1.70%	N	1	1	1	1.70%	1.70%	∞
17	Drift of output power	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	∞
Phantom and Set-up										
18	Phantom uncertainty	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
19	Liquid conductivity (target)	B	5.00%	R	$\sqrt{3}$	0.64	0.43	1.80%	1.20%	∞
20	Liquid conductivity (meas.)	A	0.50%	N	1	0.64	0.43	0.32%	0.26%	∞
21	Liquid permittivity (target)	B	5.00%	R	$\sqrt{3}$	0.64	0.43	1.80%	1.20%	∞
22	Liquid permittivity (meas.)	A	0.16%	N	1	0.64	0.43	0.10%	0.07%	∞
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$		/	/	/	/	9.79%	9.67%	∞
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		R	K=2	/	/	19.57%	19.34%	∞

System Check Uncertainty										
No.	Error Description	Type	Uncertainty Value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement System										
1	Probe calibration	B	6.0%	N	1	1	1	6.0%	6.0%	∞
2	Axial isotropy	B	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	∞
3	Hemispherical isotropy	B	9.60%	R	$\sqrt{3}$	0.7	0.7	3.90%	3.90%	∞
4	Boundary Effects	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
5	Probe Linearity	B	4.70%	R	$\sqrt{3}$	1	1	2.70%	2.70%	∞
6	Detection limit	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
7	RF ambient conditions-noise	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
8	RF ambient conditions-reflection	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
9	Response time	B	0.80%	R	$\sqrt{3}$	1	1	0.50%	0.50%	∞
10	Integration time	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	∞
11	RF ambient	B	3.00%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
12	Probe positioned mech. restrictions	B	0.40%	R	$\sqrt{3}$	1	1	0.20%	0.20%	∞
13	Probe positioning with respect to phantom shell	B	2.90%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
14	Max.SAR evalation	B	3.90%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
System validation source-dipole										
15	Deviation of experimental dipole from numerical dipole	A	1.58%	N	1	1	1	1.58%	1.58%	∞
16	Dipole axis to liquid distance	A	1.35%	N	1	1	1	1.35%	1.35%	∞
17	Input power and SAR drift	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
Phantom and Set-up										
18	Phantom uncertainty	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
20	Liquid conductivity (meas.)	A	0.50%	N	1	0.64	0.43	0.32%	0.26%	∞
22	Liquid cpermittivity (meas.)	A	0.16%	N	1	0.64	0.43	0.10%	0.07%	∞
Combined standard uncertainty			$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$	/	/	/	/	8.80%	8.79%	∞
Expanded uncertainty (confidence interval of 95 %)			$u_e = 2u_c$	R	K=2	/	/	17.59%	17.58%	∞

6. SAR Measurements System Configuration

6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

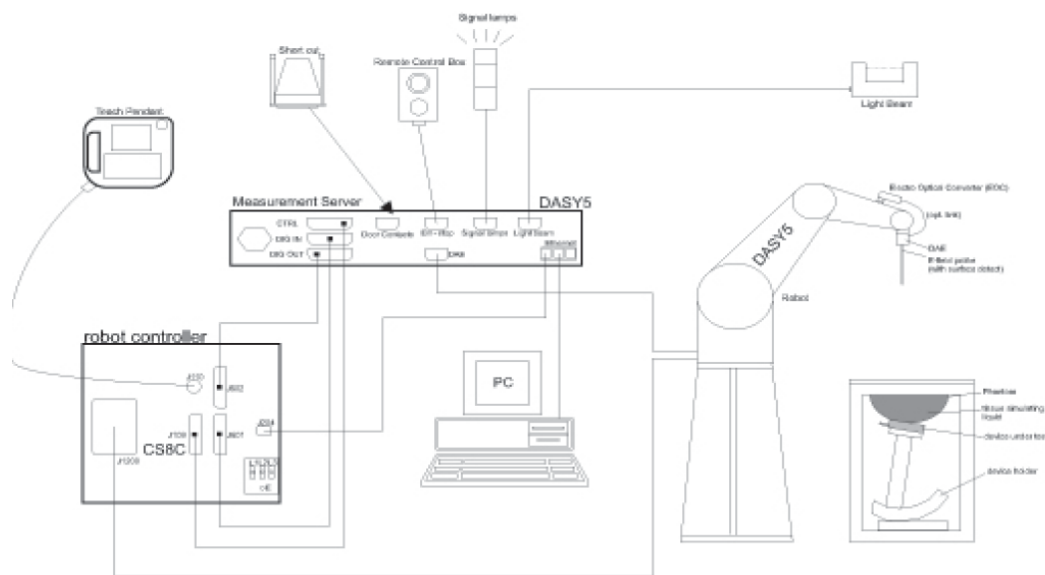

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

● Probe Specification


Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 6 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



● Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

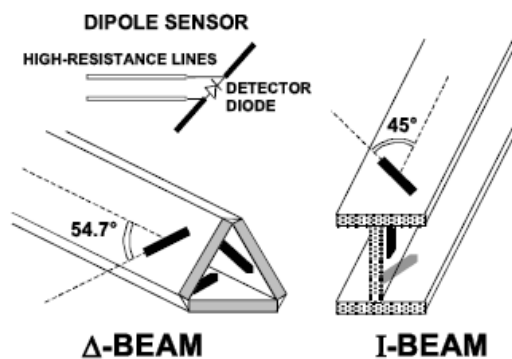

6.3. Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7. SAR Test Procedure

7.1. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

Zoom Scan

After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm.

Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard’s method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space.

They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard’s method for extrapolation.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

Table 1: Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v04

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm \pm 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm \pm 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.</p> <p>* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>				

7.2. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors),s together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DA4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi:	compensated signal of channel (i = x, y, z)
Ui:	input signal of channel (i = x, y, z)
cf:	crest factor of exciting field (DASY parameter)
dcp _i :	diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes} : \quad E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$H - \text{fieldprobes} : \quad H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi:	compensated signal of channel (i = x, y, z)
Norm _i :	sensor sensitivity of channel (i = x, y, z), [mV/(V/m) ²] for E-field Probes
ConvF:	sensitivity enhancement in solution
a _{ij} :	sensor sensitivity factors for H-field probes
f:	carrier frequency [GHz]
E _i :	electric field strength of channel i in V/m
H _i :	magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg
Etot: total field strength in V/m
 σ : conductivity in [mho/m] or [Siemens/m]
 ρ : equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

8. Position of the wireless device in relation to the phantom


8.1. Head Position

The wireless device define two imaginary lines on the handset, the vertical centreline and the horizontal line, for the handset in vertical orientation as shown in Figures 5a and 5b.


The vertical centreline passes through two points on the front side of the handset: the midpoint of the width W_t of the handset at the level of the acoustic output (point A in Figures 5a and 5b), and the midpoint of the width W_b of the bottom of the handset (point B).

The horizontal line is perpendicular to the vertical centreline and passes through the centre of the acoustic output (see Figures 5a and 5b). The two lines intersect at point A.

Note that for many handsets, point A coincides with the centre of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centreline is not necessarily parallel to the front face of the handset (see Figure 5b), especially for clam-shell handsets, handsets with flip cover pieces, and other irregularly shaped handsets.

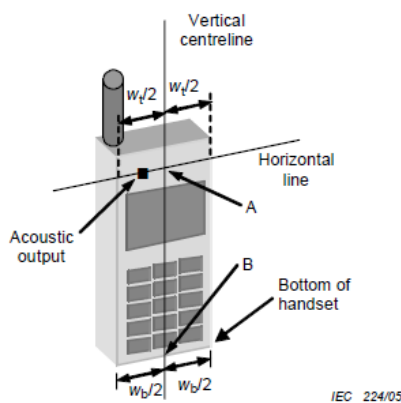


Figures 5a

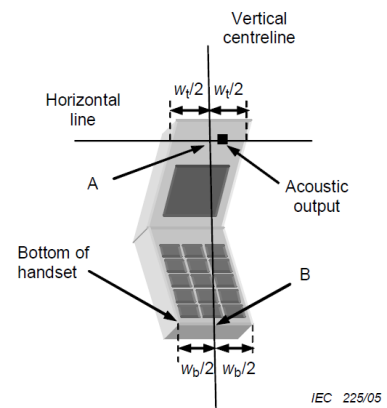

Figures 5b


- W_t Width of the handset at the level of the acoustic
- W_b Width of the bottom of the handset
- A Midpoint of the width w_t of the handset at the level of the acoustic output
- B Midpoint of the width w_b of the bottom of the handset

Cheek position

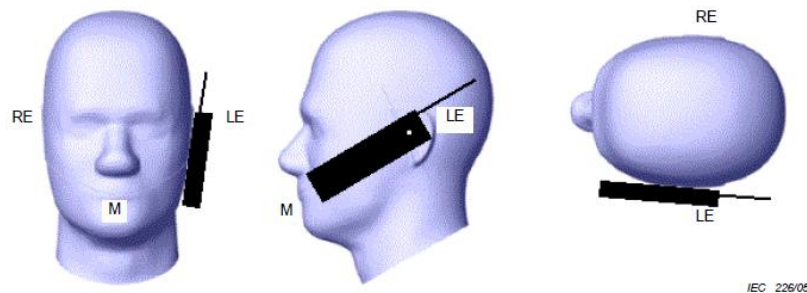

Picture 2 Cheek position of the wireless device on the left side of SAM

Tilt position

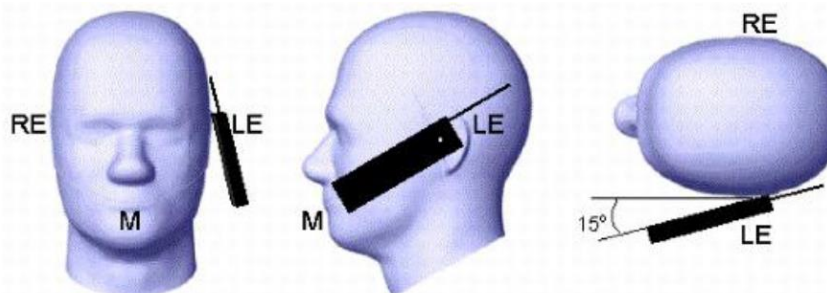


Picture 3 Tilt position of the wireless device on the left side of SAM

8.2. Body Position

Devices that support transmission while used with body-worn accessories must be tested for body-worn accessory SAR compliance, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics.


Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance $\leq 10 \text{ mm}$ to support compliance.

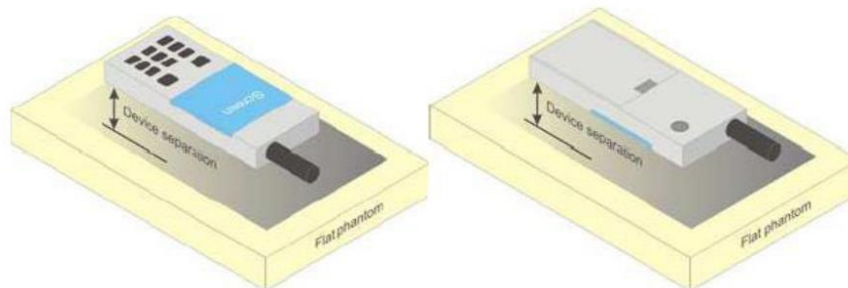

Picture 4 Test positions for body-worn devices

8.3. Hotspot Mode Exposure conditions

The hotspot mode and body-worn accessory SAR test configurations may overlap for handsets. When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations. This typically applies to the back and front surfaces of a handset when SAR is required for both hotspot mode and body-worn accessory exposure conditions. Depending on the form factor and dimensions of a device, the test separation distance used for hotspot mode SAR measurement is either **10 mm** or that used in the body-worn accessory configuration, whichever is less for devices with dimension $> 9 \text{ cm} \times 5 \text{ cm}$. For smaller devices with dimensions $\leq 9 \text{ cm} \times 5 \text{ cm}$ because of a greater potential for next to body use a test separation of $\leq 5 \text{ mm}$ must be used.

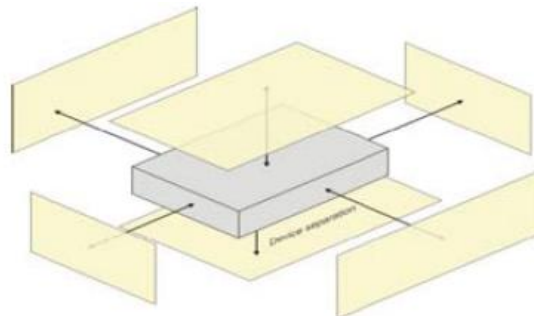

Picture 5 Test positions for Hotspot Mode

9. System Check

9.1. Tissue Dielectric Parameters

The liquid is consisted of water,salt,Glycol,Sugar,Preventol and Cellulose.The liquid has previously been proven to be suited for worst-case.The table 3 and table 4 show the detail solition.It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.4	40
2450	55	0	0	0	0	45	1.8	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800.1900.2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0	0	31.8	2.16	52.5

Tissue dielectric parameters for head and body phantoms				
Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (s/m)	ϵ_r	σ (s/m)
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
1750	40.1	1.37	53.4	1.49
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16

Check Result:

Dielectric performance of Head tissue simulating liquid				
Frequency (MHz)	Description	DielectricParameters		Temp
		ϵ_r	σ (s/m)	°C
750	Recommended result ±5% window	41.90 39.81 to 44.00	0.89 0.85 to 0.93	/
	Measurement value 2018-03-19	41.01	0.89	21
835	Recommended result ±5% window	41.50 39.43 to 43.58	0.90 0.86 to 0.95	/
	Measurement value 2018-03-19	41.62	0.92	21
1750	Recommended result ±5% window	40.10 38.10- 42.11	1.37 1.30 - 1.44	/
	Measurement value 2018-03-20	40.73	1.41	21
1900	Recommended result ±5% window	40.0 38.00 to 42.00	1.40 1.33 to 1.47	/
	Measurement value 2018-03-20	40.05	1.42	21
2450	Recommended result ±5% window	39.2 37.24 to 41.16	1.80 1.71 to 1.89	/
	Measurement value 2018-03-21	39.11	1.79	21
2600	Recommended result ±5% window	39.0 37.05 to 40.95	1.96 1.86 to 2.06	/
	Measurement value 2018-03-21	38.83	1.93	21


Dielectric performance of Body tissue simulating liquid				
Frequency (MHz)	Description	DielectricParameters		Temp
		ϵ_r	σ (s/m)	°C
750	Recommended result ±5% window	55.50 52.73 to 58.28	0.96 0.91 to 1.01	/
	Measurement value 2018-03-19	57.87	0.97	21
835	Recommended result ±5% window	55.2 52.44 to 57.96	0.97 0.92 to 1.02	/
	Measurement value 2018-03-19	55.15	0.96	21
1750	Recommended result ±5% window	53.4 50.73–56.07	1.49 1.42 - 1.56	/
	Measurement value 2018-03-20	53.52	1.44	21
1900	Recommended result ±5% window	53.3 50.64 to 55.97	1.52 1.44 to 1.60	/
	Measurement value 2018-03-20	53.12	1.53	21
2450	Recommended result ±5% window	52.7 50.07 to 55.34	1.95 1.85 to 2.05	/
	Measurement value 2018-03-21	52.52	1.94	21
2600	Recommended result ±5% window	52.5 49.88 to 55.13	2.16 2.05 to 2.27	/
	Measurement value 2018-03-21	51.12	2.14	21

9.2. SAR System Check

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

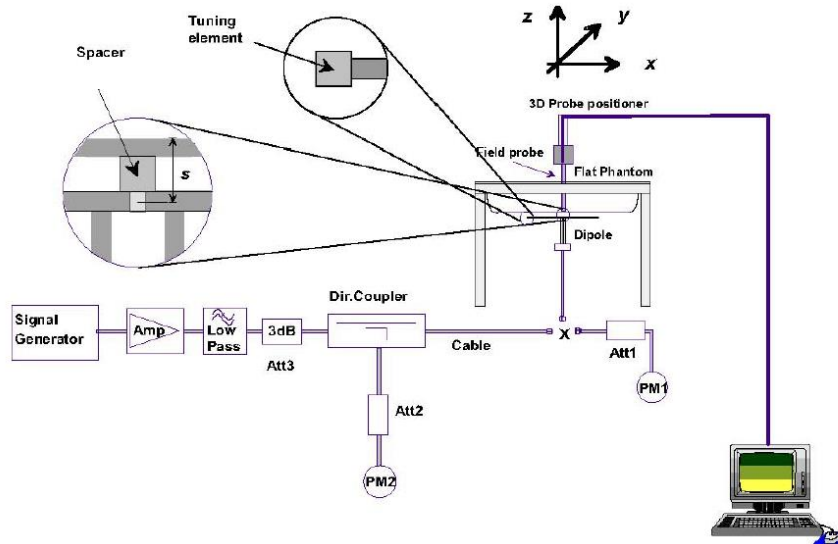

The output power on dipole port must be calibrated to 24 dBm (250mW) before dipole is connected.

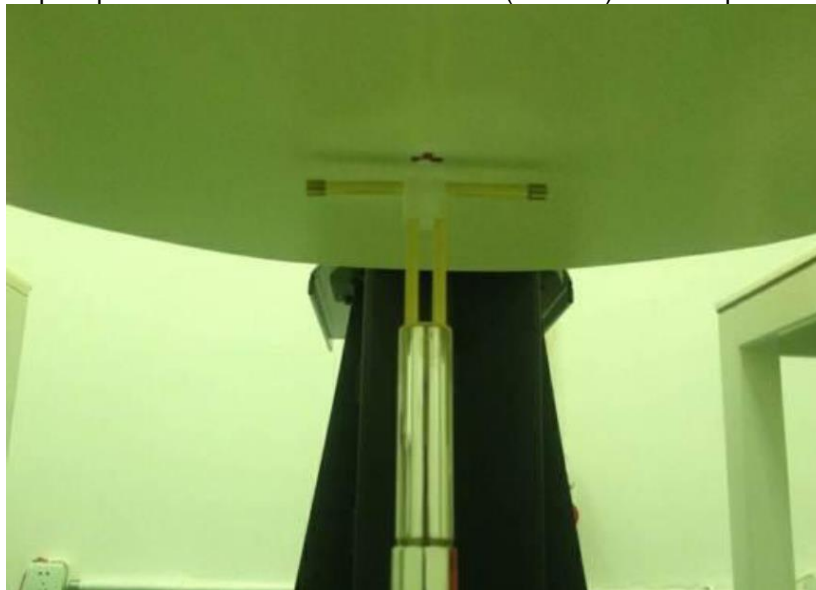


Photo of Dipole Setup

Check Result:

Head				
Frequency (MHz)	Description	SAR(W/kg)		Temp
		1g	10g	°C
750	Recommended result ±10window	2.03 1.83 - 2.23	1.33 1.20 - 1.46	/
	Measurement value 2018-03-19	2.08	1.39	21
835	Recommended result ±10window	2.30 2.07 - 2.53	1.50 1.35 - 1.65	/
	Measurement value 2018-03-19	2.34	1.52	21
1750	Recommended result ±10window	9.20 8.28 - 10.12	4.97 4.47 - 5.47	/
	Measurement value 2018-03-20	9.62	4.98	21
1900	Recommended result ±10window	10.10 9.09 - 11.11	5.34 4.81 - 5.87	/
	Measurement value 2018-03-20	9.72	5.16	21
2450	Recommended result ±10window	13.10 11.79 - 14.41	6.17 5.55 - 6.79	/
	Measurement value 2018-03-21	12.40	5.80	21
2600	Recommended result ±10window	13.7 12.33 - 15.07	6.07 5.46 - 6.68	/
	Measurement value 2018-03-21	14.20	6.29	21

Body				
Frequency (MHz)	Description	SAR(W/kg)		Temp
		1g	10g	°C
750	Recommended result ±10window	2.21 1.99 - 2.43	1.45 1.31 - 1.60	/
	Measurement value 2018-03-19	2.26	1.46	21
835	Recommended result ±10window	2.43 2.19 - 2.67	1.61 1.45 - 1.77	/
	Measurement value 2018-03-19	2.47	1.59	21
1750	Recommended result ±10window	9.22 8.30 - 10.14	4.95 4.46 - 5.45	/
	Measurement value 2018-03-20	9.30	4.99	21
1900	Recommended result ±10window	10.20 9.18 - 11.22	5.47 4.92 - 6.02	/
	Measurement value 2018-03-20	10.3	5.34	21
2450	Recommended result ±10window	13.10 11.79 -14.41	6.11 5.50 -6.72	/
	Measurement value 2018-03-21	12.5	5.76	21
2600	Recommended result ±10window	13.20 11.88 -14.52	5.87 5.28 -6.46	/
	Measurement value 2018-03-21	13.8	6.01	21

Plots of System Performance Check

System Performance Check at 750 MHz Head

DUT: Dipole750 MHz; Type: D750V3; Serial: 1156

Date: 2018-03-19

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 750$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.01$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN3842; ConvF(9.41, 9.41, 9.41); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (7x10x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 2.60 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.08 W/kg; SAR(10 g) = 1.39 W/kg

Maximum value of SAR (measured) = 2.62 W/kg

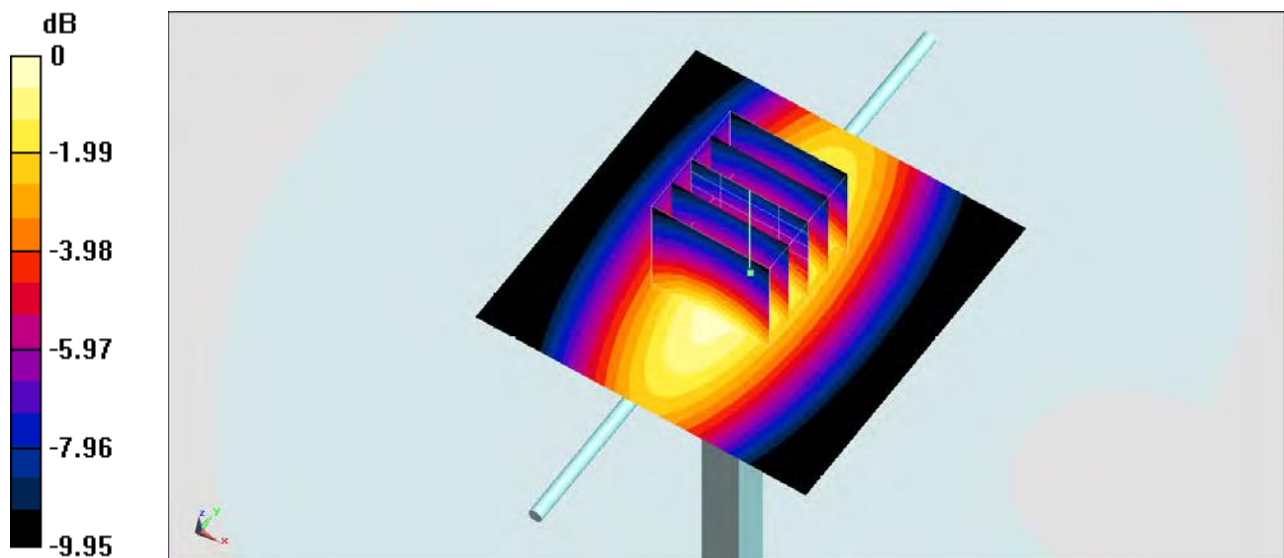

System Performance Check 750MHz Head 250mW

System Performance Check at 750 MHz Body

DUT: Dipole750 MHz; Type: D750V3; Serial: 1156

Date: 2018-03-19

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 750$ MHz; $\sigma = 0.97$ S/m; $\epsilon_r = 57.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.31, 9.31, 9.31); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (7x10x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 2.89 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.70 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 3.87 W/kg

SAR(1 g) = 2.26 W/kg; SAR(10 g) = 1.46 W/kg

Maximum value of SAR (measured) = 2.89 W/kg

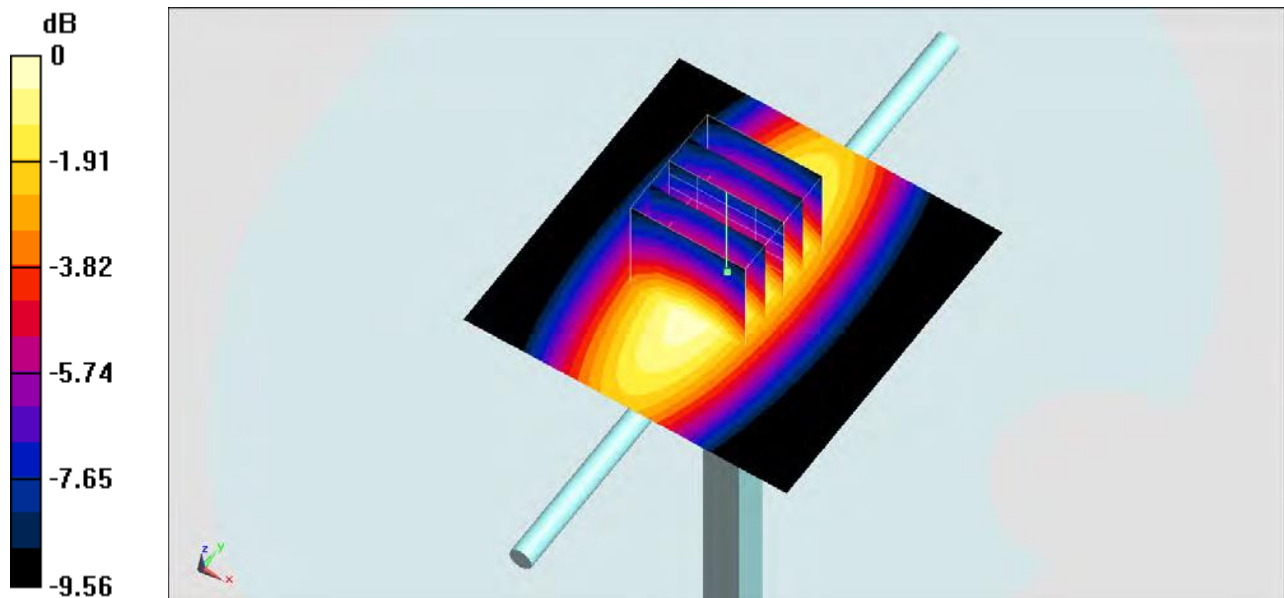

System Performance Check 750MHz Body 250mW

System Performance Check at 835 MHz Head

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d153

Date: 2018-03-19

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 41.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.15, 9.15, 9.15); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (7x10x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 2.834 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.865 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.286 W/kg

SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.52 W/kg

Maximum value of SAR (measured) = 2.825 W/kg

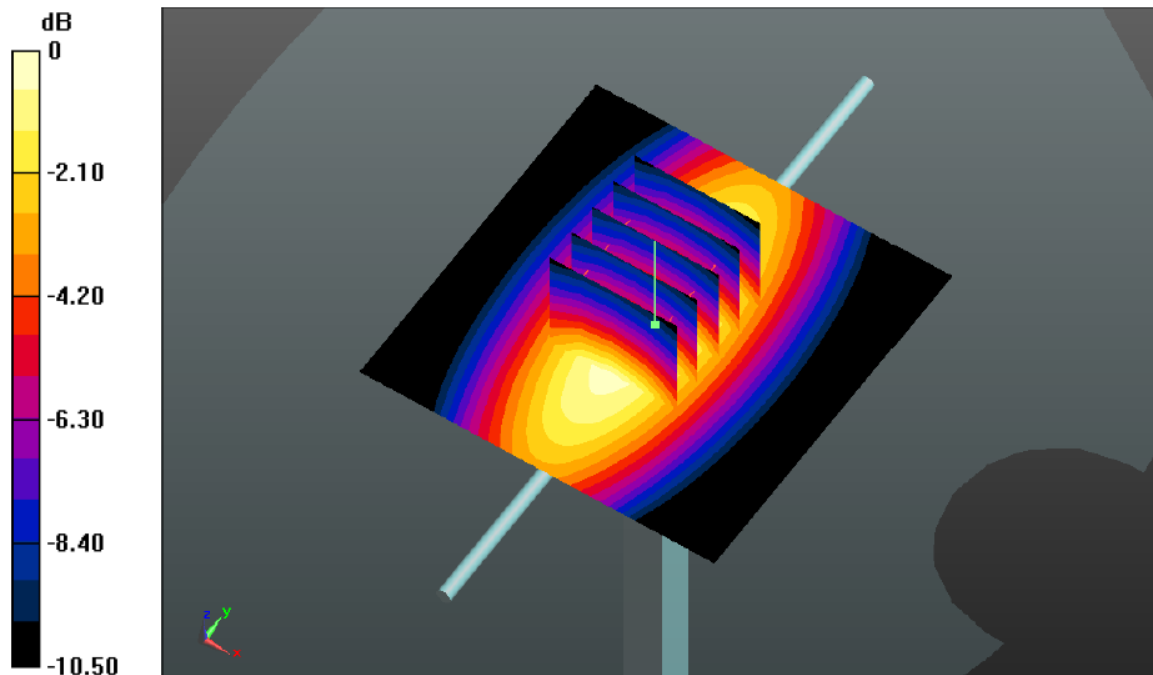

System Performance Check 835MHz Head 250mW

System Performance Check at 835 MHz Body

DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d153

Date: 2018-03-19

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.15$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.02, 9.02, 9.02); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (7x10x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 2.888 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.236 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 3.339 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.59 W/kg

Maximum value of SAR (measured) = 2.871 W/kg

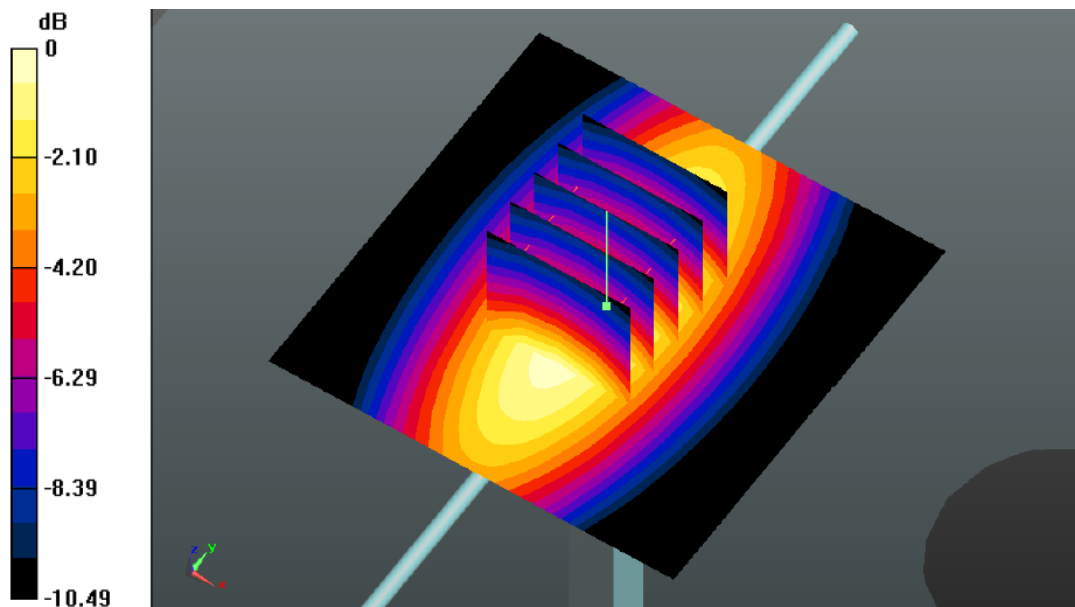

System Performance Check 835MHz Body 250mW

System Performance Check at 1750 MHz Head

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1602

Date: 2018-03-20

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1750$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(7.89, 7.89, 7.89); Calibrated: 15/08/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 15/08/2017

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (7x10x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 12.6 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 99.561 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 16.828 W/kg

SAR(1 g) = 9.62 W/kg; SAR(10 g) = 4.98 W/kg

Maximum value of SAR (measured) = 13.0 W/kg

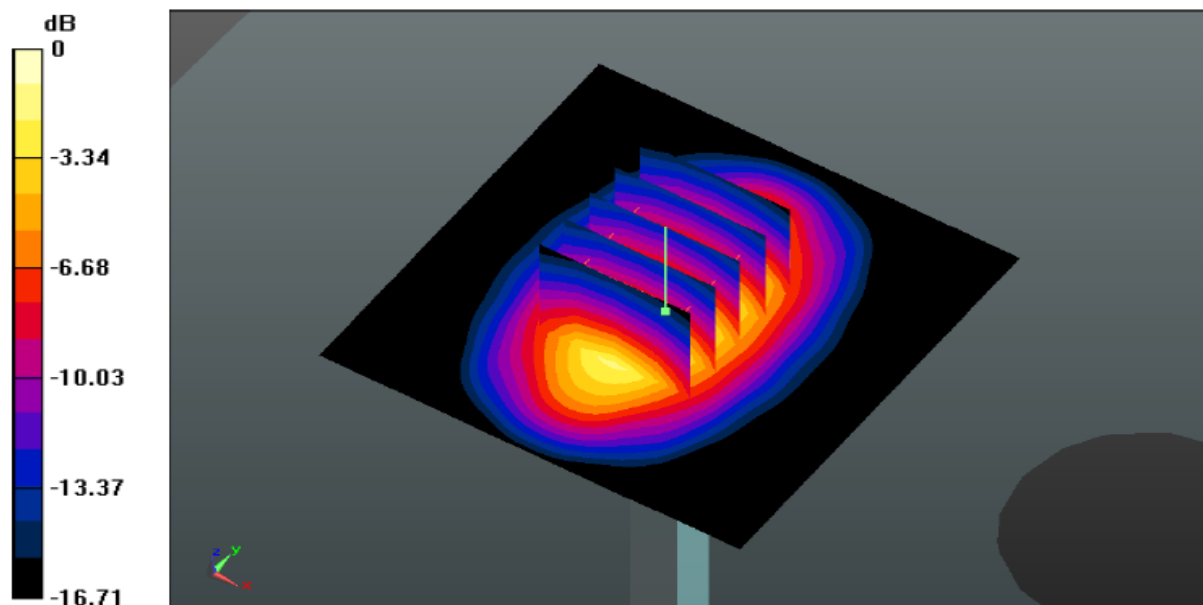

System Performance Check 1750MHz 250mW

System Performance Check at 1750 MHz Body

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1602

Date: 2018-03-20

Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1750$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 53.52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(7.57, 7.57, 7.57); Calibrated: 15/08/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 15/08/2017

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

AreaScan(7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 13.354 W/kg


ZoomScan(5x5x7)/Cube0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.582 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 16.752 W/kg

SAR(1 g) = 9.30 W/kg; SAR(10 g) = 4.99 W/kg

Maximum value of SAR (measured) = 13.273 W/kg

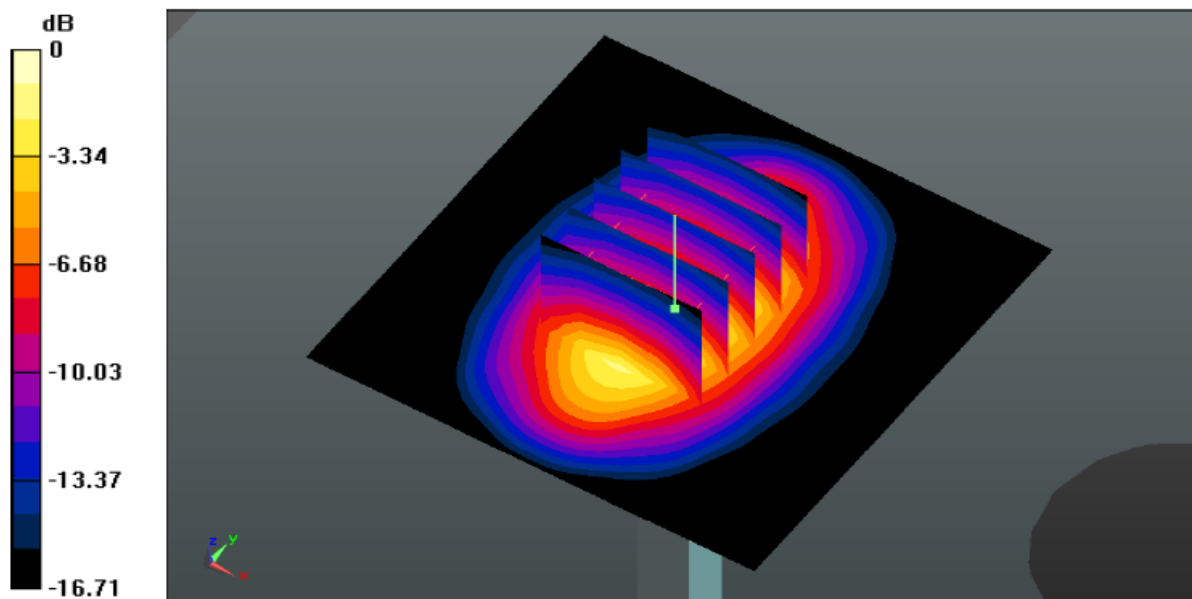

System Performance Check 1750MHz 250mW

System Performance Check at 1900 MHz Head

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d101

Date: 2018-03-20

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.05$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(7.58, 7.58, 7.58); Calibrated: 15/08/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 15/08/2017

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (7x10x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 10.61 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 94.79 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 12.34 W/kg

SAR(1 g) = 9.72 W/kg; SAR(10 g) = 5.16 W/kg

Maximum value of SAR (measured) = 12.44 W/kg

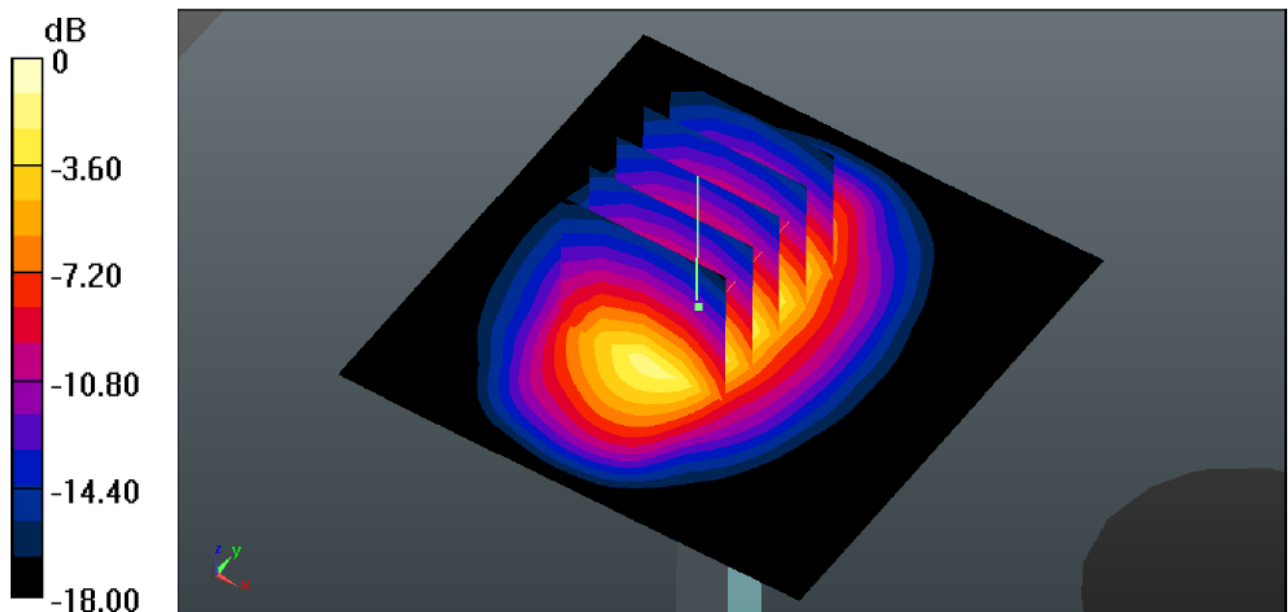

System Performance Check 1900MHz Head 250mW

System Performance Check at 1900 MHz Body

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d101

Date: 2018-03-20

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1900$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 53.12$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(7.32, 7.32, 7.32); Calibrated: 15/08/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 15/08/2017

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (7x10x1): Measurement grid: dx=15.00 mm, dy=15.00 mm

Maximum value of SAR (interpolated) = 15.187 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 87.679 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 19.027 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.34 W/kg

Maximum value of SAR (measured) = 15.09 W/kg

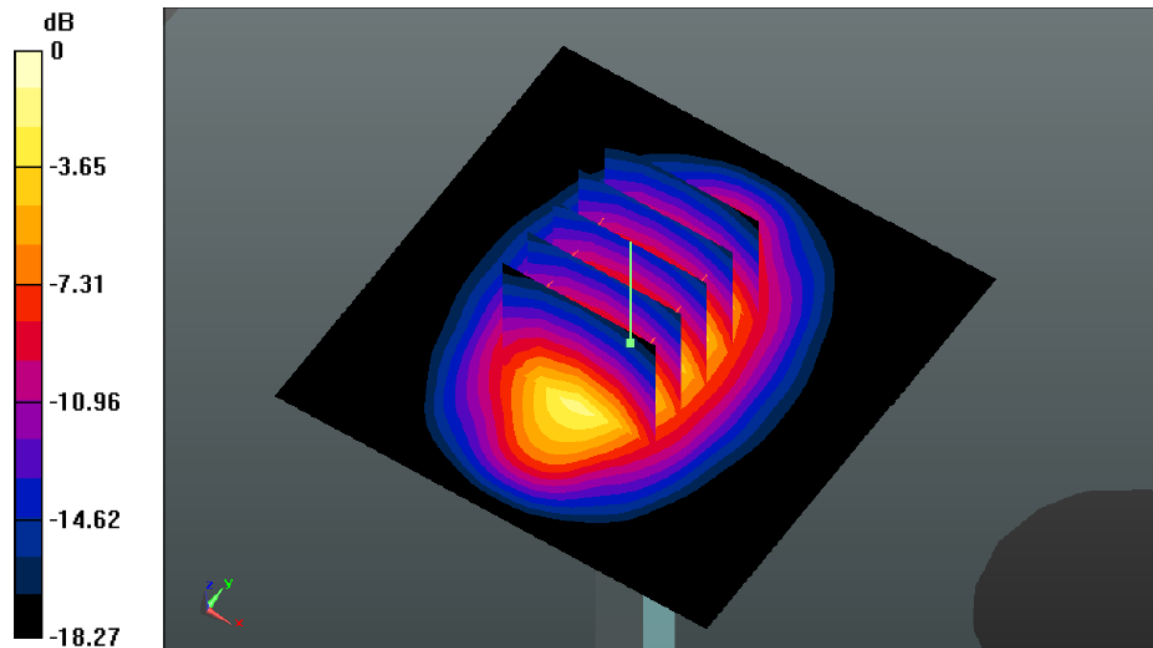

System Performance Check 1900MHz Body250mW

System Performance Check at 2450 MHz Head

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 884

Date: 2018-03-21

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.11$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(6.92, 6.92, 6.92); Calibrated: 15/08/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 15/08/2017

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (7x10x1): Measurement grid: dx=12.00 mm, dy=12.00 mm

Maximum value of SAR (interpolated) = 19.313 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.314 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 25.703 W/kg

SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.8 W/kg

Maximum value of SAR (measured) = 18.871 W/kg

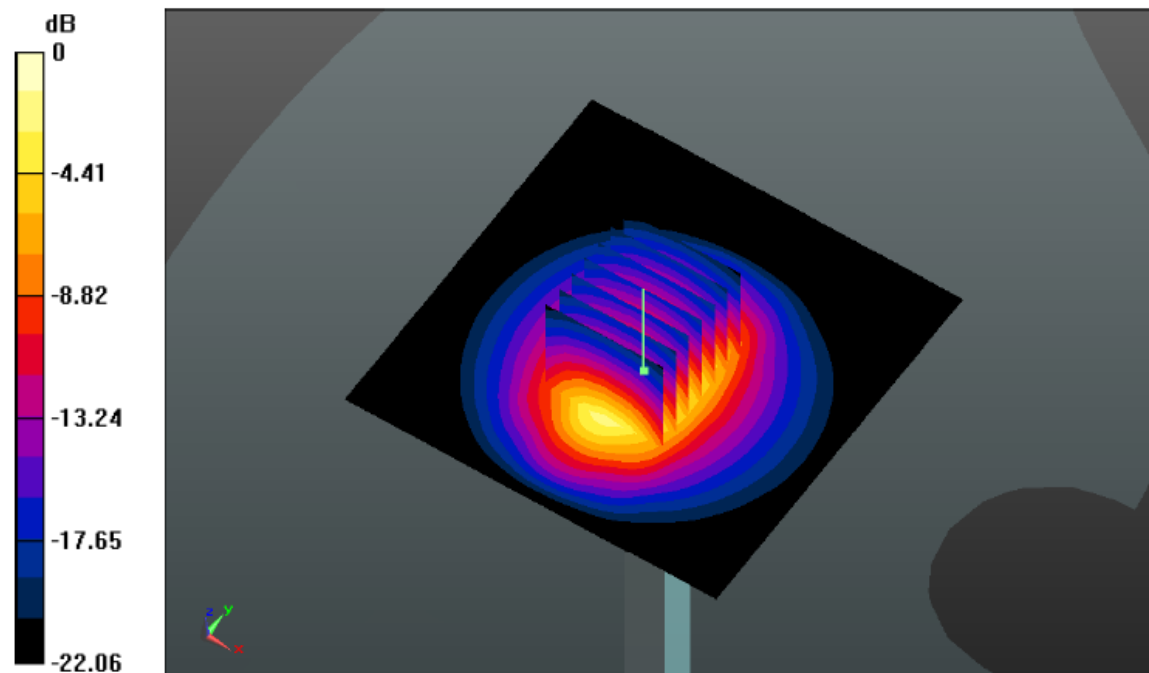

System Performance Check 2450MHz Head250mW

System Performance Check at 2450 MHz Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 884

Date: 2018-03-21

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 52.52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(7.01, 7.01, 7.01); Calibrated: 15/08/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 15/08/2017

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (7x10x1): Measurement grid: dx=12.00 mm, dy=12.00 mm

Maximum value of SAR (interpolated) = 19.266 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 84.170 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 26.174 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.76 W/kg

Maximum value of SAR (measured) = 19.27W/kg

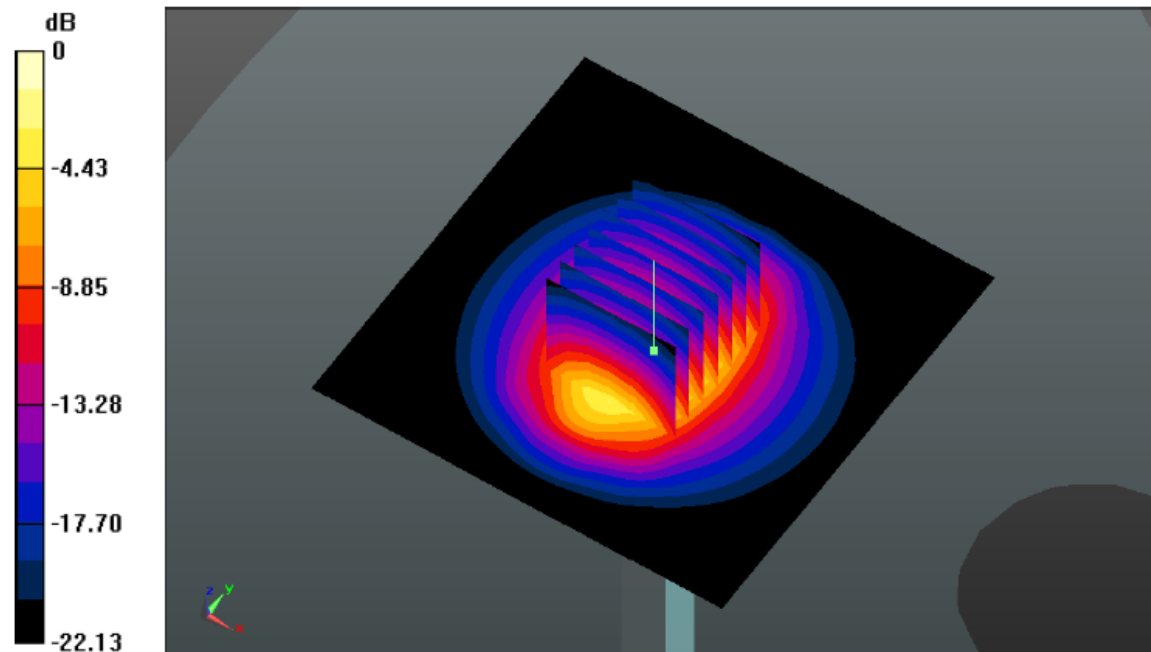

System Performance Check 2450MHz Body250mW

System Performance Check at 2600 MHz Head

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1120

Date: 2018-03-21

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2600$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 38.83$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(6.78, 6.78, 6.78); Calibrated: 15/08/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 15/08/2017

Phantom: SAM 1; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (7x10x1): Measurement grid: dx=12.00 mm, dy=12.00 mm

Maximum value of SAR (interpolated) = 22.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.2 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 33.1 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.29 W/kg

Maximum value of SAR (measured) = 25.6 W/kg

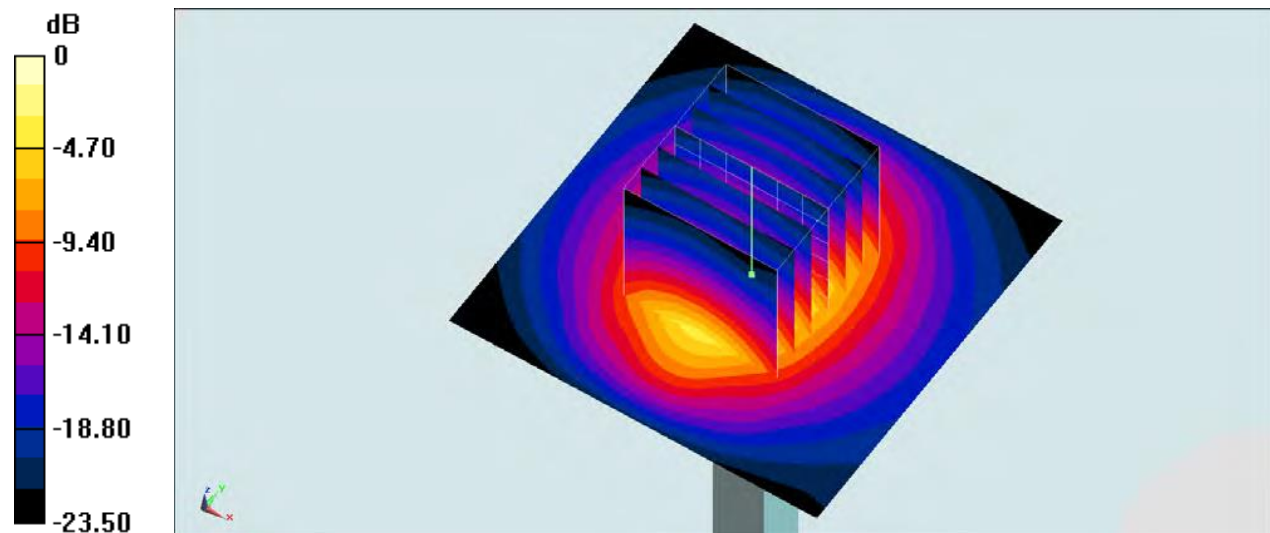

System Performance Check 2600MHz Head250mW

System Performance Check at 2600 MHz Body

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1120

Date: 2018-03-21

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2600$ MHz; $\sigma = 2.14$ S/m; $\epsilon_r = 51.12$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(6.97, 6.97, 6.97); Calibrated: 15/08/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 15/08/2017

Phantom: SAM 2; Type: SAM;

Measurement SW: DASY52, Version 52.8 (1); SEMCAD X Version 14.6.5 (6469)

Area Scan (7x10x1): Measurement grid: dx=12.00 mm, dy=12.00 mm

Maximum value of SAR (interpolated) = 24.6 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.4 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.01 W/kg

Maximum value of SAR (measured) = 23.8 W/kg

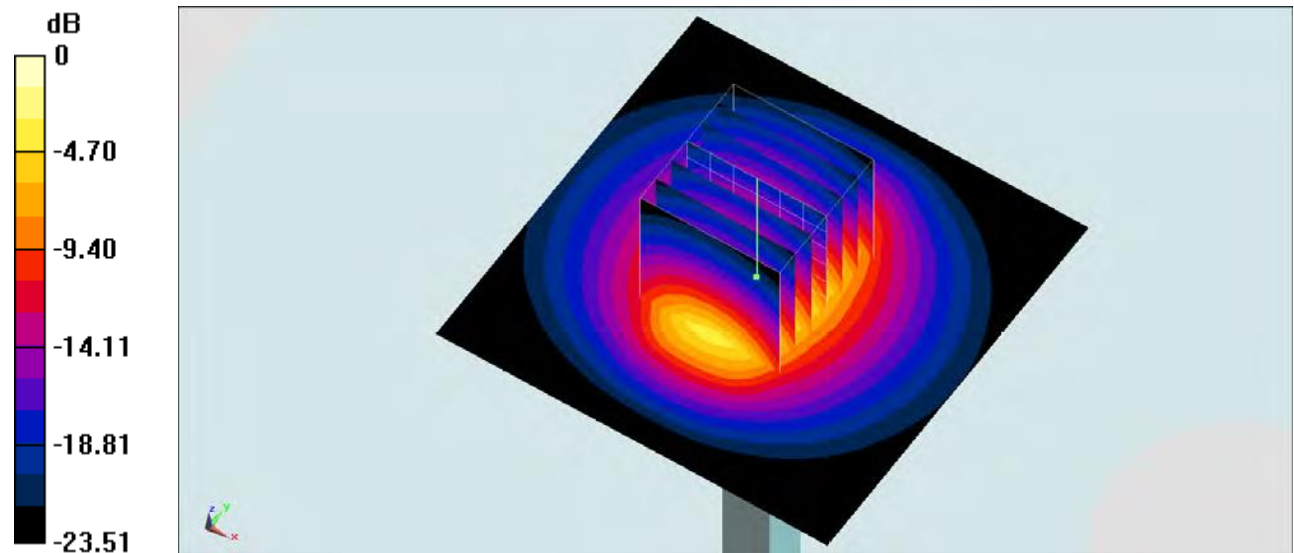

System Performance Check 2600MHz Body250mW

10. SAR Exposure Limits

SAR assessments have been made in line with the requirements of ANSI/IEEE C95.1-1992

Type Exposure	Limit (W/kg)	
	General Population / Uncontrolled Exposure Environment	Occupational / Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.60	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

11. Conducted Power Measurement Results

GSM Conducted Power

1. Per KDB 447498 D01, the maximum output power channel is used for SAR testing and further SAR test reduction
2. Per KDB 941225 D01, considering the possibility of e.g. 3rd party VoIP operation for Head and Body-worn SAR test reduction for GSM and GPRS modes is determined by the source-base time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850 and GPRS (4Tx slots) for PCS1900.
3. Per KDB941225 D01, for hotspot SAR test reduction for GPRS modes is determined by the source-based time-averaged output power including tune-up tolerance, For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the EUT was set in GPRS (4Tx slots) for GSM850 and GPRS (4Tx slots) for PCS1900.

Mode: GSM850		Conducted Power (dBm)			Division Factors	Averager Power (dBm)		
		CH128	CH190	CH251		CH128	CH190	CH251
		824.2MHz	836.6MHz	848.8MHz		824.2MHz	836.6MHz	848.8MHz
GSM		31.53	31.60	31.62	-9.03	22.50	22.57	22.59
GPRS (GMSK)	1TXslot	31.49	31.53	31.55	-9.03	22.46	22.50	22.52
	2TXslots	30.03	30.05	29.99	-6.02	24.01	24.03	23.97
	3TXslots	28.38	28.36	28.30	-4.26	24.12	24.10	24.04
	4TXslots	25.68	25.74	25.71	-3.01	22.67	22.73	22.70
EGPRS (GMSK)	1TXslot	24.44	24.76	24.58	-9.03	15.41	15.73	15.55
	2TXslots	24.72	24.58	24.77	-6.02	18.70	18.56	18.75
	3TXslots	23.86	24.02	24.18	-4.26	19.60	19.76	19.92
	4TXslots	21.73	21.59	21.55	-3.01	18.72	18.58	18.54
Mode: PCS1900		Conducted Power (dBm)			Division Factors	Averager Power (dBm)		
		CH512	CH661	CH810		CH512	CH661	CH810
		1850.2MHz	1880.0MHz	1909.8MHz		1850.2MHz	1880.0MHz	1909.8MHz
GSM		30.11	29.96	29.71	-9.03	21.08	20.93	20.68
GPRS (GMSK)	1TXslot	30.06	29.90	29.65	-9.03	21.03	20.87	20.62
	2TXslots	28.17	28.48	27.39	-6.02	22.15	22.46	21.37
	3TXslots	26.86	26.29	25.69	-4.26	22.60	22.03	21.43
	4TXslots	24.34	24.14	23.56	-3.01	21.33	21.13	20.55
EGPRS (GMSK)	1TXslot	25.37	25.07	25.19	-9.03	16.34	16.04	16.16
	2TXslots	25.67	25.34	25.58	-6.02	19.65	19.32	19.56
	3TXslots	25.12	24.93	24.29	-4.26	20.86	20.67	20.03
	4TXslots	22.61	21.88	22.14	-3.01	19.60	18.87	19.13

Note:

1) Division Factors

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

WCDMA Conducted Power

1. The following tests were conducted according to the test requirements outlines in 3GPP TS34.121 specification.
2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode to determine SAR test exclusion

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each specific sub-test in the following table, C10.1.4, Quoted from the TS 34.121
 - ii. Set RMC 12.2Kbps + HSDPA mode
 - iii. Set Cell Power=-86dBm
 - iv. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - v. Select HSDPA uplink parameters
 - vi. Set Delta ACK, Delta NACK and Delta CQI=8
 - vii. Set Ack-Nack repetition Factor to 3
 - viii. Set CQI Feedback Cycle (K) to 4ms
 - ix. Set CQI repetition factor to 2
 - x. Power ctrl mode= all up bits
- d) The transmitter maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a) The EUT was connected to base station RS CMU200 referred to the setup configuration
- b) The RF path losses were compensated into the measurements
- c) A call was established between EUT and base station with following setting:
 - i. Call configs = 5.2b, 5.9b, 5.10b, and 5.13.2B with QPSK
 - ii. Set Gain Factors (β_c and β_d) and parameters (AG index) were set according to each specific sub-test in the following table, C11.1.3, Quoted from the TS 34.121
 - iii. Set Cell Power=-86dBm
 - iv. Set channel type= 12.2Kbps + HSPA mode
 - v. Set UE Target power
 - vi. Set Ctrl mode=Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal the target E-TFCl of 75 for Sub-test 1, and other subtest's E-TFCl
- d) The transmitter maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

General Note:

- Per KDB 941225 D01, SAR for Head / Hotspot / Body-worn Exposure is measured using a 12.2Kbps RMC with TPC bit configured to all 1s
- Per KDB 941225 D01 RMC12.2Kbps setting is used to evaluate SAR. If the maximum output power and Tune-up tolerance specified for production units in HSDPA/HSUPA is $\leq 1/4$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC 12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

Mode		WCDMA Band V			WCDMA Band II		
		Conducted Power (dBm)			Conducted Power (dBm)		
		CH4132	CH4183	CH4233	CH9262	CH9400	CH9538
		826.4	836.6	846.6	1852.4	1880.0	1907.6
	AMR 12.2K	23.18	23.15	23.08	22.34	22.30	22.20
	RMC 12.2K	23.21	23.18	23.09	22.36	22.33	22.21
HSDPA	Subtest-1	23.02	22.56	22.68	21.26	21.49	21.61
	Subtest-2	22.97	22.45	22.58	21.16	21.36	21.57
	Subtest-3	23.00	22.50	22.67	21.20	21.37	21.63
	Subtest-4	22.97	22.44	22.59	21.14	21.32	21.58
HSUPA	Subtest-1	20.58	20.29	20.25	18.95	19.40	19.41
	Subtest-2	20.39	20.24	20.07	18.82	19.25	19.21
	Subtest-3	20.06	19.85	19.79	18.50	18.91	18.95
	Subtest-4	20.72	20.48	20.37	19.10	19.52	19.52
	Subtest-5	21.76	21.53	21.41	20.18	20.54	20.55

LTE Conducted Power

General Note:

1. CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel, bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r03, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r03, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r03, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r03, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r03, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r03, smaller bandwidth SAR testing is not required.

LTE-FDD Band 2				Actual output Power (dBm)			
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High	
1.4	QPSK	1	Low	22.27	22.13	22.28	
			Middle	22.28	22.15	22.30	
			High	22.26	22.15	22.32	
		3	Low	22.17	22.05	22.10	
			Middle	22.19	22.09	22.19	
			High	22.15	22.11	22.12	
		6	/	21.66	21.16	21.35	
		16QAM	1	Low	21.96	21.44	21.72
				Middle	22.10	21.52	21.73
	High			21.98	21.34	21.47	
	3		Low	21.77	21.30	21.33	
			Middle	21.77	21.32	21.34	
			High	21.72	21.24	21.23	
	6		/	21.10	20.52	20.83	
	3		QPSK	1	Low	22.31	22.40
Middle					22.29	22.37	22.21
High		22.34			22.36	22.31	
8		Low		21.54	21.15	21.43	
		Middle		21.51	21.12	21.41	
		High		21.49	21.16	21.35	
15		/		21.49	21.14	21.34	
16QAM		1		Low	22.03	21.59	21.90
				Middle	21.73	21.32	21.64
			High	22.20	21.60	21.65	
		8	Low	20.95	20.45	20.91	
			Middle	20.92	20.44	20.89	
			High	20.89	20.47	20.82	
		15	/	20.94	20.49	20.86	

5	QPSK	1	Low	22.70	22.39	22.49	
			Middle	22.69	22.38	22.70	
			High	22.81	22.40	22.68	
		12	Low	21.48	21.08	21.31	
			Middle	21.53	21.29	21.59	
			High	21.63	21.24	21.54	
		25	/	21.41	21.23	21.46	
		16QAM	1	Low	21.59	21.09	21.27
				Middle	21.72	21.45	21.84
	High			21.55	21.38	21.49	
	12		Low	21.03	20.46	20.88	
			Middle	21.08	20.65	21.15	
High			21.00	20.62	21.10		
25	/		20.88	20.64	20.97		
10	QPSK		1	Low	22.52	22.48	22.17
				Middle	22.58	22.42	22.26
		High		22.57	22.40	22.38	
		25	Low	22.08	21.33	20.78	
			Middle	21.84	21.42	21.15	
			High	21.62	21.60	21.60	
		50	/	21.85	21.47	21.20	
		16QAM	1	Low	21.90	21.43	21.21
				Middle	22.14	21.69	21.41
	High			21.66	21.84	21.52	
	25		Low	21.40	20.70	20.30	
			Middle	21.13	20.78	20.67	
			High	20.92	20.97	21.12	
	50		/	21.18	20.86	20.72	

15	QPSK	1	Low	22.58	22.51	22.19	
			Middle	22.62	22.50	22.24	
			High	22.62	22.41	22.39	
		38	Low	21.86	21.46	21.19	
			Middle	21.70	21.48	21.50	
			High	21.54	21.78	21.14	
		75	/	21.58	21.32	21.58	
		16QAM	1	Low	21.51	20.90	21.01
				Middle	22.11	21.79	21.02
	High			21.04	21.24	21.18	
	38		Low	21.16	20.95	20.63	
			Middle	20.98	20.84	20.93	
High			21.01	21.28	20.65		
75	/		20.83	20.75	21.03		
20	QPSK		1	Low	22.47	22.44	22.29
				Middle	22.55	22.39	22.30
		High		22.44	22.36	22.47	
		50	Low	21.98	21.74	21.83	
			Middle	21.68	21.43	21.32	
			High	21.50	21.68	20.92	
		100	/	21.85	21.39	21.78	
		16QAM	1	Low	22.20	22.09	22.10
				Middle	22.09	21.72	21.49
	High			22.14	22.53	22.12	
	50		Low	21.04	20.93	20.87	
			Middle	21.18	20.84	20.75	
			High	20.90	21.26	20.41	
	100		/	21.16	20.74	21.08	

LTE-FDD Band 4				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
1.4	QPSK	1	Low	22.35	22.40	22.36
			Middle	22.36	22.38	22.41
			High	22.29	22.41	22.48
		3	Low	22.32	22.39	22.36
			Middle	22.37	22.27	22.39
			High	22.36	22.40	22.36
	6	/	22.32	22.01	22.29	
	16QAM	1	Low	22.51	21.98	22.35
			Middle	22.63	22.08	22.45
			High	22.56	22.15	22.33
		3	Low	22.24	21.92	22.29
			Middle	22.29	21.94	22.32
High			22.28	22.07	22.29	
6	/	21.46	21.48	21.57		
3	QPSK	1	Low	22.10	22.23	22.32
			Middle	22.19	22.24	22.38
			High	22.22	22.36	22.39
		8	Low	22.53	22.22	22.57
			Middle	22.55	22.43	22.55
			High	22.71	22.43	22.58
	15	/	22.64	22.20	22.56	
	16QAM	1	Low	22.90	22.40	22.82
			Middle	22.78	22.43	22.63
			High	22.80	22.62	22.88
		8	Low	21.66	21.60	21.91
			Middle	21.70	21.65	21.91
			High	21.89	21.65	21.92
		15	/	21.86	21.61	21.83

5	QPSK	1	Low	22.38	22.21	22.52	
			Middle	22.41	22.22	22.47	
			High	22.39	22.29	22.50	
		12	Low	22.48	22.13	22.29	
			Middle	22.65	22.21	22.43	
			High	22.32	22.23	22.35	
		25	/	22.54	22.11	22.33	
		16QAM	1	Low	22.48	22.07	22.35
				Middle	22.81	22.25	22.60
	High			22.40	22.13	22.40	
	12		Low	21.75	21.49	21.63	
			Middle	21.92	21.57	21.77	
High			21.57	21.53	21.69		
25	/		21.73	21.49	21.62		
10	QPSK		1	Low	22.10	22.19	22.20
				Middle	22.17	22.20	22.22
		High		22.10	22.32	22.24	
		25	Low	22.48	22.35	22.51	
			Middle	22.58	22.30	22.50	
			High	22.75	22.41	22.55	
		50	/	22.62	22.15	22.51	
		16QAM	1	Low	22.54	22.06	22.23
				Middle	22.78	22.31	22.68
	High			22.32	22.14	22.42	
	25		Low	21.66	21.70	21.79	
			Middle	21.77	21.67	21.79	
			High	21.95	21.61	21.84	
	50		/	21.82	21.59	21.80	

15	QPSK	1	Low	22.12	22.20	22.17	
			Middle	22.11	22.23	22.31	
			High	22.07	22.27	22.30	
		38	Low	22.24	22.13	22.22	
			Middle	22.57	22.19	22.35	
			High	22.22	22.12	22.26	
		75	/	22.47	22.10	22.24	
		16QAM	1	Low	21.91	21.85	21.92
				Middle	22.39	22.37	22.62
	High			21.87	21.67	21.84	
	38		Low	21.52	21.48	21.55	
			Middle	21.82	21.54	21.67	
High			21.60	21.48	21.62		
75	/		21.73	21.45	21.58		
20	QPSK		1	Low	22.77	22.84	22.69
				Middle	22.02	22.04	22.19
		High		22.09	22.06	22.21	
		50	Low	22.33	22.14	22.18	
			Middle	22.30	22.06	22.27	
			High	22.25	22.15	22.36	
		100	/	22.28	22.12	22.38	
		16QAM	1	Low	22.46	22.26	22.41
				Middle	22.58	22.27	22.51
	High			22.36	22.18	22.65	
	50		Low	21.64	21.45	21.50	
			Middle	21.67	21.49	21.60	
			High	21.63	21.38	21.55	
	100		/	21.56	21.42	21.57	

LTE-FDD Band 5				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
1.4	QPSK	1	Low	23.27	23.10	22.98
			Middle	23.27	23.16	23.00
			High	23.23	23.16	22.98
		3	Low	23.07	22.78	22.98
			Middle	23.02	22.77	22.94
			High	23.07	22.71	22.88
	6	/	22.15	22.00	22.47	
	16QAM	1	Low	22.18	22.23	22.30
			Middle	22.37	22.30	22.51
			High	22.37	22.94	22.51
		3	Low	21.82	22.07	22.47
			Middle	21.90	22.10	22.55
High			22.23	22.87	22.61	
6	/	21.56	21.59	21.99		
3	QPSK	1	Low	22.72	22.97	23.10
			Middle	23.08	22.92	23.13
			High	23.03	22.81	23.06
		8	Low	22.31	22.56	22.22
			Middle	22.46	23.30	22.32
			High	22.63	23.17	22.45
	15	/	22.45	22.36	22.32	
	16QAM	1	Low	22.59	23.29	22.58
			Middle	22.71	23.42	22.56
			High	22.30	23.50	23.03
		8	Low	21.79	21.97	21.75
			Middle	21.96	22.71	21.86
			High	22.11	22.57	21.99
	15	/	21.85	21.83	21.91	

5	QPSK	1	Low	23.40	22.82	22.82	
			Middle	23.24	22.82	22.99	
			High	23.30	22.79	22.98	
		12	Low	22.31	22.40	21.92	
			Middle	22.71	22.29	22.22	
			High	21.88	22.68	22.38	
	25	/	22.63	22.15	22.16		
	16QAM	1	Low	22.14	22.75	21.87	
			Middle	22.99	22.50	22.52	
			High	22.24	22.45	22.75	
		12	Low	21.81	21.85	21.53	
			Middle	22.23	21.71	21.84	
High			21.59	22.10	21.99		
25	/	22.06	21.61	21.71			
10	QPSK	1	Low	23.05	23.22	22.88	
			Middle	23.04	23.10	23.05	
			High	22.94	23.22	23.04	
		25	Low	21.85	22.86	21.98	
			Middle	22.27	22.34	21.98	
			High	22.42	22.64	22.30	
		50	/	22.16	22.36	22.11	
		16QAM	1	Low	22.34	23.25	22.27
				Middle	22.86	22.64	22.12
	High			23.07	22.05	22.65	
	25		Low	21.47	22.31	21.56	
			Middle	21.91	21.77	21.54	
			High	22.06	22.05	21.86	
	50		/	21.81	21.83	21.67	

LTE-FDD Band 7				Actual output Power (dBm)		
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High
5	QPSK	1	Low	22.47	22.44	21.57
			Middle	22.10	22.53	21.48
			High	22.81	22.20	21.52
		12	Low	22.30	21.86	20.80
			Middle	22.56	21.95	20.86
			High	22.18	21.79	20.66
	25	/	22.43	21.83	20.74	
	16QAM	1	Low	22.27	22.06	21.18
			Middle	22.89	22.20	21.21
			High	22.53	21.89	20.81
		12	Low	21.70	21.48	20.45
			Middle	21.98	21.58	20.49
High			21.84	21.41	20.30	
25	/	21.76	21.49	20.33		
10	QPSK	1	Low	22.29	21.75	21.17
			Middle	22.63	22.34	21.51
			High	22.30	22.08	21.79
		25	Low	22.07	21.86	21.09
			Middle	22.33	21.79	20.95
			High	22.59	21.76	20.82
	50	/	22.31	21.81	20.95	
	16QAM	1	Low	22.16	21.48	20.94
			Middle	22.70	22.09	21.29
			High	22.22	21.86	21.63
		25	Low	21.64	21.49	20.69
			Middle	21.89	21.42	20.55
			High	22.14	21.39	20.42
		50	/	21.89	21.45	20.54

15	QPSK	1	Low	21.74	21.65	20.91	
			Middle	22.52	22.33	21.65	
			High	21.50	21.75	21.09	
		38	Low	21.99	21.30	20.80	
			Middle	22.50	21.77	20.81	
			High	22.01	21.78	20.75	
		75	/	22.29	21.58	20.60	
		16QAM	1	Low	21.54	21.19	20.69
				Middle	22.32	22.07	21.43
	High			21.38	21.25	20.92	
	38		Low	21.66	20.78	20.59	
			Middle	22.09	21.40	20.52	
High			21.74	21.52	20.41		
75	/		21.91	21.32	20.40		
20	QPSK		1	Low	22.68	22.77	22.74
				Middle	22.94	22.55	21.87
		High		22.12	22.43	21.56	
		50	Low	22.25	22.34	22.25	
			Middle	22.35	22.10	21.22	
			High	21.89	22.00	21.13	
		100	/	22.36	22.12	21.20	
		16QAM	1	Low	22.42	22.05	22.13
				Middle	22.78	22.38	21.68
	High			22.01	22.35	21.23	
	50		Low	22.00	21.15	21.04	
			Middle	21.94	21.73	20.91	
			High	21.64	21.74	20.88	
	100		/	21.74	21.62	20.84	

LTE-FDD Band 17				Actual output Power (dBm)			
Band-width	Modulation	RB allocation	RB offset	Low	Middle	High	
5MHz	QPSK	1RB	Low	22.55	22.50	22.48	
			Middle	22.50	22.42	22.43	
			High	22.51	22.48	22.47	
		12RB	Low	22.00	22.97	22.61	
			Middle	22.59	23.05	22.38	
			High	22.72	22.63	21.85	
		25RB	/	22.50	22.85	22.77	
		16QAM	1RB	Low	21.69	22.99	22.79
				Middle	22.88	23.30	22.66
	High			23.04	22.75	21.70	
	12RB		Low	21.52	22.52	22.23	
			Middle	22.12	22.61	21.96	
			High	22.39	22.19	21.43	
	25RB	/	21.93	22.43	22.26		
	10MHz	QPSK	1RB	Low	22.77	22.60	22.86
Middle				22.52	22.66	22.57	
High				22.54	22.73	22.56	
25RB			Low	22.47	22.50	22.41	
			Middle	22.46	22.41	22.24	
			High	22.23	22.40	22.05	
50RB			/	22.11	22.09	22.01	
16QAM			1RB	Low	22.28	22.36	22.06
				Middle	22.07	22.45	22.47
		High		22.08	22.58	22.21	
		25RB	Low	22.51	22.53	22.42	
			Middle	22.02	22.35	22.11	
			High	22.09	22.32	22.19	
50RB		/	22.70	22.67	22.55		

WLAN Conducted Power

For 2.4GHz WLAN SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were for SAR evaluation. 802.11g/n were not investigated since the average putput powers over all channels and data rates were not more than 0.25dB higher than the tested channel in the lowest data rate of 802.11b mode.

WIFI					
Mode	Channel	Frequency (MHz)	Conducted Peak Power (dBm)	Conducted Average Power (dBm)	Data rate
802.11b	01	2412	16.45	14.03	1 Mbps
	06	2437	16.79	14.33	1 Mbps
	11	2462	14.09	12.01	1 Mbps
802.11g	01	2412	14.82	11.61	6 Mbps
	06	2437	14.21	11.10	6 Mbps
	11	2462	14.68	11.48	6 Mbps
802.11n(HT20)	01	2412	14.48	11.04	6.5 Mbps
	06	2437	14.42	10.98	6.5 Mbps
	11	2462	14.56	11.08	6.5 Mbps

Note: The output power was test all data rate and recorded worst case at recorded data rate.

Bluetooth Conducted Power

Bluetooth			
Mode	Channel	Frequency (MHz)	Conducted power (dBm)
GFSK	0	2402	0.03
	39	2441	1.76
	78	2480	1.97
$\pi/4$ QPSK	0	2402	1.62
	39	2441	2.69
	78	2480	3.27
8DPSK	0	2402	1.96
	39	2441	3.02
	78	2480	3.51
BLE	0	2402	1.09
	19	2440	1.78
	39	2480	1.95

12. Maximum Tune-up Limit

GSM		
Mode	Maximum Tune-up (dBm)	
	GSM850	PCS1900
GSM (GMSK, 1Tx Slot)	32.00	30.50
GPRS (GMSK, 1Tx Slot)	32.00	30.50
GPRS (GMSK, 2Tx Slot)	30.50	28.50
GPRS (GMSK, 3Tx Slot)	28.50	26.50
GPRS (GMSK, 4Tx Slot)	26.00	24.50
EGPRS (GMSK, 1Tx Slot)	25.00	25.50
EGPRS (GMSK, 2Tx Slot)	25.00	26.00
EGPRS (GMSK, 3Tx Slot)	24.50	25.50
EGPRS (GMSK, 4Tx Slot)	22.00	23.00

WCDMA		
Mode	Maximum Tune-up (dBm)	
	WCDMA Band V	WCDMA Band II
AMR 12.2Kbps	23.50	22.50
RMC 12.2Kbps	23.50	22.50
HSDPA Subtest-1	23.50	22.00
HSDPA Subtest-2	23.00	22.00
HSDPA Subtest-3	23.00	22.00
HSDPA Subtest-4	23.00	22.00
HSUPA Subtest-1	21.00	19.50
HSUPA Subtest-2	20.50	19.50
HSUPA Subtest-3	20.50	19.00
HSUPA Subtest-4	21.00	20.00
HSUPA Subtest-5	22.00	21.00

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 2	20	QPSK	1	23.00
			50	22.00
			100	22.00
		16QAM	1	23.00
			50	21.50
			100	21.50
	15	QPSK	1	23.00
			38	22.00
			75	22.00
		16QAM	1	22.50
			38	21.50
			75	21.50
	10	QPSK	1	23.00
			25	22.50
			50	22.00
		16QAM	1	22.00
			25	21.50
			50	21.50
	5	QPSK	1	23.00
			12	22.00
			25	21.50
		16QAM	1	22.00
			12	21.50
			25	21.00
	3	QPSK	1	22.50
			8	22.00
			15	21.50
		16QAM	1	22.50
			8	21.00
			15	21.00
1.4	QPSK	1	22.50	
		3	22.50	
		6	22.00	
	16QAM	1	22.50	
		3	22.00	
		6	21.50	

LTE				
Frequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 4	20	QPSK	1	23.00
			50	22.50
			100	22.50
		16QAM	1	22.50
			50	22.00
			100	22.00
	15	QPSK	1	22.50
			38	23.00
			75	22.50
		16QAM	1	23.00
			38	22.00
			75	22.00
	10	QPSK	1	22.50
			25	23.00
			50	23.00
		16QAM	1	23.00
			25	22.00
			50	22.00
	5	QPSK	1	23.00
			12	23.00
			25	23.00
		16QAM	1	23.00
			12	22.00
			25	22.00
3	QPSK	1	22.50	
		8	23.00	
		15	23.00	
	16QAM	1	23.00	
		8	22.00	
		15	22.00	
1.4	QPSK	1	22.50	
		3	22.50	
		6	22.50	
	16QAM	1	23.00	
		3	22.50	
		6	22.00	

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 5	10	QPSK	1	23.50
			25	23.00
			50	22.50
		16QAM	1	23.50
			25	22.50
			50	22.00
	5	QPSK	1	23.50
			12	23.00
			25	23.00
		16QAM	1	23.00
			12	22.50
			25	22.50
	3	QPSK	1	23.50
			8	23.50
			15	22.50
		16QAM	1	23.50
			8	23.00
			15	22.00
	1.4	QPSK	1	23.50
			3	23.50
			6	22.50
		16QAM	1	23.00
			3	23.00
			6	22.00

LTE				
Fequency Band	Band-width(MHz)	Modulation	RB allocation	Maximum Tune-up (dBm)
LTE Band 7	20	QPSK	1	23.00
			50	22.50
			100	22.50
		16QAM	1	23.00
			50	22.00
			100	22.00
	15	QPSK	1	23.00
			38	22.50
			75	22.50
		16QAM	1	22.50
			38	22.50
			75	22.00
	10	QPSK	1	23.00
			25	22.50
			50	22.50
		16QAM	1	23.00
			25	22.00
			50	22.00
	5	QPSK	1	23.00
			12	23.00
			25	22.50
		16QAM	1	22.50
			12	22.00
			25	22.00
LTE Band 17	10	QPSK	1	23.00
			25	22.50
			50	22.50
		16QAM	1	23.00
			25	23.00
			50	23.00
	5	QPSK	1	23.00
			12	23.00
			25	23.00
		16QAM	1	23.00
			12	23.00
			25	22.50

LTE MPR will followup 3GPP setting as below:

Modulation	Channel bandwidth / Transmission bandwidth (NRB)						MPR (dB)
	1.4MHz	3.0MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

WLAN		
Mode	Maximum Tune-up (dBm) Peak Power	Maximum Tune-up (dBm) Burst Average Power
802.11b	17.00	14.50
802.11g	15.00	12.00
802.11n(HT20)	15.00	11.50

Bluetooth			
Mode	Channel	Frequency (MHz)	Maximum Tune-up (dBm)
GFSK	0	2402	2.00
	39	2441	
	78	2480	
π/4QPSK	0	2402	3.50
	39	2441	
	78	2480	
8DPSK	0	2402	4.00
	39	2441	
	78	2480	
BLE	0	2402	2.00
	19	2440	
	39	2480	

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances ≤ 50 mm are determined by:


$$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})]^* [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR}$$

Band/Mode	F(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.45	Head	9.6	4.00	2.51	Yes
		Body	19.2	4.00	2.51	Yes

Per KDB 447498 D01, when the minimum test separation distance is <5mm, a distance of 5mm is applied to determine SAR test exclusion.

The test exclusion threshold is ≤ 3 , SAR testing is not required.

13. Antenna Location

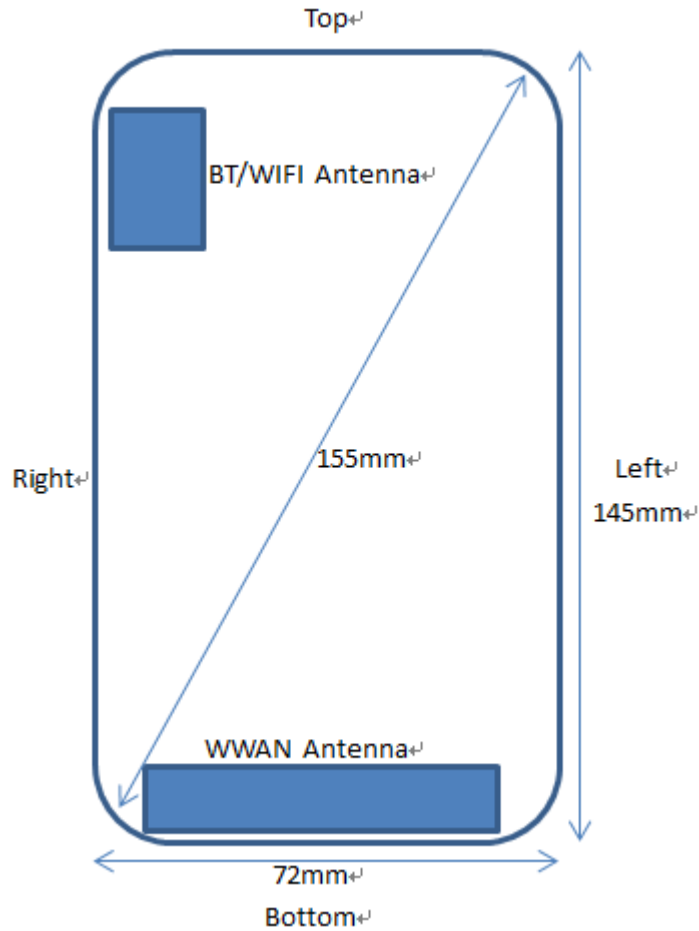

Distance of the Antenna to the EUT surface/edge(mm)						
Antenna	Back	Front	Top Side	Bottom Side	Left Side	Right Side
WWAN	5	8	125	5	5	10
WIFI / BT	5	8	10	122	60	5

Positions for SAR tests; Hotspot mode						
Antenna	Back	Front	Top side	Bottom side	Right side	Left side
WWAN	Yes	Yes	No	Yes	Yes	Yes
WIFI / BT	Yes	Yes	Yes	No	No	Yes

General note:

Referring to KDB941225 D06, when the overall device length and width are >9cm*5cm, the test distance is 10mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

14. SAR Measurement Results

Head SAR

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Left-Cheek	128	824.2	28.38	28.50	1.03	-	-	-	-
		190	836.6	28.36	28.50	1.03	0.14	0.107	0.111	H1
		251	848.8	28.30	28.50	1.05	-	-	-	-
	Left-Tilt	128	824.2	28.38	28.50	1.03	-	-	-	-
		190	836.6	28.36	28.50	1.03	0.12	0.082	0.085	-
		251	848.8	28.30	28.50	1.05	-	-	-	-
	Right-Cheek	128	824.2	28.38	28.50	1.03	-	-	-	-
		190	836.6	28.36	28.50	1.03	-0.06	0.099	0.102	-
		251	848.8	28.30	28.50	1.05	-	-	-	-
	Right-Tilt	128	824.2	28.38	28.50	1.03	-	-	-	-
		190	836.6	28.36	28.50	1.03	0.08	0.075	0.078	-
		251	848.8	28.30	28.50	1.05	-	-	-	-

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Left-Cheek	512	1850.2	26.86	27.00	1.03	-	-	-	-
		661	1880.0	26.29	27.00	1.18	0.19	0.051	0.060	H2
		810	1909.8	25.69	27.00	1.35	-	-	-	-
	Left-Tilt	512	1850.2	26.86	27.00	1.03	-	-	-	-
		661	1880.0	26.29	27.00	1.18	0.14	0.041	0.048	-
		810	1909.8	25.69	27.00	1.35	-	-	-	-
	Right-Cheek	512	1850.2	26.86	27.00	1.03	-	-	-	-
		661	1880.0	26.29	27.00	1.18	-0.10	0.049	0.058	-
		810	1909.8	25.69	27.00	1.35	-	-	-	-
	Right-Tilt	512	1850.2	26.86	27.00	1.03	-	-	-	-
		661	1880.0	26.29	27.00	1.18	-0.12	0.039	0.045	-
		810	1909.8	25.69	27.00	1.35	-	-	-	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC 12.2K bps	Left-Cheek	4132	826.4	23.21	23.50	1.07	-	-	-	-
		4183	836.6	23.18	23.50	1.08	0.14	0.087	0.094	H3
		4233	846.6	23.09	23.50	1.10	-	-	-	-
	Left-Tilt	4132	826.4	23.21	23.50	1.07	-	-	-	-
		4183	836.6	23.18	23.50	1.08	0.08	0.070	0.075	-
		4233	846.6	23.09	23.50	1.10	-	-	-	-
	Right-Cheek	4132	826.4	23.21	23.50	1.07	-	-	-	-
		4183	836.6	23.18	23.50	1.08	-0.19	0.084	0.090	-
		4233	846.6	23.09	23.50	1.10	-	-	-	-
	Right-Tilt	4132	826.4	23.21	23.50	1.07	-	-	-	-
		4183	836.6	23.18	23.50	1.08	-0.07	0.066	0.071	-
		4233	846.6	23.09	23.50	1.10	-	-	-	-

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC 12.2K bps	Left-Cheek	9262	1852.4	22.36	22.50	1.03	-	-	-	-
		9400	1880.0	22.33	22.50	1.04	0.13	0.179	0.186	H4
		9538	1907.6	22.21	22.50	1.07	-	-	-	-
	Left-Tilt	9262	1852.4	22.36	22.50	1.03	-	-	-	-
		9400	1880.0	22.33	22.50	1.04	0.11	0.147	0.153	-
		9538	1907.6	22.21	22.50	1.07	-	-	-	-
	Right-Cheek	9262	1852.4	22.36	22.50	1.03	-	-	-	-
		9400	1880.0	22.33	22.50	1.04	0.18	0.171	0.178	-
		9538	1907.6	22.21	22.50	1.07	-	-	-	-
	Right-Tilt	9262	1852.4	22.36	22.50	1.03	-	-	-	-
		9400	1880.0	22.33	22.50	1.04	-0.06	0.137	0.142	-
		9538	1907.6	22.21	22.50	1.07	-	-	-	-

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1 RB	Left-Cheek	18700	1860.0	22.47	23.00	1.13	-	-	-	-
		18900	1880.0	22.44	23.00	1.14	0.18	0.129	0.147	H5
		19100	1900.0	22.29	23.00	1.18	-	-	-	-
	Left-Tilt	18700	1860.0	22.47	23.00	1.13	-	-	-	-
		18900	1880.0	22.44	23.00	1.14	-0.13	0.106	0.120	-
		19100	1900.0	22.29	23.00	1.18	-	-	-	-
	Right-Cheek	18700	1860.0	22.47	23.00	1.13	-	-	-	-
		18900	1880.0	22.44	23.00	1.14	-0.08	0.126	0.143	-
		19100	1900.0	22.29	23.00	1.18	-	-	-	-
	Right-Tilt	18700	1860.0	22.47	23.00	1.13	-	-	-	-
		18900	1880.0	22.44	23.00	1.14	0.10	0.100	0.114	-
		19100	1900.0	22.29	23.00	1.18	-	-	-	-
20M_5 0RB	Left-Cheek	18700	1860.0	21.98	22.00	1.00	-	-	-	-
		18900	1880.0	21.74	22.00	1.06	0.09	0.112	0.119	-
		19100	1900.0	21.83	22.00	1.04	-	-	-	-
	Left-Tilt	18700	1860.0	21.98	22.00	1.00	-	-	-	-
		18900	1880.0	21.74	22.00	1.06	-0.05	0.098	0.104	-
		19100	1900.0	21.83	22.00	1.04	-	-	-	-
	Right-Cheek	18700	1860.0	21.98	22.00	1.00	-	-	-	-
		18900	1880.0	21.74	22.00	1.06	-0.04	0.104	0.110	-
		19100	1900.0	21.83	22.00	1.04	-	-	-	-
	Right-Tilt	18700	1860.0	21.98	22.00	1.00	-	-	-	-
		18900	1880.0	21.74	22.00	1.06	0.03	0.088	0.094	-
		19100	1900.0	21.83	22.00	1.04	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1 RB	Left-Cheek	20050	1720.0	22.77	23.00	1.05	-	-	-	-
		20175	1732.5	22.84	23.00	1.04	0.08	0.405	0.420	H6
		20300	1745.0	22.69	23.00	1.07	-	-	-	-
	Left-Tilt	20050	1720.0	22.77	23.00	1.05	-	-	-	-
		20175	1732.5	22.84	23.00	1.04	-0.01	0.303	0.314	-
		20300	1745.0	22.69	23.00	1.07	-	-	-	-
	Right-Cheek	20050	1720.0	22.77	23.00	1.05	-	-	-	-
		20175	1732.5	22.84	23.00	1.04	-0.04	0.393	0.408	-
		20300	1745.0	22.69	23.00	1.07	-	-	-	-
	Right-Tilt	20050	1720.0	22.77	23.00	1.05	-	-	-	-
		20175	1732.5	22.84	23.00	1.04	0.02	0.305	0.317	-
		20300	1745.0	22.69	23.00	1.07	-	-	-	-
20M_5 0RB	Left-Cheek	20050	1720.0	22.33	22.50	1.04	-	-	-	-
		20175	1732.5	22.14	22.50	1.09	0.17	0.342	0.372	-
		20300	1745.0	22.18	22.50	1.08	-	-	-	-
	Left-Tilt	20050	1720.0	22.33	22.50	1.04	-	-	-	-
		20175	1732.5	22.14	22.50	1.09	-0.14	0.270	0.294	-
		20300	1745.0	22.18	22.50	1.08	-	-	-	-
	Right-Cheek	20050	1720.0	22.33	22.50	1.04	-	-	-	-
		20175	1732.5	22.14	22.50	1.09	-0.08	0.311	0.337	-
		20300	1745.0	22.18	22.50	1.08	-	-	-	-
	Right-Tilt	20050	1720.0	22.33	22.50	1.04	-	-	-	-
		20175	1732.5	22.14	22.50	1.09	0.10	0.220	0.239	-
		20300	1745.0	22.18	22.50	1.08	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1 RB	Left-Cheek	20450	829.0	23.05	23.50	1.11	-	-	-	-
		20525	836.5	23.22	23.50	1.07	-0.15	0.088	0.094	H7
		20600	844.0	22.88	23.50	1.15	-	-	-	-
	Left-Tilt	20450	829.0	23.05	23.50	1.11	-	-	-	-
		20525	836.5	23.22	23.50	1.07	-0.08	0.074	0.079	-
		20600	844.0	22.88	23.50	1.15	-	-	-	-
	Right-Cheek	20450	829.0	23.05	23.50	1.11	-	-	-	-
		20525	836.5	23.22	23.50	1.07	0.11	0.085	0.091	-
		20600	844.0	22.88	23.50	1.15	-	-	-	-
	Right-Tilt	20450	829.0	23.05	23.50	1.11	-	-	-	-
		20525	836.5	23.22	23.50	1.07	-0.05	0.067	0.072	-
		20600	844.0	22.88	23.50	1.15	-	-	-	-
10M_2 5RB	Left-Cheek	20450	829.0	21.85	23.00	1.30	-	-	-	-
		20525	836.5	22.86	23.00	1.03	0.11	0.074	0.076	-
		20600	844.0	21.98	23.00	1.26	-	-	-	-
	Left-Tilt	20450	829.0	21.85	23.00	1.30	-	-	-	-
		20525	836.5	22.86	23.00	1.03	-0.07	0.057	0.059	-
		20600	844.0	21.98	23.00	1.26	-	-	-	-
	Right-Cheek	20450	829.0	21.85	23.00	1.30	-	-	-	-
		20525	836.5	22.86	23.00	1.03	0.05	0.074	0.076	-
		20600	844.0	21.98	23.00	1.26	-	-	-	-
	Right-Tilt	20450	829.0	21.85	23.00	1.30	-	-	-	-
		20525	836.5	22.86	23.00	1.03	0.06	0.060	0.062	-
		20600	844.0	21.98	23.00	1.26	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1 RB	Left-Cheek	20850	2510	22.68	23.00	1.08	-	-	-	-
		21100	2535	22.77	23.00	1.05	-0.18	0.241	0.254	H8
		21350	2560	22.74	23.00	1.06	-	-	-	-
	Left-Tilt	20850	2510	22.68	23.00	1.08	-	-	-	-
		21100	2535	22.77	23.00	1.05	-0.02	0.212	0.223	-
		21350	2560	22.74	23.00	1.06	-	-	-	-
	Right-Cheek	20850	2510	22.68	23.00	1.08	-	-	-	-
		21100	2535	22.77	23.00	1.05	0.08	0.232	0.245	-
		21350	2560	22.74	23.00	1.06	-	-	-	-
	Right-Tilt	20850	2510	22.68	23.00	1.08	-	-	-	-
		21100	2535	22.77	23.00	1.05	-0.06	0.198	0.209	-
		21350	2560	22.74	23.00	1.06	-	-	-	-
20M_5 0RB	Left-Cheek	20850	2510	22.25	22.50	1.06	-	-	-	-
		21100	2535	22.34	22.50	1.04	0.07	0.196	0.203	-
		21350	2560	22.25	22.50	1.06	-	-	-	-
	Left-Tilt	20850	2510	22.25	22.50	1.06	-	-	-	-
		21100	2535	22.34	22.50	1.04	-0.02	0.178	0.185	-
		21350	2560	22.25	22.50	1.06	-	-	-	-
	Right-Cheek	20850	2510	22.25	22.50	1.06	-	-	-	-
		21100	2535	22.34	22.50	1.04	0.02	0.187	0.194	-
		21350	2560	22.25	22.50	1.06	-	-	-	-
	Right-Tilt	20850	2510	22.25	22.50	1.06	-	-	-	-
		21100	2535	22.34	22.50	1.04	-0.03	0.153	0.158	-
		21350	2560	22.25	22.50	1.06	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1 RB	Left-Cheek	23755	709.0	22.77	23.00	1.05	-	-	-	-
		23790	710.0	22.60	23.00	1.10	0.14	0.050	0.055	H9
		23800	711.0	22.86	23.00	1.03	-	-	-	-
	Left-Tilt	23755	709.0	22.77	23.00	1.05	-	-	-	-
		23790	710.0	22.60	23.00	1.10	0.01	0.044	0.048	-
		23800	711.0	22.86	23.00	1.03	-	-	-	-
	Right-Cheek	23755	709.0	22.77	23.00	1.05	-	-	-	-
		23790	710.0	22.60	23.00	1.10	-0.06	0.048	0.053	-
		23800	711.0	22.86	23.00	1.03	-	-	-	-
	Right-Tilt	23755	709.0	22.77	23.00	1.05	-	-	-	-
		23790	710.0	22.60	23.00	1.10	0.05	0.041	0.045	-
		23800	711.0	22.86	23.00	1.03	-	-	-	-
10M_2 5RB	Left-Cheek	23755	709.0	22.47	22.50	1.01	-	-	-	-
		23790	710.0	22.50	22.50	1.00	0.07	0.049	0.049	-
		23800	711.0	22.41	22.50	1.02	-	-	-	-
	Left-Tilt	23755	709.0	22.47	22.50	1.01	-	-	-	-
		23790	710.0	22.50	22.50	1.00	-0.02	0.045	0.045	-
		23800	711.0	22.41	22.50	1.02	-	-	-	-
	Right-Cheek	23755	709.0	22.47	22.50	1.01	-	-	-	-
		23790	710.0	22.50	22.50	1.00	0.02	0.047	0.047	-
		23800	711.0	22.41	22.50	1.02	-	-	-	-
	Right-Tilt	23755	709.0	22.47	22.50	1.01	-	-	-	-
		23790	710.0	22.50	22.50	1.00	-0.03	0.038	0.038	-
		23800	711.0	22.41	22.50	1.02	-	-	-	-

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

WLAN										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
802.11 b 1Mbps	Left-Cheek	01	2412	14.03	14.50	1.11	-	-	-	-
		06	2437	14.33	14.50	1.04	0.13	0.447	0.465	H10
		11	2462	12.01	14.50	1.77	-	-	-	-
	Left-Tilt	01	2412	14.03	14.50	1.11	-	-	-	-
		06	2437	14.33	14.50	1.04	-0.17	0.379	0.394	-
		11	2462	12.01	14.50	1.77	-	-	-	-
	Right-Cheek	01	2412	14.03	14.50	1.11	-	-	-	-
		06	2437	14.33	14.50	1.04	-0.07	0.430	0.447	-
		11	2462	12.01	14.50	1.77	-	-	-	-
	Right-Tilt	01	2412	14.03	14.50	1.11	-	-	-	-
		06	2437	14.33	14.50	1.04	0.09	0.361	0.375	-
		11	2462	12.01	14.50	1.77	-	-	-	-

Note:

- According to the above table, the initial test position for head is "LeftCheek", and its reported SAR is ≤ 0.4 W/kg. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
 - When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, the 802.11g/n is not required.

WLAN- Scaled Reported SAR							
Mode	Test Position	Frequency		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
		CH	MHz				
802.11b 1Mbps	Left-Cheek	6	2437	98.52%	100%	0.465	0.472
	Left-Tilt	6	2437	98.52%	100%	0.394	0.400
	Right-Cheek	6	2437	98.52%	100%	0.447	0.454
	Right-Tilt	6	2437	98.52%	100%	0.375	0.381

Note:

- According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 98.15% is achievable for WLAN in this project.

Body SAR

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Front	128	824.2	28.38	28.50	1.03	-	-	-	-
		190	836.6	28.36	28.50	1.03	0.08	0.119	0.123	-
		251	848.8	28.30	28.50	1.05	-	-	-	-
	Back	128	824.2	28.38	28.50	1.03	-	-	-	-
		190	836.6	28.36	28.50	1.03	-0.16	0.180	0.186	B1
		251	848.8	28.30	28.50	1.05	-	-	-	-

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Front	512	1850.2	26.86	27.00	1.03	-	-	-	-
		661	1880.0	26.29	27.00	1.18	0.03	0.206	0.243	-
		810	1909.8	25.69	27.00	1.35	-	-	-	-
	Back	512	1850.2	26.86	27.00	1.03	-	-	-	-
		661	1880.0	26.29	27.00	1.18	-0.04	0.326	0.384	B2
		810	1909.8	25.69	27.00	1.35	-	-	-	-

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC 12.2Kbps	Front	4132	826.4	23.21	23.50	1.07	-	-	-	-
		4183	836.6	23.18	23.50	1.08	-0.07	0.081	0.087	-
		4233	846.6	23.09	23.50	1.10	-	-	-	-
	Back	4132	826.4	23.21	23.50	1.07	-	-	-	-
		4183	836.6	23.18	23.50	1.08	-0.16	0.132	0.142	B4
		4233	846.6	23.09	23.50	1.10	-	-	-	-

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC 12.2Kbps	Front	9262	1852.4	22.36	22.50	1.03	-	-	-	-
		9400	1880.0	22.33	22.50	1.04	0.01	0.117	0.122	-
		9538	1907.6	22.21	22.50	1.07	-	-	-	-
	Back	9262	1852.4	22.36	22.50	1.03	-	-	-	-
		9400	1880.0	22.33	22.50	1.04	-0.02	0.165	0.172	B5
		9538	1907.6	22.21	22.50	1.07	-	-	-	-

Note:

- Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1RB	Front	18700	1860.0	22.47	23.00	1.13	-	-	-	-
		18900	1880.0	22.44	23.00	1.14	0.00	0.363	0.413	-
		19100	1900.0	22.29	23.00	1.18	-	-	-	-
	Back	18700	1860.0	22.47	23.00	1.13	-	-	-	-
		18900	1880.0	22.44	23.00	1.14	0.01	0.604	0.687	B6
		19100	1900.0	22.29	23.00	1.18	-	-	-	-
20M_50RB	Front	18700	1860.0	21.98	22.00	1.14	-	-	-	-
		18900	1880.0	21.74	22.00	1.14	-0.01	0.333	0.354	-
		19100	1900.0	21.83	22.00	1.14	-	-	-	-
	Back	18700	1860.0	21.98	22.00	1.14	-	-	-	-
		18900	1880.0	21.74	22.00	1.00	0.09	0.589	0.625	-
		19100	1900.0	21.83	22.00	1.06	-	-	-	-

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1RB	Front	20050	1720.0	22.77	23.00	1.05	-	-	-	-
		20175	1732.5	22.84	23.00	1.04	0.00	0.309	0.321	-
		20300	1745.0	22.69	23.00	1.07	-	-	-	-
	Back	20050	1720.0	22.77	23.00	1.05	-	-	-	-
		20175	1732.5	22.84	23.00	1.04	0.01	0.664	0.689	B7
		20300	1745.0	22.69	23.00	1.07	-	-	-	-
20M_50RB	Front	20050	1720.0	22.33	22.50	1.04	-	-	-	-
		20175	1732.5	22.14	22.50	1.04	-0.02	0.252	0.274	-
		20300	1745.0	22.18	22.50	1.04	-	-	-	-
	Back	20050	1720.0	22.33	22.50	1.04	-	-	-	-
		20175	1732.5	22.14	22.50	1.04	0.11	0.577	0.627	-
		20300	1745.0	22.18	22.50	1.09	-	-	-	-

Note:

- Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
- Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1RB	Front	20450	829.0	23.05	23.50	1.11	-	-	-	-
		20525	836.5	23.22	23.50	1.07	-0.06	0.359	0.383	-
		20600	844.0	22.88	23.50	1.15	-	-	-	-
	Back	20450	829.0	23.05	23.50	1.11	-	-	-	-
		20525	836.5	23.22	23.50	1.07	0.10	0.532	0.567	B8
		20600	844.0	22.88	23.50	1.15	-	-	-	-
10M_25RB	Front	20450	829.0	21.85	23.00	1.07	-	-	-	-
		20525	836.5	22.86	23.00	1.07	-0.06	0.242	0.250	-
		20600	844.0	21.98	23.00	1.07	-	-	-	-
	Back	20450	829.0	21.85	23.00	1.07	-	-	-	-
		20525	836.5	22.86	23.00	1.30	0.09	0.442	0.456	-
		20600	844.0	21.98	23.00	1.03	-	-	-	-

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1RB	Front	20850	2510	22.68	23.00	1.08	-	-	-	-
		21100	2535	22.77	23.00	1.05	0.04	0.363	0.383	-
		21350	2560	22.74	23.00	1.06	-	-	-	-
	Back	20850	2510	22.68	23.00	1.08	-	-	-	-
		21100	2535	22.77	23.00	1.05	-0.18	0.514	0.542	B9
		21350	2560	22.74	23.00	1.06	-	-	-	-
20M_50RB	Front	20850	2510	22.25	22.50	1.05	-	-	-	-
		21100	2535	22.34	22.50	1.05	-0.03	0.296	0.307	-
		21350	2560	22.25	22.50	1.05	-	-	-	-
	Back	20850	2510	22.25	22.50	1.05	-	-	-	-
		21100	2535	22.34	22.50	1.06	0.11	0.435	0.451	-
		21350	2560	22.25	22.50	1.04	-	-	-	-
20M_100RB	Back	20850	2510	22.68	23.00	1.08	-	-	-	-
		21100	2535	22.77	23.00	1.05	0.04	0.363	0.383	-
		21350	2560	22.74	23.00	1.06	-	-	-	-

Note:

- Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
- Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1RB	Front	23755	709.0	22.77	23.00	1.05	-	-	-	-
		23790	710.0	22.60	23.00	1.10	0.04	0.359	0.393	-
		23800	711.0	22.86	23.00	1.03	-	-	-	-
	Back	23755	709.0	22.77	23.00	1.05	-	-	-	-
		23790	710.0	22.60	23.00	1.10	-0.17	0.508	0.557	B11
		23800	711.0	22.86	23.00	1.03	-	-	-	-
10M_25RB	Front	23755	709.0	22.47	22.50	1.10	-	-	-	-
		23790	710.0	22.50	22.50	1.10	-0.03	0.289	0.289	-
		23800	711.0	22.41	22.50	1.10	-	-	-	-
	Back	23755	709.0	22.47	22.50	1.10	-	-	-	-
		23790	710.0	22.50	22.50	1.01	0.11	0.424	0.424	-
		23800	711.0	22.41	22.50	1.00	-	-	-	-

Note:

- Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
- Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

WLAN										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
802.11b 1Mbps	Front	1	2412	14.03	14.50	1.11	-	-	-	-
		6	2437	14.33	14.50	1.04	-0.01	0.285	0.296	-
		11	2462	12.01	14.50	1.77	-	-	-	-
	Back	1	2412	14.03	14.50	1.11	-	-	-	-
		6	2437	14.33	14.50	1.04	0.01	0.418	0.435	B12
		11	2462	12.01	14.50	1.77	-	-	-	-

Note:

- According to the above table, the initial test position for body is "Back", and its reported SAR is ≤ 0.4 W/kg. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.

WLAN- Scaled Reported SAR							
Mode	Test Position	Frequency		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
		CH	MHz				
802.11b 1Mbps	Front	6	2437	98.52%	100%	0.296	0.301
	Back	6	2437	98.52%	100%	0.435	0.442

Note:

- According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 98.15% is achievable for WLAN in this project.

Hotspot SAR

GSM850										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Front	128	824.2	28.38	28.50	1.03	-	-	-	-
		190	836.6	28.36	28.50	1.03	0.08	0.119	0.123	-
		251	848.8	28.30	28.50	1.05	-	-	-	-
	Back	128	824.2	28.38	28.50	1.03	-	-	-	-
		190	836.6	28.36	28.50	1.03	-0.16	0.180	0.186	B1
		251	848.8	28.30	28.50	1.05	-	-	-	-
	Left	190	836.6	28.36	28.50	1.03	0.09	0.129	0.133	-
	Right	190	836.6	28.36	28.50	1.03	-0.06	0.057	0.059	-
	Top	190	836.6	28.36	28.50	1.03	-	-	-	-
Bottom	190	836.6	28.36	28.50	1.03	-0.06	0.123	0.127	-	

PCS1900										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
GPRS (3Tx slot)	Front	512	1850.2	26.86	27.00	1.03	-	-	-	-
		661	1880.0	26.29	27.00	1.18	0.03	0.206	0.243	-
		810	1909.8	25.69	27.00	1.35	-	-	-	-
	Back	512	1850.2	26.86	27.00	1.03	-	-	-	-
		661	1880.0	26.29	27.00	1.18	-0.04	0.326	0.384	B2
		810	1909.8	25.69	27.00	1.35	-	-	-	-
	Left	661	1880.0	26.29	27.00	1.18	0.02	0.197	0.232	-
	Right	661	1880.0	26.29	27.00	1.18	0.01	0.108	0.127	-
	Top	661	1880.0	26.29	27.00	1.18	-	-	-	-
Bottom	661	1880.0	26.29	27.00	1.18	-0.04	0.205	0.241	-	

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

WCDMA Band V										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC 12.2Kbps	Front	4132	826.4	23.21	23.50	1.07	-	-	-	-
		4183	836.6	23.18	23.50	1.08	-0.07	0.081	0.087	-
		4233	846.6	23.09	23.50	1.10	-	-	-	-
	Back	4132	826.4	23.21	23.50	1.07	-	-	-	-
		4183	836.6	23.18	23.50	1.08	-0.16	0.132	0.142	B4
		4233	846.6	23.09	23.50	1.10	-	-	-	-
	Left	4183	836.6	23.18	23.50	1.08	0.12	0.080	0.086	-
	Right	4183	836.6	23.18	23.50	1.08	-0.20	0.049	0.053	-
	Top	4183	836.6	23.18	23.50	1.08	-	-	-	-
Bottom	4183	836.6	23.18	23.50	1.08	-0.08	0.080	0.086	-	

WCDMA Band II										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
RMC 12.2Kbps	Front	9262	1852.4	22.36	22.50	1.03	-	-	-	-
		9400	1880.0	22.33	22.50	1.04	0.01	0.117	0.122	-
		9538	1907.6	22.21	22.50	1.07	-	-	-	-
	Back	9262	1852.4	22.36	22.50	1.03	-	-	-	-
		9400	1880.0	22.33	22.50	1.04	-0.02	0.165	0.172	B4
		9538	1907.6	22.21	22.50	1.07	-	-	-	-
	Left	9400	1880.0	22.33	22.50	1.04	-0.03	0.112	0.117	-
	Right	9400	1880.0	22.33	22.50	1.04	0.02	0.062	0.064	-
	Top	9400	1880.0	22.33	22.50	1.04	-	-	-	-
Bottom	9400	1880.0	22.33	22.50	1.04	0.01	0.109	0.113	-	

Note:

Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg

LTE Band 2										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1RB	Front	18700	1860.0	22.47	23.00	1.13	-	-	-	-
		18900	1880.0	22.44	23.00	1.14	0.00	0.363	0.413	-
		19100	1900.0	22.29	23.00	1.18	-	-	-	-
	Back	18700	1860.0	22.47	23.00	1.13	-	-	-	-
		18900	1880.0	22.44	23.00	1.14	0.01	0.604	0.687	B5
		19100	1900.0	22.29	23.00	1.18	-	-	-	-
	Left	18900	1880.0	22.44	23.00	1.14	-0.01	0.349	0.397	-
	Right	18900	1880.0	22.44	23.00	1.14	0.00	0.264	0.300	-
	Top	18900	1880.0	22.44	23.00	1.14	-	-	-	-
Bottom	18900	1880.0	22.44	23.00	1.14	0.01	0.378	0.431	-	
20M_50RB	Front	18700	1860.0	21.98	22.00	1.00	-	-	-	-
		18900	1880.0	21.74	22.00	1.06	-0.01	0.333	0.354	-
		19100	1900.0	21.83	22.00	1.04	-	-	-	-
	Back	18700	1860.0	21.98	22.00	1.00	-	-	-	-
		18900	1880.0	21.74	22.00	1.06	0.09	0.589	0.625	-
		19100	1900.0	21.83	22.00	1.04	-	-	-	-
	Left	18900	1880.0	21.74	22.00	1.06	-0.02	0.381	0.404	-
	Right	18900	1880.0	21.74	22.00	1.06	-0.02	0.238	0.252	-
	Top	18900	1880.0	21.74	22.00	1.06	-	-	-	-
Bottom	18900	1880.0	21.74	22.00	1.06	0.09	0.373	0.396	-	

Note:

1. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
2. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 4										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1RB	Front	20050	1720.0	22.77	23.00	1.05	-	-	-	-
		20175	1732.5	22.84	23.00	1.04	0.00	0.309	0.321	-
		20300	1745.0	22.69	23.00	1.07	-	-	-	-
	Back	20050	1720.0	22.77	23.00	1.05	-	-	-	-
		20175	1732.5	22.84	23.00	1.04	0.01	0.664	0.689	B6
		20300	1745.0	22.69	23.00	1.07	-	-	-	-
	Left	20175	1732.5	22.84	23.00	1.04	-0.01	0.402	0.417	-
	Right	20175	1732.5	22.84	23.00	1.04	0.00	0.272	0.283	-
	Top	20175	1732.5	22.84	23.00	1.04	-	-	-	-
Bottom	20175	1732.5	22.84	23.00	1.04	0.00	0.407	0.422	-	
20M_50RB	Front	20050	1720.0	22.33	22.50	1.04	-	-	-	-
		20175	1732.5	22.14	22.50	1.09	-0.02	0.252	0.274	-
		20300	1745.0	22.18	22.50	1.08	-	-	-	-
	Back	20050	1720.0	22.33	22.50	1.04	-	-	-	-
		20175	1732.5	22.14	22.50	1.09	0.11	0.577	0.627	-
		20300	1745.0	22.18	22.50	1.08	-	-	-	-
	Left	20175	1732.5	22.14	22.50	1.09	-0.07	0.393	0.427	-
	Right	20175	1732.5	22.14	22.50	1.09	0.01	0.229	0.249	-
	Top	20175	1732.5	22.14	22.50	1.09	-	-	-	-
Bottom	20175	1732.5	22.14	22.50	1.09	0.03	0.382	0.415	-	

Note:

- Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
- Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 5										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1RB	Front	20450	829.0	23.05	23.50	1.11	-	-	-	-
		20525	836.5	23.22	23.50	1.07	-0.06	0.359	0.383	-
		20600	844.0	22.88	23.50	1.15	-	-	-	-
	Back	20450	829.0	23.05	23.50	1.11	-	-	-	-
		20525	836.5	23.22	23.50	1.07	0.10	0.532	0.567	B7
		20600	844.0	22.88	23.50	1.15	-	-	-	-
	Left	20525	836.5	23.22	23.50	1.07	-0.04	0.376	0.401	-
	Right	20525	836.5	23.22	23.50	1.07	0.04	0.231	0.246	-
	Top	20525	836.5	23.22	23.50	1.07	-	-	-	-
Bottom	20525	836.5	23.22	23.50	1.07	0.06	0.322	0.343	-	
10M_25RB	Front	20450	829.0	21.85	23.00	1.30	-	-	-	-
		20525	836.5	22.86	23.00	1.03	-0.06	0.242	0.250	-
		20600	844.0	21.98	23.00	1.26	-	-	-	-
	Back	20450	829.0	21.85	23.00	1.30	-	-	-	-
		20525	836.5	22.86	23.00	1.03	0.09	0.442	0.456	-
		20600	844.0	21.98	23.00	1.26	-	-	-	-
	Left	20525	836.5	22.86	23.00	1.03	-0.07	0.292	0.301	-
	Right	20525	836.5	22.86	23.00	1.03	0.03	0.192	0.198	-
	Top	20525	836.5	22.86	23.00	1.03	-	-	-	-
Bottom	20525	836.5	22.86	23.00	1.03	0.01	0.242	0.250	-	

Note:

- Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
- Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 7										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
20M_1RB	Front	20850	2510	22.68	23.00	1.08	-	-	-	-
		21100	2535	22.77	23.00	1.05	0.04	0.363	0.383	-
		21350	2560	22.74	23.00	1.06	-	-	-	-
	Back	20850	2510	22.68	23.00	1.08	-	-	-	-
		21100	2535	22.77	23.00	1.05	-0.18	0.514	0.542	B8
		21350	2560	22.74	23.00	1.06	-	-	-	-
	Left	21100	2535	22.77	23.00	1.05	0.06	0.321	0.338	-
	Right	21100	2535	22.77	23.00	1.05	-0.04	0.179	0.188	-
	Top	21100	2535	22.77	23.00	1.05	-	-	-	-
Bottom	21100	2535	22.77	23.00	1.05	-0.04	0.278	0.293	-	
20M_50RB	Front	20850	2510	22.25	22.50	1.06	-	-	-	-
		21100	2535	22.34	22.50	1.04	-0.03	0.296	0.307	-
		21350	2560	22.25	22.50	1.06	-	-	-	-
	Back	20850	2510	22.25	22.50	1.06	-	-	-	-
		21100	2535	22.34	22.50	1.04	0.11	0.435	0.451	-
		21350	2560	22.25	22.50	1.06	-	-	-	-
	Left	21100	2535	22.34	22.50	1.04	-0.03	0.250	0.259	-
	Right	21100	2535	22.34	22.50	1.04	0.03	0.175	0.182	-
	Top	21100	2535	22.34	22.50	1.04	-	-	-	-
Bottom	21100	2535	22.34	22.50	1.04	0.15	0.229	0.237	-	

Note:

- Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
- Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

LTE Band 17										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
10M_1RB	Front	23755	709.0	22.77	23.00	1.05	-	-	-	-
		23790	710.0	22.60	23.00	1.10	0.04	0.359	0.393	-
		23800	711.0	22.86	23.00	1.03	-	-	-	-
	Back	23755	709.0	22.77	23.00	1.05	-	-	-	-
		23790	710.0	22.60	23.00	1.10	-0.17	0.508	0.557	B9
		23800	711.0	22.86	23.00	1.03	-	-	-	-
	Left	23790	710.0	22.60	23.00	1.10	0.06	0.317	0.348	-
	Right	23790	710.0	22.60	23.00	1.10	-0.04	0.176	0.193	-
	Top	23790	710.0	22.60	23.00	1.10	-	-	-	-
Bottom	23790	710.0	22.60	23.00	1.10	-0.04	0.275	0.301	-	
10M_25RB	Front	23755	709.0	22.47	22.50	1.01	-	-	-	-
		23790	710.0	22.50	22.50	1.00	-0.03	0.289	0.289	-
		23800	711.0	22.41	22.50	1.02	-	-	-	-
	Back	23755	709.0	22.47	22.50	1.01	-	-	-	-
		23790	710.0	22.50	22.50	1.00	0.11	0.424	0.424	-
		23800	711.0	22.41	22.50	1.02	-	-	-	-
	Left	23790	710.0	22.50	22.50	1.00	-0.03	0.244	0.244	-
	Right	23790	710.0	22.50	22.50	1.00	0.03	0.171	0.171	-
	Top	23790	710.0	22.50	22.50	1.00	-	-	-	-
Bottom	23790	710.0	22.50	22.50	1.00	0.15	0.223	0.223	-	

Note:

9. Per KDB865664 D01v01r04, Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg
10. Per KDB 941225 D05v02r03, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

WLAN										
Mode	Test Position	Frequency		Conducted Power (dBm)	Tune up limit (dBm)	Tune up scaling factor	Power Drift(dB)	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	Test Plot
		CH	MHz							
802.11b 1Mbps	Front	1	2412	14.03	14.50	1.11	-	-	-	-
		6	2437	14.33	14.50	1.04	-0.01	0.285	0.296	-
		11	2462	12.01	14.50	1.77	-	-	-	-
	Back	1	2412	14.03	14.50	1.11	-	-	-	-
		6	2437	14.33	14.50	1.04	0.01	0.418	0.435	B10
		11	2462	12.01	14.50	1.77	-	-	-	-
	Left	6	2437	14.33	14.50	1.04	-	-	-	-
	Right	6	2437	14.33	14.50	1.04	0.01	0.349	0.363	-
	Top	6	2437	14.33	14.50	1.04	0.00	0.276	0.287	-
Bottom	6	2437	14.33	14.50	1.04	-	-	-	-	

Note:

- According to the above table, the initial test position for body is "Back", and its reported SAR is ≤ 0.4 W/kg. Thus further SAR measurement is not required for the other (remaining) test positions. Because the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied. SAR is not required for the following 2.4 GHz OFDM conditions.
 - When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
 - When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. the 802.11g/n is not required

WLAN- Scaled Reported SAR							
Mode	Test Position	Frequency		Actual duty factor	maximum duty factor	Reported SAR (1g)(W/kg)	Scaled reported SAR (1g)(W/kg)
		CH	MHz				
802.11b 1Mbps	Front	6	2437	98.52%	100%	0.296	0.301
	Back	6	2437	98.52%	100%	0.435	0.442
	Left	6	2437	98.52%	100%	0.363	0.369
	Top	6	2437	98.52%	100%	0.287	0.291

Note:

- According to the KDB248227 D01, The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. A maximum transmission duty factor of 98.15% is achievable for WLAN in this project.

SAR Test Data Plots

Test mode: GSM850-GPRS 3TS Test Position: Left Head Cheek Test Plot: H1

Date:2018-03-19

Communication System: Customer System; Frequency: 836.6 MHz;Duty Cycle: 1: 3.01995

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.15, 9.15, 9.15); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Measurement grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (measured) = 0.116 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.505 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.140 mW/g

SAR(1 g) = 0.107 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.120 W/kg

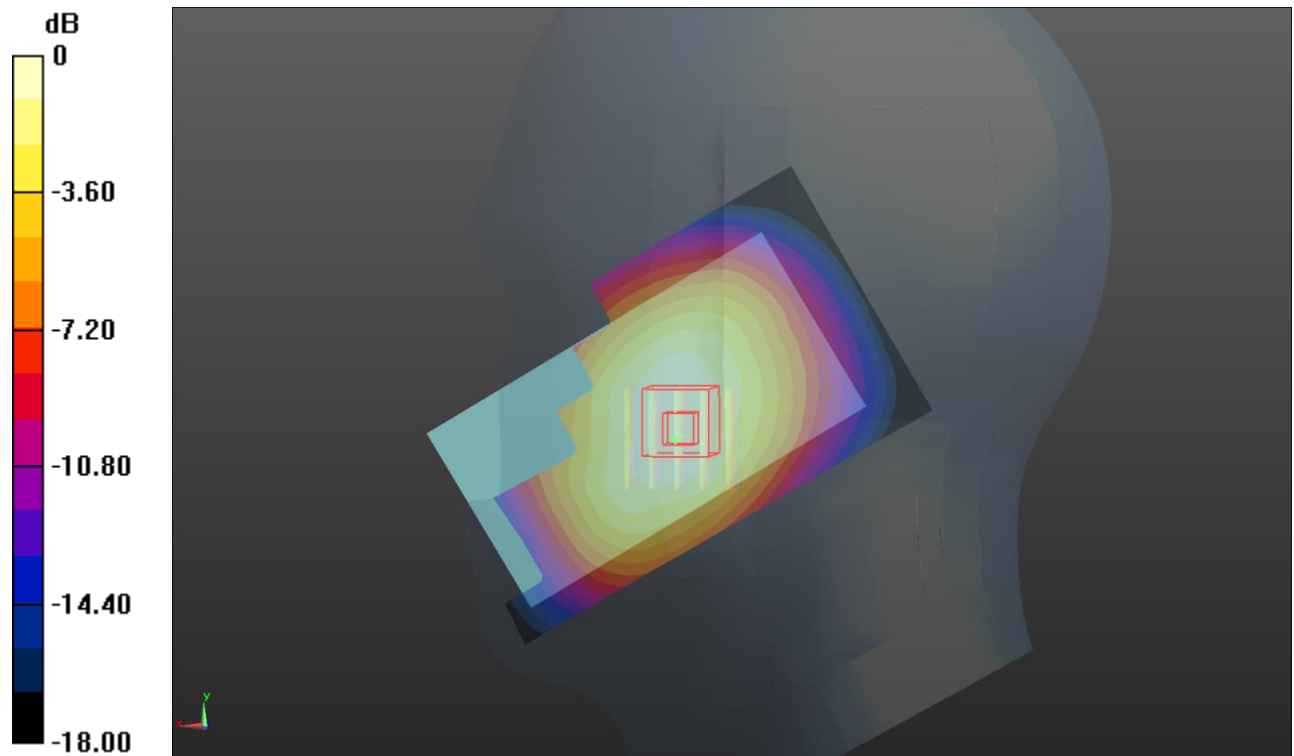

Test mode: PCS1900 GPRS 3TS Test Position: Left Head Cheek Test Plot: H2

Date:2018-03-20

Communication System: Customer System; Frequency: 1880 MHz;Duty Cycle: 1: 3.01995

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(7.58, 7.58, 7.58); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Measurement grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (measured) = 0.0572 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.604 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.080 mW/g

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.0596 W/kg

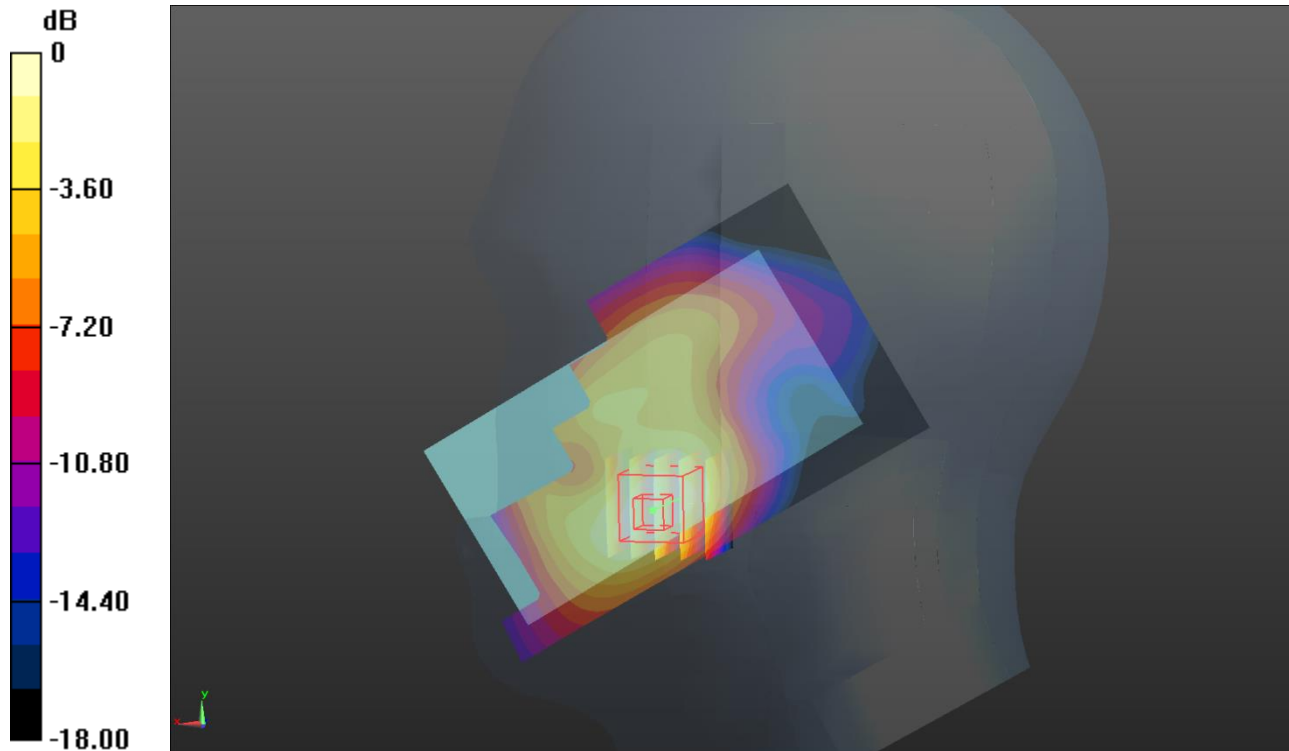

Test mode: WCDMA Band V

Test Position: Left Head Cheek

Test Plot: H3

Date:2018-03-19

Communication System: WCDMA; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.15, 9.15, 9.15); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.104 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.777 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.107 mW/g

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.0962 W/kg

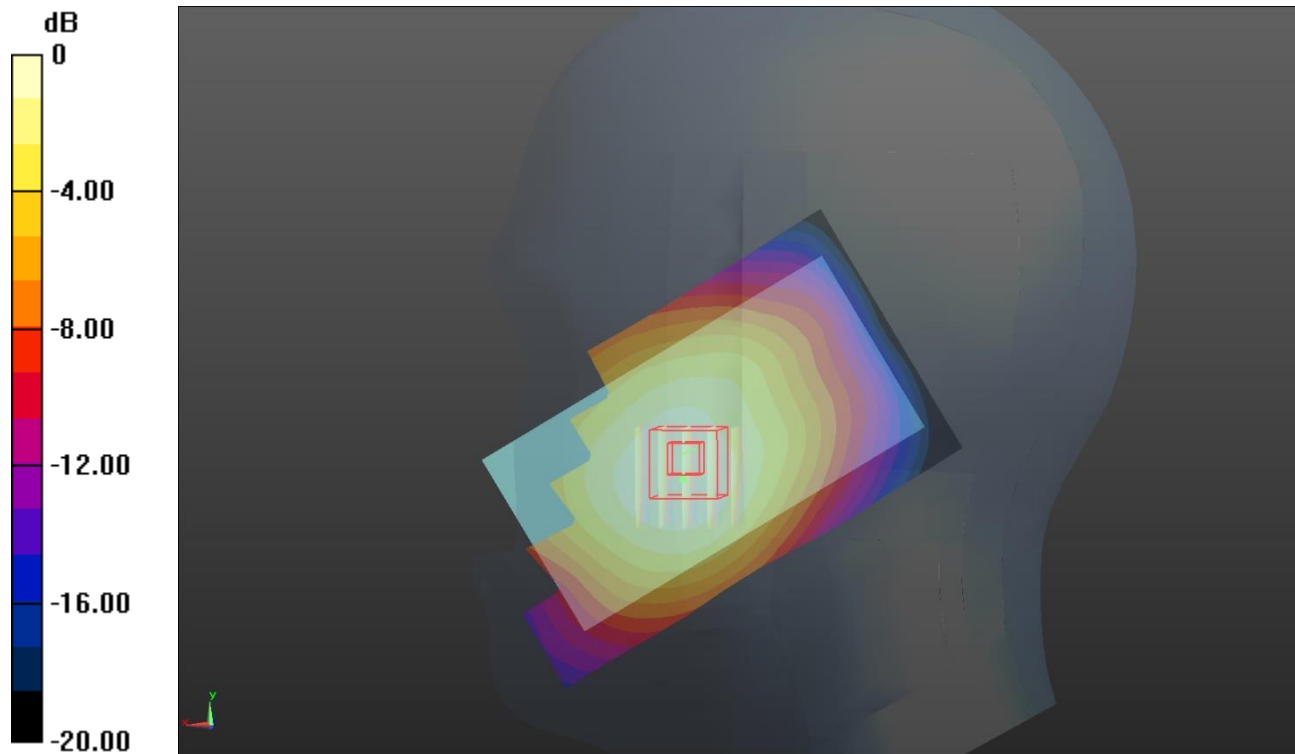

Test mode: WCDMA Band II

Test Position: Left Head Cheek

Test Plot: H4

Date:2018-03-20

Communication System: WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 39.76$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(7.58, 7.58, 7.58); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (measured) = 0.197 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.476 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.274 mW/g

SAR(1 g) = 0.179 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.209 W/kg

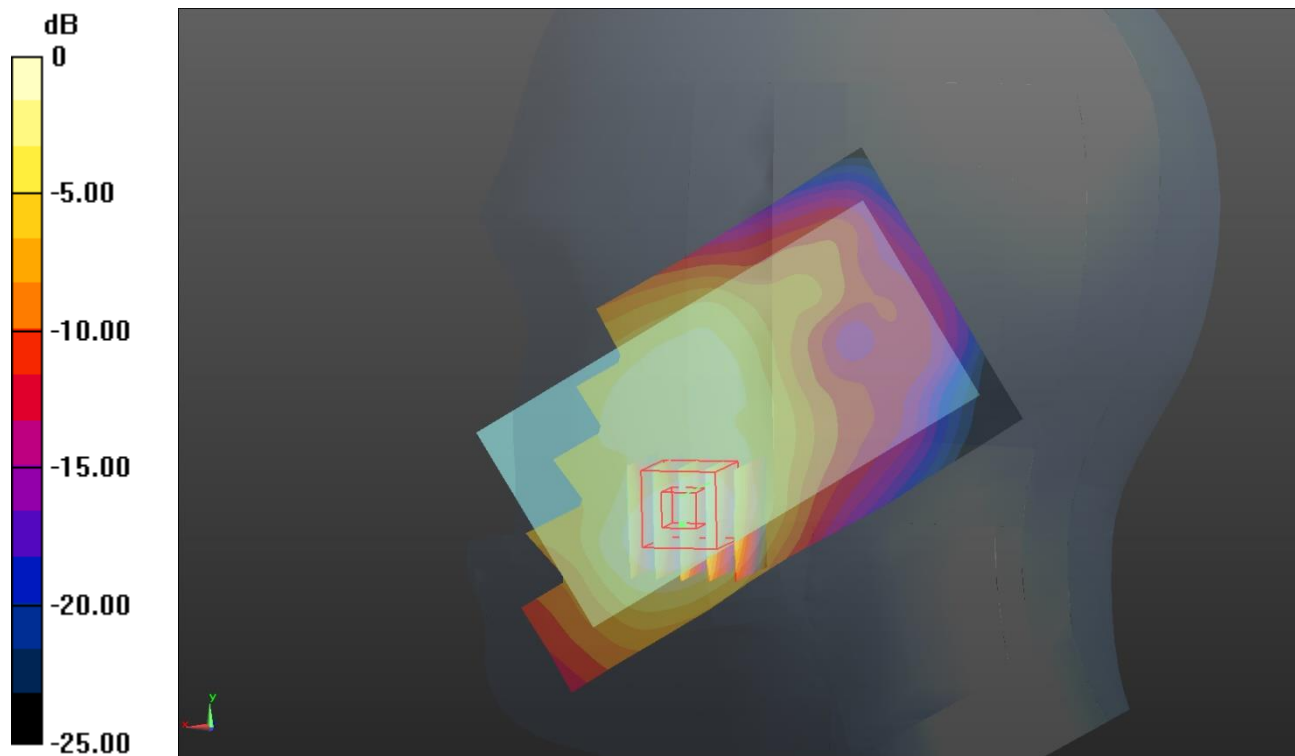

Test mode: LTE Band 2

Test Position: Left Head Cheek

Test Plot: H5

Date:2018-03-20

Communication System: Generic LTE; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(7.58, 7.58, 7.58); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.155 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.551 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.186 mW/g

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.147 W/kg

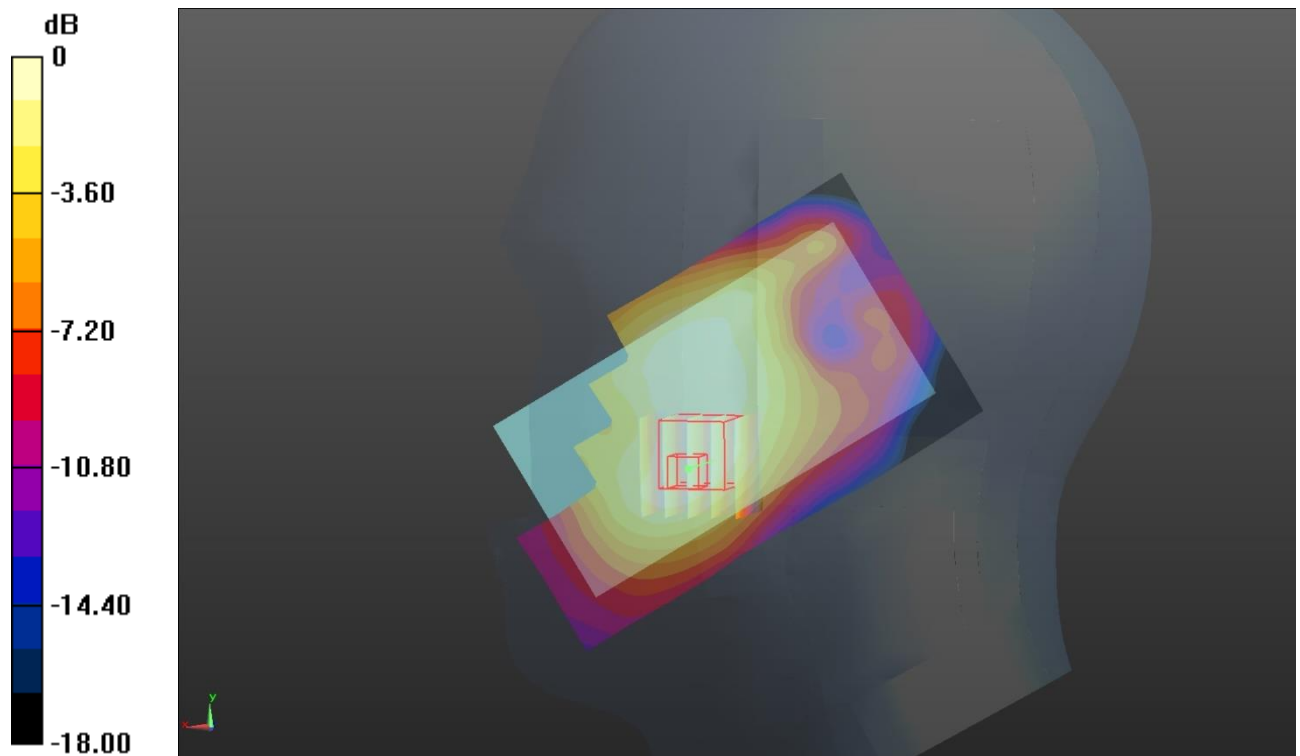

Test mode: LTE Band 4

Test Position: Left Head Cheek

Test Plot: H6

Date:2018-03-20

Communication System: Generic LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.363$ mho/m; $\epsilon_r = 40.136$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842; ConvF(7.89, 7.89, 7.89); Calibrated: 15/08/2017;

•Sensor-Surface: 1.4mm (Mechanical Surface Detection)

•Electronics: DAE4 Sn1315; Calibrated: 15/08/2017

•Phantom: SAM 1; Type: SAM;

•Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.499 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.603 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.572 mW/g

SAR(1 g) = 0.405 mW/g; SAR(10 g) = 0.269 mW/g

Maximum value of SAR (measured) = 0.465 W/kg

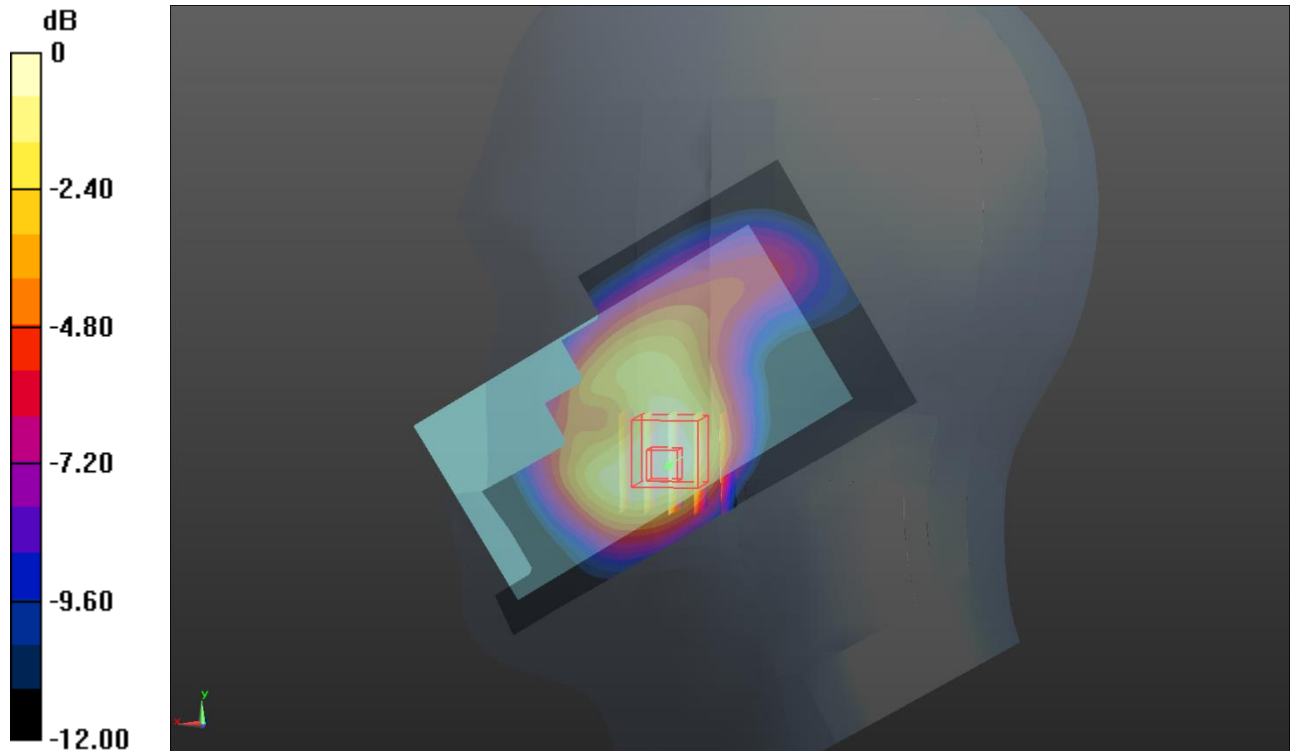

Test mode: LTE Band 5

Test Position: Left Head Cheek

Test Plot: H7

Date:2018-03-19

Communication System: Generic LTE; Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.479$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.15, 9.15, 9.15); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.104 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.777 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.107 mW/g

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.0962 W/kg

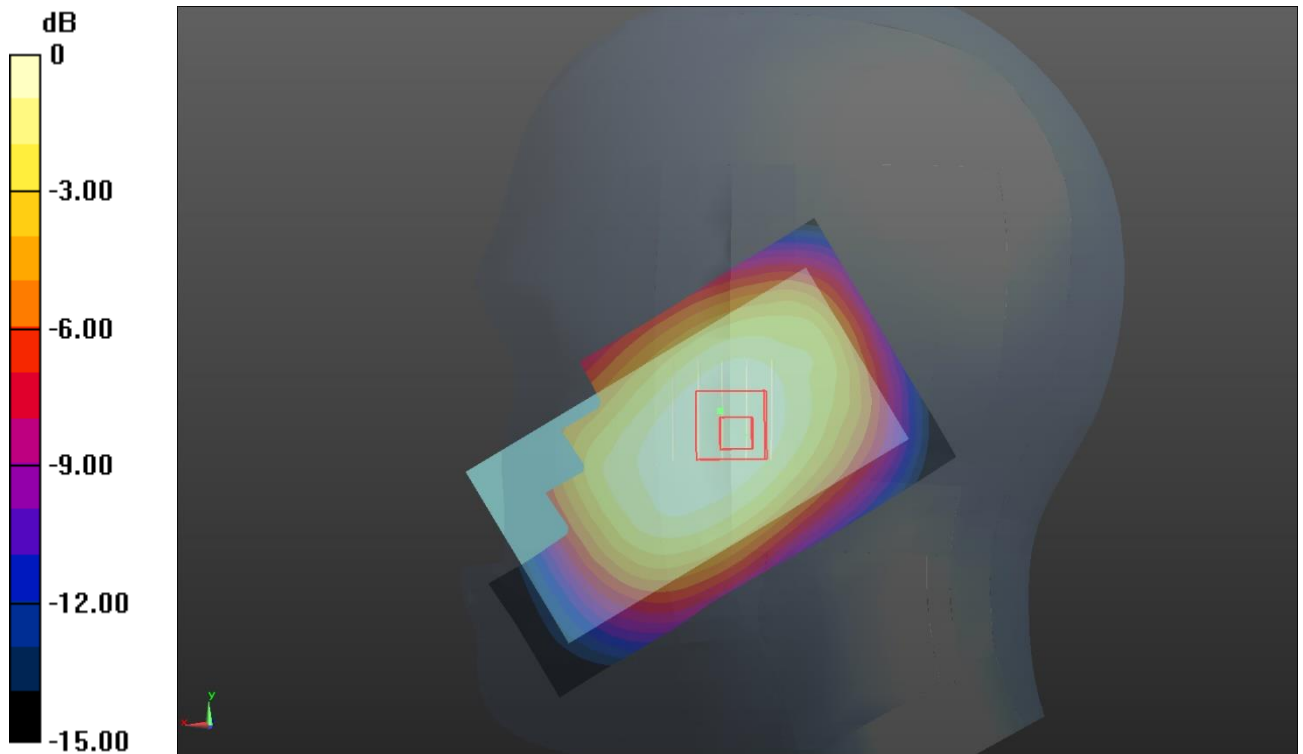

Test mode: LTE Band 7

Test Position: Left Head Cheek

Test Plot: H8

Date:2018-03-21

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 1.799$ mho/m; $\epsilon_r = 40.469$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(6.78, 6.78, 6.78); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.340 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.184 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.248 mW/g

SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.287 W/kg

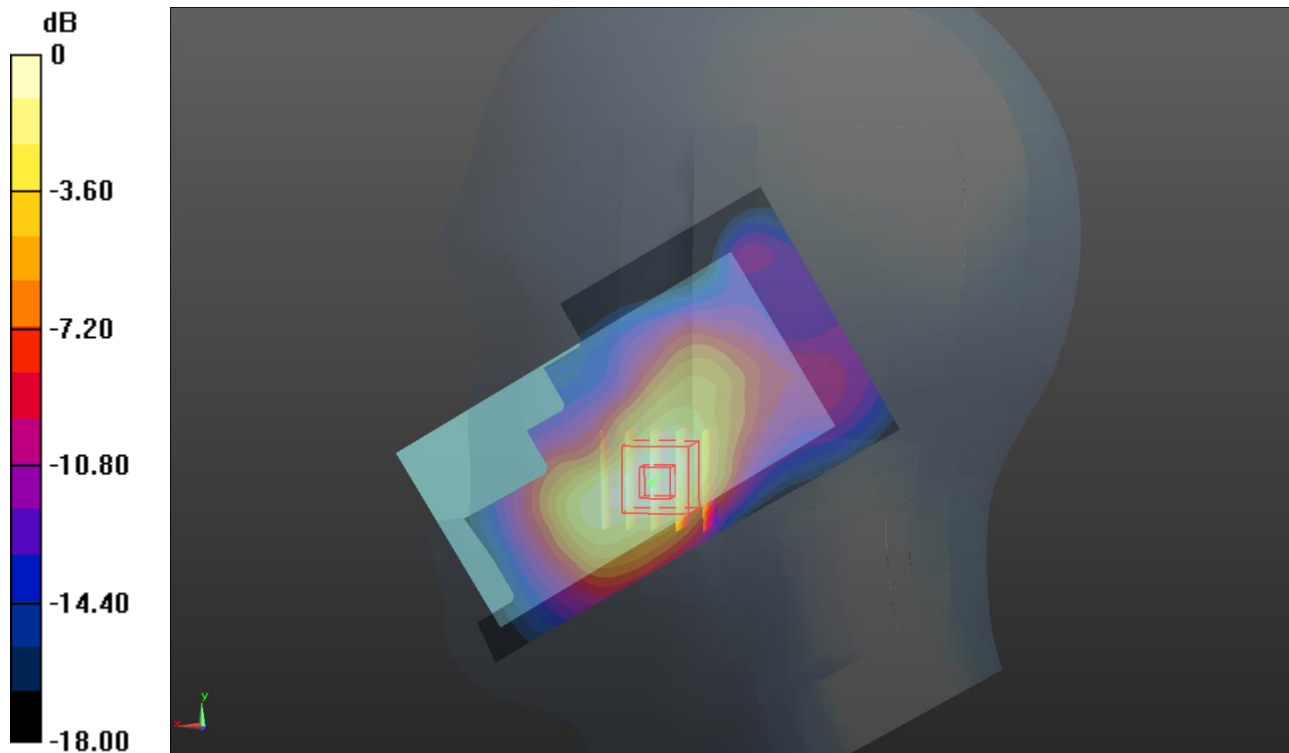

Test mode: LTE Band 17

Test Position: Left Head Cheek

Test Plot: H9

Date: 2018-03-19

Communication System: Generic LTE; Frequency: 710 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.83 \text{ mho/m}$; $\epsilon_r = 43.258$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.41, 9.41, 9.41); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.440 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.365 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.064 mW/g

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.0550 W/kg

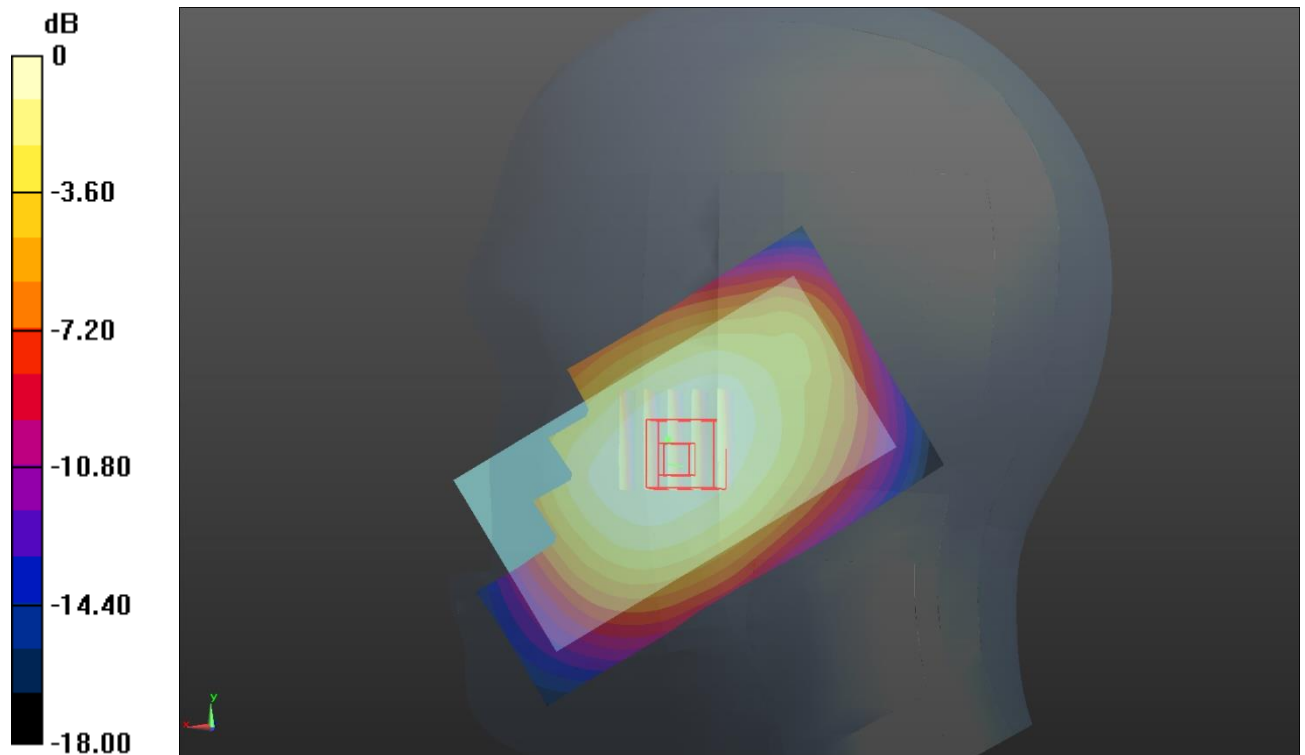

Test mode: WLAN 802.11b

Test Position: Left Head Cheek

Test Plot: H10

Date:2018-03-21

Communication System: wifi; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.883$ mho/m; $\epsilon_r = 38.021$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(6.92, 6.92, 6.92); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 1; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.616 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.905 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 3.289 mW/g

SAR(1 g) = 0.447 mW/g; SAR(10 g) = 0.280 mW/g

Maximum value of SAR (measured) = 0.515 W/kg

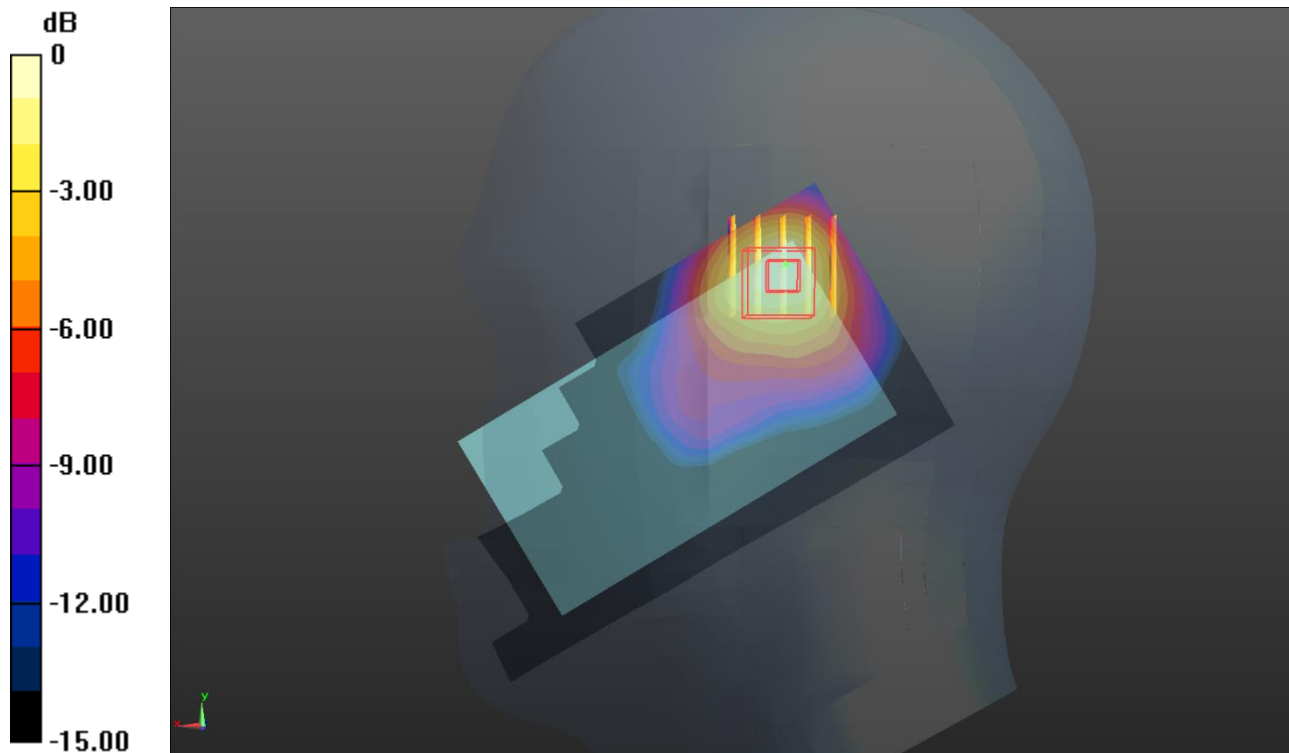

Test mode: GSM850 GPRS 3TS Test Position: Body- worn Rear Side Test Plot: B1

Date:2018-03-19

Communication System: Customer System; Frequency: 836.6 MHz;Duty Cycle: 1: 3.01995

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.02, 9.02, 9.02); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (measured) = 0.198 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.081 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.280 mW/g

SAR(1 g) = 0.180 mW/g; SAR(10 g) = 0.118 mW/g

Maximum value of SAR (measured) = 0.215 W/kg

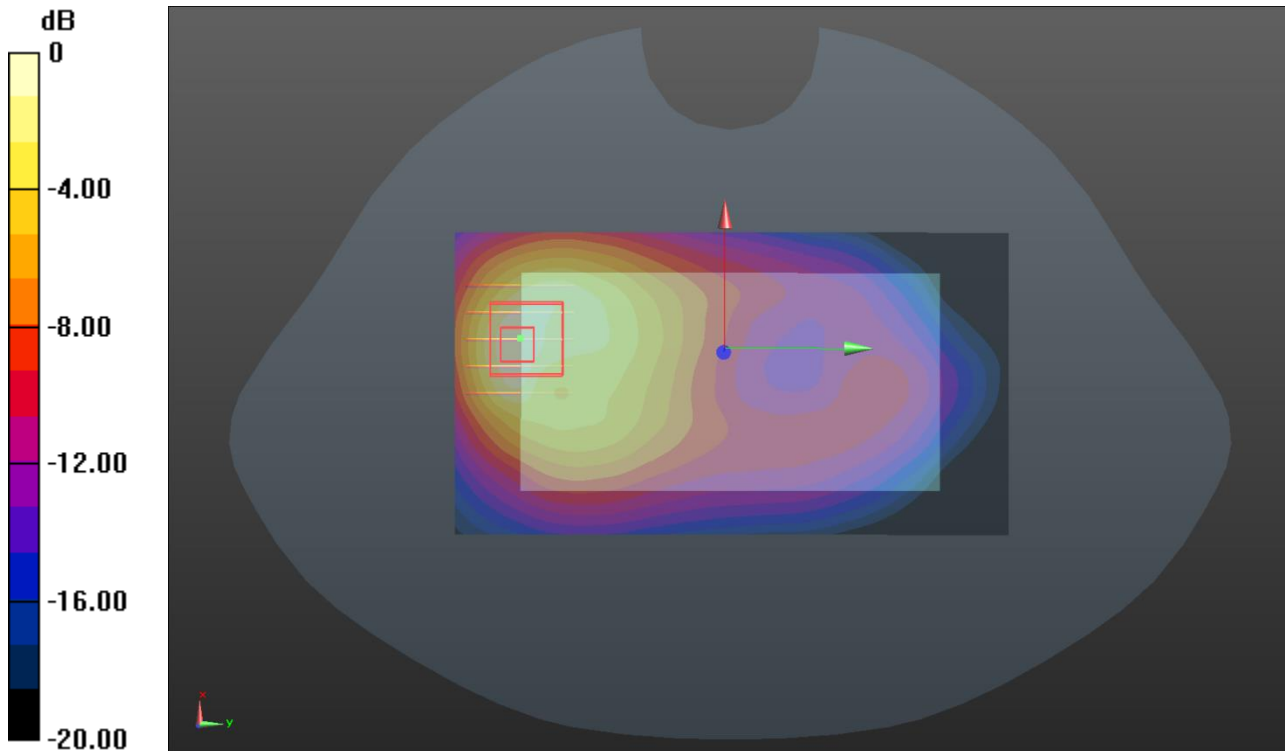

Test mode: PCS1900 GPRS 3TS Test Position: Body- worn Rear Side Test Plot: B2

Date:2018-03-20

Communication System: Customer System; Frequency: 1880 MHz;Duty Cycle: 1: 3.01995

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ mho/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(7.32, 7.32, 7.32); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (measured) = 0.336 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.703 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.604 mW/g

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.417 W/kg

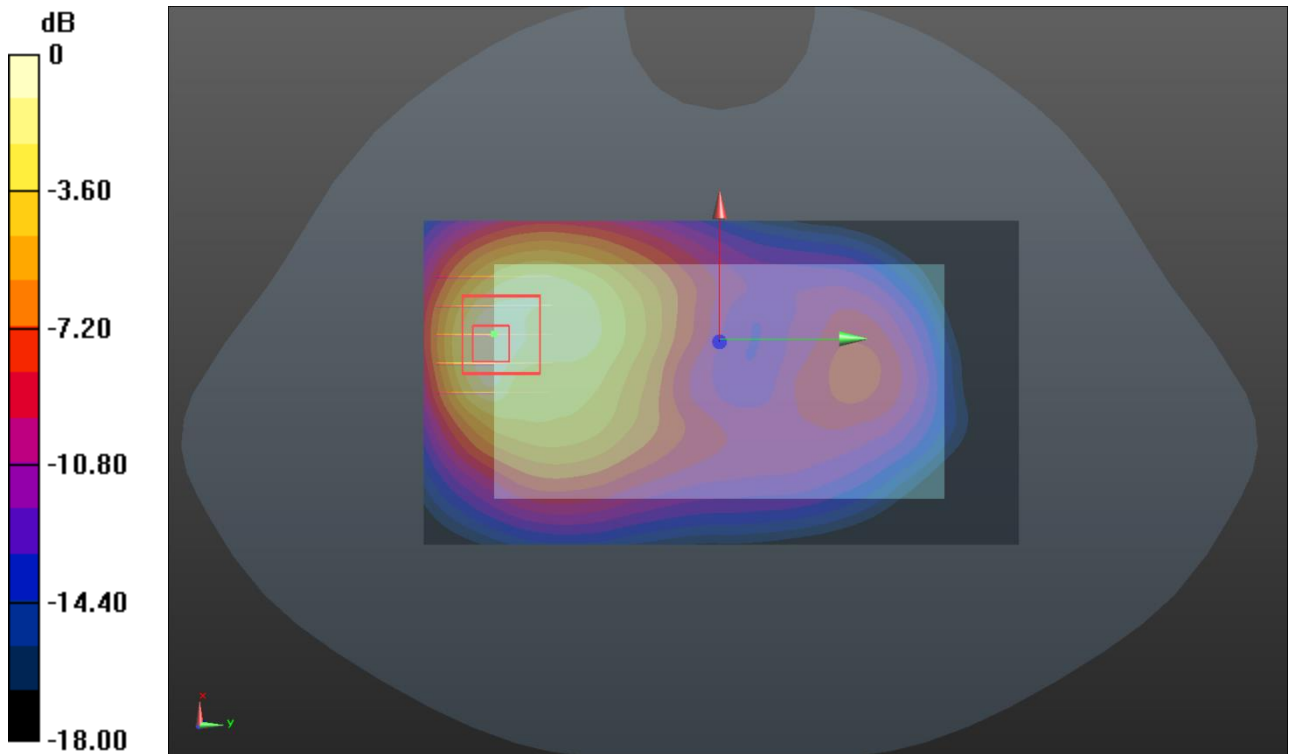

Test mode: WCDMA Band V Test Position: Body- worn Rear Side Test Plot: B3

Date:2018-03-19

Communication System: WCDMA; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55.86$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.02, 9.02, 9.02); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.252 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.034 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.252 mW/g

SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.097 mW/g

Maximum value of SAR (measured) = 0.257 W/kg

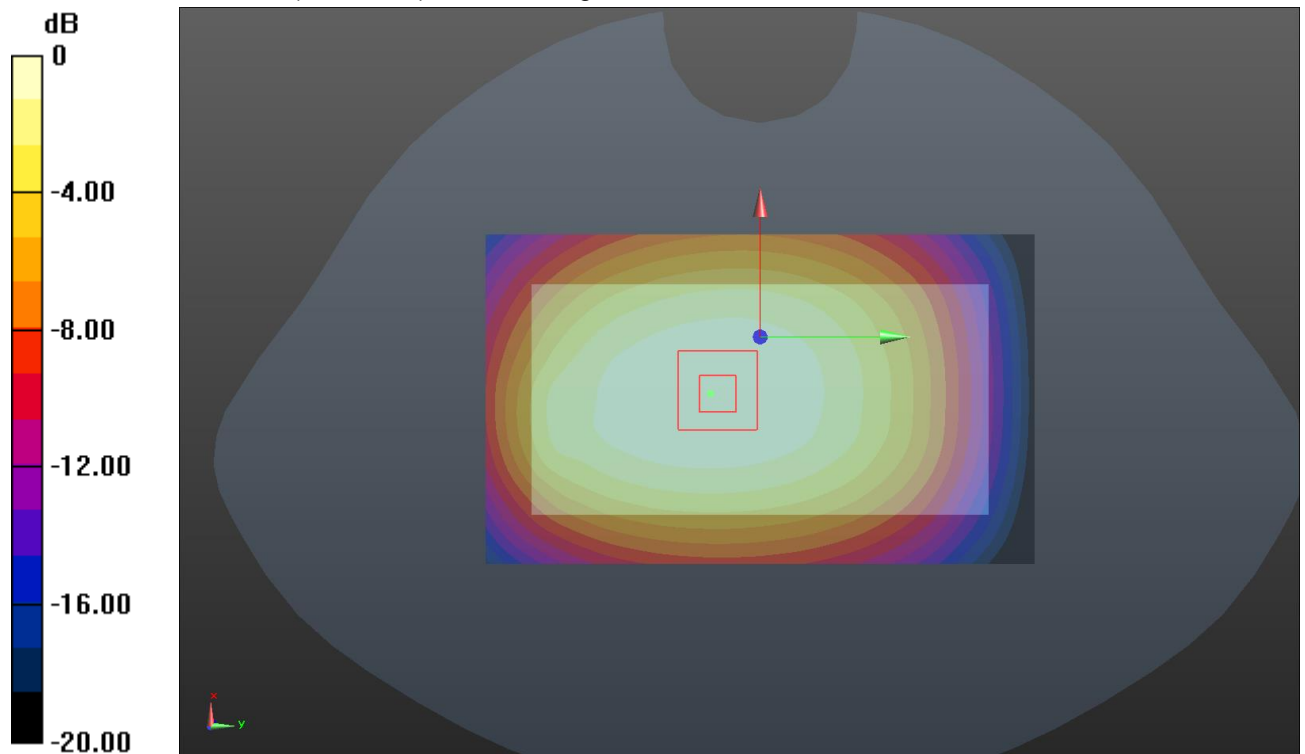

Test mode: WCDMA Band II Test Position: Body- worn Rear Side Test Plot: B4

Date:2018-03-20

Communication System: WCDMA; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(7.32, 7.32, 7.32); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.299 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.174 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.252 mW/g

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.110 mW/g

Maximum value of SAR (measured) = 0.298 W/kg

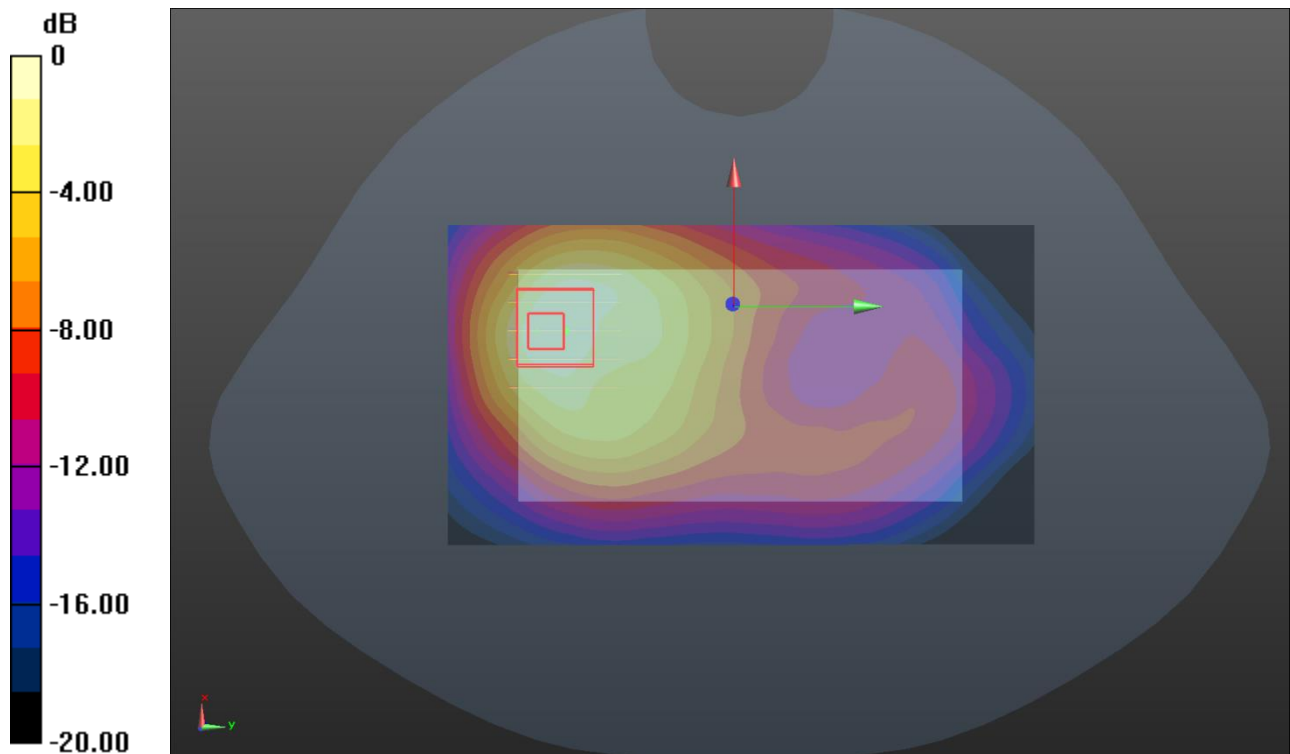

Test mode: LTE Band 2

Test Position: Body- worn Rear Side

Test Plot: B5

Date:2018-03-20

Communication System: Generic LTE; Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(7.32, 7.32, 7.32); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.02 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.537 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.009 mW/g

SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.425 mW/g

Maximum value of SAR (measured) = 0.789 W/kg

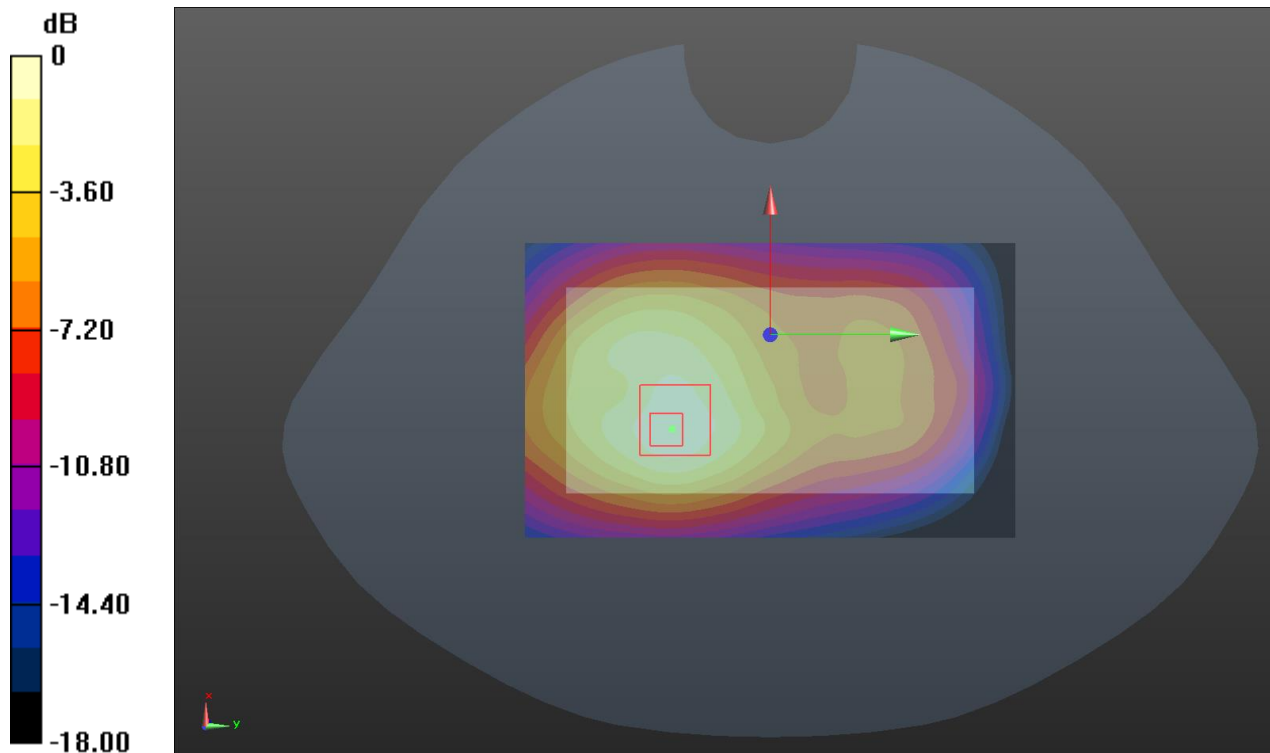

Test mode: LTE Band 4	Test Position: Body- worn Rear Side	Test Plot: B6
-----------------------	-------------------------------------	---------------

Date:2018-03-20

Communication System: Generic LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.459 \text{ mho/m}$; $\epsilon_r = 53.239$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(7.57, 7.57, 7.57); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.661 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.458 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.026 mW/g

SAR(1 g) = 0.664 mW/g; SAR(10 g) = 0.424 mW/g

Maximum value of SAR (measured) = 0.775 W/kg

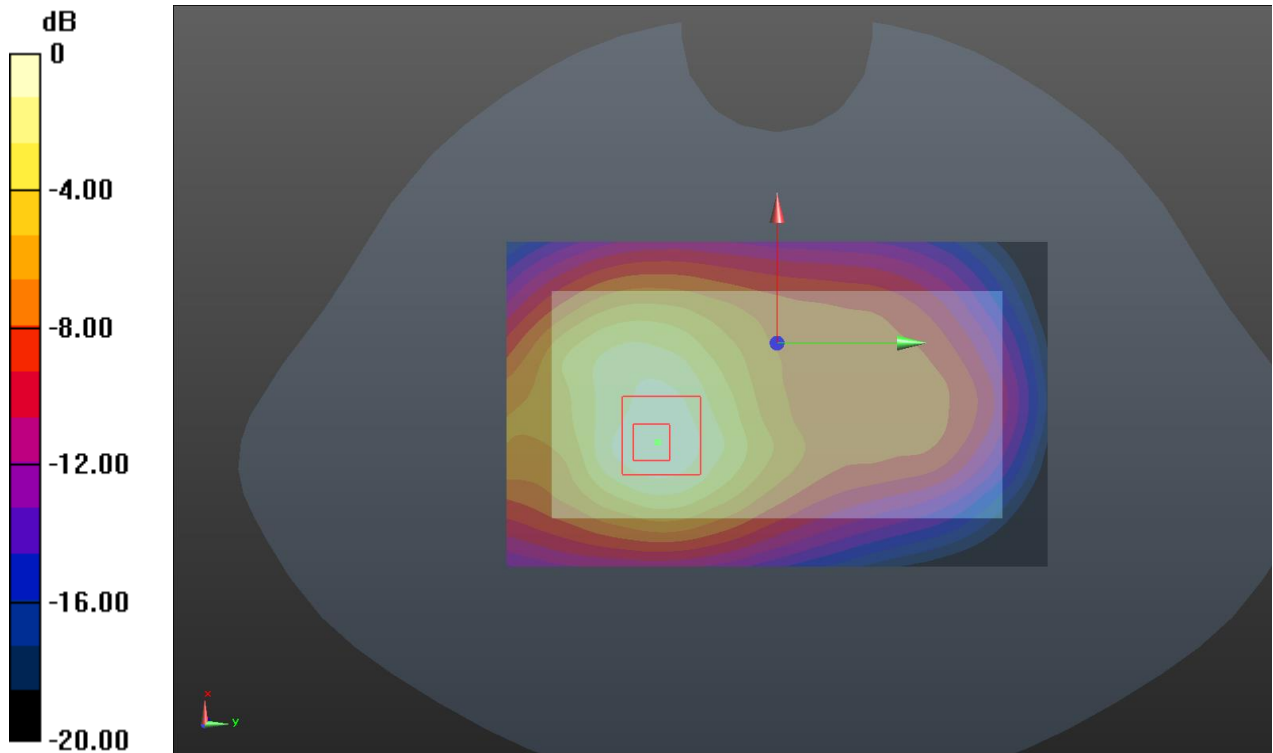

Test mode: LTE Band 5

Test Position: Body- worn Rear Side

Test Plot: B7

Date:2018-03-19

Communication System: Generic LTE; Frequency: 836.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55.859$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.02, 9.02, 9.02); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.563 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.886 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.707 mW/g

SAR(1 g) = 0.532 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.538 W/kg

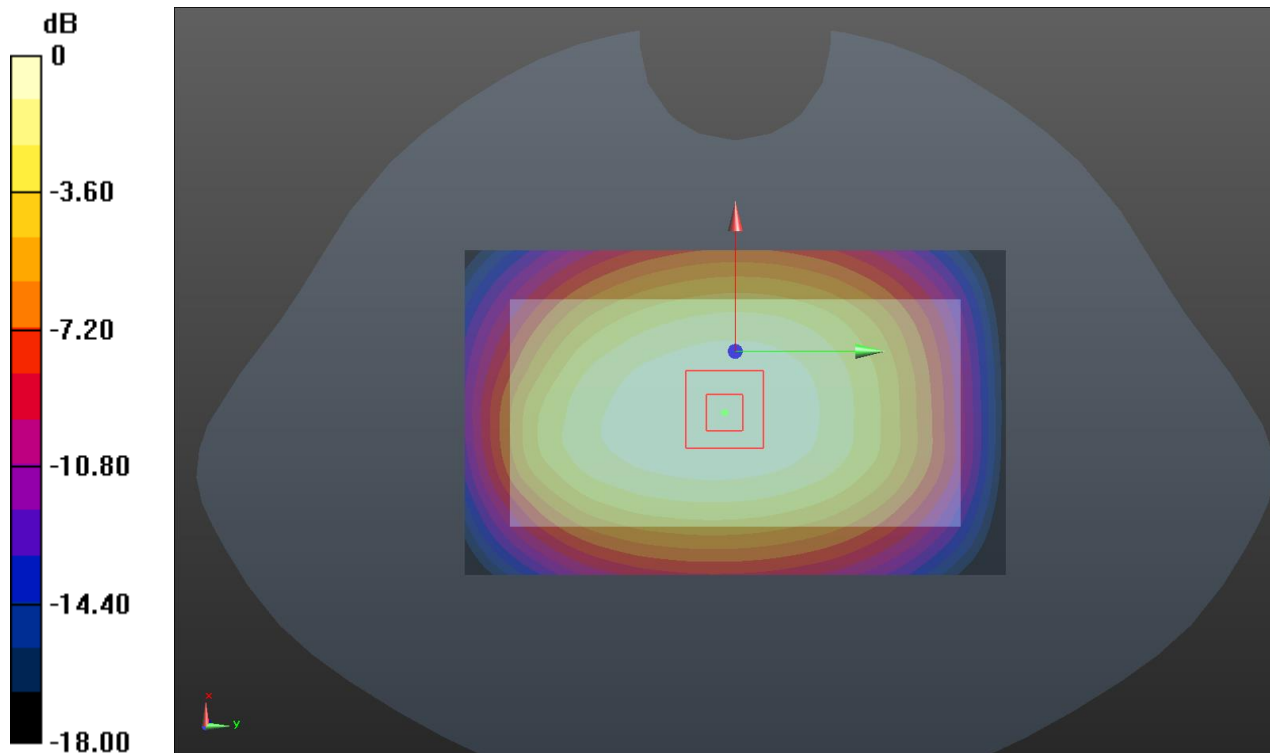

Test mode: LTE Band 7

Test Position: Body- worn Rear Side

Test Plot: B8

Date:2018-03-21

Communication System: Generic LTE; Frequency: 2535 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2535$ MHz; $\sigma = 2.09$ mho/m; $\epsilon_r = 50.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(6.97, 6.97, 6.97); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (measured) = 0.638 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.818 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.142 mW/g

SAR(1 g) = 0.514 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 0.676 W/kg

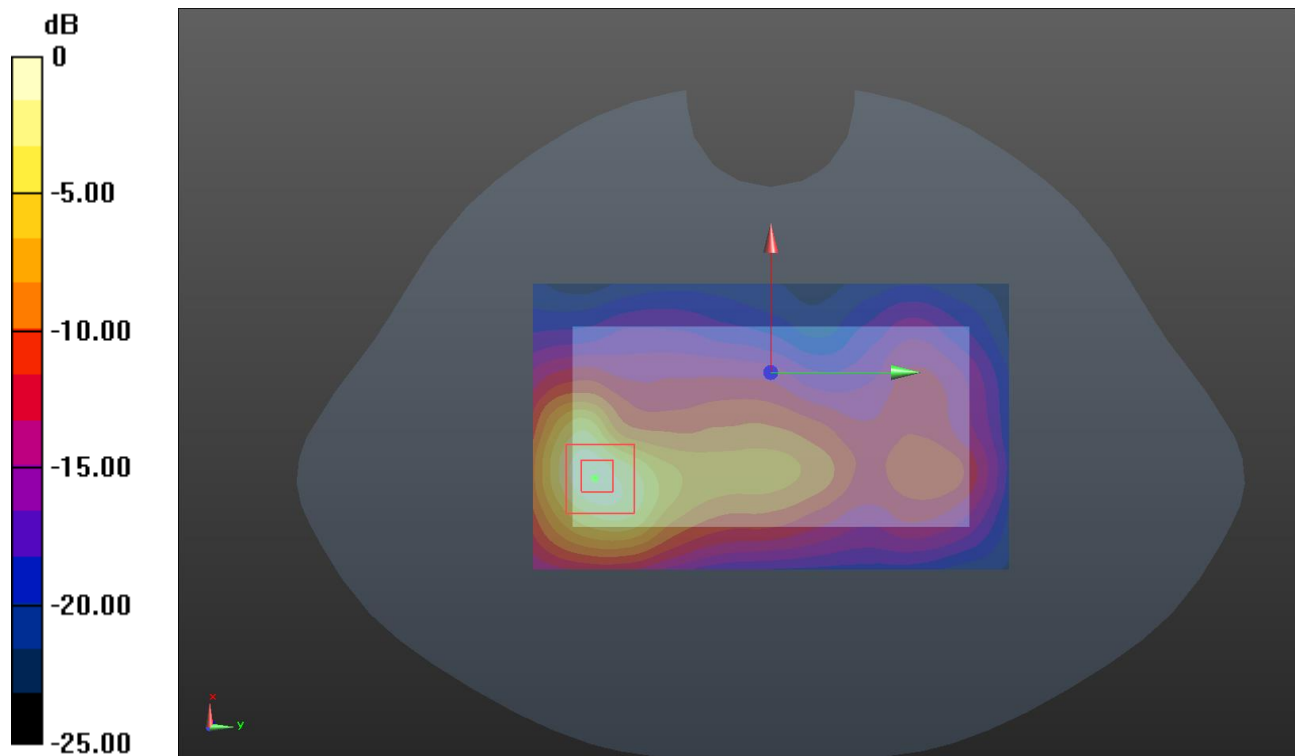

Test mode: LTE Band 17

Test Position: Body- worn Rear Side

Test Plot: B9

Date:2018-03-19

Communication System: Generic LTE; Frequency: 710 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 710 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 55.258$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(9.31, 9.31, 9.31); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.749 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.428 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.185 mW/g

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.387 mW/g

Maximum value of SAR (measured) = 0.645 W/kg

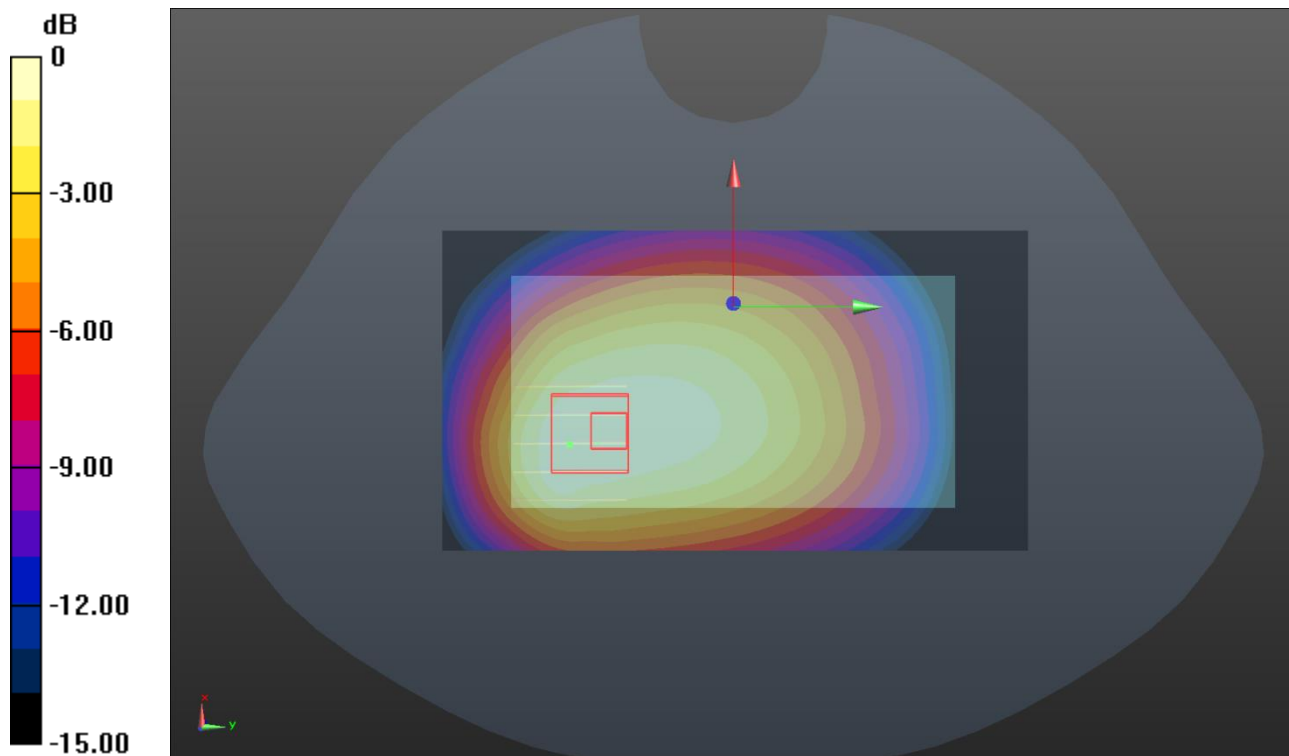

Test mode: WLAN 802.11b

Test Position: Body- worn Rear Side

Test Plot: B10

Date:2018-03-21

Communication System: wifi; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 2.02$ mho/m; $\epsilon_r = 50.719$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 – SN3842; ConvF(7.01, 7.01, 7.01); Calibrated: 15/08/2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 15/08/2017
- Phantom: SAM 2; Type: SAM;
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (measured) = 0.502 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.382 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.894 mW/g

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.542 W/kg

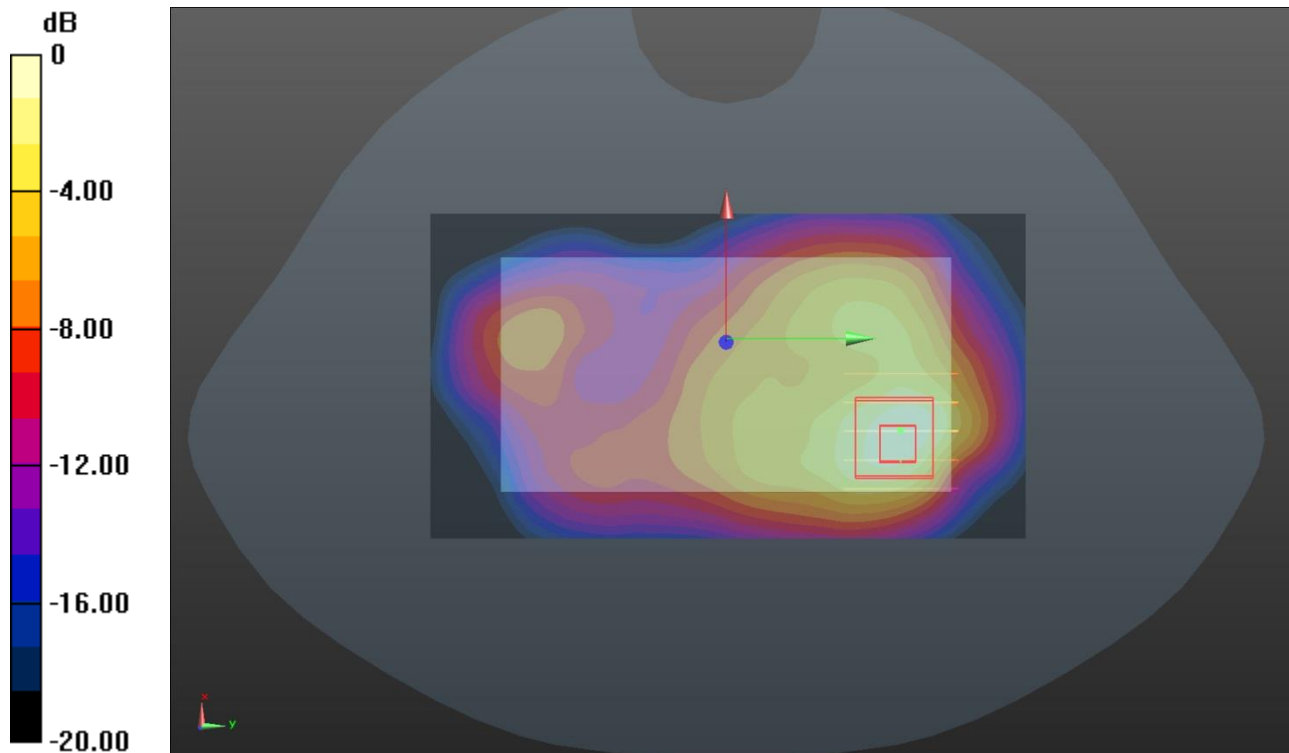

15. Simultaneous Transmission analysis

No.	Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Note
1	GSM(voice) + Bluetooth (data)	Yes	Yes		
2	GSM(voice) + WIFI (data)	Yes	Yes		
3	WCDMA(voice) + Bluetooth (data)	Yes	Yes		
4	WCDMA(voice) + WIFI (data)	Yes	Yes		
5	GPRS (data) + Bluetooth (data)	Yes	Yes	NA	
6	GPRS (data) + WIFI (data)	Yes	Yes	Yes	
7	WCDMA (data) + Bluetooth (data)	Yes	Yes	NA	
8	WCDMA (data) + WIFI (data)	Yes	Yes	Yes	
9	LTE + Bluetooth (data)	Yes	Yes	NA	
10	LTE + WIFI (data)	Yes	Yes	Yes	

General note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. EUT will choose either GSM or WCDMA LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. The reported SAR summation is calculated based on the same configuration and test position
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 based on the formula below
 - a) $[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f(\text{GHz})}/x] \text{W/kg}$ for test separation distances $\leq 50\text{mm}$; when $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.
 - b) When the minimum separation distance is $<5\text{mm}$, the distance is used 5mm to determine SAR test exclusion
 - c) 0.4 W/kg for 1-g SAR and 1.0W/kg for 10-g SAR, when the test separation distances is $>50\text{mm}$.

Bluetooth Max power	Exposure position	Head	Body worn
	Test separation	0mm	10mm
4.00 dBm	Estimated SAR (W/kg)	0.105	0.052

Maximum reported SAR value for Head

WWAN PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCE	WLAN DTS	
GSM	GSM850	Left Cheek	0.111	0.472	0.583
		Left Tilted	0.085	0.400	0.485
		Right Cheek	0.102	0.454	0.556
		Right Tilted	0.078	0.381	0.459
	PCS1900	Left Cheek	0.060	0.472	0.532
		Left Tilted	0.048	0.400	0.448
		Right Cheek	0.058	0.454	0.511
		Right Tilted	0.045	0.381	0.426
WCDMA	Band V	Left Cheek	0.094	0.472	0.566
		Left Tilted	0.075	0.400	0.475
		Right Cheek	0.090	0.454	0.544
		Right Tilted	0.071	0.381	0.452
	Band II	Left Cheek	0.186	0.472	0.658
		Left Tilted	0.153	0.400	0.553
		Right Cheek	0.178	0.454	0.631
		Right Tilted	0.142	0.381	0.523
LTE	B2 1RB	Left Cheek	0.147	0.472	0.619
		Left Tilted	0.120	0.400	0.520
		Right Cheek	0.143	0.454	0.597
		Right Tilted	0.114	0.381	0.495
	B2 50RB	Left Cheek	0.119	0.472	0.591
		Left Tilted	0.104	0.400	0.504
		Right Cheek	0.110	0.454	0.564
		Right Tilted	0.094	0.381	0.475
	B4 1RB	Left Cheek	0.420	0.472	0.892
		Left Tilted	0.314	0.400	0.714
		Right Cheek	0.408	0.454	0.862
		Right Tilted	0.317	0.381	0.698
	B4 50RB	Left Cheek	0.372	0.472	0.844
		Left Tilted	0.294	0.400	0.694
		Right Cheek	0.337	0.454	0.791
		Right Tilted	0.239	0.381	0.620

LTE	B5 1RB	Left Cheek	0.094	0.472	0.566
		Left Tilted	0.079	0.400	0.479
		Right Cheek	0.091	0.454	0.544
		Right Tilted	0.072	0.381	0.453
	B5 25RB	Left Cheek	0.076	0.472	0.549
		Left Tilted	0.059	0.400	0.459
		Right Cheek	0.076	0.454	0.530
		Right Tilted	0.062	0.381	0.443
	B7 1RB	Left Cheek	0.254	0.472	0.726
		Left Tilted	0.223	0.400	0.623
		Right Cheek	0.245	0.454	0.698
		Right Tilted	0.209	0.381	0.590
	B7 50RB	Left Cheek	0.203	0.472	0.676
		Left Tilted	0.185	0.400	0.585
		Right Cheek	0.194	0.454	0.647
		Right Tilted	0.158	0.381	0.539
	B17 1RB	Left Cheek	0.055	0.472	0.527
		Left Tilted	0.048	0.400	0.448
		Right Cheek	0.053	0.454	0.507
		Right Tilted	0.045	0.381	0.426
B17 25RB	Left Cheek	0.049	0.472	0.521	
	Left Tilted	0.045	0.400	0.445	
	Right Cheek	0.047	0.454	0.500	
	Right Tilted	0.038	0.381	0.419	

WWAN PCE + Bluetooth					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR (W/kg)
			WWAN PCE	Bluetooth	
GSM	GSM850	Left Cheek	0.111	0.105	0.215
		Left Tilted	0.085	0.105	0.189
		Right Cheek	0.102	0.105	0.207
		Right Tilted	0.078	0.105	0.182
	PCS1900	Left Cheek	0.060	0.105	0.165
		Left Tilted	0.048	0.105	0.153
		Right Cheek	0.058	0.105	0.163
		Right Tilted	0.045	0.105	0.150
WCDMA	Band V	Left Cheek	0.094	0.105	0.198
		Left Tilted	0.075	0.105	0.180
		Right Cheek	0.090	0.105	0.195
		Right Tilted	0.071	0.105	0.176
	Band II	Left Cheek	0.186	0.105	0.291
		Left Tilted	0.153	0.105	0.258
		Right Cheek	0.178	0.105	0.283
		Right Tilted	0.142	0.105	0.247
LTE	B2 1RB	Left Cheek	0.147	0.105	0.252
		Left Tilted	0.120	0.105	0.225
		Right Cheek	0.143	0.105	0.248
		Right Tilted	0.114	0.105	0.219
	B2 50RB	Left Cheek	0.119	0.105	0.224
		Left Tilted	0.104	0.105	0.209
		Right Cheek	0.110	0.105	0.215
		Right Tilted	0.094	0.105	0.198
	B4 1RB	Left Cheek	0.420	0.105	0.525
		Left Tilted	0.314	0.105	0.419
		Right Cheek	0.408	0.105	0.513
		Right Tilted	0.317	0.105	0.421
	B4 50RB	Left Cheek	0.372	0.105	0.476
		Left Tilted	0.294	0.105	0.398
		Right Cheek	0.337	0.105	0.442
		Right Tilted	0.239	0.105	0.344

LTE	B5 1RB	Left Cheek	0.094	0.105	0.199
		Left Tilted	0.079	0.105	0.183
		Right Cheek	0.091	0.105	0.196
		Right Tilted	0.072	0.105	0.177
	B5 25RB	Left Cheek	0.076	0.105	0.181
		Left Tilted	0.059	0.105	0.164
		Right Cheek	0.076	0.105	0.181
		Right Tilted	0.062	0.105	0.167
	B7 1RB	Left Cheek	0.254	0.105	0.359
		Left Tilted	0.223	0.105	0.328
		Right Cheek	0.245	0.105	0.350
		Right Tilted	0.209	0.105	0.313
	B7 50RB	Left Cheek	0.203	0.105	0.308
		Left Tilted	0.185	0.105	0.290
		Right Cheek	0.194	0.105	0.299
		Right Tilted	0.158	0.105	0.263
	B17 1RB	Left Cheek	0.055	0.105	0.160
		Left Tilted	0.048	0.105	0.153
		Right Cheek	0.053	0.105	0.158
		Right Tilted	0.045	0.105	0.150
B17 25RB	Left Cheek	0.049	0.105	0.154	
	Left Tilted	0.045	0.105	0.149	
	Right Cheek	0.047	0.105	0.152	
	Right Tilted	0.038	0.105	0.143	

Maximum reported SAR value for Body

WWAN PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			WWAN PCE	WLAN DTS	(W/kg)
GSM	GSM850	Front	0.123	0.301	0.424
		Back	0.186	0.442	0.627
	PCS1900	Front	0.243	0.301	0.544
		Back	0.384	0.442	0.825
WCDMA	Band V	Front	0.087	0.301	0.388
		Back	0.142	0.442	0.584
	Band II	Front	0.122	0.301	0.423
		Back	0.172	0.442	0.613
LTE	B2 1RB	Front	0.413	0.301	0.714
		Back	0.687	0.442	1.129
	B2 50RB	Front	0.354	0.301	0.655
		Back	0.625	0.442	1.067
	B4 1RB	Front	0.321	0.301	0.622
		Back	0.689	0.442	1.131
	B4 50RB	Front	0.274	0.301	0.575
		Back	0.627	0.442	1.068
	B5 1RB	Front	0.383	0.301	0.684
		Back	0.567	0.442	1.009
	B5 25RB	Front	0.250	0.301	0.550
		Back	0.456	0.442	0.898
	B7 1RB	Front	0.383	0.301	0.684
		Back	0.542	0.442	0.983
	B7 50RB	Front	0.307	0.301	0.608
		Back	0.451	0.442	0.893
	B17 1RB	Front	0.393	0.301	0.694
		Back	0.557	0.442	0.999
B17 25RB	Front	0.289	0.301	0.589	
	Back	0.424	0.442	0.866	

WWAN PCE + Bluetooth					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			WWAN PCE	Bluetooth	(W/kg)
GSM	GSM850	Front	0.123	0.052	0.175
		Back	0.186	0.052	0.238
	PCS1900	Front	0.243	0.052	0.295
		Back	0.384	0.052	0.436
WCDMA	Band V	Front	0.087	0.052	0.140
		Back	0.142	0.052	0.194
	Band II	Front	0.122	0.052	0.175
		Back	0.172	0.052	0.224
LTE	B2 1RB	Front	0.413	0.052	0.466
		Back	0.687	0.052	0.740
	B2 50RB	Front	0.354	0.052	0.406
		Back	0.625	0.052	0.678
	B4 1RB	Front	0.321	0.052	0.373
		Back	0.689	0.052	0.741
	B4 50RB	Front	0.274	0.052	0.326
		Back	0.627	0.052	0.679
	B5 1RB	Front	0.383	0.052	0.435
		Back	0.567	0.052	0.620
	B5 25RB	Front	0.250	0.052	0.302
		Back	0.456	0.052	0.509
	B7 1RB	Front	0.383	0.052	0.435
		Back	0.542	0.052	0.594
	B7 50RB	Front	0.307	0.052	0.360
		Back	0.451	0.052	0.504
	B17 1RB	Front	0.393	0.052	0.446
		Back	0.557	0.052	0.609
	B17 25RB	Front	0.289	0.052	0.341
		Back	0.424	0.052	0.476



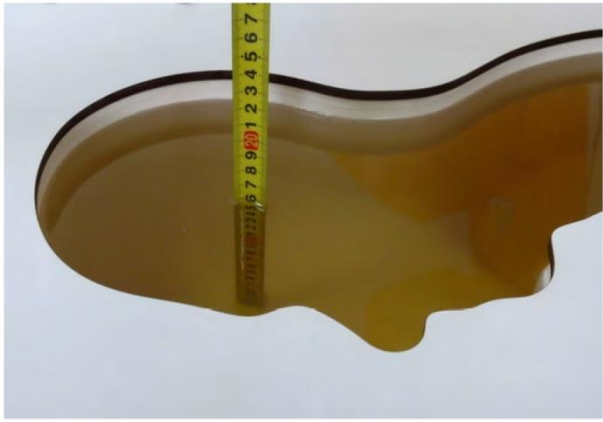





Maximum reported SAR value for Hotspot mode




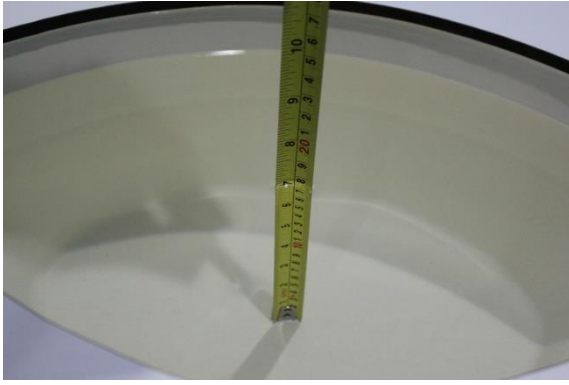
WWAN PCE + WLAN DTS					
WWAN Band		Exposure Position	Max SAR (W/kg)		Summed SAR
			WWAN PCE	WLAN DTS	(W/kg)
GSM	GSM850	Front	0.123	0.301	0.424
		Back	0.186	0.442	0.627
		Left side	0.133	-	0.133
		Right side	0.059	0.369	0.428
		Top side	-	0.291	0.291
		Bottom side	0.127	-	0.127
	PCS1900	Front	0.243	0.301	0.544
		Back	0.384	0.442	0.825
		Left side	0.232	-	0.232
		Right side	0.127	0.369	0.496
		Top side	-	0.291	0.291
		Bottom side	0.241	-	0.241
WCDMA	Band V	Front	0.087	0.301	0.388
		Back	0.142	0.442	0.584
		Left side	0.086	-	0.086
		Right side	0.053	0.369	0.422
		Top side	-	0.291	0.291
		Bottom side	0.086	-	0.086
	Band II	Front	0.122	0.301	0.423
		Back	0.172	0.442	0.613
		Left side	0.117	-	0.117
		Right side	0.064	0.369	0.433
		Top side	-	0.291	0.291
		Bottom side	0.113	-	0.113

LTE	B2 1RB	Front	0.413	0.301	0.714
		Back	0.687	0.442	1.129
		Left side	0.397	-	0.397
		Right side	0.300	0.369	0.669
		Top side	-	0.291	0.291
		Bottom side	0.431	-	0.431
	B2 50RB	Front	0.354	0.301	0.655
		Back	0.625	0.442	1.067
		Left side	0.404	-	0.404
		Right side	0.252	0.369	0.621
		Top side	-	0.291	0.291
		Bottom side	0.396	-	0.396
	B4 1RB	Front	0.321	0.301	0.622
		Back	0.689	0.442	1.131
		Left side	0.417	-	0.417
		Right side	0.283	0.369	0.652
		Top side	-	0.291	0.291
		Bottom side	0.422	-	0.422
	B4 50RB	Front	0.274	0.301	0.575
		Back	0.627	0.442	1.068
		Left side	0.427	-	0.427
		Right side	0.249	0.369	0.618
		Top side	-	0.291	0.291
		Bottom side	0.415	-	0.415
B5 1RB	Front	0.383	0.301	0.684	
	Back	0.567	0.442	1.009	
	Left side	0.401	-	0.401	
	Right side	0.246	0.369	0.615	
	Top side	-	0.291	0.291	
	Bottom side	0.343	-	0.343	
B5 25RB	Front	0.250	0.301	0.550	
	Back	0.456	0.442	0.898	
	Left side	0.301	-	0.301	
	Right side	0.198	0.369	0.567	
	Top side	-	0.291	0.291	
	Bottom side	0.250	-	0.250	

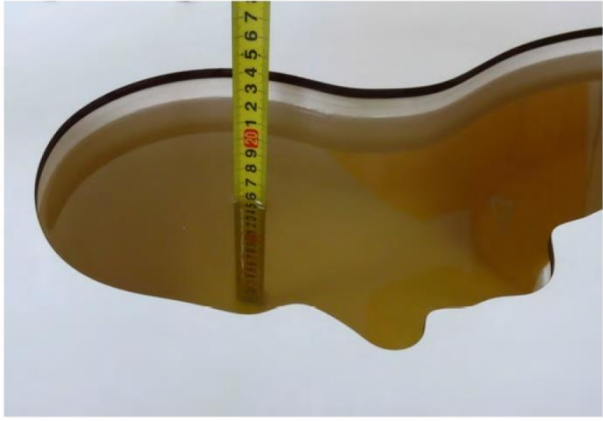LTE	B7 1RB	Front	0.383	0.301	0.684
		Back	0.542	0.442	0.983
		Left side	0.338	-	0.338
		Right side	0.188	0.369	0.557
		Top side	-	0.291	0.291
		Bottom side	0.293	-	0.293
	B7 50RB	Front	0.307	0.301	0.608
		Back	0.451	0.442	0.893
		Left side	0.259	-	0.259
		Right side	0.182	0.369	0.551
		Top side	-	0.291	0.291
		Bottom side	0.237	-	0.237
	B17 1RB	Front	0.393	0.301	0.694
		Back	0.557	0.442	0.999
		Left side	0.348	-	0.348
		Right side	0.193	0.369	0.562
		Top side	-	0.291	0.291
		Bottom side	0.301	-	0.301
	B17 25RB	Front	0.289	0.301	0.589
		Back	0.424	0.442	0.866
		Left side	0.244	-	0.244
		Right side	0.171	0.369	0.540
		Top side	-	0.291	0.291
		Bottom side	0.223	-	0.223


16. TestSetup Photos

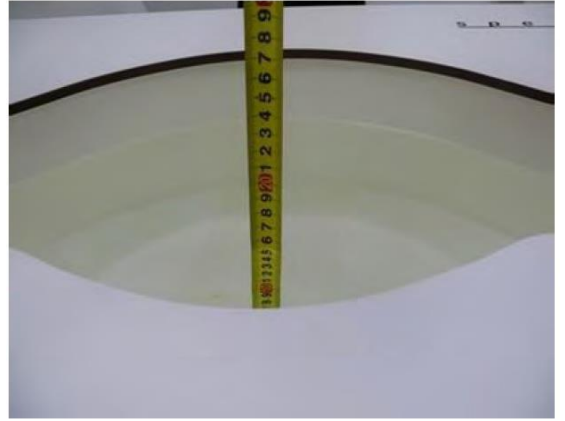	
Liquid depth in the head phantom (750MHz)	Liquid depth in the body phantom (750MHz)
	
Liquid depth in the head phantom (835MHz)	Liquid depth in the body phantom (835MHz)
	
Liquid depth in the head phantom (1750MHz)	Liquid depth in the body phantom (1750MHz)
	

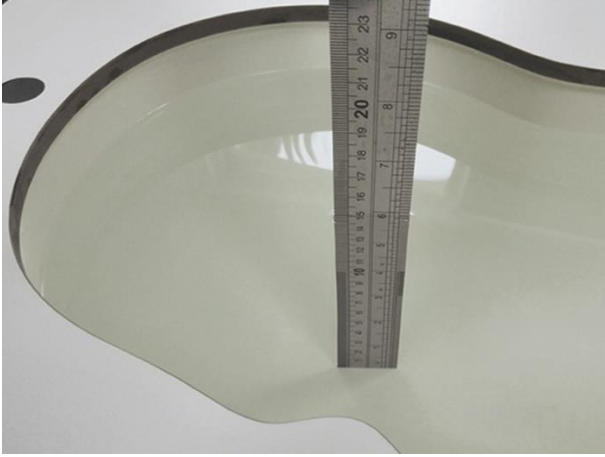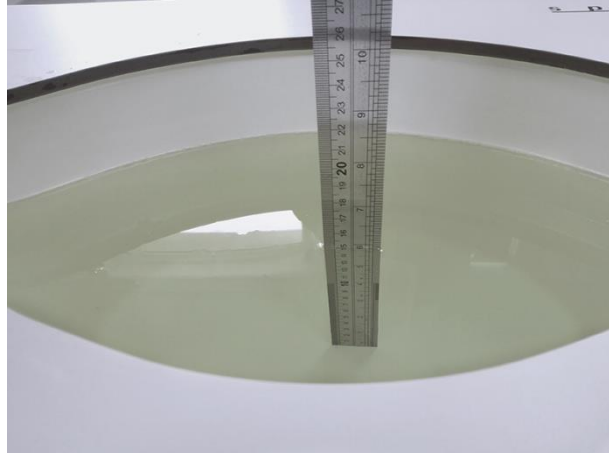Liquid depth in the head phantom (1900MHz)	Liquid depth in the body phantom (1900MHz)
	
Liquid depth in the head phantom (2450MHz)	Liquid depth in the body phantom (2450MHz)
	
Liquid depth in the head phantom (2600MHz)	Liquid depth in the body phantom (2600MHz)




Left Head Touch

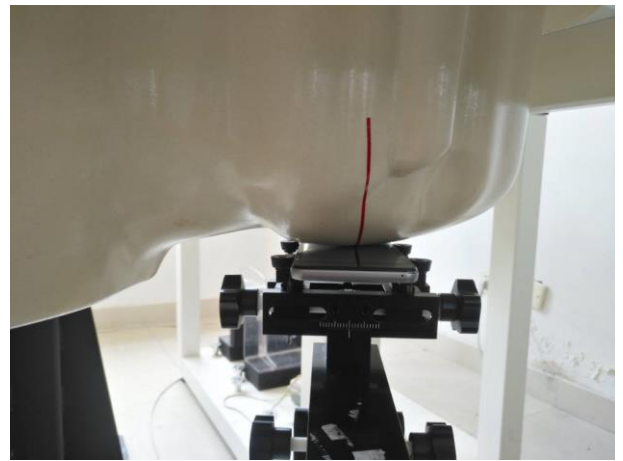

Right Head Touch



Left Head Tilt (15°)

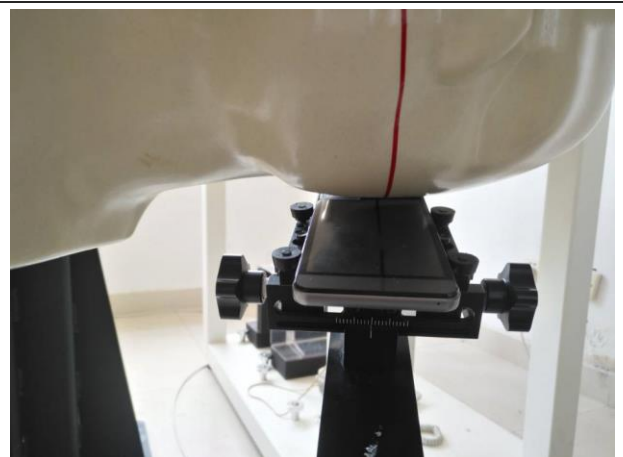


Right Head Tilt (15°)



Body-worn Front Side (10mm)



Body-worn Rear Side (10mm)

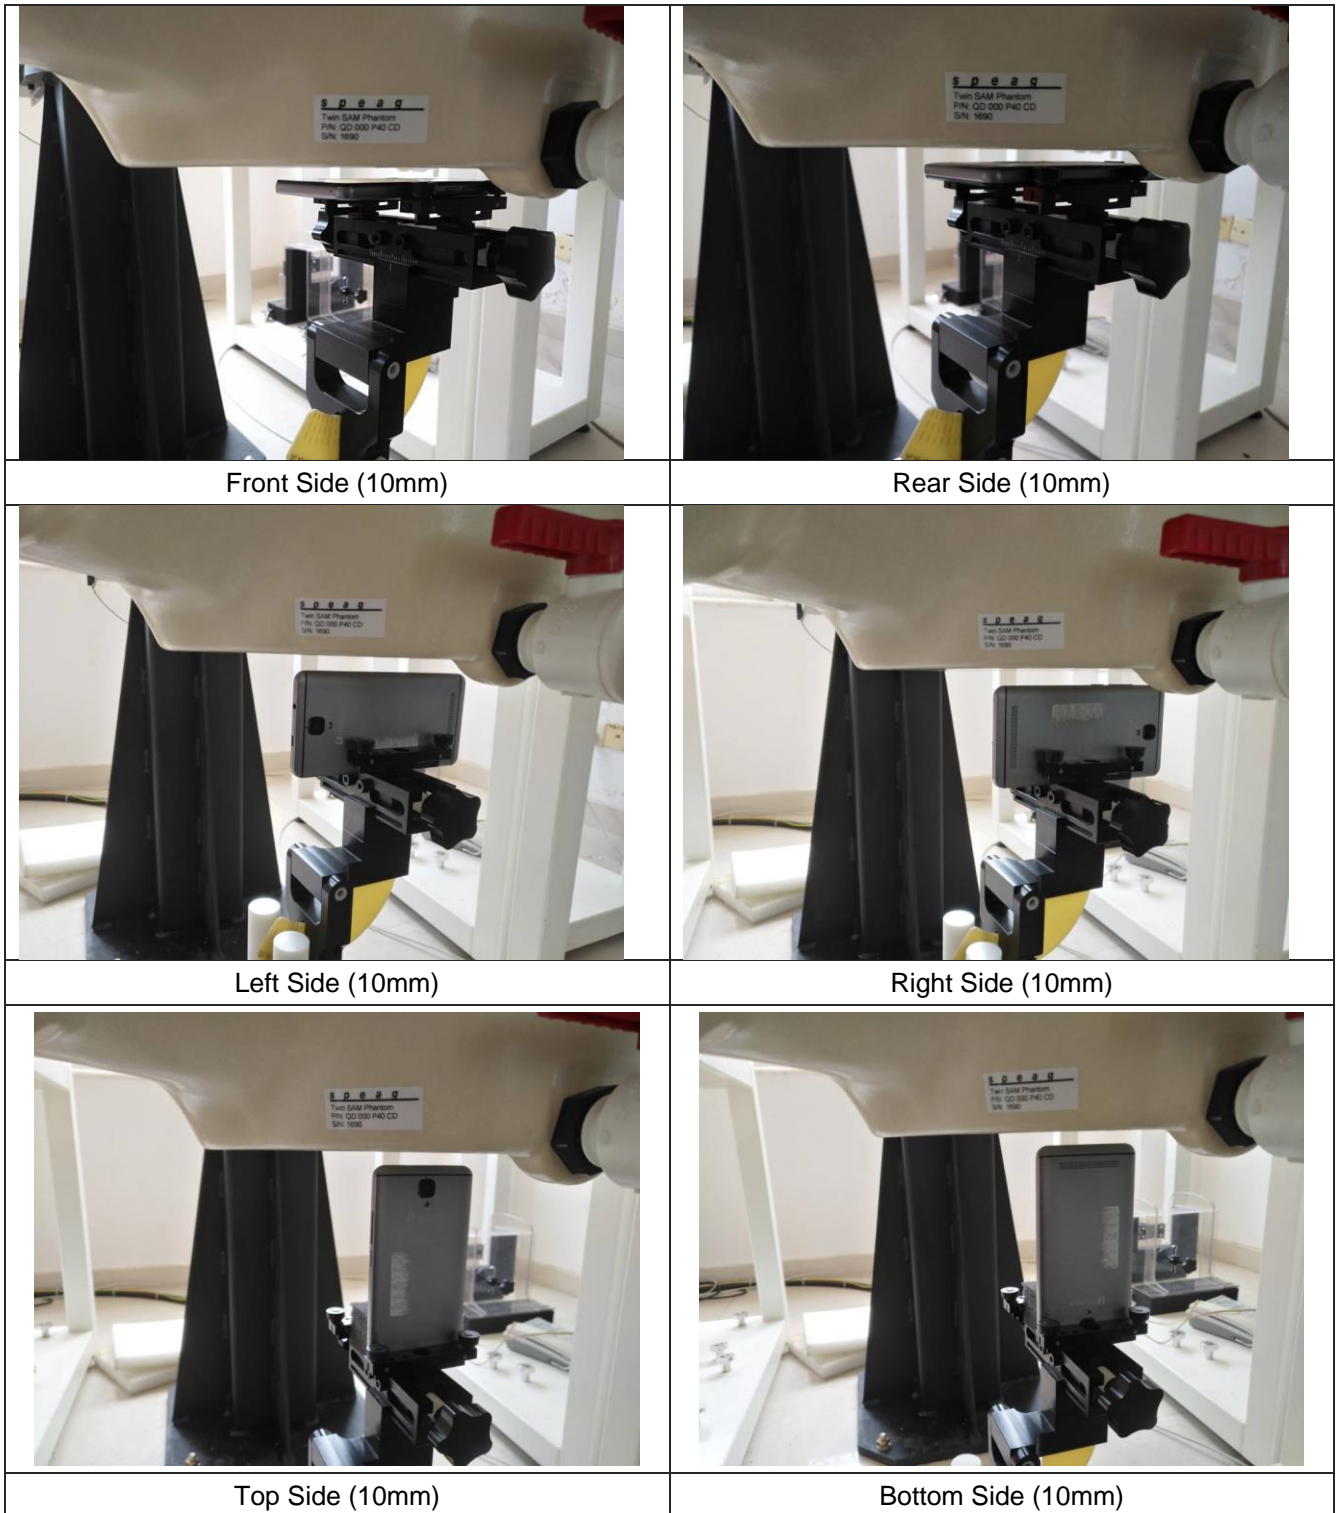


17. External and Internal Photos of the EUT

Please reference to the report No.: TRE1803009501.

-----End of Report-----

1.1. DAE4 Calibration Certificate



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



中国认可
 国际互认
 校准
 CALIBRATION
 CNAS L0570

Client : **CIQ(Shenzhen)**

Certificate No: **Z17-97109**

CALIBRATION CERTIFICATE

Object: **DAE4 - SN: 1315**

Calibration Procedure(s): **FF-Z11-002-01**
 Calibration Procedure for the Data Acquisition Electronics (DAEx)

Calibration date: **August 15, 2017**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	27-Jun-17 (CTTL, No.J17X05859)	June-18

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: August 16, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
E-mail: cttl@chinattl.com Http://www.chinattl.cn

Glossary:

DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209
 E-mail: cttl@chinattl.com Http://www.chinattl.cn

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1μV, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	405.175 ± 0.15% (k=2)	405.013 ± 0.15% (k=2)	404.971 ± 0.15% (k=2)
Low Range	3.99087 ± 0.7% (k=2)	3.98644 ± 0.7% (k=2)	3.98913 ± 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	20.5° ± 1 °
---	-------------