

## **7.8 SPURIOUS RF CONDUCTED EMISSIONS**

### **7.8.1 Conformance Limit**

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### **7.8.2 Measuring Instruments**

The Measuring equipment is listed in the section 6.3 of this test report.

### **7.8.3 Test Setup**

Please refer to Section 6.1 of this test report.

### **7.8.4 Test Procedure**


The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and measure frequency range from 9KHz to 26.5GHz.

### **7.8.5 Test Results**


Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandedge measurement data.

## Test Plot


802.11b on channel 01

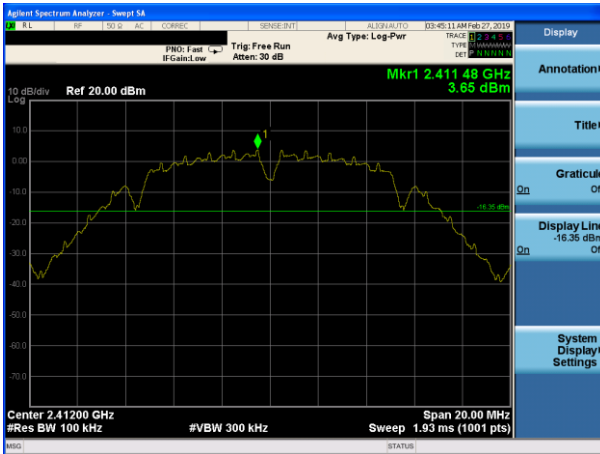


802.11b on channel 01

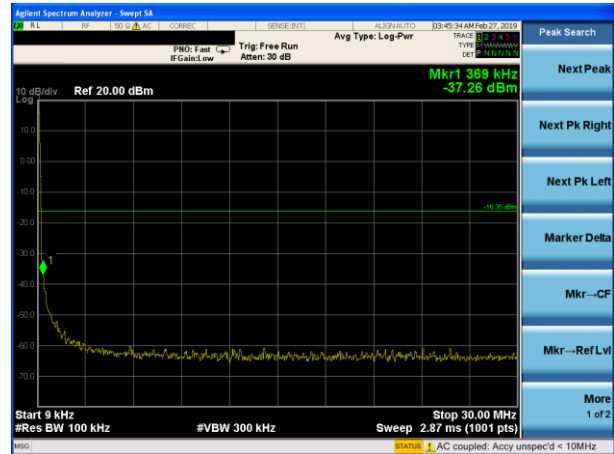

802.11b on channel 01

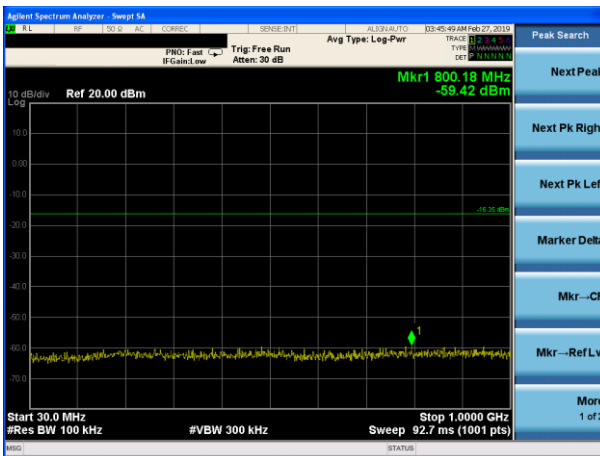


802.11b on channel 01

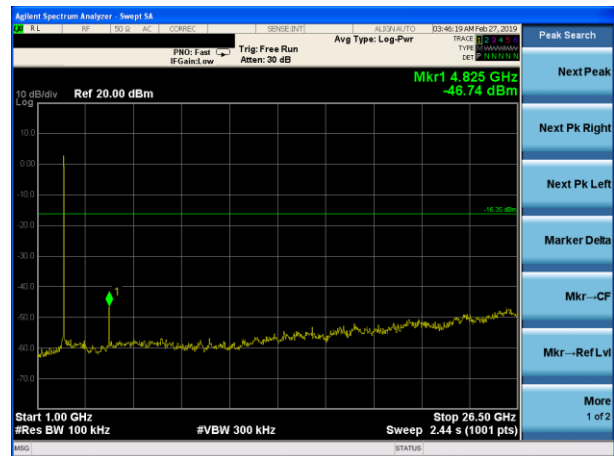


## Test Plot


802.11b on channel 06

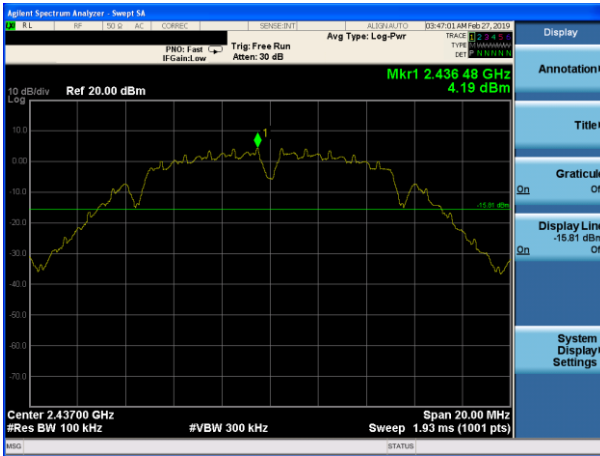


802.11b on channel 06

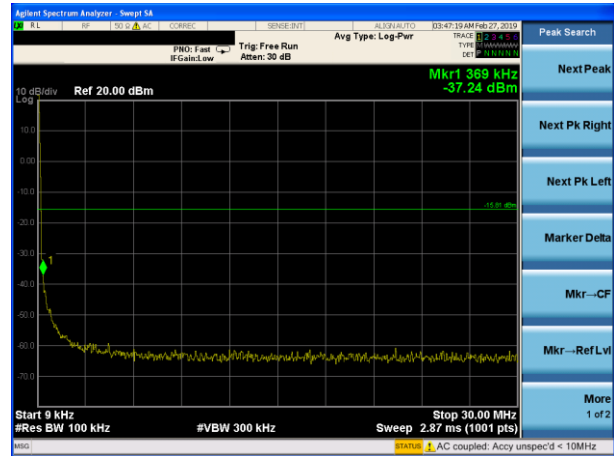

802.11b on channel 06

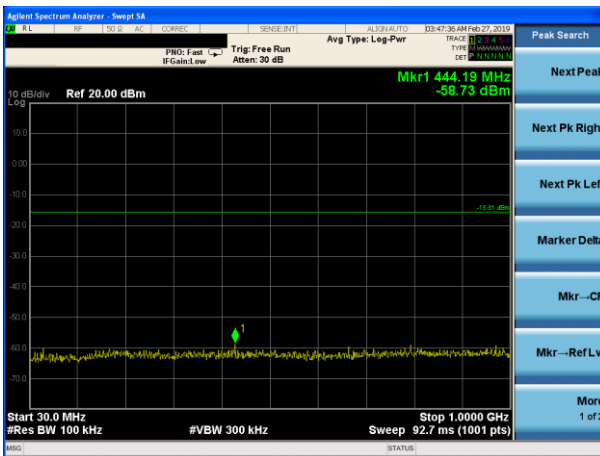

802.11b on channel 06

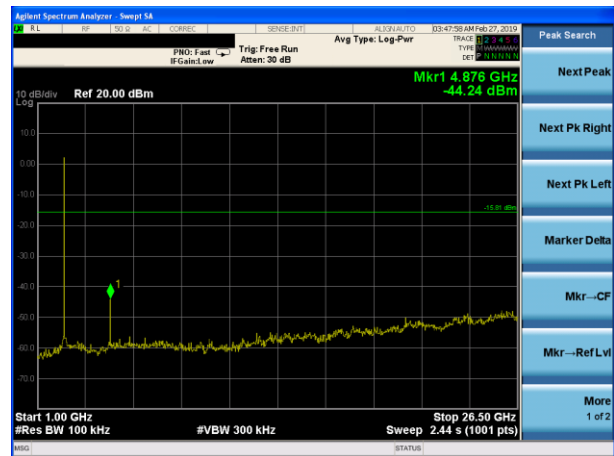


## Test Plot


802.11b on channel 11




802.11b on channel 11

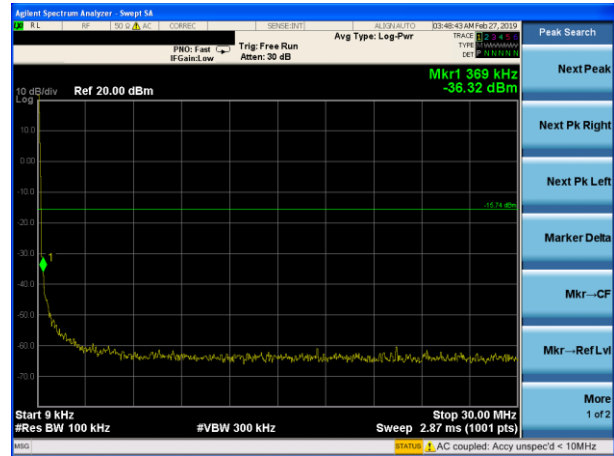

802.11b on channel 11

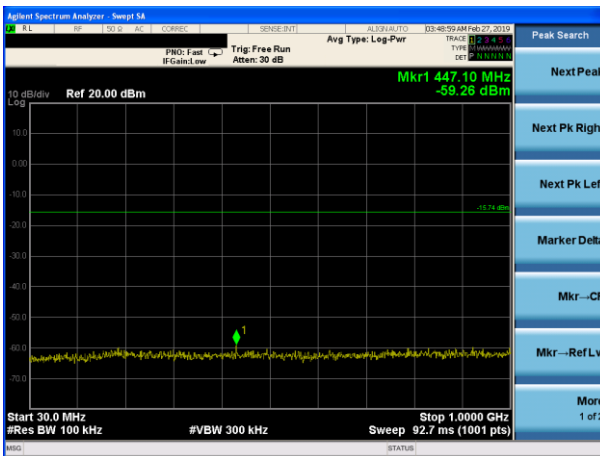


802.11b on channel 11

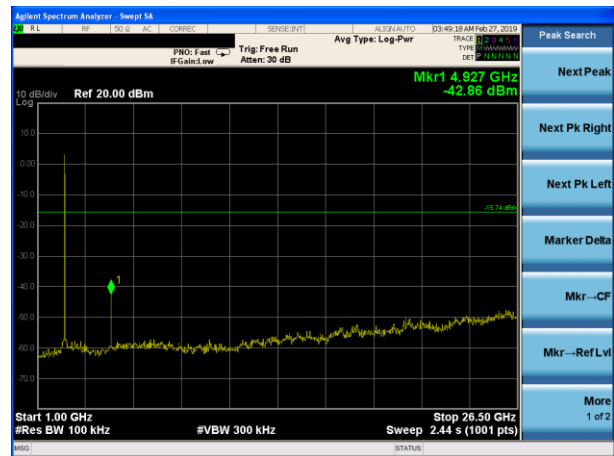


## Test Plot


802.11g on channel 01

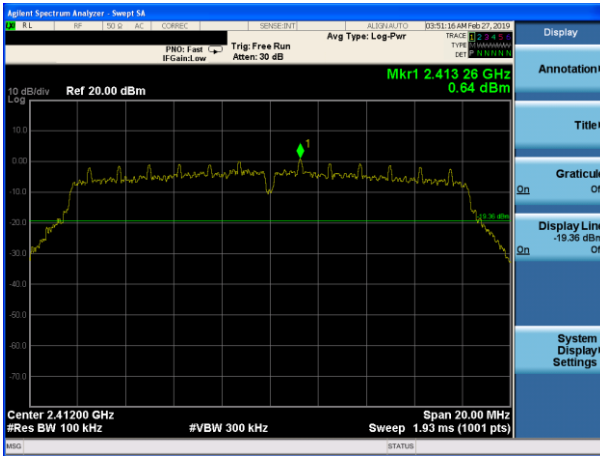

802.11g on channel 01

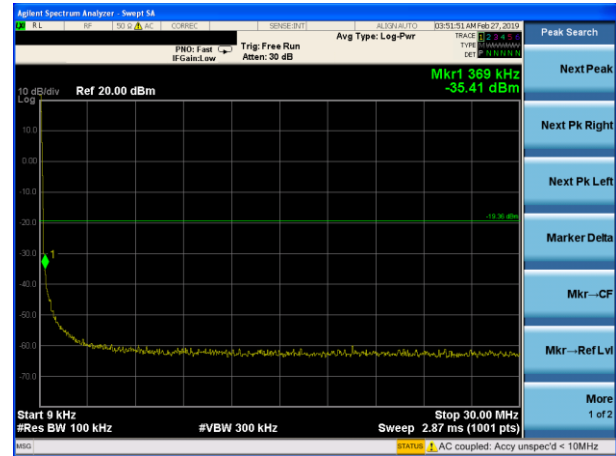

802.11g on channel 01

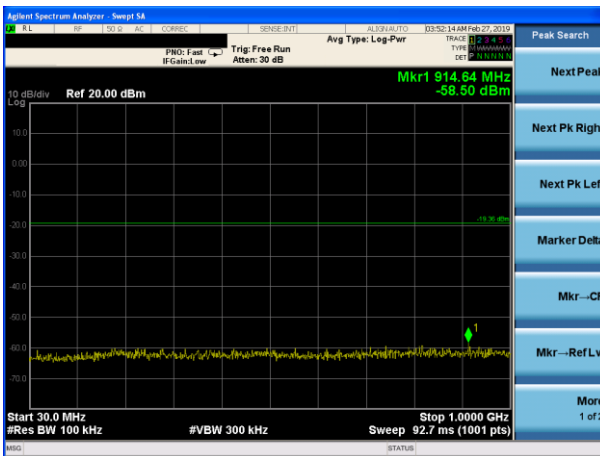


802.11g on channel 01




## Test Plot


802.11g on channel 06

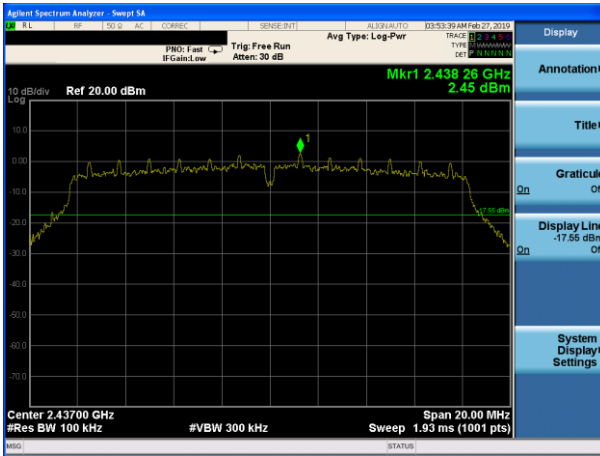

802.11g on channel 06

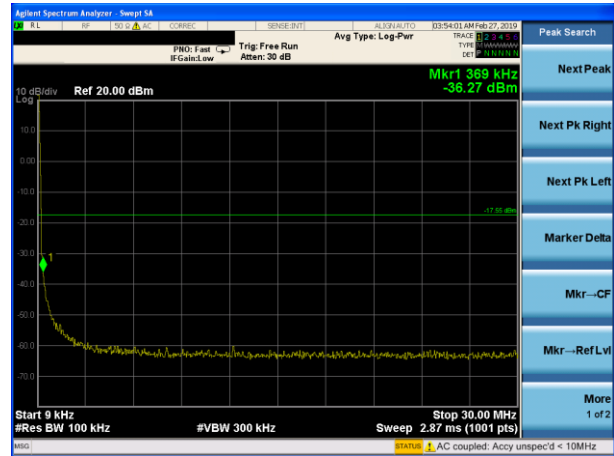

802.11g on channel 06

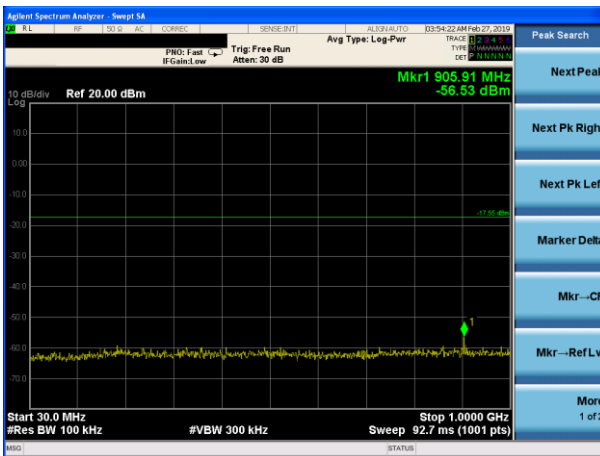


802.11g on channel 06




## Test Plot


802.11g on channel 11

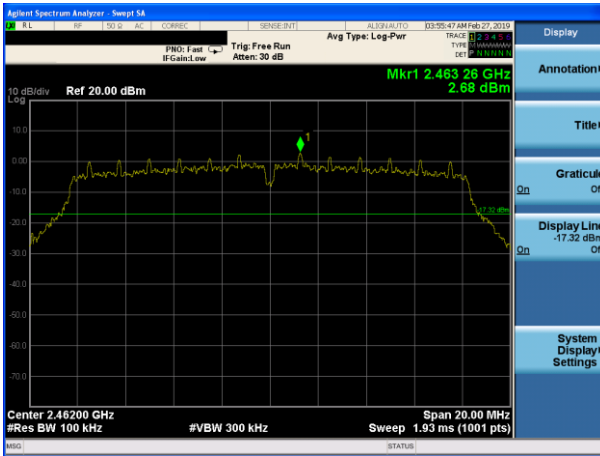

802.11g on channel 11

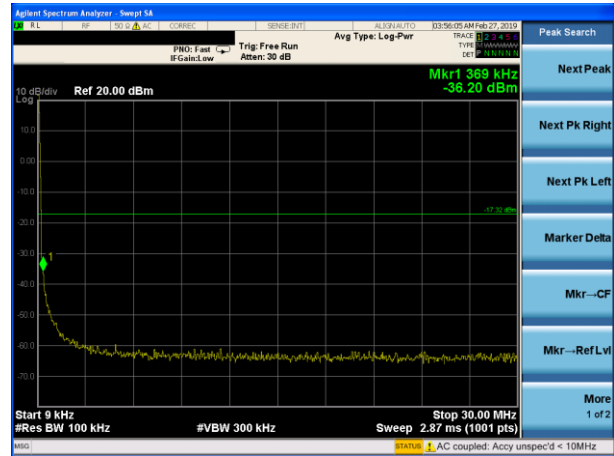

802.11g on channel 11

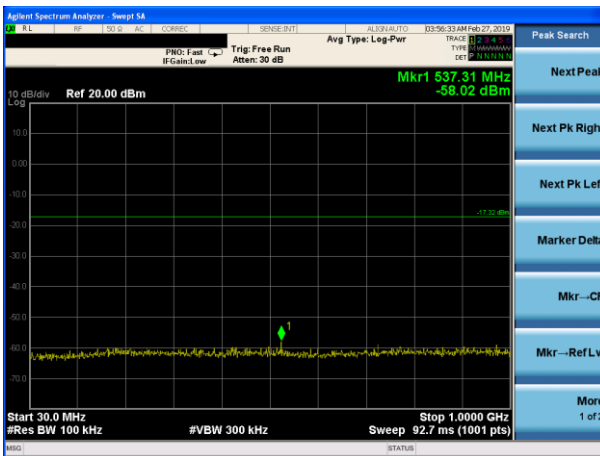


802.11g on channel 11




## Test Plot


802.11n20 on channel 01

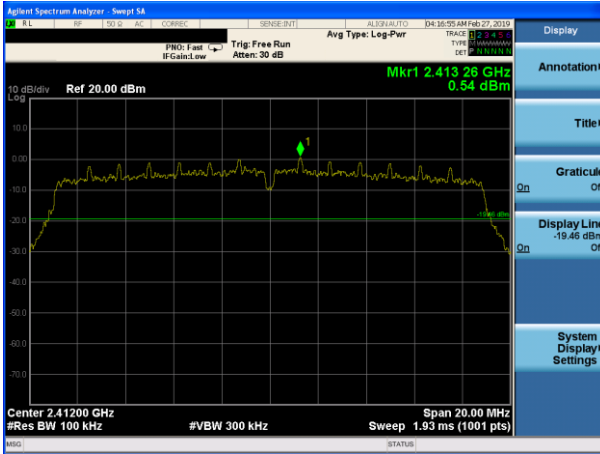

802.11n20 on channel 01

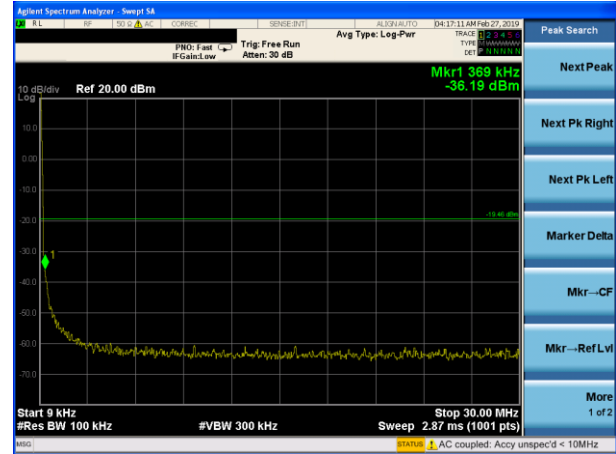

802.11 n20 on channel 01

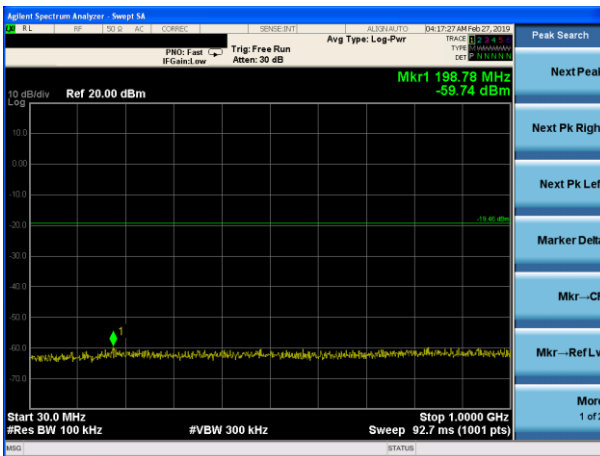


802.11 n20 on channel 01






## Test Plot


802.11 n20 on channel 06

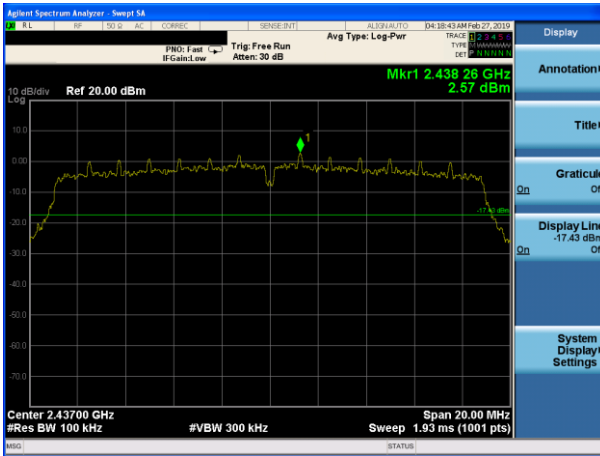

802.11 n20 on channel 06

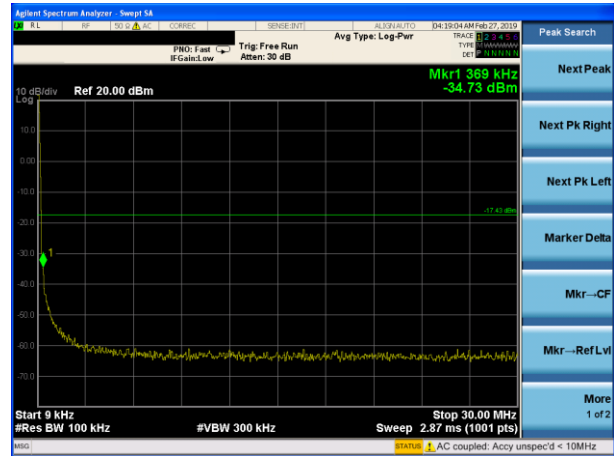

802.11 n20 on channel 06

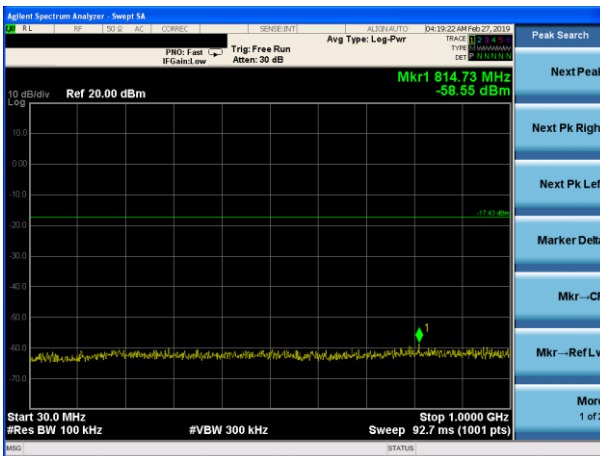


802.11 n20 on channel 06




## Test Plot


802.11 n20 on channel 11

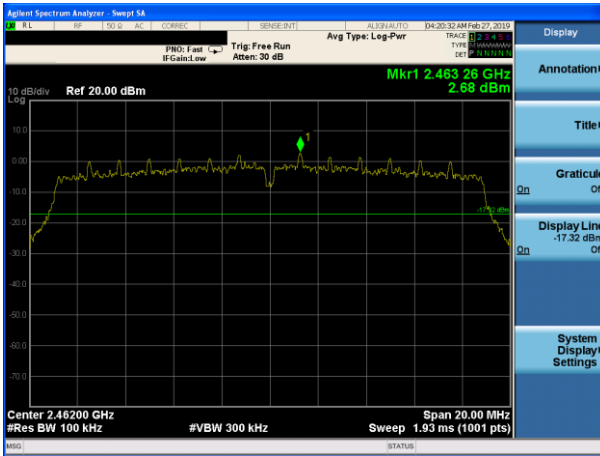


802.11 n20 on channel 11

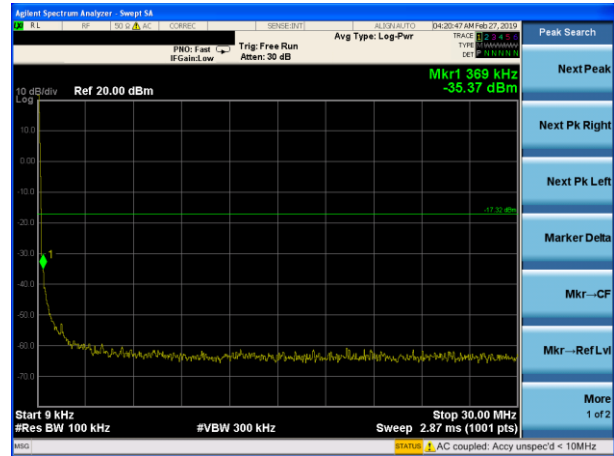

802.11 n20 on channel 11

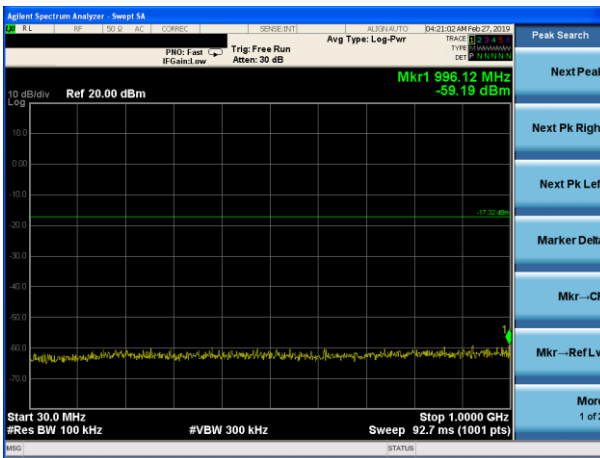


802.11 n20 on channel 11

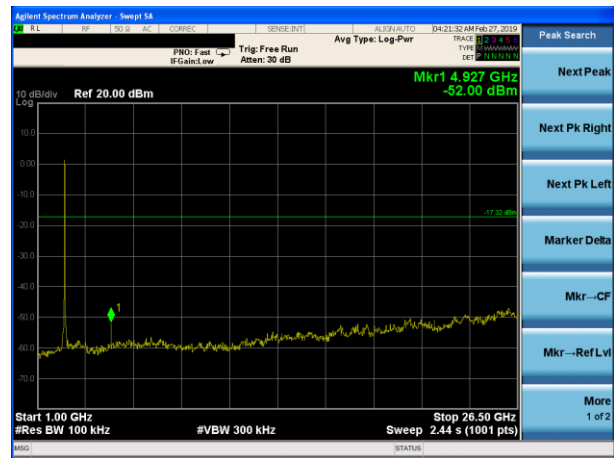


## Test Plot


802.11n40 on channel 03

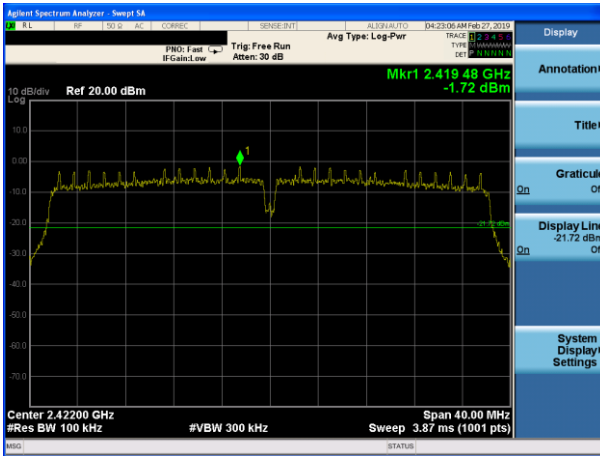

802.11n40 on channel 03

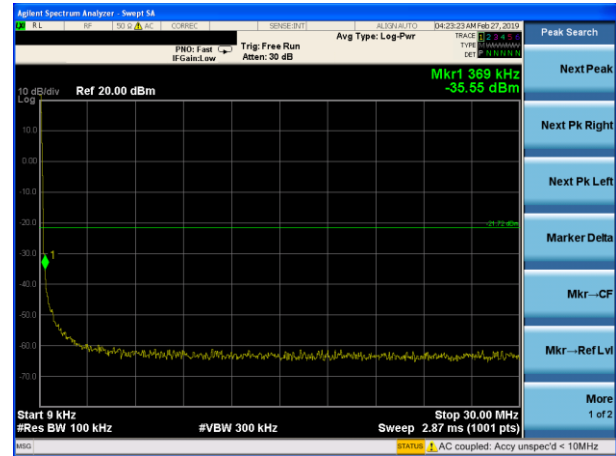

802.11n40 on channel 03

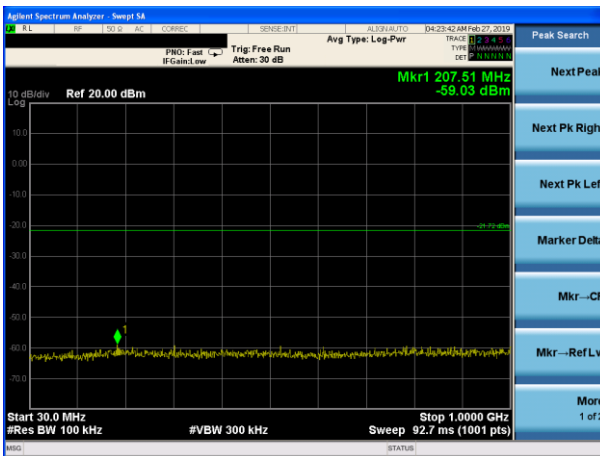

802.11n40 on channel 03




## Test Plot


802.11n40 on channel 06



802.11 n40 on channel 06

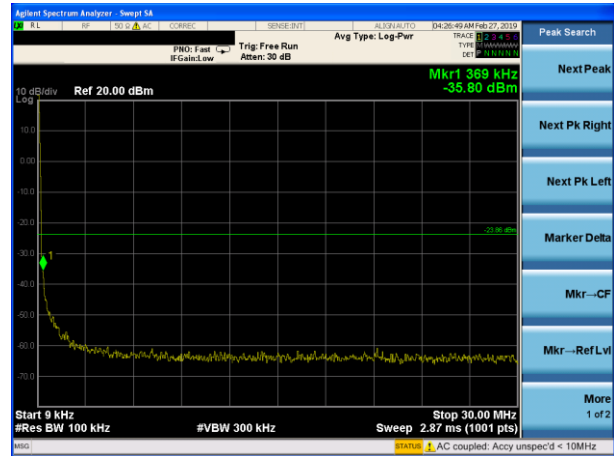

802.11 n40 on channel 06

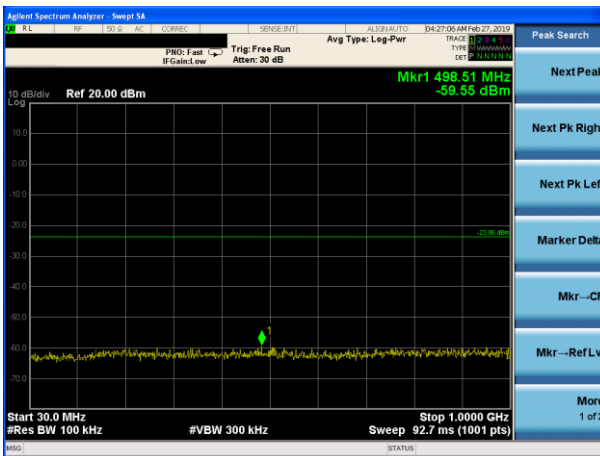


802.11 n40 on channel 06




## Test Plot


802.11 n40 on channel 9

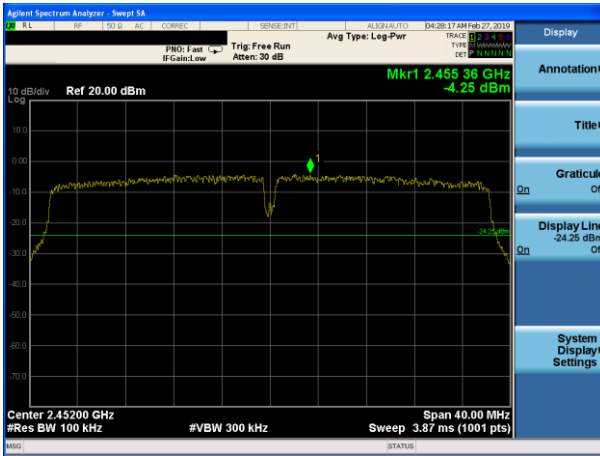

802.11 n40 on channel 9

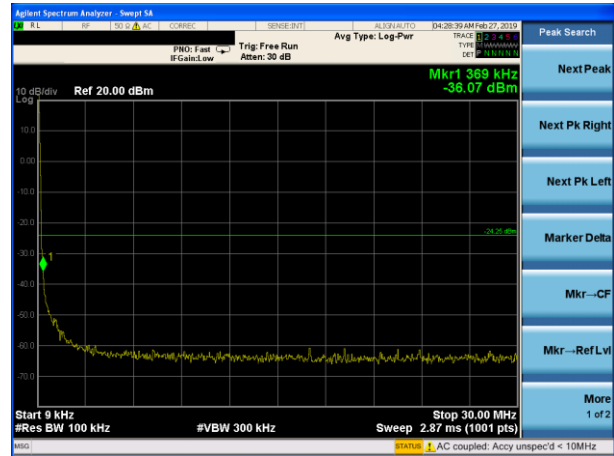

802.11 n40 on channel 9

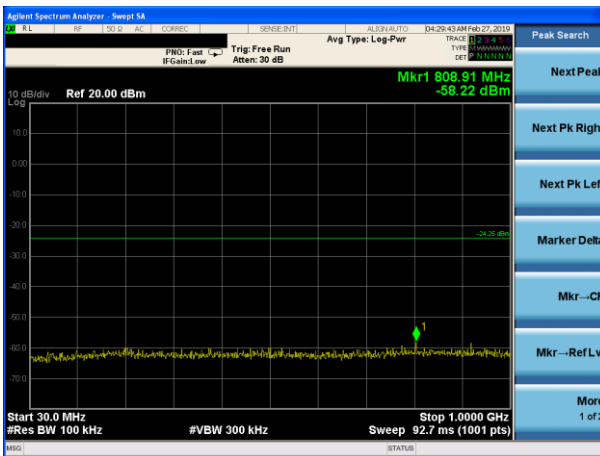

802.11 n40 on channel 9



## 7.9 ANTENNA APPLICATION

### 7.9.1 Antenna Requirement

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 7.9.2 Result

The EUT antenna is permanent attached PIFA antenna (Gain: 0dBi). It comply with the standard requirement.

END OF REPORT