Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road,Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



FCC REPORT

Report Reference No.....: CHTEW19060042

Report verification:

Project No....:: S

SHT1905043901EW

FCC ID.....: ZSW-30-087

Applicant's name.....: b mobile HK Limited

Address...... Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak

Street; Kwai Chung; New Territories; Hong Kong.

Manufacturer..... b mobile HK Limited

Address...... Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak

Street; Kwai Chung; New Territories; Hong Kong.

Test item description: Mobile Phone

Trade Mark Bmobile

Model/Type reference...... AX1082

Listed Model(s)

Standard: FCC CFR Title 47 Part 2

FCC CFR Title 47 Part 22 FCC CFR Title 47 Part 24 FCC CFR Title 47 Part 27

Date of receipt of test sample.......... May 17, 2019

Date of testing...... May 18, 2019- Jun 06, 2019

Result...... Pass

Compiled by

(position+printedname+signature)...: File administrators Silvia Li

Silvia Li

Supervised by

(position+printedname+signature)....: Project Engineer Xiaodong Zhao

Xiaodong Zheo

Approved by

(position+printedname+signature)....: Manager Hans Hu

Testing Laboratory Name: Shenzhen Huatongwei International Inspection Co., Ltd.

Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

Report No.: CHTEW19060042 Page: 2 of 39 Issued: 2019-06-10

Contents

<u>1.</u>	TEST STANDARDS AND REPORT VERSION	3
1.1.	Applicable Standards	3
1.2.	Report version information	3
	·	
<u>2.</u>	TEST DESCRIPTION	4
•	OUMM A D.V.	_
<u>3.</u>	SUMMARY	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT operation mode	7
3.5.	EUT configuration	8
3.6.	Modifications	8
<u>4.</u>	TEST ENVIRONMENT	9
4.1.	Address of the test laboratory	0
	Address of the test laboratory	9
4.2.	Test Facility	9
4.3.	Equipments Used during the Test	10
4.4.	Environmental conditions	11
4.5.	Statement of the measurement uncertainty	11
<u>5.</u>	TEST CONDITIONS AND RESULTS	12
5.1.	Conducted Output Power	12
5.2.	Peak-to-Average Ratio	13
5.2. 5.3.	99% Occupied Bandwidth & 26 dB Bandwidth	14
5.4.	Band Edge	15
5. 5 .	Conducted Spurious Emissions	16
5.6.	Frequency stability VS Temperature measurement	17
5.7.	Frequency stability VS Voltage measurement	18
5.7. 5.8.	ERP and EIRP	19
5.9.	Radiated Spurious Emission	27
<u>6.</u>	TEST SETUP PHOTOS OF THE EUT	39
<u>7.</u>	EXTERNAL AND INTERNAL PHOTOS OF THE EUT	39
		
8.	APPENDIX REPORT	39

Report No.: CHTEW19060042 Page: 3 of 39 Issued: 2019-06-10

1. TEST STANDARDS AND REPORT VERSION

1.1. Applicable Standards

The tests were performed according to following standards:

FCC Rules Part 2: FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

FCC Rules Part 22: PUBLIC MOBILE SERVICES

FCC Rules Part 24: PERSONAL COMMUNICATIONS SERVICES

FCC Rules Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

ANSI C63.26: 2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

KDB 971168 D01 Power Meas License Digital Systems v03: MEASUREMENT GUIDANCE FOR

CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

1.2. Report version information

Revision No.	Date of issue	Description
N/A	2019-06-10	Original

Report No.: CHTEW19060042 Page: 4 of 39 Issued: 2019-06-10

2. Test Description

Test Item	Section in CFR 47	Result	Test Engineer	
	Part 2.1046			
Conducted Output Power	Part 22.913(a)	Pass	Jiongsheng Feng	
Conducted Catput Circle	Part 24.232(c)	1 455	Giorigonorig i orig	
	Part 27.50			
Peak-to-Average Ratio	Part 24.232	Pass	Jiongsheng Feng	
T can to Average Natio	Part 27.50	1 433	Siongsheng reng	
	Part 2.1049			
99% Occupied Bandwidth & 26 dB	Part 22.917(b)	Pass	Jiongsheng Feng	
Bandwidth	Part 24.238(b)	1 055	Jiongsheng reng	
	Part 27.53			
	Part 2.1051			
Band Edge	Part 22.917	Pass	Jiongsheng Feng	
Band Edge	Part 24.238	Pass	Jiongsheng Feng	
	Part 27.53			
	Part 2.1051			
Conducted Spurious Emissions	Part 22.917	Door	Jiongsheng Feng	
Conducted Spurious Emissions	Part 24.238	Pass		
	Part 27.53			
	Part 2.1055(a)(1)(b)		Jiongsheng Feng	
Frequency stability VS Temperature	Part 22.355	Pass		
l requericy stability v3 remperature	Part 24.235	Fass	Jiongsheng reng	
	Part 27.54			
	Part 2.1055(d)(1)(2)			
Frequency stability VS Voltage	Part 22.355	Pass	Jiongsheng Feng	
rrequericy stability v3 voltage	Part 24.235	F a 5 5	Jiongsheng Feng	
	Part 27.54			
	Part 22.913(a)			
ERP and EIRP	Part 24.232(b)	Pass	Shower Dai	
	Part 27.50			
	Part 2.1053			
Padiated Spurious Emissions	Part 22.917	Pass	Shower Dai	
Radiated Spurious Emissions	Part 24.238	F d 5 5		
	Part 27.53			

Note: The measurement uncertainty is not included in the test result.

Report No.: CHTEW19060042 Page: 5 of 39 Issued: 2019-06-10

3. **SUMMARY**

3.1. Client Information

Applicant:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.
Manufacturer:	b mobile HK Limited
Address:	Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street; Kwai Chung; New Territories; Hong Kong.

3.2. Product Description

Name of EUT:	Mobile Phone	Mobile Phone				
Trade Mark:	Bmobile					
Model No.:	AX1082					
Listed Model(s):	-					
IMEI Code:	Conducted: 352378094					
SIM Information:	Support One SIM Ca	ırd				
Power supply:	DC 3.8V					
Adapter information:	•	Input:100-240Va.c., 50/60Hz, 0.2A Output:5.0Vd.c., 1.0A				
Hardware version:	V00					
Software version:	Bmobile_AX1082_TEM_CL_V010					
4G						
Operation Band:	☑ FDD Band 2☑ FDD Band 7	⊠ FDD Band 4 ⊠ FDD Band 5				
Transmit frequency:	FDD Band 2: FDD Band 4: FDD Band 5: FDD Band 7:	1850.7 MHz – 1909.3 MHz 1710.7 MHz – 1754.3 MHz 824.7 MHz – 848.3 MHz 2502.5 MHz – 2567.5 MHz				
Receive frequency:	FDD Band 2: FDD Band 4: FDD Band 5: FDD Band 7:	1930.7 MHz – 1989.3 MHz 2110.7 MHz – 2154.3 MHz 869.7 MHz – 893.3 MHz 2622.5 MHz – 2687.5 MHz				
Channel bandwidth:	FDD Band 2: FDD Band 4: FDD Band 5: FDD Band 7:	1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz 1.4MHz, 3MHz, 5MHz, 10MHz 5MHz, 10MHz, 15MHz, 20MHz				
Power Class:	Class 3					
Modulation type:	QPSK, 16QAM					

Report No.: CHTEW19060042 Page: 6 of 39 Issued: 2019-06-10

Antenna type	PIFA Antenna
Antenna Gain	Band2:0dBi Band4:0.5dBi Band5:-2.0dBi
	Band7:2.0dBi

3.3. Operation state

> Test frequency list

ID	Test frequency fist						
Section Sect	FDD Band 2			NuL	Frequency of Uplink [MHz]	N _{DL}	Frequency of Downlink [MHz]
Low Range			1.4	18607	1850.7	607	1930.7
Low Range			3			615	
15 100		Low Range					
Mild Range		Low realige					
Mid Range			15 111				
FDD Band 4		Mid Range	1.4/3/5/10				
High Range							
Figh Range							
Test Frequency ID		High Dangs	5	19175	1907.5	1175	1987.5
Note Bandwidth for which are leavation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed. Test Frequency ID Bandwidth Nu. Frequency of Uplink [MHz]		nigh Range					
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.1011 [27] Clause 7.3) is allowed. Test Frequency of Uplink [MHz]			15 111				
Test Frequency ID		NOTE A B A LIN					
MHz Uplink MHz Downlin MHz MH		36.101 [2	7] Clause 7.3) is alk	owed.	cilled OE receiver s	sensitivity rec	quirement (15
Low Range	FDD Band 4	Test Frequency ID	[MHz]		Uplink [MHz]		Frequency of Downlink [MHz]
Low Range							
Low Range							
Test Frequency ID		Low Range					
Mid Range						2000	
Mid Range				20025	1717.5	2025	
Test Frequency ID		Mid Range			1732.5		
High Range						2393	2154.3
FDD Band 5 Test Frequency ID Bandwidth NuL Frequency of Uplink [MHz] Downlin [MHz] Dow		1 1	3	20385	1753.5		2153.5
Test Frequency ID		High Range					2152.5
Test Frequency ID		I light Natige				2350	
FDD Band 5 Test Frequency ID Bandwidth [MHz] NuL Frequency of Uplink [MHz] Downlin [MHz] Nul Implies [MHz] Nul Im						2325	
Low Range			20	20300	1745	2300	2145
Low Range	FDD Band 5	Test Frequency ID		NuL		N _{DL}	Frequency of Downlink [MHz]
Low Range							869.7
Test Frequency ID Bandwidth MHz Downlin Downlin MHz Downlin MHz Downlin MHz Downlin MHz Downlin MHz Downlin MHz Downlin Downlin MHz Downlin Downlin MHz Downlin MHz Downlin Downlin MHz Downlin Downlin MHz Downlin Downlin MHz Downlin Downlin Downlin MHz Downlin Downl		Low Bango					870.5
Mid Range		Low Range	5				871.5
Test Frequency ID			10 ""	20450	829	2450	874
High Range		Mid Range					881.5
Figh Range							893.3
Test Frequency ID		High Range					
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed. Test Frequency ID Bandwidth [MHz] NuL Frequency of Uplink [MHz]			10 [1]				
Test Frequency ID		NOTE 1: Randwidth f					
MHz Uplink [MHz] Downlin [MHz] Downlin [MHz]					med OE receiver se	monty requi	mement (10
S 20775 2502.5 2775 2622.5	FDD Band 7	Test Frequency ID	[MHz]		Uplink [MHz]		
Low Range			5				2622.5
15 2004 20850 2510 2850 2637.5 2011 20850 2510 2850 2630 Mid Range		Low Range	10	20800	2505	2800	2625
Mid Range 5/10/15 20 l¹1 21100 2535 3100 2655 5 21425 2567.5 3425 2687.5 High Range 10 21400 2565 3400 2685 15 21375 2562.5 3375 2682.5 20 l¹1 21350 2560 3350 2680		25W Harringo	15	20825			
High Range 5 21425 2567.5 3425 2687.5 10 21400 2565 3400 2685 15 21375 2562.5 3375 2682.5 20 19 21350 2560 3350 2680			5/10/15				
High Range 10 21400 2565 3400 2685 15 21376 2562.5 3375 2682.5 20 10 21350 2560 3350 2680		Mid Range	20 [1]				
15 21375 2562.5 3375 2682.5 20 19 21350 2560 3350 2680							
20 ¹⁹ 21350 2560 3350 2680		High Range		21400	2565		2685
			15				
		NOTE 1: Bandwidth 6		21350	fied LIE recoiver con		
NOTE 1. barrawind for wind a relaxation of the specified de receiver sensitivity requirement (15 36.101 [27] Clause 7.3) is allowed.		36,101 [27	1 Clause 7.3) is allow	ved.	med OF leceivel Sel	ionivity requir	ement (19
		, , , , , , , , , , , , , , , , , , , ,					

Report No.: CHTEW19060042 Page: 7 of 39 Issued: 2019-06-10

3.4. EUT operation mode

For RF test items

The EUT has been tested under typical operating condition. Testing was performed by configuring EUT to maximum output power status.

-	Б.	Bandwidth (MHz)				Modulation		RB#				
Test Items	Band	1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full
	2	0	0	0	0	0	0	0	0	0	0	0
Conducted Output	4	0	0	0	0	0	0	0	0	0	0	0
Power	5	0	0	0	0	-	-	0	0	0	0	0
	7	-	-	0	0	0	0	0	0	0	0	0
	2	0	0	0	0	0	0	0	0	0	-	0
Peak-to-Average	4	0	0	0	0	0	0	0	0	0	-	0
Ratio	5	0	0	0	0	-	-	0	0	0	-	0
	7	-	-	0	0	0	0	0	0	0	-	0
	2	0	0	0	0	0	0	0	0	-	-	0
99% Occupied Bandwidth & 26	4	0	0	0	0	0	0	0	0	1	-	0
dB Bandwidth	5	0	0	0	0	-	-	0	0	-	-	0
	7	-	-	0	0	0	0	0	0	-	-	0
	2	0	0	0	0	0	0	0	0	0	-	0
Band Edge	4	0	0	0	0	0	0	0	0	0	-	0
Band Luge	5	0	0	0	0	-	-	0	0	0	-	0
	7	-	-	0	0	0	0	0	0	0	-	0
	2	0	0	0	0	0	0	0	0	0	-	-
Conducted	4	0	0	0	0	0	0	0	0	0	-	-
Spurious Emission	5	0	0	0	0	-	-	0	0	0	-	-
	7	-	-	0	0	0	0	0	0	0	-	-
	2	0	0	0	0	0	0	0	0	-	-	0
Frequency	4	0	0	0	0	0	0	0	0	-	-	0
Stability	5	0	0	0	0	-	-	0	0	-	-	0
	7	-	-	0	0	0	0	0	0	-	-	0
	2	0	0	0	0	0	0	0	0	0	-	-
ERP and EIRP	4	0	0	0	0	0	0	0	0	0	-	-
Ziti did Ziiti	5	0	0	0	0	-	-	0	0	0	-	-
	7	-	-	0	0	0	0	0	0	0	-	-
	2	0	0	0	0	0	0	0	=	0	-	-
Radiated Spurious	4	0	0	0	0	0	0	0	-	0	-	-
Emission	5	0	0	0	0	-	-	0	-	0	-	-
	7	-	-	0	0	0	0	0	=	0	-	-
Remark	1. The mark " o"means that this configuration is chosenfor testing 2. The mark "-"means that this bandwidth is not test. 3. The device is investigatedfrom 30MHz to10 times offundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.											

Report No.: CHTEW19060042 Page: 8 of 39 Issued: 2019-06-10

3.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

supplied by the manufacturersupplied by the lab

	-	capplied by the lab		
)	/	Manufacturer:	1
	0		Model No.:	1
	0		Manufacturer:	1
			Model No.:	/

3.6. Modifications

No modifications were implemented to meet testing criteria.

Report No.: CHTEW19060042 Page: 9 of 39 Issued: 2019-06-10

4. TEST ENVIRONMENT

4.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd. Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

4.2. Test Facility

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No.: 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 762235

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

IC-Registration No.:5377B-1

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

Report No.: CHTEW19060042 Page: 10 of 39 Issued: 2019-06-10

4.3. Equipments Used during the Test

Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Signal and spectrum Analyzer	R&S	FSV40	100048	2018/10/28	2019/10/27
•	Spectrum Analyzer	Agilent	N9020A	MY50510187	2018/09/29	2019/09/28
•	Radio communication tester	R&S	CMW500	137688-Lv	2018/09/29	2019/09/28
•	Test software	Tonscend	JS1120-1(LTE)	N/A	N/A	N/A
•	Test software	Tonscend	JS1120-2(WIFI)	N/A	N/A	N/A
•	Test software	Tonscend	JS1120-3(WCDMA)	N/A	N/A	N/A
•	Test software	Tonscend	JS1120-4(GSM)	N/A	N/A	N/A

•	Radiated Spurio	us Emission				
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
•	Semi-Anechoic Chamber	Albatross projects	SAC-3m-01	N/A	2018/09/30	2021/09/29
•	Spectrum Analyzer	R&S	FSP40	100597	2018/10/27	2019/10/26
•	Loop Antenna	R&S	HFH2-Z2	100020	2017/11/20	2020/11/19
•	Ultra-Broadband Antenna	SCHWARZBECK	VULB9163	538	2017/04/05	2020/04/04
•	Horn Antenna	SCHWARZBECK	9120D	1011	2017/04/01	2020/03/31
0	Horn Antenna	SCHWARZBECK	BBHA9170	25841	2017/03/27	2020/03/26
0	Pre-amplifier	BONN	BLWA0160-2M	1811887	2018/11/14	2019/11/13
•	Pre-amplifier	CD	PAP-0102	12004	2018/11/14	2019/11/13
•	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-248	2019/04/26	2020/04/25
•	RF Connection Cable	HUBER+SUHNER	RE-7-FH	N/A	2018/11/15	2019/11/14
•	RF Connection Cable	HUBER+SUHNER	RE-7-FL	N/A	2018/11/15	2019/11/14
•	EMI Test Software	Audix	E3	N/A	N/A	N/A
•	Turntable	MATURO	TT2.0	N/A	N/A	N/A
•	Antenna Mast	MATURO	TAM-4.0-P	N/A	N/A	N/A

Report No.: CHTEW19060042 Page: 11 of 39 Issued: 2019-06-10

4.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

	VN=Nominal Voltage	DC 3.80V		
Voltage	VL=Lower Voltage	DC 3.60V		
	VH=Higher Voltage	DC 4.35V		
Tomporoturo	TN=Normal Temperature	25 °C		
Temperature	Extreme Temperature	From −30° to + 50° centigrade		
Humidity	30~60 %			
Air Pressure	950-1050 hPa			

4.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01"Electromagnetic compatibilityand Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics;Part 1"and TR-100028-02 "Electromagnetic compatibilityand Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics;Part 2 " and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongweilaboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.51 dB	(1)
Transmitter power Radiated	2.66dB for <1GHz 3.44dB for >1GHz	(1)
Conducted spurious emissions 9kHz~40GHz	1.93 dB	(1)
Radiated spurious emissions	4.90dB for <1GHz 4.96dB for >1GHz	(1)
Occupied Bandwidth	15Hz for <1GHz 70Hz for >1GHz	(1)
Frequency error	15Hz for <1GHz 70Hz for >1GHz	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=1.96.

Report No.: CHTEW19060042 Page: 12 of 39 Issued: 2019-06-10


5. TEST CONDITIONS AND RESULTS

5.1. Conducted Output Power

LIMIT

N/A

TEST CONFIGURATION

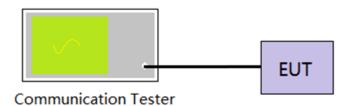

TEST PROCEDURE

- 1. The EUT output port was connected to communication tester.
- 2. Set EUT at maximum power through communication tester.
- 3. Select lowest, middle, and highest channels for each band and different modulation.
- 4. Measure the maximum burst average power.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Refer to appendix A on the section 8 appendix report


Report No.: CHTEW19060042 Page: 13 of 39 Issued: 2019-06-10

5.2. Peak-to-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

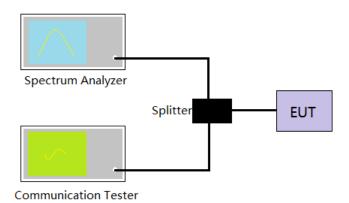

TEST PROCEDURE

- The EUT was connected to the spectrum analyzer and communication tester via a power splitter
- 2. Set EUT in maximum power output.
- 3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed.
 - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
 - ii. For bursttransmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that issynced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in whichthetransmitter is operating at maximum power
- 6. Record the maximum PAPR level associated with a probability of 0.1%.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Refer to appendix B on the section 8 appendix report


Report No.: CHTEW19060042 Page: 14 of 39 Issued: 2019-06-10

5.3. 99% Occupied Bandwidth & 26 dB Bandwidth

<u>LIMIT</u>

N/A

TEST CONFIGURATION

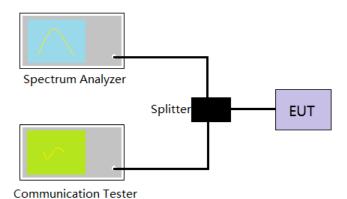

TEST PROCEDURE

- 1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
- 2. Set EUT in maximum power output.
- 3. Spectrum analyzer setting as follow:

Center Frequency= Carrier frequency, RBW=1% to 5% of the anticipated OBW, VBW= 3 * RBW, Detector=Peak,

Trace maximum hold.

4. Record the value of 99% Occupied bandwidth and 26dB bandwidth.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Refer to appendix C on the section 8 appendix report

Report No.: CHTEW19060042 Page: 15 of 39 Issued: 2019-06-10

5.4. Band Edge

LIMIT


Part 24.238 and Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

LTE Band 7

Part 27.53 m(4) For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Limit <-25 dBm

TEST CONFIGURATION

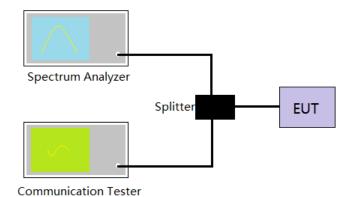

TEST PROCEDURE

- 1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
- 2. Set EUT in maximum power output.
- The band edges of low and high channels were measured.
- Spectrum analyzer setting as follow:
 RBW= no less than 1% of the OBW, VBW =3 * RBW, Sweep time= Auto
- 5. Record the test plot.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Refer to appendix D on the section 8 appendix report

Report No.: CHTEW19060042 Page: 16 of 39 Issued: 2019-06-10

5.5. Conducted Spurious Emissions

LIMIT


Part 24.238 and Part 22.917 and Part 27.53 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

LTE Band 7

Part 27.53 m(4) For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees. Limit <-25 dBm

TEST CONFIGURATION

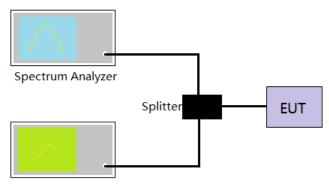

Communication Tester

TEST PROCEDURE

- 1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter
- 2. Set EUT in maximum power output.
- 3. Spectrum analyzer setting as follow:

Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=Peak, Sweep time= Auto Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto Scan frequency range up to 10th harmonic.

4. Record the test plot.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Refer to appendix E on the section 8 appendix report


Report No.: CHTEW19060042 Page: 17 of 39 Issued: 2019-06-10

5.6. Frequency stability VS Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

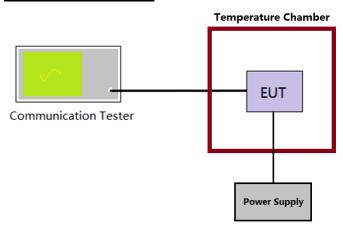

TEST PROCEDURE

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. The EUT output port was connected to communication tester.
- 3. The EUT was placed inside the temperature chamber.
- 4. Turn EUT off and set the chamber temperature to –30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- 5. Repeat step 4 measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Refer to appendix F on the section 8 appendix report


Report No.: CHTEW19060042 Page: 18 of 39 Issued: 2019-06-10

5.7. Frequency stability VS Voltage measurement

LIMIT

2.5ppm

TEST CONFIGURATION

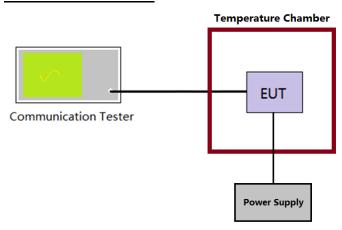

TEST PROCEDURE

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. The EUT output port was connected to communication tester.
- 3. The EUT was placed inside the temperature chamber at 25°C
- 4. The power supply voltage to the EUT was varied ±15% of the nominal value measured at the input to the EUT
- 5. Record the maximum frequency change.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

Refer to appendix F on the section 8 appendix report


Report No.: CHTEW19060042 Page: 19 of 39 Issued: 2019-06-10

5.8. ERP and EIRP

LIMIT

LTE Band 2/7: 2W(33dBm) EIRP LTE Band 4: 1W(30dBm) EIRP LTE Band 5: 7W(38.50dBm) ERP

TEST CONFIGURATION

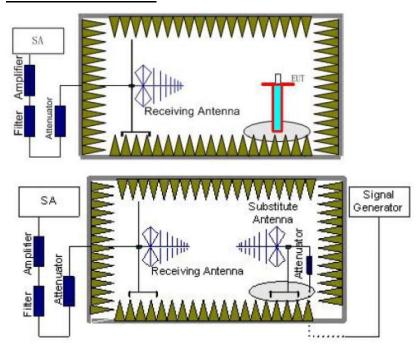

TEST PROCEDURE

- 1. EUT was placed on a 0.8 meter for below 1GHz and 1.5 meter for above 1GHz high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below:

Report No.: CHTEW19060042 Page: 20 of 39 Issued: 2019-06-10

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

□ Passed	☐ Not Applicable

Report No.: CHTEW19060042 Page: 21 of 39 Issued: 2019-06-10

LTE Band 2-1.4MHz						
Maril Jacks	Channel	EIRP	(dBm)	Limit (dPm)	Result	
Modulation	Channel	Vertical	Horizontal	Limit (dBm)		
	Low	18.71	21.98	22.00		
QPSK	Mid	18.74	22.13		PASS	
	High	18.86	21.83			
	Low	18.60	21.95	<33.00		
16QAM	Mid	18.61	22.15		PASS	
	High	18.65	21.68			

LTE Band 2-3MHz						
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Decult	
Modulation	Chamilei	Vertical	Horizontal	Lillii (dbill)	Result	
	Low	18.50	21.58	22.00		
QPSK	Mid	18.60	22.12		PASS	
	High	18.64	21.67			
	Low	17.54	21.03	<33.00		
16QAM	Mid	17.38	21.07		PASS	
	High	17.13	20.70			

LTE Band 2-5MHz						
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result	
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)		
	Low	19.42	22.46	- 22.00		
QPSK	Mid	19.44	22.53		PASS	
	High	19.71	22.27			
	Low	19.40	22.41	- <33.00 -		
16QAM	Mid	19.29	22.56		PASS	
	High	19.29	22.05			

LTE Band 2-10MHz						
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Result	
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)		
	Low	19.39	22.54	22.00		
QPSK	Mid	19.40	22.61		PASS	
	High	19.67	22.44			
	Low	19.36	22.53	- <33.00 - -	PASS	
16QAM	Mid	19.26	22.74			
	High	19.26	22.18			

Report No.: CHTEW19060042 Page: 22 of 39 Issued: 2019-06-10

LTE Band 2-15MHz						
	Ob annual	EIRP	(dBm)	Lineit (JDne)		
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result	
	Low	19.09	22.06	22.00		
QPSK	Mid	19.18	22.54		PASS	
	High	19.34	22.20			
	Low	18.20	21.53	<33.00		
16QAM	Mid	17.94	21.59		PASS	
	High	17.66	21.13			

	LTE Band 2-20MHz						
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Dogult		
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	19.25	22.21	22.00			
QPSK	Mid	19.42	22.73		PASS		
	High	19.59	22.36				
	Low	18.19	21.63	- <33.00 -			
16QAM	Mid	18.09	21.70		PASS		
	High	17.88	21.24				

Report No.: CHTEW19060042 Page: 23 of 39 Issued: 2019-06-10

LTE Band 4-1.4MHz						
Modulation	Channal	EIRP	(dBm)	Limit (dDm)	Dogult	
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result	
	Low	20.73	22.08	00.00		
QPSK	Mid	21.18	22.50		PASS	
	High	21.09	22.32			
	Low	18.44	20.39	<30.00		
16QAM	Mid	18.83	20.86		PASS	
	High	18.62	20.81			

	LTE Band 4-3MHz						
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Dogult		
Modulation	Chamei	Vertical	Horizontal	Limit (dBm)	Result		
	Low	21.16	22.08	20.00			
QPSK	Mid	21.10	22.26		PASS		
	High	20.77	22.17				
	Low	18.73	20.84	- <30.00 -			
16QAM	Mid	19.05	20.33		PASS		
	High	18.92	21.02				

	LTE Band 4-5MHz						
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	D !!		
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	21.77	22.63				
QPSK	Mid	22.03	23.02		PASS		
	High	21.91	22.88				
	Low	19.22	20.77	<30.00			
16QAM	Mid	19.52	21.78		PASS		
	High	19.19	21.11				

	LTE Band 4-10MHz						
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Dogult		
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	21.33	22.46	20.00			
QPSK	Mid	21.67	22.85		PASS		
	High	21.56	22.67				
	Low	18.88	20.69	- <30.00 -			
16QAM	Mid	19.22	21.13		PASS		
	High	18.94	21.03				

Report No.: CHTEW19060042 Page: 24 of 39 Issued: 2019-06-10

LTE Band 4-15MHz							
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Dogult		
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	21.79	22.41	20.00	PASS		
QPSK	Mid	21.61	22.57				
	High	21.26	22.51				
	Low	19.20	21.07	<30.00			
16QAM	Mid	19.46	20.88		PASS		
	High	19.26	21.20				

	LTE Band 4-20MHz							
Modulation	Channel	EIRP	EIRP (dBm)		Daguit			
Modulation	Chamilei	Vertical	Horizontal	Limit (dBm)	Result			
	Low	21.85	22.46	-20.00				
QPSK	Mid	21.85	22.68		PASS			
	High	21.47	22.56					
	Low	19.18	21.15	<30.00				
16QAM	Mid	19.69	20.81		PASS			
	High	19.51	21.36					

Report No.: CHTEW19060042 Page: 25 of 39 Issued: 2019-06-10

LTE Band 5-1.4MHz							
Modulation	Channel	ERP	ERP (dBm)		Danill		
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	22.18	20.58	20.50			
QPSK	Mid	22.47	20.46		PASS		
	High	22.44	20.37				
	Low	20.58	18.98	<38.50			
16QAM	Mid	20.65	19.04		PASS		
	High	20.69	18.76				

	LTE Band 5-3MHz							
Modulation	Channel	ERP	(dBm)	Limit (dPm)	Pocult			
Modulation	Chamei	Vertical	Horizontal	Limit (dBm)	Result			
	Low	23.22	20.12	20.50				
QPSK	Mid	22.94	19.98		PASS			
	High	22.37	19.69					
	Low	20.64	19.56	<38.50 				
16QAM	Mid	20.76	18.82		PASS			
	High	20.79	18.58					

	LTE Band 5-5MHz							
Modulation	Channel	ERP	(dBm)	Limit (dDm)	Result			
Modulation	Chamei	Vertical	Horizontal	Limit (dBm)				
	Low	22.83	20.37	20.50	PASS			
QPSK	Mid	22.67	20.23					
	High	22.15	19.83					
	Low	21.11	19.58	- <38.50 -				
16QAM	Mid	20.99	19.43		PASS			
	High	20.94	19.25					

		LTE Band	5-10MHz		
Modulation	Channel	ERP	(dBm)	Limit (dPm)	D !!
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result
	Low	22.77	20.40	20.50	
QPSK	Mid	22.61	20.25		PASS
	High	22.12	19.84		
	Low	20.97	19.18		
16QAM	Mid	21.09	19.27		PASS
	High	21.16	19.01		

Report No.: CHTEW19060042 Page: 26 of 39 Issued: 2019-06-10

LTE Band 7-5MHz							
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result		
iviodulation	Channel	Vertical	Horizontal	LIIIII (UDIII)			
	Low	20.32	23.46	22.00			
QPSK	Mid	20.49	23.49		PASS		
	High	20.36	22.99				
	Low	18.47	22.74	<33.00			
16QAM	Mid	18.66	22.71		PASS		
	High	18.56	22.59				

	LTE Band 7-10MHz							
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Popult			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	20.18	23.21					
QPSK	Mid	20.27	23.06	22.00	PASS			
	High	20.16	22.94					
	Low	18.90	22.83	<33.00 - -	PASS			
16QAM	Mid	18.87	22.60					
	High	18.82	22.37					

LTE Band 7-15MHz							
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result		
Modulation	Chamei	Vertical	Horizontal	Limit (dBm)			
	Low	20.19	23.29	20.00	PASS		
QPSK	Mid	20.34	23.48				
	High	20.20	23.22				
	Low	18.62	22.51	<33.00			
16QAM	Mid	18.78	22.45		PASS		
	High	18.67	22.35				

		LTE Band	7-20MHz		
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Result
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	
	Low	20.15	23.39	22.00	
QPSK	Mid	20.23	23.23		PASS
	High	20.11	23.12		
	Low	18.98	22.93	<33.00	
16QAM	Mid	19.24	23.07		PASS
	High	19.05	22.92		


Report No.: CHTEW19060042 Page: 27 of 39 Issued: 2019-06-10

5.9. Radiated Spurious Emission

LIMIT

LTE Band 2/4/5: -13dBm; LTE Band 7: -25dBm

TEST CONFIGURATION

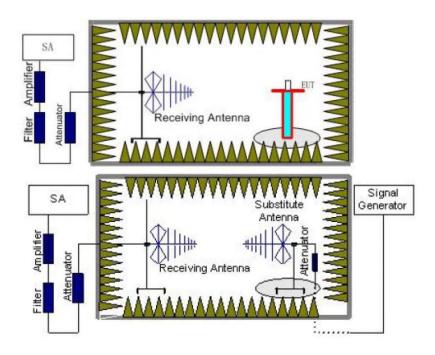

TEST PROCEDURE

- 1. EUT was placed on a 0.8 meter for below 1GHz and 1.5 meter for above 1GHz high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.0m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.

Report No.: CHTEW19060042 Page: 28 of 39 Issued: 2019-06-10

- 6. The measurement results are obtained as described below:
 - Power(EIRP)=PMea- PAg Pcl + Ga
 - We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below:

Power(EIRP)=PMea- Pcl + Ga

- 7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
 - ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

□ - .	
□ Passed	■ Not Applicable

Report No.: CHTEW19060042 Page: 29 of 39 Issued: 2019-06-10

		LTE Band	d 2-1.4MHz		
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Dooult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3701.40	Vertical	-35.81		
	5552.10	V	-39.52	<-13.00	Pass
Law	7402.80	V	-40.54		
Low	3701.40	Horizontal	-37.05		
	5552.10	Н	-40.69	<-13.00	Pass
	7402.80	Н	-41.53		
	3760.00	Vertical	-34.88		
	5640.00	V	-38.64	<-13.00	Pass
Mid	7520.00	V	-39.71		
IVIIG	3760.00	Horizontal	-35.91		
	5640.00	Н	-39.77	<-13.00	Pass
	7520.00	Н	-40.65		
	3818.60	Vertical	-33.29		
	5727.90	V	-37.19	<-13.00	Pass
l liada	7637.20	V	-38.33		
High	3818.60	Horizontal	-35.35		
	5727.90	Н	-39.25	<-13.00	Pass
	7637.20	Н	-40.20		
		LTE Ban	d 2-3MHz		
Channel	Frequency	Spurious I	Emission	Limit (dBm)	Result
Chamei	(MHz)	Polarization	Level (dBm)		Result
	3703.00	Vertical	-32.26		
	5554.50	V	-34.28	<-13.00	Pass
Low	7406.00	V	-36.21		
LOW	3703.00	Horizontal	-32.83		
	5554.50	Н	-36.26	<-13.00	Pass
	7406.00	Н	-38.64		
	3760.00	Vertical	-29.41		
	5640.00	V	-31.59	<-13.00	Pass
Mid	7520.00	V	-33.28		
IVIIU	3760.00	Horizontal	-30.45		
	5640.00	Н	-34.60	<-13.00	Pass
	7520.00	Н	-36.73		
	3817.00	Vertical	-26.80		
	5725.50	V	-29.70	<-13.00	Pass
Lliah	7634.00	V	-32.04		
High	3817.00	Horizontal	-27.95		
	5725.50	Н	-32.70	<-13.00	Pass
	7634.00	Н	-33.38		

Report No.: CHTEW19060042 Page: 30 of 39 Issued: 2019-06-10

		LTE Bar	d 2-5MHz		
01	Frequency	Spurious	Emission	L':'((JD)	D !!
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3705.00	Vertical	-24.00		
	5557.50	V	-25.45	<-13.00	Pass
Lavo	7410.00	V	-28.85		
Low	3705.00	Horizontal	-30.08		
	5557.50	Н	-36.50	<-13.00	Pass
	7410.00	Н	-35.24		
	3760.00	Vertical	-25.37		
	5640.00	V	-27.99	<-13.00	Pass
	7520.00	V	-31.05		
Mid	3760.00	Horizontal	-33.25		
	5640.00	Н	-38.65	<-13.00	Pass
	7520.00	Н	-36.88		
	3815.00	Vertical	-28.83		Pass
	5722.50	V	-30.45	<-13.00	
	7630.00	V	-33.17		
High	3815.00	Horizontal	-35.73	<-13.00	Pass
	5722.50	Н	-40.95		
	7630.00	Н	-38.63		
	1	LTE Ban	d 2-10MHz	1	
Channel	Frequency	Spurious	Emission	Lineit (dDne)	Result
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Nesult
	3710.00	Vertical	-26.53		
	5565.00	V	-29.21	<-13.00	Pass
1 -	7420.00	V	-31.68		
Low	3710.00	Horizontal	-39.24	<-13.00	Pass
	5565.00	Н	-43.35		
	7420.00	Н	-41.39		
	3760.00	Vertical	-29.26		
	5640.00	V	-31.49	<-13.00	Pass
N //: -l	7520.00	V	-34.43		
Mid	3760.00	Horizontal	-41.04		
	5640.00	Н	-46.03	<-13.00	Pass
	7520.00	Н	-43.51		
	3810.00	Vertical	-30.27		
	5715.00	V	-33.77	<-13.00	Pass
	7620.00	V	-37.07		
l limb	7620.00				
High	3810.00	Horizontal	-38.87		
High		Horizontal H	-38.87 -44.77	<-13.00	Pass

Report No.: CHTEW19060042 31 of 39 2019-06-10 Page: Issued:

		LTE Band	d 2-15MHz		
<u> </u>	Frequency	Spurious I	Emission		5
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3715.00	Vertical	-28.42		
	5572.50	V	-32.10	<-13.00	Pass
1 -	7430.00	V	-35.28		
Low	3715.00	Horizontal	-40.62		
	5572.50	Н	-46.42	<-13.00	Pass
	7430.00	Н	-43.23		
	3760.00	Vertical	-29.74		
	5640.00	V	-33.34	<-13.00	Pass
N. 42 - 1	7520.00	V	-36.44		
Mid	3760.00	Horizontal	-38.96		
	5640.00	Н	-44.69	<-13.00	Pass
	7520.00	Н	-42.25		
	3805.00	Vertical	-28.37		Pass
	5707.50	V	-30.78	<-13.00	
	7610.00	V	-33.90		
High	3805.00	Horizontal	-41.14	<-13.00	
	5707.50	Н	-48.22		Pass
	7610.00	Н	-45.88		
	,	LTE Band	d 2-20MHz		
Channel	Frequency Spurious Emission			Limit (dDm)	Result
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	IVESUIL
	3720.00	Vertical	-30.53		Pass Pass
	5580.00	V	-33.24	<-13.00	
Law	7440.00	V	-35.75		
Low	3720.00	Horizontal	-41.58		
	5580.00	Н	-48.64	<-13.00	
	7440.00	Н	-46.23		
	3760.00	Vertical	-30.86		
	5640.00	V	-33.55	<-13.00	Pass
N. 42 - 1	7520.00	V	-36.04		
Mid	3760.00	Horizontal	-41.87		
			-48.88	<-13.00	Pass
	5640.00	H			
	5640.00 7520.00	H H	-46.45		
	7520.00	Н	-46.45	<-13.00	Pass
III.	7520.00 3800.00	H Vertical	-46.45 -29.29	<-13.00	
High	7520.00 3800.00 5700.00	H Vertical V	-46.45 -29.29 -31.44	<-13.00	
High	7520.00 3800.00 5700.00 7600.00	H Vertical V	-46.45 -29.29 -31.44 -34.52	<-13.00 <-13.00	

Remark:

- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report. 2.

Report No.: CHTEW19060042 Page: 32 of 39 Issued: 2019-06-10

		LTE Band	d 4-1.4MHz		
Observat	Frequency	Spurious	Emission	Lineit (dDne)	Danilt
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3421.40	Vertical	-32.83		
	5132.10	V	-38.50	<-13.00	Pass
Low	6842.80	V	-38.43		
Low	3421.40	Horizontal	-34.48		
	5132.10	Н	-40.06	<-13.00	Pass
	6842.80	Н	-39.75		
	3465.00	Vertical	-31.59		
	5197.50	V	-37.33	<-13.00	Pass
N 4" 1	6930.00	V	-37.33		
Mid	3465.00	Horizontal	-32.96		
	5197.50	Н	-38.83	<-13.00	Pass
	6930.00	Н	-38.58		
	3508.60	Vertical	-29.47		Pass
	5262.90	V	-35.40	<-13.00	
	7017.20	V	-35.50		
High	3508.60	Horizontal	-31.22	<-13.00	Pass
	5262.90	Н	-37.18		
	7017.20	Н	-37.01		
		LTE Bar	nd 4-3MHz	1	
011	Frequency	Spurious	Emission	L''(/ ID)	D It
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3423.00	Vertical	-32.13		
	5134.50	V	-37.77	<-13.00	Pass
	6846.00	V	-37.85		
Low	3423.00	Horizontal	-33.33	<-13.00	Pass
	5134.50	Н	-40.52		
	6846.00	Н	-39.55		
	3465.00	Vertical	-34.91		
	5197.50	V	-40.54	<-13.00	Pass
N 4" 1	6930.00	V	-39.99		
Mid	0.40=.00		-38.65	<-13.00	Pass
	3465.00	Horizontal	00.00		
2	3465.00 5197.50	Horizontal H	-44.27	<-13.00	Pass
				<-13.00	Pass
	5197.50	Н	-44.27	<-13.00	Pass
	5197.50 6930.00	H H	-44.27 -43.91	<-13.00 <-13.00	Pass Pass
	5197.50 6930.00 3507.00	H H Vertical	-44.27 -43.91 -36.78		
High	5197.50 6930.00 3507.00 5260.50	H H Vertical V	-44.27 -43.91 -36.78 -42.24		
	5197.50 6930.00 3507.00 5260.50 7014.00	H H Vertical V	-44.27 -43.91 -36.78 -42.24 -41.60		

Report No.: CHTEW19060042 Page: 33 of 39 Issued: 2019-06-10

		LTE Ban	d 4-5MHz		
01 1	Frequency	Spurious I	Emission	(15)	D 11
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3425.00	Vertical	-40.19		
	5137.50	V	-44.74	<-13.00	Pass
	6850.00	V	-44.99		
Low	3425.00	Horizontal	-42.59		
	5137.50	Н	-48.45	<-13.00	Pass
	6850.00	Н	-47.12		
	3465.00	Vertical	-41.21		
	5197.50	V	-45.70	<-13.00	Pass
. 4: 1	6930.00	V	-45.89		
Mid	3465.00	Horizontal	-43.79		
	5197.50	Н	-49.42	<-13.00	Pass
	6930.00	Н	-48.04		
	3505.00	Vertical	-42.68		Pass
	5257.50	V	-47.04	<-13.00	
	7010.00	V	-47.16		
High	3505.00	Horizontal	-44.75	<-13.00	Pass
	5257.50	Н	-50.32		
	7010.00	Н	-48.81		
		LTE Band	d 4-10MHz		
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Result
Chamilei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Noouit
	3430.00	Vertical	-45.29		
	5145.00	V	-48.63	<-13.00	Pass
Low	6860.00	V	-48.13		
Low	3430.00	Horizontal	-45.01		Pass
	5145.00	Н	-50.56	<-13.00	
	6860.00	Н	-49.02		
	3465.00	Vertical	-45.48		
	5197.50	V	-48.81	<-13.00	Pass
Mid	6930.00	V	-48.66		
iviiu	3465.00	Horizontal	-45.22		
	5197.50	Н	-50.73	<-13.00	Pass
	6930.00	Н	-49.18		
	3500.00	Vertical	-45.74		
	5250.00	V	-49.05	<-13.00	Pass
∐iah	7000.00	V	-48.89		
High	3500.00	Horizontal	-45.42		
	5050.00	Н	-50.92	<-13.00	Pass
	5250.00	п	-30.92		1 033

Report No.: CHTEW19060042 Page: 34 of 39 Issued: 2019-06-10

		LTE Band	d 4-15MHz		
	Frequency	Spurious I	Emission		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3435.00	Vertical	-46.43		
	5152.50	V	-49.75	<-13.00	Pass
	6870.00	V	-49.44		
Low	3435.00	Horizontal	-47.50		
	5152.50	Н	-52.87	<-13.00	Pass
	6870.00	Н	-52.95		
	3465.00	Vertical	-49.83		
	5197.50	V	-52.94	<-13.00	Pass
	6930.00	V	-52.44		
Mid	3465.00	Horizontal	-50.14		
	5197.50	Н	-55.01	<-13.00	Pass
	6930.00	Н	-54.98		
	3495.00	Vertical	-52.33		Pass
	5242.50	V	-55.21	<-13.00	
1.0.1	6990.00	V	-54.60		
High	3495.00	Horizontal	-52.36		
	5242.50	Н	-57.10	<-13.00	Pass
	6990.00	Н	-58.84		
		LTE Band	d 4-20MHz		
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Dogult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3440.00	Vertical	-64.59		Pass Pass
	5160.00	V	-58.00	<-13.00	
Law	6880.00	V	-56.97		
Low	3440.00	Horizontal	-54.73		
	5160.00	Н	-67.32	<-13.00	
	6880.00	Н	-69.10		
	3465.00	Vertical	-75.59		
	5197.50	V	-63.24	<-13.00	Pass
N A: -I	6930.00	V	-61.90		
Mid	3465.00	Horizontal	-61.69		
	5197.50	Н	-74.44	<-13.00	Pass
	6930.00	Н	-72.93		
	3490.00	Vertical	-78.72		
				<-13.00	Pass
	5235.00	V	-65.25	<-13.00	Pass
11:		V	-65.25 -63.73	<-13.00	Pass
High	5235.00			<-13.00	Pass
High	5235.00 6980.00	V	-63.73	<-13.00 <-13.00	Pass

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: CHTEW19060042 Page: 35 of 39 Issued: 2019-06-10

		LTE Band	d 5-1.4MHz		
Observation	Frequency	Spurious	Emission	Limit (JD.)	D !
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1649.40	Vertical	-35.72		
	2474.10	V	-43.29	<-13.00	Pass
Law	3298.80	V	-43.84		
Low	1649.40	Horizontal	-38.10		
	2474.10	Н	-46.09	<-13.00	Pass
	3298.80	Н	-46.39		
	1673.00	Vertical	-35.01		
	2509.50	V	-42.63	<-13.00	Pass
N 4: al	3346.00	V	-43.07		
Mid	1673.00	Horizontal	-37.38		
	2509.50	Н	-45.41	<-13.00	Pass
	3346.00	Н	-45.75		
	1696.60	Vertical	-34.20		Pass
	2544.90	V	-41.98	<-13.00	
1.12.1	3393.20	V	-42.45		
High	1696.60	Horizontal	-34.57		
	2544.90	Н	-41.64	<-13.00	Pass
	3393.20	Н	-43.03		
		LTE Bar	nd 5-3MHz		
Observal	Frequency Spurious Emission			Lineit (dDne)	Danult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1651.00	Vertical	-32.73		Pass
	2476.50	V	-40.60	<-13.00	
Law	3302.00	V	-41.28		
Low	1651.00	Horizontal	-33.61		Pass
	2476.50	Н	-40.73	<-13.00	
	3302.00	Н	-42.26		
	1673.00	Vertical	-32.01		
	2509.50	V	-39.92	<-13.00	Pass
M: al	3346.00	V	-40.64		
Mid	1673.00	Horizontal	-32.32		
	2509.50	Н	-39.68	<-13.00	Pass
	3346.00	Н	-41.27		
	1695.00	Vertical	-30.42		
	2542.50	V	-38.48	<-13.00	Pass
11:	3390.00	V	-39.27		
High	1695.00	Horizontal	-31.14		
	2542.50	Н	-38.57	<-13.00	Pass
	3390.00	Н	-40.33		

Report No.: CHTEW19060042 36 of 39 2019-06-10 Page: Issued:

		LTE Ban	d 5-5MHz		
01	Frequency	Spurious I	Emission	L''((ID)	D !!
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1653.00	Vertical	-27.48		
	2479.50	V	-36.65	<-13.00	Pass
Law	3306.00	V	-36.86		
Low	1653.00	Horizontal	-31.85		
	2479.50	Н	-39.23	<-13.00	Pass
	3306.00	Н	-40.89		
	1673.00	Vertical	-28.01		
	2509.50	V	-37.15	<-13.00	Pass
N 47 1	3346.00	V	-37.33		
Mid	1673.00	Horizontal	-32.00		
	2509.50	Н	-39.35	<-13.00	Pass
	3346.00	Н	-41.01		
	1693.00	Vertical	-28.66		Pass
	2539.50	V	-37.74	<-13.00	
	3386.00	V	-37.89		
High	1693.00	Horizontal	-30.78	<-13.00	Pass
	2539.50	Н	-38.20		
	3386.00	Н	-40.03		
		LTE Band	d 5-10MHz	1	
Channal	Frequency	Spurious I	Emission	Lineit (dDne)	Result
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Nesult
	1658.00	Vertical	-27.83		
	2487.00	V	-37.03	<-13.00	Pass
	3316.00	V	-37.29		
Low	1658.00	Horizontal	-31.73		Pass
	2487.00	Н	-39.09	<-13.00	
	3316.00	Н	-40.79		
	1673.00	Vertical	-28.54		
	2509.50	V	-37.70	<-13.00	Pass
N 42 - 1	3346.00	V	-37.92		
Mid	1673.00	Horizontal	-31.92		
	2509.50	Н	-39.24	<-13.00	Pass
	3346.00	Н	-40.94		
	1688.00	Vertical	-28.77		
	2532.00	V	-37.91	<-13.00	Pass
	2002.00		i	ζ-13.00	F 033
1 11 1-	3376.00	V	-38.12		
High		V Horizontal	-38.12 -32.10		
High	3376.00			<-13.00	Pass

Remark:

- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report. 2.

Report No.: CHTEW19060042 Page: 37 of 39 Issued: 2019-06-10

		LTE Bar	nd 7-5MHz		
0	Frequency	Spurious	Emission		- "
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	5005.00	Vertical	-36.61		
	7507.50	V	-41.04	<-25.00	Pass
Low	10010.00	V	-41.44		
Low	5005.00	Horizontal	-39.10		
	7507.50	Н	-44.10	<-25.00	Pass
	10010.00	Н	-43.24		
	5070.00	Vertical	-35.35		
	7605.00	V	-39.18	<-25.00	Pass
N 4: -J	10140.00	V	-39.88		
Mid	5070.00	Horizontal	-35.67		
	7605.00	Н	-41.19	<-25.00	Pass
	10140.00	Н	-41.29		
	5135.00	Vertical	-31.81		
	7702.50	V	-35.96	<-25.00	Pass
	10270.00	V	-36.82		
High	5135.00	Horizontal	-33.31		
	7702.50	Н	-38.98	<-25.00	Pass
	10270.00	Н	-39.41		
		LTE Ban	d 7-10MHz		
Channal	Frequency Spurious Emission			Limit (dDm)	Decult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	5010.00	Vertical	-30.21		Pass Pass
	7515.00	V	-34.60	<-25.00	
1	10020.00	V	-35.66		
Low	5010.00	Horizontal	-34.64		
	7515.00	Н	-40.23	<-25.00	
	10020.00	Н	-40.47		
	5070.00	Vertical	-31.21		
	7605.00	V	-35.54	<-25.00	Pass
N 4: al	10140.00	V	-36.54		
Mid	5070.00	Horizontal	-36.25		
	7605.00	Н	-41.53	<-25.00	Pass
	10140.00	Н	-41.71		
	5130.00	Vertical	-32.85		
	7695.00	V	-37.03	<-25.00	Pass
] 13 a.b.	10260.00	V	-37.96		
High	5130.00	Horizontal	-37.31		
	7695.00	Н	-42.53	<-25.00	Pass
	10260.00	Н	-42.56		

Report No.: CHTEW19060042 38 of 39 2019-06-10 Page: Issued:


		LTE Band	d 7-15MHz		
01 1	Frequency	Spurious I	Emission	(15)	D 11
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	5015.00	Vertical	-31.41		
	7522.50	V	-35.80	<-25.00	Pass
1	10030.00	V	-36.92		
Low	5015.00	Horizontal	-39.54		
	7522.50	Н	-45.77	<-25.00	Pass
	10030.00	Н	-45.73		
	5070.00	Vertical	-34.45		
	7605.00	V	-38.48	<-25.00	Pass
N.41 I	10140.00	V	-38.88		
Mid	5070.00	Horizontal	-38.27		
	7605.00	Н	-44.74	<-25.00	Pass
	10140.00	Н	-44.75		
	5125.00	Vertical	-32.89	<-25.00	Pass
	7687.50	V	-37.06		
	10250.00	V	-37.53		
High	5125.00	Horizontal	-37.23		
	7687.50	Н	-43.76	<-25.00	Pass
	10250.00	Н	-43.92		
		LTE Band	d 7-20MHz		
Channel	Frequency	Spurious I	Emission	Limit (dDm)	Result
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	IVESUIL
	5020.00	Vertical	-31.35		Pass Pass
	7530.00	V	-35.14	<-25.00	
Law	10040.00	V	-35.90		
Low	5020.00	Horizontal	-35.75		
	7530.00	Н	-42.37	<-25.00	
	10040.00	Н	-42.74		
	5070.00	Vertical	-30.24		
	7605.00	V	-34.10	<-25.00	Pass
N 41 - 1	10140.00	V	-34.92		
Mid	5070.00	Horizontal	-33.82		
	7605.00	Н	-40.81	<-25.00	Pass
	10140.00	Н	-41.25		
	5120.00	Vertical	-28.87		
	7680.00	V	-32.86	<-25.00	Pass
11:	10240.00	V	-33.74		
High	5120.00	Horizontal	-35.89		
		Н	-42.75	<-25.00	Pass
	7680.00		-42.73		r a55


Remark:

- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report. 2.

Report No.: CHTEW19060042 Page: 39 of 39 Issued: 2019-06-10

6. TEST SETUP PHOTOS OF THE EUT

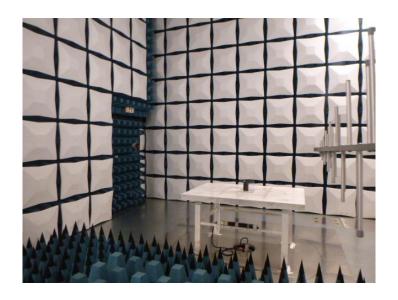

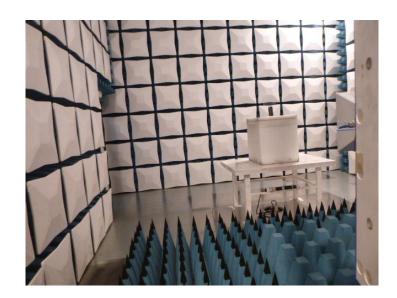

7. EXTERNAL AND INTERNAL PHOTOS OF THE EUT

Refere to the test report No.: CHTEW19060040

8. APPENDIX REPORT