

# FCC SAR EVALUATION REPORT

In accordance with the requirements of  
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and  
IEEE Std 1528-2013

**Product Name :** Mobile Phone

**Trademark :** Bmobile

**Model Name :** BL52

**Family Model :** BL52T

**Report No. :** S23050801903001

**FCC ID :** ZSW-30-117

**Prepared for**

b mobile HK Limited

Flat 18; 14/F Block 1; Golden Industrial Building; 16-26 Kwai Tak Street; Kwai Chung;  
New Territories; Hong Kong, China

**Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,  
Bao'an District, Shenzhen 518126 P.R.China.

Tel.: 400-800-6106, 0755-2320 0050, 0755-2320 0090

Website: <http://www.ntek.org.cn>

### TEST RESULT CERTIFICATION

**Applicant's name** .....: b mobile HK Limited  
 Address .....: Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street;  
 Kwai Chung;New Territories; Hong Kong, China

**Manufacturer's Name** .....: b mobile HK Limited  
 Address .....: Flat 18; 14/F Block 1; Golden Industrial Building;16-26 Kwai Tak Street;  
 Kwai Chung;New Territories; Hong Kong, China

**Product description**

Product name .....: Mobile Phone  
 Trademark .....: Bmobile  
 Model Name .....: BL52  
 Family Model .....: BL52T

FCC 47 CFR Part 2(2.1093)

**Standards** .....: ANSI/IEEE C95.1-1992;IEEE Std 1528-2013  
 Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

**Date of Test**

Date (s) of performance of tests .....: Dec. 17, 2021 ~ May 22, 2023

Date of Issue.....: May 25, 2023

Test Result.....: **Pass**

*Note: All test data of this report are based on the original test report S22101200703001, dated by Nov 03, 2022*

Prepared By : Jack Li  
 (Test Engineer) : (Jack Li)

Approved By : Alex  
 (Lab Manager) : (Alex Li)

※ ※ **Revision History** ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release	Jan. 20, 2022	Jacob Chen
Rev.2.0	Added Model. Updated HW Version, screen's Manufacturer.	Nov 03, 2022	Jacob Chen
Rev.3.0	Added WCDMA Band 4, LTE Band26/38/66, Updated WIFI2.4G. Updated the HW and SW version	May 25, 2023	Jack Li

## TABLE OF CONTENTS

1.	General Information .....	6
1.1.	RF exposure limits.....	6
1.2.	Statement of Compliance .....	7
1.3.	EUT Description .....	7
1.4.	Test specification(s) .....	9
1.5.	Ambient Condition.....	9
2.	SAR Measurement System .....	10
2.1.	SATIMO SAR Measurement Set-up Diagram .....	10
2.2.	Robot .....	11
2.3.	E-Field Probe.....	12
2.3.1.	E-Field Probe Calibration .....	12
2.4.	SAM phantoms .....	13
2.4.1.	Technical Data .....	14
2.5.	Device Holder .....	15
2.6.	Test Equipment List .....	16
3.	SAR Measurement Procedures .....	18
3.1.	Power Reference .....	18
3.2.	Area scan & Zoom scan.....	18
3.3.	Description of interpolation/extrapolation scheme .....	20
3.4.	Volumetric Scan .....	20
3.5.	Power Drift .....	20
4.	System Verification Procedure .....	21
4.1.	Tissue Verification .....	21
4.1.1.	Tissue Dielectric Parameter Check Results .....	22
4.2.	System Verification Procedure .....	23
4.2.1.	System Verification Results.....	24
5.	SAR Measurement variability and uncertainty .....	25
5.1.	SAR measurement variability.....	25
5.2.	SAR measurement uncertainty .....	25
6.	RF Exposure Positions .....	26
6.1.	Ear and handset reference point .....	26
6.2.	Definition of the cheek position .....	26
6.3.	Definition of the tilt position .....	28
6.4.	Body Worn Accessory .....	28
7.	RF Output Power .....	30
7.1.	GSM Conducted Power .....	30
7.2.	WCDMA Conducted Power .....	31
7.3.	LTE Conducted Power .....	32
7.4.	WLAN &Bluetooth Output Power .....	50

8. Antenna Location.....	51
9. Stand-alone SAR test exclusion.....	51
10. SAR Results .....	52
10.1. SAR measurement results .....	52
10.1.1. SAR measurement Result of GSM850.....	52
10.1.2. SAR measurement Result of GSM1900.....	53
10.1.3. SAR measurement Result of WCDMA Band 2.....	54
10.1.4. SAR measurement Result of WCDMA Band 4.....	55
10.1.5. SAR measurement Result of WCDMA Band 5.....	56
10.1.6. SAR measurement Result of LTE Band 2 .....	57
10.1.7. SAR measurement Result of LTE Band 4 .....	59
10.1.8. SAR measurement Result of LTE Band 5 .....	61
10.1.9. SAR measurement Result of LTE Band 7 .....	63
10.1.10. SAR measurement Result of LTE Band 26a .....	64
10.1.11. SAR measurement Result of LTE Band 26b .....	66
10.1.12. SAR measurement Result of LTE Band 38 .....	68
10.1.13. SAR measurement Result of LTE Band 66 .....	70
10.1.14. SAR measurement Result of WLAN 2.4G .....	74
10.2. SAR Summation Scenario.....	74
11. Appendix A. Photo documentation .....	76
12. Appendix B. System Check Plots.....	76
13. Appendix C. Plots of High SAR Measurement.....	93
14. Appendix D. Calibration Certificate .....	150

## 1. General Information

### 1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

#### **Occupational/Controlled Environments:**

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

#### **General Population/Uncontrolled Environments:**

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE  
HEAD AND TRUNK LIMIT  
1.6 W/kg  
APPLIED TO THIS EUT

### 1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for BL52 are as follows.

RF Exposure Conditions		Equipment Class -Highest Reported SAR (W/kg)			
		PCE	DTS	NII	DSS
1-g Head		1.023	0.179	N/A	N/A
1-g Body-Worn (Separation distance of 10mm)		0.936	0.020	N/A	N/A
1-g Hotspot (Separation distance of 10mm)		0.936	0.020	N/A	N/A
Max Simultaneous Tx	Head	1.233	1.202	N/A	1.233
	Body-Worn	1.041	0.956	N/A	1.041
	Hotspot	1.041	0.956	N/A	1.041

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

### 1.3. EUT Description

Device Information	
Product Name	Mobile Phone
Trade Name	Bmobile
Model Name	BL52
Family Model	BL52T
FCC ID	ZSW-30-117
Device Phase	Identical Prototype
Exposure Category	General population / Uncontrolled environment
Antenna	PIFA Antenna
Battery Information	DC 3.7V, 2000mAh
Hard Ware Version	Bmobile_BL52T_HW_V001
Soft Ware Version	Bmobile_BL52_TEM MX_V001
Device Operating Configurations	
Supporting Mode(s)	GSM 850/1900, WCDMA Band 2/4/5, LTE Band 2/4/5/7/26/38/66, WLAN 2.4G , Bluetooth
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, π/4-DQPSK, 8DPSK),
Device Class	B

Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band 2	1850-1910	1930-1990
	WCDMA Band 4	1710-1755	2110-2155
	WCDMA Band 5	824-849	869-894
	LTE Band 2	1850-1910	1930-1990
	LTE Band 4	1710-1755	2110-2155
	LTE Band 5	824-849	869-894
	LTE Band 7	2500-2570	2620-2690
	LTE Band 26	814-849	859-894
	LTE Band 38	2570-2620	
	LTE Band 66	1710-1780	2110-2200
	WLAN 2.4G	2412-2462	
	Bluetooth	2402-2480	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink		4
	Max Number of Timeslots in Downlink		4
	Max Total Timeslot		5
Power Class	4, tested with power level 5(GSM 850)		
	1, tested with power level 0(GSM 1900)		
	3, tested with power control "all 1"(WCDMA Band 2)		
	3, tested with power control "all 1"(WCDMA Band 4)		
	3, tested with power control "all 1"(WCDMA Band 5)		
	3, tested with power control all Max.(LTE Band 2)		
	3, tested with power control all Max.(LTE Band 4)		
	3, tested with power control all Max.(LTE Band 5)		
	3, tested with power control all Max.(LTE Band 7)		
	3, tested with power control all Max.(LTE Band 26)		
	3, tested with power control all Max.(LTE Band 38)		
	3, tested with power control all Max.(LTE Band 66)		



**1.4. Test specification(s)**


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

**1.5. Ambient Condition**

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

## 2. SAR Measurement System

### 2.1. SATIMO SAR Measurement Set-up Diagram

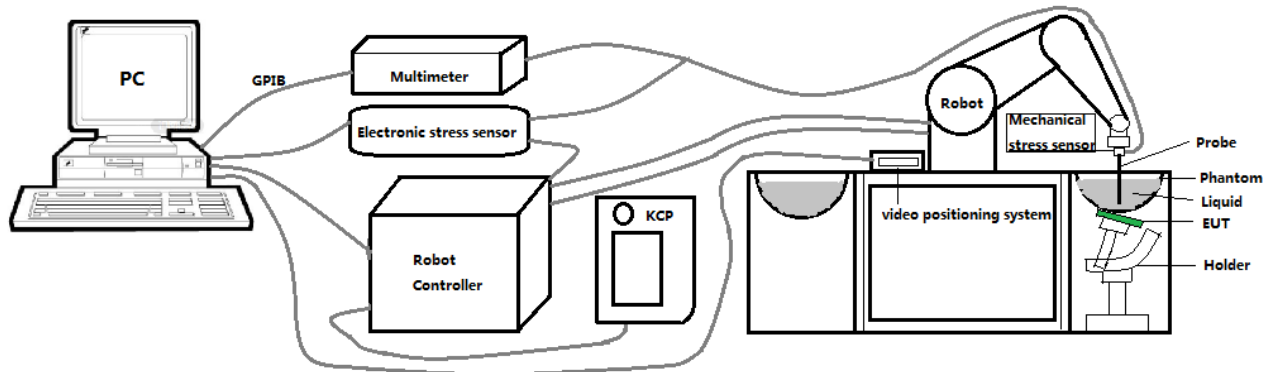

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than  $\pm 0.03$  mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

## 2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability  $\pm 0.03$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

### 2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
  - Tip Diameter : 2.5 mm
  - Distance between probe tip and sensor center: 1 mm
  - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than  $\pm 1$  mm).
  - Probe linearity:  $\pm 0.08$  dB
  - Axial isotropy:  $\pm 0.01$  dB
  - Hemispherical Isotropy:  $\pm 0.01$  dB
  - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
  - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than  $30^\circ$ .

#### 2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$ dB. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

## 2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm ±0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

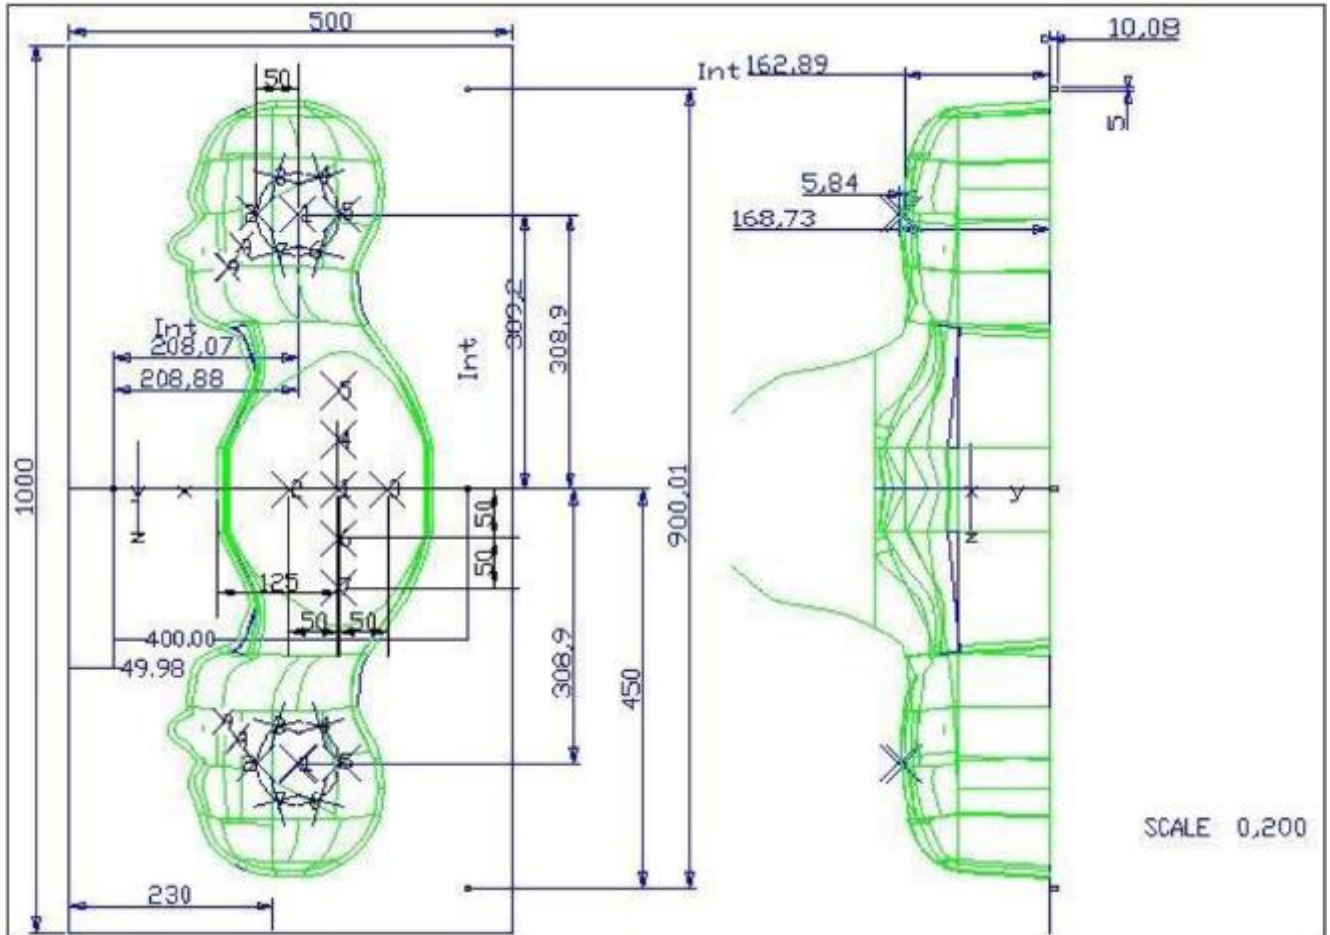


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
	1	2	1	2	1	2
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 µm.

## 2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

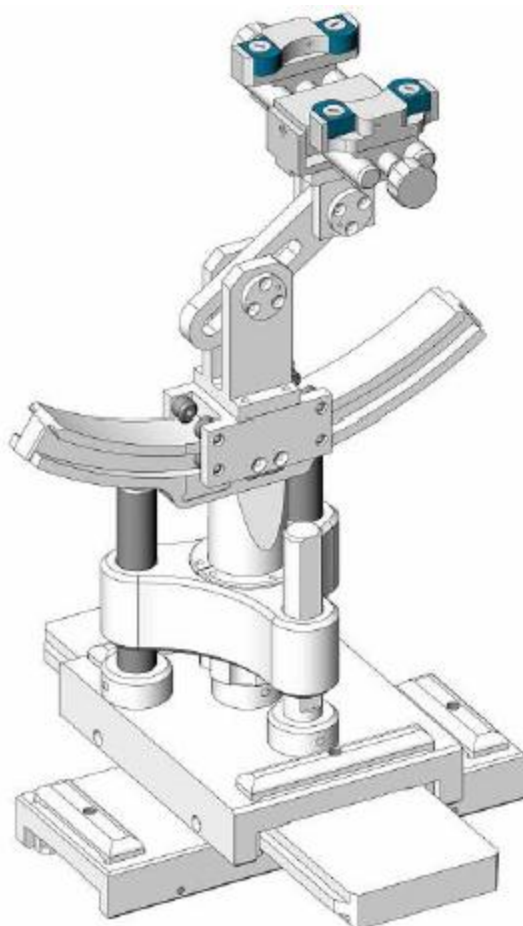

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

## 2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
<input checked="" type="checkbox"/>	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Mar. 01, 2021	Feb. 28, 2022
<input type="checkbox"/>	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Mar. 01, 2021	Feb. 28, 2024
<input type="checkbox"/>	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Mar. 01, 2021	Feb. 28, 2024
<input checked="" type="checkbox"/>	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
<input checked="" type="checkbox"/>	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
<input checked="" type="checkbox"/>	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
<input checked="" type="checkbox"/>	R&S	Universal radio communication tester	CMU200	117858	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	R&S	Wideband radio communication tester	CMW500	103917	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	HP	Network Analyzer	8753D	3410J01136	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Jul. 01, 2021	Jun. 30, 2022



<input checked="" type="checkbox"/>	Agilent	Power meter	E4419B	MY45102538	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	MY41495644	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	US39212148	Jul. 01, 2021	Jun. 30, 2022
<input checked="" type="checkbox"/>	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Jul. 17, 2020	Jul. 16, 2023

ADD

<input checked="" type="checkbox"/>	HP	Network Analyzer	8753D	3410J01136	Jun. 17, 2022	Jun. 16, 2023
<input checked="" type="checkbox"/>	Agilent	MXG Vector Signal Generator	N5182A	MY47070317	Jun. 16, 2022	Jun. 15, 2023
<input checked="" type="checkbox"/>	Agilent	Power meter	E4419B	MY45102538	Jun. 17, 2022	Jun. 16, 2023
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	MY41495644	Jun. 17, 2022	Jun. 16, 2023
<input checked="" type="checkbox"/>	Agilent	Power sensor	E9301A	US39212148	Jun. 17, 2022	Jun. 16, 2023
<input checked="" type="checkbox"/>	MVG	SAM Phantom	SSM2	SN 16/15 SAM119	NCR	NCR
<input checked="" type="checkbox"/>	MVG	Device Holder	SMPPD	SN 16/15 MSH100	NCR	NCR
<input checked="" type="checkbox"/>	R&S	Wideband radio communication tester	CMW500	103917	Jun. 17, 2022	Jun. 16, 2023
<input checked="" type="checkbox"/>	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Jan. 10, 2023	Jan. 09, 2024

### 3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

#### 3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

#### 3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8 \* 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	½·δ·ln(2) ± 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° ± 1°	20° ± 1°	
Maximum area scan spatial resolution: Δx <sub>Area</sub> , Δy <sub>Area</sub>		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz <sub>Zoom</sub> (n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		Δz <sub>Zoom</sub> (n>1): between subsequent points	≤ 1.5·Δz <sub>Zoom</sub> (n-1)	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

\* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

### 3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is used to determine these highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

### 3.4. Volumetric Scan

The volumetric scan consists of a full 3D scan over a specific area. This 3D scan is useful for multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scans to calculate the SAR value of the combined measurement as it is defined in the standard IEEE1528 and IEC62209.

### 3.5. Power Drift

All SAR testing is under the EUT installed with a full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than  $\pm 5\%$ , the SAR will be retested.


## 4. System Verification Procedure

### 4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
	750	835	900	1800	1900	2000	2450	2600	5200	5800
Frequency Band (MHz)										
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid depth from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm.

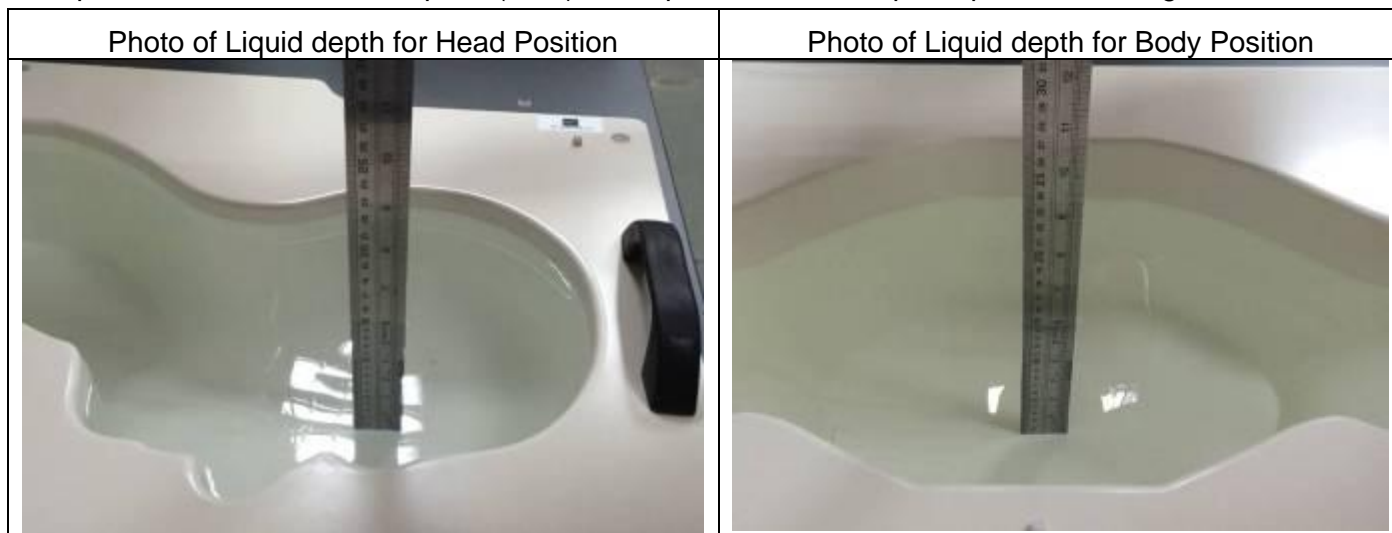

#### 4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within  $\pm 5\%$  of the target values.

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r$ ( $\pm 5\%$ )	$\sigma$ (S/m) ( $\pm 5\%$ )	$\epsilon_r$	$\sigma$ (S/m)		
Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	42.67	0.93	21.6 °C	Dec. 29, 2021
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.20	1.39	21.7 °C	Dec. 24, 2021
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.79	1.46	21.4 °C	Dec. 30, 2021
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	40.20	1.83	21.5 °C	Dec. 31, 2021
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	39.50	1.99	21.4 °C	Dec. 17, 2021


Head 850	835	41.50 (39.43~43.58)	0.90 (0.86~0.95)	40.85	0.91	21.8 °C	May. 22, 2023
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.94	1.41	21.3 °C	May. 12, 2023
Head 2600	2600	39.01 (37.06~40.96)	1.96 (1.86~2.06)	38.10	1.99	21.5 °C	May. 17, 2023

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

### 4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

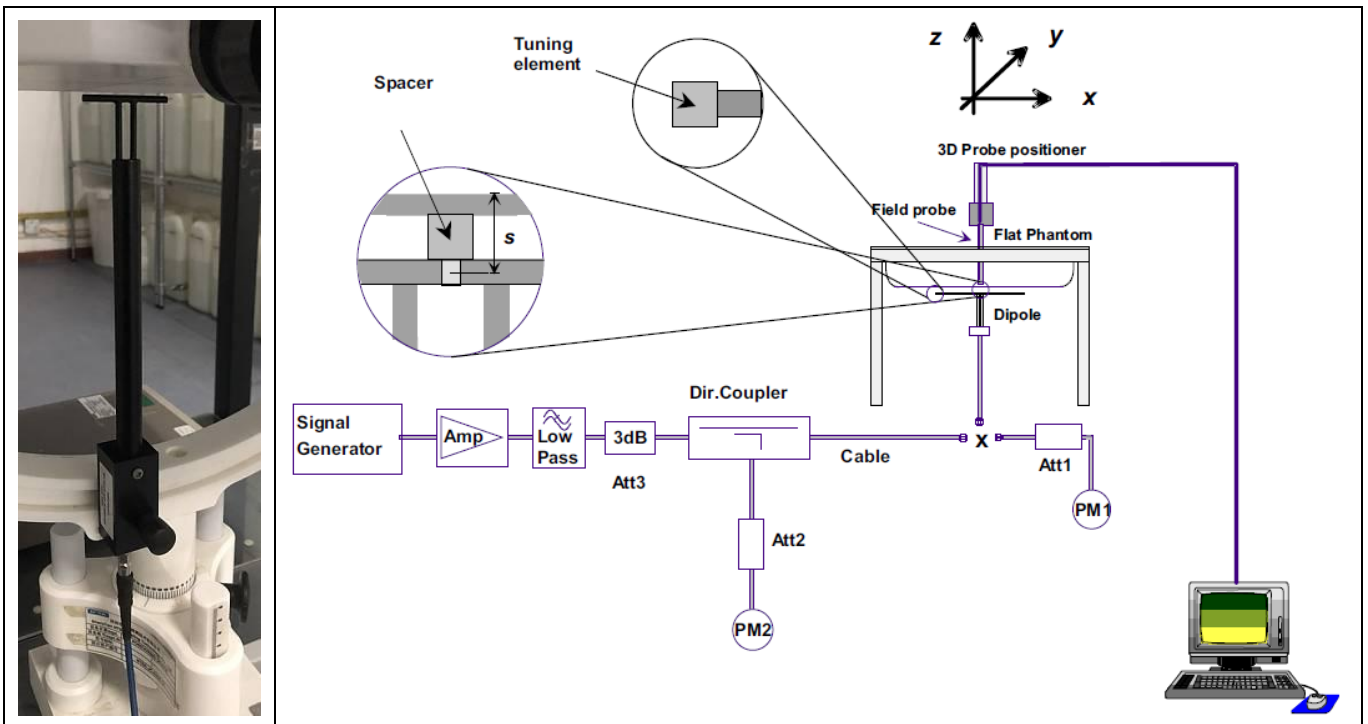

#### 4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of  $\pm 10\%$ . Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ( $\pm 10\%$ )		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
835MHz	9.84 (8.86~10.82)	6.22 (5.60~6.84)	9.63	6.19	21.6 °C	Dec. 29, 2021
1800MHz	37.96 (34.17~41.75)	19.81 (17.83~21.79)	37.27	20.52	21.7 °C	Dec. 24, 2021
1900MHz	40.37 (36.34~44.40)	20.48 (18.44~22.52)	43.64	21.02	21.4 °C	Dec. 30, 2021
2450MHz	53.69 (48.33~59.05)	23.94 (21.55~26.33)	57.44	24.88	21.5 °C	Dec. 31, 2021
2600MHz	55.83 (50.25~61.41)	24.19 (21.78~26.60)	56.80	25.32	21.4 °C	Dec. 17, 2021

835MHz	9.84 (8.86~10.82)	6.22 (5.60~6.84)	10.09 (2.54%)	6.58 (5.79%)	21.8 °C	May. 22, 2023
1800MHz	37.96 (34.17~41.75)	19.81 (17.83~21.79)	39.13 (3.08%)	18.64 (-5.91%)	21.3 °C	May. 12, 2023
2600MHz	55.83 (50.25~61.41)	24.19 (21.78~26.60)	51.59 (-7.59%)	22.12 (-8.56%)	21.5 °C	May. 17, 2023



## 5. SAR Measurement variability and uncertainty

### 5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### 5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 6. RF Exposure Positions

### 6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

### 6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.

6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

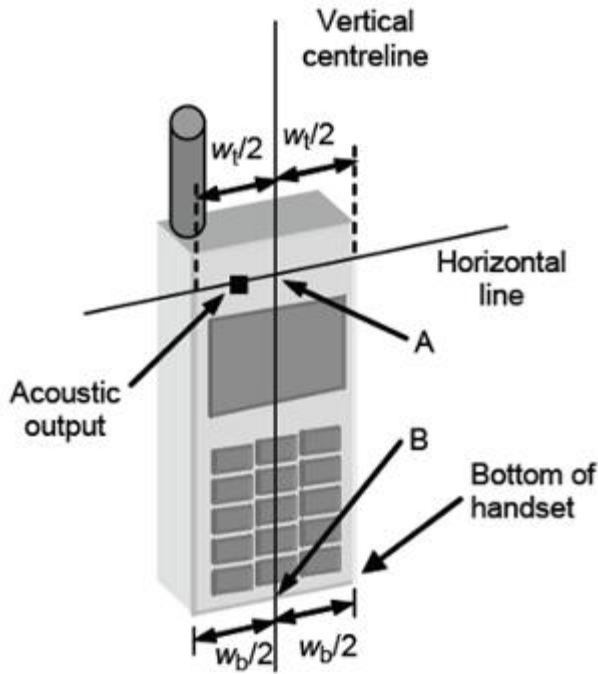


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

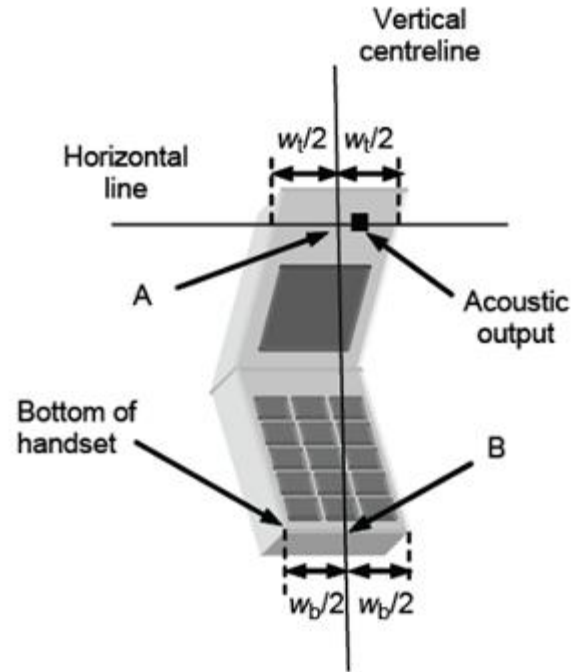


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

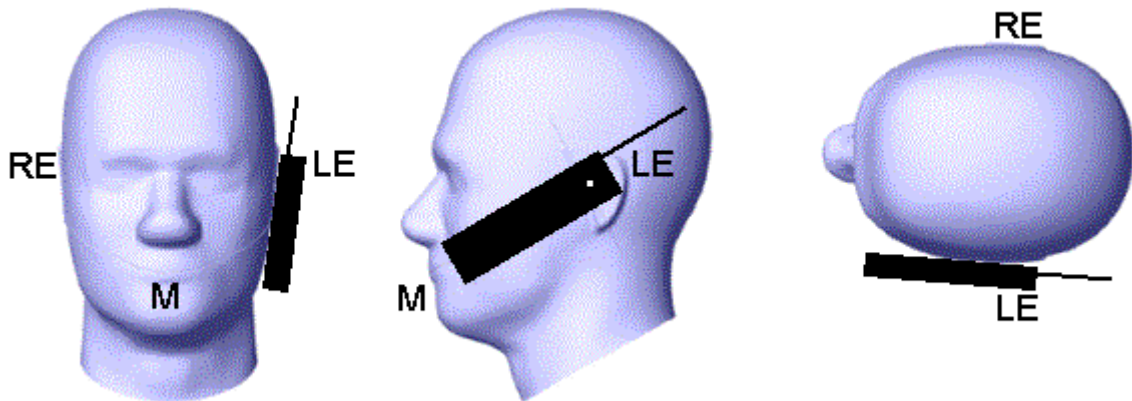


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

### 6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.



Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

### 6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is  $< 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

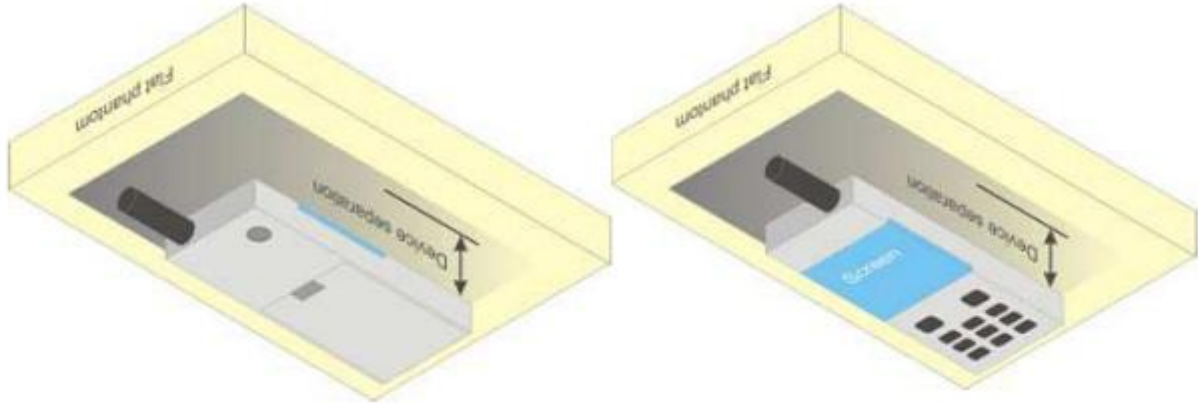


Figure 6.4.1 – Test positions for body-worn devices

## 7. RF Output Power

### 7.1. GSM Conducted Power

Band GSM850		Burst-Averaged output Power (dBm)			Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	33.00	32.59	32.35	32.40	23.97	23.56	23.32	23.37
GPRS(GMSK,1 Tx slot)	33.00	32.54	32.33	32.38	23.97	23.51	23.30	23.35
GPRS(GMSK,2 Tx slot)	31.00	30.52	30.26	30.32	24.98	24.50	24.24	24.30
GPRS(GMSK,3 Tx slot)	29.00	28.54	28.30	28.34	24.74	24.28	24.04	24.08
GPRS(GMSK,4 Tx slot)	26.50	26.26	26.05	26.06	23.49	23.25	23.04	23.05
EGPRS(8PSK,1 Tx slot)	25.00	24.76	24.59	24.74	15.97	15.73	15.56	15.71
EGPRS(8PSK,2 Tx slot)	25.00	24.56	24.81	24.88	18.98	18.54	18.79	18.86
EGPRS(8PSK,3 Tx slot)	24.00	23.40	23.85	23.24	19.74	19.14	19.59	18.98
EGPRS(8PSK,4 Tx slot)	21.50	21.03	21.08	20.71	18.49	18.02	18.07	17.70
Band GSM1900		Burst-Averaged output Power (dBm)			Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	29.50	29.34	29.03	28.92	20.47	20.31	20.00	19.89
GPRS(GMSK,1 Tx slot)	29.50	29.32	29.00	28.89	20.47	20.29	19.97	19.86
GPRS(GMSK,2 Tx slot)	27.50	27.03	26.63	26.27	21.48	21.01	20.61	20.25
GPRS(GMSK,3 Tx slot)	25.50	25.40	24.94	24.60	21.24	21.14	20.68	20.34
GPRS(GMSK,4 Tx slot)	23.50	23.38	22.95	22.60	20.49	20.37	19.94	19.59
EGPRS(8PSK,1 Tx slot)	25.00	24.97	24.67	24.31	15.97	15.94	15.64	15.28
EGPRS(8PSK,2 Tx slot)	25.00	24.02	24.68	24.56	18.98	18.00	18.66	18.54
EGPRS(8PSK,3 Tx slot)	23.50	22.74	23.36	22.83	19.24	18.48	19.10	18.57
EGPRS(8PSK,4 Tx slot)	21.00	20.41	20.53	20.20	17.99	17.40	17.52	17.19

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

**7.2. WCDMA Conducted Power**

WCDMA Band 2		Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	9262	9400	9538	
Frequency (MHz)		1852.4	1880	1907.6	
RMC12.2K	22.50	22.29	22.26	22.06	
HSDPA Sub 1	22.50	21.26	21.92	22.08	
HSDPA Sub 2	22.00	21.03	21.70	21.73	
HSDPA Sub 3	21.50	20.68	21.47	21.32	
HSDPA Sub 4	21.50	20.54	21.31	21.40	
HSUPA Sub 1	22.00	21.23	21.65	21.81	
HSUPA Sub 2	22.00	21.13	21.98	21.97	
HSUPA Sub 3	22.00	20.74	21.62	21.75	
HSUPA Sub 4	22.50	21.08	21.68	22.09	
HSUPA Sub 5	22.00	20.96	21.67	21.82	
WCDMA Band 4		Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	1312	1413	1513	
Frequency (MHz)		1712.4	1732.6	1752.6	
RMC12.2K	26.50	26.07	25.78	24.91	
HSDPA Sub 1	26.50	26.08	25.85	24.93	
HSDPA Sub 2	26.00	25.65	25.45	24.48	
HSDPA Sub 3	24.50	24.37	24.29	23.44	
HSDPA Sub 4	24.50	24.33	24.13	23.57	
HSUPA Sub 1	26.00	24.51	25.65	24.68	
HSUPA Sub 2	26.00	25.75	25.70	24.81	
HSUPA Sub 3	25.00	24.30	24.52	23.54	
HSUPA Sub 4	26.00	25.56	25.83	24.93	
HSUPA Sub 5	25.50	24.44	25.13	24.19	
WCDMA Band 5		Burst-Averaged output Power (dBm)			
Tx Channel	Tune-up (dBm)	4132	4182	4233	
Frequency (MHz)		826.4	836.4	846.6	
RMC12.2K	22.50	22.21	22.24	22.24	
HSDPA Sub 1	22.00	21.80	21.52	21.19	
HSDPA Sub 2	21.50	21.44	21.33	21.07	
HSDPA Sub 3	21.50	21.06	20.92	20.66	
HSDPA Sub 4	21.00	20.92	20.76	20.56	

HSUPA Sub 1	22.00	21.67	21.33	21.08
HSUPA Sub 2	22.00	21.73	21.41	21.24
HSUPA Sub 3	21.50	21.40	21.12	20.95
HSUPA Sub 4	22.00	21.55	21.52	21.12
HSUPA Sub 5	21.50	21.48	21.20	20.90

**7.3. LTE Conducted Power**

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band 2	1.4MHz	QPSK	1	0	24.00	23.75	23.03	23.10
			1	2	24.00	23.31	23.26	23.22
			1	5	24.00	23.21	22.99	23.00
			3	0	23.50	23.20	23.27	23.20
			3	1	23.50	23.16	23.44	23.14
			3	2	23.50	23.16	23.33	23.00
		16QAM	6	0	22.50	22.14	22.32	22.27
			1	0	22.50	22.24	22.16	22.26
			1	2	22.50	22.45	22.15	22.26
			1	5	22.50	22.21	22.08	22.04
			3	0	23.00	22.42	22.13	22.76
			3	1	23.00	22.47	22.14	22.64
			3	2	23.00	22.39	22.16	22.35
			6	0	21.50	21.48	21.27	21.33
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band 2	3MHz	QPSK	1	0	24.00	23.02	22.97	23.18
			1	7	24.00	23.37	23.01	23.21
			1	14	24.00	23.21	22.92	23.13
			8	0	22.50	21.95	22.22	22.22
			8	4	22.50	22.09	22.31	22.10
			8	7	22.50	22.20	22.27	22.08
			15	0	22.50	22.08	22.19	22.19
		16QAM	1	0	23.00	22.50	22.07	22.22
			1	7	23.00	22.48	22.12	21.92
			1	14	23.00	22.40	22.01	21.62



Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
			8	0	21.50	20.85	21.04	21.23
			8	4	21.50	21.20	21.05	21.20
			8	7	21.50	21.22	21.10	20.99
			15	0	21.50	21.11	21.07	21.36
LTE Band 2	5MHz	QPSK	1	0	24.00	22.77	22.55	22.92
			1	12	24.00	23.22	22.83	22.70
			1	24	24.00	22.91	22.71	22.84
			12	0	22.50	21.96	22.00	22.11
			12	6	22.50	22.15	22.06	22.07
			12	11	22.50	22.17	22.13	21.99
			25	0	22.50	21.97	22.11	22.15
		16QAM	1	0	22.50	22.32	21.65	22.33
			1	12	22.50	22.36	21.84	22.18
			1	24	22.50	21.97	22.06	21.72
			12	0	21.50	20.89	20.77	21.26
			12	6	21.50	20.95	20.85	21.09
			12	11	21.50	21.14	20.81	20.86
			25	0	21.50	21.17	20.94	21.03
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18650/1855	18900/1880	19150/1905
LTE Band 2	10MHz	QPSK	1	0	24.00	23.23	22.84	22.93
			1	24	24.00	23.42	23.34	23.26
			1	49	24.00	22.88	23.18	23.09
			25	0	22.50	21.88	22.06	21.99
			25	12	22.50	22.09	22.21	22.14
			25	24	22.50	22.08	22.08	21.91
			50	0	22.50	22.09	22.00	21.93
		16QAM	1	0	23.00	22.43	21.96	21.97
			1	24	23.00	22.92	21.89	22.05
			1	49	23.00	22.20	21.81	21.67
			25	0	21.50	21.00	21.11	21.17
			25	12	21.50	21.32	21.43	21.02
			25	24	21.50	21.08	21.34	20.92
			50	0	21.50	21.09	21.09	21.00

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band 2	15MHz	QPSK	1	0	24.00	22.88	22.90	22.86
			1	37	24.00	23.32	23.06	23.00
			1	74	24.00	22.84	23.13	22.72
			36	0	22.50	21.99	21.87	21.88
			36	18	22.50	21.97	22.06	21.98
			36	37	22.50	21.85	22.02	21.86
			75	0	22.00	21.86	21.97	21.89
		16QAM	1	0	23.50	22.51	22.01	22.26
			1	37	23.50	23.24	21.99	22.50
			1	74	23.50	22.24	21.59	22.20
			36	0	21.50	21.09	21.05	20.96
			36	18	21.50	21.09	21.15	20.96
			36	37	21.50	20.88	21.19	20.91
			75	0	21.50	21.05	21.09	21.03

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band 2	20MHz	QPSK	1	0	24.00	22.54	23.12	22.64
			1	49	24.00	22.93	23.42	22.72
			1	99	24.00	22.44	23.12	22.70
			50	0	22.50	21.96	22.00	21.96
			50	24	22.50	21.97	22.08	22.02
			50	49	22.50	21.79	22.00	21.99
			100	0	22.00	21.97	21.92	21.87
		16QAM	1	0	23.00	21.82	22.51	21.79
			1	49	23.00	21.78	22.02	21.63
			1	99	23.00	21.19	21.81	21.62
			50	0	21.50	21.12	20.91	20.95
			50	24	21.50	21.04	21.27	21.11
			50	49	21.50	20.92	21.19	20.98
			100	0	21.50	21.01	21.03	21.01

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB	RB		19957/1710.7	20175/1732.5	20393/1754.3

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE Band 4	1.4MHz	QPSK	1	0	24.50	22.71	23.02	23.56
			1	2	24.50	22.82	23.11	23.87
			1	5	24.50	22.65	23.14	23.74
			3	0	24.50	22.83	23.23	23.87
			3	1	24.50	22.93	23.25	24.01
			3	2	24.50	22.93	23.30	23.97
		16QAM	6	0	23.00	21.94	22.30	22.89
			1	0	23.00	21.91	22.21	22.59
			1	2	23.00	22.02	22.19	22.93
			1	5	23.00	21.82	22.14	22.82
			3	0	23.50	22.01	22.39	23.12
			3	1	23.50	22.16	22.42	23.29
			3	2	23.50	22.27	22.27	23.27
			6	0	22.00	21.28	21.40	21.87
LTE Band 4	3MHz	QPSK	1	0	24.50	22.82	23.14	23.42
			1	7	24.50	22.95	23.21	23.57
			1	14	24.50	22.87	23.13	23.77
			8	0	23.00	21.79	22.41	22.77
			8	4	23.00	21.82	22.42	22.81
			8	7	23.00	21.77	22.44	22.82
			15	0	23.00	21.70	22.47	22.79
		16QAM	1	0	23.00	22.39	22.26	22.40
			1	7	23.00	22.45	22.41	22.56
			1	14	23.00	22.34	22.25	22.74
			8	0	22.00	20.90	21.45	21.68
			8	4	22.00	20.74	21.35	21.73
			8	7	22.00	20.80	21.40	21.73
			15	0	22.00	20.71	21.39	21.68
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band 4	5MHz	QPSK	1	0	24.50	22.73	22.79	23.72
			1	12	24.50	23.12	23.14	23.89
			1	24	24.50	22.74	23.18	23.84

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)				
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750		
			12	0	23.00	21.73	22.37	22.84		
			12	6	23.00	21.81	22.26	22.91		
			12	11	23.00	21.82	22.47	22.95		
			25	0	23.00	21.78	22.42	22.89		
		16QAM	1	0	23.50	22.09	22.24	23.13		
			1	12	23.50	22.12	21.99	23.20		
			1	24	23.50	22.08	21.86	23.28		
			12	0	22.00	20.61	21.26	21.81		
			12	6	22.00	20.62	21.17	21.87		
			12	11	22.00	20.82	21.19	21.98		
			25	0	22.00	20.82	21.36	21.79		
			LTE Band 4	10MHz	QPSK	1	0	24.50	22.81	23.01
		1				24	24.50	23.24	23.16	24.07
		1				49	24.50	23.22	23.24	24.12
25	0	23.00				21.79	22.46	22.90		
25	12	23.00				21.90	22.39	22.97		
25	24	23.00				21.94	22.45	22.87		
50	0	23.00				21.83	22.42	22.80		
16QAM	1	0			23.50	22.48	22.21	22.77		
	1	24			23.50	22.91	22.16	22.97		
	1	49			23.50	22.76	21.74	23.03		
	25	0			22.00	20.73	21.50	21.73		
	25	12			22.00	21.10	21.45	21.82		
	25	24			22.00	20.96	21.40	21.81		
	50	0			22.00	20.92	21.58	21.70		
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)				
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5		
LTE Band 4	15MHz	QPSK	1	0	24.50	22.96	22.97	23.69		
			1	37	24.50	23.33	23.21	24.06		
			1	74	24.50	23.21	23.16	23.73		
			36	0	23.00	21.71	22.45	22.63		
			36	18	23.00	21.89	22.32	22.81		
			36	37	23.00	21.94	22.34	22.91		
			75	0	23.00	21.74	22.41	22.77		

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band 4	20MHz	16QAM	1	0	23.50	22.29	22.14	23.02
			1	37	23.50	22.78	22.26	23.40
			1	74	23.50	22.61	21.89	23.41
			36	0	22.00	20.71	21.55	21.48
			36	18	22.00	20.96	21.52	21.64
			36	37	22.00	20.98	21.34	21.71
			75	0	22.00	20.84	21.35	21.64
LTE Band 4	20MHz	QPSK	1	0	24.50	22.51	23.12	23.10
			1	49	24.50	23.10	23.23	23.91
			1	99	24.50	22.94	23.54	24.04
			50	0	23.00	21.79	22.21	22.54
			50	24	23.00	21.89	22.22	22.76
			50	49	23.00	22.13	22.42	22.84
			100	0	23.00	21.87	22.32	22.70
		16QAM	1	0	22.50	21.87	22.18	22.28
			1	49	22.50	21.90	22.23	22.45
			1	99	22.50	21.55	21.97	22.40
			50	0	22.00	20.85	21.32	21.54
			50	24	22.00	21.12	21.34	21.76
			50	49	22.00	20.94	21.30	21.82
			100	0	22.00	20.82	21.38	21.60

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band 5	1.4MHz	QPSK	1	0	23.50	22.37	22.44	22.97
			1	2	23.50	22.83	22.63	22.95
			1	5	23.50	22.65	22.49	22.67
			3	0	23.50	22.79	22.65	23.18
			3	1	23.50	22.85	22.68	23.10
			3	2	23.50	22.86	22.77	22.95
			6	0	22.00	21.99	21.72	21.91
		16QAM	1	0	22.50	21.83	21.28	22.04
			1	2	22.50	21.72	21.43	22.08
			1	5	22.50	21.47	21.29	21.88

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
			3	0	22.50	21.66	21.62	22.21
			3	1	22.50	21.68	21.58	22.07
			3	2	22.50	21.68	21.63	22.05
			6	0	21.50	20.69	20.69	21.21
LTE Band 5	3MHz	QPSK	1	0	23.50	23.06	22.52	22.89
			1	7	23.50	22.96	22.55	23.12
			1	14	23.50	22.81	22.58	22.98
			8	0	22.00	21.92	21.64	21.96
			8	4	22.00	21.95	21.69	21.97
			8	7	22.00	21.81	21.64	21.90
			15	0	22.00	21.90	21.66	22.00
		16QAM	1	0	22.50	22.39	21.64	21.86
			1	7	22.50	22.35	21.74	21.80
			1	14	22.50	22.28	21.68	21.63
			8	0	21.00	20.76	20.68	20.52
			8	4	21.00	20.57	20.72	20.60
			8	7	21.00	20.44	20.67	20.56
			15	0	21.00	20.71	20.56	20.81
			RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band 5	5MHz	QPSK	1	0	23.50	22.72	22.30	22.52
			1	12	23.50	22.80	22.44	22.67
			1	24	23.50	22.68	22.36	22.75
			12	0	22.00	21.88	21.68	21.90
			12	6	22.00	21.89	21.71	21.94
			12	11	22.00	21.90	21.65	21.93
			25	0	22.00	21.84	21.67	21.87
		16QAM	1	0	22.50	22.09	21.58	21.99
			1	12	22.50	22.12	21.50	21.71
			1	24	22.50	21.74	21.40	21.38
			12	0	21.00	20.51	20.38	20.87
			12	6	21.00	20.59	20.43	20.98
			12	11	21.00	20.48	20.37	20.94
			25	0	21.00	20.74	20.53	20.80

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band 5	10MHz	QPSK	1	0	23.50	22.97	22.63	22.99
			1	24	23.50	23.01	22.97	23.07
			1	49	23.50	22.66	22.96	22.92
			25	0	22.00	21.85	21.79	21.87
			25	12	22.00	21.93	21.76	21.94
			25	24	22.00	21.75	21.73	21.98
			50	0	22.00	21.80	21.83	21.90
		16QAM	1	0	23.00	22.51	21.59	21.96
			1	24	23.00	22.48	21.66	21.97
			1	49	23.00	22.12	21.04	21.86
			25	0	21.50	20.80	20.66	20.96
			25	12	21.50	20.88	20.65	20.99
			25	24	21.50	20.69	20.57	21.03
			50	0	21.00	20.75	20.70	20.92

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band 7	5MHz	QPSK	1	0	24.00	22.79	22.62	23.34
			1	12	24.00	22.82	22.98	23.33
			1	24	24.00	22.73	22.94	22.98
			12	0	23.00	21.94	22.17	22.64
			12	6	23.00	22.00	22.21	22.45
			12	11	23.00	21.87	22.15	22.42
			25	0	23.00	21.87	22.13	22.66
		16QAM	1	0	23.00	22.04	21.97	22.67
			1	12	23.00	22.08	21.96	22.15
			1	24	23.00	21.98	21.94	22.23
			12	0	22.00	20.76	20.87	21.69
			12	6	22.00	20.84	20.93	21.44
			12	11	22.00	20.82	21.00	21.33
			25	0	22.00	20.89	21.29	21.73

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB	RB		20800/2505	21100/2535	21400/2565

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band 7	10MHz	QPSK	1	0	24.00	22.89	23.06	23.77
			1	24	24.00	23.30	23.36	23.62
			1	49	24.00	23.22	23.20	22.42
			25	0	23.00	22.01	22.32	22.84
			25	12	23.00	21.97	22.33	22.56
			25	24	23.00	22.02	22.27	22.64
		16QAM	50	0	23.00	21.92	22.33	22.86
			1	0	23.00	22.43	22.16	22.90
			1	24	23.00	22.87	22.17	22.80
			1	49	23.00	22.67	22.06	21.70
			25	0	22.00	21.12	21.42	21.98
			25	12	22.00	21.06	21.38	21.55
			25	24	22.00	21.00	21.40	21.62
			50	0	22.00	20.97	21.37	21.78
LTE Band 7	15MHz	QPSK	1	0	24.00	23.12	23.19	23.62
			1	37	24.00	23.30	23.22	23.83
			1	74	24.00	23.27	23.52	22.01
			36	0	23.00	22.07	22.35	22.85
			36	18	23.00	22.07	22.37	22.67
			36	37	23.00	22.07	22.36	22.67
			75	0	23.00	21.99	22.31	22.88
		16QAM	1	0	23.50	22.75	22.30	23.16
			1	37	23.50	22.84	22.29	22.96
			1	74	23.50	22.70	22.29	21.57
			36	0	22.00	21.07	21.40	21.91
			36	18	22.00	21.11	21.42	21.71
			36	37	22.00	21.09	21.38	21.62
			75	0	22.00	20.91	21.28	21.96
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band	20MHz	QPSK	1	0	24.00	22.84	23.24	23.70
			1	49	24.00	23.32	23.41	23.71



7			1	99	24.00	22.95	23.64	22.01	
			50	0	23.00	22.11	22.46	22.89	
			50	24	23.00	22.17	22.45	22.73	
			50	49	23.00	22.14	22.45	22.77	
			100	0	23.00	22.12	22.41	22.94	
	16QAM			1	0	23.00	21.99	22.42	22.64
				1	49	23.00	22.05	22.43	22.63
				1	99	23.00	21.68	22.27	21.43
				50	0	22.00	21.03	21.44	21.90
				50	24	22.00	21.11	21.50	21.82
				50	49	22.00	20.96	21.54	21.87
				100	0	22.00	20.98	21.39	21.90

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)				
			RB Size	RB Offset		26697/814.7	26740/819	26783/823.3		
LTE Band 26a	1.4MHz	QPSK	1	0	24.00	23.58	23.23	23.26		
			1	2	24.00	23.74	23.32	23.33		
			1	5	24.00	23.63	23.19	23.20		
			3	0	24.00	23.67	23.27	23.29		
			3	1	24.00	23.70	23.28	23.29		
			3	2	24.00	23.70	23.26	23.25		
			6	0	23.00	22.71	22.34	22.31		
		16QAM			1	0	23.00	22.76	22.46	22.40
					1	2	23.00	22.87	22.56	22.57
					1	5	23.00	22.76	22.51	22.44
					3	0	23.00	22.69	22.30	22.29
					3	1	23.00	22.39	22.36	22.36
					3	2	23.00	22.23	22.31	22.23
					6	0	21.50	21.27	21.41	21.40
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)				
			RB Size	RB Offset		26705/818.5	26740/819	26775/822.5		
LTE Band 26a	3MHz	QPSK	1	0	24.00	23.22	23.33	23.35		
			1	7	24.00	23.26	23.34	23.32		
			1	14	24.00	23.30	23.34	23.30		
			8	0	22.50	22.26	22.35	22.38		
			8	4	22.50	22.35	22.40	22.40		

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)					
			RB Size	RB Offset		26715/816.5	26740/819	26765/821.5			
		16QAM	8	7	22.50	22.31	22.35	22.35			
			15	0	22.50	22.32	22.36	22.36			
			1	0	23.00	22.44	22.59	22.67			
			1	7	23.00	22.40	22.60	22.65			
			1	14	23.00	22.50	22.52	22.58			
			8	0	21.50	21.29	21.39	21.45			
			8	4	21.50	21.38	21.45	21.43			
			8	7	21.50	21.38	21.43	21.38			
			15	0	21.50	21.32	21.36	21.37			
LTE Band 26a	5MHz	QPSK	1	0	24.00	23.07	23.14	23.14			
			1	12	24.00	23.24	23.26	23.29			
			1	24	24.00	23.15	23.17	23.15			
			12	0	22.50	22.14	22.21	22.26			
			12	6	22.50	22.30	22.30	22.33			
			12	11	22.50	22.25	22.29	22.23			
		16QAM	25	0	22.50	22.24	22.26	22.28			
			1	0	23.00	22.37	22.35	22.33			
			1	12	23.00	22.41	22.55	22.55			
			1	24	23.00	22.33	22.49	22.47			
			12	0	21.50	21.18	21.22	21.29			
			12	6	21.50	21.32	21.37	21.35			
					12	11	21.50	21.30	21.30	21.23	
					25	0	21.50	21.24	21.25	21.28	
					QPSK	1	0	24.00	N/A	23.13	N/A
						1	24	24.00	N/A	23.37	N/A
						1	49	24.00	N/A	23.19	N/A
					16QAM	25	0	22.50	N/A	22.22	N/A
25	12	22.50	N/A	22.38		N/A					
25	24	22.50	N/A	22.29		N/A					
50	0	22.50	N/A	22.27		N/A					
1	0	23.00	N/A	22.32		N/A					
1	24	23.00	N/A	22.66		N/A					

			1	49	23.00	N/A	22.38	N/A
			25	0	21.50	N/A	21.22	N/A
			25	12	21.50	N/A	21.37	N/A
			25	24	21.50	N/A	21.28	N/A
			50	0	21.50	N/A	21.27	N/A

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26797/824.7	26915/836.5	27033/848.3
LTE Band 26b	1.4MHz	QPSK	1	0	23.50	23.15	22.95	23.16
			1	2	23.50	23.26	23.05	23.22
			1	5	23.50	23.17	22.97	23.10
			3	0	23.50	23.24	23.04	23.21
			3	1	23.50	23.26	23.06	23.22
			3	2	23.50	23.22	23.05	23.22
		16QAM	6	0	22.50	22.26	22.06	22.26
			1	0	23.00	22.34	22.17	22.47
			1	2	23.00	22.50	22.34	22.54
			1	5	23.00	22.47	22.20	22.35
			3	0	22.50	22.29	22.07	22.15
			3	1	22.50	22.25	22.11	22.26
			3	2	22.50	22.19	22.07	22.23
			6	0	21.50	21.38	21.11	21.36
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26805/825.5	26915/836.5	27025/847.5
LTE Band 26b	3MHz	QPSK	1	0	23.50	23.30	23.06	23.31
			1	7	23.50	23.28	23.08	23.28
			1	14	23.50	23.23	23.08	23.30
			8	0	22.50	22.31	22.14	22.34
			8	4	22.50	22.35	22.17	22.36
			8	7	22.50	22.30	22.11	22.30
		16QAM	15	0	22.50	22.32	22.14	22.33
			1	0	23.00	22.58	22.29	22.54
			1	7	23.00	22.59	22.37	22.52
			1	14	23.00	22.40	22.29	22.49
			8	0	21.50	21.37	21.19	21.41
			8	4	21.50	21.41	21.23	21.41

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26815/826.5	26915/836.5	27015/846.5
			8	7	21.50	21.34	21.18	21.35
			15	0	21.50	21.32	21.13	21.35
LTE Band 26b	5MHz	QPSK	1	0	23.50	23.12	22.88	23.08
			1	12	23.50	23.17	23.03	23.21
			1	24	23.50	22.98	22.87	23.08
			12	0	22.50	22.22	22.02	22.26
			12	6	22.50	22.21	22.08	22.26
			12	11	22.50	22.14	21.97	22.16
			25	0	22.50	22.21	22.05	22.25
		16QAM	1	0	22.50	22.41	22.05	22.34
			1	12	22.50	22.42	22.20	22.46
			1	24	22.50	22.29	22.10	22.36
			12	0	21.50	21.25	21.02	21.30
			12	6	21.50	21.26	21.11	21.29
			12	11	21.50	21.16	21.00	21.20
			25	0	21.50	21.21	21.04	21.24
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		26840/829	26915/836.5	26990/844
LTE Band 26b	10MHz	QPSK	1	0	23.50	23.19	22.96	23.03
			1	24	23.50	23.17	23.16	23.29
			1	49	23.50	22.92	23.04	23.14
			25	0	22.50	22.31	22.10	22.29
			25	12	22.50	22.21	22.16	22.31
			25	24	22.50	22.22	22.06	22.18
			50	0	22.50	22.28	22.12	22.23
		16QAM	1	0	23.00	22.40	22.20	22.23
			1	24	23.00	22.37	22.38	22.51
			1	49	23.00	22.03	22.40	22.39
			25	0	21.50	21.29	21.07	21.29
			25	12	21.50	21.22	21.14	21.31
			25	24	21.50	21.21	21.05	21.20
			50	0	21.50	21.22	21.09	21.25
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37775/2572.5	38000/2595	38225/2617.5
LTE Band 26b	15MHz	QPSK	1	0	23.50	26.37	26.60	26.22
			1	37	23.50	26.62	26.64	26.31
			1	74	23.50	26.56	26.08	26.11
			36	0	22.50	25.57	25.31	25.39
			36	18	22.50	25.66	25.28	25.38
			36	37	22.50	25.66	25.16	25.30
			75	0	22.50	25.53	25.22	25.35
		16QAM	1	0	26.00	25.40	25.32	25.41
			1	37	26.00	25.58	25.33	25.45
			1	74	26.00	25.56	25.13	25.25
			12	0	25.00	24.48	24.31	24.40
			12	6	25.00	24.59	24.27	24.39
			12	11	25.00	24.57	24.16	24.29
			25	0	24.50	24.49	24.22	24.35

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37800/2575	38000/2595	38200/2615
LTE	10MHz	QPSK	1	0	27.00	25.94	26.42	26.41

Band 38			1	24	27.00	26.28	26.34	26.35
			1	49	27.00	26.25	26.02	26.25
			25	0	26.00	25.20	25.44	25.61
			25	12	26.00	25.30	25.31	25.53
			25	24	26.00	25.31	25.17	25.38
			50	0	26.00	25.35	25.39	25.56
			50	24	26.00	25.31	25.17	25.38
		16QAM	1	0	26.00	25.03	25.53	25.54
			1	24	26.00	25.37	25.44	25.62
			1	49	26.00	25.34	25.16	25.32
			25	0	25.00	24.16	24.43	24.61
			25	12	25.00	24.25	24.32	24.53
			25	24	25.00	24.27	24.17	24.40
			50	0	25.00	24.28	24.37	24.56
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37825/2577.5	38000/2595	38175/2615
LTE Band 38	15MHz	QPSK	1	0	27.00	25.82	26.33	26.11
			1	37	27.00	26.25	26.19	26.34
			1	74	27.00	26.22	25.90	26.26
			36	0	26.00	25.21	25.46	25.49
			36	18	26.00	25.34	25.28	25.52
			36	37	26.00	25.38	25.10	25.37
			75	0	25.50	25.28	25.28	25.42
		16QAM	1	0	26.00	24.92	25.43	25.25
			1	37	26.00	25.32	25.30	25.52
			1	74	26.00	25.31	25.05	25.17
			36	0	24.50	24.14	24.42	24.45
			36	18	24.50	24.27	24.23	24.48
			36	37	24.50	24.31	24.08	24.33
			75	0	24.50	24.24	24.24	24.42
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		37850/2580	38000/2595	38150/2610
LTE Band 38	20MHz	QPSK	1	0	27.00	25.71	26.24	25.89
			1	49	27.00	26.43	26.24	26.39
			1	99	27.00	26.47	26.15	26.12
			50	0	27.00	25.36	25.55	26.73
			50	24	27.00	25.50	25.34	25.51

	16QAM	50	49	27.00	25.44	25.08	25.38
		100	0	25.50	25.42	25.39	25.48
		1	0	26.00	24.81	25.35	25.01
		1	49	26.00	25.54	25.38	25.59
		1	99	26.00	25.60	25.40	25.48
		50	0	25.00	24.30	24.54	24.48
		50	24	25.00	24.44	24.30	24.51
		50	49	25.00	24.39	24.07	24.37
		100	0	24.50	24.36	24.32	24.42

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131979/1710.7	132322/1745	132665/1779.3
LTE Band 66	1.4MHz	QPSK	1	0	24.50	24.34	23.70	23.39
			1	2	24.50	24.49	23.81	23.49
			1	5	24.50	24.36	23.67	23.36
			3	0	24.50	24.43	23.75	23.43
			3	1	24.50	24.46	23.80	23.47
			3	2	24.50	24.46	23.75	23.49
		16QAM	1	0	24.00	23.43	22.99	22.52
			1	2	24.00	23.67	23.06	22.70
			1	5	24.00	23.51	22.98	22.64
			3	0	23.50	23.31	22.82	22.37
			3	1	23.50	23.40	22.82	22.43
			3	2	23.50	23.37	22.73	22.42
			6	0	23.00	22.53	21.91	21.58

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131987/1711.5	132322/1745	132657/1778.5
LTE Band 66	3MHz	QPSK	1	0	24.50	24.45	23.87	23.44
			1	7	24.50	24.46	23.84	23.40
			1	14	24.50	24.43	23.81	23.43
			8	0	24.00	23.51	22.90	22.47
			8	4	24.00	23.54	22.89	22.49
			8	7	24.00	23.53	22.88	22.46
			15	0	24.00	23.57	22.89	22.48
		16QAM	1	0	24.00	23.65	23.04	22.60

Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		131997/1712.5	132322/1745	132647/1777.5
			1	7	24.00	23.53	23.00	22.62
			1	14	24.00	23.52	23.09	22.54
			8	0	23.00	22.52	21.95	21.54
			8	4	23.00	22.56	21.94	21.54
			8	7	23.00	22.53	21.92	21.48
			15	0	23.00	22.51	21.89	21.49
LTE Band 66	5MHz	QPSK	1	0	24.50	24.28	23.72	23.35
			1	12	24.50	24.37	23.79	23.37
			1	24	24.50	24.27	23.63	23.23
			12	0	23.50	23.41	22.82	22.41
			12	6	23.50	23.47	22.83	22.42
			12	11	23.50	23.38	22.74	22.31
			25	0	23.50	23.45	22.81	22.42
		16QAM	1	0	23.50	23.40	22.99	22.48
			1	12	23.50	23.46	22.97	22.64
			1	24	23.50	23.32	22.88	22.36
			12	0	22.50	22.39	21.84	21.44
			12	6	22.50	22.45	21.87	21.47
			12	11	22.50	22.38	21.76	21.35
			25	0	22.50	22.44	21.79	21.42
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132022/1715	132322/1745	132622/1775
LTE Band 66	10MHz	QPSK	1	0	24.50	24.38	23.87	23.42
			1	24	24.50	24.48	23.89	23.55
			1	49	24.50	24.20	23.64	23.30
			25	0	24.00	23.54	22.98	22.54
			25	12	24.00	23.52	22.91	22.51
			25	24	24.00	23.42	22.81	22.42
			50	0	24.00	23.51	22.93	22.53
		16QAM	1	0	24.00	23.43	23.09	22.63
			1	24	24.00	23.61	23.12	22.91
			1	49	24.00	23.41	22.90	22.56
			25	0	23.00	22.50	21.95	21.53
			25	12	23.00	22.48	21.88	21.50



Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132047/1717.5	132322/1745	132597/1772.5
			25	24	23.00	22.38	21.80	21.43
			50	0	22.50	22.45	21.89	21.52
LTE Band 66	15MHz	QPSK	1	0	24.50	24.22	23.74	23.31
			1	37	24.50	24.31	23.79	23.41
			1	74	24.50	23.99	23.50	23.17
			36	0	23.50	23.44	22.89	22.46
			36	18	23.50	23.39	22.84	22.46
			36	37	23.50	23.27	22.70	22.36
			75	0	23.50	23.37	22.83	22.44
		16QAM	1	0	23.50	23.38	23.00	22.60
			1	37	23.50	23.48	22.94	22.71
			1	74	23.50	23.26	22.65	22.43
			36	0	22.50	22.43	21.89	21.51
			36	18	22.50	22.38	21.82	21.49
			36	37	22.50	22.25	21.71	21.37
			75	0	22.50	22.33	21.81	21.43
Band	Band Width	Modulation	RB Configuration		Tune-up (dBm)	Channel/Frequency(MHz)		
			RB Size	RB Offset		132072/1720	132322/1745	132572/1770
LTE Band 66	20MHz	QPSK	1	0	24.50	24.06	23.63	23.26
			1	49	24.50	24.31	23.85	23.50
			1	99	24.50	23.79	23.28	23.04
			50	0	23.50	23.45	22.97	22.57
			50	24	23.50	23.37	22.90	22.50
			50	49	23.50	23.24	22.69	22.38
			100	0	23.50	23.31	22.83	22.46
		16QAM	1	0	23.50	23.20	22.80	22.45
			1	49	23.50	23.42	23.11	22.70
			1	99	23.50	23.01	22.59	22.23
			50	0	22.50	22.42	21.94	21.57
			50	24	22.50	22.34	21.87	21.50
			50	49	22.50	22.21	21.68	21.38
			100	0	22.50	22.26	21.80	21.47

**7.4. WLAN & Bluetooth Output Power**

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	13.00	12.88
	6	2437	13.00	12.48
	11	2462	13.00	12.80
802.11g	1	2412	12.00	11.82
	6	2437	12.00	11.76
	11	2462	12.00	11.82
802.11n HT20	1	2412	12.00	11.81
	6	2437	12.00	11.86
	11	2462	12.00	11.91
802.11n HT40	3	2422	12.00	12.00
	6	2437	12.00	11.03
	9	2452	12.00	11.30


NOTE: Power measurement results of WLAN 2.4G.

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			1M	2M	3M
	0CH	7.000	6.111	5.141	5.409
	39CH	6.000	5.580	4.457	4.751
	78CH	6.000	5.615	4.562	4.905

BLE	Channel	Tune-up	Output Power (dBm)
	0CH	6.000	5.866
	19CH	6.000	5.174
	39CH	6.000	5.423

NOTE: Power measurement results of Bluetooth.

### 8. Antenna Location

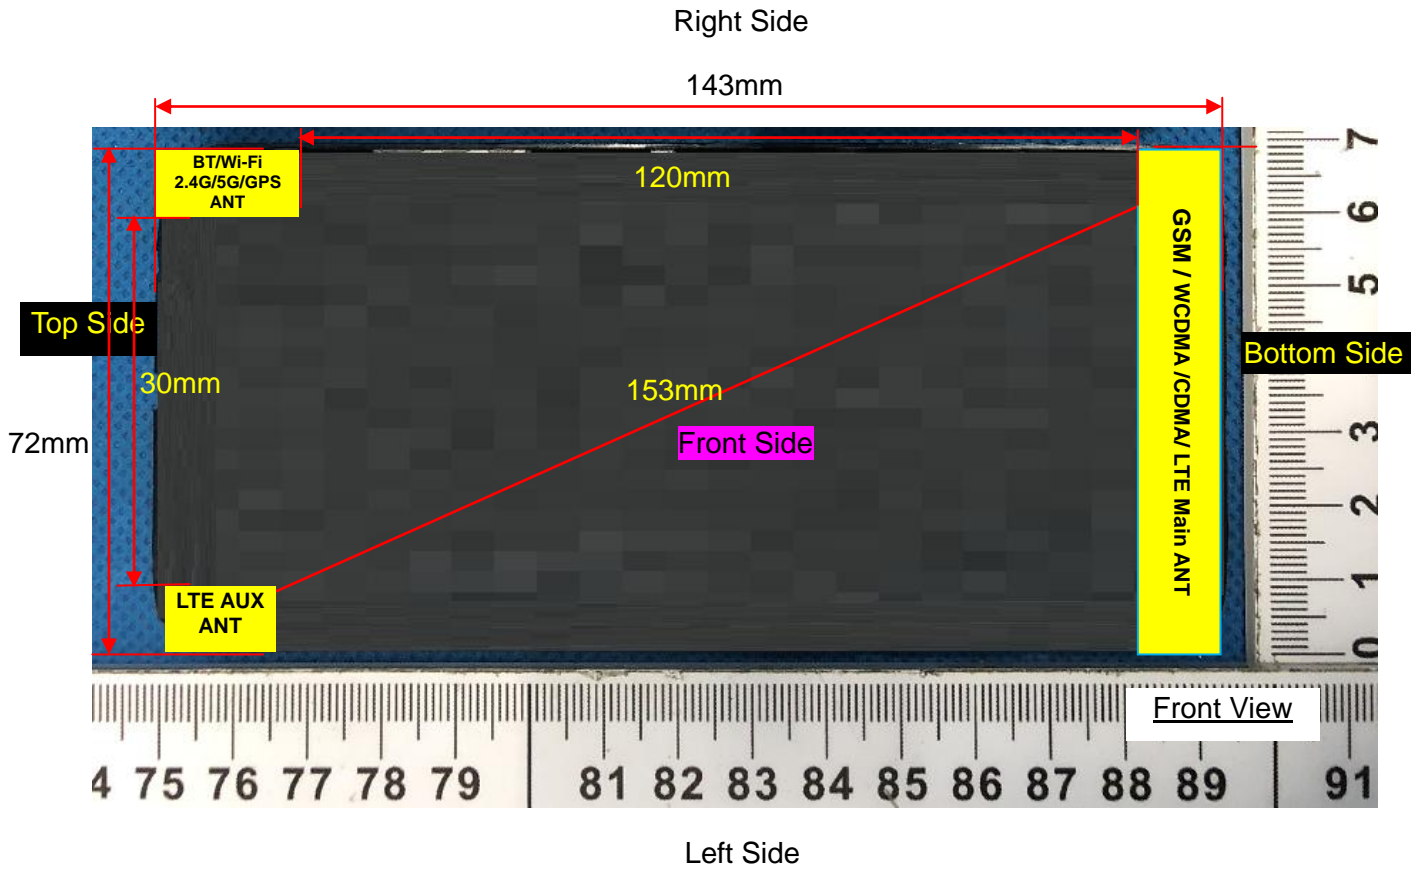

Note: Since the confidentiality request of EUT, the antenna location example diagram see as above.

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	≤ 25mm	≤ 25mm	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	> 25mm	≤ 25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main ANT	Yes	Yes	Yes	Yes	NO	Yes
WLAN & Bluetooth	Yes	Yes	NO	Yes	Yes	NO

### 9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{GHz}}}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where:}$$

- $f_{\text{GHz}}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine

SAR test exclusion.

Mode	Pmax (dBm)	Pmax (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	7.00	5.01	5	2.480	1.58	3	Yes

NOTE: Standalone SAR test exclusion for Bluetooth.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f_{(\text{GHz})}} / x]$  W/kg for test separation distances  $\leq 50\text{mm}$ , where  $x = 7.5$  for 1-g SAR and  $x = 18.75$  for 10-g SAR.

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P <sub>max</sub> (dBm)	P <sub>max</sub> (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	7.00	5.01	5	2.48	7.5	0.210
Bluetooth	Body	7.00	5.01	10	2.48	7.5	0.105
Bluetooth	Hotspot	7.00	5.01	10	2.48	7.5	0.105

NOTE: Estimated SAR calculation for Bluetooth

## 10. SAR Results

### 10.1. SAR measurement results

#### 10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	189/836.4	GPRS(GMSK 2TS)	0.656	0.497	0.31	30.26	31.00	0.778	2021/12/29
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.387	0.275	1.31	30.26	31.00	0.459	2021/12/29
Right Cheek	189/836.4	GPRS(GMSK 2TS)	0.613	0.422	-1.04	30.26	31.00	0.727	2021/12/29
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 2TS)	0.302	0.208	-2.78	30.26	31.00	0.358	2021/12/29

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift ( $\pm 5\%$ )	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 2TS)	0.336	0.246	1.78	30.26	31.00	0.398	2021/12/29
Back Side	189/836.4	GPRS(GMSK 2TS)	0.536	0.393	0.59	30.26	31.00	0.636	2021/12/29

2TS)

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	189/836.4	GPRS(GMSK 2TS)	0.336	0.246	1.78	30.26	31.00	0.398	2021/12/29
Back Side	189/836.4	GPRS(GMSK 2TS)	0.536	0.393	0.59	30.26	31.00	0.636	2021/12/29
Left Side	189/836.4	GPRS(GMSK 2TS)	0.171	0.125	0.92	30.26	31.00	0.203	2021/12/29
Right Side	189/836.4	GPRS(GMSK 2TS)	0.165	0.116	0.49	30.26	31.00	0.196	2021/12/29
Bottom Side	189/836.4	GPRS(GMSK 2TS)	0.290	0.211	-2.75	30.26	31.00	0.344	2021/12/29

NOTE: Hotspot SAR test results of GSM850

**10.1.2. SAR measurement Result of GSM1900**

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	661/1880	GPRS(GMSK 2TS)	0.146	0.097	-1.56	26.63	27.50	0.178	2021/12/30
Left Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.074	0.048	1.36	26.63	27.50	0.090	2021/12/30
Right Cheek	661/1880	GPRS(GMSK 2TS)	0.139	0.088	2.33	26.63	27.50	0.170	2021/12/30
Right Tilt 15 Degree	661/1880	GPRS(GMSK 2TS)	0.070	0.045	0.10	26.63	27.50	0.086	2021/12/30

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 2TS)	0.402	0.223	-1.77	26.63	27.50	0.491	2021/12/30
Back Side	661/1880	GPRS(GMSK 2TS)	0.641	0.367	1.86	26.63	27.50	0.783	2021/12/30

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	661/1880	GPRS(GMSK 2TS)	0.402	0.223	-1.77	26.63	27.50	0.491	2021/12/30
Back Side	661/1880	GPRS(GMSK 2TS)	0.641	0.367	1.86	26.63	27.50	0.783	2021/12/30
Left Side	661/1880	GPRS(GMSK 2TS)	0.198	0.109	-1.92	26.63	27.50	0.242	2021/12/30
Right Side	661/1880	GPRS(GMSK 2TS)	0.201	0.113	-3.09	26.63	27.50	0.246	2021/12/30
Bottom Side	661/1880	GPRS(GMSK 2TS)	0.325	0.184	0.46	26.63	27.50	0.397	2021/12/30

NOTE: Hotspot SAR test results of GSM1900

**10.1.3. SAR measurement Result of WCDMA Band 2**

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	9400/1880	RMC12.2K	0.446	0.282	-0.05	22.26	22.50	0.471	2021/12/30
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.242	0.150	3.42	22.26	22.50	0.256	2021/12/30
Right Cheek	9400/1880	RMC12.2K	0.413	0.259	3.43	22.26	22.50	0.436	2021/12/30
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.219	0.138	1.75	22.26	22.50	0.231	2021/12/30

NOTE: Head SAR test results of WCDMA Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.534	0.306	3.78	22.26	22.50	0.564	2021/12/30
Back Side	9400/1880	RMC12.2K	0.886	0.534	-0.27	22.26	22.50	0.936	2021/12/30
Back Side Repeated	9400/1880	RMC12.2K	0.880	0.530	1.25	22.26	22.50	0.930	2021/12/30
Back Side	9262/1852.4	RMC12.2K	0.744	0.448	0.66	22.29	22.50	0.781	2021/12/30
Back Side	9538/1907.6	RMC12.2K	0.797	0.466	3.53	22.06	22.50	0.882	2021/12/30

NOTE: Body-Worn SAR test results of WCDMA Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	9400/1880	RMC12.2K	0.534	0.306	3.78	22.26	22.50	0.564	2021/12/30
Back Side	9400/1880	RMC12.2K	0.886	0.534	-0.27	22.26	22.50	0.936	2021/12/30
Back Side Repeated	9400/1880	RMC12.2K	0.880	0.530	1.25	22.26	22.50	0.930	2021/12/30
Left Side	9400/1880	RMC12.2K	0.270	0.161	-1.60	22.26	22.50	0.285	2021/12/30
Right Side	9400/1880	RMC12.2K	0.267	0.159	1.56	22.26	22.50	0.282	2021/12/30
Bottom Side	9400/1880	RMC12.2K	0.460	0.266	-1.44	22.26	22.50	0.486	2021/12/30
Back Side	9262/1852.4	RMC12.2K	0.744	0.448	0.66	22.29	22.50	0.781	2021/12/30
Back Side	9538/1907.6	RMC12.2K	0.797	0.466	3.53	22.06	22.50	0.882	2021/12/30

NOTE: Hotspot SAR test results of WCDMA Band 2

**10.1.4. SAR measurement Result of WCDMA Band 4**

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	1413/1732.6	RMC12.2K	0.558	0.320	2.12	25.78	26.50	0.659	2023/5/12
Left Tilt 15 Degree	1413/1732.6	RMC12.2K	0.312	0.178	0.12	25.78	26.50	0.368	2023/5/12
Right Cheek	1413/1732.6	RMC12.2K	0.502	0.284	0.30	25.78	26.50	0.593	2023/5/12
Right Tilt 15 Degree	1413/1732.6	RMC12.2K	0.275	0.145	0.25	25.78	26.50	0.325	2023/5/12

NOTE: Head SAR test results of WCDMA Band 4

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	1413/1732.6	RMC12.2K	0.354	0.216	0.21	25.78	26.50	0.418	2023/5/12
Back Side	1413/1732.6	RMC12.2K	0.462	0.262	1.23	25.78	26.50	0.545	2023/5/12

NOTE: Body-Worn SAR test results of WCDMA Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	1413/1732.6	RMC12.2K	0.354	0.216	0.21	25.78	26.50	0.418	2023/5/12
Back Side	1413/1732.6	RMC12.2K	0.462	0.262	1.23	25.78	26.50	0.545	2023/5/12
Left Side	1413/1732.6	RMC12.2K	0.236	0.168	0.17	25.78	26.50	0.279	2023/5/12
Right Side	1413/1732.6	RMC12.2K	0.210	0.141	0.25	25.78	26.50	0.248	2023/5/12
Bottom Side	1413/1732.6	RMC12.2K	0.258	0.179	1.12	25.78	26.50	0.305	2023/5/12

NOTE: Hotspot SAR test results of WCDMA Band 4

**10.1.5. SAR measurement Result of WCDMA Band 5**

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	4182/836.4	RMC12.2K	0.472	0.413	-3.75	22.24	22.50	0.501	2021/12/29
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.277	0.230	-1.94	22.24	22.50	0.294	2021/12/29
Right Cheek	4182/836.4	RMC12.2K	0.418	0.362	1.12	22.24	22.50	0.444	2021/12/29
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.225	0.191	-1.46	22.24	22.50	0.239	2021/12/29

NOTE: Head SAR test results of WCDMA Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	RMC12.2K	0.252	0.212	-3.72	22.24	22.50	0.268	2021/12/29
Back Side	4182/836.4	RMC12.2K	0.406	0.356	-1.35	22.24	22.50	0.431	2021/12/29

NOTE: Body-Worn SAR test results of WCDMA Band 5



Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	4182/836.4	RMC12.2K	0.252	0.212	-3.72	22.24	22.50	0.268	2021/12/29
Back Side	4182/836.4	RMC12.2K	0.406	0.356	-1.35	22.24	22.50	0.431	2021/12/29
Left Side	4182/836.4	RMC12.2K	0.135	0.118	-2.00	22.24	22.50	0.143	2021/12/29
Right Side	4182/836.4	RMC12.2K	0.132	0.110	2.71	22.24	22.50	0.140	2021/12/29
Bottom Side	4182/836.4	RMC12.2K	0.220	0.193	0.55	22.24	22.50	0.234	2021/12/29

NOTE: Hotspot SAR test results of WCDMA Band 5

**10.1.6. SAR measurement Result of LTE Band 2**

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
<b>1RB</b>									
Left Cheek	18900/1880	20M QPSK(1,49)	0.068	0.046	-4.05	23.42	24.00	0.078	2021/12/30
Left Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.035	0.022	-1.60	23.42	24.00	0.040	2021/12/30
Right Cheek	18900/1880	20M QPSK(1,49)	0.062	0.041	-1.25	23.42	24.00	0.071	2021/12/30
Right Tilt 15 Degree	18900/1880	20M QPSK(1,49)	0.030	0.020	-1.61	23.42	24.00	0.034	2021/12/30
<b>50%RB</b>									
Left Cheek	18900/1880	20M QPSK(50,24)	0.036	0.024	1.02	22.08	22.50	0.040	2021/12/30
Left Tilt 15 Degree	18900/1880	20M QPSK(50,24)	0.020	0.012	-2.42	22.08	22.50	0.022	2021/12/30
Right Cheek	18900/1880	20M QPSK(50,24)	0.032	0.023	-1.68	22.08	22.50	0.035	2021/12/30
Right Tilt 15 Degree	18900/1880	20M QPSK(50,24)	0.017	0.011	-0.91	22.08	22.50	0.019	2021/12/30

NOTE: Head SAR test results of LTE Band 2

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	18900/1880	20M QPSK(1,49)	0.156	0.094	2.06	23.42	24.00	0.178	2021/12/30
Back Side	18900/1880	20M QPSK(1,49)	0.238	0.143	-1.04	23.42	24.00	0.272	2021/12/30
50%RB									
Front Side	18900/1880	20M QPSK(50,24)	0.080	0.056	1.61	22.08	22.50	0.088	2021/12/30
Back Side	18900/1880	20M QPSK(50,24)	0.135	0.078	2.38	22.08	22.50	0.149	2021/12/30

NOTE: Body-Worn SAR test results of LTE Band 2

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	18900/1880	20M QPSK(1,49)	0.156	0.094	2.06	23.42	24.00	0.178	2021/12/30
Back Side	18900/1880	20M QPSK(1,49)	0.238	0.143	-1.04	23.42	24.00	0.272	2021/12/30
Left Side	18900/1880	20M QPSK(1,49)	0.072	0.042	2.08	23.42	24.00	0.082	2021/12/30
Right Side	18900/1880	20M QPSK(1,49)	0.075	0.043	-0.96	23.42	24.00	0.086	2021/12/30
Bottom Side	18900/1880	20M QPSK(1,49)	0.130	0.074	-0.85	23.42	24.00	0.149	2021/12/30
50%RB									
Front Side	18900/1880	20M QPSK(50,24)	0.080	0.056	1.61	22.08	22.50	0.088	2021/12/30
Back Side	18900/1880	20M QPSK(50,24)	0.135	0.078	2.38	22.08	22.50	0.149	2021/12/30
Left Side	18900/1880	20M QPSK(50,24)	0.039	0.024	-0.08	22.08	22.50	0.043	2021/12/30

Right Side	18900/1880	20M QPSK(50,24)	0.043	0.022	4.63	22.08	22.50	0.047	2021/12/30
Bottom Side	18900/1880	20M QPSK(50,24)	0.077	0.039	-4.76	22.08	22.50	0.085	2021/12/30

NOTE: Hotspot SAR test results of LTE Band 2

**10.1.7. SAR measurement Result of LTE Band 4**

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	20175/1732.5	20M QPSK(1,99)	0.057	0.042	-0.74	23.54	24.50	0.071	2021/12/24
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,99)	0.033	0.024	-1.94	23.54	24.50	0.041	2021/12/24
Right Cheek	20175/1732.5	20M QPSK(1,99)	0.052	0.037	2.67	23.54	24.50	0.065	2021/12/24
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,99)	0.028	0.021	2.64	23.54	24.50	0.035	2021/12/24
50%RB									
Left Cheek	20175/1732.5	20M QPSK(50,49)	0.034	0.022	-2.74	22.42	23.00	0.039	2021/12/24
Left Tilt 15 Degree	20175/1732.5	20M QPSK(50,49)	0.017	0.012	2.04	22.42	23.00	0.019	2021/12/24
Right Cheek	20175/1732.5	20M QPSK(50,49)	0.028	0.019	-2.65	22.42	23.00	0.032	2021/12/24
Right Tilt 15 Degree	20175/1732.5	20M QPSK(50,49)	0.015	0.011	1.91	22.42	23.00	0.017	2021/12/24

NOTE: Head SAR test results of LTE Band 4

Test Position of Body-Worn with	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					

10mm								)	
1RB									
Front Side	20175/1732.5	20M QPSK(1,99)	0.174	0.108	3.08	23.54	24.50	0.217	2021/12/24
Back Side	20175/1732.5	20M QPSK(1,99)	0.267	0.168	-4.83	23.54	24.50	0.333	2021/12/24
50%RB									
Front Side	20175/1732.5	20M QPSK(50,49)	0.104	0.057	-4.15	22.42	23.00	0.119	2021/12/24
Back Side	20175/1732.5	20M QPSK(50,49)	0.135	0.097	1.77	22.42	23.00	0.154	2021/12/24

NOTE: Body-Worn SAR test results of LTE Band 4

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20175/1732.5	20M QPSK(1,99)	0.174	0.108	3.08	23.54	24.50	0.217	2021/12/24
Back Side	20175/1732.5	20M QPSK(1,99)	0.267	0.168	-4.83	23.54	24.50	0.333	2021/12/24
Left Side	20175/1732.5	20M QPSK(1,99)	0.093	0.057	1.21	23.54	24.50	0.116	2021/12/24
Right Side	20175/1732.5	20M QPSK(1,99)	0.090	0.055	0.87	23.54	24.50	0.112	2021/12/24
Bottom Side	20175/1732.5	20M QPSK(1,99)	0.140	0.087	-1.42	23.54	24.50	0.175	2021/12/24
50%RB									
Front Side	20175/1732.5	20M QPSK(50,49)	0.104	0.057	-4.15	22.42	23.00	0.119	2021/12/24
Back Side	20175/1732.5	20M QPSK(50,49)	0.135	0.097	1.77	22.42	23.00	0.154	2021/12/24
Left Side	20175/1732.5	20M QPSK(50,49)	0.049	0.034	-0.64	22.42	23.00	0.056	2021/12/24

Right Side	20175/1732.5	20M QPSK(50,49)	0.046	0.033	3.77	22.42	23.00	0.053	2021/12/24
Bottom Side	20175/1732.5	20M QPSK(50,49)	0.072	0.050	4.34	22.42	23.00	0.082	2021/12/24

NOTE: Hotspot SAR test results of LTE Band 4

**10.1.8. SAR measurement Result of LTE Band 5**

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Left Cheek	20525/836.5	10M QPSK(1,24)	0.315	0.243	-3.54	22.97	23.50	0.356	2021/12/29
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.165	0.122	1.98	22.97	23.50	0.186	2021/12/29
Right Cheek	20525/836.5	10M QPSK(1,24)	0.273	0.206	1.54	22.97	23.50	0.308	2021/12/29
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.128	0.097	1.14	22.97	23.50	0.145	2021/12/29
50%RB									
Left Cheek	20525/836.5	10M QPSK(25,24)	0.176	0.139	-3.87	21.73	22.00	0.187	2021/12/29
Left Tilt 15 Degree	20525/836.5	10M QPSK(25,24)	0.088	0.073	-1.65	21.73	22.00	0.094	2021/12/29
Right Cheek	20525/836.5	10M QPSK(25,24)	0.158	0.103	-4.60	21.73	22.00	0.168	2021/12/29
Right Tilt 15 Degree	20525/836.5	10M QPSK(25,24)	0.070	0.050	3.60	21.73	22.00	0.074	2021/12/29

NOTE: Head SAR test results of LTE Band 5

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									

Front Side	20525/836.5	10M QPSK(1,24)	0.180	0.129	-1.97	22.97	23.50	0.203	2021/12/29
Back Side	20525/836.5	10M QPSK(1,24)	0.262	0.197	-0.25	22.97	23.50	0.296	2021/12/29
50%RB									
Front Side	20525/836.5	10M QPSK(25,24)	0.104	0.067	-2.43	21.73	22.00	0.111	2021/12/29
Back Side	20525/836.5	10M QPSK(25,24)	0.151	0.114	4.41	21.73	22.00	0.161	2021/12/29

NOTE: Body-Worn SAR test results of LTE Band 5

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	20525/836.5	10M QPSK(1,24)	0.180	0.129	-1.97	22.97	23.50	0.203	2021/12/29
Back Side	20525/836.5	10M QPSK(1,24)	0.262	0.197	-0.25	22.97	23.50	0.296	2021/12/29
Left Side	20525/836.5	10M QPSK(1,24)	0.087	0.062	1.99	22.97	23.50	0.098	2021/12/29
Right Side	20525/836.5	10M QPSK(1,24)	0.093	0.067	3.81	22.97	23.50	0.105	2021/12/29
Bottom Side	20525/836.5	10M QPSK(1,24)	0.150	0.109	-2.07	22.97	23.50	0.169	2021/12/29
50%RB									
Front Side	20525/836.5	10M QPSK(25,24)	0.104	0.067	-2.43	21.73	22.00	0.111	2021/12/29
Back Side	20525/836.5	10M QPSK(25,24)	0.151	0.114	4.41	21.73	22.00	0.161	2021/12/29
Left Side	20525/836.5	10M QPSK(25,24)	0.044	0.036	1.48	21.73	22.00	0.047	2021/12/29
Right Side	20525/836.5	10M QPSK(25,24)	0.048	0.037	-1.95	21.73	22.00	0.051	2021/12/29
Bottom Side	20525/836.5	10M QPSK(25,24)	0.086	0.061	1.27	21.73	22.00	0.092	2021/12/29

NOTE: Hotspot SAR test results of LTE Band 5

**10.1.9. SAR measurement Result of LTE Band 7**

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
<b>1RB</b>									
Left Cheek	21100/2535	20M QPSK(1,49)	0.086	0.052	0.59	23.41	24.00	0.099	2021/12/17
Left Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.051	0.030	-3.15	23.41	24.00	0.058	2021/12/17
Right Cheek	21100/2535	20M QPSK(1,49)	0.075	0.045	-2.20	23.41	24.00	0.086	2021/12/17
Right Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.036	0.021	3.14	23.41	24.00	0.041	2021/12/17
<b>50%RB</b>									
Left Cheek	21100/2535	20M QPSK(50,0)	0.050	0.030	4.57	22.46	23.00	0.057	2021/12/17
Left Tilt 15 Degree	21100/2535	20M QPSK(50,0)	0.030	0.018	-4.57	22.46	23.00	0.034	2021/12/17
Right Cheek	21100/2535	20M QPSK(50,0)	0.042	0.023	-0.89	22.46	23.00	0.048	2021/12/17
Right Tilt 15 Degree	21100/2535	20M QPSK(50,0)	0.019	0.011	-4.20	22.46	23.00	0.022	2021/12/17

NOTE: Head SAR test results of LTE Band 7

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
<b>1RB</b>									
Front Side	21100/2535	20M QPSK(1,49)	0.108	0.055	1.85	23.41	24.00	0.124	2021/12/17
Back Side	21100/2535	20M QPSK(1,49)	0.171	0.092	-0.63	23.41	24.00	0.196	2021/12/17

50%RB									
Front Side	21100/2535	20M QPSK(50,0)	0.062	0.030	-4.33	22.46	23.00	0.070	2021/12/17
Back Side	21100/2535	20M QPSK(50,0)	0.099	0.049	1.87	22.46	23.00	0.112	2021/12/17

NOTE: Body-Worn SAR test results of LTE Band 7

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
1RB									
Front Side	21100/2535	20M QPSK(1,49)	0.108	0.055	1.85	23.41	24.00	0.124	2021/12/17
Back Side	21100/2535	20M QPSK(1,49)	0.171	0.092	-0.63	23.41	24.00	0.196	2021/12/17
Left Side	21100/2535	20M QPSK(1,49)	0.060	0.032	1.65	23.41	24.00	0.069	2021/12/17
Right Side	21100/2535	20M QPSK(1,49)	0.057	0.030	0.15	23.41	24.00	0.065	2021/12/17
Bottom Side	21100/2535	20M QPSK(1,49)	0.100	0.053	-0.15	23.41	24.00	0.115	2021/12/17
50%RB									
Front Side	21100/2535	20M QPSK(50,0)	0.062	0.030	-4.33	22.46	23.00	0.070	2021/12/17
Back Side	21100/2535	20M QPSK(50,0)	0.099	0.049	1.87	22.46	23.00	0.112	2021/12/17
Left Side	21100/2535	20M QPSK(50,0)	0.034	0.019	-3.82	22.46	23.00	0.039	2021/12/17
Right Side	21100/2535	20M QPSK(50,0)	0.029	0.017	-1.47	22.46	23.00	0.033	2021/12/17
Bottom Side	21100/2535	20M QPSK(50,0)	0.059	0.029	0.19	22.46	23.00	0.067	2021/12/17

NOTE: Hotspot SAR test results of LTE Band 7

**10.1.10. SAR measurement Result of LTE Band 26a**

Test	Test	Mode	SAR Value	Power	Conducted	Tune-up	Scaled	Date	Plot
------	------	------	-----------	-------	-----------	---------	--------	------	------



Position of Head	channel /Freq.		(W/kg)		Drift(%)	Power (dBm)	Power (dBm)	SAR 1-g (W/Kg)		
			1-g	10-g						
1RB										
Left Cheek	26740/819	10M QPSK(1,24)	0.466	0.348	0.88	23.37	24.00	0.539	2023/5/22	19#
Left Tilt 15 Degree	26740/819	10M QPSK(1,24)	0.254	0.180	3.26	23.37	24.00	0.294	2023/5/22	
Right Cheek	26740/819	10M QPSK(1,24)	0.426	0.302	0.21	23.37	24.00	0.493	2023/5/22	
Right Tilt 15 Degree	26740/819	10M QPSK(1,24)	0.199	0.147	3.42	23.37	24.00	0.230	2023/5/22	
50%RB										
Left Cheek	26740/819	10M QPSK(25,12)	0.247	0.206	3.60	22.38	22.50	0.254	2023/5/22	
Left Tilt 15 Degree	26740/819	10M QPSK(25,12)	0.149	0.094	-2.64	22.38	22.50	0.153	2023/5/22	
Right Cheek	26740/819	10M QPSK(25,12)	0.235	0.178	0.16	22.38	22.50	0.242	2023/5/22	
Right Tilt 15 Degree	26740/819	10M QPSK(25,12)	0.115	0.084	0.71	22.38	22.50	0.118	2023/5/22	

NOTE: Head SAR test results of LTE Band 26a

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26740/819	10M QPSK(1,24)	0.270	0.191	-2.09	23.37	24.00	0.312	2023/5/22	
Back Side	26740/819	10M QPSK(1,24)	0.445	0.332	0.11	23.37	24.00	0.514	2023/5/22	20#
50%RB										
Front Side	26740/819	10M QPSK(25,12)	0.140	0.113	0.26	22.38	22.50	0.144	2023/5/22	
Back Side	26740/819	10M	0.232	0.191	-3.24	22.38	22.50	0.457	2023/5/22	

		QPSK(25,12)								
--	--	-------------	--	--	--	--	--	--	--	--

NOTE: Body-Worn SAR test results of LTE Band 26a

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26740/819	10M QPSK(1,24)	0.270	0.191	-2.09	23.37	24.00	0.312	2023/5/22	
Back Side	26740/819	10M QPSK(1,24)	0.445	0.332	0.11	23.37	24.00	0.514	2023/5/22	20#
Left Side	26740/819	10M QPSK(1,24)	0.138	0.102	-3.49	23.37	24.00	0.160	2023/5/22	
Right Side	26740/819	10M QPSK(1,24)	0.135	0.099	-2.24	23.37	24.00	0.156	2023/5/22	
Bottom Side	26740/819	10M QPSK(1,24)	0.230	0.165	-1.66	23.37	24.00	0.266	2023/5/22	
50%RB										
Front Side	26740/819	10M QPSK(25,12)	0.140	0.113	0.26	22.38	22.50	0.144	2023/5/22	
Back Side	26740/819	10M QPSK(25,12)	0.232	0.191	-3.24	22.38	22.50	0.457	2023/5/22	
Left Side	26740/819	10M QPSK(25,12)	0.082	0.057	-1.64	22.38	22.50	0.084	2023/5/22	
Right Side	26740/819	10M QPSK(25,12)	0.069	0.051	-1.82	22.38	22.50	0.071	2023/5/22	
Bottom Side	26740/819	10M QPSK(25,12)	0.134	0.085	-2.83	22.38	22.50	0.138	2023/5/22	

NOTE: Hotspot SAR test results of LTE Band 26a

**10.1.11. SAR measurement Result of LTE Band 26b**

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										

Left Cheek	26865/831.5	15M QPSK(1,37)	0.482	0.353	-0.16	23.00	23.50	0.541	2023/5/22	21#
Left Tilt 15 Degree	26865/831.5	15M QPSK(1,37)	0.260	0.190	-2.91	23.00	23.50	0.292	2023/5/22	
Right Cheek	26865/831.5	15M QPSK(1,37)	0.427	0.310	0.13	23.00	23.50	0.479	2023/5/22	
Right Tilt 15 Degree	26865/831.5	15M QPSK(1,37)	0.214	0.152	-0.14	23.00	23.50	0.240	2023/5/22	
50%RB										
Left Cheek	26865/831.5	15M QPSK(36,18)	0.268	0.184	-2.29	22.05	22.50	0.297	2023/5/22	
Left Tilt 15 Degree	26865/831.5	15M QPSK(36,18)	0.156	0.100	2.52	22.05	22.50	0.173	2023/5/22	
Right Cheek	26865/831.5	15M QPSK(36,18)	0.230	0.167	3.45	22.05	22.50	0.255	2023/5/22	
Right Tilt 15 Degree	26865/831.5	15M QPSK(36,18)	0.125	0.090	2.44	22.05	22.50	0.139	2023/5/22	

NOTE: Head SAR test results of LTE Band 26b

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	26865/831.5	15M QPSK(1,37)	0.282	0.205	0.28	23.00	23.50	0.316	2023/5/22	
Back Side	26865/831.5	15M QPSK(1,37)	0.434	0.322	0.37	23.00	23.50	0.487	2023/5/22	22#
50%RB										
Front Side	26865/831.5	15M QPSK(36,18)	0.166	0.115	2.87	22.05	22.50	0.184	2023/5/22	
Back Side	26865/831.5	15M QPSK(36,18)	0.252	0.189	-4.11	22.05	22.50	0.280	2023/5/22	

NOTE: Body-Worn SAR test results of LTE Band 26b

Test	Test channel	Mode	SAR Value	Power	Conducted	Tune-up	Scaled	Date	Plot
------	--------------	------	-----------	-------	-----------	---------	--------	------	------

Position of Hotspot with 10mm	/Freq.		(W/kg)		Drift(%)	Power (dBm)	Power (dBm)	SAR 1-g (W/Kg)		
			1-g	10-g						
1RB										
Front Side	26865/831.5	15M QPSK(1,37)	0.282	0.205	0.28	23.00	23.50	0.316	2023/5/22	
Back Side	26865/831.5	15M QPSK(1,37)	0.434	0.322	0.37	23.00	23.50	0.487	2023/5/22	22#
Left Side	26865/831.5	15M QPSK(1,37)	0.144	0.101	1.95	23.00	23.50	0.162	2023/5/22	
Right Side	26865/831.5	15M QPSK(1,37)	0.132	0.097	0.77	23.00	23.50	0.148	2023/5/22	
Bottom Side	26865/831.5	15M QPSK(1,37)	0.235	0.171	-0.38	23.00	23.50	0.264	2023/5/22	
50%RB										
Front Side	26865/831.5	15M QPSK(36,18)	0.166	0.115	2.87	22.05	22.50	0.184	2023/5/22	
Back Side	26865/831.5	15M QPSK(36,18)	0.252	0.189	-4.11	22.05	22.50	0.280	2023/5/22	
Left Side	26865/831.5	15M QPSK(36,18)	0.076	0.058	0.91	22.05	22.50	0.084	2023/5/22	
Right Side	26865/831.5	15M QPSK(36,18)	0.071	0.053	-0.25	22.05	22.50	0.079	2023/5/22	
Bottom Side	26865/831.5	15M QPSK(36,18)	0.130	0.095	-4.01	22.05	22.50	0.144	2023/5/22	

NOTE: Hotspot SAR test results of LTE Band 26b

**10.1.12. SAR measurement Result of LTE Band 38**

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	38000/2595	20M QPSK(1,99)	0.459	0.237	0.28	26.15	27.00	0.558	2023/5/17	23#
Left Tilt 15	38000/2595	20M QPSK(1,99)	0.270	0.135	-1.83	26.15	27.00	0.328	2023/5/17	

Degree										
Right Cheek	38000/2595	20M QPSK(1,99)	0.402	0.203	1.43	26.15	27.00	0.489	2023/5/17	
Right Tilt 15 Degree	38000/2595	20M QPSK(1,99)	0.190	0.093	-0.58	26.15	27.00	0.231	2023/5/17	
50%RB										
Left Cheek	38000/2595	20M QPSK(50,0)	0.263	0.119	-4.29	27.55	28.00	0.292	2023/5/17	
Left Tilt 15 Degree	38000/2595	20M QPSK(50,0)	0.140	0.077	-0.67	27.55	28.00	0.155	2023/5/17	
Right Cheek	38000/2595	20M QPSK(50,0)	0.237	0.110	2.69	27.55	28.00	0.263	2023/5/17	
Right Tilt 15 Degree	38000/2595	20M QPSK(50,0)	0.099	0.049	0.17	27.55	28.00	0.110	2023/5/17	

NOTE: Head SAR test results of LTE Band 38

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	38000/2595	20M QPSK(1,99)	0.378	0.189	-2.61	26.15	27.00	0.460	2023/5/17	
Back Side	38000/2595	20M QPSK(1,99)	0.585	0.301	1.49	26.15	27.00	0.711	2023/5/17	24#
50%RB										
Front Side	38000/2595	20M QPSK(50,0)	0.214	0.102	1.84	25.55	27.00	0.299	2023/5/17	
Back Side	38000/2595	20M QPSK(50,0)	0.339	0.168	-0.87	25.55	27.00	0.473	2023/5/17	

NOTE: Body-Worn SAR test results of LTE Band 38

Test Position of Hotspot with	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						

10mm										
1RB										
Front Side	38000/2595	20M QPSK(1,99)	0.378	0.189	-2.61	26.15	27.00	0.460	2023/5/17	
Back Side	38000/2595	20M QPSK(1,99)	0.585	0.301	1.49	26.15	27.00	0.711	2023/5/17	24#
Left Side	38000/2595	20M QPSK(1,99)	0.186	0.091	1.90	26.15	27.00	0.226	2023/5/17	
Right Side	38000/2595	20M QPSK(1,99)	0.189	0.096	-2.21	26.15	27.00	0.230	2023/5/17	
Bottom Side	38000/2595	20M QPSK(1,99)	0.315	0.162	2.84	26.15	27.00	0.383	2023/5/17	
50%RB										
Front Side	38000/2595	20M QPSK(50,0)	0.214	0.102	1.84	25.55	27.00	0.299	2023/5/17	
Back Side	38000/2595	20M QPSK(50,0)	0.339	0.168	-0.87	25.55	27.00	0.473	2023/5/17	
Left Side	38000/2595	20M QPSK(50,0)	0.104	0.049	-2.90	25.55	27.00	0.145	2023/5/17	
Right Side	38000/2595	20M QPSK(50,0)	0.108	0.052	-4.86	25.55	27.00	0.151	2023/5/17	
Bottom Side	38000/2595	20M QPSK(50,0)	0.186	0.086	-1.40	25.55	27.00	0.260	2023/5/17	

NOTE: Hotspot SAR test results of LTE Band 38

**10.1.13. SAR measurement Result of LTE Band 66**

Test Position of Head	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Left Cheek	132322/1745	20M QPSK(1,49)	0.838	0.410	0.61	23.85	24.50	0.973	2023/5/12	
Left Tilt 15 Degree	132322/1745	20M QPSK(1,49)	0.501	0.240	-2.12	23.85	24.50	0.582	2023/5/12	
Right Cheek	132322/1745	20M QPSK(1,49)	0.716	0.343	-0.42	23.85	24.50	0.832	2023/5/12	
Right Tilt	132322/1745	20M	0.336	0.164	-1.32	23.85	24.50	0.390	2023/5/12	

15 Degree		QPSK(1,49)								
Left Cheek	132072/1720	20M QPSK(1,49)	0.979	0.533	-0.48	24.31	24.50	1.023	2023/5/12	25#
Left Cheek	132572/1770	20M QPSK(1,49)	0.717	0.342	0.00	23.50	24.50	0.903	2023/5/12	
Left Cheek Repeated	132072/1720	20M QPSK(1,49)	0.966	0.527	3.52	24.31	24.50	1.009	2023/5/12	
50%RB										
Left Cheek	132322/1745	20M QPSK(50,0)	0.426	0.245	-1.20	22.97	23.50	0.481	2023/5/12	
Left Tilt 15 Degree	132322/1745	20M QPSK(50,0)	0.262	0.129	-3.87	22.97	23.50	0.296	2023/5/12	
Right Cheek	132322/1745	20M QPSK(50,0)	0.387	0.179	-0.96	22.97	23.50	0.437	2023/5/12	
Right Tilt 15 Degree	132322/1745	20M QPSK(50,0)	0.169	0.083	-1.79	22.97	23.50	0.191	2023/5/12	
100%RB										
Left Cheek	132322/1745	20M QPSK(100,0)	0.407	0.204	4.68	22.83	23.50	0.475	2023/5/12	

NOTE: Head SAR test results of LTE Band 66

Test Position of Body-Worn with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	132322/1745	20M QPSK(1,0)	0.462	0.242	3.70	23.85	24.50	0.537	2023/5/12	
Back Side	132322/1745	20M QPSK(1,0)	0.762	0.415	-0.25	23.85	24.50	0.885	2023/5/12	
Back Side	132072/1720	20M QPSK(1,0)	0.867	0.519	-0.42	24.31	24.50	0.906	2023/5/12	26#
Back Side	132572/1770	20M QPSK(1,0)	0.705	0.395	-0.60	23.50	24.50	0.888	2023/5/12	
BackSide Repeated	132072/1720	20M QPSK(1,0)	0.866	0.518	3.95	24.31	24.50	0.905	2023/5/12	

50%RB										
Front Side	132322/1745	20M QPSK(50,0)	0.234	0.139	-0.50	22.97	23.50	0.264	2023/5/12	
Back Side	132322/1745	20M QPSK(50,0)	0.424	0.244	3.81	22.97	23.50	0.479	2023/5/12	
100%RB										
Back Side	132322/1745	20M QPSK(100,0)	0.390	0.248	-2.86	22.83	23.50	0.455	2023/5/12	

NOTE: Body-Worn SAR test results of LTE Band 66

Test Position of Hotspot with 10mm	Test channel /Freq.	Mode	SAR Value (W/kg)		Power Drift(%)	Conducted Power (dBm)	Tune-up Power (dBm)	Scaled SAR 1-g (W/Kg)	Date	Plot
			1-g	10-g						
1RB										
Front Side	132322/1745	20M QPSK(1,0)	0.462	0.242	3.70	23.85	24.50	0.537	2023/5/12	
Back Side	132322/1745	20M QPSK(1,0)	0.762	0.415	-0.25	23.85	24.50	0.885	2023/5/12	
Left Side	132322/1745	20M QPSK(1,0)	0.237	0.125	0.19	23.85	24.50	0.275	2023/5/12	
Right Side	132322/1745	20M QPSK(1,0)	0.237	0.123	-1.74	23.85	24.50	0.275	2023/5/12	
Bottom Side	132322/1745	20M QPSK(1,0)	0.400	0.207	-1.94	23.85	24.50	0.465	2023/5/12	
Back Side	132072/1720	20M QPSK(1,0)	0.867	0.519	-0.42	24.31	24.50	0.906	2023/5/12	26#
Back Side	132572/1770	20M QPSK(1,0)	0.705	0.395	-0.60	23.50	24.50	0.888	2023/5/12	
BackSide Repeated	132072/1720	20M QPSK(1,0)	0.866	0.518	3.95	24.31	24.50	0.905	2023/5/12	
50%RB										
Front Side	132322/1745	20M QPSK(50,0)	0.234	0.139	-0.50	22.97	23.50	0.264	2023/5/12	
Back Side	132322/1745	20M QPSK(50,0)	0.424	0.244	3.81	22.97	23.50	0.479	2023/5/12	
Left Side	132322/1745	20M QPSK(50,0)	0.134	0.068	-0.07	22.97	23.50	0.151	2023/5/12	
Right	132322/1745	20M	0.123	0.070	3.95	22.97	23.50	0.139	2023/5/12	



Side		QPSK(50,0)								
Bottom Side	132322/1745	20M QPSK(50,0)	0.236	0.107	-3.16	22.97	23.50	0.267	2023/5/12	
100%RB										
Back Side	132322/1745	20M QPSK(100,0)	0.390	0.248	-2.86	22.83	23.50	0.455	2023/5/12	

NOTE: Hotspot SAR test results of LTE Band 66

**10.1.14. SAR measurement Result of WLAN 2.4G**

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Left Cheek	6/2437	802.11b	0.159	0.056	-0.09	12.48	13.00	0.179	2023/5/15
Left Tilt 15 Degree	6/2437	802.11b	0.065	0.030	0.20	12.48	13.00	0.073	2023/5/15
Right Cheek	6/2437	802.11b	0.112	0.047	1.01	12.48	13.00	0.126	2023/5/15
Right Tilt 15 Degree	6/2437	802.11b	0.042	0.025	3.02	12.48	13.00	0.047	2023/5/15

NOTE: Head SAR test results of WLAN 2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11b	0.010	0.004	0.30	12.48	13.00	0.011	2023/5/15
Back Side	6/2437	802.11b	0.018	0.007	2.27	12.48	13.00	0.020	2023/5/15

NOTE: Body-Worn SAR test results of WLAN 2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)	Date
			1g	10g					
Front Side	6/2437	802.11b	0.010	0.004	0.30	12.48	13.00	0.011	2023/5/15
Back Side	6/2437	802.11b	0.018	0.007	2.27	12.48	13.00	0.020	2023/5/15
Right Side	6/2437	802.11b	0.008	0.003	0.85	12.48	13.00	0.009	2023/5/15
Top Side	6/2437	802.11b	0.006	0.003	2.14	12.48	13.00	0.007	2023/5/15

NOTE: Hotspot SAR test results of WLAN 2.4G

**10.2. SAR Summation Scenario**

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation < 1.6W/kg.
- 2)  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (\text{min. separation distance, mm})$ , and the peak separation distance is determined from the square root of  $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$ , where  $(x_1, y_1, z_1)$  and  $(x_2, y_2, z_2)$  are the coordinates of the extrapolated peak SAR locations in the zoom scan. If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.

Test Position	Scaled SAR <sub>MAX</sub>	∑ 1-g SAR	SPLSR	Remark
---------------	---------------------------	-----------	-------	--------

		WWAN	DTS	(W/Kg)		
Head	Left Cheek	1.023	0.179	1.202	N/A	N/A
	Left Tilt 15 Degree	0.582	0.073	0.655	N/A	N/A
	Right Cheek	0.832	0.126	0.958	N/A	N/A
	Right Tilt 15 Degree	0.390	0.047	0.437	N/A	N/A
Body-Worn	Front Side	0.564	0.011	0.575	N/A	N/A
	Back Side	0.936	0.020	0.956	N/A	N/A
Hotspot	Front Side	0.564	0.011	0.575	N/A	N/A
	Back Side	0.936	0.020	0.956	N/A	N/A
	Left Side	0.285	N/A	0.285	N/A	N/A
	Right Side	0.282	0.009	0.291	N/A	N/A
	Top Side	N/A	0.007	0.007	N/A	N/A
	Bottom Side	0.486	N/A	0.486	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WWAN and DTS.

Test Position		Scaled SAR <sub>MAX</sub>		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WWAN	DSS			
Head	Left Cheek	1.023	0.210	1.233	N/A	N/A
	Left Tilt 15 Degree	0.582	0.210	0.792	N/A	N/A
	Right Cheek	0.832	0.210	1.042	N/A	N/A
	Right Tilt 15 Degree	0.390	0.210	0.600	N/A	N/A
Body-Worn	Front Side	0.564	0.105	0.669	N/A	N/A
	Back Side	0.936	0.105	1.041	N/A	N/A
Hotspot	Front Side	0.564	0.105	0.669	N/A	N/A
	Back Side	0.936	0.105	1.041	N/A	N/A
	Left Side	0.285	N/A	0.285	N/A	N/A
	Right Side	0.282	0.105	0.387	N/A	N/A
	Top Side	N/A	0.105	0.105	N/A	N/A
	Bottom Side	0.486	N/A	0.486	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WWAN and DSS.

## 11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

## 12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - 835MHz
MEASUREMENT 2 System Performance Check - 1800MHz
MEASUREMENT 3 System Performance Check - 1900MHz
MEASUREMENT 4 System Performance Check - 2450MHz
MEASUREMENT 5 System Performance Check - 2600MHz
MEASUREMENT 6 System Performance Check - 835MHz
MEASUREMENT 7 System Performance Check - 1800MHz
MEASUREMENT 8 System Performance Check - 2600MHz

# MEASUREMENT 1


Date of measurement: 29/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Dipole</u>
<b>Band</b>	<u>CW835</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>CW (Crest factor: 1.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	42.666539
<b>Relative permittivity (imaginary part)</b>	20.029856
<b>Conductivity (S/m)</b>	0.929163
<b>Variation (%)</b>	-3.920000

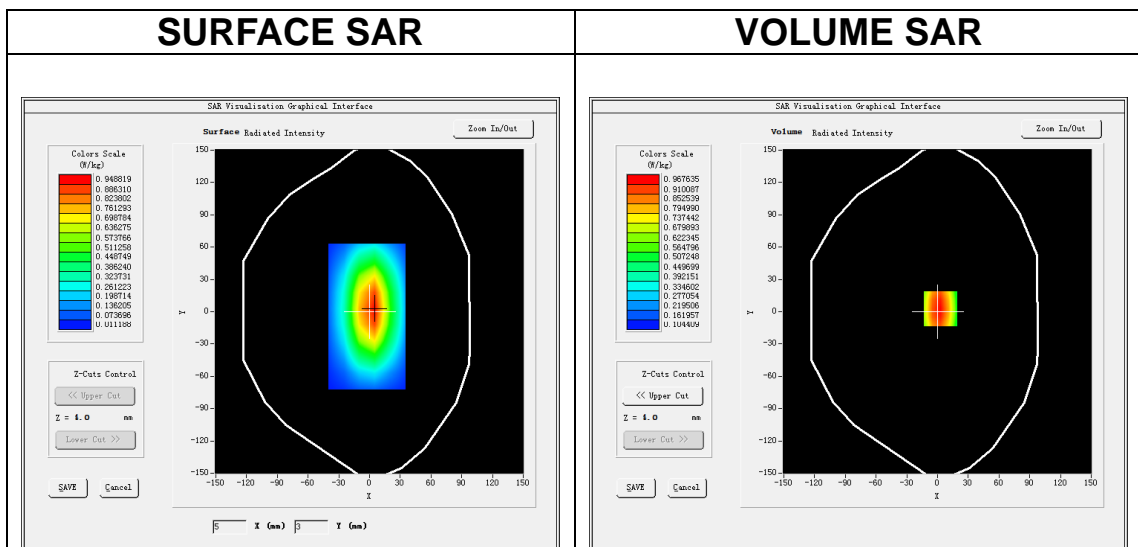

**Maximum location: X=3.00, Y=3.00**

**SAR Peak: 1.30 W/kg**

<b>SAR 10g (W/Kg)</b>	0.619158
<b>SAR 1g (W/Kg)</b>	0.963222

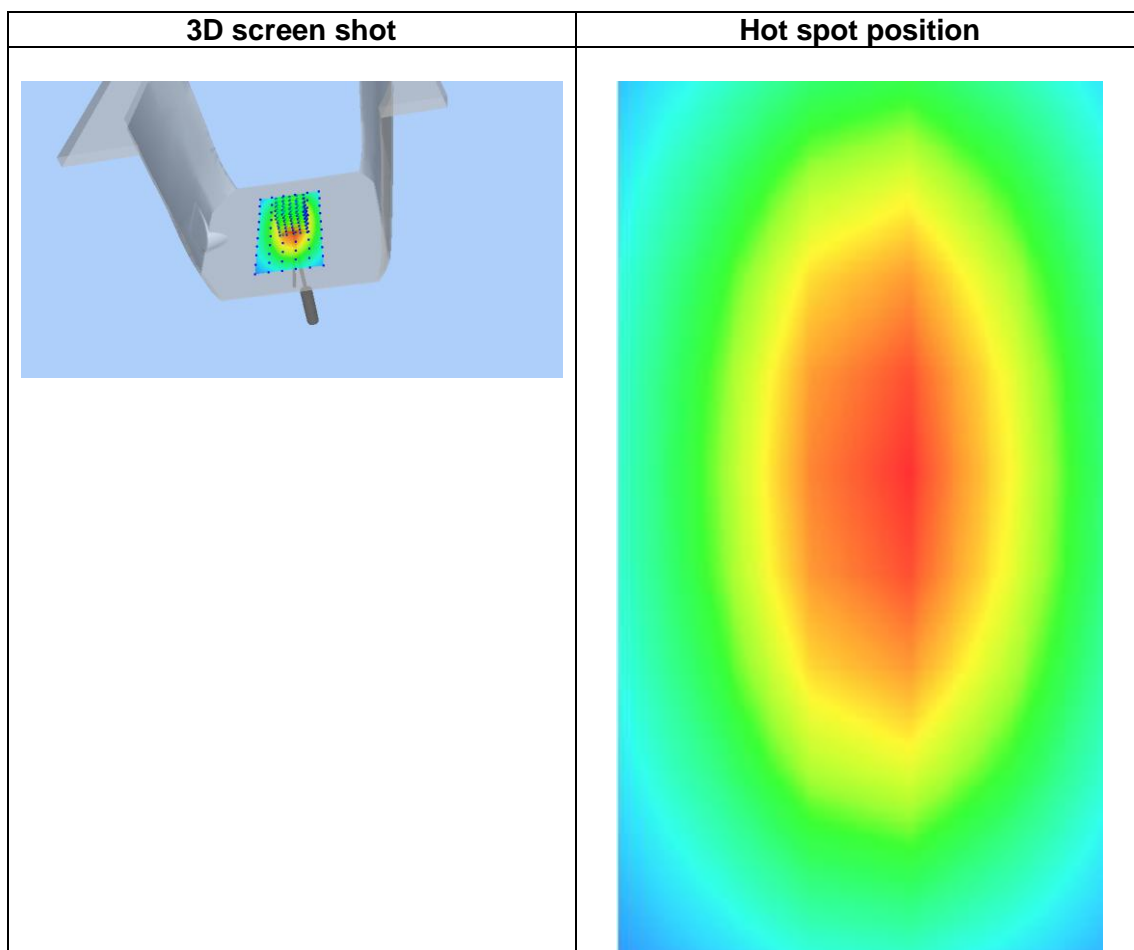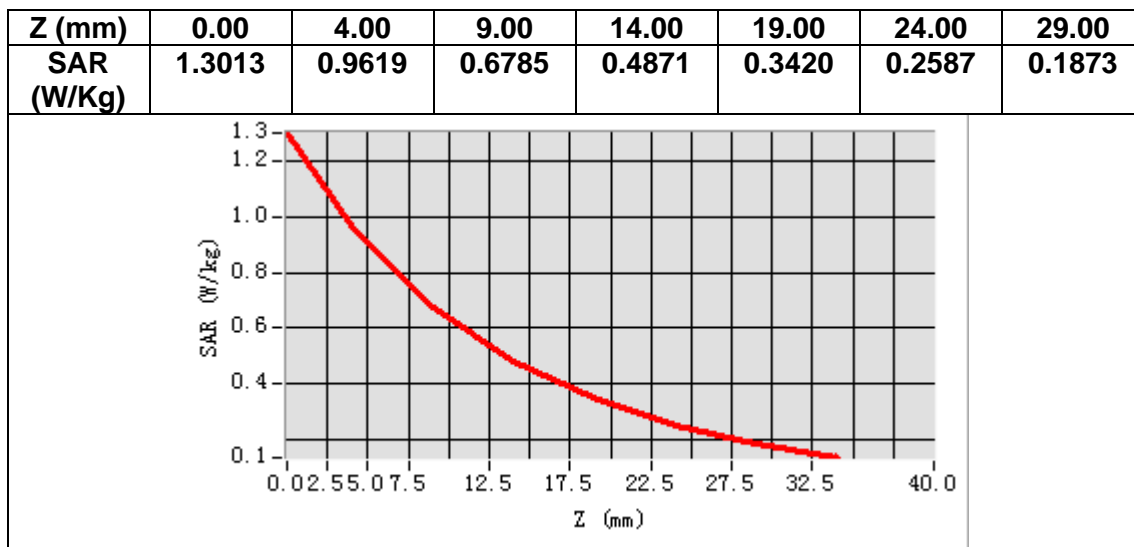

# MEASUREMENT 2


Date of measurement: 24/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Dipole</u>
<b>Band</b>	<u>CW1800</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>CW (Crest factor: 1.0)</u>

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1800.000000
<b>Relative permittivity (real part)</b>	39.203258
<b>Relative permittivity (imaginary part)</b>	13.912569
<b>Conductivity (S/m)</b>	1.391257
<b>Variation (%)</b>	-1.080000

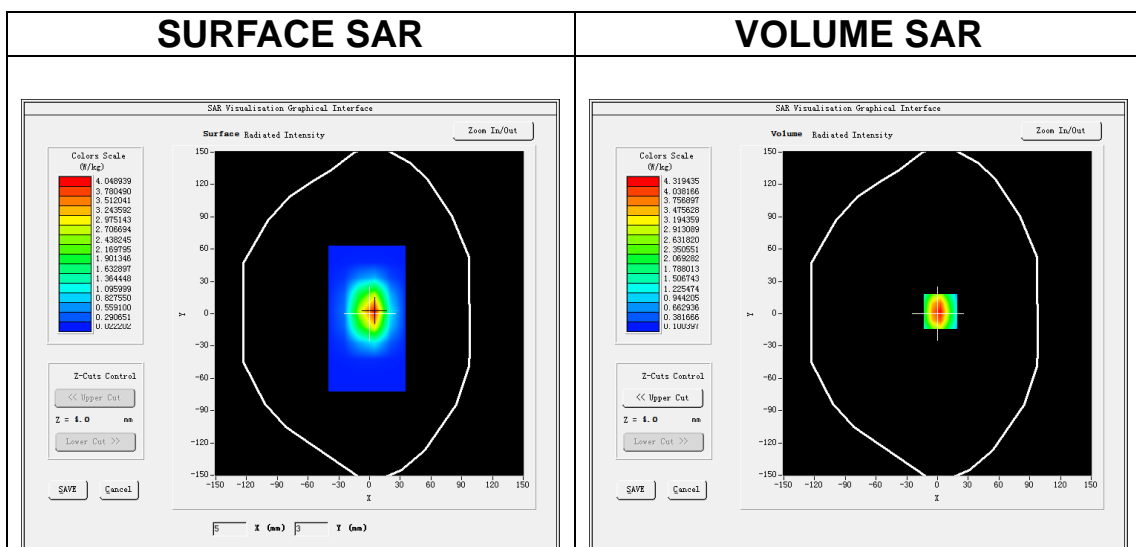




**Maximum location: X=3.00, Y=2.00**

**SAR Peak: 6.82 W/kg**

<b>SAR 10g (W/Kg)</b>	2.052321
<b>SAR 1g (W/Kg)</b>	3.727203

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.7453	4.3154	2.4350	1.4252	0.8599	0.5298	0.3248

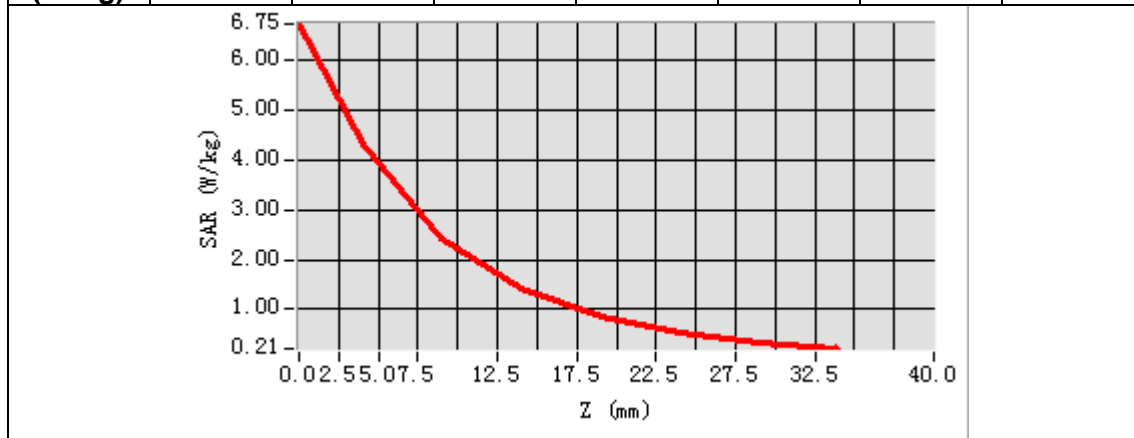

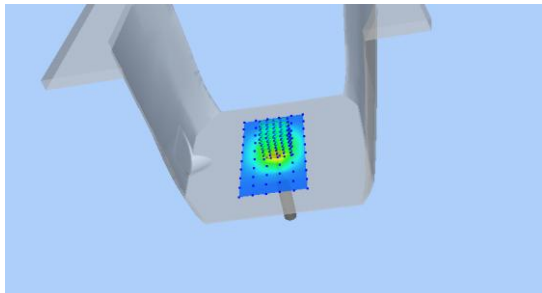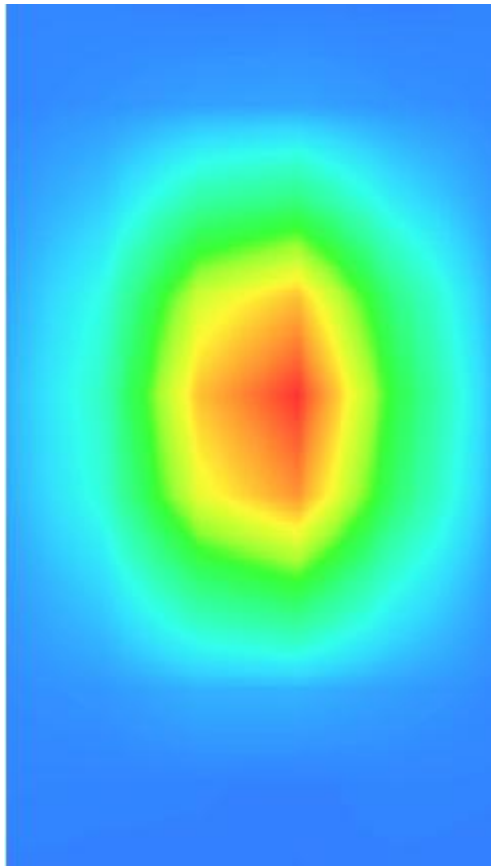3D screen shot	Hot spot position
	



# MEASUREMENT 3


Date of measurement: 30/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Dipole</u>
<b>Band</b>	<u>CW1900</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>CW (Crest factor: 1.0)</u>

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1900.000000
<b>Relative permittivity (real part)</b>	38.793900
<b>Relative permittivity (imaginary part)</b>	13.840659
<b>Conductivity (S/m)</b>	1.460958
<b>Variation (%)</b>	1.540000

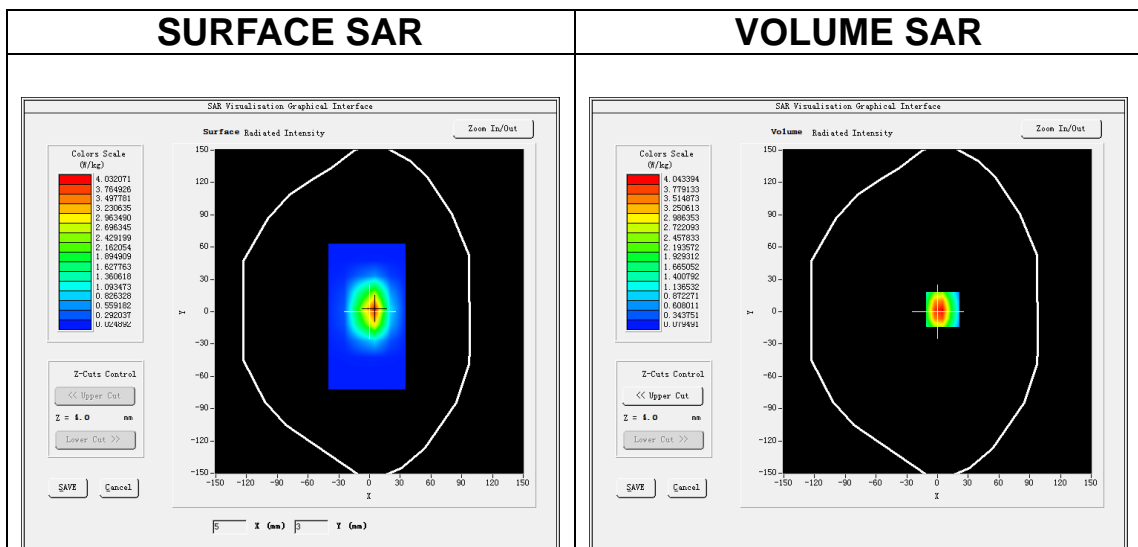


**Maximum location: X=5.00, Y=2.00**

**SAR Peak: 6.70 W/kg**

<b>SAR 10g (W/Kg)</b>	2.102249
<b>SAR 1g (W/Kg)</b>	4.364252

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.3211	4.0423	2.2653	1.3028	0.7633	0.4548	0.2747

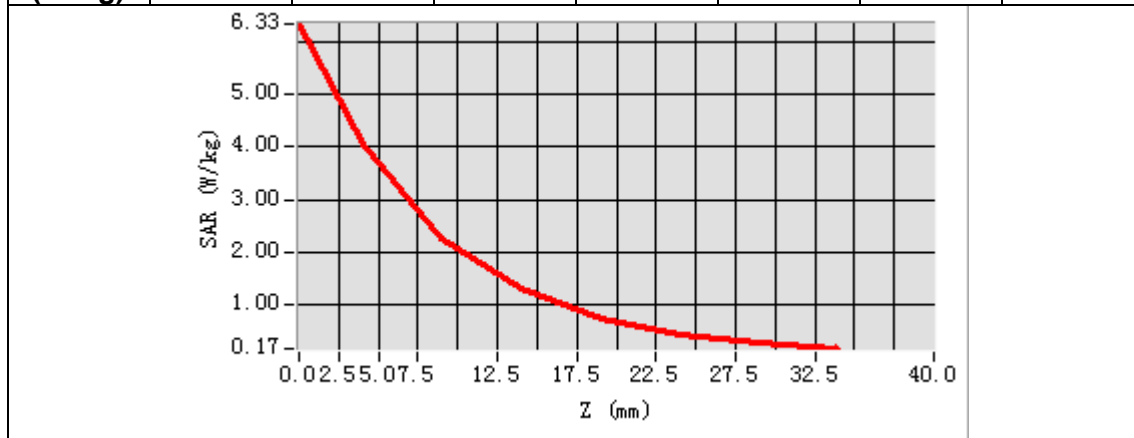

3D screen shot	Hot spot position
<p>A 3D perspective view of a grey mechanical device. A small rectangular area on the front face is highlighted with a color-coded grid, showing a central red/yellow hot spot that transitions to green and then blue towards the edges.</p>	<p>A 2D heatmap showing a circular region of high intensity (red/yellow) in the center, surrounded by concentric rings of decreasing intensity (green, cyan, blue) against a dark blue background.</p>

# MEASUREMENT 4


Date of measurement: 15/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Dipole</u>
<b>Band</b>	<u>CW2450</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>CW (Crest factor: 1.0)</u>

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2450.000000
<b>Relative permittivity (real part)</b>	40.199355
<b>Relative permittivity (imaginary part)</b>	13.438397
<b>Conductivity (S/m)</b>	1.829115
<b>Variation (%)</b>	0.660000

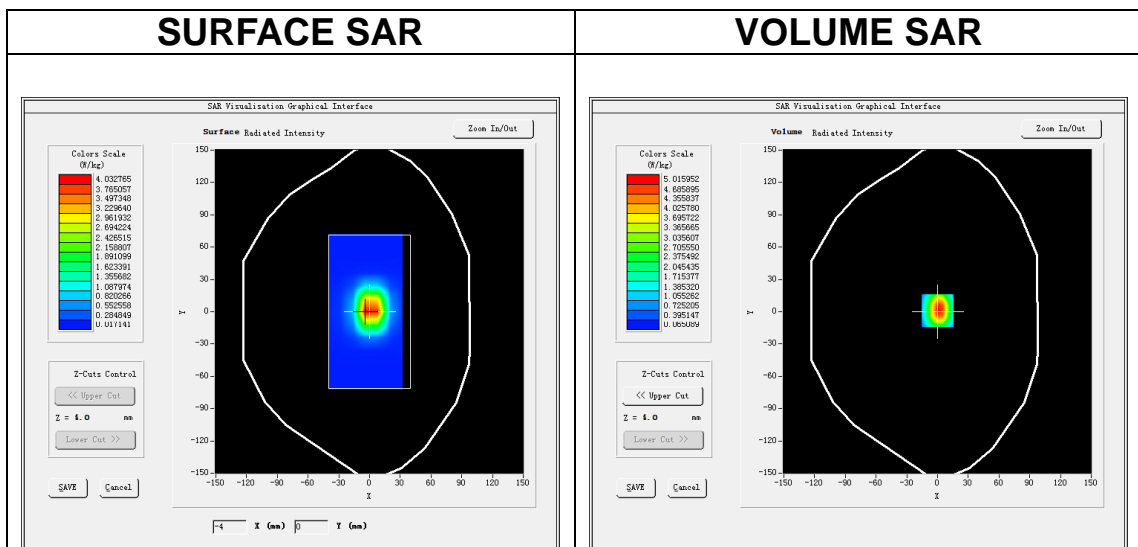




**Maximum location: X=0.00, Y=1.00**

**SAR Peak: 8.14 W/kg**

<b>SAR 10g (W/Kg)</b>	2.488157
<b>SAR 1g (W/Kg)</b>	5.744305

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	8.0374	5.0192	2.6968	1.4823	0.8302	0.4697	0.2656

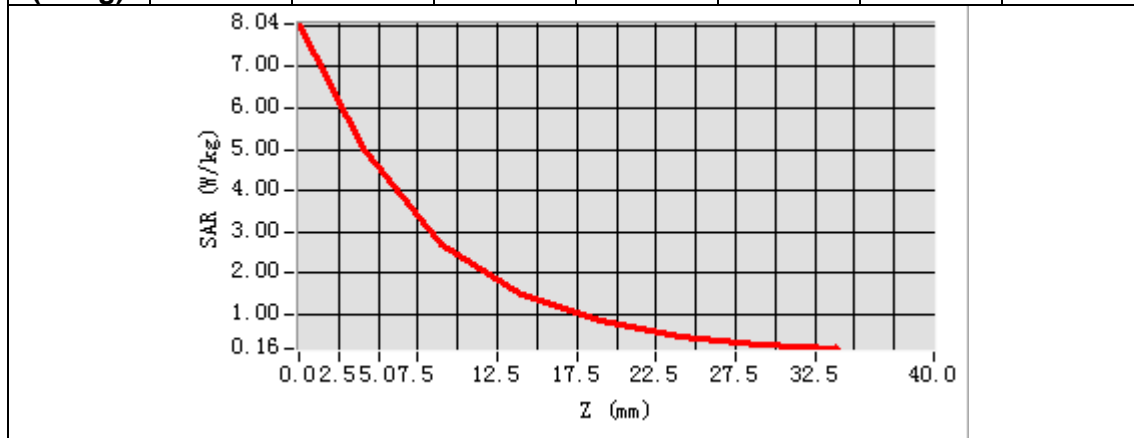

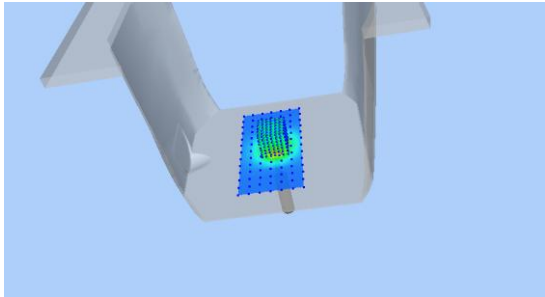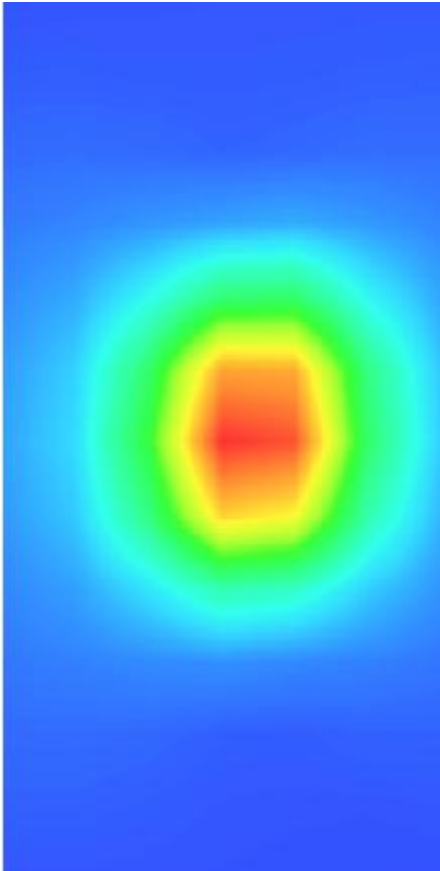3D screen shot	Hot spot position
	

# MEASUREMENT 5


Date of measurement: 17/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Dipole</u>
<b>Band</b>	<u>CW2600</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>CW (Crest factor: 1.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	2600.000000
<b>Relative permittivity (real part)</b>	39.504364
<b>Relative permittivity (imaginary part)</b>	13.772666
<b>Conductivity (S/m)</b>	1.989385
<b>Variation (%)</b>	-0.680000

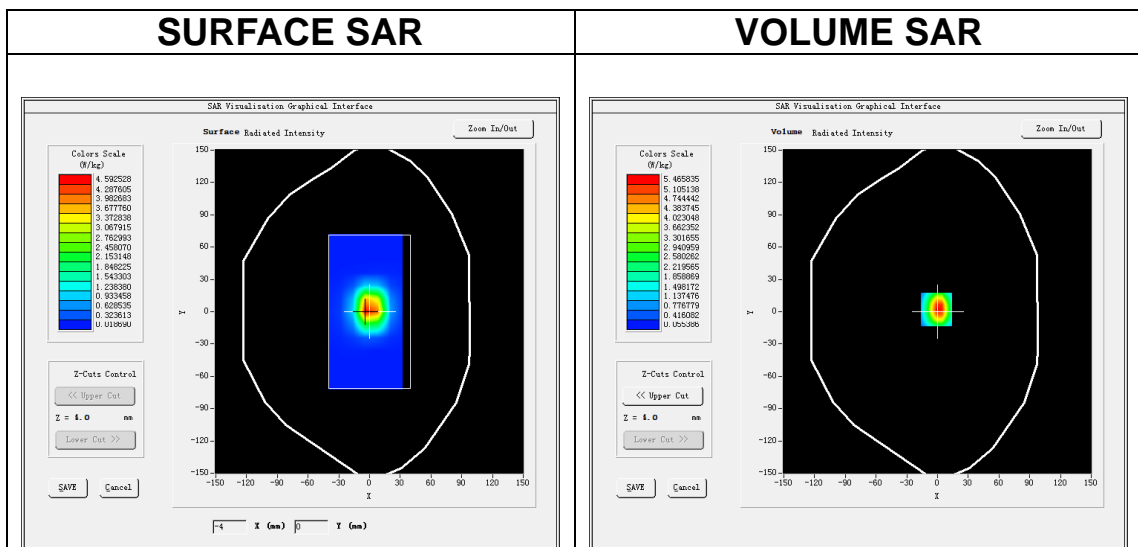

**Maximum location: X=-1.00, Y=2.00**

**SAR Peak: 9.07 W/kg**

<b>SAR 10g (W/Kg)</b>	2.532045
<b>SAR 1g (W/Kg)</b>	5.680270

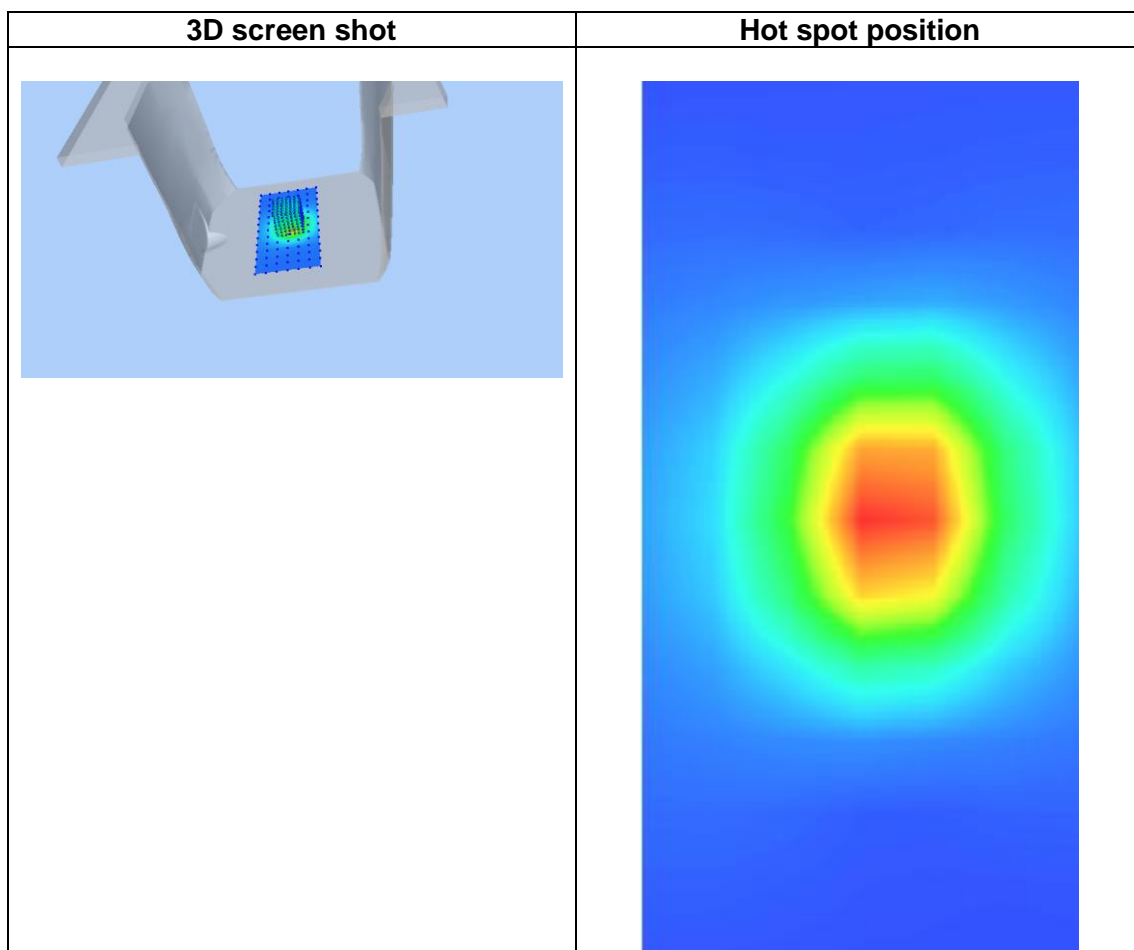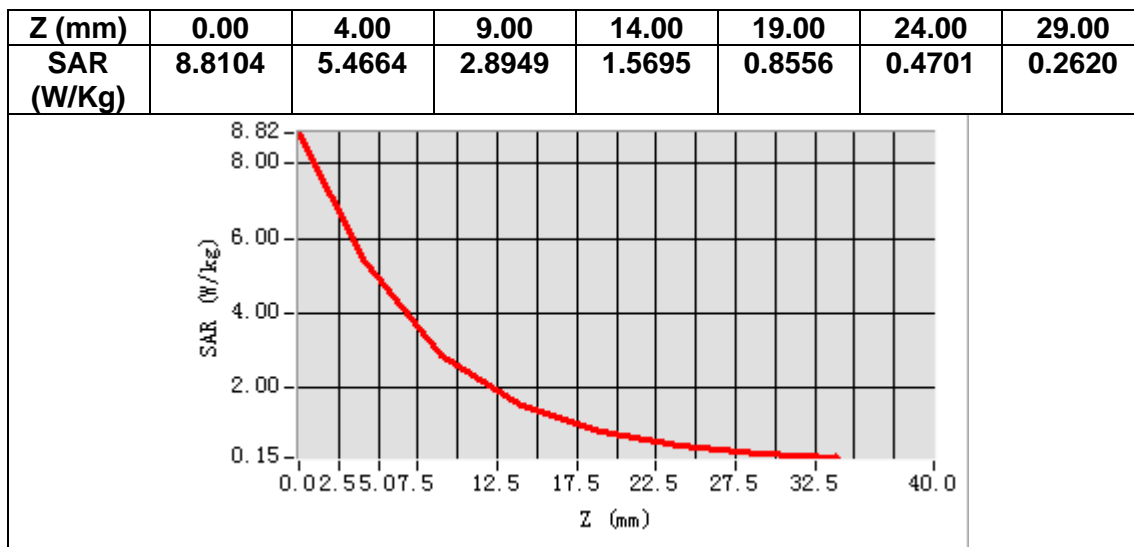

# MEASUREMENT 6


Date of measurement: 22/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Dipole</u>
<b>Band</b>	<u>CW835</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>CW (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.50</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	835.000000
<b>Relative permittivity (real part)</b>	40.851013
<b>Relative permittivity (imaginary part)</b>	19.567467
<b>Conductivity (S/m)</b>	0.907713
<b>Variation (%)</b>	1.260000

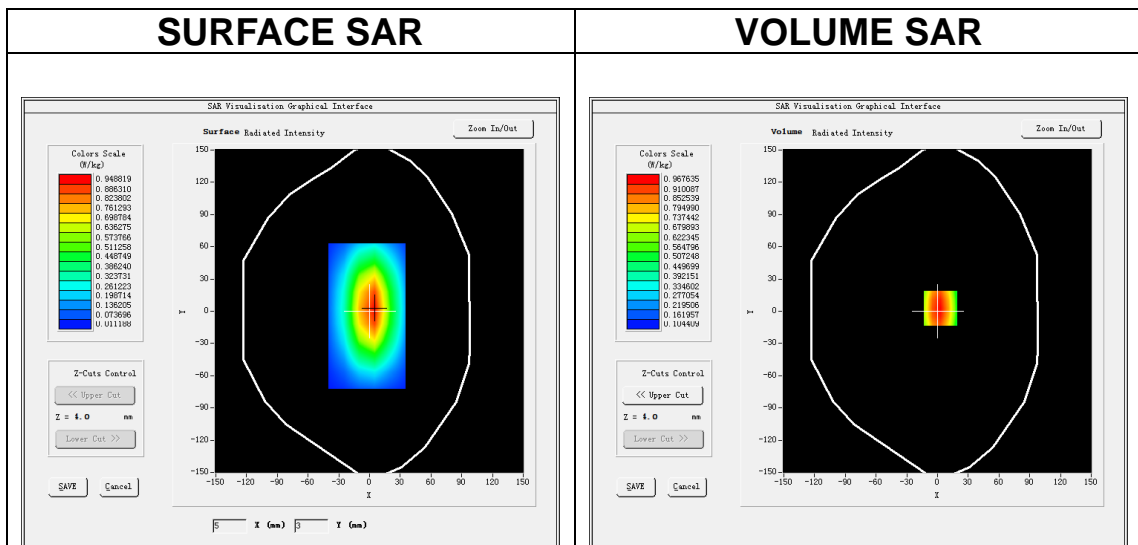

**Maximum location: X=3.00, Y=3.00**  
**SAR Peak: 1.30 W/Kg**

<b>SAR 10g (W/Kg)</b>	0.658142
<b>SAR 1g (W/Kg)</b>	1.009105

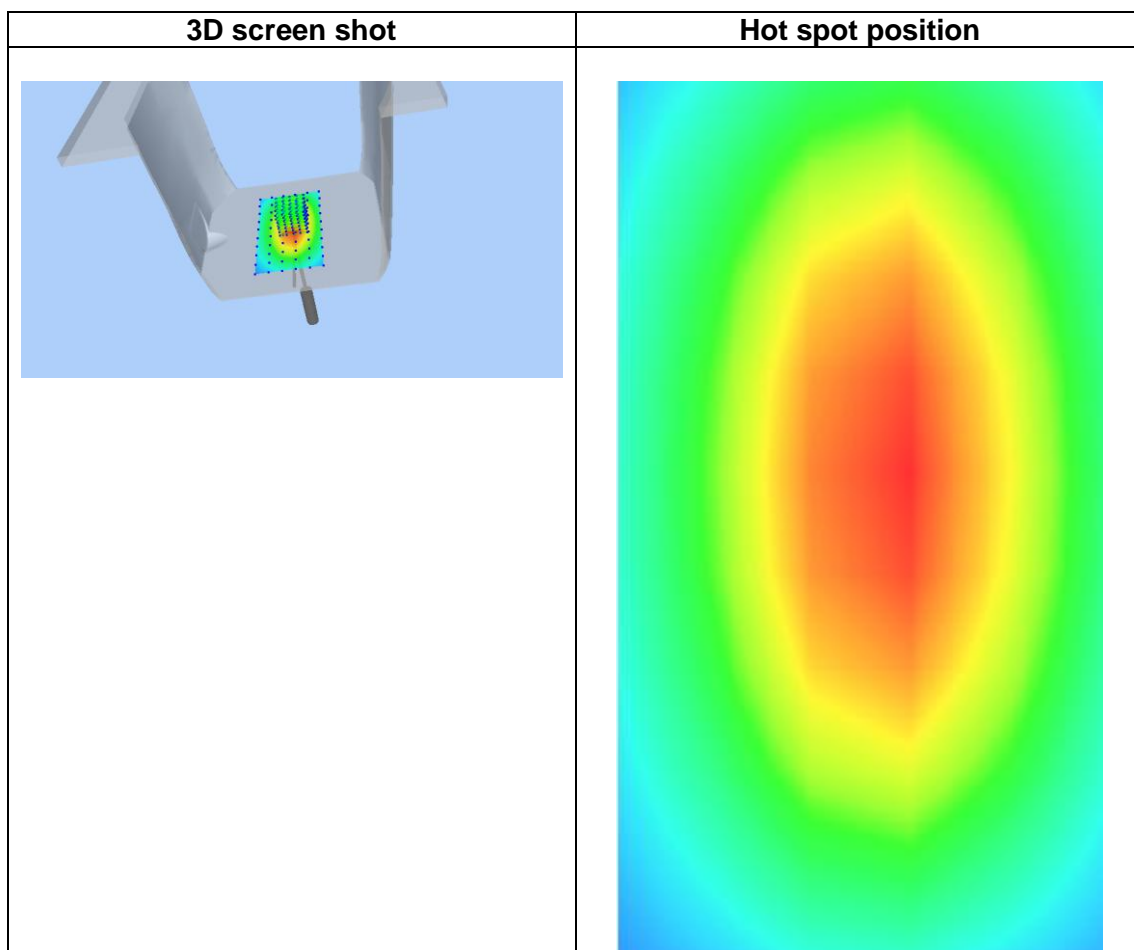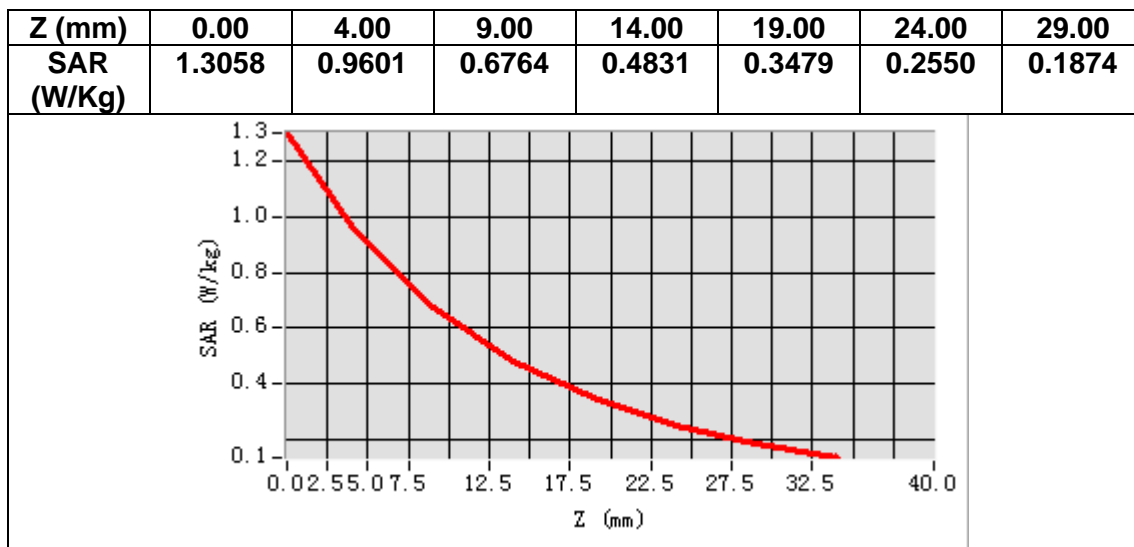



# MEASUREMENT 7


Date of measurement: 12/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Dipole</u>
<b>Band</b>	<u>CW1800</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>CW (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.73</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1800.000000
<b>Relative permittivity (real part)</b>	38.939563
<b>Relative permittivity (imaginary part)</b>	14.081262
<b>Conductivity (S/m)</b>	1.408126
<b>Variation (%)</b>	-2.640000

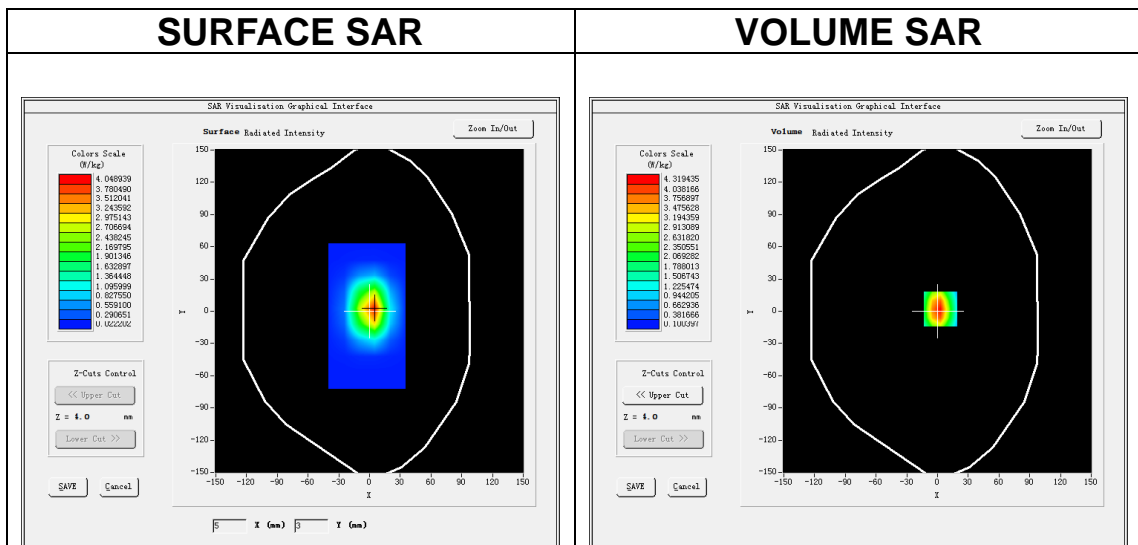

**Maximum location: X=3.00, Y=2.00**  
**SAR Peak: 6.82 W/kg**

<b>SAR 10g (W/Kg)</b>	1.864042
<b>SAR 1g (W/Kg)</b>	3.913104

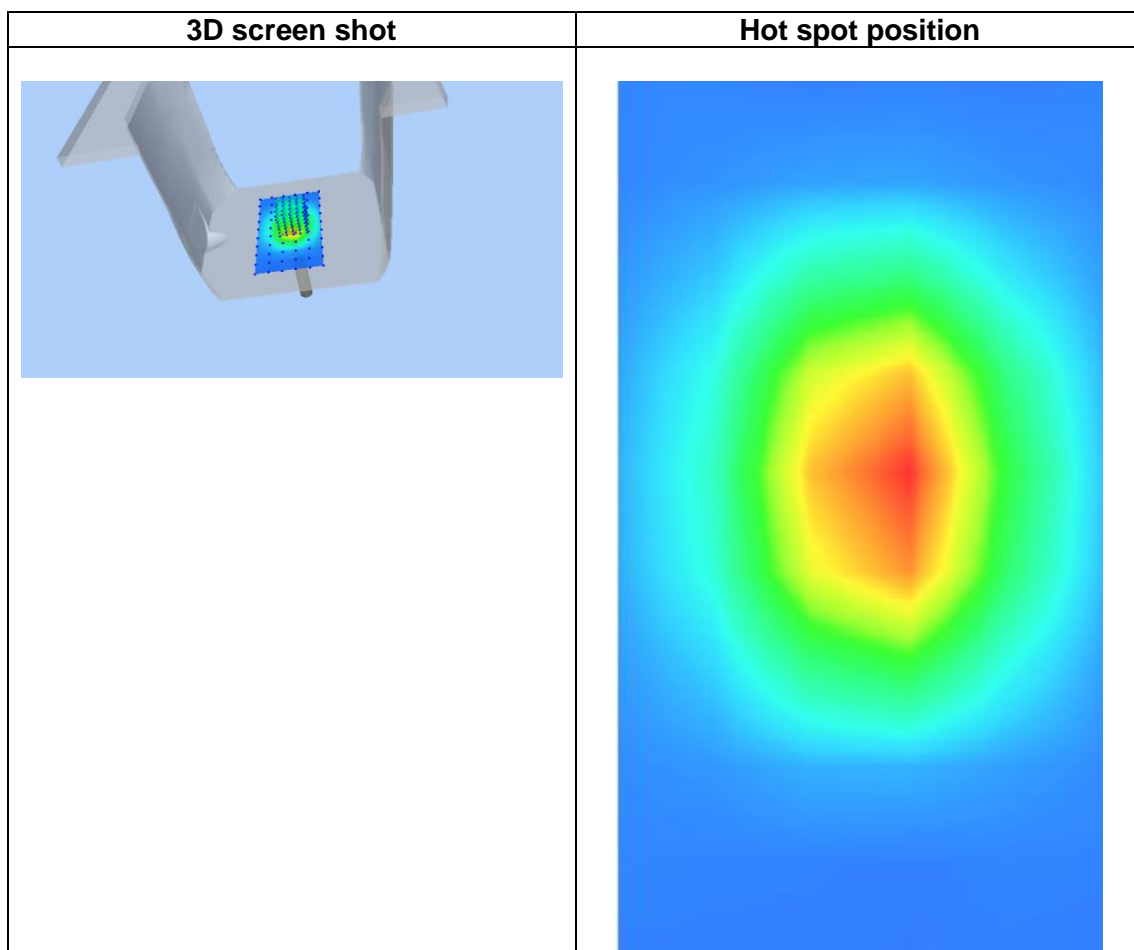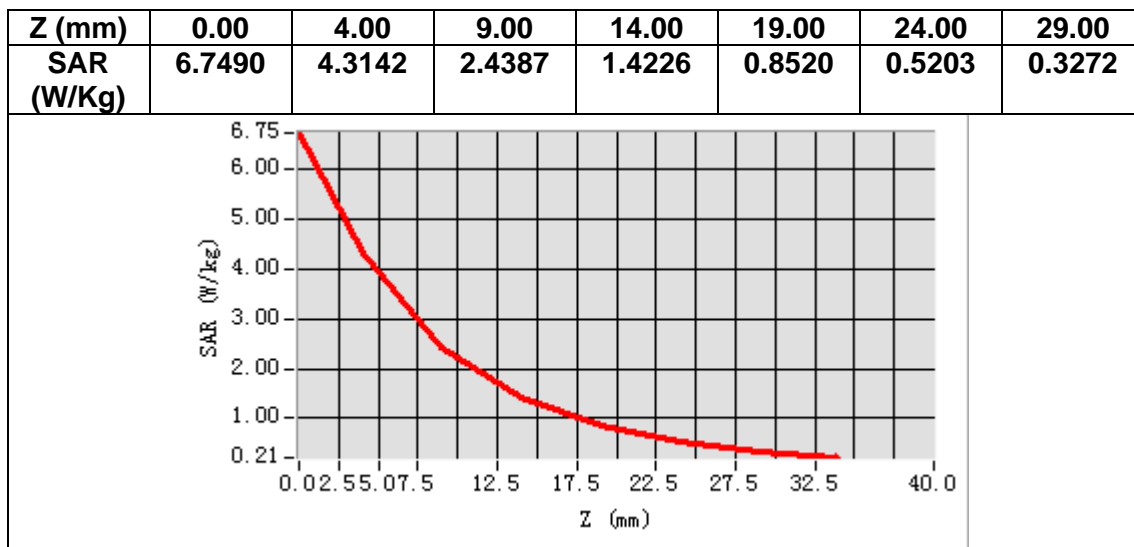

# MEASUREMENT 8


Date of measurement: 17/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Dipole</u>
<b>Band</b>	<u>CW2600</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>CW (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.87</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2600.000000
<b>Relative permittivity (real part)</b>	38.103742
<b>Relative permittivity (imaginary part)</b>	13.779907
<b>Conductivity (S/m)</b>	1.990431
<b>Variation (%)</b>	-2.350000

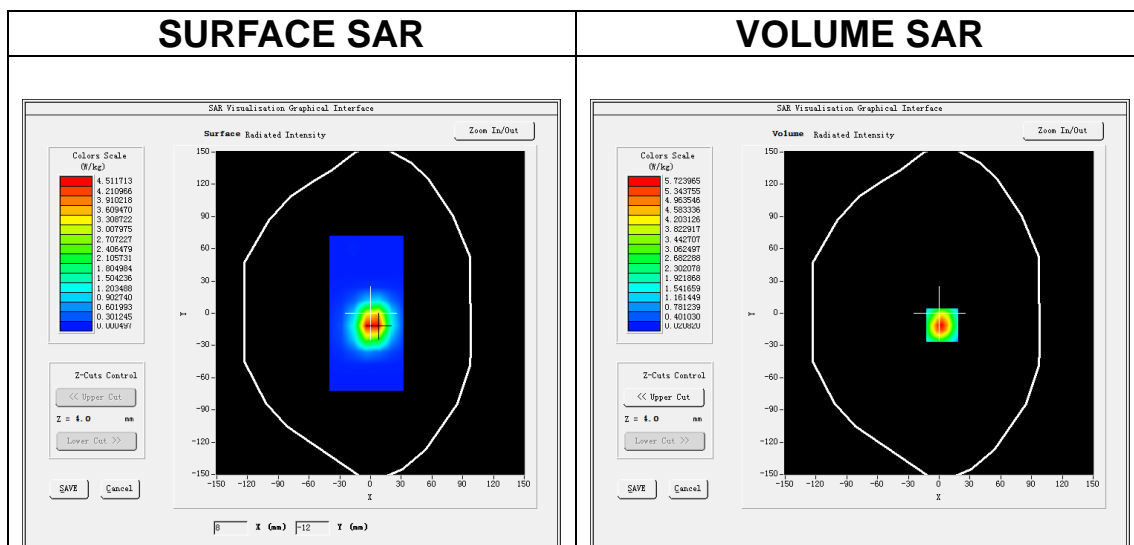

**Maximum location: X=3.00, Y=-11.00**  
**SAR Peak: 10.29 W/kg**

<b>SAR 10g (W/Kg)</b>	2.212042
<b>SAR 1g (W/Kg)</b>	5.159310

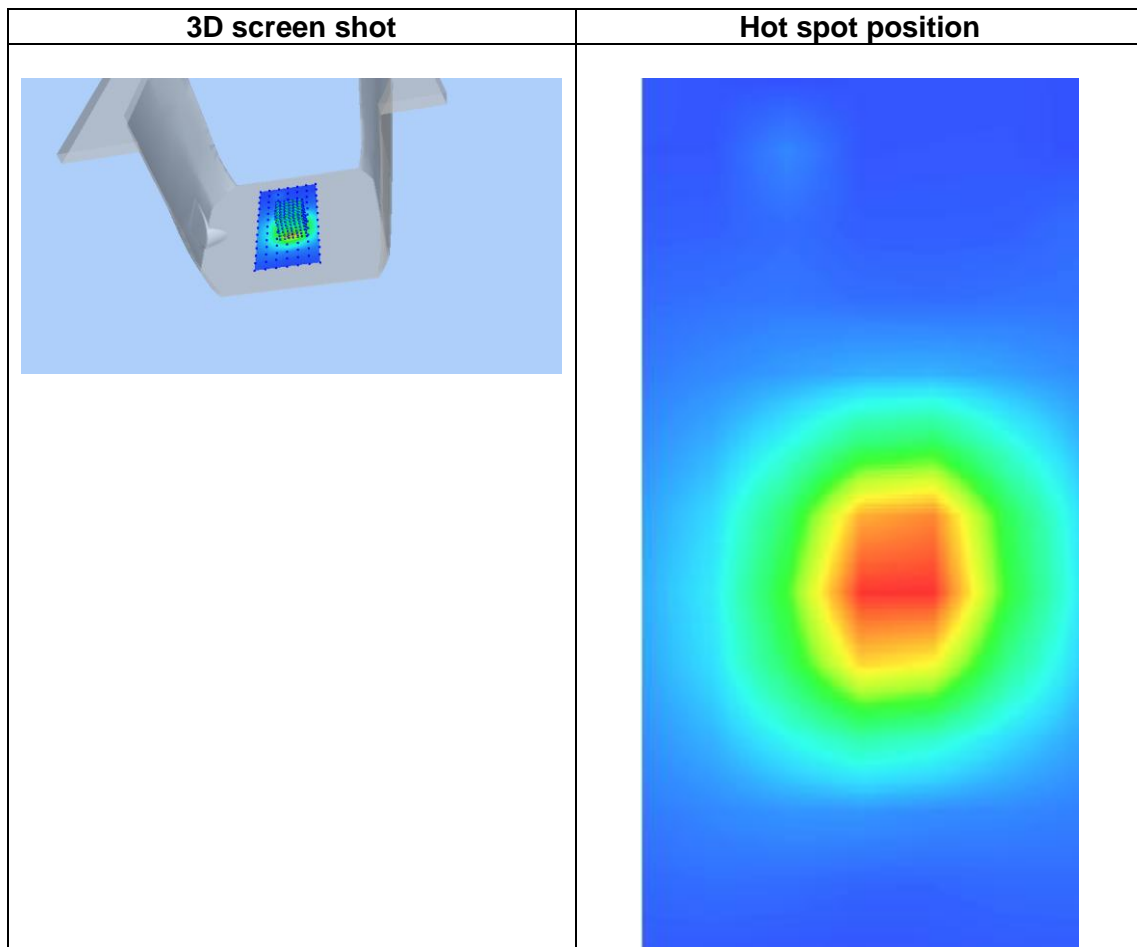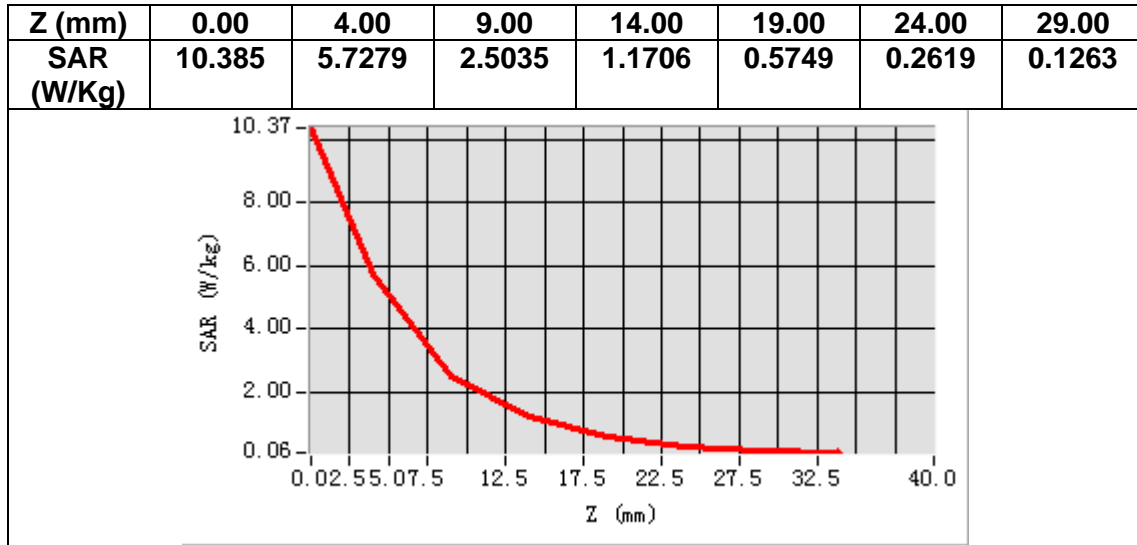

### 13. Appendix C. Plots of High SAR Measurement

Table of contents
<b>MEASUREMENT 1 GSM 850 Head</b>
<b>MEASUREMENT 2 GSM 850 Body</b>
<b>MEASUREMENT 3 GSM 1900 Head</b>
<b>MEASUREMENT 4 GSM 1900 Body</b>
<b>MEASUREMENT 5 WCDMA Band 2 Head</b>
<b>MEASUREMENT 6 WCDMA Band 2 Body</b>
<b>MEASUREMENT 7 WCDMA Band 4 Head</b>
<b>MEASUREMENT 8 WCDMA Band 4 Body</b>
<b>MEASUREMENT 9 WCDMA Band 5 Head</b>
<b>MEASUREMENT 10 WCDMA Band 5 Body</b>
<b>MEASUREMENT 11 WLAN 2.4G Head</b>
<b>MEASUREMENT 12 WLAN 2.4G Body</b>
<b>MEASUREMENT 13 LTE Band 2 Head</b>
<b>MEASUREMENT 14 LTE Band 2 Body</b>
<b>MEASUREMENT 15 LTE Band 4 Head</b>
<b>MEASUREMENT 16 LTE Band 4 Body</b>
<b>MEASUREMENT 17 LTE Band 5 Head</b>
<b>MEASUREMENT 18 LTE Band 5 Body</b>
<b>MEASUREMENT 19 LTE Band 7 Head</b>
<b>MEASUREMENT 20 LTE Band 7 Body</b>
<b>MEASUREMENT 21 LTE Band 26A Head</b>
<b>MEASUREMENT 22 LTE Band 26A Body</b>
<b>MEASUREMENT 23 LTE Band 26B Head</b>
<b>MEASUREMENT 24 LTE Band 26B Body</b>
<b>MEASUREMENT 25 LTE Band 38 Head</b>
<b>MEASUREMENT 26 LTE Band 38 Body</b>
<b>MEASUREMENT 27 LTE Band 66 Head</b>
<b>MEASUREMENT 28 LTE Band 66 Body</b>

# MEASUREMENT 1


Date of measurement: 29/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>GSM850</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>TDMA (Crest factor: 4.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	836.400000
<b>Relative permittivity (real part)</b>	42.582199
<b>Relative permittivity (imaginary part)</b>	20.055696
<b>Conductivity (S/m)</b>	0.931921
<b>Variation (%)</b>	0.310000

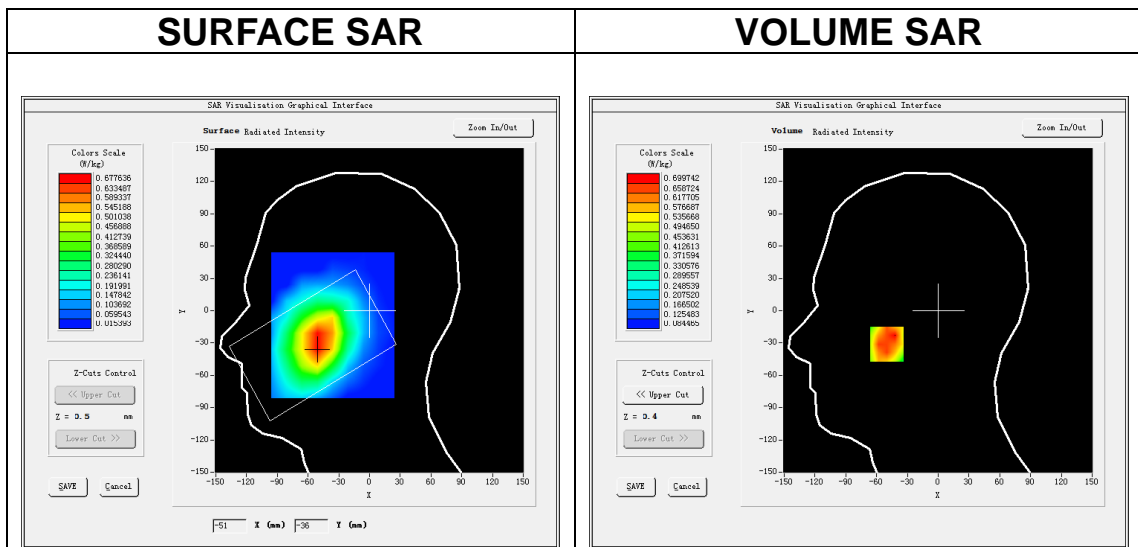

**Maximum location: X=-50.00, Y=-31.00**

**SAR Peak: 1.02 W/kg**

<b>SAR 10g (W/Kg)</b>	0.497014
<b>SAR 1g (W/Kg)</b>	0.655709

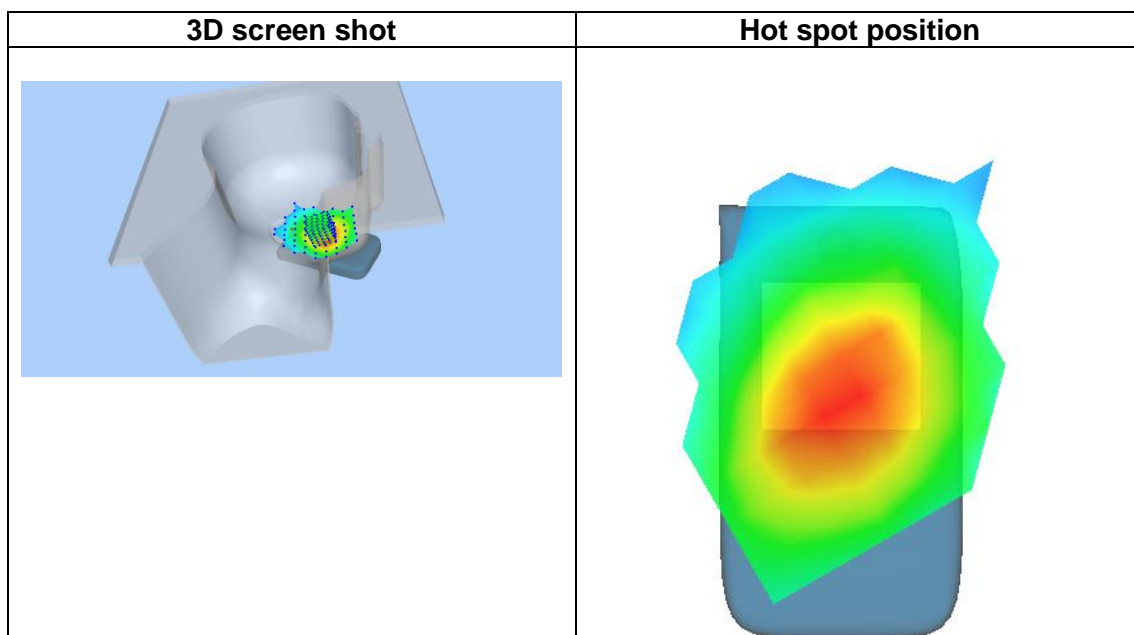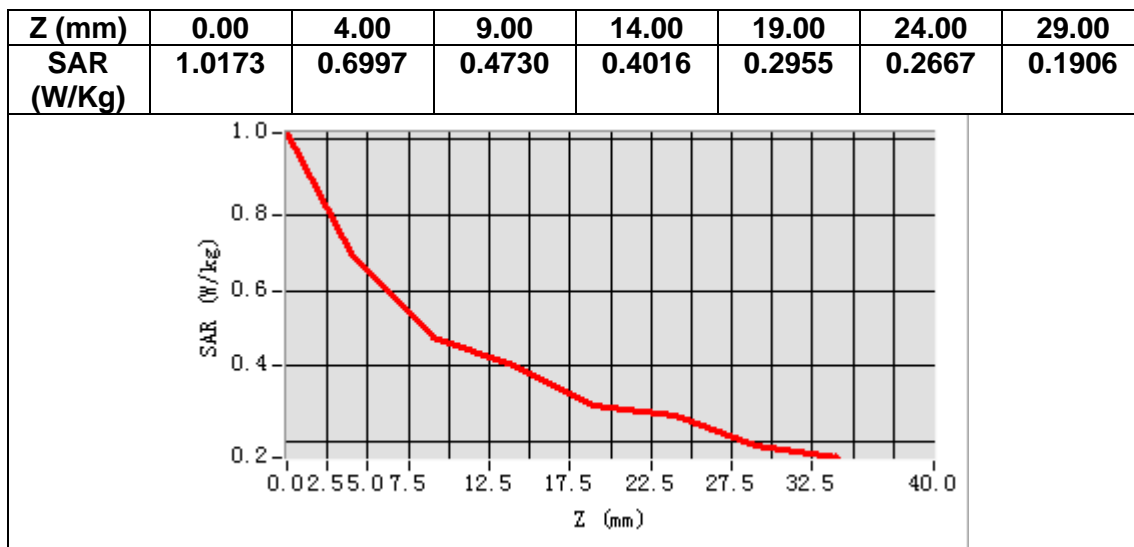

# MEASUREMENT 2


Date of measurement: 29/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>GSM850</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>TDMA (Crest factor: 4.0)</u>

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative permittivity (real part)</b>	42.582199
<b>Relative permittivity (imaginary part)</b>	20.055696
<b>Conductivity (S/m)</b>	0.931921
<b>Variation (%)</b>	0.590000


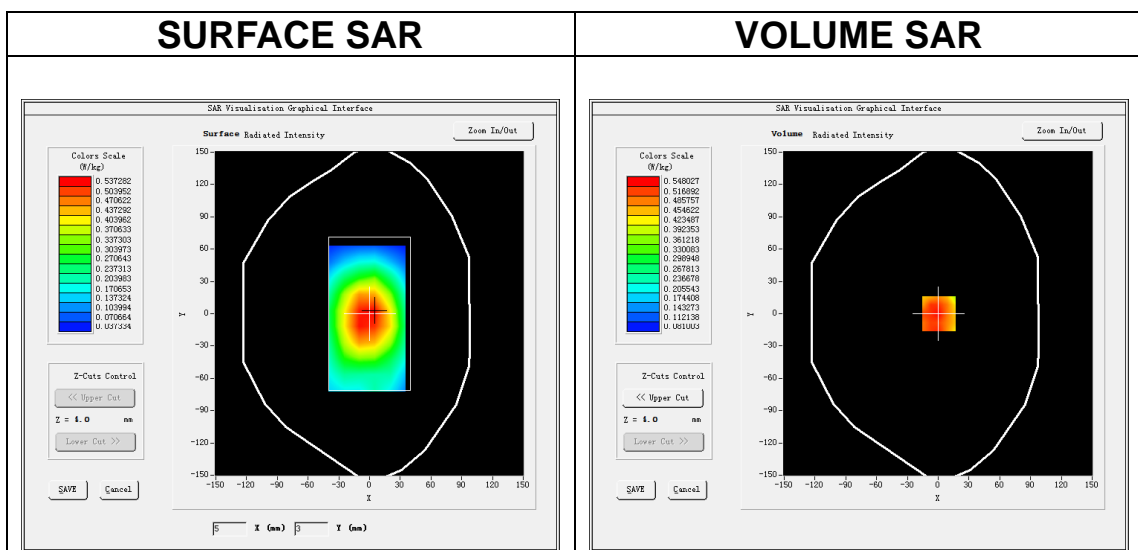


**Maximum location: X=1.00, Y=0.00**

**SAR Peak: 0.71 W/kg**

<b>SAR 10g (W/Kg)</b>	0.393459
<b>SAR 1g (W/Kg)</b>	0.536171



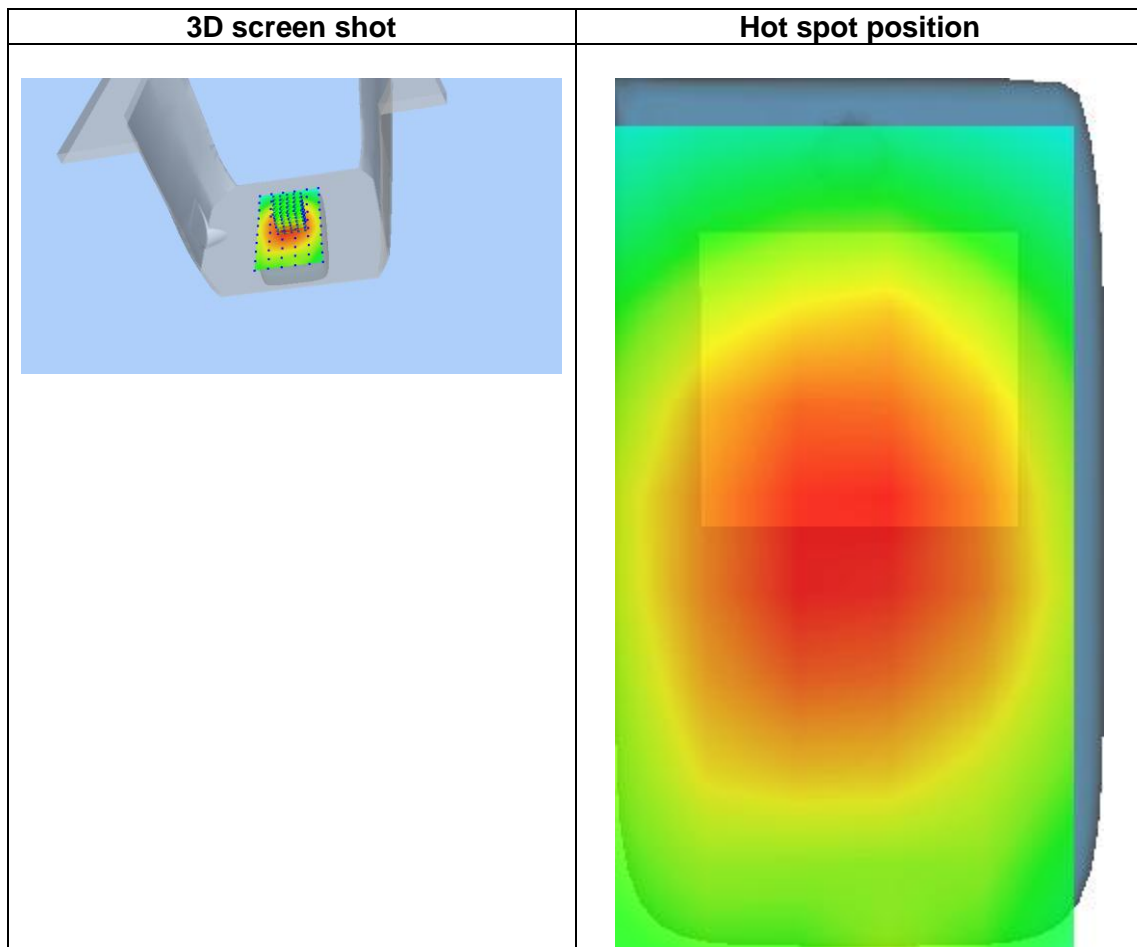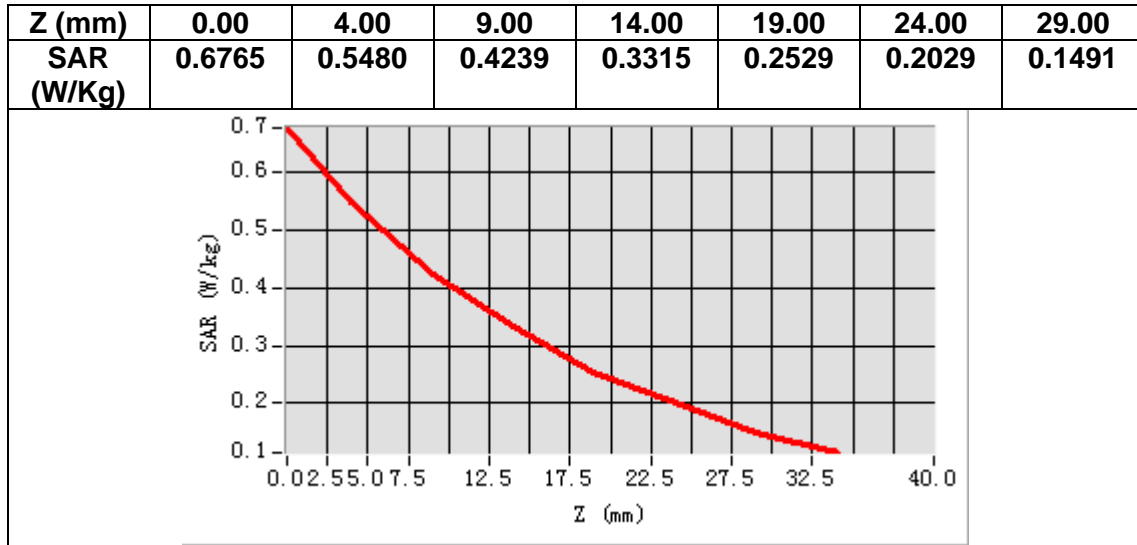

# MEASUREMENT 3


Date of measurement: 30/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>GSM1900</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>TDMA (Crest factor: 4.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	38.880299
<b>Relative permittivity (imaginary part)</b>	13.858459
<b>Conductivity (S/m)</b>	1.447439
<b>Variation (%)</b>	-1.560000

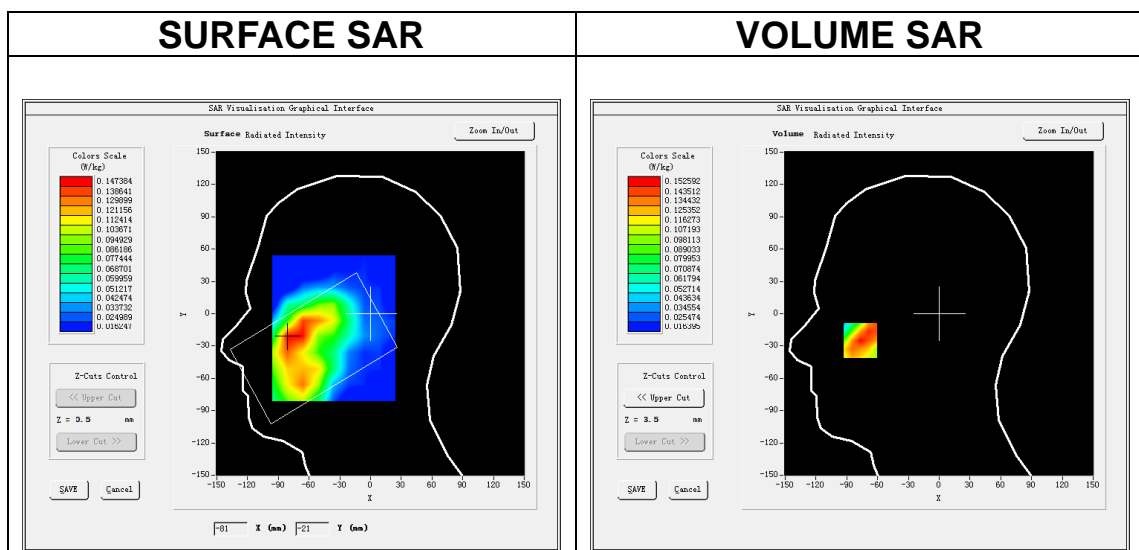

**Maximum location: X=-77.00, Y=-23.00**

**SAR Peak: 0.21 W/kg**

<b>SAR 10g (W/Kg)</b>	0.097211
<b>SAR 1g (W/Kg)</b>	0.146219

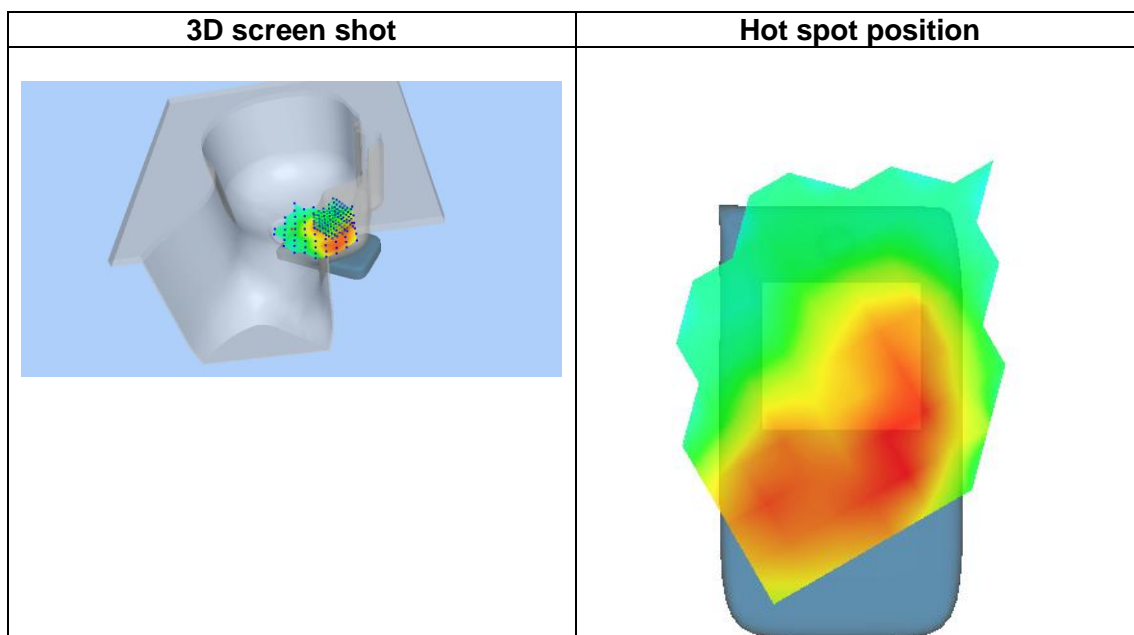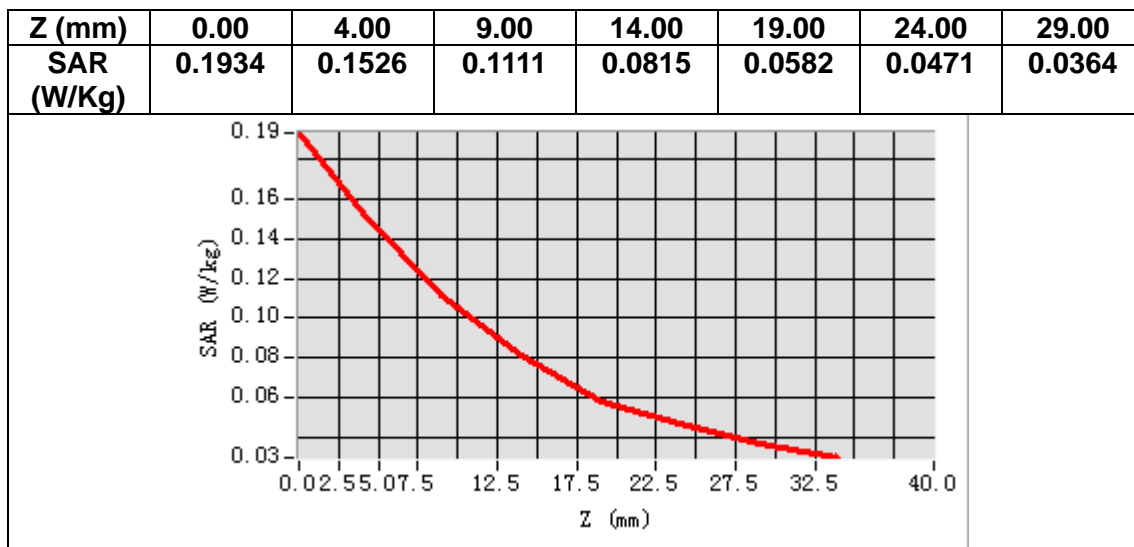

# MEASUREMENT 4


Date of measurement: 30/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>GSM1900</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>TDMA (Crest factor: 4.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	38.880299
<b>Relative permittivity (imaginary part)</b>	13.858459
<b>Conductivity (S/m)</b>	1.447439
<b>Variation (%)</b>	1.860000

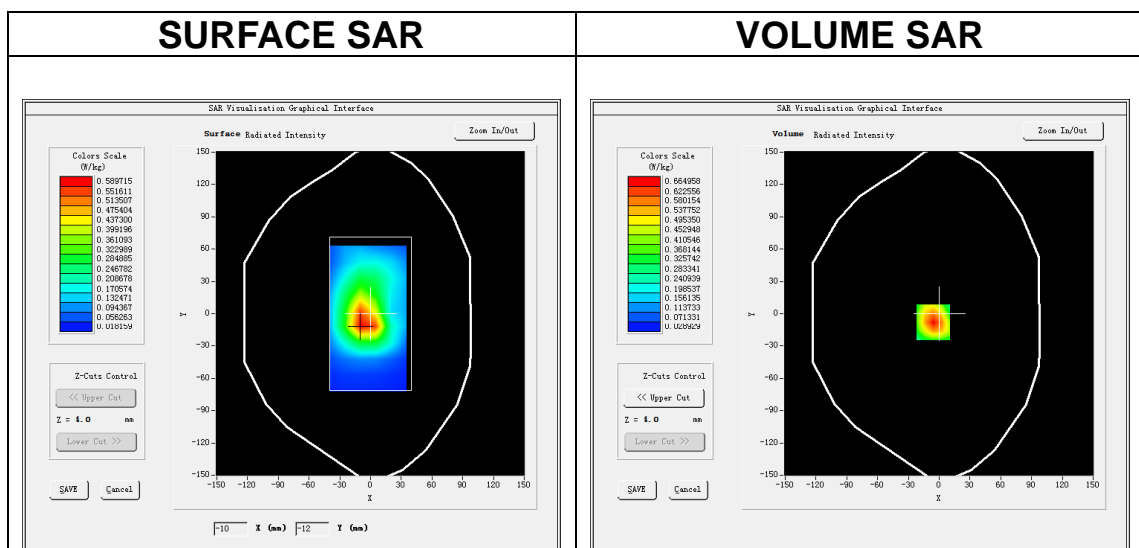

**Maximum location: X=-6.00, Y=-8.00**

**SAR Peak: 0.98 W/kg**

<b>SAR 10g (W/Kg)</b>	0.366569
<b>SAR 1g (W/Kg)</b>	0.641183

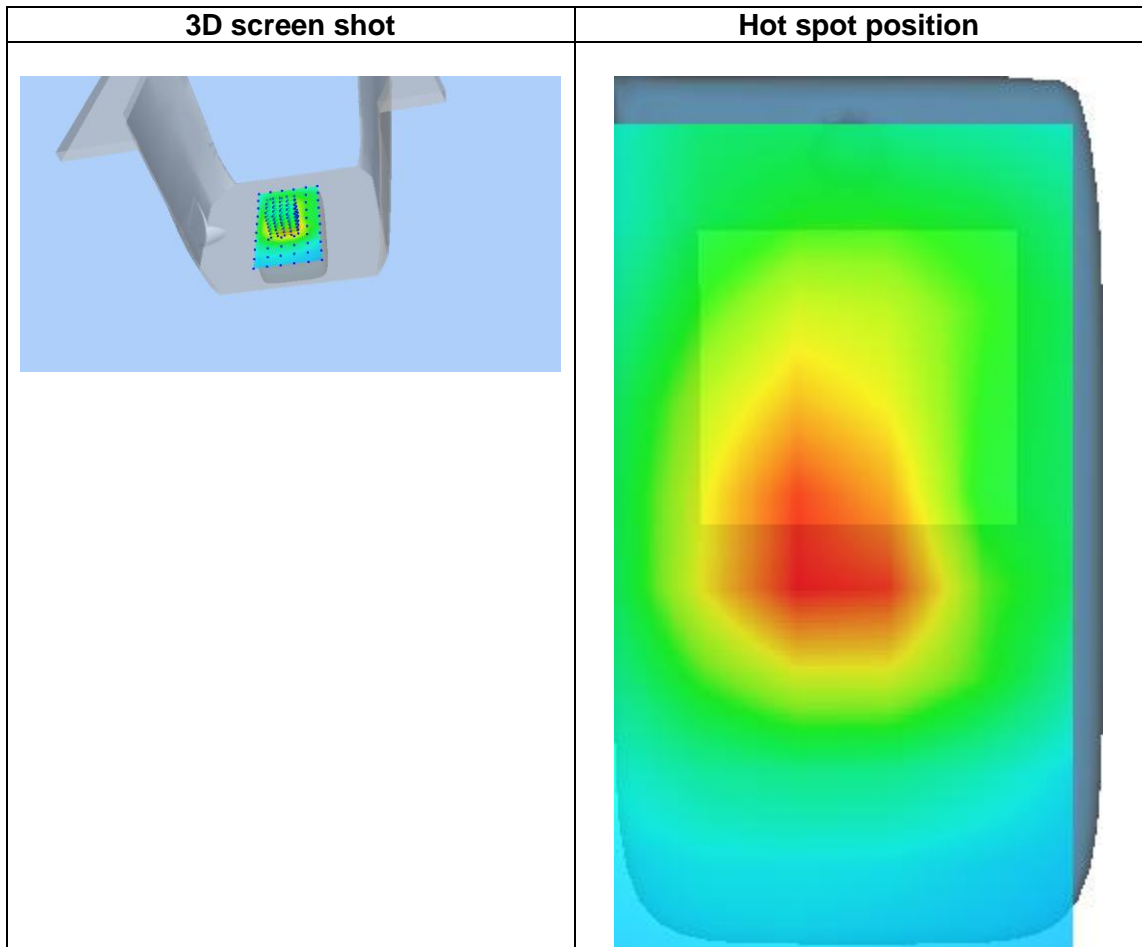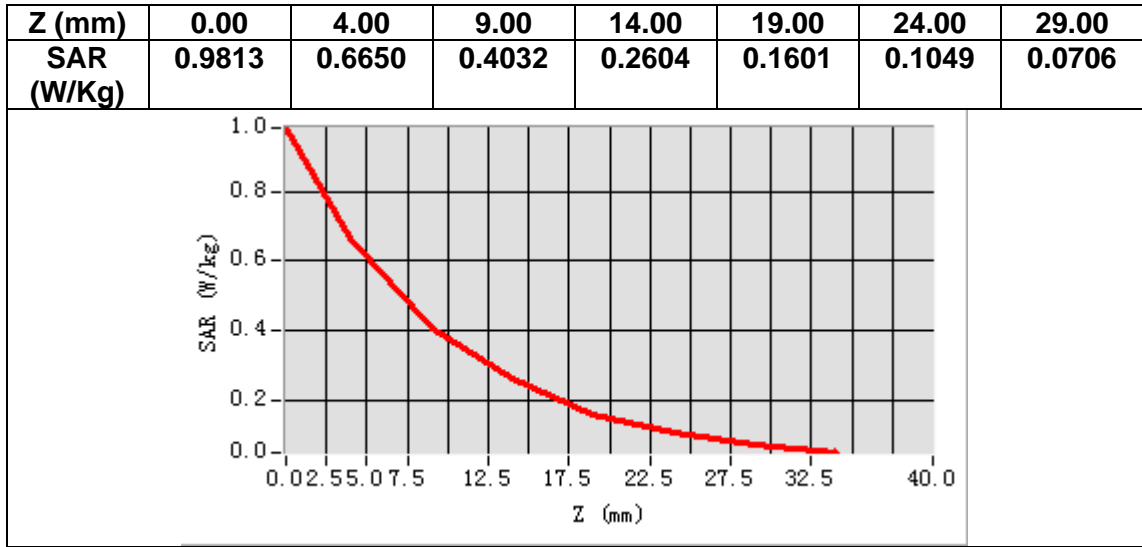

# MEASUREMENT 5


Date of measurement: 30/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>Band2 WCDMA1900</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	38.880299
<b>Relative permittivity (imaginary part)</b>	13.858459
<b>Conductivity (S/m)</b>	1.447439
<b>Variation (%)</b>	-0.050000

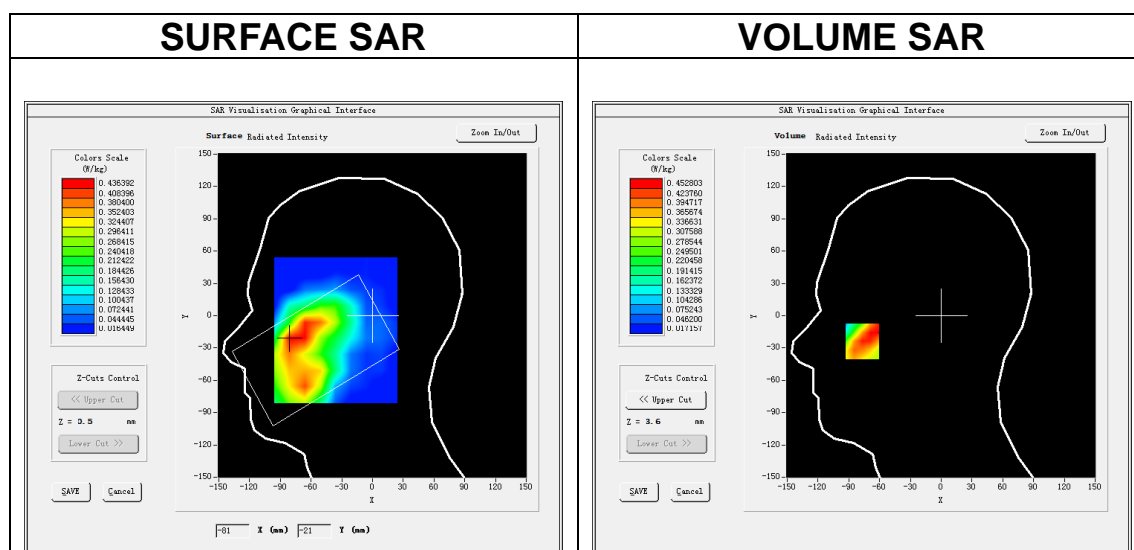

**Maximum location: X=-77.00, Y=-22.00**  
**SAR Peak: 0.65 W/kg**

<b>SAR 10g (W/Kg)</b>	0.282439
<b>SAR 1g (W/Kg)</b>	0.445695

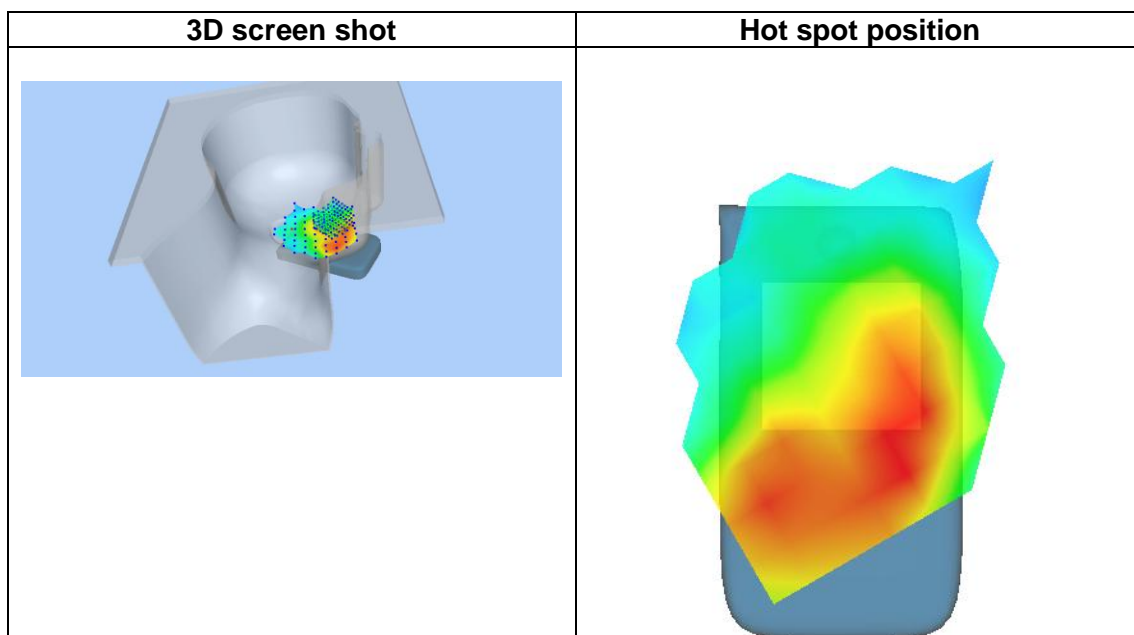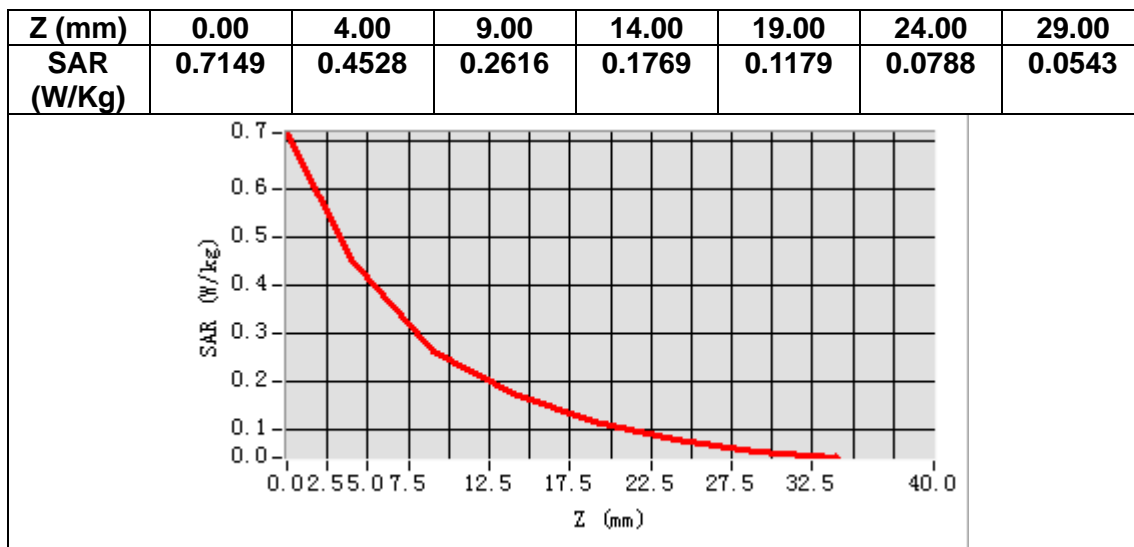

# MEASUREMENT 6


Date of measurement: 30/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>Band2 WCDMA1900</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	38.880299
<b>Relative permittivity (imaginary part)</b>	13.858459
<b>Conductivity (S/m)</b>	1.447439
<b>Variation (%)</b>	-0.270000


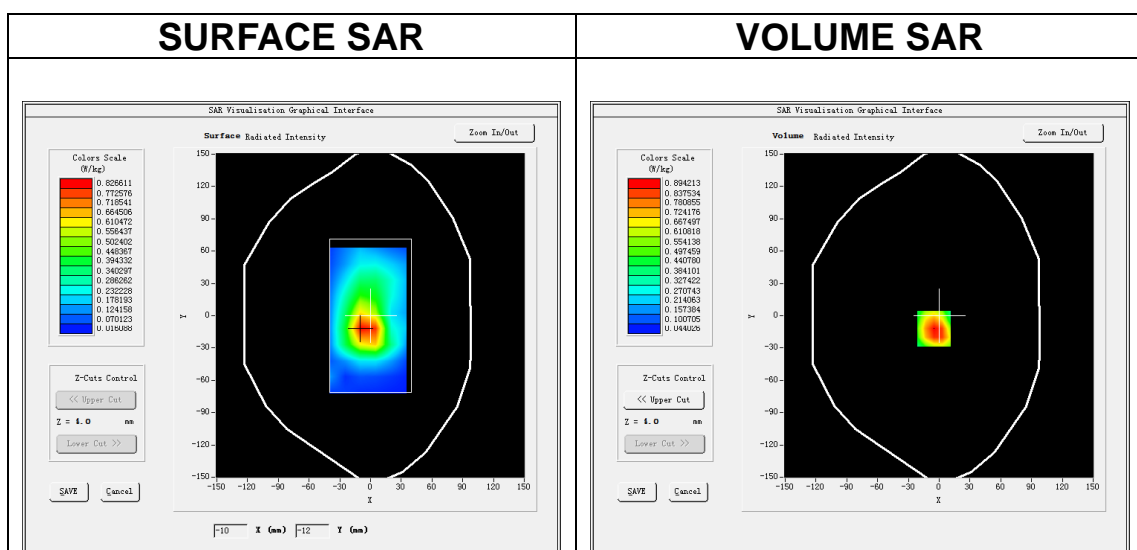


**Maximum location: X=-5.00, Y=-12.00**

**SAR Peak: 1.26 W/kg**

<b>SAR 10g (W/Kg)</b>	0.534188
<b>SAR 1g (W/Kg)</b>	0.886147



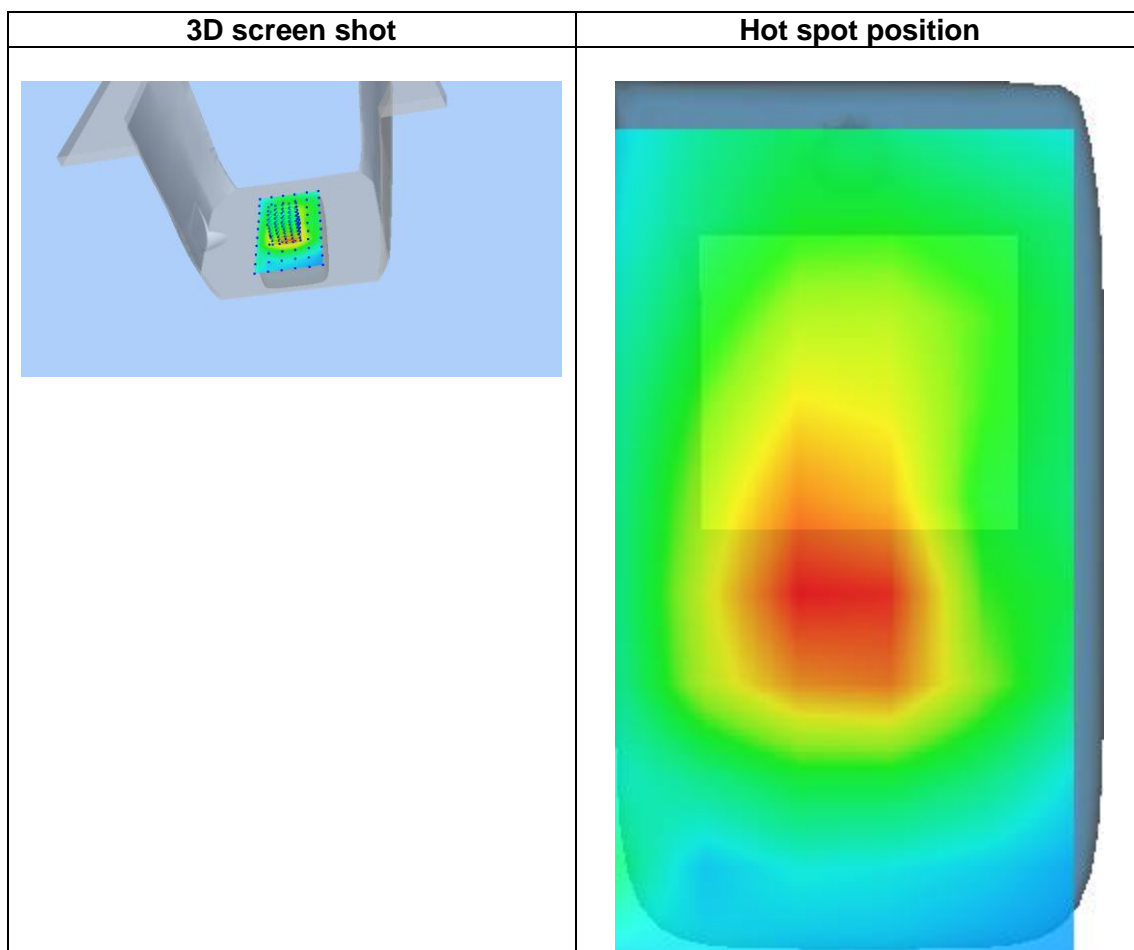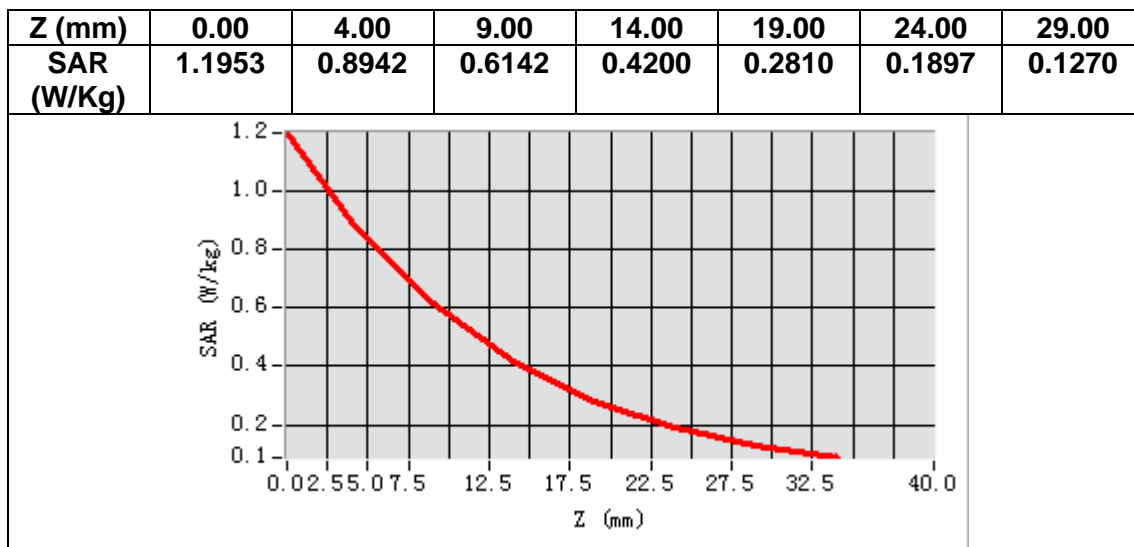

# MEASUREMENT 7


Date of measurement: 12/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>Band4 WCDMA1700</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.73</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1732.600000
<b>Relative permittivity (real part)</b>	39.146786
<b>Relative permittivity (imaginary part)</b>	13.751020
<b>Conductivity (S/m)</b>	1.323154
<b>Variation (%)</b>	2.120000

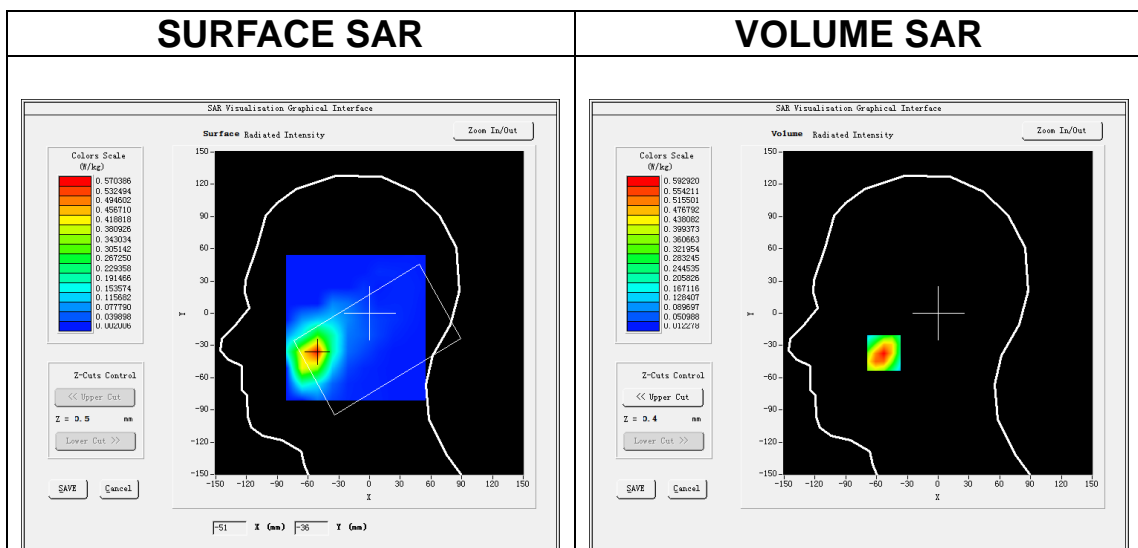

**Maximum location: X=-53.00, Y=-37.00**  
**SAR Peak: 0.84 W/kg**

<b>SAR 10g (W/Kg)</b>	0.320021
<b>SAR 1g (W/Kg)</b>	0.558124

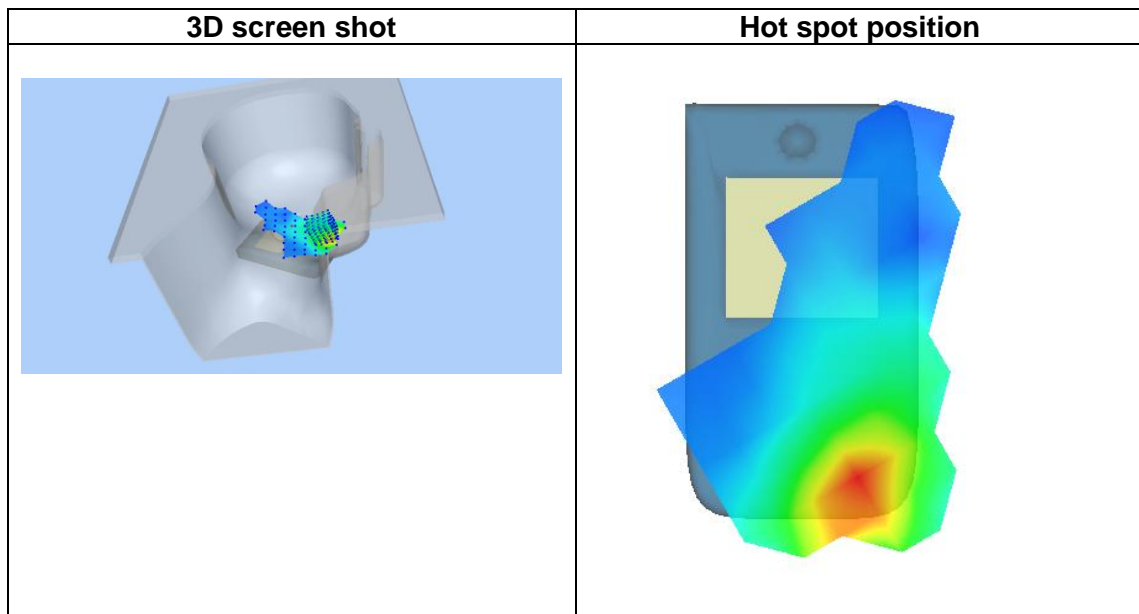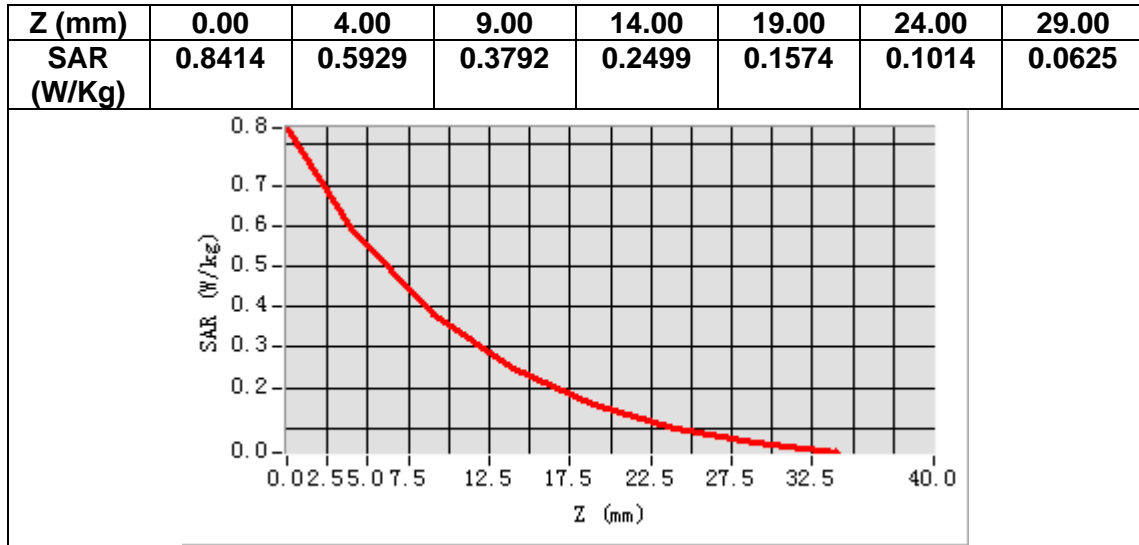

# MEASUREMENT 8


Date of measurement: 12/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>Band4 WCDMA1700</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.73</u>

## B. SAR Measurement Results


<b>Frequency (MHz)</b>	1732.600000
<b>Relative permittivity (real part)</b>	39.146786
<b>Relative permittivity (imaginary part)</b>	13.751020
<b>Conductivity (S/m)</b>	1.323154
<b>Variation (%)</b>	1.230000

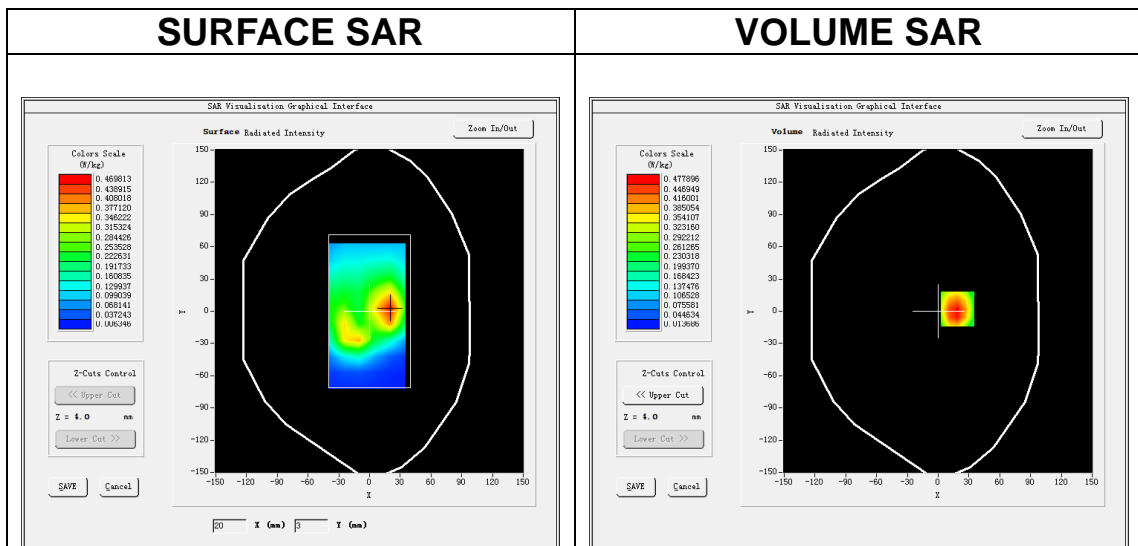


**Maximum location: X=19.00, Y=2.00**  
**SAR Peak: 0.73 W/kg**

<b>SAR 10g (W/Kg)</b>	0.261412
<b>SAR 1g (W/Kg)</b>	0.462042


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.6887	0.4779	0.2965	0.1853	0.1127	0.0686	0.0418

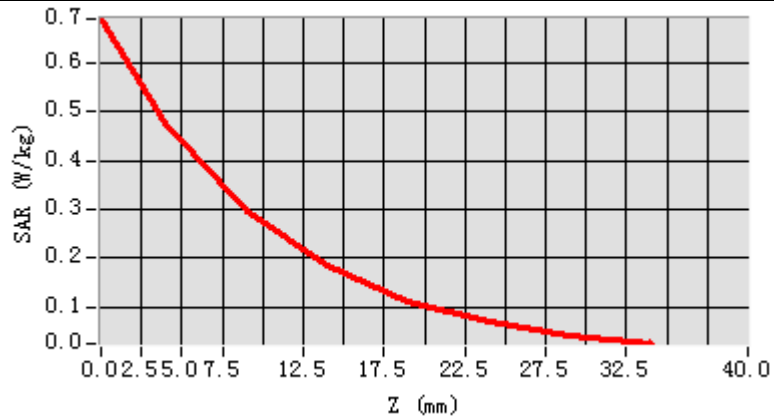

3D screen shot

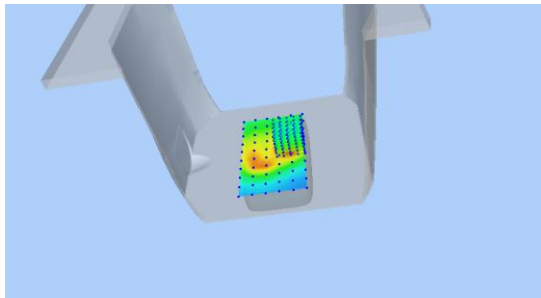

Hot spot position

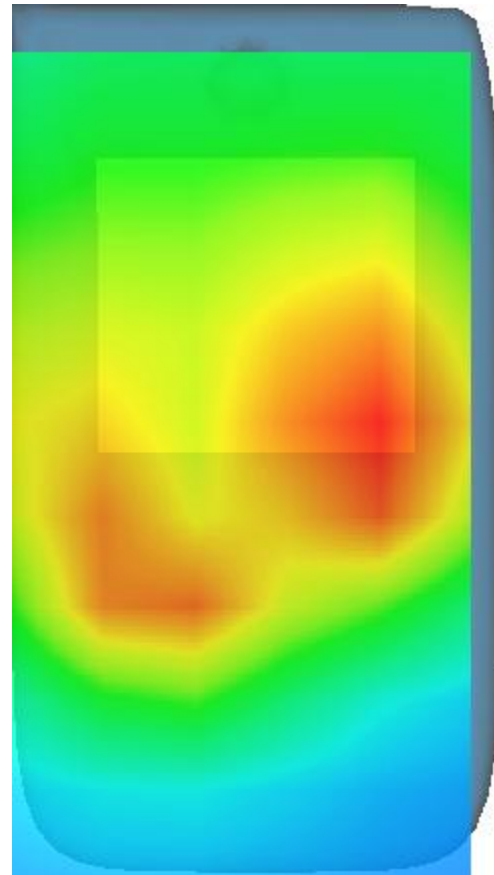

# MEASUREMENT 9


Date of measurement: 29/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>Band5_WCDMA850</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	836.400000
<b>Relative permittivity (real part)</b>	42.582199
<b>Relative permittivity (imaginary part)</b>	20.055696
<b>Conductivity (S/m)</b>	0.931921
<b>Variation (%)</b>	-3.750000

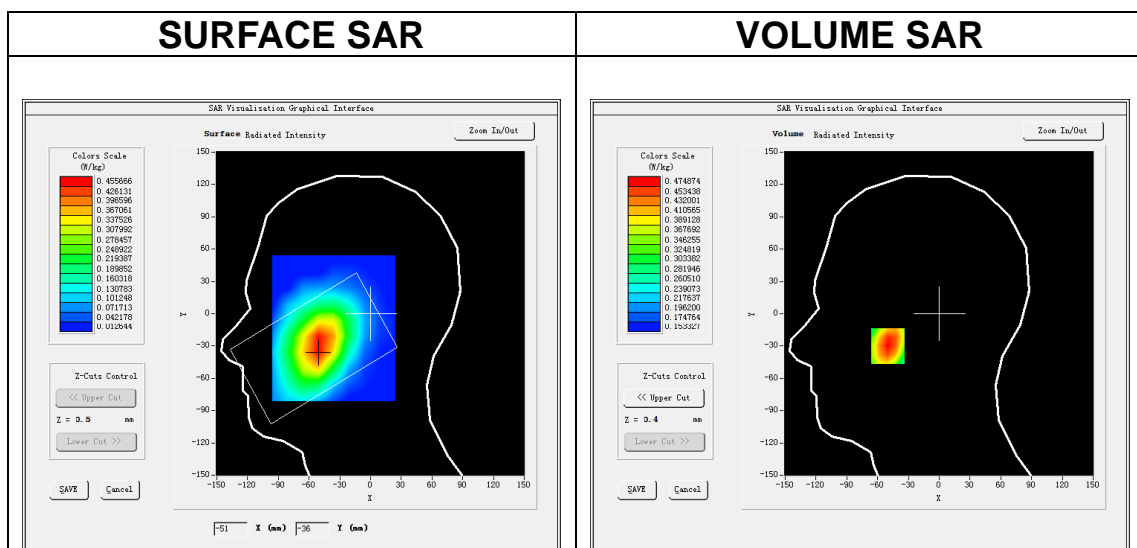

**Maximum location: X=-50.00, Y=-30.00**

**SAR Peak: 0.52 W/kg**

<b>SAR 10g (W/Kg)</b>	0.413064
<b>SAR 1g (W/Kg)</b>	0.471922

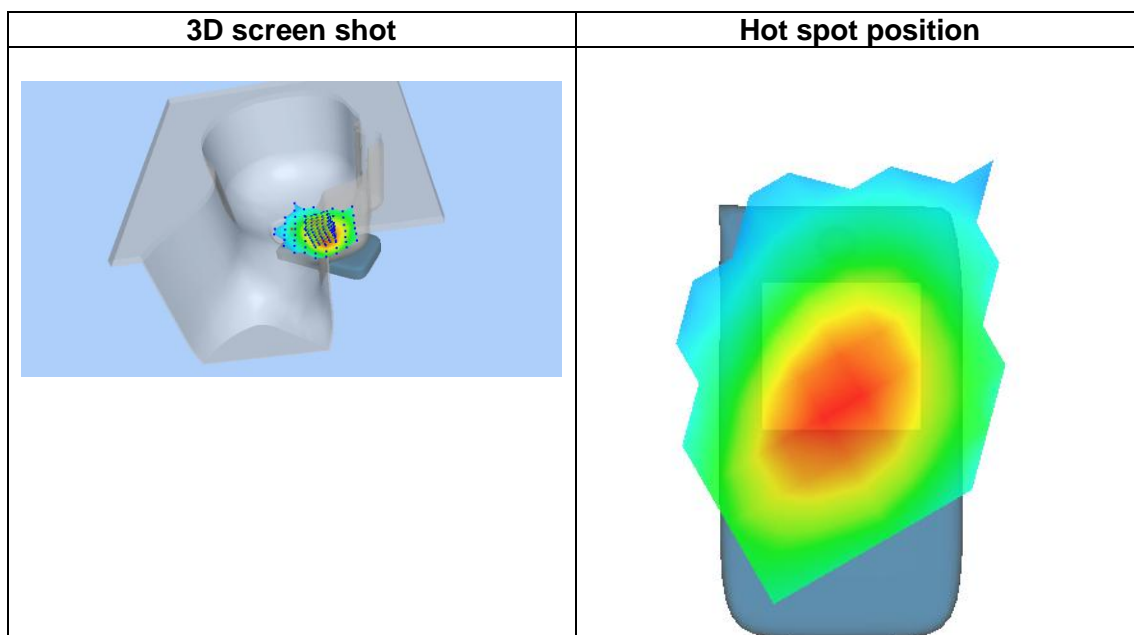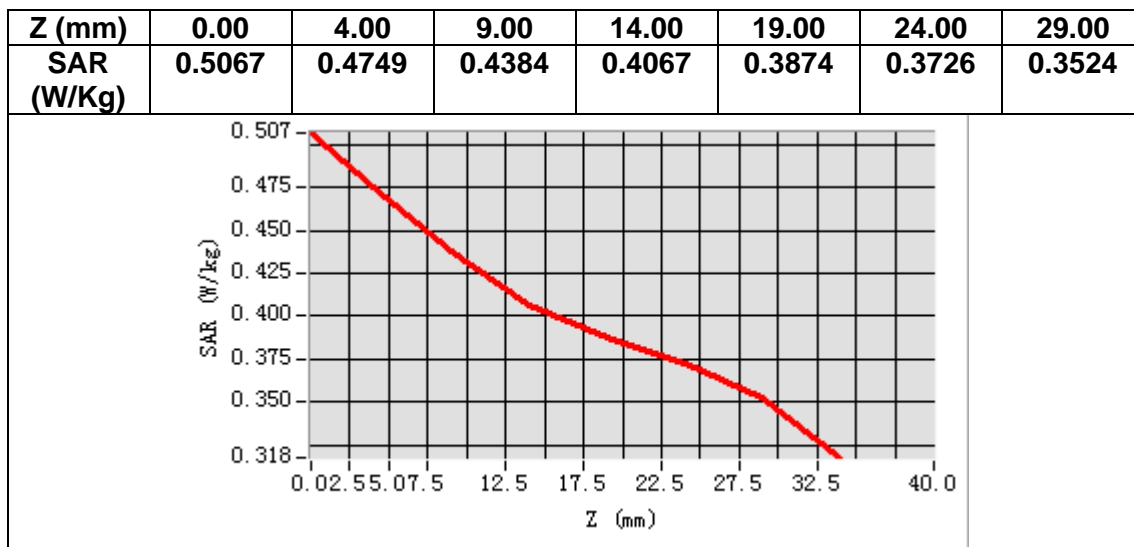

# MEASUREMENT 10


Date of measurement: 29/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>Band5_WCDMA850</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>WCDMA (Crest factor: 1.0)</u>

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.400000
<b>Relative permittivity (real part)</b>	42.582199
<b>Relative permittivity (imaginary part)</b>	20.055696
<b>Conductivity (S/m)</b>	0.931921
<b>Variation (%)</b>	-1.350000


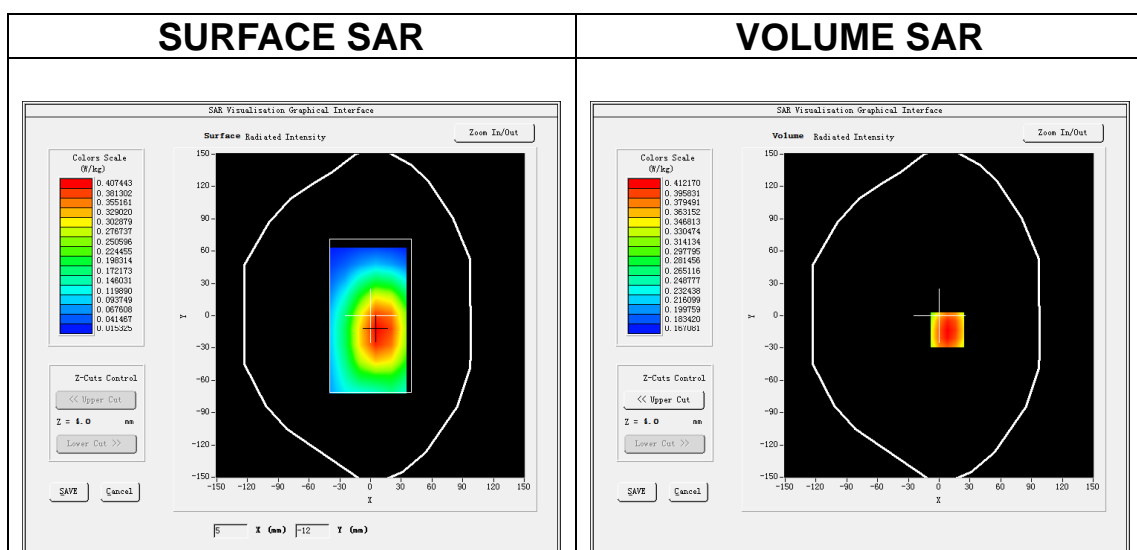


**Maximum location: X=8.00, Y=-13.00**

**SAR Peak: 0.43 W/kg**

<b>SAR 10g (W/Kg)</b>	0.356402
<b>SAR 1g (W/Kg)</b>	0.406485



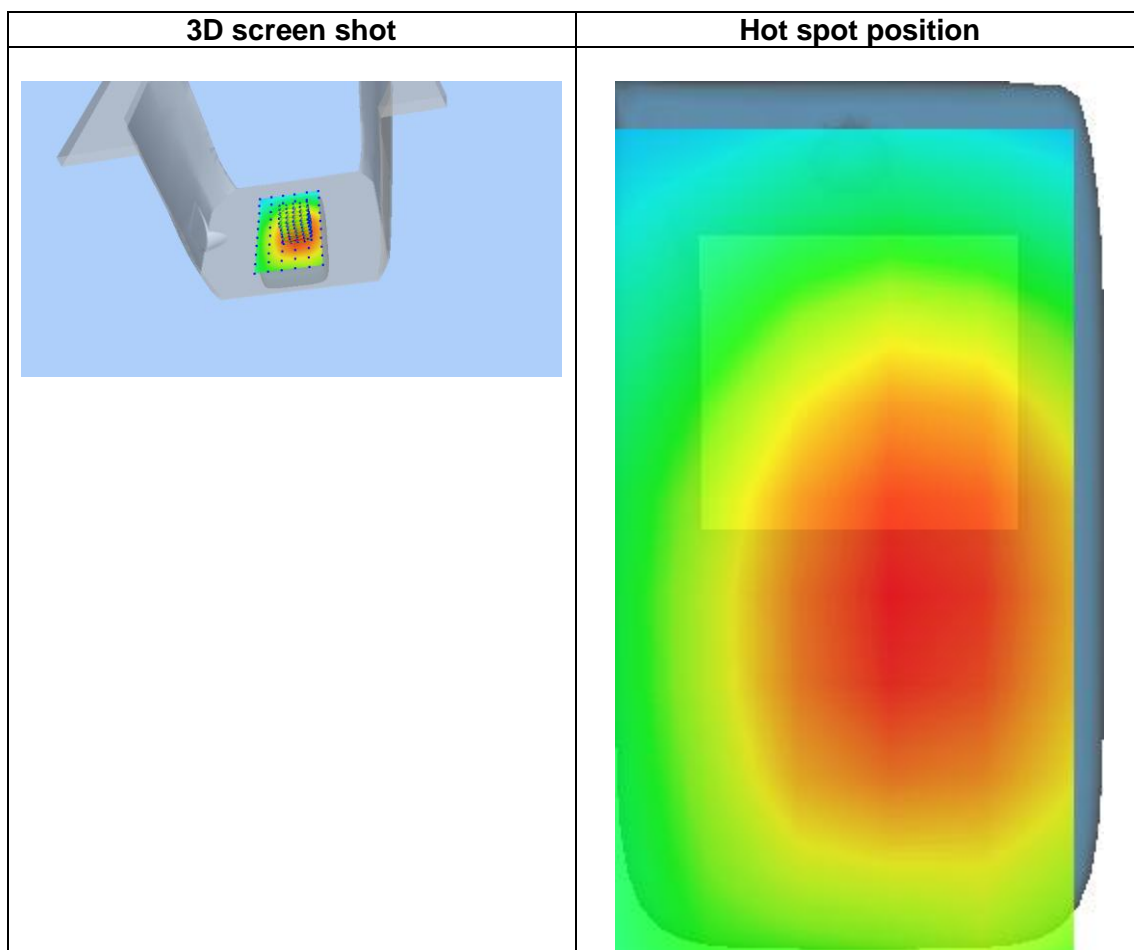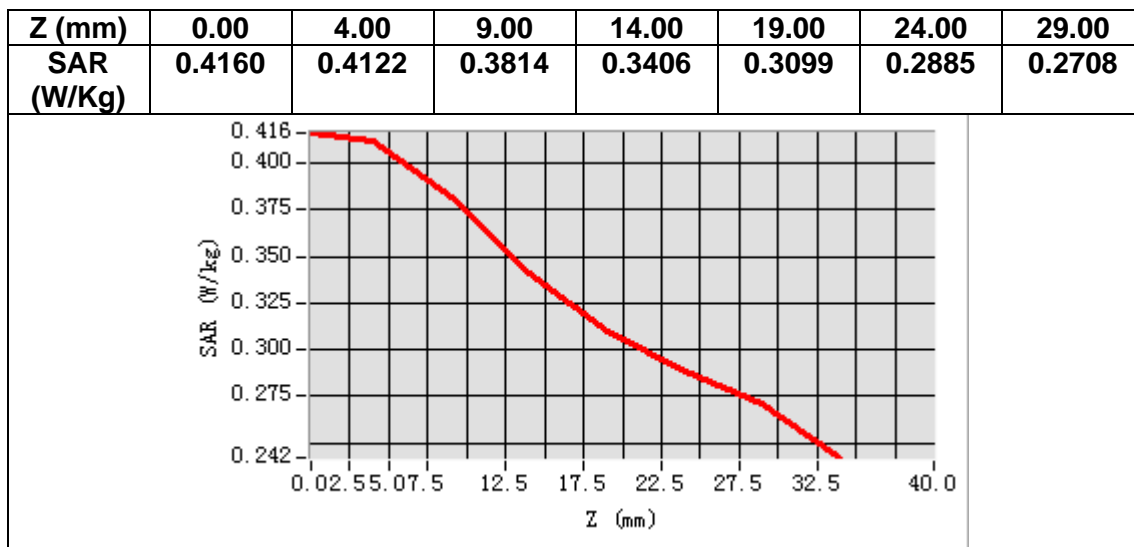

# MEASUREMENT 11


Date of measurement: 25/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>IEEE 802.11b ISM</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.98</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2437.000000
<b>Relative permittivity (real part)</b>	37.827473
<b>Relative permittivity (imaginary part)</b>	13.179621
<b>Conductivity (S/m)</b>	1.784374
<b>Variation (%)</b>	-0.090000

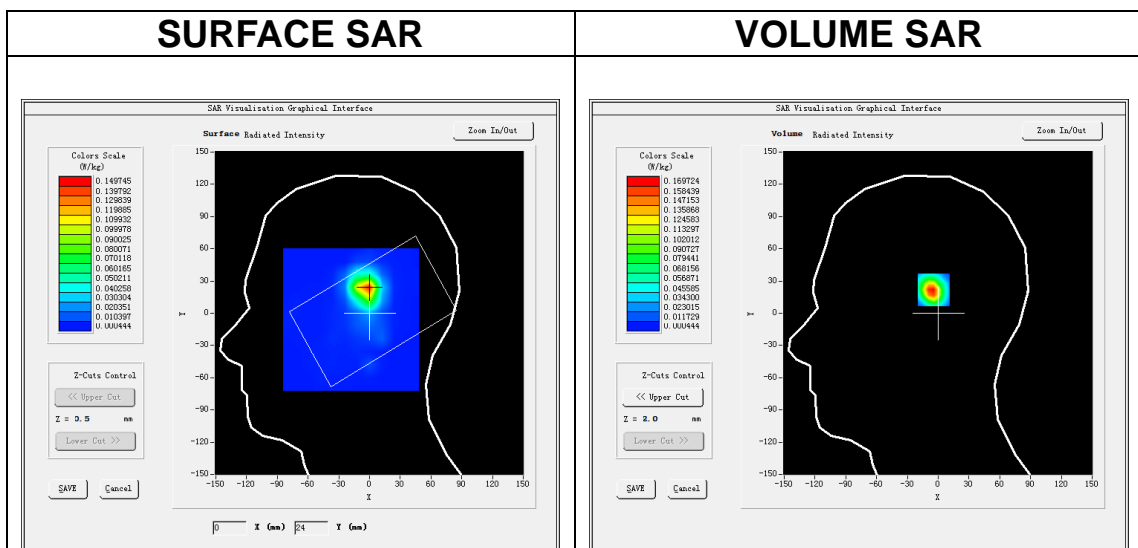

**Maximum location: X=-2.00, Y=23.00**  
**SAR Peak: 0.35 W/kg**

<b>SAR 10g (W/Kg)</b>	0.056350
<b>SAR 1g (W/Kg)</b>	0.159199

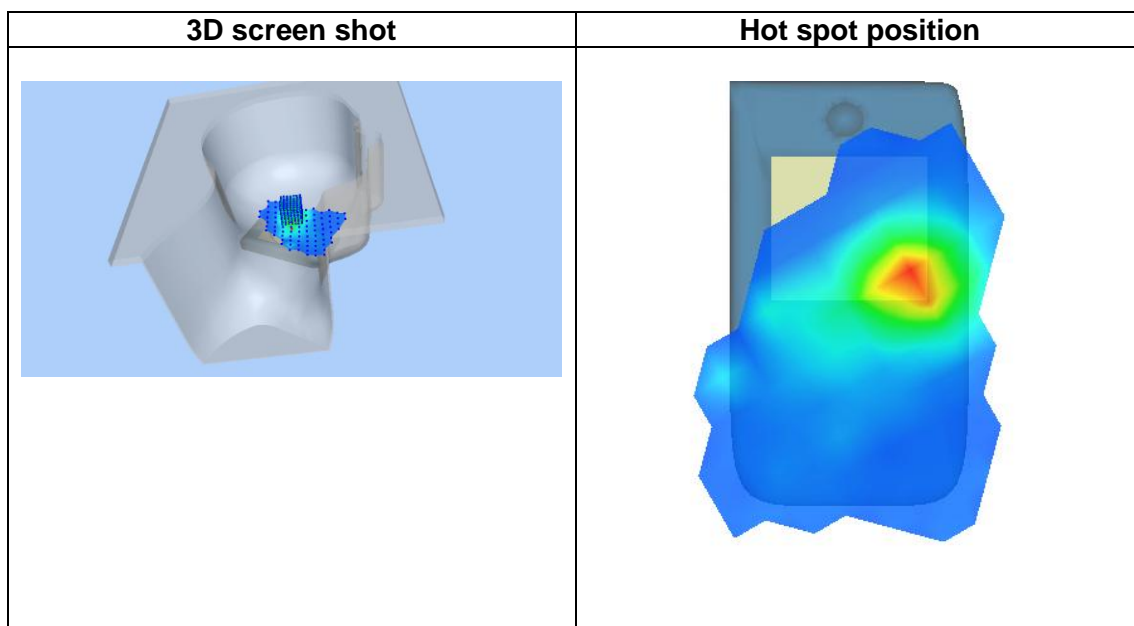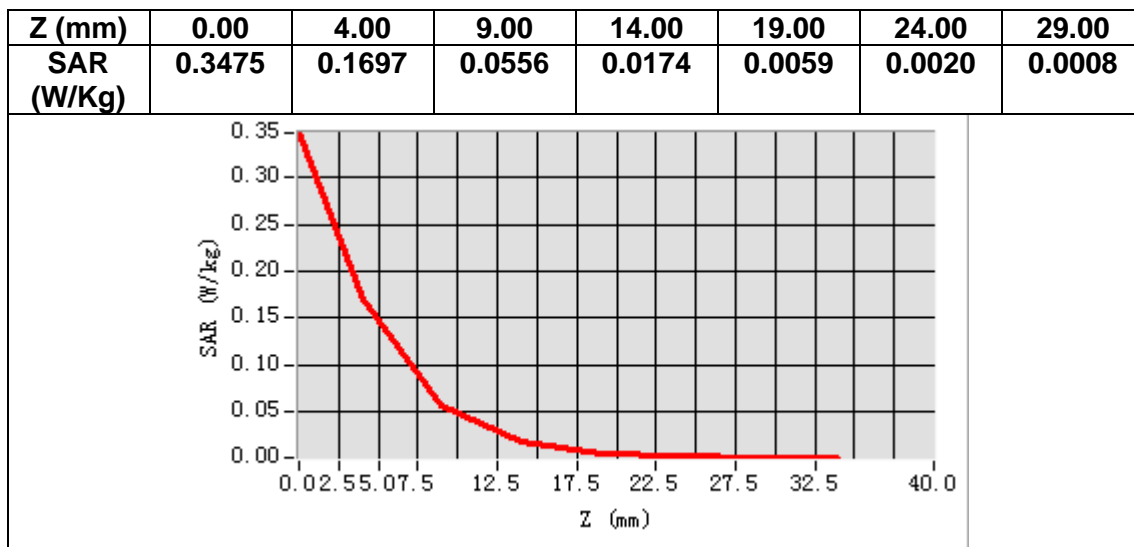

# MEASUREMENT 12


Date of measurement: 25/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>IEEE 802.11b ISM</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>IEEE802.11b (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.98</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	2437.000000
<b>Relative permittivity (real part)</b>	37.827473
<b>Relative permittivity (imaginary part)</b>	13.179621
<b>Conductivity (S/m)</b>	1.784374
<b>Variation (%)</b>	2.270000

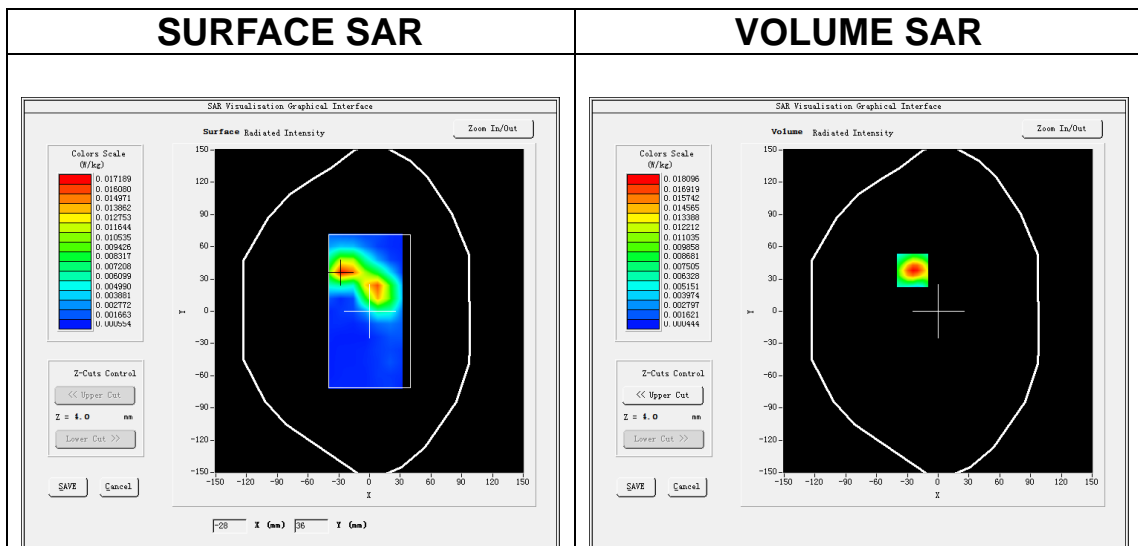

**Maximum location: X=-25.00, Y=38.00**  
**SAR Peak: 0.04 W/kg**

<b>SAR 10g (W/Kg)</b>	0.007236
<b>SAR 1g (W/Kg)</b>	0.017659

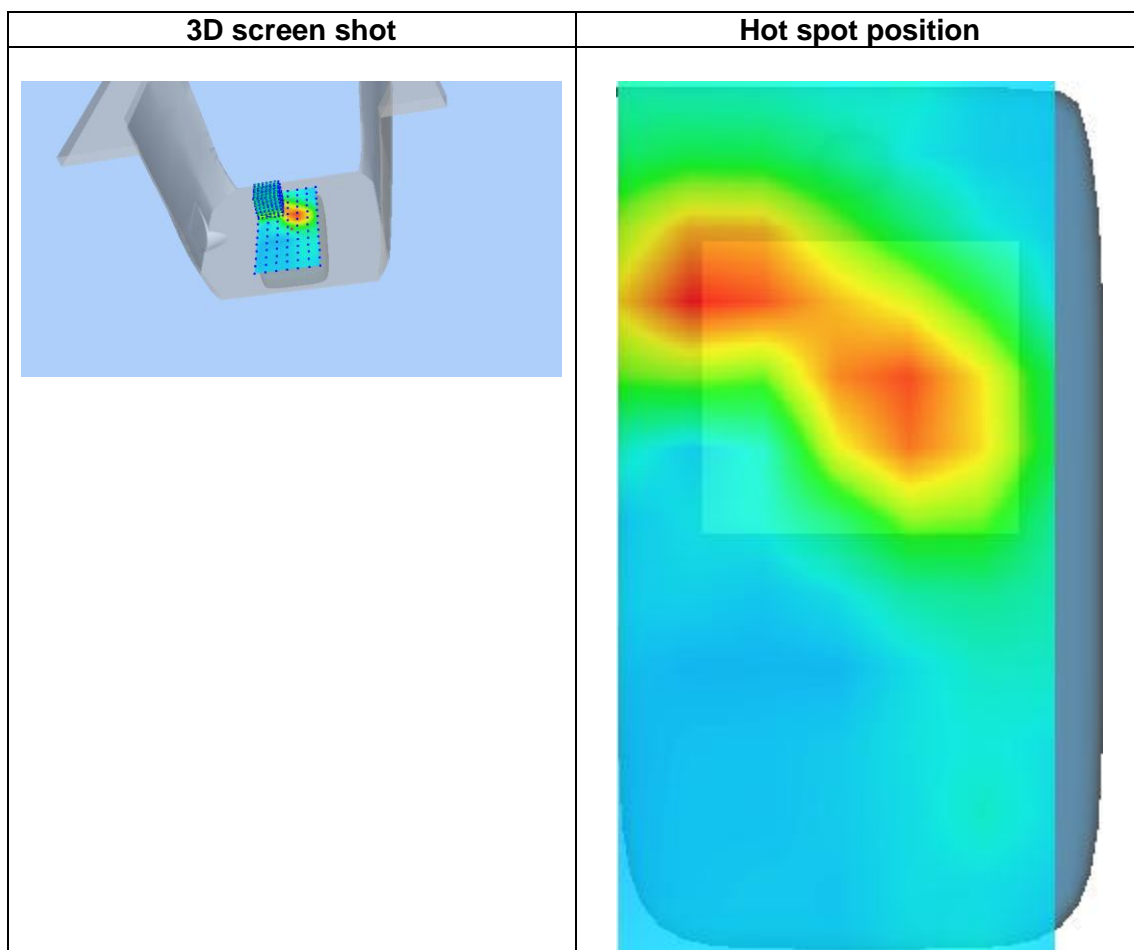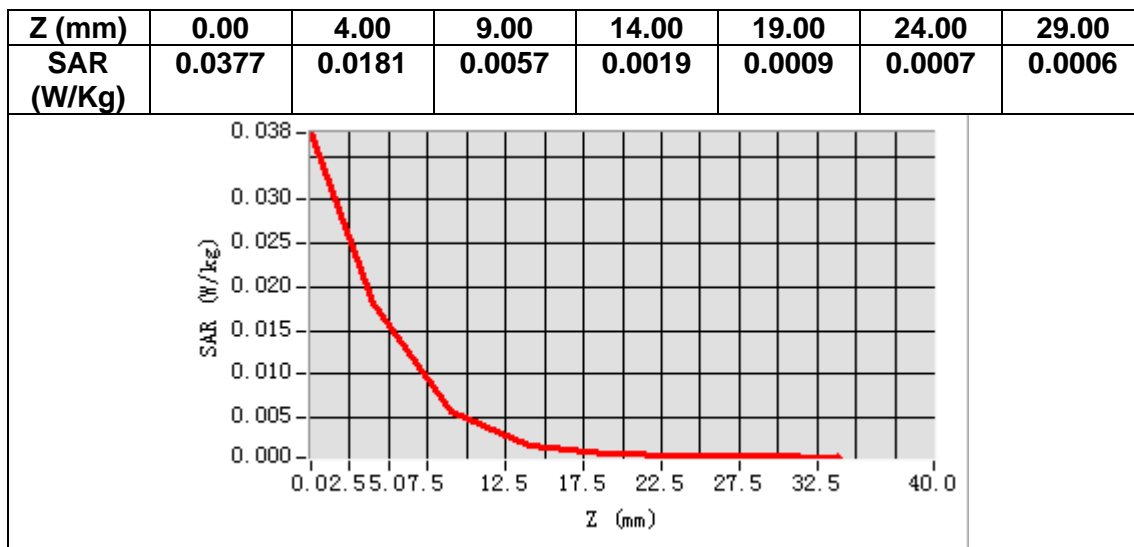

# MEASUREMENT 13


Date of measurement: 30/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 2</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	38.880299
<b>Relative permittivity (imaginary part)</b>	13.858459
<b>Conductivity (S/m)</b>	1.447439
<b>Variation (%)</b>	-4.050000

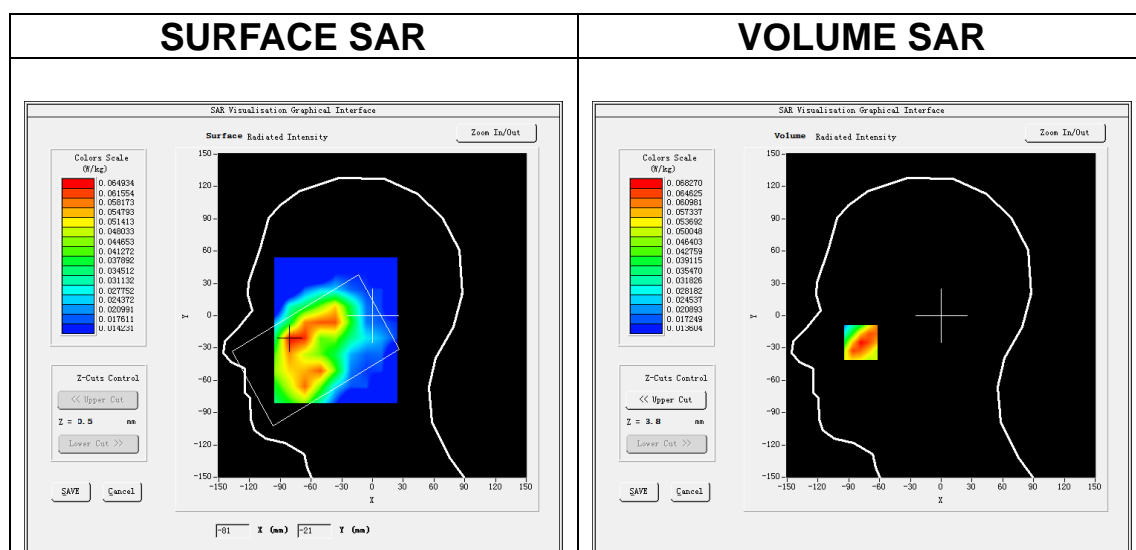

**Maximum location: X=-78.00, Y=-23.00**  
**SAR Peak: 0.10 W/kg**

<b>SAR 10g (W/Kg)</b>	0.046025
<b>SAR 1g (W/Kg)</b>	0.068376

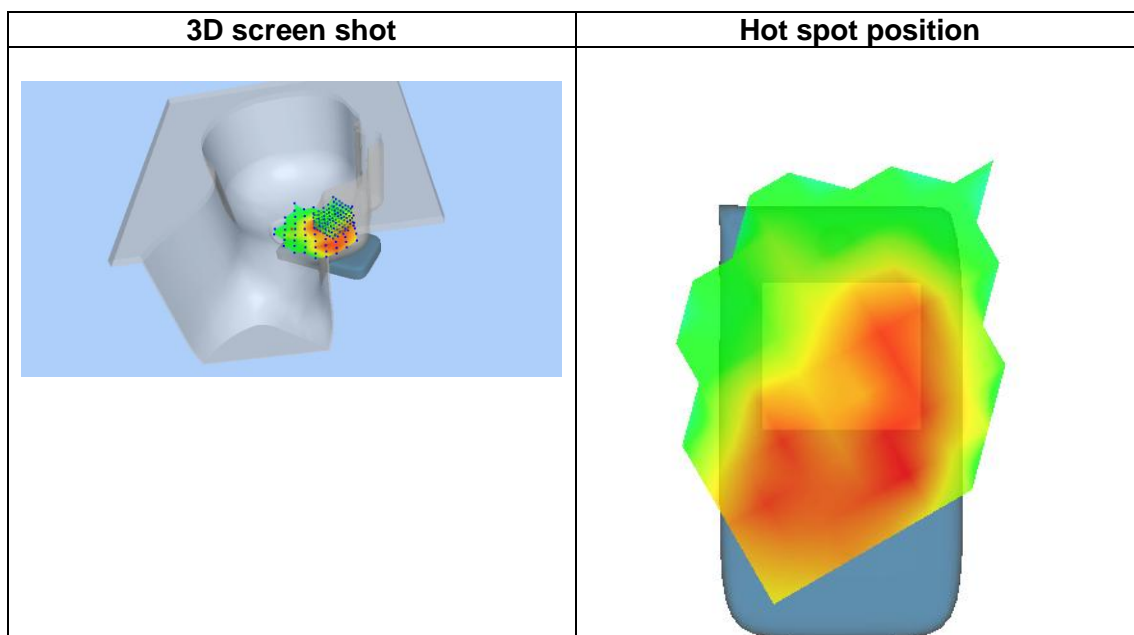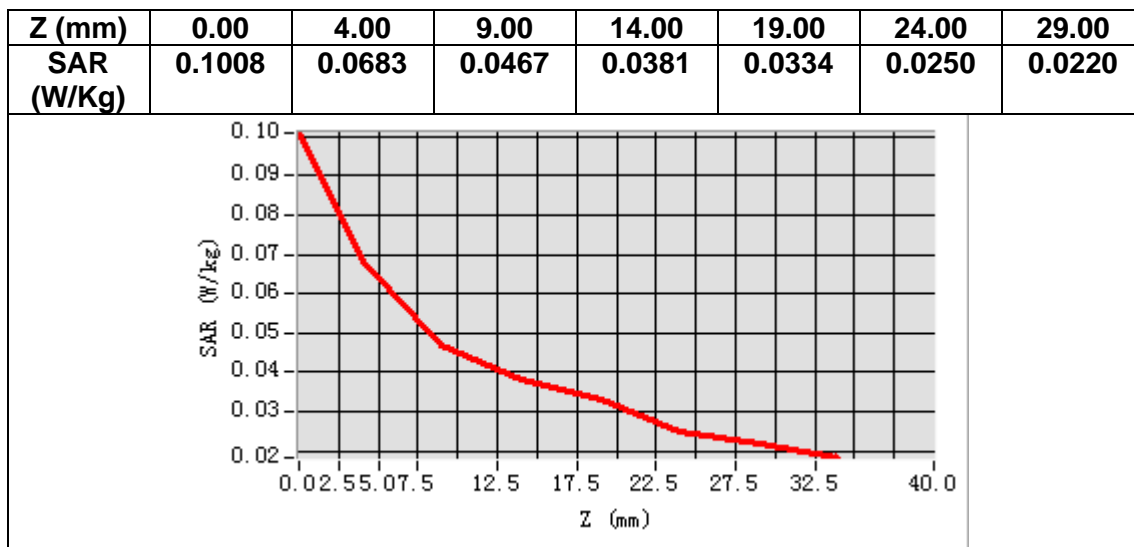

# MEASUREMENT 14


Date of measurement: 30/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 2</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1880.000000
<b>Relative permittivity (real part)</b>	38.880299
<b>Relative permittivity (imaginary part)</b>	13.858459
<b>Conductivity (S/m)</b>	1.447439
<b>Variation (%)</b>	-1.040000


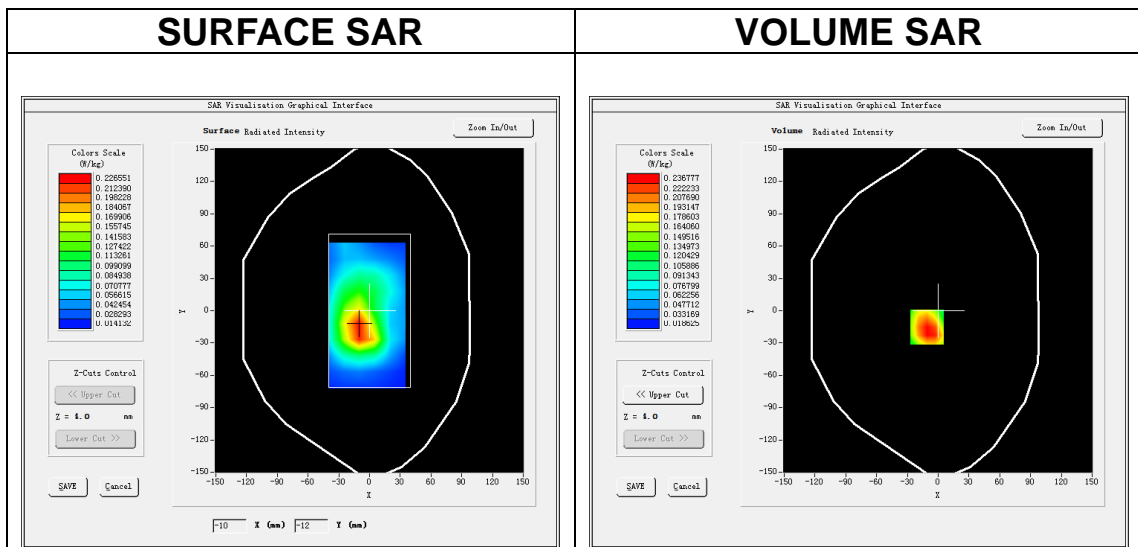


**Maximum location: X=-11.00, Y=-15.00**

**SAR Peak: 0.35 W/kg**

<b>SAR 10g (W/Kg)</b>	0.143058
<b>SAR 1g (W/Kg)</b>	0.238473



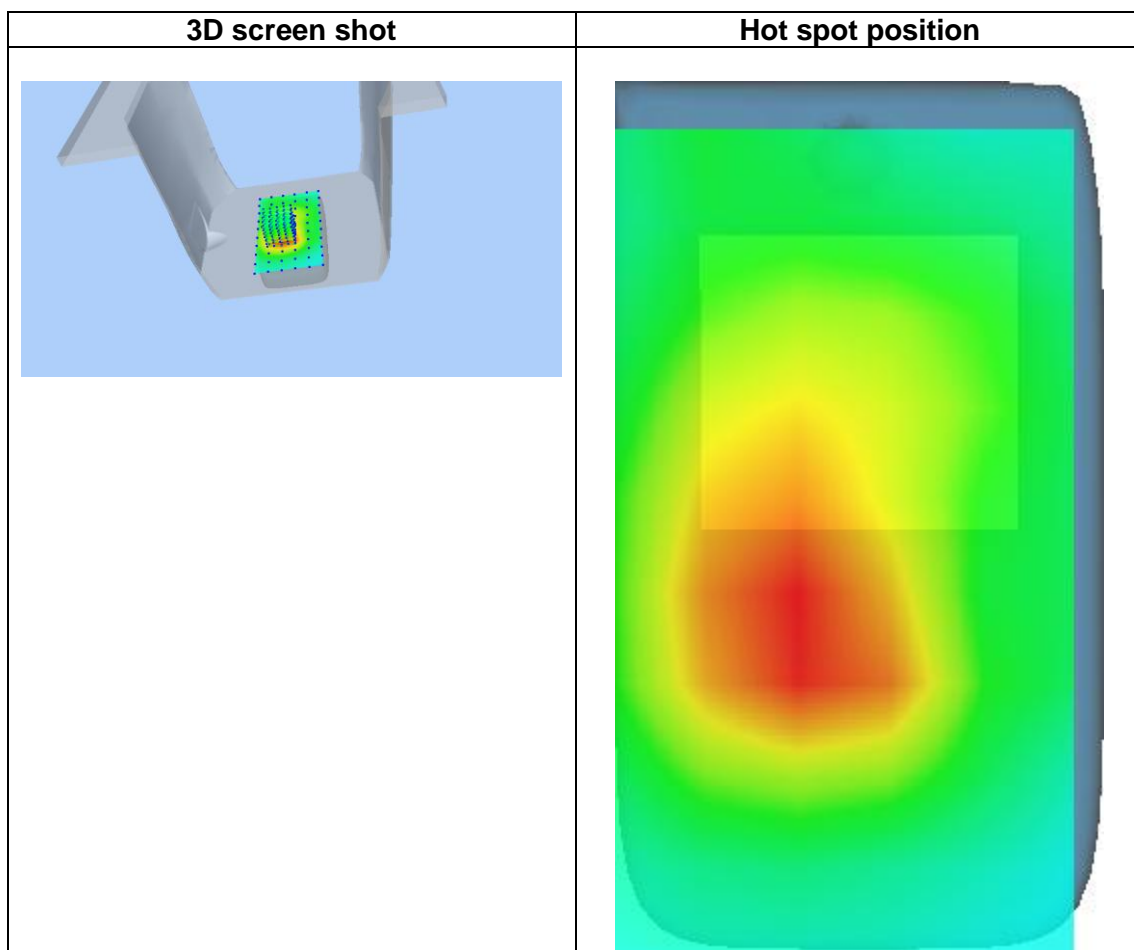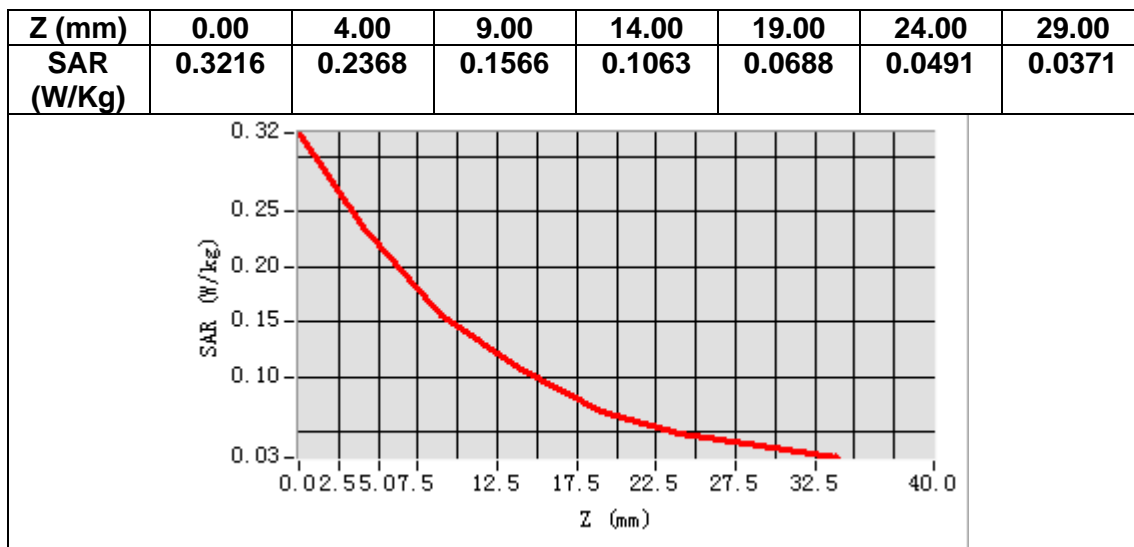

# MEASUREMENT 15


Date of measurement: 24/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 4</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1732.500000
<b>Relative permittivity (real part)</b>	39.670856
<b>Relative permittivity (imaginary part)</b>	13.849719
<b>Conductivity (S/m)</b>	1.333035
<b>Variation (%)</b>	-0.740000

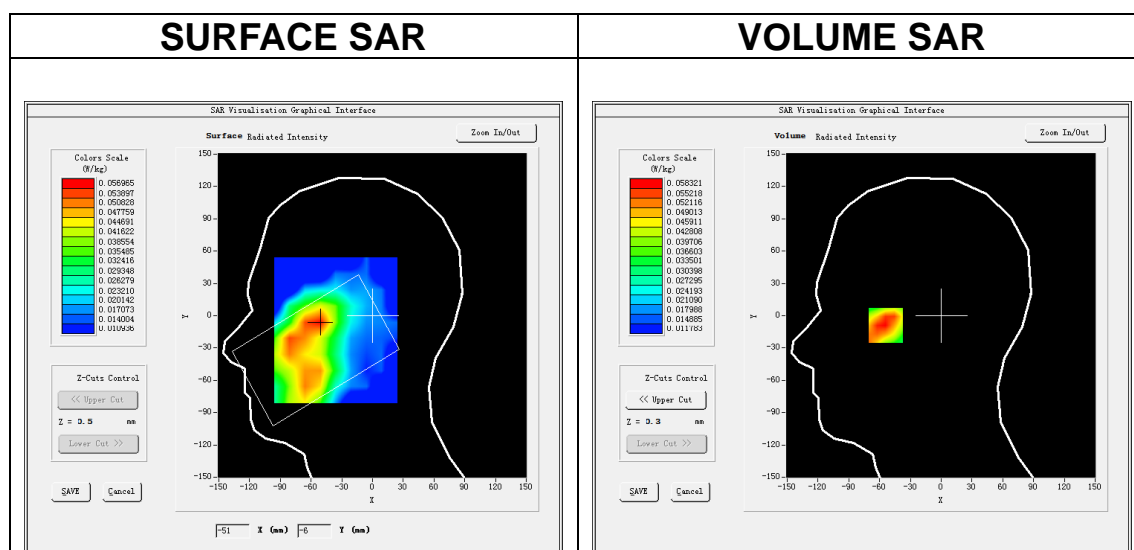

**Maximum location: X=-54.00, Y=-6.00**  
**SAR Peak: 0.08 W/kg**

<b>SAR 10g (W/Kg)</b>	0.041669
<b>SAR 1g (W/Kg)</b>	0.056893

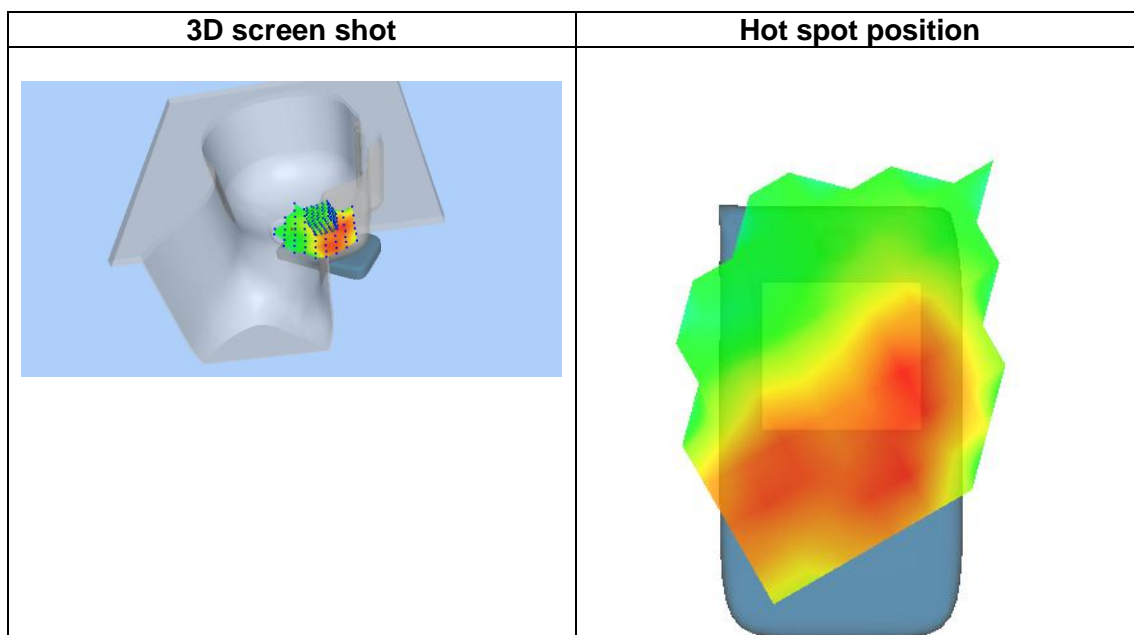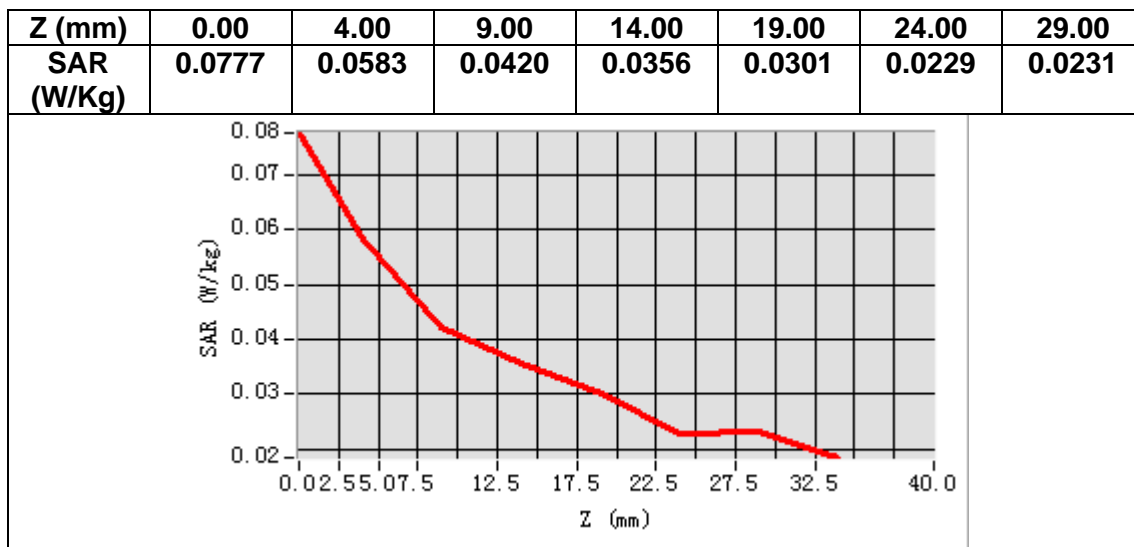

# MEASUREMENT 16


Date of measurement: 24/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 4</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	1732.500000
<b>Relative permittivity (real part)</b>	39.670856
<b>Relative permittivity (imaginary part)</b>	13.849719
<b>Conductivity (S/m)</b>	1.333035
<b>Variation (%)</b>	-4.830000

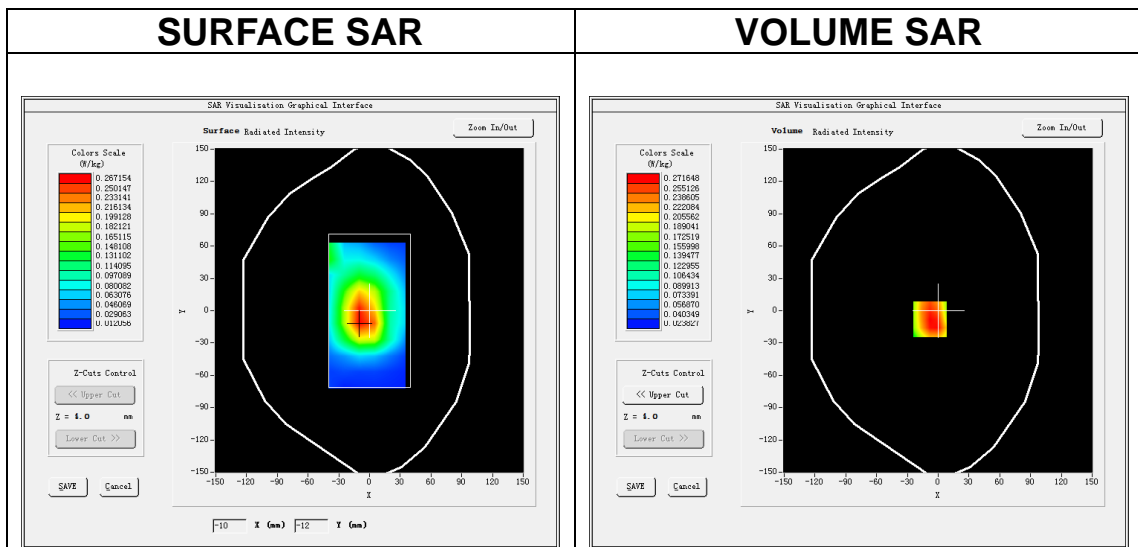

**Maximum location: X=-8.00, Y=-8.00**

**SAR Peak: 0.39 W/kg**

<b>SAR 10g (W/Kg)</b>	0.168180
<b>SAR 1g (W/Kg)</b>	0.267158

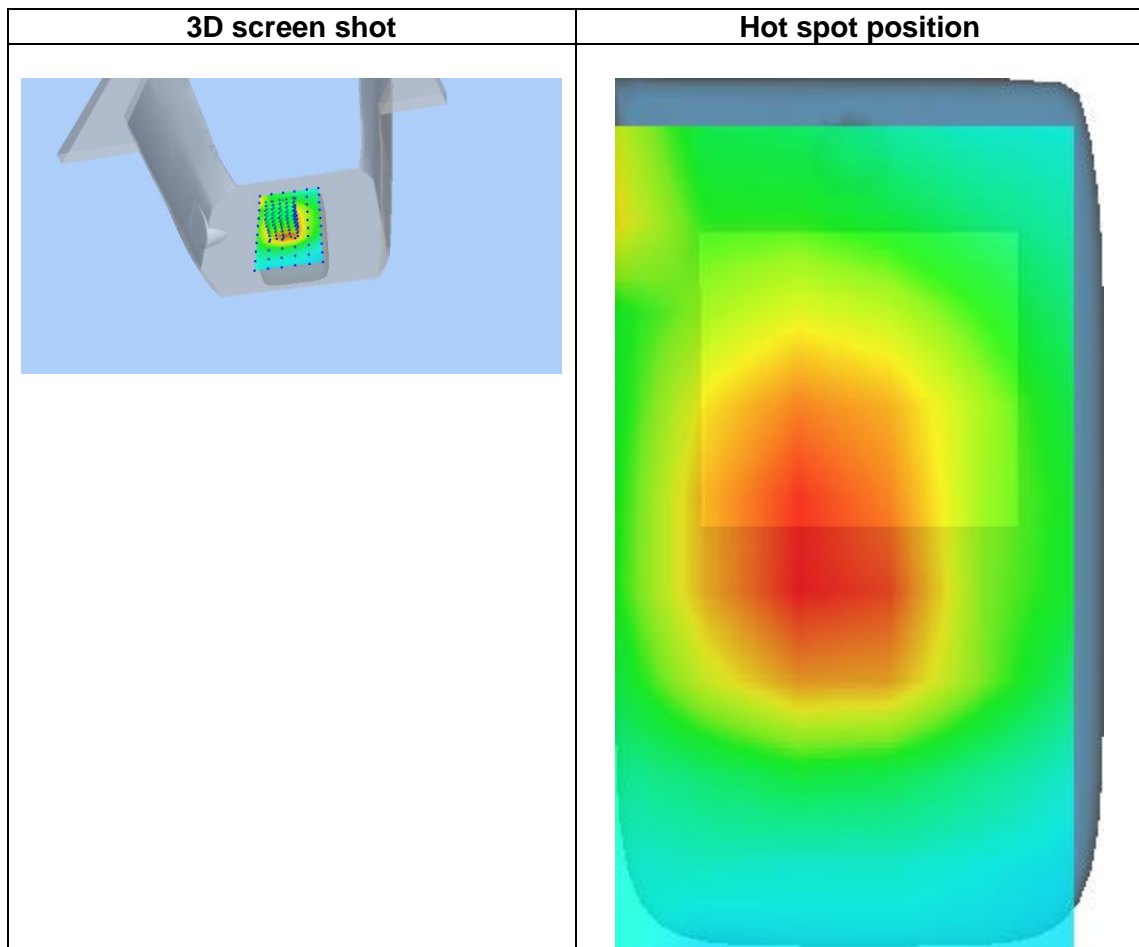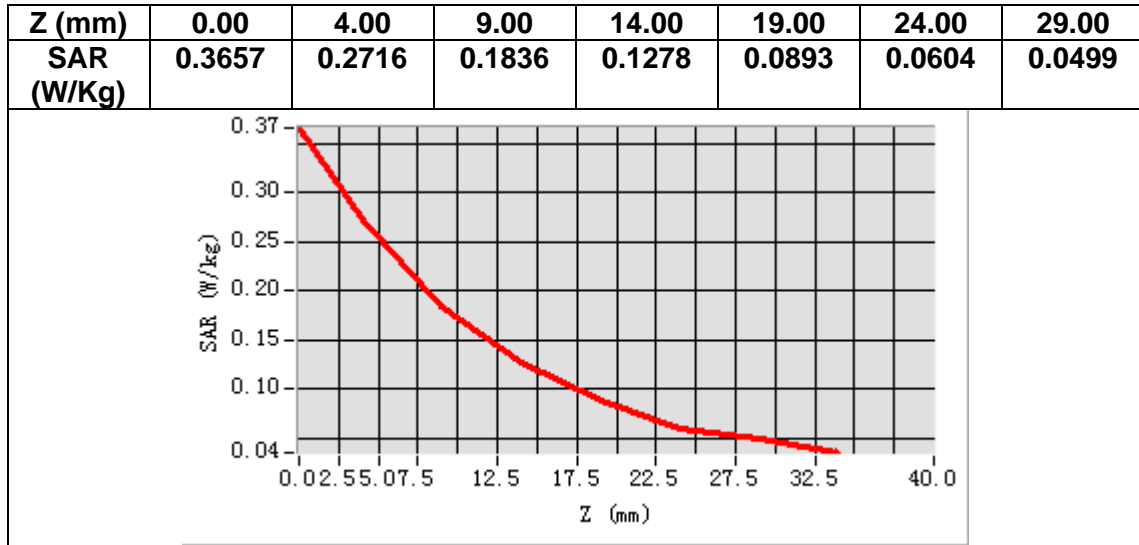

# MEASUREMENT 17


Date of measurement: 29/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 5</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	836.500000
<b>Relative permittivity (real part)</b>	42.584789
<b>Relative permittivity (imaginary part)</b>	20.054356
<b>Conductivity (S/m)</b>	0.931970
<b>Variation (%)</b>	-3.540000

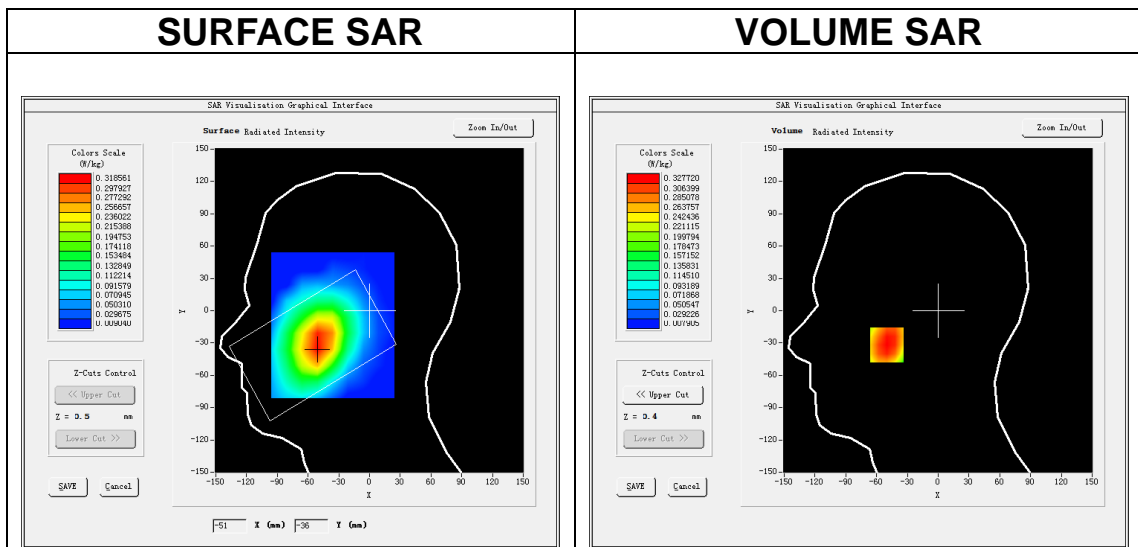

**Maximum location: X=-50.00, Y=-32.00**

**SAR Peak: 0.39 W/kg**

<b>SAR 10g (W/Kg)</b>	0.242846
<b>SAR 1g (W/Kg)</b>	0.314584

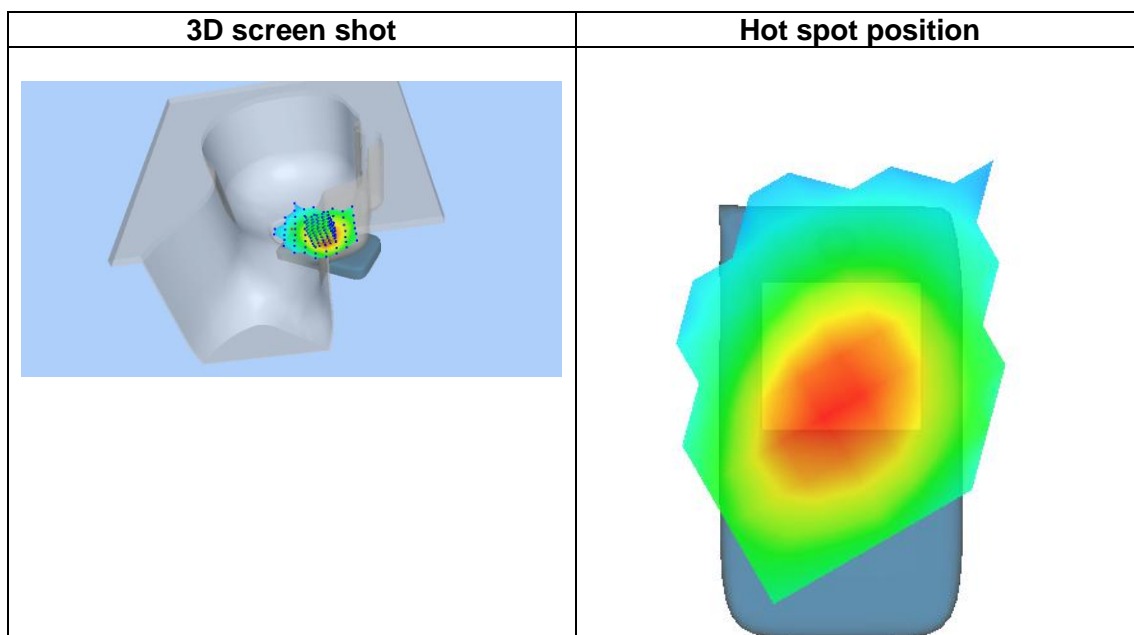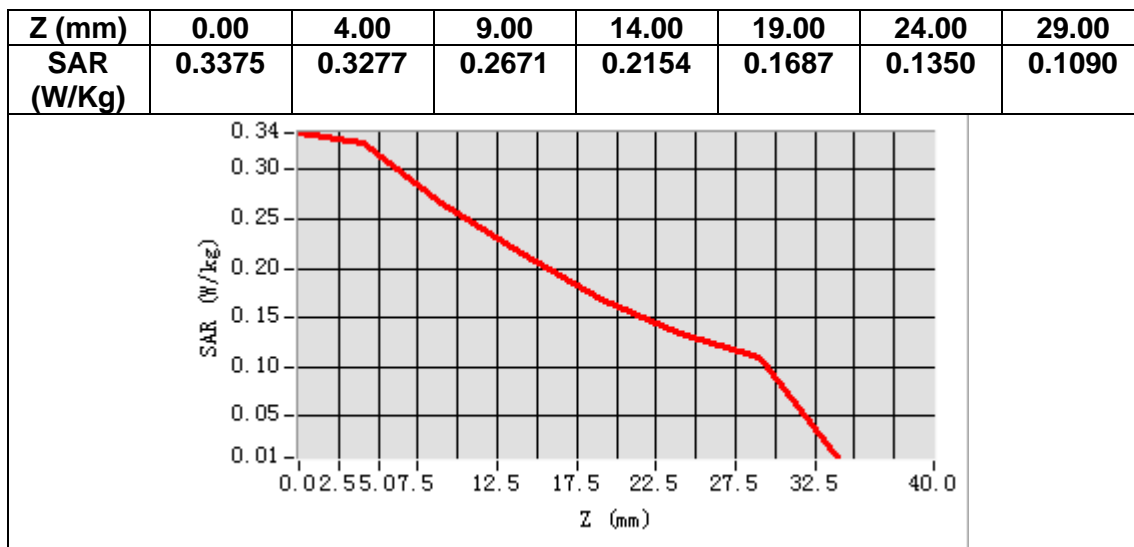

# MEASUREMENT 18


Date of measurement: 29/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 5</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>

## B. SAR Measurement Results

<b>Frequency (MHz)</b>	836.500000
<b>Relative permittivity (real part)</b>	42.584789
<b>Relative permittivity (imaginary part)</b>	20.054356
<b>Conductivity (S/m)</b>	0.931970
<b>Variation (%)</b>	-0.250000


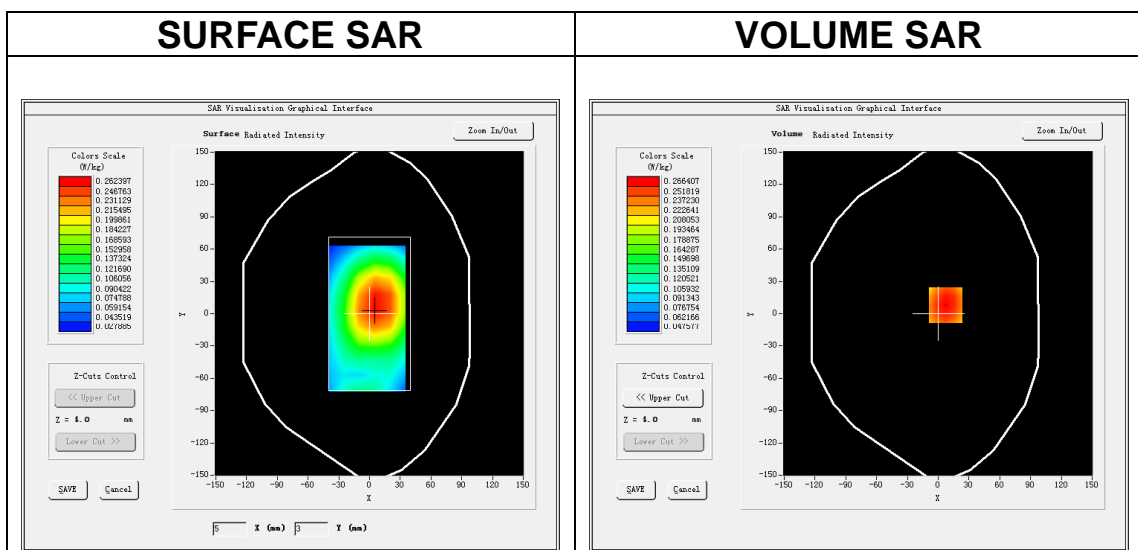


**Maximum location: X=7.00, Y=8.00**

**SAR Peak: 0.32 W/kg**

<b>SAR 10g (W/Kg)</b>	0.197383
<b>SAR 1g (W/Kg)</b>	0.262097



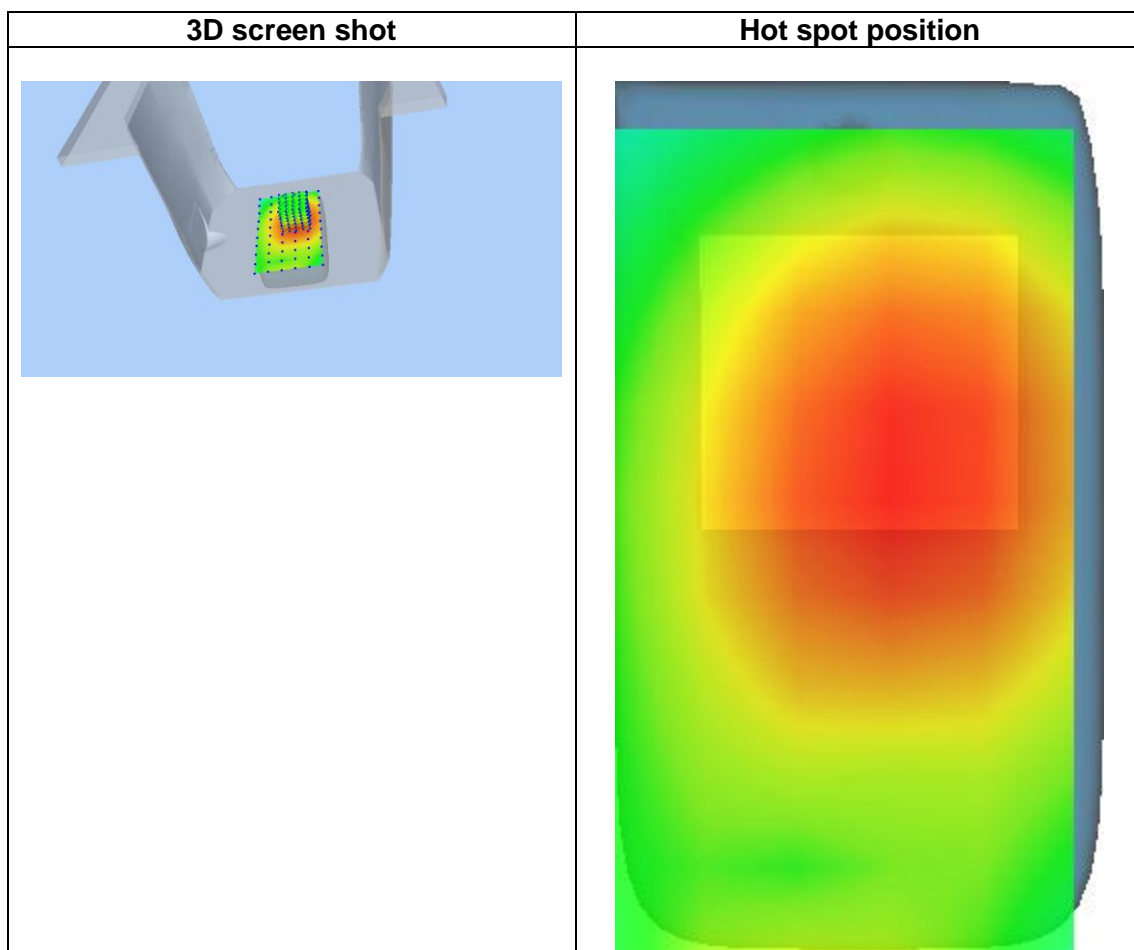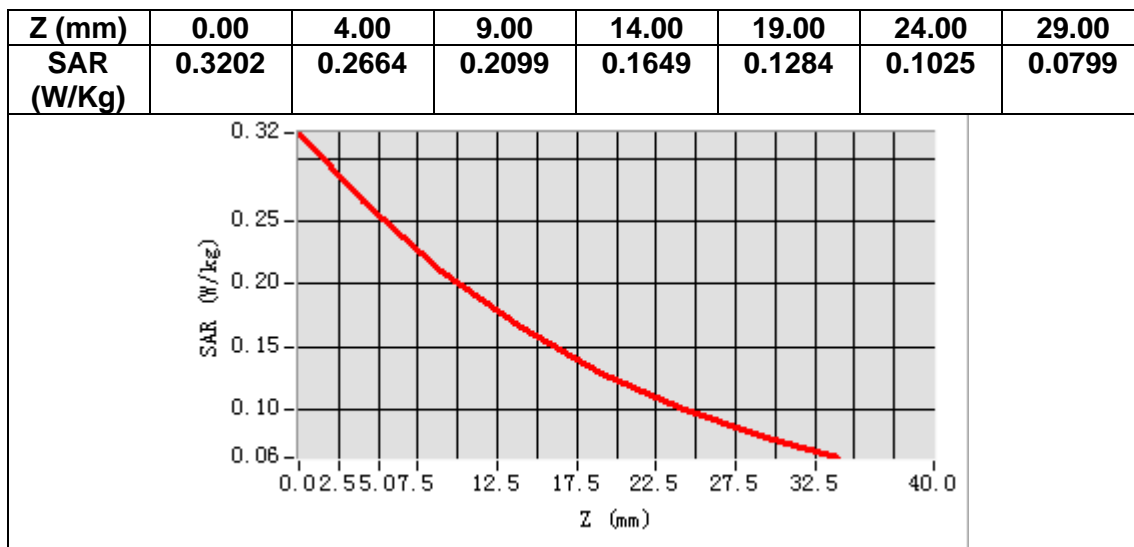

# MEASUREMENT 19


Date of measurement: 17/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 7</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	2535.000000
<b>Relative permittivity (real part)</b>	39.839664
<b>Relative permittivity (imaginary part)</b>	13.640566
<b>Conductivity (S/m)</b>	1.921046
<b>Variation (%)</b>	0.590000

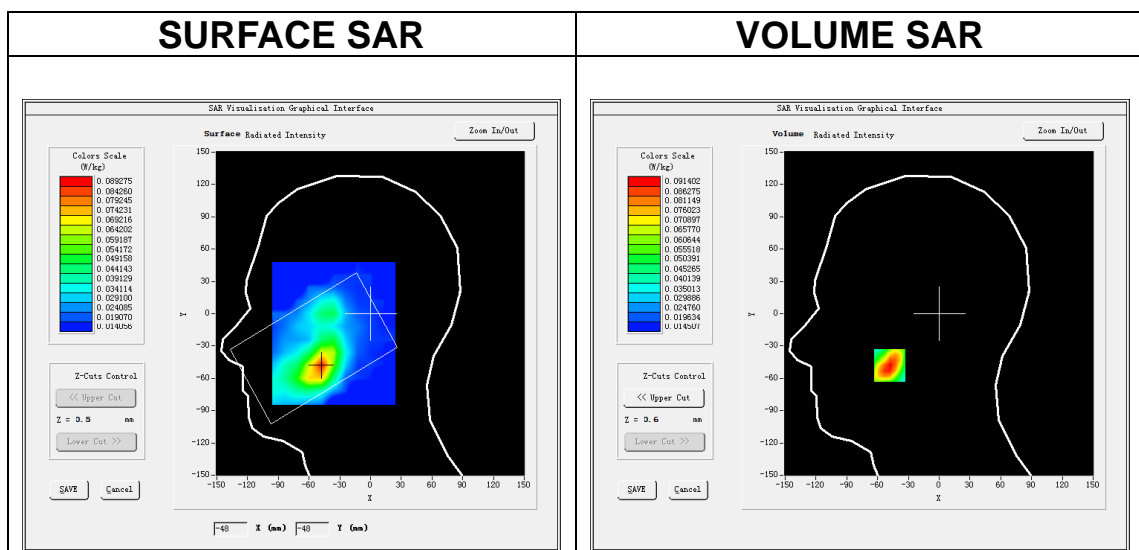

**Maximum location: X=-48.00, Y=-48.00**

**SAR Peak: 0.14 W/kg**

<b>SAR 10g (W/Kg)</b>	0.051573
<b>SAR 1g (W/Kg)</b>	0.086083

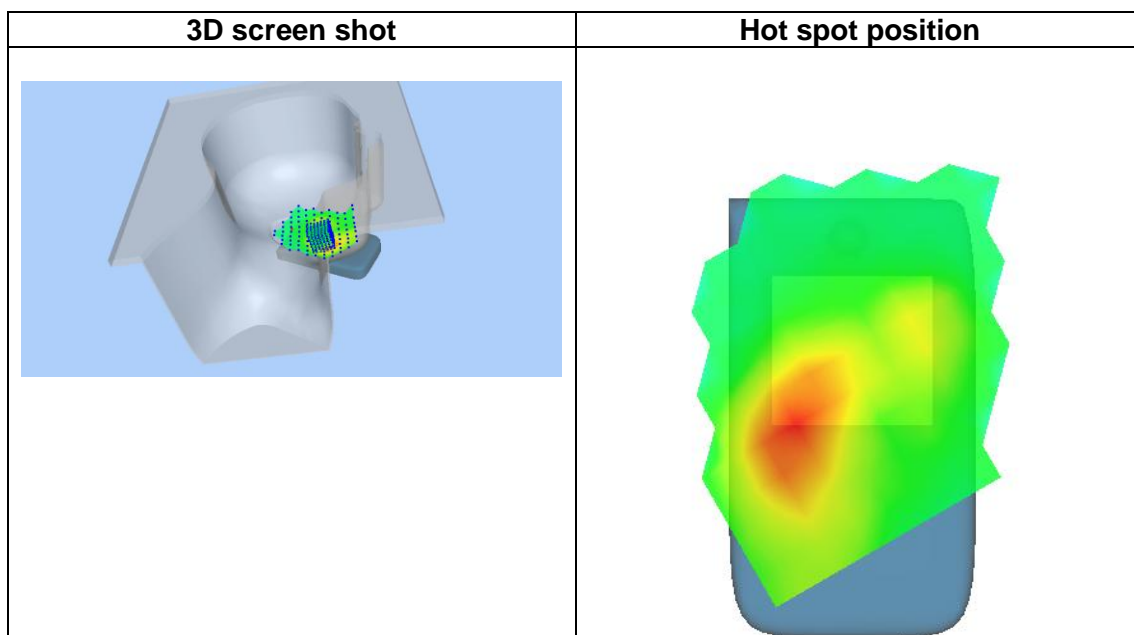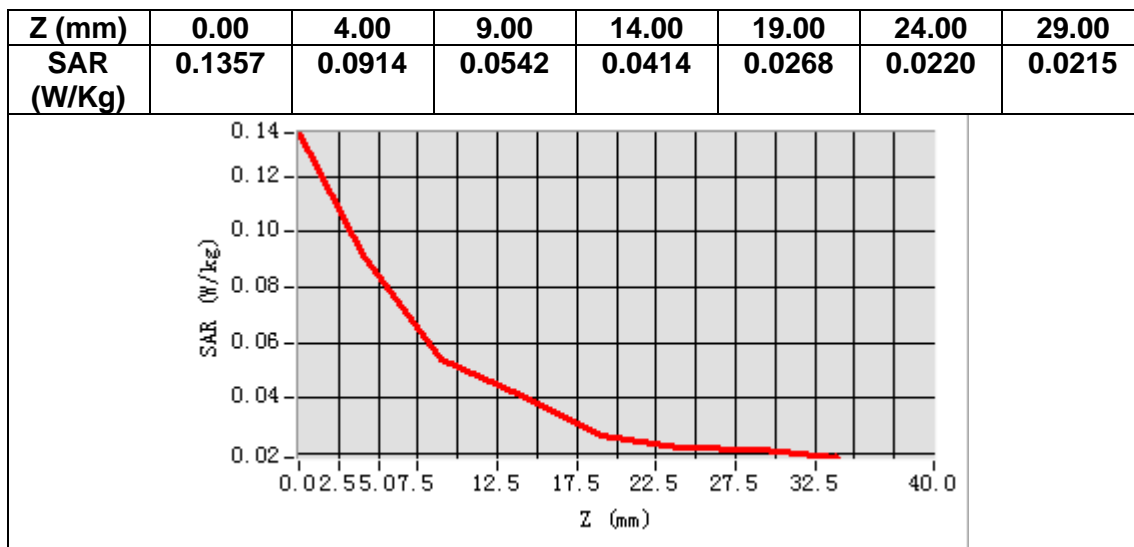

# MEASUREMENT 20


Date of measurement: 17/12/2021

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 7</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	2535.000000
<b>Relative permittivity (real part)</b>	39.839664
<b>Relative permittivity (imaginary part)</b>	13.640566
<b>Conductivity (S/m)</b>	1.921046
<b>Variation (%)</b>	-0.630000

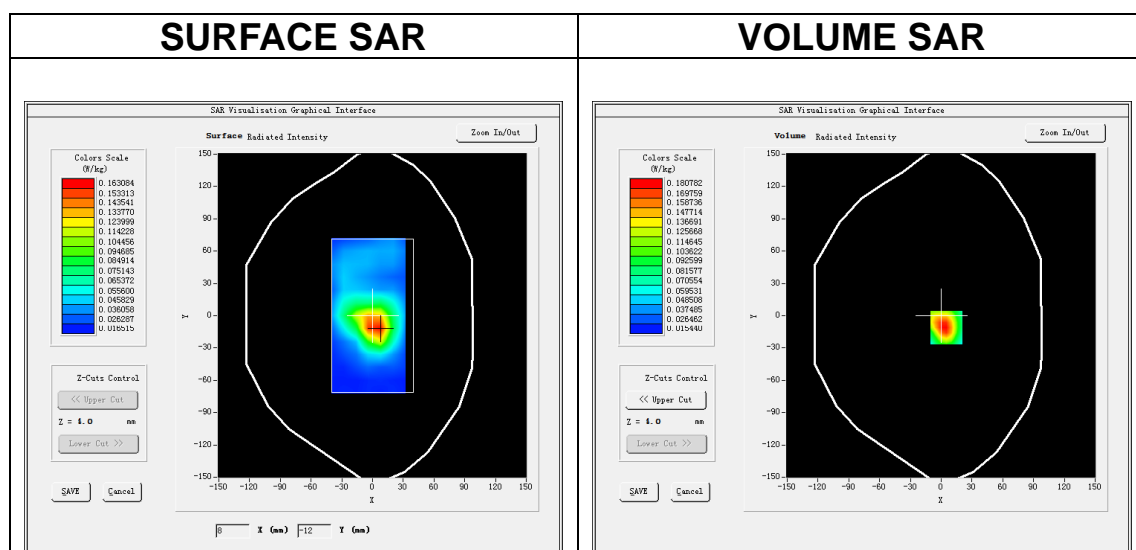

**Maximum location: X=5.00, Y=-11.00**

**SAR Peak: 0.29 W/kg**

<b>SAR 10g (W/Kg)</b>	0.092021
<b>SAR 1g (W/Kg)</b>	0.170530

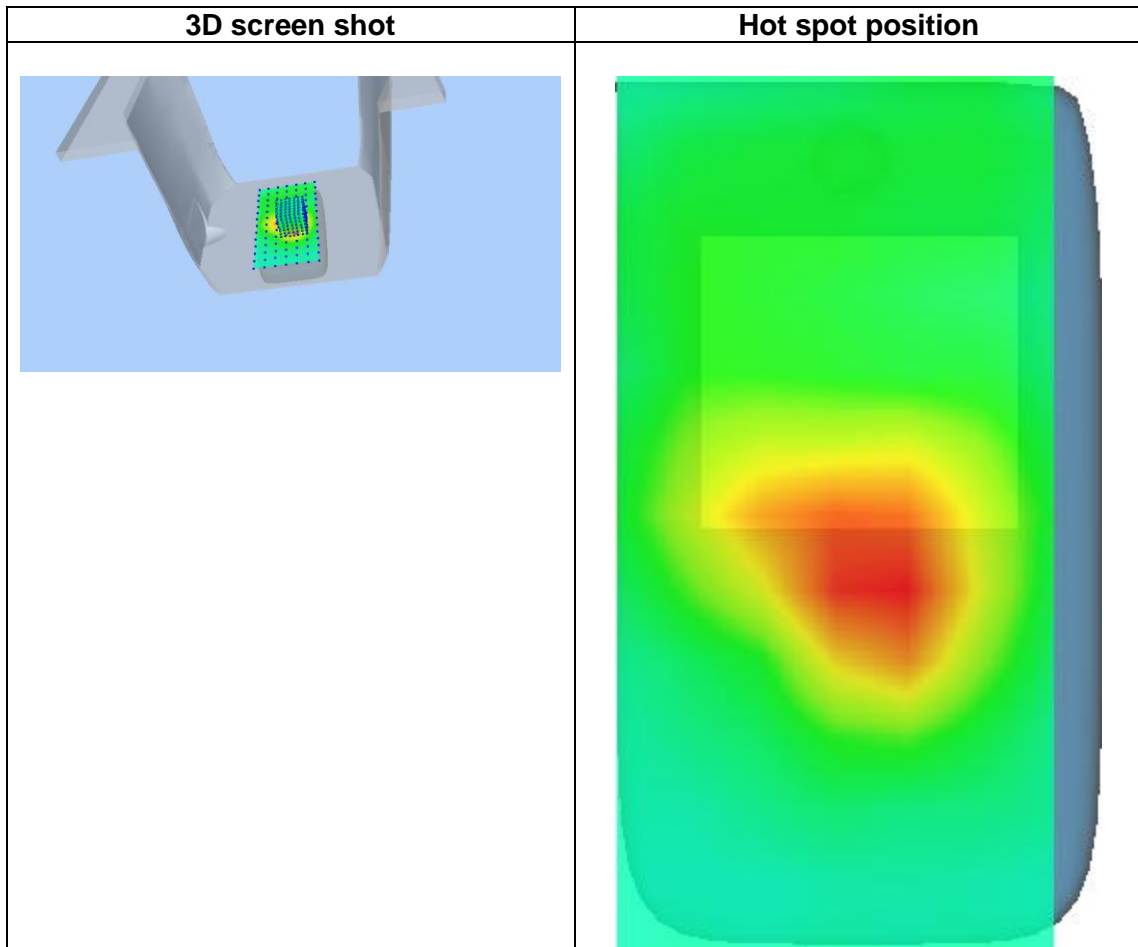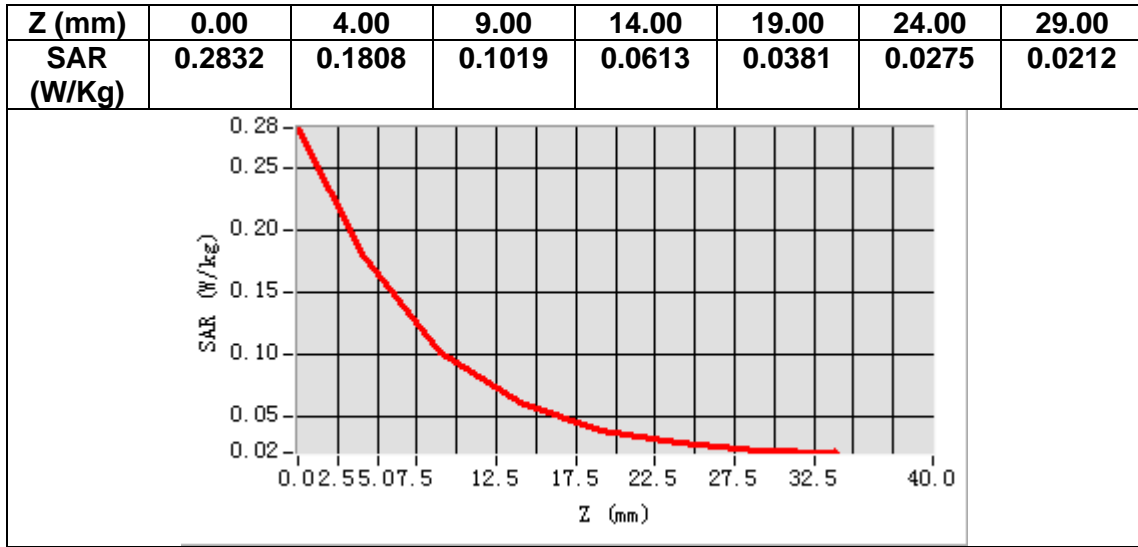

# MEASUREMENT 21


Date of measurement: 22/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>FDDBand26A</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>(Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.50</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	819.000000
<b>Relative permittivity (real part)</b>	41.035912
<b>Relative permittivity (imaginary part)</b>	19.575768
<b>Conductivity (S/m)</b>	0.890697
<b>Variation (%)</b>	0.880000

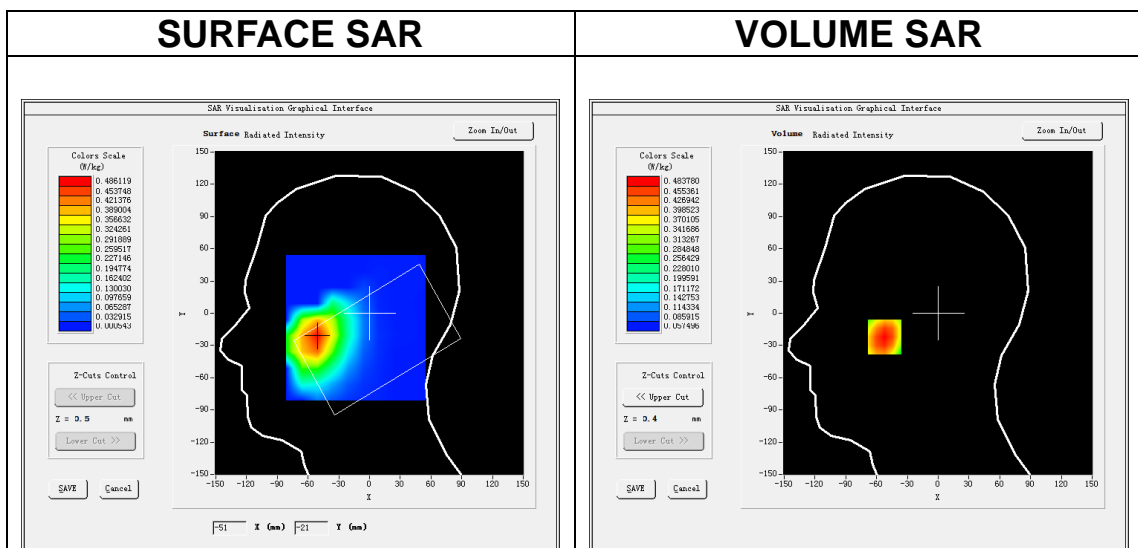

**Maximum location: X=-52.00, Y=-22.00**  
**SAR Peak: 0.57 W/kg**

<b>SAR 10g (W/Kg)</b>	0.347530
<b>SAR 1g (W/Kg)</b>	0.465613

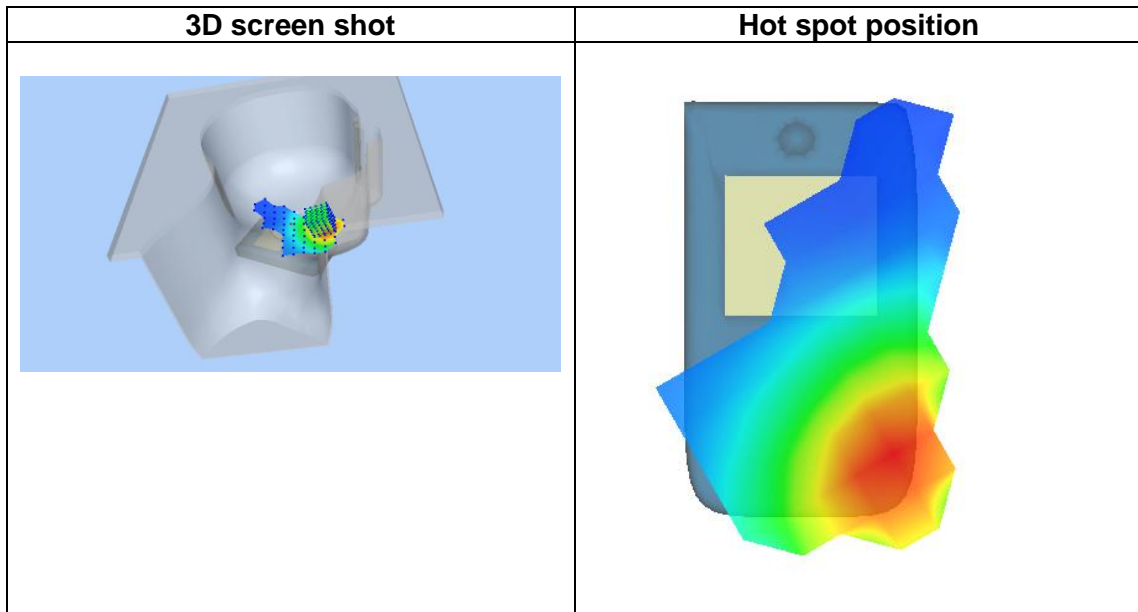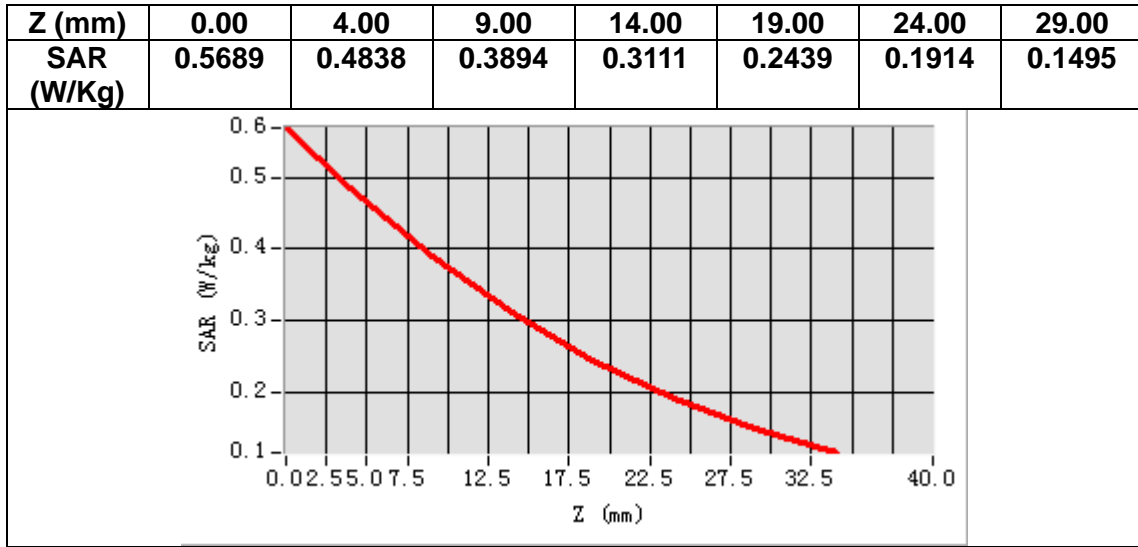

# MEASUREMENT 22


Date of measurement: 22/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>FDDBand26A</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>(Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.50</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	819.000000
<b>Relative permittivity (real part)</b>	41.035912
<b>Relative permittivity (imaginary part)</b>	19.575768
<b>Conductivity (S/m)</b>	0.890697
<b>Variation (%)</b>	0.110000

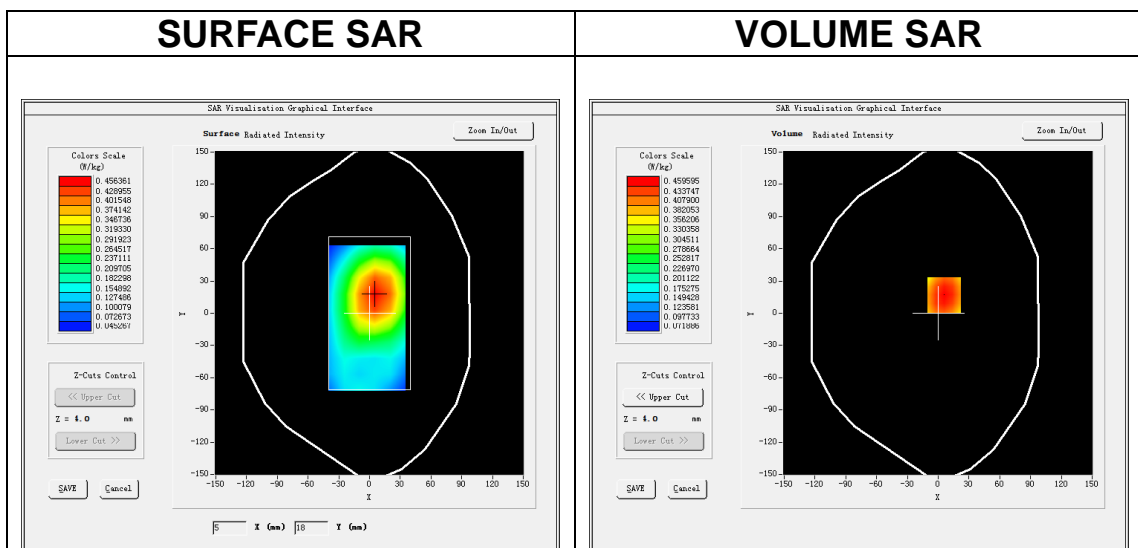

**Maximum location: X=6.00, Y=17.00**  
**SAR Peak: 0.56 W/kg**

<b>SAR 10g (W/Kg)</b>	0.332310
<b>SAR 1g (W/Kg)</b>	0.444994



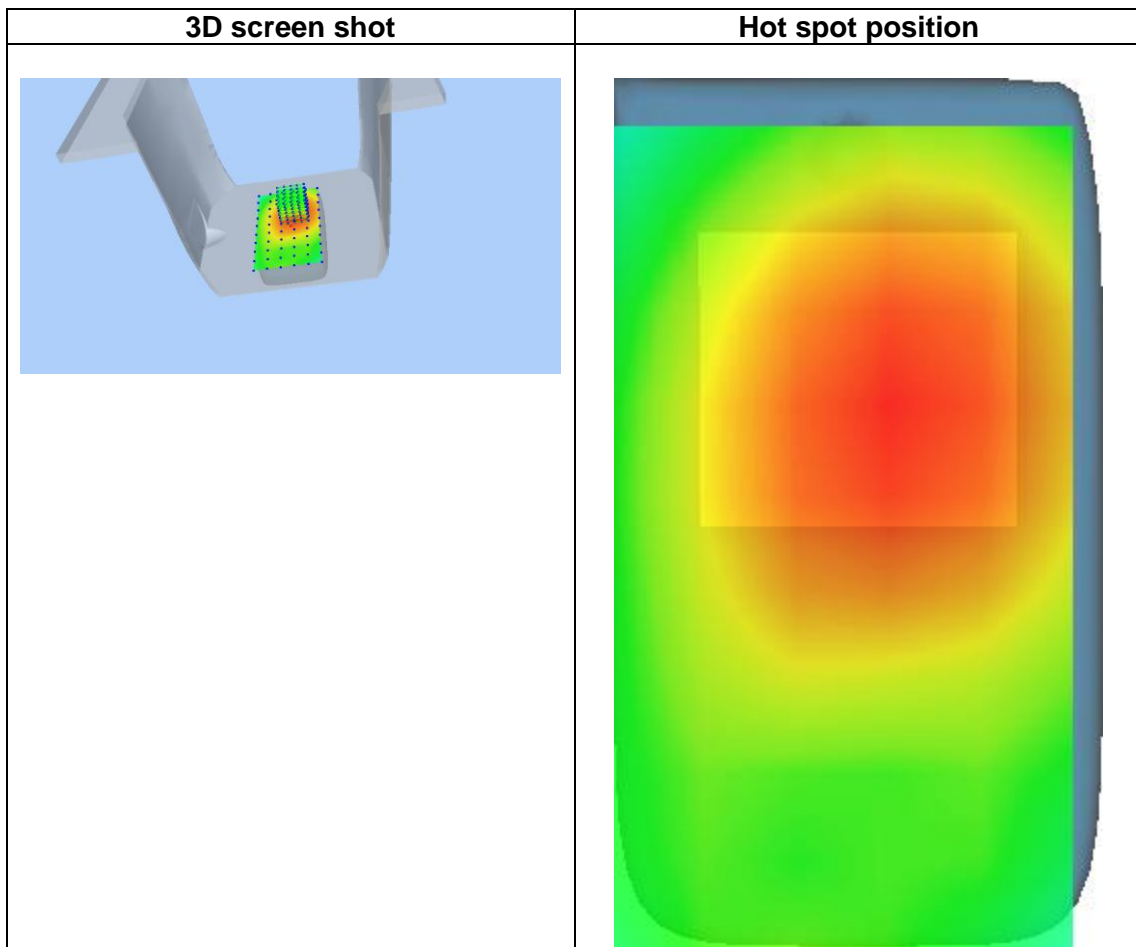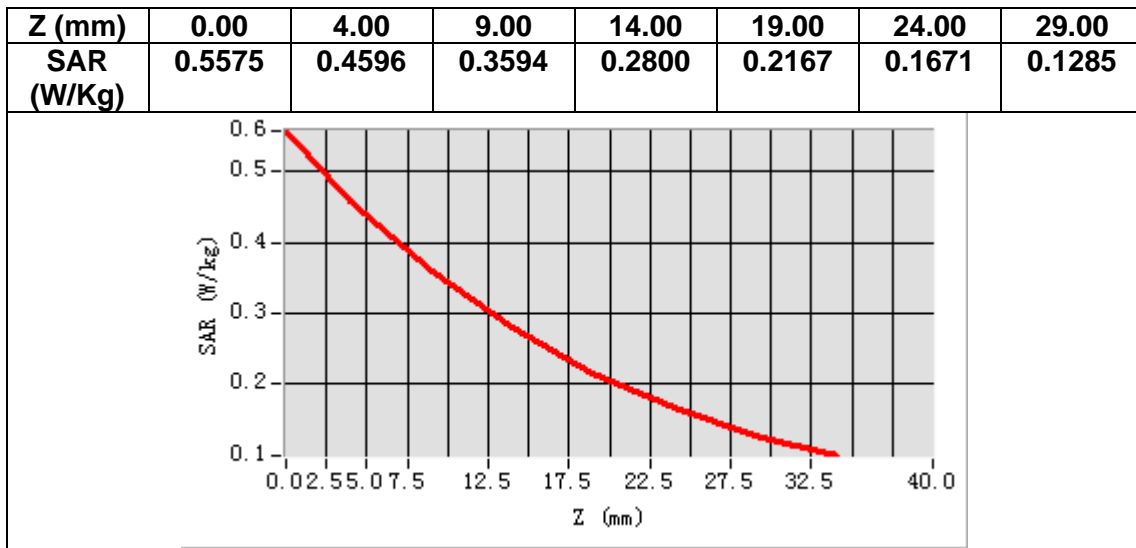

# MEASUREMENT 23


Date of measurement: 22/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>FDDBand26B</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>(Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.50</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	831.500000
<b>Relative permittivity (real part)</b>	40.819962
<b>Relative permittivity (imaginary part)</b>	19.581717
<b>Conductivity (S/m)</b>	0.904567
<b>Variation (%)</b>	-0.160000

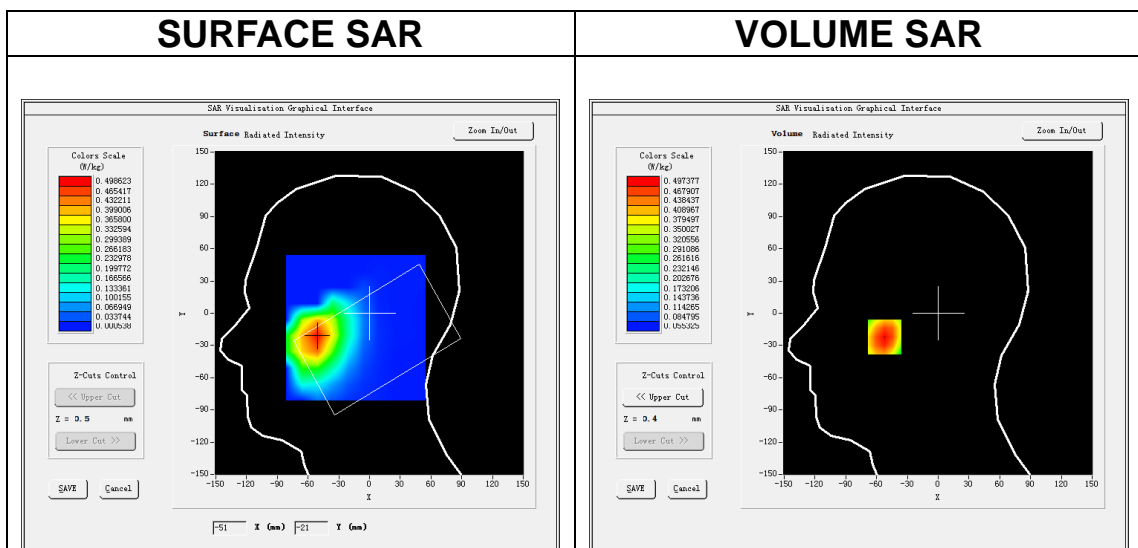

**Maximum location: X=-52.00, Y=-22.00**  
**SAR Peak: 0.60 W/kg**

<b>SAR 10g (W/Kg)</b>	0.353388
<b>SAR 1g (W/Kg)</b>	0.482175

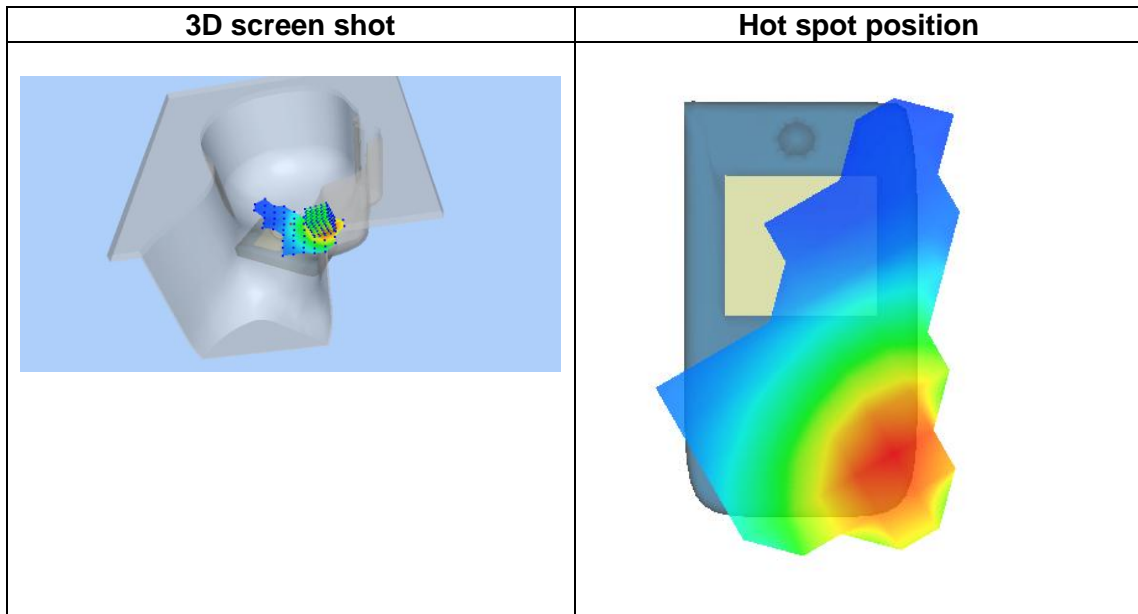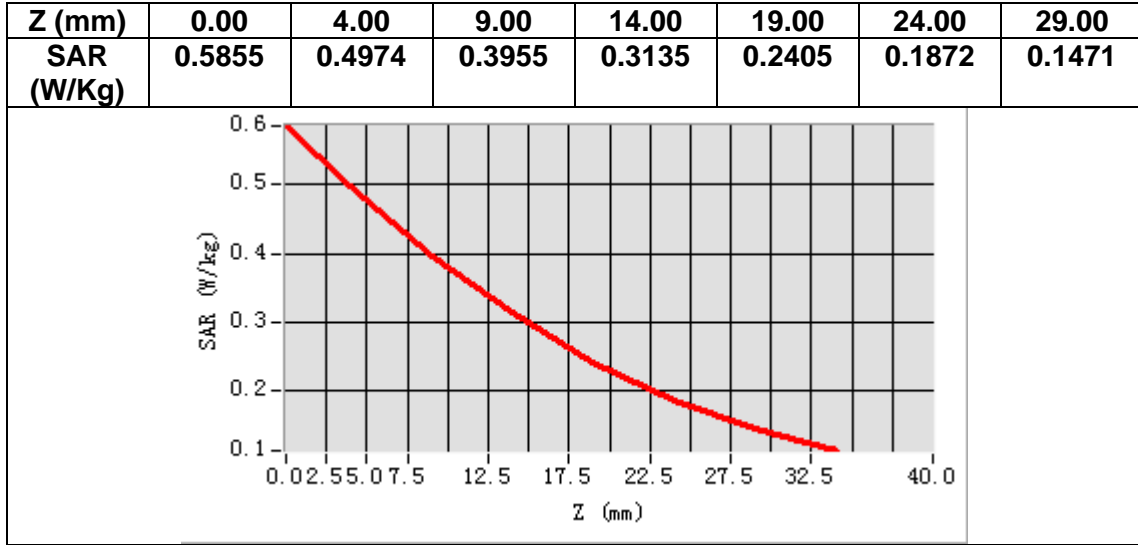

# MEASUREMENT 24


Date of measurement: 22/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>FDDBand26B</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>(Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.50</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	831.500000
<b>Relative permittivity (real part)</b>	40.819962
<b>Relative permittivity (imaginary part)</b>	19.581717
<b>Conductivity (S/m)</b>	0.904567
<b>Variation (%)</b>	0.370000

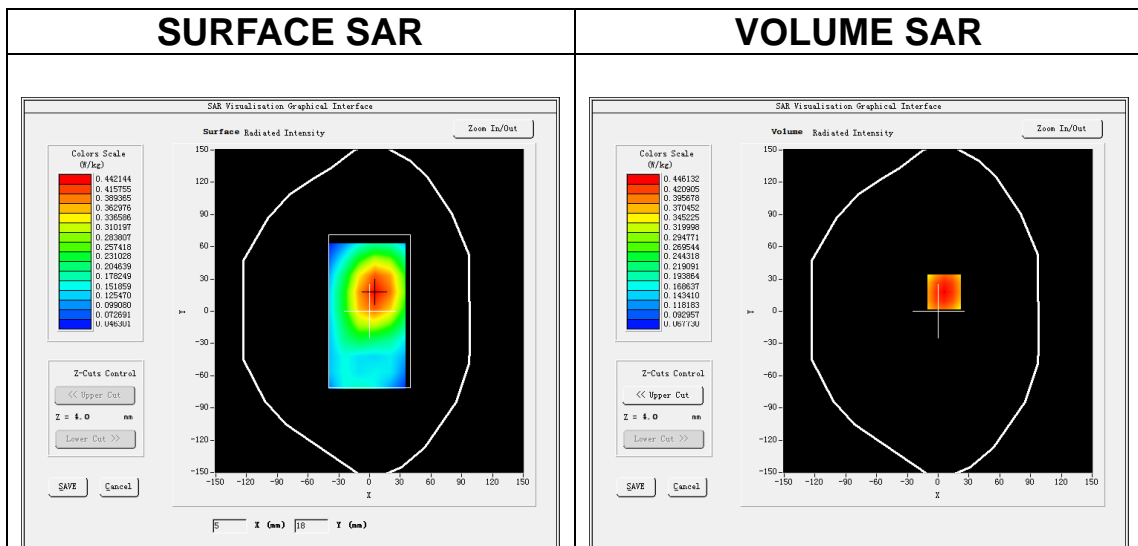

**Maximum location: X=6.00, Y=18.00**  
**SAR Peak: 0.54 W/kg**

<b>SAR 10g (W/Kg)</b>	0.321506
<b>SAR 1g (W/Kg)</b>	0.434251

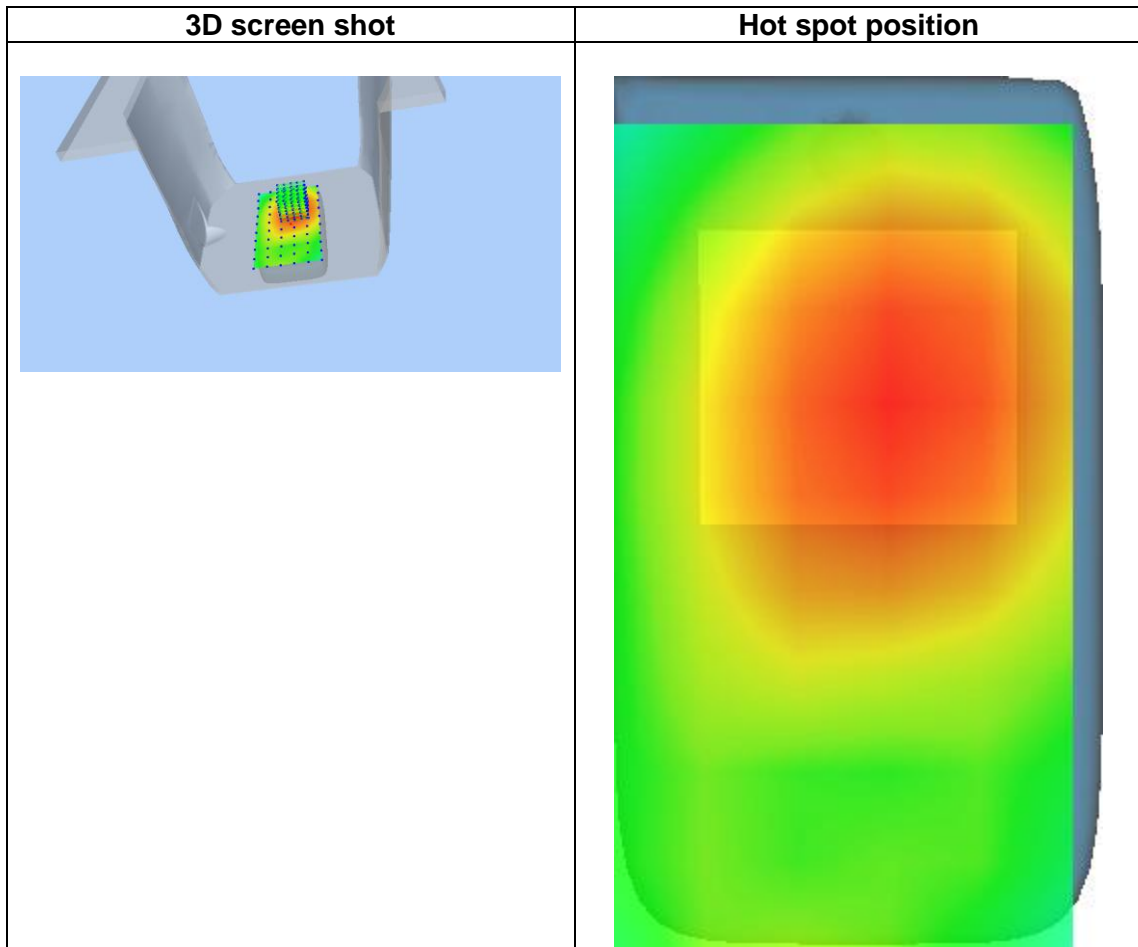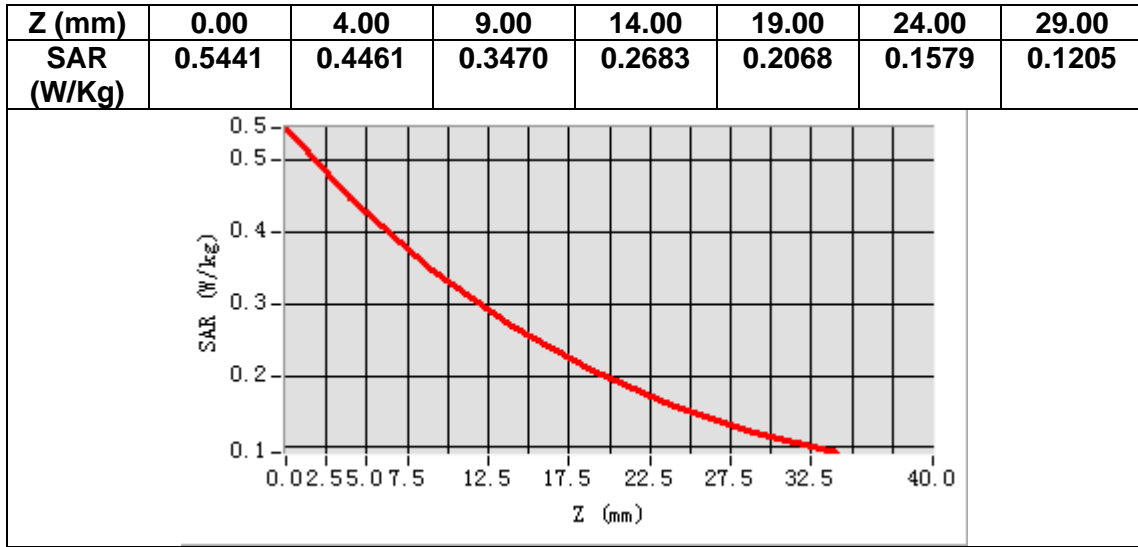

# MEASUREMENT 25


Date of measurement: 17/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>LTE band 38</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.87</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	2595.000000
<b>Relative permittivity (real part)</b>	38.071140
<b>Relative permittivity (imaginary part)</b>	13.861607
<b>Conductivity (S/m)</b>	1.998382
<b>Variation (%)</b>	0.280000

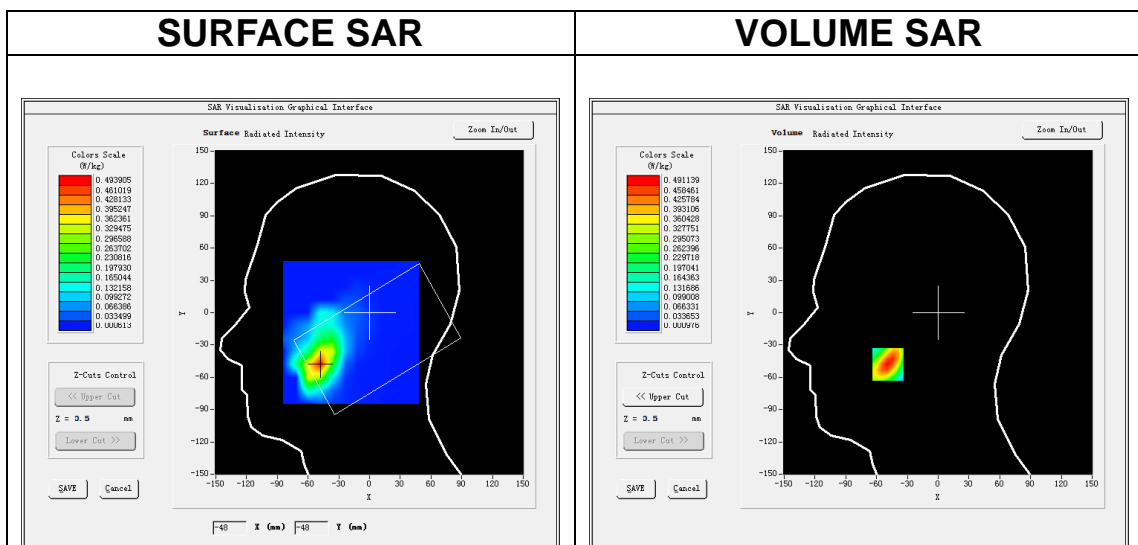

**Maximum location: X=-49.00, Y=-48.00**

**SAR Peak: 0.76 W/kg**

<b>SAR 10g (W/Kg)</b>	0.236939
<b>SAR 1g (W/Kg)</b>	0.459093

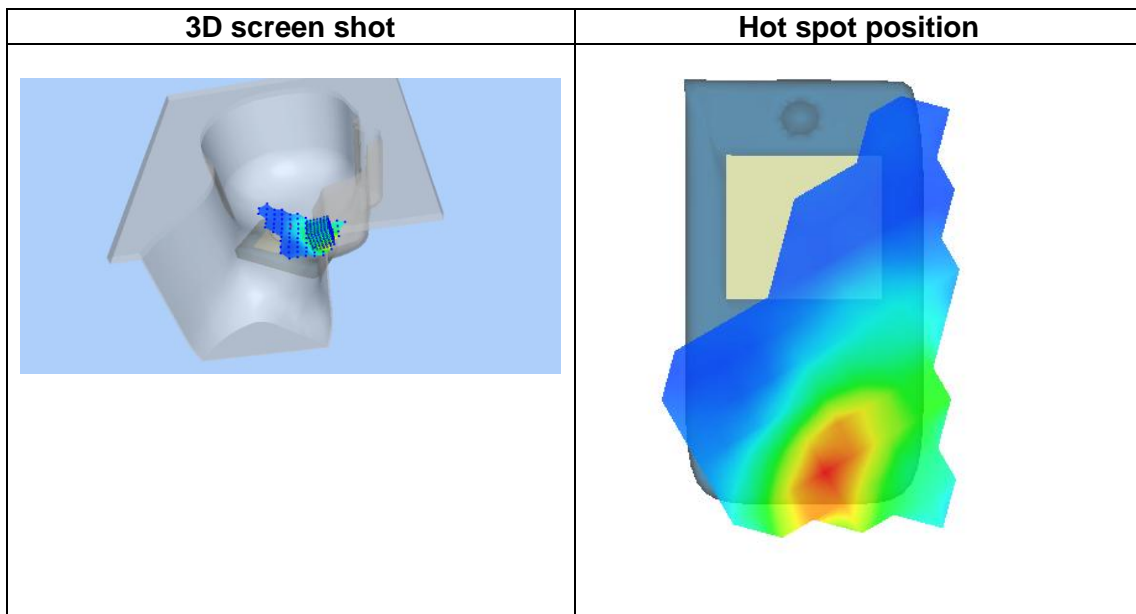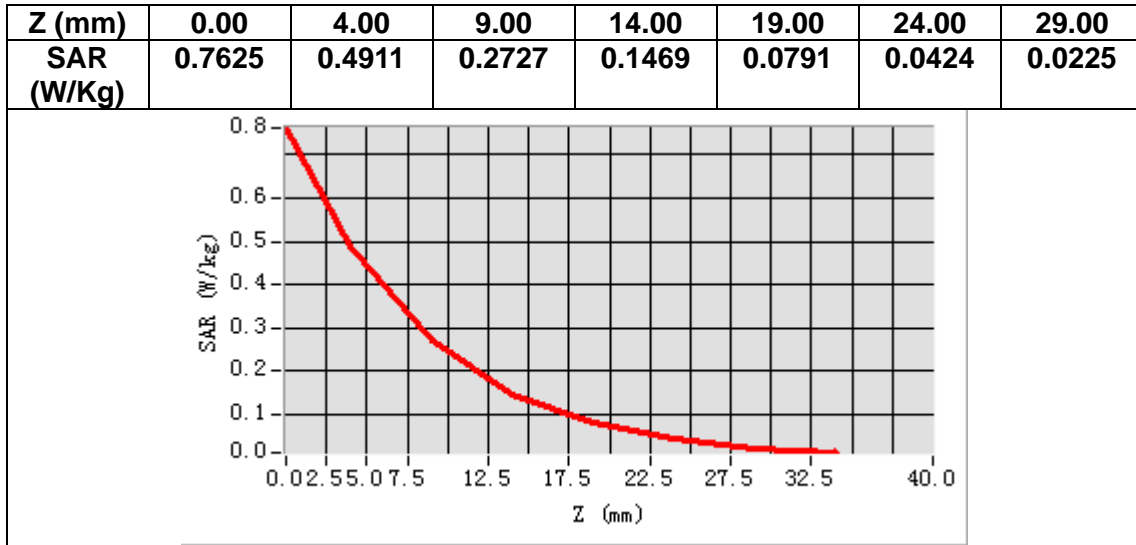

# MEASUREMENT 26


Date of measurement: 17/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>7x7x7, dx=5mm dy=5mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>LTE band 38</u>
<b>Channels</b>	<u>Middle</u>
<b>Signal</b>	<u>LTE (Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.87</u>

## B. SAR Measurement Results



<b>Frequency (MHz)</b>	2595.000000
<b>Relative permittivity (real part)</b>	38.071140
<b>Relative permittivity (imaginary part)</b>	13.861607
<b>Conductivity (S/m)</b>	1.998382
<b>Variation (%)</b>	1.490000

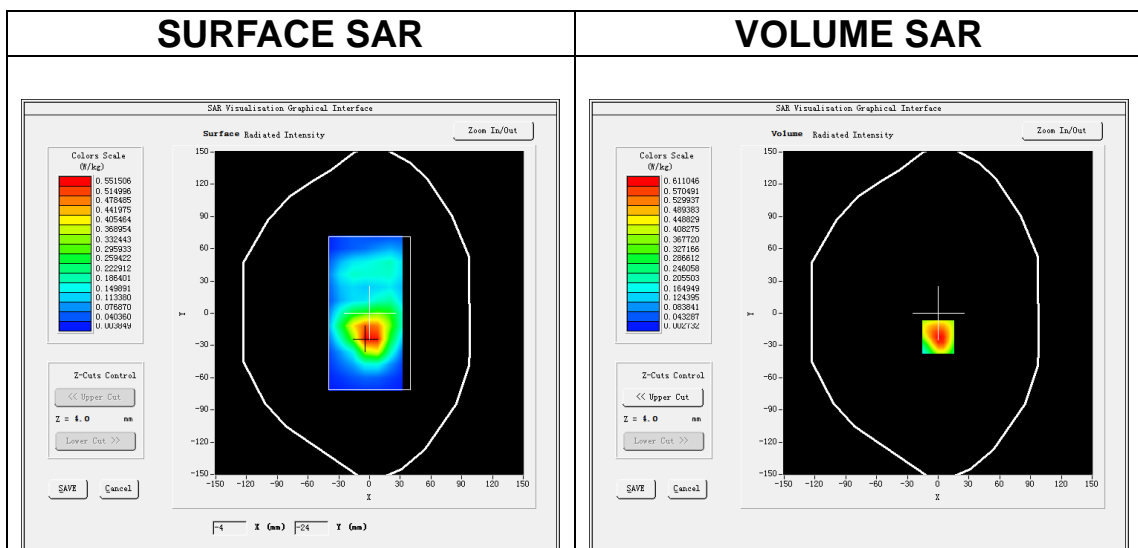

**Maximum location: X=0.00, Y=-22.00**  
**SAR Peak: 0.99 W/kg**

<b>SAR 10g (W/Kg)</b>	0.301149
<b>SAR 1g (W/Kg)</b>	0.584690



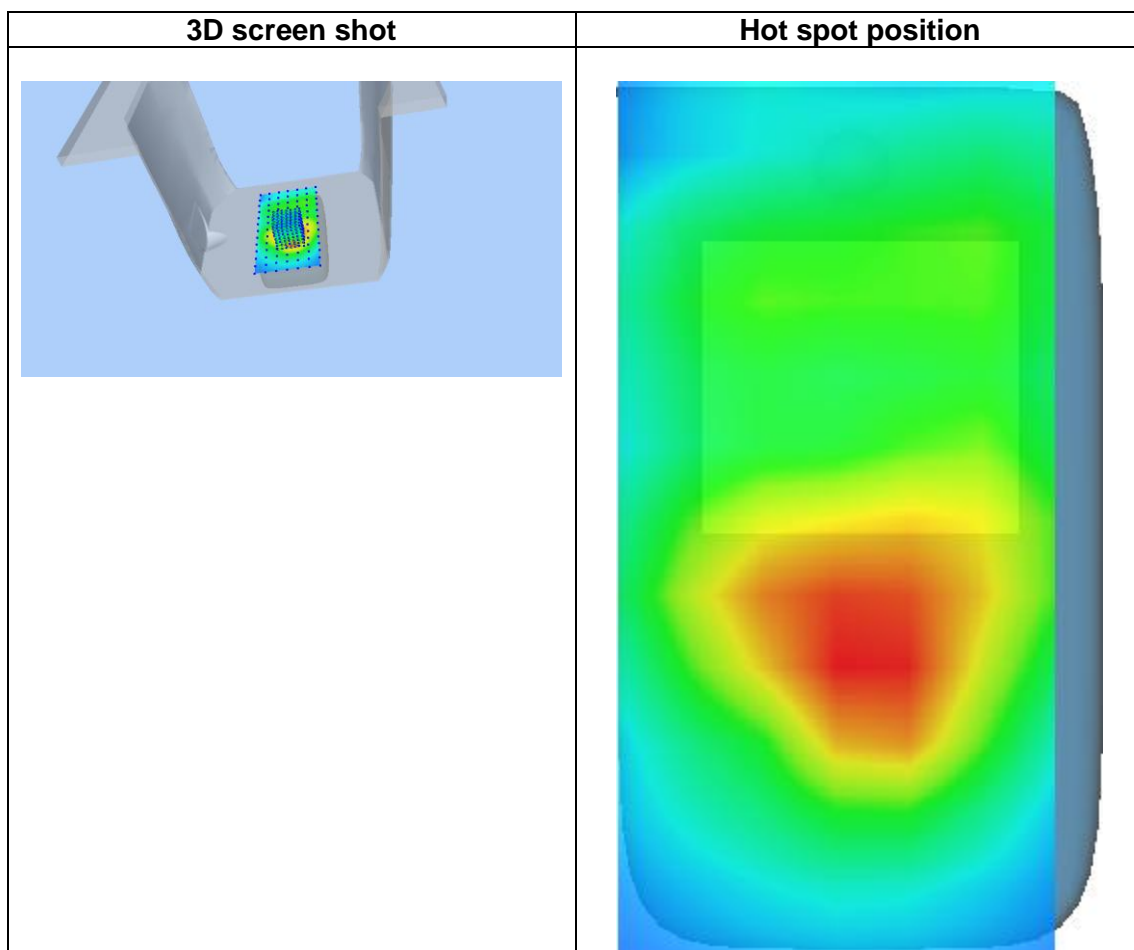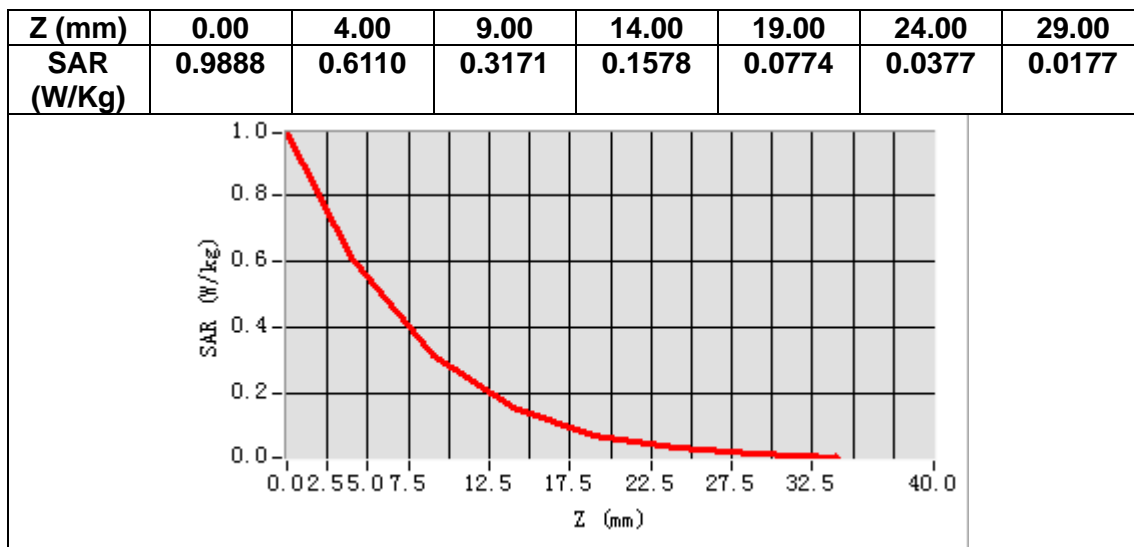

# MEASUREMENT 27


Date of measurement: 12/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Left head</u>
<b>Device Position</b>	<u>Cheek</u>
<b>Band</b>	<u>FDDBand66</u>
<b>Channels</b>	<u>Low</u>
<b>Signal</b>	<u>(Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.73</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1720.000000
<b>Relative permittivity (real part)</b>	39.529564
<b>Relative permittivity (imaginary part)</b>	14.009062
<b>Conductivity (S/m)</b>	1.338644
<b>Variation (%)</b>	-0.480000

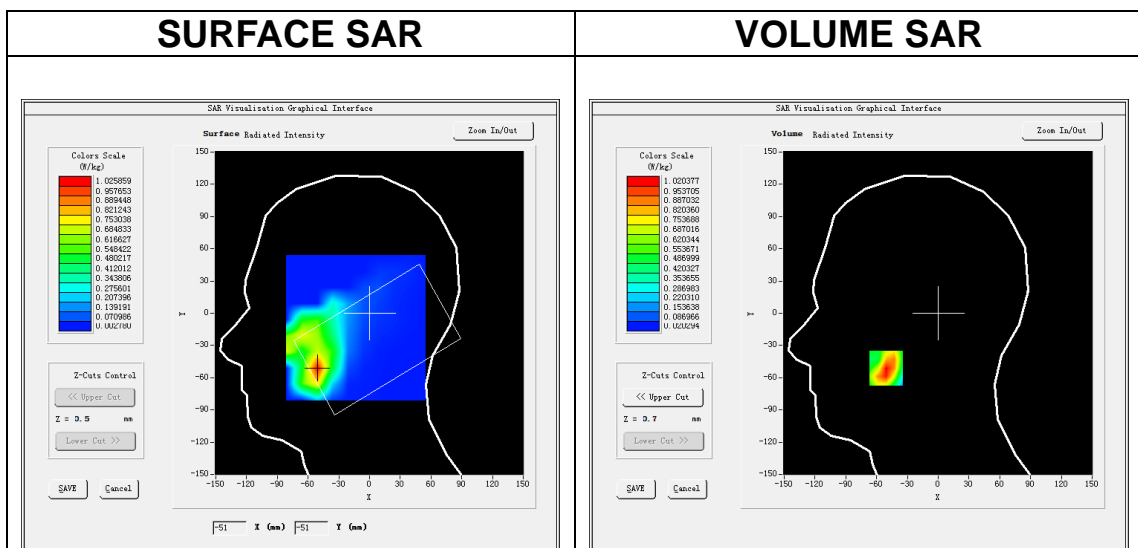

**Maximum location: X=-51.00, Y=-51.00**  
**SAR Peak: 1.55 W/kg**

<b>SAR 10g (W/Kg)</b>	0.532798
<b>SAR 1g (W/Kg)</b>	0.978757

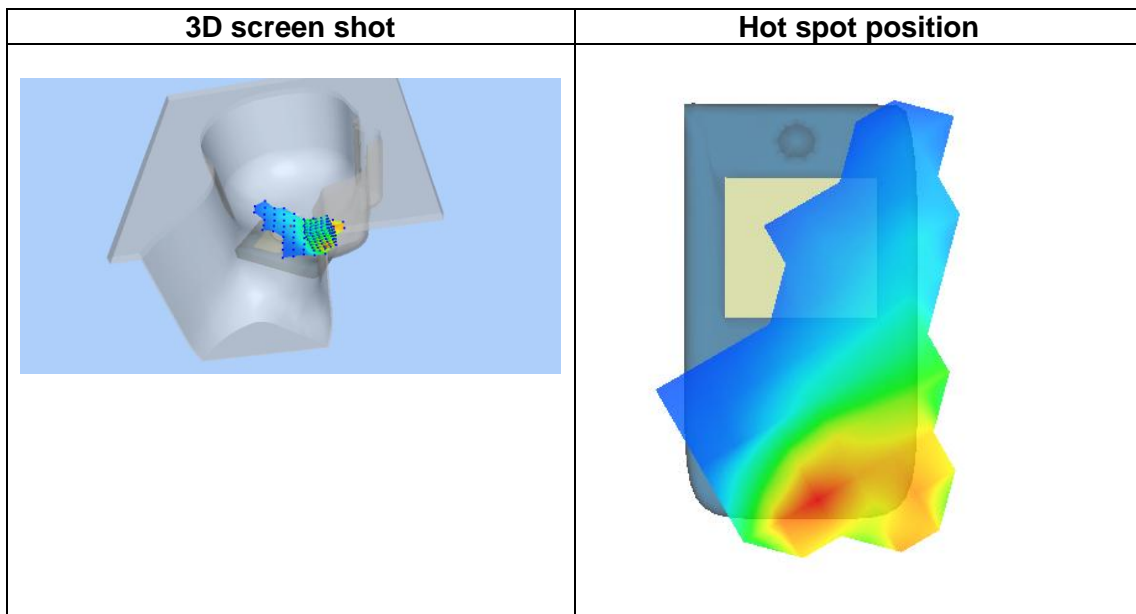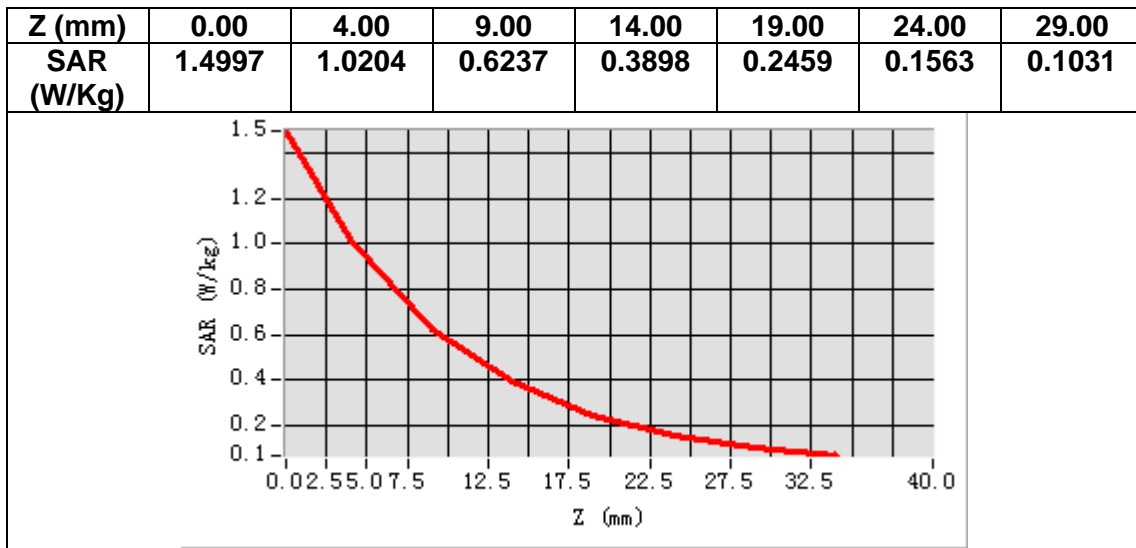

# MEASUREMENT 28


Date of measurement: 12/5/2023

## A. Experimental conditions.

<b>Area Scan</b>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<b>ZoomScan</b>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<b>Phantom</b>	<u>Validation plane</u>
<b>Device Position</b>	<u>Body</u>
<b>Band</b>	<u>FDDBand66</u>
<b>Channels</b>	<u>Low</u>
<b>Signal</b>	<u>(Crest factor: 1.0)</u>
<b>ConvF</b>	<u>1.73</u>



## B. SAR Measurement Results

<b>Frequency (MHz)</b>	1720.000000
<b>Relative permittivity (real part)</b>	39.529564
<b>Relative permittivity (imaginary part)</b>	14.009062
<b>Conductivity (S/m)</b>	1.338644
<b>Variation (%)</b>	-0.420000

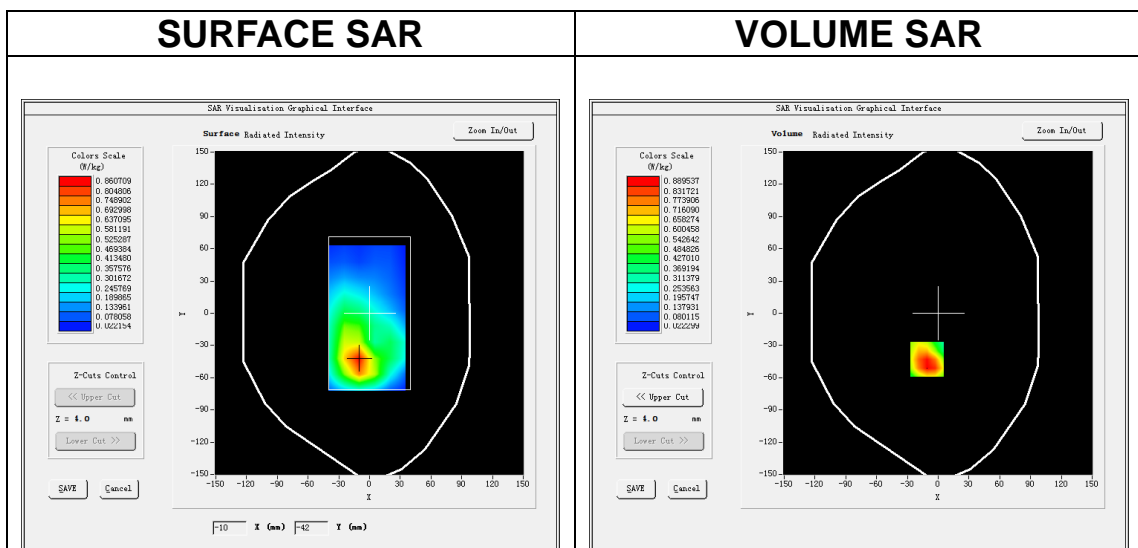

**Maximum location: X=-11.00, Y=-43.00**  
**SAR Peak: 1.29 W/kg**

<b>SAR 10g (W/Kg)</b>	0.519182
<b>SAR 1g (W/Kg)</b>	0.866669

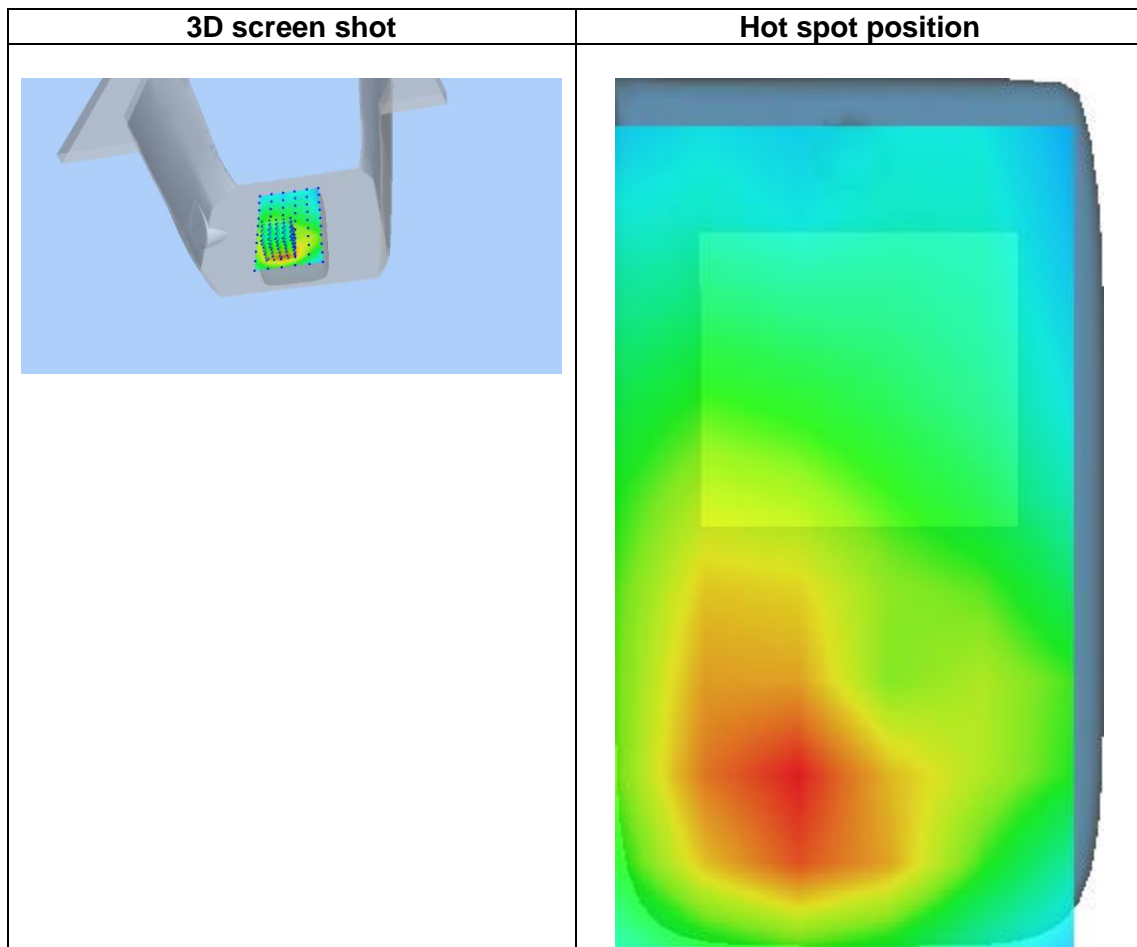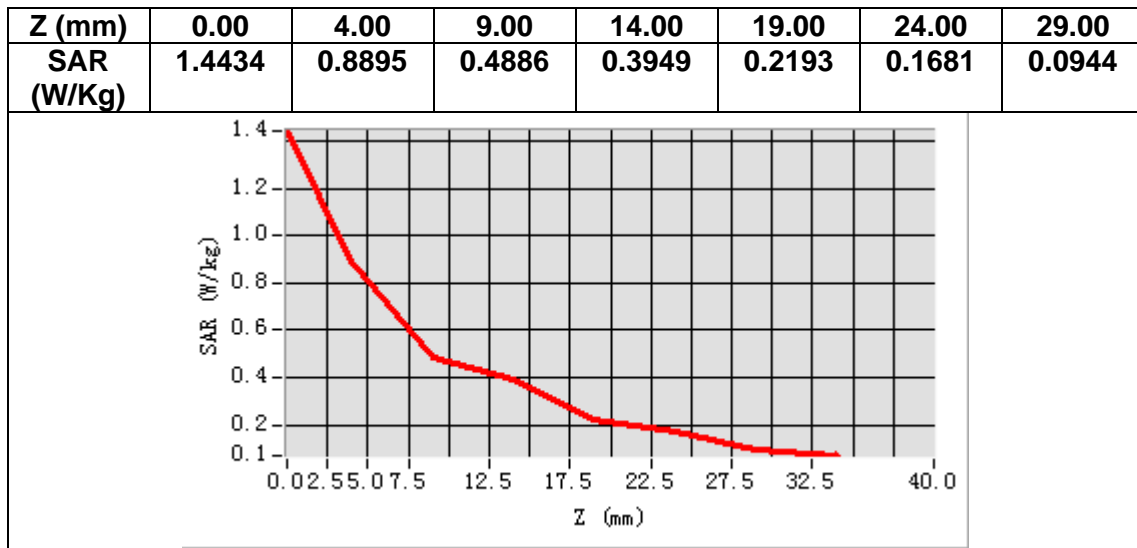

## 14. Appendix D. Calibration Certificate

<b>Table of contents</b>
E Field Probe - SN 08/16 EPGO287
E Field Probe - SN 08/16 EPGO287-2023
835 MHz Dipole - SN 03/15 DIP 0G835-347
1800 MHz Dipole - SN 03/15 DIP 1G800-349
1900 MHz Dipole - SN 03/15 DIP 1G900-350
2450 MHz Dipole - SN 03/15 DIP 2G450-352
2600 MHz Dipole - SN 03/15 DIP 2G600-356
E Field Probe - SN 08/16 EPGO287-2023-10-1
Extended Calibration Certificate