

APPLICATION CERTIFICATION  
On Behalf of  
MTP Instruments Inc.

Wireless Energy Monitor  
Model No.: MTP 3100

FCC ID: ZSX-MTP3100

Prepared for : MTP Instruments Inc.  
Address : 4409 Charleroi Street Montreal Quebec H1H 1T6 Canada

Prepared by : ACCURATE TECHNOLOGY CO. LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20111325  
Date of Test : July 21-23, 2011  
Date of Report : July 23, 2011

## TABLE OF CONTENTS

Description	Page
<b>Test Report Certification</b>	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	5
1.3. Measurement Uncertainty.....	5
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>6</b>
<b>3. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>4. THE FIELD STRENGTH OF RADIATION EMISSION .....</b>	<b>8</b>
4.1. Block Diagram of Test Setup.....	8
4.2. The Field Strength of Radiation Emission Measurement Limits.....	9
4.3. Configuration of EUT on Measurement .....	9
4.4. Operating Condition of EUT .....	9
4.5. Test Procedure .....	10
4.6. The Field Strength of Radiation Emission Measurement Results .....	11
<b>5. 20DB OCCUPIED BANDWIDTH .....</b>	<b>13</b>
5.1. Block Diagram of Test Setup.....	13
5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c) .....	13
5.3. EUT Configuration on Measurement .....	14
5.4. Operating Condition of EUT .....	14
5.5. Test Procedure .....	14
5.6. Measurement Result .....	15
<b>6. DURATION TIME AND SILENT PERIOD MEASUREMENT.....</b>	<b>16</b>
6.1. Block Diagram of Test Setup.....	16
6.2. Duration Time and silent period measurement according to FCC Part 15 Section 15.231(e) .....	16
6.3. EUT Configuration on Measurement .....	17
6.4. Operating Condition of EUT .....	17
6.5. Test Procedure .....	17
6.6. Measurement Result .....	18
<b>7. AVERAGE FACTOR MEASUREMENT .....</b>	<b>19</b>
7.1. Block Diagram of Test Setup.....	19
7.2. Average factor Measurement according to ANSI 63.4: 2003.....	19
7.3. EUT Configuration on Measurement .....	19
7.4. Operating Condition of EUT .....	20
7.5. Test Procedure .....	20
7.6. Measurement Result .....	21

APPENDIX I ( TEST CURVES) (7 pages)

## Test Report Certification

Applicant : MTP Instruments Inc.  
 Manufacturer : Shenzhen Sailwider Electronics Co., Ltd.  
 EUT Description : Wireless Energy Monitor  
     (A) MODEL NO.: MTP 3100  
     (B) SERIAL NO.: N/A  
     (C) POWER SUPPLY: DC 3V ("C" batteries 2×)

Measurement Procedure Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.231**  
**ANSI 63.4: 2003**

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : July 21-23, 2011

Prepared by : Apple Lv  
 \_\_\_\_\_  
 (Engineer)

Approved & Authorized Signer : Guang Lv  
 \_\_\_\_\_  
 (Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : Wireless Energy Monitor

Model Number : MTP 3100

Operation Frequency : 433.9770MHz

Power Supply : DC 3V ("C" batteries 2×)

Applicant : MTP Instruments Inc.  
Address : 4409 Charleroi Street Montreal Quebec H1H 1T6 Canada

Manufacturer : Shenzhen Sailwider Electronics Co., Ltd.  
Address : Unit Y-Z, 25th Floor, Bldg. A, Fortune Plaza,  
No.7002 Shennan Road, Futian District,  
Shenzhen 518040, China

Date of sample received : July 13, 2011

Date of Test : July 21-23, 2011

## 1.2.Description of Test Facility

EMC Lab	: Accredited by TUV Rheinland Shenzhen
	Listed by FCC The Registration Number is 752051
	Listed by Industry Canada The Registration Number is 5077A-2
	Accredited by China National Accreditation Committee for Laboratories The Certificate Registration Number is L3193
Name of Firm	: ACCURATE TECHNOLOGY CO. LTD
Site Location	: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

## 1.3.Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 3.08dB, k=2  
(9kHz-30MHz)

Radiated emission expanded uncertainty = 4.42dB, k=2  
(30MHz-1000MHz)

Radiated emission expanded uncertainty = 4.06dB, k=2  
(Above 1GHz)

## 2. MEASURING DEVICE AND TEST EQUIPMENT

**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 15, 2012
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 15, 2012
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 15, 2012
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 15, 2012
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2012
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2012
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2012
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2012
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 15, 2012
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 15, 2012

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Conducted Emission	N/A
Section 15.231(e)	Radiated Emission	Compliant
Section 15.231(c)	20dB Bandwidth	Compliant
Section 15.231(e)	Duration time and silent period measurement	Compliant

Remark: “N/A” means “Not applicable”.

## 4. THE FIELD STRENGTH OF RADIATION EMISSION


### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Energy Monitor)

#### 4.1.2. Semi-anechoic Chamber Test Setup Diagram

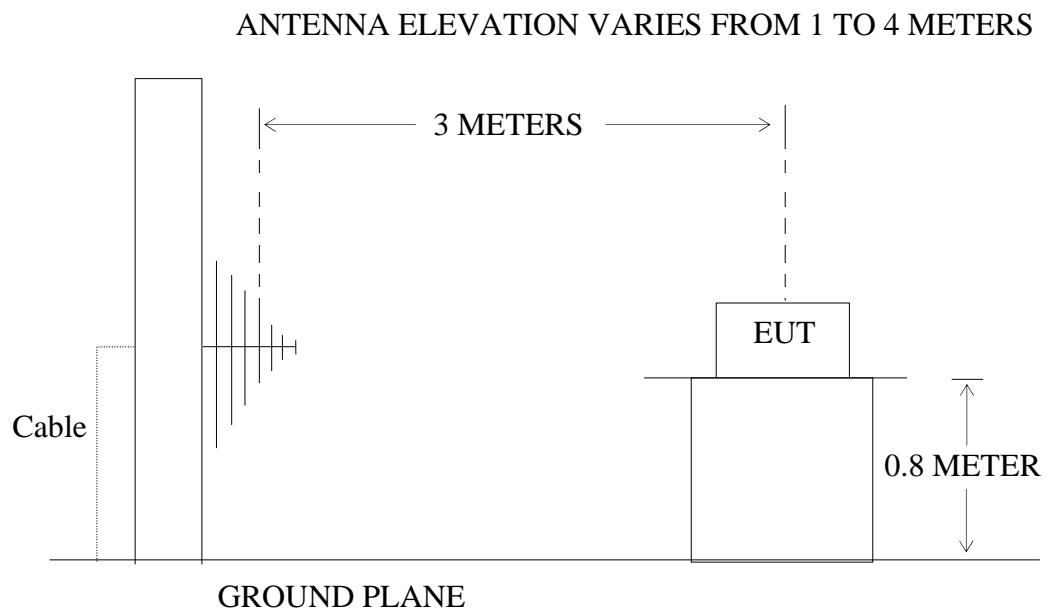

(EUT: Wireless Energy Monitor)

## 4.2.The Field Strength of Radiation Emission Measurement Limits

### 4.2.1.Radiation Emission Measurement Limits According to Section 15.231(e)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [ $\mu$ V/m]	Field Strength of Spurious Emission [Average] [ $\mu$ V/m]
40.66-40.70	1000	100
70-130	500	50
130-174	500 - 1500	50-150
174-260	1500	150
260-470	1500-5000	150-500
Above 470	5000	500

Where F is the frequency in MHz, The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174MHz,  $\mu$ V/m at 3 meters=22.72727(F)-2454.545; For the band 260-470MHz,  $\mu$ V/m at 3 meters=16.6667(F)-2833.3333. The maximum permissible unwanted emission level is 20dB below the maximum permitted fundamental level.

### 4.2.2.Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section15.209.

## 4.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 4.3.1. Wireless Energy Monitor (EUT)

Model Number : MTP 3100  
Serial Number : N/A  
Manufacturer : Shenzhen Sailwider Electronics Co., Ltd.

## 4.4.Operating Condition of EUT

### 4.4.1.Setup the EUT and simulator as shown as Section 4.1.

### 4.4.2.Turn on the power of all equipment.

### 4.4.3.Let the EUT work in measuring mode (TX) measure it.

#### 4.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.4 on radiated emission measurement.

The bandwidth of test receiver is set at 120kHz in 30-1000MHz, and 1MHz in 1000-5000MHz.

The frequency range from 30MHz to 5000MHz is checked.

## 4.6. The Field Strength of Radiation Emission Measurement Results PASS.

The frequency range 30MHz to 5000MHz is investigated.

Date of Test:	July 21-23, 2011	Temperature:	25°C
EUT:	Wireless Energy Monitor	Humidity:	50%
Model No.:	MTP 3100	Power Supply:	DC 3V
Test Mode:	TX	Test Engineer:	PEI

Frequency (MHz)	Reading (dB $\mu$ V/m)	Factor	Average Factor	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
<b>433.9770</b>	<b>60.99</b>	<b>22.95</b>	<b>-11.84</b>	<b>72.1</b>	<b>83.94</b>	<b>72.8</b>	<b>92.8</b>	<b>-0.7</b>	<b>-8.86</b>	Horizontal
866.5300	22.13	28.63	-11.84	38.92	50.76	52.8	72.8	-13.88	-22.04	
1299.795	64.70	-12.20	-11.84	40.66	52.50	52.8	72.8	-12.14	-20.3	
1733.080	60.45	-10.39	-11.84	38.22	50.06	52.8	72.8	-14.58	-22.74	
216.327	54.71	-8.41	-11.84	34.46	46.30	52.8	72.8	-18.34	-26.5	
2599.606	50.71	-6.72	-11.84	32.15	43.99	52.8	72.8	-20.65	-28.81	
<b>433.9770</b>	<b>59.50</b>	<b>22.95</b>	<b>-11.84</b>	<b>70.61</b>	<b>82.45</b>	<b>72.8</b>	<b>92.8</b>	<b>-2.19</b>	<b>-10.35</b>	
866.5300	20.15	28.63	-11.84	36.94	48.78	52.8	72.8	-15.86	-24.02	
1299.795	64.54	-12.20	-11.84	40.5	52.34	52.8	72.8	-12.3	-20.46	
1733.080	60.74	-10.39	-11.84	38.51	50.35	52.8	72.8	-14.29	-22.45	
2166.327	57.33	-8.41	-11.84	37.08	48.92	52.8	72.8	-15.72	-23.88	Vertical
2599.606	53.09	-6.72	-11.84	34.54	46.37	52.8	72.8	-18.26	-26.43	

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. \*: Denotes restricted band of operation.

Measurements were made using a peak detector. Average results were calculated by using average factor calculation method. Any emission falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

4. FCC Limit for Average Measurement =  $16.6667(433.9)-2833.3333 = 4398.68\mu\text{V}/\text{m} = 72.8\text{dB}\mu\text{V}/\text{m}$

5. Pulse Desensitization Correction Factor

$$\text{Pulse Width (PW)} = 25.6\text{ms}$$

$$1/\text{PW} = 1/25.6\text{ms} = 0.0391 \text{ kHz}$$

RBW (10 kHz) > 1/PW (0.0391 kHz)

Therefore PDCF is not needed

6. The spectral diagrams in appendix I display the measurement of peak values.
7. The lab use average detector to perform average measurement. The report shows average factor and average results were calculated by using average factor calculation method.

## 5. 20DB OCCUPIED BANDWIDTH

### 5.1. Block Diagram of Test Setup


#### 5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Energy Monitor)

#### 5.1.2. Semi-anechoic Chamber Test Setup Diagram

ANTENNA ELEVATION VARIES FROM 1 TO 4 METERS

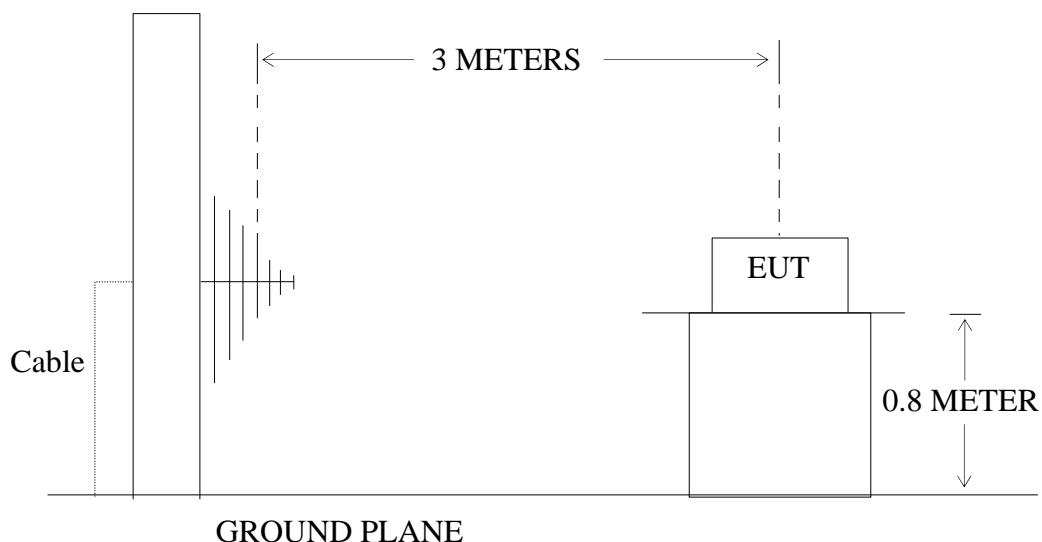

(EUT: Wireless Energy Monitor)

### 5.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

#### 15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is  $433.9\text{MHz} \times 0.25\% = 1084.8\text{kHz}$ . Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

### 5.3.EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 5.3.1. Wireless Energy Monitor (EUT)

Model Number : MTP 3100  
Serial Number : N/A  
Manufacturer : Shenzhen Sailwider Electronics Co., Ltd.

### 5.4.Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in measuring mode (TX) measure it.

### 5.5.Test Procedure

5.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz, VBW = 30kHz, Span = 500kHz.

5.5.2. Set SPA Max hold. Mark peak, -20dB

## 5.6. Measurement Result

**The EUT does meet the FCC requirement.**

-20dB bandwidth = 256.0 kHz < 1084.8 kHz.

The spectral diagrams in appendix I.

## 6. DURATION TIME AND SILENT PERIOD MEASUREMENT


### 6.1. Block Diagram of Test Setup

#### 6.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Energy Monitor)

#### 6.1.2. Semi-anechoic Chamber Test Setup Diagram

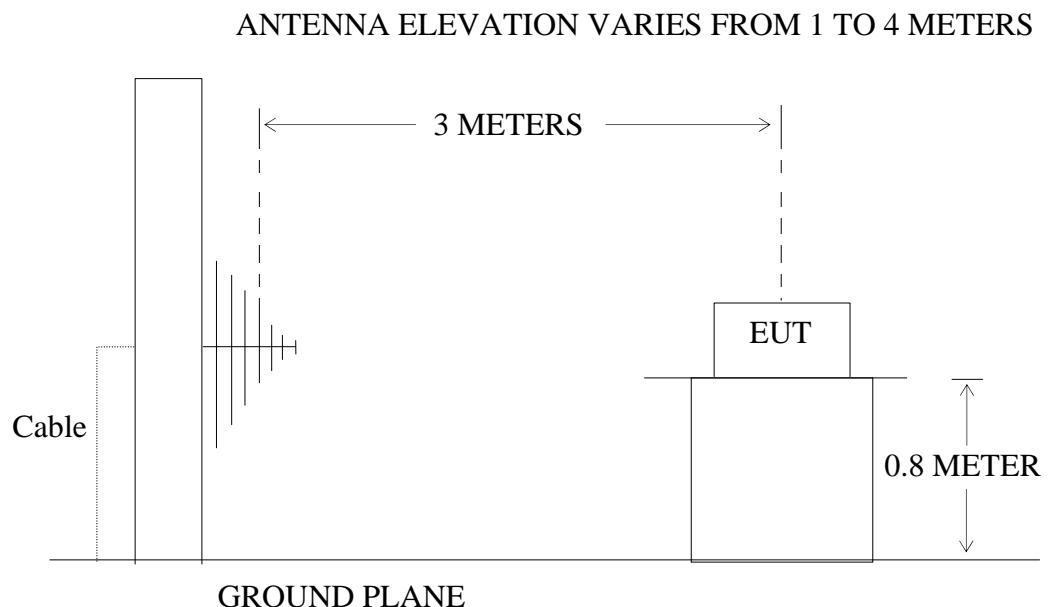

(EUT: Wireless Energy Monitor)

### 6.2. Duration Time and silent period measurement according to FCC Part 15

#### Section 15.231(e)

Section 15.231(e) In addition, devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

### 6.3.EUT Configuration on Measurement

The following equipment are installed on duration time and silent period measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.3.1.Wireless Energy Monitor (EUT)

Model Number : MTP 3100  
Serial Number : N/A  
Manufacturer : Shenzhen Sailwider Electronics Co., Ltd.

### 6.4.Operating Condition of EUT

6.4.1.Setup the EUT and simulator as shown as Section 6.1.

6.4.2.Turn on the power of all equipment.

6.4.3.Let the EUT work in measuring mode (TX) measure it.

### 6.5.Test Procedure

6.5.1.Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz,  
VBW =30kHz, Span = 0Hz.

6.5.2.Set EUT as normal operation.

6.5.3.Set SPA View. Delta Mark time.

## 6.6. Measurement Result

**The EUT does meet the FCC requirement.**

Duration time = 25.6 ms <1 s

Silent period = 11.24 seconds >10 seconds > 30 times the duration of the transmission

The spectral diagrams in appendix I.

## 7. AVERAGE FACTOR MEASUREMENT


### 7.1. Block Diagram of Test Setup

#### 7.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Energy Monitor)

#### 7.1.2. Semi-anechoic Chamber Test Setup Diagram

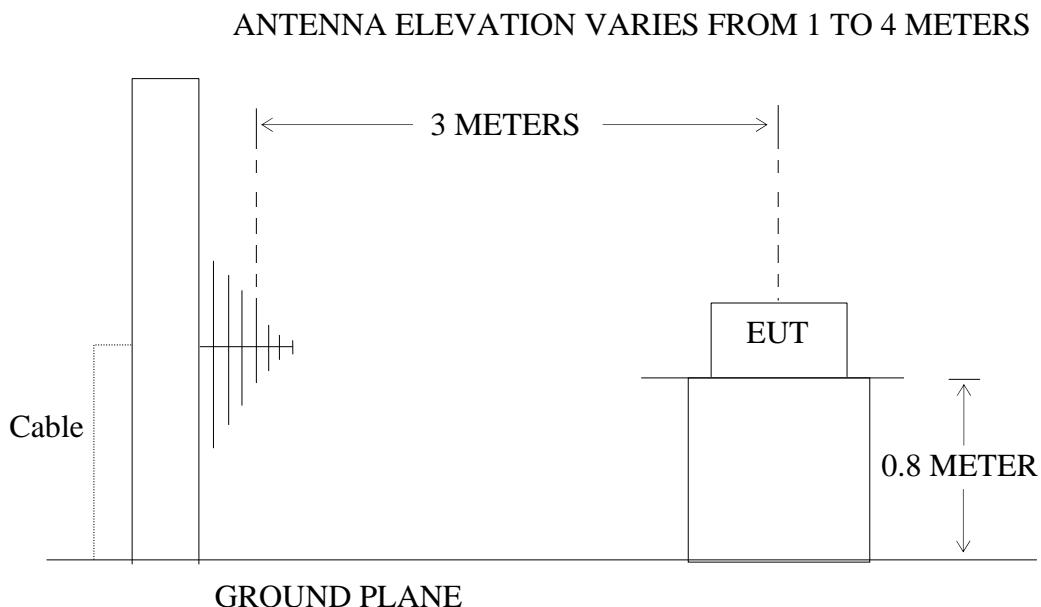

(EUT: Wireless Energy Monitor)

### 7.2. Average factor Measurement according to ANSI 63.4: 2003

**ANSI 63.4: 2003 Section 13.1.4.2** Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum. Instructions on calculating the duty cycle of a transmitter with pulsed emissions are provided in ANSI 63.4 H.4, step j.

**Average factor in dB =  $20 \log (\text{duty cycle})$**

### 7.3. EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 7.3.1. Wireless Energy Monitor (EUT)

Model Number : MTP 3100  
Serial Number : N/A  
Manufacturer : Shenzhen Sailwider Electronics Co., Ltd.

### 7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 7.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in measuring mode (TX) measure it.

### 7.5. Test Procedure

7.5.1. The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

7.5.2. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz,

VBW = 30kHz, Span = 0Hz.

7.5.3. Set EUT as normal operation.

7.5.4. Set SPA View. Delta Mark time.

## 7.6. Measurement Result

**The duty cycle is simply the on time divided by the period:**

Effective period of one cycle = 100ms

Sum of pulse width = 25.6ms

Duty Cycle =  $25.6\text{ms}/100\text{ms} = 0.256$

**Therefore, the average factor is found by  $20\log0.256 = -11.84\text{dB}$**

The spectral diagrams in appendix I.

## APPENDIX I (Test Curves)



## ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: pei #5021  
Standard: FCC Class B 3M Radiated  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 24 C / 48 %  
EUT: Wireless Energy Monitor  
Mode: TX  
Model: MTP 3100  
Manufacturer: Shenzhen Sailwider Electronics Co.,Ltd.

Polarization: Horizontal  
Power Source: DC 3V  
Date: 2011/07/22  
Time: 22:12:12  
Engineer Signature: PEI  
Distance: 3m

Note: Report No.:ATE20111325

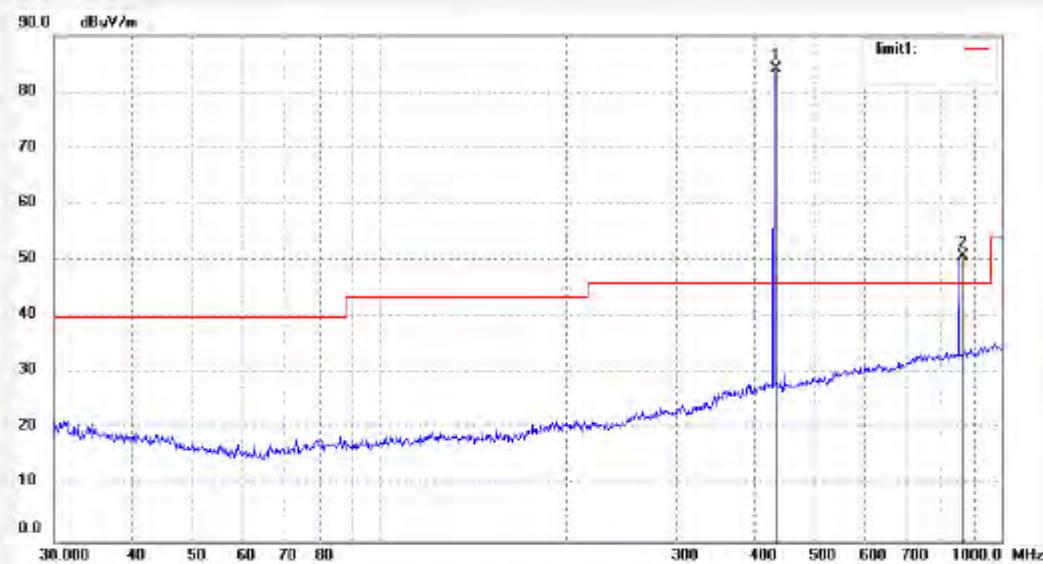

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	433.9770	60.99	22.95	83.94	92.80	-8.86	peak			
2	866.5300	22.13	28.63	50.76	72.80	-22.04	peak			




## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: pei #5020	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 2011/07/22
Temp. ( C)/Hum.(%) 24 C / 48 %	Time: 22:01:45
EUT: Wireless Energy Monitor	Engineer Signature: PEI
Mode: TX	Distance: 3m
Model: MTP 3100	
Manufacturer: Shenzhen Sailwider Electronics Co.,Ltd.	
Note: Report No.:ATE20111325	

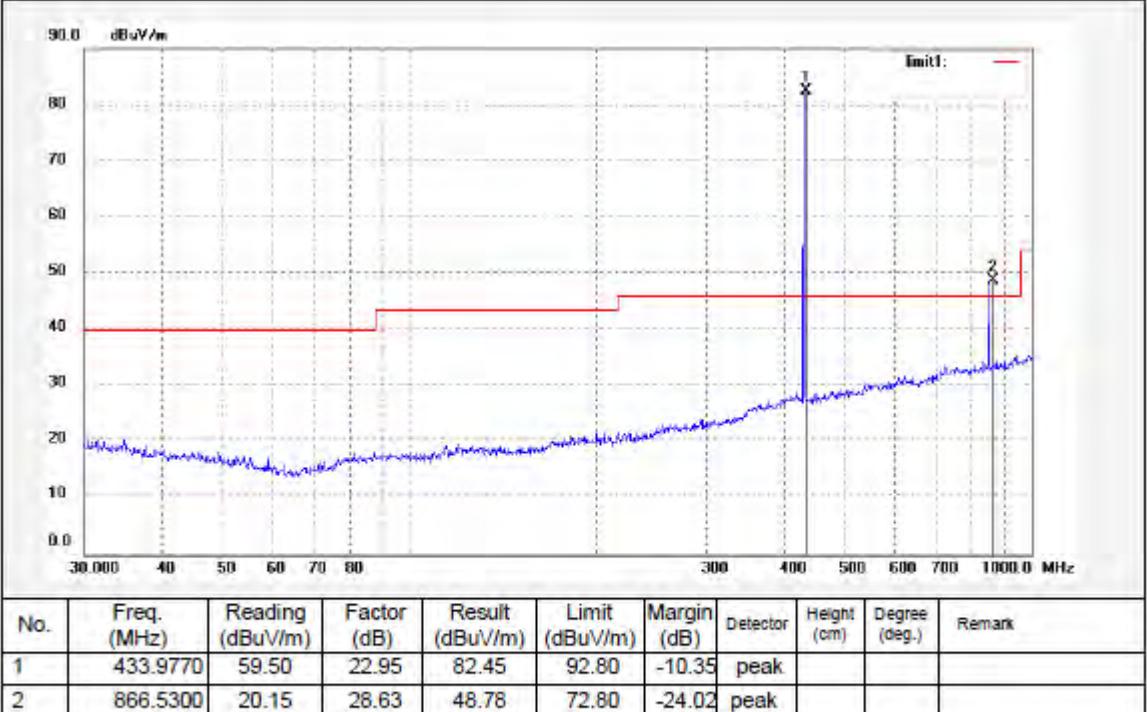




## ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber  
Tel:+86-0755-26503290  
Fax:+86-0755-26503396

Job No.: pei #5023	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: DC 3V
Test item: Radiation Test	Date: 2011/07/22
Temp.( C)/Hum.(%) 24 C / 48 %	Time: 22:37:12
EUT: Wireless Energy Monitor	Engineer Signature: PEI
Mode: TX	Distance: 3m
Model: MTP 3100	
Manufacturer: Shenzhen Sailwider Electronics Co.,Ltd.	
Note: Report No.:ATE20111325	

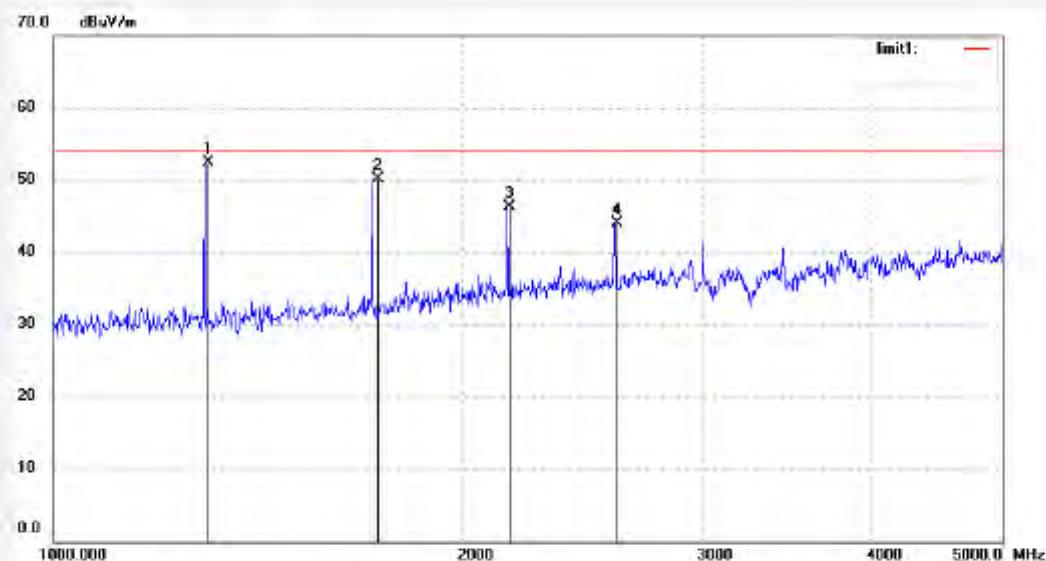

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1299.795	64.70	-12.20	52.50	92.80	-40.30	peak			
2	1733.080	60.45	-10.39	50.06	92.80	-42.74	peak			
3	2166.327	54.71	-8.41	46.30	92.80	-46.50	peak			
4	2599.606	50.71	-6.72	43.99	92.80	-48.81	peak			



## ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber


Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: pei #5022 Polarization: Vertical  
 Standard: FCC Class B 3M Radiated Power Source: DC 3V  
 Test item: Radiation Test Date: 2011/07/22  
 Temp.( C)/Hum.(%) 24 C / 48 % Time: 22:24:12  
 EUT: Wireless Energy Monitor Engineer Signature: PEI  
 Mode: TX Distance: 3m  
 Model: MTP 3100  
 Manufacturer: Shenzhen Sailwider Electronics Co.,Ltd.  
 Note: Report No.:ATE20111325

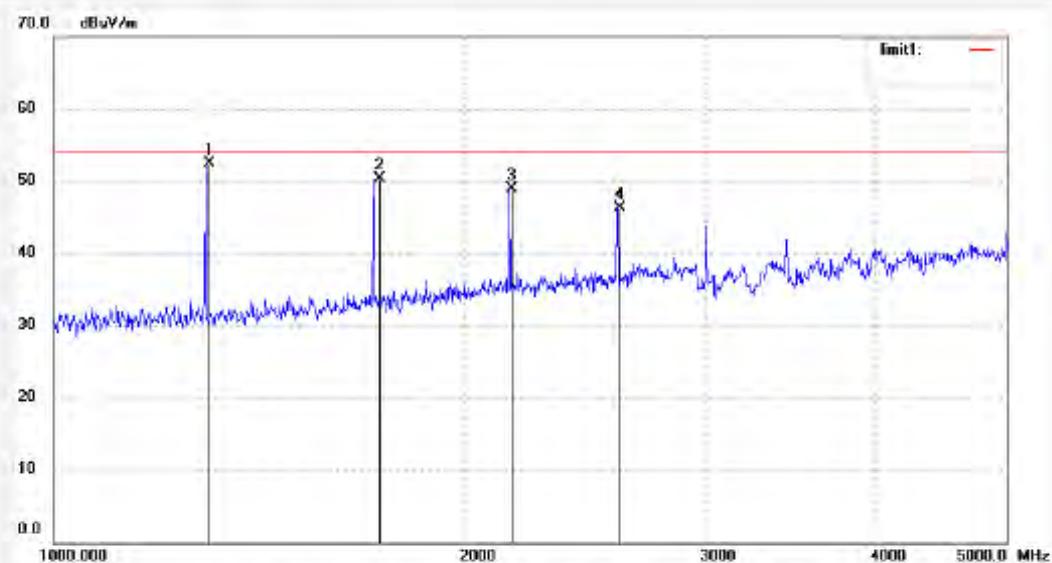


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	1299.795	64.54	-12.20	52.34	72.80	-20.46	peak			
2	1733.080	60.74	-10.39	50.35	72.80	-22.45	peak			
3	2166.327	57.33	-8.41	48.92	72.80	-23.88	peak			
4	2599.606	53.09	-6.72	46.37	72.80	-26.43	peak			

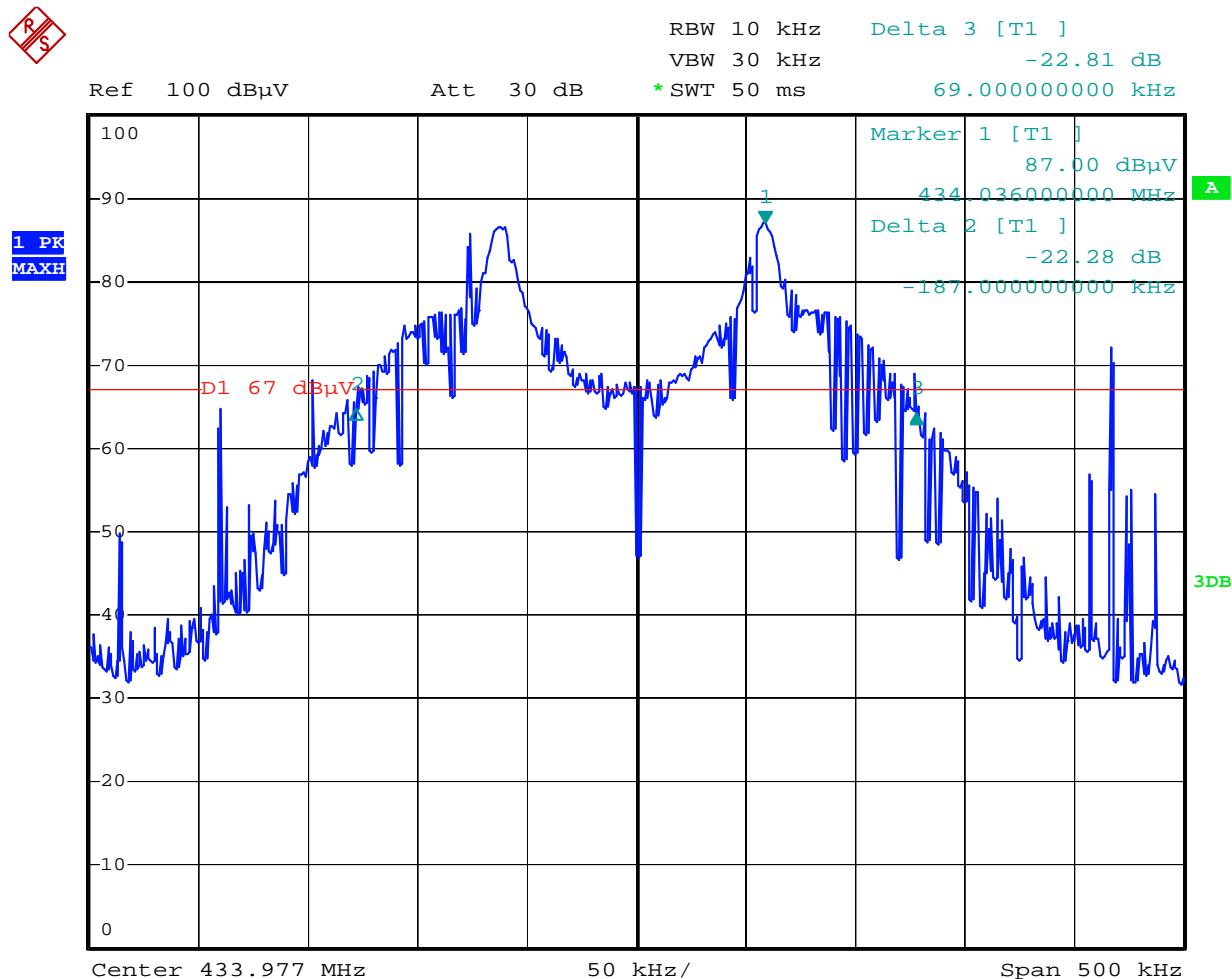


Date: 23.JUL.2011 11:44:05

-20dB bandwidth is 256.0 kHz.

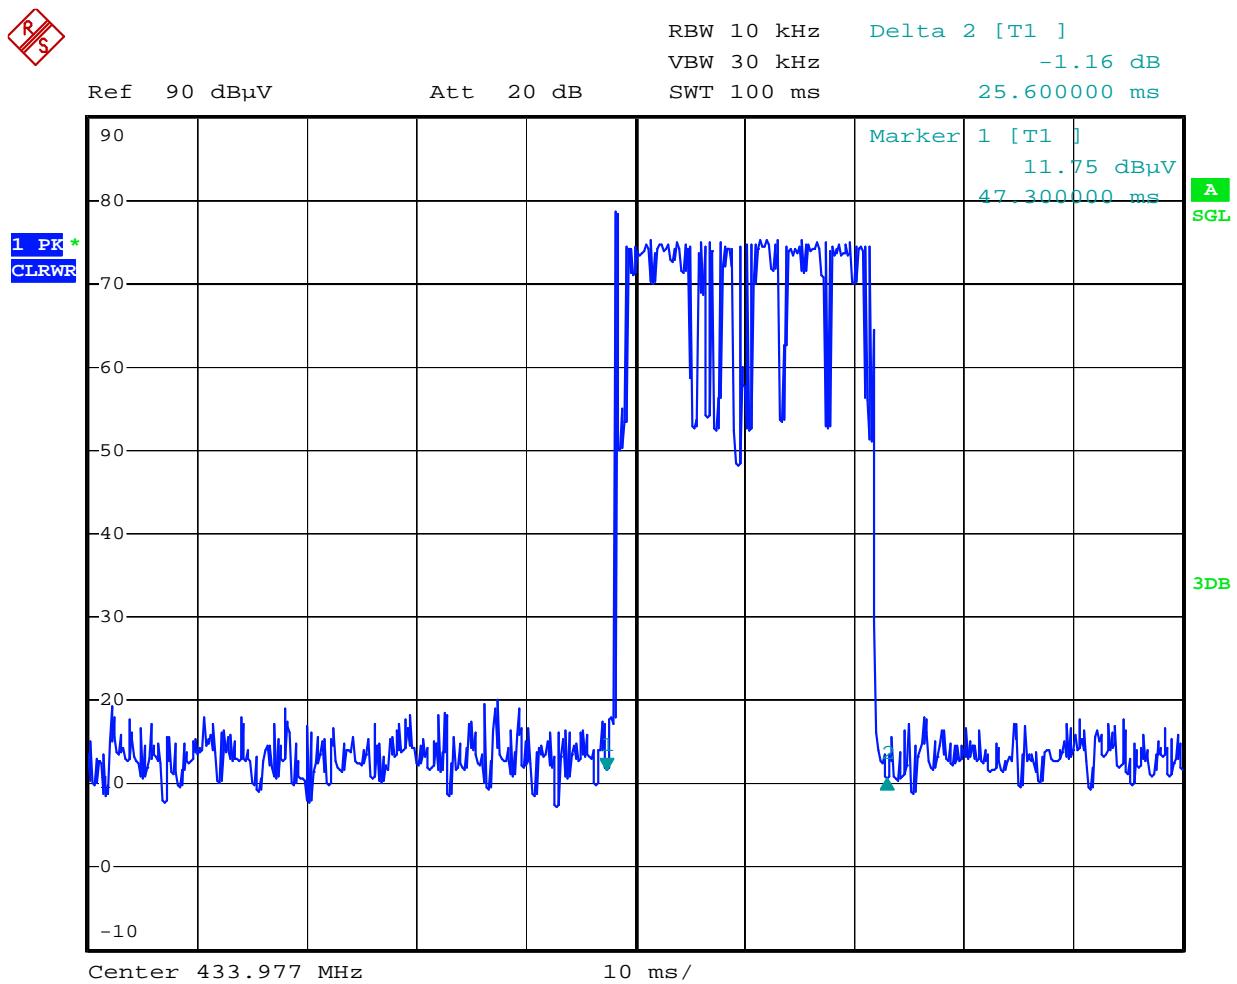

Date: 23.JUL.2011 11:57:25

The graphs show the duration of ‘on’ signal, duration is 25.6 ms.  
Duty Cycle = 25.6ms/100ms = 0.256.

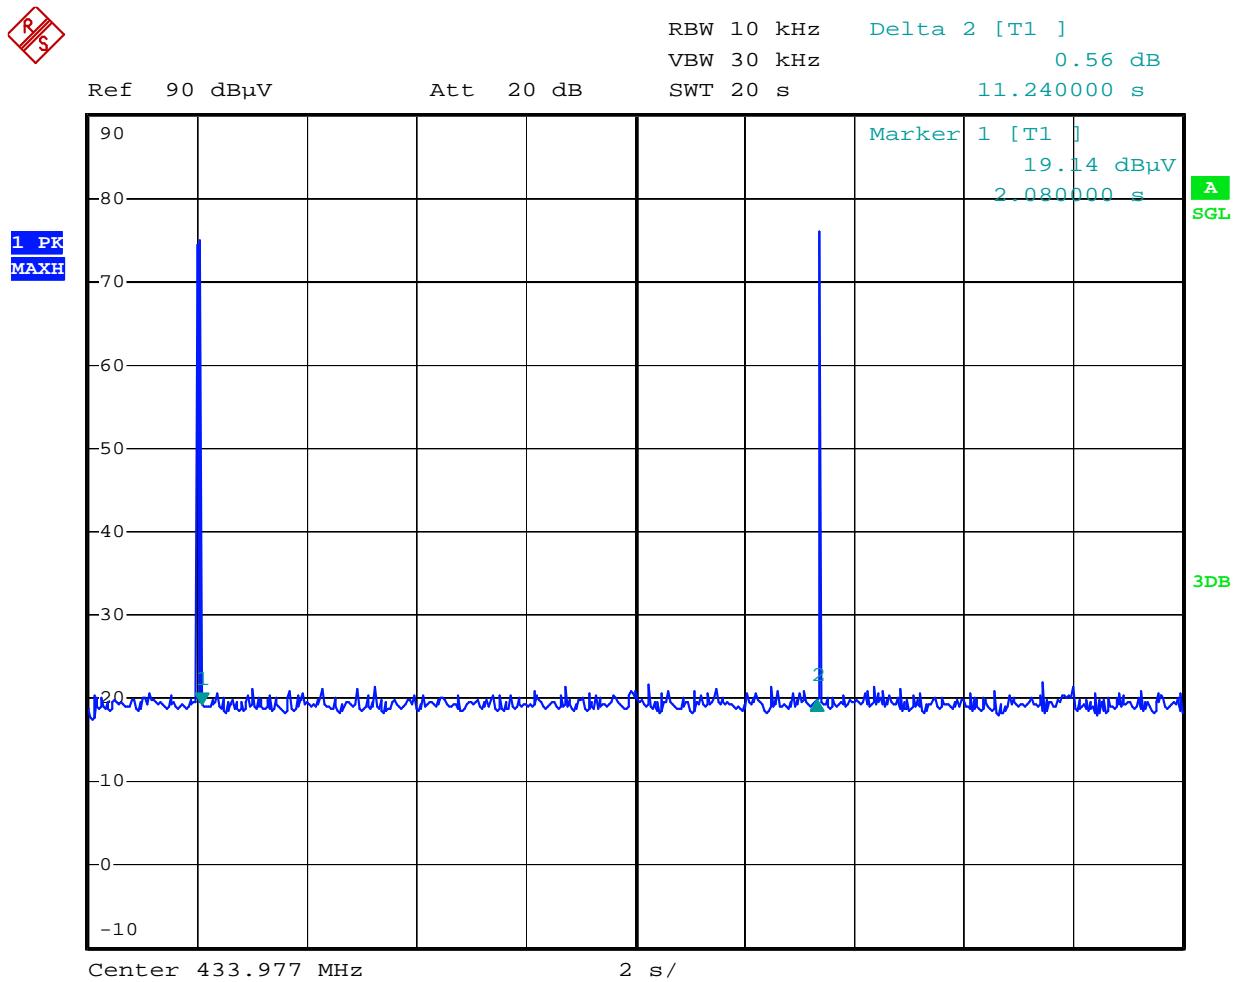

Date: 23.JUL.2011 12:00:26

The graphs show the silent period of 'off' signal, silent period is 11.24 s.