

# FCC Test Report

**Application No.:** HKES13100024601  
**Applicant:** SHANTOU CHENGHAI JIN XING DA PLASTIC TOYS FACTORY  
**Address:** Linghai Industrial Area, Batou, Chenghai District  
Shantou City  
China

## Product Information:

**Product Description:** Remote Control Flying Saucer  
**Model No.(EUT):** JD385, 335, 339, 349, 351, 356, 352W, 365, 366, 380, 381, 382, 383, 386, 387, 388, 389, 390, 391, 392, 393, 395, 396, 397, 398, 399 ♣  
♣ Please refer to section 2 of this report which indicates which item was actually tested and which were electrically identical.  
**Product Class :** Low Power Communication Device – Transmitter (2.4 GHz)  
**FCC ID:** ZSYJXD76499973  
**Requirement:** CFR 47 FCC PART 15 SUBPART C, 2012  
- Intentional Radiators.  
**Date of Receipt:** 2013-10-22  
**Date of Test:** 2013-11-01  
**Date of Issue:** 2013-11-04

<b>Test Result :</b>	<b>PASS*</b>
----------------------	--------------

\* In the configuration tested, the EUT complied with the requirements for the relevant clauses of Federal Communications Commission Rules as specified above.

Authorized Signature:



**LOKE Sai Kit, Wilson**  
**Senior Manager**

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS IECC Limited or testing done by SGS IECC Limited in connection with, distribution or use of the product described in this report must be approved by SGS IECC Limited in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Test Summary

Test	Test Requirement	Test Method	Result
Conducted Emission (150KHz to 30MHz)	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2003	N/A <sup>1)</sup>
Radiated Emission (9kMHz to 1GHz)	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2003	PASS
Radiated Emission above 1 GHz	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2003	PASS
Band edge / 20 dB Bandwidth	FCC PART 15, SUBPART C: 2012	ANSI C63.4:2003 Marker-Delta measurement	PASS
<b>Remark :</b> 1) Please refer to section 6.1 of this report for explanation  Item no.: JD385, 335, 339, 349, 351, 356, 352W, 365, 366, 380, 381, 382, 383, 386, 387, 388, 389, 390, 391, 392, 393, 395, 396, 397, 398, 399  According to the confirmation from the applicant, the above models are identical in all electrical aspects in relating to the circuit design, PCB layout, electrical components used, internal wiring and function. The differences are only the model and color.  Therefore only the model JD385 was tested in this report.			

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS.....</b>	<b>3</b>
<b>4 GENERAL INFORMATION .....</b>	<b>4</b>
<b>4.1 GENERAL DESCRIPTION OF EUT .....</b>	<b>4</b>
<b>4.2 DETAILS OF EUT .....</b>	<b>4</b>
<b>4.3 CONDITIONS OF EUT .....</b>	<b>4</b>
<b>4.4 DESCRIPTION OF SUPPORT UNITS .....</b>	<b>5</b>
<b>4.5 STANDARDS APPLICABLE FOR TESTING .....</b>	<b>5</b>
<b>4.6 TEST LOCATION .....</b>	<b>5</b>
<b>4.7 TEST FACILITY .....</b>	<b>5</b>
<b>4.8 DEVIATION FROM STANDARDS .....</b>	<b>6</b>
<b>4.9 ABNORMALITIES FROM STANDARD CONDITIONS .....</b>	<b>6</b>
<b>4.10 DECLARATION OF FAMILY GROUPING .....</b>	<b>6</b>
<b>4.11 ABBREVIATIONS .....</b>	<b>6</b>
<b>5 EQUIPMENTS USED DURING TEST .....</b>	<b>7</b>
<b>6 TEST RESULTS .....</b>	<b>8</b>
<b>6.1 CONDUCTED EMISSIONS MAINS TERMINALS, 150kHz TO 30MHz .....</b>	<b>8</b>
<b>6.2 RADIATED EMISSIONS, 9kHz TO 1GHz .....</b>	<b>8</b>
<b>6.2.1 EUT Operation.....</b>	<b>8</b>
<b>6.2.2 Test Setup and Procedure.....</b>	<b>9</b>
<b>6.2.3 Measurement Data .....</b>	<b>10</b>
<b>6.3 RADIATED EMISSIONS ABOVE 1 GHz .....</b>	<b>12</b>
<b>6.3.1 EUT Operation.....</b>	<b>12</b>
<b>6.3.2 Test Setup and Procedure.....</b>	<b>13</b>
<b>6.3.3 Measurement Data .....</b>	<b>14</b>
<b>6.4 BAND EDGE / 20 dB BANDWIDTH .....</b>	<b>16</b>
<b>7 PHOTOGRAPHS.....</b>	<b>19</b>
<b>7.1 RADIATED EMISSION TEST SETUP .....</b>	<b>19</b>

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 4 General Information

### 4.1 General Description of EUT

EUT Name: Remote Control Flying Saucer  
Model: JD385  
Serial No.: --

### 4.2 Details of EUT

Power Supply: DC 9V (AA battery x 6) for TX  
Power Cord: --  
Operating Frequency: 2417-2458MHz  
Antenna Type: Integral antenna  
Modulation Type: GFSK

EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2417	7	2441
2	2421	8	2445
3	2425	9	2449
4	2429	10	2453
5	2432	11	2458
6	2437		

Test frequencies tested are the lowest channel: 1 channel(2417 MHz), middle channel: 6 channel(2437 MHz) and highest channel: 11 channel(2458 MHz)

Channel configuration method:

Press and hold the button Flip key on in front panel and then Turn on power switch botton, and through High Speed botton to select different channels.

### 4.3 Conditions of EUT

The received sample was under good condition.

#### 4.4 Description of Support Units

The EUT has been tested as an independent unit.

#### 4.5 Standards Applicable for Testing

CFR 47, FCC Part 15, Oct 2012  
ANSI C63.4:2003

#### 4.6 Test Location

All tests were performed at:

SGS IECC Limited (Member of the SGS Group (SGS SA))

Units 303-305, 3/F., 31 Lok Yip Road, On Lok Tsuen, Fanling, N.T., Hong Kong

Tel: +852 2305 2570 Fax: +852 2756 4480

#### 4.7 Test Facility

Measurement facility located at Fanling (Hong Kong), placed on file with the FCC Pursuant to Section 2.948 of the FCC Rules (FCC Registration No. : 97774).

The test facility is recognized, certified, or accredited by the following organizations:

FCC – CAB Registration No.: 446297

Measurement facility located at Fanling (Hong Kong), accredited as a Conformity Assessment Body (CAB) and was designated by FCC to perform compliance testing on equipment subject to Declaration Of Conformity (DOC) and Certification under Part 15 and 18 of the Commission's Rules.

#### **4.8 Deviation from Standards**

None.

#### **4.9 Abnormalities from Standard Conditions**

None.

#### **4.10 Declaration of Family Grouping**

None.

#### **4.11 Abbreviations**

N/A: Not Applicable

EUT: Equipment Under Test

## 5 Equipments Used during Test

Radiated Emission				
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date
3m Semi-Anechoic Chamber (pre-test)	--	--	--	--
3m / 10m Open Area Test Site	--	--	2012/02/24	2015/02/23
Test Receiver	Rohde & Schwarz	ESCS 30 / 100388	2013/10/23	2014/10/22
Spectrum Analyzer	Rohde & Schwarz	FSP 30 / 101474	2013/8/8	2014/8/7
Loop antenna	Rohde & Schwarz	HFH2-Z2 / 871336/48	2012/12/27	2015/12/26
Antenna 30-1000MHz	Schaffner	CBL6111C / 2791	2012/10/12	2014/10/11
Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D / 9120D-1070	2012/11/13	2014/11/12
Horn Antenna 15-26.5GHz	Schwarzbeck	BBHA9170 / 9170-492	2012/11/12	2014/11/11
Preamplifier 10MHz – 6GHz	Schwarzbeck	BBV9743 / 9743-052	2012/11/13	2014/11/12
Preamplifier 1-18GHz	Schwarzbeck	BBV9718 / 9718-223	2012/11/13	2014/11/12
Preamplifier 18- 26.5GHz	Schwarzbeck	BBV9719 / 9719-019	2012/11/13	2014/11/12
Coaxial Cable	--	E167	2012/02/06	2014/02/05
RF Cable	HUBER+SUHNER	E207	2012/11/14	2014/11/13
Antenna Mast System	Schwarzbeck	AM9104 / -	--	--
Turntable with Controller	Drehtisch	DT312 / -	--	--
General Use Equipment				
Equipment	Manufacturer	Model / Serial No.	Cal. Date	Cal. Due Date
Digital Multimeter	Fluke	189/ 83640020	2013/04/10	2014/04/09
Temperature / Humidity meter	-	E158	2013/11/05	2014/11/04

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 6 Test Results

### 6.1 Conducted Emissions Mains Terminals, 150kHz to 30MHz

Test Requirement: FCC Part15 C Section 15.207

Test Method: ANSI C63.4:2003

Test Date: Not Applicable

**Remark:**

The product is battery operated and this test is not applicable.

### 6.2 Radiated Emissions, 9kHz to 1GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 and 15.249(d)

Test Method: ANSI C63.4:2003

Test Date: 2013-11-01

Measurement Distance: 3m

Detector: Peak for pre-scan (120kHz resolution bandwidth)  
Quasi-Peak if maximised peak within 6dB of limit

Limit :

Frequency range MHz	Quasi-peak limits dB (μV/m)
0.009 – 0.490	-72.4 – 20logF(MHz)
0.490 – 1.705	-12.4 – 20logF(MHz)
1.705 – 30.0	-10.5
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960	54

Note:

- 1) At transitional frequencies the lower limit applies.
- 2) F is the frequency of the spurious emission measured in MHz.
- 3) Limit from 0.009 – 30 MHz is converted from measuring distance 300m or 30m to 3m with the formula provided in FCC Part 15, section 15.31(f)(2)
- 4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

#### 6.2.1 EUT Operation

Operating Environment:

Temperature: 21 °C

Humidity: 48%

EUT Operation: Pre-test with Peak detector with the following mode(s):

1. Transmission for difference code for controlling different directions by manual

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




control .

Final test with Quasi-Peak detector with the following mode(s):

1. Transimission for controlling forward direction with maximum speed and work in continuous transmitting mode
2. Respectively test in Lowest; Middle and Highest channels.

## 6.2.2 Test Setup and Procedure

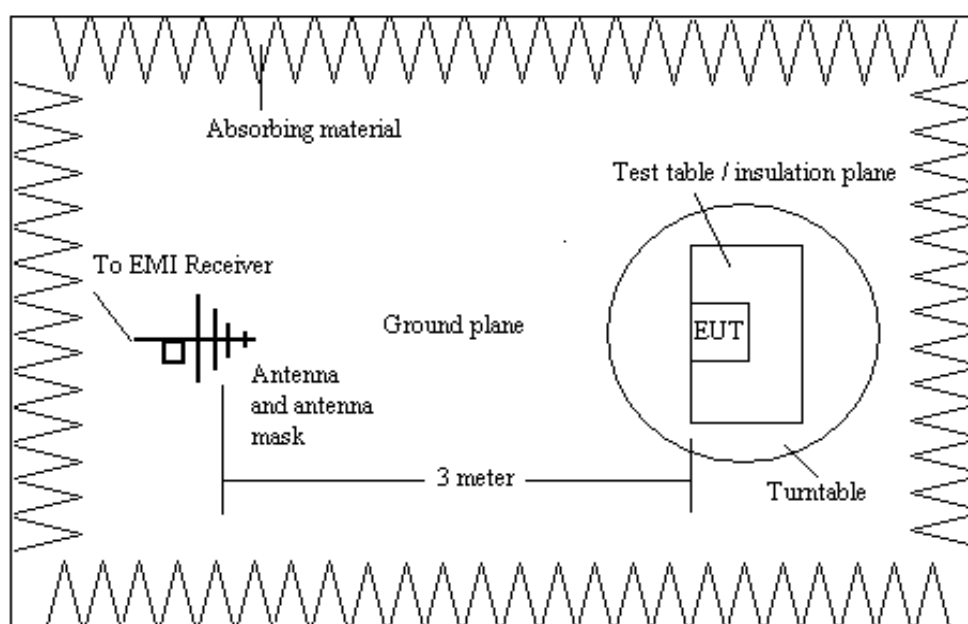

1. The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
2. The EUT was operated with new batteries. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane.
3. Loop antenat and Bilog antenna was used for the frequency range from the lowest generated frequency to 30MHz and 30MHz to 1GHz respectively
4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters for Bilog antenna (Loop antenna is still maintain in 1m height) in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

### 6.2.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured by Bilog antenna with 2 orthogonal polarities and frequencies of peak emissions from the EUT were detected within 6dB of the limit line. Final measurement was conducted in the open area test site with data as follows:

#### Test results on operation with control for transmission mode:

##### (1) Operation Frequency : 2417.0 MHz

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)
30.000	H	19.4	2.3	21.7	40.0	-18.3
100.000	V	9.9	4.2	14.1	43.5	-29.4
200.000	V	9.5	3.8	13.3	43.5	-30.2
300.000	V	14.1	4.0	18.1	46.0	-27.9
500.000	H	18.2	4.1	22.3	46.0	-23.7
800.000	H	21.7	2.1	23.8	46.0	-22.2

##### (2) Operation Frequency : 2437.0 MHz

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)
30.000	V	19.4	2.6	22.0	40.0	-18.0
100.000	H	9.9	4.1	14.0	43.5	-29.5
200.000	H	9.5	3.9	13.4	43.5	-30.1
300.000	H	14.1	4.0	18.1	46.0	-27.9
500.000	V	18.2	3.9	22.1	46.0	-23.9
800.000	H	21.7	2.0	23.7	46.0	-22.3

**(3) Operation Frequency : 2458.0 MHz**

Frequency (MHz)	Antenna Polarization	Correction Factor (dB/m)	Receiver QP Reading (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Over Limit (dB)
30.000	H	19.4	2.4	21.8	40.0	-18.2
100.000	V	9.9	4.2	14.1	43.5	-29.4
200.000	V	9.5	3.8	13.3	43.5	-30.2
300.000	H	14.1	4.1	18.2	46.0	-27.8
500.000	V	18.2	4.1	22.3	46.0	-23.7
800.000	V	21.7	2.0	23.7	46.0	-22.3

**Note:**

- 1) All readings are Quasi-Peak values.
- 2) Correction Factor = Antenna Factor + Cable Loss.
- 3) The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 4) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.
- 5) There is not any other emission which falls in restricted bands which set out in Section 15.205 Restricted bands can be detected and reported.

## 6.3 Radiated Emissions above 1 GHz

Test Requirement: FCC Part15 Subpart C Section 15.209 & 15.249(a) & (d)  
Test Method: ANSI C63.4:2003  
Test Date: 2013-11-01  
Frequency Range: 1GHz – 26GHz  
Measurement Distance: 3m  
Detector: Peak for pre-scan (1MHz resolution bandwidth)  
Average and Peak detector for final test

Limit :

Fundamental Frequency :

Frequency range MHz	Limits (Peak) dB (μV/m)	Limits (Average) dB (μV/m)
2400 to 2483.5	114	94

Spurious Emission :

Frequency range MHz	Limits (Peak) dB (μV/m)	Limits (Average) dB (μV/m)
Over 1000	74	54


### 6.3.1 EUT Operation

Operating Environment:

Temperature: 21 °C Humidity: 48 %

EUT Operation: Pre-test with Peak detector with the following mode(s):  
1. Transmission for difference code for controlling different directions by manual control .  
Final test with Quasi-Peak detector with the following mode(s):  
1. Transimission for controlling forward direction with maximum speed and work in continuous transmitting mode  
2. Respectively test in Lowest; Middle and Highest channels.

### 6.3.2 Test Setup and Procedure

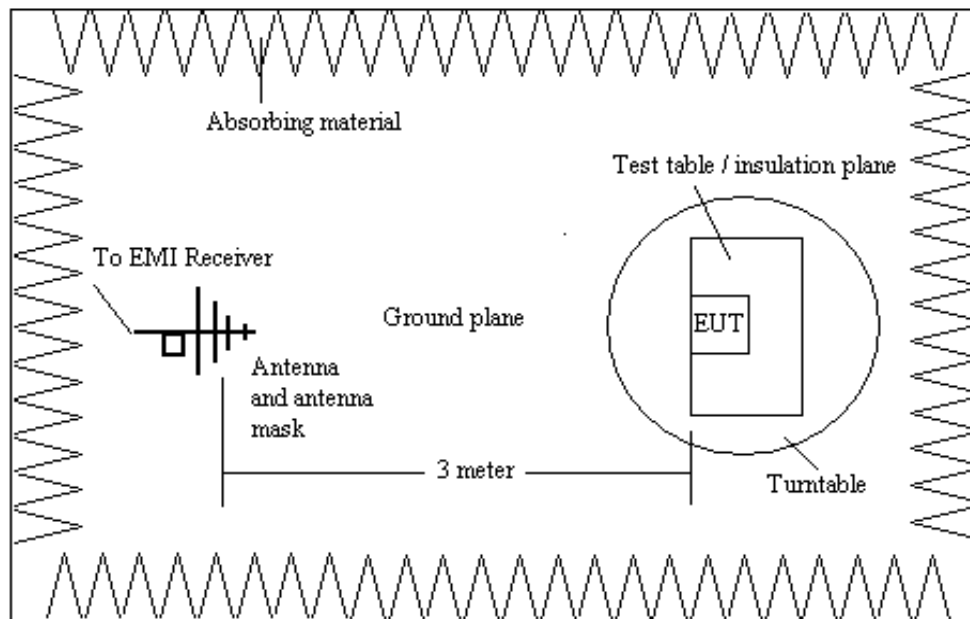

1. The pre-test of the radiated emissions test was conducted in a semi-anechoic chamber and the final measurement was conducted in the open area test site.
2. The EUT was operated with new batteries. The EUT was placed upon a non-metallic table 0.8m above the ground reference plane.
3. Horn antenna was used for the frequency over 1GHz
4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT with located frequencies.
5. The actual frequencies of maximum emission were confirmed in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

### 6.3.3 Measurement Data

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. The EUT was measured with 2 orthogonal polarities and frequencies of average emissions from the EUT were measured as follows:

#### Test results on operation with control for transmission mode:

##### (1) Fundamental Frequency

Frequency (MHz)	Antenna Polarization	Emission Level (dBμV/m)		Limit (dBμV/m)		Remark
		Peak	Average	Peak	Average	
2417	H	91.82	91.5	114	94	Pass
2417	V	84.94	84.5	114	94	Pass
2437	H	90.5	90.1	114	94	Pass
2437	V	84.5	84.1	114	94	Pass
2458	H	88.5	88.1	114	94	Pass
2458	V	82.6	82.0	114	94	Pass

##### (2) Spurious Emission

Operation Frequency : 2417.0 MHz

Frequency (MHz)	Antenna Polarization	Emission Level (dBμV/m)		Limit (dBμV/m)		Remark
		Peak	Average	Peak	Average	
4834	V	50.8	47.6	74	54	Pass
7251	V	54.2	49.9	74	54	Pass
9668	V	50.5	41.0	74	54	Pass
12080	V	52.0	39.0	74	54	Pass
14498	V	60.0	46.0	74	54	Pass
16922	V	61.0	45.8	74	54	Pass

### Operation Frequency : 2437.0 MHz

Frequency (MHz)	Antenna Polarization	Emission Level (dBμV/m)		Limit (dBμV/m)		Remark
		Peak	Average	Peak	Average	
4874	V	52.6	49.7	74	54	Pass
7311	V	51.5	48.9	74	54	Pass
9748	V	50.0	40.8	74	54	Pass
12188	V	51.2	39.0	74	54	Pass
14619	V	60.0	46.0	74	54	Pass
17054	V	58.0	46.0	74	54	Pass

### Operation Frequency : 2458.0 MHz

Frequency (MHz)	Antenna Polarization	Emission Level (dBμV/m)		Limit (dBμV/m)		Remark
		Peak	Average	Peak	Average	
4916	V	53.1	48.6	74	54	Pass
7374	V	51.0	47.9	74	54	Pass
9832	V	49.0	35.0	74	54	Pass
12290	V	50.8	38.0	74	54	Pass
14748	V	60.8	45.8	74	54	Pass
17206	V	59.0	46.0	74	54	Pass

#### Note:


- 1) The above results were the worst case results with the EUT positioned in all 3 axis during the test. The EUT was positioned vertically and horizontally on the table for vertical and horizontal measurement respectively.
- 2) Other emissions more than 20dB below the limit are not shown on the above table and only worst six emissions below 1GHz are listed.
- 3) There is not any other emission which falls in restricted bands which set out in Section 15.205 Restricted bands can be detected and reported.

## 6.4 Band Edge / 20 dB Bandwidth

Test Requirement: FCC Part15 Subpart C Section 15.215, 15.249(d)  
Test Method: ANSI C63.4:2003 and Marker-Delta Method  
Test Date: 2013-11-01  
EUT Operation: Pre-test with Peak detector with the following mode(s):  
1. Transmission for difference code for controlling different directions.  
Final test with Quasi-Peak detector with the following mode(s):  
1. Transmission for controlling forward direction with maximum speed and work in continuous transmitting mode  
Result: Pass

### Test Plot :

Operation frequency : 2317.0 MHz

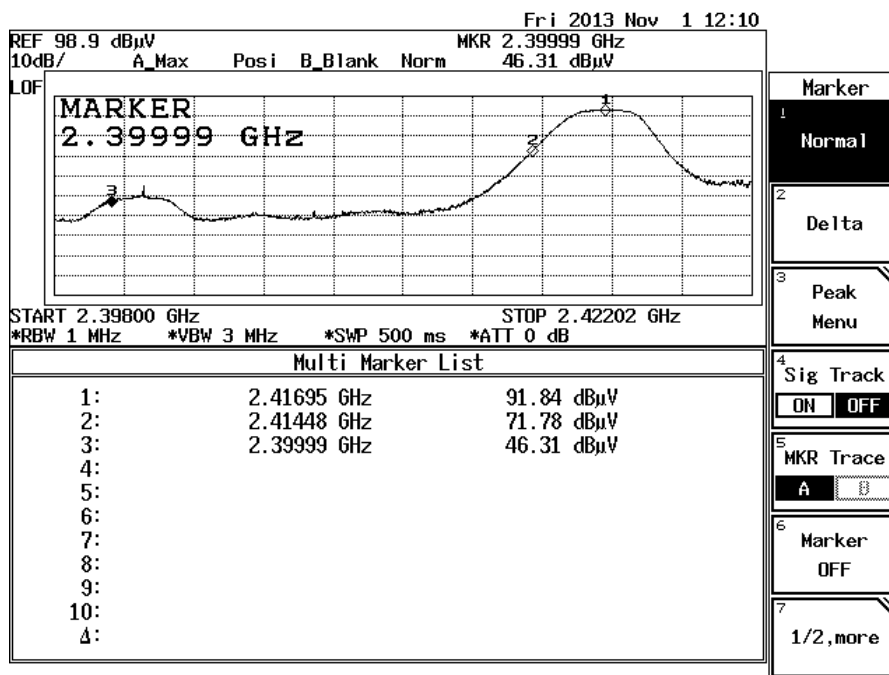

According to the page 12 of this report, the emission of the fundamental frequency 2417.0MHz is 91.82dBuV/m and 91.5dBuV/m for peak and average level respectively. Based on the delta method, the emission at the bandedge, 2400MHz, is more than 40dB below the fundamental and 20dB bandwidth falls in assigned band. It

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




is deemed to comply with section 15.215. Besides, it is below the limit of 74dBuV/m and 54dBuV/m for peak and average level under 15.209. It is deemed to comply with section 15.249(d).

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## Test Plot :

Operation frequency : 2458.0 MHz

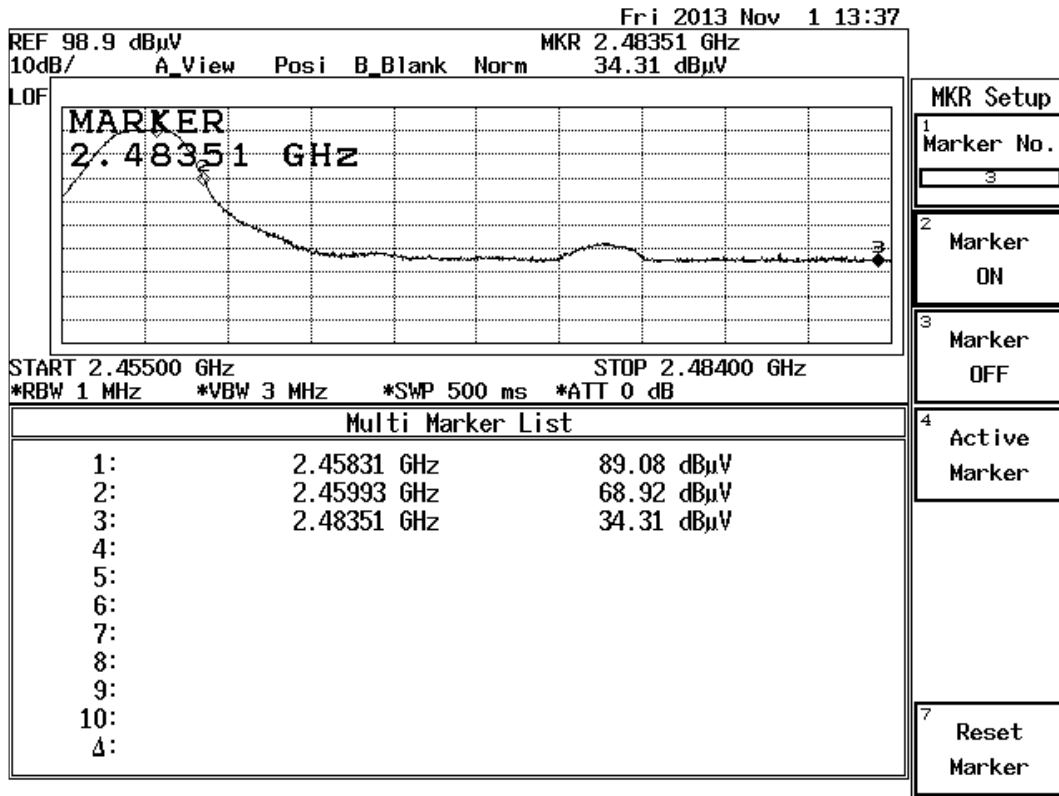

According to the page 12 of this report, the emission of the fundamental frequency 2458.00MHz is 88.50dBuV/m and 88.10dBuV/m for peak and average level respectively. Based on the delta method, the emission at the bandedge, 2483.5MHz, is more than 40dB below the fundamental and 20dB bandwidth falls in the assigned band. It is deemed to comply with section 15.215. Besides, it is below the limit of 74dBuV/m and 54dBuV/m for peak and average level under 15.209. It is deemed to comply with section 15.249(d).

## 7 Photographs

### 7.1 Radiatd Emission Test Setup



This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 7.3 EUT Constructional Details



- END OF REPORT -

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.