



FCC TEST REPORT

Issued to

Megasoft Limited

For

Active Poster- Virtual mobile commerce terminal

Model Name: AP-BX-GX

Trade Name: XIUS

Brand Name: Active Poster / Mobile Touch Transaction (MTT)

FCC ID: ZTDAPBXGX

Standard: 47 CFR Part 15 Subpart C

Test date: May 20, 2011 –July 15, 2011

Issue date: August 12, 2011

by

Shenzhen Morlab Communications Technology Co., Ltd.

Tested by

Tu Long
Tu Lang

Date


2011.8.12

Approved by

Date

Review by

Cao Shaodong
2011.8.12

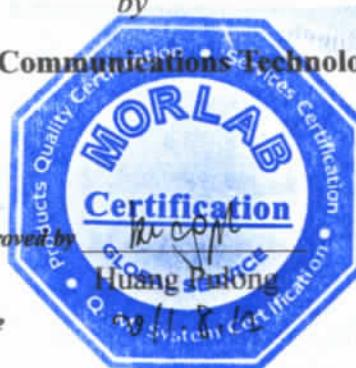

CTIA Authorized Test Lab

LAB CODE 20081223-00

IEEE 1725

OTA

OFTA

電訊管理局



GCF

Official Observer of
Global Certification Forum

Bluetooth

BQTF

FCC

Reg. No.
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it, or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 EUT Description	3
1.2 Test Standards and Results	4
1.3 Facilities and Accreditations.....	5
1.3.1 Facilities	5
1.3.2 Test Environment Conditions.....	5
1.3.3 Measurement Uncertainty	5
2. 47 CFR PART 15C REQUIREMENTS.....	6
2.1 Conducted Emission.....	6
2.1.1 Requirement	6
2.1.2 Test Description	6
2.1.3 Test Result.....	7
4.1.3.1 Test Mode.....	7
2.2 Radiated Emission	9
2.2.1 Requirement	9
2.2.2 Test Description	10
2.2.3 Test Result.....	11
2.3 Frequency Tolerance	14
2.3.1 Requirement	14
2.3.2 Test Description	14
2.3.3 Test Verdict.....	14
2.4 20dB Bandwidth	16
2.4.1 Definition	16
2.4.2 Test Description	16
2.4.3 Test Verdict.....	16

Change History		
Issue	Date	Reason for change
1.0	August 12, 2011	First edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type: Active Poster- Virtual mobile commerce terminal
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: 01
Software Version: 3.10.5.8
Applicant: Megasoft Limited
6-3-1192/2/1, Kundanbagh, Begumpet, Hyderabad – 500016
Manufacturer: Megasoft Limited
6-3-1192/2/1, Kundanbagh, Begumpet, Hyderabad – 500016
Frequency: 13.56MHz
Modulation Type.....: ASK
Power Supply: Battery
Brand Name: Wisewod
Model No.: WD335585PN1800mAh
Serial No.: (n.a. marked #1 by test site)
Capacitance: 1800mAh
Rated Voltage: 3.7V
Charge Limit: 4.2V
Manufacturer: Shenzhen Wisewod Technology Co. Limited
Ancillary Equipments.....: AC Adapter (Charger for Battery)
Brand Name: Qiwi
Model Name: GFP181DA-0530-1
Serial No.: (n.a. marked #1 by test site)
Rated Input: ~ 100-240V, 50/60Hz, 0.35A
Rated Output: == 5V, 3A
Manufacturer: DEE VAN ENTERPRISE CO., LTD.

Note 1: The EUT is a Active Poster- Virtual mobile commerce terminal; it supports GPRS 850MHz, 900MHz, 1800MHz, 1900MHz and NFC module, and only NFC module was tested in this report.

Note 2: The Bhagyashree Industries of the AC Adapter is SA151102050030.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.207	Conducted Emission	PASS
2	15.225(a) (b)(c)(d)	Radiated Emission	PASS
3	15.225(e)	Frequency Stability	PASS
4	15.215(c)	20dB Bandwidth	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in ANSI C63.4 2010.

1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	±1.8dB
Uncertainty of Radiated Emission:	±3.1dB

2. 47 CFR PART 15C REQUIREMENTS

2.1 Conducted Emission

2.1.1 Requirement

According to FCC section 15.207, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.1.2 Test Description

A. Test Setup:

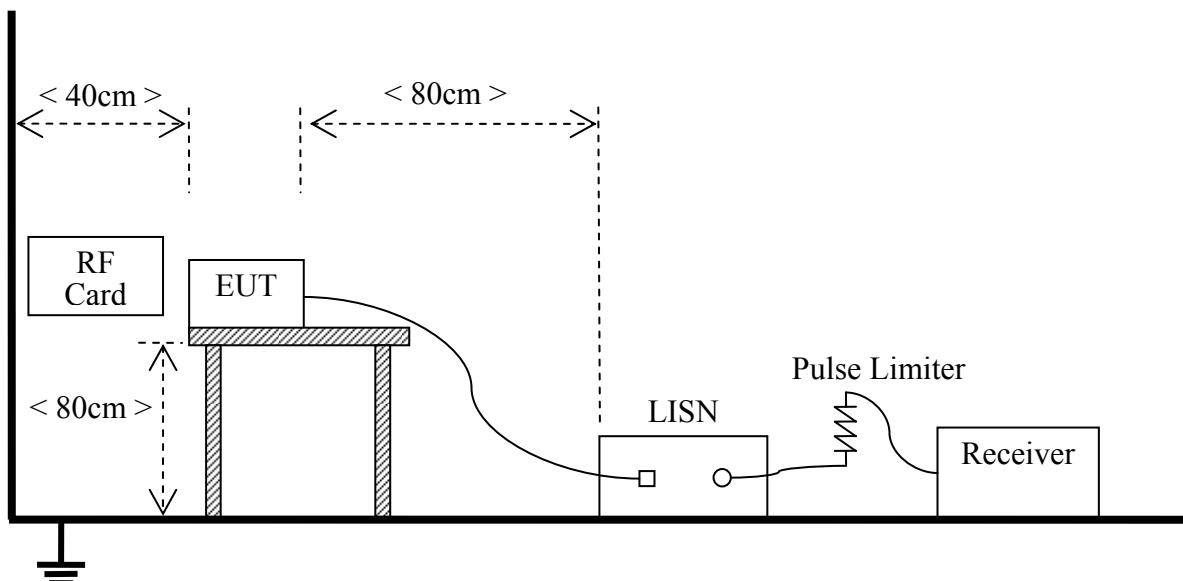

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor,

and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The RF Card is used for the call between with the EUT, and the EUT was measured by transmitter mode continuously. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

B. Equipments List:


Description	Manufacturer	Model	Serial No.	Cal. Date
Receiver	Agilent	E7405A	US44210471	2011.05
LISN	Schwarzbeck	NSLK 8127	812744	2011.05
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)
Spectrum Analyzer	Agilent	E7405A	US44210471	2011.05
Personal Computer	IBM	IBM_T20	(n.a.)	(n.a.)
Bluetooth-Headset	Nokia	HS-36W	(n.a.)	(n.a.)
T-Flash Card	SanDisk	256MB	(n.a.)	(n.a.)

2.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

4.1.3.1 Test Mode

A. Test Plots And Suspicious Points:

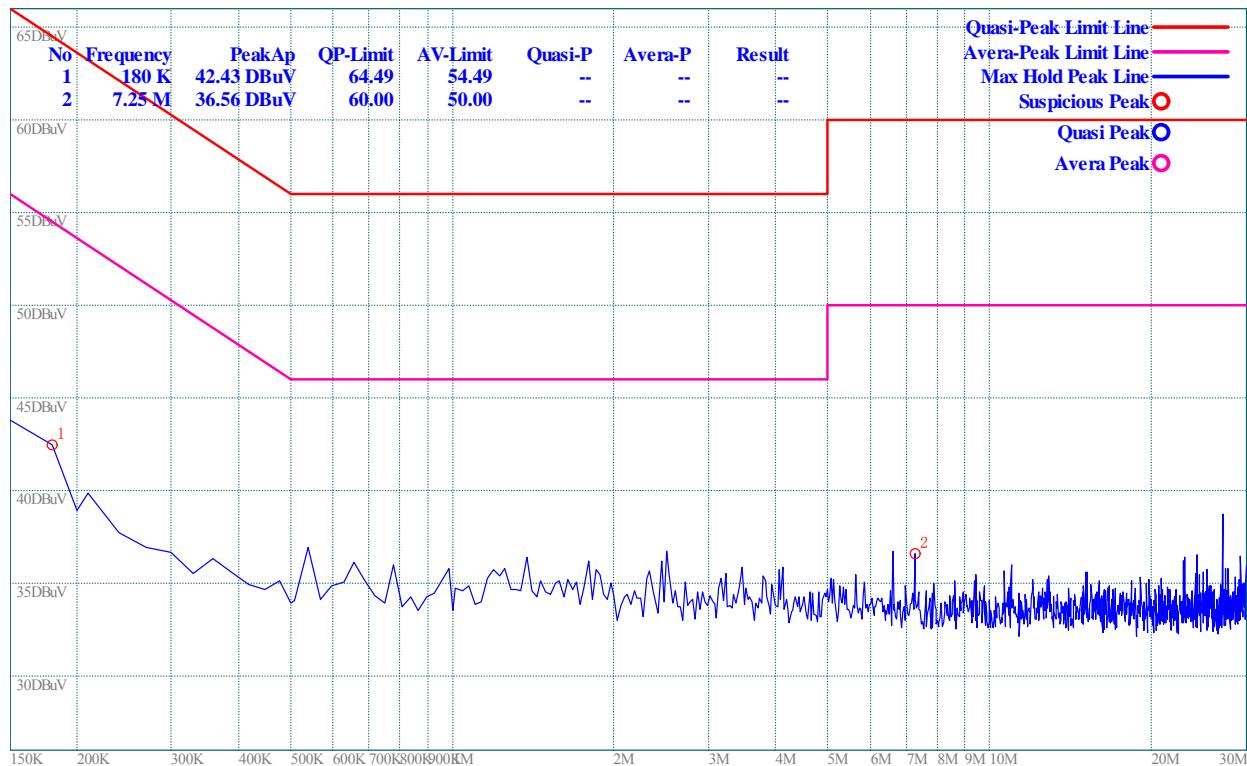

(Plot A: L Phase)

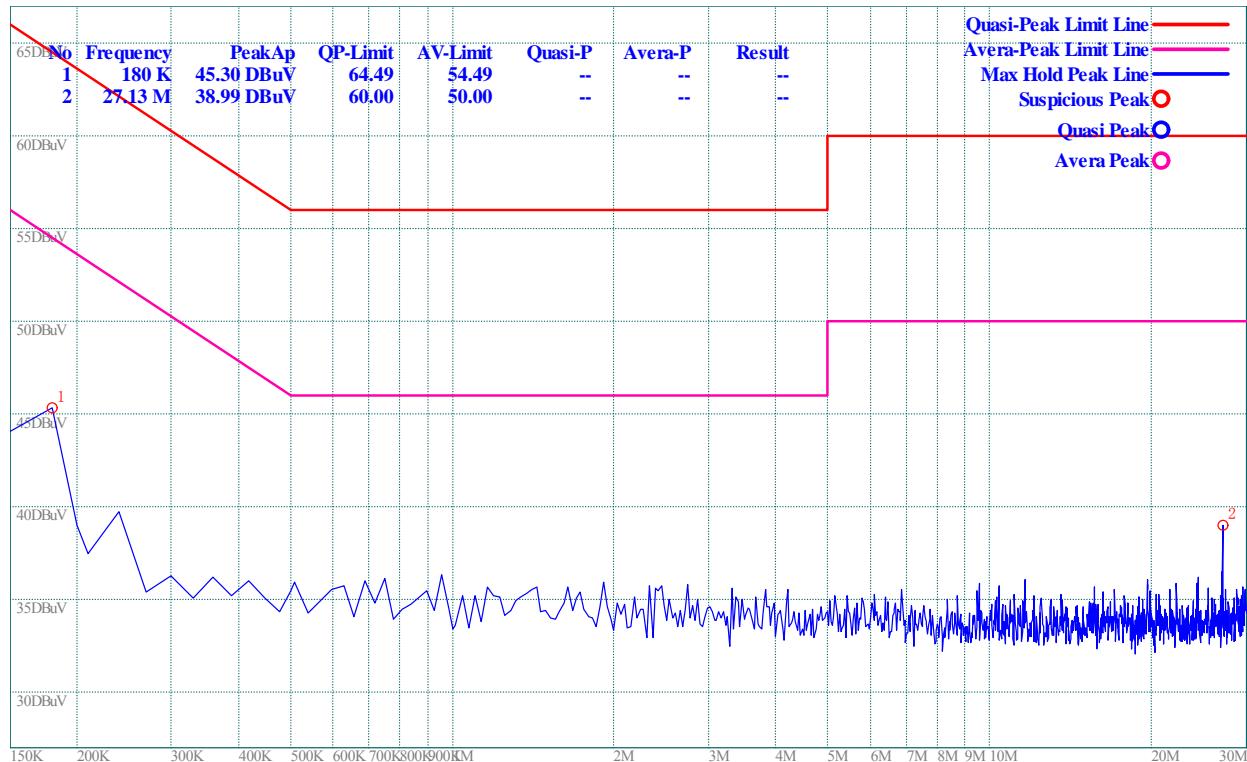

(Plot B: N Phase)

Result: PASS

2.2 Radiated Emission

2.2.1 Requirement

Radiated Emission <30MHz (9KHz-30MHz, H-field)

According to FCC section 15.225, for <30MHz, Radiated emissions were measured according to ANSIC63.4. The EUT was set to transmit at the highest output power. The EUT was set 10 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10KHz. (Note: During testing the receive antenna was rotated about its axis to maximize the emission from the EUT)

There was no detected Restricted bands and Radiated suprious emission below 30MHz. The 30m limit was converted to 10m Limit using square factor(x) as it was found by measurements as follows; 10 m Limit(dBuV/m) = $20\log(X) + 40\log(30/10) = 20\log(15848) + 40\log(30/10) = 103\text{dBuV}$

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency range (MHz)	Field Strength@30m		Field Strength@10m
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
Below 13.110	30	29.5	48.6
13.110 ~ 13.410	106	40.5	59.6
13.410 ~ 13.553	334	50.5	69.6
13.553 ~13.567	15848	84	103
13.567 ~ 13.710	334	50.5	69.6
13.710 ~14.010	106	40.5	59.6
Above 14.010	30	29.5	48.6

NOTE:

- Field Strength (dB μ V/m) = $20 * \log[\text{Field Strength } (\mu\text{V/m})]$.
- In the emission tables above, the tighter limit applies at the band edges.

Radiated Emission >30MHz (30MHz-1GHz, E-field)

According to FCC section 15.225, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Frequency range (MHz)	Field Strength	
	$\mu\text{V/m}$	$\text{dB}\mu\text{V/m}$
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

NOTE:

- Field Strength (dB μ V/m) = 20*log[Field Strength (μ V/m)].
- In the emission tables above, the tighter limit applies at the band edges.

2.2.2 Test Description

C. Test Setup:

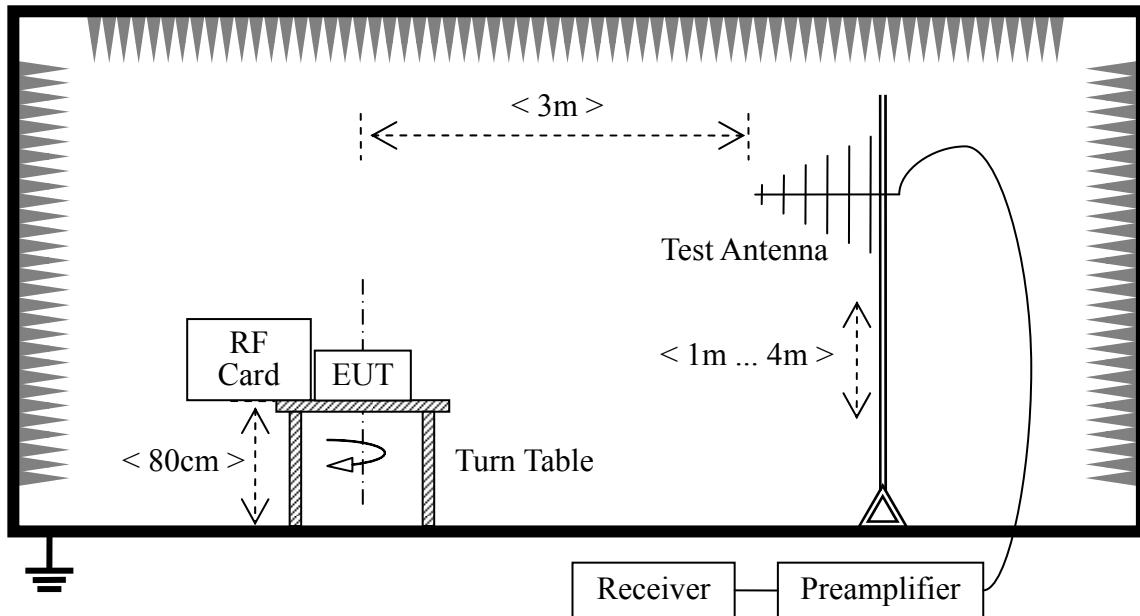

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower. The RF Card is used for the call between with the EUT, and the EUT was measured by transmitter mode continuously.

D. Equipments List:


Description	Manufacturer	Model	Serial No.	Cal. Date
Receiver	Agilent	E7405A	US44210471	2011.05
Semi-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2011.05
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2011.05
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2011.05
Test Antenna- Loop	R&S	HFH2-Z2	(n.a.)	2011.05
Spectrum Analyzer	Agilent	E7405A	US44210471	2011.05
Personal Computer	IBM	IBM_T20	(n.a)	(n.a.)

Description	Manufacturer	Model	Serial No.	Cal. Date
Bluetooth-Headset	Nokia	HS-36W	(n.a.)	(n.a.)
T-Flash Card	SanDisk	256MB	(n.a.)	(n.a.)


2.2.3 Test Result

2.2.3.1 Radiated Emission <30MHz (9KHz-30MHz, H-field)

A. Test Plots

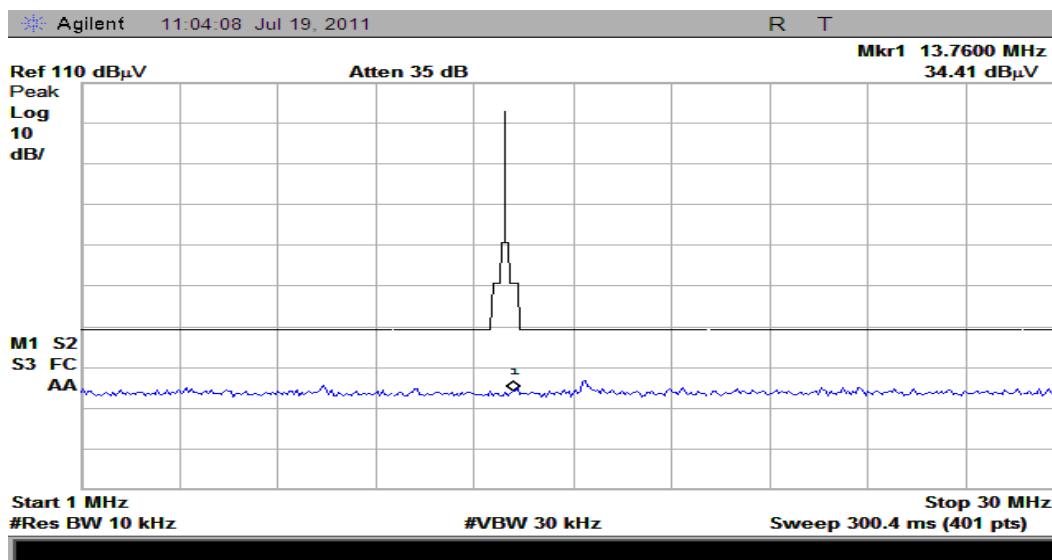

(Plot A: Test Antenna Vertical)

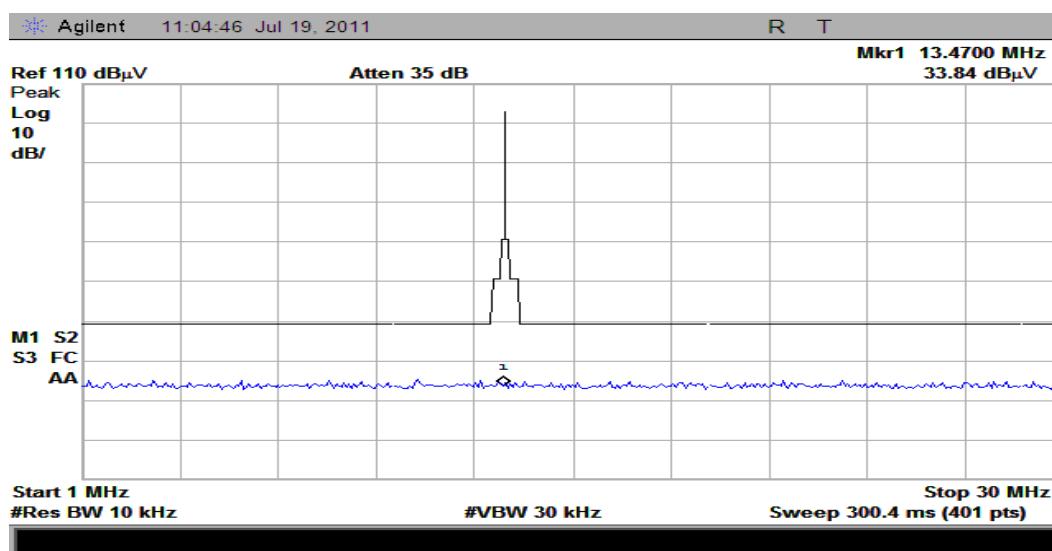

(Plot B: Test Antenna Horizontal)

2.2.3.2 Radiated Emission >30MHz (30MHz-1GHz, E-field)

A. Test Plots:



(Plot A: Test Antenna Vertical)



(Plot B: Test Antenna Horizontal)

Result: PASS

2.2.3.3 Field strength data list

Frequency (MHz)	Field strength(dB μ V/m)		Limit(dB μ V/m)	Remark
	Antenna V	Antenna H		
13.56	34.41	33.84	103	fundamental
27.12	33.97	33.90	48.6	harmonics
40.68	25.49	13.11	40	harmonics
54.24	16.35	12.82	40	harmonics


2.3 Frequency Tolerance

2.3.1 Requirement

According to FCC section 15.225, the devices operating in the 13.553 – 13.567 MHz shall maintain the carrier frequency within 0.01% of the operating frequency over the temperature variation of -20°C to +50°C using an environmental chamber. The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

2.3.2 Test Description

Test Setup:

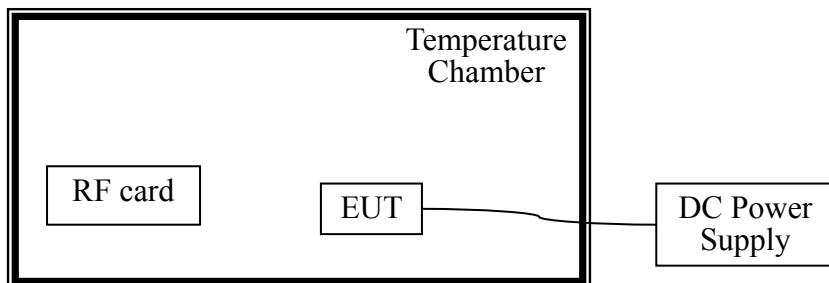

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber. The RF Card is used for the call between with the EUT, and the EUT was measured by transmitter mode continuously.

1. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E7405A	US44210471	2011.05
DC Power Supply	Good Will	GPS-3030DD	EF920938	2011.05
Temperature Chamber	YinHe Experimental Equip.	HL4003T	(n.a.)	2011.05

2.3.3 Test Verdict

Operating Frequency: 13,560,000 Hz

Deference Voltage: 5.0V

Deviant Limit: $\pm 0.01\%$



VOLTAG E(%)	Test Conditions		Frequency(Hz)	Deviation	Verdict
	Power (VDC)	Temperatur e (°C)			
100	4.8	+20°C(Ref)	13,560,315	-0.002323	PASS
100		-20	13,560,612	-0.004513	
100		-10	13,560,648	-0.004779	
100		0	13,560,588	-0.004336	
100		+10	13,560,579	-0.004270	
100		+20	13,560,305	-0.002249	
100		+25	13,560,519	-0.003827	
100		+30	13,560,636	-0.004690	
100		+40	13,560,652	-0.004808	
100		+50	13,560,321	-0.002367	
Battery End Point	5.0	+20	13,560,451	-0.003326	
115	5.2	+20	13,560,351	-0.002588	


2.4 20dB Bandwidth

2.4.1 Definition

According to FCC section 15.215(c), the 20dB bandwidth is measured with a spectrum analyzer connected to the EUT while the EUT is operating in transmission mode.

2.4.2 Test Description


1. Test Setup:



The EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA).

Description	Manufacturer	Model	Serial No.	Cal. Date
Spectrum Analyzer	Agilent	E7405A	US44210471	2011.05
DC Power Supply	Good Will	GPS-3030DD	EF920938	2011.05

2.4.3 Test Verdict

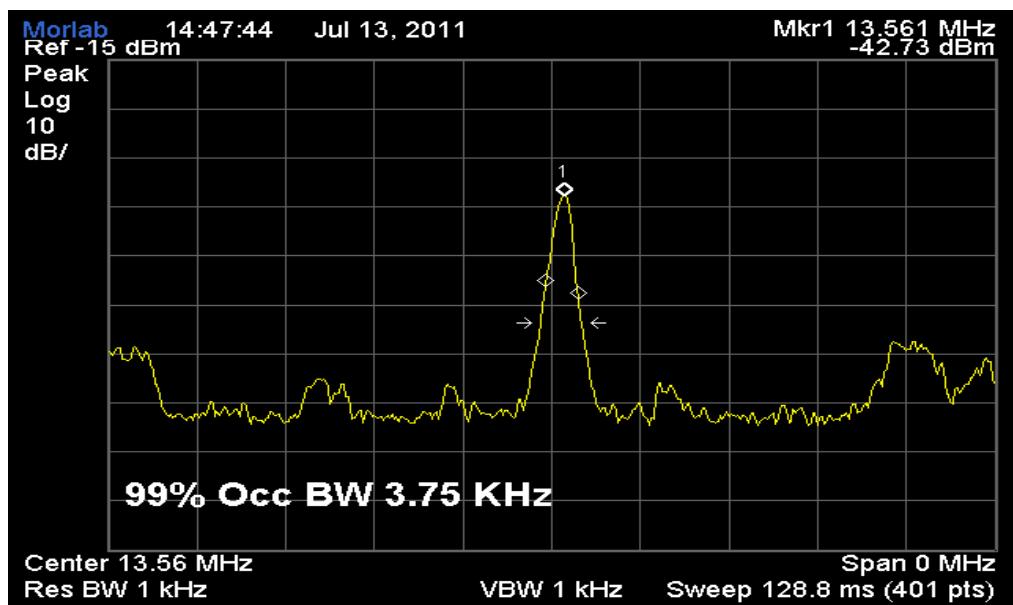

** END OF REPORT **